

Table of Contents

1. Introduction 4

1.1 What is LPS8v2 4



Table of Contents:

- [1. Introduction](#)
 - [1.1 What is LPS8v2](#)
 - [1.2 Specifications](#)
 - [1.3 Features](#)
 - [1.4 LED Indicators](#)
 - [1.5 Button Intruction](#)

- [2. Quick Start](#)
 - [2.1 Access and Configure LPS8-V2](#)
 - [2.1.1 Find IP address of LPS8-V2](#)
 - [Method 1: Connect via LPS8-V2 WiFi](#)
 - [Method 2: Connect via Ethernet with DHCP IP from the router](#)
 - [Method 3: Connect via LPS8-V2 Fallback IP](#)
 - [Method 4: Connect via WiFi with DHCP IP from the router](#)
 - [2.1.2 Access Configure Web UI](#)
 - [2.2 Typical Network Setup](#)
 - [2.2.1 Overview](#)
 - [2.2.2 Use WAN port to access Internet](#)
 - [2.2.3 Access the Internet as a WiFi Client](#)
 - [2.2.4 Use built-in 4G modem for internet access](#)
 - [2.2.5 Check Internet connection](#)
 - [2.3 The LPS8-V2 is registered and connected to The Things Network](#)
 - [2.3.1 Select your area frequency](#)
 - [2.3.2 Get the only gateway EUI](#)
 - [2.3.3 Register the gateway to The Things Network](#)
- [3. Web Configure Pages](#)
 - [3.1 Home](#)
 - [3.2 LoRa Settings](#)
 - [3.2.1 LoRa --> LoRa](#)
 - [3.3 LoRaWAN Settings](#)
 - [3.3.1 LoRaWAN --> LoRaWAN Semtech UDP](#)
 - [3.3.2 LoRaWAN --> LoRaWAN Basic Station](#)
 - [3.4 Network Settings](#)
 - [3.4.1 Network --> WiFi](#)
 - [3.4.2 Network --> System Status](#)
 - [3.4.3 Network --> Network](#)
 - [3.4.4 Network --> Cellular](#)
 - [3.5 System](#)
 - [3.5.1 System --> System Overview](#)
 - [3.5.2 System --> System General](#)
 - [3.5.3 System --> Backup/Restore](#)
 - [3.5.4 System --> Reboot / Reset](#)
 - [3.5.5 System --> Remoteit](#)
 - [3.5.6 System --> Package Management](#)
- [4. Build-in Server](#)
 - [1\). LoRaWAN Network Server: ChirpStack-V4](#)
 - [2\). Application Network Server: Node-Red](#)
 - [3\). Troubleshooting:](#)
 - [If the URL does not jump properly.](#)
 - [How to install InfluxDB, Grafana.](#)
 - [How to upgrade the gateway node.js to the latest version.](#)
 - [How to batch register device on the built-in Chirpstack network server](#)
 - [Why my gateway is not Chirpstack?](#)
 - [How to disable the built-in server](#)
 - [How to choose the Chirpstack server frequency SubBand](#)
- [5. Watch Dog](#)
- [6. How users can access LPS8-V2 using serial USB](#)
- [7. OTA System Update](#)
 - [7.1 Auto-update method](#)
 - [7.2 Manual upgrade method](#)
- [8. FAQ](#)
 - [8.1 How to change Hostname](#)
 - [8.2 Build-in The Things Network migrate to ChirpStack](#)
 - [Method 1: Using the Linux shell](#)
 - [Method 2: Flash a new image](#)
 - [8.3 How to reduce the 4g data consumed](#)
 - [8.4 How to connect the helium blockchain as a Data-only hotspot](#)

- [8.5 How to change built-in LoRaWAN Server from ChirpStack v4 to TTN Stack v3.](#)
- [8.6 How do I view gateway logs](#)
 - [8.6.1 LoRaWAN Log:](#)
 - [Semtech UDP Log :](#)
 - [Station Log:](#)
 - [8.6.2 4G Log](#)
 - [8.6.3 Dmesg Log](#)
 - [8.6.4 Record Log](#)
 - [8.6.5 View gateway logs via Linux Command](#)
- [8.7 DIN Mount Reference:](#)
- [9. Trouble Shooting](#)
 - [9.1 I can't log in to the built-in Server TTN Stack which shows 'Login failed'.](#)
 - [9.2 The built-in TTN status is "Not Running" and the URI is "dragino-123456". How users fix this problem](#)
 - [9.3 Fallback IP does not work, how can users check](#)
 - [9.4 Click "Manual Update", why there is no response?](#)
 - [9.5 Why the LPS8V2's Access Point does not do not appear & Fallback IP unable to access](#)
 - [9.6 How to reset the built-in server](#)
- [10. Supports](#)
- [11. Reference](#)
- [12. Order Info](#)
- [13. Manufacturer Info](#)
- [14. FCC Warning](#)

1. Introduction

1.1 What is LPS8v2

The LPS8v2 is an **open-source LoRaWAN Gateway**. It lets you bridge LoRa wireless network to an IP network via **WiFi , Ethernet or Cellular Network** (via Optional 4G module). The LoRa wireless allows users to send data and reach extremely long ranges at low data rates.

The LPS8v2 is fully compatible with LoRaWAN protocol. It supports different kinds of LoRaWAN Network Connections such as: **Semtech UDP Packet Forwarder, LoRaWAN Basic Station, ChirpStack MQTT Bridge**, and so on. This makes LPS8V2 work with most LoRaWAN platforms in the market.

LPS8v2 also includes a **built-in LoRaWAN Server and IoT server**, which provide the possibility for the system integrator to deploy the IoT service without cloud service or 3rd servers.

Different countries use different LoRaWAN frequency bands. LPS8v2 has these bands pre-configured. Users can also customize the frequency bands to use in their own LoRa network.

LPS8v2 supports **remote management**. System Integrator can easy to remote monitor the gateway and maintain it.

1.2 Specifications

Hardware System:

- CPU: Quad-core Cortex-A7 1.2Ghz
- RAM: 512MB
- eMMC: 4GB

Interface:

- 10M/100M RJ45 Ports x 1
- Multi-Channel LoRaWAN Wireless
- WiFi 802.11 b/g/n
- Sensitivity: -140dBm

- Max Output Power: 27dBm

Operating Condition:

- Work Temperature: -20 ~ 70°C
- Storage Temperature: -20 ~ 70°C
- Power Input: 5V, 2A, DC

1.3 Features

- Open Source Debian system
- Managed by Web GUI, SSH via WAN or WiFi
- Remote Management
- Auto-provisioning for batch deployment and management
- LoRaWAN Gateway
- 10 programmable parallel demodulation paths
- Pre-configured to support different LoRaWAN regional settings.
- Allow customizing LoRaWAN regional parameters.
- Different kinds of LoRaWAN Connections such as
 - Semtech UDP Packet Forwarder
 - LoRaWAN Basic Station
 - ChirpStack-Gateway-Bridge (MQTT)
- Built-in **ChirpStack** local LoRaWAN server
- Built-in **Node-Red** local Application server

1.4 LED Indicators

LPS8-V2 has totally four LEDs, They are:

Power LED: This RED LED will be solid if the device is properly powered

ETH LED: This RGB LED will blink GREEN when the ETH port is connecting

SYS LED: This RGB LED will show different colors in different states:

SOLID GREEN: The device is alive with a LoRaWAN server connection.

BLINKING GREEN: a) Device has internet connection but no LoRaWAN Connection. or b) Device is in booting stage, in this stage, it will BLINKING GREEN for several seconds and then with BLINKING GREEN together

SOLID RED: Device doesn't have an Internet connection.

WIFI LED: This LED shows the WIFI interface connection status.

1.5 Button Intruction

LPS8-V2 has a black toggle button, which is:

Long press 4-5s : the gateway will reload the Network and Initialize wifi configuration

LED status: ETH LED will BLINKIND BULE Until the reload is finished.

Long press more than 10s: the gateway will restore the factory settings.

LED status: ETH LED will SOLID BULE Until the restore is finished.

Note: Restoring factory Settings does not erase data from the LPS8-V2 built-in server

See this link for steps on how to clear data from the built-in server: [How to reset the built-in server](#)

When the gateway restores the factory settings is complete,
The WiFi configuration will enable WiFi Access Point by default.
The other configuration will be restored to the default configuration.

2. Quick Start

The LPS8-V2 supports network access via Ethernet or Wi-Fi connection and runs without a network.
In most cases, the first thing you need to do is make the lps8-v2 accessible to the network.

2.1 Access and Configure LPS8-V2

2.1.1 Find IP address of LPS8-V2

Method 1: Connect via LPS8-V2 WiFi

Since software version **230524**, At the first boot of LPS8-V2, it will auto generate a WiFi network called **dragino-xxxxxx** with password:

dragino+dragino

User can use a PC to connect to this WiFi network. The PC will get an IP address 10.130.1.xxx and the LPS8-V2 has the default IP **10.130.1.1**



WiFi Network from LPS8-V2







Method 2: Connect via Ethernet with DHCP IP from the router

Connect the LPS8-V2 Ethernet port to your router and LPS8-V2 can obtain an IP address from your router. In the router's management portal, you should be able to find what IP address the router has assigned to the LPS8-V2.

You can also use this IP to connect.

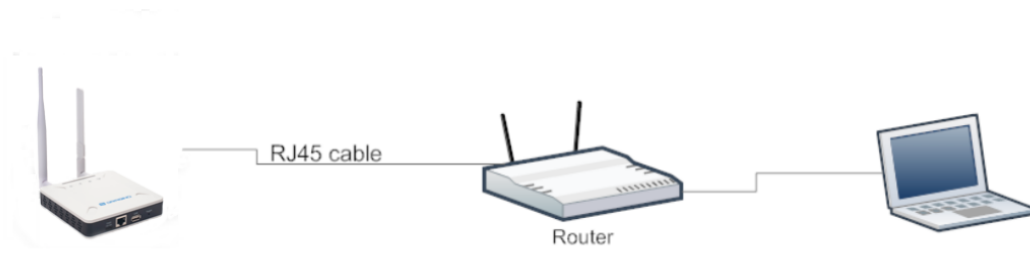

Method 3: Connect via LPS8-V2 Fallback IP

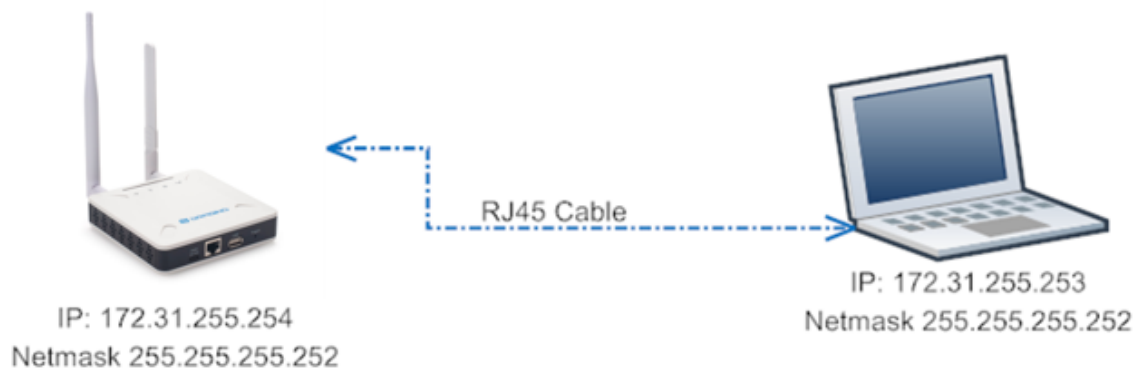


Steps to connect via fallback IP:

1. Connect the PC's Ethernet port to LPS8-V2's WAN port
2. Configure PC's Ethernet port has IP: 172.31.255.253 and Netmask: 255.255.255.252

Settings --> Network & Internet --> Ethernet --> Change advanced sharing options --> Double-click "Ethernet" --> Internet Protocol Version 4 (TCP/IPv4)


As in the below photo:

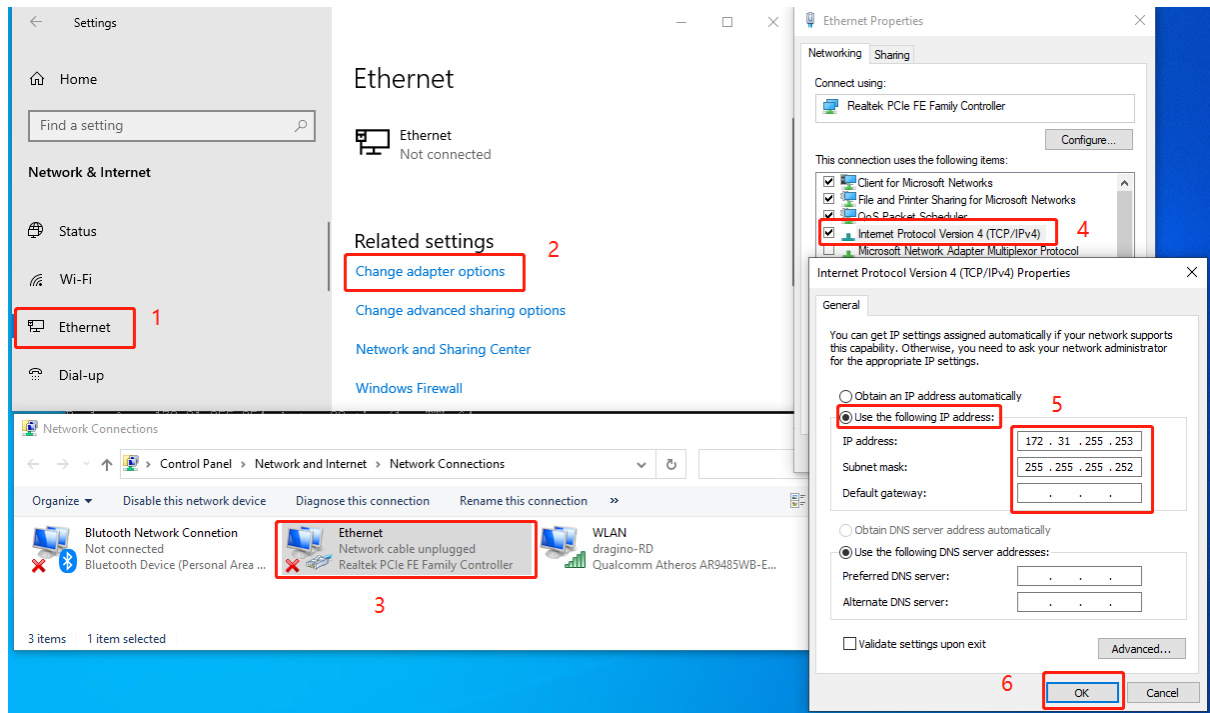

Configure computer Ethernet port steps video: [fallback ip.mp4](#)

If you still can't access the LPS8-V2 fallback ip, follow this connection to debug : [Trouble Shooting](#)

3. In the PC, use IP address 172.31.255.254 to access the LPS8-V2 via Web or Console.

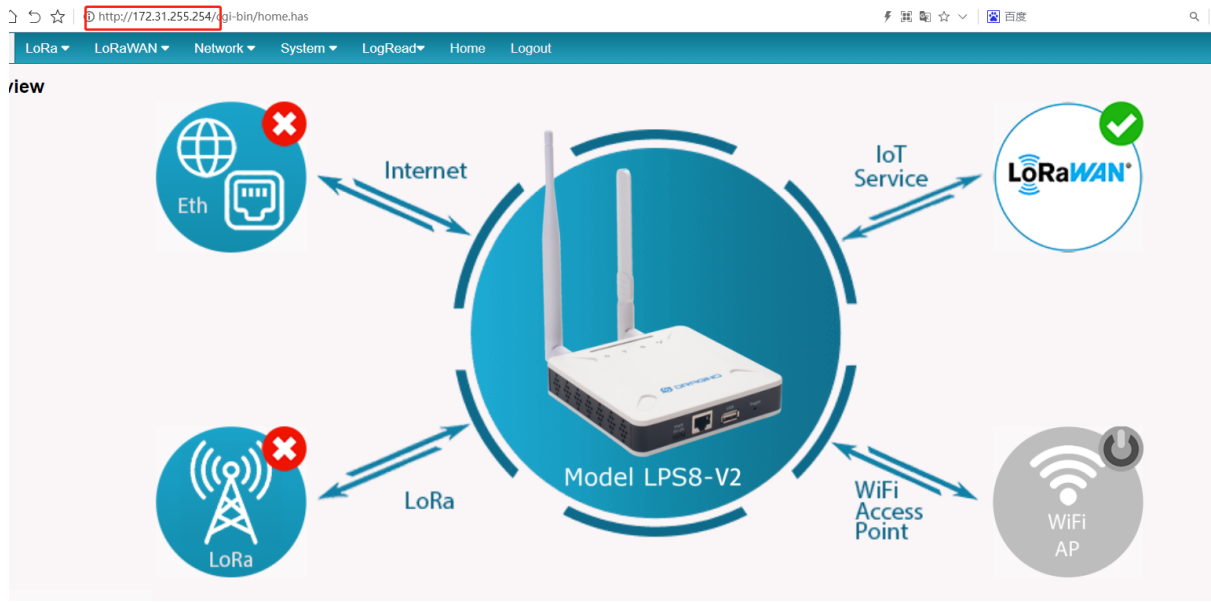

Method 4: Connect via WiFi with DHCP IP from the router



Fill in the WiFi information by checking the box and clicking **Save&Apply**

The screenshot shows the DRAGINO web interface. The top navigation bar includes 'LoRa', 'LoRaWAN', 'Network', 'System', 'LogRead', 'Home', and 'Logout'. The 'Network' tab is selected. The 'WiFi' section is active, showing 'WiFi WAN Client Settings'. The 'Enable WiFi WAN Client' checkbox is checked (1). The 'Host WiFi SSID' and 'Passphrase' fields are visible (2). The 'Save&Apply' button is highlighted (3). A dropdown menu is open showing 'Wi-Fi', 'Network Status', and 'Firewall'.

Wi-Fi configuration successful


LoRa ▾
LoRaWAN ▾
Network ▾
System ▾
LogRead ▾
Home
Logout

WiFi

WiFi WAN Client Settings

Enable WiFi WAN Client ☒

Host WiFi SSID WiFi Survey

Passphrase [Show](#)

□[2K Device 'wlan0' successfully activated with '65c55b4a-774c-4522-a072-9981126db405'.



2.1.2 Access Configure Web UI

Web Interface

Open a browser on the PC and type the LPS8-V2 ip address (depends on your connect method)


http://IP_ADDRESS or <http://172.31.255.254>(Fallback IP)

You will see the login interface of LPS8-V2 as shown below.

The account details for Web Login are:

User Name: root

Password: dragino

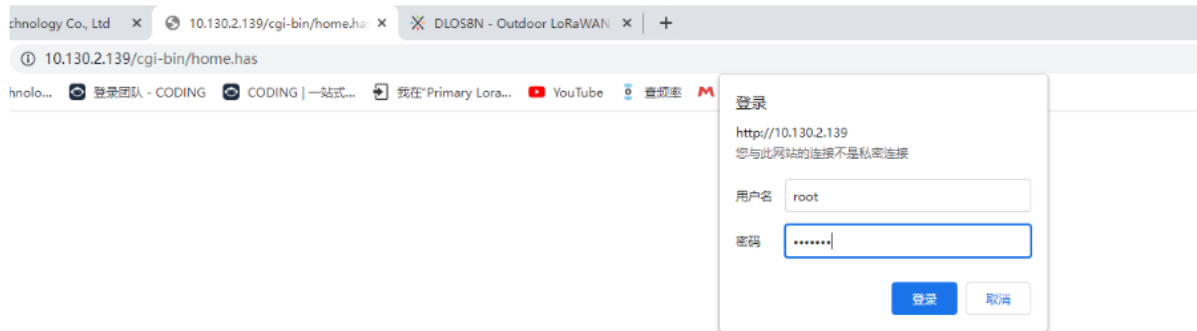

2.2 Typical Network Setup

2.2.1 Overview

LPS8-V2 supports flexible network set up for different environment. This section describes the typical network topology can be set in LPS8-V2. The typical network set up includes:

- **WAN Port Internet Mode**
- **WiFi Client Mode**
- **Cellular Mode**

2.2.2 Use WAN port to access Internet

By default, the LPS8-V2 is set to use the WAN port to connect to an upstream network. When you connect the LPS8-V2's WAN port to an upstream router, LPS8-V2 will get an IP address from the router and have Internet access via the upstream router. The network status can be checked in the [home page](#):



2.2.3 Access the Internet as a WiFi Client

In the WiFi Client Mode, LPS8-V2 acts as a WiFi client and gets DHCP from an upstream router via WiFi.

The settings for WiFi Client is under page [Network --> Wi-Fi](#)

 LoRa ▾ LoRaWAN ▾ Network ▾ System ▾ LogRead ▾ Home Logout

WiFi

WiFi WAN Client Settings

Enable WiFi WAN Client ☒

Host WiFi SSID

dragino-RD

WiFi Survey

Choose WiFi SSID... ▾

Passphrase

.....

Show

Proto Type

DHCP ▾

Save&Apply

Cancel

In the WiFi Survey Choose the WiFi AP, and input the Passphrase then click **Save & Apply** to connect.

2.2.4 Use built-in 4G modem for internet access

Since Hardware version HP0C 1.4

Users can see whether LPS8v2 has EC25 on the label of the gateway to determine whether there is 3G/4G Cellular modem.

If the LPS8-V2 has 3G/4G Cellular modem, user can use it as main internet connection or back up.

First, install the Micro SIM card as below direction

Second, Power off/ ON LPS8-V2 to let it detect the SIM card.

A close-up photograph of the back of a white LPS8-V2 gateway. The device has a black plastic cover with ventilation holes. A Micro SIM card is partially inserted into a slot on the right side. Below the slot, there is a small label with the text 'EC25'. The device has a central oval-shaped cutout and two circular ports on the left and right sides.

The set up page is **Network --> Cellular**

While use the cellular as Backup WAN, device will use Cellular for internet connection while WAN port or WiFi is not valid and switch back to WAN port or WiFi after they recover.

Page 15 / 60 - last modified by Xiaoling on 2024/03/20 14:19

Cellular Settings

☒ Enable Cellular WAN
☒ Use Cellular as Backup WAN

APN

3gnet

Service

UMTS / GPRS

Dial Number

*99#

Pincode

SIM Pincode

Username

SIM Acct Username

Password

SIM Acct Password

Show

Save&Apply

Cancel

2.2.5 Check Internet connection

In the **home** page, we can check the Internet connection.

- GREEN Tick  : This interface has Internet connection.
- Yellow Tick  : This interface has IP address but don't use it for internet connection.
- RED Cross  : This interface doesn't connected or no internet.



2.3 The LPS8-V2 is registered and connected to The Things Network

2.3.1 Select your area frequency

First, you need to set the frequency plan in LPS8-V2 to match the end node we use, so to receive the LoRaWAN packets from the LoRaWAN sensor.

 LoRa LoRaWAN Network System LogRead Home Logout

LoRa Configura

LoRa

Debug Level

Low

Radio Settings

Keep Alive Period (sec)

30

Frequency Plan

EU868 Europe 868Mhz (863~870)

EU868 Europe 868Mhz (863~870)

CN470 China 470MHz (470~510)

US915 United States 915Mhz (902~928)

AU915 Australia 915Mhz (915~928)

IN865 India 865MHz (865~867)

KR920 Korea 920MHz (920~923)

AS923 Asia AS923-1

AS923 Asia AS923-2

AS923 Asia AS923-3

AS923 Asia AS923-4

RU864 Russia 864MHz (864~870)

Customized Bands

Static GPS coordinates ?

Enable Static GPS

Latitude

450

114.240000

Current Mode: LoRaWAN Semtec

Save&Apply

Disable

Cancel

2.3.2 Get the only gateway EUI

Every LPS8-V2 has a unique gateway id. The ID can be found on LoRaWAN Semtech page:


LoRa ▾
LoRaWAN ▾
Network ▾
System ▾
LogRead ▾
Home
Logout

LoRaWAN Configuratio

LoRaWAN Semtech UDP
LoRaWAN Basic Station

General Settings

Email

Gateway EUI

Primary LoRaWAN Server

Service Provider The Things Network V3 ▾ Server Address eu1.cloud.thethings.network ▾

Uplink Port Downlink Port

Primary Packet Filter

Fport Filter ? DevAddr Filter ?

Secondary LoRaWAN Server

Service Provider Disable ▾

Secondary Packet Filter

Fport Filter ? DevAddr Filter ?

Current Mode: LoRaWAN Semtech UDP

Note: Choose the cluster that corresponds to a specific Gateway server address

- # Europe 1: corresponding Gateway server address: **eu1.cloud.thethings.network**
- # North America 1: corresponding Gateway server address: **nam1.cloud.thethings.network**
- # Australia 1: corresponding Gateway server address: **au1.cloud.thethings.network**
- # Legacy V2 Console: TTN v2 shuts down in December 2021

Primary LoRaWAN Server

Service Provider The Things Network V3

Uplink Port 1700

Primary Packet Filter

Fport Filter ? 0

Server Address eu1.cloud.thethings.network

Downlink Port

DevAddr Filter ? 0

eu1.cloud.thethings.network

eu1.cloud.thethings.network

nam1.cloud.thethings.network

au1.cloud.thethings.network

2.3.3 Register the gateway to The Things Network

Login to The Things Network


<https://console.cloud.thethings.network/>

Add the gateway

Welcome back, xiaoye0! 🙌

Walk right through to your applications and/or gateways.

Need help? Have a look at our [Documentation](#) or [Get support](#).

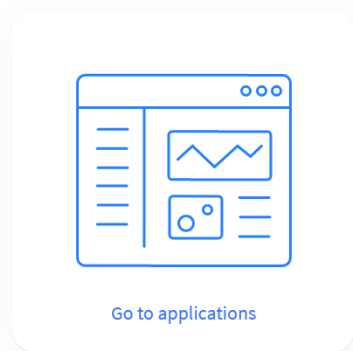

Get it online

3. Web Configure Pages

3.1 Home

Shows the system running status:



3.2 LoRa Settings

3.2.1 LoRa --> LoRa

This page shows the LoRa Radio Settings. There is a set of default frequency bands according to LoRaWAN protocol, and users can customize the band* as well.

Different LPS8v2 hardware versions can support different frequency ranges:

- **868**: valid frequency: 863Mhz ~ 870Mhz. for bands EU868, RU864, IN865, or KZ865.
- **915**: valid frequency: 902Mhz ~ 928Mhz. for bands US915, AU915, AS923 or KR920

After the user choose the frequency plan, the user can see the actual frequency is used by checking the page [LogRead --> LoRa Log](#)


LoRa ▼ LoRaWAN ▼ Network ▼ System ▼ LogRead▼ Home Logout

LoRa Configuration

Debug Level

Low ▼

Radio Settings

Keep Alive Period (sec)

30

Frequency Plan

EU868 Europe 868Mhz (863~870) ▼

EU868 Europe 868Mhz (863~870)
CN470 China 470MHz (470~510)
US915 United States 915Mhz (902~928)
AU915 Australia 915Mhz (915~928)
IN865 India 865MHz (865~867)
KR920 Korea 920MHz (920~923)
AS923 Asia AS923-1
AS923 Asia AS923-2
AS923 Asia AS923-3
AS923 Asia AS923-4
RU864 Russia 864MHz (864~870)
Customized Bands

Static GPS coordinates ?

Enable Static GPS

Latitude

450

114.240000

Current Mode: LoRaWAN Semtec

Save&Apply

Disable

Cancel

Note *: See this instruction for how to customize the frequency band: [How to customized LoRaWAN frequency band - DRAGINO](#)

3.3 LoRaWAN Settings

3.3.1 LoRaWAN --> LoRaWAN Semtech UDP

This page is for the connection set up to a general LoRaWAN Network server such as [TTN](#), [ChirpStack](#), etc.

 LoRa ▼ LoRaWAN ▼ Network ▼ System ▼ LogRead ▼ Home Logout

LoRaWAN Configuration

General Settings

Email

Gateway EUI

Primary LoRaWAN Server

Service Provider Server Address

Uplink Port Downlink Port

Primary Packet Filter

Fport Filter ? DevAddr Filter ?

Secondary LoRaWAN Server

Service Provider

Secondary Packet Filter

Fport Filter ? DevAddr Filter ?

Current Mode: **LoRaWAN Semtech UDP**

3.3.2 LoRaWAN --> LoRaWAN Basic Station

This page is for the connection set up to the TTN Basic Station, AWS-IoT, etc.

 LoRa ▼ LoRaWAN ▼ Network ▼ System ▼ LogRead ▼ Home Logout

LoRaWAN -- Basic Station

General Settings

Email

Gateway ID Restore ?

Primary LoRaWAN Server

Service Provider

Server URI

Sever CUPS

CUPS trust Not Found CA certificate,User can clicking DEFAULTde CERTIFICATE to install certificate

Current Mode: **LoRaWAN Semtech UDP** Click Save & Apply will change to mode: **LoRaWAN Basic Station**

Please see this instruction to know more detail and a demo for how to use of LoRaWAN Basic Station: [Use of LoRaWAN Basic Station - DRAGINO](#)

3.4 Network Settings

3.4.1 Network --> WiFi

Users can configure the wifi WAN and enable Wifi Access Point on this interface

 [LoRa](#) [LoRaWAN](#) [Network](#) [System](#) [Server](#) [LogRead](#) [Home](#) [Logout](#)

WiFi Settings

WiFi Mode

Wi-Fi WAN Client
Wi-Fi Access Point
Wi-Fi WAN Client

WiFi WAN Client Settings

Enable WiFi WAN Client ☐

Host WiFi SSID

PDCN

WiFi Survey

Choose WiFi SSID...

Passphrase

.....

Show

Proto Type

DHCP

Save&Apply

Cancel

3.4.2 Network --> System Status

Page 25 / 60 - last modified by Xiaoling on 2024/03/20 14:19

 LoRa ▼ LoRaWAN ▼ Network ▼ System ▼ LogRead ▼ Home Logout

System Status

Network / WiFi Status

```
eth0: connected to Wired connection 1
"eth0"
ethernet (dwmac-sun8i), 02:81:8F:3E:1A:15, hw, mtu 1500
ip4 default
inet4 10.130.2.22/24
route4 10.130.2.0/24 metric 100
route4 default via 10.130.2.1 metric 100
inet6 fe80::52f5:c37e:e26b:9039/64
route6 fe80::/64 metric 1024

br-af3e3e44fb1b: connected (externally) to br-af3e3e44fb1b
"br-af3e3e44fb1b"
bridge, 02:42:25:DE:18:58, sw, mtu 1500
inet4 172.18.0.1/16
route4 172.18.0.0/16 metric 0
inet6 fe80::42:25ff:fede:1858/64
route6 fe80::/64 metric 256

docker0: connected (externally) to docker0
"docker0"
bridge, 02:42:EE:06:DB:1C, sw, mtu 1500
inet4 172.17.0.1/16
route4 172.17.0.0/16 metric 0

wlan0: disconnected
"Ralink MT7601U"
wifi (mt7601u), 30:7B:C9:51:C3:4A, hw, mtu 1500


veth632a869: unmanaged
"veth632a869"
ethernet (veth), 2E:55:34:EC:17:A4, sw, mtu 1500

vetha711dc8: unmanaged
"vetha711dc8"
ethernet (veth), 96:F3:44:55:D9:47, sw, mtu 1500
```

Refresh

3.4.3 Network --> Network

In the **Network --> Network** interface, Users can set the Ethernet WAN static ip address.

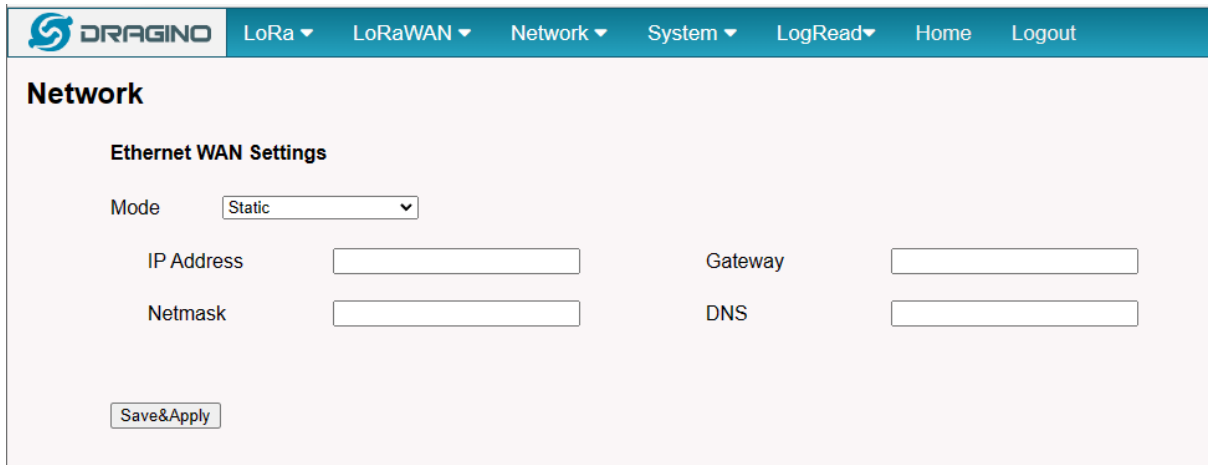


The screenshot shows the 'Network' configuration page. At the top is a navigation bar with the Dragino logo and menu items: LoRa, LoRaWAN, Network, System, LogRead, Home, and Logout. The 'Network' section is titled 'Ethernet WAN Settings'. It contains a 'Mode' dropdown menu set to 'Static'. Below this are four input fields: 'IP Address', 'Gateway', 'Netmask', and 'DNS'. A 'Save&Apply' button is located at the bottom left of the form.

3.4.4 Network --> Cellular

In the **Network --> Cellular** interface, Users can Enable Cellular WAN and configure Cellular.

Note: APN cannot be empty.

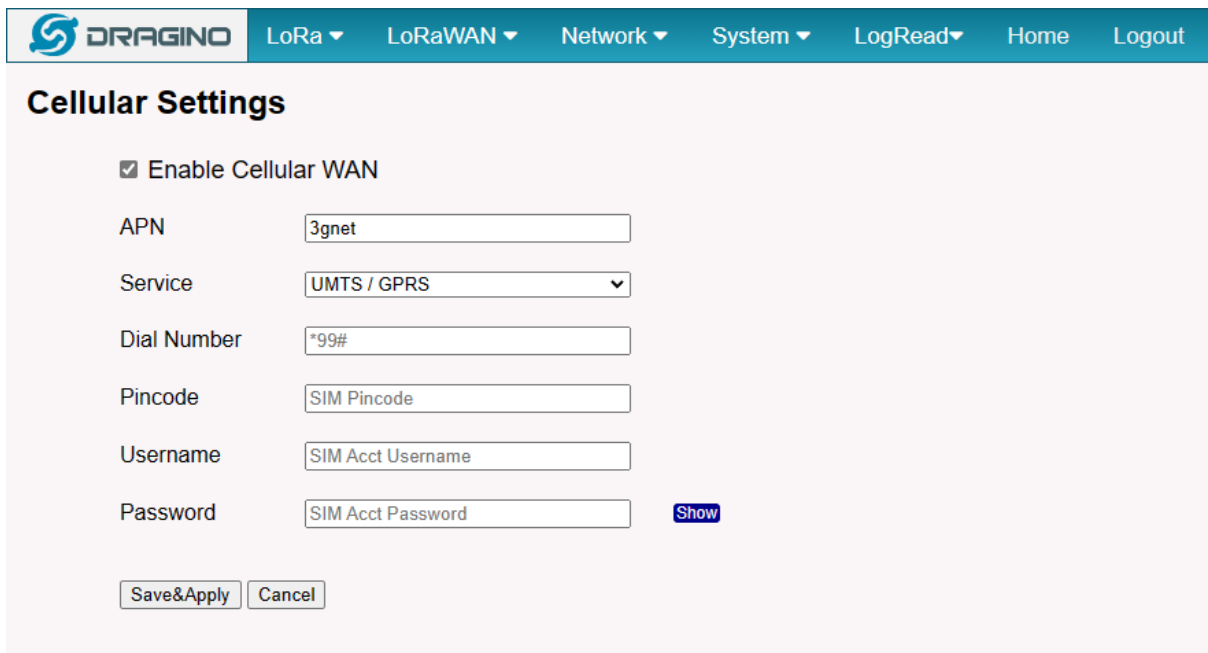

The screenshot shows the 'Cellular Settings' configuration page. The navigation bar is identical to the previous page. The 'Cellular Settings' section has a checkbox labeled 'Enable Cellular WAN' which is checked. Below this are six input fields: 'APN' (containing '3gnet'), 'Service' (dropdown menu set to 'UMTS / GPRS'), 'Dial Number' (containing '*99#'), 'Pincode' (containing 'SIM Pincode'), 'Username' (containing 'SIM Acct Username'), and 'Password' (containing 'SIM Acct Password'). A 'Show' button is located to the right of the Password field. At the bottom are 'Save&Apply' and 'Cancel' buttons.

After the configuration is complete, return to the Home interface and put the mouse on the Cell icon to check the Cellular state.



Note: Known bugs: 4g consumes a lot of data which has been fixed by the package: dragino-ui-230716

[Reduce data method](#)

3.5 System

3.5.1 System --> System Overview

Shows the system info:

 LoRa ▼ LoRaWAN ▼ Network ▼ System ▼ Server ▼ LogRead ▼ Home Logout

System Overview

Device Model:	LPS8-V2
Hostname:	dragino-2d5d26
FWD version:	Release:2023-08-05 08:49:02, Version:2.8.7
Cellular :	Not Detected
System Time:	Tue Oct 31 08:28:46 UTC 2023
Uptime:	32 days
Load Avg:	56, 3 users, load average
Memory:	Free Memory: 113028 / Total Memory: 503640kB
IoT Service:	lorawan
ETH0 MAC:	a8:40:41:24:00:01
WiFi MAC:	30:7b:c9:52:01:9c

Internet Connection OK



LoRaWAN Connection OK



3.5.2 System --> System General

In the **System-> System General** interface, Users can customize the configuration System Password and set Timezone.

In addition, Users can customize the FallBack IP address.

 LoRa ▼ LoRaWAN ▼ Network ▼ System ▼ LogRead ▼ Home Logout

System General

System Password

Password Hide SetPassword Login: root

TimeZone

Timezone

HTTP Web Service

Enable HTTP Service ☒

Set HTTP Port

Terminal Service

Enable SSH service ☒

Set SSH Port

FallBack Service

Enable FallBack service ☒

Set FallBack Address

Save&Apply

3.5.3 System --> Backup/Restore

 LoRa ▼ LoRaWAN ▼ Network ▼ System ▼ Server ▼ LogRead ▼ Home Logout

Backup/Restore

Click "Generate archive" to download a tar archive of the current configuration files."

Download backup: Generate_archive [Download Backup File](#)

To restore configuration files, you can upload a previously generated backup archive here.

Restore backup: 选择文件 未选择文件 Upload_archive

3.5.4 System --> Reboot / Reset


In the **System--> Reboot / Reset** interface, users can restart or reset the gateway.

ETH LED will SOLID BLUE Until the restore is finished.

When the gateway restores the factory settings is complete,

The WiFi configuration will enable WiFi Access Point by default.


The other configuration will be restored to the default configuration.

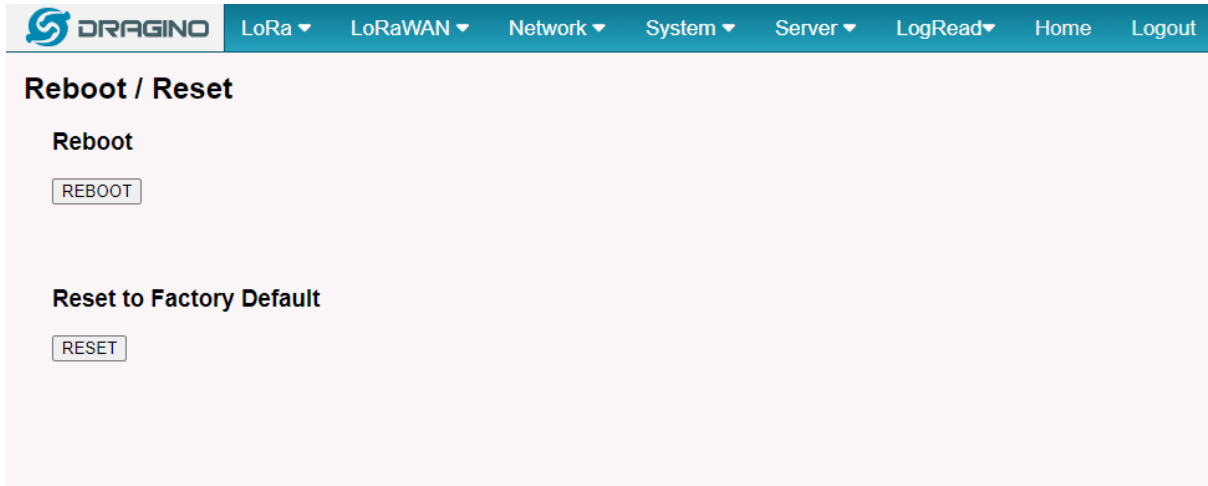

3.5.5 System --> Remoteit

In the **System-> Remoteit** interface, users can configure the gateway to be accessed remotely via Remote.it.

the users can refer to this link to configure them: [Monitor & Remote Access Gateway](#)

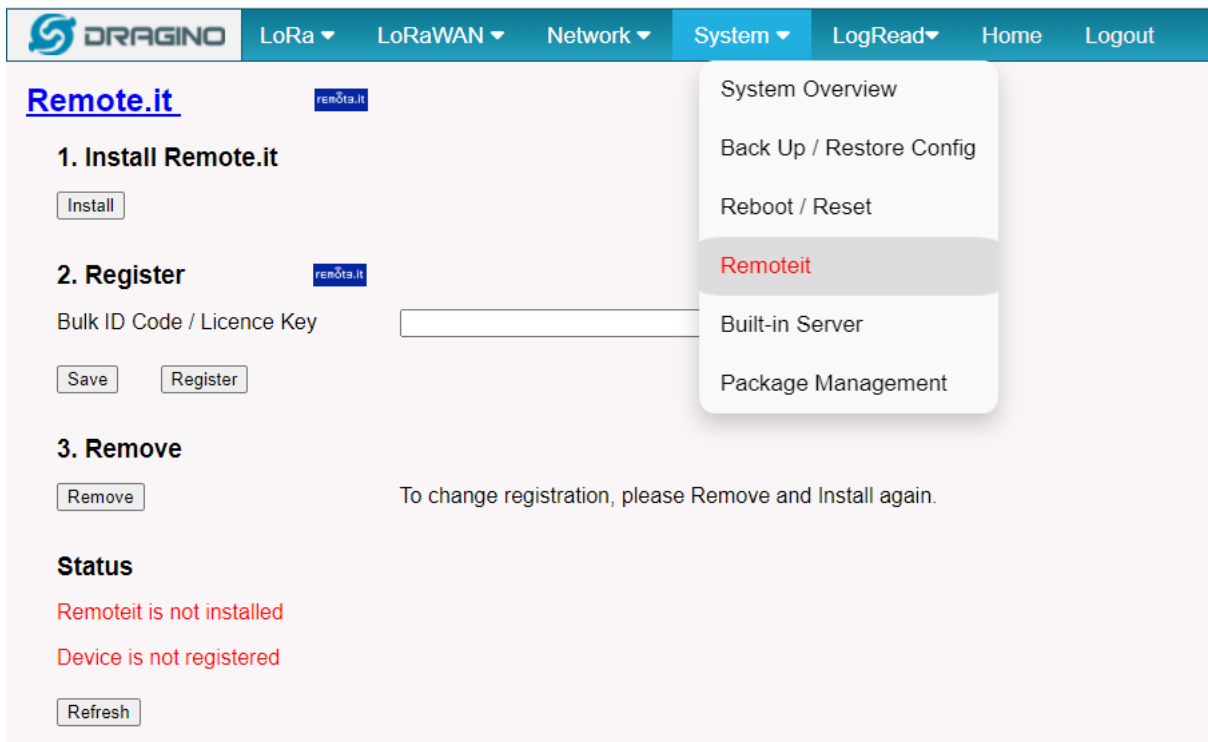

3.5.6 System --> Package Management

In the **System --> Package Management** interface, Users can check the current version of Core Packages.

Name	Current Version
dragino-httpd :	2022-12-02
dragino-ui :	2023-02-06
draginofwd :	2022-10-23
draginoups :	2023-01-06
dragino-fallback :	23.01.05
armbian-bsp-cli-draginohp0z :	22.05.2

4. Build-in Server

After the v1.7-230606 version, the LPS8-V2 default factory pre-installed the LoRaWAN Server: [ChirpStack-V4](#), Application Server: [Node-Red](#).

1). LoRaWAN Network Server: **ChirpStack-V4**

 LoRa ▾ LoRaWAN ▾ Network ▾ System ▾ **Server ▾** LogRead ▾ Home Logout

Built-In Network Server

Platform Provider Chirpstack

Enable ☒ Launch

Service Status **Running**

Server Versions **Chirpstack V4**

Reset Chirstack Reset

Frequency Plan


EU868 ▾

- [Management](#)

Save&Apply

Network Server

Application Server

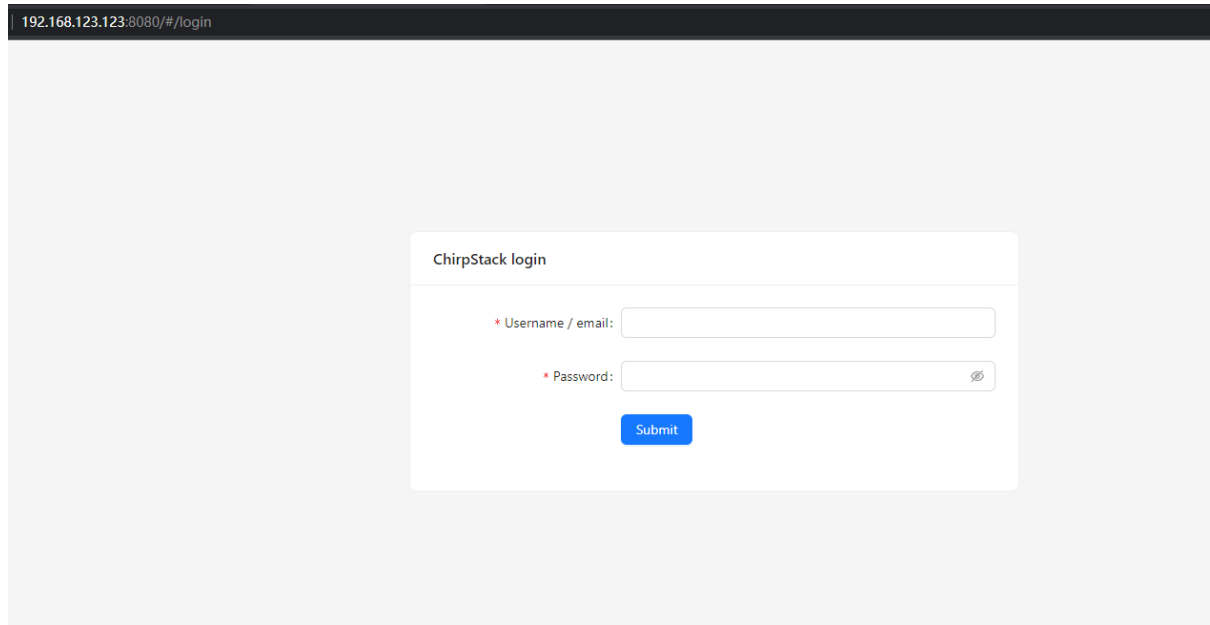

192.168.123.123:8080/#/login

ChirpStack login

* Username / email:

* Password: 

Note: The user can access the **ChirpStack-V4** via click the 'Launch' button, and the login account: **admin/admin**

For more information on server operations see [Register LPSV2 to the built-in Chirpstack](#)

2). Application Network Server: **Node-Red**

 DRAGINO

LoRa ▾

LoRaWAN ▾

Network ▾

System ▾

Server ▾

LogRead ▾

Home

Logout

Network Server

Application Server

Built-In Application Server

Platform Provider

Node-Red

Enable

☒

Launch

Service Status

Running

Node-RED Versions

v3.0.2


Nodejs Versions

v12.22.9

npm Versions

8.5.1

Save&Apply

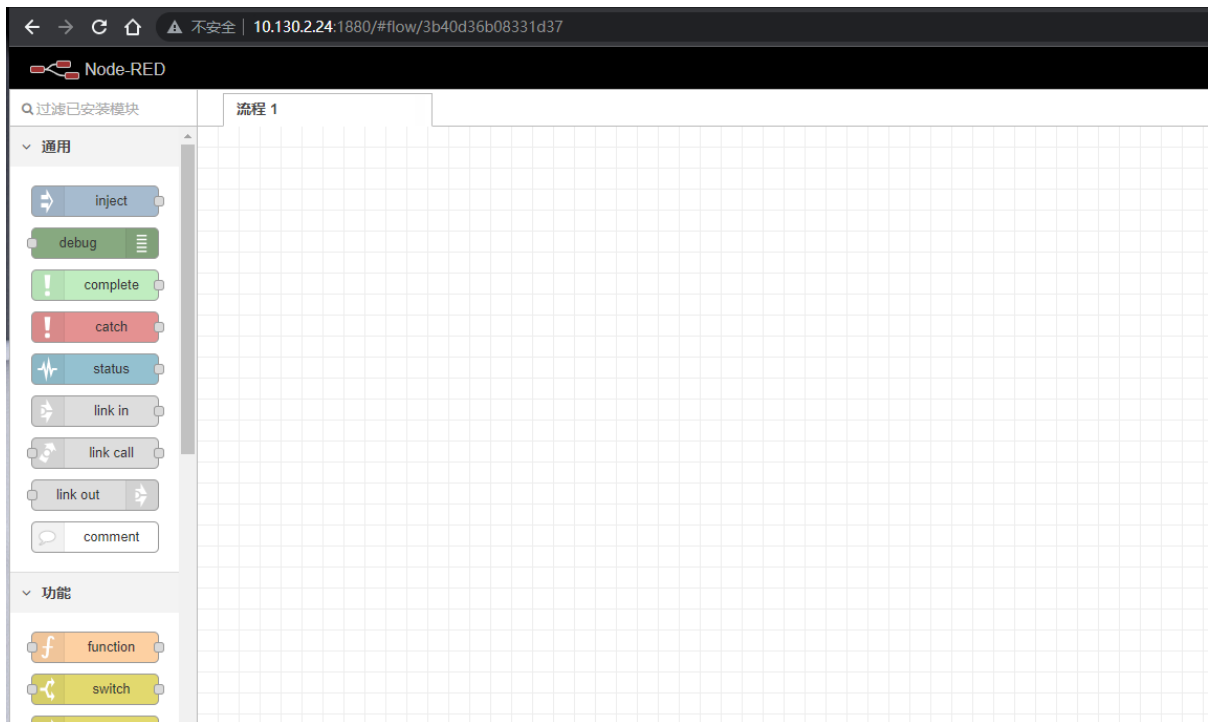

Note: The user can access the **Node-RED** via click the 'Launch' button

3). Troubleshooting:

If the URL does not jump properly.

For the ChirpStack, you can use the local IP address and the port is **8080** to access it.

For the Node-Red, you can use the local IP address and the port is **1880** to access it.

How to install InfluxDB, Garfana.

The LPS8V2 is not pre-installed with InfluxDB and Garfana, the users can install them, see [InfluxDB](#)

How to upgrade the gateway node.js to the latest version.

The user can upgrade nodejs, see [Upgrade Nodejs](#)

How to batch register device on the built-in Chirpstack network server

The user can register devices in batch on the gateway Web UI, see [Batch Register](#)

Why my gateway is not Chirpstack?

After June '23, the default factory LPS8V2 pre-installed Chirpstack-V4 instead of The Things Stack, the users can migrate to Chirpstack-V4, see [Change TTN Stack v3 to ChirpStack](#)

How to disable the built-in server

Use the following commands to start and stop the TTNv3 service:

```
# start
systemctl start ttnstack

# stop
systemctl stop ttnstack

# enable
systemctl enable ttnstack

#disable
systemctl disable ttnstack
```

Use the following commands to start and stop the Node-Red service:

```
# start
systemctl start nodered

# stop
systemctl stop nodered

# enable
systemctl enable nodered

#disable
systemctl disable nodered
```

How to choose the Chirpstack server frequency SubBand

The user has to choose a SubBand if using CN470, US915, AU915, or AS923.

Note: Since the subbands of the Chirpstack are counted from 0, us915_1 of the Chirpstack is equal to US915 FSB2, so if your LoRa Rradio is using the US915 FSB2 you have to choose the us915_1 as the Chirpstack FSB.

 DRAGINO

LoRa ▾

LoRaWAN ▾

Network ▾

System ▾

Server ▾

LogRead ▾

Home

Logout

Built-In Network Server

Platform Provider

Chirpstack

Enable

☒

Launch

Service Status

Running

Server Versions

Chirpstack V4

Frequency Plan

US915 ▾

Frequency Sub Band

us915_1 ▾

us915_0

us915_1

us915_2

us915_3

us915_4

us915_5

us915_6

us915_7

Save&Apply

When the configuration is complete, click "**Save&Apply**".

Note: When adding the device profile, the selected Region configuration is also calculated from 0, so setting it to us915_1 corresponds to US915 Sub Band 2.

ChirpStack

Search...

admin

Tenants / ChirpStack / Device profiles / US915-2

US915-2 device profile id: 4be507fe-ce60-4525-90e7-f63c461ef819

Delete device profile

General Join (OTAA / ABP) Class-B Class-C Codectags Measurements

Select device-profile template

Name

US915-2

Description

Region

US915

Region configuration

us915_1

MAC version

LoRaWAN 1.0.3

Regional parameters revision

A

ADR algorithm

Default ADR algorithm (LoRa only)

Flush queue on activate

Expected uplink interval (secs)

Device-status request frequency (req/day)

5. Watch Dog

LPS8-V2 supports the Watch Dog but is not enabled by the previous releases(2023-11-24)

The uses can be via the below method to enable Watch Dog:

```
wget -P /tmp/ http://repo.dragino.com/release/tool/watchdog/enable_watchdog.sh && chmod +x /tmp/enable_watchdog.sh && /tmp/enable_watchdog.sh
```

```
root@dragino-2d5d26:~# wget -P /tmp/ http://repo.dragino.com/release/tool/watchdog/enable_watchdog.sh && chmod +x /tmp/enable_watchdog.sh && /tmp/enable_watchdog.sh
--2023-11-24 03:18:34-- http://repo.dragino.com/release/tool/watchdog/enable_watchdog.sh
Resolving repo.dragino.com (repo.dragino.com)... 47.89.8.92
Connecting to repo.dragino.com (repo.dragino.com)|47.89.8.92|:80... connected.
HTTP request sent, awaiting response... 200 OK
Length: 287 [application/octet-stream]
Saving to: '/tmp/enable_watchdog.sh'

enable_watchdog.sh 100%[=====] 287 --.-KB/s in 0s

2023-11-24 03:18:40 (4.38 MB/s) - '/tmp/enable_watchdog.sh' saved [287/287]

--2023-11-24 03:18:40-- http://repo.dragino.com/release/tool/watchdog/basic_dog
Resolving repo.dragino.com (repo.dragino.com)... 47.89.8.92
Connecting to repo.dragino.com (repo.dragino.com)|47.89.8.92|:80... connected.
HTTP request sent, awaiting response... 200 OK
Length: 7976 (7.8k) [application/octet-stream]
Saving to: '/usr/bin/basic_dog.1'

basic_dog.1 100%[=====] 7.79k --.-KB/s in 0s

2023-11-24 03:18:40 (114 MB/s) - '/usr/bin/basic_dog.1' saved [7976/7976]

--2023-11-24 03:18:40-- http://repo.dragino.com/release/tool/watchdog/draginowatchdog.service
Resolving repo.dragino.com (repo.dragino.com)... 47.89.8.92
Connecting to repo.dragino.com (repo.dragino.com)|47.89.8.92|:80... connected.
HTTP request sent, awaiting response... 200 OK
Length: 136 [application/octet-stream]
Saving to: '/usr/lib/systemd/system/draginowatchdog.service.1'

draginowatchdog.service.1 100%[=====] 136 --.-KB/s in 0s

2023-11-24 03:18:40 (2.70 MB/s) - '/usr/lib/systemd/system/draginowatchdog.service.1' saved [136/136]

Created symlink /etc/systemd/system/multi-user.target.wants/draginowatchdog.service - /lib/systemd/system/draginowatchdog.service.
root@dragino-2d5d26:~#
root@dragino-2d5d26:~#
root@dragino-2d5d26:~#
root@dragino-2d5d26:~# systemctl status draginowatchdog
● draginowatchdog.service - dragino watch dog
   Loaded: loaded (/lib/systemd/system/draginowatchdog.service; enabled; vendor preset: enabled)
   Active: active (running) since Fri 2023-11-24 03:18:42 UTC; 21s ago
     Main PID: 3278 (basic_dog)
       Tasks: 1 (limit: 901)
      Memory: 128.0K
         CPU: 1ms
      CGroup: /system.slice/draginowatchdog.service
              └─3278 /usr/bin/basic_dog
```

6. How users can access LPS8-V2 using serial USB

USB TTL to LPS8-V2 Connection:


Port 1 of the UART on the LPS8-V2 is GND

TXD <--> UART RXD (Gray line)


RXD <--> UART TXD (White line)


GND <--> GND (Black line)

LPS8v2 UART connection photo

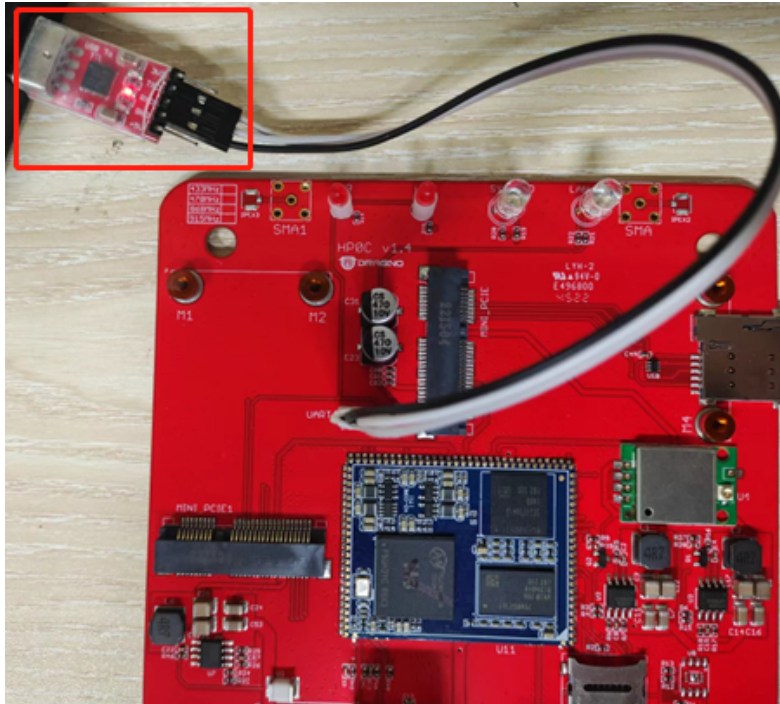

In the PC, you can use the serial port tool (such as [putty](#) in Windows), you need to set the serial baud rate to **115200** to access the serial console for LPS8v2. LPS8v2 will output system info once power on as below:

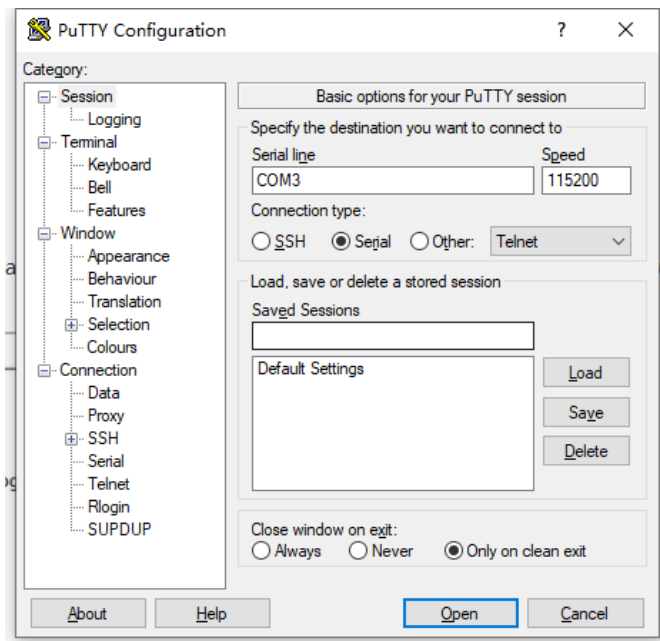

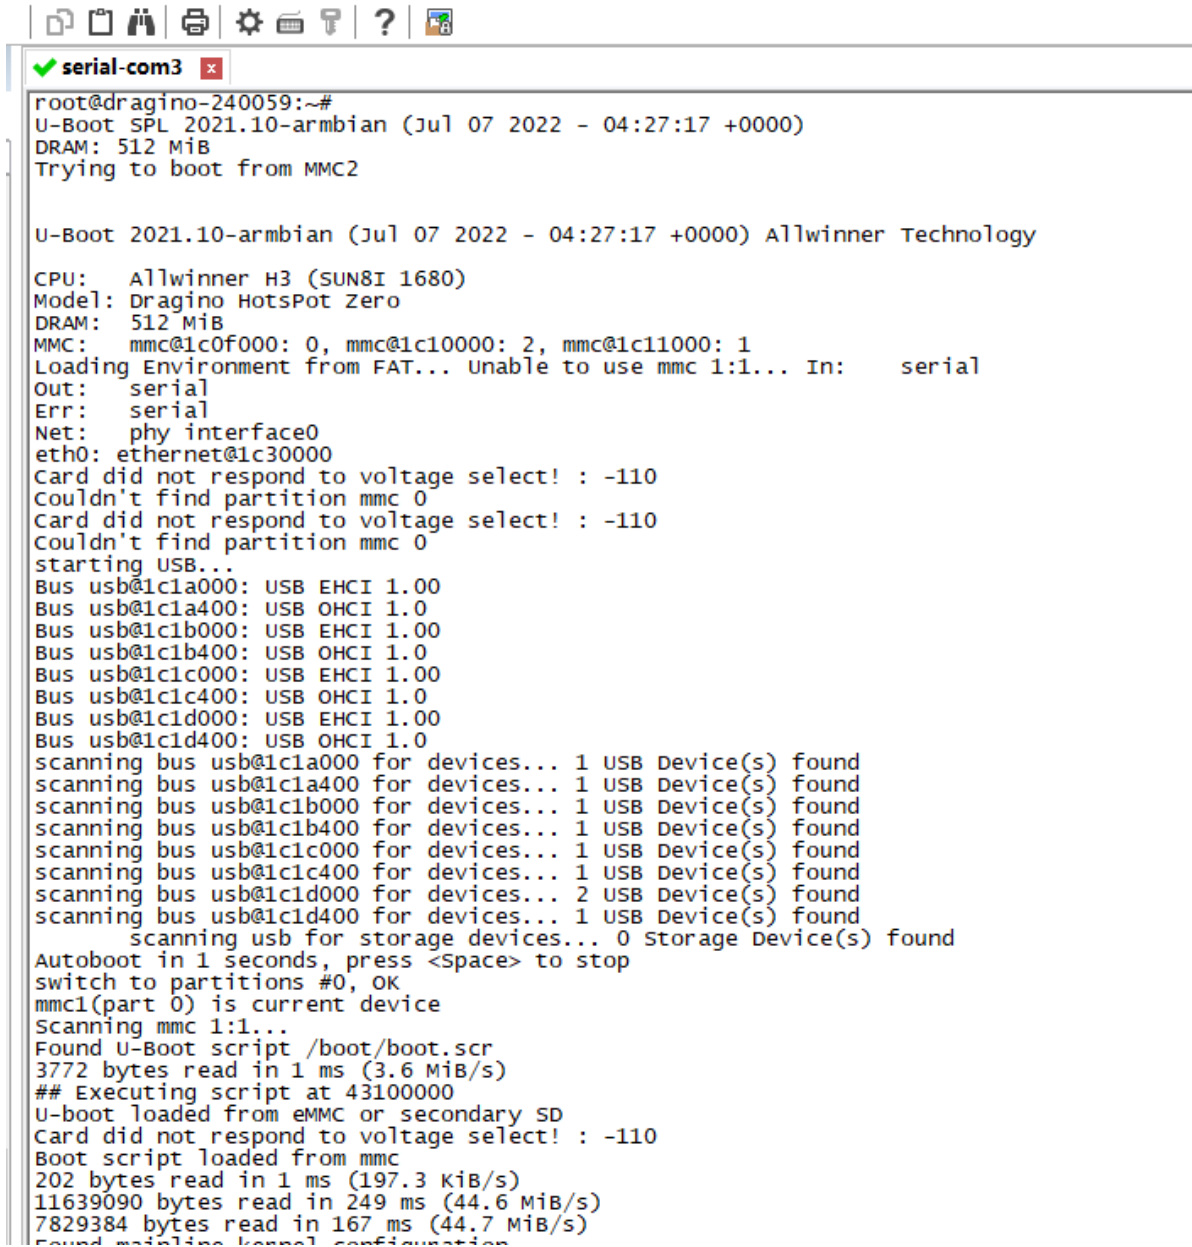

```
root@dragino-240059:~#
U-Boot SPL 2021.10-armbian (Jul 07 2022 - 04:27:17 +0000)
DRAM: 512 MiB
Trying to boot from MMC2

U-Boot 2021.10-armbian (Jul 07 2022 - 04:27:17 +0000) Allwinner Technology
CPU: Allwinner H3 (SUN8I 1680)
Model: Dragino HotsPot Zero
DRAM: 512 MiB
MMC: mmc@1c0f000: 0, mmc@1c10000: 2, mmc@1c11000: 1
Loading Environment from FAT... Unable to use mmc 1:1... In: serial
Out: serial
Err: serial
Net: phy interface0
eth0: ethernet@1c30000
Card did not respond to voltage select! : -110
Couldn't find partition mmc 0
Card did not respond to voltage select! : -110
Couldn't find partition mmc 0
starting USB...
Bus usb@1c1a000: USB EHCI 1.00
Bus usb@1c1a400: USB OHCI 1.0
Bus usb@1c1b000: USB EHCI 1.00
Bus usb@1c1b400: USB OHCI 1.0
Bus usb@1c1c000: USB EHCI 1.00
Bus usb@1c1c400: USB OHCI 1.0
Bus usb@1c1d000: USB EHCI 1.00
Bus usb@1c1d400: USB OHCI 1.0
scanning bus usb@1c1a000 for devices... 1 USB Device(s) found
scanning bus usb@1c1a400 for devices... 1 USB Device(s) found
scanning bus usb@1c1b000 for devices... 1 USB Device(s) found
scanning bus usb@1c1b400 for devices... 1 USB Device(s) found
scanning bus usb@1c1c000 for devices... 1 USB Device(s) found
scanning bus usb@1c1c400 for devices... 1 USB Device(s) found
scanning bus usb@1c1d000 for devices... 2 USB Device(s) found
scanning bus usb@1c1d400 for devices... 1 USB Device(s) found
scanning usb for storage devices... 0 Storage Device(s) found
Autoboot in 1 seconds, press <Space> to stop
switch to partitions #0, OK
mmc1(part 0) is current device
Scanning mmc 1:1...
Found U-Boot script /boot/boot.scr
3772 bytes read in 1 ms (3.6 MiB/s)
## Executing script at 43100000
U-boot loaded from eMMC or secondary SD
Card did not respond to voltage select! : -110
Boot script loaded from mmc
202 bytes read in 1 ms (197.3 KiB/s)
11639090 bytes read in 249 ms (44.6 MiB/s)
7829384 bytes read in 167 ms (44.7 MiB/s)
Found mainline kernel configuration
```

7. OTA System Update

LPS8v2 supports system auto-update via OTA, please see [this URL](#) for the detail of this feature.

7.1 Auto-update method

The default, each gateway will enable the auto-update function.

this function will be triggered every boot and every midnight.

Users can enable/disable it via Web Page

DRAGINO LoRa LoRaWAN Network System Server LogRead Home Logout

Package Management

General Settings

- Enable update every boot ☒
- Enable update every day midnight ☒

Core Packages

Name	Current Version
dragino-httpd :	2023-04-07
dragino-ui :	2023-05-28
draginofwd :	2023-04-07
draginoup :	2023-05-30
dragino-fallback :	23.01.05

System Overview
General
Back Up / Restore Config
Reboot / Reset
Remoteit
Built-in Server
Package Management

7.2 Manual upgrade method

1). Using the Linux command to upgrade the system

apt update && apt install *dragino*

2). Upgrade the system via the Web page button of "Manual Update"

Note: this method needs about 10 mins, so you will get the log after 10 mins.

DRAGINO LoRa LoRaWAN Network System Server LogRead Home Logout

Package Management

General Settings

- Enable update every boot ☒
- Enable update every day midnight ☒

Core Packages

Name	Current Version
dragino-httpd :	2023-04-07
dragino-ui :	2023-05-28
draginofwd :	2023-04-07
draginoup :	2023-05-30
dragino-fallback :	23.01.05
armbian-bsp-cli-draginohp0z :	23.02.16
linux-image-current-draginohp0z :	22.05.2

System Overview
General
Back Up / Restore Config
Reboot / Reset
Remoteit
Built-in Server
Package Management

Manual_Update

Package Auto-Update Log

8. FAQ

8.1 How to change Hostname

By default, Hostname is dragino-xxxxxx, If the user needs to change the hostname, the user needs to access the linux console of LPS8v2 and enter the following command:

```
hostnamectl set-hostname dragino-123456
```


LoRa ▼
LoRaWAN ▼
Network ▼
System ▼
Server ▼
LogRead ▼
Home
Logout

System General

System Password

Password
Show
Set

Password (admin)
Show
Set

TimeZone

Timezone
Set Timezone

HTTP Web Service

Enable HTTP Service
☒

Set HTTP Port
Set HTTP Service

Terminal Service

Enable SSH service
☒

Set SSH Port
Set SSH Service

FallBack Service

Enable FallBack service
☒

Set FallBack Address
Set FallBack Service

Keep Alive

Network Check Time
Set Check Time

System Overview
General
Back Up / Restore Config
Reboot / Reset
Remoteit
Package Management

2. Change the LoRa status package interval time: It does not affect the connection between the gateway and the server, just the status packet interval


LoRa ▾
LoRaWAN ▾
Network ▾
System ▾
Server ▾
LogRead ▾
Home
Logout

LoRa Configura LoRa

Debug Level Low ▾

Radio Settings

Stat Package Period (sec) 30

Frequency Plan EU868 Europe 868Mhz (863~870) ▾

Static GPS coordinates ?

Enable Static GPS ☐

Latitude 22.700000

Altitude (m) 450

Longitude 114.240000

Current Mode: LoRaWAN Semtech UDP

Save&Apply
Disable
Cancel

3. Disable the auto-update:


LoRa ▾
LoRaWAN ▾
Network ▾
System ▾
Server ▾
LogRead ▾
Home
Logout

Package Management

General Settings

Enable update every boot ☒

Enable update every day midnight ☒ SAVE

Core Packages

Name	Current Version
dragino-httpd :	2023-04-07
dragino-ui :	2023-07-16
draginofwd :	2023-04-07
draginoups :	2023-06-30
dragino-fallback :	23.01.05
armbian-bsp-cli-draginohp0z :	23.02.16
linux-image-current-draginohp0z :	22.05.2

Manual_Update

Package Auto-Update Log

8.4 How to connect the helium blockchain as a Data-only hotspot

apt update && apt install helium-gateway

8.5 How to change built-in LoRaWAN Server from ChirpStack v4 to TTN Stack v3.

By default, the LPS8v2's built-in server is ChirpStack v4,

If the user needs to change the built-in server from ChirpStack v4 to TTN Stack v3, the User needs to download the image and flash it to the LPS8v2 gateway:

<https://www.dropbox.com/scl/fi/qwtaw4i4dqonzramr93e4/dragino-LPS8V2-TTN-231124.rar?rlkey=nrftlkd1h8en6j07vzbhbj9ui&dl=0>

Image flash steps: [How to flash a new image\(OS\) to the gateway\(LPS8V2\)](#)

8.6 How do I view gateway logs

8.6.1 LoRaWAN Log:

Semtech UDP Log :

When the gateway starts LoRaWAN Semtech UDP, users can check the logs of the Semtech UDP in the **LogRead** --> **System Log** interface



LoRa ▼ LoRaWAN ▼ Network ▼ System ▼ Server ▼ LogRead ▼ Home Logout

System Log

USB Devices:

```
Bus 008 Device 001: ID 1d6b:0001 Linux Foundation 1.1 root hub
Bus 004 Device 003: ID 14bf:7601 Ralink Technology, Corp. MT7601U Wireless Adapter
Bus 004 Device 001: ID 1d6b:0002 Linux Foundation 2.0 root hub
Bus 007 Device 001: ID 1d6b:0001 Linux Foundation 1.1 root hub
Bus 003 Device 001: ID 1d6b:0002 Linux Foundation 2.0 root hub
Bus 006 Device 001: ID 1d6b:0001 Linux Foundation 1.1 root hub
Bus 002 Device 001: ID 1d6b:0002 Linux Foundation 2.0 root hub
Bus 005 Device 001: ID 1d6b:0001 Linux Foundation 1.1 root hub
```

Boot Info:

```
[1608979.483316] eth0: renamed from vethc890f81
[1608979.507183] IPv6: ADDRCONF(NETDEV_CHANGE): vethbf2belf: link becomes ready
[1608979.507433] br-f8865b8def50: port 6(vethbf2belf) entered blocking state
[1608979.507459] br-f8865b8def50: port 6(vethbf2belf) entered forwarding state
[1608980.062144] br-f8865b8def50: port 6(vethbf2belf) entered disabled state
[1608980.063348] vethc890f81: renamed from eth0
[1608980.135216] br-f8865b8def50: port 6(vethbf2belf) entered disabled state
[1608980.138507] device vethbf2belf left promiscuous mode
[1608980.138560] br-f8865b8def50: port 6(vethbf2belf) entered disabled state
[1609039.944186] overlayfs: disabling nfs_export due to index=off
```

Previous Log: lorawan

```
Oct 17 03:20:48 dragino-2d5d26 fwd[16343]: PKTUP [secondary_server] JSON: {"rxpk":[{"jver":1,"tmst":2350260279,"time":"2023-10-17T03:20:48.710786Z","chan":2,"rfch":1,"freq":868.500000,"mid":0,"stat":1,"modu":"LORA","datr":"SF12BW125","codr":"4/5","rssi":-76,"lsnr":3.8,"foff":-558,"rssi":-75,"size":25,"data":"gGb///+BagkNAqHj0oNZXEAKh89As0q05A=="}]}
Oct 17 03:20:48 dragino-2d5d26 fwd[16343]: PKTUP [primary_server] JSON: {"rxpk":[{"jver":1,"tmst":2350260279,"time":"2023-10-17T03:20:48.710851Z","chan":2,"rfch":1,"freq":868.500000,"mid":0,"stat":1,"modu":"LORA","datr":"SF12BW125","codr":"4/5","rssi":-76,"lsnr":3.8,"foff":-558,"rssi":-75,"size":25,"data":"gGb///+BagkNAqHj0oNZXEAKh89As0q05A=="}]}
Oct 17 03:20:48 dragino-2d5d26 fwd[16343]: INFO [primary_server-up] PUSH_ACK received in 1 ms
Oct 17 03:20:48 dragino-2d5d26 fwd[16343]: CONF_UP: {"ADDR":"FFFFFFF66","Size":25,"Rssi":-75,"snr":4,"FCtrl":{"ADR":1,"ACK":0,"FPending":0,"FOptsLen":1,"FCnt":2410,"FPort":2,"MIC":"E48E4AB3"}}
Oct 17 03:20:48 dragino-2d5d26 fwd[16343]: lgw_receive:1323: INFO: RSSI temperature offset applied: 1.472 dB (current temperature 33.8 C)
Oct 17 03:20:48 dragino-2d5d26 fwd[16343]: lgw_receive:1326: INFO: nb pkt found:1 left:0
Oct 17 03:20:48 dragino-2d5d26 fwd[16343]: INFO [primary_server-up] received packages from mote: FFFFFFFAA (fcnt=51596)
Oct 17 03:20:48 dragino-2d5d26 fwd[16343]: PKTUP [primary_server] JSON: {"rxpk":[{"jver":1,"tmst":2350448884,"time":"2023-10-17T03:20:48.901937Z","chan":1,"rfch":1,"freq":868.300000,"mid":2,"stat":1,"modu":"LORA","datr":"SF12BW125","codr":"4/5","rssi":-79,"lsnr":8.8,"foff":-308,"rssi":-78,"size":24,"data":"QKr///+AjMkCn0J0fhWFK/wjvJTezfX0"}]}
Oct 17 03:20:48 dragino-2d5d26 fwd[16343]: INFO [primary_server-up] PUSH_ACK received in 1 ms
```

Station Log:

When the gateway starts Basic Station, users can check the logs of the station in the **LogRead --> System Log** interface



LoRa ▼ LoRaWAN ▼ Network ▼ System ▼ LogRead ▼ Home Logout

System Log

LoRa Log
Gateway Traffic
System Log
Record Log

USB Devices:

```
Bus 008 Device 001: ID 1d6b:0001 Linux Foundation 1.1 root hub
Bus 004 Device 002: ID 149f:7601 Realtek Technology, Corp. MT7601U Wireless Adapter
Bus 004 Device 001: ID 1d6b:0002 Linux Foundation 2.0 root hub
Bus 007 Device 001: ID 1d6b:0001 Linux Foundation 1.1 root hub
Bus 003 Device 001: ID 1d6b:0002 Linux Foundation 2.0 root hub
Bus 006 Device 001: ID 1d6b:0001 Linux Foundation 1.1 root hub
Bus 002 Device 002: ID 2c7c:0125 Quectel Wireless Solutions Co., Ltd. EC25 LTE modem
Bus 002 Device 001: ID 1d6b:0002 Linux Foundation 2.0 root hub
```

Boot Info:

```
[ 0.000000] Booting Linux on physical CPU 0x0
[ 0.000000] Linux version 5.15.43-m700 (root@lc2ad345ab57) (arm-linux-gnueabi-hf-gcc (GNU Toolchain for the A-profile Architecture 8.3-2019.03 (arm-rel-8.36)) 8.3.0, GNU ld (GNU Toolchain for the A-profile Architecture 8.3-2019.03 (arm-rel-8.36)) 2.32.0.20190321) #22.05.2 SMP Thu Sep 21 03:32:54 UTC 2023
[ 0.000000] CPU: ARMv7 Processor [410fc075] revision 5 (ARMv7), cr=50c5387d
[ 0.000000] CPU: div instructions available: patching division code
[ 0.000000] CPU: PIPT / VIPT nonaliasing data cache, VIPT aliasing instruction cache
[ 0.000000] OF: fdt: Machine model: M700
[ 0.000000] Memory policy: Data cache writealloc
[ 0.000000] cma: Reserved 104 MiB at 0x57400000
[ 0.000000] Zone ranges:
```

Previous Log: station

```
F0pts=[ 02D3ED69..1230 mic=-1536678225 (24 bytes)
2023-10-17 02:12:16.866 [RAL:DEBU] [CRC FAIL] 868.300MHz -1.50/-102.5 SF12/BW125 (mod=16/dr=12/bw=4) xtick=bf094c62 (3205057634) 25 bytes:
8022FFFFF81B0090D0288B4BC78925CF48E1AD764D0A0E87F
2023-10-17 02:12:17.892 [S2E:VERB] RX 868.3MHz DR0 SF12/BW125 snr=3.5 rssi=-98 xtime=0xC90006BF18EB97 - updf mhdr=80 DevAddr=FFFFFFF7 FCtrl=81 FCnt=2383
F0pts=[0D] 029C5449..AF3D mic=-844766740 (25 bytes)
2023-10-17 02:12:19.675 [S2E:VERB] RX 868.3MHz DR5 SF7/BW125 snr=10.8 rssi=-114 xtime=0xC90006BF345F93 - updf mhdr=40 DevAddr=002F1FD1 FCtrl=80 FCnt=16730
F0pts=[ 02DD839F..9206 mic=-759554165 (24 bytes)
2023-10-17 02:12:21.990 [S2E:VERB] RX 868.1MHz DR5 SF7/BW125 snr=12.5 rssi=-110 xtime=0xC90006BF57B969 - updf mhdr=40 DevAddr=00750E4B FCtrl=C0 FCnt=25393
F0pts=[ 02C55E2C..D4DA mic=-722967603 (24 bytes)
2023-10-17 02:12:22.589 [SYN:INFO] MCU/SX130X drift stats: min: +0.0ppm q50: +1.4ppm q80: +11.9ppm max: +14.8ppm - threshold q90: -12.9ppm
2023-10-17 02:12:22.590 [SYN:INFO] Mean MCU drift vs SX130X#0: 1.3ppm
2023-10-17 02:12:22.690 [RAL:DEBU] [CRC FAIL] 868.500MHz 1.75/-115.5 SF12/BW125 (mod=16/dr=12/bw=4) xtick=bf624ce7 (3210890471) 24 bytes:
40AAFFFFF806BC902956C1AD2AC655F62928BF6C23C486D
2023-10-17 02:12:24.037 [RAL:DEBU] [CRC FAIL] 868.500MHz -3.50/-108.5 SF12/BW125 (mod=16/dr=12/bw=4) xtick=bf76c4a5 (3212231845) 25 bytes:
80334F0FEE102D38FC035EB1A3063770B49455161D4CCEEBB
2023-10-17 02:12:24.707 [S2E:VERB] RX 868.5MHz DR0 SF12/BW125 snr=5.8 rssi=-104 xtime=0xC90006BF80F8A6 - updf mhdr=80 DevAddr=FFFFFFF7 FCtrl=81 FCnt=2481
F0pts=[0D] 02B4D935..3F1C mic=-1918622993 (25 bytes)
2023-10-17 02:12:24.731 [S2E:VERB] RX 868.1MHz DR0 SF12/BW125 snr=8.8 rssi=-99 xtime=0xC90006BF815DEC - updf mhdr=80 DevAddr=FFFFFFF7 FCtrl=81 FCnt=2384
F0pts=[0D] 02EC923B..2311 mic=-1034066505 (25 bytes)
```

8.6.2 4G Log

The user needs to access the Linux console of the gateway and enter the following command:

```
cat /var/log/qmilog.txt
```

```
root@m700-24d12d:~# cat /var/log/qmilog.txt
[10-16_03:17:10:214] Find /sys/bus/usb/devices/2-1 idVendor=0x2c7c idProduct=0x125, bus=0x002, dev=0x002
[10-16_03:17:10:215] Auto find qmichannel = /dev/cdc-wdm0
[10-16_03:17:10:215] Auto find usbnet_adapter = wwan0
[10-16_03:17:10:215] netcard driver = qmi_wwan, driver version = 5.15.43-m700
[10-16_03:17:10:222] Modem works in QMI mode
[10-16_03:17:10:370] cdc_wdm_fd = 8
[10-16_03:17:10:453] Get clientWDS = 20
[10-16_03:17:10:485] Get clientDMS = 1
[10-16_03:17:10:520] Get clientNAS = 4
[10-16_03:17:10:550] Get clientUIM = 1
[10-16_03:17:10:582] Get clientWDA = 1
[10-16_03:17:10:618] requestBaseBandVersion EC25EFAR06A16M4G
[10-16_03:17:10:742] requestGetSIMStatus SIMStatus: SIM_READY
[10-16_03:17:10:742] requestSetProfile[1] 3gnet///0
[10-16_03:17:10:808] requestGetProfile[1] 3gnet///0
[10-16_03:17:10:839] requestRegistrationState2 MCC: 460, MNC: 1, PS: Attached, DataCap: LTE
[10-16_03:17:10:870] requestQueryDataCall IPv4ConnectionStatus: DISCONNECTED
[10-16_03:17:10:870] ifconfig wwan0 0.0.0.0
[10-16_03:17:10:889] ifconfig wwan0 down
[10-16_03:17:10:998] requestSetupDataCall wdsConnectionIPv4Handle: 0x8729f850
[10-16_03:17:11:127] ifconfig wwan0 up
[10-16_03:17:11:156] busybox udhcpc -f -n -q -t 5 -i wwan0
[10-16_03:43:47:086] File:q_l_raw_ip_mode_check Line:136 udhcpc fail to get ip address, try next:
[10-16_03:43:47:086] ifconfig wwan0 down
[10-16_03:43:47:106] echo Y > /sys/class/net/wwan0/qmi/raw_ip
[10-16_03:43:47:106] ifconfig wwan0 up
[10-16_03:43:47:124] busybox udhcpc -f -n -q -t 5 -i wwan0
[10-16_03:47:03:742] requestQueryDataCall IPv4ConnectionStatus: DISCONNECTED
[10-16_03:47:03:743] ifconfig wwan0 0.0.0.0
[10-16_03:47:03:758] ifconfig wwan0 down
[10-16_03:47:03:934] requestRegistrationState2 MCC: 0, MNC: 0, PS: Detached, DataCap: UNKNOWN
[10-16_03:47:08:286] requestRegistrationState2 MCC: 460, MNC: 0, PS: Detached, DataCap: UNKNOWN
[10-16_03:47:08:319] requestRegistrationState2 MCC: 460, MNC: 0, PS: Detached, DataCap: UNKNOWN
[10-16_03:47:57:313] QmiWwanThread exit
[10-16_03:47:57:314] qmi_main exit
[10-16_03:48:27:602] Find /sys/bus/usb/devices/2-1 idVendor=0x2c7c idProduct=0x125, bus=0x002, dev=0x002
[10-16_03:48:27:604] Auto find qmichannel = /dev/cdc-wdm0
[10-16_03:48:27:604] Auto find usbnet_adapter = wwan0
[10-16_03:48:27:604] netcard driver = qmi_wwan, driver version = 5.15.43-m700
[10-16_03:48:27:604] Modem works in QMI mode
[10-16_03:48:27:621] cdc_wdm_fd = 8
[10-16_03:48:27:710] Get clientWDS = 20
[10-16_03:48:27:742] Get clientDMS = 1
[10-16_03:48:27:774] Get clientNAS = 4
[10-16_03:48:27:807] Get clientUIM = 1
[10-16_03:48:27:838] Get clientWDA = 1
[10-16_03:48:27:870] requestBaseBandVersion EC25EFAR06A16M4G
[10-16_03:48:27:999] requestGetSIMStatus SIMStatus: SIM_ABSENT
[10-16_03:48:27:999] requestSetProfile[1] 3gnet///0
[10-16_03:48:28:064] requestGetProfile[1] 3gnet///0
[10-16_03:48:28:095] requestRegistrationState2 MCC: 460, MNC: 0, PS: Detached, DataCap: UNKNOWN
[10-16_03:48:28:127] requestQueryDataCall IPv4ConnectionStatus: DISCONNECTED
[10-16_03:48:28:127] ifconfig wwan0 0.0.0.0
[10-16_03:48:28:145] ifconfig wwan0 down
[10-16_03:55:52:899] QmiWwanThread exit
[10-16_03:55:52:901] qmi_main exit
```

8.6.3 Dmesg Log

Users can check the logs of the Dmesg in the **LogRead --> System Log** interface:

System Log

USB Devices:

```
Bus 008 Device 001: ID 1d6b:0001 Linux Foundation 1.1 root hub
Bus 004 Device 002: ID 148f:7601 Ralink Technology, Corp. MT7601U Wireless Adapter
Bus 004 Device 001: ID 1d6b:0002 Linux Foundation 2.0 root hub
Bus 007 Device 001: ID 1d6b:0001 Linux Foundation 1.1 root hub
Bus 003 Device 001: ID 1d6b:0002 Linux Foundation 2.0 root hub
Bus 006 Device 001: ID 1d6b:0001 Linux Foundation 1.1 root hub
Bus 002 Device 002: ID 2c7c:0125 Quectel Wireless Solutions Co., Ltd. EC25 LTE modem
Bus 002 Device 001: ID 1d6b:0002 Linux Foundation 2.0 root hub
```

Boot Info:

```
[ 16.527695] dwmac-sun8i 1c30000.ethernet eth0: No Safety Features support found
[ 16.527726] dwmac-sun8i 1c30000.ethernet eth0: No MAC Management Counters available
[ 16.527739] dwmac-sun8i 1c30000.ethernet eth0: PTP not supported by HW
[ 16.534420] dwmac-sun8i 1c30000.ethernet eth0: configuring for phy/mii link mode
[ 16.539976] dwmac-sun8i 1c30000.ethernet eth0: Link is Up - 100Mbps/Full - flow control rx/tx
[ 16.540348] IPv6: ADDRCONF (NETDEV_CHANGE): eth0: link becomes ready
[ 33.786196] vcc3v0: disabling
[61592.464305] dwmac-sun8i 1c30000.ethernet eth0: Link is Down
[61660.048368] dwmac-sun8i 1c30000.ethernet eth0: Link is Up - 100Mbps/Full - flow control rx/tx
```

Previous Log: station

```
2023-10-16 19:42:08.002 [S2E:VERB] RX 868.5MHz DR0 SF12/BW125 snr=4.5 rssi=-113 xtime=0xC900014BC25731 - updf mhdr=80 DevAddr=FFFFFFF3 FCtrl=81 FCnt=64917
FOpts=[OD] 024A8B41..DC67 mic=740548861 (25 bytes)
2023-10-16 19:42:08.997 [S2E:VERB] RX 868.3MHz DR0 SF12/BW125 snr=7.8 rssi=-105 xtime=0xC900014BD19993 - updf mhdr=80 DevAddr=FFFFFFF6 FCtrl=81 FCnt=64926
FOpts=[OD] 02E68464..4C0A mic=1633235622 (25 bytes)
2023-10-16 19:42:10.095 [S2E:VERB] RX 868.1MHz DR0 SF12/BW125 snr=8.2 rssi=-101 xtime=0xC900014BE25BF3 - updf mhdr=80 DevAddr=FFFFFFF7 FCtrl=81 FCnt=64947
FOpts=[OD] 02B583DD..28F5 mic=907600284 (25 bytes)
2023-10-16 19:42:10.096 [INFO] lgw_receive:1326: INFO: nb pkt found:1 left:0
lgw_receive:1323: INFO: RSSI temperature offset applied: 1.786 dB (current temperature 39.4 C)
lgw_receive:1326: INFO: nb pkt found:1 left:0
lgw_receive:1323: INFO: RSSI temperature offset applied: 1.782 dB (current temperature 39.4 C)
lgw_receive:1326: INFO: nb pkt found:1 left:0
lgw_receive:1323: INFO: RSSI temperature offset applied: 1.786 dB (current temperature 39.4 C)
lgw_receive:1326: INFO: nb pkt found:1 left:0
lgw_receive:1323: INFO: RSSI temperature offset applied: 1.782 dB (current temperature 39.4 C)
lgw_receive:1326: INFO: nb pkt found:1 left:0
lgw_receive:1323: INFO: RSSI temperature offset applied: 1.786 dB (current temperature 39.4 C)
lgw_receive:1326: INFO: nb pkt found:1 left:0
lgw_receive:1323: INFO: RSSI temperature offset applied: 1.782 dB (current temperature 39.4 C)
lgw_receive:1326: INFO: nb pkt found:1 left:0
lgw_receive:1323: INFO: RSSI temperature offset applied: 1.786 dB (current temperature 39.4 C)
```

8.6.4 Record Log

Users can record DMESG logs and LoRaWAN logs on the **LogRead -->Record Log** interface

Record Log

[StartLog](#) [StopLog](#) [ResetLog](#) [Download Log File](#)

8.6.5 View gateway logs via Linux Command

Semtech UDP Log :

journalctl -u draginofwd -f

```
root@dragino-240057:~#
root@dragino-240057:~# journalctl -u draginofwd -f
Dec 07 06:44:04 dragino-240057 fwd[3144]: PKTUP~ [secondary_server] JSON: {"stat":{"time":"2023-12-07 06:43:34 GMT","rxnb":0,"rxok":0,"rxfw":0,"ackr":0.0,"dmb":0,"txnb":0,"txfr":0,"pfrm":"sx1302","mail":"","desc":"Dragino LoRaWAN Gateway"}}
Dec 07 06:44:04 dragino-240057 fwd[3144]: INFO~ [primary_server-up] PUSH_ACK received in 230 ms
Dec 07 06:44:04 dragino-240057 fwd[3144]: INFO~ [primary_server-down] PULL_ACK received in 231 ms
Dec 07 06:44:04 dragino-240057 fwd[3144]: INFO~ [primary_server-down] PULL_ACK received in 231 ms
Dec 07 06:44:04 dragino-240057 fwd[3144]: INFO~ [primary_server-down] PULL_ACK received in 231 ms
Dec 07 06:44:04 dragino-240057 fwd[3144]: INFO~ [primary_server-down] PULL_ACK received in 231 ms
Dec 07 06:44:04 dragino-240057 fwd[3144]: INFO~ [primary_server-down] PULL_ACK received in 232 ms
Dec 07 06:44:04 dragino-240057 fwd[3144]: #####[PKT_SERV] no report of this service #####
Dec 07 06:44:04 dragino-240057 fwd[3144]: PKTUP~ [primary_server] JSON: {"stat":{"time":"2023-12-07 06:44:04 GMT","rxnb":0,"rxok":0,"rxfw":0,"ackr":90.4,"dmb":0,"txnb":0,"txfr":0,"pfrm":"sx1302","mail":"","desc":"Dragino LoRaWAN Gateway"}}
Dec 07 06:44:04 dragino-240057 fwd[3144]: PKTUP~ [secondary_server] JSON: {"stat":{"time":"2023-12-07 06:44:04 GMT","rxnb":0,"rxok":0,"rxfw":0,"ackr":0.0,"dmb":0,"txnb":0,"txfr":0,"pfrm":"sx1302","mail":"","desc":"Dragino LoRaWAN Gateway"}}
Dec 07 06:46:04 dragino-240057 fwd[3144]: INFO~ [primary_server-up] PUSH_ACK received in 230 ms
Dec 07 06:46:04 dragino-240057 fwd[3144]: INFO~ [primary_server-down] PULL_ACK received in 231 ms
Dec 07 06:46:04 dragino-240057 fwd[3144]: INFO~ [primary_server-down] PULL_ACK received in 231 ms
Dec 07 06:46:04 dragino-240057 fwd[3144]: INFO~ [primary_server-down] PULL_ACK received in 232 ms
Dec 07 06:46:04 dragino-240057 fwd[3144]: INFO~ [primary_server-down] PULL_ACK received in 231 ms
Dec 07 06:46:04 dragino-240057 fwd[3144]: INFO~ [primary_server-down] PULL_ACK received in 232 ms
Dec 07 06:46:04 dragino-240057 fwd[3144]: #####[PKT_SERV] no report of this service #####
Dec 07 06:46:04 dragino-240057 fwd[3144]: PKTUP~ [primary_server] JSON: {"stat":{"time":"2023-12-07 06:44:34 GMT","rxnb":0,"rxok":0,"rxfw":0,"ackr":90.4,"dmb":0,"txnb":0,"txfr":0,"pfrm":"sx1302","mail":"","desc":"Dragino LoRaWAN Gateway"}}
Dec 07 06:46:04 dragino-240057 fwd[3144]: PKTUP~ [secondary_server] JSON: {"stat":{"time":"2023-12-07 06:44:34 GMT","rxnb":0,"rxok":0,"rxfw":0,"ackr":0.0,"dmb":0,"txnb":0,"txfr":0,"pfrm":"sx1302","mail":"","desc":"Dragino LoRaWAN Gateway"}}
Dec 07 06:46:04 dragino-240057 fwd[3144]: INFO~ [primary_server-up] PUSH_ACK received in 230 ms
Dec 07 06:46:04 dragino-240057 fwd[3144]: INFO~ [primary_server-down] PULL_ACK received in 231 ms
Dec 07 06:46:04 dragino-240057 fwd[3144]: lgw_receive:1323: INFO: RSSI temperature offset applied: 1.293 dB (current temperature 30.4 C)
Dec 07 06:46:04 dragino-240057 fwd[3144]: lgw_receive:1326: INFO: nb pkt found:1 left:0
Dec 07 06:46:04 dragino-240057 fwd[3144]: INFO~ [primary_server-up] received packages from mote: 2608A102 (Fcnt=15501)
Dec 07 06:46:04 dragino-240057 fwd[3144]: PKTUP~ [primary_server] JSON: {"rxpk":{"f":1,"t":1,"tmst":624418711,"time":"2023-12-07T06:44:43.125370Z","chan":6,"rfch":1,"freq":905.100000,"mid": 8,"stat":1,"modu":"LORA","datr":"SF7Bw125","codr":"4/5","rssi":-113,"lsnr":5.8,"rfrr":3965,"rssi1":-112,"size":27,"data":"QAKKcyadJTwG/gycvJX6XT+e1trgl4Fu9ea0"}}
Dec 07 06:46:04 dragino-240057 fwd[3144]: INFO~ [secondary_server-up] received packages from mote: 2608A102 (Fcnt=15501)
Dec 07 06:46:04 dragino-240057 fwd[3144]: PKTUP~ [secondary_server] JSON: {"rxpk":{"f":1,"t":1,"tmst":624418711,"time":"2023-12-07T06:44:43.125657Z","chan":6,"rfch":1,"freq":905.100000,"mid": 8,"stat":1,"modu":"LORA","datr":"SF7Bw125","codr":"4/5","rssi":-113,"lsnr":5.8,"rfrr":3965,"rssi1":-112,"size":27,"data":"QAKKcyadJTwG/gycvJX6XT+e1trgl4Fu9ea0"}}
Dec 07 06:46:04 dragino-240057 fwd[3144]: UNCONF_UP:{"ADDR":"2608A102","size":27,"rssi":-112,"snr":6,"Fctrl":["ADR":1,"ACK":0,"Fpending":0,"FoptsLen":13],"Fcnt":15501,"Fport":12,"Mic":"B4E6F56E"}
Dec 07 06:46:04 dragino-240057 fwd[3144]: INFO~ [primary_server-up] PUSH_ACK received in 230 ms
Dec 07 06:46:04 dragino-240057 fwd[3144]: INFO~ [primary_server-down] PULL_ACK received in 231 ms
Dec 07 06:46:04 dragino-240057 fwd[3144]: INFO~ [primary_server-down] PULL_ACK received in 231 ms
Dec 07 06:46:04 dragino-240057 fwd[3144]: INFO~ [primary_server-down] PULL_ACK received in 232 ms
```

Station Log:

tail -f /var/log/station.log

```
root@dragino-240057:~#
root@dragino-240057:~# tail -f /var/log/station.log
2023-12-06 08:19:37.963 [SVN:INFO] MCU/SX130X drift stats: min: -2.4ppm q50: -7.1ppm q80: -12.9ppm max: -17.6ppm - threshold q90: -15.9ppm
2023-12-06 08:19:37.964 [SVN:INFO] Mean MCU drift vs SX130X#0: -4.5ppm
2023-12-06 08:19:42.165 [SVN:WARN] Time sync rejected: quality=302 threshold=322
2023-12-06 08:19:44.266 [SVN:WARN] Repeated excessive clock drifts between MCU/SX130X#0 (3 retries): 37.8ppm (threshold 15.9ppm)
2023-12-06 08:19:46.367 [SVN:WARN] Time sync rejected: quality=326 threshold=322
2023-12-06 08:19:48.467 [SVN:WARN] Time sync rejected: quality=303 threshold=322
2023-12-06 08:19:51.618 [SVN:WARN] Repeated excessive clock drifts between MCU/SX130X#0 (6 retries): 38.0ppm (threshold 15.9ppm)
2023-12-06 08:19:56.870 [SVN:WARN] Time sync rejected: quality=368 threshold=322
2023-12-06 08:20:11.573 [SVN:WARN] Time sync rejected: quality=399 threshold=322
2023-12-06 08:20:11.669 [SZL:WARN] RX 904.3MHz DR3 SF7/Bw125 snr=-7.8 rssi=-128 xtime=0x58000009C0B1CD - updf mhdr=80 DevAddr=26085CD4 Fctrl=180 Fcnt=6253 Fopts=[ 02F8CE7D..F081 mfc=353996689 (24 by tes)
```

Dmesg Log:

dmesg


```

tes)
AC
root@dragino-240057:~# dmesg
[    0.000000] Booting Linux on physical CPU 0x0
[    0.000000] Linux version 5.15.43-dragino2 (root@72ba7d3800e0) (arm-linux-gnueabi-hf-gcc (GNU Toolchain for the A-profile Architecture 8.3-2019.03 (arm-rel-8.36)) 8.3.0, GNU ld (GNU Toolchain for the A-profile Architecture 8.3-2019.03 (arm-rel-8.36)) 2.32.0.20190321) #22.05.2 SMP wed oct 19 08:27:27 UTC 2022
[    0.000000] CPU: ARMv7 Processor [410fc075] revision 5 (ARMv7), cr=50c5387d
[    0.000000] CPU: div instructions available: patching division code
[    0.000000] CPU: PIPT / VIPT nonaliasing data cache, VIPT aliasing instruction cache
[    0.000000] OF: fdt: Machine model: Dragino HotsPot Zero
[    0.000000] Memory policy: Data cache writealloc
[    0.000000] cma: Reserved 104 MiB at 0x57400000
[    0.000000] Zone ranges:
[    0.000000] Normal [mem 0x00000000-0x00000000-0x000000005fffffff]
[    0.000000] HighMem empty
[    0.000000] Movable zone start for each node
[    0.000000] Early memory node ranges
[    0.000000] node 0: [mem 0x00000000-0x00000000-0x000000005fffffff]
[    0.000000] Initmem setup node 0 [mem 0x00000000-0x00000000-0x000000005fffffff]
[    0.000000] psci: probing for conduit method from DT.
[    0.000000] psci: using PSCI v0.1 function IDs from DT
[    0.000000] percpu: Embedded 16 pages/cpu s36748 r8192 d20596 u65536
[    0.000000] pcpu-alloc: s36748 r8192 d20596 u65536 alloc=16*4096
[    0.000000] pcpu-alloc: [0] 0 [0] 1 [0] 2 [0] 3
[    0.000000] Built 1 zonelists, mobility grouping on. Total pages: 129920
[    0.000000] kernel command line: root=ubi0:rootfs ubi0 rootfstype=ext4 console=ttyS0,115200 console=tty1 hdm_i.audio=EDID:0 disp.screen0_output_mode=1920x1080p60 consoleblank=0 loglevel=1 ubootpart= ubootsource=mmc usb-storage.quirks=0x2537:0x1066:u,0x2537:0x1068:u sunxi_ve_mem_reserve=0 sunxi_g2d_mem_reserve=0 sunxi_fb_mem_reserve=16 cgroup_enable=memory swapaccount=1
[    0.000000] unknown kernel command line parameters "consoleblank=0 ubootpart= ubootsource=mmc sunxi_ve_mem_reserve=0 sunxi_g2d_mem_reserve=0 sunxi_fb_mem_reserve=16 cgroup_enable=memory", will be passed to user space.
[    0.000000] Dentry cache hash table entries: 65536 (order: 6, 262144 bytes, linear)
[    0.000000] Inode cache hash table entries: 32768 (order: 5, 131072 bytes, linear)
[    0.000000] mem auto-init: stack:off, heap alloc:off, heap free:off
[    0.000000] Memory: 384792K/524288K available (0210K kernel code, 1379K rdata, 3016K rodata, 1024K init, 307K bss, 33040K reserved, 106496K cma-reserved, 0K highmem)
[    0.000000] random: get_random_u32 called from _kmem_cache_create+0x1b/0x2b0 with crng_init=0
[    0.000000] SLUB: HWalign=64, Order=0-3, MinObjects=0, CPUs=4, Nodes=1
[    0.000000] ftrace: allocating 41093 entries in 121 pages

```

8.7 DIN Mount Reference:



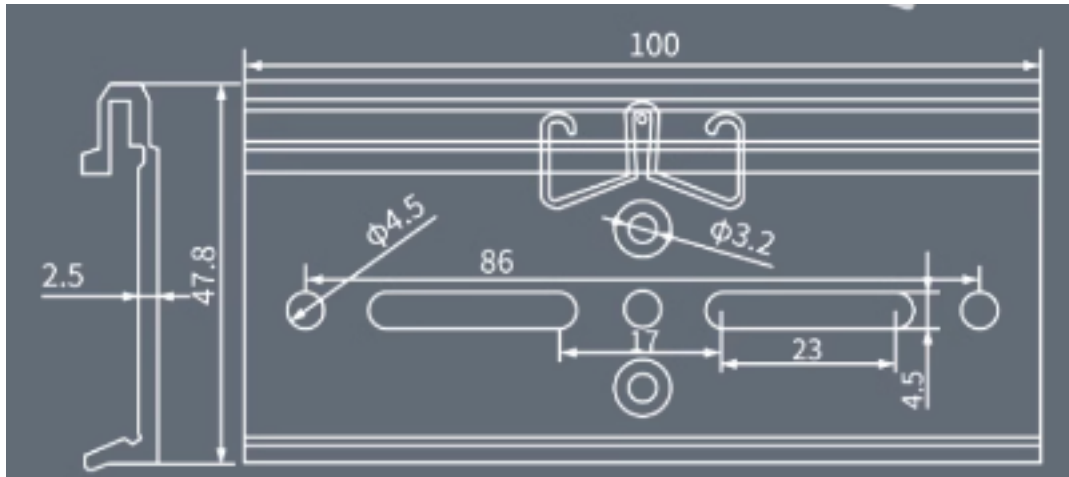

9. Trouble Shooting

9.1 I can't log in to the built-in Server TTN Stack which shows 'Login failed'.

Login failed

There was an error causing the login to fail. This might be due to server-side misconfiguration or a browser-cookie problem. Please try logging in again. If the error persists, please contact an administrator.

We're sorry for the inconvenience.

[< Back to login](#)

Error ID: `error:pkg/web/oauthclient:exchange`

Correlation ID: `853ff830a8f84d578d6290ebdc658b4b`

▼ [Technical details](#)

```
{
  "code": 7,
  "message": "error:pkg/web/oauthclient:exchange (token exchange refused)",
  "details": [
    {
      "@type": "type.googleapis.com/ttn.lorawan.v3.ErrorDetails",
      "namespace": "pkg/web/oauthclient",
      "name": "exchange",
      "message_format": "token exchange refused",
      "correlation_id": "853ff830a8f84d578d6290ebdc658b4b",
      "cause": {
        "namespace": "pkg/errors",
        "name": "request",
        "message_format": "request to `{url}` failed",
        "attributes": {
          "op": "Post",
          "url": "http://dragino-9d65cd:8080/oauth/token"
        }
      }
    }
  ]
}
```

 [Copy to clipboard](#)

This is caused by the inconsistency between the built-in TTN-Stack domain configuration and your login URL.

By default, ttn-stack uses the gateway's domain name for URL resolution, but in some networks, they prefer to resolve IP-v4 addresses.

So you can change the domain name of the TTN-Stack configuration to the IPv4 address.

Click the [update URL](#) button to configure the URL with the current eth port address.

Built-in Server

Type	Name	Status	URL	
LoRaWAN-Server	TTN-Stack	Running	http://10.130.2.22:8080/console	<button>Update URL</button> <button>Restart TTN</button>
Application-Server	Node-Red	Running	http://dragino-3e1a15:1880	<button>Restart NodeRed</button>

9.2 The built-in TTN status is "Not Running" and the URI is "dragino-123456". How users fix this problem

When this problem occurs, click "Update To DEFAULT", this problem will be fixed.

 LoRa ▾ LoRaWAN ▾ Network ▾ System ▾ LogRead ▾ Home Logout

Built-In Server

Type	Name	Status	URL	
LoRaWAN-Server	TTN-Stack	Not Running	http://dragino-123456:8080/console	<button>Update To ETH</button> <button>Update To WLAN</button> <button>Update To DEFAULT</button> <button>Restart THE TTN</button>
Application-Server	Node-Red	Running	http://dragino-2407bf:1880	<button>Restart NodeRed</button>

9.3 Fallback IP does not work, how can users check

When the computer has completed the above fallback IP configuration, the LPS8v2 Web UI is still not accessible via fallback IP.

1. Check whether the configuration is correct

Run the CMD command to ipconfig and ping 172.31.255.254.

If this fails, the user needs to reconfigure.

```
Media State . . . . . : Media disconnected
Connection-specific DNS Suffix . :

Wireless LAN adapter 本地连接* 2:

Media State . . . . . : Media disconnected
Connection-specific DNS Suffix . :

Ethernet adapter Ethernet:

Connection-specific DNS Suffix . :
Link-local IPv6 Address . . . . : fe80::7ce6:f39d:bfcc:5b71%5
IPv4 Address. . . . . : 172.31.255.253
Subnet Mask . . . . . : 255.255.255.252
Default Gateway . . . . . :

Wireless LAN adapter WLAN:

Connection-specific DNS Suffix . :
Link-local IPv6 Address . . . . : fe80::d477:393b:a910:d30b%14
IPv4 Address. . . . . : 10.130.2.141
Subnet Mask . . . . . : 255.255.255.0
Default Gateway . . . . . : 10.130.2.1

Ethernet adapter Bluetooth Network Connection:

Media State . . . . . : Media disconnected
Connection-specific DNS Suffix . :

C:\Users\Administrator>ipconfig
```

```
C:\Users\Administrator>ping 172.31.255.254

Pinging 172.31.255.254 with 32 bytes of data:
Reply from 172.31.255.254: bytes=32 time=1ms TTL=64
Reply from 172.31.255.254: bytes=32 time<1ms TTL=64
Reply from 172.31.255.254: bytes=32 time<1ms TTL=64
Reply from 172.31.255.254: bytes=32 time<1ms TTL=64

Ping statistics for 172.31.255.254:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 1ms, Average = 0ms

C:\Users\Administrator>
```

2. Check whether the firewall is disabled

If the firewall is not down, this will affect access to the gateway.

9.4 Click "Manual_Update", why there is no response?

When you click "Manual_Update", the gateway will finish updating within 10 minutes and display the update log.

 LoRa ▼ LoRaWAN ▼ Network ▼ System ▼ LogRead ▼ Home Logout

Package Management

General Settings

Enable update every boot ☒
Enable update every day midnight ☒ SAVE

Core Packages

Name	Current Version
dragino-httpd :	2023-04-07
dragino-ui :	2023-05-24
draginofwd :	2023-04-07
draginoups :	2023-05-24
dragino-fallback :	23.01.05
armbian-bsp-cli-dragino0z :	23.02.16
linux-image-current-dragino0z :	22.05.2

Manual_Update

Package Auto-Update Log

```
=====
2023-05-26 01:01
installed dragino-ui

WARNING: apt does not have a stable CLI interface. Use with caution in scripts.

Reading package lists...
Building dependency tree...
Reading state information...
The following packages will be upgraded:
  dragino-ui
1 upgraded, 0 newly installed, 0 to remove and 2 not upgraded.
Need to get 1,796 kB of archives.
After this operation, 0 B of additional disk space will be used.
Get:1 http://repo.dragino.com jammy/main armhf dragino-ui all 2023-05-24 [1,796 kB]
debconf: unable to initialize frontend: Dialog
```

9.5 Why the LPS8V2's Access Point does not do not appear & Fallback IP unable to access

Earlier versions of the LPS8V2 which missing the AP driver and not installed the fallback package, so the users have to do an extra update.

apt update && apt install *dragino*

wget -P /tmp/ http://repo.dragino.com/release/hp0c-packages/linux-image-current-dragino0z_22.05.2_armhf.deb && dpkg -i /tmp/[linux-image-current-dragino0z_22.05.2_armhf.deb](http://repo.dragino.com/release/hp0c-packages/linux-image-current-dragino0z_22.05.2_armhf.deb)

9.6 How to reset the built-in server


1) Build-in The Things Network

Refer to this link to delete the Built-in server's device.

[Delete devices from Build-in The Things Network](#)

2) Build-in Chirpstack

Users need to click "Reset" on the Server-->NetServer interface, ChirpStack will be reset.

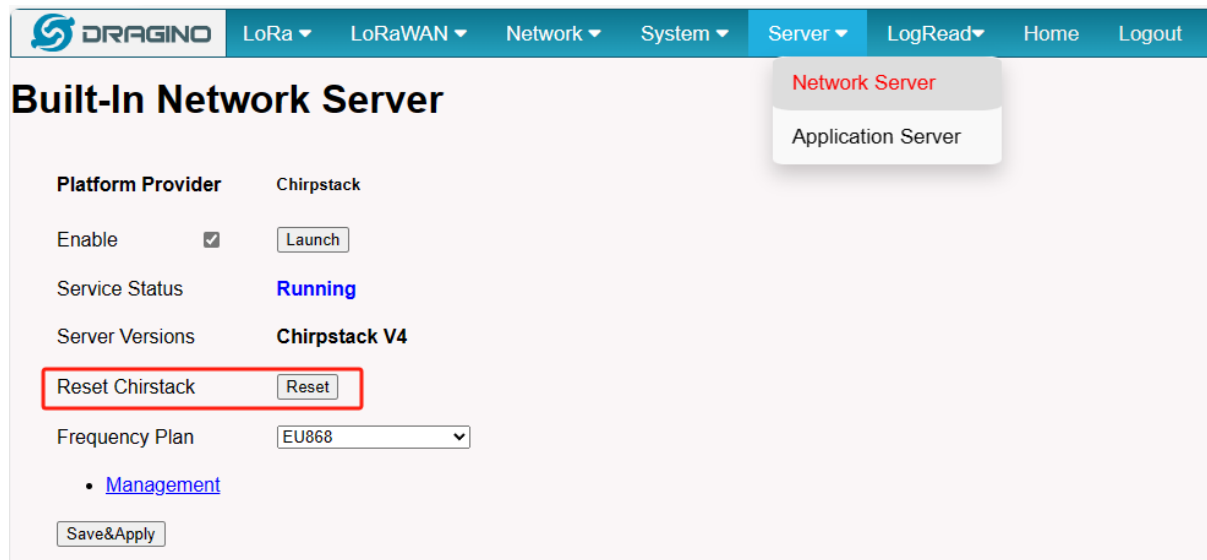

10. Supports

If you are experiencing issues and can't solve them, you can send mail to support@dragino.com.

With your question as detailed as possible. We will reply and help you in the shortest.

11. Reference

- Install Tago Core: Refer **Install Tago Core in LPS8v2** in [Instruction](#).
- [Advance OS Reference Guide for LPS8v2](#).

12. Order Info

LPS8v2-XXX-YYY

XXX: Frequency Band

- **AS923**: LoRaWAN AS923 band

- **AU915**: LoRaWAN AU915 band
- **EU868**: LoRaWAN EU868 band
- **KR920**: LoRaWAN KR920 band
- **US915**: LoRaWAN US915 band
- **IN865**: LoRaWAN IN865 band

YYY: 4G Cellular Option

- **EC25-E**: EMEA, Korea, Thailand, India
- **EC25-AFX**: America:Verizon, AT&T(FirstNet), U.S.Cellular; Canada:Telus
- **EC25-AUX**: Latin America, New Zeland, Taiwan
- **EC25-J**: Japan, DOCOMO, SoftBank, KDDI

More info about valid bands, please see [EC25-E product page](#).

13. Manufacturer Info

Shenzhen Dragino Technology Development co. LTD

Room 202, Block B, BCT Incubation Bases (BaoChengTai), No.8 CaiYunRoad

LongCheng Street, LongGang District ; Shenzhen 518116,China

14. FCC Warning

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

The antenna(s) used for this transmitter must be installed to provide a separation distance of at least 20 cm from all persons and must not be co-located or operating in conjunction with any other antenna or transmitter.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.