

# TEST REPORT

Reference No. .... : WTD21D11128909W  
FCC ID ..... : V5PSP30RF21  
Applicant..... : PAX Technology Limited  
Address..... : Room 2416, 24/F., Sun Hung Kai Centre, 30 Harbour, Hong Kong, China  
Manufacturer ..... : PAX Computer Technology(Shenzhen) Co., Ltd.  
Address..... : 4/F, No.3 Building, Software Park, Second Central Science-Tech Road, High-Tech industrial Park, Shenzhen, Guangdong, P.R.C.  
Product..... : PIN PAD  
Model(s). .... : SP30  
Brand Name..... : PAX or   
Standards..... : FCC CFR47 Part 15 Section 15.225  
Date of Receipt sample .... : 2021-11-25  
Date of Test ..... : 2021-11-25 to 2021-12-02  
Date of Issue..... : 2021-12-02  
Test Result..... : **Pass**

## Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

## Prepared By:


**Waltek Testing Group Co., Ltd.**

Address: No. 77, Houjie Section, Guantai Road, Houjie Town, Dongguan City, Guangdong, China

Tel: +86-769-2267 6998


Fax: +86-769-2267 6828

Compiled by:



Andy Feng / Project Engineer

Approved by:



Daniel Liu / Designated Reviewer

## 2 Contents

|                                                    | Page      |
|----------------------------------------------------|-----------|
| <b>1 COVER PAGE.....</b>                           | <b>1</b>  |
| <b>2 CONTENTS .....</b>                            | <b>2</b>  |
| <b>3 REVISION HISTORY .....</b>                    | <b>3</b>  |
| <b>4 GENERAL INFORMATION.....</b>                  | <b>4</b>  |
| 4.1 GENERAL DESCRIPTION OF E.U.T.....              | 4         |
| 4.2 DETAILS OF E.U.T.....                          | 4         |
| 4.3 CHANNEL LIST .....                             | 5         |
| 4.4 TEST MODE .....                                | 5         |
| 4.5 TEST FACILITY .....                            | 5         |
| <b>5 TEST SUMMARY .....</b>                        | <b>6</b>  |
| <b>6 EQUIPMENT USED DURING TEST .....</b>          | <b>7</b>  |
| 6.1 EQUIPMENTS LIST .....                          | 7         |
| 6.2 MEASUREMENT UNCERTAINTY.....                   | 8         |
| 6.3 TEST EQUIPMENT CALIBRATION .....               | 8         |
| <b>7 CONDUCTED EMISSION .....</b>                  | <b>9</b>  |
| 7.1 E.U.T. OPERATION.....                          | 9         |
| 7.2 EUT SETUP .....                                | 9         |
| 7.3 MEASUREMENT DESCRIPTION .....                  | 9         |
| 7.4 TEST RESULT .....                              | 10        |
| <b>8 RADIATED SPURIOUS EMISSIONS.....</b>          | <b>14</b> |
| 8.1 EUT OPERATION.....                             | 14        |
| 8.2 TEST SETUP .....                               | 15        |
| 8.3 SPECTRUM ANALYZER SETUP .....                  | 16        |
| 8.4 TEST PROCEDURE.....                            | 16        |
| 8.5 CORRECTED AMPLITUDE & MARGIN CALCULATION ..... | 16        |
| 8.6 SUMMARY OF TEST RESULTS .....                  | 17        |
| <b>9 FREQUENCY TOLERANCE .....</b>                 | <b>19</b> |
| 9.1 TEST PROCEDURE.....                            | 19        |
| 9.2 TEST RESULT .....                              | 19        |
| <b>10 20DB BANDWIDTH .....</b>                     | <b>21</b> |
| 10.1 TEST PROCEDURE.....                           | 21        |
| 10.2 TEST RESULT .....                             | 21        |
| <b>11 ANTENNA REQUIREMENT .....</b>                | <b>22</b> |
| <b>12 PHOTOGRAPHS- TEST SETUP PHOTOS .....</b>     | <b>23</b> |

**3 Revision History**

| Test report No. | Date of Receipt sample | Date of Test                   | Date of Issue | Purpose  | Comment | Approved |
|-----------------|------------------------|--------------------------------|---------------|----------|---------|----------|
| WTD21D11128909W | 2021-11-25             | 2021-11-25<br>to<br>2021-12-02 | 2021-12-02    | Original | -       | Valid    |

## 4 General Information

### 4.1 General Description of E.U.T.

|                    |                                            |
|--------------------|--------------------------------------------|
| Product Name:      | PIN PAD                                    |
| Model No.:         | SP30                                       |
| Model Description: | N/A                                        |
| NFC:               | Support                                    |
| Hardware Version:  | SP30-MAIN-V41B                             |
| Software Version:  | SxxMonitor_Release_20210820(v3.84) (v3.84) |
| Note:              | N/A                                        |

### 4.2 Details of E.U.T.

|                      |                                                                                                                                                                                                |
|----------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Operation Frequency: | NFC:13.56MHz                                                                                                                                                                                   |
| Ratings:             | Adapter 1#<br>Input: 100-240~ 50/60Hz, 0.25A<br>Output: 5.0V, 1.0A<br>Model: HKA00505010-2P<br>Adapter 2#<br>Input: 100-240~ 50/60Hz, 0.40A<br>Output: 5.0V, 1.0A, 5.0W<br>Model: GLH50D1000HF |

### 4.3 Channel List

| NFC Test Mode |             |                 |
|---------------|-------------|-----------------|
| Channel No.   | Channel No. | Frequency (MHz) |
| 0             | 0           | 13.56MHz        |

### 4.4 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests; the worst data were recorded and reported.

| Test mode    | Lower channel | Middle channel | Upper channel |
|--------------|---------------|----------------|---------------|
| Transmitting | N/A           | 13.56MHz       | N/A           |

### 4.5 Test Facility

The test facility has a test site registered with the following organizations:

**ISED CAB identifier: CN0013. Test Firm Registration No.: 7760A.**

Waltek Testing Group Co., Ltd. Has been registered and fully described in a report filed with the Industry Canada. The acceptance letter from the Industry Canada is maintained in our files.

Registration number 7760A, October 15, 2016.

**FCC Designation No.: CN1201. Test Firm Registration No.: 523476.**

Waltek Testing Group Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration number 523476, September 10, 2019.

## 5 Test Summary

| Test Items                                                                | Test Requirement              | Result |
|---------------------------------------------------------------------------|-------------------------------|--------|
| Conducted Emissions                                                       | 15.207                        | PASS   |
| Radiated Emission                                                         | 15.205(a)<br>15.209<br>15.225 | PASS   |
| Frequency Tolerance                                                       | 15.225                        | PASS   |
| 20dB Bandwidth                                                            | 15.215(c)                     | PASS   |
| Antenna Requirement                                                       | 15.203                        | PASS   |
| Note: C=Compliance; NC=Not Compliance; NT=Not Tested; N/A=Not Applicable. |                               |        |

## 6 Equipment Used during Test

### 6.1 Equipments List

| Conducted Emissions Test Site 1#                              |                            |                      |              |                 |                       |                      |
|---------------------------------------------------------------|----------------------------|----------------------|--------------|-----------------|-----------------------|----------------------|
| Item                                                          | Equipment                  | Manufacturer         | Model No.    | Serial No.      | Last Calibration Date | Calibration Due Date |
| 1.                                                            | EMI Test Receiver          | R&S                  | ESCI         | 100947          | 2021-07-26            | 2022-07-25           |
| 2.                                                            | LISN                       | R&S                  | ENV216       | 101215          | 2021-07-26            | 2022-07-25           |
| 3.                                                            | Cable                      | Top                  | TYPE16(3.5M) | -               | 2021-07-26            | 2022-07-25           |
| Conducted Emissions Test Site 2#                              |                            |                      |              |                 |                       |                      |
| Item                                                          | Equipment                  | Manufacturer         | Model No.    | Serial No.      | Last Calibration Date | Calibration Due Date |
| 1.                                                            | EMI Test Receiver          | R&S                  | ESCI         | 101155          | 2021-07-26            | 2022-07-25           |
| 2.                                                            | LISN                       | SCHWARZBECK          | NSLK 8128    | 8128-289        | 2021-07-26            | 2022-07-25           |
| 3.                                                            | Limiter                    | CYBERTEK             | EM5010       | 261115-001-0024 | 2021-07-26            | 2022-07-25           |
| 4.                                                            | Cable                      | Laplace              | RF300        | -               | 2021-07-26            | 2022-07-25           |
| 3m Semi-anechoic Chamber for Radiation Emissions Test site 1# |                            |                      |              |                 |                       |                      |
| Item                                                          | Equipment                  | Manufacturer         | Model No.    | Serial No.      | Last Calibration Date | Calibration Due Date |
| 1                                                             | Spectrum Analyzer          | R&S                  | FSP          | 100091          | 2021-04-26            | 2022-04-25           |
| 2                                                             | Amplifier                  | Agilent              | 8447D        | 2944A10178      | 2021-07-26            | 2022-07-25           |
| 3                                                             | Active Loop Antenna        | ANRITSU              | MH648A       | M43381          | 2021-04-26            | 2022-04-25           |
| 4                                                             | Trilog Broadband Antenna   | SCHWARZBECK          | VULB9163     | 336             | 2021-08-23            | 2022-08-22           |
| 5                                                             | Coaxial Cable (below 1GHz) | Top                  | TYPE16(13M)  | -               | 2021-04-26            | 2022-04-25           |
| 6                                                             | Broad-band Horn Antenna    | SCHWARZBECK          | BBHA 9120 D  | 667             | 2021-04-30            | 2020-04-28           |
| 7                                                             | Broadband Preamplifier     | COMPLIANCE DIRECTION | PAP-1G18     | 2004            | 2021-07-26            | 2022-07-25           |
| 8                                                             | Coaxial Cable (above 1GHz) | Top                  | 1GHz-18GHz   | N/A             | 2021-07-26            | 2022-07-25           |
| 3m Semi-anechoic Chamber for Radiation Emissions Test site 2# |                            |                      |              |                 |                       |                      |
| Item                                                          | Equipment                  | Manufacturer         | Model No.    | Serial No       | Last Calibration Date | Calibration Due Date |
| 1                                                             | Test Receiver              | R&S                  | ESCI         | 101296          | 2021-04-26            | 2022-04-25           |
| 2                                                             | Trilog Broadband Antenna   | SCHWARZBECK          | VULB9160     | 9160-3325       | 2021-10-31            | 2022-10-30           |
| 3                                                             | Amplifier                  | ANRITSU              | MH648A       | M43381          | 2021-04-26            | 2022-04-25           |
| 4                                                             | Cable                      | HUBER+SUHNER         | CBL2         | 525178          | 2021-04-26            | 2022-04-25           |

| RF Conducted Testing |                                 |              |           |            |                       |                      |
|----------------------|---------------------------------|--------------|-----------|------------|-----------------------|----------------------|
| Item                 | Equipment                       | Manufacturer | Model No. | Serial No. | Last Calibration Date | Calibration Due Date |
| 1.                   | EMC Analyzer<br>(9k~26.5GHz)    | Agilent      | E7405A    | MY45114943 | 2021-04-26            | 2022-04-25           |
| 2.                   | Spectrum Analyzer<br>(9k~6GHz)  | R&S          | FSL6      | 100959     | 2021-04-26            | 2022-04-25           |
| 3.                   | Signal Analyzer<br>(9k~26.5GHz) | Agilent      | N9010A    | MY50520207 | 2021-04-26            | 2022-04-25           |

## 6.2 Measurement Uncertainty

| Parameter                                       | Uncertainty                                    |
|-------------------------------------------------|------------------------------------------------|
| Radio Frequency                                 | $\pm 1 \times 10^{-6}$                         |
| RF Power                                        | $\pm 1.0$ dB                                   |
| RF Power Density                                | $\pm 2.2$ dB                                   |
| Radiated Spurious Emissions test                | $\pm 5.03$ dB<br>(Bilog antenna 30M~1000MHz)   |
|                                                 | $\pm 5.47$ dB<br>(Horn antenna 1000M~25000MHz) |
| Confidence interval: 95%. Confidence factor:k=2 |                                                |

## 6.3 Test Equipment Calibration

All the test equipments used are valid and calibrated by CEPREI Certification Body that address is No.110 Dongguan Zhuang RD. Guangzhou, P.R.China.



## 7 Conducted Emission

Test Requirement: FCC CFR 47 Part 15 Section 15.207  
 Test Method: ANSI C63.10:2013  
 Test Result: PASS  
 Frequency Range: 150kHz to 30MHz  
 Class/Severity: Class B  
 Limit:

| Frequency (MHz) | Limit (dB $\mu$ V) |           |
|-----------------|--------------------|-----------|
|                 | Quasi-peak         | Average   |
| 0.15 to 0.5     | 66 to 56 *         | 56 to 46* |
| 0.5 to 5        | 56                 | 46        |
| 5 to 30         | 60                 | 50        |

### 7.1 E.U.T. Operation

Operating Environment :


Temperature: 25.5 °C  
 Humidity: 51 % RH  
 Atmospheric Pressure: 101.2kPa

EUT Operation :

The test was performed in transmitting mode, the test data were shown in the report.

### 7.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.10:2013

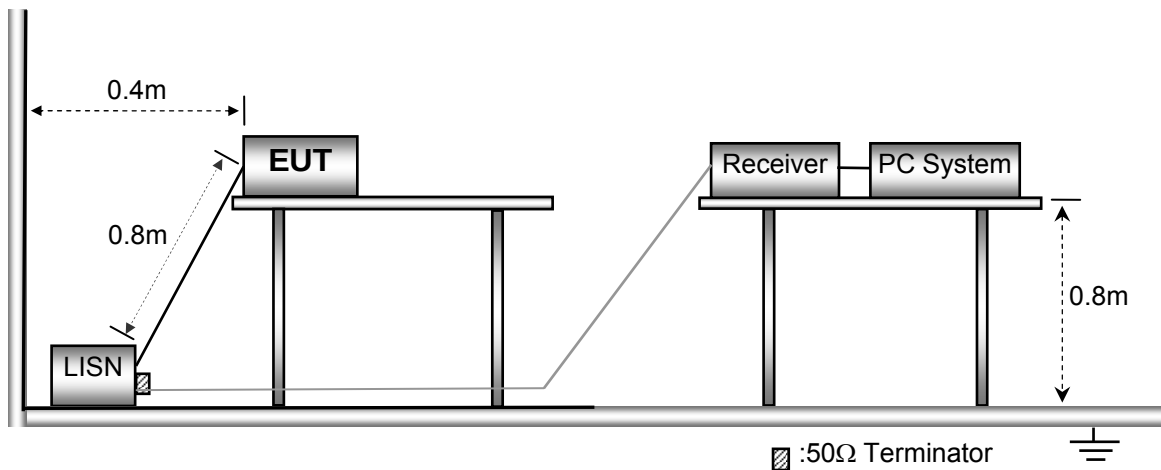


### 7.3 Measurement Description

The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.


7.4 Test Result

Adapter 1:  
Live Line :

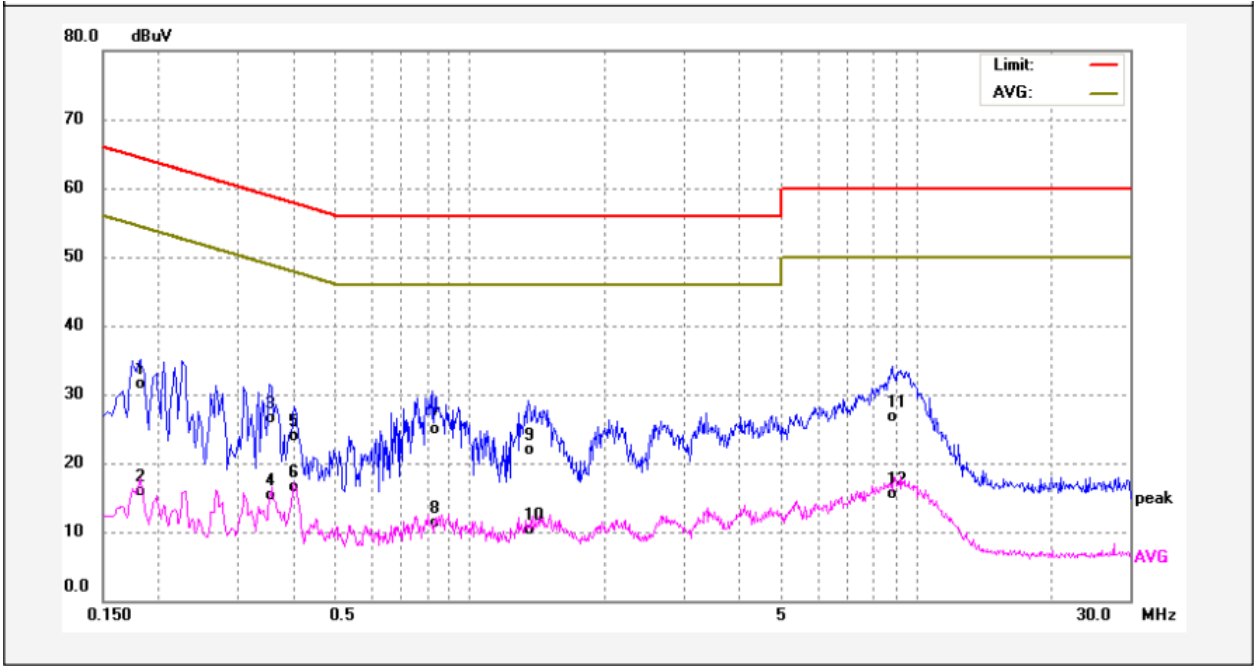


| No. | Freq. (MHz) | Reading (dBuV) | Factor (dB) | Result (dBuV) | Limit dBuV | Margin (dB) | Detector | Remark |
|-----|-------------|----------------|-------------|---------------|------------|-------------|----------|--------|
| 1   | 0.1819      | 19.58          | 11.98       | 31.56         | 64.39      | -32.83      | QP       |        |
| 2   | 0.1819      | 3.99           | 11.98       | 15.97         | 54.39      | -38.42      | AVG      |        |
| 3   | 0.3580      | 14.73          | 11.74       | 26.47         | 58.77      | -32.30      | QP       |        |
| 4   | 0.3580      | 3.65           | 11.74       | 15.39         | 48.77      | -33.38      | AVG      |        |
| 5   | 0.4020      | 12.11          | 11.74       | 23.85         | 57.81      | -33.96      | QP       |        |
| 6   | 0.4020      | 4.85           | 11.74       | 16.59         | 47.81      | -31.22      | AVG      |        |
| 7   | 0.8260      | 12.92          | 11.90       | 24.82         | 56.00      | -31.18      | QP       |        |
| 8   | 0.8260      | -0.66          | 11.90       | 11.24         | 46.00      | -34.76      | AVG      |        |
| 9   | 1.3460      | 9.97           | 11.90       | 21.87         | 56.00      | -34.13      | QP       |        |
| 10  | 1.3460      | -1.65          | 11.90       | 10.25         | 46.00      | -35.75      | AVG      |        |
| 11  | 8.7940      | 14.68          | 12.02       | 26.70         | 60.00      | -33.30      | QP       |        |
| 12  | 8.7940      | 3.44           | 12.02       | 15.46         | 50.00      | -34.54      | AVG      |        |


Neutral Line :

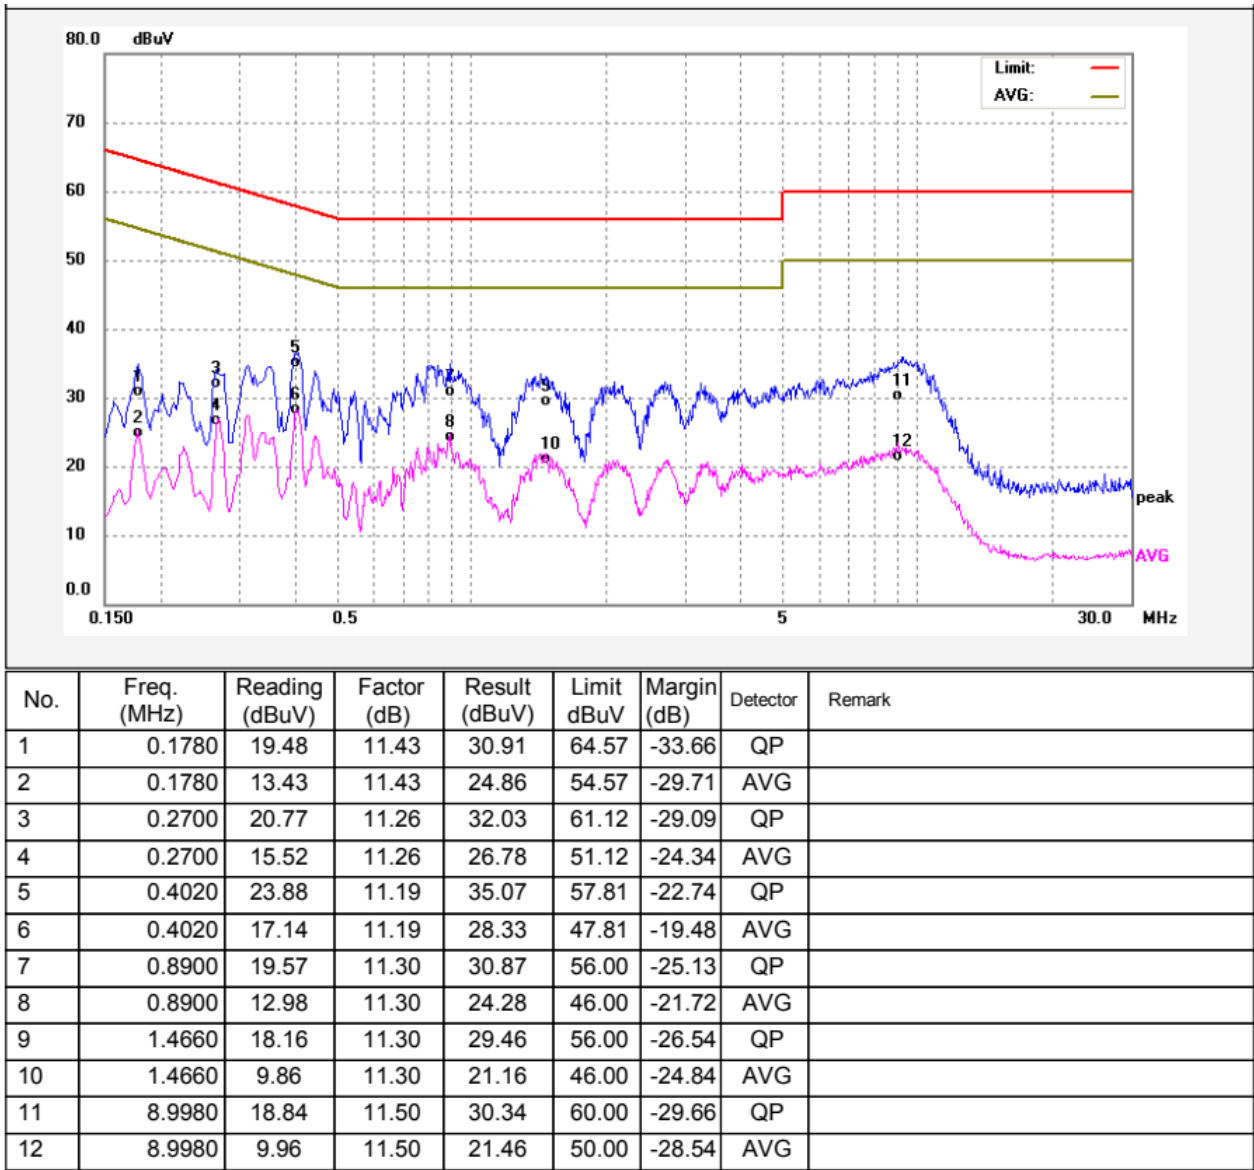

Adapter 2:  
Live Line :

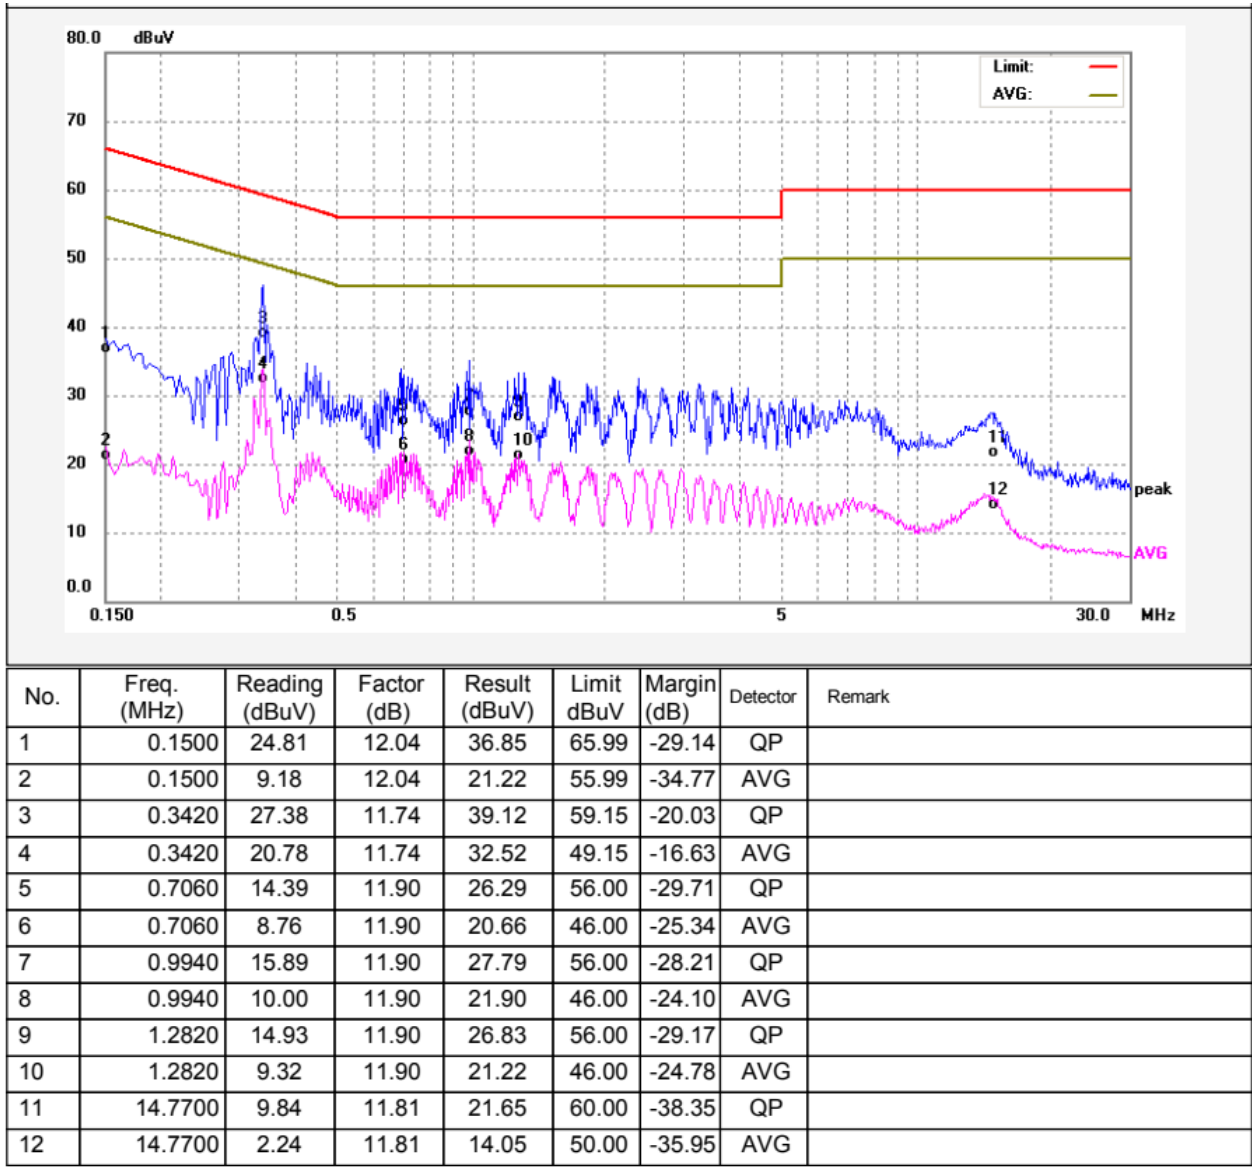

Neutral Line :

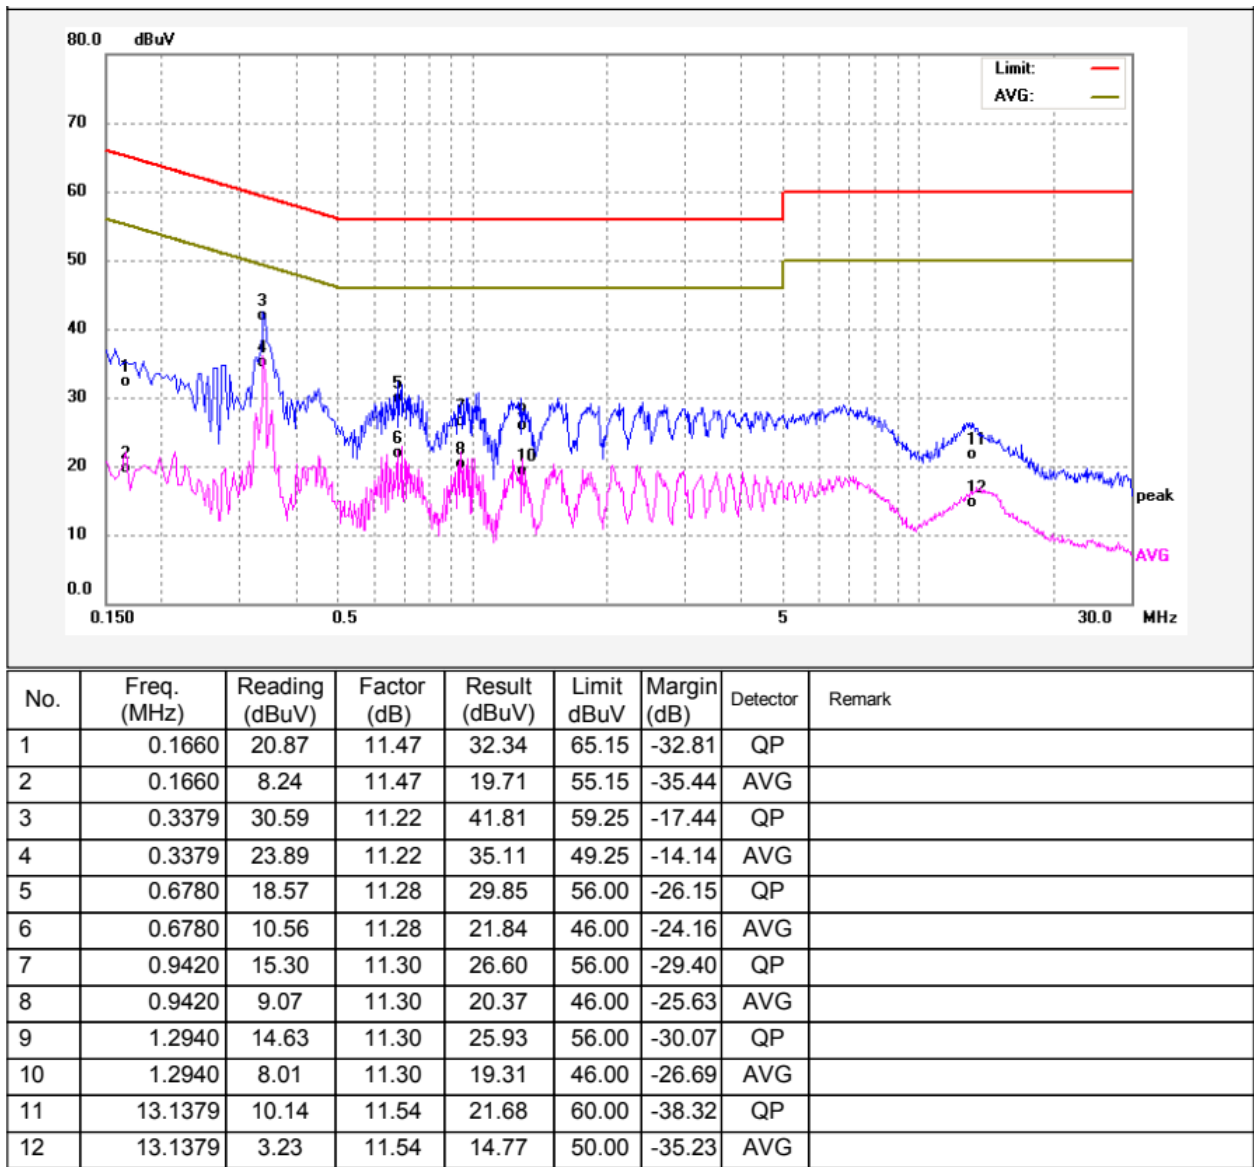

## 8 Radiated Spurious Emissions

Test Requirement: FCC CFR47 Part 15 Section 15.209

Test Method: ANSI C63.10

Test Result: PASS

Measurement Distance: 3m

Limit:

| Frequency<br>(MHz) | Field Strength |                 | Field Strength Limit at 3m Measurement Dist |                                |
|--------------------|----------------|-----------------|---------------------------------------------|--------------------------------|
|                    | uV/m           | Distance<br>(m) | uV/m                                        | dBuV/m                         |
| 0.009 ~ 0.490      | 2400/F(kHz)    | 300             | $10000 * 2400/F(kHz)$                       | $20\log^{(2400/F(kHz))} + 80$  |
| 0.490 ~ 1.705      | 24000/F(kHz)   | 30              | $100 * 24000/F(kHz)$                        | $20\log^{(24000/F(kHz))} + 40$ |
| 1.705 ~ 30         | 30             | 30              | $100 * 30$                                  | $20\log^{(30)} + 40$           |
| 30 ~ 88            | 100            | 3               | 100                                         | $20\log^{(100)}$               |
| 88 ~ 216           | 150            | 3               | 150                                         | $20\log^{(150)}$               |
| 216 ~ 960          | 200            | 3               | 200                                         | $20\log^{(200)}$               |
| Above 960          | 500            | 3               | 500                                         | $20\log^{(500)}$               |

### 8.1 EUT Operation

Operating Environment :

Temperature: 23.5 °C

Humidity: 51.1 % RH

Atmospheric Pressure: 101.2kPa


EUT Operation :

The test was performed in transmitting mode, the test data were shown in the report.


## 8.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.10: 2013

The test setup for emission measurement below 30MHz.

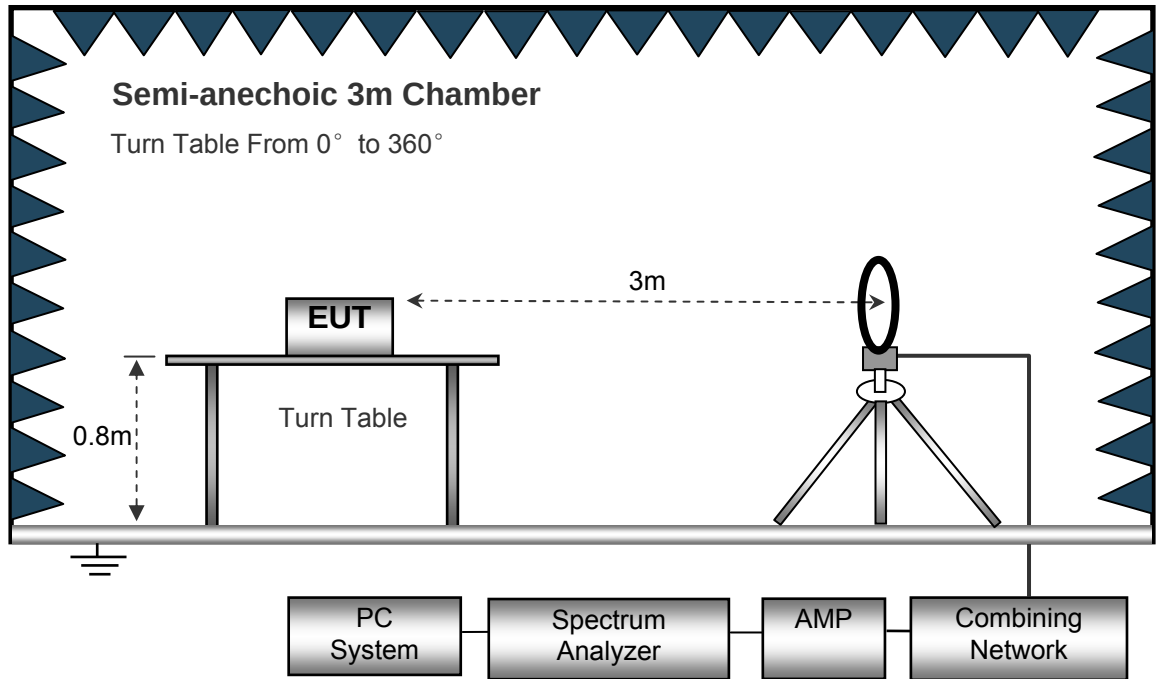

The test setup for emission measurement from 30 MHz to 1 GHz.

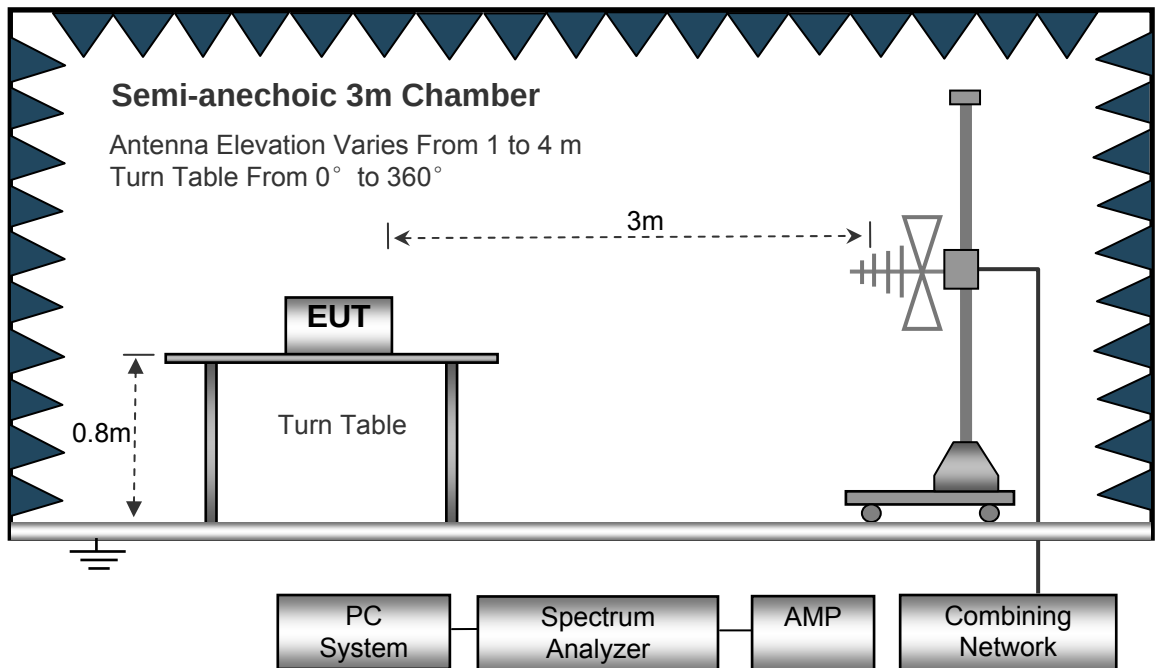

### 8.3 Spectrum Analyzer Setup

Below 30MHz

Sweep Speed .....Auto  
 IF Bandwidth.....10kHz  
 Video Bandwidth.....10kHz  
 Resolution Bandwidth.....10kHz

30MHz ~ 1GHz

Sweep Speed .....Auto  
 Detector .....PK  
 Resolution Bandwidth.....100kHz  
 Video Bandwidth.....300kHz

### 8.4 Test Procedure

1. The EUT is placed on a turntable, which is 0.8m above ground plane for below 1GHz
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions. The spectrum was investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are tested under 3-axes(X,Y,Z) position(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand), After pre-test, It was found that the worse radiation emission was get at the Z position. So the data shown was the Z position only.

### 8.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Limit}$$



## 8.6 Summary of Test Results

Test Frequency: 9 kHz ~ 30MHz Note: Correct factor = Cable loss + Antenna factor

| Frequency | Receiver Reading (PK) | Turn table Angle | RX Antenna |       | Corrected Factor | Corrected Amplitude (PK) | FCC Part 15.225 |        |
|-----------|-----------------------|------------------|------------|-------|------------------|--------------------------|-----------------|--------|
|           |                       |                  | Height     | Polar |                  |                          | Limit           | Margin |
| (MHz)     | (dBμV) @3m            | Degree           | (m)        | (H/V) | (dB/m)           | (dBμV/m) @3m             | (dBμV/m)@3m     | (dB)   |
| 13.56     | 63.79                 | 123              | 1.9        | H     | 19.68            | 83.47                    | 124             | -40.53 |
| 13.56     | 54.50                 | 316              | 1.5        | V     | 19.68            | 74.18                    | 124             | -49.82 |

| Frequency (MHz) | Receiver Reading | Detector | Correct factor | Extrapolation factor | Measurement results (calculated) | Limits      | Margin |
|-----------------|------------------|----------|----------------|----------------------|----------------------------------|-------------|--------|
|                 | dBμV @3m         | QP       | dB/m           | dB                   | dBμV/m @30m                      | dBμV/m @30m | dB     |
| 4.259           | 32.77            | QP       | 20.20          | 40.00                | 12.97                            | 29.54       | -16.57 |
| 11.437          | 35.58            | QP       | 20.10          | 40.00                | 15.48                            | 29.54       | -14.06 |

| Frequency Range (MHz) | Frequency (MHz) | Maximum Reading | Detector | Correct factor | Extrapolation factor | Measurement results (calculated) | Limits      | Margin |
|-----------------------|-----------------|-----------------|----------|----------------|----------------------|----------------------------------|-------------|--------|
|                       |                 | dBμV @3m        | QP       | dB/m           | dB                   | dBμV/m @30m                      | dBμV/m @30m | dB     |
| 13.110~13.41          | 13.401          | 40.21           | QP       | 21.55          | 40                   | 18.66                            | 40.51       | -21.85 |
| 13.410~13.553         | 13.546          | 48.77           | QP       | 21.55          | 40                   | 27.22                            | 50.47       | -23.25 |
| 13.567~13.71          | 13.587          | 48.02           | QP       | 21.55          | 40                   | 26.47                            | 50.47       | -24    |
| 13.710~14.01          | 13.719          | 37.20           | QP       | 21.55          | 40                   | 15.65                            | 40.51       | -24.86 |

**Test Frequency: 30MHz ~ 1GHz**

| Frequency | Receiver Reading | Detector | Turn table Angle | RX Antenna |       | Corrected Factor | Corrected Amplitude | FCC Part 15.225/209/205 |        |
|-----------|------------------|----------|------------------|------------|-------|------------------|---------------------|-------------------------|--------|
|           |                  |          |                  | Height     | Polar |                  |                     | Limit                   | Margin |
| (MHz)     | (dBμV) @3m       | (QP)     | Degree           | (m)        | (H/V) | (dB)             | (dBμV/m) @3m        | (dBμV/m) @3m            | (dB)   |
| 32.59     | 31.55            | QP       | 150              | 1.2        | H     | -14.30           | 17.25               | 40.00                   | -22.75 |
| 32.59     | 32.25            | QP       | 206              | 2.0        | V     | -14.30           | 17.95               | 40.00                   | -22.05 |
| 223.45    | 36.88            | QP       | 51               | 1.8        | H     | -13.58           | 23.3                | 46.00                   | -22.70 |
| 223.45    | 40.99            | QP       | 117              | 1.6        | V     | -13.58           | 27.41               | 46.00                   | -18.59 |
| 517.98    | 39.14            | QP       | 192              | 1.7        | H     | -5.63            | 33.51               | 46.00                   | -12.49 |
| 517.98    | 40.89            | QP       | 173              | 1.6        | V     | -5.63            | 35.26               | 46.00                   | -10.74 |

## 9 Frequency Tolerance

Test Requirement: FCC Part15.225

Test Method: ANSI C63.10: 2013

Limit The frequency tolerance of the carrier signal shall be maintained within +/- 0.01% of the operating frequency over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

### 9.1 Test Procedure

1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. Set EUT as normal operation
3. Set SPA Centre Frequency = fundamental frequency, RBW=30 Hz, VBW= 100 Hz, Span =3 kHz.
4. Set SPA Max hold. Mark peak.

### 9.2 Test Result

| Power Supply | Temperature (°C) | Measured Frequency (MHz) | Frequency Error | Part 15.225 Limit |
|--------------|------------------|--------------------------|-----------------|-------------------|
| DC 5V        | -20              | 13.5600                  | -0.0001%        | ±0.01%            |
|              | -10              | 13.5602                  | 0.0015%         | ±0.01%            |
|              | 0                | 13.5607                  | 0.0050%         | ±0.01%            |
|              | +10              | 13.5603                  | 0.0021%         | ±0.01%            |
|              | +20              | 13.5601                  | 0.0007%         | ±0.01%            |
|              | +30              | 13.5592                  | -0.0057%        | ±0.01%            |
|              | +40              | 13.5596                  | -0.0032%        | ±0.01%            |
|              | +50              | 13.5601                  | 0.0010%         | ±0.01%            |
| DC 4.25 V    | -20              | 13.5603                  | 0.0021%         | ±0.01%            |
|              | -10              | 13.5610                  | 0.0071%         | ±0.01%            |
|              | 0                | 13.5605                  | 0.0037%         | ±0.01%            |

|         |     |         |          |        |
|---------|-----|---------|----------|--------|
|         | +10 | 13.5611 | 0.0084%  | ±0.01% |
|         | +20 | 13.5604 | 0.0027%  | ±0.01% |
|         | +30 | 13.5609 | 0.0064%  | ±0.01% |
|         | +40 | 13.5612 | 0.0085%  | ±0.01% |
|         | +50 | 13.5602 | 0.0014%  | ±0.01% |
| DC5.75V | -20 | 13.5606 | 0.0042%  | ±0.01% |
|         | -10 | 13.5609 | 0.0066%  | ±0.01% |
|         | 0   | 13.5598 | -0.0016% | ±0.01% |
|         | +10 | 13.5603 | 0.0022%  | ±0.01% |
|         | +20 | 13.5604 | 0.0031%  | ±0.01% |
|         | +30 | 13.5613 | 0.0094%  | ±0.01% |
|         | +40 | 13.5605 | 0.0040%  | ±0.01% |
|         | +50 | 13.5599 | -0.0006% | ±0.01% |

## 10 20dB Bandwidth

Test Requirement: FCC Part15.215(C)

Test Method: ANSI C63.10: 2013


### 10.1 Test Procedure

1. The transmitter output (antenna port) was connected to the spectrum analyzer in peak mode.
2. 20dB Bandwidth the resolution bandwidth of 30 Hz and the video bandwidth of 100 Hz were used.
3. Measured the spectrum width with power higher than 20dB below carrier.

### 10.2 Test Result

| Frequency(MHz) | Bandwidth Emission(Hz) |
|----------------|------------------------|
| 13.56          | 75.00                  |

Test Plot

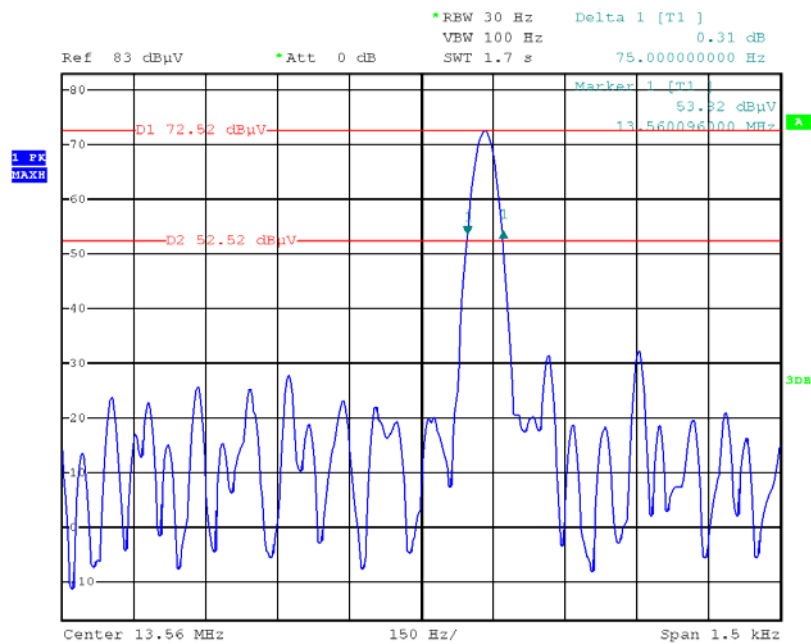

Date: 29.NOV.2021 09:19:48

## **11 Antenna Requirement**

According to the FCC Part 15 Paragraph 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

This product has an Loop antenna, fulfil the requirement of this section.

## **12 Photographs- Test Setup Photos**

Note: Please refer to Appendix-SP30-Photos.

=====End of Report=====