



PARAMETER	PERFORMANCE
MODEL NUMBER	FG9023
FREQUENCY	902 - 928 MHz
GAIN	5 dBi
POLARIZATION	VERTICAL
RADIATION PATTERN	OMNI-DIRECTIONAL
VSWR	<2.0
POWER RATING	100 WATTS
HEIGHT	~576
WEIGHT	395 g.
OUTDOOR RATED	YES
OPERATING TEMP	-31°F to +176°F -35°C to +80°C

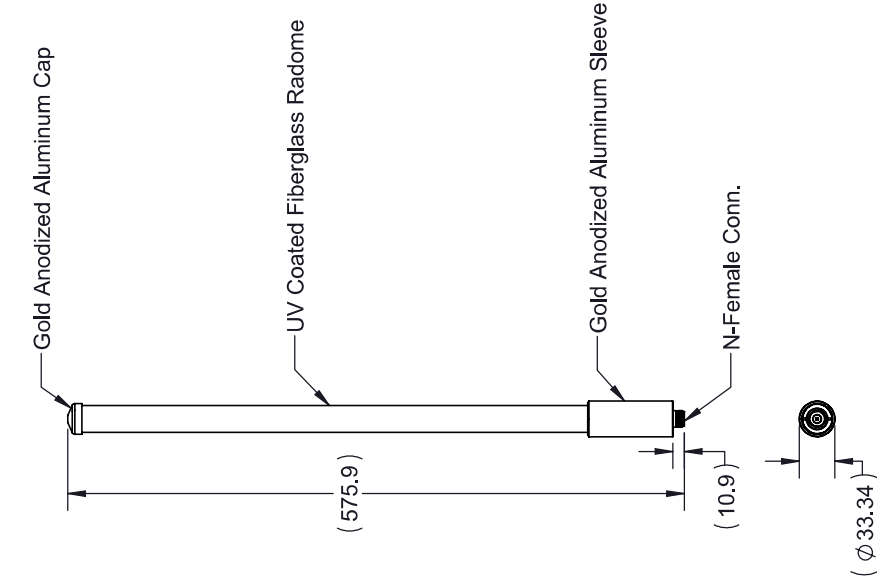

REVIEWS				
REV.	ECN#	ZONE	DESCRIPTION	CHANGED BY/DATE
F01	ECN#AS-04274	ALL	INITIAL CREATION	A.MASCORRO 24JUN15
				APPROVED BY/DATE S.SAFVI 24JUN15

MATERIAL: N/A		THIRD ANGLE PROJECTION			
FINISH: N/A		DO NOT SCALE DRAWING		TITLE:	
APPROVALS		DATE		INTERPRET DIMENSIONING AND TOLERANCING IN ACCORDANCE WITH ASME Y14.5M-2009	
DRAWN BY	A.MASCORRO	24JUN15		TOLERANCES UNLESS OTHERWISE SPECIFIED	
ELEC. ENG.	A.MASCORRO	24JUN15		DIMENSIONS ARE IN MILLIMETERS	
MECH. ENG.	S.SAFVI	24JUN15		ANGLE: DECIMAL: ±30°	
MFG./OPS.				1 PLACE DECIMAL: ±0.25	
				2 PLACE DECIMAL: ±0.13	
				SURFACE ROUGHNESS 15/	
				SIZE	
				A3	
				DWG. NO.	
				FG9023MO	
				REV	
				F01	
				SCALE: 1:5	
				PREVIOUS#	
				SHEET 1 OF 1	