

FCC TEST REPORT

REPORT NO.: RF940224H05

MODEL NO.: WPG2401

RECEIVED: Feb. 02, 2005

TESTED: Mar. 14 to 16, 2005

ISSUED: Mar. 21, 2005

APPLICANT: AboCom Systems, Inc.

ADDRESS: 1F, No.21, R&D Rd.II, SBIP, Hsin-Chu,
Taiwan, R.O.C.

ISSUED BY: Advance Data Technology Corporation

LAB LOCATION: No. 81-1, Lu Liao Keng, 9 Ling, Wu Lung Tsuen,
Chiung Lin Hsiang, Hsin Chu Hsien,
Taiwan, R.O.C.

This test report consists of 74 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA, A2LA or any government agencies. The test results in the report only apply to the tested sample. The test results in this report are traceable to the national or international standards.



0536
ILAC MRA



No. 2177-01

Table of Contents

1	CERTIFICATION	4
2	SUMMARY OF TEST RESULTS	5
3	GENERAL INFORMATION	6
3.1	GENERAL DESCRIPTION OF EUT	6
3.2	DESCRIPTION OF TEST MODES	7
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS	7
3.4	DESCRIPTION OF SUPPORT UNITS	8
3.5	CONFIGURATION OF SYSTEM UNDER TEST	9
4	TEST TYPES AND RESULTS	10
4.1	CONDUCTED EMISSION MEASUREMENT	10
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT	10
4.1.2	TEST INSTRUMENTS	10
4.1.3	TEST PROCEDURES	11
4.1.4	TEST SETUP	11
4.1.5	EUT OPERATING CONDITIONS	12
4.1.6	TEST RESULTS	13
4.2	RADIATED EMISSION MEASUREMENT	15
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT	15
4.2.2	TEST INSTRUMENTS	16
4.2.3	TEST PROCEDURES	17
4.2.4	TEST SETUP	18
4.2.5	EUT OPERATING CONDITIONS	18
4.2.6	TEST RESULTS –ANTENNA 1	19
4.2.7	TEST RESULTS –ANTENNA 2	20
4.2.8	TEST RESULTS –ANTENNA 3	21
4.2.9	TEST RESULTS –ANTENNA 4	22
4.2.10	TEST RESULTS – DSSS (ANTENNA 2)	23
4.2.11	TEST RESULTS – DSSS (ANTENNA 3)	26
4.2.12	TEST RESULTS –(ANTENNA2 – OFDM)	29
4.2.13	TEST RESULTS –(ANTENNA3 – OFDM)	32
4.3	6dB BANDWIDTH MEASUREMENT	35
4.3.1	LIMITS OF 6dB BANDWIDTH MEASUREMENT	35
4.3.2	TEST INSTRUMENTS	35
4.3.3	TEST PROCEDURE	36
4.3.4	TEST SETUP	36
4.3.5	EUT OPERATING CONDITIONS	36
4.3.6	TEST RESULTS - DSSS	37
4.3.7	TEST RESULTS -OFDM	40
4.4	MAXIMUM PEAK OUTPUT POWER	43



4.4.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT	43
4.4.2	TEST INSTRUMENTS	43
4.4.3	TEST PROCEDURES	44
4.4.4	TEST SETUP	44
4.4.5	EUT OPERATING CONDITIONS	44
4.4.6	TEST RESULTS - DSSS	45
4.4.7	TEST RESULTS - OFDM	46
4.5	POWER SPECTRAL DENSITY MEASUREMENT	47
4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	47
4.5.2	TEST INSTRUMENTS	47
4.5.3	TEST PROCEDURE	48
4.5.4	TEST SETUP	48
4.5.5	EUT OPERATING CONDITIONS	48
4.5.6	TEST RESULTS – DSSS	49
4.5.7	TEST RESULTS – OFDM	52
4.6	BAND EDGES MEASUREMENT	55
4.6.1	LIMITS OF BAND EDGES MEASUREMENT	55
4.6.2	TEST INSTRUMENTS	55
4.6.3	TEST PROCEDURE	55
4.6.4	EUT OPERATING CONDITION	55
4.6.5	TEST RESULTS – DSSS (ANTENNA 2)	56
4.6.6	TEST RESULTS – DSSS (ANTENNA 3)	59
4.6.7	TEST RESULTS – OFDM (ANTENNA 2)	62
4.6.8	TEST RESULTS – OFDM (ANTENNA 3)	65
4.7	ANTENNA REQUIREMENT	68
4.7.1	STANDARD APPLICABLE	68
4.7.2	ANTENNA CONNECTED CONSTRUCTION	68
5	PHOTOGRAPHS OF THE TEST CONFIGURATION	69
6	INFORMATION ON THE TESTING LABORATORIES	74

1 CERTIFICATION

PRODUCT : 802.11g Wireless LAN PCI Card
BRAND NAME : AboCom
MODEL NO. : WPG2401
TESTED: Mar. 14 to 16, 2005
APPLICANT : AboCom Systems, Inc.
TEST ITEM: ENGINEERING SAMPLE
STANDARDS : 47 CFR Part 15, Subpart C (Section 15.247),
ANSI C63.4-2003

The above equipment (Model: WPG2401) has been tested by **Advance Data Technology Corporation**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY :  , **DATE:** Mar. 21, 2005
(Midoli Peng)

TECHNICAL ACCEPTANCE :  , **DATE:** Mar. 21, 2005
Responsible for RF (Hank Chung)

APPROVED BY :  , **DATE:** Mar. 21, 2005
(Eric Lin, Manager)

2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: 47 CFR Part 15, Subpart C			
Standard Section	Test Type and Limit	Result	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit Minimum passing margin is -21.20 dB at 0.181 MHz
15.247(a)(2)	Spectrum Bandwidth of a Direct Sequence Spread Spectrum System Limit: min. 500kHz	PASS	Meet the requirement of limit
15.247(b)	Maximum Peak Output Power Limit: max. 30dBm	PASS	Meet the requirement of limit
15.247(c)	Transmitter Radiated Emissions Limit: Table 15.209	PASS	Meet the requirement of limit Minimum passing margin is - 1.7dB at 2390.00 MHz & 2483.50MHz
15.247(d)	Power Spectral Density Limit: max. 8dBm	PASS	Meet the requirement of limit
15.247(c)	Band Edge Measurement Limit: 20 dB less than the peak value of fundamental frequency	PASS	Meet the requirement of limit

3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	802.11g Wireless LAN PCI Card
MODEL NO.	WPG2401
POWER SUPPLY	DC 5V from host equipment
MODULATION TYPE	CCK, OFDM, DBPSK, DQPSK
RADIO TECHNOLOGY	DSSS, OFDM
TRANSFER RATE	1/2/5.5/6/9/11/12/18/24/36/48/54Mbps
FREQUENCY RANGE	2412MHz ~ 2462MHz
NUMBER OF CHANNEL	11
OUTPUT POWER	11b: 17.29dBm 11g: 18.88dBm
ANTENNA TYPE	Dipole antenna (Please see note 3)
DATA CABLE	NA
I/O PORTS	NA
ASSOCIATED DEVICES	NA

NOTE:

1. The EUT operates in the 2.4GHz frequency spectrum with throughput of up to 54Mbps.
2. The EUT complies with IEEE 802.11g draft standards, and backwards compatible with IEEE 802.11b products.
3. There are four antennas provided to this EUT, please refer to the following table:

No.	Model	Gain (dBi)	Antenna Type	Antenna Connector	Remark
1	W111-094-D8	0dBi	Dipole Antenna	Reverse SMA	With cable, white
2	W111-094-D800	0dBi	Dipole Antenna	Reverse SMA	With cable, black
3	SJW-0007A	5dBi	Dipole Antenna	SMA Reverse	NA
4	AN2400-0101RS	2dBi	Dipole Antenna	SMA Reverse	NA

From the above antennas, **antenna 2** and **3** were selected as representative antennas for the test and its data were recorded in this report. (Except for radiation tests <Below 1GHz>, **antenna 1~4** were tested and the test data were recorded in this report.)

4. The above EUT information was declared by the manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

3.2 DESCRIPTION OF TEST MODES

Eleven channels are provided in this EUT.

Channel	Frequency	Channel	Frequency
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

NOTE:

1. Below 1 GHz, the channel 1, 6, and 11 were pre-tested in chamber. The channel 11, worst case one, was chosen for final test.
2. Above 1 GHz, the channel 1, 6, and 11 were tested individually.
3. Transfer rate, 11Mbps with CCK technique and 6Mbps with OFDM technique, the worst case, were chosen for final test.

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is an 802.11g Wireless LAN PCI Card. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

47 CFR Part 15, Subpart C. (15.247)
ANSI C63.4 : 2003

All tests have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of 47 CFR Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.


NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	PERSONAL COMPUTER	DELL	4600	00043-517-542-487	DoC
2	MONITOR	ADI	G1000	240058T00100081	NA
3	PRINTER	HP	C2642A	MY79F1C3MZ	B94C2642X
4	MODEM	ACEEX	1414	0206026779	IFAXDM1414
5	KEYBOARD	BTC	KB-5200T	F24800412	E5XKB5122WTH0110
6	MOUSE	BTC	M851	G00347024425	NA

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA
2	1.5 m braid shielded wire, terminated with VGA connector via metallic frame, w/o core.
3	1.1 m braid shielded wire, terminated with DB25 and Centronics connector via metallic frame, w/o core.
4	1.1 m braid shielded wire, terminated with DB25 and DB9 connector via metallic frame, w/o core.
5	1.7 m foil shielded wire, terminal by frame, PS2 Connector, w/o Core.
6	1.5 m foil shielded wire, terminal by frame, PS2 Connector, w/o Core.


NOTE: All power cords of the above support units are non-shielded (1.8m).

3.5 CONFIGURATION OF SYSTEM UNDER TEST

For Antenna 1~2:

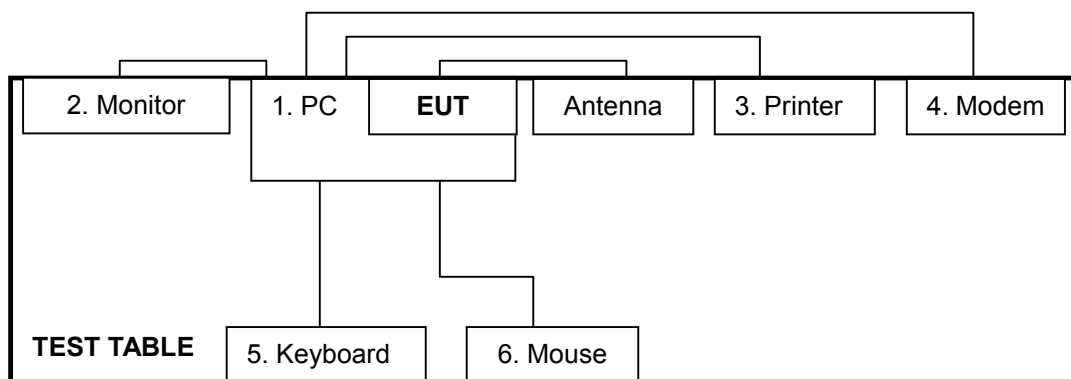

For Antenna 3~4:

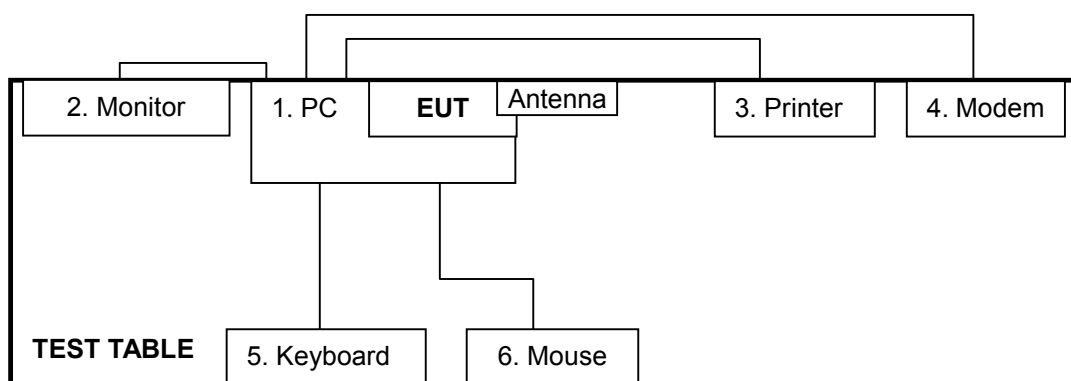

NOTE: 1. Please refer to the photos of test configuration in Item 5 also.

4 TEST TYPES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
0.15-0.5 0.5-5 5-30	Quasi-peak	Average
	66 to 56	56 to 46
	56	46
	60	50

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. All emanations from a class B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
ROHDE & SCHWARZ Test Receiver	ESCS 30	847124/029	Dec. 07, 2005
ROHDE & SCHWARZ LISN (for EUT)	ESHS-Z5	848773/004	Nov. 08, 2005
KYORITSU LISN (for peripheral)	KNW-407	8/1395/12	Jul. 23, 2005
RF Cable (JETBAO)	RG233/U	Cable_CA_01	Jul. 02, 2005
Terminator(for KYORITSU)	50	3	May 10, 2005
Software	Cond-V2e	NA	NA


NOTE:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in ADT Shielded Room No. A.
3. The VCCI Con A Registration No. is C-817.
4. The measurement uncertainty is 2.53 dB, which is calculated as per the document CISPR 16-4

4.1.3 TEST PROCEDURES

- The EUT/HOST was placed 0.4 meters from the conducting wall of the shielded room with EUT/HOST being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT/HOST were checked for maximum conducted interference.
- The frequency range from 150 kHz to 30 MHz was searched. Emission levels over 10dB under the prescribed limits could not be reported

4.1.4 TEST SETUP

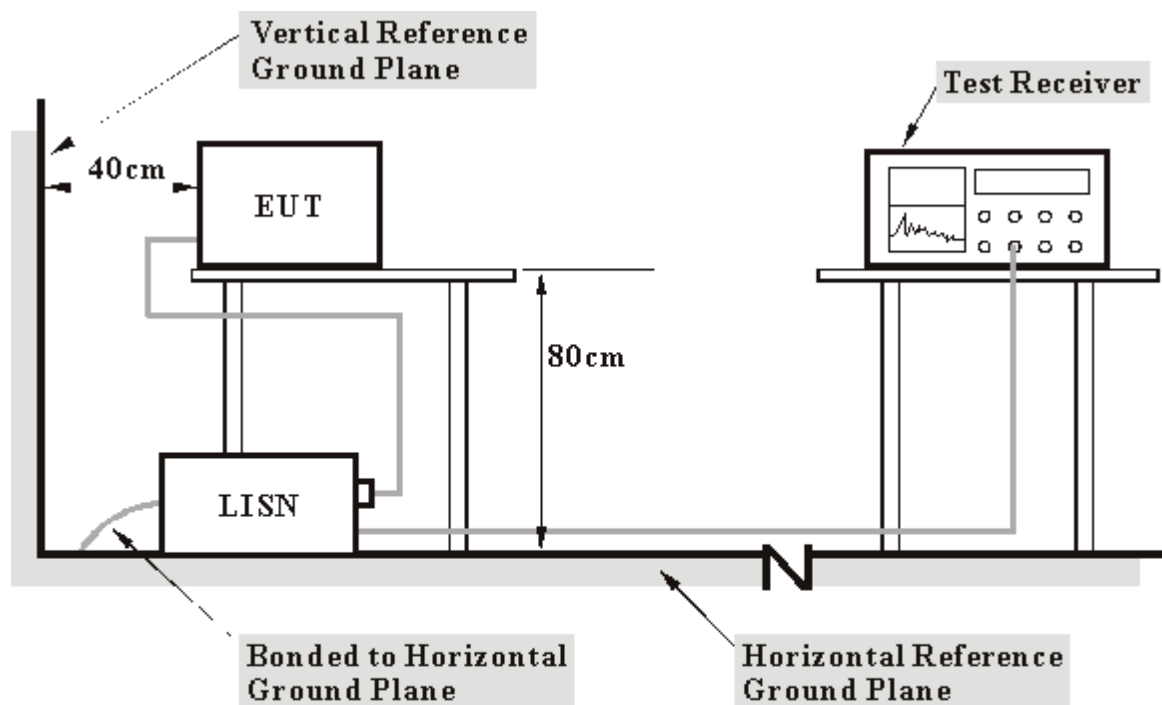

- Note:**
- Support units were connected to second LISN.
 - Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.



4.1.5 EUT OPERATING CONDITIONS


- a. Connect the EUT with the support unit 1 (Personal computer) which placed on a testing table.
- b. The support unit 1 (Personal computer) ran a test program "Radioscope 3.0" to enable EUT under transmission condition continuously at specific channel frequency.
- c. Notebook computer sends "H" messages to printer, and the printer prints them on paper.
- d. Notebook computer sends "H" messages to modem.

4.1.6 TEST RESULTS

EUT	802.11g Wireless LAN PCI Card	MODEL	WPG2401
MODE	Channel 11	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	18 deg. C, 67%RH, 980 hPa	TESTED BY	Wen Yu

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.181	0.14	43.08	-	43.22	-	64.43	54.43	-21.20	-
2	0.482	0.17	33.73	-	33.90	-	56.30	46.30	-22.40	-
3	1.208	0.21	31.90	-	32.11	-	56.00	46.00	-23.89	-
4	1.935	0.25	32.40	-	32.65	-	56.00	46.00	-23.35	-
5	7.688	0.63	33.41	-	34.04	-	60.00	50.00	-25.96	-
6	23.516	1.44	35.95	-	37.39	-	60.00	50.00	-22.61	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

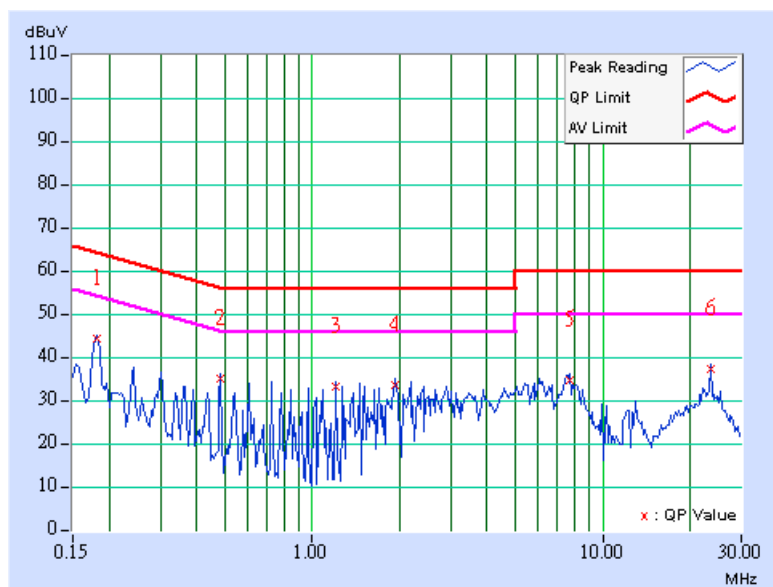

EUT	802.11g Wireless LAN PCI Card	MODEL	WPG2401
MODE	Channel 11	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	18 deg. C, 67%RH, 980 hPa	TESTED BY	Wen Yu

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.181	0.14	35.56	-	35.70	-	64.43	54.43	-28.72	-
2	0.482	0.17	31.09	-	31.26	-	56.30	46.30	-25.04	-
3	2.900	0.34	30.85	-	31.19	-	56.00	46.00	-24.81	-
4	3.387	0.39	32.54	-	32.93	-	56.00	46.00	-23.07	-
5	7.637	0.57	35.46	-	36.03	-	60.00	50.00	-23.97	-
6	23.516	1.24	35.60	-	36.84	-	60.00	50.00	-23.16	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

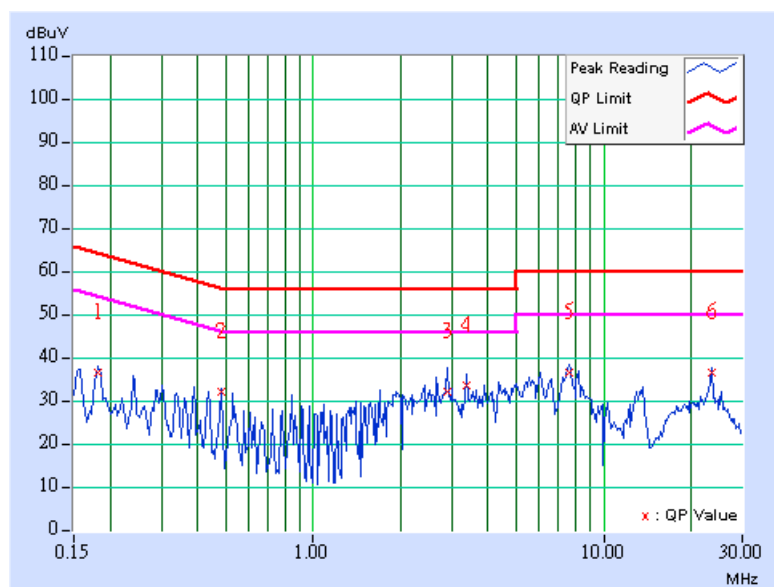

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Field strength limits are at the distance of 3 meters, emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
HP Spectrum Analyzer	8594E	3710A04861	Sep. 23, 2005
ADVANTEST Spectrum Analyzer	R3271A	85060311	Jun. 29, 2005
CHASE RF Pre_Amplifier	CPA9232	1057	Aug. 06, 2005
HP Pre_Amplifier	8449B	3008A01922	Oct. 13, 2005
ROHDE & SCHWARZ Test Receiver	ESCS30	100287	Dec. 08, 2005
CHASE Broadband Antenna	VULB9168	138	Dec. 21, 2005
Schwarzbeck Horn_Antenna	BBHA9120	D124	Jun. 16, 2005
Schwarzbeck Horn_Antenna	BBHA 9170	BBHA9170153	Jan. 30, 2006
SCHWARZBECK Biconical Antenna	VHBA9123	459	Jun. 26, 2006
SCHWARZBECK Tunable Periodic Antenna	UPA6108	1148	Jun. 26, 2006
RF Switches (ARNITSU)	CS-201	1565157	Jul. 15, 2005
RF CABLE (Chaintek) 1GHz-20GHz	SF102	22054-2	Nov. 15, 2005
RF Cable(RICHTEC)	9913-30M	STCCAB-30M-1GHz-021	Jul. 15, 2005
Software	ADT_Radiated_V 5.14	NA	NA
CHANCE MOST Antenna Tower	AT-100	0203	NA
CHANCE MOST Turn Table	TT-100	0203	NA

- Note: 1. The calibration interval of the above test instruments is 12 months (36 months for Tunable Dipole Antenna) and the calibrations are traceable to NML/ROC and NIST/USA.
2. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
3. The test was performed in ADT Open Site No. C.
4. The FCC Site Registration No. is 656396.
5. The VCCI Site Registration No. is R-1626.
6. The CANADA Site Registration No. is IC 4824-3.
7. The following table is for the measurement uncertainty, which is calculated as per the document CISPR 16-4.

Measurement	Value
Radiated emissions (30MHz-1GHz)	2.98 dB
Radiated emissions (1GHz ~18GHz)	2.21 dB
Radiated emissions (18GHz ~20GHz)	1.88 dB




4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 300 Hz for Average detection (AV) at frequency above 1GHz.

4.2.4 TEST SETUP

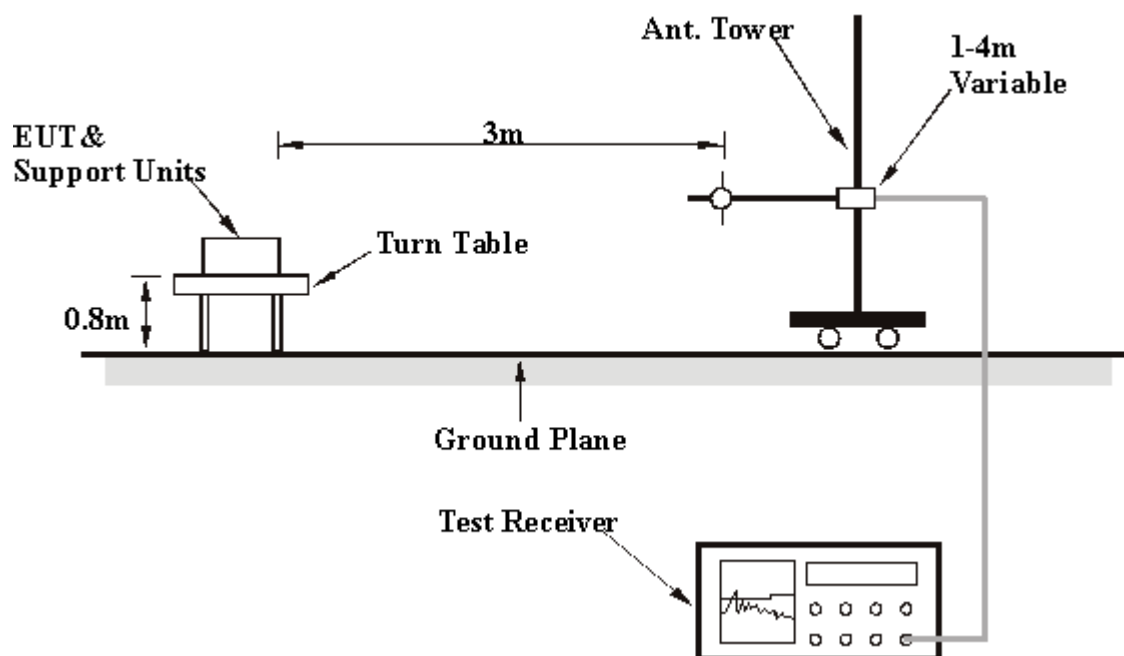

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.5 EUT OPERATING CONDITIONS

Same as 4.1.5.

4.2.6 TEST RESULTS –ANTENNA 1

EUT	802.11g Wireless LAN PCI Card	MODEL	WPG2401
MODE	Channel 11	FREQUENCY RANGE	30-1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION & BANDWIDTH	Quasi-Peak, 120kHz
ENVIRONMENTAL CONDITIONS	18 deg. C, 54%RH, 980 hPa	TESTED BY	Rex Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	133.48	27.00 QP	43.50	-16.50	1.98 H	75	14.40	12.60
2	320.00	29.30 QP	46.00	-16.70	1.08 H	81	12.80	16.50
3	443.28	28.10 QP	46.00	-17.90	1.39 H	22	8.60	19.50
4	576.12	32.70 QP	46.00	-13.30	1.22 H	19	9.70	22.90
5	651.23	38.90 QP	46.00	-7.10	1.53 H	44	14.80	24.00
6	753.04	37.30 QP	46.00	-8.70	1.27 H	341	10.90	26.40

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	133.50	32.20 QP	43.50	-11.30	1.00 V	326	19.60	12.60
2	320.00	28.00 QP	46.00	-18.00	1.00 V	318	11.50	16.50
3	443.36	35.70 QP	46.00	-10.30	1.35 V	212	16.20	19.50
4	576.08	34.50 QP	46.00	-11.50	1.17 V	351	11.60	22.90
5	651.25	35.80 QP	46.00	-10.20	1.15 V	333	11.80	24.00
6	752.84	38.90 QP	46.00	-7.10	1.19 V	359	12.50	26.40

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

4.2.7 TEST RESULTS –ANTENNA 2

EUT	802.11g Wireless LAN PCI Card	MODEL	WPG2401
MODE	Channel 11	FREQUENCY RANGE	30-1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION & BANDWIDTH	Quasi-Peak, 120kHz
ENVIRONMENTAL CONDITIONS	18 deg. C, 54%RH, 980 hPa	TESTED BY	Rex Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	133.48	26.20 QP	43.50	-17.30	1.91 H	32	13.60	12.60
2	320.00	30.80 QP	46.00	-15.20	1.56 H	333	14.30	16.50
3	443.35	27.90 QP	46.00	-18.10	1.48 H	51	8.30	19.50
4	576.08	32.80 QP	46.00	-13.20	1.69 H	276	9.90	22.90
5	651.24	38.20 QP	46.00	-7.80	1.49 H	74	14.20	24.00
6	752.90	37.50 QP	46.00	-8.50	1.16 H	329	11.10	26.40

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	133.50	31.00 QP	43.50	-12.50	1.00 V	1	18.40	12.60
2	320.01	29.50 QP	46.00	-16.50	1.00 V	263	13.00	16.50
3	443.37	35.20 QP	46.00	-10.80	1.29 V	320	15.70	19.50
4	576.10	34.00 QP	46.00	-12.00	1.09 V	337	11.10	22.90
5	651.24	36.20 QP	46.00	-9.80	1.17 V	281	12.10	24.00
6	752.94	38.80 QP	46.00	-7.20	1.34 V	279	12.40	26.40

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

4.2.8 TEST RESULTS –ANTENNA 3

EUT	802.11g Wireless LAN PCI Card	MODEL	WPG2401
MODE	Channel 11	FREQUENCY RANGE	30-1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION & BANDWIDTH	Quasi-Peak, 120kHz
ENVIRONMENTAL CONDITIONS	18 deg. C, 54%RH, 980 hPa	TESTED BY	Rex Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	133.50	26.50 QP	43.50	-17.00	1.92 H	33	13.90	12.60
2	320.00	29.40 QP	46.00	-16.60	1.75 H	232	12.90	16.50
3	443.35	29.90 QP	46.00	-16.10	1.35 H	126	10.30	19.50
4	576.08	32.60 QP	46.00	-13.40	1.50 H	11	9.70	22.90
5	651.25	38.70 QP	46.00	-7.30	1.58 H	81	14.70	24.00
6	753.00	37.90 QP	46.00	-8.10	1.22 H	312	11.50	26.40

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	133.48	33.10 QP	43.50	-10.40	1.00 V	29	20.50	12.60
2	320.00	28.90 QP	46.00	-17.10	1.00 V	260	12.40	16.50
3	443.35	35.80 QP	46.00	-10.20	1.27 V	316	16.30	19.50
4	576.08	35.00 QP	46.00	-11.00	1.20 V	271	12.10	22.90
5	651.26	35.70 QP	46.00	-10.30	1.36 V	351	11.70	24.00
6	752.83	39.20 QP	46.00	-6.80	1.26 V	1	12.80	26.40

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

4.2.9 TEST RESULTS –ANTENNA 4

EUT	802.11g Wireless LAN PCI Card	MODEL	WPG2401
MODE	Channel 11	FREQUENCY RANGE	30-1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION & BANDWIDTH	Quasi-Peak, 120kHz
ENVIRONMENTAL CONDITIONS	18 deg. C, 54%RH, 980 hPa	TESTED BY	Rex Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	133.50	27.30 QP	43.50	-16.20	1.97 H	27	14.70	12.60
2	320.00	29.60 QP	46.00	-16.40	1.63 H	310	13.10	16.50
3	443.36	33.10 QP	46.00	-12.90	1.58 H	12	13.60	19.50
4	576.07	32.60 QP	46.00	-13.40	1.66 H	359	9.70	22.90
5	651.26	38.10 QP	46.00	-7.90	1.61 H	355	14.10	24.00
6	752.98	37.10 QP	46.00	-8.90	1.19 H	331	10.70	26.40

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	133.49	33.90 QP	43.50	-9.60	1.00 V	16	21.30	12.60
2	320.00	29.20 QP	46.00	-16.80	1.00 V	69	12.70	16.50
3	443.36	35.50 QP	46.00	-10.50	1.30 V	279	16.00	19.50
4	576.10	35.70 QP	46.00	-10.30	1.28 V	59	12.80	22.90
5	651.25	37.10 QP	46.00	-8.90	1.42 V	329	13.00	24.00
6	752.86	38.90 QP	46.00	-7.10	1.25 V	342	12.40	26.40

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

4.2.10 TEST RESULTS – DSSS (ANTENNA 2)

EUT	802.11g Wireless LAN PCI Card	MODEL	WPG2401
MODE	Channel 1	FREQUENCY RANGE	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION & BANDWIDTH	Peak (PK) Average (AV) 1 MHz
ENVIRONMENTAL CONDITIONS	20 deg. C, 63%RH, 980 hPa	TESTED BY	Rex Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2038.00	45.50 PK	74.00	-28.50	1.30 H	40	17.00	28.50
1	2038.00	42.30 AV	54.00	-11.70	1.30 H	40	13.80	28.50
2	2390.00	41.90 PK	74.00	-32.10	1.00 H	307	8.20	33.70
2	2390.00	31.70 AV	54.00	-22.30	1.00 H	307	-2.00	33.70
3	*2412.00	96.50 PK			1.00 H	307	66.70	29.80
3	*2412.00	89.80 AV			1.00 H	307	60.00	29.80
4	4076.00	40.90 PK	74.00	-33.10	1.02 H	329	7.60	33.30
4	4076.00	33.60 AV	54.00	-20.40	1.02 H	329	0.30	33.30
5	4824.00	42.00 PK	74.00	-32.00	1.20 H	6	6.90	35.10
5	4824.00	30.20 AV	54.00	-23.80	1.20 H	6	-4.90	35.10
6	7236.00	47.70 PK	74.00	-26.30	1.35 H	352	7.20	40.50
6	7236.00	35.90 AV	54.00	-18.10	1.35 H	352	-4.60	40.50

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2038.00	45.30 PK	74.00	-28.70	1.00 V	302	16.80	28.50
1	2038.00	42.40 AV	54.00	-11.60	1.00 V	302	13.90	28.50
2	2390.00	57.90 PK	74.00	-16.10	1.00 V	345	24.20	33.70
2	2390.00	47.20 AV	54.00	-6.80	1.00 V	345	13.50	33.70
3	*2412.00	112.50 PK			1.00 V	345	82.70	29.80
3	*2412.00	105.30 AV			1.00 V	345	75.50	29.80
4	4076.00	43.40 PK	74.00	-30.60	1.49 V	20	10.10	33.30
4	4076.00	36.10 AV	54.00	-17.90	1.49 V	20	2.80	33.30
5	4824.00	45.00 PK	74.00	-29.00	1.29 V	15	9.90	35.10
5	4824.00	34.80 AV	54.00	-19.20	1.29 V	15	-0.30	35.10
6	7236.00	47.50 PK	74.00	-26.50	1.60 V	41	7.00	40.50
6	7236.00	36.40 AV	54.00	-17.60	1.60 V	41	-4.10	40.50

REMARKS: 1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * ” : Fundamental frequency

EUT	802.11g Wireless LAN PCI Card	MODEL	WPG2401
MODE	Channel 6	FREQUENCY RANGE	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION & BANDWIDTH	Peak (PK) Average (AV) 1 MHz
ENVIRONMENTAL CONDITIONS	20 deg. C, 63%RH, 980 hPa	TESTED BY	Rex Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2063.00	46.60 PK	74.00	-27.40	1.26 H	41	17.90	28.60
1	2063.00	44.20 AV	54.00	-9.80	1.26 H	41	15.60	28.60
2	*2437.00	96.90 PK			1.00 H	307	67.00	29.90
2	*2437.00	90.00 AV			1.00 H	307	60.10	29.90
3	4126.00	43.50 PK	74.00	-30.50	1.00 H	326	10.10	33.40
3	4126.00	36.30 AV	54.00	-17.70	1.00 H	326	3.00	33.40
4	4874.00	41.80 PK	74.00	-32.20	1.21 H	7	6.50	35.30
4	4874.00	30.20 AV	54.00	-23.80	1.21 H	7	-5.10	35.30
5	7311.00	48.50 PK	74.00	-25.50	1.33 H	354	7.80	40.70
5	7311.00	36.60 AV	54.00	-17.40	1.33 H	354	-4.10	40.70

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2063.00	45.60 PK	74.00	-28.40	1.00 V	299	17.00	28.60
1	2063.00	43.10 AV	54.00	-10.90	1.00 V	299	14.50	28.60
2	*2437.00	111.90 PK			1.00 V	346	82.00	29.90
2	*2437.00	104.70 AV			1.00 V	346	74.80	29.90
3	4126.00	43.70 PK	74.00	-30.30	1.53 V	11	10.40	33.40
3	4126.00	37.20 AV	54.00	-16.80	1.53 V	11	3.90	33.40
4	4874.00	45.00 PK	74.00	-29.00	1.30 V	12	9.70	35.30
4	4874.00	35.10 AV	54.00	-18.90	1.30 V	12	-0.20	35.30
5	7311.00	48.20 PK	74.00	-25.80	1.57 V	38	7.50	40.70
5	7311.00	36.70 AV	54.00	-17.30	1.57 V	38	-4.00	40.70

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. The limit value is defined as per 15.247
6. “ * ” : Fundamental frequency

EUT	802.11g Wireless LAN PCI Card	MODEL	WPG2401
MODE	Channel 11	FREQUENCY RANGE	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION & BANDWIDTH	Peak (PK) Average (AV) 1 MHz
ENVIRONMENTAL CONDITIONS	20 deg. C, 63%RH, 980 hPa	TESTED BY	Rex Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2088.00	46.40 PK	74.00	-27.60	1.25 H	41	17.60	28.80
1	2088.00	43.90 AV	54.00	-10.10	1.25 H	41	15.10	28.80
2	*2462.00	94.60 PK			1.00 H	308	64.60	30.00
2	*2462.00	87.90 AV			1.00 H	308	57.90	30.00
3	2483.50	41.90 PK	74.00	-32.10	1.00 H	308	11.80	30.10
3	2483.50	32.50 AV	54.00	-21.50	1.00 H	308	2.40	30.10
4	4176.00	44.60 PK	74.00	-29.40	1.02 H	334	11.20	33.40
4	4176.00	39.30 AV	54.00	-14.70	1.02 H	334	5.90	33.40
5	4924.00	41.90 PK	74.00	-32.10	1.17 H	4	6.30	35.50
5	4924.00	30.40 AV	54.00	-23.60	1.17 H	4	-5.20	35.50
6	7386.00	48.30 PK	74.00	-25.70	1.32 H	351	7.50	40.80
6	7386.00	36.60 AV	54.00	-17.40	1.32 H	351	-4.20	40.80

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2088.00	45.80 PK	74.00	-28.20	1.00 V	294	17.00	28.80
1	2088.00	43.70 AV	54.00	-10.30	1.00 V	294	14.90	28.80
2	*2462.00	108.50 PK			1.00 V	360	78.50	30.00
2	*2462.00	101.70 AV			1.00 V	360	71.70	30.00
3	2483.50	55.80 PK	74.00	-18.20	1.00 V	360	25.70	30.10
3	2483.50	46.30 AV	54.00	-7.70	1.00 V	360	16.20	30.10
4	4176.00	45.50 PK	74.00	-28.50	1.51 V	20	12.10	33.40
4	4176.00	41.00 AV	54.00	-13.00	1.51 V	20	7.60	33.40
5	4924.00	45.20 PK	74.00	-28.80	1.28 V	19	9.60	35.50
5	4924.00	35.50 AV	54.00	-18.50	1.28 V	19	-0.10	35.50
6	7386.00	48.50 PK	74.00	-25.50	1.59 V	43	7.70	40.80
6	7386.00	37.10 AV	54.00	-16.90	1.59 V	43	-3.70	40.80

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. The limit value is defined as per 15.247
6. “ * ” : Fundamental frequency

4.2.11 TEST RESULTS – DSSS (ANTENNA 3)

EUT	802.11g Wireless LAN PCI Card	MODEL	WPG2401
MODE	Channel 1	FREQUENCY RANGE	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION & BANDWIDTH	Peak (PK) Average (AV) 1 MHz
ENVIRONMENTAL CONDITIONS	20 deg. C, 63%RH, 980 hPa	TESTED BY	Rex Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2038.00	42.80 PK	74.00	-31.20	1.67 H	34	14.30	28.50
1	2038.00	38.60 AV	54.00	-15.40	1.67 H	34	10.10	28.50
2	2390.00	53.40 PK	74.00	-20.60	1.32 H	48	19.70	33.70
2	2390.00	42.80 AV	54.00	-11.20	1.32 H	48	9.10	33.70
3	*2412.00	108.00 PK			1.32 H	48	78.20	29.80
3	*2412.00	100.90 AV			1.32 H	48	71.10	29.80
4	4076.00	42.00 PK	74.00	-32.00	1.00 H	9	8.70	33.30
4	4076.00	32.80 AV	54.00	-21.20	1.00 H	9	-0.50	33.30
5	4824.00	39.90 PK	74.00	-34.10	1.00 H	62	4.80	35.10
5	4824.00	28.90 AV	54.00	-25.10	1.00 H	62	-6.20	35.10
6	7236.00	46.10 PK	74.00	-27.90	1.27 H	355	5.60	40.50
6	7236.00	34.90 AV	54.00	-19.10	1.27 H	355	-5.60	40.50

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2038.00	46.80 PK	74.00	-27.20	1.02 V	2	18.30	28.50
1	2038.00	44.60 AV	54.00	-9.40	1.02 V	2	16.10	28.50
2	2390.00	61.60 PK	74.00	-12.40	1.10 V	347	27.90	33.70
2	2390.00	51.10 AV	54.00	-2.90	1.10 V	347	17.40	33.70
3	*2412.00	116.20 PK			1.10 V	347	86.40	29.80
3	*2412.00	109.20 AV			1.10 V	347	79.40	29.80
4	4076.00	42.30 PK	74.00	-31.70	1.11 V	8	9.00	33.30
4	4076.00	33.10 AV	54.00	-20.90	1.11 V	8	-0.20	33.30
5	4824.00	50.00 PK	74.00	-24.00	1.08 V	316	14.90	35.10
5	4824.00	38.20 AV	54.00	-15.80	1.08 V	316	3.10	35.10
6	7236.00	47.60 PK	74.00	-26.40	1.35 V	11	7.10	40.50
6	7236.00	35.90 AV	54.00	-18.10	1.35 V	11	-4.60	40.50

REMARKS: 1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * ” : Fundamental frequency

EUT	802.11g Wireless LAN PCI Card	MODEL	WPG2401
MODE	Channel 6	FREQUENCY RANGE	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION & BANDWIDTH	Peak (PK) Average (AV) 1 MHz
ENVIRONMENTAL CONDITIONS	20 deg. C, 63%RH, 980 hPa	TESTED BY	Rex Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2063.00	43.30 PK	74.00	-30.70	1.66 H	35	14.70	28.60
1	2063.00	39.60 AV	54.00	-14.40	1.66 H	35	11.00	28.60
2	*2437.00	107.30 PK			1.32 H	50	77.40	29.90
2	*2437.00	100.20 AV			1.32 H	50	70.30	29.90
3	4126.00	41.80 PK	74.00	-32.20	1.00 H	8	8.50	33.40
3	4126.00	32.70 AV	54.00	-21.30	1.00 H	8	-0.70	33.40
4	4874.00	40.50 PK	74.00	-33.50	1.01 H	57	5.20	35.30
4	4874.00	29.40 AV	54.00	-24.60	1.01 H	57	-6.00	35.30
5	7311.00	46.50 PK	74.00	-27.50	1.23 H	357	5.80	40.70
5	7311.00	35.20 AV	54.00	-18.80	1.23 H	357	-5.50	40.70

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2063.00	46.70 PK	74.00	-27.30	1.03 V	3	18.10	28.60
1	2063.00	44.40 AV	54.00	-9.60	1.03 V	3	15.80	28.60
2	*2437.00	116.20 PK			1.10 V	347	86.30	29.90
2	*2437.00	109.30 AV			1.10 V	347	79.30	29.90
3	4126.00	42.20 PK	74.00	-31.80	1.08 V	337	8.90	33.40
3	4126.00	33.40 AV	54.00	-20.60	1.08 V	337	0.10	33.40
4	4874.00	49.50 PK	74.00	-24.50	1.06 V	313	14.20	35.30
4	4874.00	37.60 AV	54.00	-16.40	1.06 V	313	2.30	35.30
5	7311.00	47.50 PK	74.00	-26.50	1.37 V	14	6.80	40.70
5	7311.00	35.90 AV	54.00	-18.10	1.37 V	14	-4.80	40.70

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. The limit value is defined as per 15.247
6. “ * ” : Fundamental frequency

EUT	802.11g Wireless LAN PCI Card	MODEL	WPG2401
MODE	Channel 11	FREQUENCY RANGE	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION & BANDWIDTH	Peak (PK) Average (AV) 1 MHz
ENVIRONMENTAL CONDITIONS	20 deg. C, 63%RH, 980 hPa	TESTED BY	Rex Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2088.00	44.00 PK	74.00	-30.00	1.67 H	35	15.20	28.80
1	2088.00	40.40 AV	54.00	-13.60	1.67 H	35	11.60	28.80
2	*2462.00	106.20 PK			1.33 H	49	76.20	30.00
2	*2462.00	99.70 AV			1.33 H	49	69.70	30.00
3	2483.50	53.50 PK	74.00	-20.50	1.33 H	49	23.40	30.10
3	2483.50	44.30 AV	54.00	-9.70	1.33 H	49	14.20	30.10
4	4176.00	41.80 PK	74.00	-32.20	1.00 H	7	8.40	33.40
4	4176.00	32.60 AV	54.00	-21.40	1.00 H	7	-0.80	33.40
5	4924.00	41.10 PK	74.00	-32.90	1.00 H	63	5.50	35.50
5	4924.00	29.80 AV	54.00	-24.20	1.00 H	63	-5.80	35.50
6	7386.00	46.70 PK	74.00	-27.30	1.26 H	351	5.90	40.80
6	7386.00	35.60 AV	54.00	-18.40	1.26 H	351	-5.20	40.80

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2088.00	47.20 PK	74.00	-26.80	1.02 V	3	18.40	28.80
1	2088.00	45.00 AV	54.00	-9.00	1.02 V	3	16.20	28.80
2	*2462.00	114.70 PK			1.08 V	348	84.70	30.00
2	*2462.00	107.70 AV			1.08 V	348	77.70	30.00
3	2483.50	62.00 PK	74.00	-12.00	1.08 V	348	31.90	30.10
3	2483.50	52.30 AV	54.00	-1.70	1.08 V	348	22.20	30.10
4	4176.00	41.70 PK	74.00	-32.30	1.11 V	335	8.30	33.40
4	4176.00	32.80 AV	54.00	-21.20	1.11 V	335	-0.60	33.40
5	4924.00	49.00 PK	74.00	-25.00	1.09 V	314	13.40	35.50
5	4924.00	37.10 AV	54.00	-16.90	1.09 V	314	1.50	35.50
6	7386.00	47.60 PK	74.00	-26.40	1.38 V	10	6.80	40.80
6	7386.00	36.10 AV	54.00	-17.90	1.38 V	10	-4.70	40.80

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. The limit value is defined as per 15.247
6. " * " : Fundamental frequency

4.2.12 TEST RESULTS –(ANTENNA2 – OFDM)

EUT	802.11g Wireless LAN PCI Card	MODEL	WPG2401
MODE	Channel 1	FREQUENCY RANGE	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION & BANDWIDTH	Peak (PK) Average (AV) 1 MHz
ENVIRONMENTAL CONDITIONS	20 deg. C, 63%RH, 980 hPa	TESTED BY	Rex Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2038.00	45.60 PK	74.00	-28.40	1.29 H	39	17.10	28.50
1	2038.00	42.50 AV	54.00	-11.50	1.29 H	39	14.10	28.50
2	2390.00	43.20 PK	74.00	-30.80	1.00 H	306	9.50	33.70
2	2390.00	32.90 AV	54.00	-21.10	1.00 H	306	-0.80	33.70
3	*2412.00	91.40 PK			1.00 H	306	61.60	29.80
3	*2412.00	83.30 AV			1.00 H	306	53.50	29.80
4	4076.00	41.10 PK	74.00	-32.90	1.00 H	331	7.80	33.30
4	4076.00	33.70 AV	54.00	-20.30	1.00 H	331	0.40	33.30
5	4824.00	41.80 PK	74.00	-32.20	1.21 H	8	6.70	35.10
5	4824.00	29.90 AV	54.00	-24.10	1.21 H	8	-5.20	35.10
6	7236.00	47.80 PK	74.00	-26.20	1.41 H	339	7.30	40.50
6	7236.00	36.10 AV	54.00	-17.90	1.41 H	339	-4.40	40.50

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2038.00	45.60 PK	74.00	-28.40	1.00 V	303	17.10	28.50
1	2038.00	42.20 AV	54.00	-11.80	1.00 V	303	13.80	28.50
2	2390.00	59.00 PK	74.00	-15.00	1.00 V	345	25.30	33.70
2	2390.00	48.10 AV	54.00	-5.90	1.00 V	345	14.40	33.70
3	*2412.00	107.20 PK			1.00 V	345	77.40	29.80
3	*2412.00	98.50 AV			1.00 V	345	68.70	29.80
4	4076.00	43.10 PK	74.00	-30.90	1.47 V	19	9.80	33.30
4	4076.00	35.90 AV	54.00	-18.10	1.47 V	19	2.60	33.30
5	4824.00	42.20 PK	74.00	-31.80	1.24 V	8	7.10	35.10
5	4824.00	31.10 AV	54.00	-22.90	1.24 V	8	-4.00	35.10
6	7236.00	47.20 PK	74.00	-26.80	1.59 V	37	6.70	40.50
6	7236.00	36.10 AV	54.00	-17.90	1.59 V	37	-4.40	40.50

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * ” : Fundamental frequency

EUT	802.11g Wireless LAN PCI Card	MODEL	WPG2401
MODE	Channel 6	FREQUENCY RANGE	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION & BANDWIDTH	Peak (PK) Average (AV) 1 MHz
ENVIRONMENTAL CONDITIONS	20 deg. C, 63%RH, 980 hPa	TESTED BY	Rex Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2063.00	45.60 PK	74.00	-28.40	1.27 H	40	17.00	28.60
1	2063.00	43.10 AV	54.00	-10.90	1.27 H	40	14.50	28.60
2	2437.00	94.30 PK	74.00	20.30	1.00 H	307	64.30	29.90
2	2437.00	86.00 AV	54.00	32.00	1.00 H	307	56.10	29.90
3	4126.00	43.30 PK	74.00	-30.70	1.00 H	327	10.00	33.40
3	4126.00	36.00 AV	54.00	-18.00	1.00 H	327	2.60	33.40
4	4874.00	41.80 PK	74.00	-32.20	1.18 H	5	6.50	35.30
4	4874.00	30.30 AV	54.00	-23.70	1.18 H	5	-5.00	35.30
5	7311.00	48.60 PK	74.00	-25.40	1.37 H	343	7.90	40.70
5	7311.00	36.50 AV	54.00	-17.50	1.37 H	343	-4.20	40.70

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2063.00	45.80 PK	74.00	-28.20	1.00 V	298	17.20	28.60
1	2063.00	43.00 AV	54.00	-11.00	1.00 V	298	14.40	28.60
2	*2437.00	108.70 PK			1.00 V	347	78.80	29.90
2	*2437.00	100.40 AV			1.00 V	347	70.50	29.90
3	4126.00	43.90 PK	74.00	-30.10	1.54 V	9	10.50	33.40
3	4126.00	37.10 AV	54.00	-16.90	1.54 V	9	3.80	33.40
4	4874.00	42.80 PK	74.00	-31.20	1.27 V	13	7.50	35.30
4	4874.00	31.50 AV	54.00	-22.50	1.27 V	13	-3.80	35.30
5	7311.00	47.70 PK	74.00	-26.30	1.54 V	41	7.00	40.70
5	7311.00	36.40 AV	54.00	-17.60	1.54 V	41	-4.30	40.70

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. The limit value is defined as per 15.247
6. “ * ” : Fundamental frequency

EUT	802.11g Wireless LAN PCI Card	MODEL	WPG2401
MODE	Channel 11	FREQUENCY RANGE	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION & BANDWIDTH	Peak (PK) Average (AV) 1 MHz
ENVIRONMENTAL CONDITIONS	20 deg. C, 63%RH, 980 hPa	TESTED BY	Rex Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2088.00	46.70 PK	74.00	-27.30	1.26 H	42	17.90	28.80
1	2088.00	44.10 AV	54.00	-9.90	1.26 H	42	15.30	28.80
2	*2462.00	89.30 PK			1.00 H	308	59.20	30.00
2	*2462.00	81.00 AV			1.00 H	308	51.00	30.00
3	2483.50	44.10 PK	74.00	-29.90	1.00 H	308	14.00	30.10
3	2483.50	31.90 AV	54.00	-22.10	1.00 H	308	1.80	30.10
4	4176.00	44.90 PK	74.00	-29.10	1.01 H	335	11.50	33.40
4	4176.00	39.50 AV	54.00	-14.50	1.01 H	335	6.10	33.40
5	4924.00	42.00 PK	74.00	-32.00	1.16 H	6	6.40	35.50
5	4924.00	30.60 AV	54.00	-23.40	1.16 H	6	-5.00	35.50
6	7386.00	48.40 PK	74.00	-25.60	1.33 H	349	7.60	40.80
6	7386.00	36.50 AV	54.00	-17.50	1.33 H	349	-4.30	40.80

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2088.00	46.00 PK	74.00	-28.00	1.00 V	296	17.20	28.80
1	2088.00	43.80 AV	54.00	-10.20	1.00 V	296	15.00	28.80
2	*2462.00	103.50 PK			1.00 V	347	73.50	30.00
2	*2462.00	95.10 AV			1.00 V	347	65.10	30.00
3	2483.50	58.30 PK	74.00	-15.70	1.00 V	347	28.20	30.10
3	2483.50	46.00 AV	54.00	-8.00	1.00 V	347	15.90	30.10
4	4176.00	45.90 PK	74.00	-28.10	1.52 V	21	12.50	33.40
4	4176.00	41.50 AV	54.00	-12.50	1.52 V	21	8.10	33.40
5	4924.00	43.00 PK	74.00	-31.00	1.31 V	36	7.40	35.50
5	4924.00	32.20 AV	54.00	-21.80	1.31 V	36	-3.40	35.50
6	7386.00	48.30 PK	74.00	-25.70	1.58 V	40	7.50	40.80
6	7386.00	36.90 AV	54.00	-17.10	1.58 V	40	-3.90	40.80

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. The limit value is defined as per 15.247
6. “ * ” : Fundamental frequency

4.2.13 TEST RESULTS –(ANTENNA3 – OFDM)

EUT	802.11g Wireless LAN PCI Card	MODEL	WPG2401
MODE	Channel 1	FREQUENCY RANGE	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION & BANDWIDTH	Peak (PK) Average (AV) 1 MHz
ENVIRONMENTAL CONDITIONS	20 deg. C, 63%RH, 980 hPa	TESTED BY	Rex Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2038.00	43.00 PK	74.00	-31.00	1.00 H	34	14.60	28.50
1	2038.00	39.00 AV	54.00	-15.00	1.00 H	34	10.50	28.50
2	2390.00	54.90 PK	74.00	-19.10	1.31 H	47	21.20	33.70
2	2390.00	44.60 AV	54.00	-9.40	1.31 H	47	10.90	33.70
3	*2412.00	103.10 PK			1.31 H	47	73.30	29.80
3	*2412.00	95.00 AV			1.31 H	47	65.20	29.80
4	4076.00	41.80 PK	74.00	-32.20	1.00 H	8	8.50	33.30
4	4076.00	32.50 AV	54.00	-21.50	1.00 H	8	-0.80	33.30
5	4824.00	40.00 PK	74.00	-34.00	1.02 H	73	4.90	35.10
5	4824.00	28.80 AV	54.00	-25.20	1.02 H	73	-6.30	35.10
6	7236.00	46.20 PK	74.00	-27.80	1.28 H	349	5.70	40.50
6	7236.00	35.10 AV	54.00	-18.90	1.28 H	349	-5.40	40.50

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2038.00	46.50 PK	74.00	-27.50	1.02 V	1	18.00	28.50
1	2038.00	44.30 AV	54.00	-9.70	1.02 V	1	15.90	28.50
2	2390.00	63.50 PK	74.00	-10.50	1.10 V	347	29.80	33.70
2	2390.00	52.30 AV	54.00	-1.70	1.10 V	347	18.60	33.70
3	*2412.00	111.70 PK			1.10 V	347	81.90	29.80
3	*2412.00	102.70 AV			1.10 V	347	72.90	29.80
4	4076.00	41.60 PK	74.00	-32.40	1.14 V	6	8.20	33.30
4	4076.00	33.80 AV	54.00	-20.20	1.14 V	6	0.50	33.30
5	4824.00	44.30 PK	74.00	-29.70	1.10 V	320	9.20	35.10
5	4824.00	31.70 AV	54.00	-22.30	1.10 V	320	-3.40	35.10
6	7236.00	47.30 PK	74.00	-26.70	1.38 V	5	6.80	40.50
6	7236.00	35.80 AV	54.00	-18.20	1.38 V	5	-4.70	40.50

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * ” : Fundamental frequency

EUT	802.11g Wireless LAN PCI Card	MODEL	WPG2401
MODE	Channel 6	FREQUENCY RANGE	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION & BANDWIDTH	Peak (PK) Average (AV) 1 MHz
ENVIRONMENTAL CONDITIONS	20 deg. C, 63%RH, 980 hPa	TESTED BY	Rex Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2063.00	43.40 PK	74.00	-30.60	1.67 H	35	14.80	28.60
1	2063.00	39.80 AV	54.00	-14.20	1.67 H	35	11.20	28.60
2	*2437.00	104.30 PK			1.33 H	50	74.40	29.90
2	*2437.00	96.00 AV			1.33 H	50	66.10	29.90
3	4126.00	41.90 PK	74.00	-32.10	1.00 H	9	8.60	33.40
3	4126.00	33.60 AV	54.00	-20.40	1.00 H	9	0.30	33.40
4	4874.00	40.70 PK	74.00	-33.30	1.00 H	63	5.40	35.30
4	4874.00	29.00 AV	54.00	-25.00	1.00 H	63	-6.30	35.30
5	7311.00	46.50 PK	74.00	-27.50	1.25 H	4	5.80	40.70
5	7311.00	35.30 AV	54.00	-18.70	1.25 H	4	-5.40	40.70

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2063.00	47.00 PK	74.00	-27.00	1.02 V	4	18.40	28.60
1	2063.00	44.60 AV	54.00	-9.40	1.02 V	4	16.00	28.60
2	*2437.00	114.90 PK			1.10 V	347	84.90	29.90
2	*2437.00	105.50 AV			1.10 V	347	75.60	29.90
3	4126.00	42.50 PK	74.00	-31.50	1.09 V	335	9.10	33.40
3	4126.00	33.70 AV	54.00	-20.30	1.09 V	335	0.40	33.40
4	4874.00	47.50 PK	74.00	-26.50	1.07 V	323	12.20	35.30
4	4874.00	34.10 AV	54.00	-19.90	1.07 V	323	-1.20	35.30
5	7311.00	48.60 PK	74.00	-25.40	1.41 V	12	7.90	40.70
5	7311.00	36.10 AV	54.00	-17.90	1.41 V	12	-4.60	40.70

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. The limit value is defined as per 15.247
6. “ * ” : Fundamental frequency

EUT	802.11g Wireless LAN PCI Card	MODEL	WPG2401
MODE	Channel 11	FREQUENCY RANGE	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION & BANDWIDTH	Peak (PK) Average (AV) 1 MHz
ENVIRONMENTAL CONDITIONS	20 deg. C, 63%RH, 980 hPa	TESTED BY	Rex Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2088.00	43.90 PK	74.00	-30.10	1.66 H	35	15.10	28.80
1	2088.00	40.20 AV	54.00	-13.80	1.66 H	35	11.40	28.80
2	*2462.00	101.40 PK			1.31 H	51	71.40	30.00
2	*2462.00	92.70 AV			1.31 H	51	62.70	30.00
3	2483.50	56.20 PK	74.00	-17.80	1.31 H	51	26.10	30.10
3	2483.50	43.60 AV	54.00	-10.40	1.31 H	51	13.50	30.10
4	4176.00	41.90 PK	74.00	-32.10	1.00 H	8	8.50	33.40
4	4176.00	32.90 AV	54.00	-21.10	1.00 H	8	-0.50	33.40
5	4924.00	40.80 PK	74.00	-33.20	1.00 H	69	5.20	35.50
5	4924.00	29.40 AV	54.00	-24.60	1.00 H	69	-6.20	35.50
6	7386.00	47.00 PK	74.00	-27.00	1.31 H	351	6.20	40.80
6	7386.00	35.70 AV	54.00	-18.30	1.31 H	351	-5.10	40.80

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2088.00	47.10 PK	74.00	-26.90	1.01 V	5	18.30	28.80
1	2088.00	44.80 AV	54.00	-9.20	1.01 V	5	16.00	28.80
2	*2462.00	109.50 PK			1.09 V	347	79.50	30.00
2	*2462.00	101.00 AV			1.09 V	347	71.00	30.00
3	2483.50	64.30 PK	74.00	-9.70	1.09 V	347	34.20	30.10
3	2483.50	51.90 AV	54.00	-2.10	1.09 V	347	21.80	30.10
4	4176.00	41.80 PK	74.00	-32.20	1.12 V	334	8.40	33.40
4	4176.00	33.50 AV	54.00	-20.50	1.12 V	334	0.10	33.40
5	4924.00	43.20 PK	74.00	-30.80	1.06 V	327	7.70	35.50
5	4924.00	30.60 AV	54.00	-23.40	1.06 V	327	-4.90	35.50
6	7386.00	47.50 PK	74.00	-26.50	1.36 V	9	6.70	40.80
6	7386.00	36.00 AV	54.00	-18.00	1.36 V	9	-4.80	40.80

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. The limit value is defined as per 15.247
6. “ * ” : Fundamental frequency

4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSP40	100036	Nov. 23, 2005

NOTE:

- 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
- 2.The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 kHz RBW and 100 kHz VBW. The 6 dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6 dB.

4.3.4 TEST SETUP



For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.

4.3.5 EUT OPERATING CONDITIONS


The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3.6 TEST RESULTS - DSSS


EUT	802.11g Wireless LAN PCI Card		
MODEL	WPG2401	ENVIRONMENTAL CONDITIONS	21 deg. C, 62%RH, 980 hPa
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TESTED BY	Rex Huang

CHANNEL	CHANNEL FREQUENCY (MHz)	6 dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	12.70	0.5	PASS
6	2437	12.70	0.5	PASS
11	2462	12.70	0.5	PASS


CH1

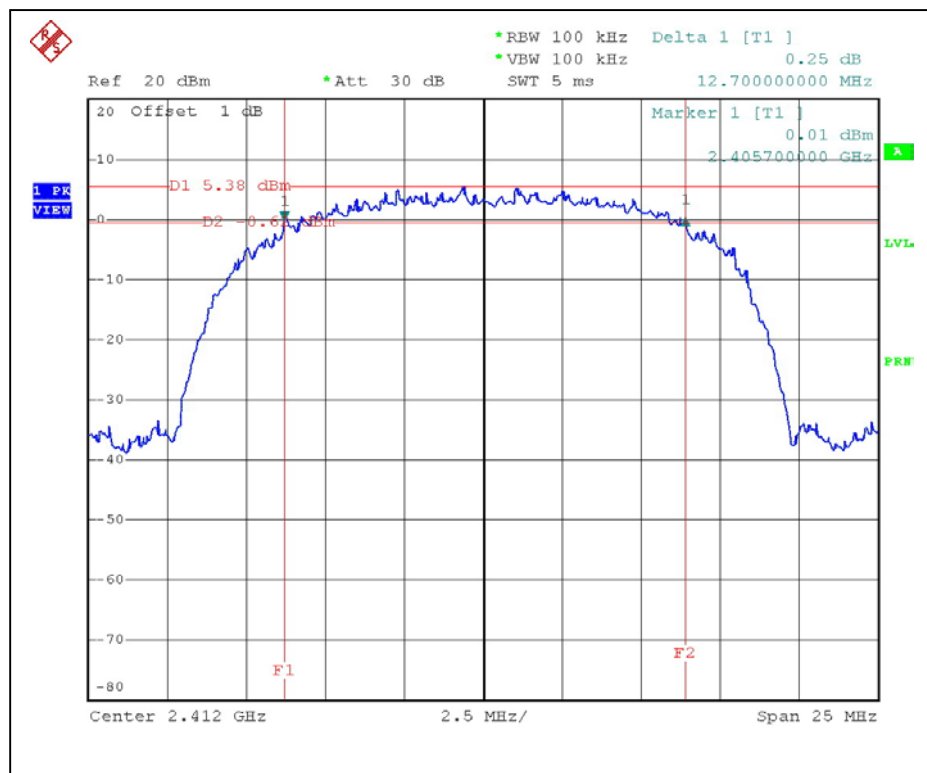

CH6

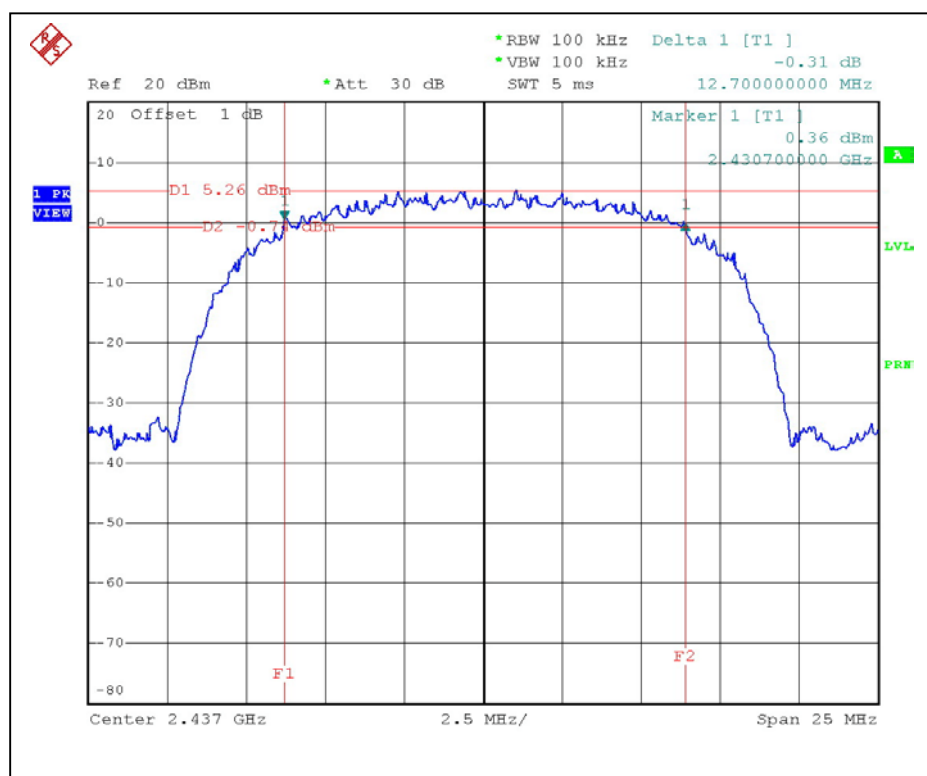

CH11

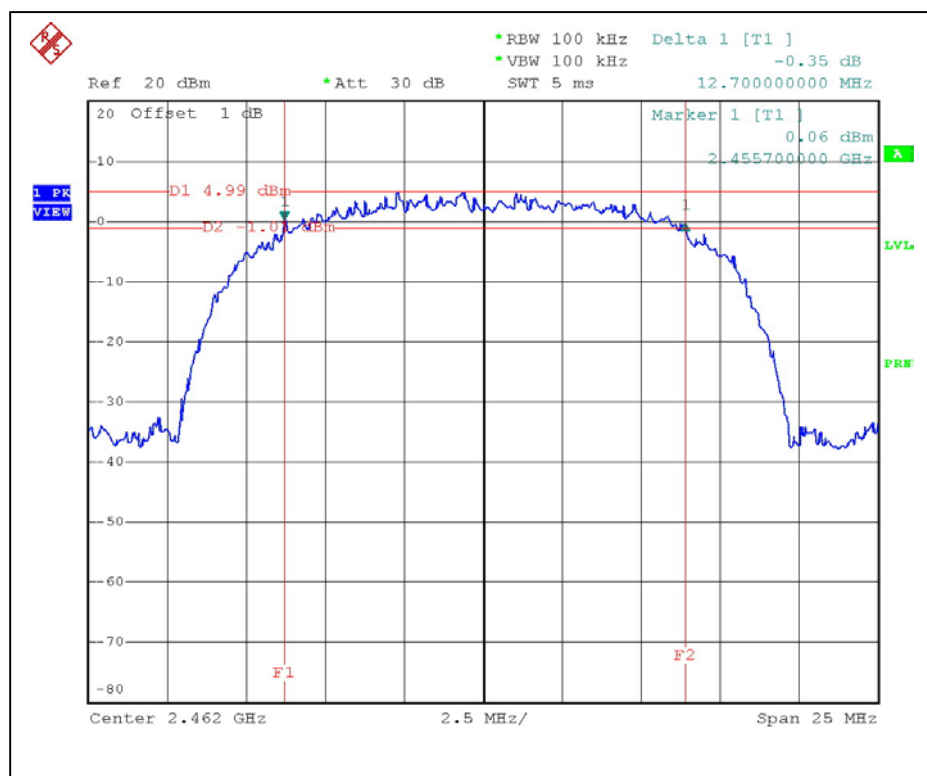


4.3.7 TEST RESULTS -OFDM


EUT	802.11g Wireless LAN PCI Card		
MODEL	WPG2401	ENVIRONMENTAL CONDITIONS	21 deg. C, 62%RH, 980 hPa
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TESTED BY	Rex Huang

CHANNEL	CHANNEL FREQUENCY (MHz)	6 dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	16.45	0.5	PASS
6	2437	16.45	0.5	PASS
11	2462	16.40	0.5	PASS


CH1

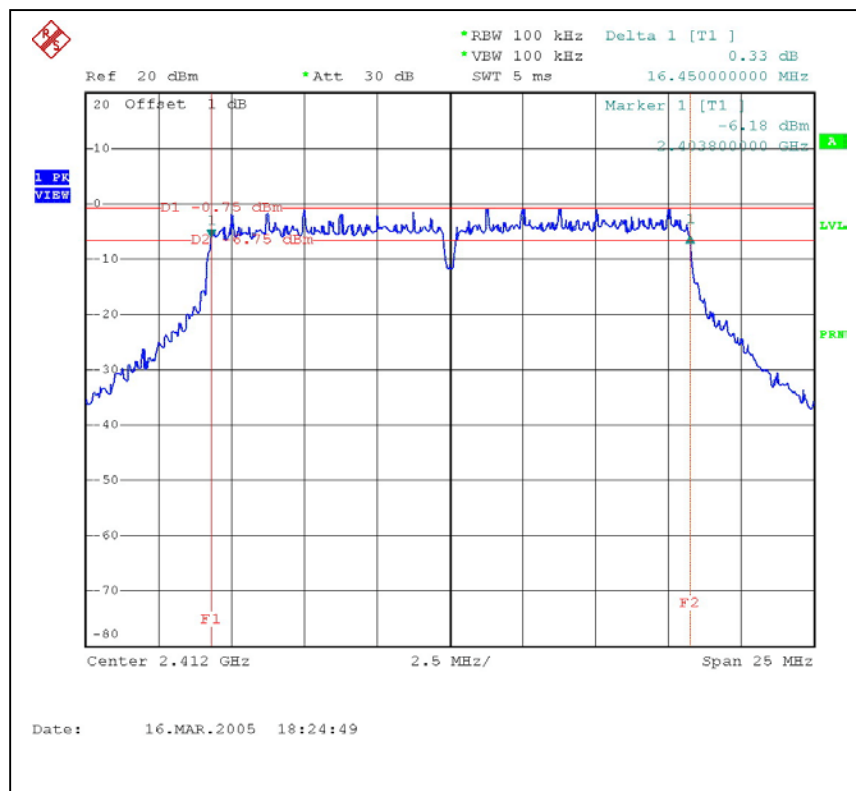

CH6

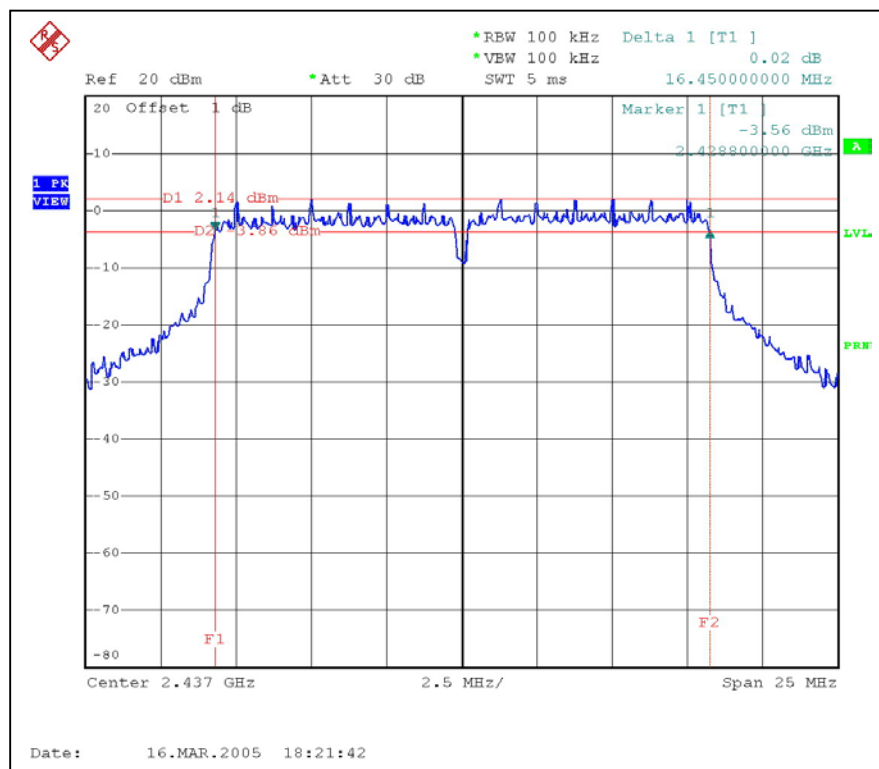

CH11

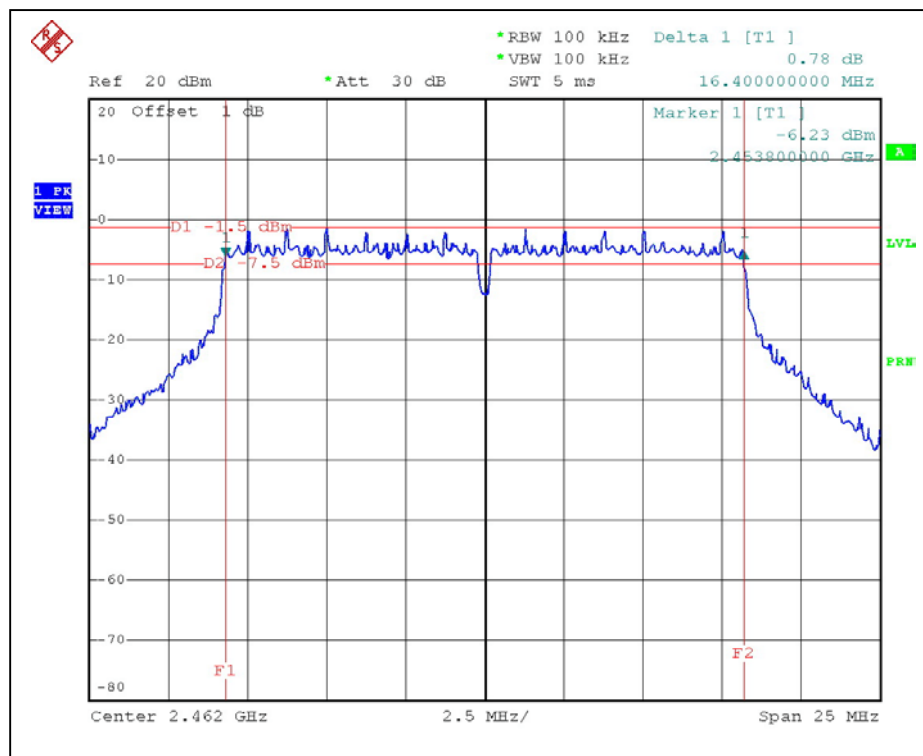

4.4 MAXIMUM PEAK OUTPUT POWER

4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

4.4.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSP40	100036	Nov. 23, 2005
Agilent SIGNAL GENERATOR	E8257C	MY43321031	May. 06, 2005
TEKTRONIX OSCILLOSCOPE	TDS 220	B027241	Jun. 30, 2005
NARDA DETECTOR	4503A	FSCM99899	NA


NOTE:

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.4.3 TEST PROCEDURES

1. A detector was used on the output port of the EUT. An oscilloscope was used to read the peak response of the detector.
2. Replaced the EUT by the signal generator. The center frequency of the S.G was adjusted to the center frequency of the measured channel.
3. Adjusted the power to have the same peak reading on oscilloscope. Record the power level.

4.4.4 TEST SETUP



4.4.5 EUT OPERATING CONDITIONS

Same as Item 4.3.5

4.4.6 TEST RESULTS - DSSS

EUT	802.11g Wireless LAN PCI Card		
MODEL	WPG2401	ENVIRONMENTAL CONDITIONS	21 deg. C, 62%RH, 980 hPa
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TESTED BY	Rex Huang

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	17.25	30	PASS
6	2437	17.29	30	PASS
11	2462	16.83	30	PASS

4.4.7 TEST RESULTS - OFDM

EUT	802.11g Wireless LAN PCI Card		
MODEL	WPG2401	ENVIRONMENTAL CONDITIONS	21 deg. C, 62%RH, 980 hPa
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TESTED BY	Rex Huang

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	16.00	30	PASS
6	2437	18.88	30	PASS
11	2462	15.00	30	PASS

4.5 POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSP40	100036	Nov. 23, 2005


NOTE:

- 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
- 2.The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.5.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3 kHz RBW and 30 kHz VBW, set sweep time=span/3kHz. The power spectral density was measured and recorded. The sweep time is allowed to be longer than span/3KHz for a full response of the mixer in the spectrum analyzer.

4.5.4 TEST SETUP



4.5.5 EUT OPERATING CONDITIONS


Same as 4.3.5

4.5.6 TEST RESULTS – DSSS


EUT	802.11g Wireless LAN PCI Card		
MODEL	WPG2401	ENVIRONMENTAL CONDITIONS	21 deg. C, 62%RH, 980 hPa
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TESTED BY	Rex Huang

CHANNEL NUMBER	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 KHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-8.48	8	PASS
6	2437	-8.49	8	PASS
11	2462	-9.07	8	PASS


CH1

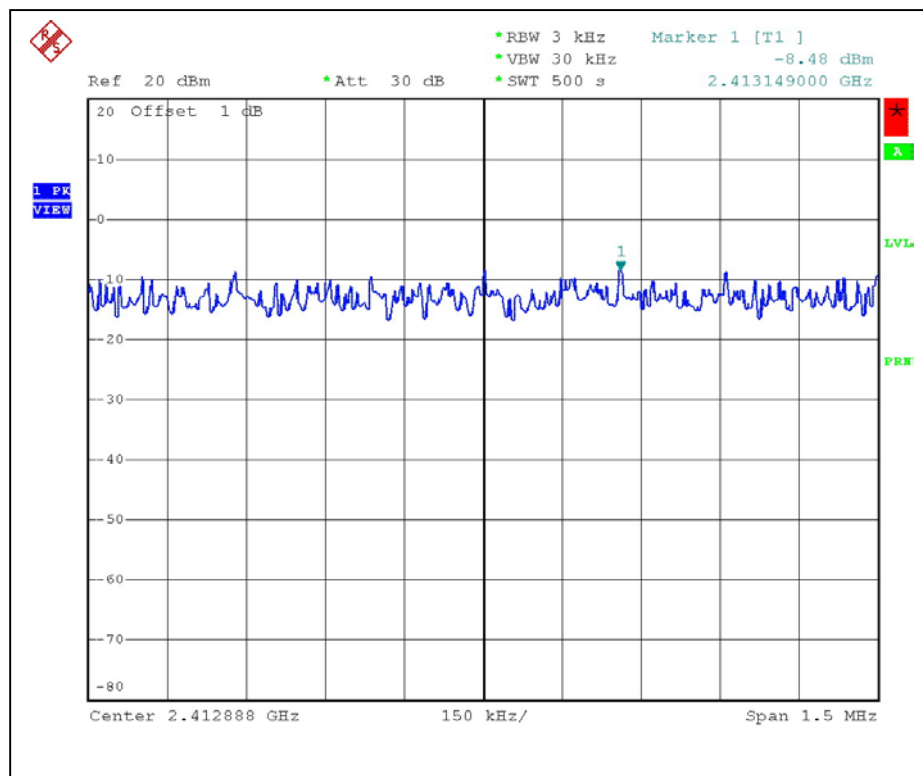

CH6

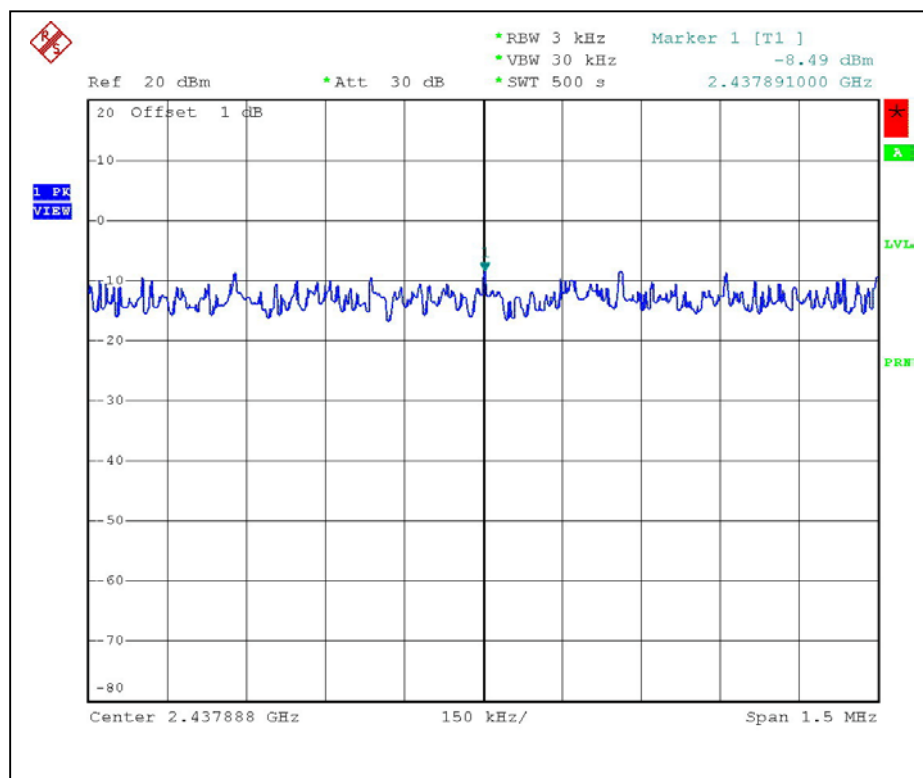

CH11

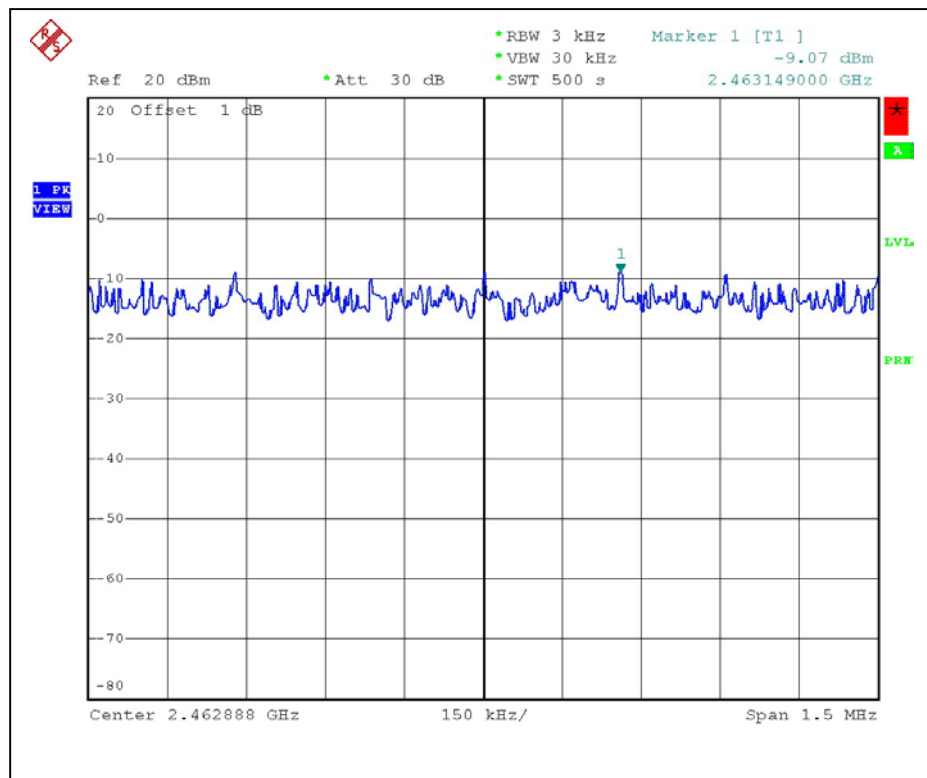


4.5.7 TEST RESULTS – OFDM


EUT	802.11g Wireless LAN PCI Card		
MODEL	WPG2401	ENVIRONMENTAL CONDITIONS	21 deg. C, 62%RH, 980 hPa
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TESTED BY	Rex Huang

CHANNEL NUMBER	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 KHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-13.95	8	PASS
6	2437	-10.27	8	PASS
11	2462	-14.58	8	PASS


CH1

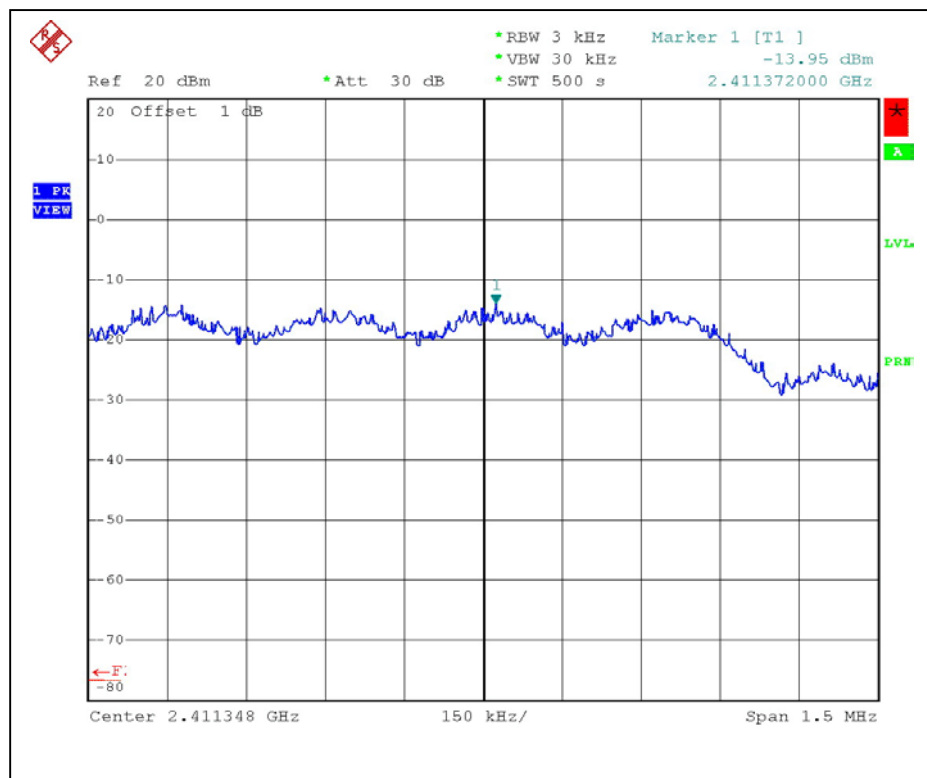

CH6

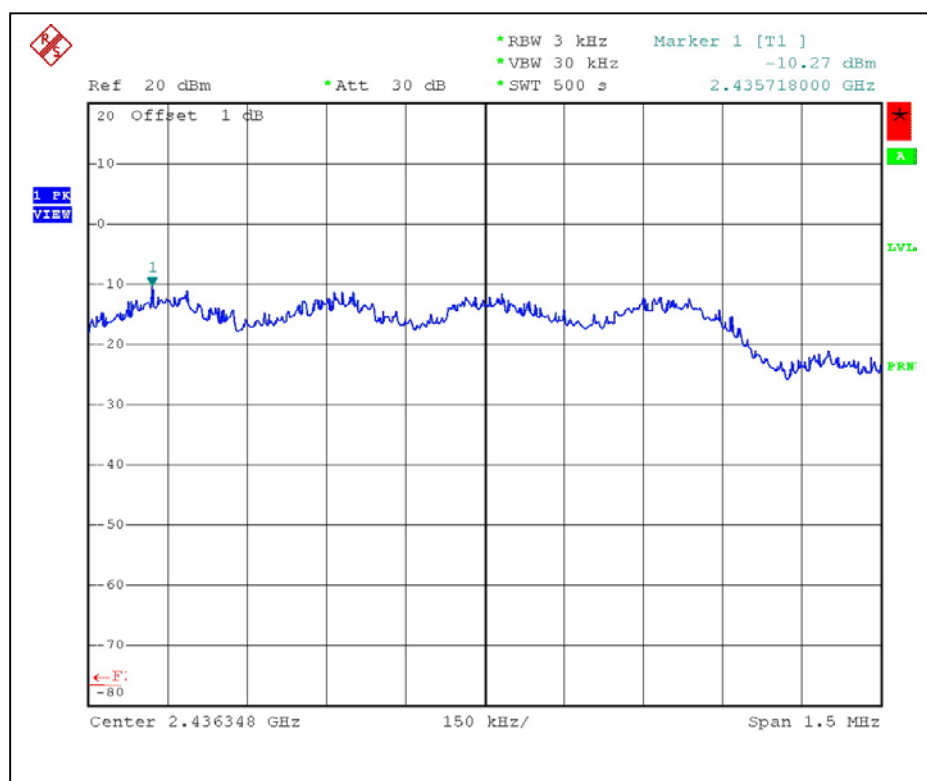

CH11

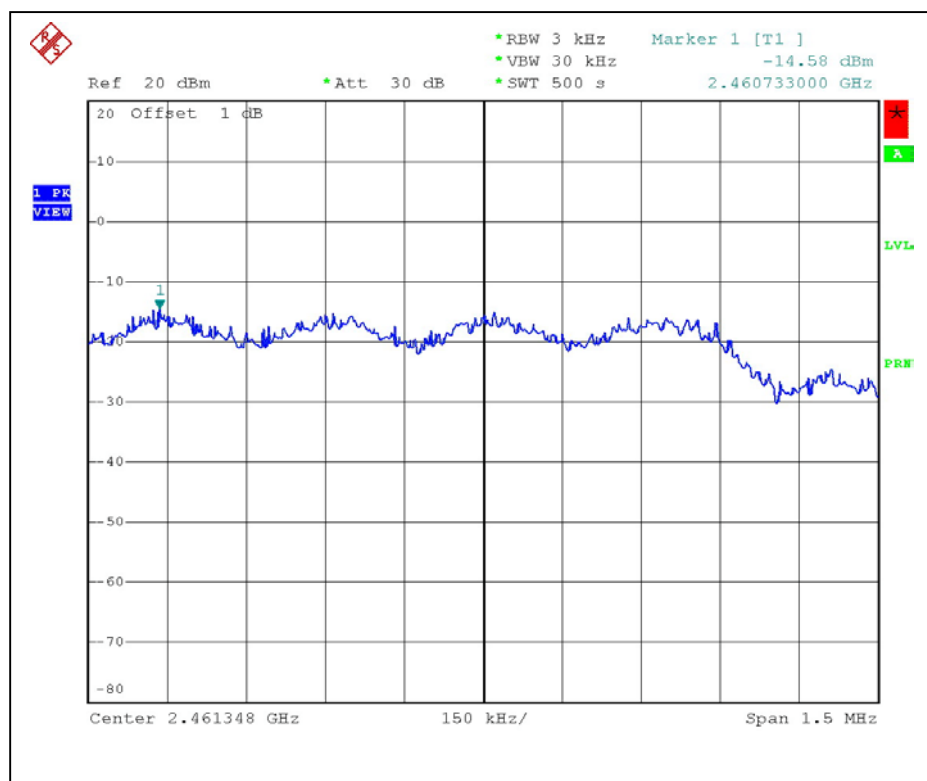



4.6 BAND EDGES MEASUREMENT

4.6.1 LIMITS OF BAND EDGES MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100KHz Resolution Bandwidth).

4.6.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSP40	100036	Nov. 23, 2005

NOTE:

- 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
- 2.The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.6.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set RBW spectrum analyzer to 100 KHz and set VBW spectrum analyzer to 100 KHz with suitable frequency span including 100 MHz bandwidth from band edge. The band edges was measured and recorded.

The spectrum plots (Peak RBW=VBW=100kHz ; Average RBW=1MHz, VBW=10Hz) are attached on the following pages.

4.6.4 EUT OPERATING CONDITION

Same as Item 4.3.5



4.6.5 TEST RESULTS – DSSS (ANTENNA 2)

The spectrum plots are attached on the following page. D1 line indicates the highest level, D2 line indicates the 20dB offset below D1. It shows compliance with the requirement in part 15.247(C).

Note - The delta method is only used up to 2 MHz away from the restricted bandage, The radiated emissions which located in other restricted frequency band, the result, please refer to 4.2.

NOTE(Peak) :



The band edge emission plot of DSSS technique on the following first page show 54.62dB delta between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2 is 112.50dBuV/m, so the maximum field strength in restrict band is $112.50 - 54.62 = 57.88$ dBuV/m which is under 74 dBuV/m limit.



The band edge emission plot of DSSS technique on the following first page shows 52.82dB delta between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2. is 108.50dBuV/m, so the maximum field strength in restrict band is $108.50 - 52.82 = 55.68$ dBuV/m which is under 74 dBuV/m limit.

NOTE (Average):

The band edge emission plot of DSSS technique on the following second page shows 58.05dB delta between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2 is 105.30dBuV/m, so the maximum field strength in restrict band is $105.30 - 58.05 = 47.25$ dBuV/m which is under 54 dBuV/m limit.

The band edge emission plot of DSSS technique on the following second page shows 55.46dB delta between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2. is 101.70dBuV/m, so the maximum field strength in restrict band is $101.70 - 55.46 = 46.24$ dBuV/m which is under 54 dBuV/m limit.

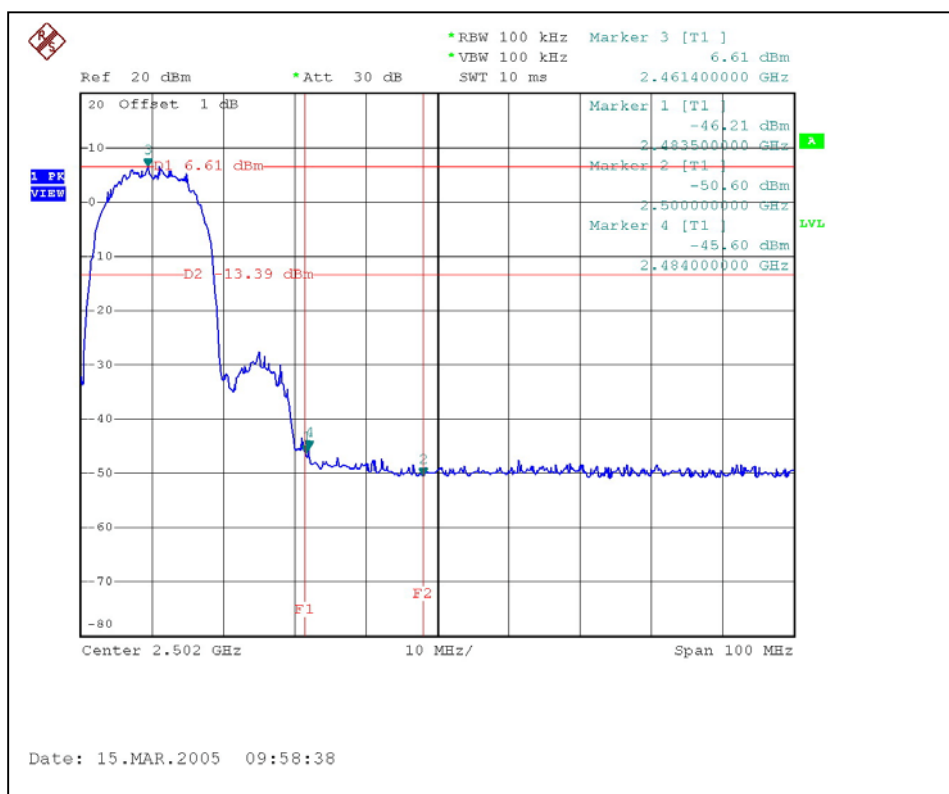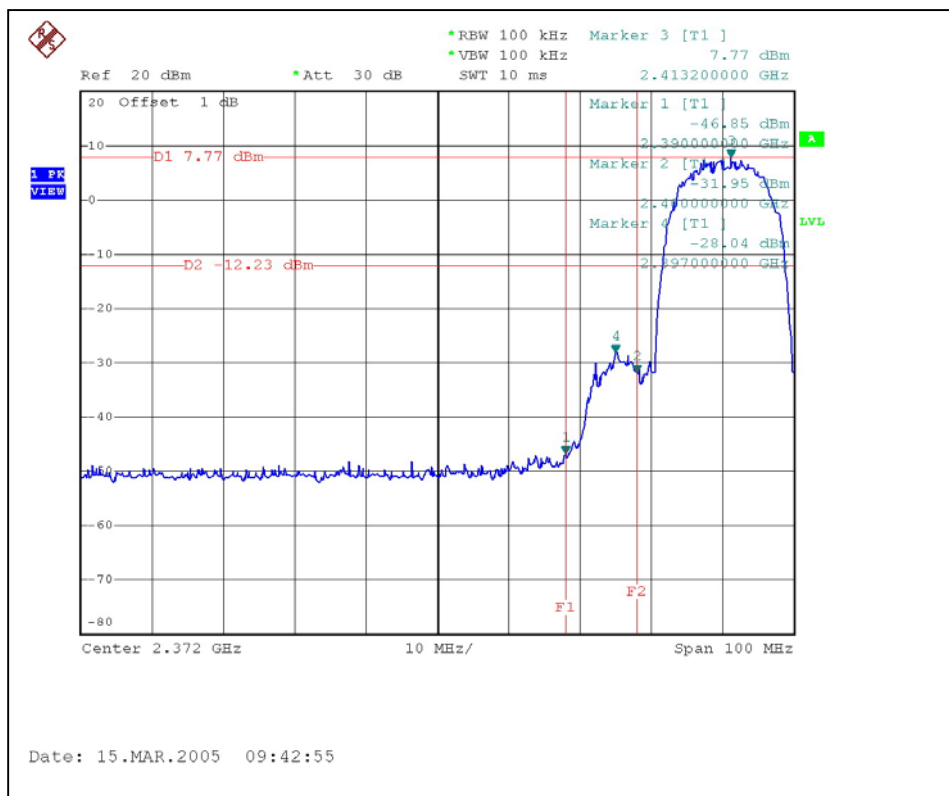

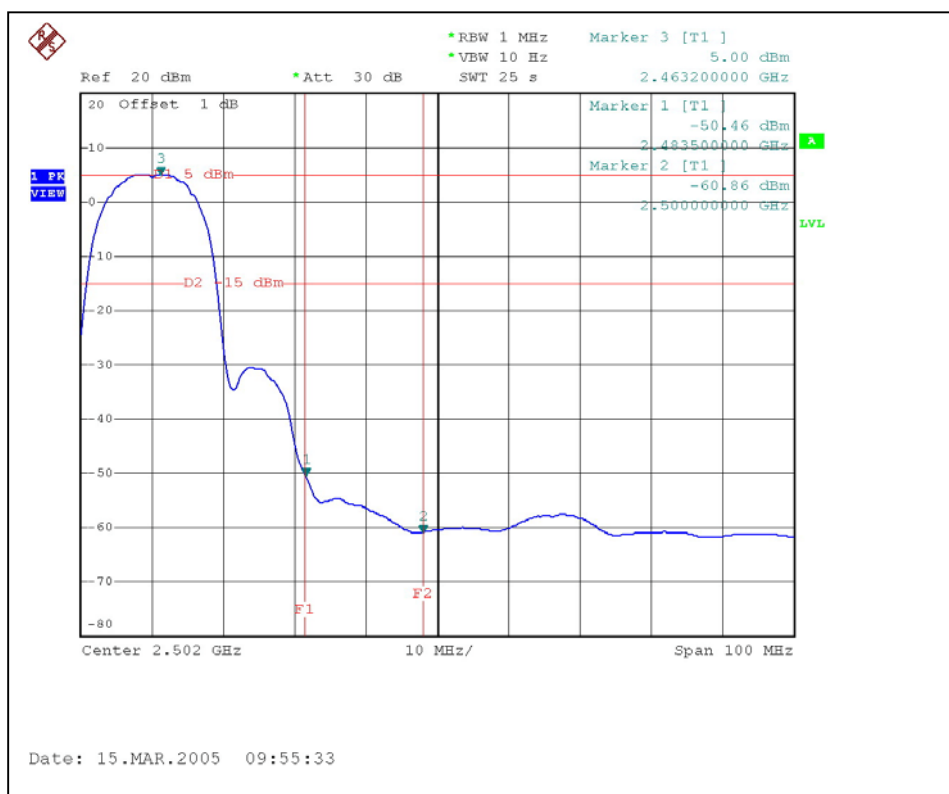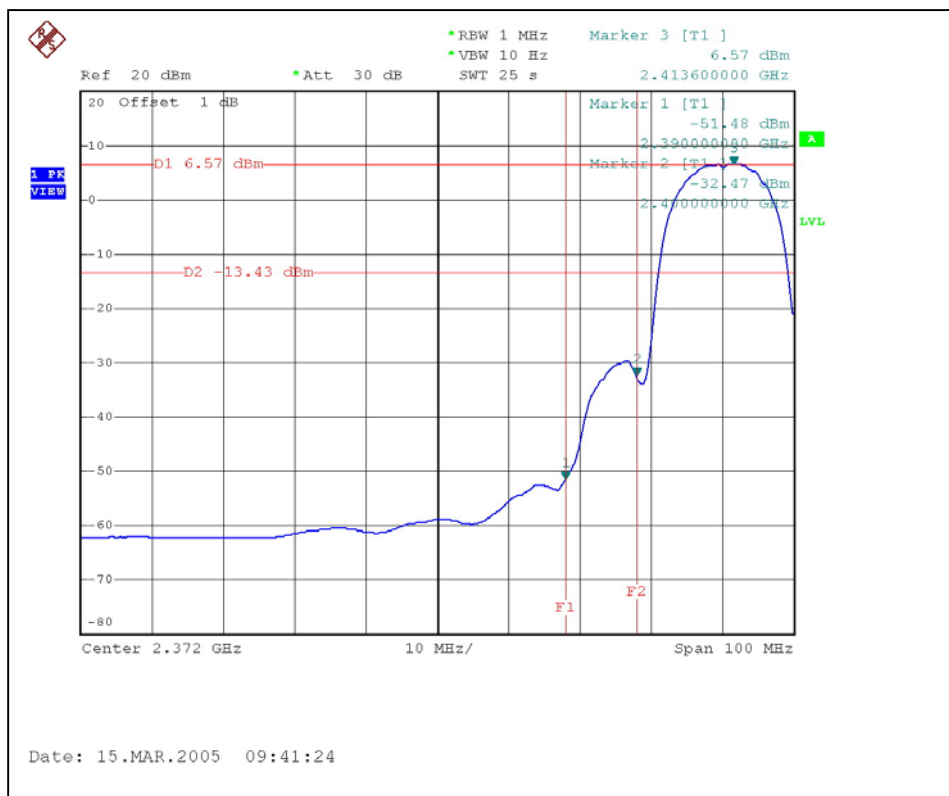



4.6.6 TEST RESULTS – DSSS (ANTENNA 3)

The spectrum plots are attached on the following page. D1 line indicates the highest level, D2 line indicates the 20dB offset below D1. It shows compliance with the requirement in part 15.247(C).

Note - The delta method is only used up to 2 MHz away from the restricted bandage, The radiated emissions which located in other restricted frequency band, the result, please refer to 4.2.

NOTE(Peak) :



The band edge emission plot of DSSS technique on the following first page show 54.62dB delta between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2 is 116.20dBuV/m, so the maximum field strength in restrict band is $116.20 - 54.62 = 61.58$ dBuV/m which is under 74 dBuV/m limit.



The band edge emission plot of DSSS technique on the following first page shows 52.82dB delta between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2. is 114.70dBuV/m, so the maximum field strength in restrict band is $114.70 - 52.82 = 61.88$ dBuV/m which is under 74 dBuV/m limit.

NOTE (Average):

The band edge emission plot of DSSS technique on the following second page shows 58.05dB delta between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2 is 109.20dBuV/m, so the maximum field strength in restrict band is $109.20 - 58.05 = 51.15$ dBuV/m which is under 54 dBuV/m limit.

The band edge emission plot of DSSS technique on the following second page shows 55.46dB delta between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2. is 107.70dBuV/m, so the maximum field strength in restrict band is $107.70 - 55.46 = 52.24$ dBuV/m which is under 54 dBuV/m limit.

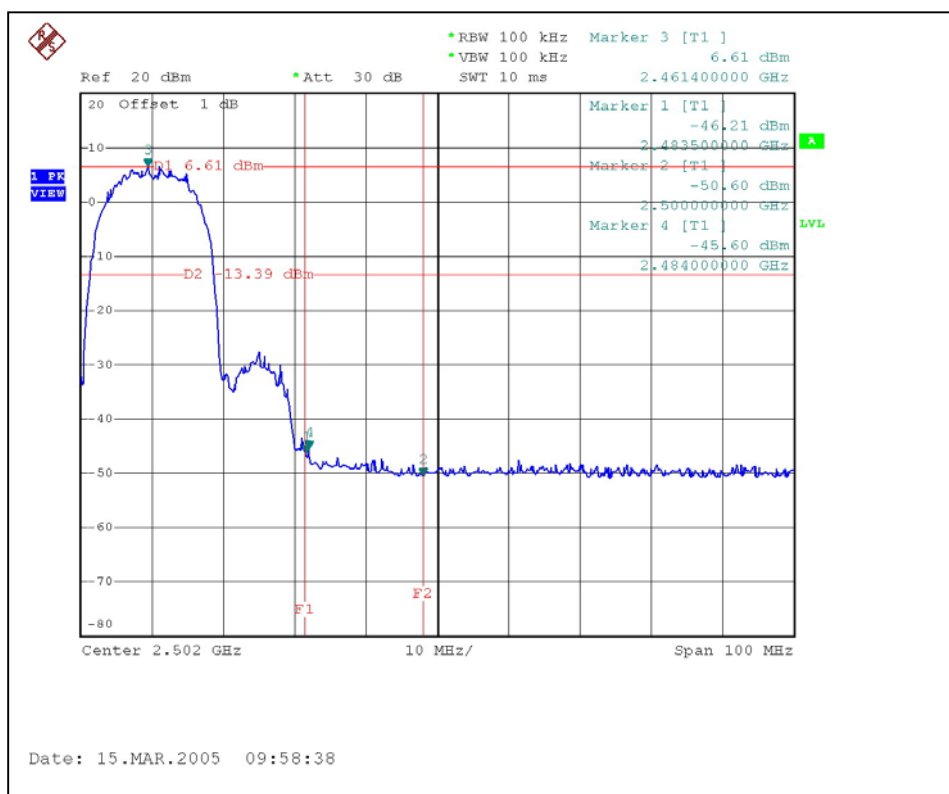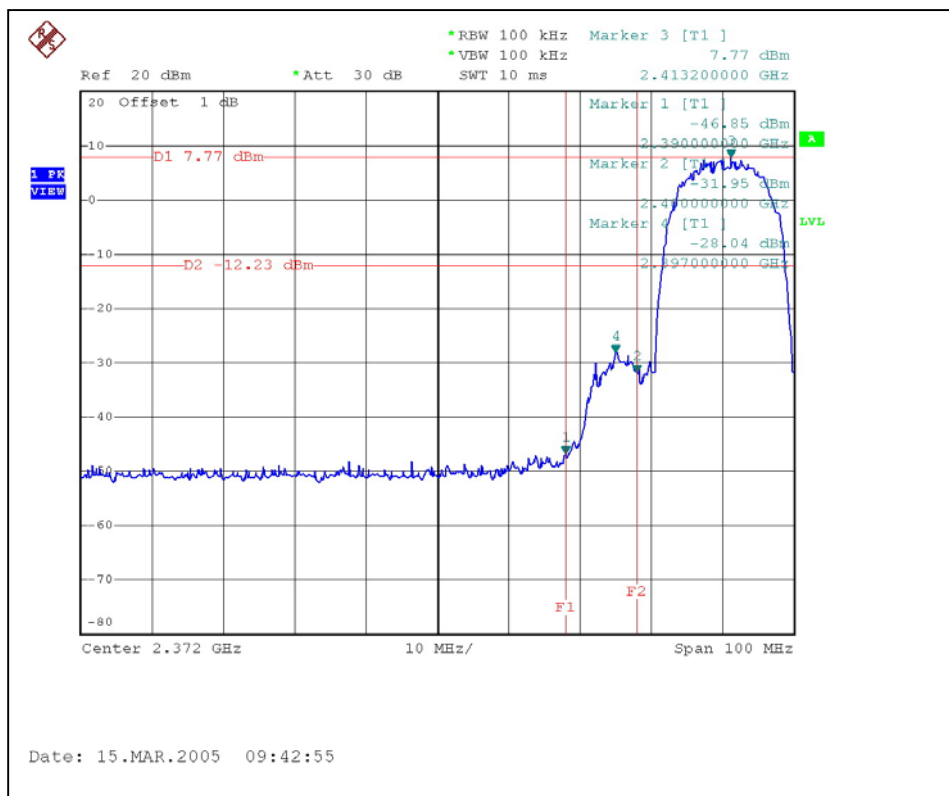

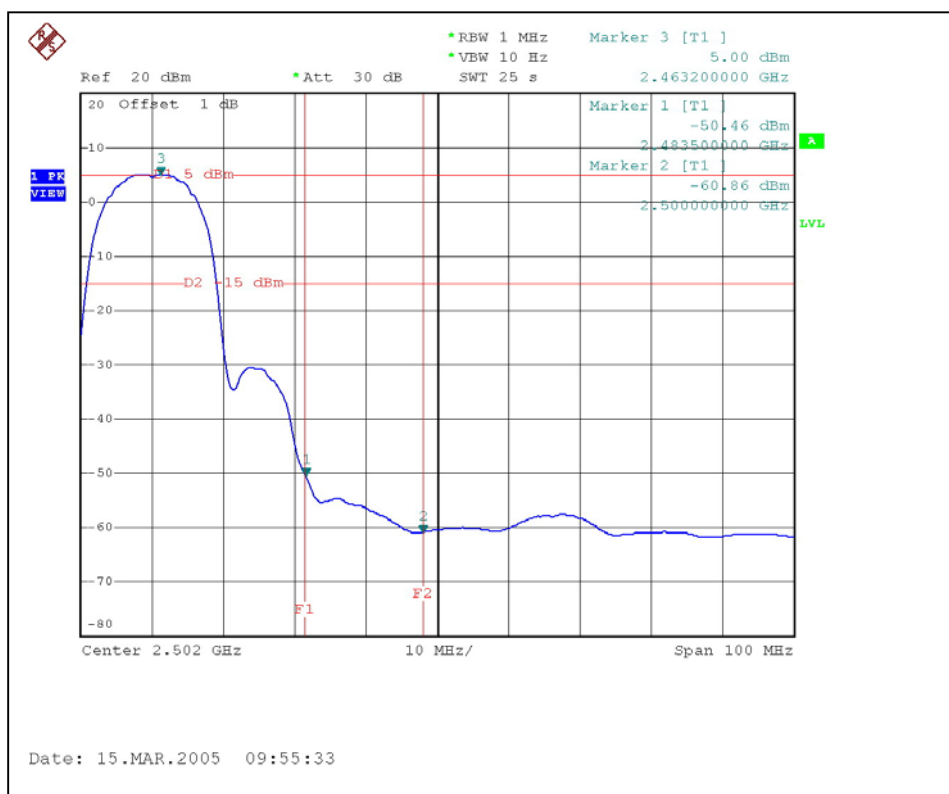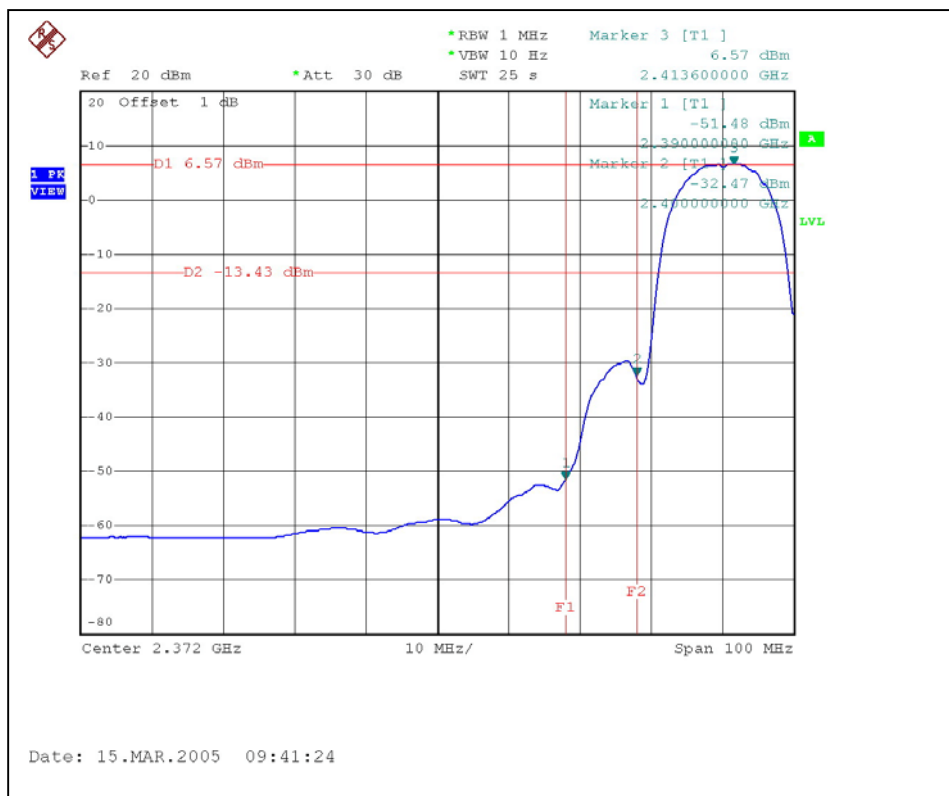

4.6.7 TEST RESULTS – OFDM (ANTENNA 2)

The spectrum plots are attached on the following page. D1 line indicates the highest level, D2 line indicates the 20dB offset below D1. It shows compliance with the requirement in part 15.247(C).

Note - The delta method is only used up to 2 MHz away from the restricted bandage, The radiated emissions which located in other restricted frequency band, the result, please refer to 4.2.

NOTE(Peak) :



The band edge emission plot of OFDM technique on the following first page show 48.20dB delta between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2 is 107.20dBuV/m, so the maximum field strength in restrict band is $107.20 - 48.20 = 59\text{dBuV/m}$ which is under 74 dBuV/m limit.



The band edge emission plot of OFDM technique on the following first page shows 45.31dB delta between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2. is 103.50dBuV/m, so the maximum field strength in restrict band is $103.50 - 45.31 = 58.19\text{dBuV/m}$ which is under 74 dBuV/m limit.

NOTE (Average):

The band edge emission plot of OFDM technique on the following second page shows 50.44dB delta between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2 is 98.50dBuV/m, so the maximum field strength in restrict band is $98.50 - 50.44 = 48.06\text{dBuV/m}$ which is under 54 dBuV/m limit.

The band edge emission plot of OFDM technique on the following second page shows 49.18dB delta between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2. is 95.10dBuV/m, so the maximum field strength in restrict band is $95.10 - 49.18 = 45.92\text{dBuV/m}$ which is under 54 dBuV/m limit.

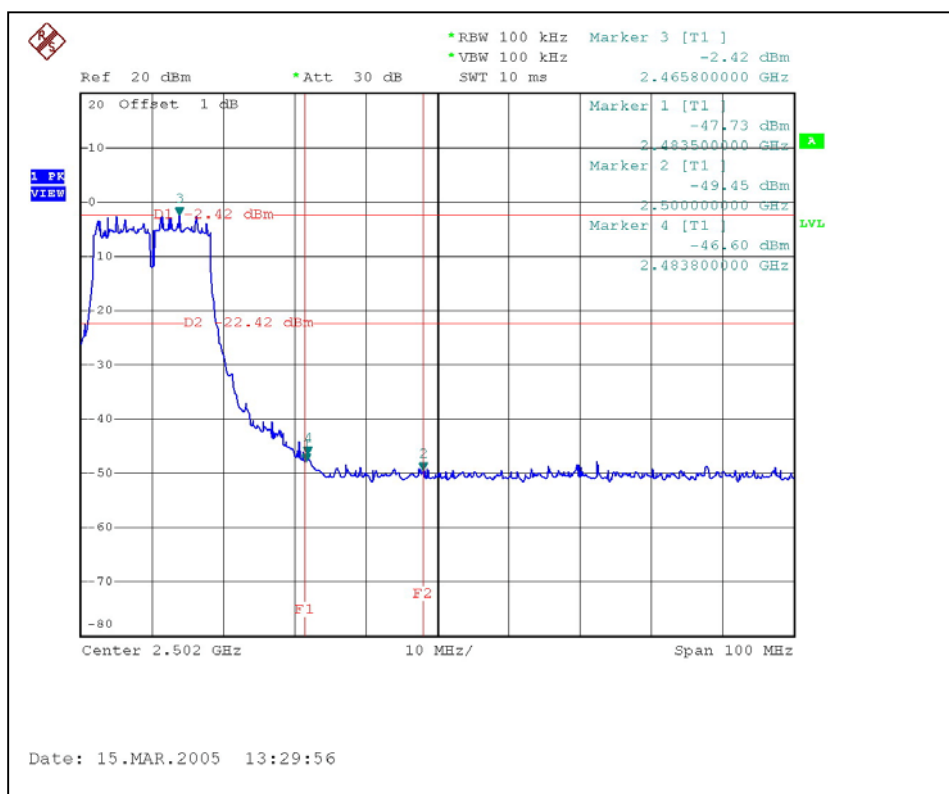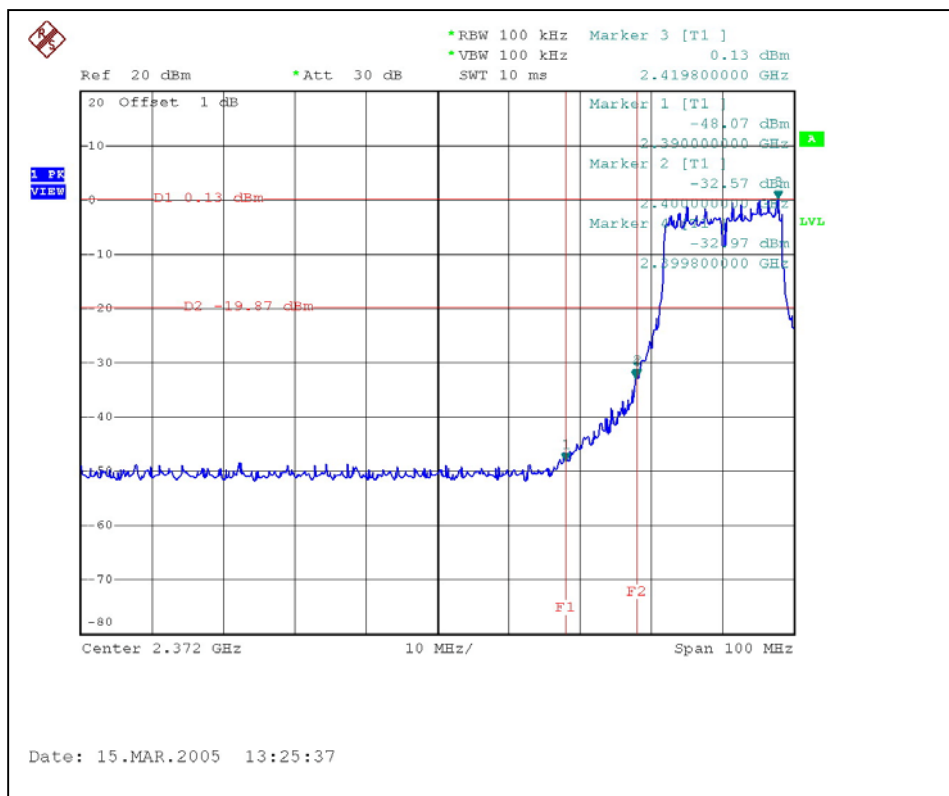

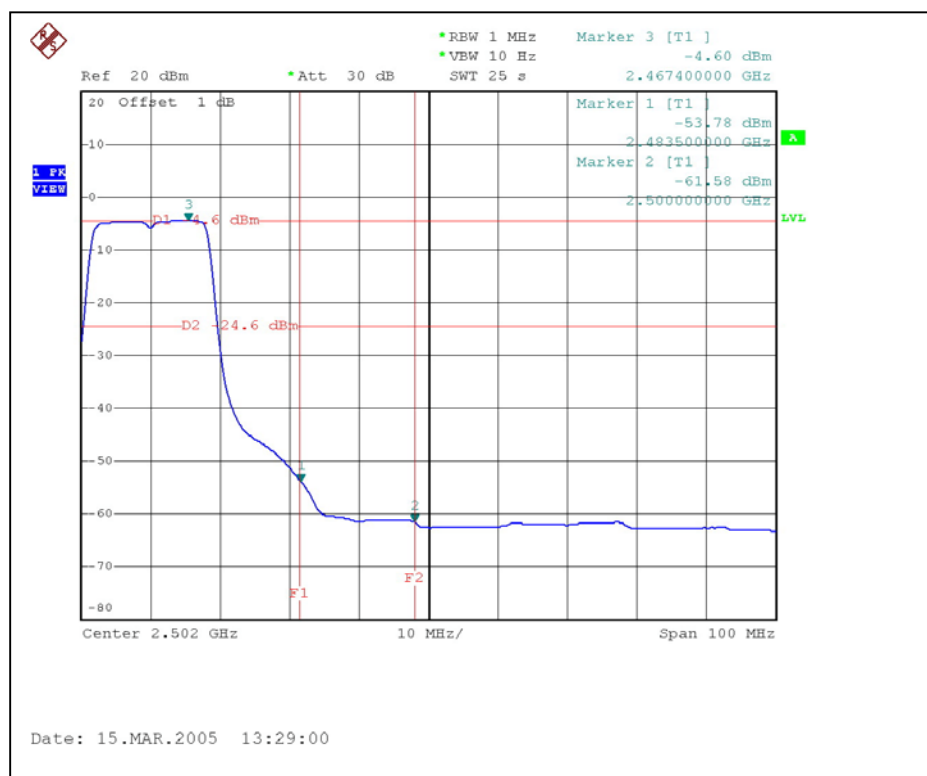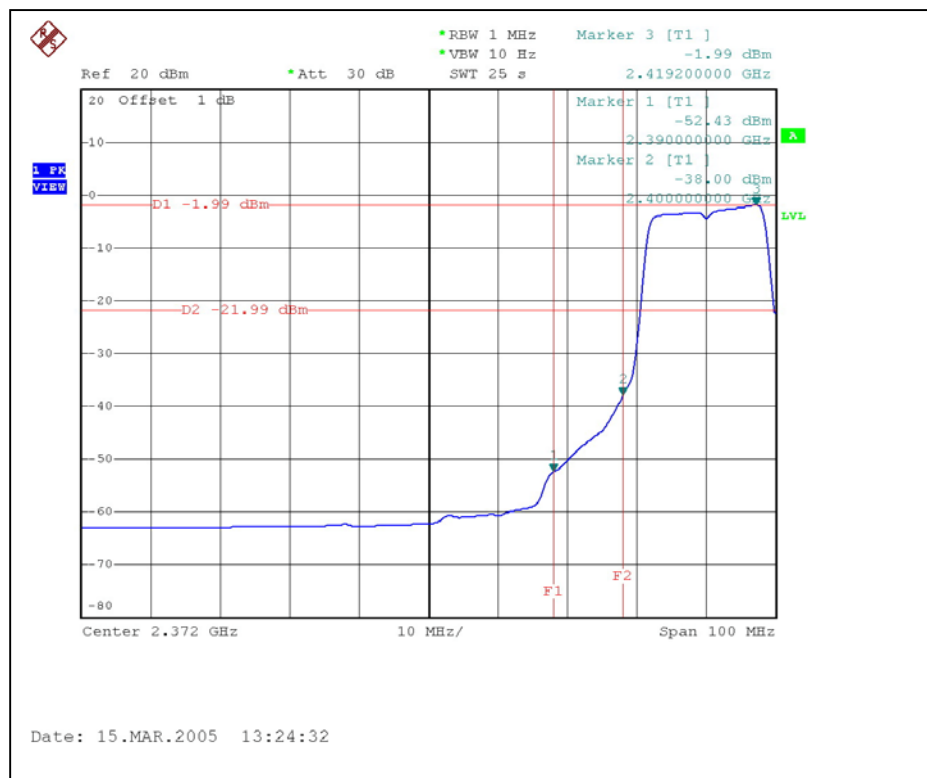

4.6.8 TEST RESULTS – OFDM (ANTENNA 3)

The spectrum plots are attached on the following page. D1 line indicates the highest level, D2 line indicates the 20dB offset below D1. It shows compliance with the requirement in part 15.247(C).

Note - The delta method is only used up to 2 MHz away from the restricted bandage, The radiated emissions which located in other restricted frequency band, the result, please refer to 4.2.

NOTE(Peak) :



The band edge emission plot of OFDM technique on the following first page show 48.20dB delta between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2 is 111.70dBuV/m, so the maximum field strength in restrict band is $111.70 - 48.20 = 63.5$ dBuV/m which is under 74 dBuV/m limit.



The band edge emission plot of OFDM technique on the following first page shows 45.31dB delta between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2. is 109.50dBuV/m, so the maximum field strength in restrict band is $109.50 - 45.31 = 64.19$ dBuV/m which is under 74 dBuV/m limit.

NOTE (Average):

The band edge emission plot of OFDM technique on the following second page shows 50.44dB delta between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2 is 102.70dBuV/m, so the maximum field strength in restrict band is $102.70 - 50.44 = 52.26$ dBuV/m which is under 54 dBuV/m limit.

The band edge emission plot of OFDM technique on the following second page shows 49.18dB delta between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2. is 101.00dBuV/m, so the maximum field strength in restrict band is $101.00 - 49.18 = 51.82$ dBuV/m which is under 54 dBuV/m limit.

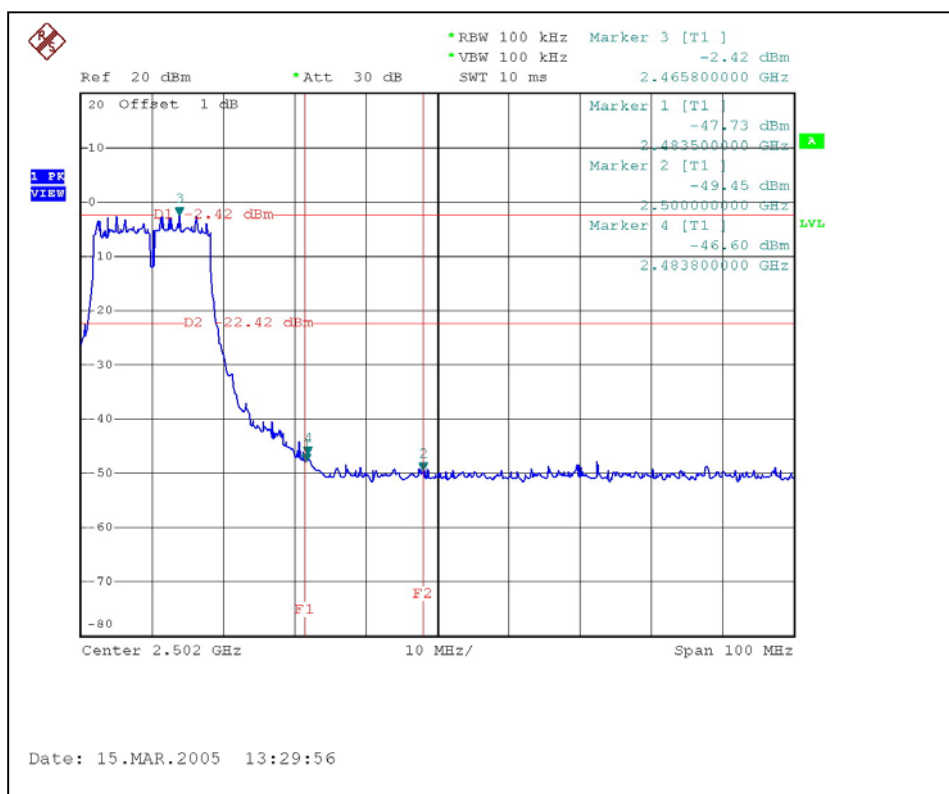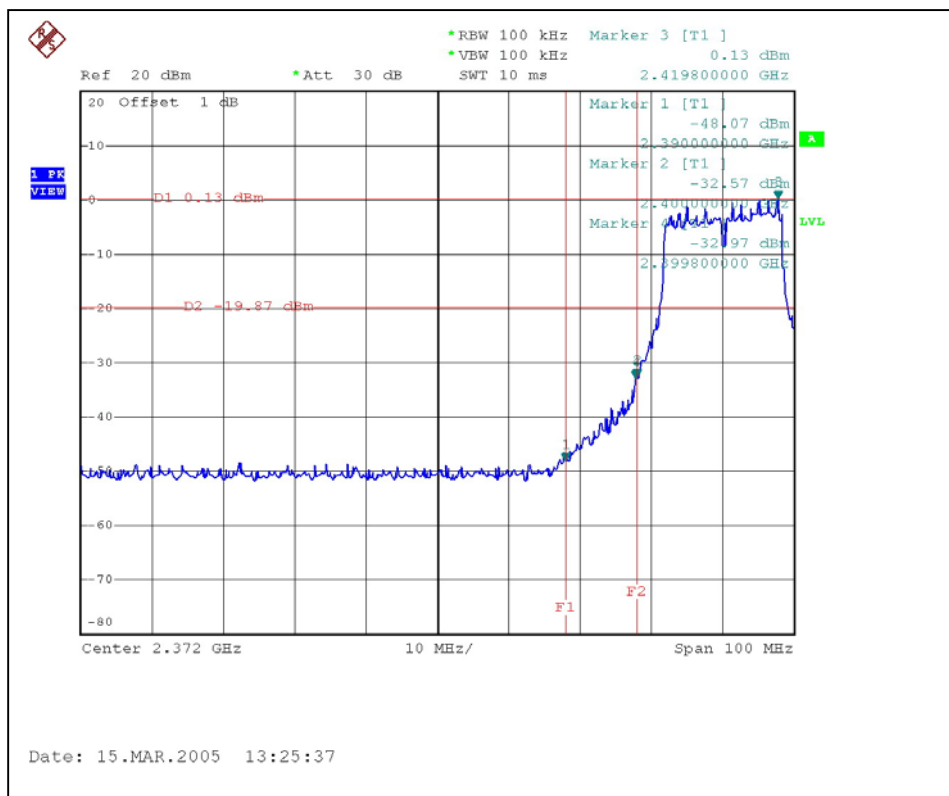

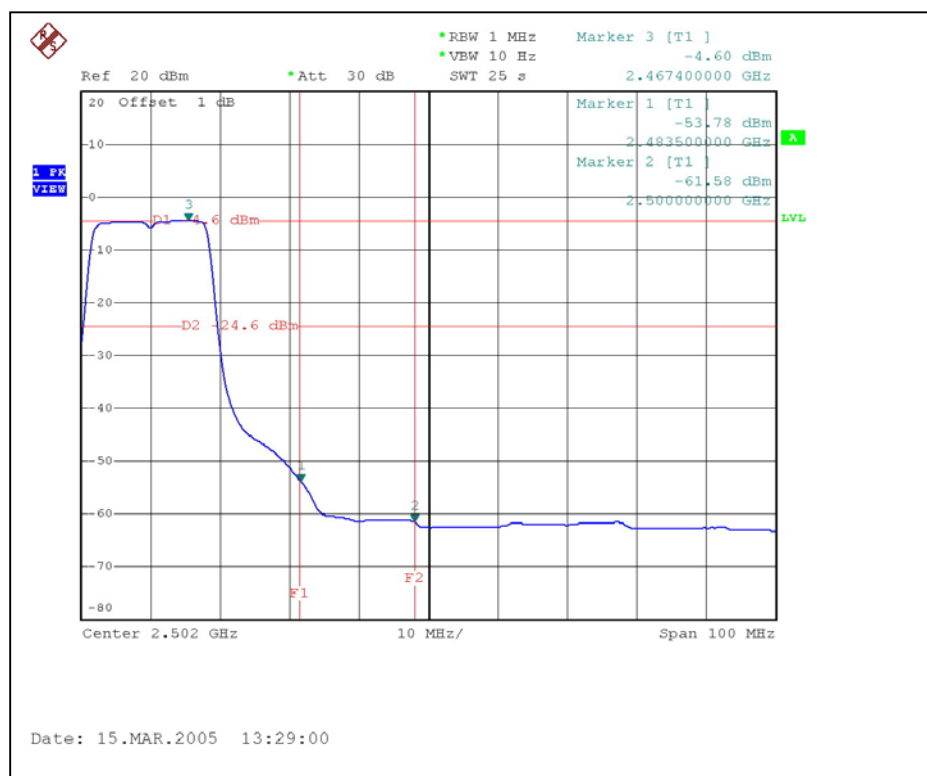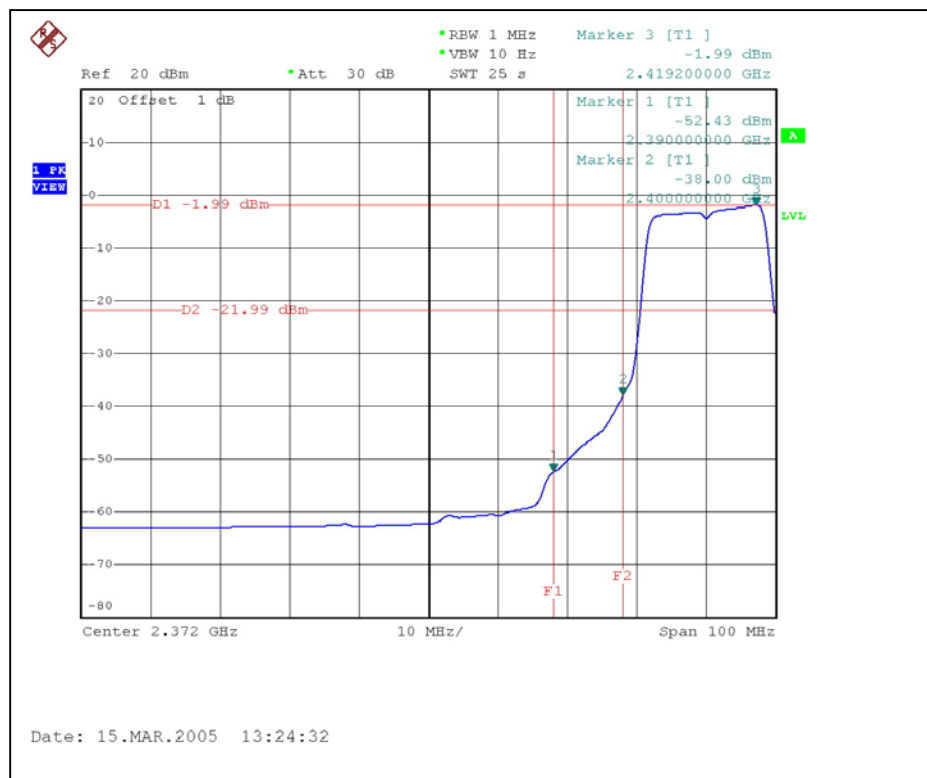

4.7 ANTENNA REQUIREMENT

4.7.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.7.2 ANTENNA CONNECTED CONSTRUCTION

The antennas used in this product are as following.

No.	Model	Gain (dBi)	Antenna Type	Antenna Connector	Remark
1	W111-094-D8	0dBi	Dipole Antenna	Reverse SMA	With cable, white
2	W111-094-D800	0dBi	Dipole Antenna	Reverse SMA	With cable, black
3	SJW-0007A	5dBi	Dipole Antenna	SMA Reverse	NA
4	AN2400-0101RS	2dBi	Dipole Antenna	SMA Reverse	NA

5 PHOTOGRAPHS OF THE TEST CONFIGURATION CONDUCTED EMISSION TEST



RADIATED EMISSION TEST (ANTENNA 1)



RADIATED EMISSION TEST (ANTENNA 2)



RADIATED EMISSION TEST (ANTENNA 3)



RADIATED EMISSION TEST (ANTENNA 4)



6 INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025:

USA	FCC, NVLAP, UL, A2LA
Germany	TUV Rheinland
Japan	VCCI
Norway	NEMKO
Canada	INDUSTRY CANADA, CSA
R.O.C.	CNLA, BSMI, DGT
Netherlands	Telefication
Singapore	PSB, GOST-ASIA (MOU)
Russia	CERTIS (MOU)

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site: www.adt.com.tw/index.5/phtml.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26052943

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety/Telecom Lab:

Tel: 886-3-3183232

Fax: 886-3-3185050

Email: service@adt.com.tw

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.