



M. Flom Associates, Inc. - Global Compliance Center

3356 North San Marcos Place, Suite 107, Chandler, Arizona 85225-7176

www.mflom.com general@mflom.com (480) 926-3100, FAX: 926-3598

Date of Report: August 6, 2001
Date of Submission: September 25, 2001

Federal Communications Commission
Via: Electronic Filing

Attention: Authorization & Evaluation Division

Applicant: Kenwood Communications Corporation
Equipment: TK-2140-1
FCC ID: ALH32253110
FCC Rules: 22, 74, 90

Gentlemen:

On behalf of the Applicant, enclosed please find Application Form 731, Engineering Test Report and all pertinent documentation, the whole for approval of the referenced equipment as shown.

Filing fees are attached.

We trust the same is in order. Should you need any further information, kindly contact the writer who is authorized to act as agent.

Sincerely yours,

A handwritten signature in black ink, appearing to read 'M. Flom P. Eng.', with a horizontal line drawn underneath the signature.

Morton Flom, P. Eng.

enclosure(s)
cc: Applicant
MF/cvr

LIST OF EXHIBITS
(FCC **CERTIFICATION** (TRANSMITTERS) - REVISED 9/28/98)

APPLICANT: Kenwood Communications Corporation

FCC ID: ALH32253110

BY APPLICANT:

- | | |
|--|---|
| 1. LETTER OF AUTHORIZATION | x |
| 2. IDENTIFICATION DRAWINGS, 2.1033(c)(11) | |
| <input checked="" type="checkbox"/> LABEL | |
| <input checked="" type="checkbox"/> LOCATION OF LABEL | |
| <input checked="" type="checkbox"/> COMPLIANCE STATEMENT | |
| <input checked="" type="checkbox"/> LOCATION OF COMPLIANCE STATEMENT | |
| 3. PHOTOGRAPHS, 2.1033(c)(12) | x |
| 4. DOCUMENTATION: 2.1033(c) | |
| (3) USER MANUAL | x |
| (9) TUNE UP INFO | x |
| (10) SCHEMATIC DIAGRAM | x |
| (10) CIRCUIT DESCRIPTION | x |
| BLOCK DIAGRAM | x |
| PARTS LIST | x |
| ACTIVE DEVICES | x |
| 5. PART 90.203(e) & (g) ATTESTATION | x |

BY M.F.A. INC.

- A. TESTIMONIAL & STATEMENT OF CERTIFICATION
- B. STATEMENT OF QUALIFICATIONS



M. Flom Associates, Inc. - Global Compliance Center

3356 North San Marcos Place, Suite 107, Chandler, Arizona 85225-7176

www.mflom.com general@mflom.com (480) 926-3100, FAX: 926-3598

T R A N S M I T T E R C E R T I F I C A T I O N

of

FCC ID: ALH32253110

MODEL: TK-2140-1

to

FEDERAL COMMUNICATIONS COMMISSION

Rule Part(s) 22, 74, 90

DATE OF REPORT: August 6, 2001

ON THE BEHALF OF THE APPLICANT:

Kenwood Communications Corporation

AT THE REQUEST OF:

P.O. 41640

Kenwood Communications Corporation
Technology Park at Johns Creek
3975 Johns Creek Court #300
Suwanee, GA 30024

Attention of:

Joel E. Berger, Research & Development
JBerger@kenwoodusa.com
(678) 474-4722; FAX: -4731

SUPERVISED BY:

A handwritten signature in black ink, reading 'M. Flom P. Eng.', is written over a horizontal line.

Morton Flom, P. Eng.

THE APPLICANT HAS BEEN CAUTIONED AS TO THE FOLLOWING:

15.21 INFORMATION TO USER.

The users manual or instruction manual for an intentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

15.27(a) SPECIAL ACCESSORIES.

Equipment marketed to a consumer must be capable of complying with the necessary regulations in the configuration in which the equipment is marketed. Where special accessories, such as shielded cables and/or special connectors are required to enable an unintentional or intentional radiator to comply with the emission limits in this part, the equipment must be marketed with, i.e. shipped and sold with, those special accessories. However, in lieu of shipping or packaging the special accessories with the unintentional or intentional radiator, the responsible party may employ other methods of ensuring that the special accessories are provided to the consumer, without additional charge.

Information detailing any alternative method used to supply the special accessories for a grant of equipment authorization or retained in the verification records, as appropriate. The party responsible for the equipment, as detailed in § 2.909 of this chapter, shall ensure that these special accessories are provided with the equipment. The instruction manual for such devices shall include appropriate instructions on the first page of text concerned with the installation of the device that these special accessories must be used with the device. It is the responsibility of the user to use the needed special accessories supplied with the equipment.

TABLE OF CONTENTS

<u>RULE</u>	<u>DESCRIPTION</u>	<u>PAGE</u>
	Test Report	1
2.1033(c)	General Information Required	2
2.1033(c)(14)	Rule Summary	6
	Standard Test Conditions and Engineering Practices	7
2.1046(a)	Carrier Output Power (Conducted)	8
2.1046(a)	R. F. Power Output (Radiated)	10
2.1051	Unwanted Emissions (Transmitter Conducted)	12
2.1053(a)	Field Strength of Spurious Radiation	16
2.1049(c)(1)	Emission Masks (Occupied Bandwidth)	20
90.214	Transient Frequency Behavior	27
2.1047(a)	Audio Low Pass Filter (Voice Input)	37
2.1047(a)	Audio Frequency Response	40
2.1047(b)	Modulation Limiting	42
2.1055(a)(1)	Frequency Stability (Temperature Variation)	45
2.1055(b)(1)	Frequency Stability (Voltage Variation)	48
2.202(g)	Necessary Bandwidth and Emission Bandwidth	49

PAGE NO. 1 of 49.

Required information per ISO/IEC Guide 25-1990, paragraph 13.2:

a) TEST REPORT

b) Laboratory: M. Flom Associates, Inc.
(FCC: 31040/SIT) 3356 N. San Marcos Place, Suite 107
(Canada: IC 2044) Chandler, AZ 85225

c) Report Number: d0180011

d) Client: Kenwood Communications Corporation
Technology Park at Johns Creek
3975 Johns Creek Court #300
Suwanee, GA 30024

e) Identification: TK-2140-1
FCC ID: ALH32253110
EUT Description: VHF FM Transceiver

f) EUT Condition: Not required unless specified in individual tests.

g) Report Date: August 6, 2001
EUT Received: July 5, 2001

h, j, k): As indicated in individual tests.

i) Sampling method: No sampling procedure used.

l) Uncertainty: In accordance with MFA internal quality manual.

m) Supervised by:



Morton Flom, P. Eng.

n) Results: The results presented in this report relate only to the item tested.

o) Reproduction: This report must not be reproduced, except in full, without written permission from this laboratory.

PAGE NO. 2 of 49.

LIST OF GENERAL INFORMATION REQUIRED FOR CERTIFICATIONIN ACCORDANCE WITH FCC RULES AND REGULATIONS,
VOLUME II, PART 2 AND TO22, 74, 90Sub-part 2.1033
(c)(1): NAME AND ADDRESS OF APPLICANT:Kenwood Communications Corporation
Technology Park at Johns Creek
3975 Johns Creek Court #300
Suwanee, GA 30024MANUFACTURER:Kenwood Electronics Technologies PTE Ltd.
1 Ang Mo Kio Street 63
Singapore 569110(c)(2): FCC ID: ALH32253110MODEL NO: TK-2140-1(c)(3): INSTRUCTION MANUAL(S):

PLEASE SEE ATTACHED EXHIBITS

(c)(4): TYPE OF EMISSION: 16K0F3E, 11K0F3E(c)(5): FREQUENCY RANGE, MHz: 136 to 174(c)(6): POWER RATING, Watts: 1 to 5.08
Switchable x Variable N/A

FCC GRANT NOTE:

BE - The output power is
continuously variable from
the value listed in this
entry to 15%-20% of the
value listed.(c)(7): MAXIMUM POWER RATING, Watts: 300DUT RESULTS:Passes x Fails

PAGE NO.

3 of 49.

INFORMATION FOR PUSH-TO-TALK DEVICES

Type and number of antenna to be used for this device:

$\lambda/4$

Maximum antenna gain for antenna indicated above:

0 dbd

Can this device sustain continuous operation with respect to its hardware capabilities and allowable operating functions?

No

Other hardware or operating restrictions that could limit a person's RF Exposure:

See user statement

Source-based time-averaging (see 2.1093 of rules) applicable to reduce the average output power:

No

If device has headset and belt-clip accessories that would allow body-worn operations, what is the minimum separation distance between the antenna and the user's body in this operating configuration?

1.0 cm

Can device access wire-line services to make phone calls, either directly or through an operator?

No

Can specific operating instructions be given to users to eliminate any potential RF Exposure concerns for both front-of-the-face and body-worn operating configurations?

Yes, User Statement

Front-of-Face = 2.5 cm

Body Worn = 1.0 cm





Other applicable information the applicant may provide that can serve as effective means for ensuring RF Exposure compliance:

N/A

PAGE NO.

4 of 49.

M. Flom Associates, Inc. is accredited by the American Association for Laboratory Accreditation (A2LA) as shown in the scope below.

 <p>THE AMERICAN ASSOCIATION FOR LABORATORY ACCREDITATION</p> <p>ACCREDITED LABORATORY</p> <p>A2LA has accredited</p> <p>M. FLOM ASSOCIATES, INC. Chandler, AZ</p> <p>for technical competence in the field of</p> <p>Electrical (EMC) Testing</p> <p>The accreditation covers the specific tests and types of tests listed on the agreed scope of accreditation. This laboratory meets the requirements of ISO/IEC 17025 - 1999 "General Requirements for the Competence of Testing and Calibration Laboratories" and any additional program requirements in the identified field of testing. Testing and calibration laboratories that comply with this International Standard also operate in accordance with ISO 9001 or ISO 9002.</p> <p>Presented this 2nd day of March, 2001.</p>  <p>President For the Accreditation Council Certificate Number 1008.01 Valid to December 31, 2002</p> <p>For tests or types of tests to which this accreditation applies, please refer to the laboratory's Electrical (EMC) Scope of Accreditation</p>	 <p>American Association for Laboratory Accreditation</p> <p><u>SCOPE OF ACCREDITATION TO ISO/IEC 17025:1999</u></p> <p>M. FLOM ASSOCIATES, INC. Electronic Testing Laboratory 3356 North San Marcos Place, Suite 107 Chandler, AZ 85225 Morton Flom Phone: 480 926 3100</p> <p>ELECTRICAL (EMC)</p> <p>Valid to: December 31, 2002 Certificate Number: 1008-01</p> <p>In recognition of the successful completion of the A2LA evaluation process, accreditation is granted to this laboratory to perform the following <u>electromagnetic compatibility tests</u>:</p> <table border="0"> <thead> <tr> <th>Tests</th> <th>Standard(s)</th> </tr> </thead> <tbody> <tr> <td>RF Emissions</td> <td>FCC Part 15 (Subparts B and C) using ANSI C63.4-1992; CISPR 11; CISPR 13; CISPR 14; CISPR 22; EN 55011; EN 55013; EN 55014; EN 55022; EN 50081-1; EN 50081-2; ICES-003; AS/NZS 1044; AS/NZS 1053; AS/NZS 3548; AS/NZS 4251.1; CNS 13438</td> </tr> <tr> <td>Harmonic Currents</td> <td>EN 61000-3-2</td> </tr> <tr> <td>Fluctuation and Flicker</td> <td>EN 61000-3-3</td> </tr> <tr> <td>RF Immunity</td> <td>EN: 50082-1, 50082-2 (both excluding "Power Frequency Magnetic Field Immunity" and "Voltage Dips, Short Interruptions, and Line Voltage Variations"); AS/NZS 4251.1</td> </tr> <tr> <td>Radiated Susceptibility</td> <td>EN 61000-4-3; ENV 50140; ENV 50204; IEC 1000-4-3; IEC 801-3</td> </tr> <tr> <td>EFT</td> <td>EN 61000-4-4; IEC 1000-4-4; IEC 801-4</td> </tr> <tr> <td>Surge</td> <td>EN 61000-4-5; ENV 50142; IEC 1000-4-5; IEC 801-5</td> </tr> <tr> <td>47 CFR (FCC)</td> <td>2, 21, 22, 23, 24, 74, 80, 87, 90, 95, 97</td> </tr> </tbody> </table> <p></p> <p>5301 Buckeystown Pike, Suite 350 • Frederick, MD 21704-8373 • Phone: 301-644 3248 • Fax: 301-662 2974</p>	Tests	Standard(s)	RF Emissions	FCC Part 15 (Subparts B and C) using ANSI C63.4-1992; CISPR 11; CISPR 13; CISPR 14; CISPR 22; EN 55011; EN 55013; EN 55014; EN 55022; EN 50081-1; EN 50081-2; ICES-003; AS/NZS 1044; AS/NZS 1053; AS/NZS 3548; AS/NZS 4251.1; CNS 13438	Harmonic Currents	EN 61000-3-2	Fluctuation and Flicker	EN 61000-3-3	RF Immunity	EN: 50082-1, 50082-2 (both excluding "Power Frequency Magnetic Field Immunity" and "Voltage Dips, Short Interruptions, and Line Voltage Variations"); AS/NZS 4251.1	Radiated Susceptibility	EN 61000-4-3; ENV 50140; ENV 50204; IEC 1000-4-3; IEC 801-3	EFT	EN 61000-4-4; IEC 1000-4-4; IEC 801-4	Surge	EN 61000-4-5; ENV 50142; IEC 1000-4-5; IEC 801-5	47 CFR (FCC)	2, 21, 22, 23, 24, 74, 80, 87, 90, 95, 97
Tests	Standard(s)																		
RF Emissions	FCC Part 15 (Subparts B and C) using ANSI C63.4-1992; CISPR 11; CISPR 13; CISPR 14; CISPR 22; EN 55011; EN 55013; EN 55014; EN 55022; EN 50081-1; EN 50081-2; ICES-003; AS/NZS 1044; AS/NZS 1053; AS/NZS 3548; AS/NZS 4251.1; CNS 13438																		
Harmonic Currents	EN 61000-3-2																		
Fluctuation and Flicker	EN 61000-3-3																		
RF Immunity	EN: 50082-1, 50082-2 (both excluding "Power Frequency Magnetic Field Immunity" and "Voltage Dips, Short Interruptions, and Line Voltage Variations"); AS/NZS 4251.1																		
Radiated Susceptibility	EN 61000-4-3; ENV 50140; ENV 50204; IEC 1000-4-3; IEC 801-3																		
EFT	EN 61000-4-4; IEC 1000-4-4; IEC 801-4																		
Surge	EN 61000-4-5; ENV 50142; IEC 1000-4-5; IEC 801-5																		
47 CFR (FCC)	2, 21, 22, 23, 24, 74, 80, 87, 90, 95, 97																		

"This laboratory is accredited by the American Association for Laboratory Accreditation (A2LA) and the results shown in this report have been determined in accordance with the laboratory's terms of accreditation unless stated otherwise in the report."

Should this report contain any data for tests for which we are not accredited, or which have been undertaken by a subcontractor that is not A2LA accredited, such data would not covered by this laboratory's A2LA accreditation.

PAGE NO. 5 of 49.

Subpart 2.1033 (continued)

(c)(8): VOLTAGES & CURRENTS IN ALL ELEMENTS IN FINAL R. F. STAGE,
INCLUDING FINAL TRANSISTOR OR SOLID STATE DEVICE:

COLLECTOR CURRENT, A = per manual
COLLECTOR VOLTAGE, Vdc = per manual
SUPPLY VOLTAGE, Vdc = 7.5

(c)(9): TUNE-UP PROCEDURE:

PLEASE SEE ATTACHED EXHIBITS

(c)(10): CIRCUIT DIAGRAM/CIRCUIT DESCRIPTION:

Including description of circuitry & devices provided for
determining and stabilizing frequency, for suppression of
spurious radiation, for limiting modulation and limiting
power.

PLEASE SEE ATTACHED EXHIBITS

(c)(11): LABEL INFORMATION:

PLEASE SEE ATTACHED EXHIBITS

(c)(12): PHOTOGRAPHS:

PLEASE SEE ATTACHED EXHIBITS

(c)(13): DIGITAL MODULATION DESCRIPTION:

 ATTACHED EXHIBITS
 x N/A

(c)(14): TEST AND MEASUREMENT DATA:

FOLLOWS

PAGE NO.

6 of 49.

Sub-part

2.1033(c)(14):

TEST AND MEASUREMENT DATA

All tests and measurement data shown were performed in accordance with FCC Rules and Regulations, Volume II; Part 2, Sub-part J, Sections 2.947, 2.1033(c), 2.1041, 2.1046, 2.1047, 2.1079, 2.1051, 2.1053, 2.1055, 2.1057 and the following individual Parts:

- ☐ 21 - Domestic Public Fixed Radio Services
- ☒ 22 - Public Mobile Services
- ☐ 22 Subpart H - Cellular Radiotelephone Service
- ☐ 22.901(d) - Alternative technologies and auxiliary services
- ☐ 23 - International Fixed Public Radiocommunication services
- ☐ 24 - Personal Communications Services
- ☒ 74 Subpart H - Low Power Auxiliary Stations
- ☐ 80 - Stations in the Maritime Services
- ☐ 80 Subpart E - General Technical Standards
- ☐ 80 Subpart F - Equipment Authorization for Compulsory Ships
- ☐ 80 Subpart K - Private Coast Stations and Marine Utility Stations
- ☐ 80 Subpart S - Compulsory Radiotelephone Installations for Small Passenger Boats
- ☐ 80 Subpart T - Radiotelephone Installation Required for Vessels on the Great Lakes
- ☐ 80 Subpart U - Radiotelephone Installations Required by the Bridge-to-Bridge Act
- ☐ 80 Subpart V - Emergency Position Indicating Radiobeacons (EPIRB'S)
- ☐ 80 Subpart W - Global Maritime Distress and Safety System (GMDSS)
- ☐ 80 Subpart X - Voluntary Radio Installations
- ☐ 87 - Aviation Services
- ☒ 90 - Private Land Mobile Radio Services
- ☐ 94 - Private Operational-Fixed Microwave Service
- ☐ 95 Subpart A - General Mobile Radio Service (GMRS)
- ☐ 95 Subpart C - Radio Control (R/C) Radio Service
- ☐ 95 Subpart D - Citizens Band (CB) Radio Service
- ☐ 95 Subpart E - Family Radio Service
- ☐ 95 Subpart F - Interactive Video and Data Service (IVDS)
- ☐ 97 - Amateur Radio Service
- ☐ 101 - Fixed Microwave Services

PAGE NO.

7 of 49.

STANDARD TEST CONDITIONS
and
ENGINEERING PRACTICES

Except as noted herein, the following conditions and procedures were observed during the testing:

In accordance with ANSI C63.4-1992/2000 Draft, section 6.1.9, and unless otherwise indicated in the specific measurement results, the ambient temperature of the actual EUT was maintained within the range of 10° to 40°C (50° to 104 °F) unless the particular equipment requirements specify testing over a different temperature range. Also, unless otherwise indicated, the humidity levels were in the range of 10% to 90% relative humidity.

Prior to testing, the EUT was tuned up in accordance with the manufacturer's alignment procedures. All external gain controls were maintained at the position of maximum and/or optimum gain throughout the testing.

Measurement results, unless otherwise noted, are worst case measurements.

PAGE NO. 8 of 49.
NAME OF TEST: Carrier Output Power (Conducted)
SPECIFICATION: 47 CFR 2.1046(a)
GUIDE: ANSI/TIA/EIA-603-1992, Paragraph 2.2.1
TEST EQUIPMENT: As per attached page

MEASUREMENT PROCEDURE


1. The EUT was connected to a resistive coaxial attenuator of normal load impedance, and the unmodulated output power was measured by means of an R. F. Power Meter.
2. Measurement accuracy is $\pm 3\%$.

MEASUREMENT RESULTS
(Worst case)

FREQUENCY OF CARRIER, MHz = 155.05, 136.05, 173.95

POWER SETTING	R. F. POWER, WATTS
Low	1
High	5

PERFORMED BY:



 Doug Noble, B.A.S. E.E.T.

PAGE NO.

9 of 49.

TRANSMITTER POWER CONDUCTED MEASUREMENTS

TEST 1: R. F. POWER OUTPUT
 TEST 2: FREQUENCY STABILITY

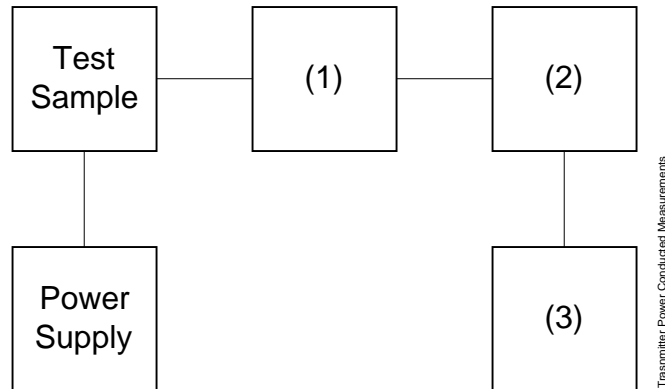

Asset	Description (as applicable)	s/n
(1)	<u>COAXIAL ATTENUATOR</u>	
i00122	Narda 766-10	7802
i00123	Narda 766-10	7802A
i00069	Bird 8329 (30 dB)	1006
i00113	Sierra 661A-3D	1059
(2)	<u>POWER METERS</u>	
i00014	HP 435A	1733A05836
i00039	HP 436A	2709A26776
i00020	HP 8901A POWER MODE	2105A01087
(3)	<u>FREQUENCY COUNTER</u>	
i00042	HP 5383A	1628A00959
i00019	HP 5334B	2704A00347
i00020	HP 8901A FREQUENCY MODE	2105A01087

PAGE NO. 10 of 49.

NAME OF TEST: R. F. Power Output (Radiated)

SPECIFICATION: 47 CFR 2.1046(a)

TEST EQUIPMENT: As per attached page

MEASUREMENT PROCEDURE (RADIATED)

1. The EUT was placed on an open-field site and its radiated field strength at a known distance was measured by means of a spectrum analyzer. Equivalent loading was calculated from the equation $P_t = ((E \times R)^2 / 49.2)$ watts, where $R = 3m$.
2. Measurement accuracy is ± 1.5 dB.

MEASUREMENT RESULTS

g0170403: 2001-Jul-20 Fri 12:48:00
STATE: 2:Low Power


FREQUENCY TUNED, MHz	FREQUENCY EMISSION, MHz	METER, dBuV/m	CF, dB	ERP, Watts
136.050000	136.050000	107.2	15.43	≤ 1.2
155.050000	155.050000	109.0	15.7	≤ 1.2
173.950000	173.950000	113.3	15.44	≤ 1.2

g0180005: 2001-Aug-01 Wed 08:11:00
STATE: 2:High Power

FREQUENCY TUNED, MHz	FREQUENCY EMISSION, MHz	METER, dBuV/m	CF, dB	ERP, Watts
136.050000	136.050000	118.2	15.4	≤ 5.04
155.050000	155.050000	118.3	15.7	≤ 5.04
173.950000	173.950000	119.0	15.4	≤ 5.04

PAGE NO.

11 of 49.

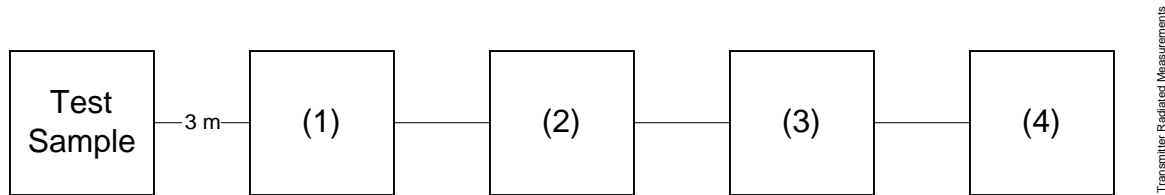TRANSMITTER RADIATED MEASUREMENTS

Asset	Description (as applicable)	s/n
(1)	<u>TRANSDUCER</u>	
i00091	Emco 3115	001469
i00089	Aprcl Log Periodic	001500
(2)	<u>HIGH PASS FILTER</u>	
i00	Narda μ PAD (In-Band Only)	
i00	Trilithic (Out-Of-Band Only)	
(3)	<u>PREAMP</u>	
i00028	HP 8449 (+30 dB)	2749A00121
(4)	<u>SPECTRUM ANALYZER</u>	
i00048	HP 8566B	2511A01467
i00057	HP 8557A	1531A00191
i00029	HP 8563E	3213A00104


PAGE NO. 12 of 49.
NAME OF TEST: Unwanted Emissions (Transmitter Conducted)
SPECIFICATION: 47 CFR 2.1051
GUIDE: ANSI/TIA/EIA-603-1992, Paragraph 2.2.13
TEST EQUIPMENT: As per attached page

MEASUREMENT PROCEDURE

1. The emissions were measured for the worst case as follows:
(a): within a band of frequencies defined by the carrier frequency plus and minus one channel.
(b): from the lowest frequency generated in the EUT and to at least the 10th harmonic of the carrier frequency, or 40 GHz, whichever is lower.
2. The magnitude of spurious emissions that are attenuated more than 20 dB below the permissible value need not be specified.
3. MEASUREMENT RESULTS: ATTACHED FOR WORST CASE

FREQUENCY OF CARRIER, MHz = 155.05, 136.05, 173.95
SPECTRUM SEARCHED, GHz = 0 to 10 x F_c
MAXIMUM RESPONSE, Hz = 2240
ALL OTHER EMISSIONS = ≥ 20 dB BELOW LIMIT

PERFORMED BY:



Doug Noble, B.A.S. E.E.T.

PAGE NO.

13 of 49.

TRANSMITTER SPURIOUS EMISSION

TEST A. OCCUPIED BANDWIDTH (IN-BAND SPURIOUS)
 TEST B. OUT-OF-BAND SPURIOUS

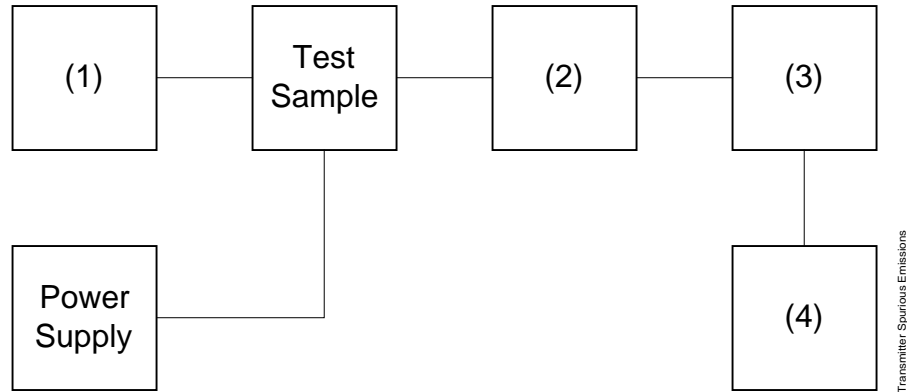

Asset Description (as applicable)	s/n
(1) <u>AUDIO OSCILLATOR/GENERATOR</u>	
i00010 HP 204D	1105A04683
i00017 HP 8903A	2216A01753
i00012 HP 3312A	1432A11250
(2) <u>COAXIAL ATTENUATOR</u>	
i00122 Narda 766-10	7802
i00123 Narda 766-10	7802A
i00069 Bird 8329 (30 dB)	1006
i00113 Sierra 661A-3D	1059
(3) <u>FILTERS; NOTCH, HP, LP, BP</u>	
i00126 Eagle TNF-1	100-250
i00125 Eagle TNF-1	50-60
i00124 Eagle TNF-1	250-850
(4) <u>SPECTRUM ANALYZER</u>	
i00048 HP 8566B	2511A01467
i00029 HP 8563E	3213A00104

PAGE NO.

14 of 49.


NAME OF TEST:

Unwanted Emissions (Transmitter Conducted)

LIMIT(S), dBc: $-(50+10 \times \text{LOG } P) = -50$ (1 Watt)
 $-(50+10 \times \text{LOG } P) = -57$ (5 Watts)

STATE: 1:Low Power g0170400: 2001-Jul-10 Tue 15:50:00

FREQUENCY TUNED, MHz	FREQUENCY EMISSION, MHz	LEVEL, dBm	LEVEL, dBc	MARGIN, dB
136.050000	272.106000	-38.9	-68.9	-18.9
155.050000	310.101000	-36.1	-66.1	-16.1
173.950000	347.895000	-44.3	-74.3	-24.3
136.050000	407.837000	-53.5	-83.5	-33.5
155.050000	465.141000	-45	-75	-25
173.950000	521.850000	-52.3	-82.3	-32.3
136.050000	544.009000	-53.8	-83.8	-33.8
155.050000	619.990000	-53.9	-83.9	-33.9
136.050000	680.583000	-53	-83	-33
173.950000	696.042000	-52.5	-82.5	-32.5
155.050000	774.989000	-52.7	-82.7	-32.7
136.050000	816.134000	-53.6	-83.6	-33.6
173.950000	870.165000	-54.1	-84.1	-34.1
155.050000	930.460000	-52.9	-82.9	-32.9
136.050000	952.352000	-53	-83	-33
173.950000	1044.179000	-53	-83	-33
155.050000	1085.080000	-53.8	-83.8	-33.8
136.050000	1088.070000	-52.8	-82.8	-32.8
173.950000	1217.736000	-53	-83	-33
136.050000	1224.176000	-53.3	-83.3	-33.3
155.050000	1240.828000	-53.1	-83.1	-33.1
136.050000	1360.411000	-52.5	-82.5	-32.5
173.950000	1391.301000	-53.3	-83.3	-33.3
155.050000	1395.808000	-53.4	-83.4	-33.4
136.050000	1496.611000	-53.4	-83.4	-33.4
155.050000	1550.705000	-52.8	-82.8	-32.8
173.950000	1565.656000	-53.3	-83.3	-33.3
136.050000	1633.062000	-52.6	-82.6	-32.6
155.050000	1705.396000	-53.6	-83.6	-33.6
173.950000	1739.885000	-52.5	-82.5	-32.5
136.050000	1768.968000	-53.6	-83.6	-33.6
155.050000	1860.486000	-52.1	-82.1	-32.1
136.050000	1905.070000	-53.5	-83.5	-33.5
173.950000	1913.409000	-52.4	-82.4	-32.4
155.050000	2015.995000	-52.1	-82.1	-32.1
136.050000	2040.394000	-52.7	-82.7	-32.7
173.950000	2087.409000	-52.3	-82.3	-32.3
155.050000	2170.487000	-51.1	-81.1	-31.1
173.950000	2261.676000	-51.2	-81.2	-31.2
155.050000	2325.914000	-52.6	-82.6	-32.6
173.950000	2435.123000	-52.1	-82.1	-32.1
173.950000	2608.780000	-54.6	-84.6	-34.6



PERFORMED BY:

Doug Noble, B.A.S. E.E.T.

PAGE NO. 15 of 49.

NAME OF TEST: Unwanted Emissions (Transmitter Conducted)

LIMIT(S), dBc: $-(50+10 \times \text{LOG } P) = -50$ (1 Watt)
 $-(50+10 \times \text{LOG } P) = -57$ (5 Watts)

STATE: 2:High Power g0170399: 2001-Jul-10 Tue 15:45:00

FREQUENCY TUNED, MHz	FREQUENCY EMISSION, MHz	LEVEL, dBm	LEVEL, dBc	MARGIN, dB
136.050000	272.106000	-31.9	-68.8	-11.9
155.050000	310.102000	-30.9	-67.8	-10.9
173.950000	347.898000	-37	-73.9	-17
136.050000	408.256000	-43.6	-80.5	-23.6
155.050000	465.139000	-42.9	-79.8	-22.9
173.950000	521.855000	-39.8	-76.7	-19.8
136.050000	544.224000	-44.4	-81.3	-24.4
155.050000	620.604000	-43	-79.9	-23
136.050000	680.660000	-42.8	-79.7	-22.8
173.950000	695.906000	-44.4	-81.3	-24.4
155.050000	774.949000	-44.5	-81.4	-24.5
136.050000	816.268000	-44.5	-81.4	-24.5
173.950000	870.011000	-43.8	-80.7	-23.8
155.050000	929.830000	-43.6	-80.5	-23.6
136.050000	952.221000	-43.8	-80.7	-23.8
173.950000	1043.360000	-44.4	-81.3	-24.4
155.050000	1084.885000	-43.7	-80.6	-23.7
136.050000	1088.672000	-44.1	-81	-24.1
173.950000	1217.852000	-42.7	-79.6	-22.7
136.050000	1224.288000	-42.9	-79.8	-22.9
155.050000	1240.387000	-43.7	-80.6	-23.7
136.050000	1360.015000	-43.3	-80.2	-23.3
173.950000	1391.607000	-43.2	-80.1	-23.2
155.050000	1395.139000	-42.8	-79.7	-22.8
136.050000	1496.057000	-43.7	-80.6	-23.7
155.050000	1550.999000	-41.9	-78.8	-21.9
173.950000	1566.001000	-42.8	-79.7	-22.8
136.050000	1632.653000	-43.5	-80.4	-23.5
155.050000	1705.760000	-42.7	-79.6	-22.7
173.950000	1739.512000	-42.6	-79.5	-22.6
136.050000	1769.118000	-42.7	-79.6	-22.7
155.050000	1860.358000	-42.7	-79.6	-22.7
136.050000	1904.860000	-43	-79.9	-23
173.950000	1913.750000	-42.9	-79.8	-22.9
155.050000	2015.552000	-42.2	-79.1	-22.2
136.050000	2041.211000	-42.6	-79.5	-22.6
173.950000	2087.013000	-43	-79.9	-23
155.050000	2171.157000	-43	-79.9	-23
173.950000	2261.121000	-42.5	-79.4	-22.5
155.050000	2326.135000	-42.4	-79.3	-22.4
173.950000	2435.729000	-41.9	-78.8	-21.9
73.950000	2608.800000	-44.7	-81.6	-24.7



PERFORMED BY:

Doug Noble, B.A.S. E.E.T.

PAGE NO. 16 of 49.

NAME OF TEST: Field Strength of Spurious Radiation

SPECIFICATION: 47 CFR 2.1053(a)


GUIDE: ANSI/TIA/EIA-603-1992, Paragraph 1.2.12

MEASUREMENT PROCEDURE

1.2.12.1 Definition: Radiated spurious emissions are emissions from the equipment when transmitting into a non-radiating load on a frequency or frequencies which are outside an occupied band sufficient to ensure transmission of information of required quality for the class of communications desired.

1.2.12.2 Method of Measurement


- A) Connect the equipment as illustrated
- B) Adjust the spectrum analyzer for the following settings:
 - 1) Resolution Bandwidth ≤ 3 kHz.
 - 2) Video Bandwidth ≥ 10 kHz
 - 3) Sweep Speed ≤ 2000 Hz/second
 - 4) Detector Mode = Positive Peak
- C) Place the transmitter to be tested on the turntable in the standard test site. The transmitter is transmitting into a non-radiating load which is placed on the turntable. The RF cable to this load should be of minimum length.

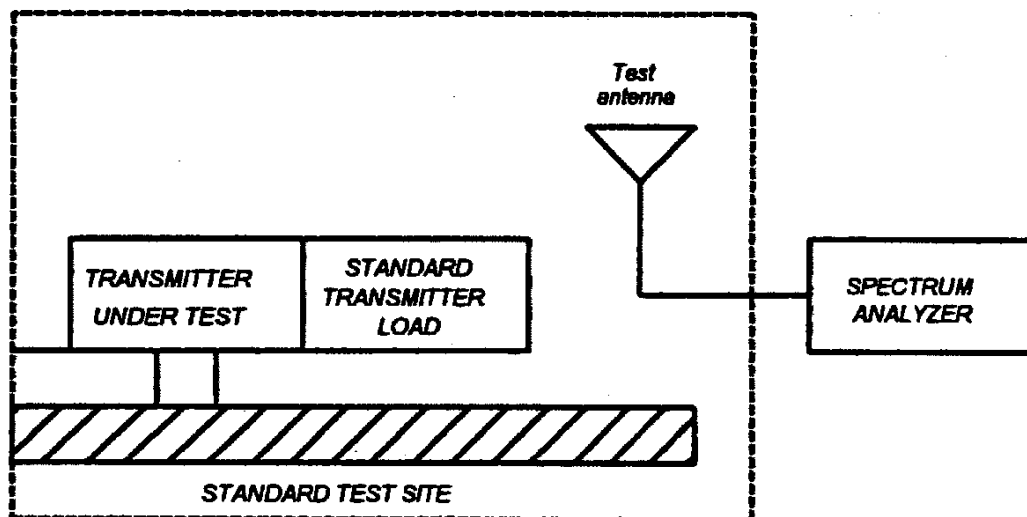

PAGE NO. 17 of 49.

NAME OF TEST: Field Strength of Spurious Radiation (Cont.)

- D) For each spurious measurement the test antenna should be adjusted to the correct length for the frequency involved. This length may be determined from a calibration ruler supplied with the equipment. Measurements shall be made from the lowest radio frequency generated in the equipment to the tenth harmonic of the carrier, except for the region close to the carrier equal to \pm the test bandwidth (see section 1.3.4.4).
- E) For each spurious frequency, raise and lower the test antenna from 1 m to 4 m to obtain a maximum reading on the spectrum analyzer with the test antenna at horizontal polarity. Repeat this procedure to obtain the highest possible reading. Record this maximum reading.
- F) Repeat step E) for each spurious frequency with the test antenna polarized vertically.

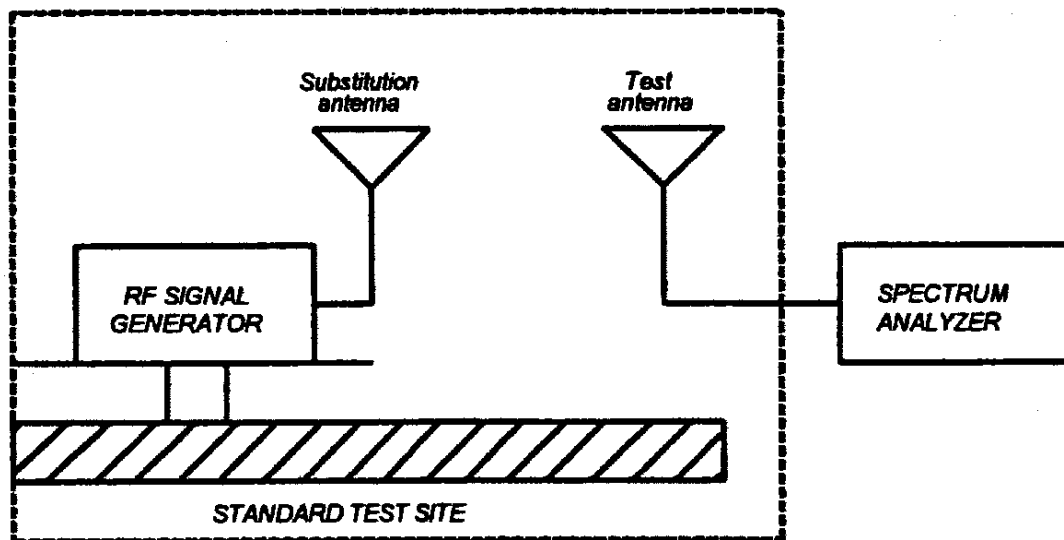

- G) Reconnect the equipment as illustrated.
- H) Keep the spectrum analyzer adjusted as in step B).
- I) Remove the transmitter and replace it with a substitution antenna (the antenna should be half-wavelength for each frequency involved). The center of the substitution antenna should be approximately at the same location as the center of the transmitter. At lower frequencies, where the substitution antenna is very long, this will be impossible to achieve when the antenna is polarized vertically. In such case the lower end of the antenna should be 0.3 m above the ground.

PAGE NO. 18 of 49.

NAME OF TEST: Field Strength of Spurious Radiation (Cont.)

- J) Feed the substitution antenna at the transmitter end with a signal generator connected to the antenna by means of a non-radiating cable. With the antennas at both ends horizontally polarized and with the signal generator tuned to a particular spurious frequency, raise and lower the test antenna to obtain a maximum reading at the spectrum analyzer. Adjust the level of the signal generator output until the previously recorded maximum reading for this set of conditions is obtained. This should be done carefully repeating the adjustment of the test antenna and generator output.
- K) Repeat step J) with both antennas vertically polarized for each spurious frequency.
- L) Calculate power in dBm into a reference ideal half-wave dipole antenna by reducing the readings obtained in steps J) and K) by the power loss in the cable between the generator and the antenna and further corrected for the gain of the substitution antenna used relative to an ideal half-wave dipole antenna.
- M) The levels recorded in step L) are absolute levels of radiated spurious emissions in dBm. The radiated spurious emissions in dB can be calculated by the following:

Radiated spurious emissions dB =
 $10\log_{10}(\text{TX power in watts}/0.001) - \text{the levels in step l})$

NOTE: It is permissible that other antennas provided can be referenced to a dipole.

Test Equipment:

Asset Description (as applicable)	s/n	Cycle	Last Cal
<u>TRANSDUCER</u>			
i00088 EMCO 3109-B 25MHz-300MHz	2336	12 mo.	Sep-00
i00065 EMCO 3301-B Active Monopole	2635	12 mo.	Sep-00
i00089 Aprel 2001 200MHz-1GHz	001500	12 mo.	Sep-00
i00103 EMCO 3115 1GHz-18GHz	9208-3925	12 mo.	Sep-00
<u>AMPLIFIER</u>			
i00028 HP 8449A	2749A00121	12 mo.	Mar-01
<u>SPECTRUM ANALYZER</u>			
i00029 HP 8563E	3213A00104	12 mo.	Aug-00
i00033 HP 85462A	3625A00357	12 mo.	May-01
i00048 HP 8566B	2511AD1467	6 mo.	May-01
<u>MICROPHONE, ANTENNA PORT, AND CABELING</u>			
Microphone	Yes/No <u>Y</u>	Cable Length <u>1</u> Meter	
Antenna Port Terminated	Yes/No <u>Y</u>	Load <u>Y</u> Antenna Gain <u>0</u> dbd	
All Ports Terminated by	Load <u>N/A</u>	Peripheral <u>No</u>	


PAGE NO.

19 of 49.

NAME OF TEST: Field Strength of Spurious Radiation
 g0170408: 2001-Jul-20 Fri 14:39:00
 STATE: 2:High Power

FREQUENCY TUNED, MHz	FREQUENCY EMISSION, MHz	METER, dBuV	CF, dB	ERP, dBm	MARGIN, dB
155.050000	310.101300	49.69	18.74	-28.9	≤-65.9
155.050000	465.151300	11.58	23.55	-62.2	≤-65.9
155.050000	620.201300	7.67	27.33	-62.4	≤-65.9
155.050000	775.251300	5.37	29.25	-62.8	≤-65.9
155.050000	930.301300	5.53	32.79	-59.1	≤-65.9
155.050000	1085.351300	5.96	33.59	-57.8	≤-65.9
155.050000	1240.400000	2.67	35.18	-59.5	≤-65.9
155.050000	1395.450000	2.36	36.46	-58.6	≤-65.9
155.050000	1550.500000	3.87	37.86	-55.6	≤-65.9

SUPERVISED BY:


 Doug Noble, B.A.S. E.E.T.

PAGE NO. 20 of 49.

NAME OF TEST: Emission Masks (Occupied Bandwidth)

SPECIFICATION: 47 CFR 2.1049(c)(1)

GUIDE: ANSI/TIA/EIA-603-1992, Paragraph 2.2.11

TEST EQUIPMENT: As per previous page


MEASUREMENT PROCEDURE

1. The EUT and test equipment were set up as shown on the following page, with the Spectrum Analyzer connected.
2. For EUTs supporting audio modulation, the audio signal generator was adjusted to the frequency of maximum response and with output level set for $\pm 2.5/\pm 1.25$ kHz deviation (or 50% modulation). With level constant, the signal level was increased 16 dB.
3. For EUTs supporting digital modulation, the digital modulation mode was operated to its maximum extent.
4. The Occupied Bandwidth was measured with the Spectrum Analyzer controls set as shown on the test results.
5. MEASUREMENT RESULTS: ATTACHED

PAGE NO.

21 of 49.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
g0170394: 2001-Jul-10 Tue 15:11:00
STATE: 1:Low Power

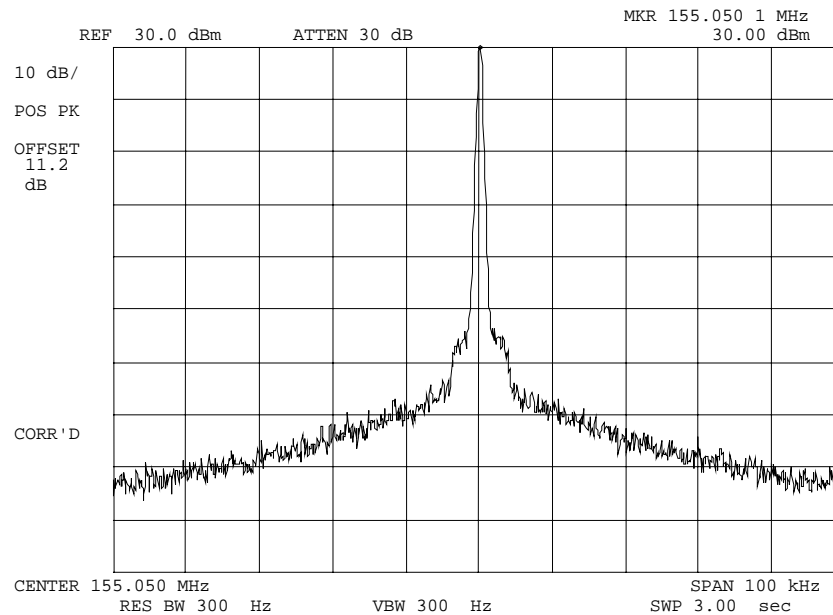

POWER:
MODULATION:

LOW
NONE


PERFORMED BY:

Doug Noble, B.A.S. E.E.T.

PAGE NO.

22 of 49.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
 g0170401: 2001-Jul-10 Tue 16:07:00
 STATE: 1:Low Power

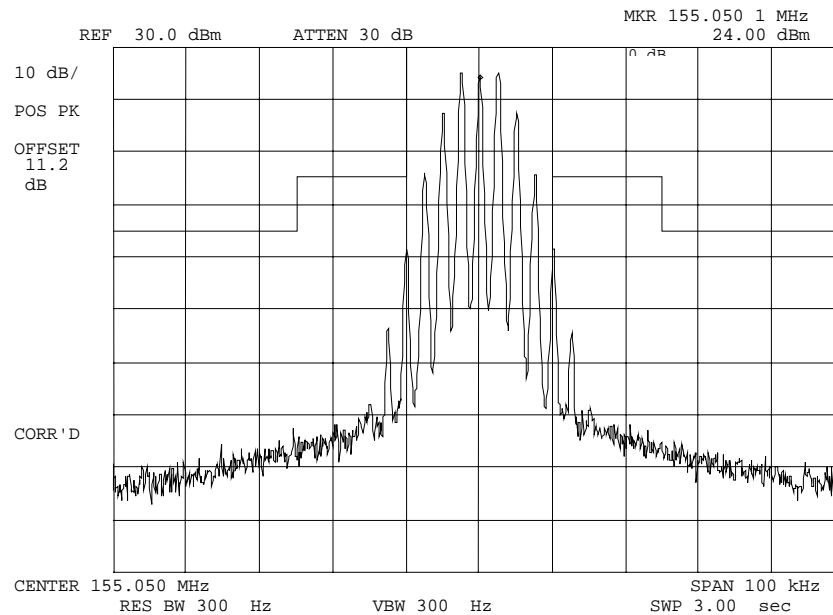

POWER:
 MODULATION:

LOW
 VOICE: 2500 Hz SINE WAVE
 MASK: B, VHF/UHF 25kHz,
 w/LPF


PERFORMED BY:

Doug Noble, B.A.S. E.E.T.

PAGE NO.

23 of 49.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
g0170398: 2001-Jul-10 Tue 15:23:00
STATE: 1:Low Power

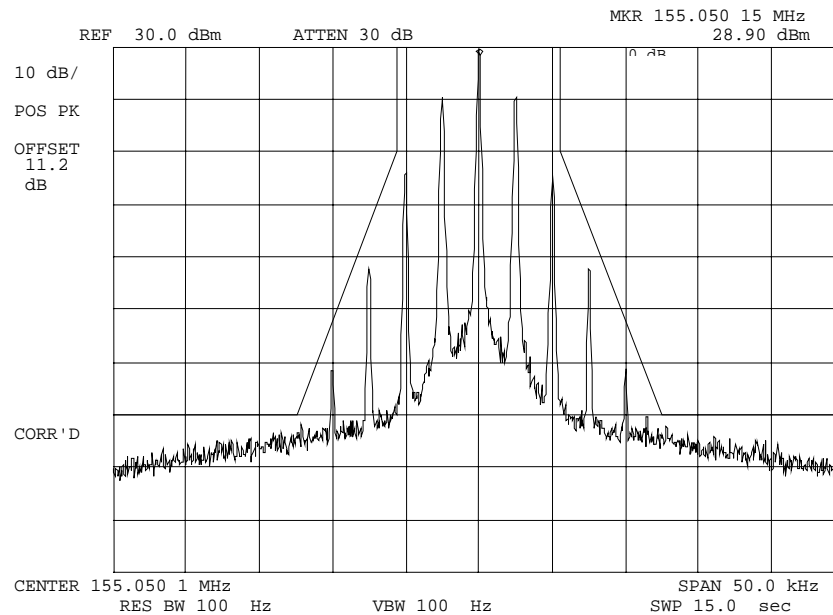

POWER:
MODULATION:

LOW
VOICE: 2500 Hz SINE WAVE
MASK: D, VHF/UHF 12.5kHz BW


PERFORMED BY:

Doug Noble, B.A.S. E.E.T.

PAGE NO.

24 of 49.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
g0170393: 2001-Jul-10 Tue 15:09:00
STATE: 2:High Power

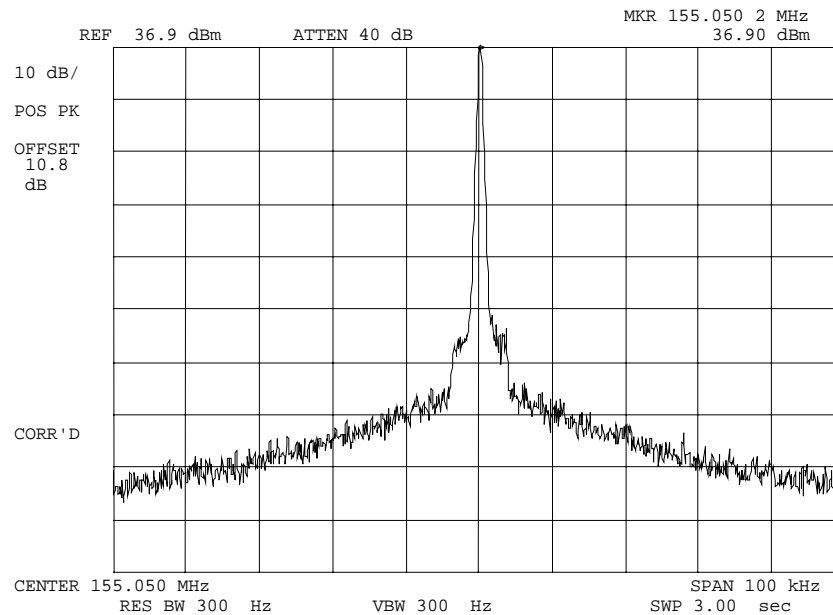

POWER: HIGH
MODULATION: NONE


PERFORMED BY:

Doug Noble, B.A.S. E.E.T.

PAGE NO.

25 of 49.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
 g0170395: 2001-Jul-10 Tue 15:13:00
 STATE: 2:High Power

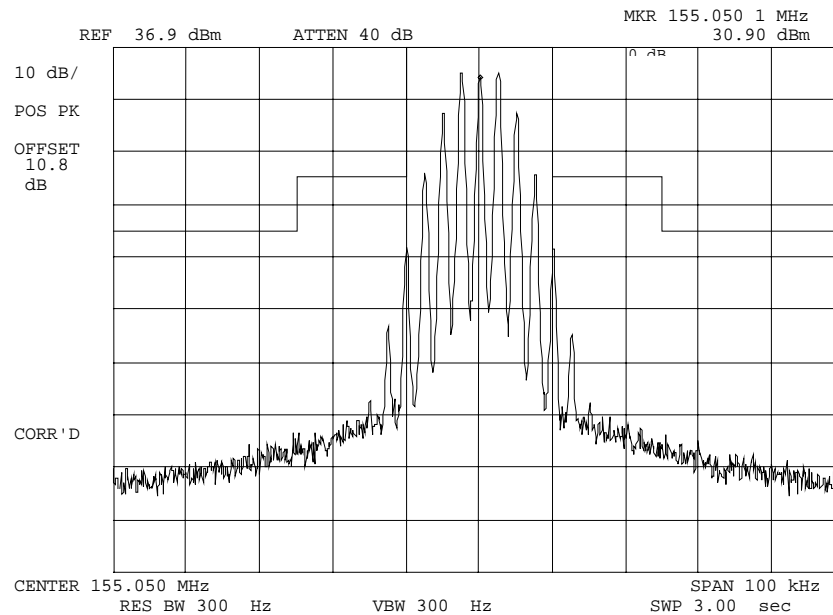

POWER:
 MODULATION:

HIGH
 VOICE: 2500 Hz SINE WAVE
 MASK: B, VHF/UHF 25kHz,
 w/LPF


PERFORMED BY:

Doug Noble, B.A.S. E.E.T.

PAGE NO.

26 of 49.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
 g0170397: 2001-Jul-10 Tue 15:18:00
 STATE: 2:High Power

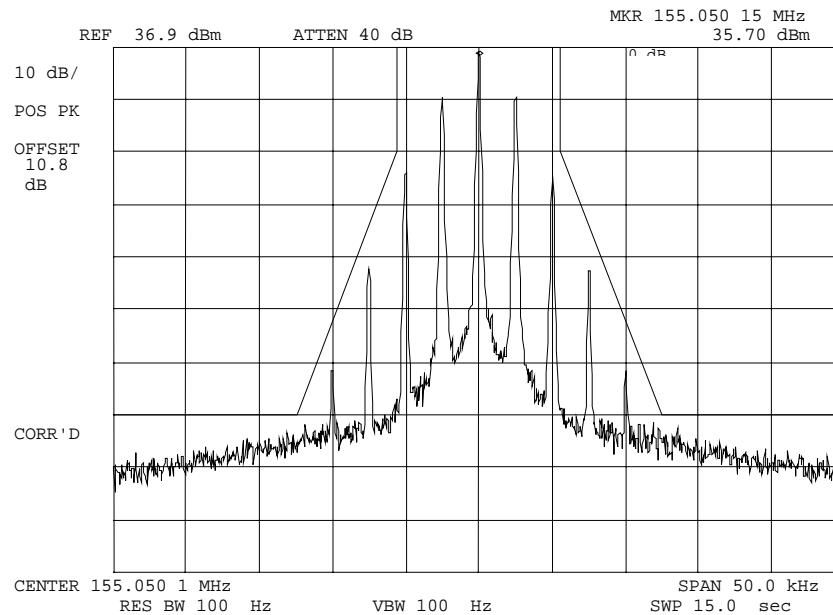

POWER:

HIGH

MODULATION:

VOICE: 2500 Hz SINE WAVE

MASK: D, VHF/UHF 12.5kHz BW

PERFORMED BY:

Doug Noble, B.A.S. E.E.T.

PAGE NO. 27 of 49.
NAME OF TEST: Transient Frequency Behavior
SPECIFICATION: 47 CFR 90.214
GUIDE: ANSI/TIA/EIA-603-1992, Paragraph 2.2.19
TEST EQUIPMENT: As per attached page

MEASUREMENT PROCEDURE

1. The EUT was setup as shown on the attached page, following TIA/EIA-603 steps a, b, and c as a *guide*.
2. The transmitter was turned on.
3. Sufficient attenuation was provided so that the transmitter carrier level measured at the output of the combiner was 40 dB below the maximum input level of the test receiver. This level was recorded as step f.
4. The transmitter was turned off.
5. An RF signal generator (1) modulated with a 1 kHz tone at either 25, 12.5, or 6.25 kHz deviation, and set to the same frequency as the assigned transmitter frequency, (2) was adjusted to a level -20 dB below the level recorded for step f, as measured at the output of the combiner. This level was then fixed for the remainder of the test and is recorded at step h.
6. The oscilloscope was setup using TIA/EIA-603 steps j and k as a guide, and to either 10 ms/div (UHF) or 5 ms/div (VHF).
7. The 30 dB attenuator was removed, the transmitter was turned on, and the level of the carrier at the output of the combiner was recorded as step l.
8. The carrier on-time as referenced in TIA/EIA-603 steps m, n, and o was captured and plotted. The carrier off-time as referenced in TIA/EIA-603 steps p, q, r, and s was captured and plotted.

LEVELS MEASURED:


<u>step f</u> , dBm	= -11.7
<u>step h</u> , dBm	= -41.1
<u>step l</u> , dBm	= 9.2

PERFORMED BY:


Doug Noble, B.A.S. E.E.T.

PAGE NO.

28 of 49.

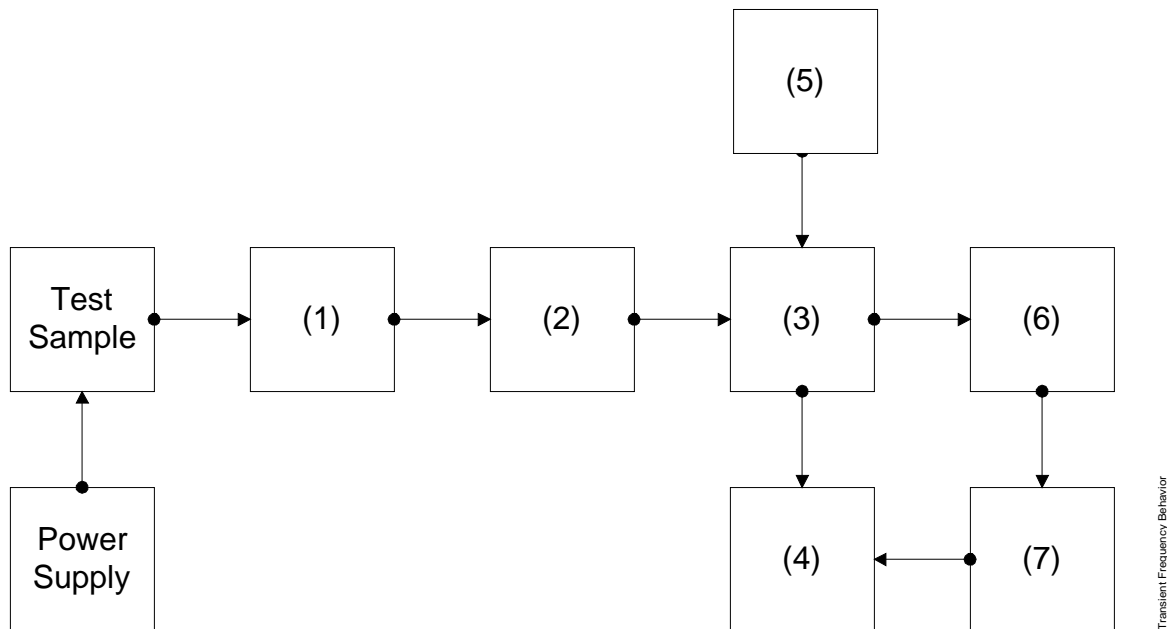
TRANSIENT FREQUENCY BEHAVIOR

Asset	Description (as applicable)	s/n
(1)	<u>ATTENUATOR</u> (Removed after 1st step)	
	i00112 Philco 30 dB	989
(2)	<u>ATTENUATOR</u>	
	i00112 Philco 30 dB	989
	i00172 Bird 30 dB	989
	i00122 Narda 10 dB	7802
	i00123 Narda 10 dB	7802A
	i00110 Kay Variable	145-387
(3)	<u>COMBINER</u>	
	i00154 4 x 25 Ω COMBINER	154
(4)	<u>CRYSTAL DETECTOR</u>	
	i00159 HP 8470B	1822A10054
(5)	<u>RF SIGNAL GENERATOR</u>	
	i00018 HP 8656A	2228A03472
	i00031 HP 8656A	2402A06180
	i00067 HP 8920A	3345U01242
(6)	<u>MODULATION ANALYZER</u>	
	i00020 HP 8901A	2105A01087
(7)	<u>SCOPE</u>	
	i00030 HP 54502A	2927A00209

PAGE NO.

29 of 49.

NAME OF TEST: Transient Frequency Behavior
 g0170388: 2001-Jul-10 Tue 12:46:00
 STATE: 2:High Power

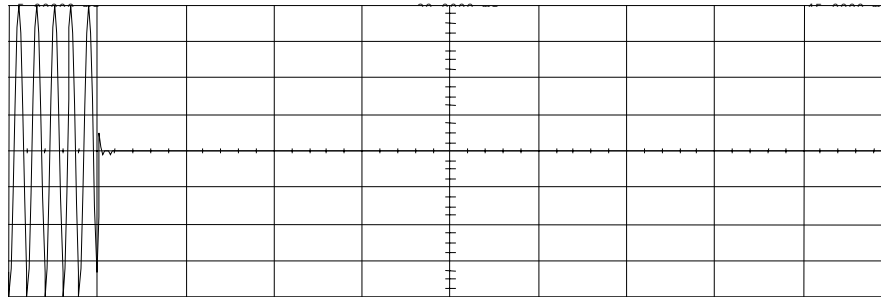

Unit	Min/Max	Ref/Dev	Ref/Dev	Mod
	Freq (MHz)	Power (dBm)	Power (dBm)	Description
Channel 1	300 MHz	0.0000 W	1.000 1	d (1M chn)
Modulation Mode: PSK				
Ref Modulation: PSK AS 1000				
Modulation Index: 1.000				
Modulation Index: 1.000				
Modulation Index: 1.000				

POWER:
 MODULATION:
 DESCRIPTION:

HIGH
 Ref Gen=12.5 kHz Deviation
 CARRIER ON TIME


PERFORMED BY:

Doug Noble, B.A.S. E.E.T.

PAGE NO.

30 of 49.


```
NAME OF TEST:      Transient Frequency Behavior
g0170389: 2001-Jul-10 Tue 12:46:00
STATE: 2:High Power
```

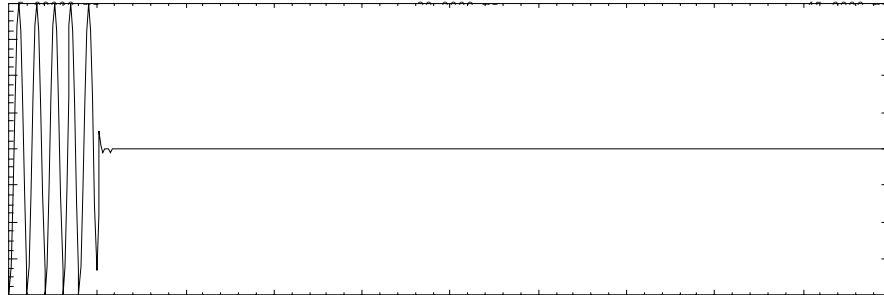[illegible]

POWER:
MODULATION:
DESCRIPTION:

HIGH
Ref Gen=12.5 kHz Deviation
CARRIER ON TIME


PERFORMED BY:


Doug Noble, B.A.S. E.E.T.

PAGE NO.

31 of 49.

NAME OF TEST: Transient Frequency Behavior
 g0170390: 2001-Jul-10 Tue 12:48:00
 STATE: 2:High Power

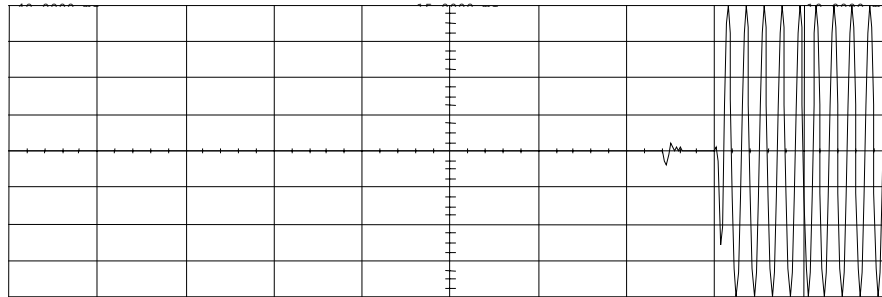

Unit	Min/Max	Ref/Dev	Ref/Dev	Mod
Hz	0.00 MHz	15.0000 MHz	0.0000 MHz	0.0000 MHz
Channel 1	0.00 MHz	0.0000 MHz	1.0000 MHz	0.0000 MHz
Modulation	0.0000 MHz	0.0000 MHz	0.0000 MHz	0.0000 MHz
Ref Deviation	0.0000 MHz	0.0000 MHz	0.0000 MHz	0.0000 MHz
Modulation Index	0.0000 MHz	0.0000 MHz	0.0000 MHz	0.0000 MHz
Carrier	0.0000 MHz	0.0000 MHz	0.0000 MHz	0.0000 MHz
Carrier	0.0000 MHz	0.0000 MHz	0.0000 MHz	0.0000 MHz

POWER:
 MODULATION:
 DESCRIPTION:

HIGH
 Ref Gen=12.5 kHz Deviation
 CARRIER OFF TIME


PERFORMED BY:

Doug Noble, B.A.S. E.E.T.

PAGE NO.

32 of 49.

NAME OF TEST: Transient Frequency Behavior
 g0170391: 2001-Jul-10 Tue 12:48:00
 STATE: 2:High Power

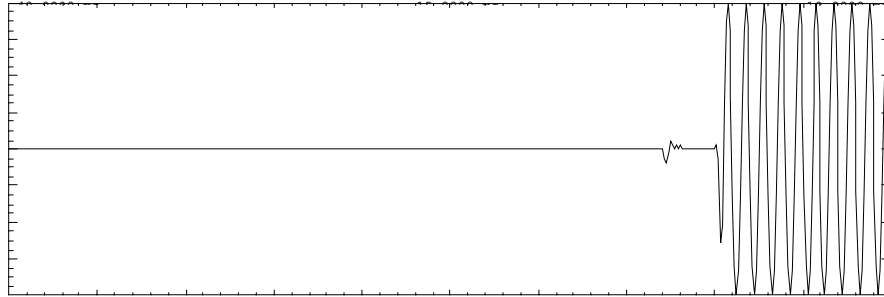

Unit	Min/Max	Ref/Dev	Ref/Dev	Mod
Hz	0.00 MHz	15.0000 MHz	0.0000 MHz	Resolution
Channel 1	0.000000 MHz	0.000000 MHz	1.000 1	2 (1M ohm)
Modulation	Ref	Ref	Ref	Ref
Ref Resolution	Ref	Ref	Ref	Ref
Modulation	Ref	Ref	Ref	Ref
Unit	1.000000 MHz	1.000000 MHz	1.000000 MHz	1.000000 MHz
Unit	1.000000 MHz	1.000000 MHz	1.000000 MHz	1.000000 MHz

POWER:
 MODULATION:
 DESCRIPTION:

HIGH
 Ref Gen=12.5 kHz Deviation
 CARRIER OFF TIME


PERFORMED BY:

Doug Noble, B.A.S. E.E.T.

PAGE NO.

33 of 49.

NAME OF TEST: Transient Frequency Behavior
 g0170384: 2001-Jul-10 Tue 12:34:00
 STATE: 2:High Power

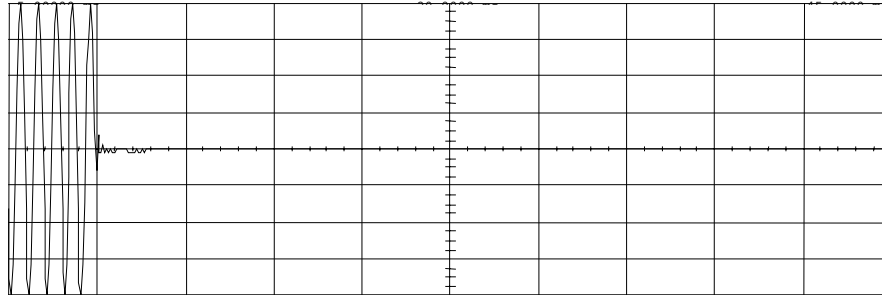

Unit	Min/Max	Ref/Dev	Ref/Dev	Mod
Power	0.00 mW/dBm	00.0000	0.0000	0.0000
Channel 1	0.00 mW/dBm	0.0000	0.0000	0.0000
Modulation	0.00	0.00	0.00	0.00
Ref Gen	0.00	0.00	0.00	0.00
Modulation	0.00	0.00	0.00	0.00
Ref Gen	0.00	0.00	0.00	0.00
Modulation	0.00	0.00	0.00	0.00

POWER:
 MODULATION:
 DESCRIPTION:

HIGH
 Ref Gen=25 kHz Deviation
 CARRIER ON TIME


PERFORMED BY:

Doug Noble, B.A.S. E.E.T.

PAGE NO.

34 of 49.

NAME OF TEST: Transient Frequency Behavior
 g0170385: 2001-Jul-10 Tue 12:34:00
 STATE: 2:High Power

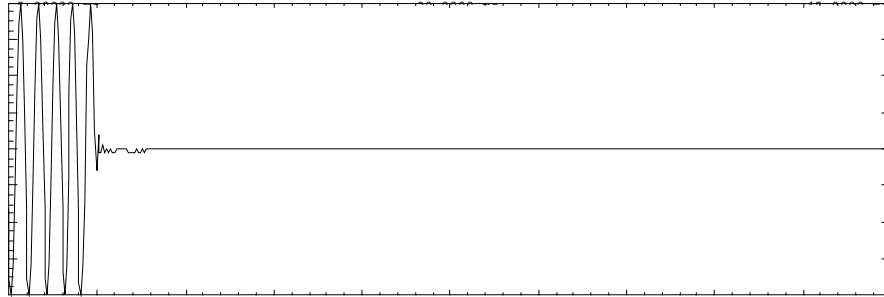

Unit	Min/Max	Ref (Peak)	Ref (Avg)	Mod
Power	0.00 mW/dBm	00.0000 W	0.0000 W	0.0000 W
Channel 1	0.00 mW/dBm	0.0000 W	1.000 1	0.0000 W
Modulation	0.0000 W	0.0000 W	0.0000 W	0.0000 W
Ref Modulation	0.0000 W	0.0000 W	0.0000 W	0.0000 W
Modulation Error	0.0000 W	0.0000 W	0.0000 W	0.0000 W
Modulation	0.0000 W	0.0000 W	0.0000 W	0.0000 W
Modulation	0.0000 W	0.0000 W	0.0000 W	0.0000 W

POWER:
 MODULATION:
 DESCRIPTION:

HIGH
 Ref Gen=25 kHz Deviation
 CARRIER ON TIME


PERFORMED BY:

Doug Noble, B.A.S. E.E.T.

PAGE NO.

35 of 49.

NAME OF TEST: Transient Frequency Behavior
 g0170386: 2001-Jul-10 Tue 12:43:00
 STATE: 2:High Power

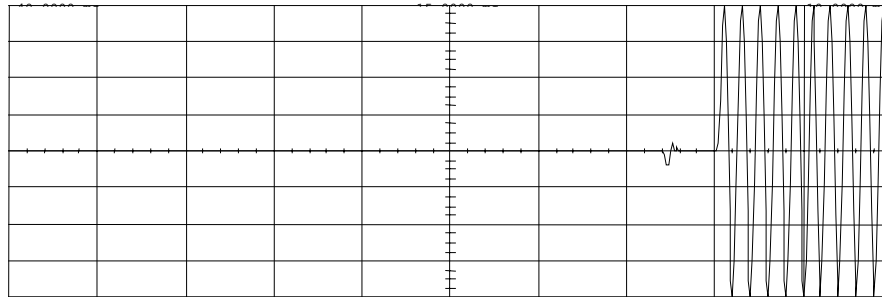

Unit	Min/Max	Ref/Dev	Ref/Dev	Mod
	F 00 mV/div	15.0000 mV	1.000 1	2 (1M ohm)
channel 1	0.00 mV/div	0.00000 V	1.000 1	2 (1M ohm)
Modulation mode	Ref			
Ref Resolution	Ref			
Modulation mode	Ref			
Ref	1.00000 V			
Ref	1.00000 V			

POWER:
 MODULATION:
 DESCRIPTION:

HIGH
 Ref Gen=25 kHz Deviation
 CARRIER OFF TIME

PERFORMED BY:

Doug Noble, B.A.S. E.E.T.

PAGE NO. 37 of 49.

NAME OF TEST: Audio Low Pass Filter (Voice Input)

SPECIFICATION: 47 CFR 2.1047(a)

GUIDE: ANSI/TIA/EIA-603-1992, Paragraph 2.2.15

TEST EQUIPMENT: As per attached page

MEASUREMENT PROCEDURE


1. The EUT and test equipment were set up such that the audio input was connected at the input to the modulation limiter, and the modulated stage.
2. The audio output was connected at the output to the modulated stage.
3. MEASUREMENT RESULTS: ATTACHED

PAGE NO.

38 of 49.

TRANSMITTER TEST SET-UP

TEST A. MODULATION CAPABILITY/DISTORTION
 TEST B. AUDIO FREQUENCY RESPONSE
 TEST C. HUM AND NOISE LEVEL
 TEST D. RESPONSE OF LOW PASS FILTER
 TEST E. MODULATION LIMITING

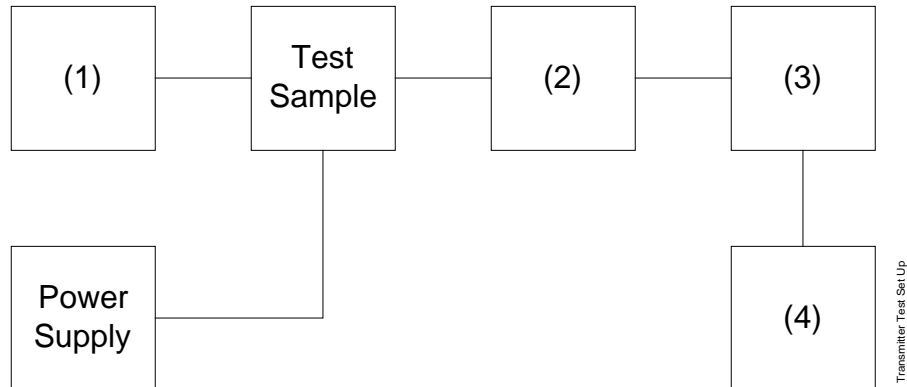


Asset	Description (as applicable)	s/n
(1)	<u>Audio Oscillator</u>	
i00010	HP 204D	1105A04683
i00017	HP 8903A	2216A01753
i00118	HP 33120A	US36002064
(2)	<u>COAXIAL ATTENUATOR</u>	
i00122	NARDA 766-10	7802
i00123	NARDA 766-10	7802A
i00113	SIERRA 661A-3D	1059
i00069	BIRD 8329 (30 dB)	10066
(3)	<u>MODULATION ANALYZER</u>	
i00020	HP 8901A	2105A01087
(4)	<u>AUDIO ANALYZER</u>	
i00017	HP 8903A	2216A01753


PAGE NO.

39 of 49.

NAME OF TEST: Audio Low Pass Filter (Voice Input)
g0170088: 2001-Jul-10 Tue 14:02:00
STATE: 0:General

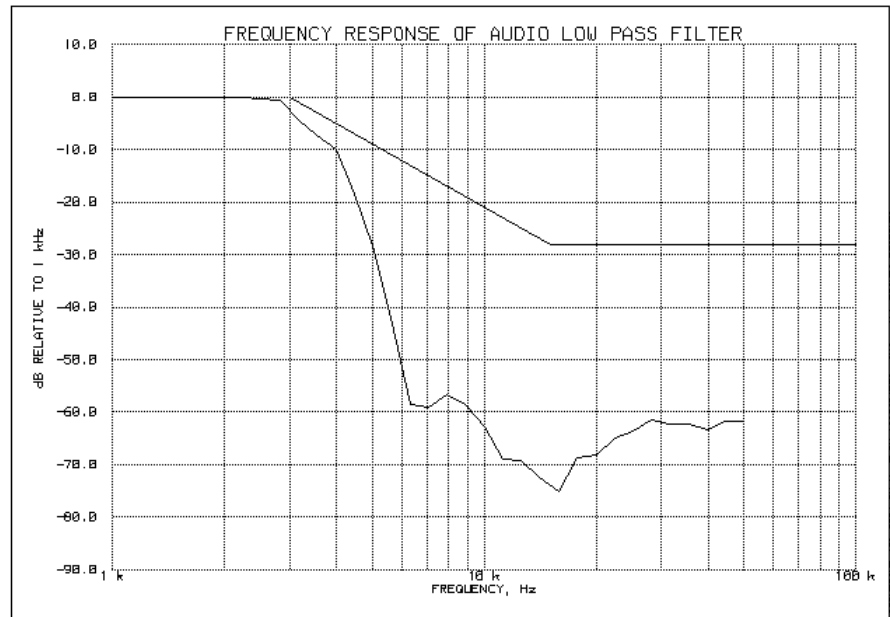

PERFORMED BY:


Doug Noble, B.A.S. E.E.T.

PAGE NO. 40 of 49.
NAME OF TEST: Audio Frequency Response
SPECIFICATION: 47 CFR 2.1047(a)
GUIDE: ANSI/TIA/EIA-603-1992, Paragraph 2.2.6
TEST EQUIPMENT: As per previous page


MEASUREMENT PROCEDURE

1. The EUT and test equipment were set up as shown on the following page.
2. The audio signal generator was connected to the audio input circuit/microphone of the EUT.
3. The audio signal input was adjusted to obtain 20% modulation at 1 kHz, and this point was taken as the 0 dB reference level.
4. With input levels held constant and below limiting at all frequencies, the audio signal generator was varied from 100 Hz to 50 kHz.
5. The response in dB relative to 1 kHz was then measured, using the HP 8901A Modulation Analyzer.
6. MEASUREMENT RESULTS: ATTACHED

PAGE NO.

41 of 49.

NAME OF TEST: Audio Frequency Response
 g0170086: 2001-Jul-10 Tue 13:52:00
 STATE: 0:General

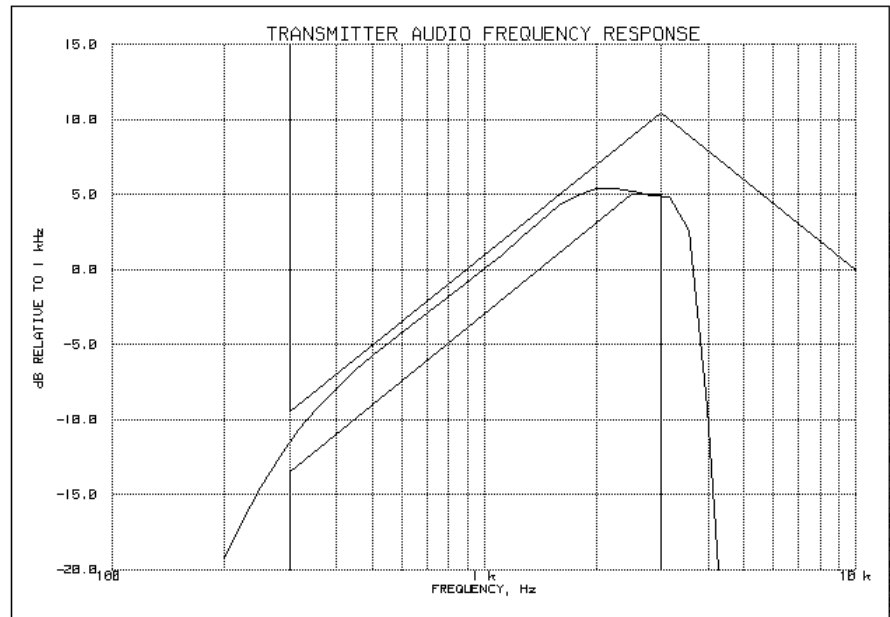


Frequency of Maximum Audio Response, Hz = 2240

Additional points:

FREQUENCY, Hz	LEVEL, dB
300	-11.55
20000	-40.25
30000	-40.09
50000	-39.91

PERFORMED BY:


 Doug Noble, B.A.S. E.E.T.

PAGE NO. 42 of 49.
NAME OF TEST: Modulation Limiting
SPECIFICATION: 47 CFR 2.1047(b)
GUIDE: ANSI/TIA/EIA-603-1992, Paragraph 2.2.3
TEST EQUIPMENT: As per previous page

MEASUREMENT PROCEDURE


1. The signal generator was connected to the input of the EUT as for "Frequency Response of the Modulating Circuit."
2. The modulation response was measured for each of three frequencies (one of which was the frequency of maximum response), and the input voltage was varied and was observed on an HP 8901A Modulation Analyzer.
3. The input level was varied from 30% modulation (± 1.5 kHz deviation) to at least 20 dB higher than the saturation point.
4. Measurements were performed for both negative and positive modulation and the respective results were recorded.
5. MEASUREMENT RESULTS: ATTACHED

PAGE NO.


43 of 49.

NAME OF TEST: Modulation Limiting
 g0170089: 2001-Jul-10 Tue 14:11:00
 STATE: 0:General

Positive
 Peaks:

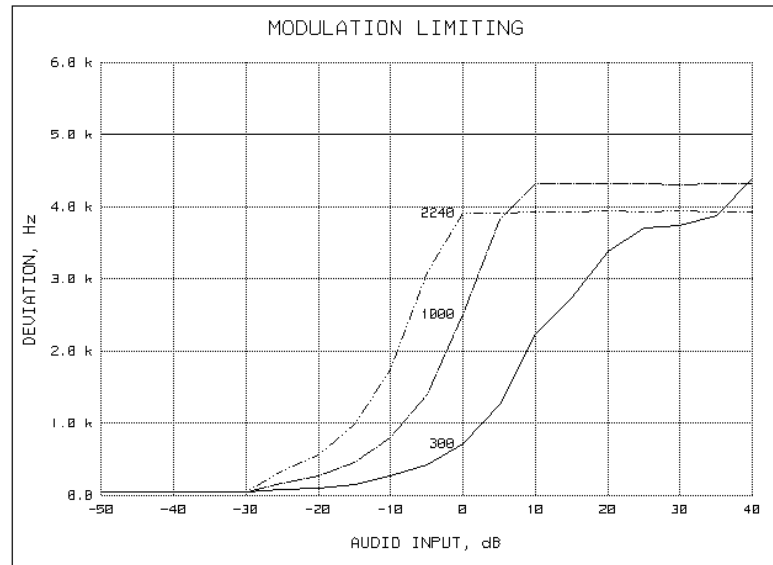

Negative
 Peaks:

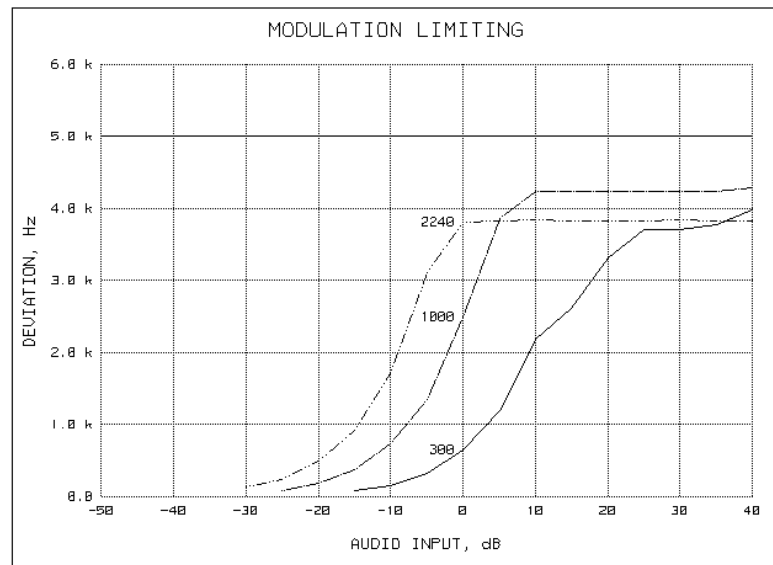

PERFORMED BY:


Doug Noble, B.A.S. E.E.T.

PAGE NO.


44 of 49.

NAME OF TEST: Modulation Limiting
g0170090: 2001-Jul-10 Tue 14:38:00
STATE: 0:General


Positive
Peaks:

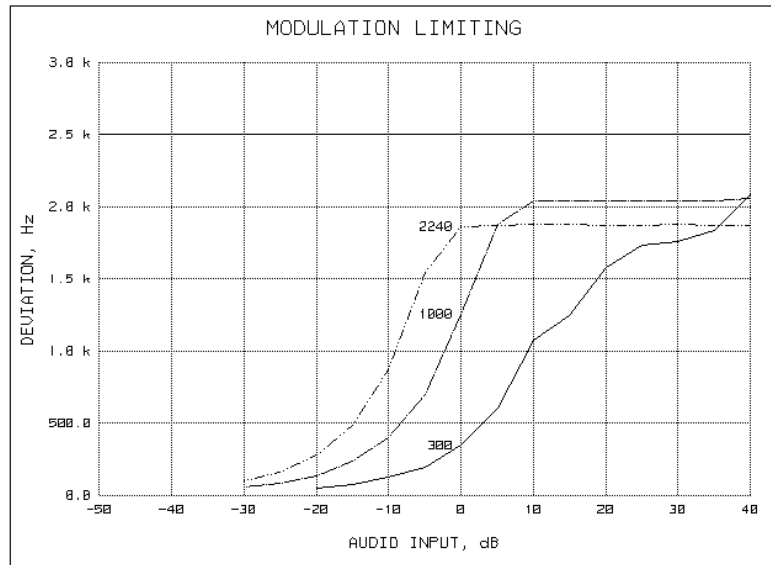

Negative
Peaks:

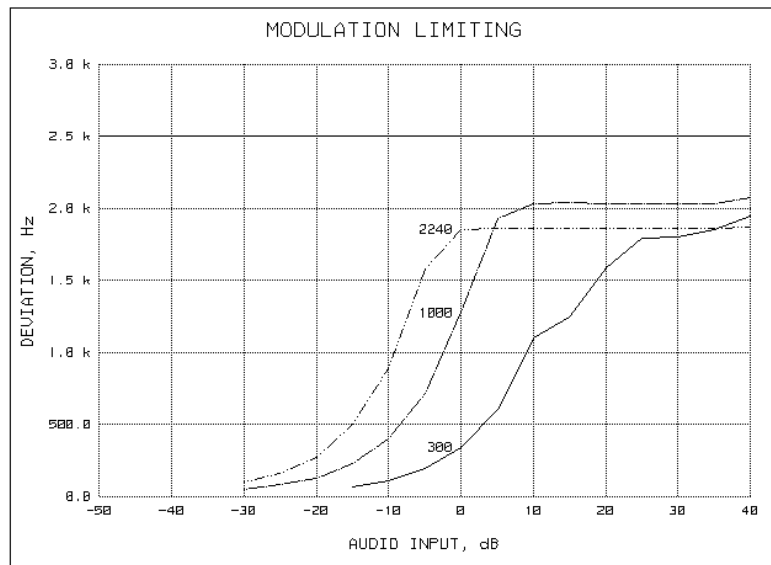

PERFORMED BY:


Doug Noble, B.A.S. E.E.T.

PAGE NO. 45 of 49.

NAME OF TEST: Frequency Stability (Temperature Variation)

SPECIFICATION: 47 CFR 2.1055(a)(1)

GUIDE: ANSI/TIA/EIA-603-1992, Paragraph 2.2.2

TEST CONDITIONS: As Indicated

TEST EQUIPMENT: As per previous page

MEASUREMENT PROCEDURE


1. The EUT and test equipment were set up as shown on the following page.
2. With all power removed, the temperature was decreased to -30°C and permitted to stabilize for three hours. Power was applied and the maximum change in frequency was noted within one minute.
3. With power OFF, the temperature was raised in 10°C steps. The sample was permitted to stabilize at each step for at least one-half hour. Power was applied and the maximum frequency change was noted within one minute.
4. The temperature tests were performed for the worst case.
5. MEASUREMENT RESULTS: ATTACHED

PAGE NO.

46 of 49.

TRANSMITTER TEST SET-UP

TEST A. OPERATIONAL STABILITY
 TEST B. CARRIER FREQUENCY STABILITY
 TEST C. OPERATIONAL PERFORMANCE STABILITY
 TEST D. HUMIDITY
 TEST E. VIBRATION
 TEST F. ENVIRONMENTAL TEMPERATURE
 TEST G. FREQUENCY STABILITY: TEMPERATURE VARIATION
 TEST H. FREQUENCY STABILITY: VOLTAGE VARIATION

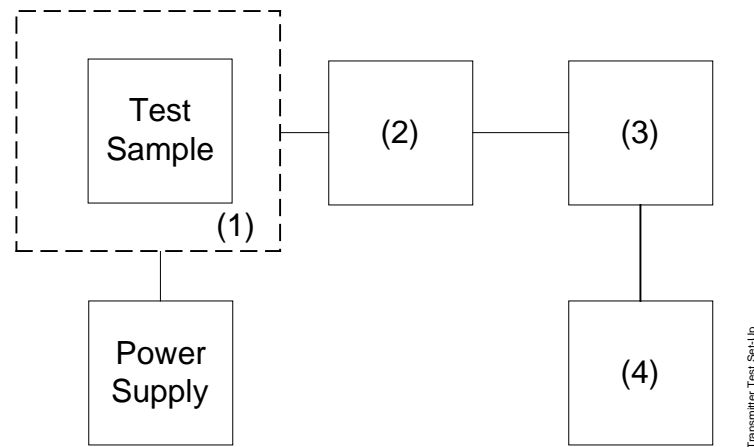


Asset	Description	s/n
(as applicable)		
(1)	<u>TEMPERATURE, HUMIDITY, VIBRATION</u>	
i00027	Tenney Temp. Chamber	9083-765-234
i00	Weber Humidity Chamber	
i00	L.A.B. RVH 18-100	
(2)	<u>COAXIAL ATTENUATOR</u>	
i00122	NARDA 766-10	7802
i00123	NARDA 766-10	7802A
i00113	SIERRA 661A-3D	1059
i00069	BIRD 8329 (30 dB)	10066
(3)	<u>R.F. POWER</u>	
i00014	HP 435A POWER METER	1733A05839
i00039	HP 436A POWER METER	2709A26776
i00020	HP 8901A POWER MODE	2105A01087
(4)	<u>FREQUENCY COUNTER</u>	
i00042	HP 5383A	1628A00959
i00019	HP 5334B	2704A00347
i00020	HP 8901A	2105A01087


PAGE NO.

47 of 49.

NAME OF TEST: Frequency Stability (Temperature Variation)
g0170091: 2001-Jul-11 Wed 08:46:47
STATE: 0:General

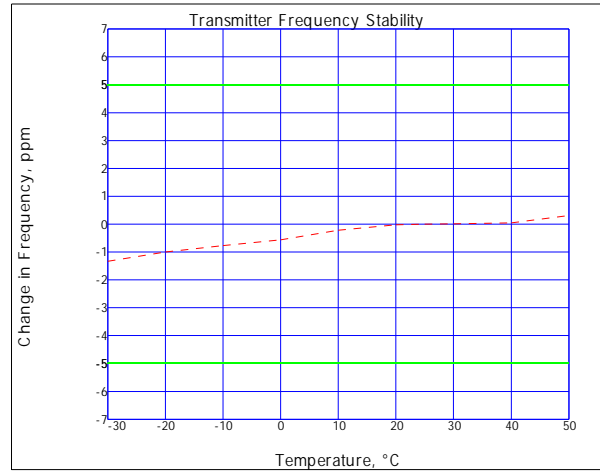

PERFORMED BY:


Doug Noble, B.A.S. E.E.T.

PAGE NO. 48 of 49.

NAME OF TEST: Frequency Stability (Voltage Variation)

SPECIFICATION: 47 CFR 2.1055(b)(1)

GUIDE: ANSI/TIA/EIA-603-1992, Paragraph 2.2.2

TEST EQUIPMENT: As per previous page

MEASUREMENT PROCEDURE


1. The EUT was placed in a temperature chamber at 25±5°C and connected as for "Frequency Stability - Temperature Variation" test.
2. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.

RESULTS: Frequency Stability (Voltage Variation)
g0170392: 2001-Jul-10 Tue 14:48:51
STATE: 0:General

LIMIT, ppm = 2.5
LIMIT, Hz = 388
BATTERY END POINT (Voltage) = 6

% of STV	Voltage	Frequency, MHz	Change, Hz	Change, ppm
85	6.37	155.049980	-20	-0.13
100	7.5	155.050000	0	0.00
115	8.62	155.050000	0	0.00
80	6	155.049990	-10	-0.06

PERFORMED BY:


Doug Noble, B.A.S. E.E.T.

PAGE NO. 49 of 49.

NAME OF TEST: Necessary Bandwidth and Emission Bandwidth

SPECIFICATION: 47 CFR 2.202(g)

MODULATION = 16K0F3E

NECESSARY BANDWIDTH CALCULATION:


MAXIMUM MODULATION (M), kHz	= 3
MAXIMUM DEVIATION (D), kHz	= 5
CONSTANT FACTOR (K)	= 1
NECESSARY BANDWIDTH (B _N), kHz	= (2xM)+(2xDxK)
	= 16.0

MODULATION = 11K0F3E

NECESSARY BANDWIDTH CALCULATION:

MAXIMUM MODULATION (M), kHz	= 3
MAXIMUM DEVIATION (D), kHz	= 2.5
CONSTANT FACTOR (K)	= 1
NECESSARY BANDWIDTH (B _N), kHz	= (2xM)+(2xDxK)
	= 11.0

PERFORMED BY:


Doug Noble, B.A.S. E.E.T.

END OF TEST REPORT

TESTIMONIAL
AND
STATEMENT OF CERTIFICATION

THIS IS TO CERTIFY THAT:

1. THAT the application was prepared either by, or under the direct supervision of, the undersigned.
2. THAT the technical data supplied with the application was taken under my direction and supervision.
3. THAT the data was obtained on representative units, randomly selected.
4. THAT, to the best of my knowledge and belief, the facts set forth in the application and accompanying technical data are true and correct.

CERTIFYING ENGINEER:

A handwritten signature in black ink, reading "M. Flom P. Eng.", with a horizontal line drawn underneath the signature.

Morton Flom, P. Eng.