

Global United Technology Services Co., Ltd.

Report No.: GTS202003000040F01

TEST REPORT

Applicant: GuangDong Unis Technology, Co. Ltd

No.1 Zheng An Road, West District, Zhongshan, **Address of Applicant:**

Guangdong, China

GuangDong Unis Technology, Co. Ltd Manufacturer:

Address of No.1 Zheng An Road, West District, Zhongshan,

Guangdong, China Manufacturer:

Equipment Under Test (EUT)

Product Name: Ticket Dome R GMP

Model No.: T-351

Trade Mark: N/A

FCC ID: 2AQKM-T-351

Applicable standards: FCC CFR Title 47 Part 15 Subpart C Section 15.225

Date of sample receipt: Feb.20,2019

Date of Test: Feb.20,2019-Mar.18,2020

Date of report issued: Mar.18,2020

PASS * Test Result:

In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:

Robinson Lo Laboratory Manager



2 Version

Version No.	Date	Description
00	Mar.18,2020	Original

Prepared By:	Joseph Cu	Date:	Mar.18,2020	
	Project Engineer			
Check By:	Job insonla	Date:	Mar.18,2020	
	Reviewer			

Xixiang Road, Baoan District, Shenzhen, Guangdong, China 518102 Telephone: +86 (0) 755 2779 8480 Fax: +86 (0) 755 2779 8960



3 Contents

			Page
1	CO	VER PAGE	1
2	VE	RSION	2
3	CO	NTENTS	2
J			
4	TES	ST SUMMARY	4
	4.1	MEASUREMENT UNCERTAINTY	4
5	GE	NERAL INFORMATION	5
	5.1	GENERAL DESCRIPTION OF EUT	5
	5.2	TEST MODE	
	5.3	TEST FACILITY	_
	5.4	TEST LOCATION	
	5.5	DESCRIPTION OF SUPPORT UNITS	
	5.6	DEVIATION FROM STANDARDS	
	5.7	ABNORMALITIES FROM STANDARD CONDITIONS	
6	TES	ST INSTRUMENTS LIST	7
7	TES	ST RESULTS AND MEASUREMENT DATA	9
	7.1	ANTENNA REQUIREMENT:	c
	7.2	CONDUCTED EMISSIONS	
	7.3	FIELD STRENGTH OF FUNDAMENTAL EMISSIONS AND MASK MEASUREMENT	
	7.4	RADIATED EMISSION	
	7.5	20dB Emission Bandwidth	19
	7.6	FREQUENCY STABILITY MEASUREMENT	23
8	TES	ST SETUP PHOTO	26
9	E115	T CONSTRUCTIONAL DETAILS	26



4 Test Summary

Test Item	Section in CFR 47	Result
Antenna Requirement	15.203	Pass
AC Power Line Conducted Emission	15.207	Pass
Field Strength of Fundamental Emissions and Mask Measurement	15.225(a)(b)(c)	Pass
Radiated Emission	15.225(d)&15.209	Pass
20dB Emission Bandwidth	15.225&15.215	Pass
Frequency Stability Measurement	15.225(e)	Pass

Remark:

Pass: The EUT complies with the essential requirements in the standard.

4.1 Measurement Uncertainty

Test Item	Frequency Range	Measurement Uncertainty	Notes
Radiated Emission	30MHz-200MHz	3.8039dB	(1)
Radiated Emission	200MHz-1GHz	3.9679dB	(1)
Radiated Emission	1GHz-18GHz	4.29dB	(1)
Radiated Emission	18GHz-40GHz	3.30dB	(1)
AC Power Line Conducted Emission	0.15MHz ~ 30MHz	3.44dB	(1)
Note (1): The measurement unce	ertainty is for coverage factor of k	=2 and a level of confidence of 9	95%.



5 General Information

5.1 General Description of EUT

Product Name:	Ticket Dome R GMP
Model No.:	T-351
Serial No.:	N/A
Test sample(s) ID:	GTS202003000040-1
Sample(s) Status	Engineered sample
Operation Frequency:	13.56MHz
Channel Number:	1
Modulation:	ASK
Antenna type:	PCB ANT
Gain of Antenna 11 to Antenna 14	Max. 0dBi each antenna
(for NFC Module 1):	wax. oubleach antenna
Gain of Antenna 21 to Antenna 24:	Max. 0dBi each antenna
(for NFC Module 2):	Wax. odbi cadii amerina
Gain of Antenna 31 to Antenna 34:	Max. 0dBi each antenna
(for NFC Module 3):	Wax. odbi cadii amerina
Gain of Antenna 41 to Antenna 44:	Max. 0dBi each antenna
(for NFC Module 4):	Wax. odbi cadii amerina
Power supply:	AC 120V/60Hz
Note:	The EUT has 4 NFC Modules, each module has 4 antennas, totally 16 antennas.



5.2 Test mode

Transmitter mode Keep the EUT in continuously transmitting.						
Pre-test mode.						
GTS has verified the construction and function in typical operation, The EUT was placed on three different polar directions; i.e. X axis, Y axis, Z axis. which was shown in this test report and defined as follows:						

 Axis
 X
 Y
 Z

 Field Strength(dBuV/m)
 86.23
 86.53
 86.45

Final Test Mode:

According to ANSI C63.4 standards, the test results are both the "worst case" and "worst setup": Y axis (see the test setup photo)

5.3 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• FCC —Registration No.: 381383

Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Registration 381383.

• IC —Registration No.: 9079A

The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 9079A

• NVLAP (LAB CODE:600179-0)

Global United Technology Services Co., Ltd., is accredited by the National Voluntary Laboratory Accreditation Program (NVLAP). LAB CODE:600179-0.

5.4 Test Location

All tests were performed at:

Global United Technology Services Co., Ltd.

Address: No. 123-128, Tower A, Jinyuan Business Building, No.2, Laodong Industrial Zone, Xixiang Road, Baoan District, Shenzhen, Guangdong, China 518102

Tel: 0755-27798480 Fax: 0755-27798960

5.5 Description of Support Units

Manufacturer	Description	Model	Serial Number

5.6 Deviation from Standards

None.

5.7 Abnormalities from Standard Conditions

N	n	Δ

Global United Technology Services Co., Ltd.

No. 123-128, Tower A, Jinyuan Business Building, No.2, Laodong Industrial Zone,

Xixiang Road, Baoan District, Shenzhen, Guangdong, China 518102



6 Test Instruments list

Radi	Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)	
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)* 6.4(H)	GTS250	July. 03 2015	July. 02 2020	
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A	
3	EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	June. 26 2019	June. 25 2020	
4	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	GTS214	June. 26 2019	June. 25 2020	
5	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9120 D	GTS208	June. 26 2019	June. 25 2020	
6	Horn Antenna	ETS-LINDGREN	3160	GTS217	June. 26 2019	June. 25 2020	
7	EMI Test Software	FARAD	EZ-EMC	N/A	N/A	N/A	
8	Coaxial Cable	GTS	N/A	GTS213	June. 26 2019	June. 25 2020	
9	Coaxial Cable	GTS	N/A	GTS211	June. 26 2019	June. 25 2020	
10	Coaxial cable	GTS	N/A	GTS210	June. 26 2019	June. 25 2020	
11	Coaxial Cable	GTS	N/A	GTS212	June. 26 2019	June. 25 2020	
12	Amplifier(100kHz-3GHz)	HP	8347A	GTS204	June. 26 2019	June. 25 2020	
13	Amplifier(2GHz-20GHz)	HP	84722A	GTS206	June. 26 2019	June. 25 2020	
14	Amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	GTS218	June. 26 2019	June. 25 2020	
15	Band filter	Amindeon	82346	GTS219	June. 26 2019	June. 25 2020	
16	Power Meter	Anritsu	ML2495A	GTS540	June. 26 2019	June. 25 2020	
17	Power Sensor	Anritsu	MA2411B	GTS541	June. 26 2019	June. 25 2020	
18	Wideband Radio Communication Tester	Rohde & Schwarz	CMW500	GTS575	June. 26 2019	June. 25 2020	
19	Splitter	Agilent	11636B	GTS237	June. 26 2019	June. 25 2020	
20	Loop Antenna	ZHINAN	ZN30900A	GTS534	June. 26 2019	June. 25 2020	
21	Breitband hornantenne	SCHWARZBECK	BBHA 9170	GTS579	Oct. 19 2019	Oct. 18 2020	
22	Amplifier	TDK	PA-02-02	GTS574	Oct. 19 2019	Oct. 18 2020	
23	Amplifier	TDK	PA-02-03	GTS576	Oct. 19 2019	Oct. 18 2020	
24	PSA Series Spectrum Analyzer	Rohde & Schwarz	FSP	GTS578	June. 26 2019	June. 25 2020	



Con	Conducted Emission					
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Shielding Room	ZhongYu Electron	7.3(L)x3.1(W)x2.9(H)	GTS252	May.15 2019	May.14 2022
2	EMI Test Receiver	R&S	ESCI 7	GTS552	June. 26 2019	June. 25 2020
3	Coaxial Switch	ANRITSU CORP	MP59B	GTS225	June. 26 2019	June. 25 2020
4	Artificial Mains Network	SCHWARZBECK MESS	NSLK8127	GTS226	June. 26 2019	June. 25 2020
5	Coaxial Cable	GTS	N/A	GTS227	N/A	N/A
6	EMI Test Software	FARAD	EZ-EMC	N/A	N/A	N/A
7	Thermo meter	KTJ	TA328	GTS233	June. 26 2019	June. 25 2020
8	Absorbing clamp	Elektronik- Feinmechanik	MDS21	GTS229	June. 26 2019	June. 25 2020
9	ISN	SCHWARZBECK	NTFM 8158	GTD565	June. 26 2019	June. 25 2020

RF C	RF Conducted Test:						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)	
1	MXA Signal Analyzer	Agilent	N9020A	GTS566	June. 26 2019	June. 25 2020	
2	EMI Test Receiver	R&S	ESCI 7	GTS552	June. 26 2019	June. 25 2020	
3	Spectrum Analyzer	Agilent	E4440A	GTS533	June. 26 2019	June. 25 2020	
4	MXG vector Signal Generator	Agilent	N5182A	GTS567	June. 26 2019	June. 25 2020	
5	ESG Analog Signal Generator	Agilent	E4428C	GTS568	June. 26 2019	June. 25 2020	
6	USB RF Power Sensor	DARE	RPR3006W	GTS569	June. 26 2019	June. 25 2020	
7	RF Switch Box	Shongyi	RFSW3003328	GTS571	June. 26 2019	June. 25 2020	
8	Programmable Constant Temp & Humi Test Chamber	WEWON	WHTH-150L-40-880	GTS572	June. 26 2019	June. 25 2020	

Gene	General used equipment:								
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)			
1	Humidity/ Temperature Indicator	KTJ	TA328	GTS243	June. 26 2019	June. 25 2020			
2	Barometer	ChangChun	DYM3	GTS255	June. 26 2019	June. 25 2020			



7 Test results and Measurement Data

7.1 Antenna requirement:

Standard requirement: FCC Part15 C Section 15.203

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

E.U.T Antenna:

The antenna is PCB antenna, the best case gain of the antenna is 0.0dBi, reference to the appendix II for details




7.2 Conducted Emissions

Test Requirement:	FCC Part15 C Section 15.2	207					
Test Method:	ANSI C63.10:2013						
Test Frequency Range:	150KHz to 30MHz						
Class / Severity:	Class B						
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto						
Limit:	Fraguera (MIII)	Limi	t (dBuV)				
	Frequency range (MHz)	Quasi-peak	Avera				
	0.15-0.5	66 to 56*	56 to 4				
	0.5-5	56	46				
	* Decreases with the logarit	thm of the frequency	50				
Test setup:	Reference Pla						
Test procedure:	Remark E.U.T Remark E.U.T. Equipment Under Test LISN Line Impedence Stabilization Network Test table height=0.8m	EMI Receiver	power	urough a			
rest procedure.	 The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2013 on conducted measurement. 						
Test Instruments:	Refer to section 6.0 for deta	ails					
Test mode:	Refer to section 5.2 for deta	ails					
Test environment:	Temp.: 25 °C H	lumid.: 52%	Press.:	1012mbar			
Test voltage:	AC 120V, 60Hz	'	<u>-L</u>				
Test results:	Pass						



Measurement data:




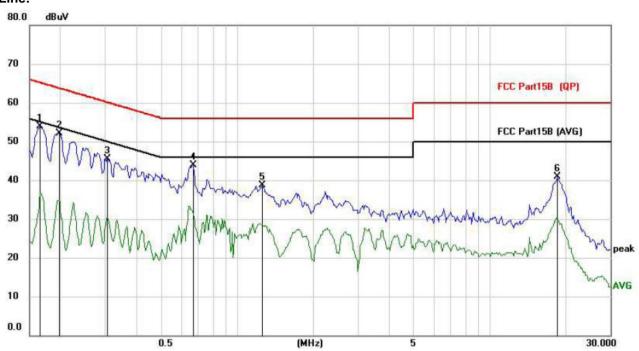

No. Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
	MHz	dBuV	dB	dBuV	dBuV	dB	Detector
1 *	0.1655	42.90	10.92	53.82	65.18	-11.36	peak
2	0.1968	41.19	10.92	52.11	63.74	-11.63	peak
3	0.3060	34.67	10.92	45.59	60.08	-14.49	peak
4	0.6687	32.96	10.92	43.88	56.00	-12.12	peak
5	1.2498	27.68	10.94	38.62	56.00	-17.38	peak
6	18.4908	29.28	11.61	40.89	60.00	-19.11	peak



Neutral:

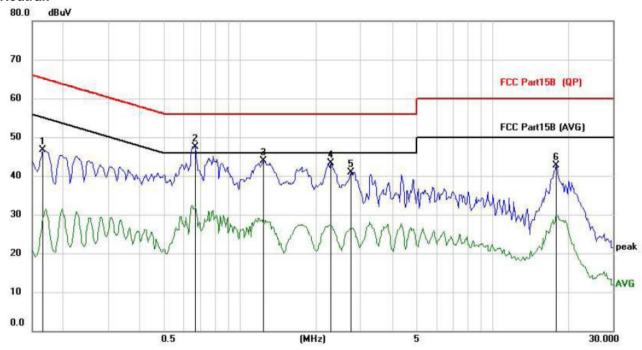

No. Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
	MHz	dBuV	dB	dBuV	dBuV	dB	Detector
1	0.1655	35.70	10.92	46.62	65.18	-18.56	peak
2 *	0.6648	36.59	10.92	47.51	56.00	-8.49	peak
3	1.2381	32.91	10.94	43.85	56.00	-12.15	peak
4	2.2950	32.34	10.98	43.32	56.00	-12.68	peak
5	2.7396	29.96	11.00	40.96	56.00	-15.04	peak
6	17.9019	31.05	11.59	42.64	60.00	-17.36	peak

Notes:

- 1. An initial pre-scan was performed on the line and neutral lines with peak detector.
- 2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
- 3. Final Level =Receiver Read level + LISN Factor + Cable Loss



7.3 Field Strength of Fundamental Emissions and Mask Measurement

7.3 Field Strength of Fundamental Emissions and Mask Measurement						
Test Requirement:	FCC Part15 C Section	15.225(a)(b)(c)				
Test Method:	ANSI C63.10:2013					
Test site:	Measurement Distance	: 3m				
Receiver setup:	RBW=9KHz, VBW=30k	(Hz, Sweep time=Auto				
limit:	Frequency (MHz)	Field Strength (microvolts/meter) at 30m	Field Strength (dBuV/m) at 3m			
	1.705~13.110	30	69.5			
	13.110~13.410	106	80.5			
	13.410~13.553	334	90.5			
	13.553~13.567	15848	124.0			
	13.567~13.710	334	90.5			
	13.710~14.010	106	80.5			
	14.010~30.000	30	69.5			
Test setup:	Metal Full Soldered Ground Plane Spectrum Analyzer / Receiver					
Test Procedure:						



	6. Compliance with the spectrum mask is tested using a spectrum analyzer with RB set to a 1KHz for the band 13.553~13.567MHz.						
Test Instruments:	Refer to section 6.0 for details						
Test mode:	Refer to section 5.2 for details						
Test results:	Pass						

Measurement data:

Fr	equency	(MHz):	13.56					Polarity:		HORIZONTAL	
N-	Frequency	Emission		Limit	Margin	Antenna	Table	Raw	Antenna	Cable	Correction
No.	(MHz)	Level	Detector	(dBuV/m)	(dB)	Height	Angle	Value	Factor	Factor	Factor
1	13.15	39.06	PK	80.50	41.44	1.00 H	185	34.36	5.26	-0.56	4.70
2	13.55	48.88	PK	90.47	41.59	1.00 H	110	44.09	5.36	-0.57	4.79
3	13.56	85.42	PK	124.00	38.58	1.00 H	95	80.54	5.45	-0.57	4.88
4	13.57	49.02	PK	90.47	41.45	1.00 H	45	43.88	5.49	-0.35	5.14
5	13.75	39.86	PK	80.50	40.64	1.00 H	155	34.53	5.63	-0.30	5.33

Fre	equency		13.56				Polarity:		VERTICAL		
No.	Frequency	Emission	Detector	Limit	Margin	Antenna	Table	Raw	Antenna	Cable	Correction
140.	(MHz)	Level	Detector	(dBuV/m)	(dB)	Height	Angle	Value	Factor	Factor	Factor
1	13.15	41.06	PK	80.50	39.44	1.00 H	185	35.48	5.26	-0.56	4.70
2	13.55	49.62	PK	90.47	40.85	1.00 H	110	45.05	5.36	-0.57	4.79
3	13.56	86.53	PK	124.00	37.47	1.00 H	95	80.96	5.45	-0.57	4.88
4	13.57	49.98	PK	90.47	40.49	1.00 H	45	44.28	5.49	-0.35	5.14
5	13.75	40.84	PK	80.50	39.66	1.00 H	155	35.27	5.63	-0.30	5.33

REMARKS:

- 1. Emission level (dBuV/m) =Raw Value (dBuV)+Correction Factor (dB/m)
- 2. Correction Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)
- Margin value = Limit value- Emission level.
 The other emission levels were very low against the limit.



7.4 Radiated Emission

7.4 Radiated Emission								
Test Requirement:	FCC Part15 C	Section 15.225(d) and 15.20	09				
Test Method:	ANSI C63.10: 2	2013						
Test Frequency Range:	9KHz to 1000M	lHz						
Test site:	Measurement [Distance: 3m						
Receiver setup:	Frequency	Detector	RBW	VBW	Remark			
	9kHz- 150kHz	Quasi-peak	200Hz	300Hz	Quasi-peak Value			
	150kHz- 30MHz	Quasi-peak	9kHz	10kHz	Quasi-peak Value			
	30MHz- 1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak Value			
Limit:			-		s specified in Section n in Table per Section			
	Frequenc	y (MHz)	Field stre (micorvolts	-	Measurement distance (meters)			
	0.009~0	0.490	2400/F(KHz)	300			
	0.490~	1.705	24000/F(KHz)		30			
	1.705	~30	30		30			
	30~8	88	100		3			
	88~2	216	150		3			
	216~9	960	200		3			
	960~1	000	500)	3			
Test setup:	Below 30MHz Tum Table < 80cm > 4 Above 30MHz							



Report No.: GTS202003000040F01 EUT Turn Table. Turn Table < 80cm Receiver# Preamplifier. Test Procedure: Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8meter above ground. The phase center of the loop receiving antenna mounted antenna tower was placed 3 meters far away from the turntable. 2. Power on the EUT, the turntable was rotated by 360 degrees to determine the position of the highest radiation. 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization. For each suspected emissions, the antenna tower was scan (from 1M to 4M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading. Set the test-receiver system to Peak or CISPR quasi-peak detect 5. function with specified bandwidth under maximum hold mode. When the radiated emissions limits are expressed in terms of the average value of the emissions and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value. 7. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. Test Instruments: Refer to section 6.0 for details Test mode: Refer to section 5.2 for details Test environment: 25 °C Humid.: 52% 1012mbar Temp.: Press.: AC 120V, 60Hz Test voltage:

Test results:


Pass



Measurement data:

The emission from 9 kHz to 30MHz was pre-tested and found the result was 20dB lower than the limit, and according to 15.31(o), the test result no need to reported.


Horizontal:

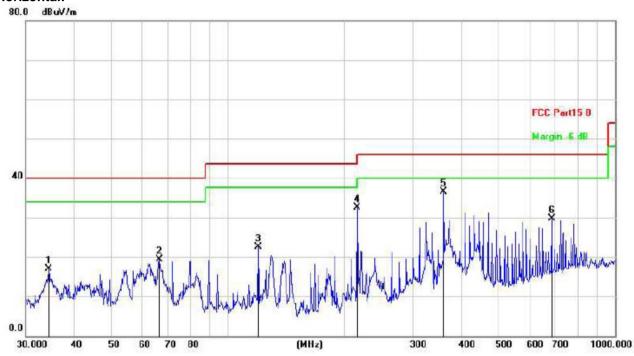

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		34.3964	35.24	-18.33	16.91	40.00	-23.09	peak
2		66.4989	38.88	-19.52	19.36	40.00	-20.64	peak
3		119.8556	42.41	-19.91	22.50	43.50	-21.00	peak
4		216.0240	51.98	-19.55	32.43	46.00	-13.57	peak
5	*	360.4476	54.26	-17.74	36.52	46.00	-9.48	peak
6		684.7454	41.75	-12.07	29.68	46.00	-16.32	peak



Vertical:

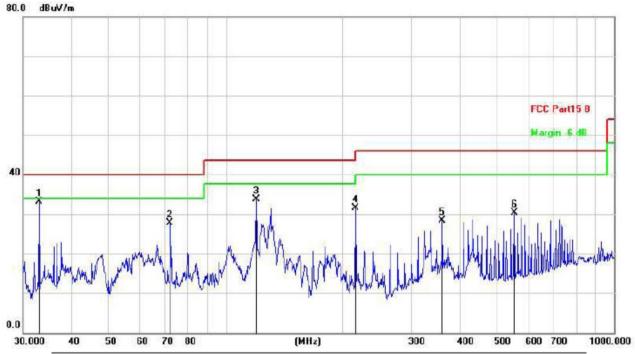

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1	*	32.9791	51.50	-18.41	33.09	40.00	-6.91	peak
2		71.8320	47.90	-20.10	27.80	40.00	-12.20	peak
3		119.8556	53.66	-19.91	33.75	43.50	-9.75	peak
4		216.0240	51.03	-19.55	31.48	46.00	-14.52	peak
5		360.4476	46.01	-17.74	28.27	46.00	-17.73	peak
6		552.8832	44.31	-13.97	30.34	46.00	-15.66	peak



7.5 20dB Emission Bandwidth

Test Requirement:	FCC Part15 C Section 15.225 and 15.215			
Test Method:	ANSI C63.10:2013			
Limit:	N/A			
Test Procedure:	 According to the follow Test-setup, keep the relative position between the artificial antenna and the EUT. Set the EUT to proper test channel. Max hold the radiated emissions, mark the peak power frequency point and the -20dB upper and lower frequency points. Read 20dB bandwidth. 			
Test setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane			
Test Instruments:	Refer to section 6.0 for details			
Test mode:	Refer to section 5.2 for details			
Test results:	Pass			



Measurement Data

Antenna 11;

Test frequency (MHz)	20dB bandwidth (KHz)	Result
13.56	13.65	Pass

Antenna 12;

Test frequency (MHz)	20dB bandwidth (KHz)	Result
13.56	13.67	Pass


Antenna 13;

Test frequency (MHz)	20dB bandwidth (KHz)	Result
13.56	13.65	Pass

Antenna 14;

Test frequency (MHz)	20dB bandwidth (KHz)	Result
13.56	13.63	Pass

Note: Tests preformed at each antennas, only report results at antenna 11 to antenna 14 of NFC module 1 as Typical representative results.



Test plot as follows:

GTS



Antenna 11



Antenna 12





Antenna 13



Antenna 14

3



7.6 Frequency Stability Measurement

Test Requirement:	FCC Part15 C Section 15.225 (e)	
Test Method:	ANSI C63.10: 2013	
Receiver setup:	RBW=1KHz, VBW=1KHz, Sweep time=Auto	
Limit:	The frequency tolerance of the carrier signal shall be maintained within +/- 0.01% of the operating frequency	
	over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage,	
	for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C.	
	For battery operated equipment, the equipment tests shall be performed using a new battery.	
Test setup:	NC 59	
	Spectrum Analyzer OVEN	
Test Procedure:	The transmitter output (antenna port) was connected to the spectrum analyzer.	
Test Procedure:	· · · · · · · · · · · · · · · · · · ·	
Test Procedure:	analyzer.EUT have transmitted absence of modulation signal and fixed	
Test Procedure:	 analyzer. EUT have transmitted absence of modulation signal and fixed channelize Set the spectrum analyzer span to view the entire absence of 	
Test Procedure:	 analyzer. EUT have transmitted absence of modulation signal and fixed channelize Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth. Set RBW=1KHz, VBW=1KHz with peak detector and maxhold 	
Test Procedure:	 analyzer. EUT have transmitted absence of modulation signal and fixed channelize Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth. Set RBW=1KHz, VBW=1KHz with peak detector and maxhold settings. fc is declaring of channel frequency. Then the frequency error 	
Test Procedure:	 analyzer. EUT have transmitted absence of modulation signal and fixed channelize Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth. Set RBW=1KHz, VBW=1KHz with peak detector and maxhold settings. fc is declaring of channel frequency. Then the frequency error formula is (fc-f)/fc x10⁶ ppm and the limit is less than ±100ppm. The test extreme voltage is to change the primary supply voltage 	
Test Instruments:	 analyzer. EUT have transmitted absence of modulation signal and fixed channelize Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth. Set RBW=1KHz, VBW=1KHz with peak detector and maxhold settings. fc is declaring of channel frequency. Then the frequency error formula is (fc-f)/fc x10⁶ ppm and the limit is less than ±100ppm. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value 	
	 analyzer. EUT have transmitted absence of modulation signal and fixed channelize Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth. Set RBW=1KHz, VBW=1KHz with peak detector and maxhold settings. fc is declaring of channel frequency. Then the frequency error formula is (fc-f)/fc x10⁶ ppm and the limit is less than ±100ppm. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value Extreme temperature rule is -20°C ~50°C 	

Measurement data:

Telephone: +86 (0) 755 2779 8480 Fax: +86 (0) 755 2779 8960 Page 23 of 26



For Antenna 11:

Reference Frequency: 13.56MHz (Limit: ±0.01%)				
Voltage (V)	Temperature (°C)	Frequency (Hz)	Frequency Deviation(Hz)	Deviation (%)
	+20(Ref)	13,560,005	6	0.00004425
	-20	13,560,007	7	0.00005162
	-10	13,560,005	5	0.00003687
	0	13,559,995	-5	-0.00003687
	+10	13,560,005	5	0.00003687
120	+20	13,560,010	10	0.00007375
	+25	13,560,006	6	0.00004425
	+30	13,559,993	-7	-0.00005162
	+40	13,559,998	-2	-0.00001475
	+50	13,559,996	-4	-0.00002950
138	+20	13,560,009	9	0.00006637
End point 102	+20	13,560,006	6	0.00004425

For Antenna 12:

Reference Frequency: 13.56MHz (Limit: ±0.01%)				
Voltage (V)	Temperature (°C)	Frequency (Hz)	Frequency Deviation(Hz)	Deviation (%)
	+20(Ref)	13,560,002	2	0.00001475
_	-20	13,560,006	6	0.00004425
_	-10	13,560,007	7	0.00005162
_	0	13,559,998	-2	-0.00001475
	+10	13,560,003	3	0.00002212
120	+20	13,560,012	12	0.00008850
<u>_</u>	+25	13,560,003	3	0.00002212
<u>_</u>	+30	13,559,997	-3	-0.00002212
<u>_</u>	+40	13,559,996	-4	-0.00002950
	+50	13,559,998	-2	-0.00001475
138	+20	13,560,007	7	0.00005162
End point 102	+20	13,560,005	5	0.00003687



For Antenna 13:

Reference Frequency: 13.56MHz (Limit: ±0.01%)				
Voltage (V)	Temperature (℃)	Frequency (Hz)	Frequency Deviation(Hz)	Deviation (%)
	+20(Ref)	13,559,993	-7	-0.00005162
	-20	13,559,996	-4	-0.00002950
	-10	13,559,993	-7	-0.00005162
	0	13,559,998	-2	-0.00001475
	+10	13,560,005	5	0.00003687
120	+20	13,560,010	10	0.00007375
	+25	13,560,006	6	0.00004425
	+30	13,559,993	-7	-0.00005162
	+40	13,559,999	-1	-0.00000737
	+50	13,559,997	-3	-0.00002212
138	+20	13,560,006	6	0.00004425
End point 102	+20	13,560,003	3	0.00002212

For Antenna 14:

1 of Afficial 14.				
Reference Frequency: 13.56MHz (Limit: ±0.01%)				
Voltage (V)	Temperature ($^{\circ}\!$	Frequency (Hz)	Frequency Deviation(Hz)	Deviation (%)
	+20(Ref)	13,560,008	8	0.00005900
	-20	13,559,997	3	0.00002212
	-10	13,560,006	6	0.00004425
	0	13,560,003	3	0.00002212
	+10	13,560,005	5	0.00003687
120	+20	13,560,010	10	0.00007375
	+25	13,560,003	3	0.00002212
	+30	13,559,997	-3	-0.00002212
	+40	13,559,998	-2	-0.00001475
	+50	13,559,993	-7	-0.00005162
138	+20	13,560,005	5	0.00003687
End point 102	+20	13,559,996	-4	-0.00002950

Note: Tests preformed at each antennas, only report results at antenna 11 to antenna 14 of NFC module 1 as Typical representative results.



8 Test Setup Photo

Reference to the appendix I for details.

9 EUT Constructional Details

Reference to the appendix II for details.	
	Fnd