

RF Exposure Report

Report No.: SA190423C24 R1

FCC ID: K7SF8J234V2

Test Model: F8J234V2

Received Date: Apr. 23, 2019

Test Date: Apr. 30, 2019

Issued Date: Jun. 05, 2019

Applicant: Belkin International, Inc.

Address: 12045 East Waterfront Drive, Playa Vista, CA 90094

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan, R.O.C.

Test Location: No. 19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City 33383, TAIWAN (R.O.C.)

FCC Registration / 788550 / TW0003
Designation Number:



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by any government agencies.

Table of Contents

Release Control Record	3
1 Certificate of Conformity	4
2 General Information	5
2.1 General Description of EUT	5
3 RF Exposure	6
3.1 Description of Support Units	6
3.1.1 Configuration of System under Test	6
3.2 Test Setup	7
3.3 Test Instruments	7
3.4 Limits for Maximum Permissible Exposure (MPE)	8
3.5 Test Point Description	8
4. Calculation Result of Maximum Conducted Power	9
5. Photographs of the Test Configuration	49

Release Control Record

Issue No.	Description	Date Issued
SA190423C24	Original release	May 09, 2019
SA190423C24 R1	Revised product name.	Jun. 05, 2019

1 Certificate of Conformity

Product: BOOST↑UP™ Special Edition Wireless Charging Dock for iPhone + Apple Watch

Brand: belkin

Test Model: F8J234V2

Sample Status: Engineering sample

Applicant: Belkin International, Inc.

Test Date: Apr. 25 ~ Apr. 27, 2019

Standards: FCC Part 2 (Section 2.1091)

KDB 680106 D01 RF Exposure Wireless Charging Apps v03

IEEE C95.1-1992

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

Prepared by : Celine Chou , **Date:** Jun. 05, 2019
Celine Chou / Senior Specialist

Approved by : Bruce Chen , **Date:** Jun. 05, 2019
Bruce Chen / Project Engineer

2 General Information

2.1 General Description of EUT

Product	BOOST↑UP™ Special Edition Wireless Charging Dock for iPhone + Apple Watch
Test Model	F8J234V2
Sample Status	Engineering sample
Power Supply Rating	15Vdc (Adapter)
Modulation Type	FSK
Operating Frequency	127.8 kHz 326.5 kHz
Antenna Type	Coil antenna
Field Strength	127.8 kHz: 74.6dBuV/m 326.5 kHz: 47.0dBuV/m
Dimension for iPhone charging coil	16.26cm ² (diameter = 45.5mm)
Dimension for Apple watch charging coil	7.95cm ² (diameter = 31.82mm)
Accessory Device	Adapter
Data Cable Supplied	NA
Maximum Power Output for Phone charging coil	7.5W
Maximum Power Output for Apple watch charging coil	5W

Note:

1. The EUT uses following adapter.

Brand	belkin
Model	2ADL045H NJ
Input Power	100-240Vac, 50/60Hz, 1.3A
Output Power	15Vdc, 3.0A
Power Line	1.5m DC cable without core attached on adapter

2. The EUT has WPC (Wireless Power Consortium) technology.

3. 326.5kHz mode is for Apple watch charging. Metal band is the worst case for final tests after pretesting plastic band and metal band.

3 RF Exposure

3.1 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.


ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	iPhone	APPLE	A1897	NA	NA	-
B.	iPhone X	APPLE	A1901	NA	NA	-
C.	Apple Watch	APPLE	A1554	NA	NA	-

ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	USB cable	1	1.15	Y	0	-


3.1.1 Configuration of System under Test

Charging Mode:

EUT wireless charging to iPhone X

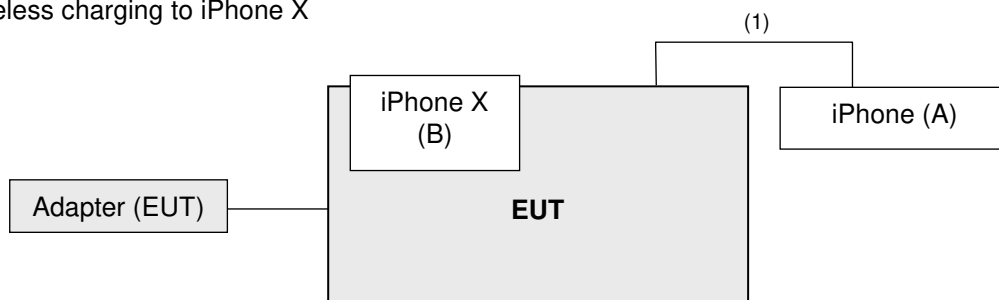


EUT wireless charging to Apple Watch

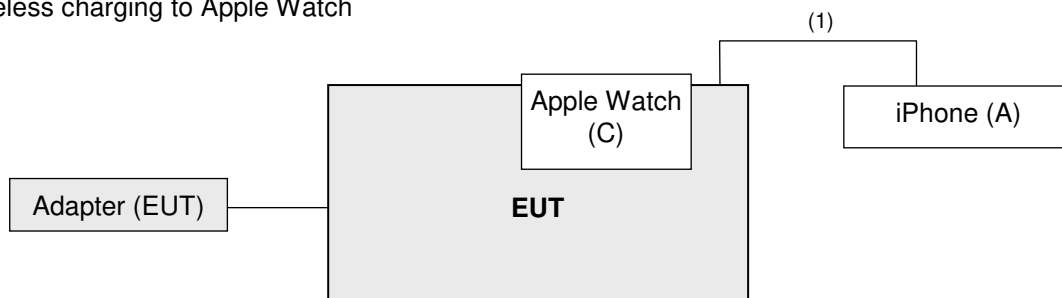


Standby Mode:

EUT only

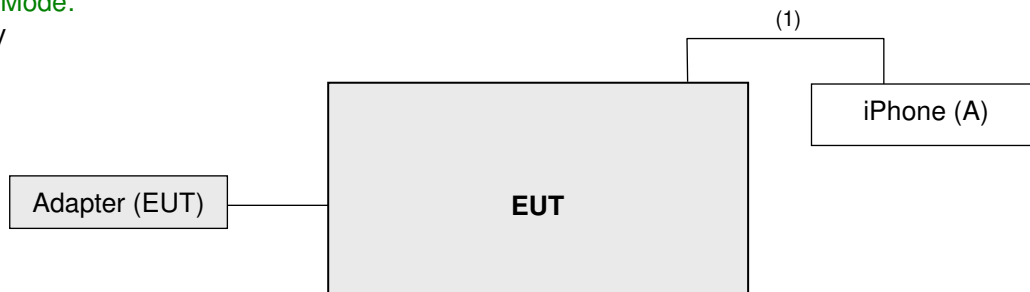

3.2 Test Setup

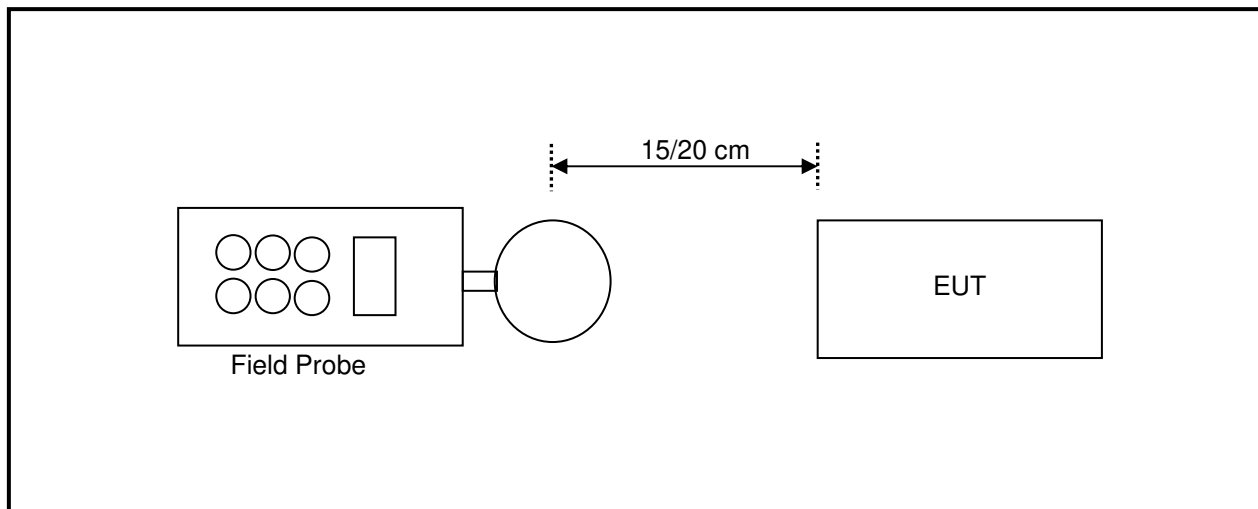

Note: Measurements were made from all sides and the top of the primary/client pair, with the 15/20cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

3.3 Test Instruments

Description	Brand	Model No.	Frequency Range	Calibrated Date	Calibrated Until
Broadband Field Meter	NARDA	NBM-550	-	Mar. 28, 2018	Mar. 27, 2020
Magnetic Field Meter	NARDA	ELT-400	1 – 400kHz	Apr. 12, 2018	Apr. 11, 2020
Magnetic Probe	NARDA	HF 3061	300kHz – 30MHz	Apr. 16, 2018	Apr. 15, 2020
Magnetic Probe	NARDA	HF-0191	27 – 1000MHz	Apr. 17, 2018	Apr. 16, 2020
Broadband Field Meter	NARDA	NBM-550	-	Mar. 28, 2018	Mar. 27, 2020
Magnetic Field Probe	NARDA	2300/90.10	1Hz – 400kHz	Apr. 12, 2018	Apr. 11, 2020
E-Field Probe	NARDA	EF 0391	100kHz – 3GHz	Apr. 16, 2018	Apr. 15, 2020
E-Field Probe	NARDA	EF6091	100MHz – 60GHz	Apr. 17, 2018	Apr. 16, 2020

Note: 1. The calibration interval of the above test instruments is 12/24 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The test was performed in HwaYa RF Chamber

3.4 Limits for Maximum Permissible Exposure (MPE)

Frequency range (MHz)	RMS electric field strength (E) ^a (V/m)	RMS magnetic field strength (H) ^a (A/m)	RMS power density (S) E-field, H-field (W/m ²) ^b	Averaging time E ² , H ² or S (min)
0.1–1.0	1842	$16.3/f_M$	$(9000, 100\,000/f_M^2)^b$	6
1.0–30	$1842/f_M$	$16.3/f_M$	$(9000/f_M^2, 100\,000/f_M^2)$	6
30–100	61.4	$16.3/f_M$	$(10, 100\,000/f_M^2)$	6
100–300	61.4	0.163	10	6
300–3000	–	–	$f_M/30$	6
3000–30 000	–	–	100	$19.63/f_G^{1.079}$
30 000–300 000	–	–	100	$2.524/f_G^{0.476}$

NOTE— f_M is the frequency in MHz, f_G is the frequency in GHz.


^aFor exposures that are uniform over the dimensions of the body, such as certain far-field plane-wave exposures, the exposure field strengths and power densities are compared with the MPEs in the Table. For non-uniform exposures, the mean values of the exposure fields, as obtained by spatially averaging the squares of the field strengths or averaging the power densities over an area equivalent to the vertical cross section of the human body (projected area), or a smaller area depending on the frequency (see NOTES to Table 8 and Table 9 below), are compared with the MPEs in the Table.

^bThese plane-wave equivalent power density values are commonly used as a convenient comparison with MPEs at higher frequencies and are displayed on some instruments in use.

680106 D01 RF Exposure Wireless Charging Apps v03

The aggregate H-fields strengths at 15 cm surrounding the device and 20cm above the top surface from all simultaneous transmitting coils are demonstrated to be less than 50% of the MPE limit.

3.5 Test Point Description

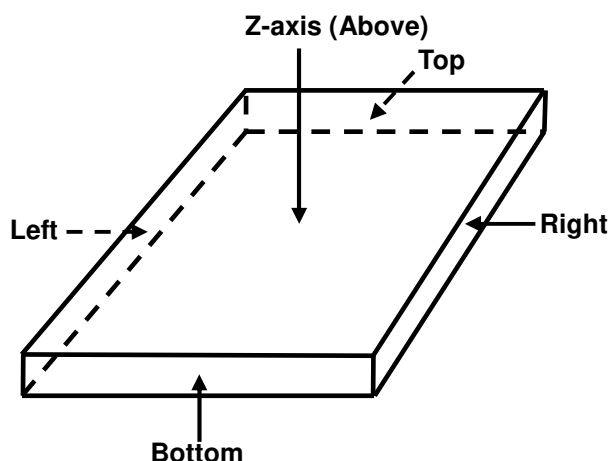

4. Calculation Result of Maximum Conducted Power

For 127.8kHz (Charging Mode)

At Center without 3mm airgap

Charging Mode with iPhone, battery 10% Charge

E-Field Measurement (15cm)						E-Field Measurement (20cm)
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)
127.8	Max E-field (V/m)	0.6500	0.6700	0.6600	0.7200	0.5900
127.8	Limit (V/m)	1842	1842	1842	1842	1842
127.8	Margin (V/m)	-1841.3500	-1841.3300	-1841.3400	-1841.2800	-1841.4100
127.8	50 % Limit (V/m)	921	921	921	921	921
127.8	50 % Margin (V/m)	-920.3500	-920.3300	-920.3400	-920.2800	-920.4100

H-Field Measurement (15cm)						H-Field Measurement (20cm)
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)
127.8	Max H-field (uT)	0.0930	0.0920	0.0890	0.0880	0.0890
127.8	Max H-field (A/m)	0.0744	0.0736	0.0712	0.0704	0.0712
127.8	Limit (A/m)	127.54	127.54	127.54	127.54	127.54
127.8	Margin (A/m)	-127.4656	-127.4664	-127.4688	-127.4696	-127.4688
127.8	50 % Limit (A/m)	63.77	63.77	63.77	63.77	63.77
127.8	50 % Margin (A/m)	-63.6956	-63.6964	-63.6988	-63.6996	-63.6988

Measurements were made from all sides and the top of the primary/client pair, with the 15/20cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Charging Mode with iPhone, battery 50% Charge

E-Field Measurement (15cm)						E-Field Measurement (20cm)
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)
127.8	Max E-field (V/m)	0.6900	0.7200	0.7100	0.7700	0.6400
127.8	Limit (V/m)	1842	1842	1842	1842	1842
127.8	Margin (V/m)	-1841.3100	-1841.2800	-1841.2900	-1841.2300	-1841.3600
127.8	50 % Limit (V/m)	921	921	921	921	921
127.8	50 % Margin (V/m)	-920.3100	-920.2800	-920.2900	-920.2300	-920.3600

H-Field Measurement (15cm)						H-Field Measurement (20cm)
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)
127.8	Max H-field (uT)	0.1030	0.1010	0.0980	0.0970	0.0990
127.8	Max H-field (A/m)	0.0824	0.0808	0.0784	0.0776	0.0792
127.8	Limit (A/m)	127.54	127.54	127.54	127.54	127.54
127.8	Margin (A/m)	-127.4576	-127.4592	-127.4616	-127.4624	-127.4608
127.8	50 % Limit (A/m)	63.77	63.77	63.77	63.77	63.77
127.8	50 % Margin (A/m)	-63.6876	-63.6892	-63.6916	-63.6924	-63.6908

Measurements were made from all sides and the top of the primary/client pair, with the 15/20cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Charging Mode with iPhone, battery 90% Charge

E-Field Measurement (15cm)						E-Field Measurement (20cm)
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)
127.8	Max E-field (V/m)	0.8800	0.9100	0.9000	0.9600	0.8300
127.8	Limit (V/m)	1842	1842	1842	1842	1842
127.8	Margin (V/m)	-1841.1200	-1841.0900	-1841.1000	-1841.0400	-1841.1700
127.8	50 % Limit (V/m)	921	921	921	921	921
127.8	50 % Margin (V/m)	-920.1200	-920.0900	-920.1000	-920.0400	-920.1700

H-Field Measurement (15cm)						H-Field Measurement (20cm)
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)
127.8	Max H-field (uT)	0.1190	0.1170	0.1140	0.1130	0.1150
127.8	Max H-field (A/m)	0.0952	0.0936	0.0912	0.0904	0.0920
127.8	Limit (A/m)	127.54	127.54	127.54	127.54	127.54
127.8	Margin (A/m)	-127.4448	-127.4464	-127.4488	-127.4496	-127.4480
127.8	50 % Limit (A/m)	63.77	63.77	63.77	63.77	63.77
127.8	50 % Margin (A/m)	-63.6748	-63.6764	-63.6788	-63.6796	-63.6780

Measurements were made from all sides and the top of the primary/client pair, with the 15/20cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Shift Left 5mm without 3mm airgap

Charging Mode with iPhone, battery 10% Charge

E-Field Measurement (15cm)						E-Field Measurement (20cm)
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)
127.8	Max E-field (V/m)	0.6300	0.6500	0.6400	0.7000	0.5700
127.8	Limit (V/m)	1842	1842	1842	1842	1842
127.8	Margin (V/m)	-1841.3700	-1841.3500	-1841.3600	-1841.3000	-1841.4300
127.8	50 % Limit (V/m)	921	921	921	921	921
127.8	50 % Margin (V/m)	-920.3700	-920.3500	-920.3600	-920.3000	-920.4300

H-Field Measurement (15cm)						H-Field Measurement (20cm)
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)
127.8	Max H-field (uT)	0.0910	0.0900	0.0880	0.0860	0.0870
127.8	Max H-field (A/m)	0.0728	0.0720	0.0704	0.0688	0.0696
127.8	Limit (A/m)	127.54	127.54	127.54	127.54	127.54
127.8	Margin (A/m)	-127.4672	-127.4680	-127.4696	-127.4712	-127.4704
127.8	50 % Limit (A/m)	63.77	63.77	63.77	63.77	63.77
127.8	50 % Margin (A/m)	-63.6972	-63.6980	-63.6996	-63.7012	-63.7004

Measurements were made from all sides and the top of the primary/client pair, with the 15/20cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Charging Mode with iPhone, battery 50% Charge

E-Field Measurement (15cm)						E-Field Measurement (20cm)
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)
127.8	Max E-field (V/m)	0.6700	0.7000	0.6900	0.7500	0.6300
127.8	Limit (V/m)	1842	1842	1842	1842	1842
127.8	Margin (V/m)	-1841.3300	-1841.3000	-1841.3100	-1841.2500	-1841.3700
127.8	50 % Limit (V/m)	921	921	921	921	921
127.8	50 % Margin (V/m)	-920.3300	-920.3000	-920.3100	-920.2500	-920.3700

H-Field Measurement (15cm)						H-Field Measurement (20cm)
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)
127.8	Max H-field (uT)	0.1010	0.0990	0.0960	0.0950	0.0970
127.8	Max H-field (A/m)	0.0808	0.0792	0.0768	0.0760	0.0776
127.8	Limit (A/m)	127.54	127.54	127.54	127.54	127.54
127.8	Margin (A/m)	-127.4592	-127.4608	-127.4632	-127.4640	-127.4624
127.8	50 % Limit (A/m)	63.77	63.77	63.77	63.77	63.77
127.8	50 % Margin (A/m)	-63.6892	-63.6908	-63.6932	-63.6940	-63.6924

Measurements were made from all sides and the top of the primary/client pair, with the 15/20cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Charging Mode with iPhone, battery 90% Charge

E-Field Measurement (15cm)						E-Field Measurement (20cm)
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)
127.8	Max E-field (V/m)	0.8700	0.8900	0.8900	0.9500	0.8100
127.8	Limit (V/m)	1842	1842	1842	1842	1842
127.8	Margin (V/m)	-1841.1300	-1841.1100	-1841.1100	-1841.0500	-1841.1900
127.8	50 % Limit (V/m)	921	921	921	921	921
127.8	50 % Margin (V/m)	-920.1300	-920.1100	-920.1100	-920.0500	-920.1900

H-Field Measurement (15cm)						H-Field Measurement (20cm)
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)
127.8	Max H-field (uT)	0.1170	0.1150	0.1120	0.0990	0.1120
127.8	Max H-field (A/m)	0.0936	0.0920	0.0896	0.0792	0.0896
127.8	Limit (A/m)	127.54	127.54	127.54	127.54	127.54
127.8	Margin (A/m)	-127.4464	-127.4480	-127.4504	-127.4608	-127.4504
127.8	50 % Limit (A/m)	63.77	63.77	63.77	63.77	63.77
127.8	50 % Margin (A/m)	-63.6764	-63.6780	-63.6804	-63.6908	-63.6804

Measurements were made from all sides and the top of the primary/client pair, with the 15/20cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Shift Right 5mm without 3mm airgap

Charging Mode with iPhone, battery 10% Charge

E-Field Measurement (15cm)						E-Field Measurement (20cm)
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)
127.8	Max E-field (V/m)	0.7100	0.7400	0.7300	0.7800	0.6500
127.8	Limit (V/m)	1842	1842	1842	1842	1842
127.8	Margin (V/m)	-1841.2900	-1841.2600	-1841.2700	-1841.2200	-1841.3500
127.8	50 % Limit (V/m)	921	921	921	921	921
127.8	50 % Margin (V/m)	-920.2900	-920.2600	-920.2700	-920.2200	-920.3500

H-Field Measurement (15cm)						H-Field Measurement (20cm)
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)
127.8	Max H-field (uT)	0.1050	0.1020	0.1010	0.0990	0.1010
127.8	Max H-field (A/m)	0.0840	0.0816	0.0808	0.0792	0.0808
127.8	Limit (A/m)	127.54	127.54	127.54	127.54	127.54
127.8	Margin (A/m)	-127.4560	-127.4584	-127.4592	-127.4608	-127.4592
127.8	50 % Limit (A/m)	63.77	63.77	63.77	63.77	63.77
127.8	50 % Margin (A/m)	-63.6860	-63.6884	-63.6892	-63.6908	-63.6892

Measurements were made from all sides and the top of the primary/client pair, with the 15/20cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Charging Mode with iPhone, battery 50% Charge

E-Field Measurement (15cm)						E-Field Measurement (20cm)
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)
127.8	Max E-field (V/m)	0.7100	0.7400	0.7300	0.7800	0.6500
127.8	Limit (V/m)	1842	1842	1842	1842	1842
127.8	Margin (V/m)	-1841.2900	-1841.2600	-1841.2700	-1841.2200	-1841.3500
127.8	50 % Limit (V/m)	921	921	921	921	921
127.8	50 % Margin (V/m)	-920.2900	-920.2600	-920.2700	-920.2200	-920.3500

H-Field Measurement (15cm)						H-Field Measurement (20cm)
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)
127.8	Max H-field (uT)	0.1050	0.1020	0.1010	0.0990	0.1010
127.8	Max H-field (A/m)	0.0840	0.0816	0.0808	0.0792	0.0808
127.8	Limit (A/m)	127.54	127.54	127.54	127.54	127.54
127.8	Margin (A/m)	-127.4560	-127.4584	-127.4592	-127.4608	-127.4592
127.8	50 % Limit (A/m)	63.77	63.77	63.77	63.77	63.77
127.8	50 % Margin (A/m)	-63.6860	-63.6884	-63.6892	-63.6908	-63.6892

Measurements were made from all sides and the top of the primary/client pair, with the 15/20cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Charging Mode with iPhone, battery 90% Charge

E-Field Measurement (15cm)						E-Field Measurement (20cm)
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)
127.8	Max E-field (V/m)	0.9000	0.9300	0.9200	0.9800	0.8500
127.8	Limit (V/m)	1842	1842	1842	1842	1842
127.8	Margin (V/m)	-1841.1000	-1841.0700	-1841.0800	-1841.0200	-1841.1500
127.8	50 % Limit (V/m)	921	921	921	921	921
127.8	50 % Margin (V/m)	-920.1000	-920.0700	-920.0800	-920.0200	-920.1500

H-Field Measurement (15cm)						H-Field Measurement (20cm)
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)
127.8	Max H-field (uT)	0.1200	0.1180	0.1150	0.1150	0.1180
127.8	Max H-field (A/m)	0.0960	0.0944	0.0920	0.0920	0.0944
127.8	Limit (A/m)	127.54	127.54	127.54	127.54	127.54
127.8	Margin (A/m)	-127.4440	-127.4456	-127.4480	-127.4480	-127.4456
127.8	50 % Limit (A/m)	63.77	63.77	63.77	63.77	63.77
127.8	50 % Margin (A/m)	-63.6740	-63.6756	-63.6780	-63.6780	-63.6756

Measurements were made from all sides and the top of the primary/client pair, with the 15/20cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

At Center with 3mm airgap

Charging Mode with iPhone, battery 10% Charge

E-Field Measurement (15cm)						E-Field Measurement (20cm)
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)
127.8	Max E-field (V/m)	0.6200	0.6400	0.6300	0.6900	0.5600
127.8	Limit (V/m)	1842	1842	1842	1842	1842
127.8	Margin (V/m)	-1841.3800	-1841.3600	-1841.3700	-1841.3100	-1841.4400
127.8	50 % Limit (V/m)	921	921	921	921	921
127.8	50 % Margin (V/m)	-920.3800	-920.3600	-920.3700	-920.3100	-920.4400

H-Field Measurement (15cm)						H-Field Measurement (20cm)
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)
127.8	Max H-field (uT)	0.0820	0.0810	0.0780	0.0770	0.0780
127.8	Max H-field (A/m)	0.0656	0.0648	0.0624	0.0616	0.0624
127.8	Limit (A/m)	127.54	127.54	127.54	127.54	127.54
127.8	Margin (A/m)	-127.4744	-127.4752	-127.4776	-127.4784	-127.4776
127.8	50 % Limit (A/m)	63.77	63.77	63.77	63.77	63.77
127.8	50 % Margin (A/m)	-63.7044	-63.7052	-63.7076	-63.7084	-63.7076

Measurements were made from all sides and the top of the primary/client pair, with the 15/20cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Charging Mode with iPhone, battery 50% Charge

E-Field Measurement (15cm)						E-Field Measurement (20cm)
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)
127.8	Max E-field (V/m)	0.6600	0.6900	0.6800	0.7400	0.6100
127.8	Limit (V/m)	1842	1842	1842	1842	1842
127.8	Margin (V/m)	-1841.3400	-1841.3100	-1841.3200	-1841.2600	-1841.3900
127.8	50 % Limit (V/m)	921	921	921	921	921
127.8	50 % Margin (V/m)	-920.3400	-920.3100	-920.3200	-920.2600	-920.3900

H-Field Measurement (15cm)						H-Field Measurement (20cm)
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)
127.8	Max H-field (uT)	0.0920	0.0900	0.0870	0.0860	0.0880
127.8	Max H-field (A/m)	0.0736	0.0720	0.0696	0.0688	0.0704
127.8	Limit (A/m)	127.54	127.54	127.54	127.54	127.54
127.8	Margin (A/m)	-127.4664	-127.4680	-127.4704	-127.4712	-127.4696
127.8	50 % Limit (A/m)	63.77	63.77	63.77	63.77	63.77
127.8	50 % Margin (A/m)	-63.6964	-63.6980	-63.7004	-63.7012	-63.6996

Measurements were made from all sides and the top of the primary/client pair, with the 15/20cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Charging Mode with iPhone, battery 90% Charge

E-Field Measurement (15cm)						E-Field Measurement (20cm)
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)
127.8	Max E-field (V/m)	0.8500	0.8800	0.8700	0.9300	0.8000
127.8	Limit (V/m)	1842	1842	1842	1842	1842
127.8	Margin (V/m)	-1841.1500	-1841.1200	-1841.1300	-1841.0700	-1841.2000
127.8	50 % Limit (V/m)	921	921	921	921	921
127.8	50 % Margin (V/m)	-920.1500	-920.1200	-920.1300	-920.0700	-920.2000

H-Field Measurement (15cm)						H-Field Measurement (20cm)
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)
127.8	Max H-field (uT)	0.1080	0.1060	0.1030	0.1020	0.1040
127.8	Max H-field (A/m)	0.0864	0.0848	0.0824	0.0816	0.0832
127.8	Limit (A/m)	127.54	127.54	127.54	127.54	127.54
127.8	Margin (A/m)	-127.4536	-127.4552	-127.4576	-127.4584	-127.4568
127.8	50 % Limit (A/m)	63.77	63.77	63.77	63.77	63.77
127.8	50 % Margin (A/m)	-63.6836	-63.6852	-63.6876	-63.6884	-63.6868

Measurements were made from all sides and the top of the primary/client pair, with the 15/20cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Shift Left 5mm with 3mm airgap

Charging Mode with iPhone, battery 10% Charge

E-Field Measurement (15cm)						E-Field Measurement (20cm)
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)
127.8	Max E-field (V/m)	0.6020	0.6200	0.6100	0.6500	0.5200
127.8	Limit (V/m)	1842	1842	1842	1842	1842
127.8	Margin (V/m)	-1841.3980	-1841.3800	-1841.3900	-1841.3500	-1841.4800
127.8	50 % Limit (V/m)	921	921	921	921	921
127.8	50 % Margin (V/m)	-920.3980	-920.3800	-920.3900	-920.3500	-920.4800

H-Field Measurement (15cm)						H-Field Measurement (20cm)
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)
127.8	Max H-field (uT)	0.0750	0.0790	0.0770	0.0750	0.0770
127.8	Max H-field (A/m)	0.0600	0.0632	0.0616	0.0600	0.0616
127.8	Limit (A/m)	127.54	127.54	127.54	127.54	127.54
127.8	Margin (A/m)	-127.4800	-127.4768	-127.4784	-127.4800	-127.4784
127.8	50 % Limit (A/m)	63.77	63.77	63.77	63.77	63.77
127.8	50 % Margin (A/m)	-63.7100	-63.7068	-63.7084	-63.7100	-63.7084

Measurements were made from all sides and the top of the primary/client pair, with the 15/20cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Charging Mode with iPhone, battery 50% Charge

E-Field Measurement (15cm)						E-Field Measurement (20cm)
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)
127.8	Max E-field (V/m)	0.6400	0.6800	0.6500	0.7200	0.5800
127.8	Limit (V/m)	1842	1842	1842	1842	1842
127.8	Margin (V/m)	-1841.3600	-1841.3200	-1841.3500	-1841.2800	-1841.4200
127.8	50 % Limit (V/m)	921	921	921	921	921
127.8	50 % Margin (V/m)	-920.3600	-920.3200	-920.3500	-920.2800	-920.4200

H-Field Measurement (15cm)						H-Field Measurement (20cm)
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)
127.8	Max H-field (uT)	0.0880	0.0890	0.0880	0.0820	0.0850
127.8	Max H-field (A/m)	0.0704	0.0712	0.0704	0.0656	0.0680
127.8	Limit (A/m)	127.54	127.54	127.54	127.54	127.54
127.8	Margin (A/m)	-127.4696	-127.4688	-127.4696	-127.4744	-127.4720
127.8	50 % Limit (A/m)	63.77	63.77	63.77	63.77	63.77
127.8	50 % Margin (A/m)	-63.6996	-63.6988	-63.6996	-63.7044	-63.7020

Measurements were made from all sides and the top of the primary/client pair, with the 15/20cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Charging Mode with iPhone, battery 90% Charge

E-Field Measurement (15cm)						E-Field Measurement (20cm)
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)
127.8	Max E-field (V/m)	0.8200	0.8500	0.8500	0.9100	0.7700
127.8	Limit (V/m)	1842	1842	1842	1842	1842
127.8	Margin (V/m)	-1841.1800	-1841.1500	-1841.1500	-1841.0900	-1841.2300
127.8	50 % Limit (V/m)	921	921	921	921	921
127.8	50 % Margin (V/m)	-920.1800	-920.1500	-920.1500	-920.0900	-920.2300

H-Field Measurement (15cm)						H-Field Measurement (20cm)
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)
127.8	Max H-field (uT)	0.1040	0.1090	0.1010	0.1020	0.1070
127.8	Max H-field (A/m)	0.0832	0.0872	0.0808	0.0816	0.0856
127.8	Limit (A/m)	127.54	127.54	127.54	127.54	127.54
127.8	Margin (A/m)	-127.4568	-127.4528	-127.4592	-127.4584	-127.4544
127.8	50 % Limit (A/m)	63.77	63.77	63.77	63.77	63.77
127.8	50 % Margin (A/m)	-63.6868	-63.6828	-63.6892	-63.6884	-63.6844

Measurements were made from all sides and the top of the primary/client pair, with the 15/20cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Shift Right 5mm with 3mm airgap

Charging Mode with iPhone, battery 10% Charge

E-Field Measurement (15cm)						E-Field Measurement (20cm)
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)
127.8	Max E-field (V/m)	0.6400	0.6300	0.6200	0.6500	0.5400
127.8	Limit (V/m)	1842	1842	1842	1842	1842
127.8	Margin (V/m)	-1841.3600	-1841.3700	-1841.3800	-1841.3500	-1841.4600
127.8	50 % Limit (V/m)	921	921	921	921	921
127.8	50 % Margin (V/m)	-920.3600	-920.3700	-920.3800	-920.3500	-920.4600

H-Field Measurement (15cm)						H-Field Measurement (20cm)
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)
127.8	Max H-field (uT)	0.0780	0.0800	0.0770	0.0790	0.0810
127.8	Max H-field (A/m)	0.0624	0.0640	0.0616	0.0632	0.0648
127.8	Limit (A/m)	127.54	127.54	127.54	127.54	127.54
127.8	Margin (A/m)	-127.4776	-127.4760	-127.4784	-127.4768	-127.4752
127.8	50 % Limit (A/m)	63.77	63.77	63.77	63.77	63.77
127.8	50 % Margin (A/m)	-63.7076	-63.7060	-63.7084	-63.7068	-63.7052

Measurements were made from all sides and the top of the primary/client pair, with the 15/20cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Charging Mode with iPhone, battery 50% Charge

E-Field Measurement (15cm)						E-Field Measurement (20cm)
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)
127.8	Max E-field (V/m)	0.6700	0.6800	0.6600	0.7500	0.6400
127.8	Limit (V/m)	1842	1842	1842	1842	1842
127.8	Margin (V/m)	-1841.3300	-1841.3200	-1841.3400	-1841.2500	-1841.3600
127.8	50 % Limit (V/m)	921	921	921	921	921
127.8	50 % Margin (V/m)	-920.3300	-920.3200	-920.3400	-920.2500	-920.3600

H-Field Measurement (15cm)						H-Field Measurement (20cm)
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)
127.8	Max H-field (uT)	0.0930	0.0910	0.0850	0.0840	0.0870
127.8	Max H-field (A/m)	0.0744	0.0728	0.0680	0.0672	0.0696
127.8	Limit (A/m)	127.54	127.54	127.54	127.54	127.54
127.8	Margin (A/m)	-127.4656	-127.4672	-127.4720	-127.4728	-127.4704
127.8	50 % Limit (A/m)	63.77	63.77	63.77	63.77	63.77
127.8	50 % Margin (A/m)	-63.6956	-63.6972	-63.7020	-63.7028	-63.7004

Measurements were made from all sides and the top of the primary/client pair, with the 15/20cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Charging Mode with iPhone, battery 90% Charge

E-Field Measurement (15cm)						E-Field Measurement (20cm)
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)
127.8	Max E-field (V/m)	0.8200	0.8400	0.8500	0.9100	0.8200
127.8	Limit (V/m)	1842	1842	1842	1842	1842
127.8	Margin (V/m)	-1841.1800	-1841.1600	-1841.1500	-1841.0900	-1841.1800
127.8	50 % Limit (V/m)	921	921	921	921	921
127.8	50 % Margin (V/m)	-920.1800	-920.1600	-920.1500	-920.0900	-920.1800

H-Field Measurement (15cm)						H-Field Measurement (20cm)
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)
127.8	Max H-field (uT)	0.1090	0.1080	0.1040	0.1050	0.1050
127.8	Max H-field (A/m)	0.0872	0.0864	0.0832	0.0840	0.0840
127.8	Limit (A/m)	127.54	127.54	127.54	127.54	127.54
127.8	Margin (A/m)	-127.4528	-127.4536	-127.4568	-127.4560	-127.4560
127.8	50 % Limit (A/m)	63.77	63.77	63.77	63.77	63.77
127.8	50 % Margin (A/m)	-63.6828	-63.6836	-63.6868	-63.6860	-63.6860

Measurements were made from all sides and the top of the primary/client pair, with the 15/20cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

For 326.5kHz (Charging Mode)

At Center

Charging Mode with watch, battery 10% Charge

E-Field Measurement (15cm)						E-Field Measurement (20cm)
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)
326.5	Max E-field (V/m)	0.4400	0.5700	0.5600	0.6400	0.4500
326.5	Limit (V/m)	1842	1842	1842	1842	1842
326.5	Margin (V/m)	-1841.5600	-1841.4300	-1841.4400	-1841.3600	-1841.5500
326.5	50 % Limit (V/m)	921	921	921	921	921
326.5	50 % Margin (V/m)	-920.5600	-920.4300	-920.4400	-920.3600	-920.5500

H-Field Measurement (15cm)						H-Field Measurement (20cm)
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)
326.5	Max H-field (uT)	0.0610	0.0640	0.0630	0.0620	0.0640
326.5	Max H-field (A/m)	0.0488	0.0512	0.0504	0.0496	0.0512
326.5	Limit (A/m)	49.92	49.92	49.92	49.92	49.92
326.5	Margin (A/m)	-49.8712	-49.8688	-49.8696	-49.8704	-49.8688
326.5	50 % Limit (A/m)	24.96	24.96	24.96	24.96	24.96
326.5	50 % Margin (A/m)	-24.9112	-24.9088	-24.9096	-24.9104	-24.9088

Measurements were made from all sides and the top of the primary/client pair, with the 15/20cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Charging Mode with watch, battery 50% Charge

E-Field Measurement (15cm)						E-Field Measurement (20cm)
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)
326.5	Max E-field (V/m)	0.4200	0.5500	0.5400	0.6200	0.4300
326.5	Limit (V/m)	1842	1842	1842	1842	1842
326.5	Margin (V/m)	-1841.5800	-1841.4500	-1841.4600	-1841.3800	-1841.5700
326.5	50 % Limit (V/m)	921	921	921	921	921
326.5	50 % Margin (V/m)	-920.5800	-920.4500	-920.4600	-920.3800	-920.5700

H-Field Measurement (15cm)						H-Field Measurement (20cm)
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)
326.5	Max H-field (uT)	0.0600	0.0620	0.0610	0.0600	0.0620
326.5	Max H-field (A/m)	0.0480	0.0496	0.0488	0.0480	0.0496
326.5	Limit (A/m)	49.92	49.92	49.92	49.92	49.92
326.5	Margin (A/m)	-49.8720	-49.8704	-49.8712	-49.8720	-49.8704
326.5	50 % Limit (A/m)	24.96	24.96	24.96	24.96	24.96
326.5	50 % Margin (A/m)	-24.9120	-24.9104	-24.9112	-24.9120	-24.9104

Measurements were made from all sides and the top of the primary/client pair, with the 15/20cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Charging Mode with watch, battery 90% Charge

E-Field Measurement (15cm)						E-Field Measurement (20cm)
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)
326.5	Max E-field (V/m)	0.3800	0.5300	0.5200	0.6000	0.4100
326.5	Limit (V/m)	1842	1842	1842	1842	1842
326.5	Margin (V/m)	-1841.6200	-1841.4700	-1841.4800	-1841.4000	-1841.5900
326.5	50 % Limit (V/m)	921	921	921	921	921
326.5	50 % Margin (V/m)	-920.6200	-920.4700	-920.4800	-920.4000	-920.5900

H-Field Measurement (15cm)						H-Field Measurement (20cm)
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)
326.5	Max H-field (uT)	0.0580	0.0600	0.0589	0.0580	0.0600
326.5	Max H-field (A/m)	0.0464	0.0480	0.0471	0.0464	0.0480
326.5	Limit (A/m)	49.92	49.92	49.92	49.92	49.92
326.5	Margin (A/m)	-49.8736	-49.8720	-49.8729	-49.8736	-49.8720
326.5	50 % Limit (A/m)	24.96	24.96	24.96	24.96	24.96
326.5	50 % Margin (A/m)	-24.9136	-24.9120	-24.9129	-24.9136	-24.9120

Measurements were made from all sides and the top of the primary/client pair, with the 15/20cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

For 127.8kHz + 326.5kHz (Charging Mode)

At Center without 3mm airgap

Charging Mode with iPhone + watch, battery 10% Charge

E-Field Measurement (15cm)						E-Field Measurement (20cm)
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)
127.8 + 326.5	Max E-field (V/m)	0.0006	0.0007	0.0007	0.0007	0.0006
127.8 + 326.5	Limit (V/m)	1	1	1	1	1
127.8 + 326.5	Margin (V/m)	-0.9994	-0.9993	-0.9993	-0.9993	-0.9994

H-Field Measurement (15cm)						H-Field Measurement (20cm)
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)
127.8 + 326.5	Max H-field (uT)	0.0016	0.0016	0.0016	0.0015	0.0016
127.8 + 326.5	Limit (A/m)	1	1	1	1	1
127.8 + 326.5	Margin (A/m)	-0.9984	-0.9984	-0.9984	-0.9985	-0.9984

Measurements were made from all sides and the top of the primary/client pair, with the 15/20cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Charging Mode with iPhone + watch, battery 50% Charge

E-Field Measurement (15cm)						E-Field Measurement (20cm)
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)
127.8 + 326.5	Max E-field (V/m)	0.0006	0.0007	0.0007	0.0008	0.0006
127.8 + 326.5	Limit (V/m)	1	1	1	1	1
127.8 + 326.5	Margin (V/m)	-0.9994	-0.9993	-0.9993	-0.9992	-0.9994

H-Field Measurement (15cm)						H-Field Measurement (20cm)
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)
127.8 + 326.5	Max H-field (uT)	0.0016	0.0016	0.0016	0.0016	0.0016
127.8 + 326.5	Limit (A/m)	1	1	1	1	1
127.8 + 326.5	Margin (A/m)	-0.9984	-0.9984	-0.9984	-0.9984	-0.9984

Measurements were made from all sides and the top of the primary/client pair, with the 15/20cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Charging Mode with iPhone + watch, battery 90% Charge

E-Field Measurement (15cm)						E-Field Measurement (20cm)
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)
127.8 + 326.5	Max E-field (V/m)	0.0007	0.0008	0.0008	0.0008	0.0007
127.8 + 326.5	Limit (V/m)	1	1	1	1	1
127.8 + 326.5	Margin (V/m)	-0.9993	-0.9992	-0.9992	-0.9992	-0.9993

H-Field Measurement (15cm)						H-Field Measurement (20cm)
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)
127.8 + 326.5	Max H-field (uT)	0.0017	0.0017	0.0017	0.0016	0.0017
127.8 + 326.5	Limit (A/m)	1	1	1	1	1
127.8 + 326.5	Margin (A/m)	-0.9983	-0.9983	-0.9983	-0.9984	-0.9983

Measurements were made from all sides and the top of the primary/client pair, with the 15/20cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Shift Left 5mm without 3mm airgap

Charging Mode with iPhone + watch, battery 10% Charge

E-Field Measurement (15cm)						E-Field Measurement (20cm)
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)
127.8 + 326.5	Max E-field (V/m)	0.0006	0.0007	0.0007	0.0007	0.0006
127.8 + 326.5	Limit (V/m)	1	1	1	1	1
127.8 + 326.5	Margin (V/m)	-0.9994	-0.9993	-0.9993	-0.9993	-0.9994

H-Field Measurement (15cm)						H-Field Measurement (20cm)
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)
127.8 + 326.5	Max H-field (uT)	0.0015	0.0016	0.0016	0.0015	0.0016
127.8 + 326.5	Limit (A/m)	1	1	1	1	1
127.8 + 326.5	Margin (A/m)	-0.9985	-0.9984	-0.9984	-0.9985	-0.9984

Measurements were made from all sides and the top of the primary/client pair, with the 15/20cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Charging Mode with iPhone + watch, battery 50% Charge

E-Field Measurement (15cm)						E-Field Measurement (20cm)
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)
127.8 + 326.5	Max E-field (V/m)	0.0006	0.0007	0.0007	0.0007	0.0006
127.8 + 326.5	Limit (V/m)	1	1	1	1	1
127.8 + 326.5	Margin (V/m)	-0.9994	-0.9993	-0.9993	-0.9993	-0.9994

H-Field Measurement (15cm)						H-Field Measurement (20cm)
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)
127.8 + 326.5	Max H-field (uT)	0.0016	0.0016	0.0016	0.0016	0.0016
127.8 + 326.5	Limit (A/m)	1	1	1	1	1
127.8 + 326.5	Margin (A/m)	-0.9984	-0.9984	-0.9984	-0.9984	-0.9984

Measurements were made from all sides and the top of the primary/client pair, with the 15/20cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Charging Mode with iPhone + watch, battery 90% Charge

E-Field Measurement (15cm)						E-Field Measurement (20cm)
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)
127.8 + 326.5	Max E-field (V/m)	0.0007	0.0008	0.0008	0.0008	0.0007
127.8 + 326.5	Limit (V/m)	1	1	1	1	1
127.8 + 326.5	Margin (V/m)	-0.9993	-0.9992	-0.9992	-0.9992	-0.9993

H-Field Measurement (15cm)						H-Field Measurement (20cm)
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)
127.8 + 326.5	Max H-field (uT)	0.0017	0.0017	0.0016	0.0016	0.0017
127.8 + 326.5	Limit (A/m)	1	1	1	1	1
127.8 + 326.5	Margin (A/m)	-0.9983	-0.9983	-0.9984	-0.9984	-0.9983

Measurements were made from all sides and the top of the primary/client pair, with the 15/20cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Shift Right 5mm without 3mm airgap

Charging Mode with iPhone + watch, battery 10% Charge

E-Field Measurement (15cm)						E-Field Measurement (20cm)
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)
127.8 + 326.5	Max E-field (V/m)	0.0006	0.0007	0.0007	0.0008	0.0006
127.8 + 326.5	Limit (V/m)	1	1	1	1	1
127.8 + 326.5	Margin (V/m)	-0.9994	-0.9993	-0.9993	-0.9992	-0.9994

H-Field Measurement (15cm)						H-Field Measurement (20cm)
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)
127.8 + 326.5	Max H-field (uT)	0.0016	0.0016	0.0016	0.0016	0.0016
127.8 + 326.5	Limit (A/m)	1	1	1	1	1
127.8 + 326.5	Margin (A/m)	-0.9984	-0.9984	-0.9984	-0.9984	-0.9984

Measurements were made from all sides and the top of the primary/client pair, with the 15/20cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Charging Mode with iPhone + watch, battery 50% Charge

E-Field Measurement (15cm)						E-Field Measurement (20cm)
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)
127.8 + 326.5	Max E-field (V/m)	0.0006	0.0007	0.0007	0.0008	0.0006
127.8 + 326.5	Limit (V/m)	1	1	1	1	1
127.8 + 326.5	Margin (V/m)	-0.9994	-0.9993	-0.9993	-0.9992	-0.9994

H-Field Measurement (15cm)						H-Field Measurement (20cm)
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)
127.8 + 326.5	Max H-field (uT)	0.0016	0.0016	0.0016	0.0016	0.0016
127.8 + 326.5	Limit (A/m)	1	1	1	1	1
127.8 + 326.5	Margin (A/m)	-0.9984	-0.9984	-0.9984	-0.9984	-0.9984

Measurements were made from all sides and the top of the primary/client pair, with the 15/20cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Charging Mode with iPhone + watch, battery 90% Charge

E-Field Measurement (15cm)						E-Field Measurement (20cm)
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)
127.8 + 326.5	Max E-field (V/m)	0.0007	0.0008	0.0008	0.0009	0.0007
127.8 + 326.5	Limit (V/m)	1	1	1	1	1
127.8 + 326.5	Margin (V/m)	-0.9993	-0.9992	-0.9992	-0.9991	-0.9993

H-Field Measurement (15cm)						H-Field Measurement (20cm)
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)
127.8 + 326.5	Max H-field (uT)	0.0017	0.0017	0.0017	0.0017	0.0017
127.8 + 326.5	Limit (A/m)	1	1	1	1	1
127.8 + 326.5	Margin (A/m)	-0.9983	-0.9983	-0.9983	-0.9983	-0.9983

Measurements were made from all sides and the top of the primary/client pair, with the 15/20cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

At Center with 3mm airgap

Charging Mode with iPhone + watch, battery 10% Charge

E-Field Measurement (15cm)						E-Field Measurement (20cm)
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)
127.8 + 326.5	Max E-field (V/m)	0.0006	0.0007	0.0006	0.0007	0.0005
127.8 + 326.5	Limit (V/m)	1	1	1	1	1
127.8 + 326.5	Margin (V/m)	-0.9994	-0.9993	-0.9994	-0.9993	-0.9995

H-Field Measurement (15cm)						H-Field Measurement (20cm)
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)
127.8 + 326.5	Max H-field (uT)	0.0015	0.0015	0.0015	0.0015	0.0015
127.8 + 326.5	Limit (A/m)	1	1	1	1	1
127.8 + 326.5	Margin (A/m)	-0.9985	-0.9985	-0.9985	-0.9985	-0.9985

Measurements were made from all sides and the top of the primary/client pair, with the 15/20cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Charging Mode with iPhone + watch, battery 50% Charge

E-Field Measurement (15cm)						E-Field Measurement (20cm)
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)
127.8 + 326.5	Max E-field (V/m)	0.0006	0.0007	0.0007	0.0007	0.0006
127.8 + 326.5	Limit (V/m)	1	1	1	1	1
127.8 + 326.5	Margin (V/m)	-0.9994	-0.9993	-0.9993	-0.9993	-0.9994

H-Field Measurement (15cm)						H-Field Measurement (20cm)
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)
127.8 + 326.5	Max H-field (uT)	0.0015	0.0016	0.0015	0.0015	0.0015
127.8 + 326.5	Limit (A/m)	1	1	1	1	1
127.8 + 326.5	Margin (A/m)	-0.9985	-0.9984	-0.9985	-0.9985	-0.9985

Measurements were made from all sides and the top of the primary/client pair, with the 15/20cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Charging Mode with iPhone + watch, battery 90% Charge

E-Field Measurement (15cm)						E-Field Measurement (20cm)
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)
127.8 + 326.5	Max E-field (V/m)	0.0007	0.0008	0.0008	0.0008	0.0007
127.8 + 326.5	Limit (V/m)	1	1	1	1	1
127.8 + 326.5	Margin (V/m)	-0.9993	-0.9992	-0.9992	-0.9992	-0.9993

H-Field Measurement (15cm)						H-Field Measurement (20cm)
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)
127.8 + 326.5	Max H-field (uT)	0.0016	0.0016	0.0016	0.0016	0.0016
127.8 + 326.5	Limit (A/m)	1	1	1	1	1
127.8 + 326.5	Margin (A/m)	-0.9984	-0.9984	-0.9984	-0.9984	-0.9984

Measurements were made from all sides and the top of the primary/client pair, with the 15/20cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Shift Left 5mm with 3mm airgap

Charging Mode with iPhone + watch, battery 10% Charge

E-Field Measurement (15cm)						E-Field Measurement (20cm)
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)
127.8 + 326.5	Max E-field (V/m)	0.0006	0.0006	0.0006	0.0007	0.0005
127.8 + 326.5	Limit (V/m)	1	1	1	1	1
127.8 + 326.5	Margin (V/m)	-0.9994	-0.9994	-0.9994	-0.9993	-0.9995

H-Field Measurement (15cm)						H-Field Measurement (20cm)
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)
127.8 + 326.5	Max H-field (uT)	0.0014	0.0015	0.0015	0.0015	0.0015
127.8 + 326.5	Limit (A/m)	1	1	1	1	1
127.8 + 326.5	Margin (A/m)	-0.9986	-0.9985	-0.9985	-0.9985	-0.9985

Measurements were made from all sides and the top of the primary/client pair, with the 15/20cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Charging Mode with iPhone + watch, battery 50% Charge

E-Field Measurement (15cm)						E-Field Measurement (20cm)
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)
127.8 + 326.5	Max E-field (V/m)	0.0006	0.0007	0.0006	0.0007	0.0005
127.8 + 326.5	Limit (V/m)	1	1	1	1	1
127.8 + 326.5	Margin (V/m)	-0.9994	-0.9993	-0.9994	-0.9993	-0.9995

H-Field Measurement (15cm)						H-Field Measurement (20cm)
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)
127.8 + 326.5	Max H-field (uT)	0.0015	0.0016	0.0015	0.0015	0.0015
127.8 + 326.5	Limit (A/m)	1	1	1	1	1
127.8 + 326.5	Margin (A/m)	-0.9985	-0.9984	-0.9985	-0.9985	-0.9985

Measurements were made from all sides and the top of the primary/client pair, with the 15/20cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Charging Mode with iPhone + watch, battery 90% Charge

E-Field Measurement (15cm)						E-Field Measurement (20cm)
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)
127.8 + 326.5	Max E-field (V/m)	0.0007	0.0007	0.0007	0.0008	0.0006
127.8 + 326.5	Limit (V/m)	1	1	1	1	1
127.8 + 326.5	Margin (V/m)	-0.9993	-0.9993	-0.9993	-0.9992	-0.9994

H-Field Measurement (15cm)						H-Field Measurement (20cm)
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)
127.8 + 326.5	Max H-field (uT)	0.0016	0.0016	0.0016	0.0016	0.0016
127.8 + 326.5	Limit (A/m)	1	1	1	1	1
127.8 + 326.5	Margin (A/m)	-0.9984	-0.9984	-0.9984	-0.9984	-0.9984

Measurements were made from all sides and the top of the primary/client pair, with the 15/20cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Shift Right 5mm with 3mm airgap

Charging Mode with iPhone + watch, battery 10% Charge

E-Field Measurement (15cm)						E-Field Measurement (20cm)
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)
127.8 + 326.5	Max E-field (V/m)	0.0006	0.0007	0.0006	0.0007	0.0005
127.8 + 326.5	Limit (V/m)	1	1	1	1	1
127.8 + 326.5	Margin (V/m)	-0.9994	-0.9993	-0.9994	-0.9993	-0.9995

H-Field Measurement (15cm)						H-Field Measurement (20cm)
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)
127.8 + 326.5	Max H-field (uT)	0.0015	0.0015	0.0015	0.0015	0.0015
127.8 + 326.5	Limit (A/m)	1	1	1	1	1
127.8 + 326.5	Margin (A/m)	-0.9985	-0.9985	-0.9985	-0.9985	-0.9985

Measurements were made from all sides and the top of the primary/client pair, with the 15/20cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Charging Mode with iPhone + watch, battery 50% Charge

E-Field Measurement (15cm)						E-Field Measurement (20cm)
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)
127.8 + 326.5	Max E-field (V/m)	0.0006	0.0007	0.0007	0.0007	0.0006
127.8 + 326.5	Limit (V/m)	1	1	1	1	1
127.8 + 326.5	Margin (V/m)	-0.9994	-0.9993	-0.9993	-0.9993	-0.9994

H-Field Measurement (15cm)						H-Field Measurement (20cm)
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)
127.8 + 326.5	Max H-field (uT)	0.0015	0.0016	0.0015	0.0015	0.0015
127.8 + 326.5	Limit (A/m)	1	1	1	1	1
127.8 + 326.5	Margin (A/m)	-0.9985	-0.9984	-0.9985	-0.9985	-0.9985

Measurements were made from all sides and the top of the primary/client pair, with the 15/20cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Charging Mode with iPhone + watch, battery 90% Charge

E-Field Measurement (15cm)						E-Field Measurement (20cm)
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)
127.8 + 326.5	Max E-field (V/m)	0.0007	0.0007	0.0007	0.0008	0.0007
127.8 + 326.5	Limit (V/m)	1	1	1	1	1
127.8 + 326.5	Margin (V/m)	-0.9993	-0.9993	-0.9993	-0.9992	-0.9993

H-Field Measurement (15cm)						H-Field Measurement (20cm)
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)
127.8 + 326.5	Max H-field (uT)	0.0016	0.0016	0.0016	0.0016	0.0016
127.8 + 326.5	Limit (A/m)	1	1	1	1	1
127.8 + 326.5	Margin (A/m)	-0.9984	-0.9984	-0.9984	-0.9984	-0.9984

Measurements were made from all sides and the top of the primary/client pair, with the 15/20cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

For 127.8kHz + 326.5kHz (Standby Mode)

Standby Mode

E-Field Measurement (15cm)						E-Field Measurement (20cm)
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)
127.8 + 326.5	Max E-field (V/m)	0.4100	0.4400	0.4300	0.5100	0.3500
127.8 + 326.5	Limit (V/m)	1842	1842	1842	1842	1842
127.8 + 326.5	Margin (V/m)	-1841.5900	-1841.5600	-1841.5700	-1841.4900	-1841.6500
127.8 + 326.5	50 % Limit (V/m)	921	921	921	921	921
127.8 + 326.5	50 % Margin (V/m)	-920.5900	-920.5600	-920.5700	-920.4900	-920.6500

H-Field Measurement (15cm)						H-Field Measurement (20cm)
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)
127.8 + 326.5	Max H-field (uT)	0.0560	0.0580	0.0560	0.0550	0.0570
127.8 + 326.5	Max H-field (A/m)	0.0448	0.0464	0.0448	0.0440	0.0456
127.8 + 326.5	Limit (A/m)	127.54	127.54	127.54	127.54	127.54
127.8 + 326.5	Margin (A/m)	-127.4952	-127.4936	-127.4952	-127.4960	-127.4944
127.8 + 326.5	50 % Limit (A/m)	63.77	63.77	63.77	63.77	63.77
127.8 + 326.5	50 % Margin (A/m)	-63.7252	-63.7236	-63.7252	-63.7260	-63.7244

Measurements were made from all sides and the top of the primary/client pair, with the 15/20cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

5. Photographs of the Test Configuration

Please refer to the attached file (Test Setup Photo).

--- END ---