



May 25, 2004

Mr. Brian W. Jones
RELM Wireless Incorporated
DBA: BK Radio
7100 Technology Drive
West Melbourne, FL 32904

Dear Mr. Jones:

Enclosed please find RELM Wireless Incorporated's file copy of the FCC Parts 22, 74, and 90 Certification Report for the Model DPHX51.

RELM Wireless Incorporated should expect to receive a certification grant for this product within the next 8-12 weeks.

If you have any questions, please don't hesitate to call. Thank you for your business.

Sincerely,

A handwritten signature in black ink, appearing to read 'L. Feudi', with a stylized flourish at the end.

Louis A. Feudi
Operations Manager



**RELM Wireless Incorporated
FCC Parts 22, 74, and 90, Certification Application
Model DPHX51**

**UST Project No: 04-0043
May 25, 2004**

MEASUREMENT/TECHNICAL REPORT

COMPANY NAME: **RELM Wireless Incorporated**MODEL: **DPHX51**FCC ID: **K95DPHX51**DATE: **May 25, 2004**

This report concerns (check one): Original grant X
Class II change _____

Equipment type: **VHF Transceiver**Deferred grant requested per 47 CFR 0.457(d)(1)(ii)? yes _____ No XIf yes, defer until: _____
dateN.A. agrees to notify the Commission by N.A.
date

of the intended date of announcement of the product so that the grant can be issued on that date.

Report prepared by:

United States Technologies, Inc.
3505 Francis Circle
Alpharetta, GA 30004

Phone Number: (770) 740-0717
Fax Number: (770) 740-1508

TABLE OF CONTENTS

SECTION 1

GENERAL INFORMATION

- 1.1 Product Description
- 1.2 Related Submittal(s)

SECTION 2

TESTS AND MEASUREMENTS

- 2.1 Configuration of Tested EUT
- 2.2 Test Facility
- 2.3 Test Equipment
- 2.4 Modifications
- 2.5 Antenna Description
- 2.6 RF Power Output
- 2.7 Modulation Characteristics
- 2.8 Occupied Bandwidth
- 2.9 Spurious Emissions at Antenna Terminals
- 2.10 Field Strength of Spurious Radiation
- 2.11 Frequency Stability
- 2.12 Transient Frequency Behavior Test

SECTION 3

LABELING INFORMATION

SECTION 4

BLOCK DIAGRAM(S)/ SCHEMATIC(S)

SECTION 5

PHOTOGRAPHS

SECTION 6

DETAILED RF TECHNICAL INFORMATION

SECTION 7

USER'S MANUAL

SECTION 8

SAR EVALUATION

LIST OF FIGURES AND TABLES

FIGURES

- 1) Test Configuration
- 2) Photograph(s) for Spurious Emissions
- 3) Modulation Characteristics
- 4) Occupied Bandwidth
- 5-11) Spurious Emissions at Antenna Terminals

TABLES

- 1) EUT and Peripherals
- 2) Test Instruments
- 3) RF Power Output
- 4) Field Strength of Spurious Emissions
- 5) Radiated Emissions

SECTION 1

GENERAL INFORMATION

GENERAL INFORMATION

1.1 Product Description

The Equipment Under Test (EUT) is a RELM Wireless Incorporated's Model DPHX51. The EUT is a VHF Portable transceiver which operates within the 136 MHz to 174 MHz range.

1.2 Related Submittal(s)/Grant(s)

The EUT will be used with part of a system to send/receive data. The transceiver presented in this report will be used with other like transceivers.

The EUT is subject to the following authorizations:

- a) Certification as a transmitter as specified by Parts 22, 74, and 90.

The information contained in this report is presented for the certification authorization(s) for the EUT.

SECTION 2

TESTS AND MEASUREMENTS

TEST AND MEASUREMENTS

2.1 Configuration of Tested System

Prepared in accordance with the requirements of the FCC Rules and Regulations Part 2. All measurements are peak unless stated otherwise. The video filter associated with the spectrum analyzer was off throughout the evaluation process. Interconnecting cables were manipulated as necessary to maximize emissions. A block diagram of the tested system is shown in Figure 1. Test configuration photographs for spurious emissions are shown in Figure 2.

The sample used for testing was received by U.S. Technologies on March 4, 2004 in good condition.

2.2 Test Facility

Unless otherwise stated, testing was performed at US Tech's measurement facility at 3505 Francis Circle, Alpharetta, GA. Conducted and digital device testing was performed at US Tech's measurement facility. This site has been fully described and registered by the FCC under Registration Number 91037. Additionally this site has also been fully described and submitted to Industry Canada (IC), and has been approved under file number IC2982.


2.3 Test Equipment

Table 2 describes test equipment used to evaluate this product.

2.4 Modifications

No modifications were made by US Tech to bring the EUT into compliance with FCC limits for the transmitter portion of the EUT.

FIGURE 1
TEST CONFIGURATION

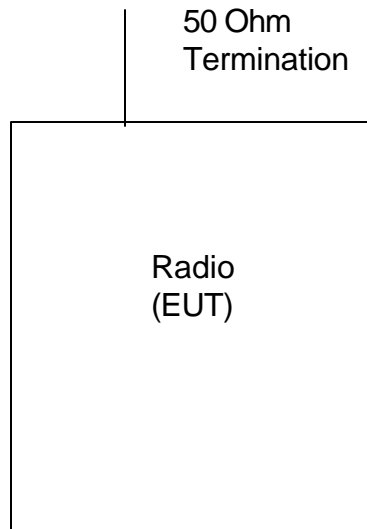

Test Date: March 23, 2004
UST Project: 04-0043
Customer: RELM Wireless Incorporated
Model: DPHX51

FIGURE 2a


Photograph(s) for Spurious Emissions (Front)



Test Date: March 23, 2004
UST Project: 04-0043
Customer: RELM Wireless Incorporated
Model: DPHX51

FIGURE 2b

Photograph(s) for Spurious Emissions

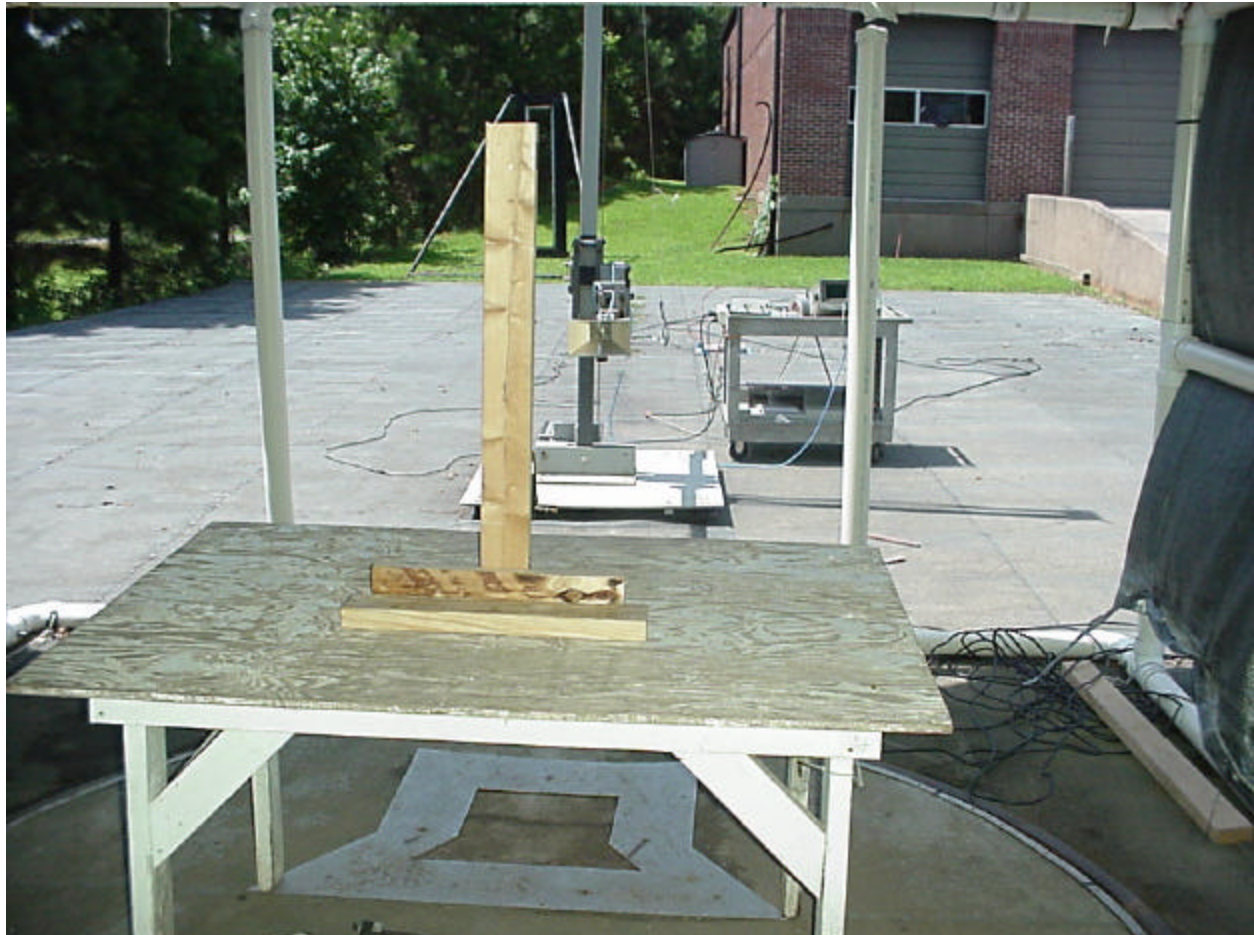

Test Date: March 23, 2004
UST Project: 04-0043
Customer: RELM Wireless Incorporated
Model: DPHX51

FIGURE 2c

Photograph(s) for Spurious Emissions



Test Date: March 23, 2004
UST Project: 04-0043
Customer: RELM Wireless Incorporated
Model: DPHX51

FIGURE 2d

Photograph(s) for Spurious Emissions



Test Date: March 23, 2004
UST Project: 04-0043
Customer: RELM Wireless Incorporated
Model: DPHX51

FIGURE 2e

Photograph(s) for Spurious Emissions



Test Date: March 23, 2004
UST Project: 04-0043
Customer: RELM Wireless Incorporated
Model: DPHX51

FIGURE 2f

Photograph(s) for Spurious Emissions

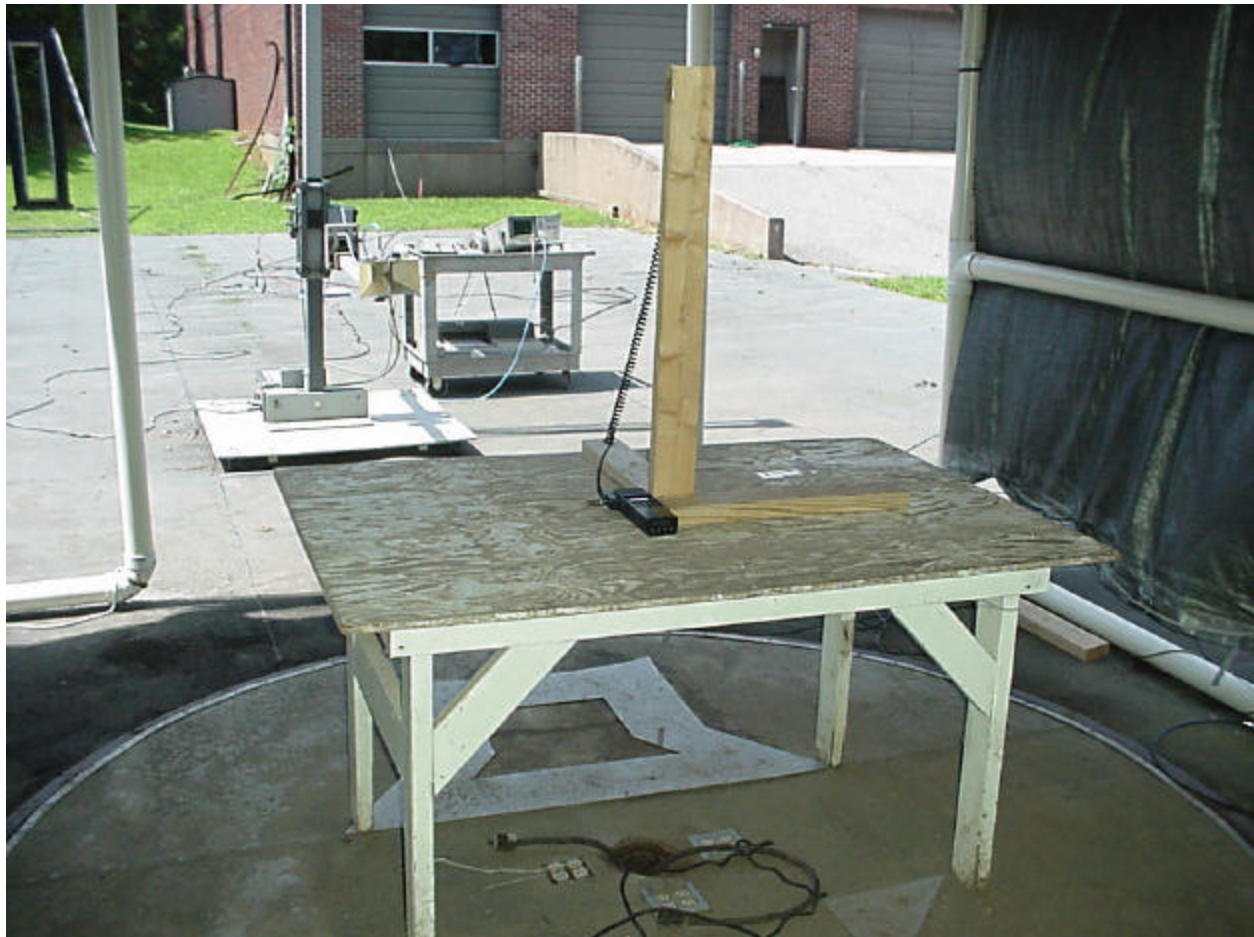


TABLE 1
EUT and Peripherals

PERIPHERAL MANUFACTURER	MODEL NUMBER	SERIAL NUMBER	FCC ID:	CABLES P/D
Radio (EUT) RELM Wireless Incorporated	DPHX51	DPH5102XX	K95DPHX51 (Pending)	None

TABLE 2
TEST INSTRUMENTS

TYPE	MANUFACTURER	MODEL	SN.	DATE OF LAST CALIBRATION
SPECTRUM ANALYZER	HEWLETT-PACKARD	8593E	3205A00124	2/19/04
HORN ANTENNA	EMCO	3115	3723	1/20/04
LOG PERIODIC ANTENNA	EMCO	3146	9110-3600	7/11/03
PLOTTER	HEWLETT-PACKARD	7475A	2325A65394	N/A
SIGNAL GENERATOR	HEWLETT-PACKARD	8648B	3642U01679	10/13/03
ROBERTS DIPOLE	CDI	A100 Element #3	None	04/26/04
ROBERTS DIPOLE	CDI	A100 Element #4	None	04/26/04

2.5 Antenna Description

Antenna 1:

Manufacturer: Centurion

Type: $\frac{1}{4}$ Wave Dipole

Model Number: LAA0820 (Short)

Gain: <1.6 dBi

Connector: SMA

Antenna 2:

Manufacturer: Centurion

Type: $\frac{1}{4}$ Wave Dipole

Model Number: LAA0818 (Long))

Gain: <1.6 dBi

Connector: SMA

2.6 RF Power Output (FCC Section 2.1046)

2.7 Modulation Characteristics (FCC Section 2.1047)

2.8 Occupied Bandwidth (FCC Section 2.1049)

**Provided By Relm Wireless Incorporated in separate document
(04-0043.Relm Tests.PDF)**

2.9 Spurious Emissions at Antenna Terminals (FCC Section 2.1051)

Spurious emissions appearing at the antenna terminals were measured with a spectrum analyzer by connecting the spectrum analyzer directly via a short cable to the antenna output terminals or across the antenna leads on the PCB as specified by the manufacturer. Results are shown in Figure 5a-5jj.

FCC Minimum Standard

FCC Part 22.359, 74.462, and 90.210 (25 kHz bandwidth only)

On any frequency removed from the center of the assigned channel by more than 250 percent at least:

Low: $43 + 10 \log (P_{\text{Watts}}) = 43 + 10 \log (6.15) = 50.9 \text{ dB}$
 Middle: $43 + 10 \log (P_{\text{Watts}}) = 43 + 10 \log (6.05) = 50.8 \text{ dB}$
 High: $43 + 10 \log (P_{\text{Watts}}) = 43 + 10 \log (6.05) = 50.8 \text{ dB}$

FCC Part 90.210 (12.5 kHz Bandwidth only)

On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 12.5 kHz at least:

Low: $50 + 10 \log (P_{\text{Watts}}) = 50 + 10 \log (6.15) = 57.9 \text{ dB}$
 Middle: $50 + 10 \log (P_{\text{Watts}}) = 50 + 10 \log (6.05) = 57.8 \text{ dB}$
 High: $50 + 10 \log (P_{\text{Watts}}) = 50 + 10 \log (6.05) = 57.8 \text{ dB}$

NOTE: In general, the worse case attenuation requirement shown above was applied.

Figure 5a
Spurious Emissions at Antenna Terminals
High Channel, Analog (12.5 kHz)

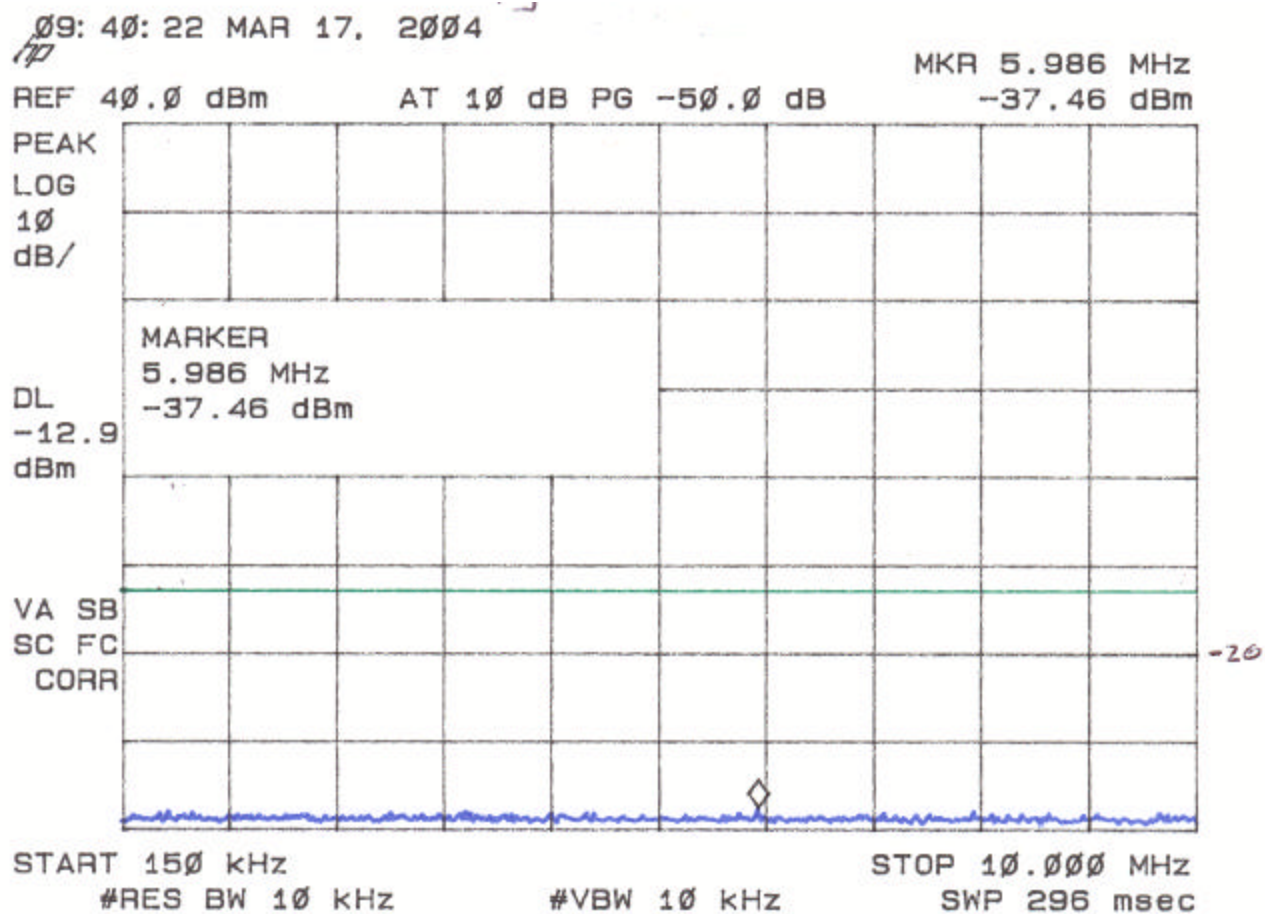


Figure 5b
Spurious Emissions at Antenna Terminals
High Channel, Analog (12.5 kHz)

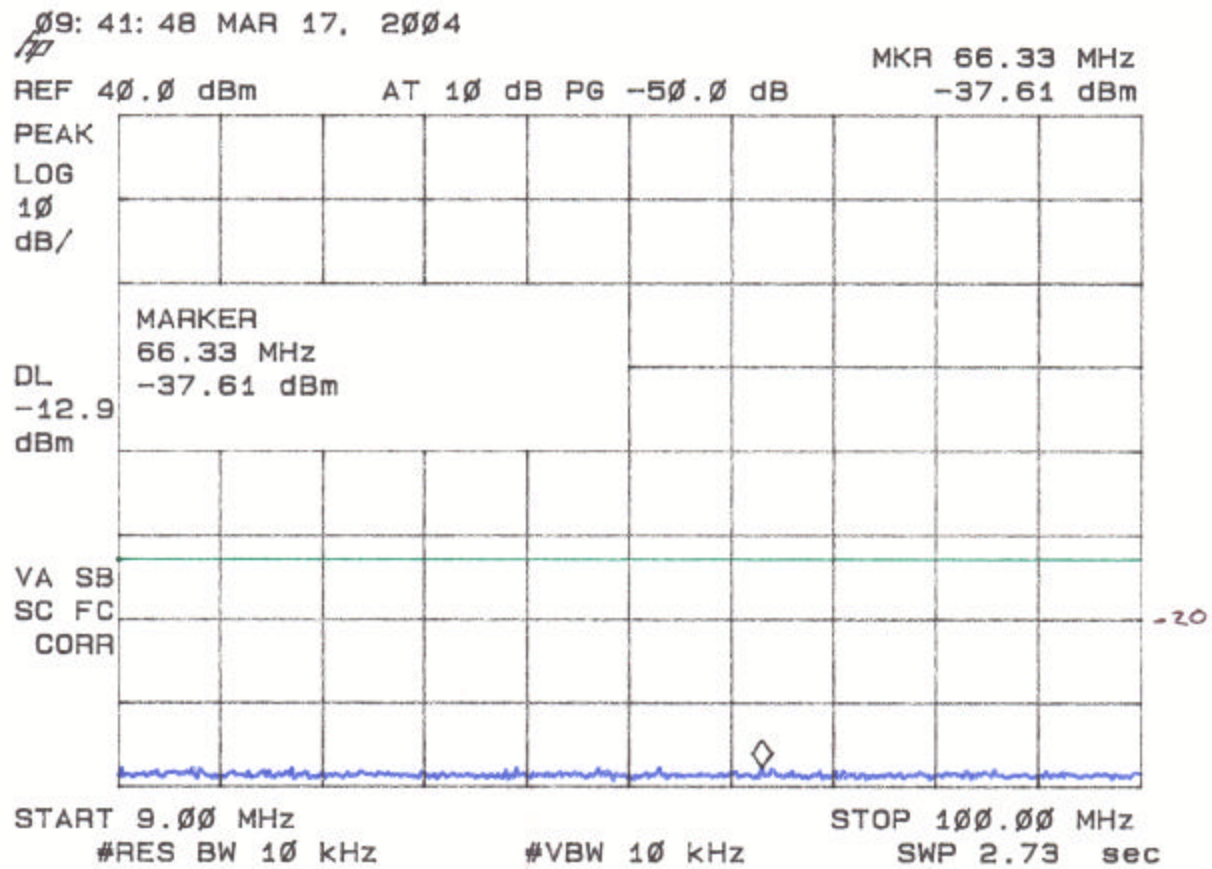


Figure 5c
Spurious Emissions at Antenna Terminals
High Channel, Analog (12.5 kHz)

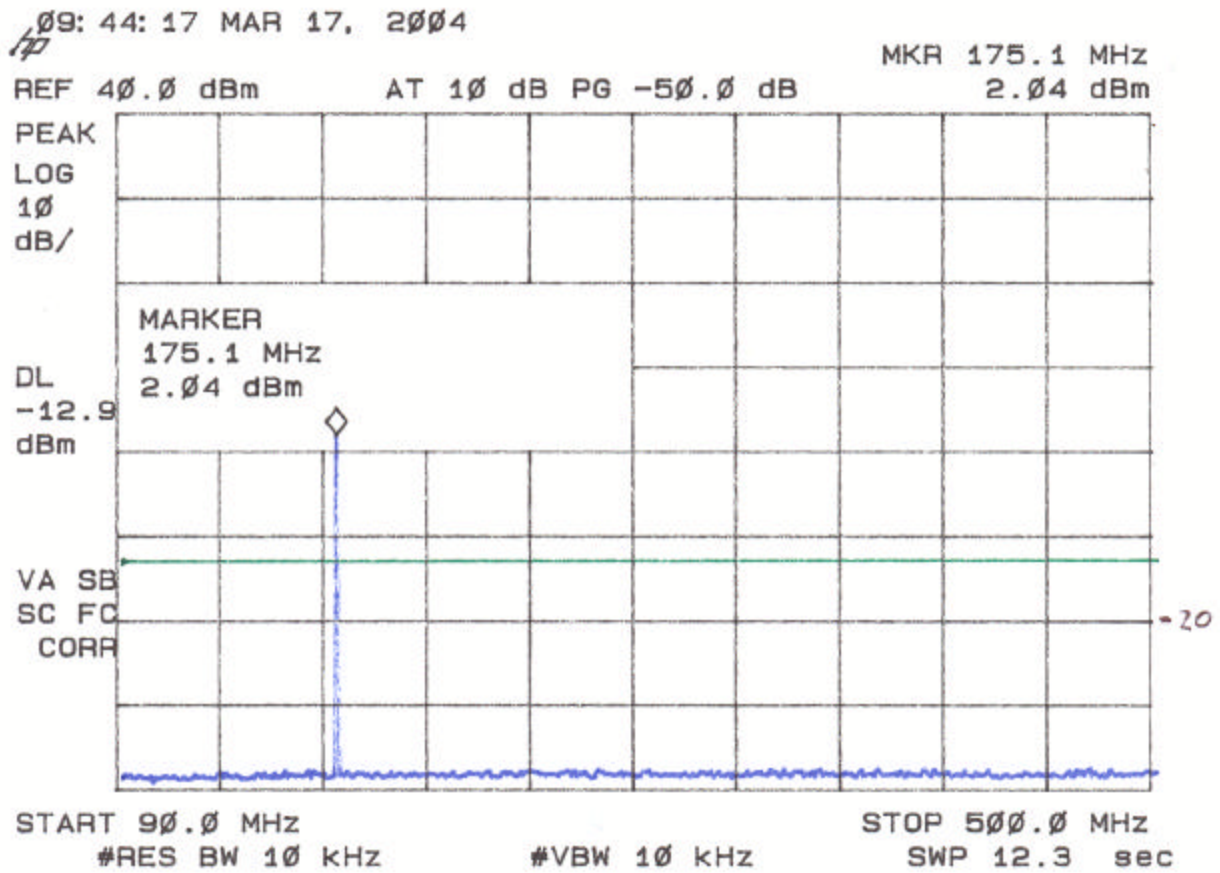


Figure 5d
Spurious Emissions at Antenna Terminals
High Channel, Analog (12.5 kHz)

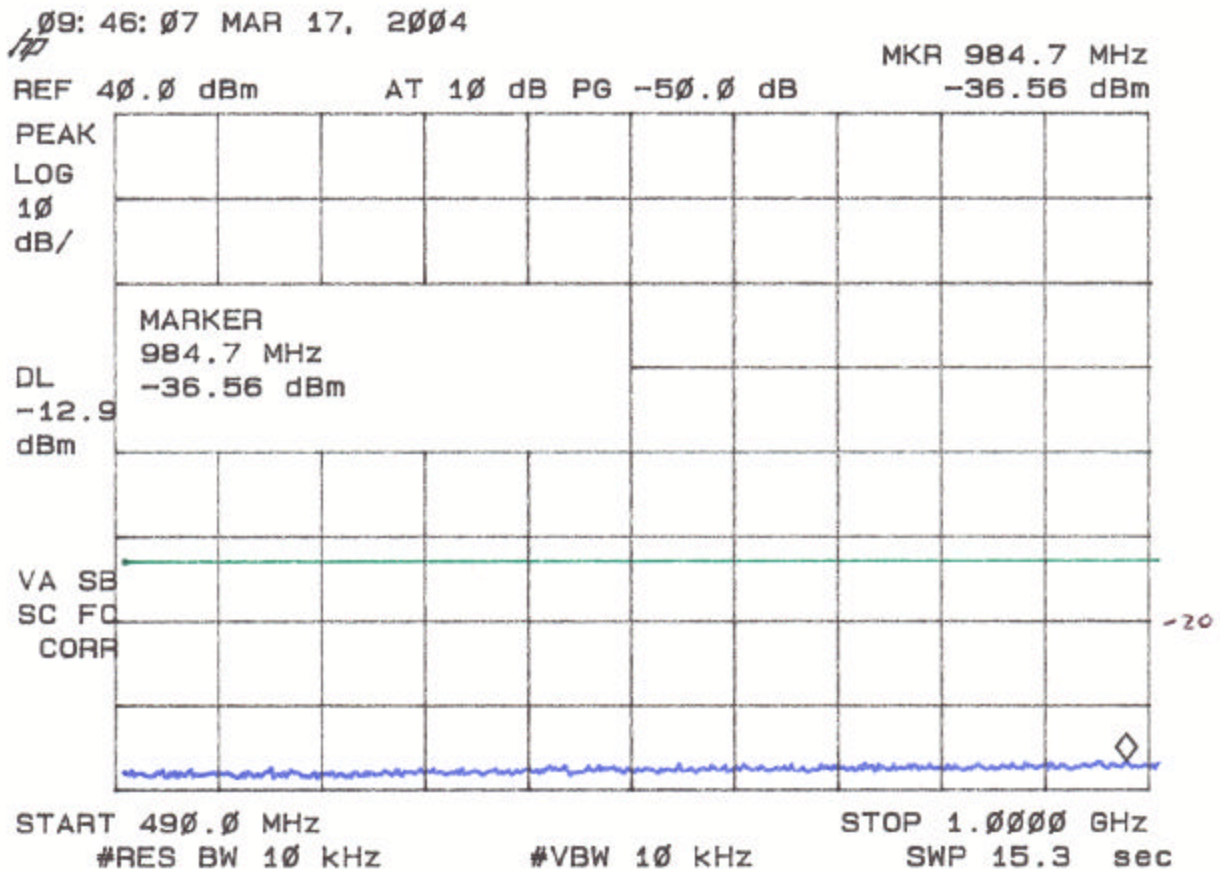


Figure 5e
Spurious Emissions at Antenna Terminals
High Channel, Analog (12.5 kHz)

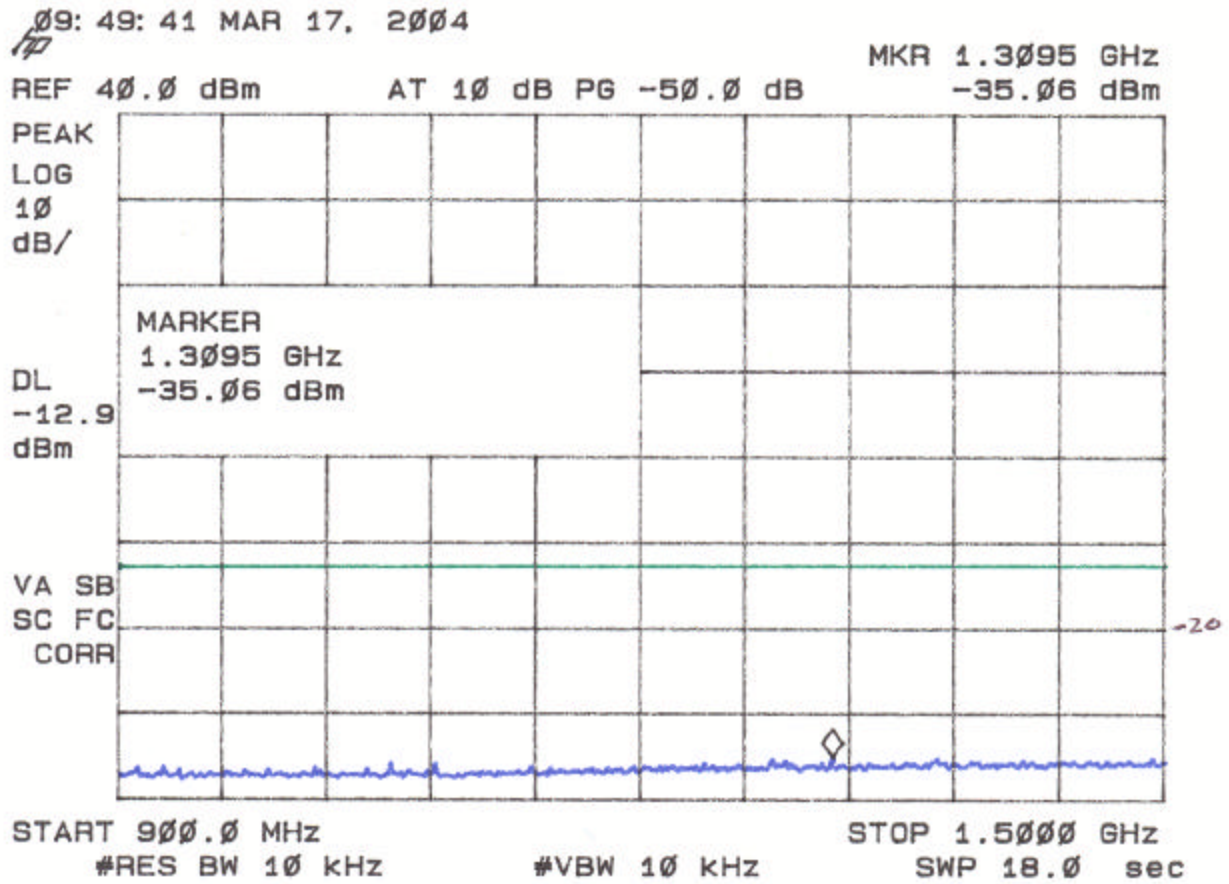


Figure 5f
Spurious Emissions at Antenna Terminals
High Channel, Analog (12.5 kHz)

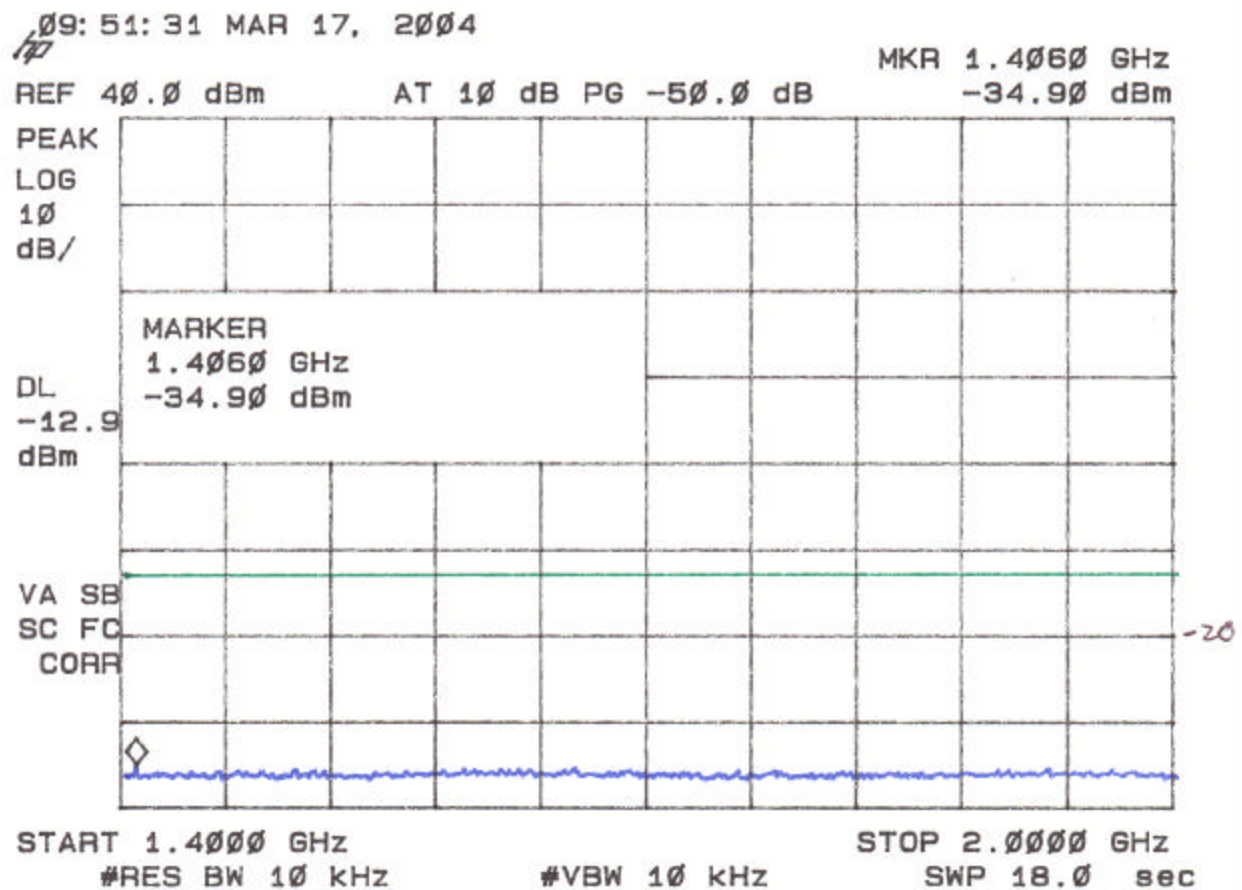


Figure 5g
Spurious Emissions at Antenna Terminals
High Channel, Analog (25 kHz)

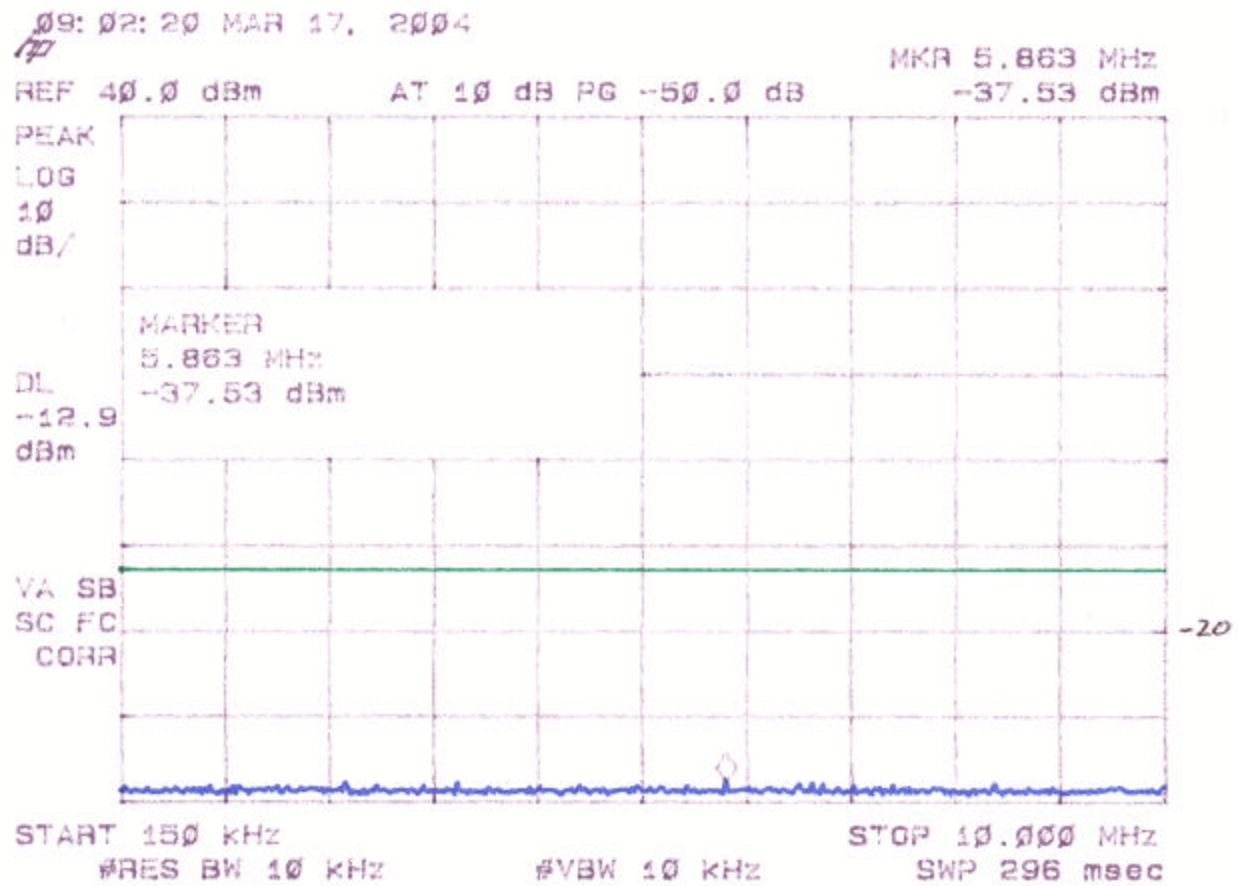


Figure 5h
Spurious Emissions at Antenna Terminals
High Channel, Analog (25 kHz)

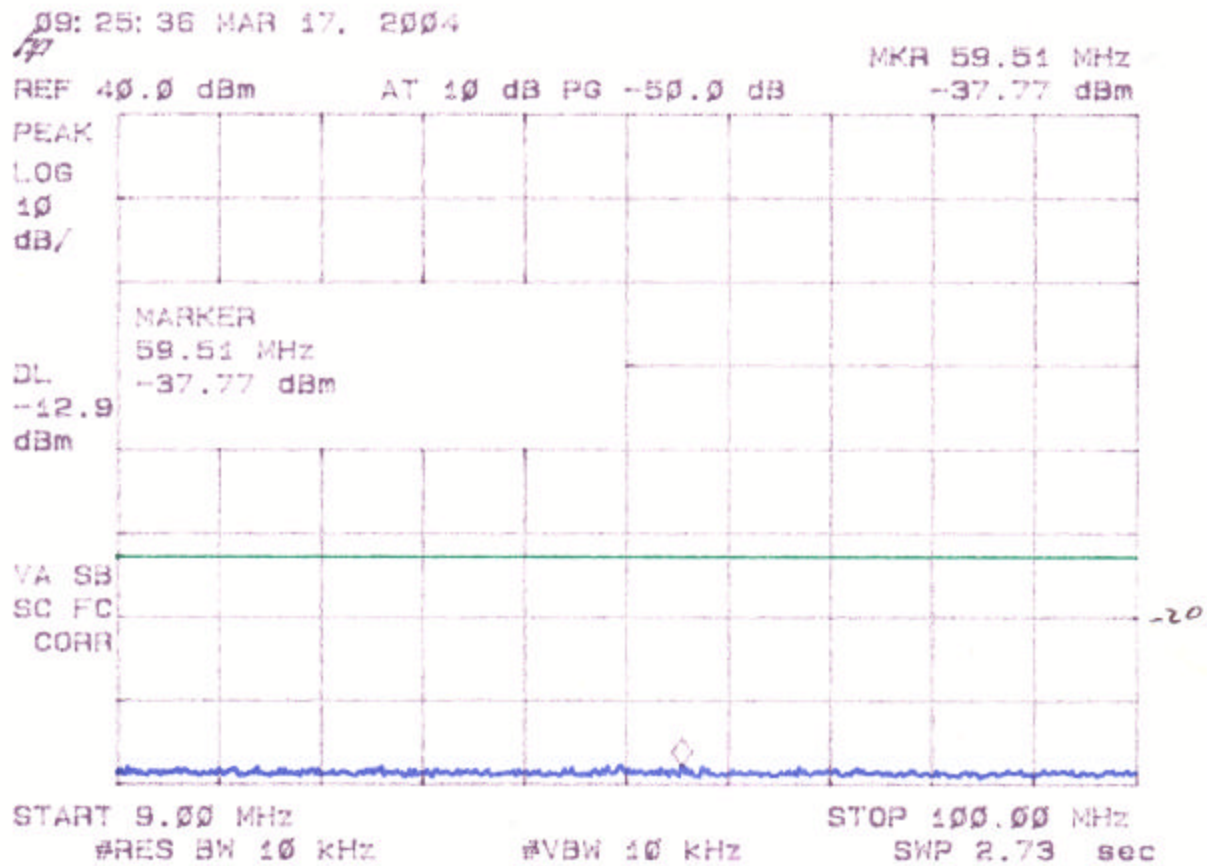


Figure 5i
Spurious Emissions at Antenna Terminals
High Channel, Analog (25 kHz)

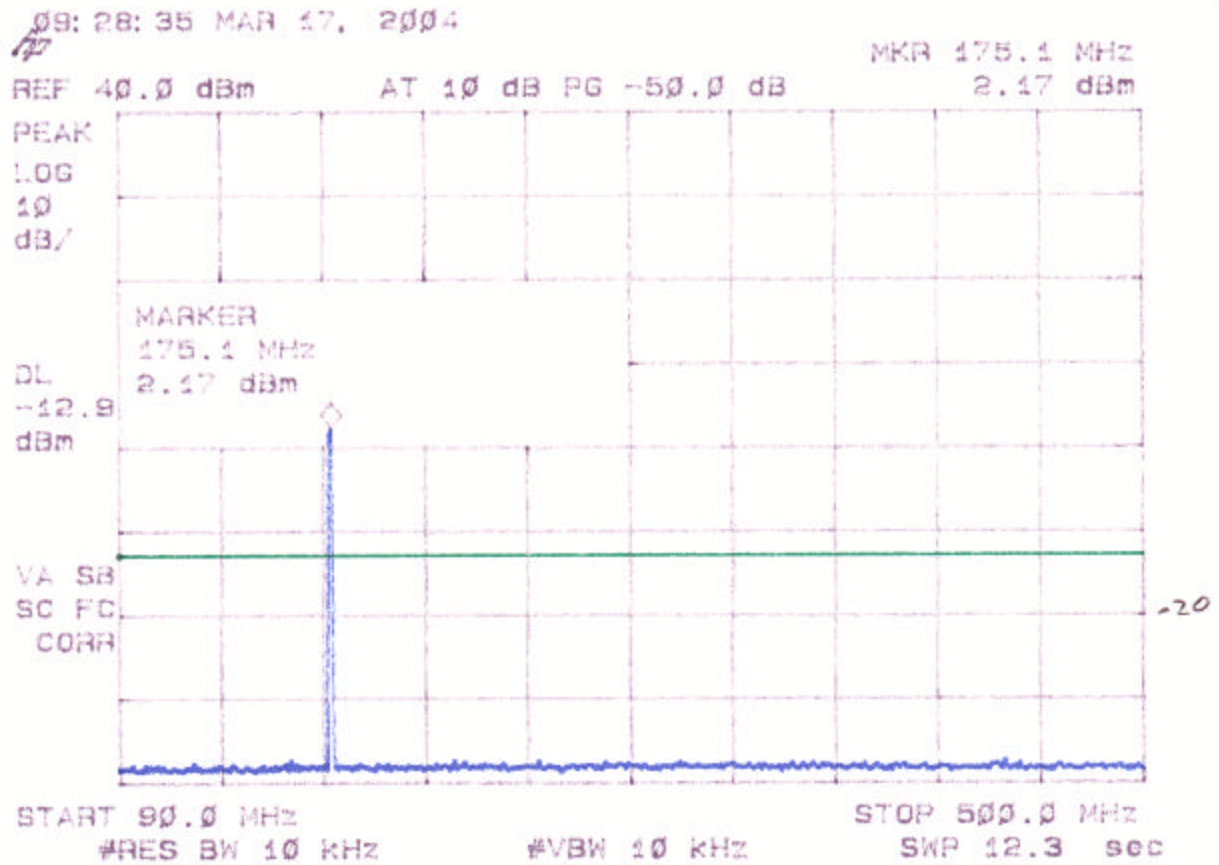


Figure 5j
Spurious Emissions at Antenna Terminals
High Channel, Analog (25 kHz)

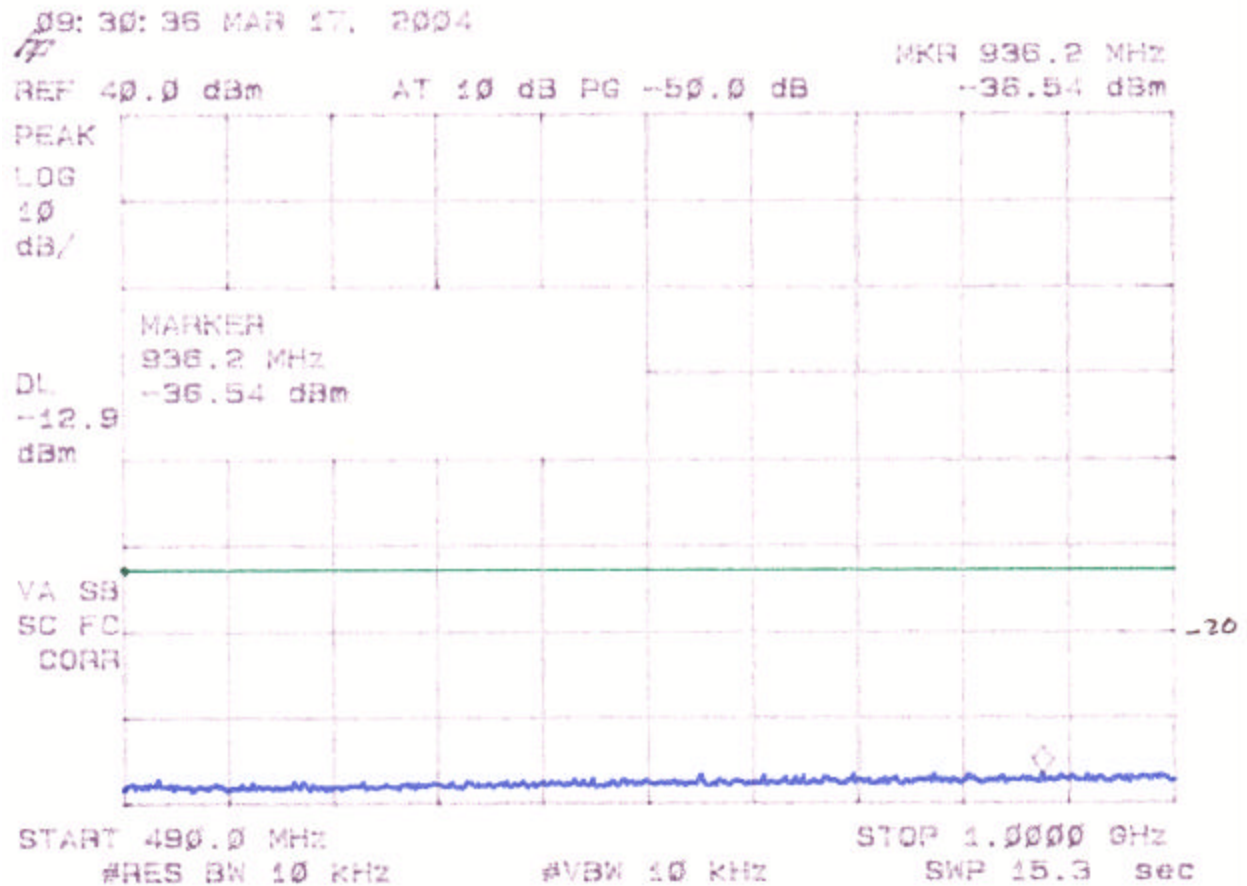


Figure 5k
Spurious Emissions at Antenna Terminals
High Channel, Analog (25 kHz)

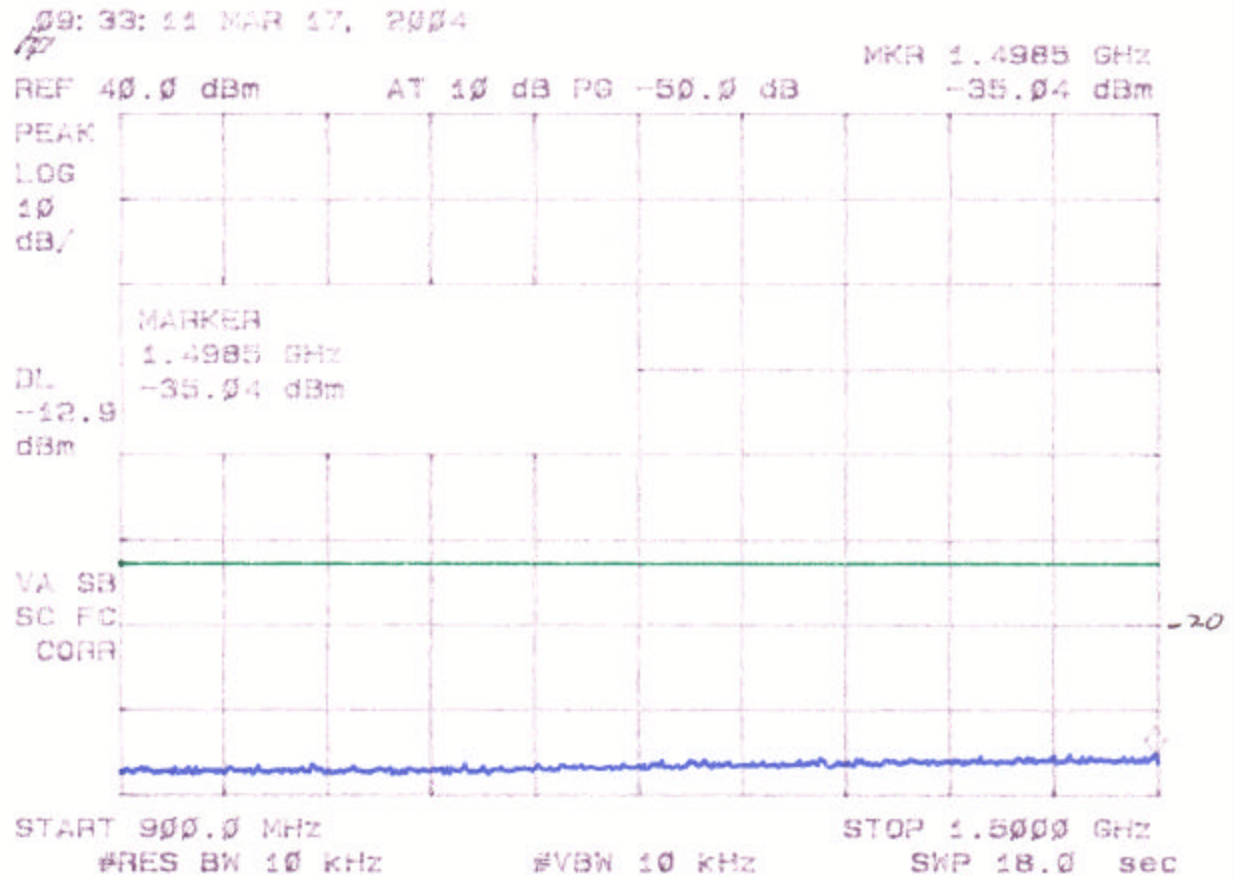


Figure 51
Spurious Emissions at Antenna Terminals
High Channel, Analog (25 kHz)

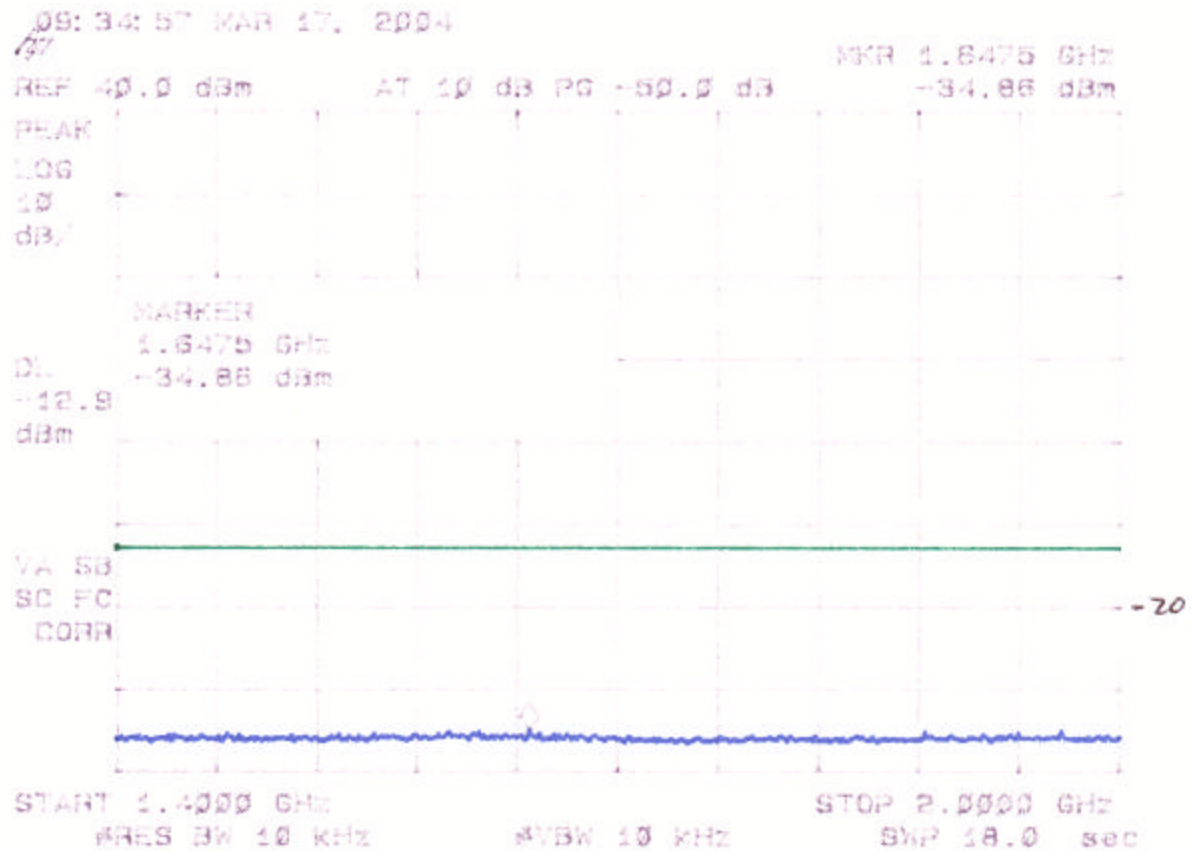


Figure 5m
Spurious Emissions at Antenna Terminals
Mid Channel, Analog (12.5 kHz)

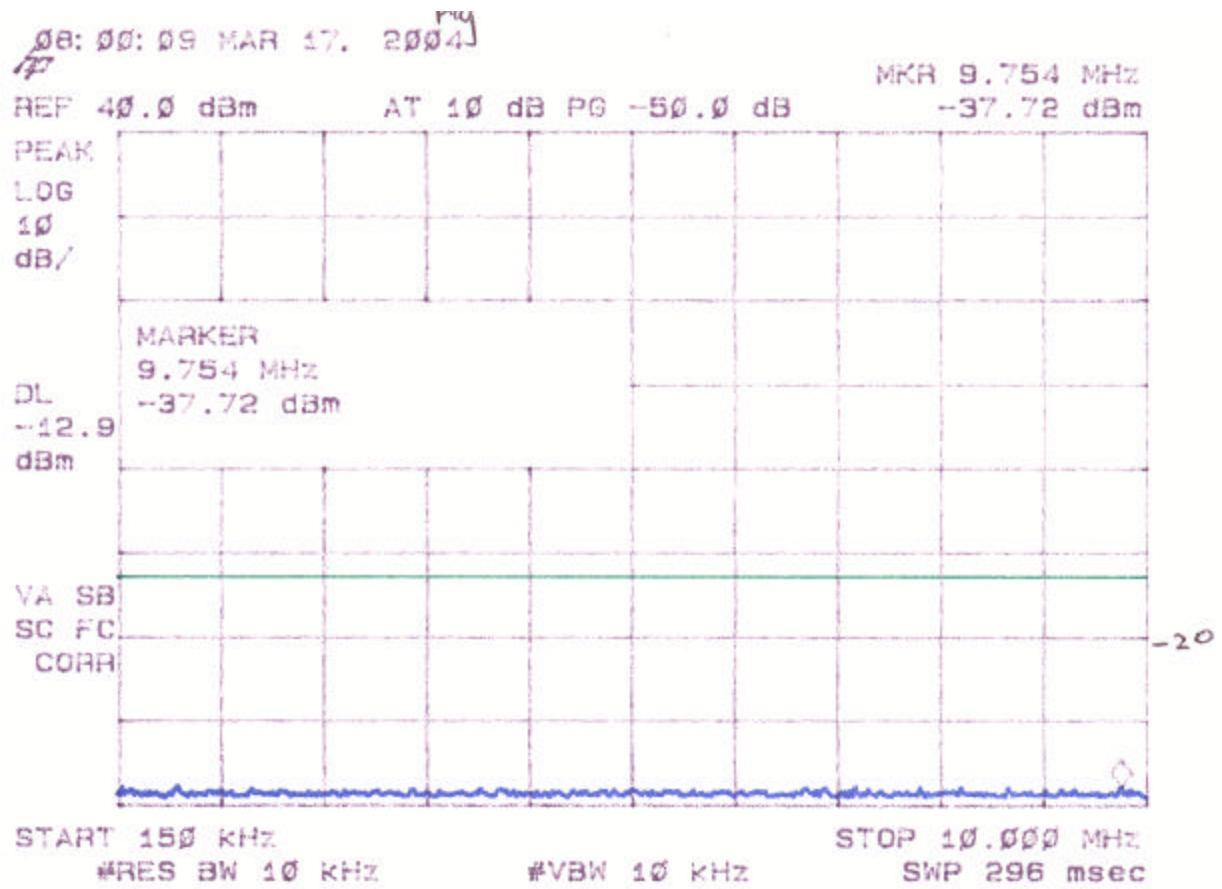


Figure 5n
Spurious Emissions at Antenna Terminals
Mid Channel, Analog (12.5 kHz)

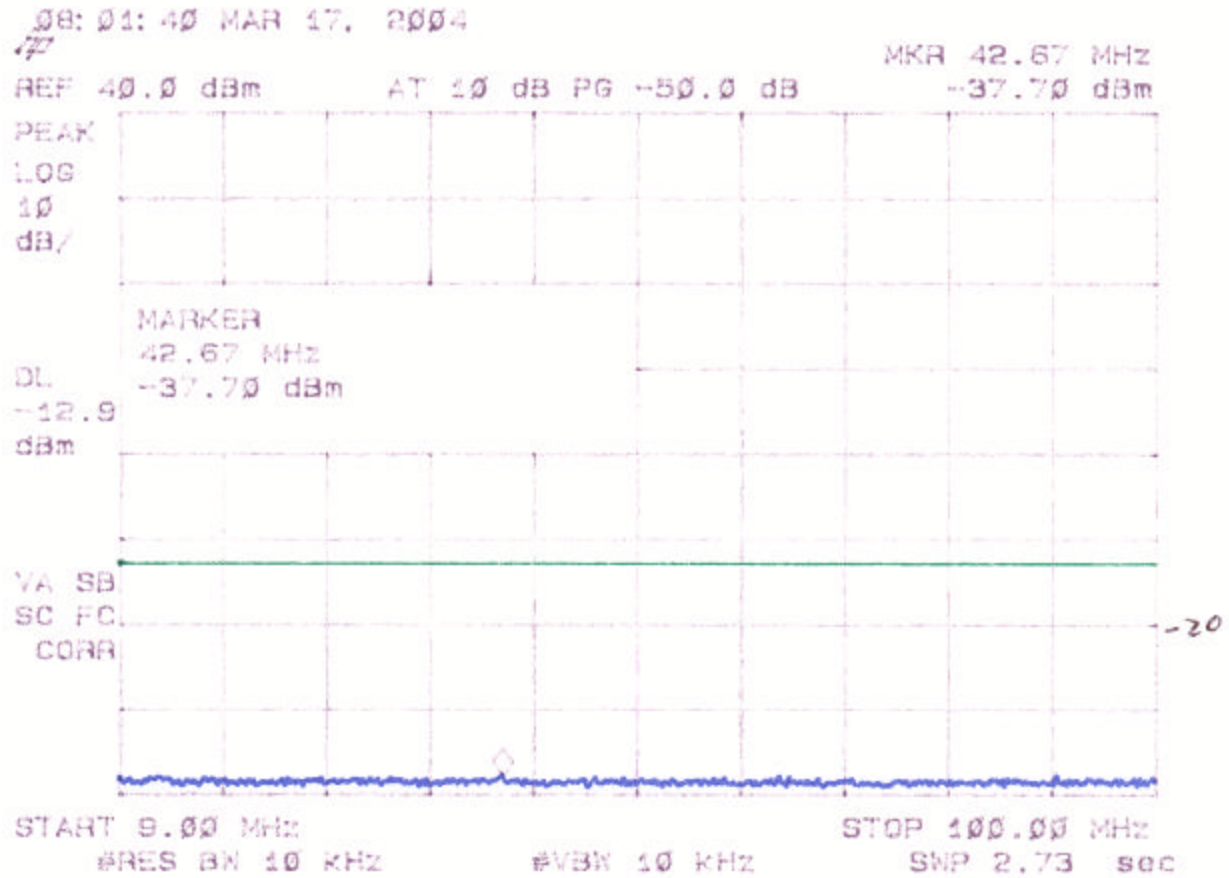


Figure 5o
Spurious Emissions at Antenna Terminals
Mid Channel, Analog (12.5 kHz)

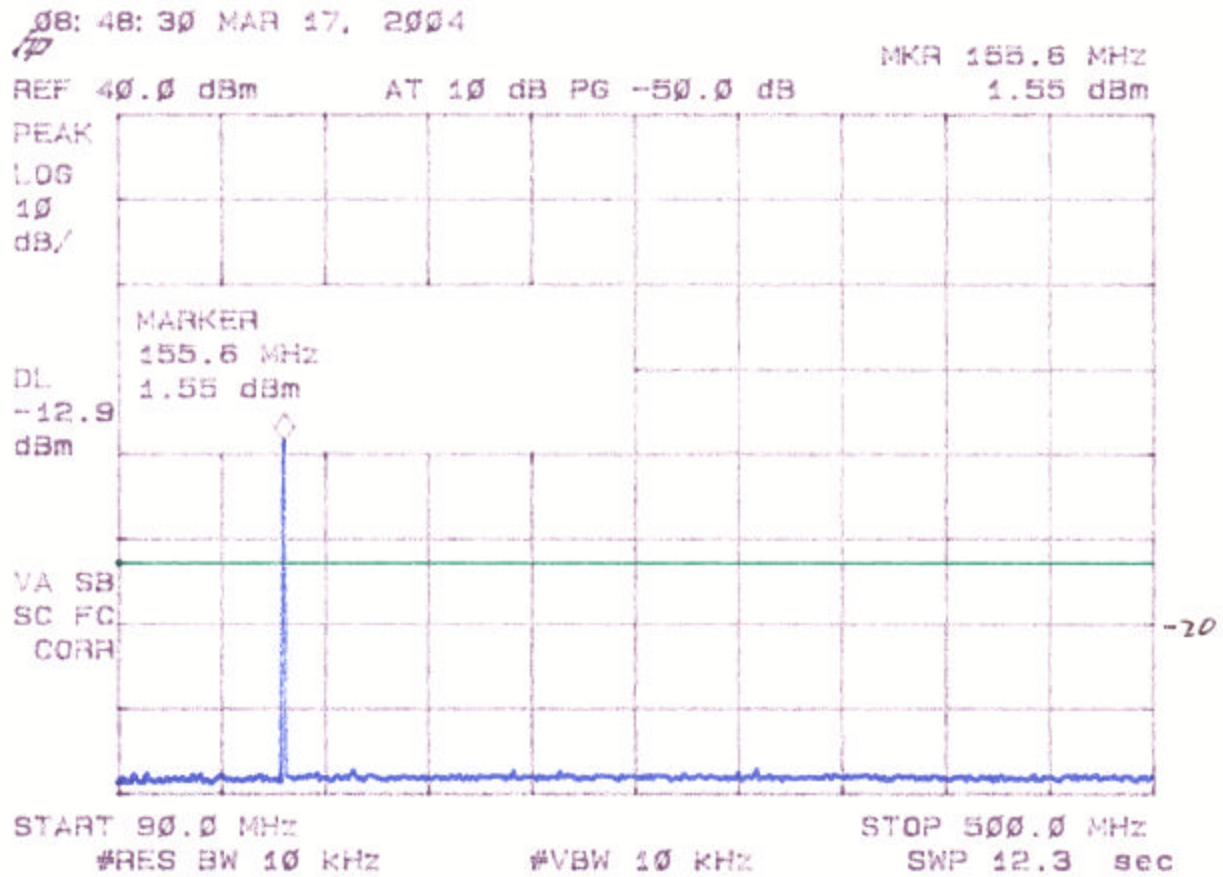


Figure 5p
Spurious Emissions at Antenna Terminals
Mid Channel, Analog (12.5 kHz)

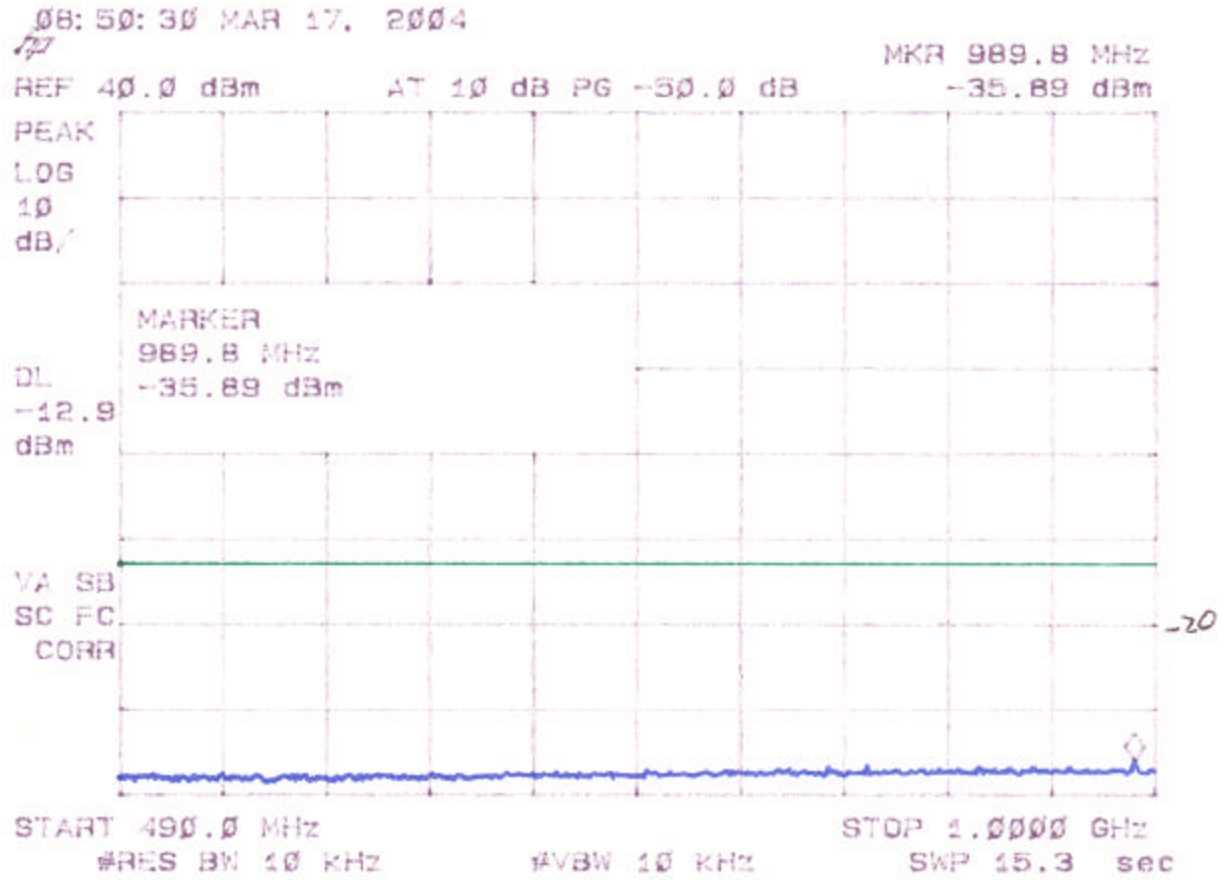


Figure 5q
Spurious Emissions at Antenna Terminals
Mid Channel, Analog (12.5 kHz)

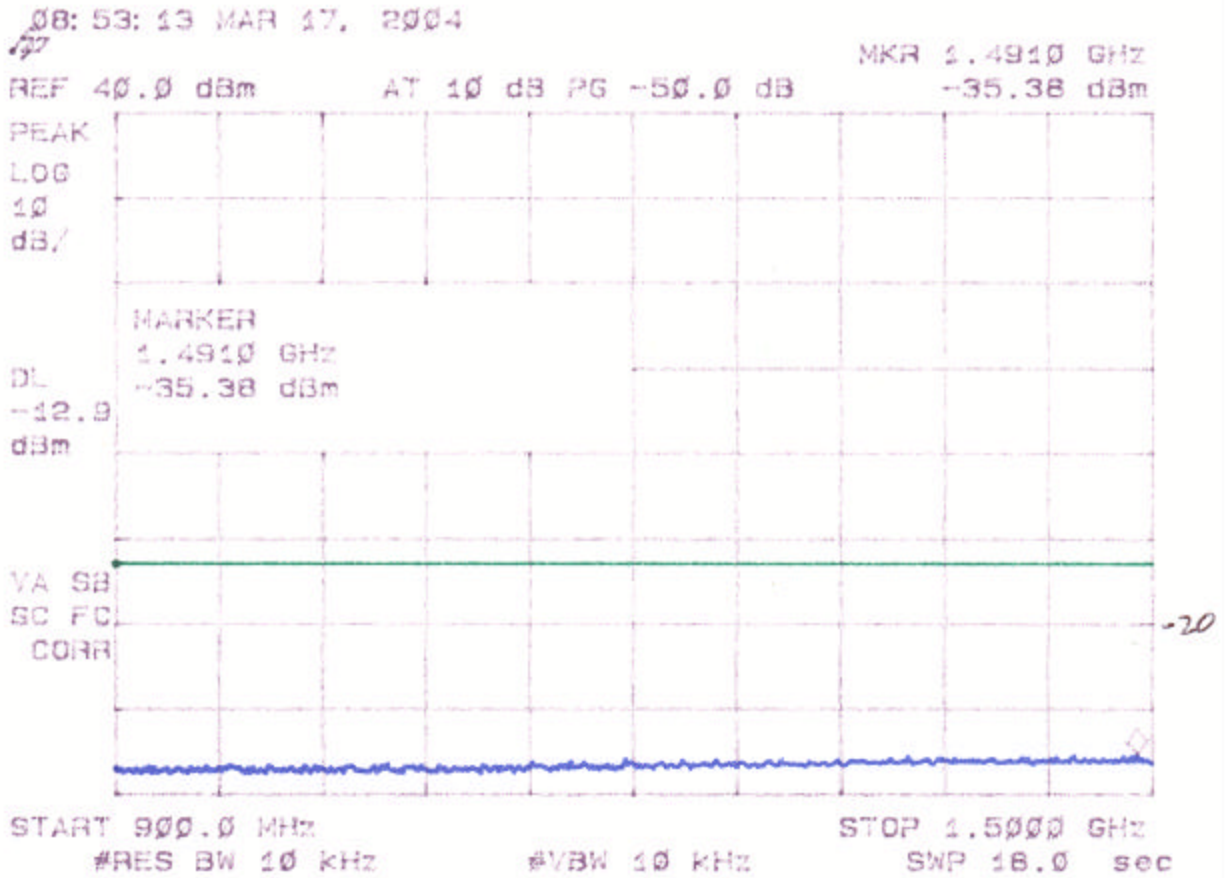


Figure 5r
Spurious Emissions at Antenna Terminals
Mid Channel, Analog (12.5 kHz)

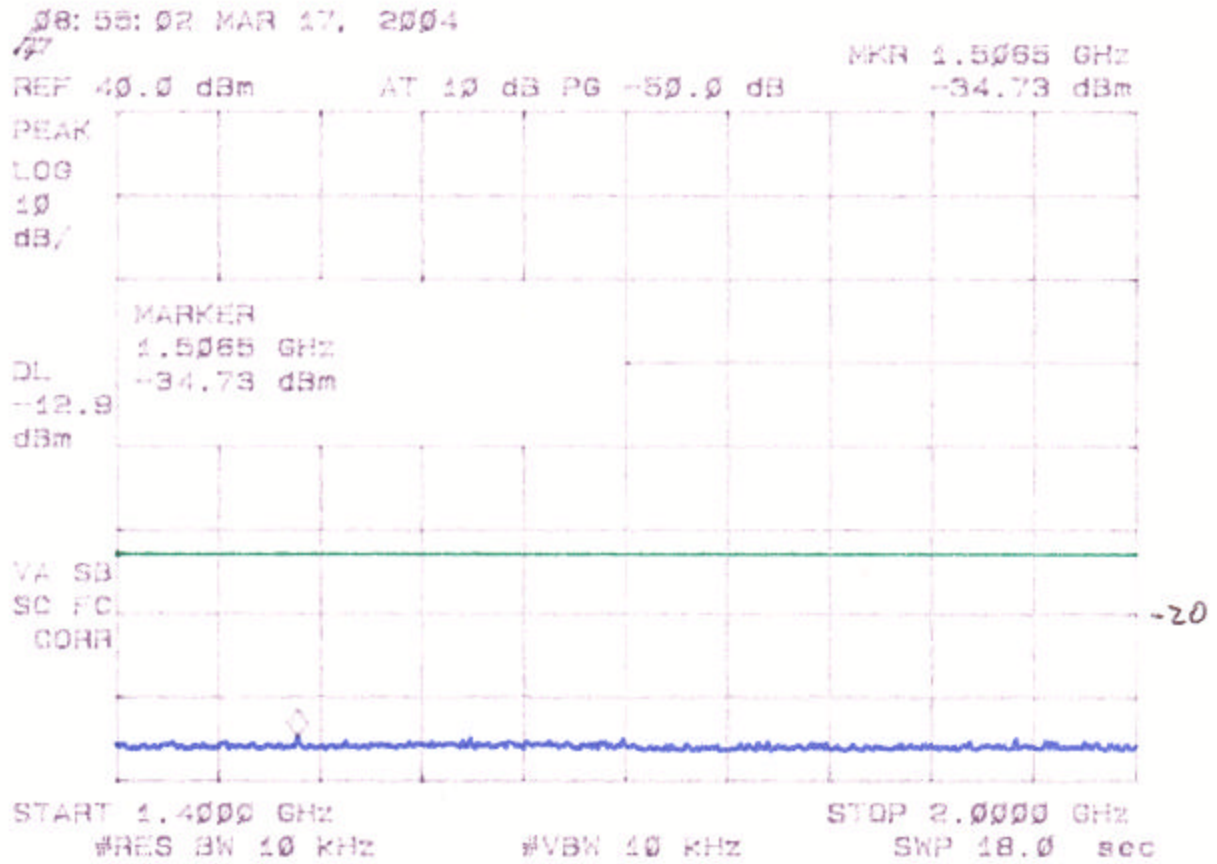


Figure 5s
Spurious Emissions at Antenna Terminals
Mid Channel, Analog (25 kHz)

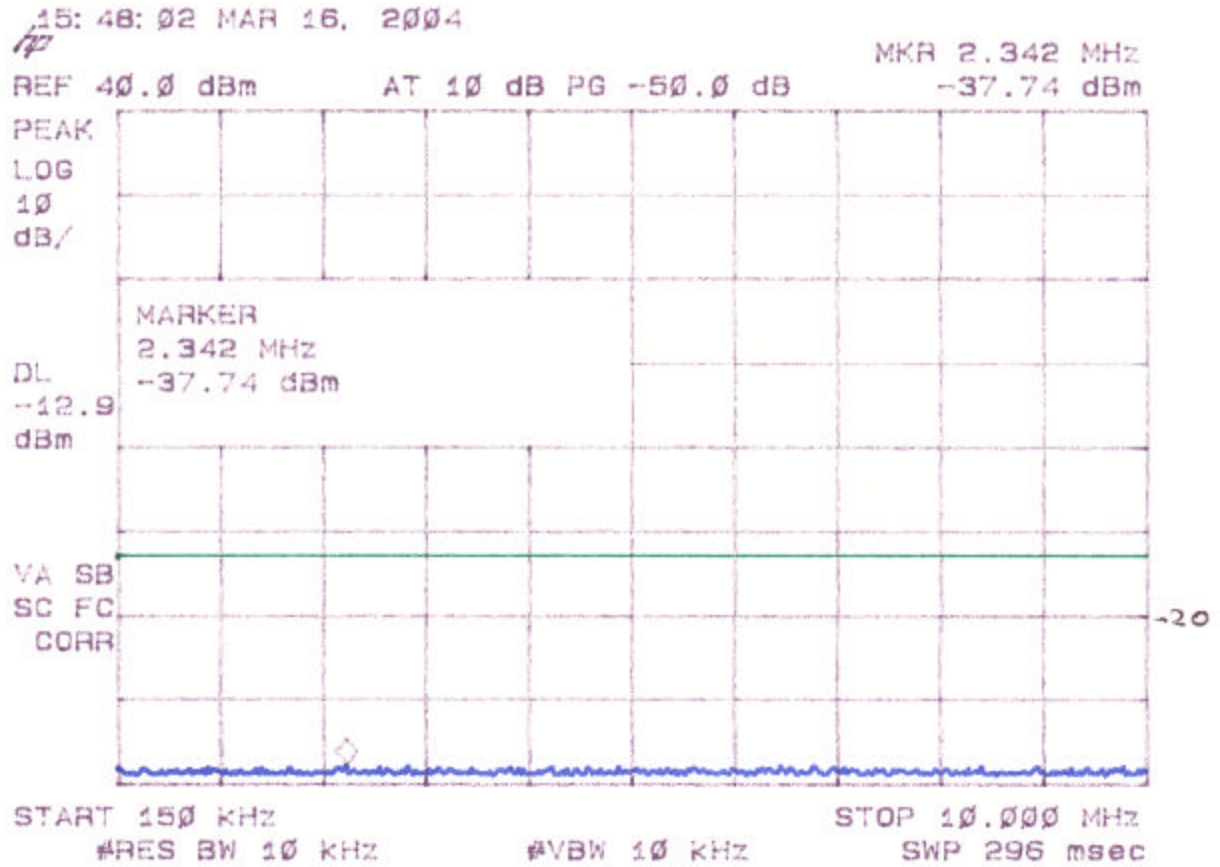


Figure 5t
Spurious Emissions at Antenna Terminals
Mid Channel, Analog (25 kHz)

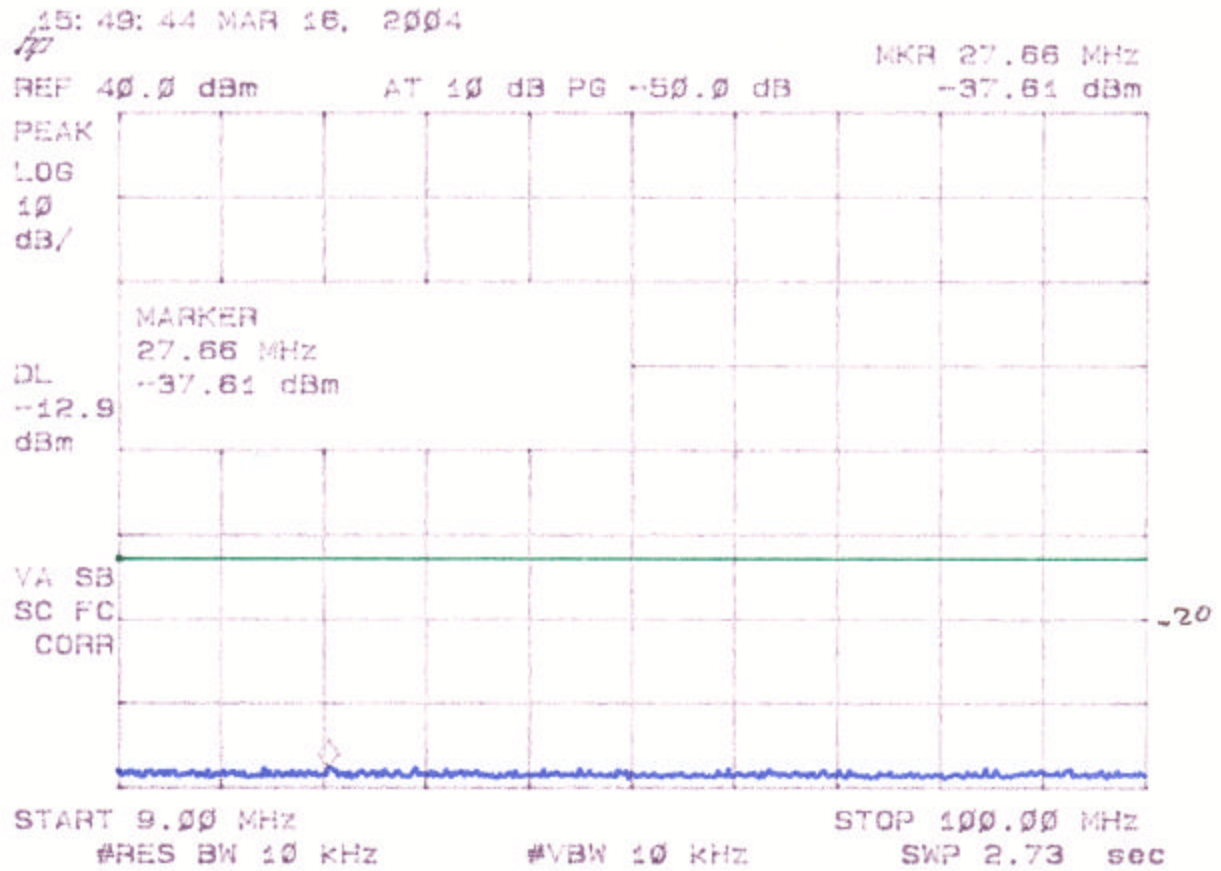


Figure 5u
Spurious Emissions at Antenna Terminals
Mid Channel, Analog (25 kHz)

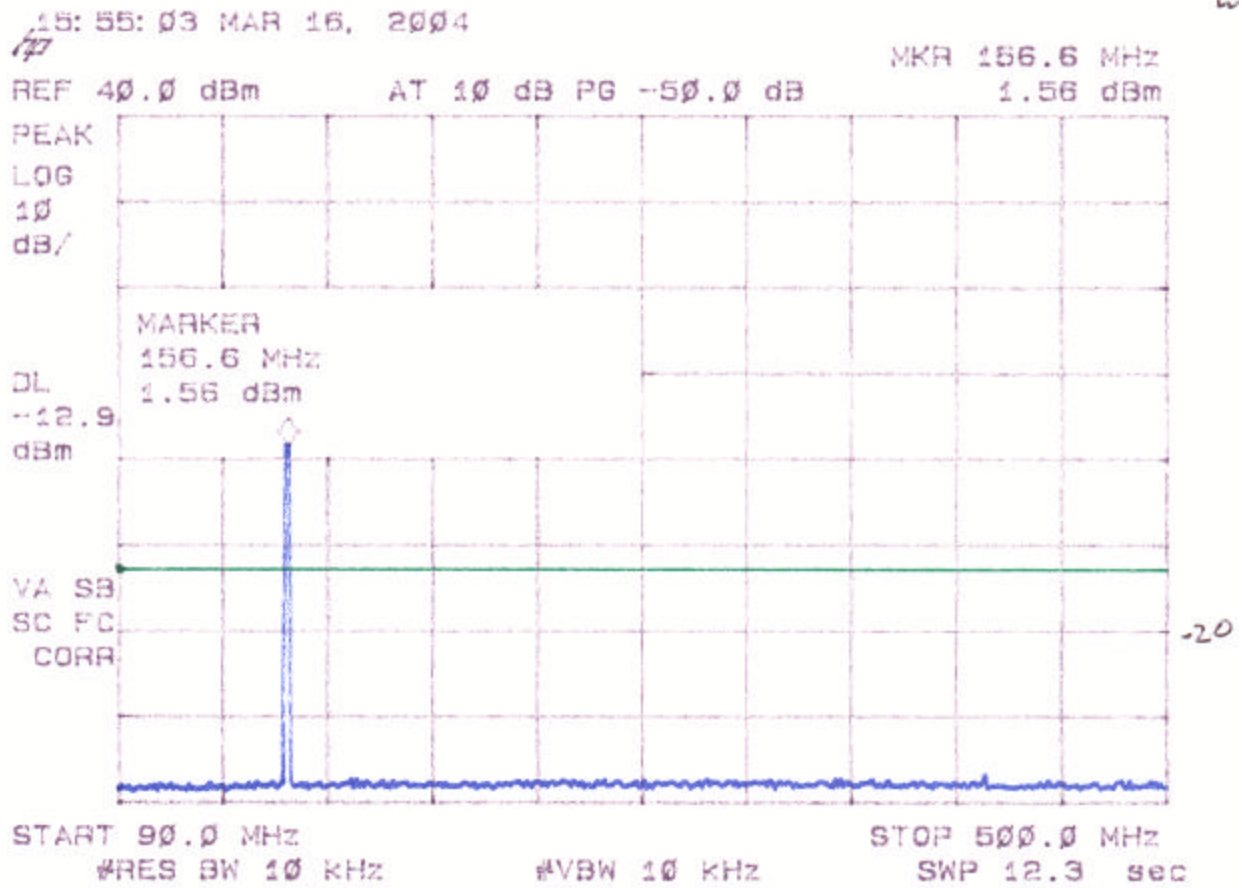


Figure 5v
Spurious Emissions at Antenna Terminals
Mid Channel, Analog (25 kHz)

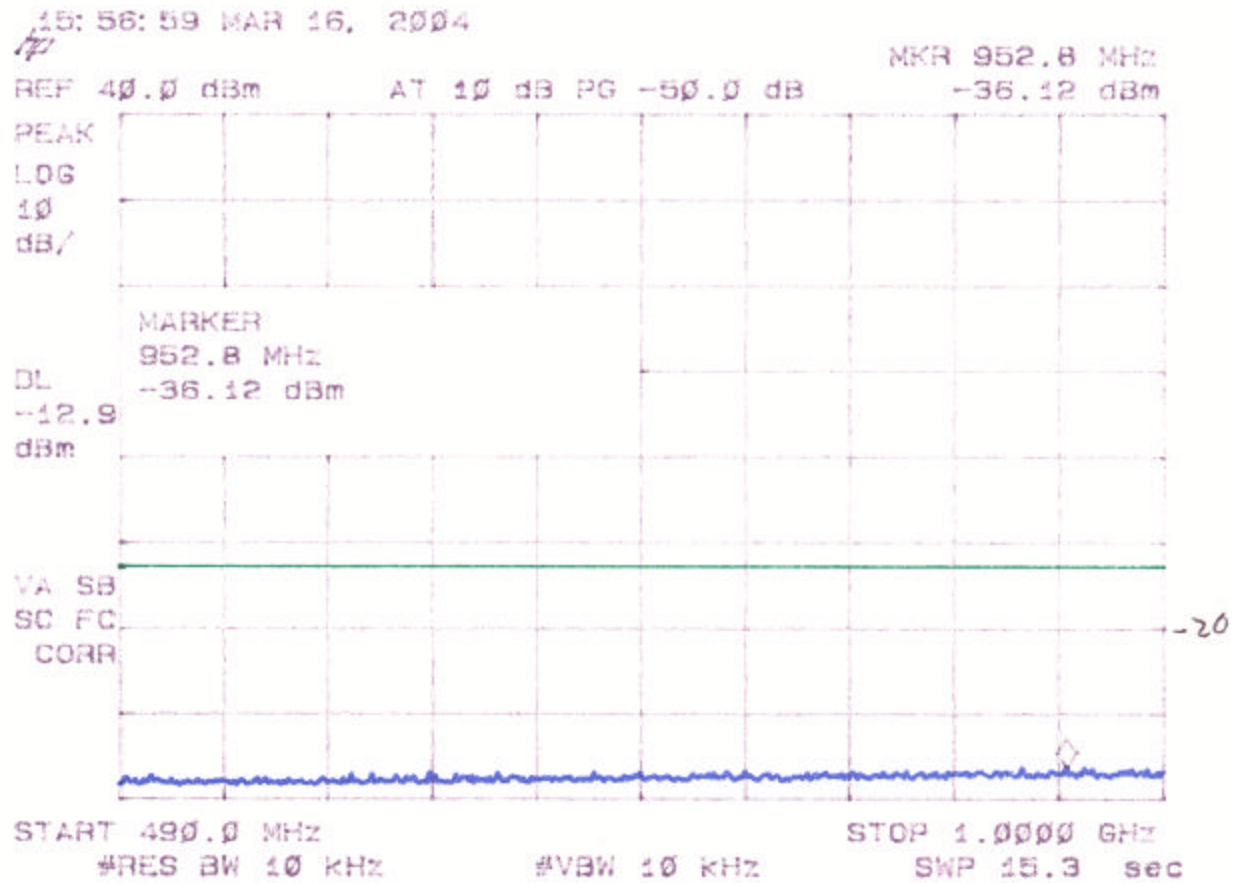


Figure 5w
Spurious Emissions at Antenna Terminals
Mid Channel, Analog (25 kHz)

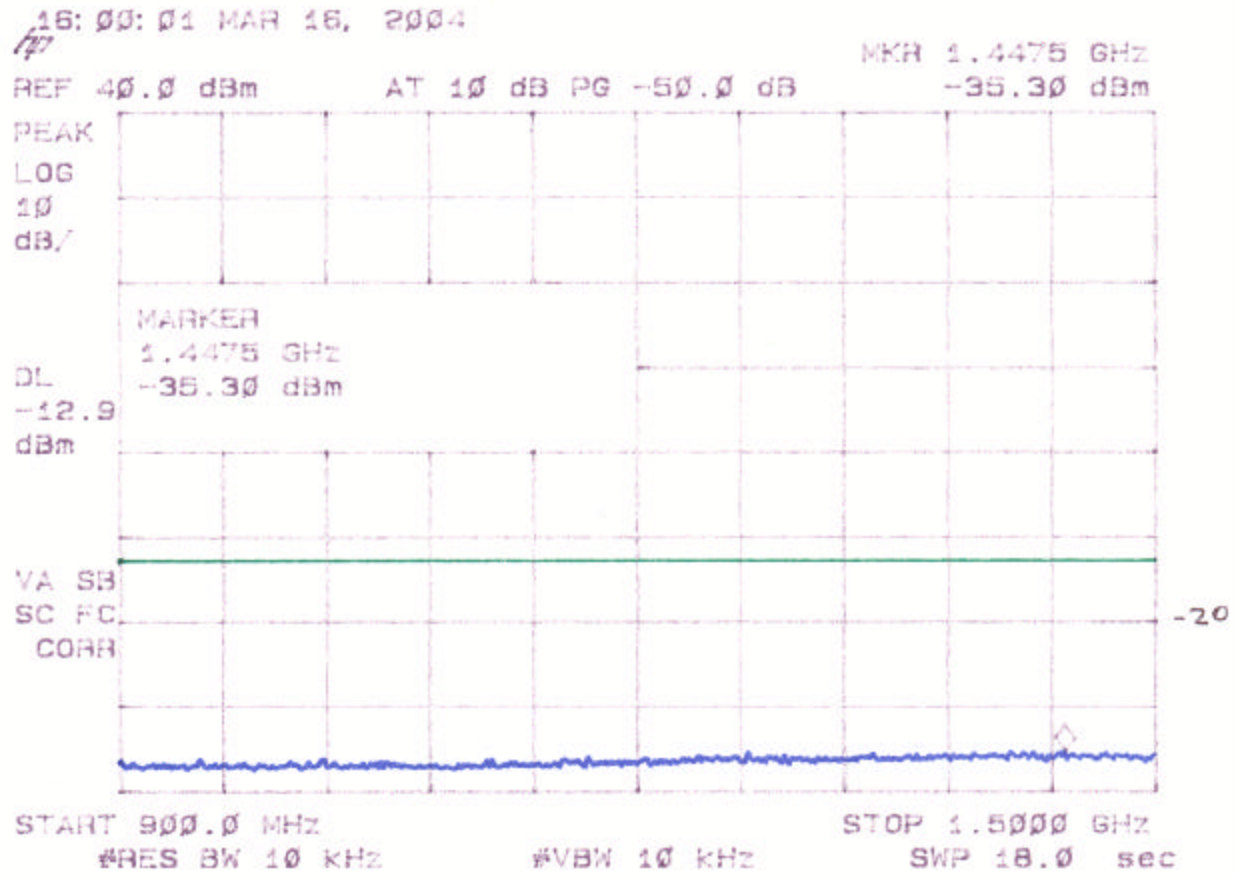


Figure 5x
Spurious Emissions at Antenna Terminals
Mid Channel, Analog (25 kHz)

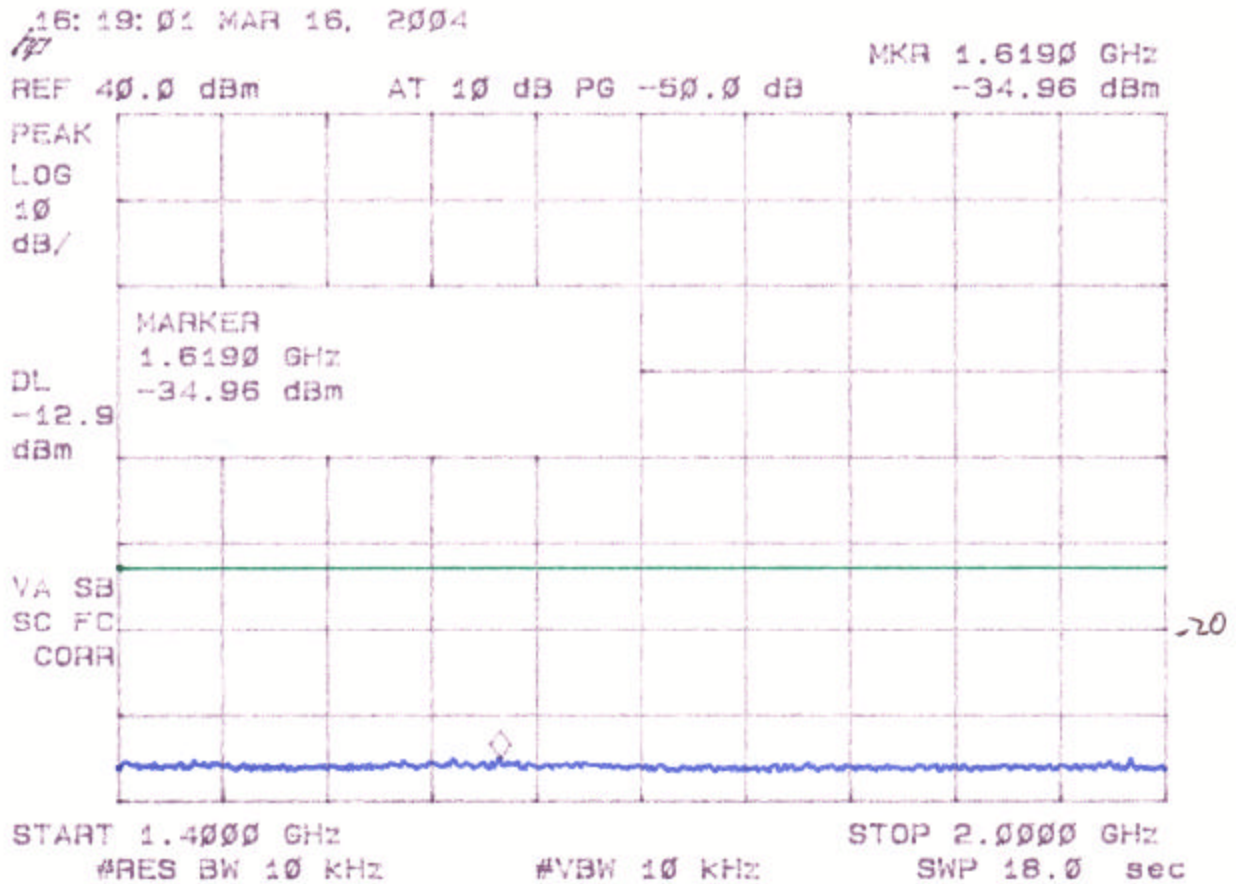


Figure 5y
Spurious Emissions at Antenna Terminals
Low Channel, Analog (12.5 kHz)

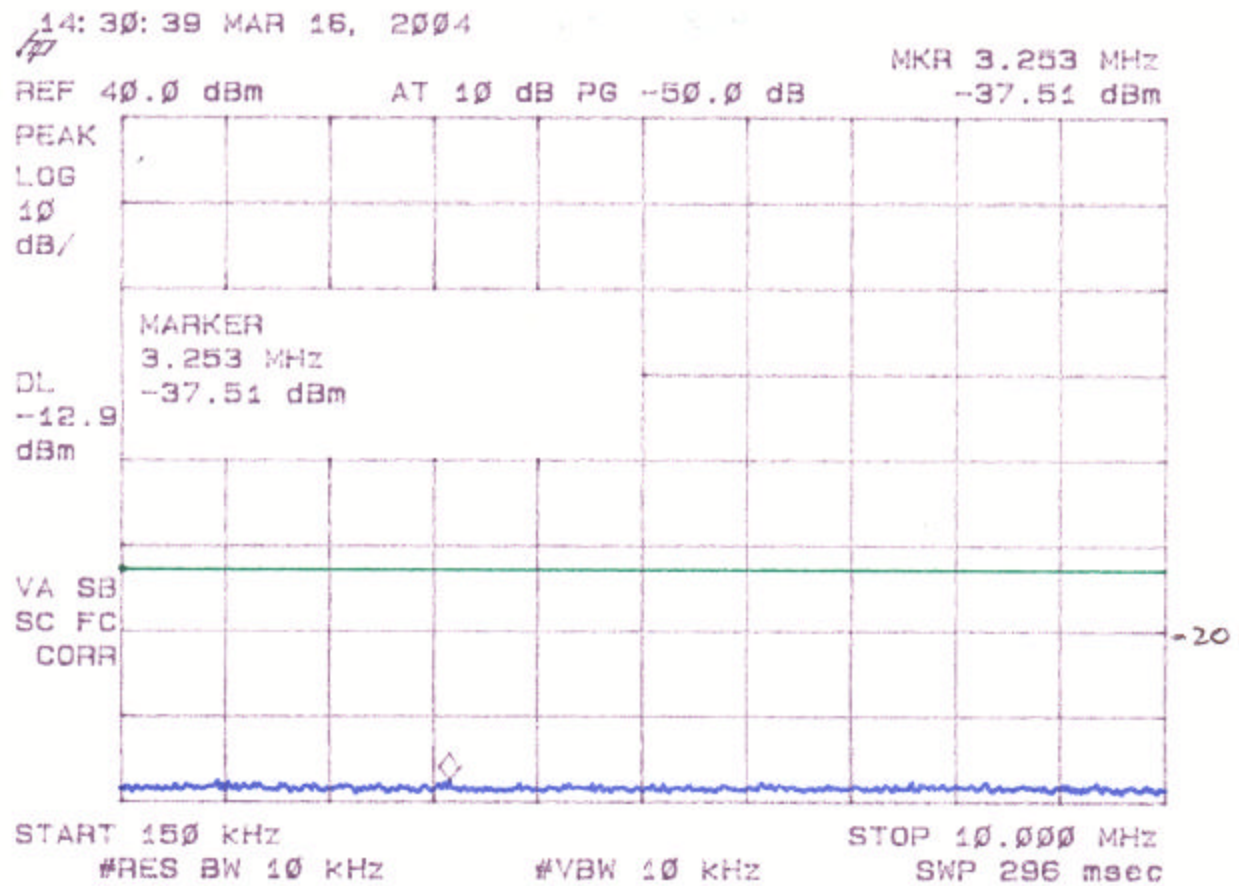


Figure 5z
Spurious Emissions at Antenna Terminals
Low Channel, Analog (12.5 kHz)

