
Appendix for the Report

Dosimetric Assessment of the Portable Device Option Fusion Quad Band PCMCIA Card (FCC ID: NCMOGLUWQ) tested in three host products

According to the FCC Requirements

SAR Distribution Plots

November 30, 2004

IMST GmbH

Carl-Friedrich-Gauß-Str. 2

D-47475 Kamp-Lintfort

Customer

7layers AG

Borsigstrasse 11

D-40880 Ratingen

The test results only relate to the items tested.
This report shall not be reproduced except in full without the written
approval of the testing laboratory.

Table of Contents

1	SAR DISTRIBUTION PLOTS, GSM 850 BODY	3
2	SAR DISTRIBUTION PLOTS, GSM 1900 BODY	20
3	SAR Z-AXIS SCANS (VALIDATION)	41
4	SAR Z-AXIS SCANS (MEASUREMENTS)	44

1 SAR Distribution Plots, GSM 850 Body

Test Laboratory: IMST GmbH; File Name: [Ricbalm_1_dell.da4](#)

DUT: Option; Type: Ricola; Serial: 004400009370040

Program Name: Unnamed Program

Communication System: GPRS 850; Frequency: 836.6 MHz; Duty Cycle: 1:4

Medium parameters used: $\sigma = 1.01$; mho/m, $\epsilon_r = 53.2$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1669; ConvF(6.32, 6.32, 6.32); Calibrated: 18.03.2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn335; Calibrated: 05.08.2004
- Phantom: SAM Sugar 1059; Type: Speag; Serial: 1059
- Measurement SW: DASY4, V4.3 Build 16; Postprocessing SW: SEMCAD, V1.8 Build 127

Unnamed procedure/Area Scan (8x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.880 mW/g

Unnamed procedure/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 25.6 V/m; Power Drift = 0.014 dB

Peak SAR (extrapolated) = 1.21 W/kg

SAR(1 g) = 0.870 mW/g; SAR(10 g) = 0.599 mW/g

Maximum value of SAR (measured) = 0.936 mW/g

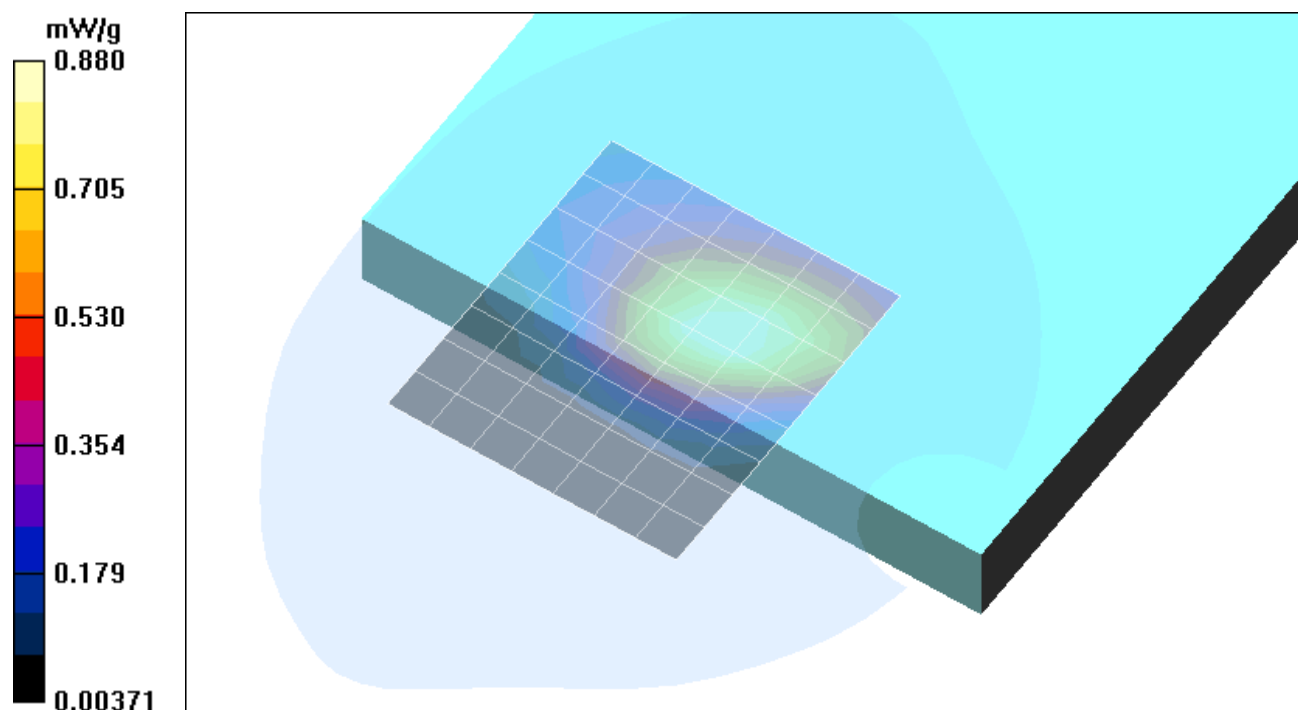


Fig. 1: SAR distribution for GSM 850, channel 190, DELL Latitude D505, position 1. (11.25.2004; Ambient Temperature: 21.2° C; Liquid Temperature: 20.3° C).

Test Laboratory: IMST GmbH; File Name: [Ricbahm_2_dell.da4](#)

DUT: Option; Type: Ricola; Serial: 004400009370040

Program Name: Unnamed Program

Communication System: GPRS 850; Frequency: 836.6 MHz; Duty Cycle: 1:4

Medium parameters used: $\sigma = 1.01$; mho/m, $\epsilon_r = 53.2$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1669; ConvF(6.32, 6.32, 6.32); Calibrated: 18.03.2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn335; Calibrated: 05.08.2004
- Phantom: SAM Sugar 1059; Type: Speag; Serial: 1059
- Measurement SW: DASY4, V4.3 Build 16; Postprocessing SW: SEMCAD, V1.8 Build 127

Unnamed procedure/Area Scan (8x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.663 mW/g

Unnamed procedure/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 17 V/m; Power Drift = -0.0381 dB

Peak SAR (extrapolated) = 0.971 W/kg

SAR(1 g) = 0.699 mW/g; SAR(10 g) = 0.481 mW/g

Maximum value of SAR (measured) = 0.741 mW/g

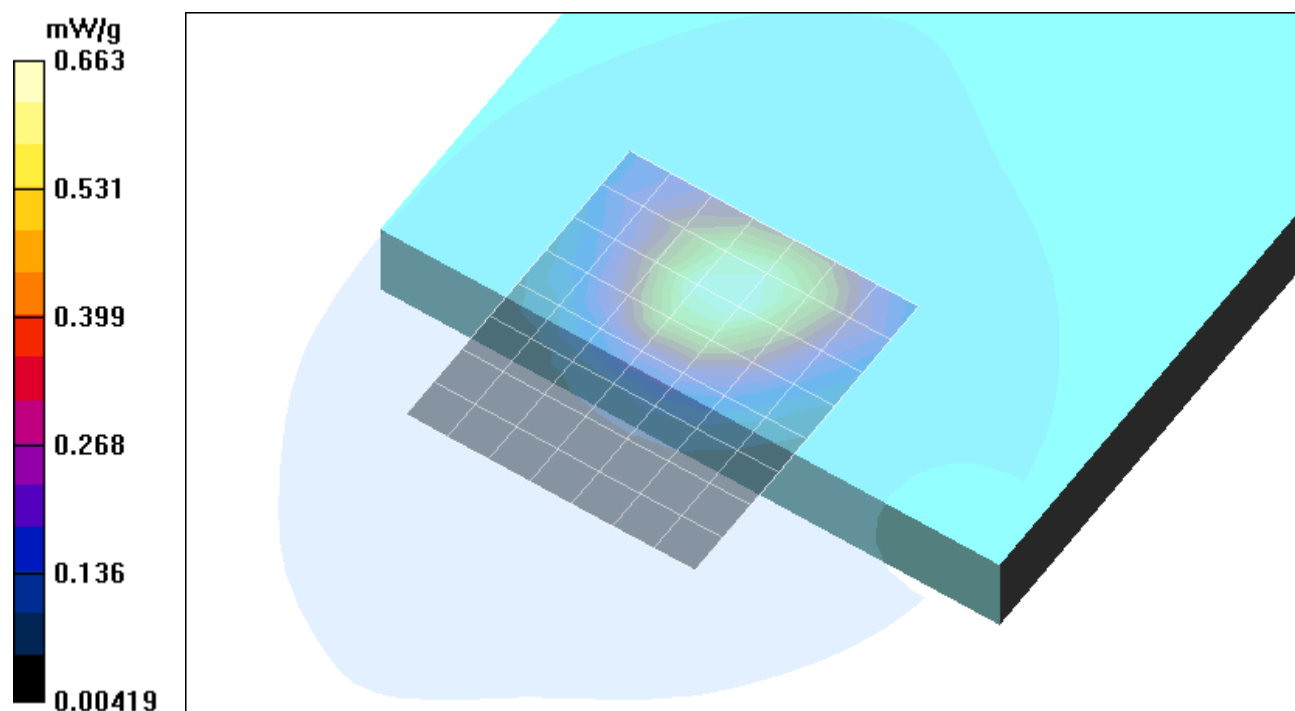


Fig. 2: SAR distribution for GSM 850, channel 190, DELL Latitude D505, position 2. (11.25.2004; Ambient Temperature: 21.2° C; Liquid Temperature: 20.3° C).

Test Laboratory: IMST GmbH; File Name: [Ricbalm_3_dell.da4](#)

DUT: Option; Type: Ricola; Serial: 004400009370040

Program Name: Unnamed Program

Communication System: GPRS 850; Frequency: 836.6 MHz; Duty Cycle: 1:4

Medium parameters used: $\sigma = 1.01$; mho/m, $\epsilon_r = 53.2$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1669; ConvF(6.32, 6.32, 6.32); Calibrated: 18.03.2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn335; Calibrated: 05.08.2004
- Phantom: SAM Sugar 1059; Type: Speag; Serial: 1059
- Measurement SW: DASY4, V4.3 Build 16; Postprocessing SW: SEMCAD, V1.8 Build 127

Unnamed procedure/Area Scan (7x7x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.081 mW/g

Unnamed procedure/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.83 V/m; Power Drift = -0.072 dB

Peak SAR (extrapolated) = 0.129 W/kg

SAR(1 g) = 0.078 mW/g; SAR(10 g) = 0.054 mW/g

Maximum value of SAR (measured) = 0.084 mW/g

Unnamed procedure/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.83 V/m; Power Drift = -0.072 dB

Peak SAR (extrapolated) = 0.135 W/kg

SAR(1 g) = 0.073 mW/g; SAR(10 g) = 0.047 mW/g

Maximum value of SAR (measured) = 0.078 mW/g

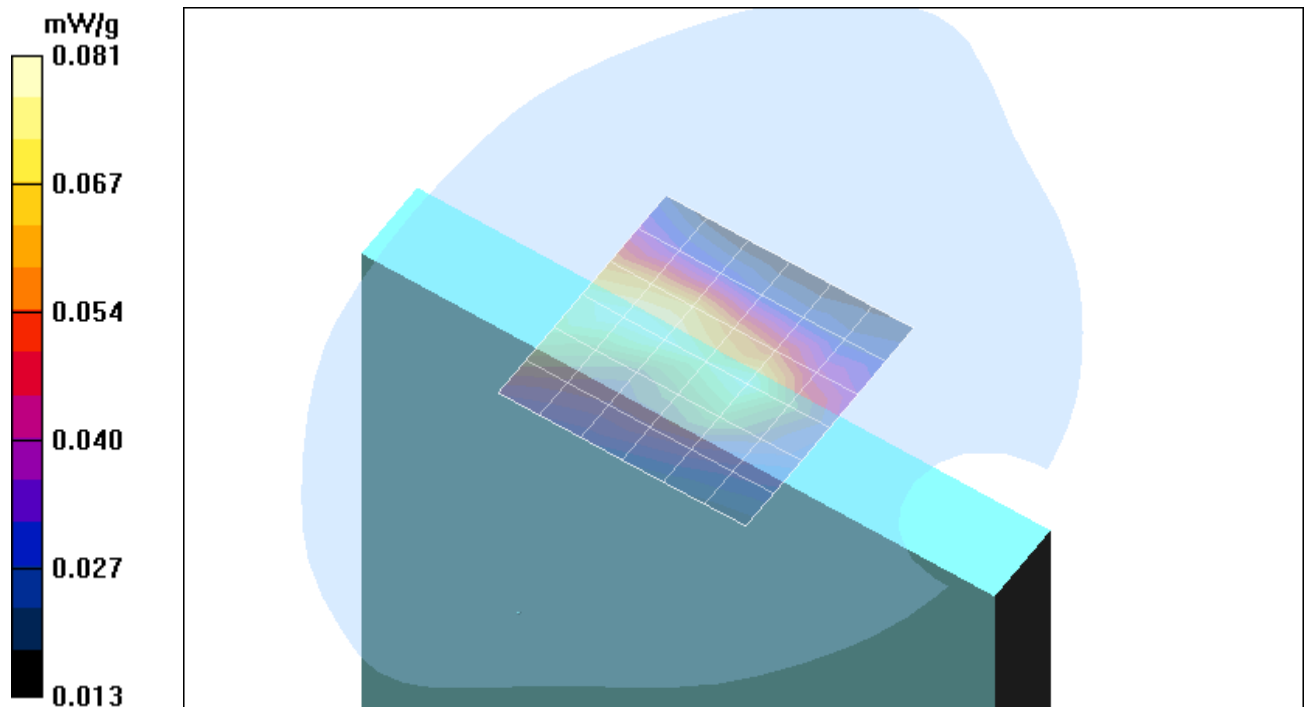


Fig. 3: SAR distribution for GSM 850, channel 190, DELL Latitude D505, position 3. (11.25.2004; Ambient Temperature: 21.2° C; Liquid Temperature: 20.3° C).

Test Laboratory: IMST GmbH; File Name: [Ricbalm_4_dell.da4](#)

DUT: Option; Type: Ricola; Serial: 004400009370040

Program Name: Unnamed Program

Communication System: GPRS 850; Frequency: 836.6 MHz; Duty Cycle: 1:4

Medium parameters used: $\sigma = 1.01$; mho/m, $\epsilon_r = 53.2$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1669; ConvF(6.32, 6.32, 6.32); Calibrated: 18.03.2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn335; Calibrated: 05.08.2004
- Phantom: SAM Sugar 1059; Type: Speag; Serial: 1059
- Measurement SW: DASY4, V4.3 Build 16; Postprocessing SW: SEMCAD, V1.8 Build 127

Unnamed procedure/Area Scan (8x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.109 mW/g

Unnamed procedure/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.8 V/m; Power Drift = -0.109 dB

Peak SAR (extrapolated) = 0.199 W/kg

SAR(1 g) = 0.108 mW/g; SAR(10 g) = 0.066 mW/g

Maximum value of SAR (measured) = 0.119 mW/g

Unnamed procedure/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.8 V/m; Power Drift = -0.109 dB

Peak SAR (extrapolated) = 0.081 W/kg

SAR(1 g) = 0.064 mW/g; SAR(10 g) = 0.047 mW/g

Maximum value of SAR (measured) = 0.069 mW/g

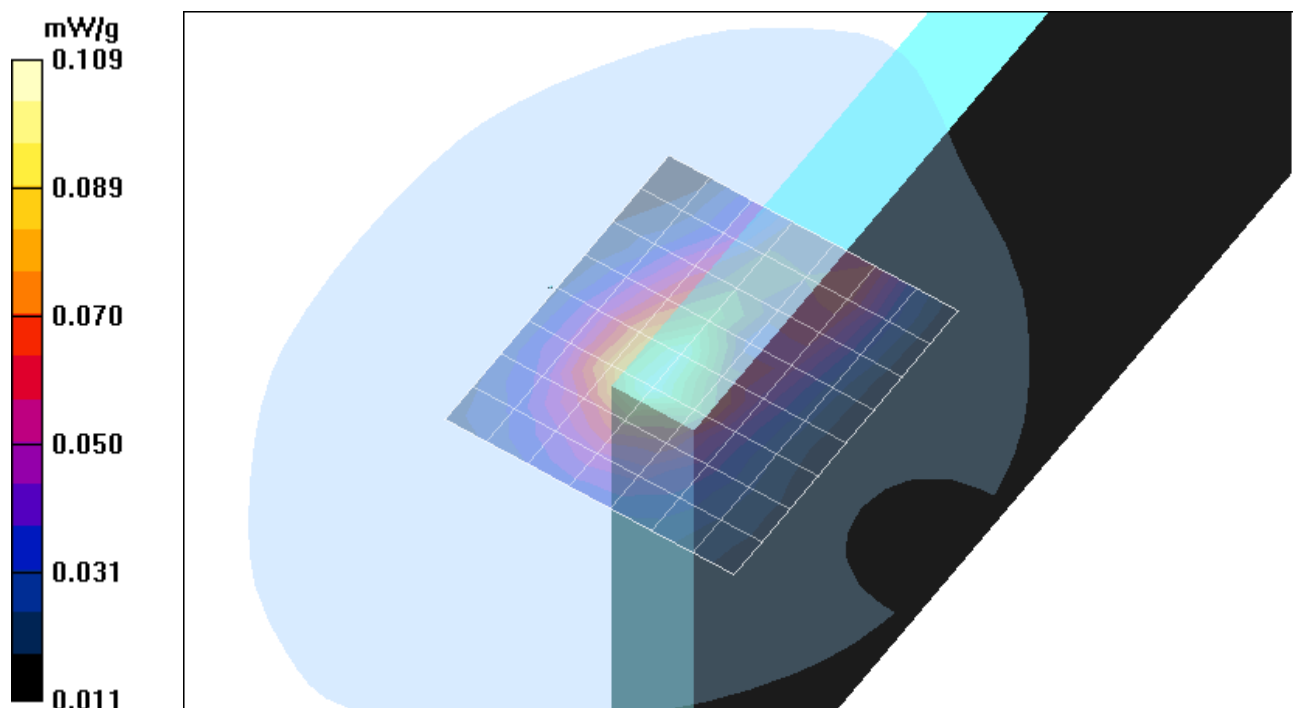


Fig. 4: SAR distribution for GSM 850, channel 190, DELL Latitude D505, position 4. (11.25.2004; Ambient Temperature: 21.2° C; Liquid Temperature: 20.3° C).

Test Laboratory: IMST GmbH; File Name: [Ricbahm_5_dell.da4](#)

DUT: Option; Type: Ricola; Serial: 004400009370040

Program Name: Unnamed Program

Communication System: GPRS 850; Frequency: 836.6 MHz; Duty Cycle: 1:4

Medium parameters used: $\sigma = 1.01$; mho/m, $\epsilon_r = 53.2$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1669; ConvF(6.32, 6.32, 6.32); Calibrated: 18.03.2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn335; Calibrated: 05.08.2004
- Phantom: SAM Sugar 1059; Type: Speag; Serial: 1059
- Measurement SW: DASY4, V4.3 Build 16; Postprocessing SW: SEMCAD, V1.8 Build 127

Unnamed procedure/Area Scan (8x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.043 mW/g

Unnamed procedure/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.78 V/m; Power Drift = 0.0536 dB

Peak SAR (extrapolated) = 0.086 W/kg

SAR(1 g) = 0.045 mW/g; SAR(10 g) = 0.027 mW/g

Maximum value of SAR (measured) = 0.050 mW/g

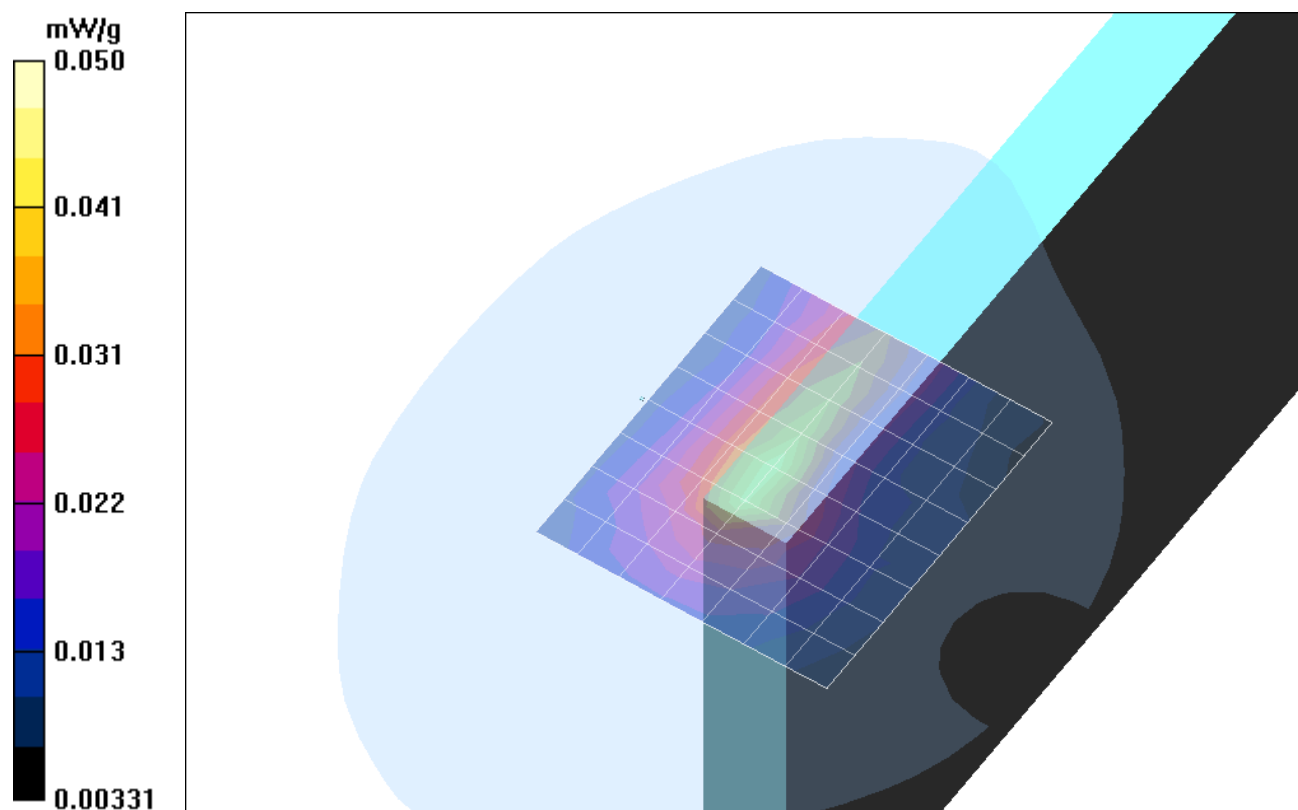


Fig. 5: SAR distribution for GSM 850, channel 190, DELL Latitude D505, position 5. (11.25.2004; Ambient Temperature: 21.2° C; Liquid Temperature: 20.3° C).

Test Laboratory: IMST GmbH; **File Name:** [Ricbahl_1_dell.da4](#)

DUT: Option; Type: Ricola; Serial: 004400009370040

Communication System: GPRS 850; Frequency: 824.2 MHz; Duty Cycle: 1:4

Medium parameters used: $\sigma = 1.01$; mho/m, $\epsilon_r = 53.2$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1669; ConvF(6.32, 6.32, 6.32); Calibrated: 18.03.2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn335; Calibrated: 05.08.2004
- Phantom: SAM Sugar 1059; Type: Speag; Serial: 1059
- Measurement SW: DASY4, V4.3 Build 16; Postprocessing SW: SEMCAD, V1.8 Build 127

Unnamed procedure/Area Scan (8x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.836 mW/g

Unnamed procedure/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.4 V/m; Power Drift = -0.162 dB

Peak SAR (extrapolated) = 1.07 W/kg

SAR(1 g) = 0.777 mW/g; SAR(10 g) = 0.544 mW/g

Maximum value of SAR (measured) = 0.831 mW/g

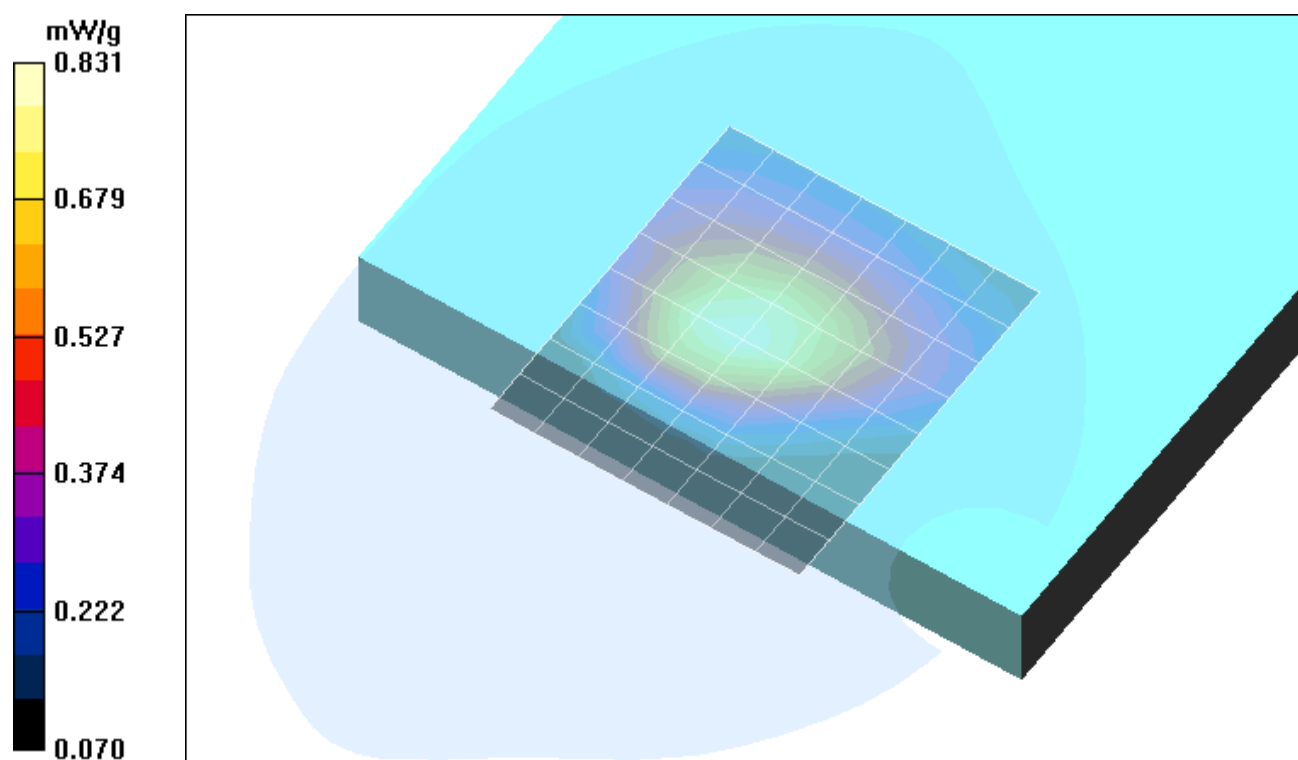


Fig. 6: SAR distribution for GSM 850, channel 128, DELL Latitude D505, position 1. (11.25.2004; Ambient Temperature: 21.3° C; Liquid Temperature: 20.3° C).

Test Laboratory: IMST GmbH; **File Name:** [Ricbahh_1_dell.da4](#)

DUT: Option; Type: Ricola; Serial: 004400009370040

Communication System: GPRS 850; Frequency: 848.8 MHz; Duty Cycle: 1:4

Medium parameters used: $\sigma = 1.01$; mho/m, $\epsilon_r = 53.2$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1669; ConvF(6.32, 6.32, 6.32); Calibrated: 18.03.2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn335; Calibrated: 05.08.2004
- Phantom: SAM Sugar 1059; Type: Speag; Serial: 1059
- Measurement SW: DASY4, V4.3 Build 16; Postprocessing SW: SEMCAD, V1.8 Build 127

Unnamed procedure/Area Scan (8x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.849 mW/g

Unnamed procedure/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.4 V/m; Power Drift = 0.002 dB

Peak SAR (extrapolated) = 1.1 W/kg

SAR(1 g) = 0.804 mW/g; SAR(10 g) = 0.560 mW/g

Maximum value of SAR (measured) = 0.855 mW/g

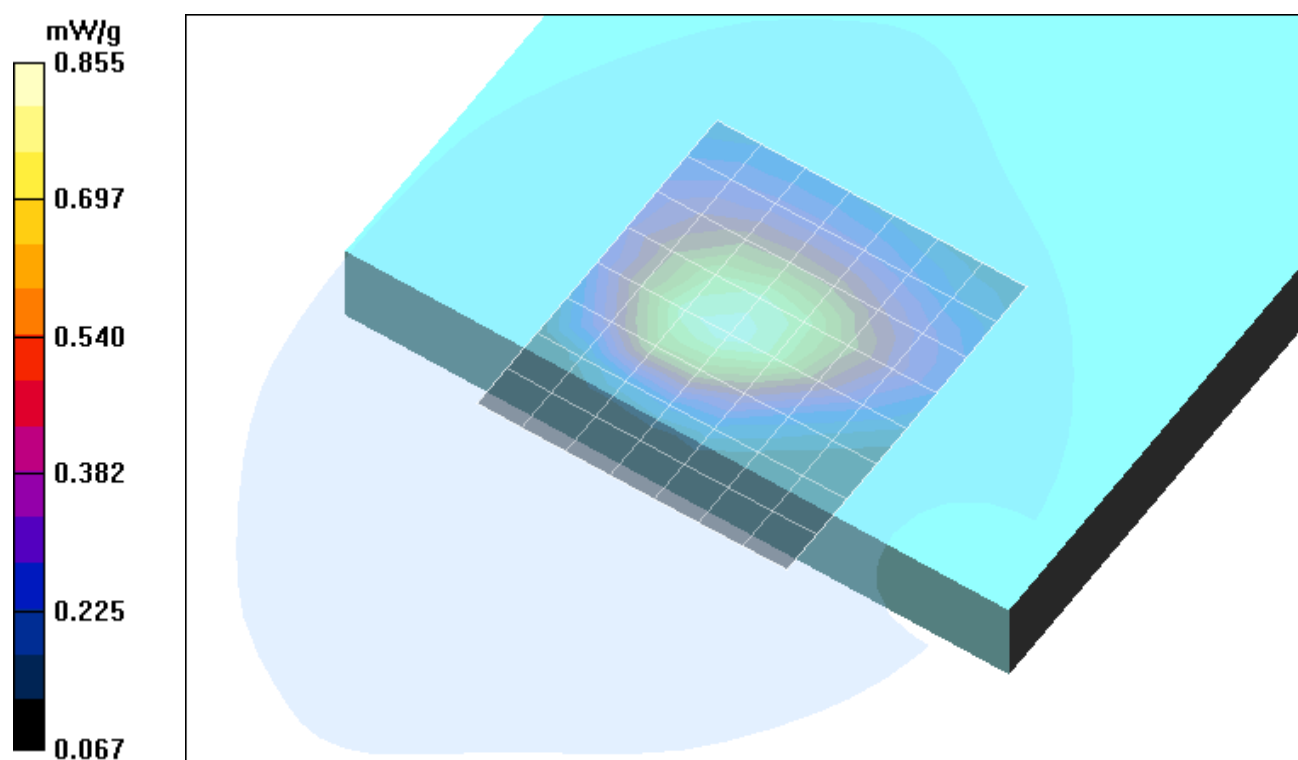


Fig. 7: SAR distribution for GSM 850, channel 251, DELL Latitude D505, position 1. (11.25.2004; Ambient Temperature: 21.4° C; Liquid Temperature: 20.3° C).

Test Laboratory: IMST GmbH; **File Name:** [Ricbalm_1_PB.da4](#)

DUT: Option; Type: Ricola; Serial: 004400009370040

Communication System: GPRS 850; Frequency: 836.6 MHz; Duty Cycle: 1:4

Medium parameters used: $\sigma = 1.01$; mho/m, $\epsilon_r = 53.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1579; ConvF(6.46, 6.46, 6.46); Calibrated: 01.09.2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn631; Calibrated: 23.07.2004
- Phantom: SAM Sugar 1059; Type: Speag; Serial: 1059
- Measurement SW: DASY4, V4.3 Build 16; Postprocessing SW: SEMCAD, V1.8 Build 127

Unnamed procedure/Area Scan (8x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.577 mW/g

Unnamed procedure/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.1 V/m; Power Drift = 0.2 dB

Peak SAR (extrapolated) = 0.831 W/kg

SAR(1 g) = 0.594 mW/g; SAR(10 g) = 0.410 mW/g

Maximum value of SAR (measured) = 0.629 mW/g

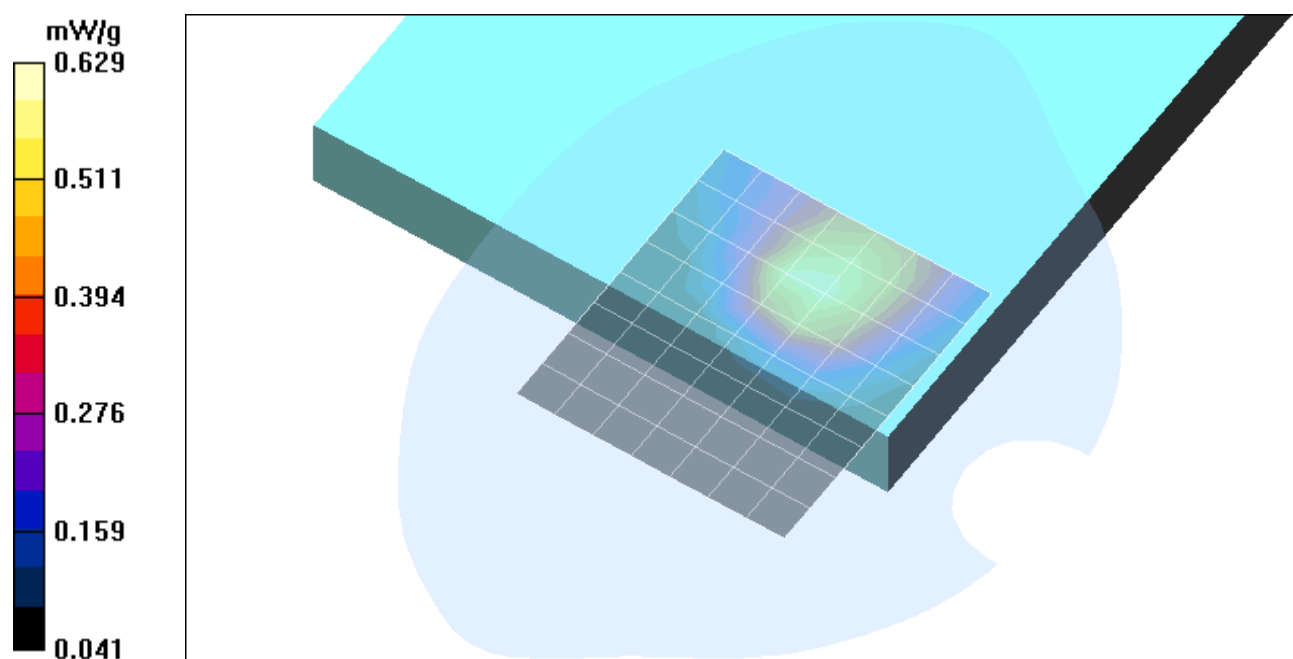


Fig. 8: SAR distribution for GSM 850, channel 190, Packard Bell Easy Note, position 1. (11.29.2004; Ambient Temperature: 21.4° C; Liquid Temperature: 20.5° C).

Test Laboratory: IMST GmbH; File Name: [Ricbahm 2 PB.da4](#)

DUT: Option; Type: Ricola; Serial: 004400009370040

Program Name: Unnamed Program

Communication System: GPRS 850; Frequency: 836.6 MHz; Duty Cycle: 1:4

Medium parameters used: $\sigma = 1.01$; mho/m, $\epsilon_r = 53.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1579; ConvF(6.46, 6.46, 6.46); Calibrated: 01.09.2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn631; Calibrated: 23.07.2004
- Phantom: SAM Sugar 1059; Type: Speag; Serial: 1059
- Measurement SW: DASY4, V4.3 Build 16; Postprocessing SW: SEMCAD, V1.8 Build 127

Unnamed procedure/Area Scan (9x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.477 mW/g

Unnamed procedure/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.5 V/m; Power Drift = 0.056 dB

Peak SAR (extrapolated) = 0.624 W/kg

SAR(1 g) = 0.453 mW/g; SAR(10 g) = 0.322 mW/g

Maximum value of SAR (measured) = 0.482 mW/g

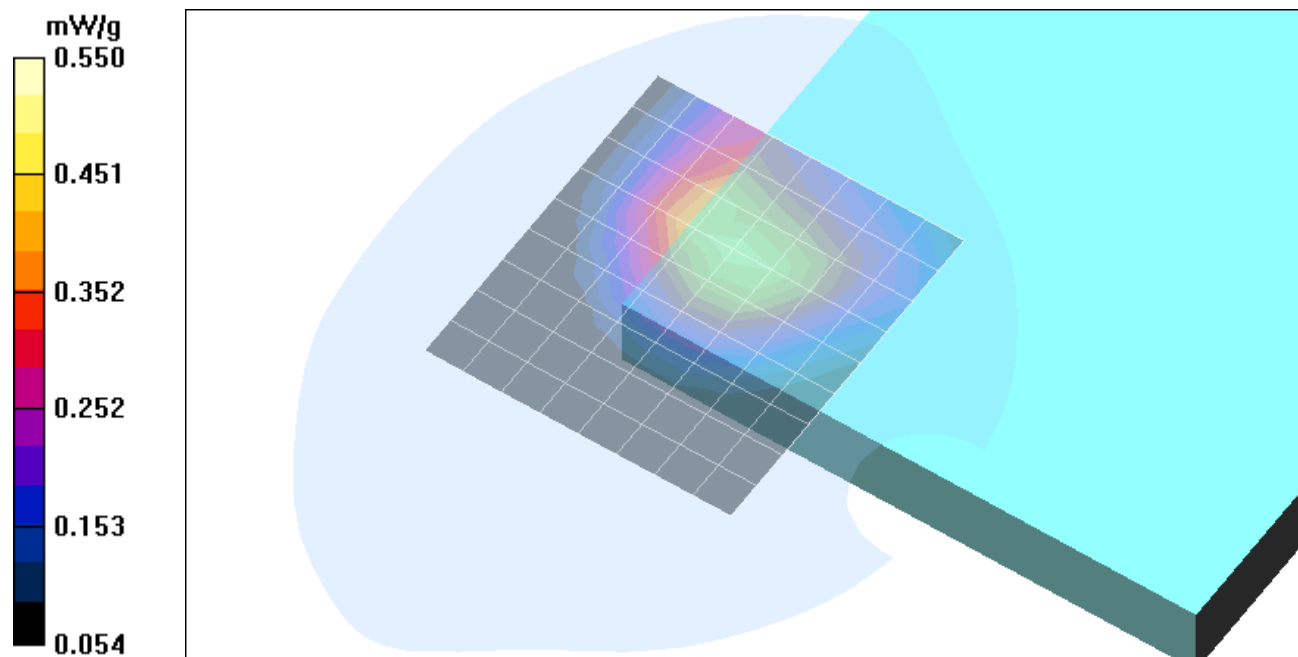


Fig. 9: SAR distribution for GSM 850, channel 190, Packard Bell Easy Note, position 2. (11.29.2004; Ambient Temperature: 21.5° C; Liquid Temperature: 20.5° C).

Test Laboratory: IMST GmbH; **File Name:** [Ricbahm_3_PB.da4](#)

DUT: Option; Type: Ricola; Serial: 004400009370040

Communication System: GPRS 850; Frequency: 836.6 MHz; Duty Cycle: 1:4

Medium parameters used: $\sigma = 1.01$; mho/m, $\epsilon_r = 53.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1579; ConvF(6.46, 6.46, 6.46); Calibrated: 01.09.2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn631; Calibrated: 23.07.2004
- Phantom: SAM Sugar 1059; Type: Speag; Serial: 1059
- Measurement SW: DASY4, V4.3 Build 16; Postprocessing SW: SEMCAD, V1.8 Build 127

Unnamed procedure/Area Scan (7x7x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.127 mW/g

Unnamed procedure/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.8 V/m; Power Drift = -0.088 dB

Peak SAR (extrapolated) = 0.194 W/kg

SAR(1 g) = 0.121 mW/g; SAR(10 g) = 0.077 mW/g

Maximum value of SAR (measured) = 0.131 mW/g

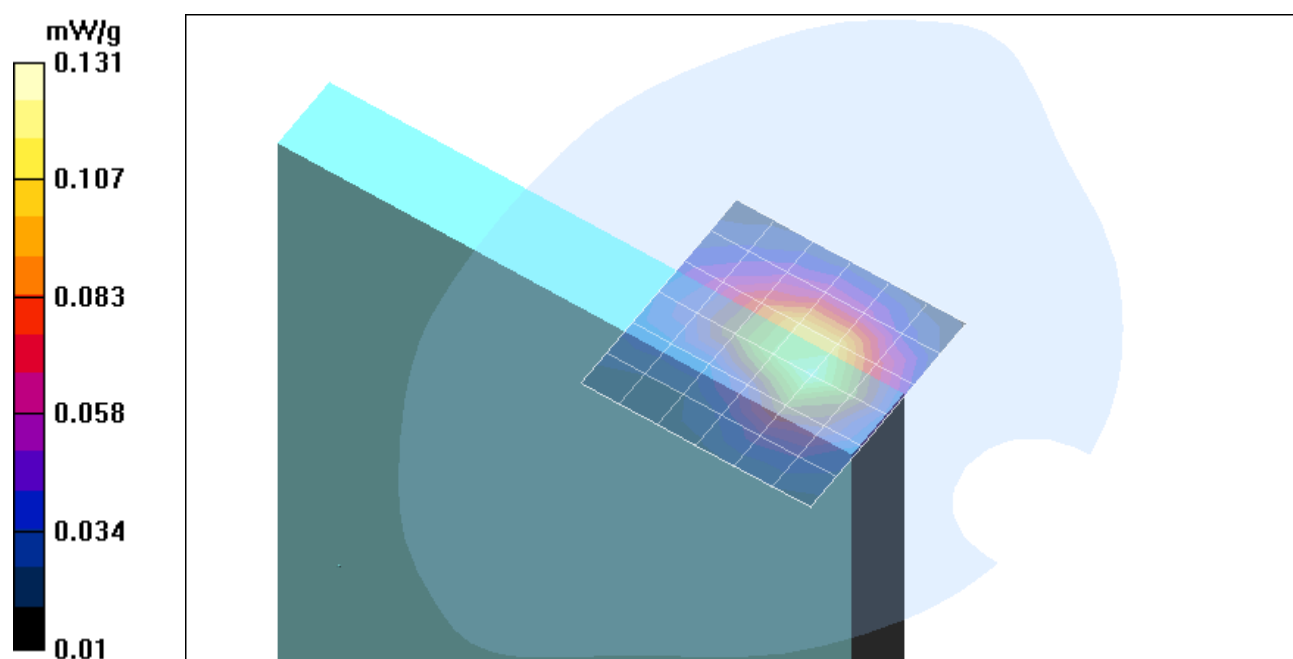


Fig. 10: SAR distribution for GSM 850, channel 190, Packard Bell Easy Note, position 3. (11.29.2004; Ambient Temperature: 21.5° C; Liquid Temperature: 20.5° C).

Test Laboratory: IMST GmbH; **File Name:** [Ricbahm_4_PB.da4](#)

DUT: Option; Type: Ricola; Serial: 004400009370040

Communication System: GPRS 850; Frequency: 836.6 MHz; Duty Cycle: 1:4

Medium parameters used: $\sigma = 1.01$; mho/m, $\epsilon_r = 53.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1579; ConvF(6.46, 6.46, 6.46); Calibrated: 01.09.2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn631; Calibrated: 23.07.2004
- Phantom: SAM Sugar 1059; Type: Speag; Serial: 1059
- Measurement SW: DASY4, V4.3 Build 16; Postprocessing SW: SEMCAD, V1.8 Build 127

Unnamed procedure/Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.140 mW/g

Unnamed procedure/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.3 V/m; Power Drift = 0.024 dB

Peak SAR (extrapolated) = 0.242 W/kg

SAR(1 g) = 0.131 mW/g; SAR(10 g) = 0.077 mW/g

Maximum value of SAR (measured) = 0.142 mW/g

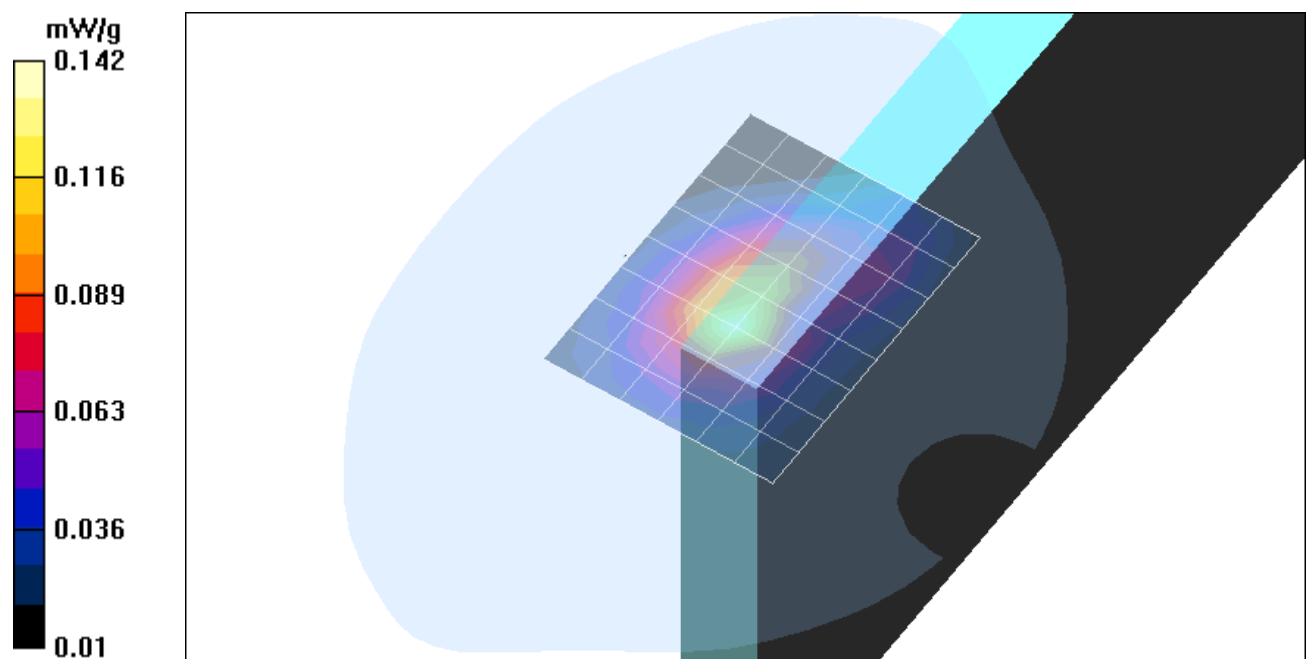


Fig. 11: SAR distribution for GSM 850, channel 190, Packard Bell Easy Note, position 4. (11.29.2004; Ambient Temperature: 21.6° C; Liquid Temperature: 20.5° C).

Test Laboratory: IMST GmbH; **File Name:** [Ricbahm_5_PB.da4](#)

DUT: Option; **Type:** Ricola; **Serial:** 004400009370040

Communication System: GPRS 850; Frequency: 836.6 MHz; Duty Cycle: 1:4

Medium parameters used: $\sigma = 1.01$; mho/m, $\epsilon_r = 53.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1579; ConvF(6.46, 6.46, 6.46); Calibrated: 01.09.2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn631; Calibrated: 23.07.2004
- Phantom: SAM Sugar 1059; Type: Speag; Serial: 1059
- Measurement SW: DASY4, V4.3 Build 16; Postprocessing SW: SEMCAD, V1.8 Build 127

Unnamed procedure/Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.640 mW/g

Unnamed procedure/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 25.5 V/m; Power Drift = -0.014 dB

Peak SAR (extrapolated) = 1.3 W/kg

SAR(1 g) = 0.621 mW/g; SAR(10 g) = 0.347 mW/g

Maximum value of SAR (measured) = 0.690 mW/g

Unnamed procedure/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 25.5 V/m; Power Drift = -0.014 dB

Peak SAR (extrapolated) = 0.695 W/kg

SAR(1 g) = 0.381 mW/g; SAR(10 g) = 0.235 mW/g

Maximum value of SAR (measured) = 0.424 mW/g

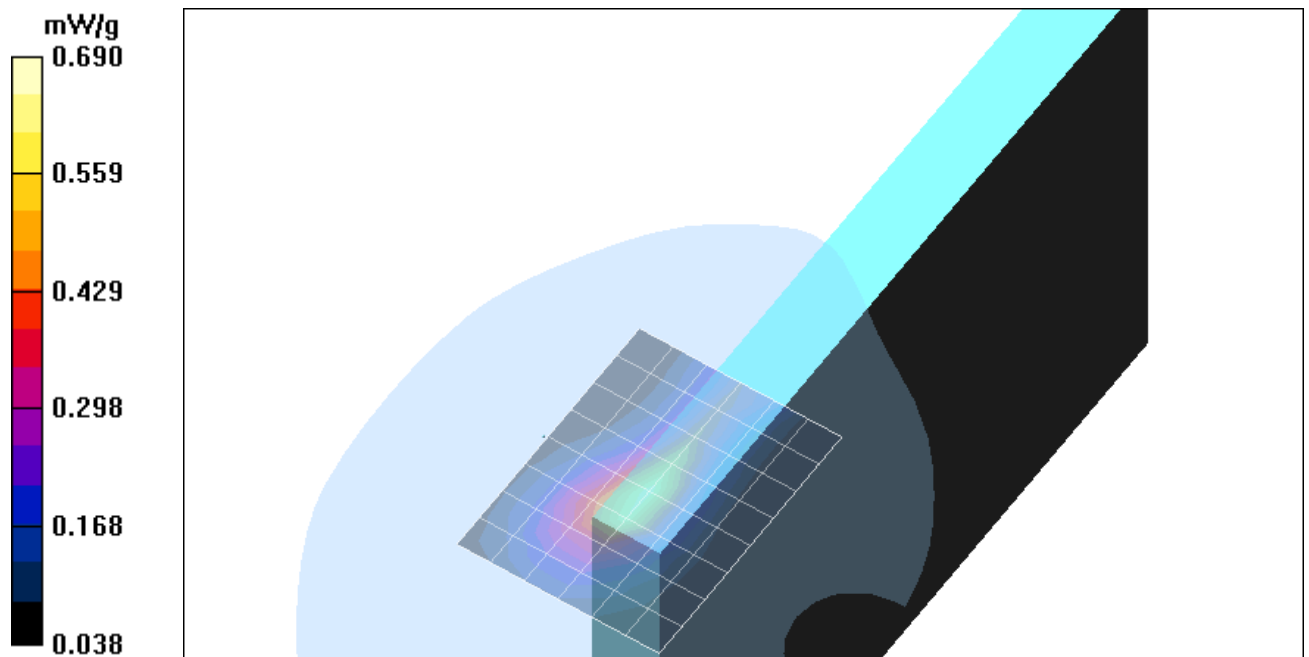


Fig. 12: SAR distribution for GSM 850, channel 190, Packard Bell Easy Note, position 5. (11.29.2004; Ambient Temperature: 21.6° C; Liquid Temperature: 20.5° C).

Test Laboratory: IMST GmbH; File Name: [ricbahm_1_Acer.da4](#)

DUT: Option; Type: Ricola; Serial: 004400009370040

Program Name: Unnamed Program

Communication System: GPRS 850; Frequency: 836.6 MHz; Duty Cycle: 1:4

Medium parameters used: $\sigma = 1.01$; mho/m, $\epsilon_r = 53.2$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1669; ConvF(6.32, 6.32, 6.32); Calibrated: 18.03.2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn335; Calibrated: 05.08.2004
- Phantom: SAM Sugar 1059; Type: Speag; Serial: 1059
- Measurement SW: DASY4, V4.3 Build 16; Postprocessing SW: SEMCAD, V1.8 Build 127

Unnamed procedure/Area Scan (9x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.696 mW/g

Unnamed procedure/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.57 V/m; Power Drift = -0.039 dB

Peak SAR (extrapolated) = 0.920 W/kg

SAR(1 g) = 0.685 mW/g; SAR(10 g) = 0.486 mW/g

Maximum value of SAR (measured) = 0.730 mW/g

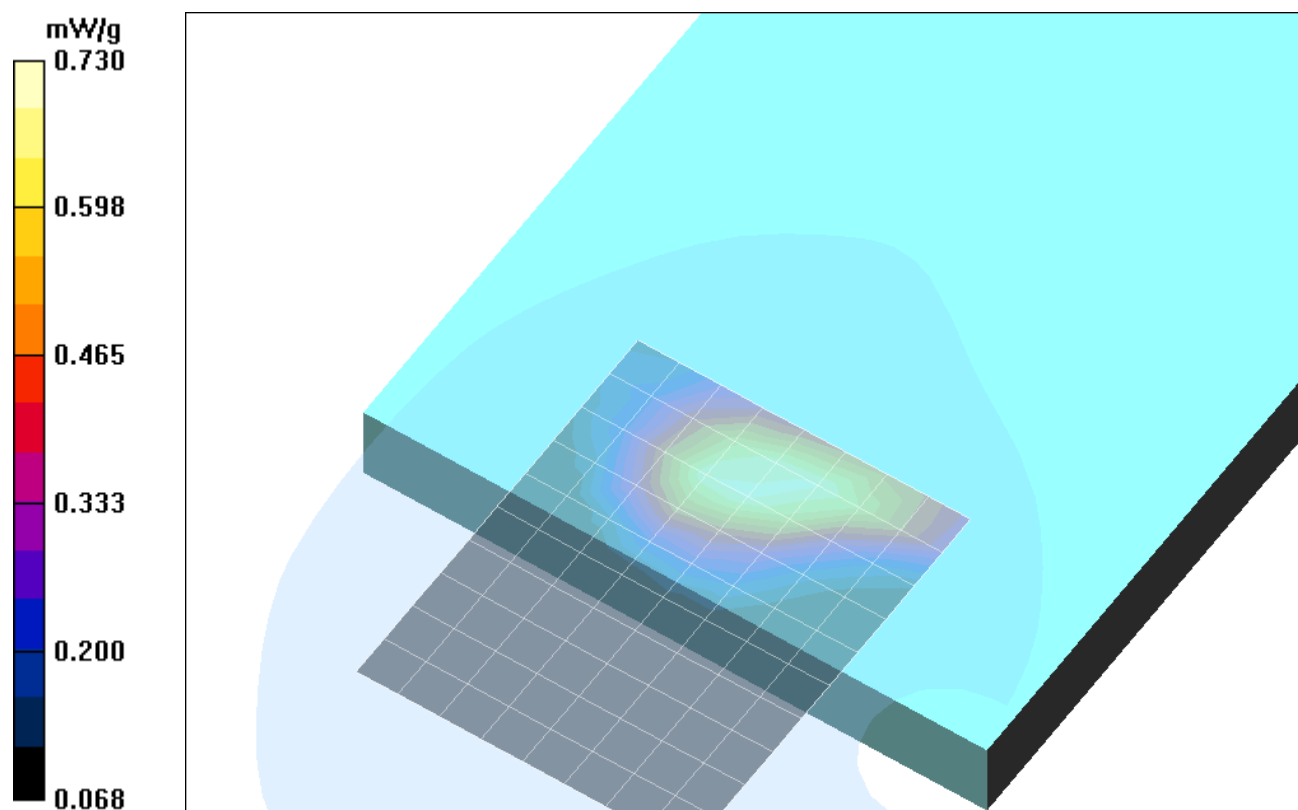


Fig. 13: SAR distribution for GSM 850, channel 190, Acer Aspire 2020, position 1. (11.25.2004; Ambient Temperature: 21.1° C; Liquid Temperature: 20.3° C).

Test Laboratory: IMST GmbH; **File Name:** [Ricbghm_2_Acer.da4](#)

DUT: Option; **Type:** Ricola; **Serial:** 004400009370040

Program Name: Unnamed Program

Communication System: GPRS 850; Frequency: 836.6 MHz; Duty Cycle: 1:4

Medium parameters used: $\sigma = 1.01$; mho/m, $\epsilon_r = 53.2$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1669; ConvF(6.32, 6.32, 6.32); Calibrated: 18.03.2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn335; Calibrated: 05.08.2004
- Phantom: SAM Sugar 1059; Type: Speag; Serial: 1059
- Measurement SW: DASY4, V4.3 Build 16; Postprocessing SW: SEMCAD, V1.8 Build 127

Unnamed procedure/Area Scan (8x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.603 mW/g

Unnamed procedure/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.5 V/m; Power Drift = -0.099 dB

Peak SAR (extrapolated) = 0.817 W/kg

SAR(1 g) = 0.597 mW/g; SAR(10 g) = 0.411 mW/g

Maximum value of SAR (measured) = 0.640 mW/g

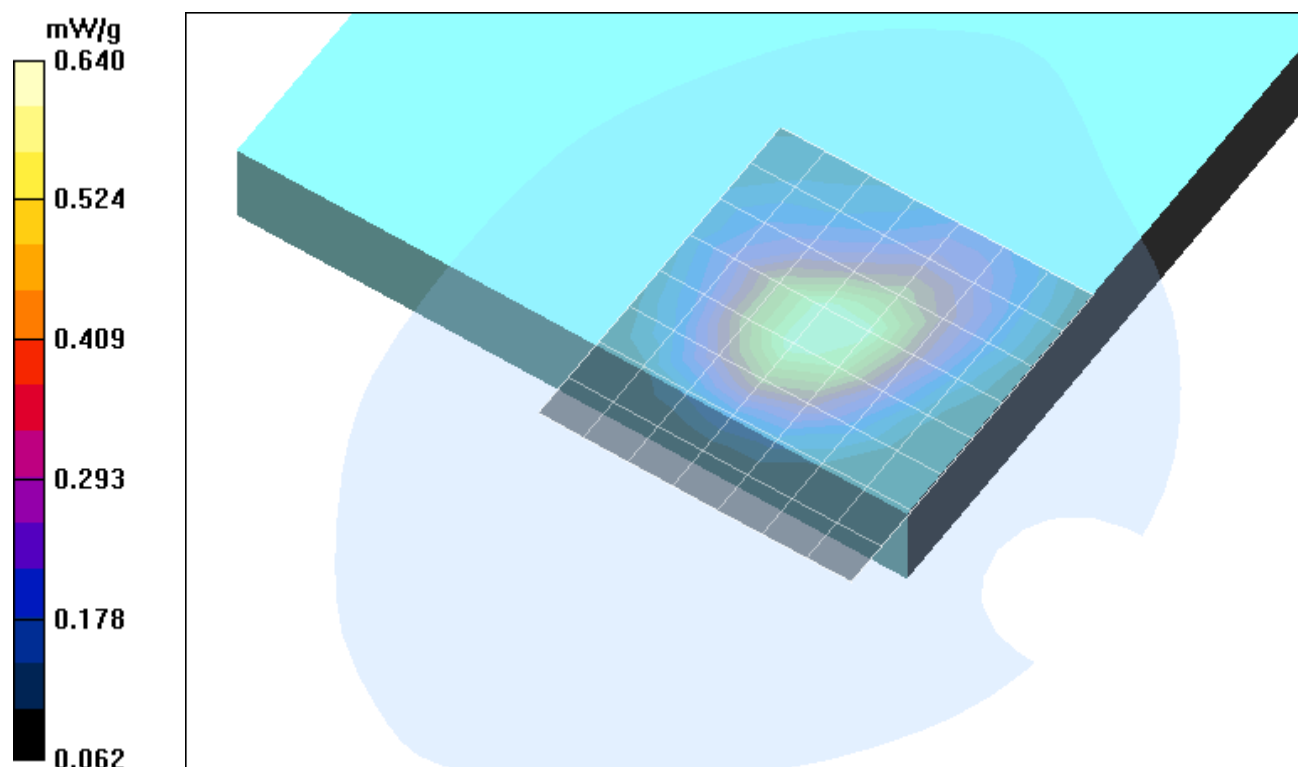


Fig. 14: SAR distribution for GSM 850, channel 190, Acer Aspire 2020, position 2. (11.25.2004; Ambient Temperature: 21.1° C; Liquid Temperature: 20.3° C).

Test Laboratory: IMST GmbH; File Name: [Ricbghm_3_Acer.da4](#)

DUT: Option; Type: Ricola; Serial: 004400009370040

Program Name: Unnamed Program

Communication System: GPRS 850; Frequency: 836.6 MHz; Duty Cycle: 1:4

Medium parameters used: $\sigma = 1.01$; mho/m, $\epsilon_r = 53.2$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1669; ConvF(6.32, 6.32, 6.32); Calibrated: 18.03.2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn335; Calibrated: 05.08.2004
- Phantom: SAM Sugar 1059; Type: Speag; Serial: 1059
- Measurement SW: DASY4, V4.3 Build 16; Postprocessing SW: SEMCAD, V1.8 Build 127

Unnamed procedure/Area Scan (7x7x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.093 mW/g

Unnamed procedure/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.52 V/m; Power Drift = -0.084 dB

Peak SAR (extrapolated) = 0.138 W/kg

SAR(1 g) = 0.088 mW/g; SAR(10 g) = 0.056 mW/g

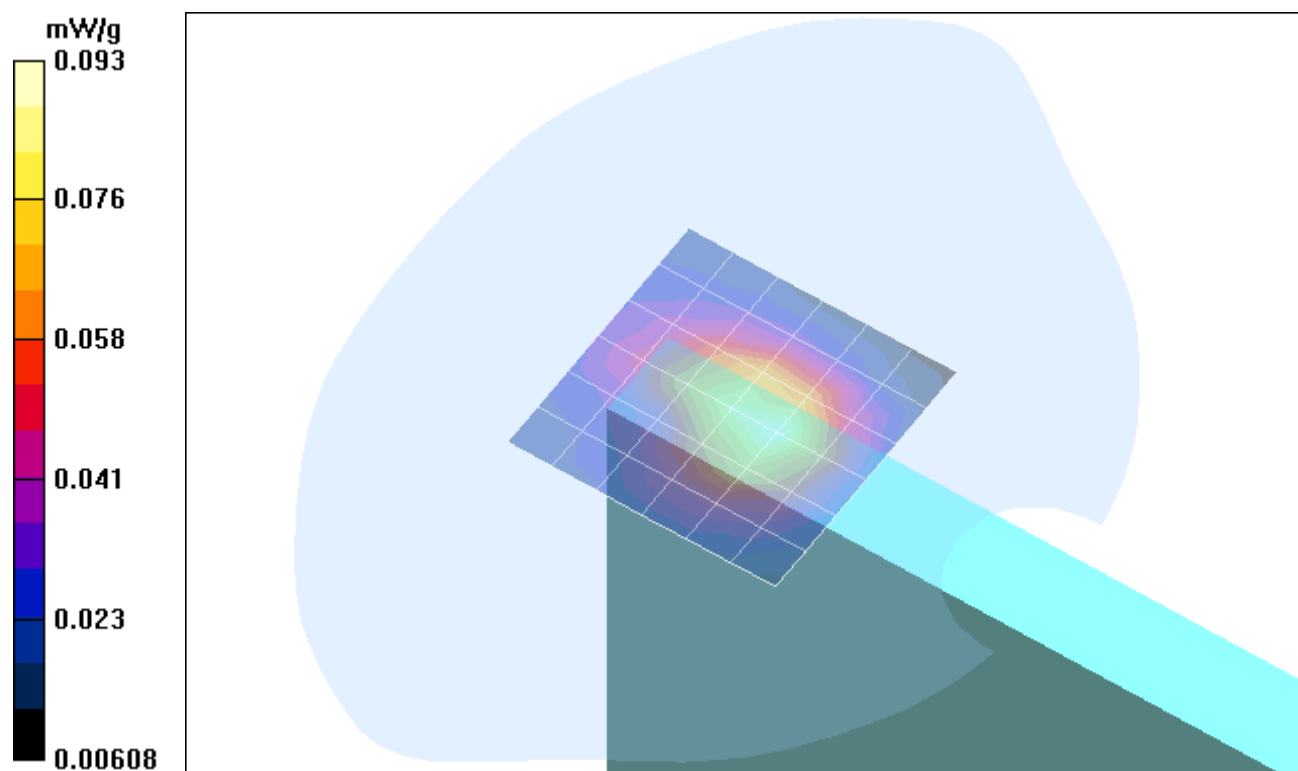


Fig. 15: SAR distribution for GSM 850, channel 190, Acer Aspire 2020, position 3. (11.25.2004; Ambient Temperature: 21.1° C; Liquid Temperature: 20.3° C).

Test Laboratory: IMST GmbH; **File Name:** [Ricbghm_4_Acer.da4](#)

DUT: Option; **Type:** Ricola; **Serial:** 004400009370040

Program Name: Unnamed Program

Communication System: GPRS 850; Frequency: 836.6 MHz; Duty Cycle: 1:4

Medium parameters used: $\sigma = 1.01$; mho/m, $\epsilon_r = 53.2$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1669; ConvF(6.32, 6.32, 6.32); Calibrated: 18.03.2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn335; Calibrated: 05.08.2004
- Phantom: SAM Sugar 1059; Type: Speag; Serial: 1059
- Measurement SW: DASY4, V4.3 Build 16; Postprocessing SW: SEMCAD, V1.8 Build 127

Unnamed procedure/Area Scan (7x7x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.433 mW/g

Unnamed procedure/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 20.1 V/m; Power Drift = -0.179 dB

Peak SAR (extrapolated) = 0.650 W/kg

SAR(1 g) = 0.396 mW/g; SAR(10 g) = 0.243 mW/g

Maximum value of SAR (measured) = 0.426 mW/g

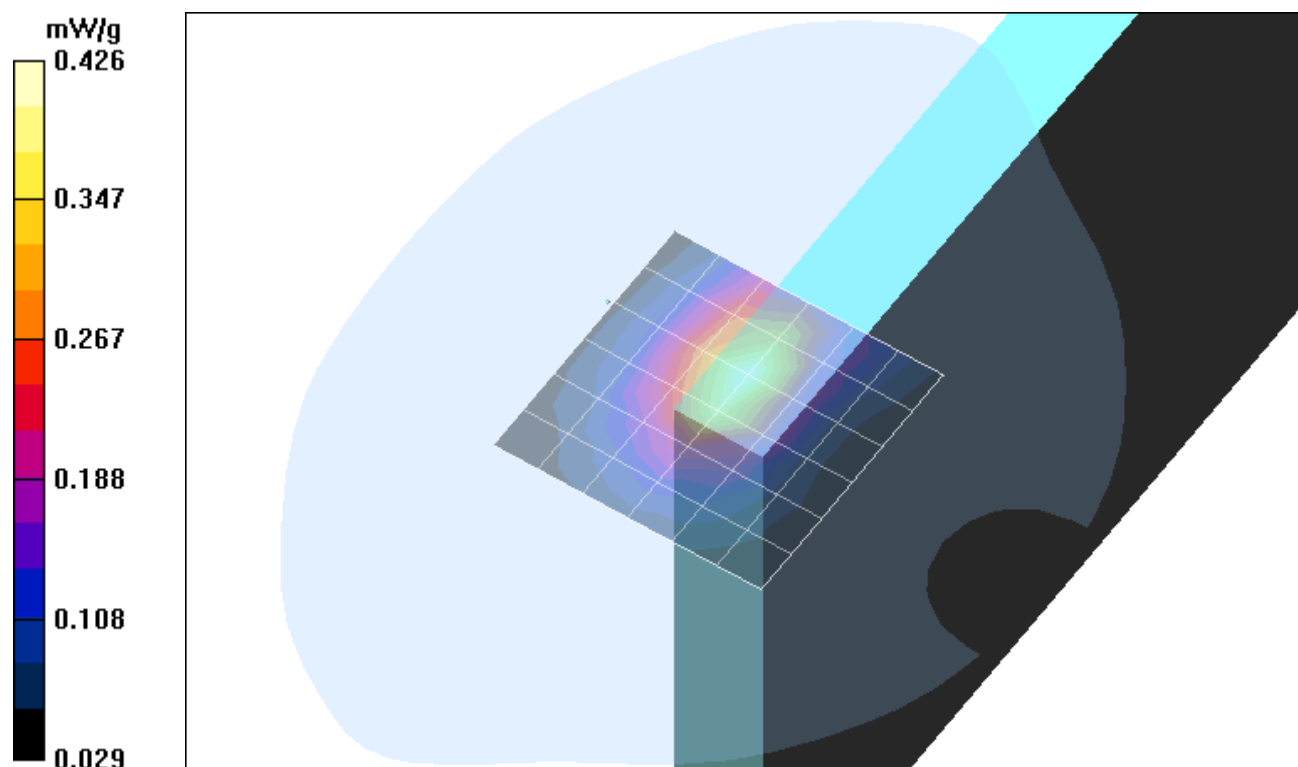


Fig. 16: SAR distribution for GSM 850, channel 190, Acer Aspire 2020, position 4. (11.25.2004; Ambient Temperature: 21.2° C; Liquid Temperature: 20.3° C).

Test Laboratory: IMST GmbH; **File Name:** [Ricbghm_5_Acer.da4](#)

DUT: Option; **Type:** Ricola; **Serial:** 004400009370040

Program Name: Unnamed Program

Communication System: GPRS 850; Frequency: 836.6 MHz; Duty Cycle: 1:4

Medium parameters used: $\sigma = 1.01$; mho/m, $\epsilon_r = 53.2$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1669; ConvF(6.32, 6.32, 6.32); Calibrated: 18.03.2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn335; Calibrated: 05.08.2004
- Phantom: SAM Sugar 1059; Type: Speag; Serial: 1059
- Measurement SW: DASY4, V4.3 Build 16; Postprocessing SW: SEMCAD, V1.8 Build 127

Unnamed procedure/Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.104 mW/g

Unnamed procedure/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8 V/m; Power Drift = -0.138 dB

Peak SAR (extrapolated) = 0.255 W/kg

SAR(1 g) = 0.124 mW/g; SAR(10 g) = 0.070 mW/g

Maximum value of SAR (measured) = 0.134 mW/g

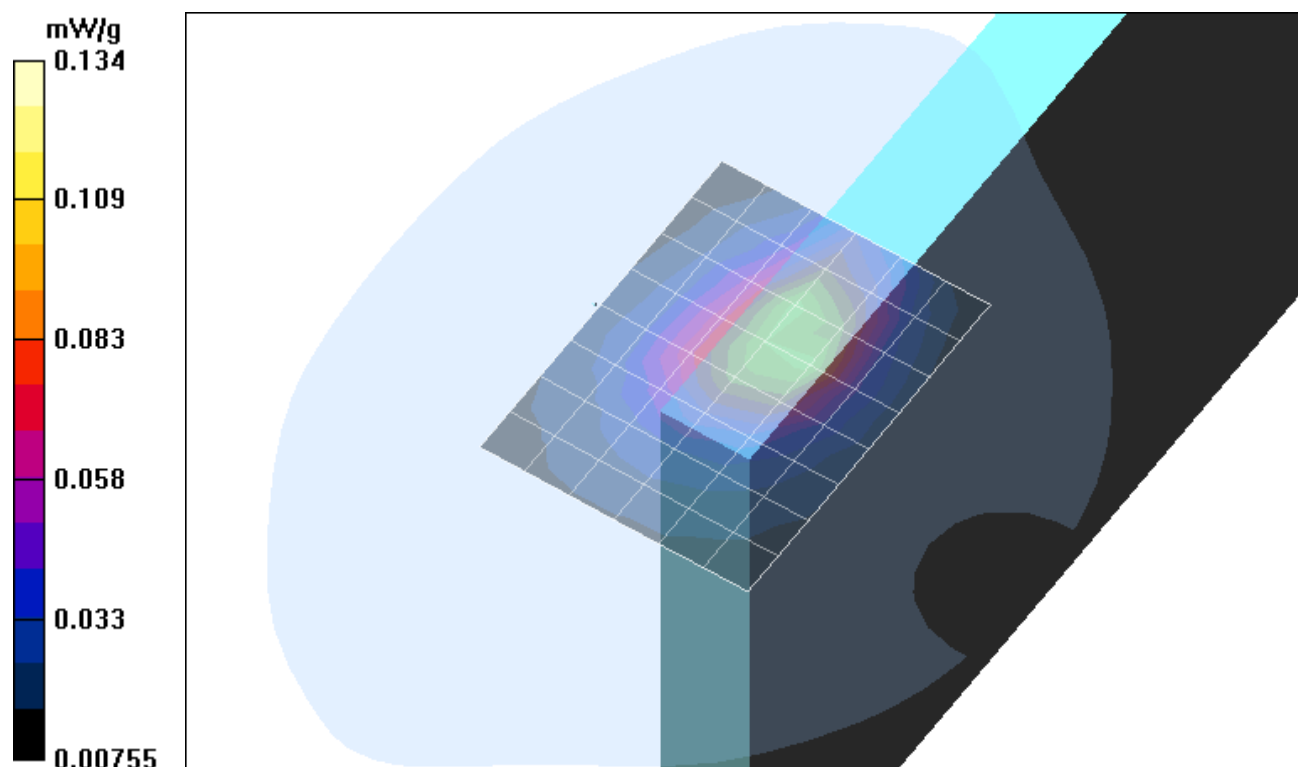


Fig. 17: SAR distribution for GSM 850, channel 190, Acer Aspire 2020, position 5. (11.25.2004; Ambient Temperature: 21.2° C; Liquid Temperature: 20.3° C).

2 SAR Distribution Plots, GSM 1900 Body

Test Laboratory: IMST GmbH; File Name: [Ricbphm_1_dell.da4](#)

DUT: Option; Type: Ricola; Serial: 004400009370040

Program Name: Unnamed Program

Communication System: GPRS 1900; Frequency: 1880 MHz; Duty Cycle: 1:4

Medium parameters used: $\sigma = 1.56$; mho/m, $\epsilon_r = 54.3$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1669; ConvF(4.54, 4.54, 4.54); Calibrated: 18.03.2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn335; Calibrated: 05.08.2004
- Phantom: SAM Glycol 1176; Type: Speag; Serial: 1176
- Measurement SW: DASY4, V4.3 Build 16; Postprocessing SW: SEMCAD, V1.8 Build 127

Unnamed procedure/Area Scan (9x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.19 mW/g

Unnamed procedure/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 29.5 V/m; Power Drift = -0.076 dB

Peak SAR (extrapolated) = 2.14 W/kg

SAR(1 g) = 1.29 mW/g; SAR(10 g) = 0.754 mW/g

Maximum value of SAR (measured) = 1.41 mW/g

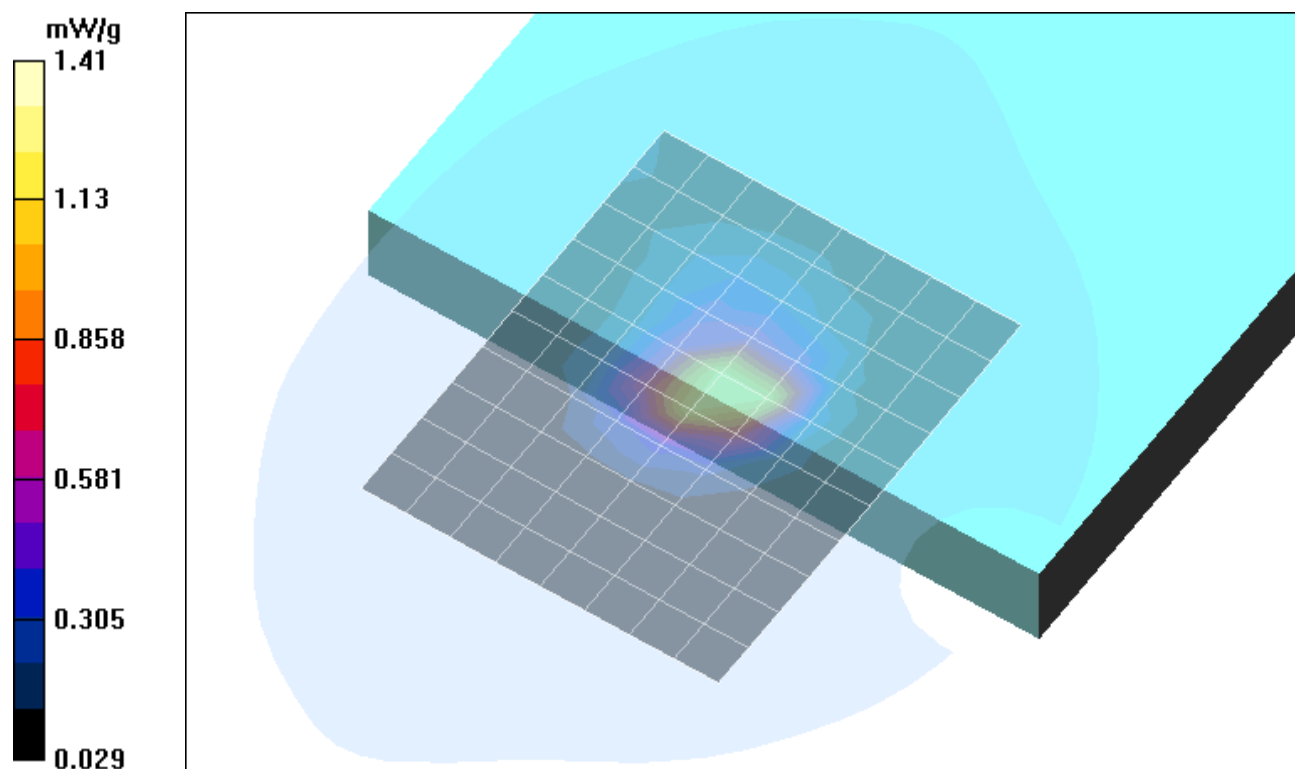


Fig. 18: SAR distribution for PCS 1900, channel 661, DELL Latitude D505, position 1. (11.24.2004; Ambient Temperature: 21.3° C; Liquid Temperature: 20.5° C).

Test Laboratory: IMST GmbH; File Name: [Ricbphm_2_dell.da4](#)

DUT: Option; Type: Ricola; Serial: 004400009370040

Program Name: Unnamed Program

Communication System: GPRS 1900; Frequency: 1880 MHz; Duty Cycle: 1:4

Medium parameters used: $\sigma = 1.56$; mho/m, $\epsilon_r = 54.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1669; ConvF(4.54, 4.54, 4.54); Calibrated: 18.03.2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn335; Calibrated: 05.08.2004
- Phantom: SAM Glycol 1176; Type: Speag; Serial: 1176
- Measurement SW: DASY4, V4.3 Build 16; Postprocessing SW: SEMCAD, V1.8 Build 127

Unnamed procedure/Area Scan (8x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.594 mW/g

Unnamed procedure/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.1 V/m; Power Drift = 0.116 dB

Peak SAR (extrapolated) = 0.848 W/kg

SAR(1 g) = 0.559 mW/g; SAR(10 g) = 0.339 mW/g

Maximum value of SAR (measured) = 0.614 mW/g

Unnamed procedure/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.1 V/m; Power Drift = 0.116 dB

Peak SAR (extrapolated) = 0.527 W/kg

SAR(1 g) = 0.320 mW/g; SAR(10 g) = 0.204 mW/g

Maximum value of SAR (measured) = 0.391 mW/g

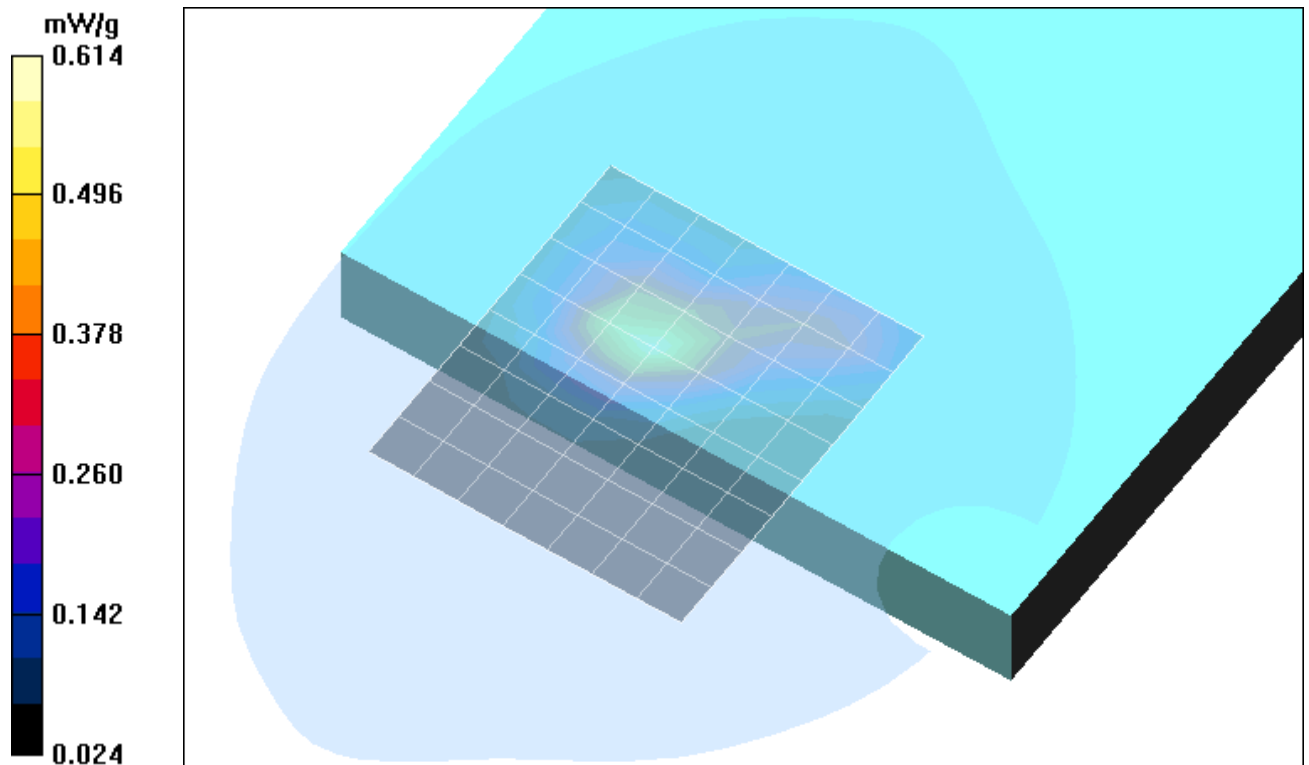


Fig. 19: SAR distribution for PCS 1900, channel 661, DELL Latitude D505, position 2. (11.24.2004; Ambient Temperature: 21.5° C; Liquid Temperature: 20.5° C).

Test Laboratory: IMST GmbH; File Name: [Ricbphm_3_dell.da4](#)

DUT: Option; Type: Ricola; Serial: 004400009370040

Program Name: Unnamed Program

Communication System: GPRS 1900; Frequency: 1880 MHz; Duty Cycle: 1:4

Medium parameters used: $\sigma = 1.56$; mho/m, $\epsilon_r = 54.3$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1669; ConvF(4.54, 4.54, 4.54); Calibrated: 18.03.2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn335; Calibrated: 05.08.2004
- Phantom: SAM Glycol 1176; Type: Speag; Serial: 1176
- Measurement SW: DASY4, V4.3 Build 16; Postprocessing SW: SEMCAD, V1.8 Build 127

Unnamed procedure/Area Scan (7x7x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.597 mW/g

Unnamed procedure/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 21.1 V/m; Power Drift = -0.030 dB

Peak SAR (extrapolated) = 0.908 W/kg

SAR(1 g) = 0.597 mW/g; SAR(10 g) = 0.352 mW/g

Maximum value of SAR (measured) = 0.656 mW/g

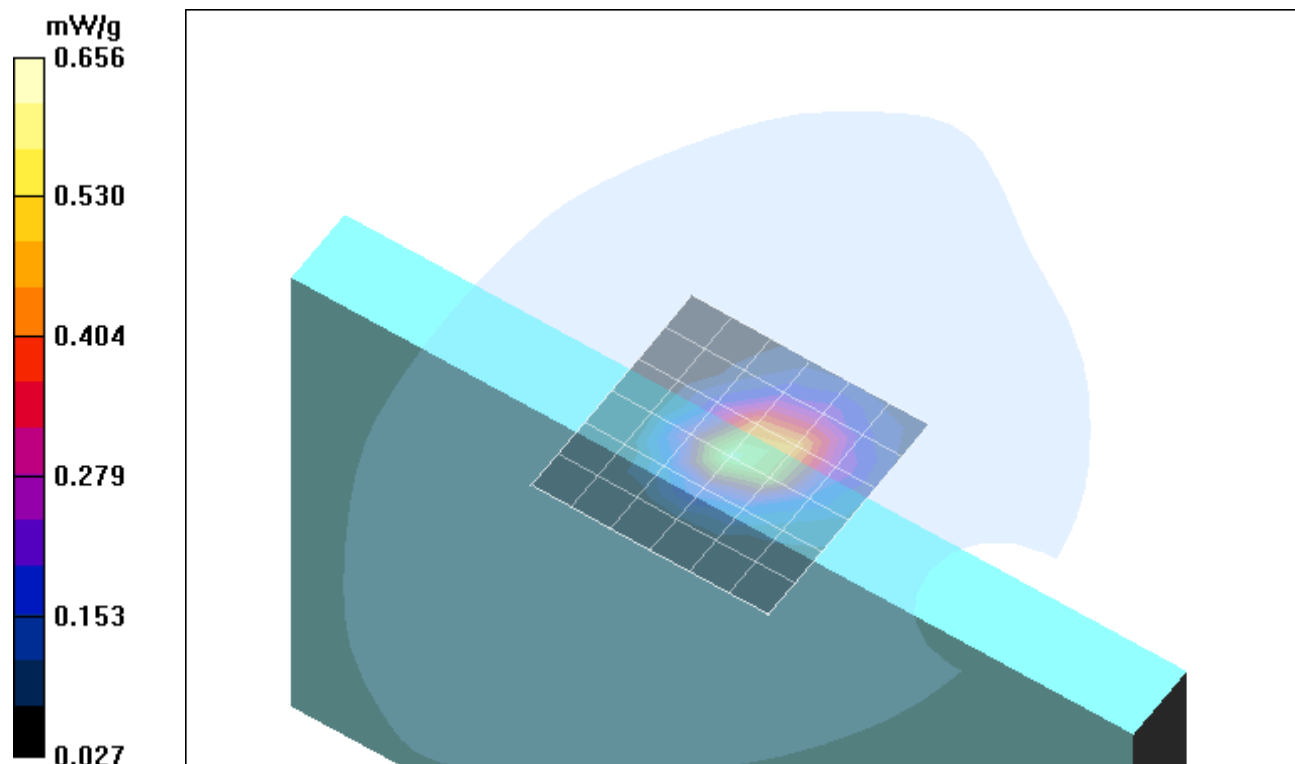


Fig. 20: SAR distribution for PCS 1900, channel 661, DELL Latitude D505, position 3. (11.24.2004; Ambient Temperature: 21.5° C; Liquid Temperature: 20.5° C).

Test Laboratory: IMST GmbH; File Name: [Ricbphm_4_dell.da4](#)

DUT: Option; Type: Ricola; Serial: 004400009370040

Program Name: Unnamed Program

Communication System: GPRS 1900; Frequency: 1880 MHz; Duty Cycle: 1:4

Medium parameters used: $\sigma = 1.56$; mho/m, $\epsilon_r = 54.3$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1669; ConvF(4.54, 4.54, 4.54); Calibrated: 18.03.2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn335; Calibrated: 05.08.2004
- Phantom: SAM Glycol 1176; Type: Speag; Serial: 1176
- Measurement SW: DASY4, V4.3 Build 16; Postprocessing SW: SEMCAD, V1.8 Build 127

Unnamed procedure/Area Scan (7x7x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.168 mW/g

Unnamed procedure/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.85 V/m; Power Drift = -0.050 dB

Peak SAR (extrapolated) = 0.329 W/kg

SAR(1 g) = 0.114 mW/g; SAR(10 g) = 0.063 mW/g

Maximum value of SAR (measured) = 0.179 mW/g

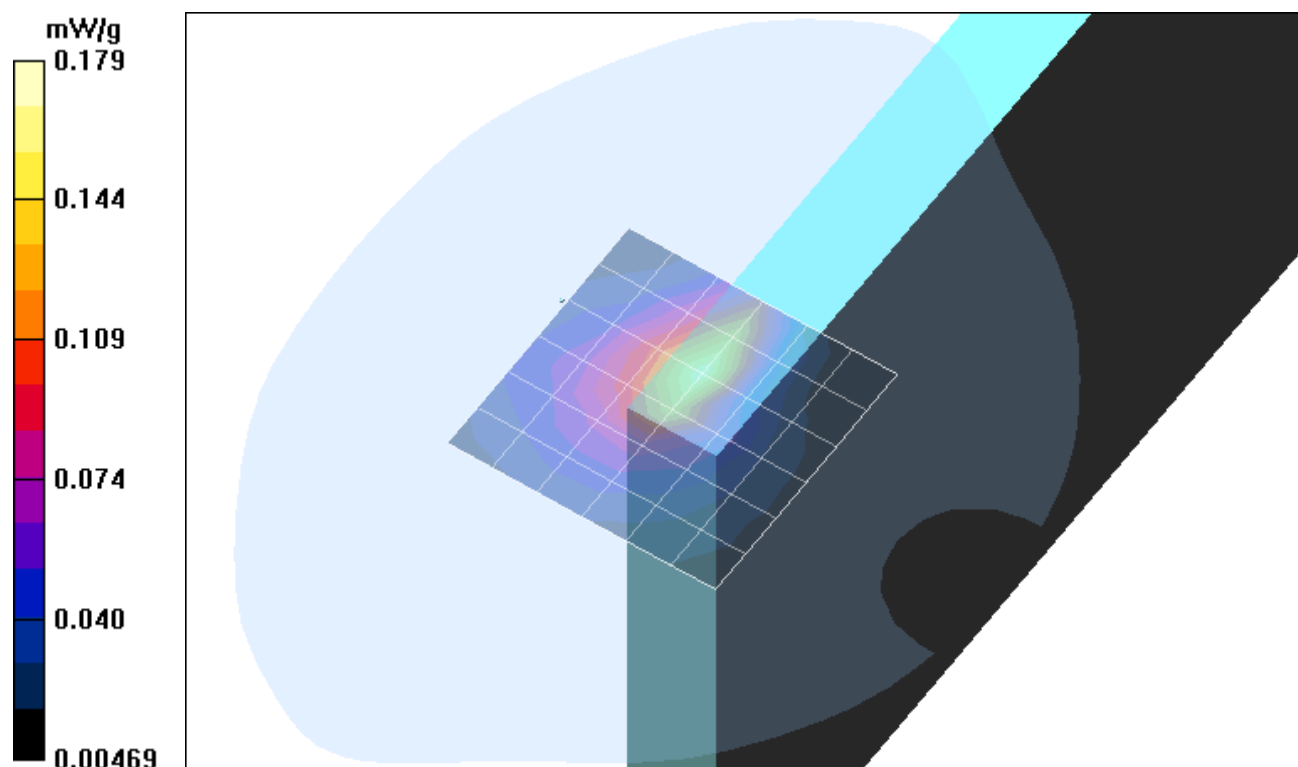


Fig. 21: SAR distribution for PCS 1900, channel 661, DELL Latitude D505, position 4. (11.24.2004; Ambient Temperature: 21.8° C; Liquid Temperature: 20.6° C).

Test Laboratory: IMST GmbH; File Name: [Ricbphm_5_dell.da4](#)

DUT: Option; Type: Ricola; Serial: 004400009370040

Program Name: Unnamed Program

Communication System: GPRS 1900; Frequency: 1880 MHz; Duty Cycle: 1:4

Medium parameters used: $\sigma = 1.56$; mho/m, $\epsilon_r = 54.3$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1669; ConvF(4.54, 4.54, 4.54); Calibrated: 18.03.2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn335; Calibrated: 05.08.2004
- Phantom: SAM Glycol 1176; Type: Speag; Serial: 1176
- Measurement SW: DASY4, V4.3 Build 16; Postprocessing SW: SEMCAD, V1.8 Build 127

Unnamed procedure/Area Scan (7x7x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.102 mW/g

Unnamed procedure/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.58 V/m; Power Drift = -0.108 dB

Peak SAR (extrapolated) = 0.142 W/kg

SAR(1 g) = 0.081 mW/g; SAR(10 g) = 0.040 mW/g

Maximum value of SAR (measured) = 0.109 mW/g

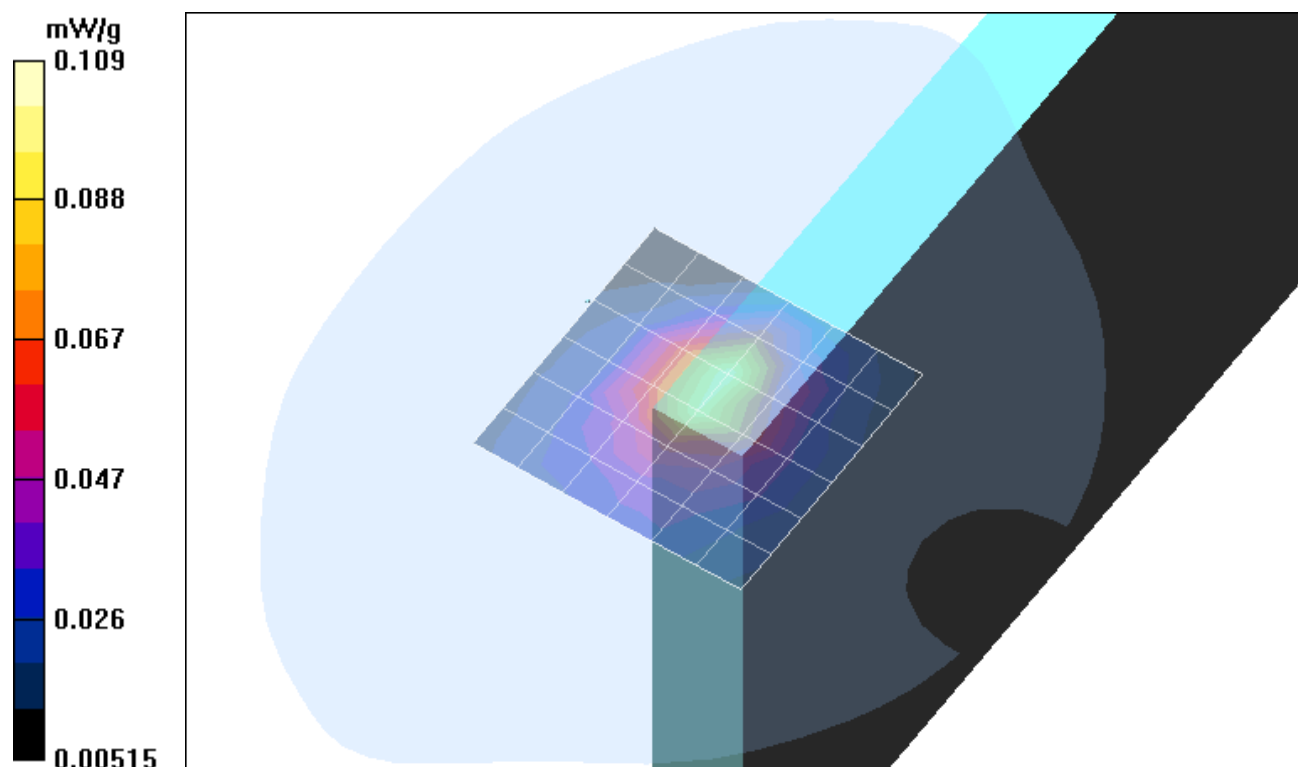


Fig. 22: SAR distribution for PCS 1900, channel 661, DELL Latitude D505, position 5. (11.24.2004; Ambient Temperature: 21.8° C; Liquid Temperature: 20.7° C).

Test Laboratory: IMST GmbH; File Name: [ricbphl_1_dell.da4](#)

DUT: Option; Type: Ricola; Serial: 004400009370040

Program Name: Unnamed Program

Communication System: GPRS 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:4

Medium parameters used: $\sigma = 1.56$; mho/m, $\epsilon_r = 54.3$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1669; ConvF(4.54, 4.54, 4.54); Calibrated: 18.03.2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn335; Calibrated: 05.08.2004
- Phantom: SAM Glycol 1176; Type: Speag; Serial: 1176
- Measurement SW: DASY4, V4.3 Build 16; Postprocessing SW: SEMCAD, V1.8 Build 127

Unnamed procedure/Area Scan (7x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.37 mW/g

Unnamed procedure/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 26.9 V/m; Power Drift = -0.018 dB

Peak SAR (extrapolated) = 2.03 W/kg

SAR(1 g) = 1.28 mW/g; SAR(10 g) = 0.758 mW/g

Maximum value of SAR (measured) = 1.39 mW/g

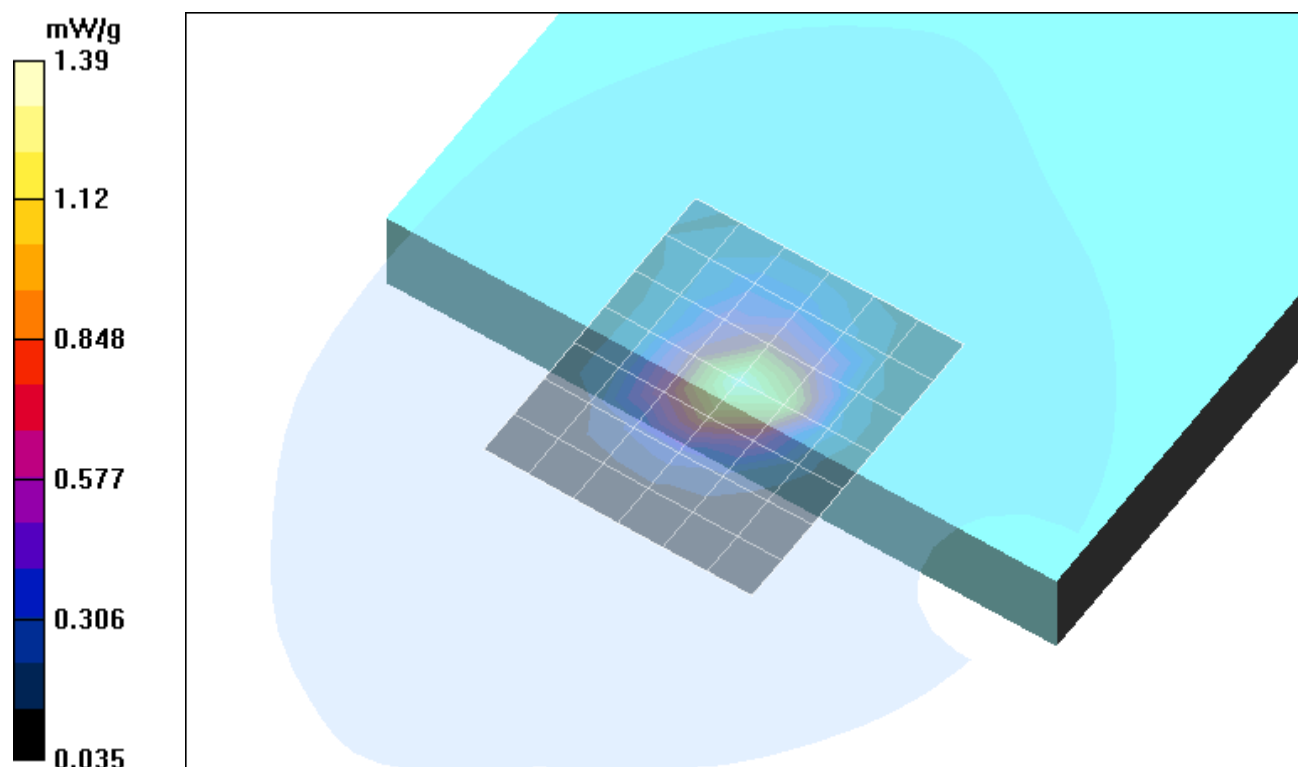


Fig. 23: SAR distribution for PCS 1900, channel 512, DELL Latitude D505, position 1. (11.24.2004; Ambient Temperature: 21.7° C; Liquid Temperature: 20.7° C).

Test Laboratory: IMST GmbH; File Name: [ricbphh_1_dell.da4](#)

DUT: Option; Type: Ricola; Serial: 004400009370040

Program Name: Unnamed Program

Communication System: GPRS 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:4

Medium parameters used: $\sigma = 1.56$; mho/m, $\epsilon_r = 54.3$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1669; ConvF(4.54, 4.54, 4.54); Calibrated: 18.03.2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn335; Calibrated: 05.08.2004
- Phantom: SAM Glycol 1176; Type: Speag; Serial: 1176
- Measurement SW: DASY4, V4.3 Build 16; Postprocessing SW: SEMCAD, V1.8 Build 127

Unnamed procedure/Area Scan (7x7x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.07 mW/g

Unnamed procedure/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 24.3 V/m; Power Drift = -0.007 dB

Peak SAR (extrapolated) = 1.82 W/kg

SAR(1 g) = 1.09 mW/g; SAR(10 g) = 0.626 mW/g

Maximum value of SAR (measured) = 1.19 mW/g

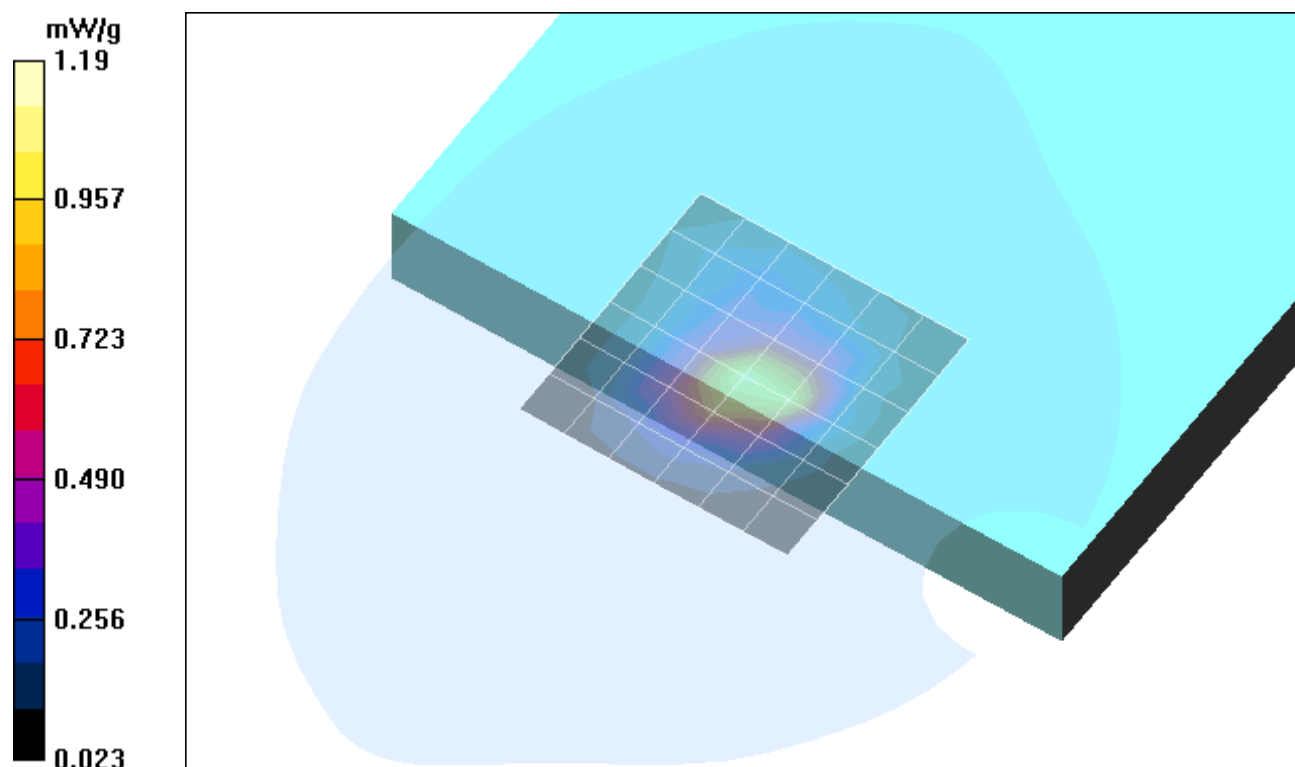


Fig. 24: SAR distribution for PCS 1900, channel 810, DELL Latitude D505, position 1. (11.24.2004; Ambient Temperature: 21.7° C; Liquid Temperature: 20.7° C).

Test Laboratory: IMST GmbH; File Name: [Ricbphm_1_PB.da4](#)

DUT: Option; Type: Ricola; Serial: 004400009370040

Program Name: Unnamed Program

Communication System: GPRS 1900; Frequency: 1880 MHz; Duty Cycle: 1:4

Medium parameters used: $\sigma = 1.56$; mho/m, $\epsilon_r = 54.3$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1669; ConvF(4.54, 4.54, 4.54); Calibrated: 18.03.2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn335; Calibrated: 05.08.2004
- Phantom: SAM Glycol 1176; Type: Speag; Serial: 1176
- Measurement SW: DASY4, V4.3 Build 16; Postprocessing SW: SEMCAD, V1.8 Build 127

Unnamed procedure/Area Scan (9x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.17 mW/g

Unnamed procedure/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 30.5 V/m; Power Drift = 0.052 dB

Peak SAR (extrapolated) = 2.33 W/kg

SAR(1 g) = 1.37 mW/g; SAR(10 g) = 0.789 mW/g

Maximum value of SAR (measured) = 1.52 mW/g

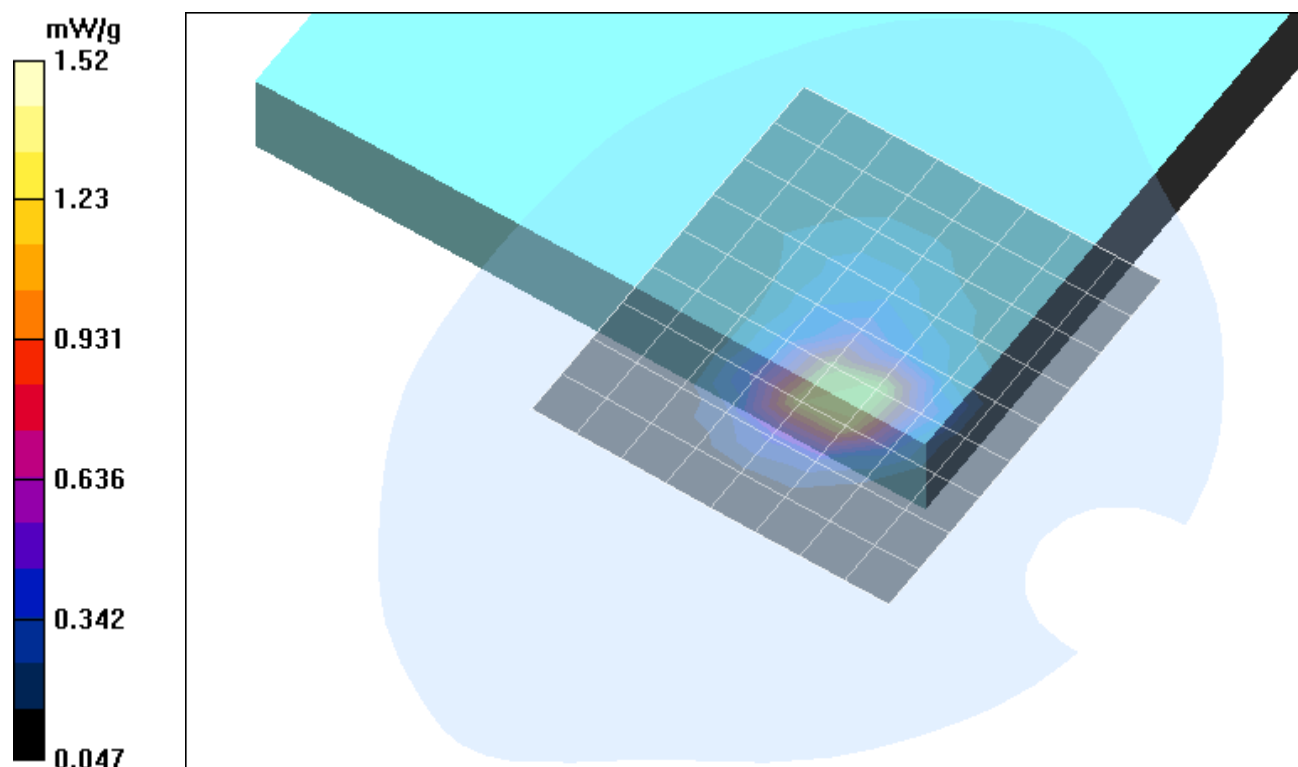


Fig. 25: SAR distribution for PCS 1900, channel 661, Packard Bell Easy Note, position 1. (11.24.2004; Ambient Temperature: 21.2° C; Liquid Temperature: 20.5° C).

Test Laboratory: IMST GmbH; File Name: [Ricbphm_2_PB.da4](#)

DUT: Option; Type: Ricola; Serial: 004400009370040

Program Name: Unnamed Program

Communication System: GPRS 1900; Frequency: 1880 MHz; Duty Cycle: 1:4

Medium parameters used: $\sigma = 1.56$; mho/m, $\epsilon_r = 54.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1669; ConvF(4.54, 4.54, 4.54); Calibrated: 18.03.2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn335; Calibrated: 05.08.2004
- Phantom: SAM Glycol 1176; Type: Speag; Serial: 1176
- Measurement SW: DASY4, V4.3 Build 16; Postprocessing SW: SEMCAD, V1.8 Build 127

Unnamed procedure/Area Scan (9x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.503 mW/g

Unnamed procedure/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.62 V/m; Power Drift = 0.030 dB

Peak SAR (extrapolated) = 0.705 W/kg

SAR(1 g) = 0.498 mW/g; SAR(10 g) = 0.323 mW/g

Maximum value of SAR (measured) = 0.536 mW/g

Unnamed procedure/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.62 V/m; Power Drift = 0.030 dB

Peak SAR (extrapolated) = 0.705 W/kg

SAR(1 g) = 0.467 mW/g; SAR(10 g) = 0.295 mW/g

Maximum value of SAR (measured) = 0.522 mW/g

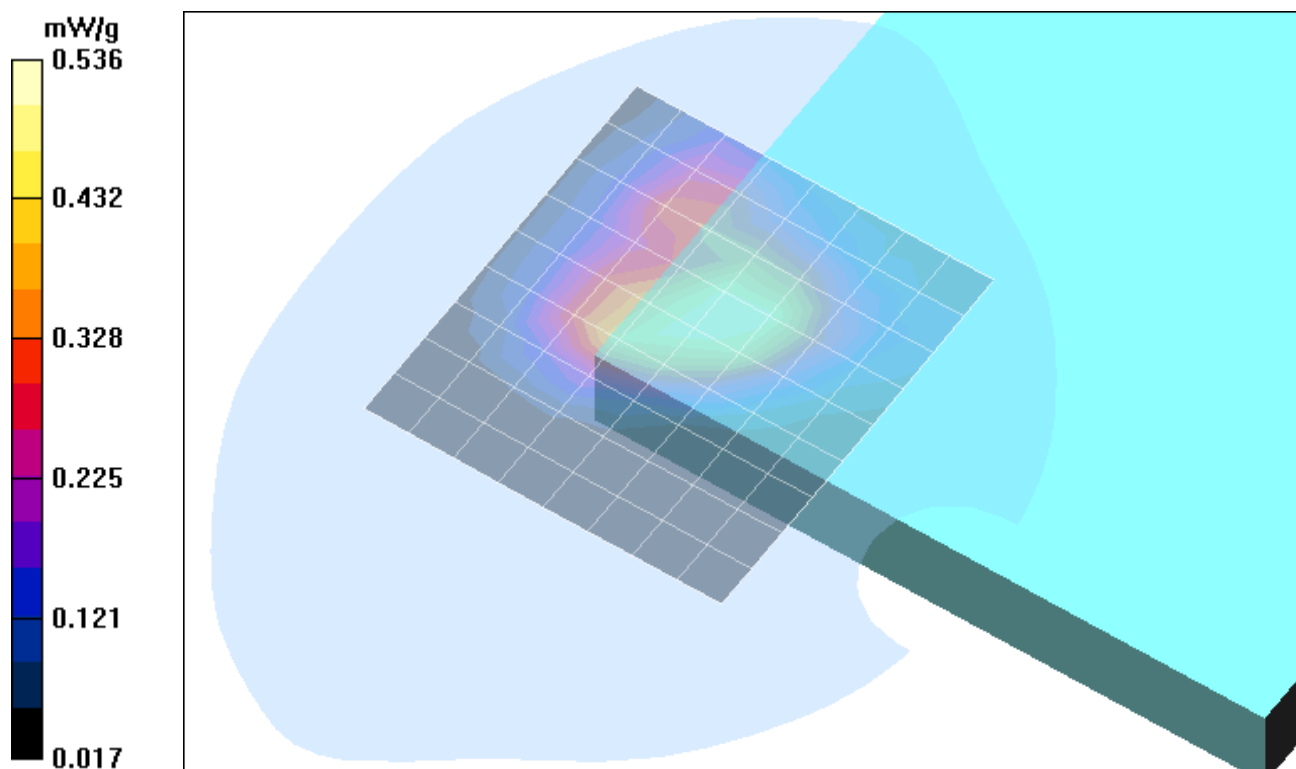


Fig. 26: SAR distribution for PCS 1900, channel 661, Packard Bell Easy Note, position 2. (11.24.2004; Ambient Temperature: 21.7° C; Liquid Temperature: 20.6° C).

Test Laboratory: IMST GmbH; File Name: [Ricbphm_3_PB.da4](#)

DUT: Option; Type: Ricola; Serial: 004400009370040

Program Name: Unnamed Program

Communication System: GPRS 1900; Frequency: 1880 MHz; Duty Cycle: 1:4

Medium parameters used: $\sigma = 1.56$; mho/m, $\epsilon_r = 54.3$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1669; ConvF(4.54, 4.54, 4.54); Calibrated: 18.03.2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn335; Calibrated: 05.08.2004
- Phantom: SAM Glycol 1176; Type: Speag; Serial: 1176
- Measurement SW: DASY4, V4.3 Build 16; Postprocessing SW: SEMCAD, V1.8 Build 127

Unnamed procedure/Area Scan (7x7x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.577 mW/g

Unnamed procedure/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 20.8 V/m; Power Drift = -0.058 dB

Peak SAR (extrapolated) = 0.877 W/kg

SAR(1 g) = 0.556 mW/g; SAR(10 g) = 0.334 mW/g

Maximum value of SAR (measured) = 0.612 mW/g

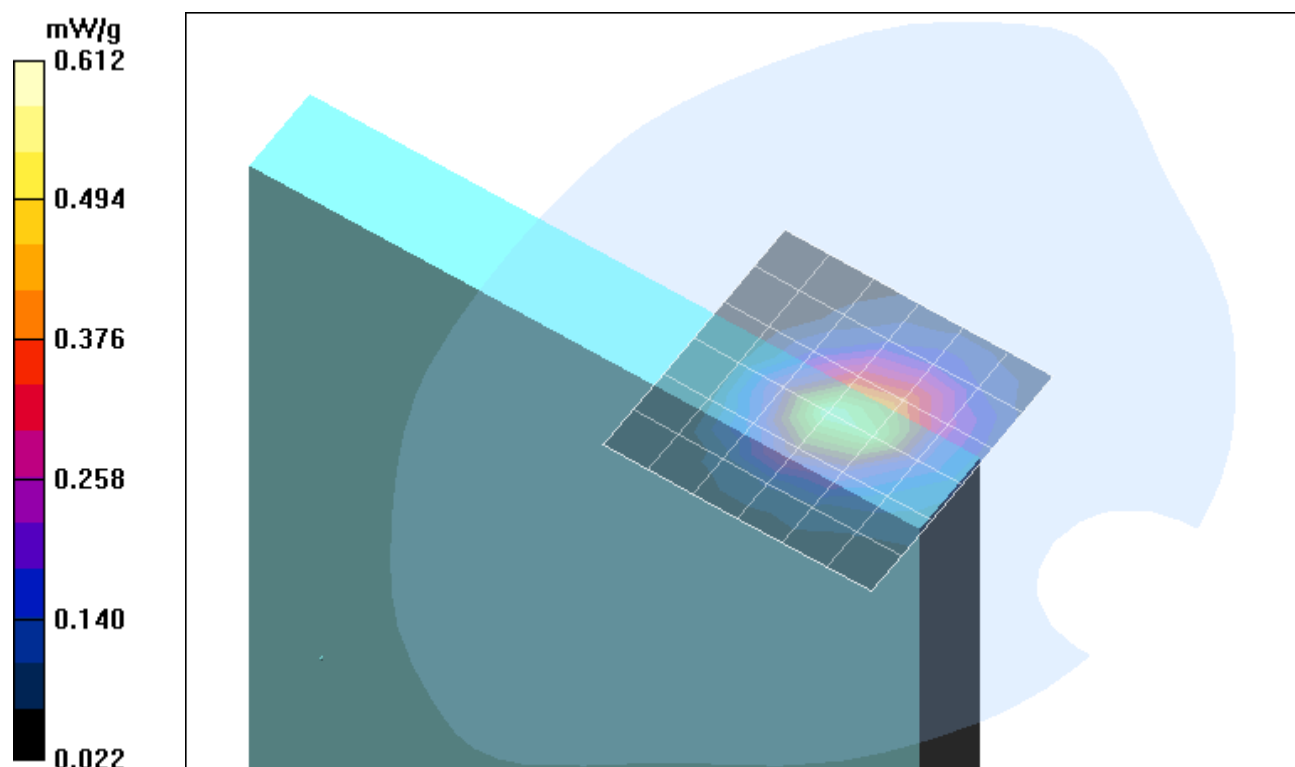


Fig. 27: SAR distribution for PCS 1900, channel 661, Packard Bell Easy Note, position 3. (11.24.2004; Ambient Temperature: 21.7° C; Liquid Temperature: 20.6° C).

Test Laboratory: IMST GmbH; File Name: [Ricbphm_4_PB.da4](#)

DUT: Option; Type: Ricola; Serial: 004400009370040

Program Name: Unnamed Program

Communication System: GPRS 1900; Frequency: 1880 MHz; Duty Cycle: 1:4

Medium parameters used: $\sigma = 1.56$; mho/m, $\epsilon_r = 54.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1669; ConvF(4.54, 4.54, 4.54); Calibrated: 18.03.2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn335; Calibrated: 05.08.2004
- Phantom: SAM Glycol 1176; Type: Speag; Serial: 1176
- Measurement SW: DASY4, V4.3 Build 16; Postprocessing SW: SEMCAD, V1.8 Build 127

Unnamed procedure/Area Scan (7x7x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.157 mW/g

Unnamed procedure/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.62 V/m; Power Drift = -0.050 dB

Peak SAR (extrapolated) = 0.225 W/kg

SAR(1 g) = 0.090 mW/g; SAR(10 g) = 0.037 mW/g

Maximum value of SAR (measured) = 0.153 mW/g

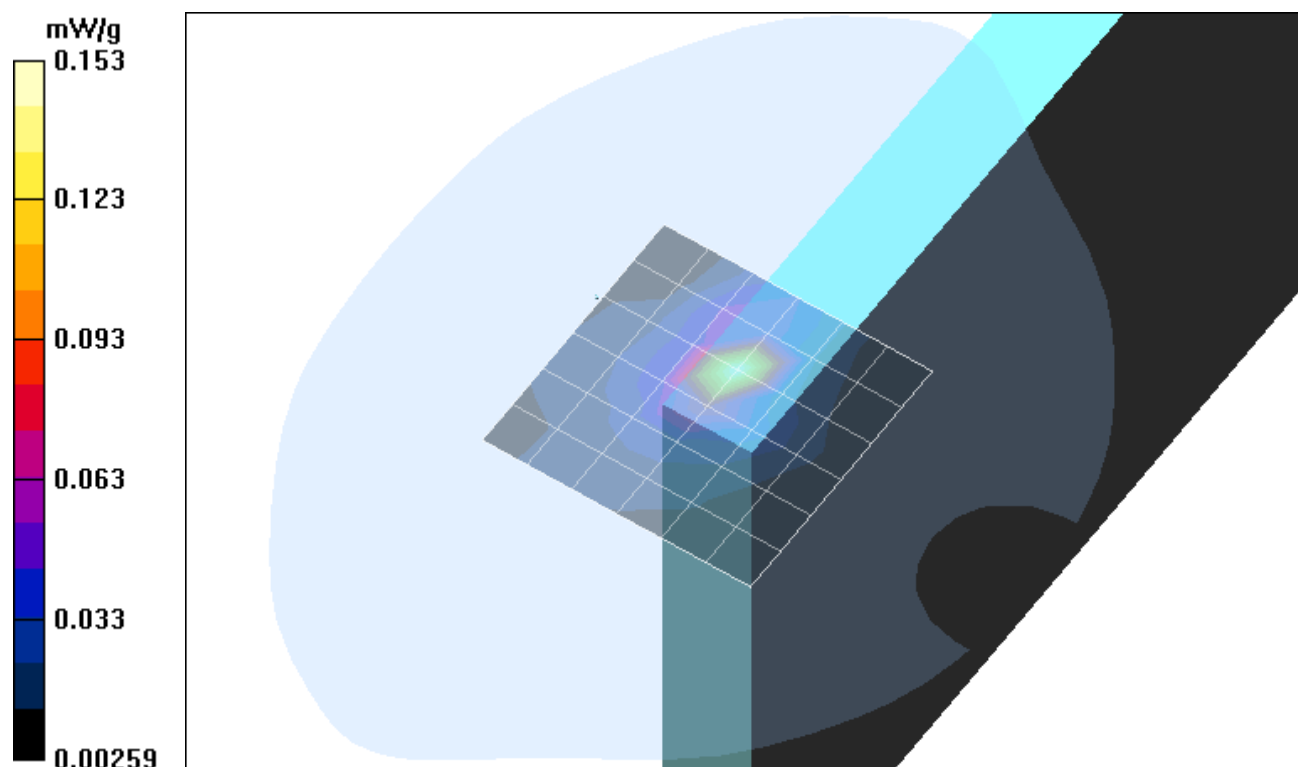


Fig. 28: SAR distribution for PCS 1900, channel 661, Packard Bell Easy Note, position 4. (11.24.2004; Ambient Temperature: 21.7° C; Liquid Temperature: 20.7° C).

Test Laboratory: IMST GmbH; File Name: [Ricbphm_5_PB.da4](#)

DUT: Option; Type: Ricola; Serial: 004400009370040

Program Name: Unnamed Program

Communication System: GPRS 1900; Frequency: 1880 MHz; Duty Cycle: 1:4

Medium parameters used: $\sigma = 1.56$; mho/m, $\epsilon_r = 54.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1669; ConvF(4.54, 4.54, 4.54); Calibrated: 18.03.2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn335; Calibrated: 05.08.2004
- Phantom: SAM Glycol 1176; Type: Speag; Serial: 1176
- Measurement SW: DASY4, V4.3 Build 16; Postprocessing SW: SEMCAD, V1.8 Build 127

Unnamed procedure/Area Scan (7x7x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.758 mW/g

Unnamed procedure/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 18.1 V/m; Power Drift = -0.105 dB

Peak SAR (extrapolated) = 1.35 W/kg

SAR(1 g) = 0.671 mW/g; SAR(10 g) = 0.354 mW/g

Maximum value of SAR (measured) = 0.760 mW/g

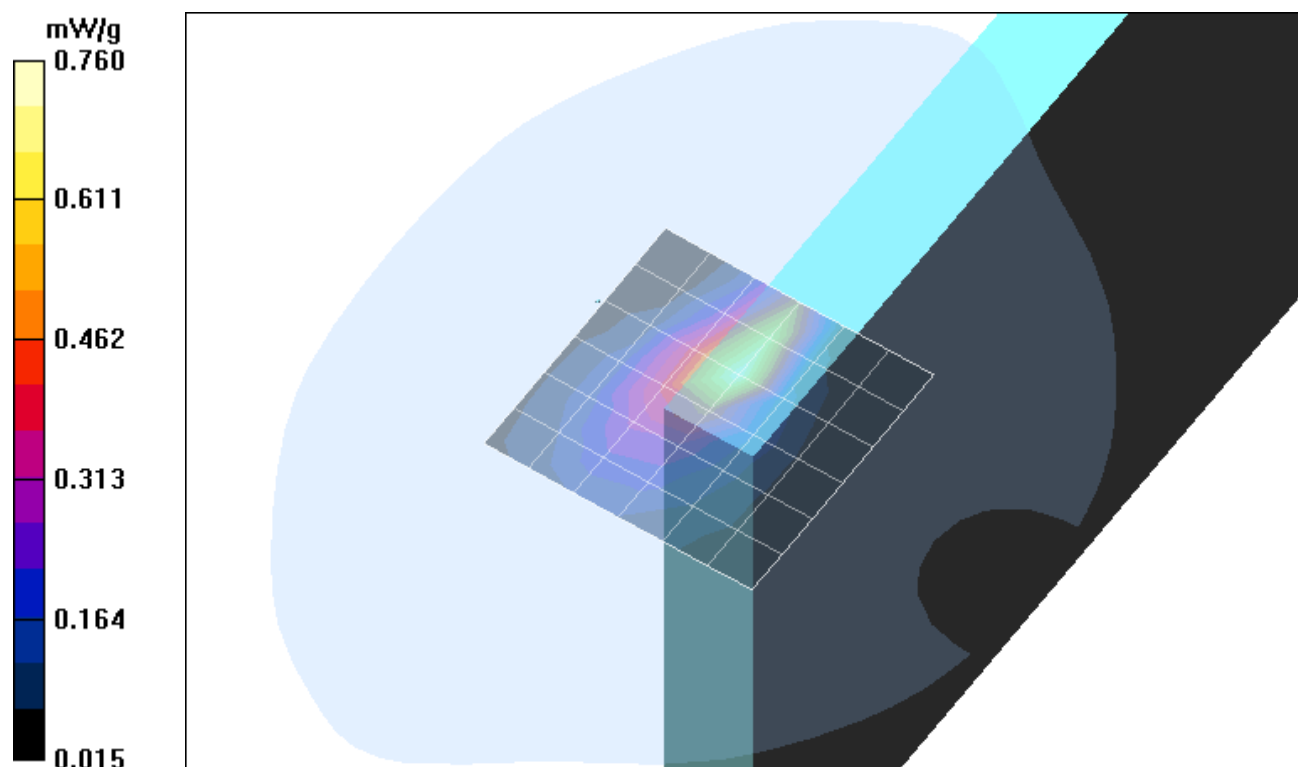


Fig. 29: SAR distribution for PCS 1900, channel 661, Packard Bell Easy Note, position 5. (11.24.2004; Ambient Temperature: 21.8° C; Liquid Temperature: 20.7° C).

Test Laboratory: IMST GmbH; **File Name:** [Ricbphl_1_PB.da4](#)

DUT: Option; Type: Ricola; **Serial:** 004400009370040

Program Name: Unnamed Program

Communication System: GPRS 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:4

Medium parameters used: $\sigma = 1.56$; mho/m, $\epsilon_r = 54.3$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1669; ConvF(4.54, 4.54, 4.54); Calibrated: 18.03.2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn335; Calibrated: 05.08.2004
- Phantom: SAM Glycol 1176; Type: Speag; Serial: 1176
- Measurement SW: DASY4, V4.3 Build 16; Postprocessing SW: SEMCAD, V1.8 Build 127

Unnamed procedure/Area Scan (8x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.32 mW/g

Unnamed procedure/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 32.1 V/m; Power Drift = -0.032 dB

Peak SAR (extrapolated) = 2.41 W/kg

SAR(1 g) = 1.47 mW/g; SAR(10 g) = 0.853 mW/g

Maximum value of SAR (measured) = 1.63 mW/g

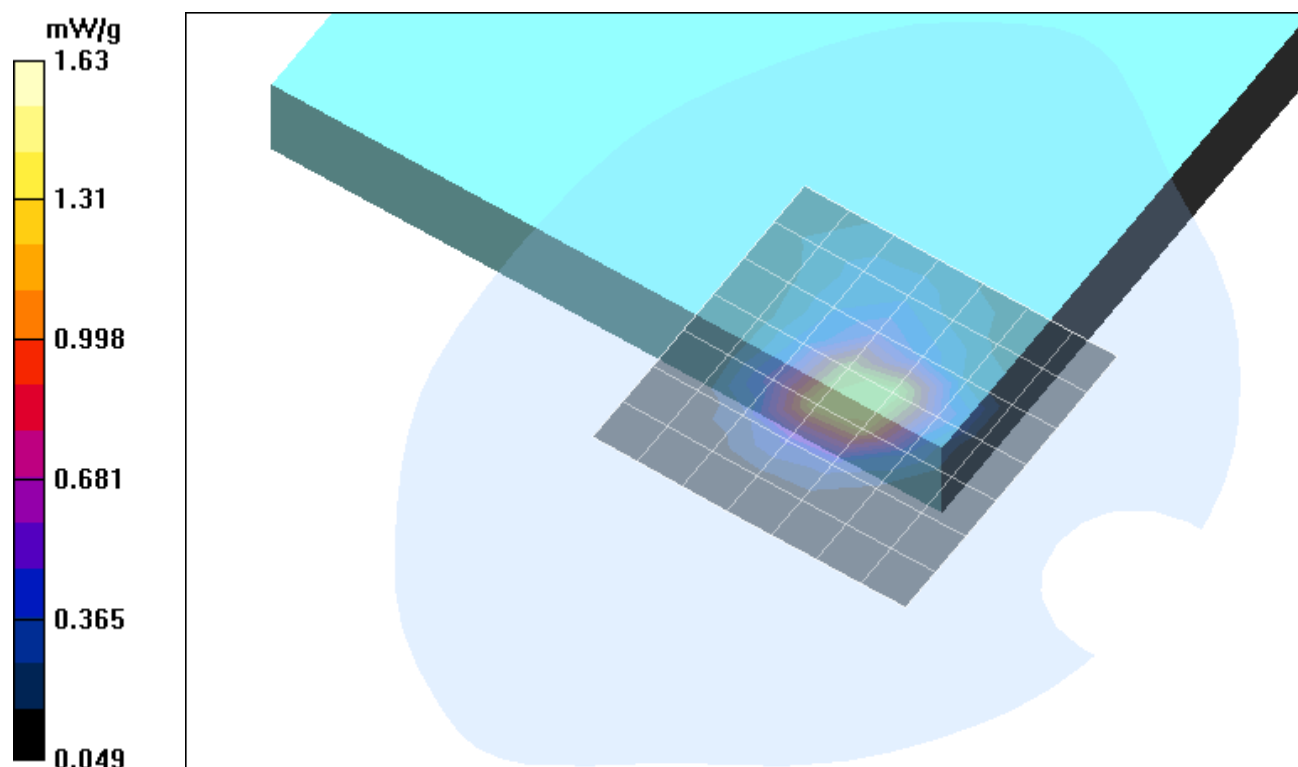


Fig. 30: SAR distribution for PCS 1900, channel 512, Packard Bell Easy Note, position 1. (11.24.2004; Ambient Temperature: 21.8° C; Liquid Temperature: 20.6° C).

Test Laboratory: IMST GmbH; File Name: [Ricbphh_1_PB.da4](#)

DUT: Option; Type: Ricola; Serial: 004400009370040

Program Name: Unnamed Program

Communication System: GPRS 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:4

Medium parameters used: $\sigma = 1.56$; mho/m, $\epsilon_r = 54.3$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1669; ConvF(4.54, 4.54, 4.54); Calibrated: 18.03.2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn335; Calibrated: 05.08.2004
- Phantom: SAM Glycol 1176; Type: Speag; Serial: 1176
- Measurement SW: DASY4, V4.3 Build 16; Postprocessing SW: SEMCAD, V1.8 Build 127

Unnamed procedure/Area Scan (8x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.08 mW/g

Unnamed procedure/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 29.1 V/m; Power Drift = -0.042 dB

Peak SAR (extrapolated) = 2.05 W/kg

SAR(1 g) = 1.21 mW/g; SAR(10 g) = 0.684 mW/g

Maximum value of SAR (measured) = 1.34 mW/g

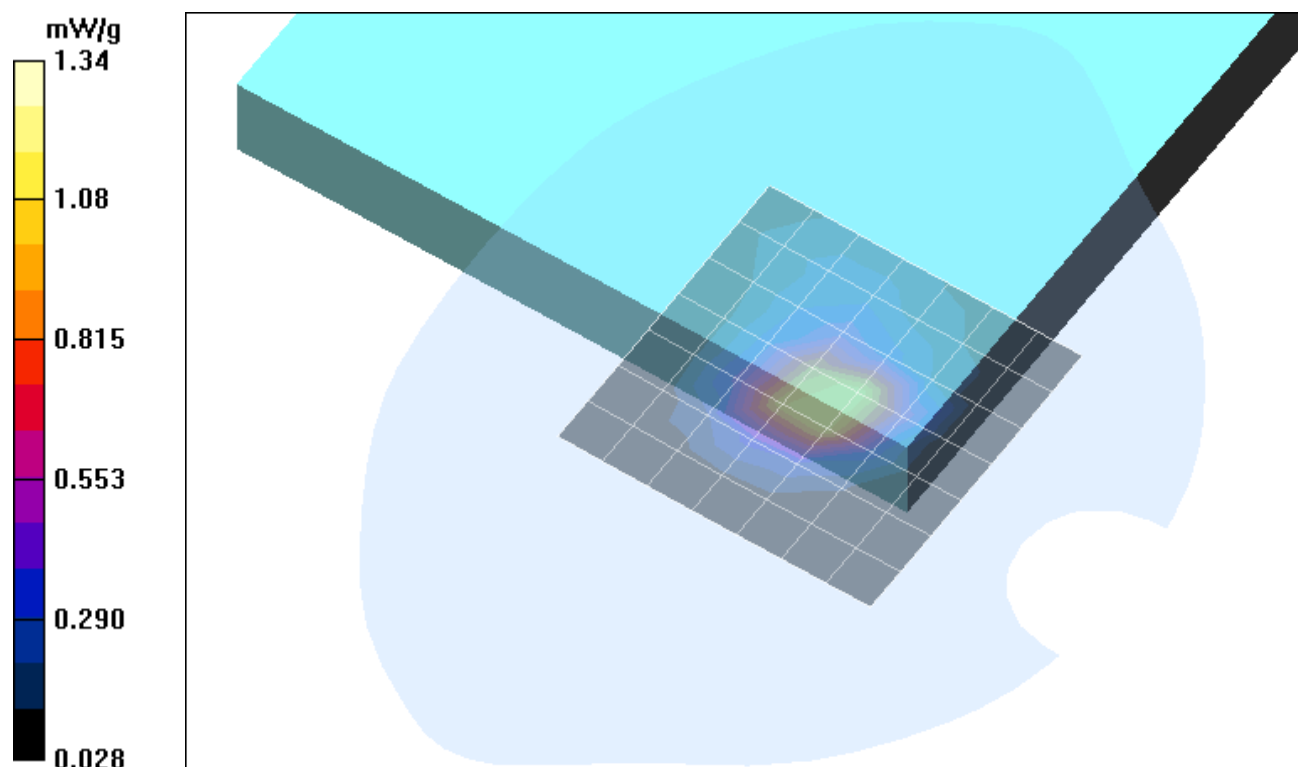


Fig. 31: SAR distribution for PCS 1900, channel 810, Packard Bell Easy Note, position 1. (11.24.2004; Ambient Temperature: 21.8° C; Liquid Temperature: 20.7° C).

Test Laboratory: IMST GmbH; **File Name:** [ricbphm_1_ARC.da4](#)

DUT: Option; Type: Ricola; Serial: 004400009370040

Program Name: Unnamed Program

Communication System: GPRS 1900; Frequency: 1880 MHz; Duty Cycle: 1:4

Medium parameters used: $\sigma = 1.56$; mho/m, $\epsilon_r = 54.3$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1669; ConvF(4.54, 4.54, 4.54); Calibrated: 18.03.2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn335; Calibrated: 05.08.2004
- Phantom: SAM Glycol 1176; Type: Speag; Serial: 1176
- Measurement SW: DASY4, V4.3 Build 16; Postprocessing SW: SEMCAD, V1.8 Build 127

Unnamed procedure/Area Scan (7x7x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.04 mW/g

Unnamed procedure/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 28.1 V/m; Power Drift = -0.2 dB

Peak SAR (extrapolated) = 1.57 W/kg

SAR(1 g) = 1.01 mW/g; SAR(10 g) = 0.599 mW/g

Maximum value of SAR (measured) = 1.11 mW/g

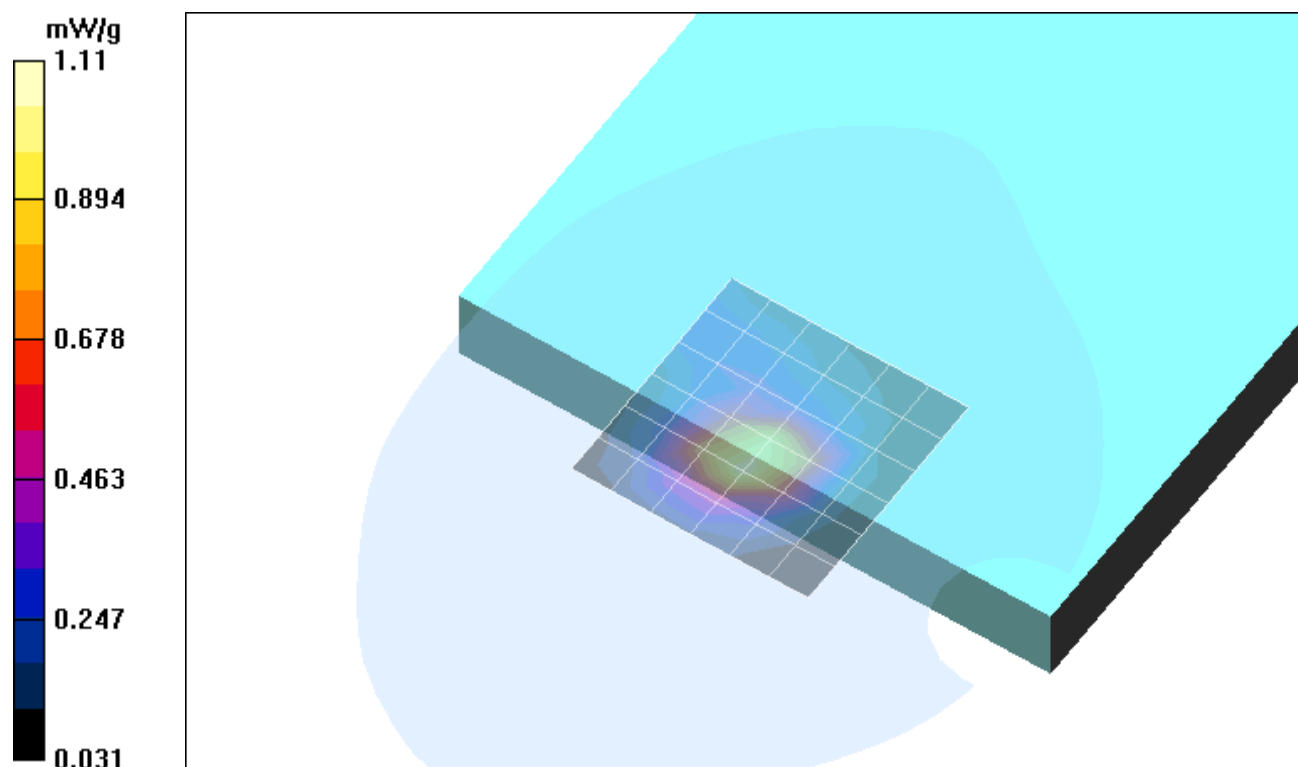


Fig. 32: SAR distribution for PCS 1900, channel 661, Acer Aspire 2020, position 1. (11.24.2004; Ambient Temperature: 21.9° C; Liquid Temperature: 20.6° C).

Test Laboratory: IMST GmbH; File Name: [Ricbphm_2_ARC.da4](#)

DUT: Option; Type: Ricola; Serial: 004400009370040

Program Name: Unnamed Program

Communication System: GPRS 1900; Frequency: 1880 MHz; Duty Cycle: 1:4

Medium parameters used: $\sigma = 1.56$; mho/m, $\epsilon_r = 54.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1669; ConvF(4.54, 4.54, 4.54); Calibrated: 18.03.2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn335; Calibrated: 05.08.2004
- Phantom: SAM Glycol 1176; Type: Speag; Serial: 1176
- Measurement SW: DASY4, V4.3 Build 16; Postprocessing SW: SEMCAD, V1.8 Build 127

Unnamed procedure/Area Scan (8x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.608 mW/g

Unnamed procedure/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.6 V/m; Power Drift = -0.115 dB

Peak SAR (extrapolated) = 0.886 W/kg

SAR(1 g) = 0.567 mW/g; SAR(10 g) = 0.350 mW/g

Maximum value of SAR (measured) = 0.613 mW/g

Unnamed procedure/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.6 V/m; Power Drift = -0.115 dB

Peak SAR (extrapolated) = 0.578 W/kg

SAR(1 g) = 0.362 mW/g; SAR(10 g) = 0.222 mW/g

Maximum value of SAR (measured) = 0.396 mW/g

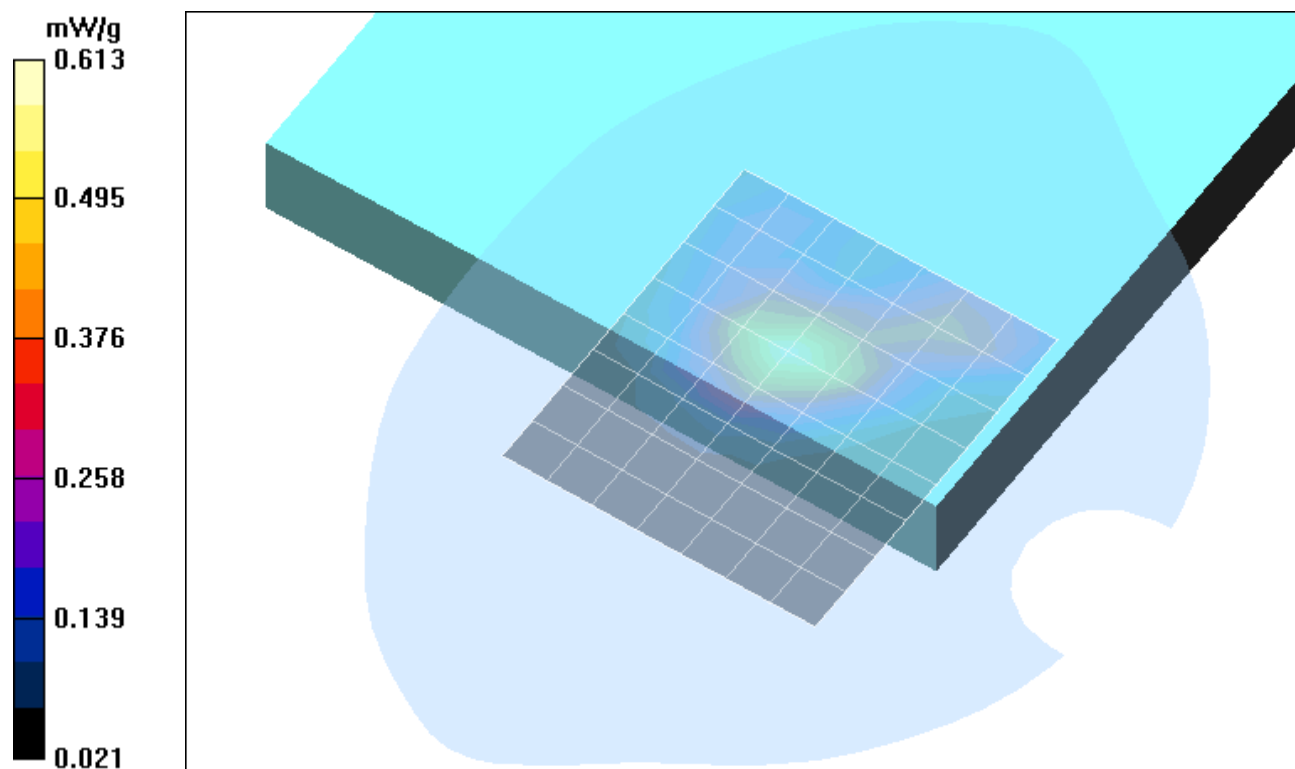


Fig. 33: SAR distribution for PCS 1900, channel 661, Acer Aspire 2020, position 2. (11.24.2004; Ambient Temperature: 21.7° C; Liquid Temperature: 20.2° C).

Test Laboratory: IMST GmbH; File Name: [Ricbphm_3_Acer.da4](#)

DUT: Option; Type: Ricola; Serial: 004400009370040

Program Name: Unnamed Program

Communication System: GPRS 1900; Frequency: 1880 MHz; Duty Cycle: 1:4

Medium parameters used: $\sigma = 1.56$; mho/m, $\epsilon_r = 54.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1669; ConvF(4.54, 4.54, 4.54); Calibrated: 18.03.2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn335; Calibrated: 05.08.2004
- Phantom: SAM Glycol 1176; Type: Speag; Serial: 1176
- Measurement SW: DASY4, V4.3 Build 16; Postprocessing SW: SEMCAD, V1.8 Build 127

Unnamed procedure/Area Scan (7x7x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.618 mW/g

Unnamed procedure/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.5 V/m; Power Drift = -0.045 dB

Peak SAR (extrapolated) = 0.934 W/kg

SAR(1 g) = 0.604 mW/g; SAR(10 g) = 0.356 mW/g

Maximum value of SAR (measured) = 0.666 mW/g

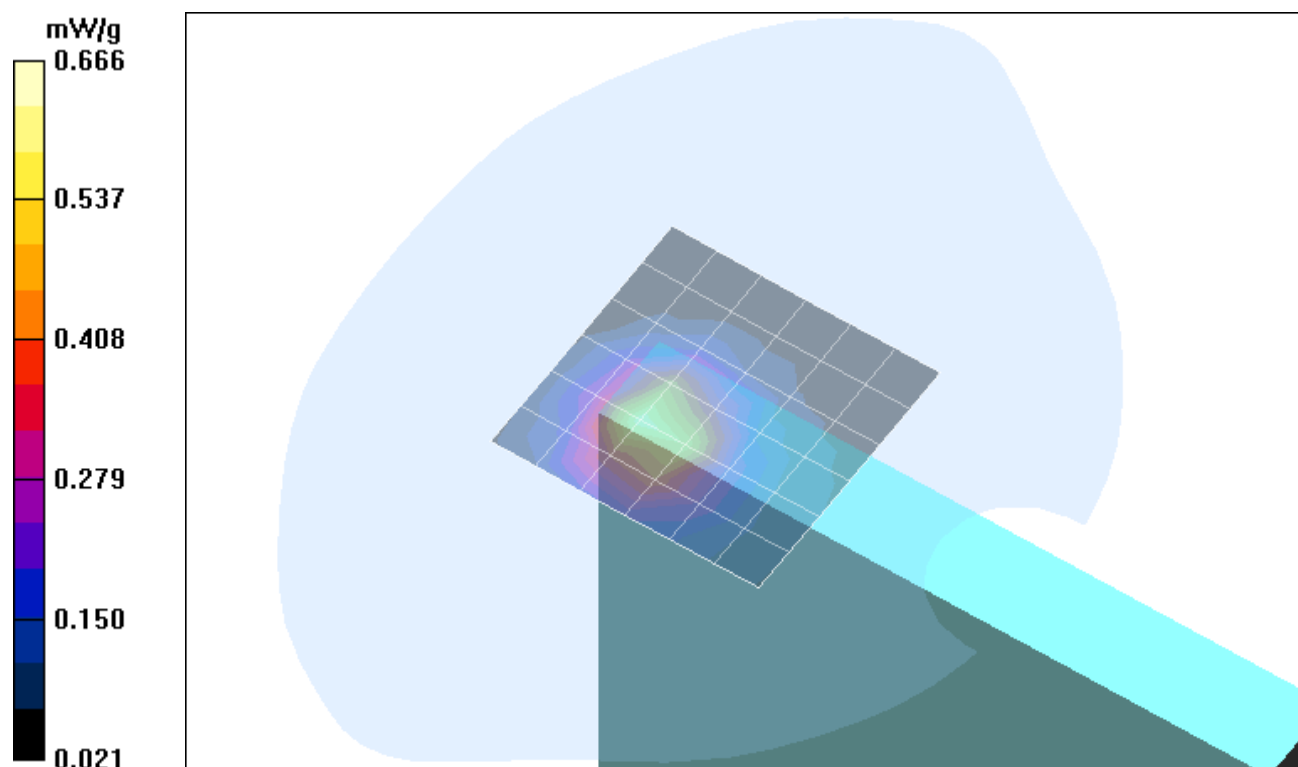


Fig. 34: SAR distribution for PCS 1900, channel 661, Acer Aspire 2020, position 3. (11.24.2004; Ambient Temperature: 21.7° C; Liquid Temperature: 20.2° C).

Test Laboratory: IMST GmbH; File Name: [Ricbphm_4_Acer.da4](#)

DUT: Option; Type: Ricola; Serial: 004400009370040

Program Name: Unnamed Program

Communication System: GPRS 1900; Frequency: 1880 MHz; Duty Cycle: 1:4

Medium parameters used: $\sigma = 1.56$; mho/m, $\epsilon_r = 54.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1669; ConvF(4.54, 4.54, 4.54); Calibrated: 18.03.2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn335; Calibrated: 05.08.2004
- Phantom: SAM Glycol 1176; Type: Speag; Serial: 1176
- Measurement SW: DASY4, V4.3 Build 16; Postprocessing SW: SEMCAD, V1.8 Build 127

Unnamed procedure/Area Scan (7x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.351 mW/g

Unnamed procedure/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.5 V/m; Power Drift = -0.076 dB

Peak SAR (extrapolated) = 0.615 W/kg

SAR(1 g) = 0.242 mW/g; SAR(10 g) = 0.135 mW/g

Maximum value of SAR (measured) = 0.402 mW/g

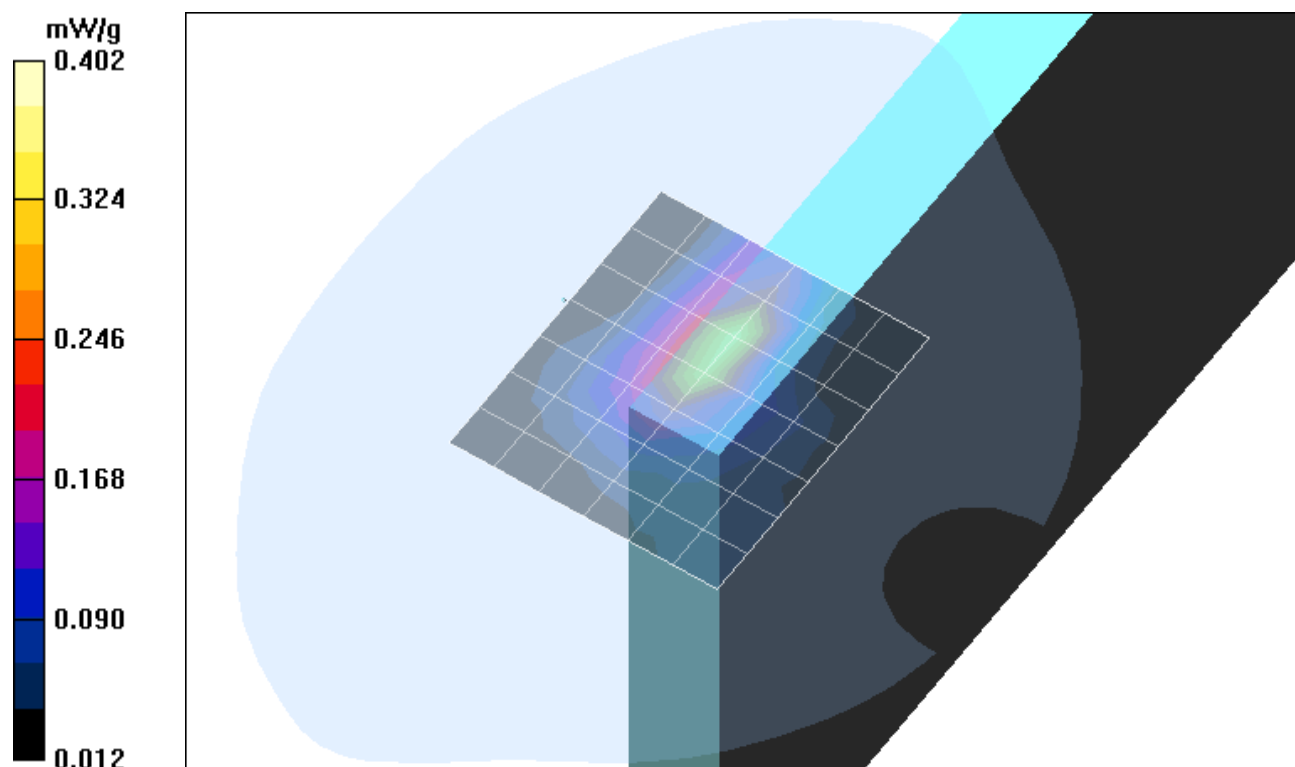


Fig. 35: SAR distribution for PCS 1900, channel 661, Acer Aspire 2020, position 4. (11.24.2004; Ambient Temperature: 21.9° C; Liquid Temperature: 20.2° C).

Test Laboratory: IMST GmbH; File Name: [Ricbphm_5_Acer.da4](#)

DUT: Option; Type: Ricola; Serial: 004400009370040

Program Name: Unnamed Program

Communication System: GPRS 1900; Frequency: 1880 MHz; Duty Cycle: 1:4

Medium parameters used: $\sigma = 1.56$; mho/m, $\epsilon_r = 54.3$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1669; ConvF(4.54, 4.54, 4.54); Calibrated: 18.03.2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn335; Calibrated: 05.08.2004
- Phantom: SAM Glycol 1176; Type: Speag; Serial: 1176
- Measurement SW: DASY4, V4.3 Build 16; Postprocessing SW: SEMCAD, V1.8 Build 127

Unnamed procedure/Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.129 mW/g

Unnamed procedure/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.27 V/m; Power Drift = -0.2 dB

Peak SAR (extrapolated) = 0.153 W/kg

SAR(1 g) = 0.087 mW/g; SAR(10 g) = 0.037 mW/g

Maximum value of SAR (measured) = 0.135 mW/g

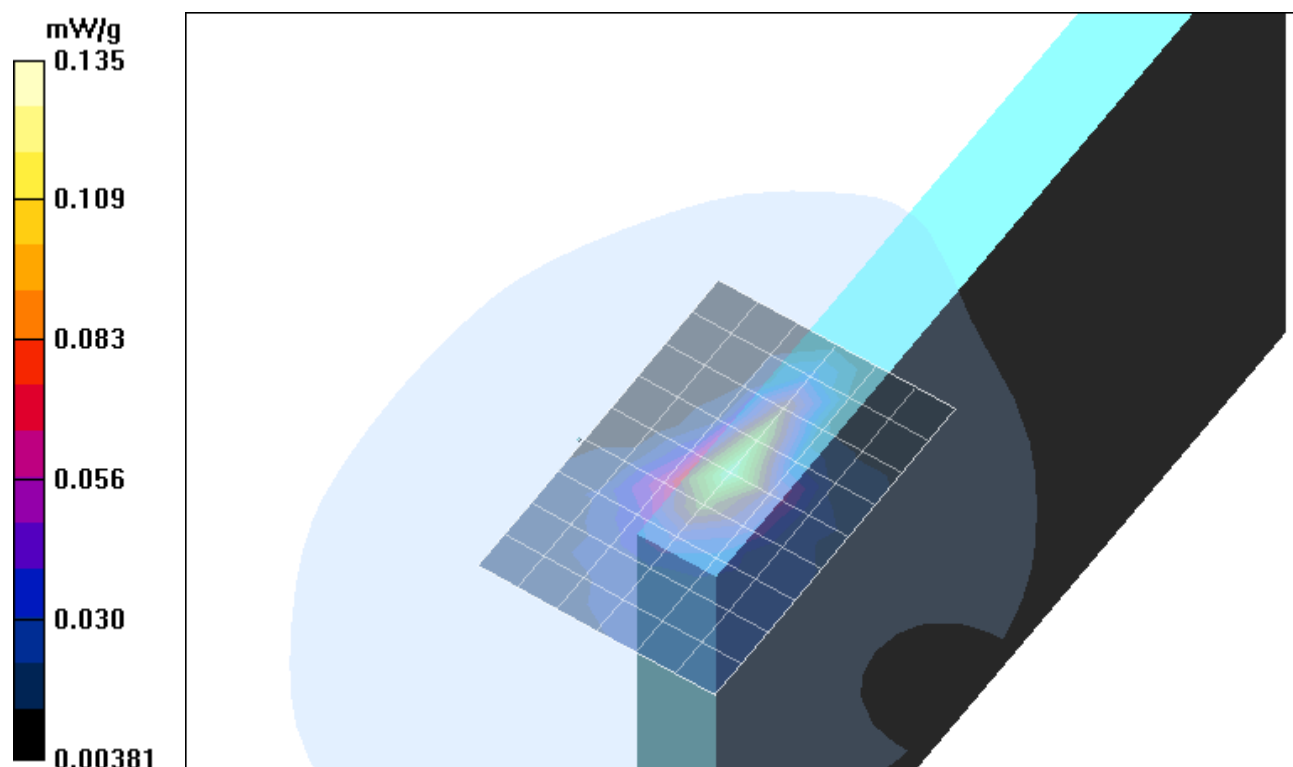


Fig. 36: SAR distribution for PCS 1900, channel 661, Acer Aspire 2020, position 5. (11.24.2004; Ambient Temperature: 21.9° C; Liquid Temperature: 20.3° C).

Test Laboratory: IMST GmbH; **File Name:** [ricbphh_1_ARC.da4](#)

DUT: Option; Type: Ricola; Serial: 004400009370040

Program Name: Unnamed Program

Communication System: GPRS 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:4

Medium parameters used: $\sigma = 1.56$; mho/m, $\epsilon_r = 54.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1669; ConvF(4.54, 4.54, 4.54); Calibrated: 18.03.2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn335; Calibrated: 05.08.2004
- Phantom: SAM Glycol 1176; Type: Speag; Serial: 1176
- Measurement SW: DASY4, V4.3 Build 16; Postprocessing SW: SEMCAD, V1.8 Build 127

Unnamed procedure/Area Scan (7x7x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.979 mW/g

Unnamed procedure/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 24.9 V/m; Power Drift = -0.1 dB

Peak SAR (extrapolated) = 1.61 W/kg

SAR(1 g) = 1 mW/g; SAR(10 g) = 0.581 mW/g

Maximum value of SAR (measured) = 1.11 mW/g

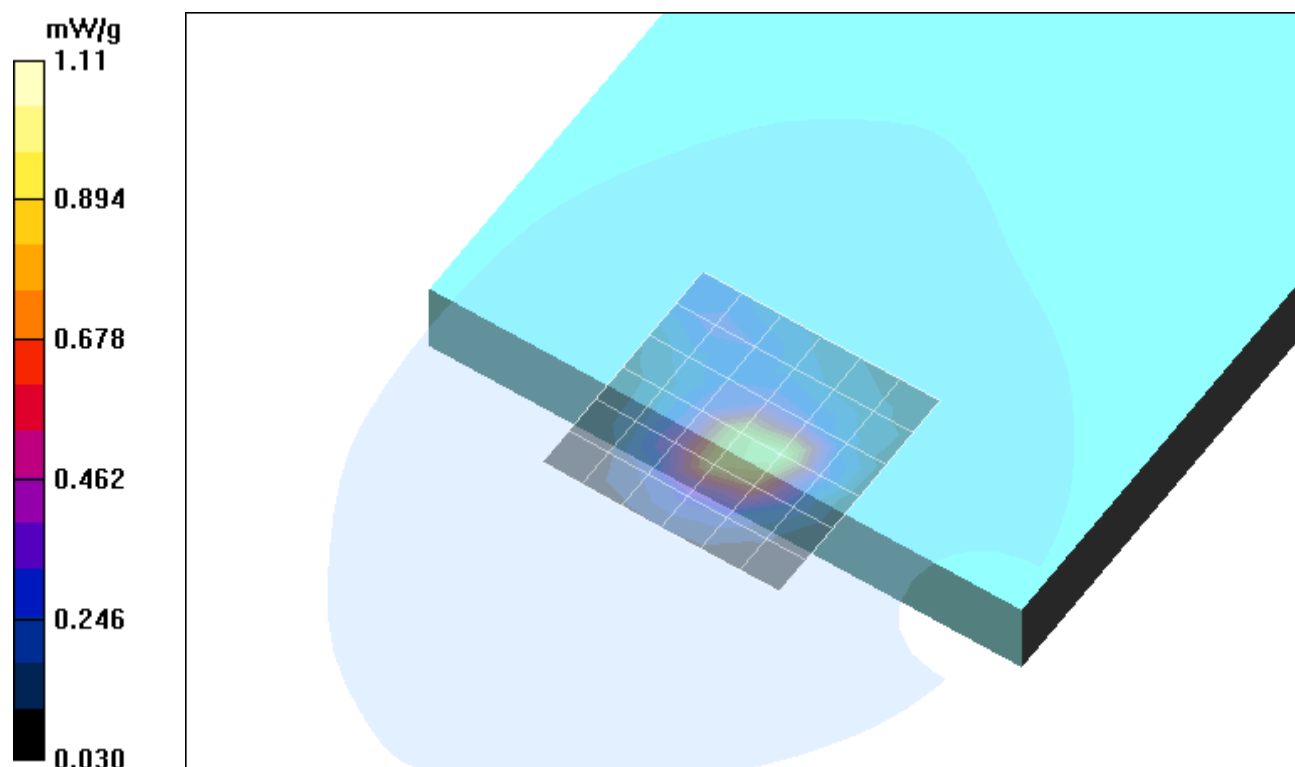


Fig. 37: SAR distribution for PCS 1900, channel 512, Acer Aspire 2020, position 1. (11.24.2004; Ambient Temperature: 21.8° C; Liquid Temperature: 20.4° C).

Test Laboratory: IMST GmbH; **File Name:** [ricbphh_1_ARC.da4](#)

DUT: Option; **Type:** Ricola; **Serial:** 004400009370040

Program Name: Unnamed Program

Communication System: GPRS 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:4

Medium parameters used: $\sigma = 1.56$; mho/m, $\epsilon_r = 54.3$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1669; ConvF(4.54, 4.54, 4.54); Calibrated: 18.03.2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn335; Calibrated: 05.08.2004
- Phantom: SAM Glycol 1176; Type: Speag; Serial: 1176
- Measurement SW: DASY4, V4.3 Build 16; Postprocessing SW: SEMCAD, V1.8 Build 127

Unnamed procedure/Area Scan (7x7x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.979 mW/g

Unnamed procedure/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 24.9 V/m; Power Drift = -0.1 dB

Peak SAR (extrapolated) = 1.61 W/kg

SAR(1 g) = 1 mW/g; SAR(10 g) = 0.581 mW/g

Maximum value of SAR (measured) = 1.11 mW/g

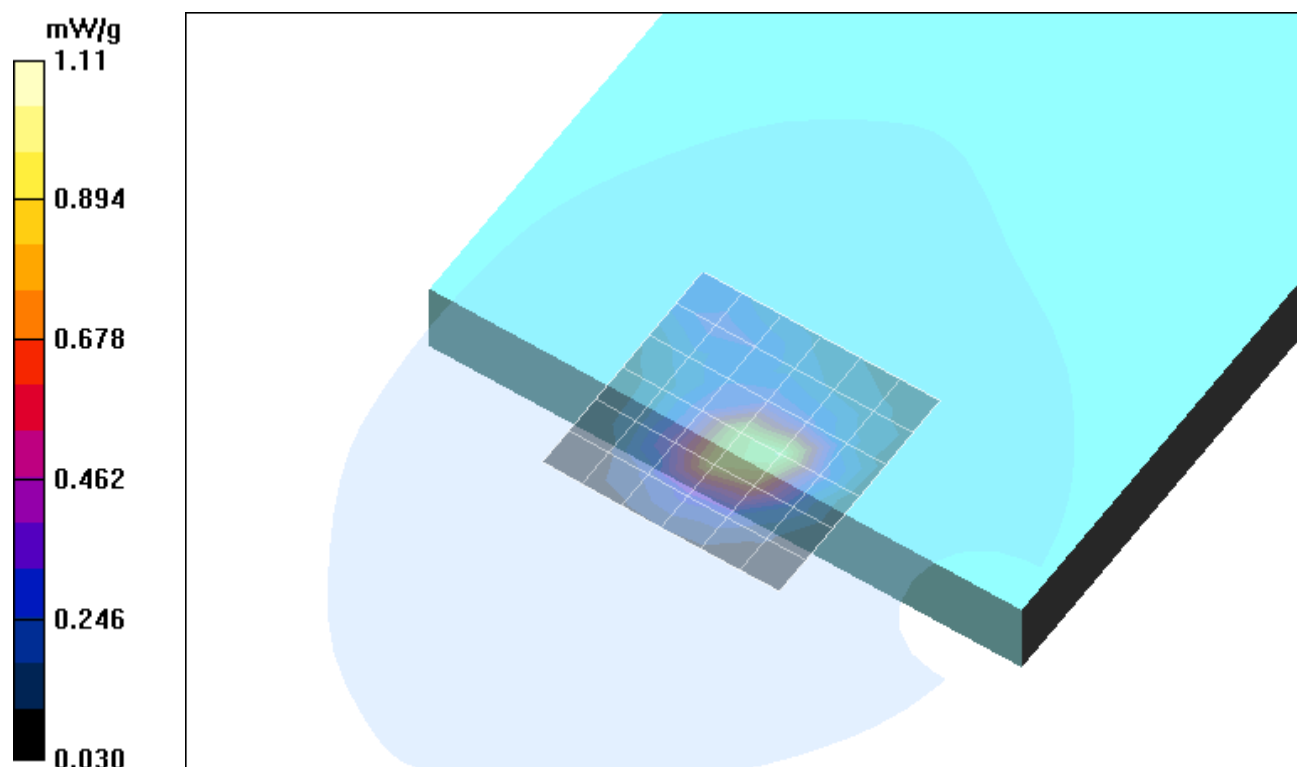


Fig. 38: SAR distribution for PCS 1900, channel 810, Acer Aspire 2020, position 1. (11.24.2004; Ambient Temperature: 21.9° C; Liquid Temperature: 20.4° C).

3 SAR z-axis scans (Validation)

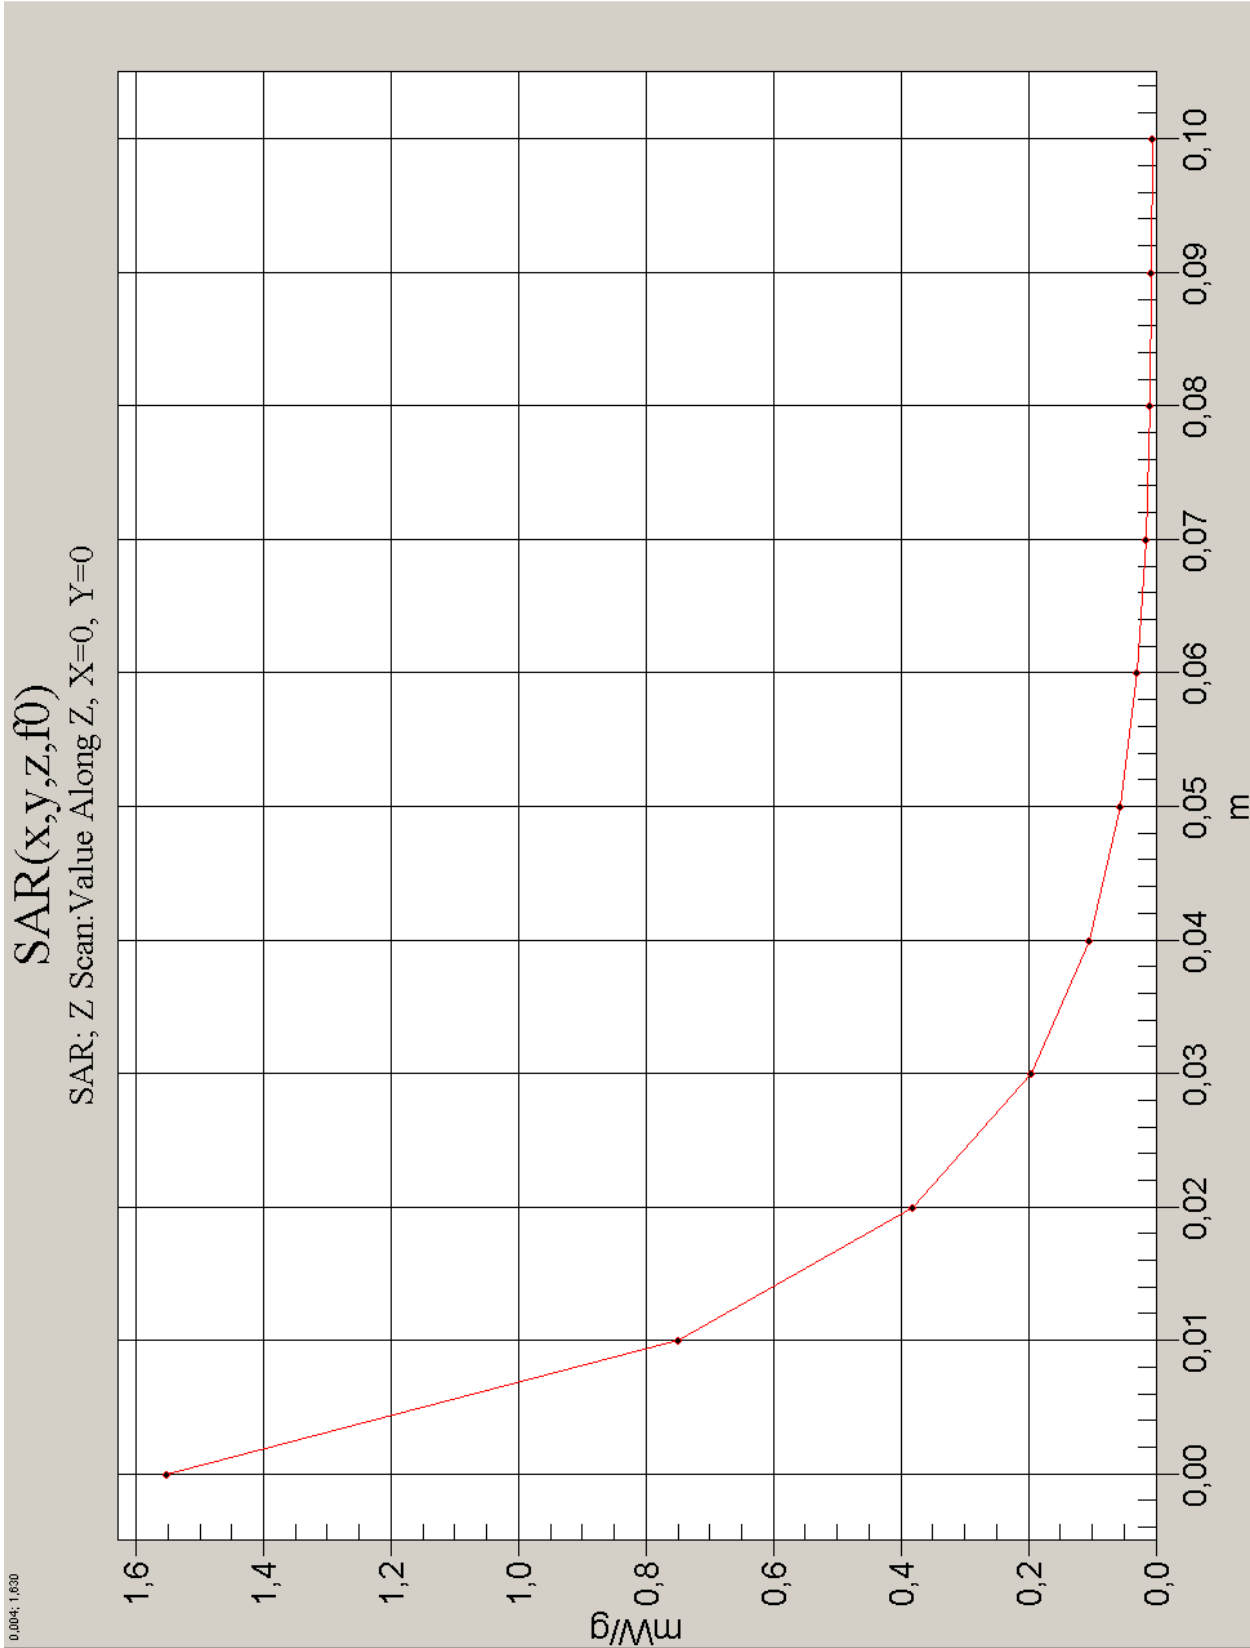


Fig. 39: SAR versus liquid depth, 835 MHz, body (25.11.2004; Ambient Temperature: 22.0° C; Liquid Temperature : 21.0° C).

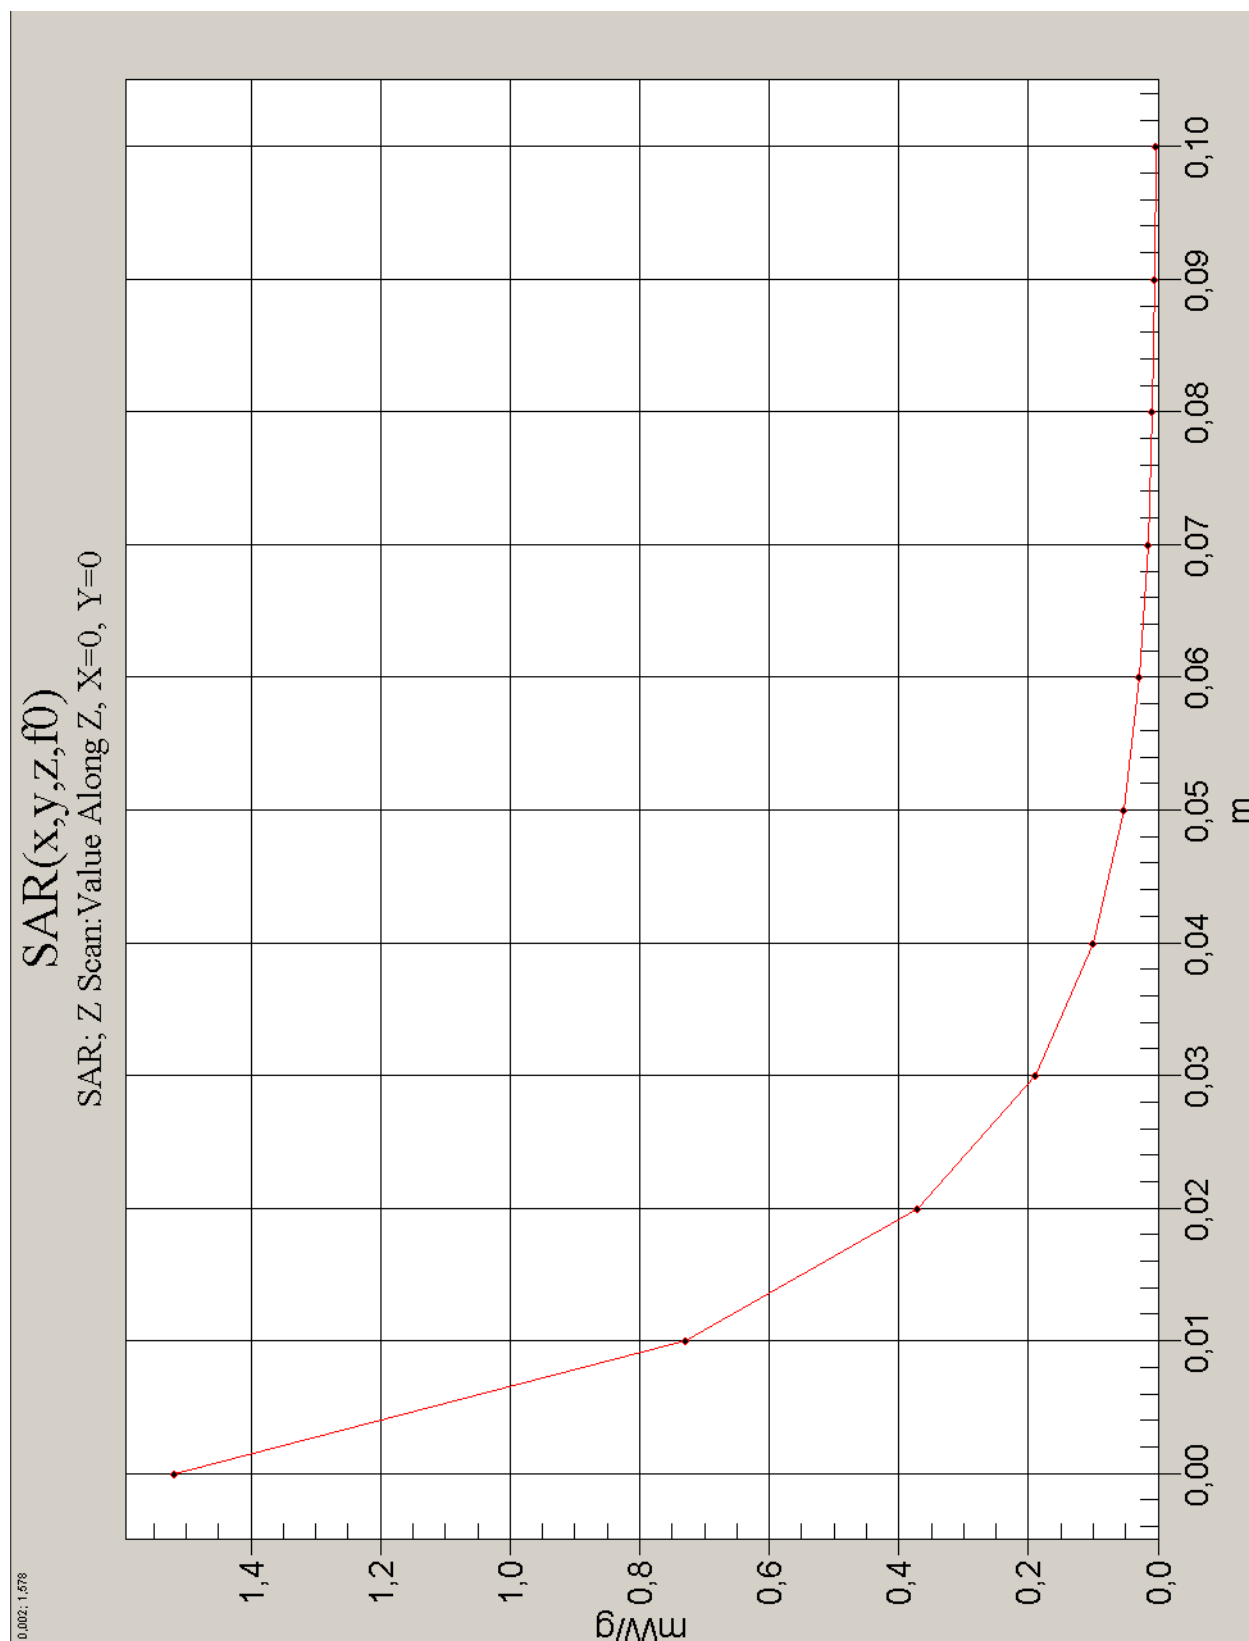


Fig. 40: SAR versus liquid depth, 835 MHz, body (29.11.2004; Ambient Temperature: 22.0° C; Liquid Temperature : 21.0° C).

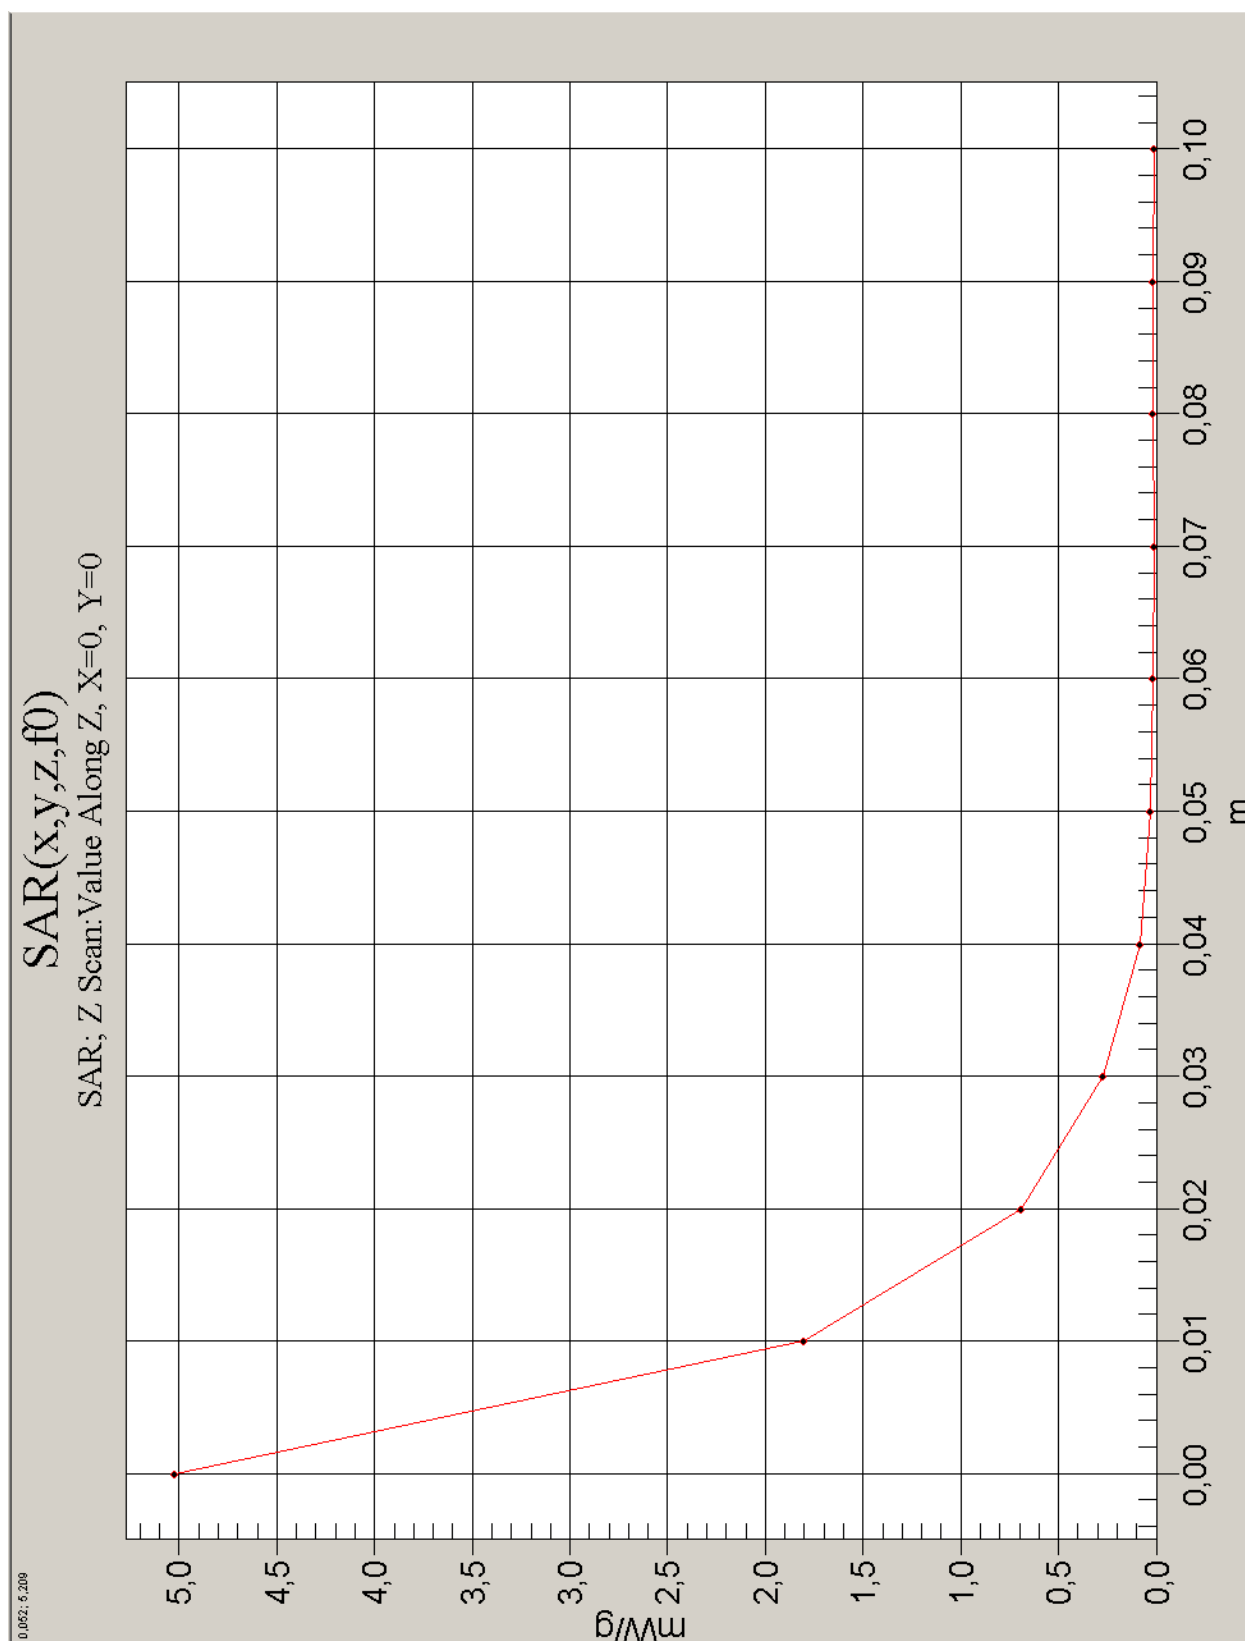


Fig. 41: SAR versus liquid depth, 1900 MHz, body (23.11.2004; Ambient Temperature: 22.0° C; Liquid Temperature : 21.0° C).

4 SAR z-axis scans (Measurements)

The following pictures show the plots of SAR versus liquid depth for the worst case values.

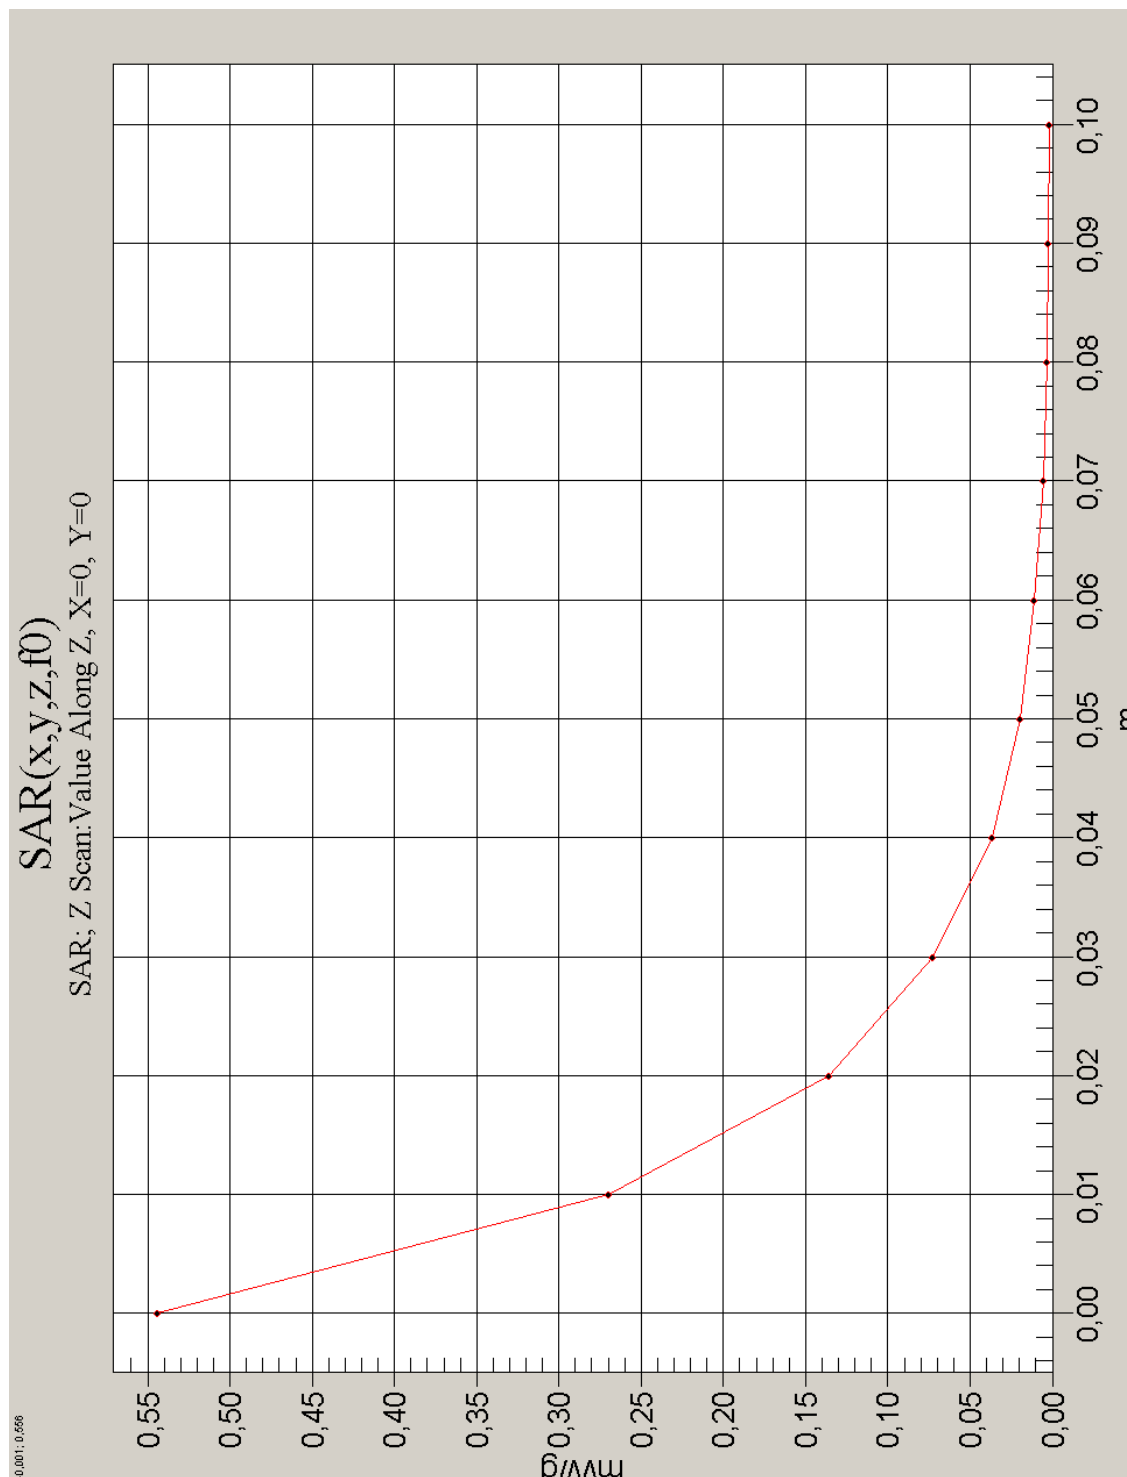


Fig. 42: SAR versus liquid depth, head: GSM 850, channel 190, DELL Latitude D505 Notebook position 1. (25.11.2004, Ambient Temperature: 21.2° C; Liquid Temperature : 20.3° C).

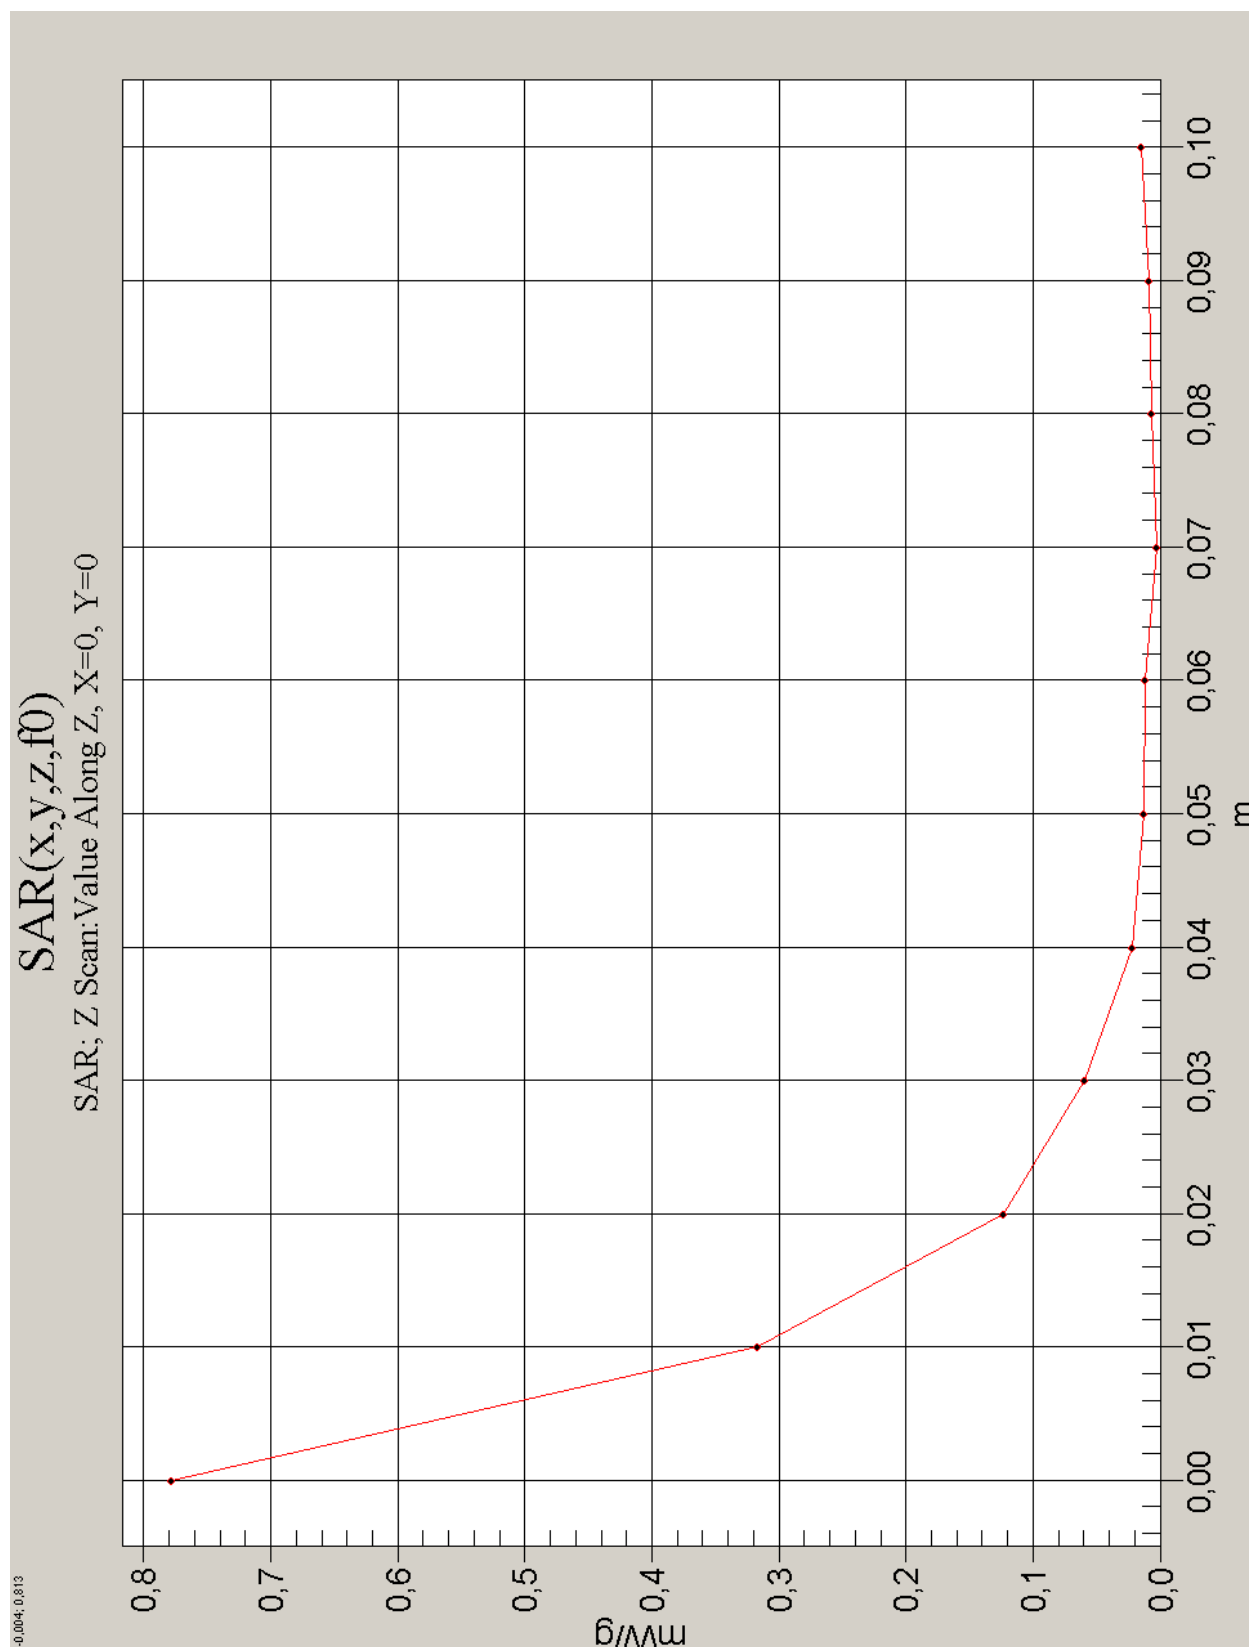


Fig. 43: SAR versus liquid depth, body: PCS 1900, channel 512, Packard Bell Easy Note Notebookposition 1. (24.11.2004, Ambient Temperature: 21.8° C; Liquid Temperature : 20.6° C).