



FCC RADIO TEST REPORT

FCC ID : 2AEM4-9471214
Equipment : Wireless Router
Brand Name : eero
Model Name : PA10001
Applicant : eero LLC
660 3rd St Fl 4, San Francisco, California, 94107, United States
Manufacturer : eero LLC
660 3rd St Fl 4, San Francisco, California, 94107, United States
Standard : FCC Part 15 Subpart E §15.407

The product was received on Sep. 23, 2024 and testing was performed from Oct. 01, 2024 to Nov. 30, 2024. We, Sporton International Inc. Wensan Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. Wensan Laboratory, the test report shall not be reproduced except in full.

Louis Wu

Approved by: Louis Wu

Sporton International Inc. Wensan Laboratory

No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Modification of EUT	5
1.3 Testing Location	6
1.4 Applicable Standards.....	6
2 Test Configuration of Equipment Under Test	7
2.1 Carrier Frequency and Channel	7
2.2 Test Mode	9
2.3 Connection Diagram of Test System.....	13
2.4 Support Unit used in test configuration and system	13
2.5 EUT Operation Test Setup	14
2.6 Measurement Results Explanation Example.....	14
3 Test Result	15
3.1 26dB & 99% Occupied Bandwidth Measurement	15
3.2 Maximum Conducted Output Power Measurement	16
3.3 Power Spectral Density Measurement	18
3.4 Unwanted Emissions Measurement	20
3.5 AC Conducted Emission Measurement.....	26
3.6 Antenna Requirements.....	28
4 List of Measuring Equipment.....	29
5 Measurement Uncertainty	31
Appendix A. Conducted Test Results	
Appendix B. AC Conducted Emission Test Result	
Appendix C. Radiated Spurious Emission Test Data	
Appendix D. Duty Cycle Plots	



History of this test report

Report No.	Version	Description	Issue Date
FR492020D	01	Initial issue of report	Dec. 12, 2024

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.403	26dB Bandwidth	Pass	-
3.1	2.1049	99% Occupied Bandwidth	Pass	-
3.2	15.407(a)	Maximum Conducted Output Power	Pass	-
3.3	15.407(a)	Power Spectral Density	Pass	-
3.4	15.407(b)	Unwanted Emissions	Pass	0.32 dB under the limit at 5435.41 MHz
3.5	15.207	AC Conducted Emission	Pass	21.07 dB under the limit at 0.17 MHz
3.6	15.203	Antenna Requirement	Pass	-

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Yun Huang

Report Producer: Emma Hsiao

1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature
General Specs Bluetooth-LE, IEEE 802.15.4, Wi-Fi 2.4GHz 802.11b/g/n/ax/be and Wi-Fi 5GHz 802.11a/n/ac/ax/be.
Antenna Type WLAN: <Ant. 0>: Dipole Antenna <Ant. 1>: Dipole Antenna Bluetooth-LE: Dipole Antenna IEEE 802.15.4: Dipole Antenna

Antenna information		
5150 MHz ~ 5250 MHz	Peak Gain (dBi)	Ant. 0: 4.09 Ant. 1: 3.92
5250 MHz ~ 5350 MHz	Peak Gain (dBi)	Ant. 0: 4.52 Ant. 1: 4.56
5470 MHz ~ 5725 MHz	Peak Gain (dBi)	Ant. 0: 5.70 Ant. 1: 5.34

Antenna information for Directional Gain		
5150 MHz ~ 5250 MHz	Peak Gain (dBi)	<5G_Ant. 0 + 5G_Ant. 1> Correlated: 4.57 Uncorrelated: 1.92
5250 MHz ~ 5350 MHz	Peak Gain (dBi)	<5G_Ant. 0 + 5G_Ant. 1> Correlated: 4.92 Uncorrelated: 2.12
5470 MHz ~ 5725 MHz	Peak Gain (dBi)	<5G_Ant. 0 + 5G_Ant. 1> Correlated: 4.88 Uncorrelated: 2.70

Remark: The EUT's information above is declared by manufacturer. Please refer to Disclaimer in report summary.

1.2 Modification of EUT

No modifications made to the EUT during the testing.

1.3 Testing Location

Test Site	Sporton International Inc. EMC & Wireless Communications Laboratory
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978
Test Site No.	Sporton Site No. CO05-HY (TAF Code: 1190)
Remark	The Conducted Emission test item subcontracted to Sporton International Inc. EMC & Wireless Communications Laboratory

Note: The test site complies with ANSI C63.4 2014 requirement.

Test Site	Sporton International Inc. Wensan Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
Test Site No.	Sporton Site No. TH05-HY, 03CH16-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC designation No.: TW1190 and TW3786

1.4 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart E
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01.
- ♦ FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ♦ ANSI C63.10-2013

Remark:

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. The TAF code is not including all the FCC KDB listed without accreditation.
3. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5150-5250 MHz Band 1 (U-NII-1)	36	5180	44	5220
	38*	5190	46*	5230
	40	5200	48	5240
	42#	5210		
Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5250-5350 MHz Band 2 (U-NII-2A)	52	5260	60	5300
	54*	5270	62*	5310
	56	5280	64	5320
	58#	5290		
Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5470-5725 MHz Band 3 (U-NII-2C)	100	5500	112	5560
	102*	5510	116	5580
	104	5520	132	5660
	106#	5530	134*	5670
	108	5540	136	5680
	110*	5550	140	5700
Frequency Band	Channel		Freq. (MHz)	
5150-5350 MHz	50@		5250	
5470-5725 MHz	114@		5570	

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
TDWR Channel	118*	5590	124	5620
	120	5600	126*	5630
	122#	5610	128	5640
Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
Straddle Channel	138#	5690	144	5720
	142*	5710		

Note:

1. The above Frequency and Channel with "*" are 802.11n HT40 and 802.11ac VHT40 and 802.11ax HE40 and 802.11be EHT40.
2. The above Frequency and Channel with "#" are 802.11ac VHT80 and 802.11ax HE80 and 802.11be EHT80.
3. The above Frequency and Channel with "@" are 802.11ac VHT160 and 802.11ax HE160 and 802.11be EHT160.
4. The above Frequency and Channel 122 with "#" is 802.11be EHT240.



2.2 Test Mode

TX power level on Ant. 1 in SISO mode is same as that in MIMO mode, so measurement in MIMO mode is sufficient to cover its SISO mode. Test has been performed on MIMO mode, and SISO mode on Ant. 0.

The power for 802.11n mode is smaller than 802.11ac mode, so all other conducted and radiated test is covered by 802.11ac mode.

The power for 802.11ax mode is smaller than 802.11be mode, so all other conducted and radiated test is covered by 802.11be mode.

The final test modes include the worst data rates for each modulation shown in the table below.

Single Mode

Modulation	Data Rate
802.11a	6 Mbps
802.11n HT20 (Covered by VHT20)	MCS0
802.11n HT40 (Covered by VHT40)	MCS0
802.11ac VHT20	MCS0
802.11ac VHT40	MCS0
802.11ac VHT80	MCS0
802.11ac VHT160	MCS0
802.11ax HE20 (Covered by EHT20)	MCS0
802.11ax HE40 (Covered by EHT 40)	MCS0
802.11ax HE80 (Covered by EHT 80)	MCS0
802.11ax HE160 (Covered by EHT 160)	MCS0
802.11be EHT20	MCS0
802.11be EHT40	MCS0
802.11be EHT80	MCS0
802.11be EHT160	MCS0
802.11be EHT240	MCS0

MIMO Mode

Modulation	Data Rate
802.11a	6 Mbps
802.11n HT20 (Covered by VHT20)	MCS0
802.11n HT40 (Covered by VHT40)	MCS0
802.11ac VHT20	MCS0
802.11ac VHT40	MCS0
802.11ac VHT80	MCS0
802.11ac VHT160	MCS0
802.11ax HE20 (Covered by EHT20)	MCS0
802.11ax HE40 (Covered by EHT 40)	MCS0
802.11ax HE80 (Covered by EHT 80)	MCS0
802.11ax HE160 (Covered by EHT160)	MCS0
802.11be EHT20	MCS0
802.11be EHT40	MCS0
802.11be EHT80	MCS0
802.11be EHT160	MCS0
802.11be EHT240	MCS0

Test Cases	
AC Conducted Emission	Mode 1 : WLAN (5GHz) Link + Adapter (Luxshare_45W type A)



Ch. #		Band I : 5150-5250 MHz	Band II : 5250-5350 MHz	Band III : 5470-5725MHz
		802.11a	802.11a	802.11a
L	Low	36	52	100
M	Middle	44	60	116
H	High	48	64	140
Straddle		-	-	144

Ch. #		Band I : 5150-5250 MHz	Band II : 5250-5350 MHz	Band III : 5470-5725MHz
		802.11ac VHT20	802.11ac VHT20	802.11ac VHT20
L	Low	36	52	100
M	Middle	44	60	116
H	High	48	64	140
Straddle		-	-	144

Ch. #		Band I : 5150-5250 MHz	Band II : 5250-5350 MHz	Band III : 5470-5725MHz
		802.11ac VHT40	802.11ac VHT40	802.11ac VHT40
L	Low	38	54	102
M	Middle	-	-	110
H	High	46	62	134
Straddle		-	-	142

Ch. #		Band I : 5150-5250 MHz	Band II : 5250-5350 MHz	Band III : 5470-5725MHz
		802.11ac VHT80	802.11ac VHT80	802.11ac VHT80
L	Low	-	-	106
M	Middle	42	58	-
H	High	-	-	122
Straddle		-	-	138

BW160	5150-5350 MHz		5470-5725MHz
	802.11ac VHT160		802.11ac VHT160
Ch. #	50		114

Ch. #		Band I : 5150-5250 MHz	Band II : 5250-5350 MHz	Band III : 5470-5725MHz
		802.11ax HE20	802.11ax HE20	802.11ax HE20
L	Low	36	52	100
M	Middle	-	-	116
H	High	48	64	140
Straddle		-	-	144



Ch. #		Band I : 5150-5250 MHz	Band II : 5250-5350 MHz	Band III : 5470-5725MHz
		802.11be EHT20	802.11be EHT20	802.11be EHT20
L	Low	36	52	100
M	Middle	44	60	116
H	High	48	64	140
Straddle		-	-	144

Ch. #		Band I : 5150-5250 MHz	Band II : 5250-5350 MHz	Band III : 5470-5725MHz
		802.11be EHT40	802.11be EHT40	802.11be EHT40
L	Low	38	54	102
M	Middle	-	-	110
H	High	46	62	134
Straddle		-	-	142


Ch. #		Band I : 5150-5250 MHz	Band II : 5250-5350 MHz	Band III : 5470-5725MHz
		802.11be EHT80	802.11be EHT80	802.11be EHT80
L	Low	-	-	106
M	Middle	42	58	-
H	High	-	-	122
Straddle		-	-	138

BW160	5150-5350 MHz		5470-5725MHz
	802.11be EHT160		802.11be EHT160
Ch. #	50		114

BW160	5470-5725MHz	
	802.11be EHT240	
Ch. #	122	

Remark: For radiation spurious emission, the modulation and the data rate picked for testing are determined by the Max. RF conducted power.

2.3 Connection Diagram of Test System

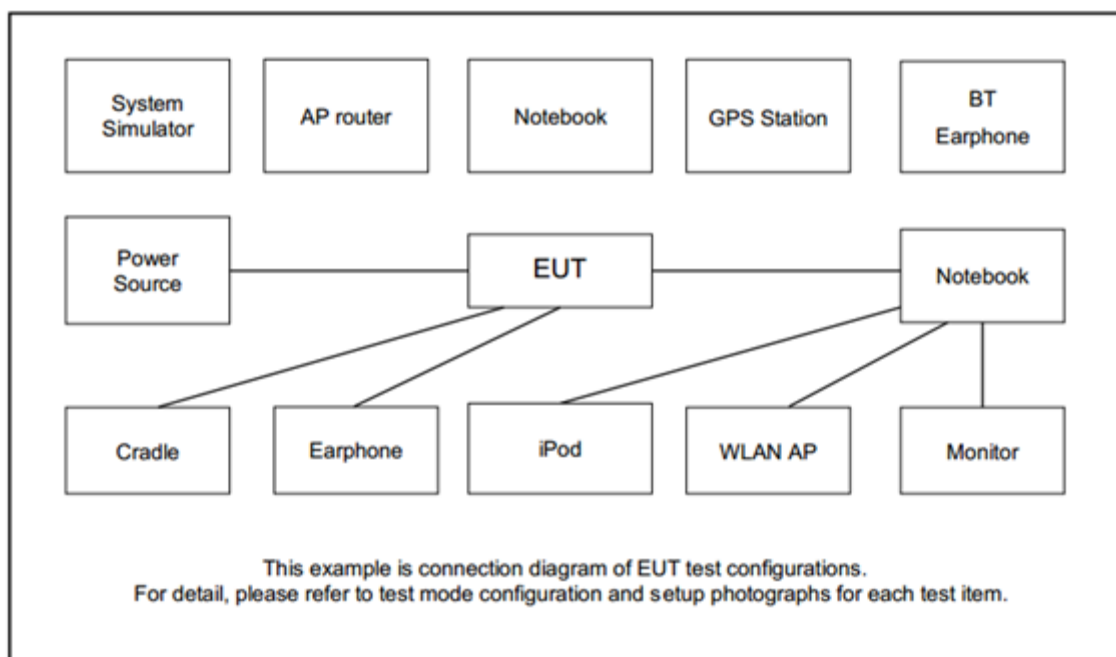

2.4 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Notebook	DELL	Latitude 3420	FCC DoC	N/A	AC I/P : Unshielded, 1.2m DC O/P : Shielded, 1.8m
2.	PC	msi	PRO DP1 80A7	FCC DoC	N/A	UnShielded, 1.8m
3.	PC	msi	Aegis-B918	FCC DoC	N/A	UnShielded, 1.8m

Remark: Applicant has ensured support unit would not be attached with the product on the market, support unit is provided by lab for testing.



2.5 EUT Operation Test Setup

The RF test items, utility “QSPR Version 6.00.00156.1” was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10 dB attenuator.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 4.2 + 10 = 14.2 \text{ (dB)}\end{aligned}$$

3 Test Result

3.1 26dB & 99% Occupied Bandwidth Measurement

3.1.1 Description of 26dB & 99% Occupied Bandwidth

This section is for reporting purpose only.

There is no restriction limits for bandwidth.

For Straddle Channel, according to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, if the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.


3.1.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.1.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section C) Emission bandwidth
2. Set RBW = approximately 1% of the emission bandwidth.
3. Set the VBW > RBW.
4. Detector = Peak.
5. Trace mode = max hold
6. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.
7. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the emission bandwidth and set the Video bandwidth (VBW) $\geq 3 * RBW$.
8. Measure and record the results in the test report.

3.1.4 Test Setup



3.1.5 Test Result of 26dB & 99% Occupied Bandwidth

Please refer to Appendix A.

3.2 Maximum Conducted Output Power Measurement

3.2.1 Limit of Maximum Conducted Output Power

<FCC 14-30 CFR 15.407>

For the 5.15–5.25 GHz bands:

■ For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW. For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

For the 5.25–5.725 GHz bands:

■ The maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz.

For Straddle Channel, according to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, if the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Note that U-NII-2 band, devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

3.2.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.2.3 Test Procedures


The testing follows Method PM-G of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM-G (Measurement using a gated RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit at its maximum power control level.
3. Measure the average power of the transmitter.
4. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.
5. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01

For Straddle Channel, according to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, if the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

3.2.4 Test Setup

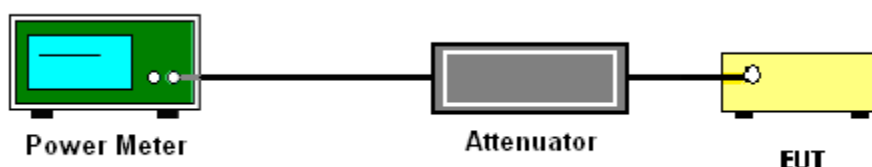

3.2.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.



3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

<FCC 14-30 CFR 15.407>

For the 5.15–5.25 GHz bands:

For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum power spectral density shall not exceed 11 dBm in any 1.0 MHz band. For an indoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1.0 MHz band.

For the 5.25–5.725 GHz bands:

The maximum power spectral density shall not exceed 11 dBm in any 1.0 MHz band.

For Straddle Channel, according to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, if the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.3.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.3.3 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Section F) Maximum power spectral density.

Method SA-2


(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

- Measure the duty cycle.
 - Set span to encompass the entire emission bandwidth (EBW) of the signal.
 - Set RBW = 1 MHz.
 - Set VBW $\geq$ 3 MHz.
 - Number of points in sweep $\geq$ 2 Span / RBW.
 - Sweep time = auto.
 - Detector = RMS
 - Trace average at least 100 traces in power averaging mode.
 - Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.
1. The RF output of EUT is connected to the spectrum analyzer by a low loss cable.
 2. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.
 3. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

Method (a): Measure and sum the spectra across the outputs.

The total final Power Spectral Density is from a device with 2 transmitter outputs. The spectrum measurements of the individual outputs are all performed with the same span and number of points; the spectrum value in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 to obtain the value for the first frequency bin of the summed spectrum.

3.3.4 Test Setup

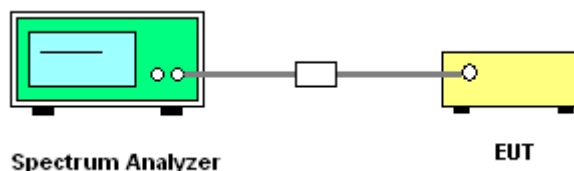

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

3.4 Unwanted Emissions Measurement

This section is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement.

3.4.1 Limit of Unwanted Emissions

- (1) For transmitters operating in the 5150-5250 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27dBm/MHz.

For transmitters operating in the 5250-5350 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27 dBm/MHz. Devices operating in the 5250-5350 MHz band that generate emissions in the 5150-5250 MHz band must meet all applicable technical requirements for operation in the 5150-5250 MHz band (including indoor use) or alternatively meet an out-of-band emission EIRP limit of -27 dBm/MHz in the 5150-5250 MHz band.

For transmitters operating in the 5470-5600 MHz and 5650-5725MHz band: all emissions outside of the 5470-5600 MHz and 5650-5725MHz band shall not exceed an EIRP of -27 dBm/MHz.

- (2) Unwanted spurious emissions falls in restricted bands shall comply with the general field strength limits as below table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

Note: The following formula is used to convert the EIRP to field strength.

$$E = \frac{1000000\sqrt{30P}}{3} \text{ } \mu\text{V/m, where P is the eirp (Watts)}$$

EIRP (dBm)	Field Strength at 3m (dBμV/m)
- 27	68.3

(3) KDB789033 D02 v02r01 G)2)c)

(i) Sections 15.407(b)(1-3) specifies the unwanted emissions limit for the U-NII-1 and U-NII-2 bands. As specified, emissions above 1000 MHz that are outside of the restricted bands are subject to a peak emission limit of -27 dBm/MHz.

(ii) Section 15.407(b)(4) specifies the unwanted emissions limit for the U-NII-3 band. A band emissions mask is specified in Section 15.407(b)(4)(i). The emission limits are based on the use of a peak detector.

3.4.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.4.3 Test Procedures

- The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section G) Unwanted emissions measurement.

(1) Procedure for Unwanted Emissions Measurements Below 1000 MHz

- RBW = 120 kHz
- VBW = 300 kHz
- Detector = Peak
- Trace mode = max hold

(2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz

- RBW = 1 MHz
- VBW $\geq$ 3 MHz
- Detector = Peak
- Sweep time = auto
- Trace mode = max hold

(3) Use the following spectrum analyzer settings:

For average measurement:

The procedure for method trace averaging is as follows:

- RBW = 1 MHz.
- $VBW \geq [3 \times RBW]$.
- Detector = RMS (power averaging), if $[\text{span} / (\# \text{ of points in sweep})] \leq RBW / 2$. Satisfying this condition can require increasing the number of points in the sweep or reducing the span. If the condition is not satisfied, then the detector mode shall be set to peak.

- d) Averaging type = power (i.e., rms) (As an alternative, the detector and averaging type may be set for linear voltage averaging.
 - e) Sweep time = auto
 - f) Perform a trace average of at least 100 traces if the transmission is continuous. If the transmission is not continuous, then the number of traces shall be increased by a factor of $1 / D$, where D is the duty cycle. For example, with 50% duty cycle, at least 200 traces shall be averaged. (If a specific emission is demonstrated to be continuous—i.e., 100% duty cycle—then rather than turning ON and OFF with the transmit cycle, at least 100 traces shall be averaged.)
 - g) If tests are performed with the EUT transmitting at a duty cycle less than 98%, then a correction factor shall be added to the measurement results prior to comparing with the emission limit, to compute the emission level that would have been measured had the test been performed at 100% duty cycle. The correction factor is computed as follows:
 - 1) If power averaging (rms) mode was used in the preceding step e), then the correction factor is $[10 \log (1 / D)]$, where D is the duty cycle. For example, if the transmit duty cycle was 50%, then 3 dB shall be added to the measured emission levels.
 - 2) If a specific emission is demonstrated to be continuous (100% duty cycle) rather than turning ON and OFF with the transmit cycle, then no duty cycle correction is required for that emission.
- 2. The EUT is placed on a turntable with 0.8 meter for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz respectively above ground.
 - 3. The EUT is set 3 meters away from the receiving antenna which is mounted on the top of a variable height antenna tower.
 - 4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
 - 5. For each suspected emission, the EUT is arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.

6. Radiated testing below 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading.


When there is no suspected emission found and the emission level is with at least 6 dB margin against QP limit line, the position is marked as “-”.

7. Radiated testing above 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading for scanning all frequencies


When there is no suspected emission found and the harmonic emission level is with at least 6 dB margin against average limit line, the position is marked as “-”.

3.4.4 Test Setup


For radiated emissions below 30MHz

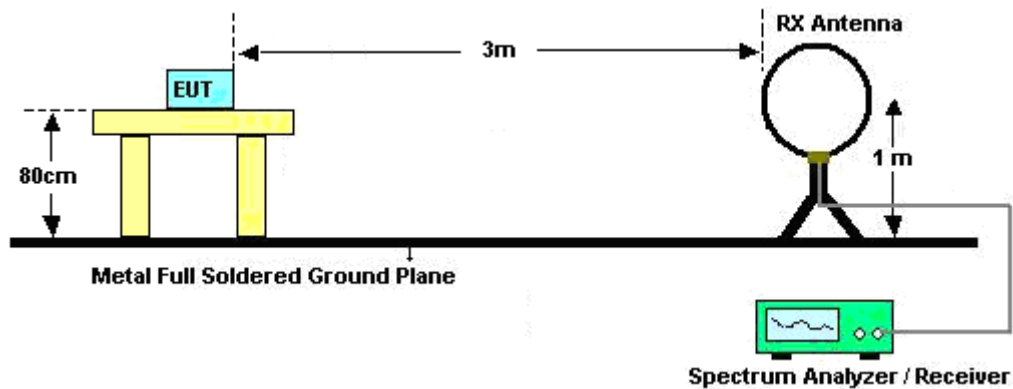


For radiated emissions from 30MHz to 1GHz

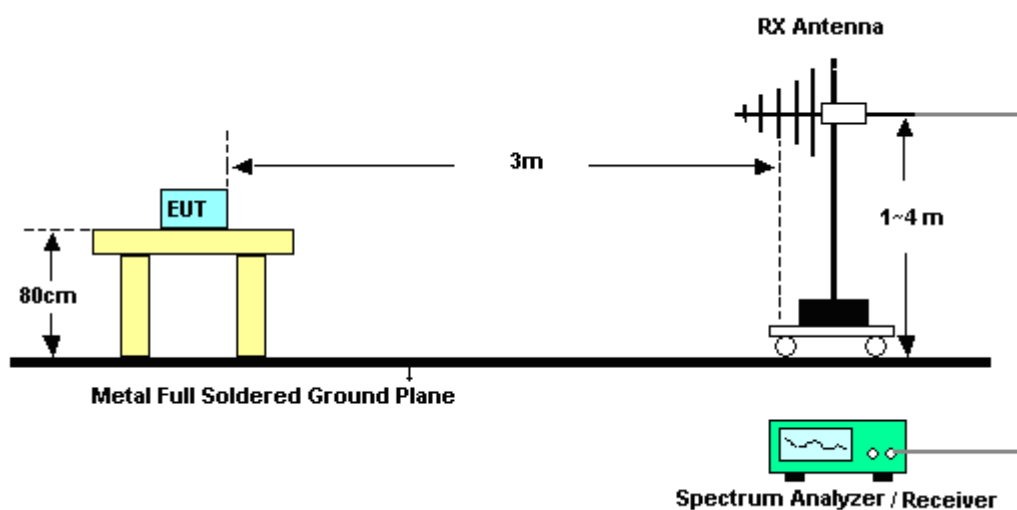

For radiated test from 1GHz to 18GHz

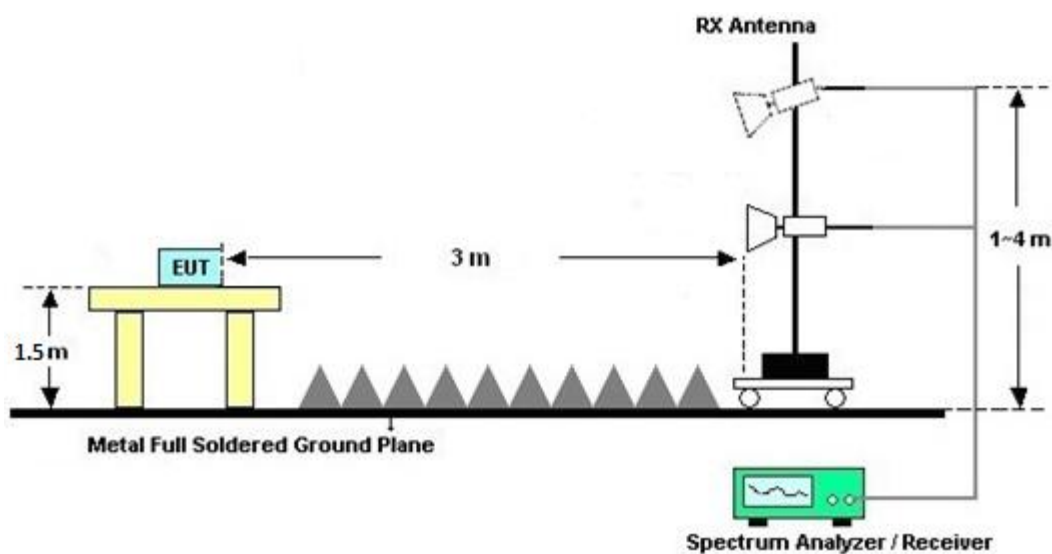

For radiated test above 18GHz

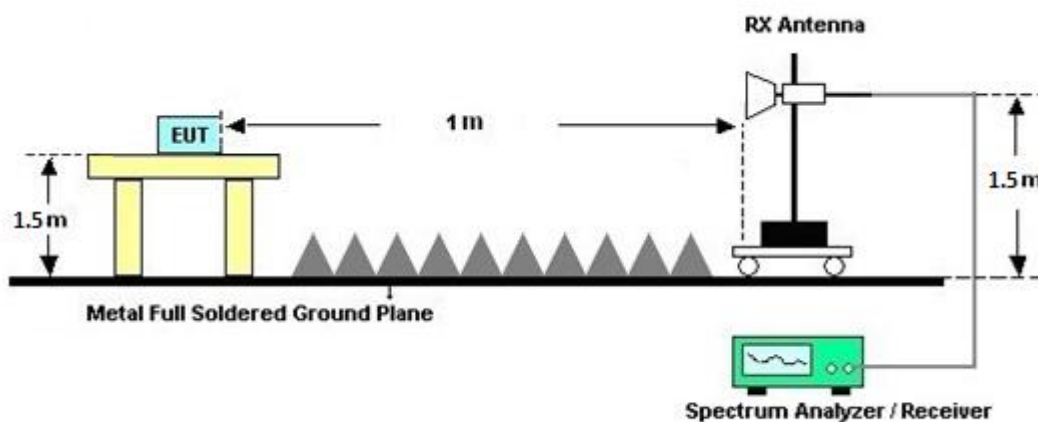

3.4.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which starts from 9 kHz to 30 MHz, is pre-scanned and the result which is 20 dB lower than the limit line is not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.

3.4.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.4.7 Duty Cycle

Please refer to Appendix D.

3.4.8 Test Result of Radiated Spurious Emissions (30MHz ~ 10th Harmonic)

Please refer to Appendix C.

3.5 AC Conducted Emission Measurement

3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.5.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.5.3 Test Procedures

1. The EUT is placed 0.4 meter away from the conducting wall of the shielding room, and is kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN shall be used.
6. Both Line and Neutral shall be tested in order to find out the maximum conducted emission.
7. The frequency range from 150 kHz to 30 MHz is scanned.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.5.4 Test Setup

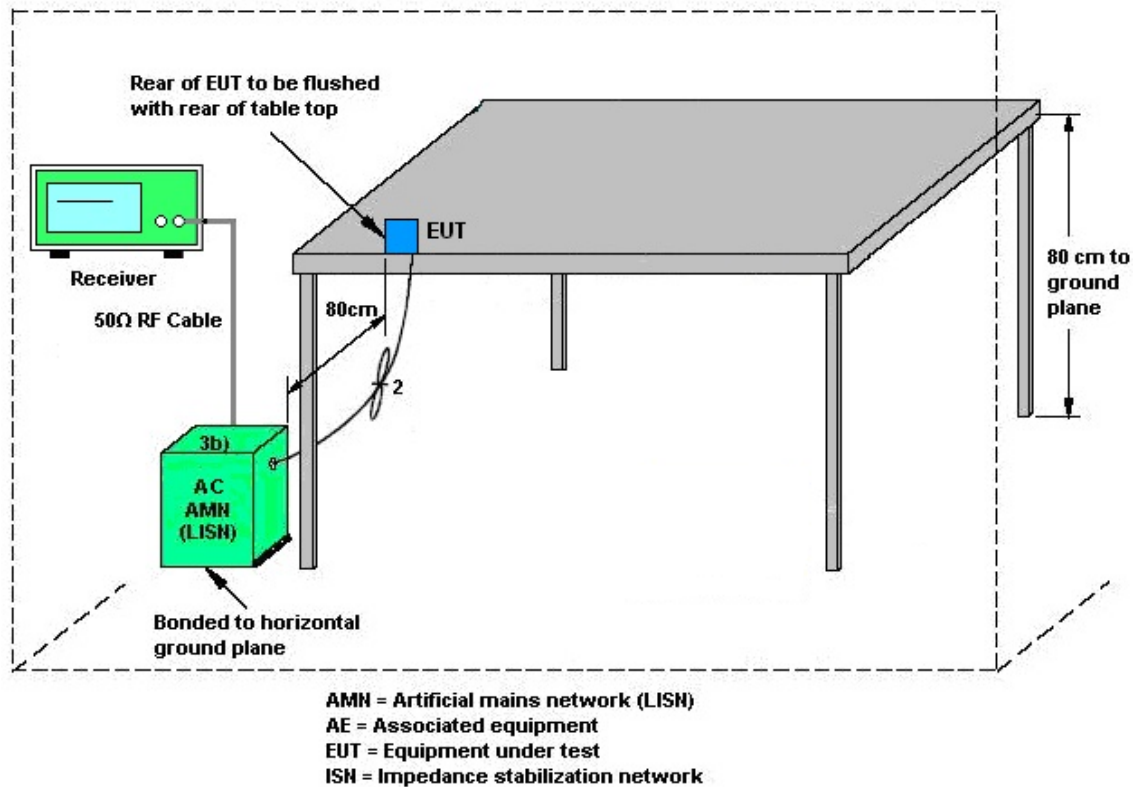

3.5.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.6 Antenna Requirements

3.6.1 Standard Applicable

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, 15.213, 15.217, 15.219, 15.221, or § 15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

3.6.2 Antenna Anti-Replacement Construction

Unique (non-standard) antenna connector.



4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	Aug. 29, 2024	Oct. 23, 2024~ Nov. 30, 2024	Aug. 28, 2025	Radiation (03CH16-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA9170	1224	18GHz~40GHz	Jun. 24, 2024	Oct. 23, 2024~ Nov. 30, 2024	Jun. 23, 2025	Radiation (03CH16-HY)
EMI Test Receiver	Keysight	N9038A(MXE)	MY57290111	3Hz~26.5GHz	Dec. 04, 2023	Oct. 23, 2024~ Nov. 30, 2024	Dec. 03, 2024	Radiation (03CH16-HY)
Bilog Antenna	TESEQ	CBL 6111D & 00802N1D01N-06	47020 & 06	30MHz to 1GHz	Oct. 05, 2024	Oct. 23, 2024~ Nov. 30, 2024	Oct. 04, 2025	Radiation (03CH16-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-1522	1G~18GHz	Mar. 28, 2024	Oct. 23, 2024~ Nov. 30, 2024	Mar. 27, 2025	Radiation (03CH16-HY)
Amplifier	SONOMA	310N	371607	9kHz~1GHz	Jul. 02, 2024	Oct. 23, 2024~ Nov. 30, 2024	Jul. 01, 2025	Radiation (03CH16-HY)
Preamplifier	Keysight	83017A	MY53270264	1GHz~26.5GHz	Dec. 07, 2023	Oct. 23, 2024~ Nov. 30, 2024	Dec. 06, 2024	Radiation (03CH16-HY)
Preamplifier	EMEC	EM1G18G	060812	1GHz~18GHz	Dec. 25, 2023	Oct. 23, 2024~ Nov. 30, 2024	Dec. 24, 2024	Radiation (03CH16-HY)
Preamplifier	EMEC	EM18G40G	060801	18GHz~40GHz	May 27, 2024	Oct. 23, 2024~ Nov. 30, 2024	May 26, 2025	Radiation (03CH16-HY)
Filter	Wainwright	WLK4-1000- 1530-8000- 40SS	SN17	1.53GHz Low Pass Filter	Jan. 15, 2024	Oct. 23, 2024~ Nov. 30, 2024	Jan. 14, 2025	Radiation (03CH16-HY)
Filter	Wainwright	WHKX8- 5872.5-6750- 18000-40ST	SN6	6.75GHz High Pass Filter	Jun. 05, 2024	Oct. 23, 2024~ Nov. 30, 2024	Jun. 04, 2025	Radiation (03CH16-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	803951/2	9K~30M	Mar. 06, 2024	Oct. 23, 2024~ Nov. 30, 2024	Mar. 05, 2025	Radiation (03CH16-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102/SUCOFLEX X 104	EC-A5-300- 5757,805935/ 4,802434/4	30MHz~18GHz	Aug. 07, 2024	Oct. 23, 2024~ Nov. 30, 2024	Aug. 06, 2025	Radiation (03CH16-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	804011/2,804 012/2	18-40GHz	Jan. 02, 2024	Oct. 23, 2024~ Nov. 30, 2024	Jan. 01, 2025	Radiation (03CH16-HY)
Software	Audix	E3 230621 V9	RK-002393	N/A	N/A	Oct. 23, 2024~ Nov. 30, 2024	N/A	Radiation (03CH16-HY)
Controller	ChainTek	3000-1	N/A	Control Turn table & Ant Mast	N/A	Oct. 23, 2024~ Nov. 30, 2024	N/A	Radiation (03CH16-HY)
Antenna Mast	ChainTek	MBS-520-1	N/A	1m~4m	N/A	Oct. 23, 2024~ Nov. 30, 2024	N/A	Radiation (03CH16-HY)
Turn Table	ChainTek	T-200-S-1	N/A	0~360 Degree	N/A	Oct. 23, 2024~ Nov. 30, 2024	N/A	Radiation (03CH16-HY)



Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Hygrometer	TECEPEL	DTM-303A	TP201996	N/A	Nov. 01, 2024	Nov. 01, 2024~ Nov. 22, 2024	Oct. 31, 2025	Conducted (TH05-HY)
Hygrometer	TECEPEL	DTM-303A	TP201996	N/A	Nov. 07, 2023	Oct. 01, 2024~ Oct. 31, 2024	Nov. 06, 2024	Conducted (TH05-HY)
Power Sensor	DARE	RPR3006W	15I00041SNO 10 (NO:248)	10MHz~6GHz	Jan. 10, 2024	Oct. 01, 2024~ Nov. 22, 2024	Jan. 09, 2025	Conducted (TH05-HY)
Signal Analyzer	Rohde & Schwarz	FSV40	101566	10Hz~40GHz	Aug. 23, 2024	Oct. 01, 2024~ Nov. 22, 2024	Aug. 22, 2025	Conducted (TH05-HY)
Switch Control Mainframe	Burgeon	ETF-058	EC1300485 (BOX4)	N/A	Apr. 08, 2024	Oct. 01, 2024~ Nov. 22, 2024	Apr. 07, 2025	Conducted (TH05-HY)
Software	Sporton	BTWIFI_Final_v ersion_241028	N/A	Conducted Other Test Item	N/A	Oct. 01, 2024~ Nov. 22, 2024	N/A	Conducted (TH05-HY)
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	Nov. 25, 2024	N/A	Conduction (CO05-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102388	9kHz~3.6GHz	Dec. 06, 2023	Nov. 25, 2024	Dec. 05, 2024	Conduction (CO05-HY)
Hygrometer	Testo	608-H1	34913912	N/A	Oct. 14, 2024	Nov. 25, 2024	Oct. 13, 2025	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100081	9kHz~30MHz	Nov. 14, 2024	Nov. 25, 2024	Nov. 13, 2025	Conduction (CO05-HY)
Software	Rohde & Schwarz	EMC32	N/A	N/A	N/A	Nov. 25, 2024	N/A	Conduction (CO05-HY)
Pulse Limiter	SCHWARZB ECK	VTSD 9561-F N	00691	N/A	Jul. 30, 2024	Nov. 25, 2024	Jul. 29, 2025	Conduction (CO05-HY)
LISN Cable	MVE	RG-400	MQT2408250 1	N/A	Oct. 15, 2024	Nov. 25, 2024	Oct. 14, 2025	Conduction (CO05-HY)

5 Measurement Uncertainty

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.7 dB
--	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	6.5 dB
--	--------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 6000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.9 dB
--	--------

Uncertainty of Radiated Emission Measurement (6000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.1 dB
--	--------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.3 dB
--	--------

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Sylvia Li	Temperature:	21~25	°C
Test Date:	2024/10/1~2024/11/22	Relative Humidity:	51~54	%

TEST RESULTS DATA
26dB and 99% OBW

U-NII-1 single antenna													
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	99% Bandwidth (MHz)		26 dB Bandwidth (MHz)		IC 99% Bandwidth Power Limit (dBm)		IC 99% Bandwidth EIRP Limit (dBm)		Note
					Ant 0	Ant 1	Ant 0	Ant 1	Ant 0	Ant 1	Ant 0	Ant 1	
11a	6Mbps	1	36	5180	17.11	-	23.10	-	-	-	22.33	-	
11a	6Mbps	1	44	5220	17.14	-	23.28	-	-	-	22.34	-	
11a	6Mbps	1	48	5240	17.12	-	23.03	-	-	-	22.33	-	
VHT20	MCS0	1	36	5180	18.29	-	24.24	-	-	-	22.62	-	
VHT20	MCS0	1	44	5220	18.29	-	24.03	-	-	-	22.62	-	
VHT20	MCS0	1	48	5240	18.29	-	24.69	-	-	-	22.62	-	
VHT40	MCS0	1	38	5190	37.86	-	47.87	-	-	-	23.01	-	
VHT40	MCS0	1	46	5230	37.77	-	48.18	-	-	-	23.01	-	
VHT80	MCS0	1	42	5210	76.58	-	91.90	-	-	-	23.01	-	
VHT160	MCS0	1	50	5250	157.04	-	181.73	-	-	-	23.01	-	

U-NII-1 MIMO													
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	99% Bandwidth (MHz)		26 dB Bandwidth (MHz)		IC 99% Bandwidth Power Limit (dBm)		IC 99% Bandwidth EIRP Limit (dBm)		Note
					Ant 0	Ant 1	Ant 0	Ant 1	Ant 0	Ant 1	Ant 0	Ant 1	
11a	6Mbps	2	36	5180	17.13	17.13	23.32	22.84	-	-	22.34	-	
11a	6Mbps	2	44	5220	17.16	17.15	23.44	23.10	-	-	22.34	-	
11a	6Mbps	2	48	5240	17.16	17.11	23.22	23.49	-	-	22.33	-	
VHT20	MCS0	2	36	5180	18.32	18.28	24.49	24.36	-	-	22.62	-	
VHT20	MCS0	2	44	5220	18.32	18.30	24.32	24.19	-	-	22.63	-	
VHT20	MCS0	2	48	5240	18.40	18.37	24.82	24.12	-	-	22.64	-	
VHT40	MCS0	2	38	5190	37.70	37.53	47.74	47.36	-	-	23.01	-	
VHT40	MCS0	2	46	5230	37.70	37.48	47.23	47.04	-	-	23.01	-	
VHT80	MCS0	2	42	5210	76.68	76.42	92.45	91.20	-	-	23.01	-	
VHT160	MCS0	2	50	5250	157.04	156.46	180.82	175.63	-	-	23.01	-	

TEST RESULTS DATA
Average Power Table

FCC U-NII-1 single antenna													
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)			Pass/Fail
					Ant 0	Ant 1	SUM	Ant 0	Ant 1	Ant 0	Ant 1		
11a	6Mbps	1	36	5180	22.20	-	-	30.00	-	4.09	-	-	Pass
11a	6Mbps	1	44	5220	24.30	-		30.00	-	4.09	-		Pass
11a	6Mbps	1	48	5240	24.30	-		30.00	-	4.09	-		Pass
HT20	MCS0	1	36	5180	22.30	-		30.00	-	4.09	-		Pass
HT20	MCS0	1	44	5220	24.20	-		30.00	-	4.09	-		Pass
HT20	MCS0	1	48	5240	24.20	-		30.00	-	4.09	-		Pass
HT40	MCS0	1	38	5190	20.90	-		30.00	-	4.09	-		Pass
HT40	MCS0	1	46	5230	22.90	-		30.00	-	4.09	-		Pass
VHT20	MCS0	1	36	5180	22.40	-		30.00	-	4.09	-		Pass
VHT20	MCS0	1	44	5220	24.30	-		30.00	-	4.09	-		Pass
VHT20	MCS0	1	48	5240	24.30	-		30.00	-	4.09	-		Pass
VHT40	MCS0	1	38	5190	21.00	-		30.00	-	4.09	-		Pass
VHT40	MCS0	1	46	5230	23.00	-		30.00	-	4.09	-		Pass
VHT80	MCS0	1	42	5210	20.80	-		30.00	-	4.09	-		Pass
VHT160	MCS0	1	50	5250	19.70	-		30.00	-	4.09	-		Pass

FCC U-NII-1 MIMO													
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)			Pass/Fail
					Ant 0	Ant 1	SUM	Ant 0	Ant 1	Ant 0	Ant 1		
11a	6Mbps	2	36	5180	21.30	21.10	24.21	30.00		1.92		-	Pass
11a	6Mbps	2	44	5220	24.10	24.20	27.16	30.00		1.92			Pass
11a	6Mbps	2	48	5240	24.10	24.10	27.11	30.00		1.92			Pass
HT20	MCS0	2	36	5180	20.80	20.60	23.71	30.00		1.92			Pass
HT20	MCS0	2	44	5220	23.60	23.60	26.61	30.00		1.92			Pass
HT20	MCS0	2	48	5240	23.60	23.50	26.56	30.00		1.92			Pass
HT40	MCS0	2	38	5190	20.30	20.40	23.36	30.00		1.92			Pass
HT40	MCS0	2	46	5230	22.30	22.40	25.36	30.00		1.92			Pass
VHT20	MCS0	2	36	5180	20.90	20.70	23.81	30.00		1.92			Pass
VHT20	MCS0	2	44	5220	23.70	23.70	26.71	30.00		1.92			Pass
VHT20	MCS0	2	48	5240	23.70	23.60	26.66	30.00		1.92			Pass
VHT40	MCS0	2	38	5190	20.40	20.50	23.46	30.00		1.92			Pass
VHT40	MCS0	2	46	5230	22.40	22.50	25.46	30.00		1.92			Pass
VHT80	MCS0	2	42	5210	20.20	20.10	23.16	30.00		1.92			Pass
VHT160	MCS0	2	50	5250	19.20	18.90	22.06	30.00		1.92			Pass

TEST RESULTS DATA
Power Spectral Density

FCC U-NII-1 single antenna														
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Duty Factor (dB)		Average Power Density with Duty Factor (dBm/MHz)			Average PSD Limit (dBm/MHz)		DG (dBi)		Pass /Fail
					Ant 0	Ant 1	Ant 0	Ant 1	SUM	Ant 0	Ant 1	Ant 0	Ant 1	
11a	6Mbps	1	36	5180	0.04	-	10.42	-	-	17.00	-	4.09	-	Pass
11a	6Mbps	1	44	5220	0.04	-	12.15	-		17.00	-	4.09	-	Pass
11a	6Mbps	1	48	5240	0.04	-	12.36	-		17.00	-	4.09	-	Pass
VHT20	MCS0	1	36	5180	0.13	-	10.26	-		17.00	-	4.09	-	Pass
VHT20	MCS0	1	44	5220	0.13	-	11.84	-		17.00	-	4.09	-	Pass
VHT20	MCS0	1	48	5240	0.13	-	12.20	-		17.00	-	4.09	-	Pass
VHT40	MCS0	1	38	5190	0.11	-	5.92	-		17.00	-	4.09	-	Pass
VHT40	MCS0	1	46	5230	0.11	-	7.73	-		17.00	-	4.09	-	Pass
VHT80	MCS0	1	42	5210	0.12	-	2.18	-		17.00	-	4.09	-	Pass
VHT160	MCS0	1	50	5250	0.11	-	-1.52	-		17.00	-	4.09	-	Pass

FCC U-NII-1 MIMO														
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Duty Factor (dB)		Average Power Density with Duty Factor (dBm/MHz)			Average PSD Limit (dBm/MHz)		DG (dBi)		Pass /Fail
					Ant 0	Ant 1	Ant 0	Ant 1	SUM	Ant 0	Ant 1	Ant 0	Ant 1	
11a	6Mbps	2	36	5180	0.04	0.04	-		12.42	17.00		4.57		Pass
11a	6Mbps	2	44	5220	0.04	0.04			15.25	17.00		4.57		Pass
11a	6Mbps	2	48	5240	0.04	0.04			15.39	17.00		4.57		Pass
VHT20	MCS0	2	36	5180	0.13	0.12			11.48	17.00		4.57		Pass
VHT20	MCS0	2	44	5220	0.13	0.12			14.60	17.00		4.57		Pass
VHT20	MCS0	2	48	5240	0.13	0.12			14.74	17.00		4.57		Pass
VHT40	MCS0	2	38	5190	0.11	0.12			8.15	17.00		4.57		Pass
VHT40	MCS0	2	46	5230	0.11	0.12			10.20	17.00		4.57		Pass
VHT80	MCS0	2	42	5210	0.11	0.11			4.74	17.00		4.57		Pass
VHT160	MCS0	2	50	5250	0.09	0.10			0.88	17.00		4.57		Pass

TEST RESULTS DATA
26dB and 99% OBW

U-NII-2A single antenna															
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	99% Bandwidth (MHz)		26 dB Bandwidth (MHz)		IC 99% Bandwidth Power Limit (dBm)		IC 99% Bandwidth EIRP Limit (dBm)		FCC 26dB Bandwidth Power Limit (dBm)		Note
					Ant 0	Ant 1	Ant 0	Ant 1	Ant 0	Ant 1	Ant 0	Ant 1	Ant 0	Ant 1	
11a	6Mbps	1	52	5260	17.16	-	23.37	-	23.35	-	29.35	-	23.98	-	-
11a	6Mbps	1	60	5300	17.24	-	23.12	-	23.36	-	29.36	-	23.98	-	
11a	6Mbps	1	64	5320	17.13	-	23.60	-	23.34	-	29.34	-	23.98	-	
VHT20	MCS0	1	52	5260	18.31	-	24.54	-	23.63	-	29.63	-	23.98	-	
VHT20	MCS0	1	60	5300	18.31	-	24.38	-	23.63	-	29.63	-	23.98	-	
VHT20	MCS0	1	64	5320	18.28	-	23.74	-	23.62	-	29.62	-	23.98	-	
VHT40	MCS0	1	54	5270	37.66	-	47.65	-	23.98	-	30.00	-	23.98	-	
VHT40	MCS0	1	62	5310	37.71	-	47.97	-	23.98	-	30.00	-	23.98	-	
VHT80	MCS0	1	58	5290	76.60	-	91.97	-	23.98	-	30.00	-	23.98	-	
VHT160	MCS0	1	50	5250	157.04	-	181.73	-	23.98	-	30.00	-	23.98	-	

U-NII-2A MIMO															
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	99% Bandwidth (MHz)		26 dB Bandwidth (MHz)		IC 99% Bandwidth Power Limit (dBm)		IC 99% Bandwidth EIRP Limit (dBm)		FCC 26dB Bandwidth Power Limit (dBm)		Note
					Ant 0	Ant 1	Ant 0	Ant 1	Ant 0	Ant 1	Ant 0	Ant 1	Ant 0	Ant 1	
11a	6Mbps	2	52	5260	17.15	17.11	23.28	22.97	23.33		29.33		23.98		-
11a	6Mbps	2	60	5300	17.17	17.12	23.39	22.98	23.33		29.33		23.98		
11a	6Mbps	2	64	5320	17.14	17.14	23.36	22.90	23.34		29.34		23.98		
VHT20	MCS0	2	52	5260	18.36	18.35	24.68	24.48	23.64		29.64		23.98		
VHT20	MCS0	2	60	5300	18.36	18.42	24.78	24.54	23.64		29.64		23.98		
VHT20	MCS0	2	64	5320	18.35	18.45	24.46	24.29	23.64		29.64		23.98		
VHT40	MCS0	2	54	5270	37.72	37.39	47.31	47.52	23.98		30.00		23.98		
VHT40	MCS0	2	62	5310	37.81	37.35	47.65	46.91	23.98		30.00		23.98		
VHT80	MCS0	2	58	5290	76.55	76.24	93.12	90.30	23.98		30.00		23.98		
VHT160	MCS0	2	50	5250	157.04	156.46	180.82	175.63	23.98		30.00		23.98		

TEST RESULTS DATA
Average Power Table

FCC U-NII-2A single antenna													
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail
					Ant 0	Ant 1	SUM	Ant 0	Ant 1	Ant 0	Ant 1		
11a	6Mbps	1	52	5260	22.80	-	-	23.98	-	4.52	-	30	Pass
11a	6Mbps	1	60	5300	22.70	-		23.98	-	4.52	-	30	Pass
11a	6Mbps	1	64	5320	22.60	-		23.98	-	4.52	-	30	Pass
HT20	MCS0	1	52	5260	22.70	-		23.98	-	4.52	-	30	Pass
HT20	MCS0	1	60	5300	23.00	-		23.98	-	4.52	-	30	Pass
HT20	MCS0	1	64	5320	23.10	-		23.98	-	4.52	-	30	Pass
HT40	MCS0	1	54	5270	23.40	-		23.98	-	4.52	-	30	Pass
HT40	MCS0	1	62	5310	20.80	-		23.98	-	4.52	-	30	Pass
VHT20	MCS0	1	52	5260	22.80	-		23.98	-	4.52	-	30	Pass
VHT20	MCS0	1	60	5300	23.10	-		23.98	-	4.52	-	30	Pass
VHT20	MCS0	1	64	5320	23.20	-		23.98	-	4.52	-	30	Pass
VHT40	MCS0	1	54	5270	23.50	-		23.98	-	4.52	-	30	Pass
VHT40	MCS0	1	62	5310	20.90	-		23.98	-	4.52	-	30	Pass
VHT80	MCS0	1	58	5290	20.70	-		23.98	-	4.52	-	30	Pass
VHT160	MCS0	1	50	5250	19.70	-		23.98	-	4.52	-	30	Pass

FCC U-NII-2A MIMO													
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail
					Ant 0	Ant 1	SUM	Ant 0	Ant 1	Ant 0	Ant 1		
11a	6Mbps	2	52	5260	19.50	19.30	22.41	23.98		2.12		30	Pass
11a	6Mbps	2	60	5300	19.60	19.30	22.46	23.98		2.12		30	Pass
11a	6Mbps	2	64	5320	19.50	19.20	22.36	23.98		2.12		30	Pass
HT20	MCS0	2	52	5260	19.60	19.50	22.56	23.98		2.12		30	Pass
HT20	MCS0	2	60	5300	19.50	19.60	22.56	23.98		2.12		30	Pass
HT20	MCS0	2	64	5320	19.50	19.40	22.46	23.98		2.12		30	Pass
HT40	MCS0	2	54	5270	20.40	20.50	23.46	23.98		2.12		30	Pass
HT40	MCS0	2	62	5310	20.50	20.50	23.51	23.98		2.12		30	Pass
VHT20	MCS0	2	52	5260	19.70	19.60	22.66	23.98		2.12		30	Pass
VHT20	MCS0	2	60	5300	19.60	19.70	22.66	23.98		2.12		30	Pass
VHT20	MCS0	2	64	5320	19.60	19.50	22.56	23.98		2.12		30	Pass
VHT40	MCS0	2	54	5270	20.50	20.60	23.56	23.98		2.12		30	Pass
VHT40	MCS0	2	62	5310	20.60	20.60	23.61	23.98		2.12		30	Pass
VHT80	MCS0	2	58	5290	20.60	20.50	23.56	23.98		2.12		30	Pass
VHT160	MCS0	2	50	5250	19.20	18.90	22.06	23.98		2.12		30	Pass

TEST RESULTS DATA
Power Spectral Density

U-NII-2A single antenna														
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Duty Factor (dB)		Average Power Density with Duty Factor (dBm/MHz)			Average PSD Limit (dBm/MHz)		DG (dBi)		Pass /Fail
					Ant 0	Ant 1	Ant 0	Ant 1	SUM	Ant 0	Ant 1	Ant 0	Ant 1	
11a	6Mbps	1	52	5260	0.04	-	10.84	-	-	11.00	-	4.52	-	Pass
11a	6Mbps	1	60	5300	0.04	-	10.65	-		11.00	-	4.52	-	Pass
11a	6Mbps	1	64	5320	0.04	-	10.73	-		11.00	-	4.52	-	Pass
VHT20	MCS0	1	52	5260	0.13	-	10.54	-		11.00	-	4.52	-	Pass
VHT20	MCS0	1	60	5300	0.13	-	10.79	-		11.00	-	4.52	-	Pass
VHT20	MCS0	1	64	5320	0.13	-	10.97	-		11.00	-	4.52	-	Pass
VHT40	MCS0	1	54	5270	0.11	-	8.22	-		11.00	-	4.52	-	Pass
VHT40	MCS0	1	62	5310	0.11	-	5.65	-		11.00	-	4.52	-	Pass
VHT80	MCS0	1	58	5290	0.12	-	2.31	-		11.00	-	4.52	-	Pass
VHT160	MCS0	1	50	5250	0.11	-	-1.52	-		11.00	-	4.52	-	Pass

U-NII-2A MIMO														
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Duty Factor (dB)		Average Power Density with Duty Factor (dBm/MHz)			Average PSD Limit (dBm/MHz)		DG (dBi)		Pass /Fail
					Ant 0	Ant 1	Ant 0	Ant 1	SUM	Ant 0	Ant 1	Ant 0	Ant 1	
11a	6Mbps	2	52	5260	0.04	0.04	-		10.91	11.00		4.92		Pass
11a	6Mbps	2	60	5300	0.04	0.04			10.71	11.00		4.92		Pass
11a	6Mbps	2	64	5320	0.04	0.04			10.79	11.00		4.92		Pass
VHT20	MCS0	2	52	5260	0.13	0.12			10.67	11.00		4.92		Pass
VHT20	MCS0	2	60	5300	0.13	0.12			10.64	11.00		4.92		Pass
VHT20	MCS0	2	64	5320	0.13	0.12			10.58	11.00		4.92		Pass
VHT40	MCS0	2	54	5270	0.11	0.12			8.34	11.00		4.92		Pass
VHT40	MCS0	2	62	5310	0.11	0.12			8.50	11.00		4.92		Pass
VHT80	MCS0	2	58	5290	0.11	0.11			5.39	11.00		4.92		Pass
VHT160	MCS0	2	50	5250	0.09	0.10			0.88	11.00		4.92		Pass

TEST RESULTS DATA
26dB and 99% OBW

U-NII-2C single antenna																
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	99% Bandwidth In U-NII 2C (MHz)		26 dB Bandwidth In U-NII 2C (MHz)		IC 99% Bandwidth Power Limit (dBm)		IC 99% Bandwidth EIRP Limit (dBm)		FCC 26dB Bandwidth Power Limit (dBm)		6 dB Bandwidth for Straddle Channel (MHz)	
					Ant 0	Ant 1	Ant 0	Ant 1	Ant 0	Ant 1	Ant 0	Ant 1	Ant 0	Ant 1	Ant 0	Ant 1
11a	6Mbps	1	100	5500	17.14	-	23.80	-	23.34	-	29.34	-	23.98	-	----	----
11a	6Mbps	1	116	5580	17.15	-	23.60	-	23.34	-	29.34	-	23.98	-	----	----
11a	6Mbps	1	140	5700	17.13	-	23.67	-	23.34	-	29.34	-	23.98	-	----	----
VHT20	MCS0	1	100	5500	18.30	-	24.55	-	23.63	-	29.63	-	23.98	-	----	----
VHT20	MCS0	1	116	5580	18.28	-	24.38	-	23.62	-	29.62	-	23.98	-	----	----
VHT20	MCS0	1	140	5700	18.31	-	24.57	-	23.63	-	29.63	-	23.98	-	----	----
VHT40	MCS0	1	102	5510	37.71	-	47.33	-	23.98	-	30.00	-	23.98	-	----	----
VHT40	MCS0	1	110	5550	37.69	-	48.02	-	23.98	-	30.00	-	23.98	-	----	----
VHT40	MCS0	1	134	5670	37.72	-	48.35	-	23.98	-	30.00	-	23.98	-	----	----
VHT80	MCS0	1	106	5530	76.71	-	93.66	-	23.98	-	30.00	-	23.98	-	----	----
VHT80	MCS0	1	122	5610	76.74	-	92.16	-	23.98	-	30.00	-	23.98	-	----	----
VHT160	MCS0	1	114	5570	157.38	-	181.44	-	23.98	-	30.00	-	23.98	-	----	----

U-NII-2C MIMO																
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	99% Bandwidth In U-NII 2C (MHz)		26 dB Bandwidth In U-NII 2C (MHz)		IC 99% Bandwidth Power Limit (dBm)		IC 99% Bandwidth EIRP Limit (dBm)		FCC 26dB Bandwidth Power Limit (dBm)		6 dB Bandwidth for Straddle Channel (MHz)	
					Ant 0	Ant 1	Ant 0	Ant 1	Ant 0	Ant 1	Ant 0	Ant 1	Ant 0	Ant 1	Ant 0	Ant 1
11a	6Mbps	2	100	5500	17.16	17.12	23.18	22.82	23.34		29.34		23.98		----	----
11a	6Mbps	2	116	5580	17.15	17.16	23.37	22.87	23.34		29.34		23.98		----	----
11a	6Mbps	2	140	5700	17.14	17.09	23.15	22.88	23.33		29.33		23.98		----	----
VHT20	MCS0	2	100	5500	18.31	18.25	24.54	24.15	23.61		29.61		23.98		----	----
VHT20	MCS0	2	116	5580	18.26	18.15	24.23	23.44	23.59		29.59		23.98		----	----
VHT20	MCS0	2	140	5700	18.24	18.05	24.37	23.94	23.57		29.57		23.98		----	----
VHT40	MCS0	2	102	5510	37.71	37.56	47.73	47.28	23.98		30.00		23.98		----	----
VHT40	MCS0	2	110	5550	37.71	37.58	47.68	47.14	23.98		30.00		23.98		----	----
VHT40	MCS0	2	134	5670	37.88	37.85	47.98	46.67	23.98		30.00		23.98		----	----
VHT80	MCS0	2	106	5530	76.73	76.50	93.70	89.95	23.98		30.00		23.98		----	----
VHT80	MCS0	2	122	5610	76.80	76.67	91.97	89.82	23.98		30.00		23.98		----	----
VHT160	MCS0	2	114	5570	157.40	156.99	180.53	175.63	23.98		30.00		23.98		----	----

U-NII-2C straddle channel single antenna																
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	99% Bandwidth In U-NII 2C (MHz)		26 dB Bandwidth In U-NII 2C (MHz)		IC 99% Bandwidth Power Limit (dBm)		IC 99% Bandwidth EIRP Limit (dBm)		FCC 26dB Bandwidth Power Limit (dBm)		6 dB Bandwidth for Straddle Channel (MHz)	
					Ant 0	Ant 1	Ant 0	Ant 1	Ant 0	Ant 1	Ant 0	Ant 1	Ant 0	Ant 1	Ant 0	Ant 1
11a	6Mbps	1	144	5720	13.61	-	17.09	-	23.34	-	29.34	-	23.98	-	3.13	-
VHT20	MCS0	1	144	5720	14.16	-	17.37	-	23.62	-	29.62	-	23.98	-	3.75	-
VHT40	MCS0	1	142	5710	33.86	-	39.02	-	23.98	-	30.00	-	23.98	-	3.171	-
VHT80	MCS0	1	138	5690	73.40	-	81.30	-	23.98	-	30.00	-	23.98	-	3.144	-

U-NII-2C straddle channel MIMO																
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	99% Bandwidth In U-NII 2C (MHz)		26 dB Bandwidth In U-NII 2C (MHz)		IC 99% Bandwidth Power Limit (dBm)		IC 99% Bandwidth EIRP Limit (dBm)		FCC 26dB Bandwidth Power Limit (dBm)		6 dB Bandwidth for Straddle Channel (MHz)	
					Ant 0	Ant 1	Ant 0	Ant 1	Ant 0	Ant 1	Ant 0	Ant 1	Ant 0	Ant 1	Ant 0	Ant 1
11a	6Mbps	2	144	5720	13.61	13.64	16.83	16.38	23.33		29.33		23.98		3.11	2.48
VHT20	MCS0	2	144	5720	14.13	14.08	17.06	16.98	23.57		29.57		23.98		3.745	3.465
VHT40	MCS0	2	142	5710	33.89	34.03	38.82	38.66	23.98		30.00		23.98		3.162	3.135
VHT80	MCS0	2	138	5690	73.40	73.61	82.07	80.63	23.98		30.00		23.98		3.176	3.144

TEST RESULTS DATA
Average Power Table

FCC U-NII-2C single antenna													
Mod.	Data Rate	N _{rx}	CH.	Freq. (MHz)	Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail
					Ant 0	Ant 1	SUM	Ant 0	Ant 1	Ant 0	Ant 1		
11a	6Mbps	1	100	5500	22.90	-	-	23.98	-	5.70	-	30	Pass
11a	6Mbps	1	116	5580	22.80	-		23.98	-	5.70	-	30	Pass
11a	6Mbps	1	140	5700	22.70	-		23.98	-	5.70	-	30	Pass
HT20	MCS0	1	100	5500	23.40	-		23.98	-	5.70	-	30	Pass
HT20	MCS0	1	116	5580	22.70	-		23.98	-	5.70	-	30	Pass
HT20	MCS0	1	140	5700	23.00	-		23.98	-	5.70	-	30	Pass
HT40	MCS0	1	102	5510	23.00	-		23.98	-	5.70	-	30	Pass
HT40	MCS0	1	110	5550	23.40	-		23.98	-	5.70	-	30	Pass
HT40	MCS0	1	134	5670	23.70	-		23.98	-	5.70	-	30	Pass
VHT20	MCS0	1	100	5500	23.50	-		23.98	-	5.70	-	30	Pass
VHT20	MCS0	1	116	5580	22.80	-		23.98	-	5.70	-	30	Pass
VHT20	MCS0	1	140	5700	23.10	-		23.98	-	5.70	-	30	Pass
VHT40	MCS0	1	102	5510	23.10	-		23.98	-	5.70	-	30	Pass
VHT40	MCS0	1	110	5550	23.50	-		23.98	-	5.70	-	30	Pass
VHT40	MCS0	1	134	5670	23.80	-		23.98	-	5.70	-	30	Pass
VHT80	MCS0	1	106	5530	20.80	-		23.98	-	5.70	-	30	Pass
VHT80	MCS0	1	122	5610	23.80	-	23.98	-	5.70	-	30	Pass	
VHT160	MCS0	1	114	5570	18.10	-	23.98	-	5.70	-	30	Pass	

FCC U-NII-2C MIMO													
Mod.	Data Rate	N _{rx}	CH.	Freq. (MHz)	Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail
					Ant 0	Ant 1	SUM	Ant 0	Ant 1	Ant 0	Ant 1		
11a	6Mbps	2	100	5500	19.80	19.10	22.47	23.98		2.70		30	Pass
11a	6Mbps	2	116	5580	19.80	19.10	22.47	23.98		2.70		30	Pass
11a	6Mbps	2	140	5700	19.70	19.60	22.66	23.98		2.70		30	Pass
HT20	MCS0	2	100	5500	20.20	19.70	22.97	23.98		2.70		30	Pass
HT20	MCS0	2	116	5580	19.60	19.20	22.41	23.98		2.70		30	Pass
HT20	MCS0	2	140	5700	19.80	19.80	22.81	23.98		2.70		30	Pass
HT40	MCS0	2	102	5510	21.00	20.60	23.81	23.98		2.70		30	Pass
HT40	MCS0	2	110	5550	20.90	20.50	23.71	23.98		2.70		30	Pass
HT40	MCS0	2	134	5670	20.70	20.50	23.61	23.98		2.70		30	Pass
VHT20	MCS0	2	100	5500	20.30	19.80	23.07	23.98		2.70		30	Pass
VHT20	MCS0	2	116	5580	19.70	19.30	22.51	23.98		2.70		30	Pass
VHT20	MCS0	2	140	5700	19.90	19.90	22.91	23.98		2.70		30	Pass
VHT40	MCS0	2	102	5510	21.10	20.70	23.91	23.98		2.70		30	Pass
VHT40	MCS0	2	110	5550	21.00	20.60	23.81	23.98		2.70		30	Pass
VHT40	MCS0	2	134	5670	20.80	20.60	23.71	23.98		2.70		30	Pass
VHT80	MCS0	2	106	5530	20.30	19.80	23.07	23.98		2.70		30	Pass
VHT80	MCS0	2	122	5610	20.90	20.30	23.62	23.98		2.70		30	Pass
VHT160	MCS0	2	114	5570	17.70	17.20	20.47	23.98		2.70		30	Pass

FCC U-NII-2C straddle channel single antenna													
Mod.	Data Rate	N _{rx}	CH.	Freq. (MHz)	Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail
					Ant 0	Ant 1	SUM	Ant 0	Ant 1	Ant 0	Ant 1		
11a	6Mbps	1	144	5720	22.80	-	-	23.98	-	5.70	-	30	Pass
HT20	MCS0	1	144	5720	23.20	-		23.98	-	5.70	-	30	Pass
HT40	MCS0	1	142	5710	23.50	-		23.98	-	5.70	-	30	Pass
VHT20	MCS0	1	144	5720	23.30	-		23.98	-	5.70	-	30	Pass
VHT40	MCS0	1	142	5710	23.60	-		23.98	-	5.70	-	30	Pass
VHT80	MCS0	1	138	5690	23.50	-		23.98	-	5.70	-	30	Pass

FCC U-NII-2C straddle channel MIMO													
Mod.	Data Rate	N _{rx}	CH.	Freq. (MHz)	Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail
					Ant 0	Ant 1	SUM	Ant 0	Ant 1	Ant 0	Ant 1		
11a	6Mbps	2	144	5720	19.80	19.50	22.66	23.98		2.70		30	Pass
HT20	MCS0	2	144	5720	19.80	19.60	22.71	23.98		2.70		30	Pass
HT40	MCS0	2	142	5710	20.60	20.60	23.61	23.98		2.70		30	Pass
VHT20	MCS0	2	144	5720	19.90	19.70	22.81	23.98		2.70		30	Pass
VHT40	MCS0	2	142	5710	20.70	20.70	23.71	23.98		2.70		30	Pass
VHT80	MCS0	2	138	5690	20.90	20.70	23.81	23.98		2.70		30	Pass

TEST RESULTS DATA
Power Spectral Density

U-NII-2C single antenna														
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Duty Factor (dB)		Average Power Density with Duty Factor (dBm/MHz)			Average PSD Limit (dBm/MHz)		DG (dBi)		Pass /Fail
					Ant 0	Ant 1	Ant 0	Ant 1	SUM	Ant 0	Ant 1	Ant 0	Ant 1	
11a	6Mbps	1	100	5500	0.04	-	10.59	-	-	11.00	-	5.70	-	Pass
11a	6Mbps	1	116	5580	0.04	-	10.89	-		11.00	-	5.70	-	Pass
11a	6Mbps	1	140	5700	0.04	-	10.55	-		11.00	-	5.70	-	Pass
VHT20	MCS0	1	100	5500	0.13	-	10.94	-		11.00	-	5.70	-	Pass
VHT20	MCS0	1	116	5580	0.13	-	10.56	-		11.00	-	5.70	-	Pass
VHT20	MCS0	1	140	5700	0.13	-	10.80	-		11.00	-	5.70	-	Pass
VHT40	MCS0	1	102	5510	0.11	-	7.52	-		11.00	-	5.70	-	Pass
VHT40	MCS0	1	110	5550	0.11	-	7.75	-		11.00	-	5.70	-	Pass
VHT40	MCS0	1	134	5670	0.11	-	8.31	-		11.00	-	5.70	-	Pass
VHT80	MCS0	1	106	5530	0.12	-	2.22	-		11.00	-	5.70	-	Pass
VHT80	MCS0	1	122	5610	0.12	-	5.66	-		11.00	-	5.70	-	Pass
VHT160	MCS0	1	114	5570	0.11	-	-3.00	-		11.00	-	5.70	-	Pass

U-NII-2C MIMO														
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Duty Factor (dB)		Average Power Density with Duty Factor (dBm/MHz)			Average PSD Limit (dBm/MHz)		DG (dBi)		Pass /Fail
					Ant 0	Ant 1	Ant 0	Ant 1	SUM	Ant 0	Ant 1	Ant 0	Ant 1	
11a	6Mbps	2	100	5500	0.04	0.04	-		10.59	11.00		4.88		Pass
11a	6Mbps	2	116	5580	0.04	0.04			10.77	11.00		4.88		Pass
11a	6Mbps	2	140	5700	0.04	0.04			10.91	11.00		4.88		Pass
VHT20	MCS0	2	100	5500	0.13	0.12			10.81	11.00		4.88		Pass
VHT20	MCS0	2	116	5580	0.13	0.12			10.53	11.00		4.88		Pass
VHT20	MCS0	2	140	5700	0.13	0.12			10.84	11.00		4.88		Pass
VHT40	MCS0	2	102	5510	0.11	0.12			8.85	11.00		4.88		Pass
VHT40	MCS0	2	110	5550	0.11	0.12			8.39	11.00		4.88		Pass
VHT40	MCS0	2	134	5670	0.11	0.12			8.64	11.00		4.88		Pass
VHT80	MCS0	2	106	5530	0.11	0.11			5.00	11.00		4.88		Pass
VHT80	MCS0	2	122	5610	0.11	0.11			6.05	11.00		4.88		Pass
VHT160	MCS0	2	114	5570	0.09	0.10			0.15	11.00		4.88		Pass

U-NII-2C straddle channel single antenna														
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Duty Factor (dB)		Average Power Density (dBm/MHz)			Average PSD Limit (dBm/MHz)		DG (dBi)		Pass /Fail
					Ant 0	Ant 1	Ant 0	Ant 1	SUM	Ant 0	Ant 1	Ant 0	Ant 1	
11a	6Mbps	1	144	5720	0.04	-	10.61	-	-	11.00	-	5.70	-	Pass
VHT20	MCS0	1	144	5720	0.13	-	10.85	-		11.00	-	5.70	-	Pass
VHT40	MCS0	1	142	5710	0.11	-	8.16	-		11.00	-	5.70	-	Pass
VHT80	MCS0	1	138	5690	0.12	-	5.26	-		11.00	-	5.70	-	Pass

U-NII-2C straddle channel MIMO														
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Duty Factor (dB)		Average Power Density (dBm/MHz)			Average PSD Limit (dBm/MHz)		DG (dBi)		Pass /Fail
					Ant 0	Ant 1	Ant 0	Ant 1	SUM	Ant 0	Ant 1	Ant 0	Ant 1	
11a	6Mbps	2	144	5720	0.04	0.04	-		10.95	11.00		4.88		Pass
VHT20	MCS0	2	144	5720	0.13	0.12			10.77	11.00		4.88		Pass
VHT40	MCS0	2	142	5710	0.11	0.12			8.68	11.00		4.88		Pass
VHT80	MCS0	2	138	5690	0.11	0.11			5.73	11.00		4.88		Pass

TEST RESULTS DATA
Average Power Table

FCC U-NII-1 single antenna													
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	RU Config	Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		Pass/Fail
						Ant 0	Ant 1	SUM	Ant 0	Ant 1	Ant 0	Ant 1	
HE20	MCS0	1	36	5180	Full	22.10	-	-	30.00	-	4.09	-	Pass
HE20	MCS0	1	44	5220	Full	23.80	-		30.00	-	4.09	-	Pass
HE20	MCS0	1	48	5240	Full	24.40	-		30.00	-	4.09	-	Pass
HE40	MCS0	1	38	5190	Full	19.90	-		30.00	-	4.09	-	Pass
HE40	MCS0	1	46	5230	Full	22.40	-		30.00	-	4.09	-	Pass
HE80	MCS0	1	42	5210	Full	20.60	-		30.00	-	4.09	-	Pass
HE160	MCS0	1	50	5250	Full	19.60	-		30.00	-	4.09	-	Pass

FCC U-NII-1 MIMO													
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	RU Config	Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		Pass/Fail
						Ant 0	Ant 1	SUM	Ant 0	Ant 1	Ant 0	Ant 1	
HE20	MCS0	2	36	5180	Full	20.80	20.60	23.71	30.00		1.92		Pass
HE20	MCS0	2	44	5220	Full	23.20	23.20	26.21	30.00		1.92		Pass
HE20	MCS0	2	48	5240	Full	24.20	24.20	27.21	30.00		1.92		Pass
HE40	MCS0	2	38	5190	Full	19.80	19.70	22.76	30.00		1.92		Pass
HE40	MCS0	2	46	5230	Full	22.30	22.30	25.31	30.00		1.92		Pass
HE80	MCS0	2	42	5210	Full	20.00	20.00	23.01	30.00		1.92		Pass
HE160	MCS0	2	50	5250	Full	20.00	19.80	22.91	30.00		1.92		Pass

TEST RESULTS DATA
Average Power Table

FCC U-NII-2A single antenna														
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	RU Config	Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail
						Ant 0	Ant 1	SUM	Ant 0	Ant 1	Ant 0	Ant 1		
HE20	MCS0	1	52	5260	Full	23.30	-	-	23.98	-	4.52	-	30	Pass
HE20	MCS0	1	60	5300	Full	23.30	-		23.98	-	4.52	-	30	Pass
HE20	MCS0	1	64	5320	Full	22.10	-		23.98	-	4.52	-	30	Pass
HE40	MCS0	1	54	5270	Full	22.80	-		23.98	-	4.52	-	30	Pass
HE40	MCS0	1	62	5310	Full	20.80	-		23.98	-	4.52	-	30	Pass
HE80	MCS0	1	58	5290	Full	20.50	-		23.98	-	4.52	-	30	Pass
HE160	MCS0	1	50	5250	Full	19.60	-		23.98	-	4.52	-	30	Pass

FCC U-NII-2A MIMO														
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	RU Config	Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail
						Ant 0	Ant 1	SUM	Ant 0	Ant 1	Ant 0	Ant 1		
HE20	MCS0	2	52	5260	Full	19.60	19.30	22.46	23.98		2.12		30	Pass
HE20	MCS0	2	60	5300	Full	19.50	19.20	22.36	23.98		2.12		30	Pass
HE20	MCS0	2	64	5320	Full	19.50	19.20	22.36	23.98		2.12		30	Pass
HE40	MCS0	2	54	5270	Full	20.70	20.70	23.71	23.98		2.12		30	Pass
HE40	MCS0	2	62	5310	Full	20.80	20.70	23.76	23.98		2.12		30	Pass
HE80	MCS0	2	58	5290	Full	20.60	20.60	23.61	23.98		2.12		30	Pass
HE160	MCS0	2	50	5250	Full	20.00	19.80	22.91	23.98		2.12		30	Pass

TEST RESULTS DATA
Average Power Table

FCC U-NII-2C single antenna														
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	RU Config	Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail
						Ant 0	Ant 1	SUM	Ant 0	Ant 1	Ant 0	Ant 1		
HE20	MCS0	1	100	5500	Full	23.50	-	-	23.98	-	5.70	-	30	Pass
HE20	MCS0	1	116	5580	Full	22.90	-		23.98	-	5.70	-	30	Pass
HE20	MCS0	1	140	5700	Full	22.20	-		23.98	-	5.70	-	30	Pass
HE40	MCS0	1	102	5510	Full	22.30	-		23.98	-	5.70	-	30	Pass
HE40	MCS0	1	110	5550	Full	23.40	-		23.98	-	5.70	-	30	Pass
HE40	MCS0	1	134	5670	Full	23.60	-		23.98	-	5.70	-	30	Pass
HE80	MCS0	1	106	5530	Full	19.50	-		23.98	-	5.70	-	30	Pass
HE80	MCS0	1	122	5610	Full	23.60	-		23.98	-	5.70	-	30	Pass
HE160	MCS0	1	114	5570	Full	18.10	-		23.98	-	5.70	-	30	Pass

FCC U-NII-2C MIMO														
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	RU Config	Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail
						Ant 0	Ant 1	SUM	Ant 0	Ant 1	Ant 0	Ant 1		
HE20	MCS0	2	100	5500	Full	20.30	19.70	23.02	23.98		2.70		30	Pass
HE20	MCS0	2	116	5580	Full	20.30	19.70	23.02	23.98		2.70		30	Pass
HE20	MCS0	2	140	5700	Full	19.60	19.50	22.56	23.98		2.70		30	Pass
HE40	MCS0	2	102	5510	Full	20.90	20.40	23.67	23.98		2.70		30	Pass
HE40	MCS0	2	110	5550	Full	20.90	20.40	23.67	23.98		2.70		30	Pass
HE40	MCS0	2	134	5670	Full	20.60	20.30	23.46	23.98		2.70		30	Pass
HE80	MCS0	2	106	5530	Full	18.70	18.20	21.47	23.98		2.70		30	Pass
HE80	MCS0	2	122	5610	Full	20.80	20.50	23.66	23.98		2.70		30	Pass
HE160	MCS0	2	114	5570	Full	17.70	17.20	20.47	23.98		2.70		30	Pass

FCC U-NII-2C straddle channel single antenna														
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	RU Config	Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail
						Ant 0	Ant 1	SUM	Ant 0	Ant 1	Ant 0	Ant 1		
HE20	MCS0	1	144	5720	Full	23.30	-	-	23.98	-	5.70	-	30	Pass
HE40	MCS0	1	142	5710	Full	23.40	-		23.98	-	5.70	-	30	Pass
HE80	MCS0	1	138	5690	Full	23.60	-		23.98	-	5.70	-	30	Pass

FCC U-NII-2C straddle channel MIMO														
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	RU Config	Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail
						Ant 0	Ant 1	SUM	Ant 0	Ant 1	Ant 0	Ant 1		
HE20	MCS0	2	144	5720	Full	19.70	19.50	22.61	23.98		2.70		30	Pass
HE40	MCS0	2	142	5710	Full	20.40	20.40	23.41	23.98		2.70		30	Pass
HE80	MCS0	2	138	5690	Full	20.90	20.80	23.86	23.98		2.70		30	Pass

TEST RESULTS DATA
26dB and 99% OBW

U-NII-1 single antenna															
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	RU Config.	99% Bandwidth (MHz)		26 dB Bandwidth (MHz)		IC 99% Bandwidth Power Limit (dBm)		IC 99% Bandwidth EIRP Limit (dBm)			Note
						Ant 0	Ant 1	Ant 0	Ant 1	Ant 0	Ant 1	Ant 0	Ant 1		
EHT20	MCS0	1	36	5180	Full	19.24	-	24.02	-	-	-	22.84	-	-	-
EHT20	MCS0	1	44	5220	Full	19.23	-	23.98	-	-	-	22.84	-		
EHT20	MCS0	1	48	5240	Full	19.24	-	23.74	-	-	-	22.84	-		
EHT40	MCS0	1	38	5190	Full	38.61	-	45.97	-	-	-	23.01	-		
EHT40	MCS0	1	46	5230	Full	38.68	-	45.60	-	-	-	23.01	-		
EHT80	MCS0	1	42	5210	Full	77.91	-	88.42	-	-	-	23.01	-		
EHT160	MCS0	1	50	5250	Full	158.34	-	177.74	-	-	-	23.01	-		

U-NII-1 MIMO															
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	RU Config.	99% Bandwidth (MHz)		26 dB Bandwidth (MHz)		IC 99% Bandwidth Power Limit (dBm)		IC 99% Bandwidth EIRP Limit (dBm)			Note
						Ant 0	Ant 1	Ant 0	Ant 1	Ant 0	Ant 1	Ant 0	Ant 1		
EHT20	MCS0	2	36	5180	Full	19.22	19.24	24.46	24.55	-	-	22.84	-	-	-
EHT20	MCS0	2	44	5220	Full	19.25	19.27	23.62	24.86	-	-	22.84	-		
EHT20	MCS0	2	48	5240	Full	19.26	19.29	23.93	24.55	-	-	22.85	-		
EHT40	MCS0	2	38	5190	Full	38.56	38.57	45.78	46.14	-	-	23.01	-		
EHT40	MCS0	2	46	5230	Full	38.59	38.54	45.86	45.55	-	-	23.01	-		
EHT80	MCS0	2	42	5210	Full	77.90	77.82	89.86	89.82	-	-	23.01	-		
EHT160	MCS0	2	50	5250	Full	158.07	157.76	178.32	176.59	-	-	23.01	-		

TEST RESULTS DATA
Average Power Table

FCC U-NII-1 single antenna														
Mod.	Data Rate	N _{rx}	CH.	Freq. (MHz)	RU Config.	Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)			Pass/Fail
						Ant 0	Ant 1	SUM	Ant 0	Ant 1	Ant 0	Ant 1		
EHT20	MCS0	1	36	5180	Full	22.20	-	-	30.00	-	4.09	-	-	Pass
EHT20	MCS0	1	44	5220	Full	23.90	-		30.00	-	4.09	-		Pass
EHT20	MCS0	1	48	5240	Full	24.50	-		30.00	-	4.09	-		Pass
EHT40	MCS0	1	38	5190	Full	20.00	-		30.00	-	4.09	-		Pass
EHT40	MCS0	1	46	5230	Full	22.50	-		30.00	-	4.09	-		Pass
EHT80	MCS0	1	42	5210	Full	20.70	-		30.00	-	4.09	-		Pass
EHT160	MCS0	1	50	5250	Full	19.70	-		30.00	-	4.09	-		Pass

FCC U-NII-1 MIMO														
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	RU Config.	Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)			Pass/Fail
						Ant 0	Ant 1	SUM	Ant 0	Ant 1	Ant 0	Ant 1		
EHT20	MCS0	2	36	5180	Full	20.90	20.70	23.81	30.00		1.92		-	Pass
EHT20	MCS0	2	44	5220	Full	23.30	23.30	26.31	30.00		1.92			Pass
EHT20	MCS0	2	48	5240	Full	24.30	24.30	27.31	30.00		1.92			Pass
EHT40	MCS0	2	38	5190	Full	19.90	19.80	22.86	30.00		1.92			Pass
EHT40	MCS0	2	46	5230	Full	22.40	22.40	25.41	30.00		1.92			Pass
EHT80	MCS0	2	42	5210	Full	20.10	20.10	23.11	30.00		1.92			Pass
EHT160	MCS0	2	50	5250	Full	20.10	19.90	23.01	30.00		1.92			Pass

TEST RESULTS DATA
Power Spectral Density

FCC U-NII-1 single antenna															
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Average Power Density with Duty Factor (dBm/MHz)			Average PSD Limit (dBm/MHz)		DG (dBi)		Pass /Fail
						Ant 0	Ant 1	Ant 0	Ant 1	SUM	Ant 0	Ant 1	Ant 0	Ant 1	
EHT20	MCS0	1	36	5180	Full	0.13	-	9.79	-	-	17.00	-	4.09	-	-
EHT20	MCS0	1	44	5220	Full	0.13	-	11.22	-		17.00	-	4.09	-	
EHT20	MCS0	1	48	5240	Full	0.13	-	12.16	-		17.00	-	4.09	-	
EHT40	MCS0	1	38	5190	Full	0.13	-	4.66	-		17.00	-	4.09	-	
EHT40	MCS0	1	46	5230	Full	0.13	-	7.10	-		17.00	-	4.09	-	
EHT80	MCS0	1	42	5210	Full	0.09	-	2.01	-		17.00	-	4.09	-	
EHT160	MCS0	1	50	5250	Full	0.11	-	-1.69	-		17.00	-	4.09	-	Pass

FCC U-NII-1 MIMO															
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Average Power Density with Duty Factor (dBm/MHz)			Average PSD Limit (dBm/MHz)		DG (dBi)		Pass /Fail
						Ant 0	Ant 1	Ant 0	Ant 1	SUM	Ant 0	Ant 1	Ant 0	Ant 1	
EHT20	MCS0	2	36	5180	Full	0.11	0.12	-		11.53	17.00		4.57		-
EHT20	MCS0	2	44	5220	Full	0.11	0.12			14.00	17.00		4.57		
EHT20	MCS0	2	48	5240	Full	0.11	0.12			15.42	17.00		4.57		
EHT40	MCS0	2	38	5190	Full	0.12	0.10			7.50	17.00		4.57		
EHT40	MCS0	2	46	5230	Full	0.12	0.10			9.94	17.00		4.57		
EHT80	MCS0	2	42	5210	Full	0.14	0.13			4.62	17.00		4.57		
EHT160	MCS0	2	50	5250	Full	0.10	0.11			1.81	17.00		4.57		Pass

TEST RESULTS DATA
26dB and 99% OBW

U-NII-2A single antenna																
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	RU Config.	99% Bandwidth (MHz)		26 dB Bandwidth (MHz)		IC 99% Bandwidth Power Limit (dBm)		IC 99% Bandwidth EIRP Limit (dBm)		FCC 26dB Bandwidth Power Limit (dBm)		Note
						Ant 0	Ant 1	Ant 0	Ant 1	Ant 0	Ant 1	Ant 0	Ant 1	Ant 0	Ant 1	
EHT20	MCS0	1	52	5260	Full	19.22	-	24.16	-	23.84	-	29.84	-	23.98	-	-
EHT20	MCS0	1	60	5300	Full	19.23	-	23.95	-	23.84	-	29.84	-	23.98	-	
EHT20	MCS0	1	64	5320	Full	19.24	-	24.40	-	23.84	-	29.84	-	23.98	-	
EHT40	MCS0	1	54	5270	Full	38.60	-	45.79	-	23.98	-	30.00	-	23.98	-	
EHT40	MCS0	1	62	5310	Full	38.63	-	45.50	-	23.98	-	30.00	-	23.98	-	
EHT80	MCS0	1	58	5290	Full	77.92	-	89.57	-	23.98	-	30.00	-	23.98	-	
EHT160	MCS0	1	50	5250	Full	158.34	-	177.74	-	23.98	-	30.00	-	23.98	-	

U-NII-2A MIMO																
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	RU Config.	99% Bandwidth (MHz)		26 dB Bandwidth (MHz)		IC 99% Bandwidth Power Limit (dBm)		IC 99% Bandwidth EIRP Limit (dBm)		FCC 26dB Bandwidth Power Limit (dBm)		Note
						Ant 0	Ant 1	Ant 0	Ant 1	Ant 0	Ant 1	Ant 0	Ant 1	Ant 0	Ant 1	
EHT20	MCS0	2	52	5260	Full	19.25	19.31	24.62	24.61	23.84		29.84		23.98	-	
EHT20	MCS0	2	60	5300	Full	19.25	19.38	24.02	24.44	23.84		29.84		23.98		
EHT20	MCS0	2	64	5320	Full	19.26	19.31	23.88	24.24	23.85		29.85		23.98		
EHT40	MCS0	2	54	5270	Full	38.61	38.50	46.21	46.03	23.98		30.00		23.98		
EHT40	MCS0	2	62	5310	Full	38.57	38.43	46.08	45.49	23.98		30.00		23.98		
EHT80	MCS0	2	58	5290	Full	77.85	77.69	89.60	87.71	23.98		30.00		23.98		
EHT160	MCS0	2	50	5250	Full	158.07	157.76	178.32	176.59	23.98		30.00		23.98		

TEST RESULTS DATA
Average Power Table

FCC U-NII-2A single antenna														
Mod.	Data Rate	N _{rx}	CH.	Freq. (MHz)	RU Config.	Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail
						Ant 0	Ant 1	SUM	Ant 0	Ant 1	Ant 0	Ant 1		
EHT20	MCS0	1	52	5260	Full	23.40	-	-	23.98	-	4.52	-	30	Pass
EHT20	MCS0	1	60	5300	Full	23.40	-		23.98	-	4.52	-	30	Pass
EHT20	MCS0	1	64	5320	Full	22.20	-		23.98	-	4.52	-	30	Pass
EHT40	MCS0	1	54	5270	Full	22.90	-		23.98	-	4.52	-	30	Pass
EHT40	MCS0	1	62	5310	Full	20.90	-		23.98	-	4.52	-	30	Pass
EHT80	MCS0	1	58	5290	Full	20.60	-		23.98	-	4.52	-	30	Pass
EHT160	MCS0	1	50	5250	Full	19.70	-		23.98	-	4.52	-	30	Pass

FCC U-NII-2A MIMO														
Mod.	Data Rate	N _{Tx}	CH.	Freq. (MHz)	RU Config.	Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail
						Ant 0	Ant 1	SUM	Ant 0	Ant 1	Ant 0	Ant 1		
EHT20	MCS0	2	52	5260	Full	19.70	19.40	22.56	23.98		2.12		30	Pass
EHT20	MCS0	2	60	5300	Full	19.60	19.30	22.46	23.98		2.12		30	Pass
EHT20	MCS0	2	64	5320	Full	19.60	19.30	22.46	23.98		2.12		30	Pass
EHT40	MCS0	2	54	5270	Full	20.80	20.80	23.81	23.98		2.12		30	Pass
EHT40	MCS0	2	62	5310	Full	20.90	20.80	23.86	23.98		2.12		30	Pass
EHT80	MCS0	2	58	5290	Full	20.70	20.70	23.71	23.98		2.12		30	Pass
EHT160	MCS0	2	50	5250	Full	20.10	19.90	23.01	23.98		2.12		30	Pass

TEST RESULTS DATA
Power Spectral Density

U-NII-2A single antenna															
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Average Power Density with Duty Factor (dBm/MHz)			Average PSD Limit (dBm/MHz)		DG (dBi)		Pass /Fail
						Ant 0	Ant 1	Ant 0	Ant 1	SUM	Ant 0	Ant 1	Ant 0	Ant 1	
EHT20	MCS0	1	52	5260	Full	0.13	-	10.99	-	-	11.00	-	4.52	-	-
EHT20	MCS0	1	60	5300	Full	0.13	-	10.91	-		11.00	-	4.52	-	
EHT20	MCS0	1	64	5320	Full	0.13	-	9.83	-		11.00	-	4.52	-	
EHT40	MCS0	1	54	5270	Full	0.13	-	7.47	-		11.00	-	4.52	-	
EHT40	MCS0	1	62	5310	Full	0.13	-	5.34	-		11.00	-	4.52	-	
EHT80	MCS0	1	58	5290	Full	0.09	-	1.86	-		11.00	-	4.52	-	
EHT160	MCS0	1	50	5250	Full	0.11	-	-1.69	-		11.00	-	4.52	-	Pass

U-NII-2A MIMO															
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Average Power Density with Duty Factor (dBm/MHz)			Average PSD Limit (dBm/MHz)		DG (dBi)		Pass /Fail
						Ant 0	Ant 1	Ant 0	Ant 1	SUM	Ant 0	Ant 1	Ant 0	Ant 1	
EHT20	MCS0	2	52	5260	Full	0.11	0.12	-		10.79	11.00		4.92		-
EHT20	MCS0	2	60	5300	Full	0.11	0.12			10.55	11.00		4.92		
EHT20	MCS0	2	64	5320	Full	0.11	0.12			10.64	11.00		4.92		
EHT40	MCS0	2	54	5270	Full	0.12	0.10			8.49	11.00		4.92		
EHT40	MCS0	2	62	5310	Full	0.12	0.10			8.53	11.00		4.92		
EHT80	MCS0	2	58	5290	Full	0.14	0.13			5.42	11.00		4.92		
EHT160	MCS0	2	50	5250	Full	0.10	0.11			1.81	11.00		4.92		Pass

TEST RESULTS DATA
26dB and 99% OBW

U-NII-2C single antenna																	
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	RU Config.	99% Bandwidth In U-NII 2C (MHz)		26 dB Bandwidth In U-NII 2C (MHz)		IC 99% Bandwidth Power Limit (dBm)		IC 99% Bandwidth EIRP Limit (dBm)		FCC 26dB Bandwidth Power Limit (dBm)		6 dB Bandwidth for Straddle Channel (MHz)	
						Ant 0	Ant 1	Ant 0	Ant 1	Ant 0	Ant 1	Ant 0	Ant 1	Ant 0	Ant 1	Ant 0	Ant 1
EHT20	MCS0	1	100	5500	Full	19.22	-	24.28	-	23.84	-	29.84	-	23.98	-	----	----
EHT20	MCS0	1	116	5580	Full	19.21	-	24.24	-	23.83	-	29.83	-	23.98	-	----	----
EHT20	MCS0	1	140	5700	Full	19.23	-	24.19	-	23.84	-	29.84	-	23.98	-	----	----
EHT40	MCS0	1	102	5510	Full	38.66	-	46.06	-	23.98	-	30.00	-	23.98	-	----	----
EHT40	MCS0	1	110	5550	Full	38.61	-	46.00	-	23.98	-	30.00	-	23.98	-	----	----
EHT40	MCS0	1	134	5670	Full	38.67	-	46.02	-	23.98	-	30.00	-	23.98	-	----	----
EHT80	MCS0	1	106	5530	Full	77.97	-	89.50	-	23.98	-	30.00	-	23.98	-	----	----
EHT80	MCS0	1	122	5610	Full	78.00	-	90.85	-	23.98	-	30.00	-	23.98	-	----	----
EHT160	MCS0	1	114	5570	Full	158.22	-	177.89	-	23.98	-	30.00	-	23.98	-	----	----
EHT240	MCS0	1	122	5610	Full	237.94	-	328.10	-	23.98	-	30.00	-	23.98	-	----	----

U-NII-2C MIMO																	
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	RU Config.	99% Bandwidth In U-NII 2C (MHz)		26 dB Bandwidth In U-NII 2C (MHz)		IC 99% Bandwidth Power Limit (dBm)		IC 99% Bandwidth EIRP Limit (dBm)		FCC 26dB Bandwidth Power Limit (dBm)		6 dB Bandwidth for Straddle Channel (MHz)	
						Ant 0	Ant 1	Ant 0	Ant 1	Ant 0	Ant 1	Ant 0	Ant 1	Ant 0	Ant 1	Ant 0	Ant 1
EHT20	MCS0	2	100	5500	Full	19.22	19.23	23.87	24.16	23.84		29.84		23.98		----	----
EHT20	MCS0	2	116	5580	Full	19.19	19.19	23.66	23.33	23.83		29.83		23.98		----	----
EHT20	MCS0	2	140	5700	Full	19.20	19.13	23.66	23.48	23.82		29.82		23.98		----	----
EHT40	MCS0	2	102	5510	Full	38.60	38.71	46.18	45.86	23.98		30.00		23.98		----	----
EHT40	MCS0	2	110	5550	Full	38.63	38.67	46.43	45.58	23.98		30.00		23.98		----	----
EHT40	MCS0	2	134	5670	Full	38.73	38.81	46.40	45.42	23.98		30.00		23.98		----	----
EHT80	MCS0	2	106	5530	Full	77.97	77.96	89.60	87.81	23.98		30.00		23.98		----	----
EHT80	MCS0	2	122	5610	Full	78.10	78.00	89.92	88.58	23.98		30.00		23.98		----	----
EHT160	MCS0	2	114	5570	Full	158.38	158.17	178.32	174.29	23.98		30.00		23.98		----	----
EHT240	MCS0	2	122	5610	Full	237.61	237.22	317.09	264.60	23.98		30.00		23.98		----	----

U-NII-2C straddle channel single antenna																	
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	RU Config.	99% Bandwidth In U-NII 2C (MHz)		26 dB Bandwidth In U-NII 2C (MHz)		IC 99% Bandwidth Power Limit (dBm)		IC 99% Bandwidth EIRP Limit (dBm)		FCC 26dB Bandwidth Power Limit (dBm)		6 dB Bandwidth for Straddle Channel (MHz)	
						Ant 0	Ant 1	Ant 0	Ant 1	Ant 0	Ant 1	Ant 0	Ant 1	Ant 0	Ant 1	Ant 0	Ant 1
EHT20	MCS0	1	144	5720	Full	14.65	-	17.07	-	23.84	-	29.84	-	23.98	-	4.495	-
EHT40	MCS0	1	142	5710	Full	34.27	-	38.23	-	23.98	-	30.00	-	23.98	-	4.044	-
EHT80	MCS0	1	138	5690	Full	74.01	-	79.58	-	23.98	-	30.00	-	23.98	-	4.024	-

U-NII-2C straddle channel MIMO																	
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	RU Config.	99% Bandwidth In U-NII 2C (MHz)		26 dB Bandwidth In U-NII 2C (MHz)		IC 99% Bandwidth Power Limit (dBm)		IC 99% Bandwidth EIRP Limit (dBm)		FCC 26dB Bandwidth Power Limit (dBm)		6 dB Bandwidth for Straddle Channel (MHz)	
						Ant 0	Ant 1	Ant 0	Ant 1	Ant 0	Ant 1	Ant 0	Ant 1	Ant 0	Ant 1	Ant 0	Ant 1
EHT20	MCS0	2	144	5720	Full	14.61	14.61	16.73	16.84	23.81		29.81		23.98		4.42	4.345
EHT40	MCS0	2	142	5710	Full	34.36	34.49	37.51	38.60	23.98		30.00		23.98		3.999	3.972
EHT80	MCS0	2	138	5690	Full	74.03	74.20	79.74	79.61	23.98		30.00		23.98		4.008	3.896

TEST RESULTS DATA
Average Power Table

FCC U-NII-2C single antenna														
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	RU Config.	Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail
						Ant 0	Ant 1	SUM	Ant 0	Ant 1	Ant 0	Ant 1		
EHT20	MCS0	1	100	5500	Full	23.60	-	-	23.98	-	5.70	-	30	Pass
EHT20	MCS0	1	116	5580	Full	23.00	-		23.98	-	5.70	-	30	Pass
EHT20	MCS0	1	140	5700	Full	22.30	-		23.98	-	5.70	-	30	Pass
EHT40	MCS0	1	102	5510	Full	22.40	-		23.98	-	5.70	-	30	Pass
EHT40	MCS0	1	110	5550	Full	23.50	-		23.98	-	5.70	-	30	Pass
EHT40	MCS0	1	134	5670	Full	23.70	-		23.98	-	5.70	-	30	Pass
EHT80	MCS0	1	106	5530	Full	19.60	-		23.98	-	5.70	-	30	Pass
EHT80	MCS0	1	122	5610	Full	23.70	-		23.98	-	5.70	-	30	Pass
EHT160	MCS0	1	114	5570	Full	18.20	-		23.98	-	5.70	-	30	Pass
EHT240	MCS0	1	122	5610	Full	16.00	-		23.98	-	5.70	-	30	Pass

FCC U-NII-2C MIMO														
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	RU Config.	Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail
						Ant 0	Ant 1	SUM	Ant 0	Ant 1	Ant 0	Ant 1		
EHT20	MCS0	2	100	5500	Full	20.40	19.80	23.12	23.98		2.70		30	Pass
EHT20	MCS0	2	116	5580	Full	20.40	19.80	23.12	23.98		2.70		30	Pass
EHT20	MCS0	2	140	5700	Full	19.70	19.60	22.66	23.98		2.70		30	Pass
EHT40	MCS0	2	102	5510	Full	21.00	20.50	23.77	23.98		2.70		30	Pass
EHT40	MCS0	2	110	5550	Full	21.00	20.50	23.77	23.98		2.70		30	Pass
EHT40	MCS0	2	134	5670	Full	20.70	20.40	23.56	23.98		2.70		30	Pass
EHT80	MCS0	2	106	5530	Full	18.80	18.30	21.57	23.98		2.70		30	Pass
EHT80	MCS0	2	122	5610	Full	20.90	20.60	23.76	23.98		2.70		30	Pass
EHT160	MCS0	2	114	5570	Full	17.80	17.30	20.57	23.98		2.70		30	Pass
EHT240	MCS0	2	122	5610	Full	14.60	14.30	17.46	23.98		2.70		30	Pass

FCC U-NII-2C straddle channel single antenna														
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	RU Config.	Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail
						Ant 0	Ant 1	SUM	Ant 0	Ant 1	Ant 0	Ant 1		
EHT20	MCS0	1	144	5720	Full	23.40	-	-	23.98	-	5.70	-	30	Pass
EHT40	MCS0	1	142	5710	Full	23.50	-		23.98	-	5.70	-	30	Pass
EHT80	MCS0	1	138	5690	Full	23.70	-		23.98	-	5.70	-	30	Pass

FCC U-NII-2C straddle channel MIMO														
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	RU Config.	Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail
						Ant 0	Ant 1	SUM	Ant 0	Ant 1	Ant 0	Ant 1		
EHT20	MCS0	2	144	5720	Full	19.80	19.60	22.71	23.98		2.70		30	Pass
EHT40	MCS0	2	142	5710	Full	20.50	20.50	23.51	23.98		2.70		30	Pass
EHT80	MCS0	2	138	5690	Full	21.00	20.90	23.96	23.98		2.70		30	Pass

TEST RESULTS DATA
Power Spectral Density

U-NII-2C single antenna															
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Average Power Density with Duty Factor (dBm/MHz)			Average PSD Limit (dBm/MHz)		DG (dBi)		Pass /Fail
						Ant 0	Ant 1	Ant 0	Ant 1	SUM	Ant 0	Ant 1	Ant 0	Ant 1	
EHT20	MCS0	1	100	5500	Full	0.13	-	10.88	-	-	11.00	-	5.70	-	Pass
EHT20	MCS0	1	116	5580	Full	0.13	-	10.70	-		11.00	-	5.70	-	Pass
EHT20	MCS0	1	140	5700	Full	0.13	-	9.74	-		11.00	-	5.70	-	Pass
EHT40	MCS0	1	102	5510	Full	0.13	-	6.68	-		11.00	-	5.70	-	Pass
EHT40	MCS0	1	110	5550	Full	0.13	-	7.48	-		11.00	-	5.70	-	Pass
EHT40	MCS0	1	134	5670	Full	0.13	-	7.99	-		11.00	-	5.70	-	Pass
EHT80	MCS0	1	106	5530	Full	0.09	-	0.86	-		11.00	-	5.70	-	Pass
EHT80	MCS0	1	122	5610	Full	0.09	-	5.34	-		11.00	-	5.70	-	Pass
EHT160	MCS0	1	114	5570	Full	0.11	-	-3.11	-		11.00	-	5.70	-	Pass
EHT240	MCS0	1	122	5610	Full	0.11	-	-6.51	-		11.00	-	5.70	-	Pass

U-NII-2C MIMO															
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Average Power Density with Duty Factor (dBm/MHz)			Average PSD Limit (dBm/MHz)		DG (dBi)		Pass /Fail
						Ant 0	Ant 1	Ant 0	Ant 1	SUM	Ant 0	Ant 1	Ant 0	Ant 1	
EHT20	MCS0	2	100	5500	Full	0.11	0.12	-	-	10.56	11.00	4.88	-	-	Pass
EHT20	MCS0	2	116	5580	Full	0.11	0.12			10.79	11.00	4.88			Pass
EHT20	MCS0	2	140	5700	Full	0.11	0.12			10.52	11.00	4.88			Pass
EHT40	MCS0	2	102	5510	Full	0.12	0.10			8.46	11.00	4.88			Pass
EHT40	MCS0	2	110	5550	Full	0.12	0.10			8.04	11.00	4.88			Pass
EHT40	MCS0	2	134	5670	Full	0.12	0.10			8.34	11.00	4.88			Pass
EHT80	MCS0	2	106	5530	Full	0.14	0.13			3.49	11.00	4.88			Pass
EHT80	MCS0	2	122	5610	Full	0.14	0.13			6.13	11.00	4.88			Pass
EHT160	MCS0	2	114	5570	Full	0.10	0.11			0.29	11.00	4.88			Pass
EHT240	MCS0	2	122	5610	Full	0.12	0.11			-3.88	11.00	4.88			Pass


U-NII-2C straddle channel single antenna															
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Average Power Density (dBm/MHz)			Average PSD Limit (dBm/MHz)		DG (dBi)		Pass /Fail
						Ant 0	Ant 1	Ant 0	Ant 1	SUM	Ant 0	Ant 1	Ant 0	Ant 1	
EHT20	MCS0	1	144	5720	Full	0.13	-	10.81	-	-	11.00	-	5.70	-	Pass
EHT40	MCS0	1	142	5710	Full	0.13	-	8.11	-		11.00	-	5.70	-	Pass
EHT80	MCS0	1	138	5690	Full	0.09	-	5.41	-		11.00	-	5.70	-	Pass

U-NII-2C straddle channel MIMO															
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Average Power Density (dBm/MHz)			Average PSD Limit (dBm/MHz)		DG (dBi)		Pass /Fail
						Ant 0	Ant 1	Ant 0	Ant 1	SUM	Ant 0	Ant 1	Ant 0	Ant 1	
EHT20	MCS0	2	144	5720	Full	0.11	0.12	-	-	10.53	11.00	4.88	-	-	Pass
EHT40	MCS0	2	142	5710	Full	0.12	0.10			8.39	11.00	4.88			Pass
EHT80	MCS0	2	138	5690	Full	0.14	0.13			5.76	11.00	4.88			Pass

**Test Result of 26dB & 99% Occupied Bandwidth**


<Ant. 0>

<802.11a>

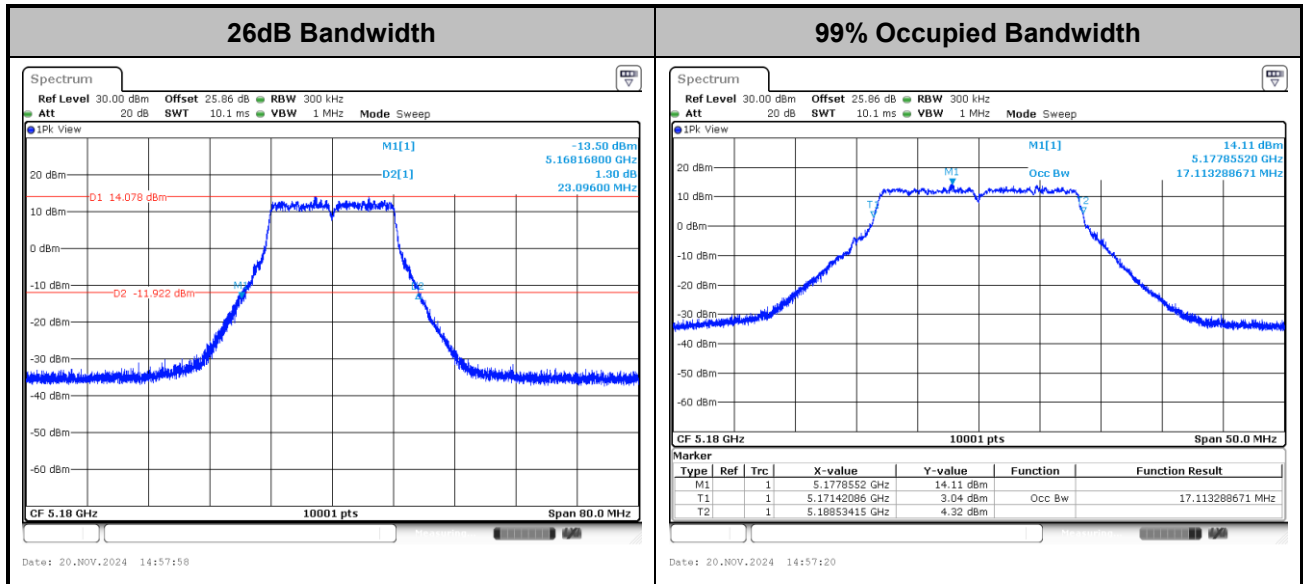

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.


<802.11ac VHT20>

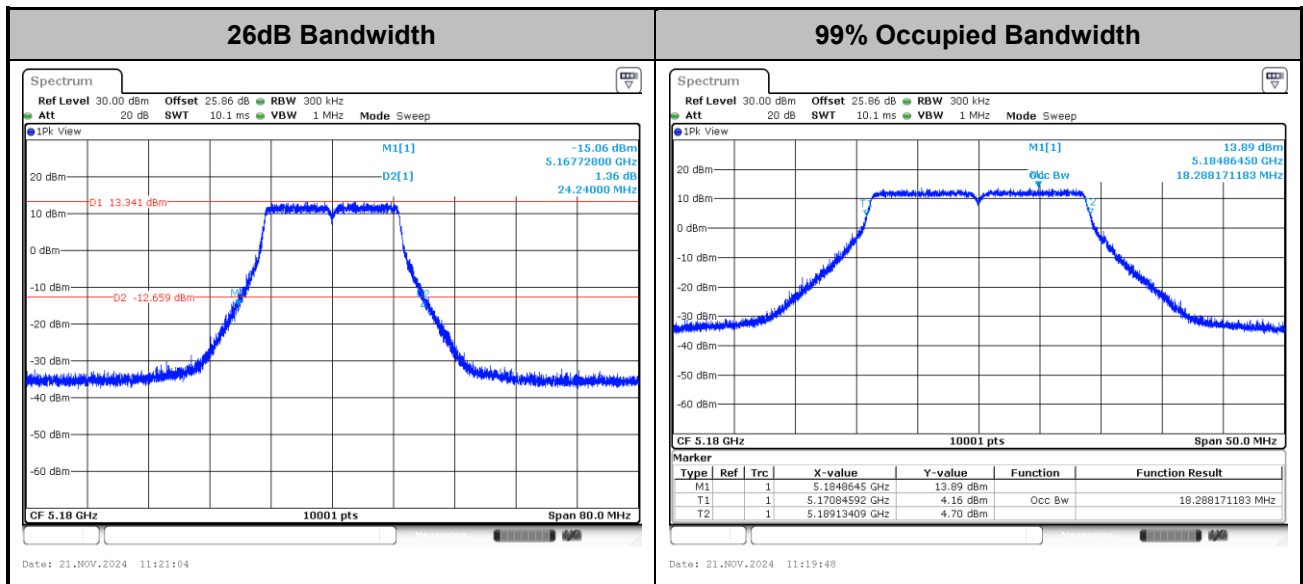

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.




<802.11ac VHT40>

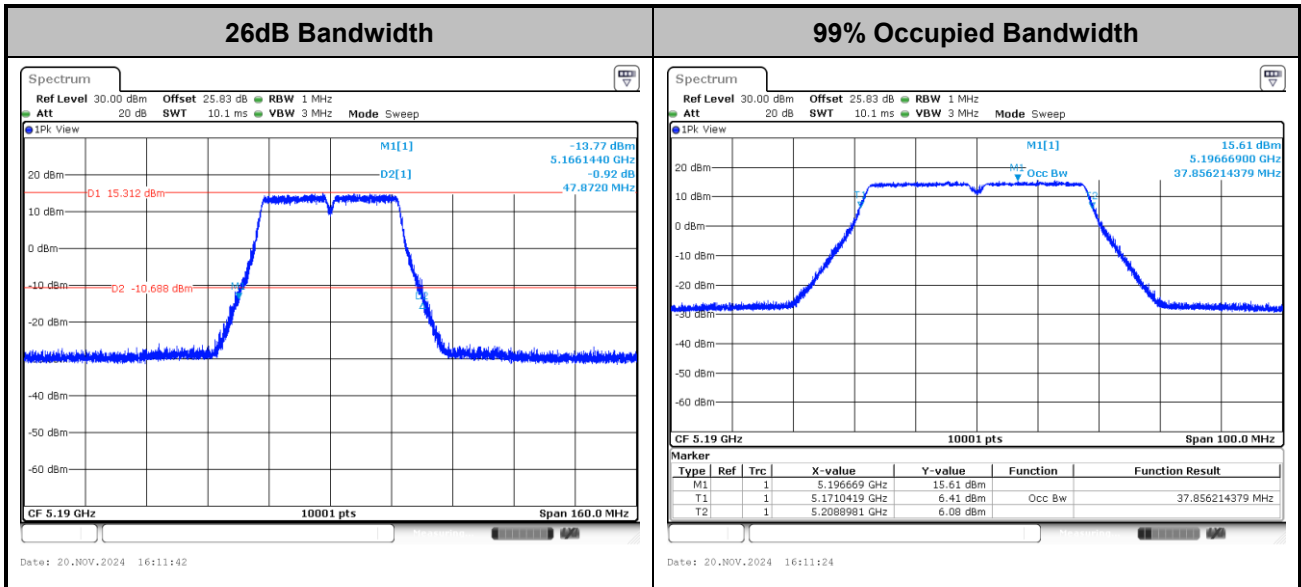

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.


<802.11ac VHT80>

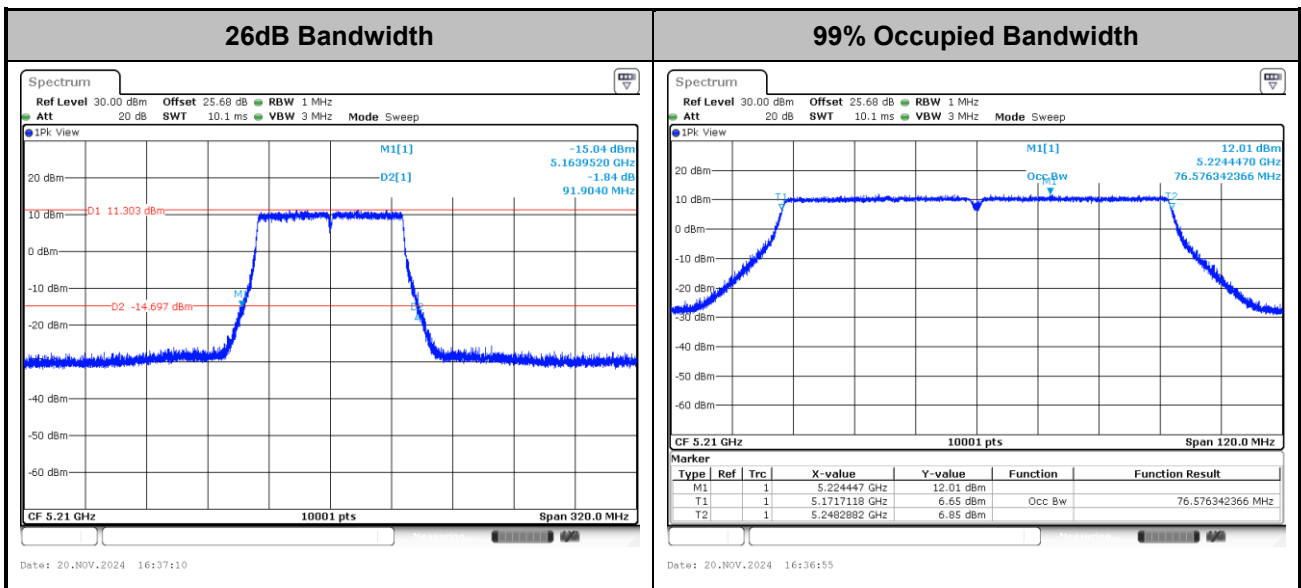

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.




<802.11ac VHT160>

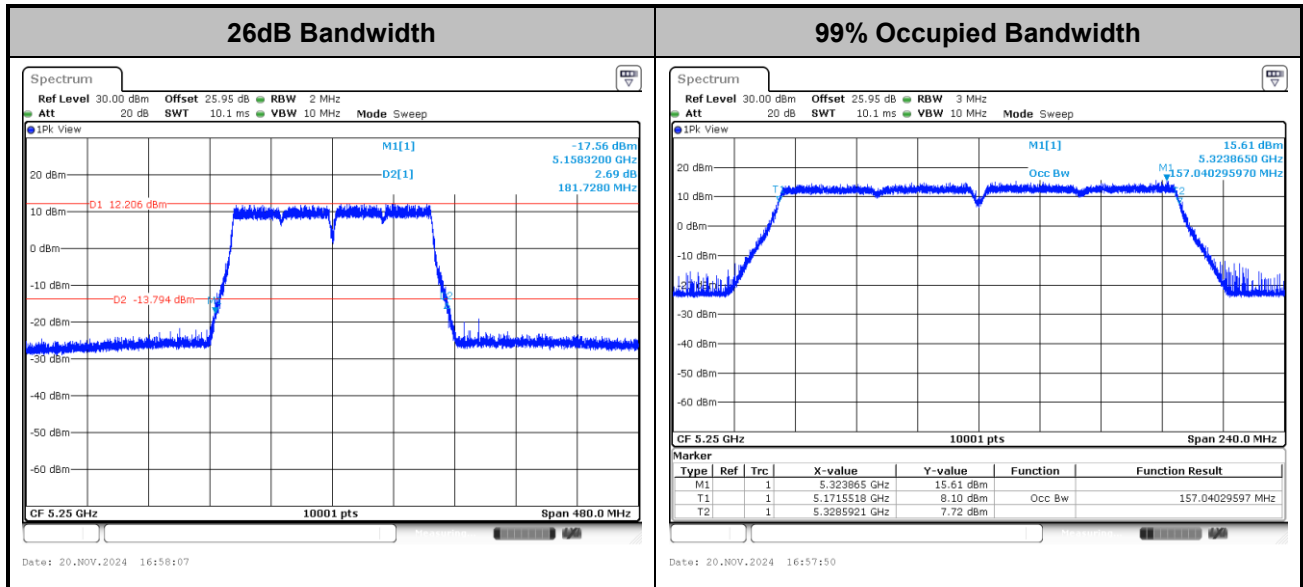

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.


<802.11be EHT20>

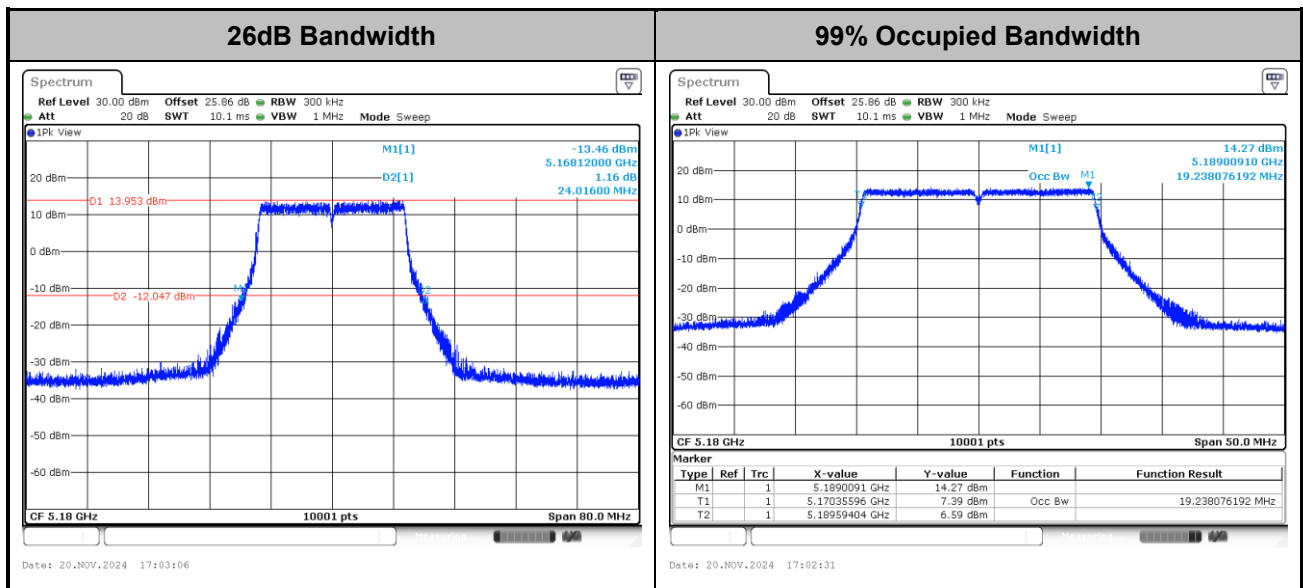

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.




<802.11be EHT40>

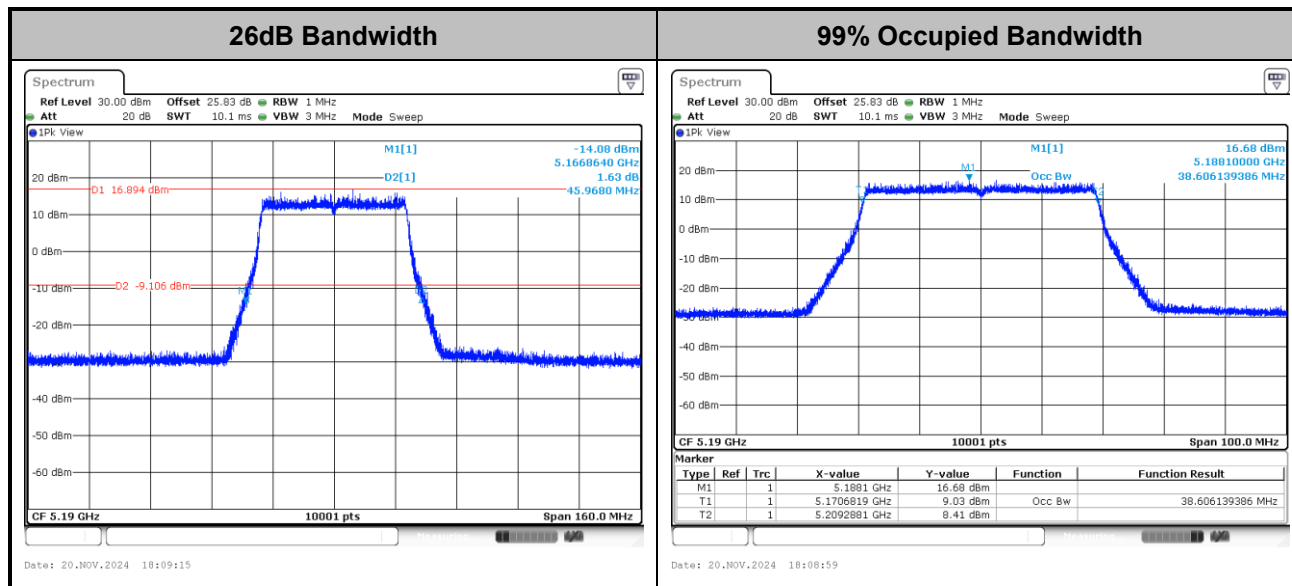

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.


<802.11be EHT80>

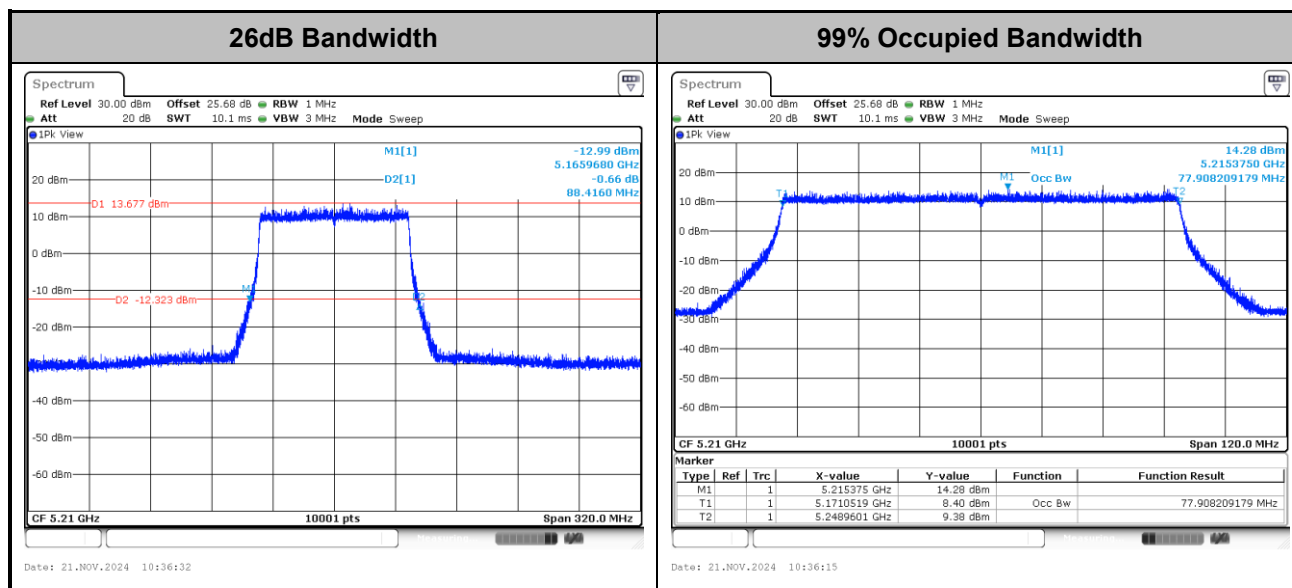

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.




<802.11be EHT160>

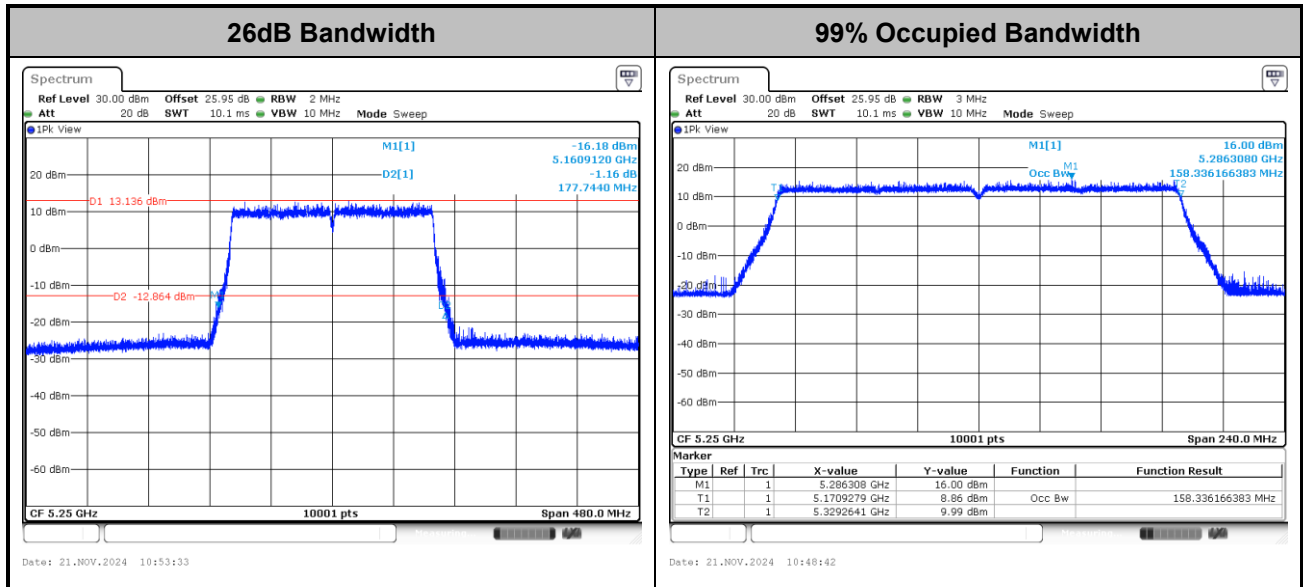

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

<802.11be EHT240>

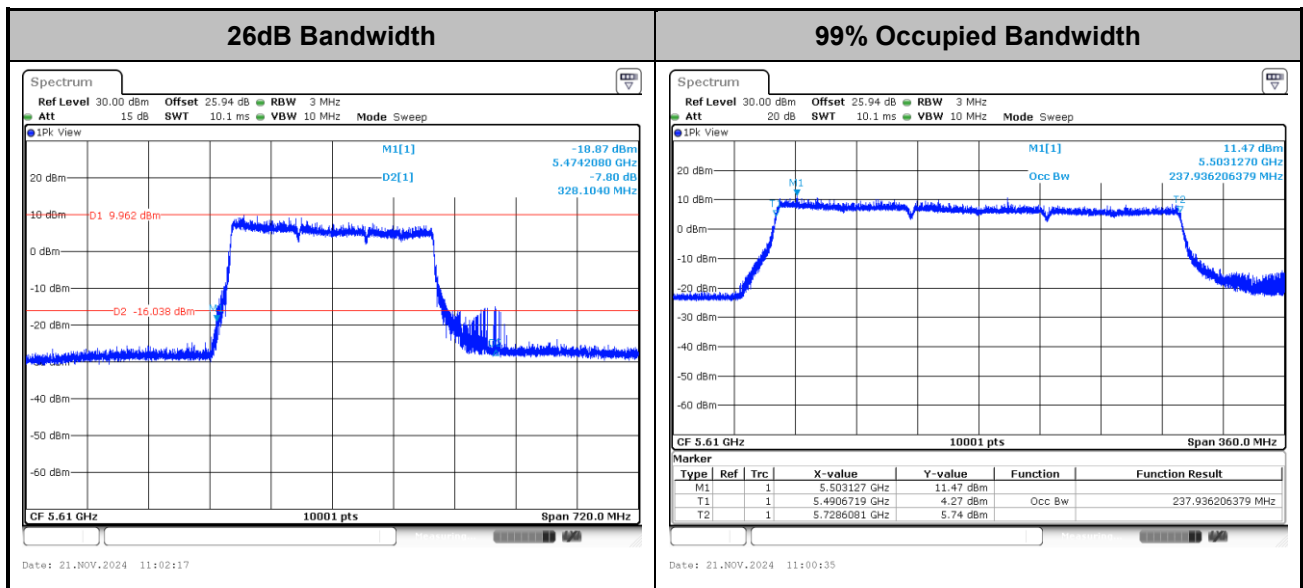


Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.




MIMO <Ant. 0+1>

<802.11a>

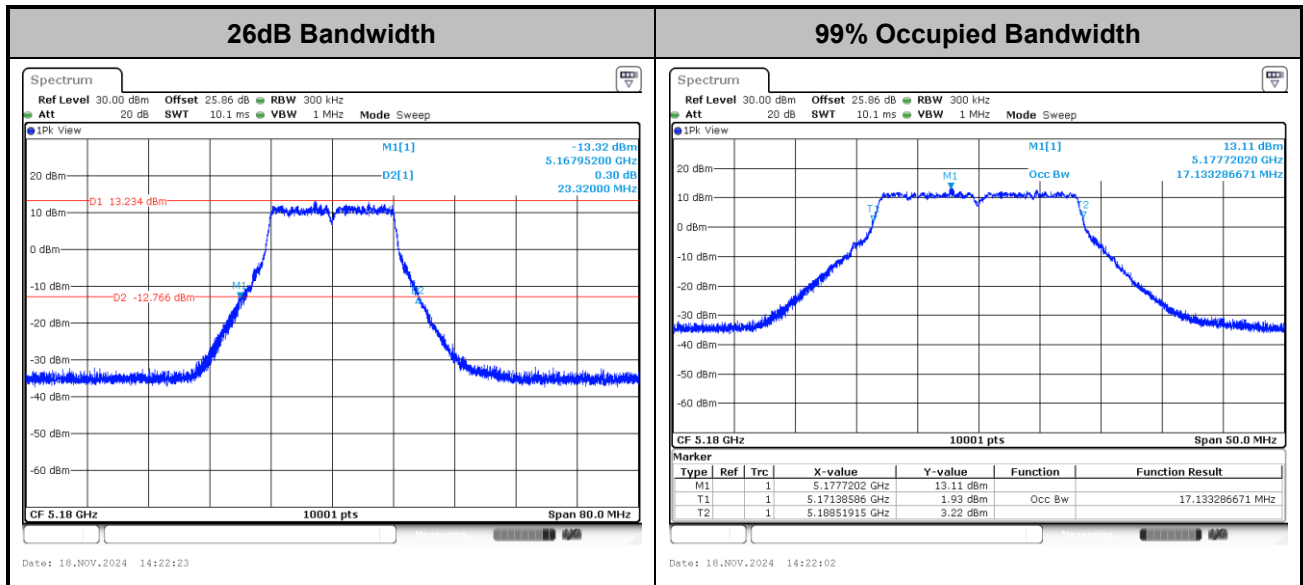

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.


<802.11ac VHT20>

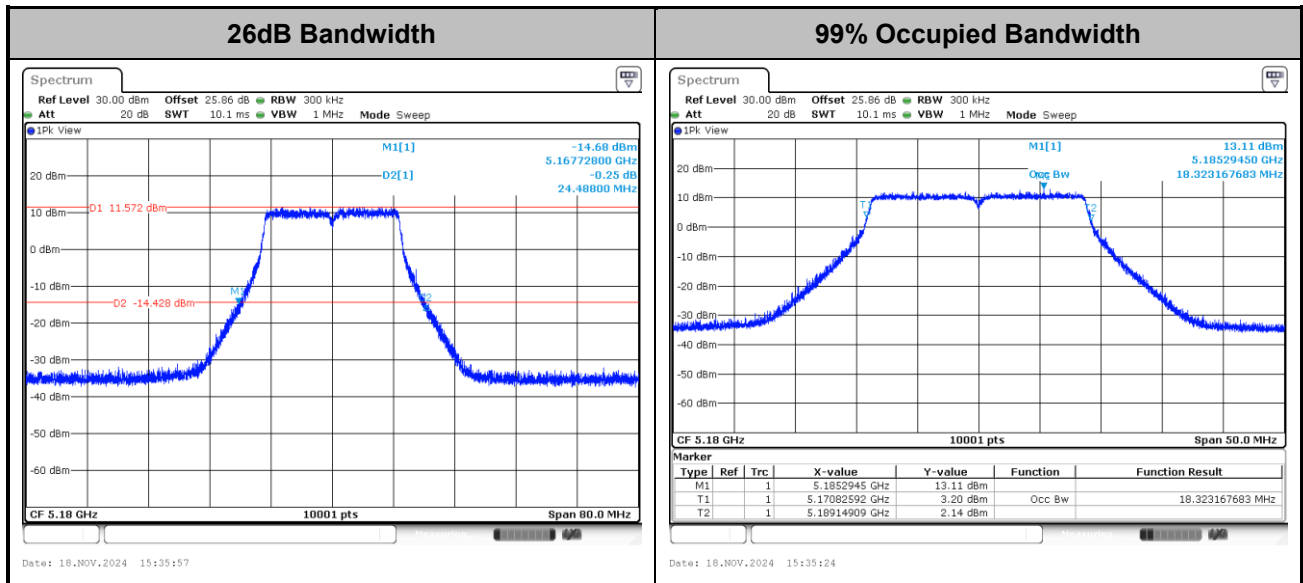

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.




<802.11ac VHT40>

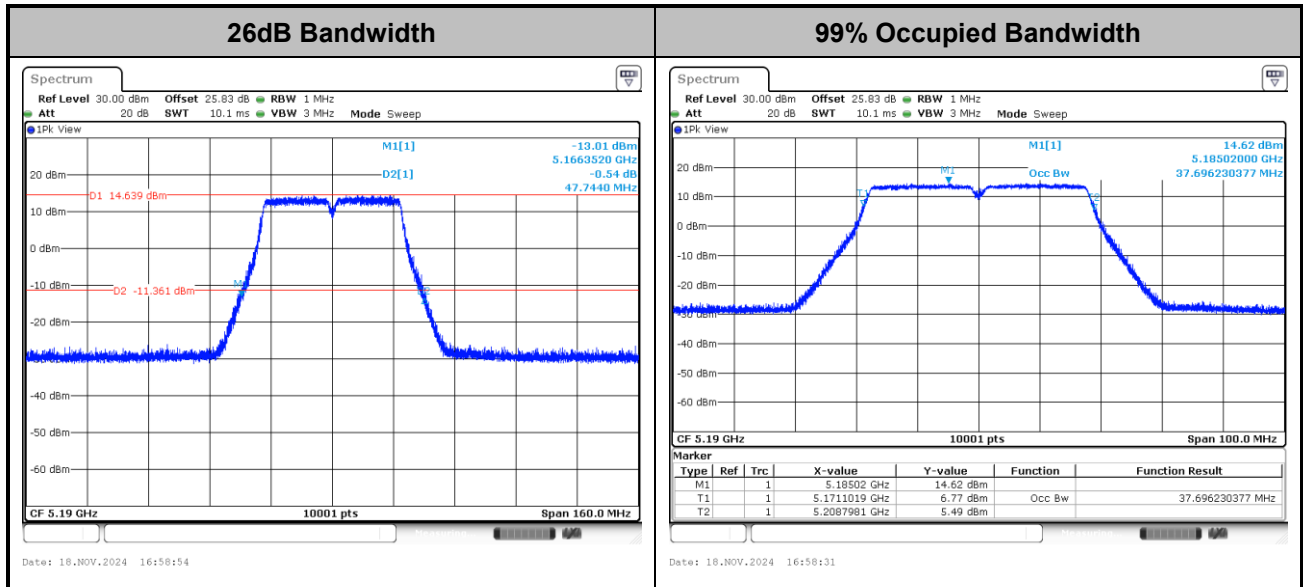

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.


<802.11ac VHT80>

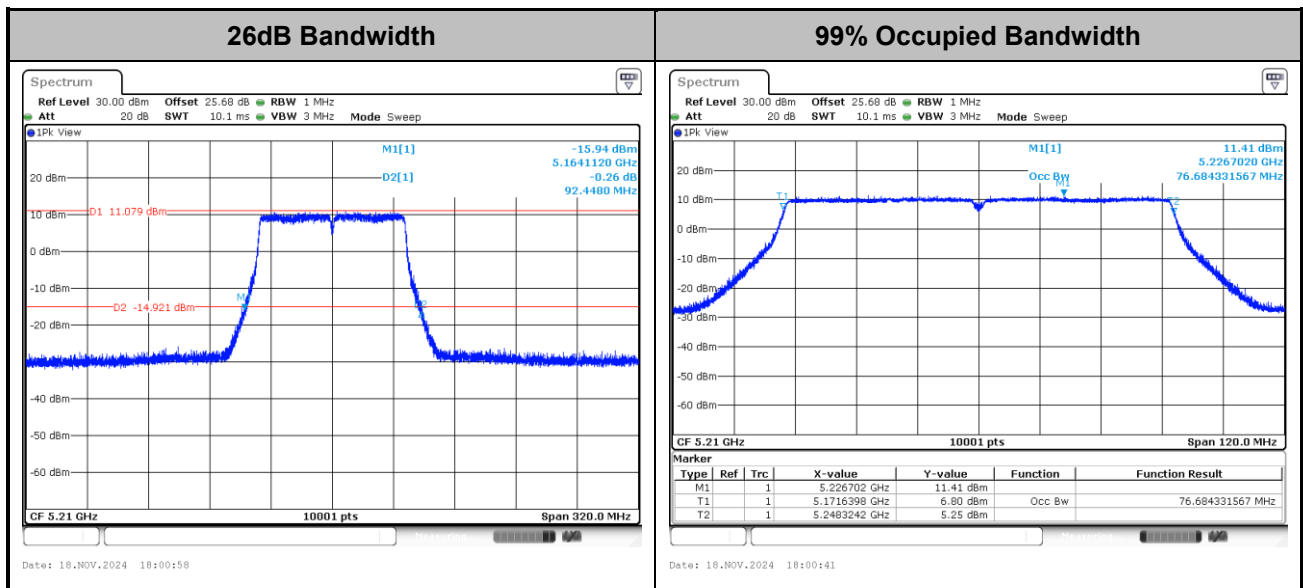

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.




<802.11ac VHT160>

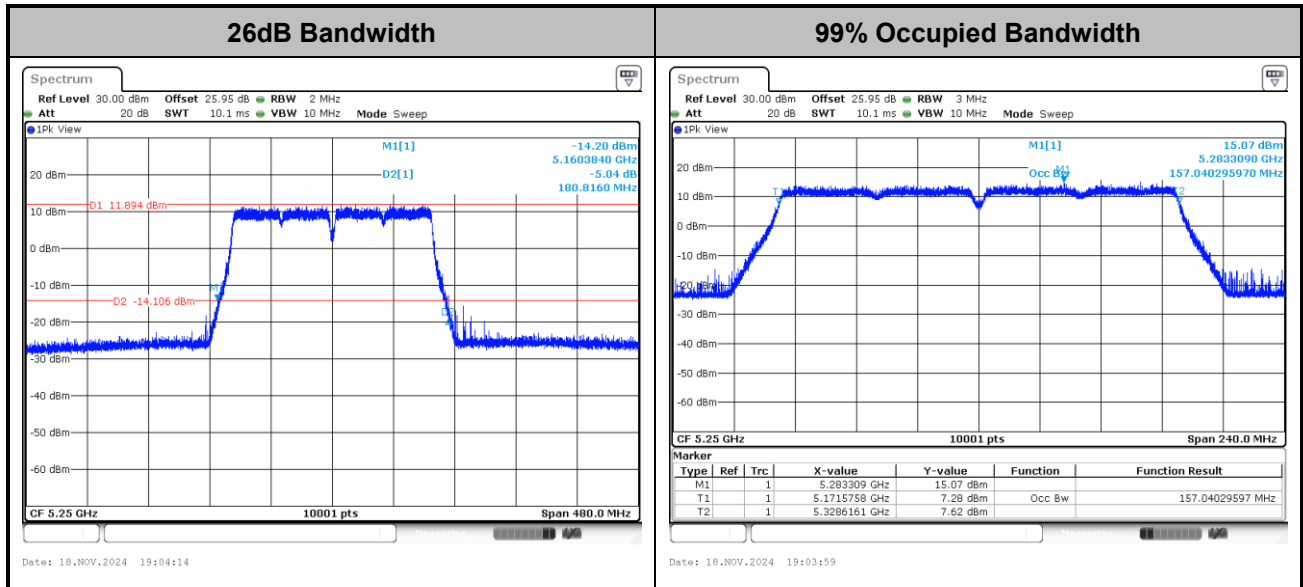

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.


<802.11be EHT20>

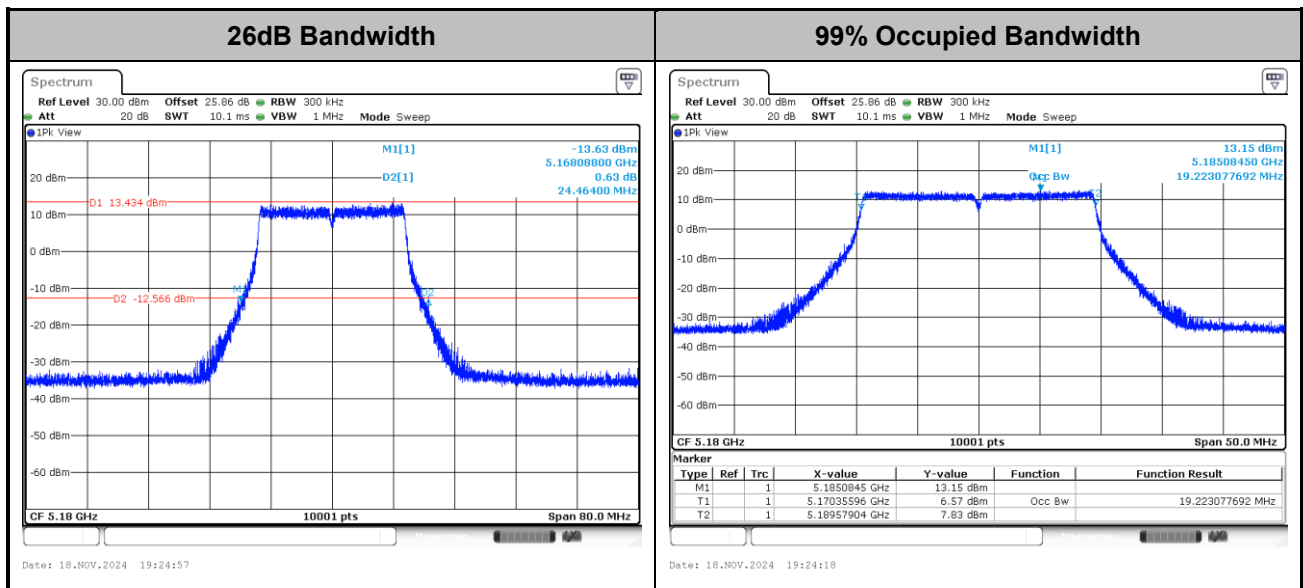

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.




<802.11be EHT40>

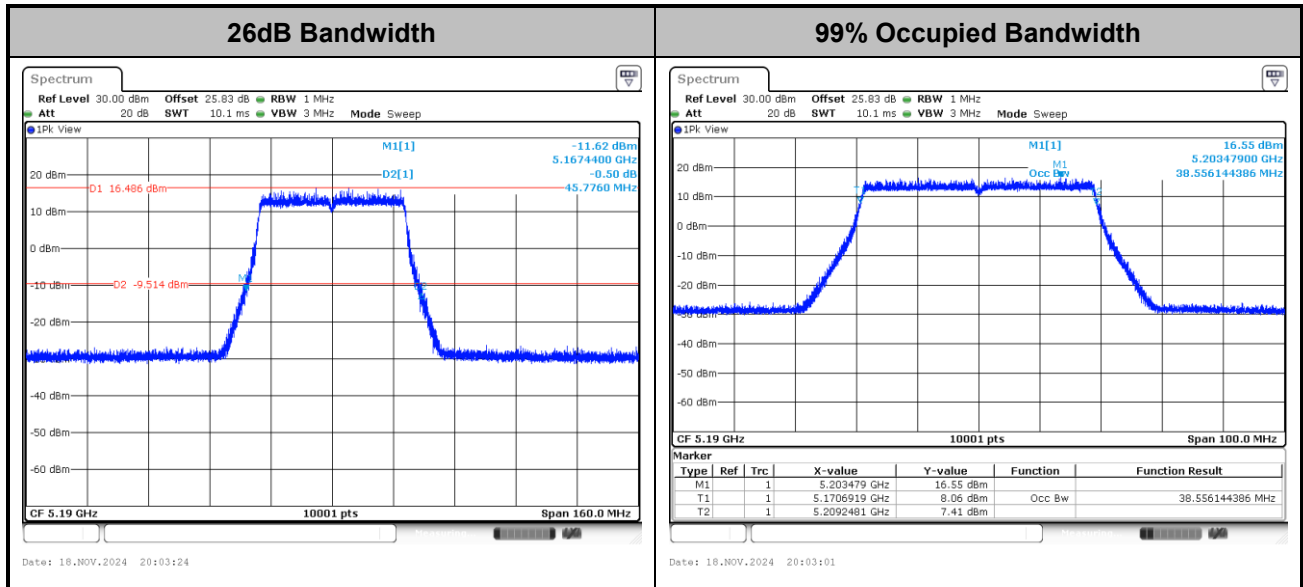

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.


<802.11be EHT80>

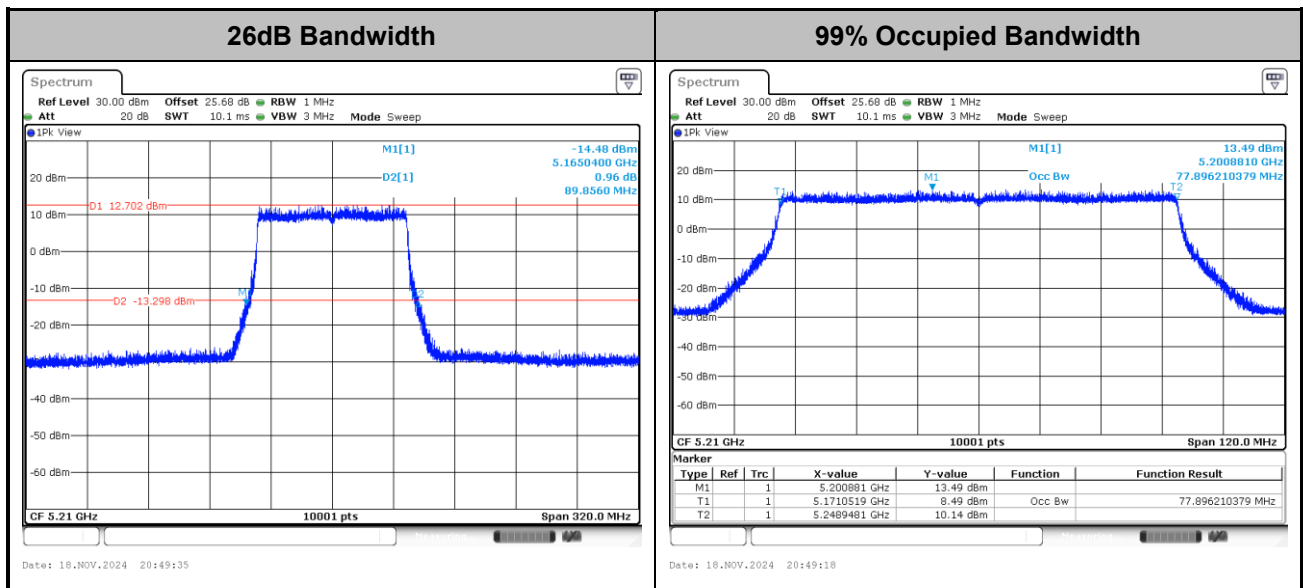

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.




<802.11be EHT160>

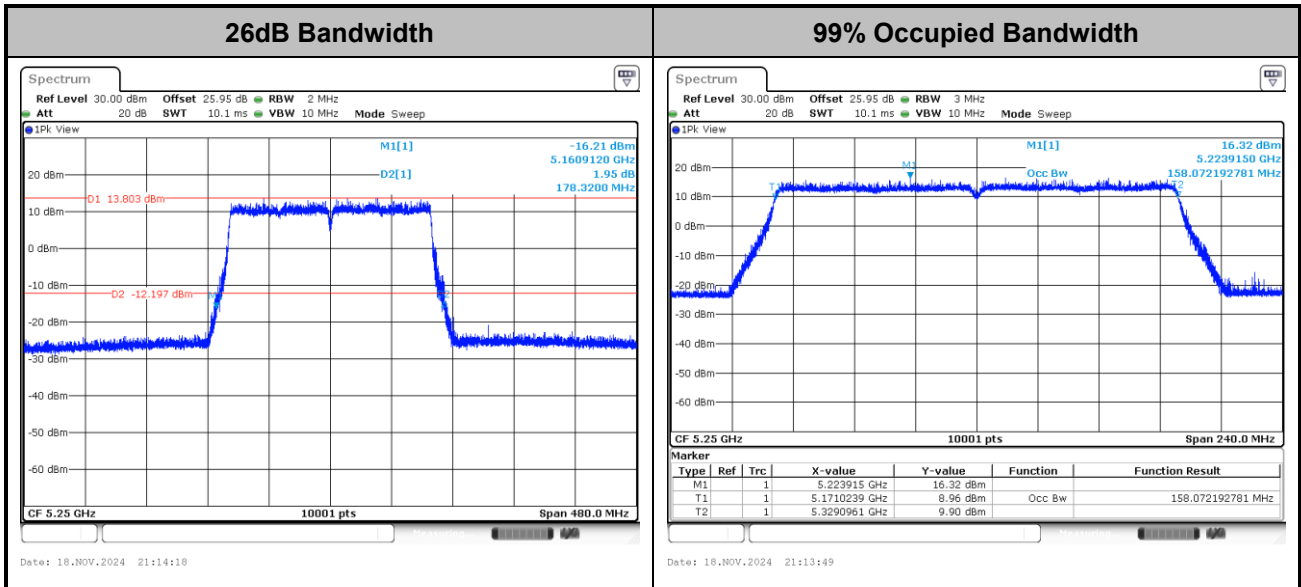

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

<802.11be EHT240>

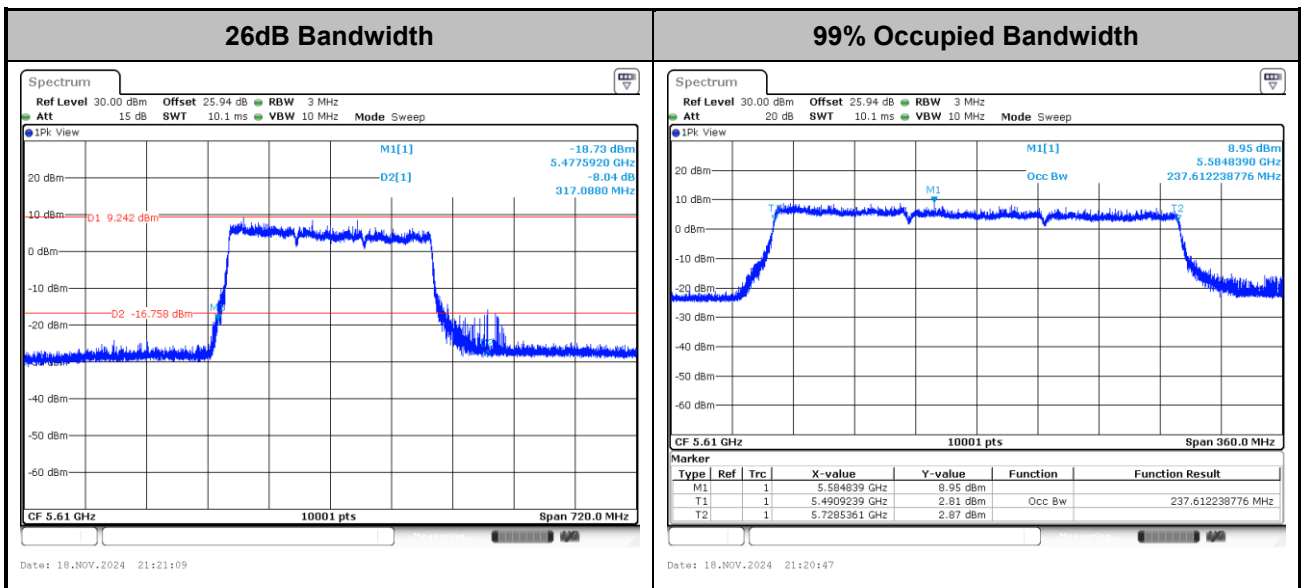


Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.




Test Result of Power Spectral Density

<Ant.0>

<802.11a>

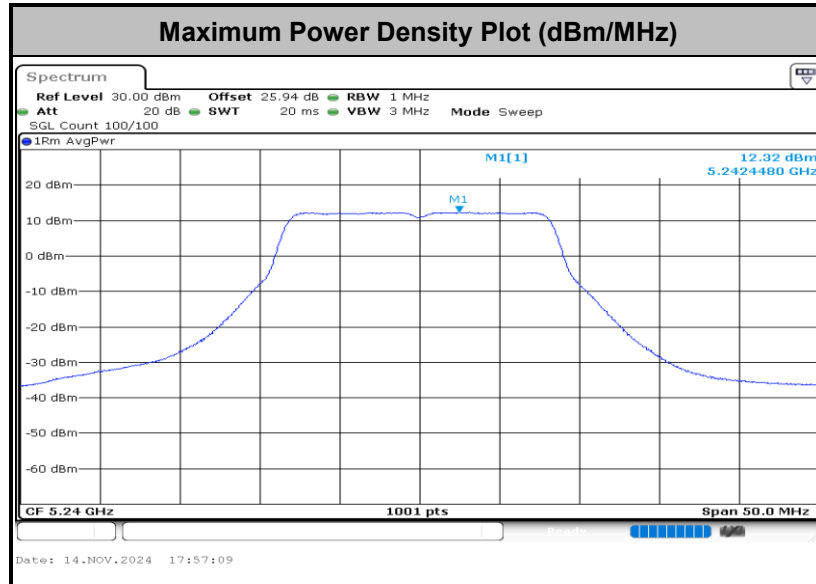


<802.11ac VHT20>

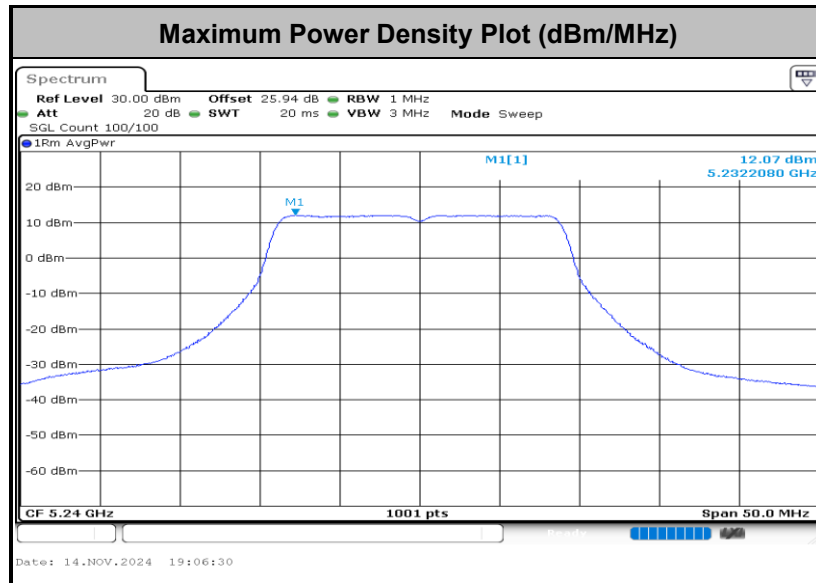




<802.11ac VHT40>

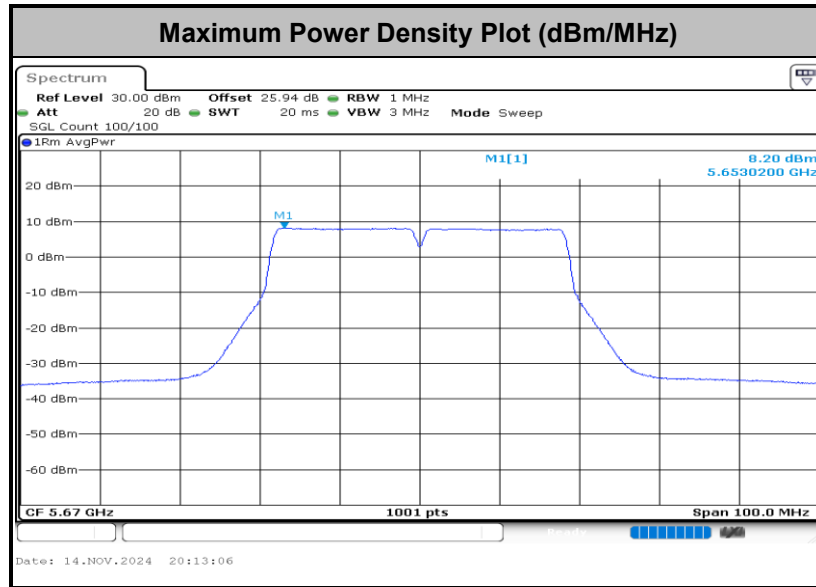


<802.11ac VHT80>

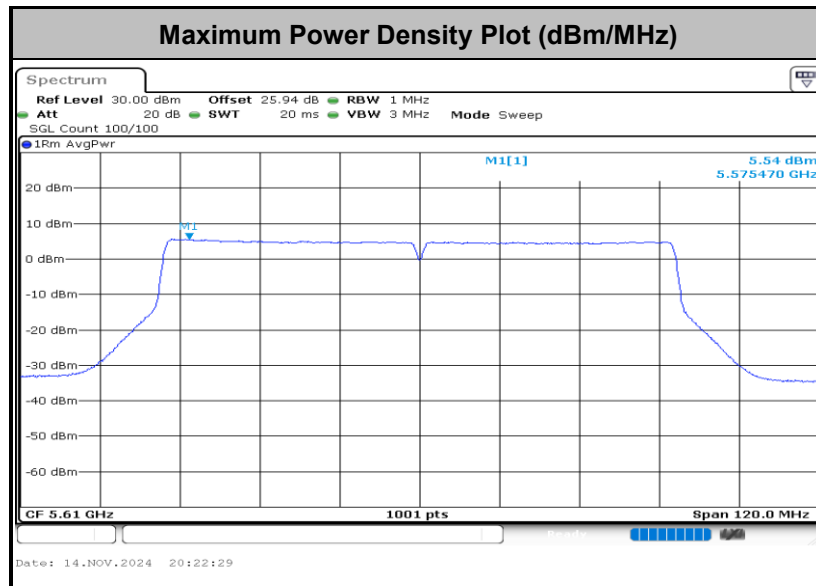




<802.11ac VHT160>

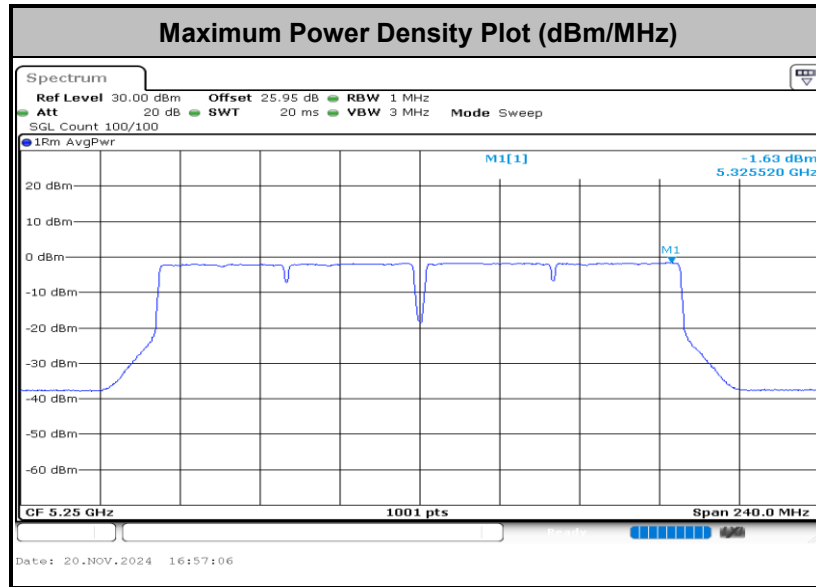


<802.11be EHT20>

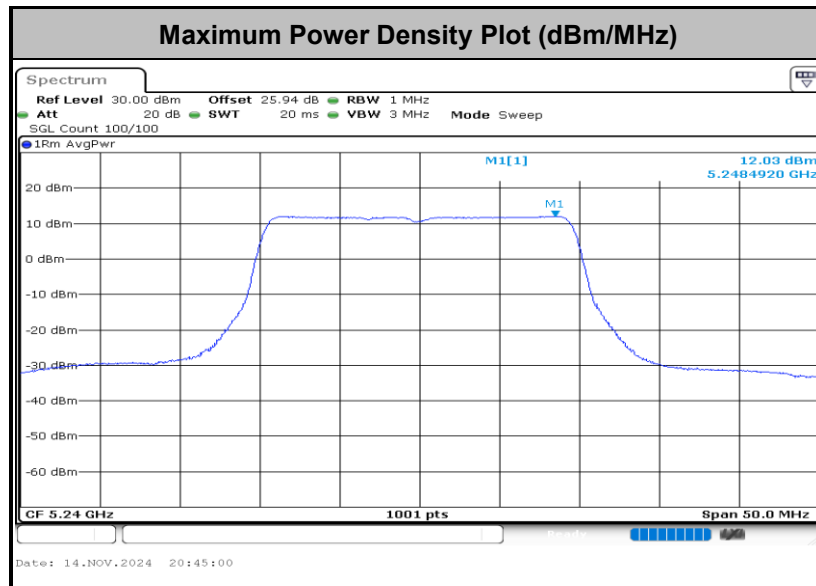




<802.11be EHT40>

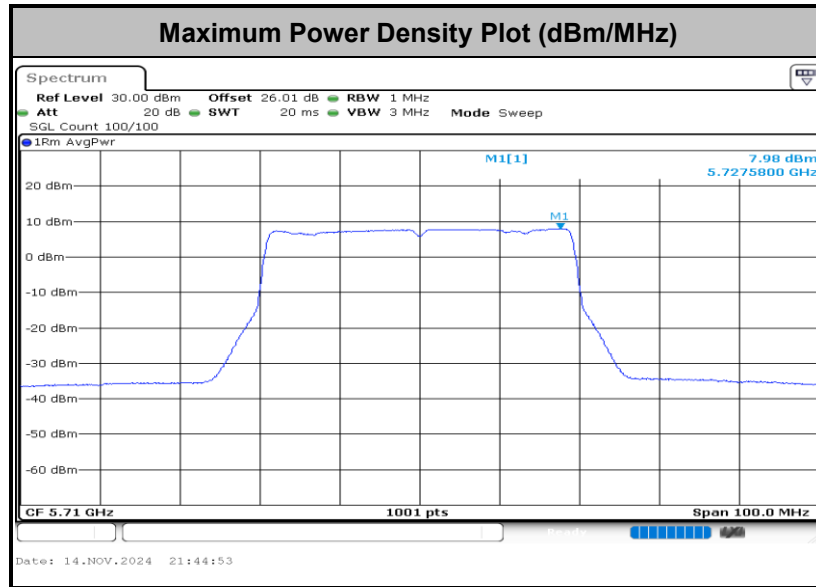


<802.11be EHT80>

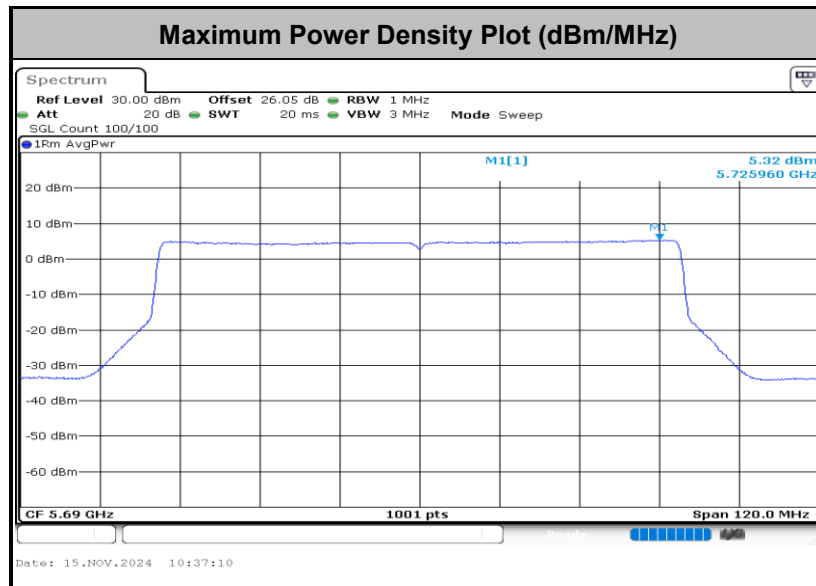





<802.11be EHT160>

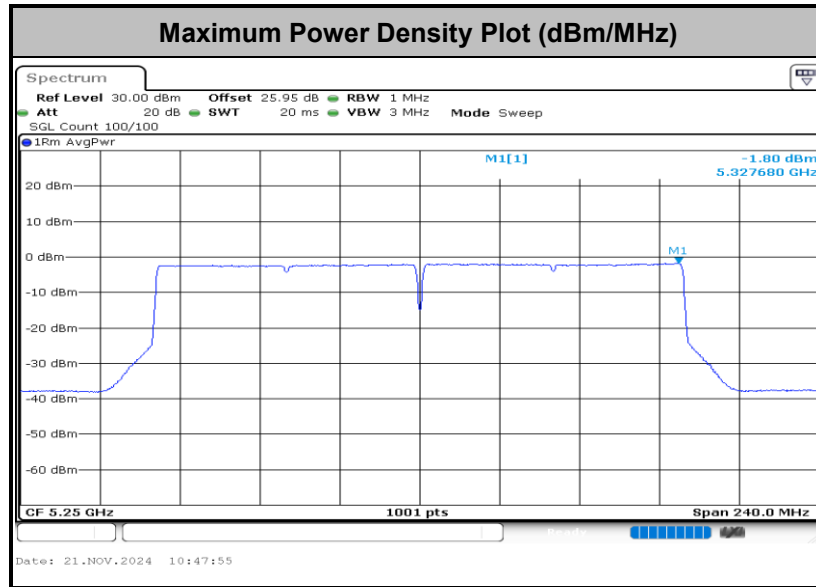


<802.11be EHT240>

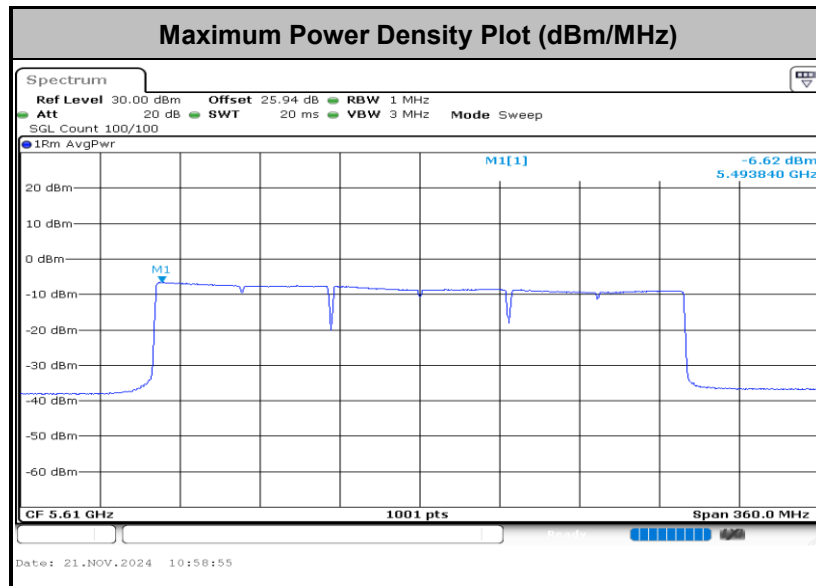

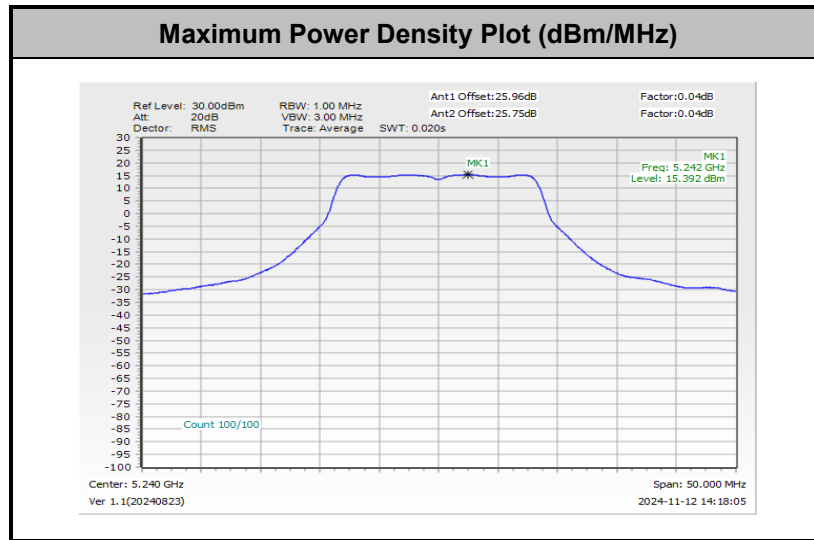
MIMO <Ant. 0+1>
<802.11a>


Remark: The test plot is showing a bin by bin combined result mathematically adds two traces.

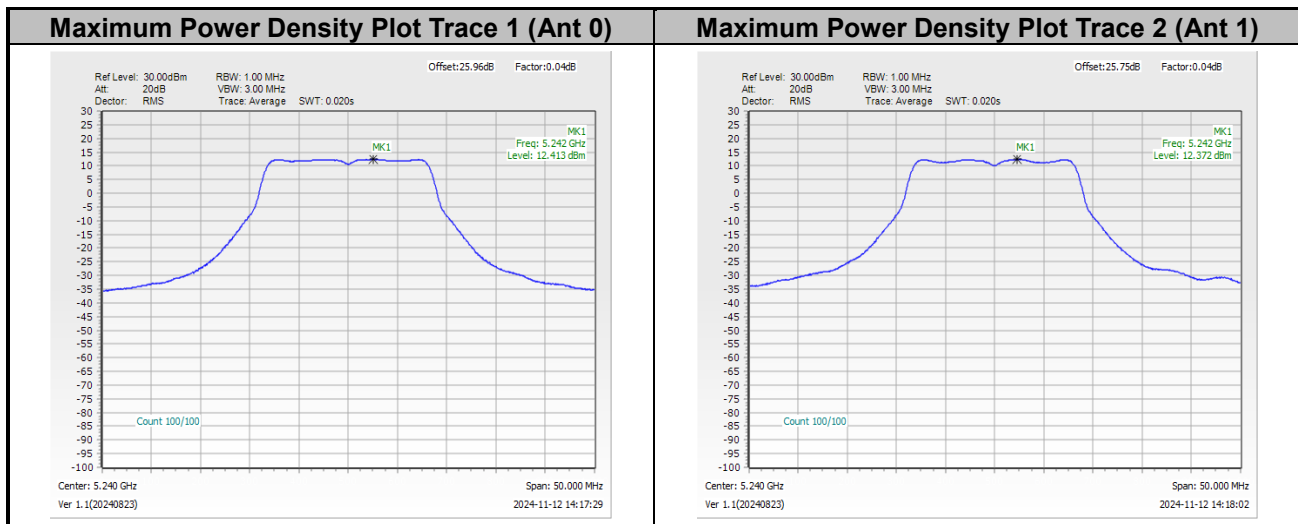




<802.11ac VHT20>

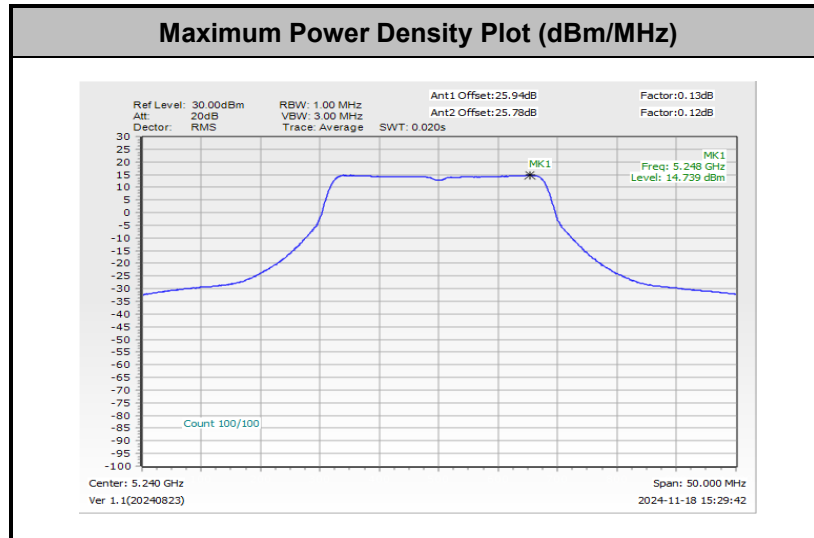


Remark: The test plot is showing a bin by bin combined result mathematically adds two traces.

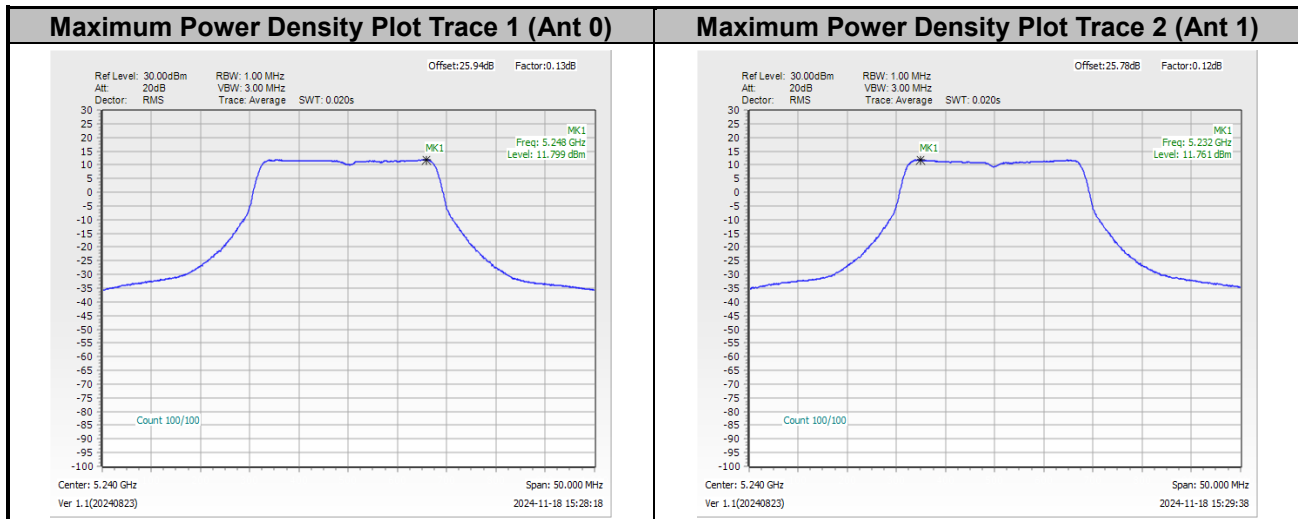




<802.11ac VHT40>

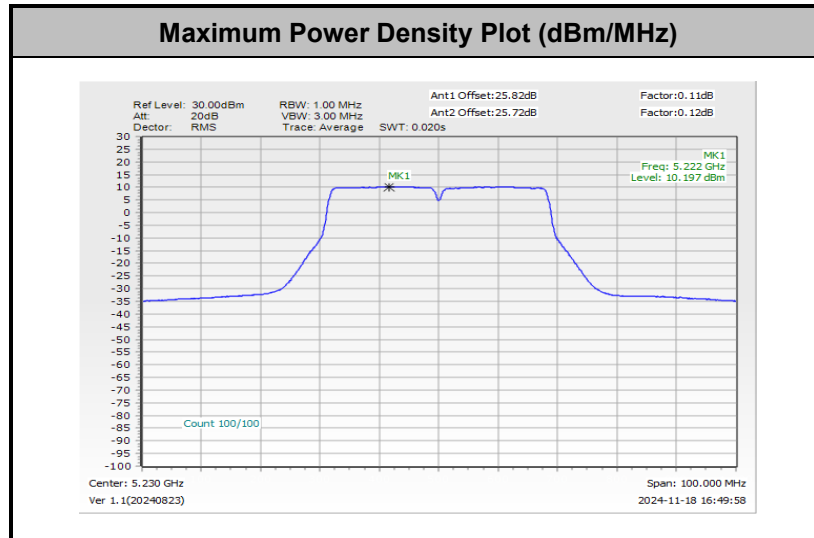


Remark: The test plot is showing a bin by bin combined result mathematically adds two traces.

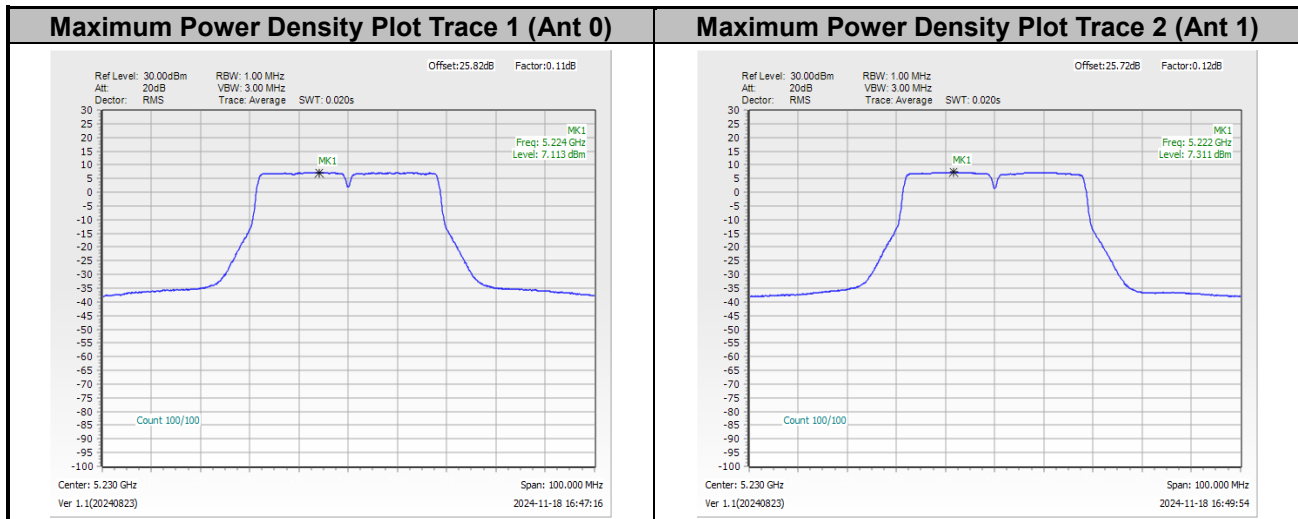




<802.11ac VHT80>

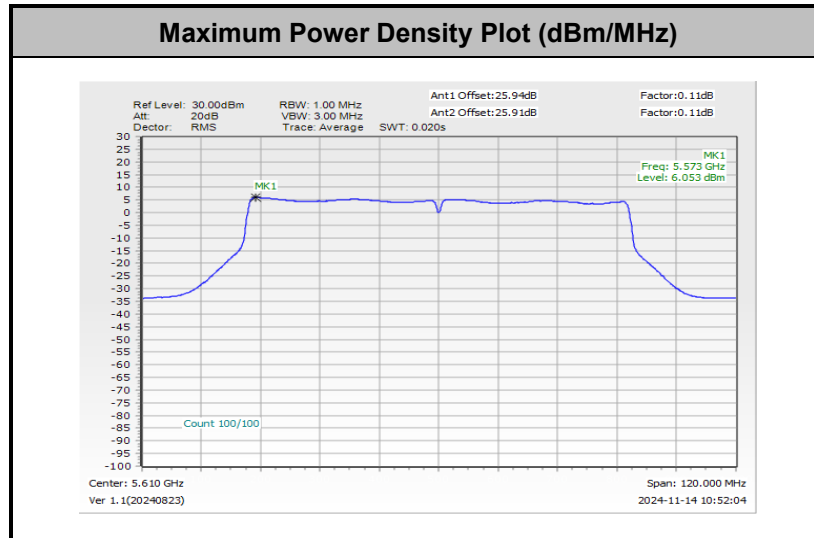


Remark: The test plot is showing a bin by bin combined result mathematically adds two traces.

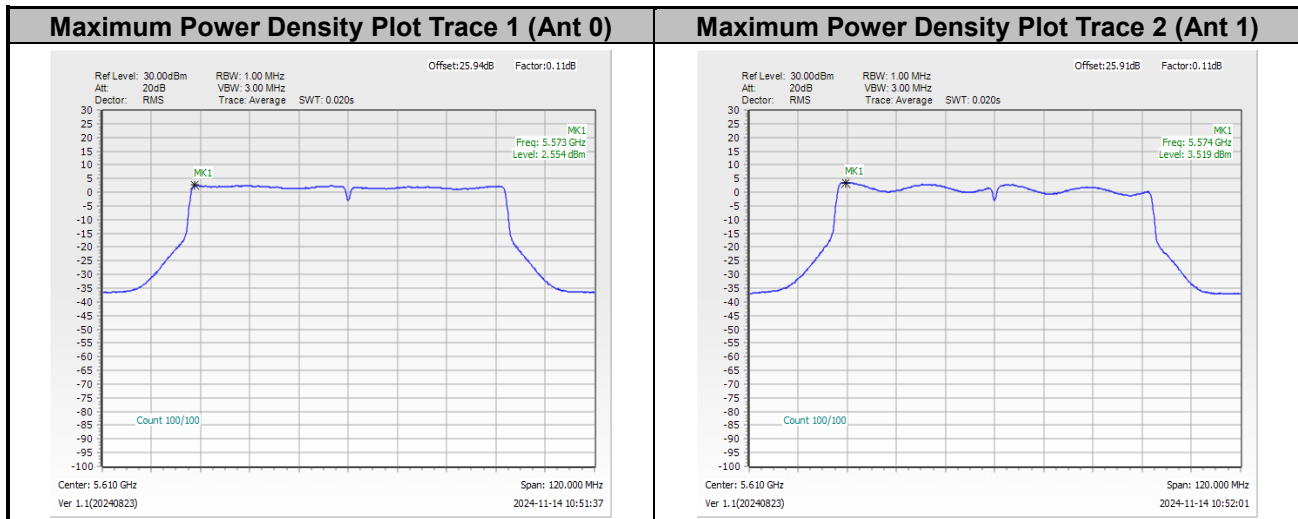




<802.11ac VHT160>

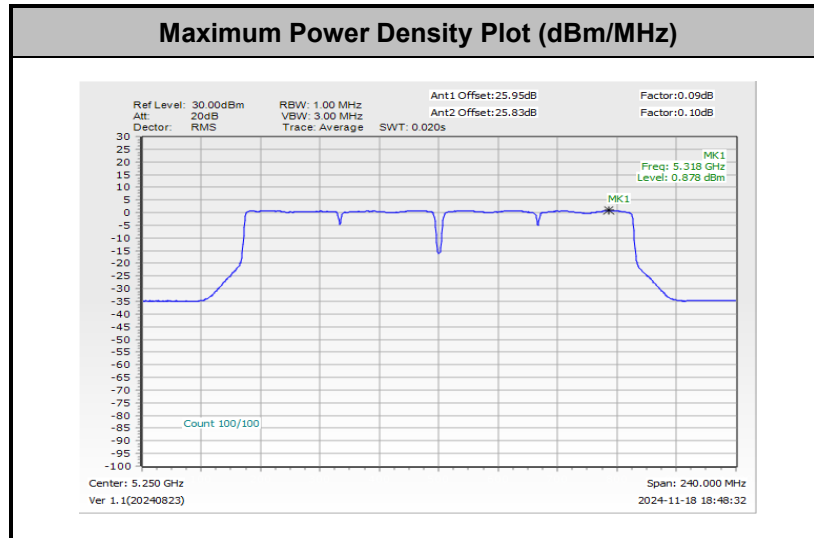


Remark: The test plot is showing a bin by bin combined result mathematically adds two traces.

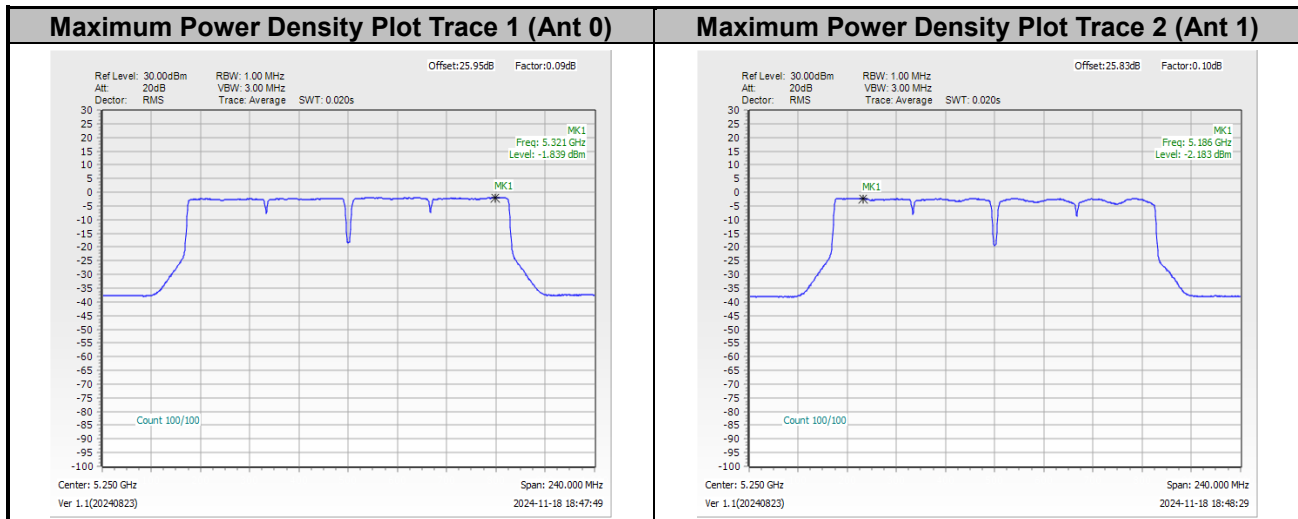




<802.11be EHT20>

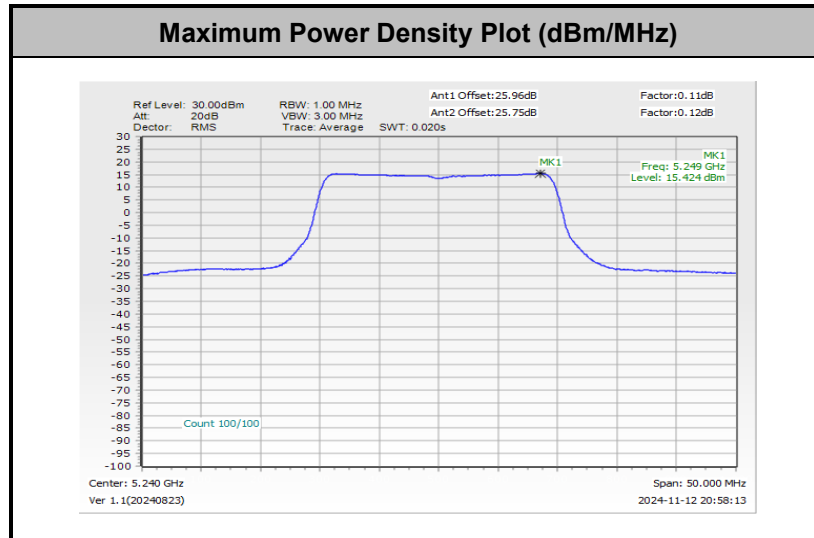


Remark: The test plot is showing a bin by bin combined result mathematically adds two traces.

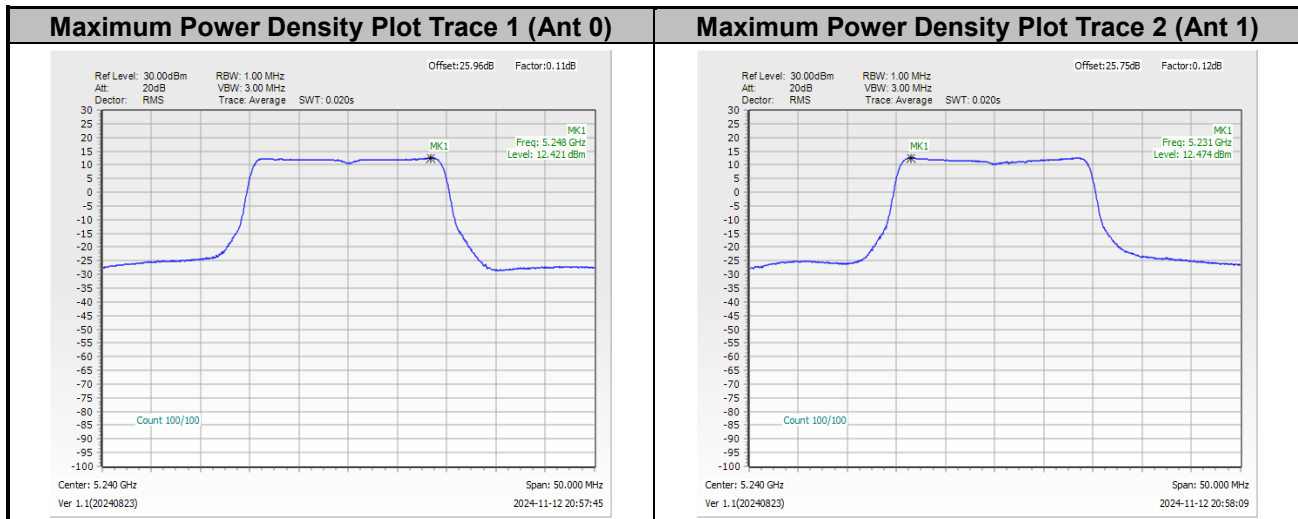




<802.11be EHT40>

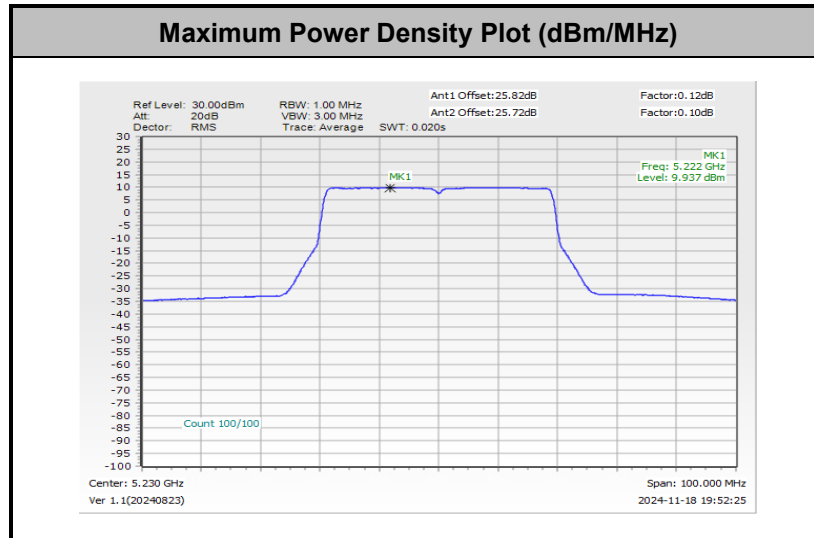


Remark: The test plot is showing a bin by bin combined result mathematically adds two traces.

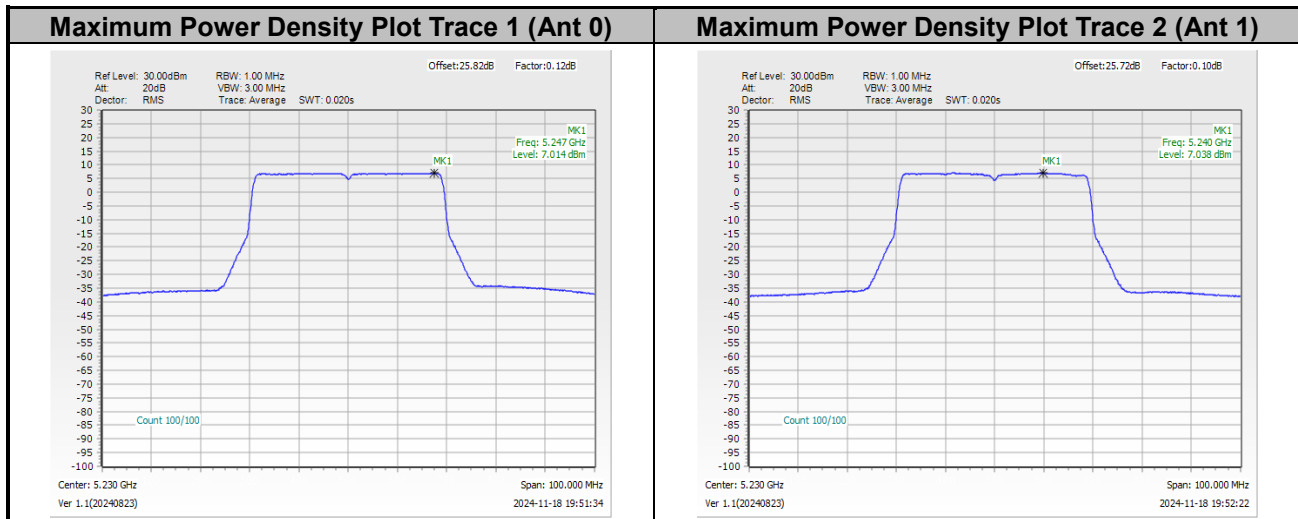




<802.11be EHT80>

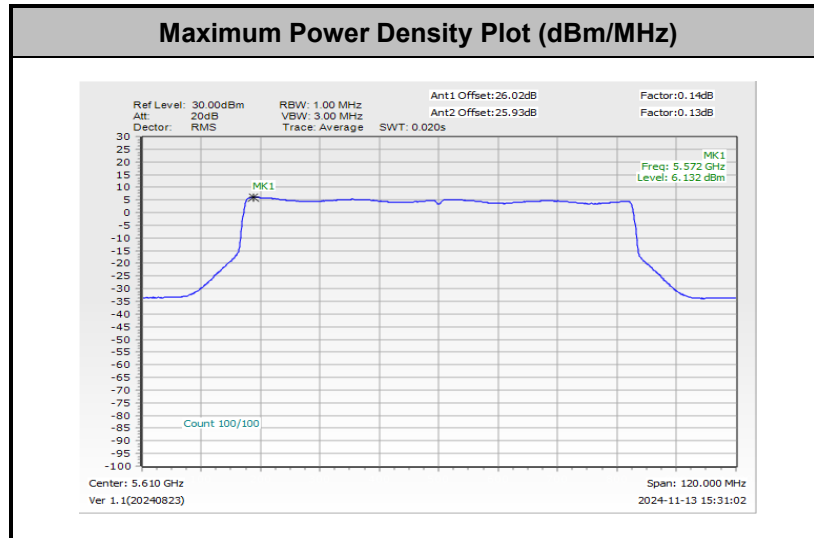


Remark: The test plot is showing a bin by bin combined result mathematically adds two traces.

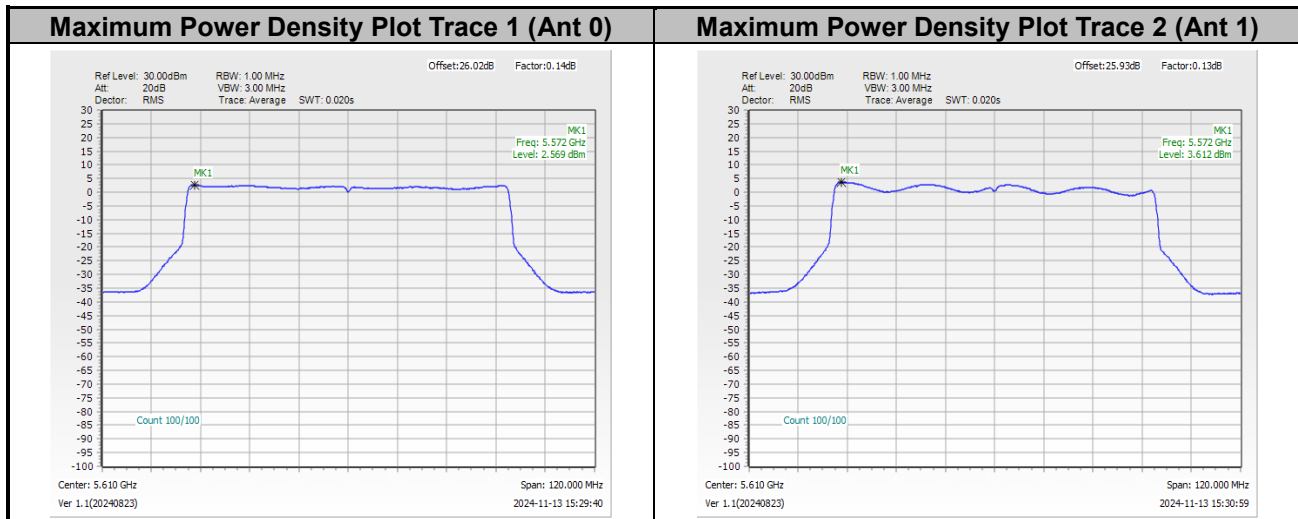




<802.11be EHT160>

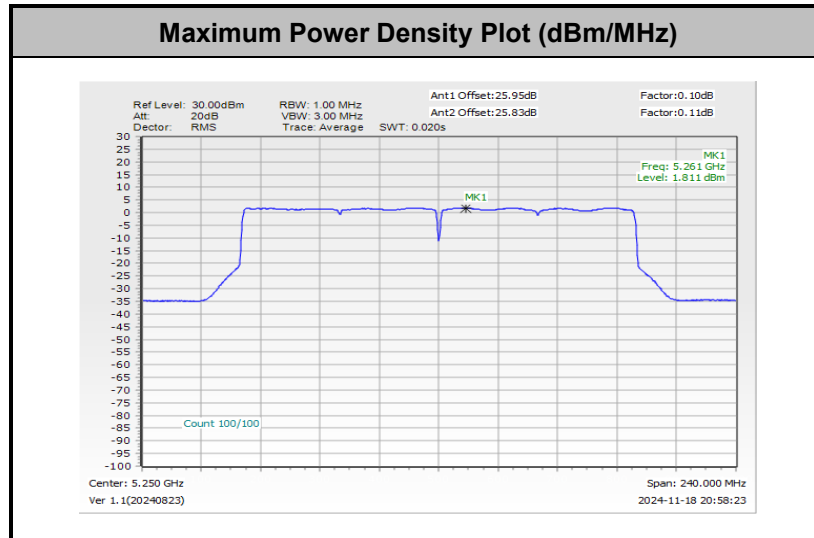


Remark: The test plot is showing a bin by bin combined result mathematically adds two traces.

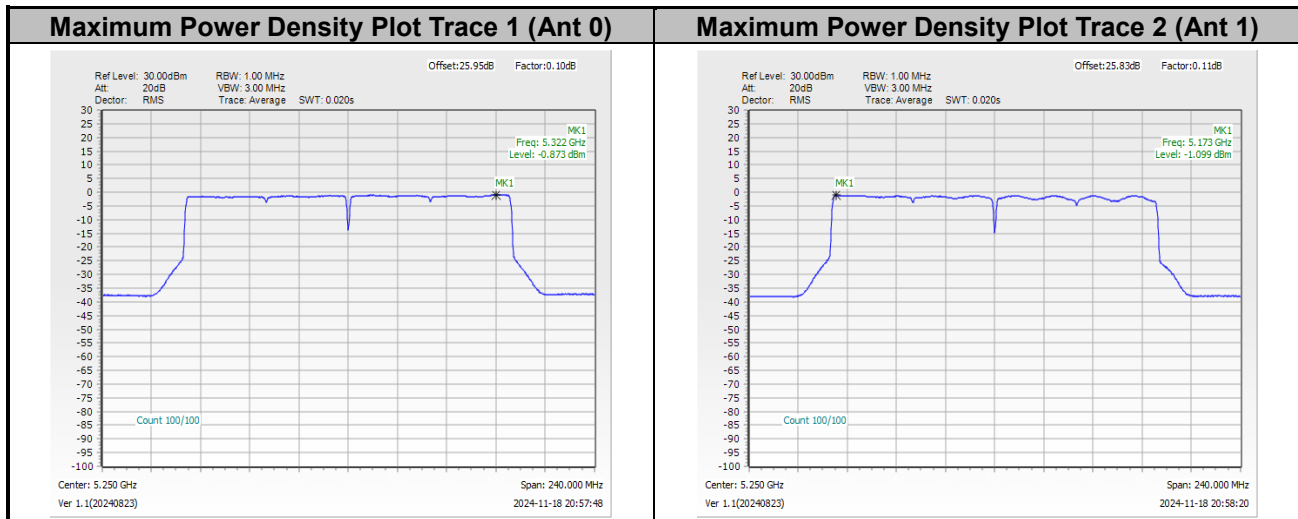




<802.11be EHT240>

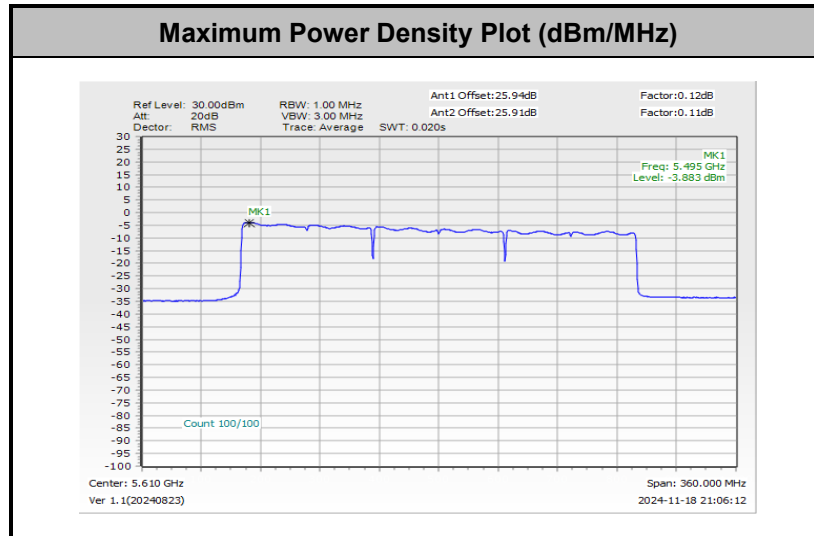

Remark: The test plot is showing a bin by bin combined result mathematically adds two traces.

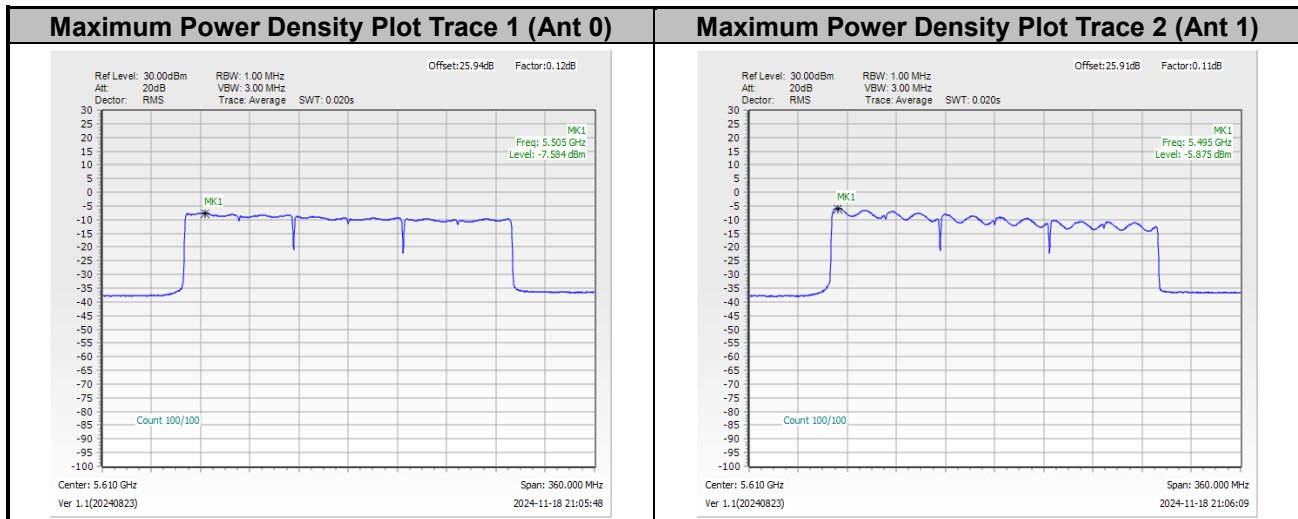



Appendix B. AC Conducted Emission Test Results


Test Engineer :	Calvin Wang	Temperature :	23~26℃
		Relative Humidity :	45~55%

EUT Information

Report NO :
Test Mode :
Test Voltage :
Phase :

492020
Mode 1
120Vac/60Hz
Line
WIFI 5G Tx

Full Spectrum

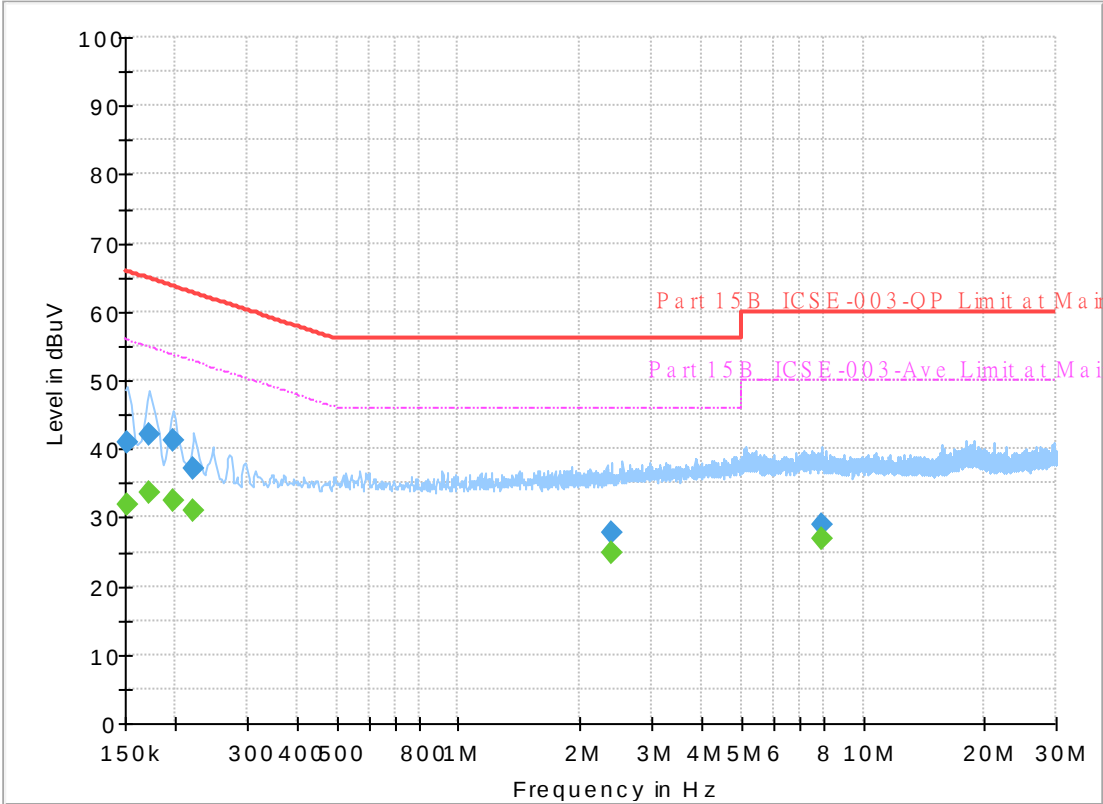

Final_Result


Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.152250	---	31.90	55.88	23.98	L1	OFF	19.8
0.152250	41.07	---	65.88	24.81	L1	OFF	19.8
0.172500	---	33.67	54.84	21.17	L1	OFF	19.8
0.172500	42.16	---	64.84	22.68	L1	OFF	19.8
0.197250	---	32.58	53.73	21.15	L1	OFF	19.8
0.197250	41.24	---	63.73	22.49	L1	OFF	19.8
0.222000	---	30.93	52.74	21.81	L1	OFF	19.8
0.222000	37.14	---	62.74	25.60	L1	OFF	19.8
2.395500	---	24.89	46.00	21.11	L1	OFF	19.9
2.395500	27.85	---	56.00	28.15	L1	OFF	19.9
7.899000	---	26.88	50.00	23.12	L1	OFF	20.2
7.899000	29.04	---	60.00	30.96	L1	OFF	20.2

EUT Information

Report NO :
Test Mode :
Test Voltage :
Phase :

492020
Mode 1
120Vac/60Hz
Neutral
WIFI 5G Tx

Full Spectrum

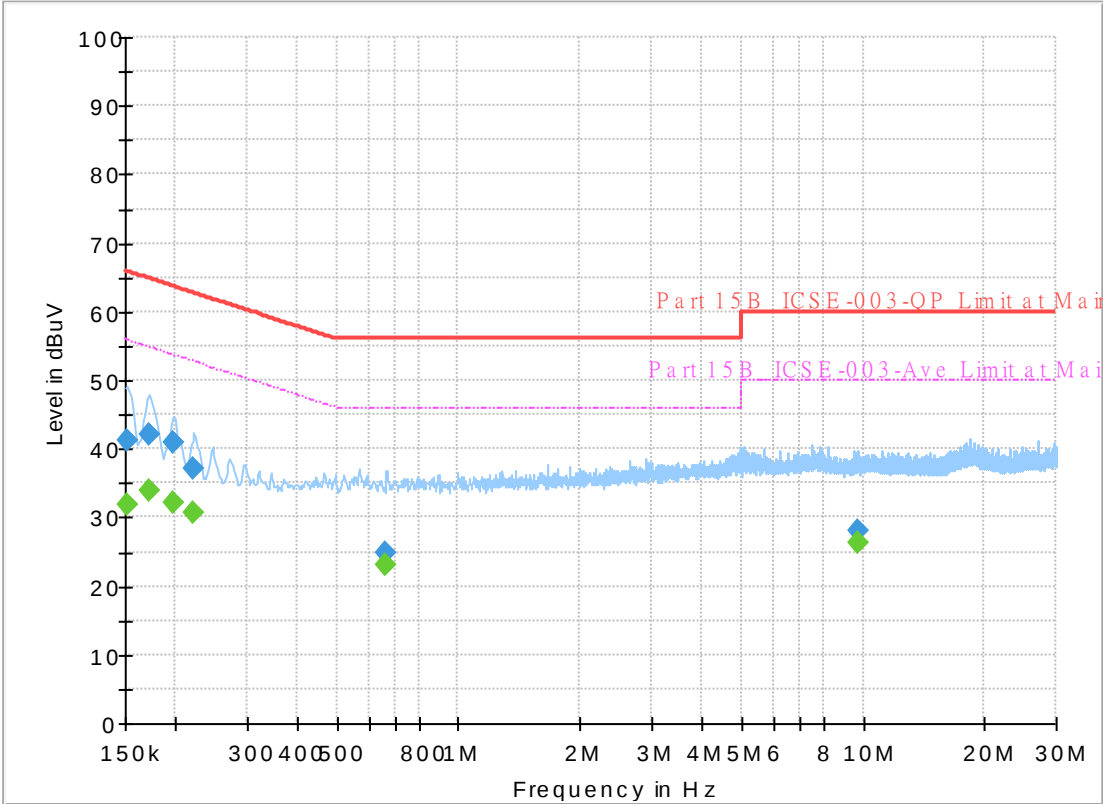

Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.152250	---	31.85	55.88	24.03	N	OFF	19.8
0.152250	41.33	---	65.88	24.55	N	OFF	19.8
0.172500	---	33.77	54.84	21.07	N	OFF	19.8
0.172500	42.06	---	64.84	22.78	N	OFF	19.8
0.197250	---	32.06	53.73	21.67	N	OFF	19.8
0.197250	41.08	---	63.73	22.65	N	OFF	19.8
0.222000	---	30.79	52.74	21.95	N	OFF	19.8
0.222000	37.01	---	62.74	25.73	N	OFF	19.8
0.663000	---	23.23	46.00	22.77	N	OFF	19.8
0.663000	24.78	---	56.00	31.22	N	OFF	19.8
9.755250	---	26.22	50.00	23.78	N	OFF	20.3
9.755250	28.03	---	60.00	31.97	N	OFF	20.3



Appendix C. Radiated Spurious Emission Test Data

Test Engineer :	Jerry Lan, Gary Guo and Steven Wu	Temperature :	18.2~20.2°C
		Relative Humidity :	54.2~56.1%

Note symbol

-L	Low channel location
-R	High channel location

**C1-1. Radiated Spurious Emission Test Modes**

Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 72	U-NII-1	5.15-5.25	0	802.11a	36	5180	6Mbps	-	-
Mode 73	U-NII-1	5.15-5.25	0	802.11a	44	5220	6Mbps	-	-
Mode 74	U-NII-1	5.15-5.25	0	802.11a	48	5240	6Mbps	-	-
Mode 75	U-NII-1	5.15-5.25	0	802.11ac VHT20	36	5180	MCS0	-	-
Mode 76	U-NII-1	5.15-5.25	0	802.11ac VHT20	44	5220	MCS0	-	-
Mode 77	U-NII-1	5.15-5.25	0	802.11ac VHT20	48	5240	MCS0	-	-
Mode 78	U-NII-1	5.15-5.25	0	802.11ac VHT40	38	5190	MCS0	-	-
Mode 79	U-NII-1	5.15-5.25	0	802.11ac VHT40	46	5230	MCS0	-	-
Mode 80	U-NII-1	5.15-5.25	0	802.11ac VHT80	42	5210	MCS0	-	-
Mode 81	U-NII-1	5.15-5.25	0	802.11ac VHT160	50	5250	MCS0	-	-
Mode 82	U-NII-1	5.15-5.25	0	802.11be EHT20	36	5180	MCS0	Full RU	-
Mode 83	U-NII-1	5.15-5.25	0	802.11be EHT20	44	5220	MCS0	Full RU	-
Mode 84	U-NII-1	5.15-5.25	0	802.11be EHT20	48	5240	MCS0	Full RU	-
Mode 85	U-NII-1	5.15-5.25	0	802.11be EHT40	38	5190	MCS0	Full RU	-
Mode 86	U-NII-1	5.15-5.25	0	802.11be EHT40	46	5230	MCS0	Full RU	-
Mode 87	U-NII-1	5.15-5.25	0	802.11be EHT80	42	5210	MCS0	Full RU	-
Mode 88	U-NII-1	5.15-5.25	0	802.11be EHT160	50	5250	MCS0	Full RU	-
Mode 89	U-NII-1	5.15-5.25	0	802.11ax HE20	36	5180	MCS0	Full RU	-
Mode 90	U-NII-1	5.15-5.25	0	802.11ax HE20	48	5240	MCS0	Full RU	-
Mode 91	U-NII-2A	5.25-5.35	0	802.11a	52	5260	6Mbps	-	-
Mode 92	U-NII-2A	5.25-5.35	0	802.11a	60	5300	6Mbps	-	-
Mode 93	U-NII-2A	5.25-5.35	0	802.11a	64	5320	6Mbps	-	-



Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 94	U-NII-2A	5.25-5.35	0	802.11ac VHT20	52	5260	MCS0	-	-
Mode 95	U-NII-2A	5.25-5.35	0	802.11ac VHT20	60	5300	MCS0	-	-
Mode 96	U-NII-2A	5.25-5.35	0	802.11ac VHT20	64	5320	MCS0	-	-
Mode 97	U-NII-2A	5.25-5.35	0	802.11ac VHT40	54	5270	MCS0	-	-
Mode 98	U-NII-2A	5.25-5.35	0	802.11ac VHT40	62	5310	MCS0	-	-
Mode 99	U-NII-2A	5.25-5.35	0	802.11ac VHT80	58	5290	MCS0	-	-
Mode 100	U-NII-2A	5.25-5.35	0	802.11be EHT20	52	5260	MCS0	Full RU	-
Mode 101	U-NII-2A	5.25-5.35	0	802.11be EHT20	60	5300	MCS0	Full RU	-
Mode 102	U-NII-2A	5.25-5.35	0	802.11be EHT20	64	5320	MCS0	Full RU	-
Mode 103	U-NII-2A	5.25-5.35	0	802.11be EHT40	54	5270	MCS0	Full RU	-
Mode 104	U-NII-2A	5.25-5.35	0	802.11be EHT40	62	5310	MCS0	Full RU	-
Mode 105	U-NII-2A	5.25-5.35	0	802.11be EHT80	58	5290	MCS0	Full RU	-
Mode 106	U-NII-2A	5.25-5.35	0	802.11ax HE20	52	5260	MCS0	Full RU	-
Mode 107	U-NII-2A	5.25-5.35	0	802.11ax HE20	64	5320	MCS0	Full RU	-
Mode 105	U-NII-2A	5.25-5.35	0	802.11be EHT80	58	5290	MCS0	Full RU	-
Mode 106	U-NII-2A	5.25-5.35	0	802.11ax HE20	52	5260	MCS0	Full RU	-
Mode 107	U-NII-2A	5.25-5.35	0	802.11ax HE20	64	5320	MCS0	Full RU	-
Mode 108	U-NII-2C	5.47-5.725	0	802.11a	100	5500	6Mbps	-	-
Mode 109	U-NII-2C	5.47-5.725	0	802.11a	116	5580	6Mbps	-	-
Mode 110	U-NII-2C	5.47-5.725	0	802.11a	140	5700	6Mbps	-	-
Mode 111	U-NII-2C	5.47-5.725	0	802.11a	144	5720	6Mbps	-	-



Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 110	U-NII-2C	5.47-5.725	0	802.11a	140	5700	6Mbps	-	-
Mode 111	U-NII-2C	5.47-5.725	0	802.11a	144	5720	6Mbps	-	-
Mode 112	U-NII-2C	5.47-5.725	0	802.11ac VHT20	100	5500	MCS0	-	-
Mode 113	U-NII-2C	5.47-5.725	0	802.11ac VHT20	116	5580	MCS0	-	-
Mode 114	U-NII-2C	5.47-5.725	0	802.11ac VHT20	140	5700	MCS0	-	-
Mode 115	U-NII-2C	5.47-5.725	0	802.11ac VHT20	144	5720	MCS0	-	-
Mode 116	U-NII-2C	5.47-5.725	0	802.11ac VHT40	102	5510	MCS0	-	-
Mode 117	U-NII-2C	5.47-5.725	0	802.11ac VHT40	110	5550	MCS0	-	-
Mode 118	U-NII-2C	5.47-5.725	0	802.11ac VHT40	134	5670	MCS0	-	-
Mode 119	U-NII-2C	5.47-5.725	0	802.11ac VHT40	142	5710	MCS0	-	-
Mode 120	U-NII-2C	5.47-5.725	0	802.11ac VHT80	106	5530	MCS0	-	-
Mode 121	U-NII-2C	5.47-5.725	0	802.11ac VHT80	122	5610	MCS0	-	-
Mode 122	U-NII-2C	5.47-5.725	0	802.11ac VHT80	138	5690	MCS0	-	-
Mode 123	U-NII-2C	5.47-5.725	0	802.11ac VHT160	114	5570	MCS0	-	-
Mode 124	U-NII-2C	5.47-5.725	0	802.11be EHT20	100	5500	MCS0	Full RU	-
Mode 125	U-NII-2C	5.47-5.725	0	802.11be EHT20	116	5580	MCS0	Full RU	-
Mode 126	U-NII-2C	5.47-5.725	0	802.11be EHT20	140	5700	MCS0	Full RU	-
Mode 127	U-NII-2C	5.47-5.725	0	802.11be EHT20	144	5720	MCS0	Full RU	-
Mode 128	U-NII-2C	5.47-5.725	0	802.11be EHT40	102	5510	MCS0	Full RU	-
Mode 129	U-NII-2C	5.47-5.725	0	802.11be EHT40	110	5550	MCS0	Full RU	-
Mode 130	U-NII-2C	5.47-5.725	0	802.11be EHT40	134	5670	MCS0	Full RU	-

Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 131	U-NII-2C	5.47-5.725	0	802.11be EHT40	142	5710	MCS0	Full RU	-
Mode 132	U-NII-2C	5.47-5.725	0	802.11be EHT80	106	5530	MCS0	Full RU	-
Mode 133	U-NII-2C	5.47-5.725	0	802.11be EHT80	122	5610	MCS0	Full RU	-
Mode 134	U-NII-2C	5.47-5.725	0	802.11be EHT80	138	5690	MCS0	Full RU	-
Mode 135	U-NII-2C	5.47-5.725	0	802.11be EHT160	114	5570	MCS0	Full RU	-
Mode 136	U-NII-2C	5.47-5.725	0	802.11be EHT240	122	5610	MCS0	Full RU	-
Mode 137	U-NII-2C	5.47-5.725	0	802.11ax HE20	100	5500	MCS0	Full RU	-
Mode 138	U-NII-2C	5.47-5.725	0	802.11ax HE20	116	5580	MCS0	Full RU	-
Mode 139	U-NII-2C	5.47-5.725	0	802.11ax HE20	140	5700	MCS0	Full RU	-
Mode 140	U-NII-2C	5.47-5.725	0	802.11ax HE20	144	5720	MCS0	Full RU	-
Mode 141	SHF								-
Mode 142	LF								-

C1-2. Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
72	802.11a	36	5149.76	51.96	54.00	-2.04	V	Avg.	Pass	-	Band Edge
	802.11a	36	10360.00	47.58	68.20	-20.62	V	Peak	Pass	-	Harmonic
73	802.11a	44	5145.86	48.90	54.00	-5.10	V	Avg.	Pass	-	Band Edge
	802.11a	44	10440.00	47.91	68.20	-20.29	H	Peak	Pass	-	Harmonic
74	802.11a	48	5150.00	47.30	54.00	-6.70	V	Avg.	Pass	-	Band Edge
	802.11a	48	10480.00	48.22	68.20	-19.98	H	Peak	Pass	-	Harmonic
75	802.11ac VHT20	36	5149.94	53.13	54.00	-0.87	V	Avg.	Pass	-	Band Edge
	802.11ac VHT20	36	10360.00	47.17	68.20	-21.03	V	Peak	Pass	-	Harmonic
76	802.11ac VHT20	44	5149.16	52.32	54.00	-1.68	V	Avg.	Pass	-	Band Edge
	802.11ac VHT20	44	10440.00	47.61	68.20	-20.59	H	Peak	Pass	-	Harmonic
77	802.11ac VHT20	48	5142.08	47.70	54.00	-6.30	V	Avg.	Pass	-	Band Edge
	802.11ac VHT20	48	10480.00	46.94	68.20	-21.26	V	Peak	Pass	-	Harmonic
78	802.11ac VHT40	38	5148.20	52.89	54.00	-1.11	V	Avg.	Pass	-	Band Edge
	802.11ac VHT40	38	10380.00	47.94	68.20	-20.26	H	Peak	Pass	-	Harmonic
79	802.11ac VHT40	46	5149.50	52.98	54.00	-1.02	V	Avg.	Pass	-	Band Edge
	802.11ac VHT40	46	10460.00	47.28	68.20	-20.92	V	Peak	Pass	-	Harmonic
80	802.11ac VHT80	42	5148.89	52.51	54.00	-1.49	V	Avg.	Pass	-	Band Edge
	802.11ac VHT80	42	10420.00	48.00	68.20	-20.20	H	Peak	Pass	-	Harmonic
81	802.11ac VHT160	50	5353.32	52.31	54.00	-1.69	V	Avg.	Pass	-	Band Edge
	802.11ac VHT160	50	10500.00	48.55	68.20	-19.65	V	Peak	Pass	-	Harmonic



Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
80	802.11ac VHT80	42	5148.89	52.51	54.00	-1.49	V	Avg.	Pass	-	Band Edge
	802.11ac VHT80	42	10420.00	48.00	68.20	-20.20	H	Peak	Pass	-	Harmonic
81	802.11ac VHT160	50	5353.32	52.31	54.00	-1.69	V	Avg.	Pass	-	Band Edge
	802.11ac VHT160	50	10500.00	48.55	68.20	-19.65	V	Peak	Pass	-	Harmonic
82	802.11be EHT20	36	5142.74	50.72	54.00	-3.28	V	Avg.	Pass	Full RU	Band Edge
	802.11be EHT20	36	10360.00	47.21	68.20	-20.99	H	Peak	Pass	Full RU	Harmonic
83	802.11be EHT20	44	5148.94	50.82	54.00	-3.18	V	Avg.	Pass	Full RU	Band Edge
	802.11be EHT20	44	10440.00	47.93	68.20	-20.27	H	Peak	Pass	Full RU	Harmonic
84	802.11be EHT20	48	5145.20	50.04	54.00	-3.96	V	Avg.	Pass	Full RU	Band Edge
	802.11be EHT20	48	10480.00	47.30	68.20	-20.90	H	Peak	Pass	Full RU	Harmonic
85	802.11be EHT40	38	5149.72	52.20	54.00	-1.80	V	Avg.	Pass	Full RU	Band Edge
	802.11be EHT40	38	10380.00	47.60	68.20	-20.60	V	Peak	Pass	Full RU	Harmonic
86	802.11be EHT40	46	5146.74	51.82	54.00	-2.18	V	Avg.	Pass	Full RU	Band Edge
	802.11be EHT40	46	10460.00	47.58	68.20	-20.62	H	Peak	Pass	Full RU	Harmonic



Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
87	802.11be EHT80	42	5149.10	52.14	54.00	-1.86	V	Avg.	Pass	Full RU	Band Edge
	802.11be EHT80	42	10420.00	47.54	68.20	-20.66	H	Peak	Pass	Full RU	Harmonic
88	802.11be EHT160	50	5368.65	52.87	54.00	-1.13	V	Avg.	Pass	Full RU	Band Edge
	802.11be EHT160	50	10500.00	47.65	68.20	-20.55	H	Peak	Pass	Full RU	Harmonic
89	802.11ax HE20	36	5148.50	51.71	54.00	-2.29	V	Avg.	Pass	Full RU	Band Edge
90	802.11ax HE20	48	10480.00	47.91	68.20	-20.29	H	Peak	Pass	Full RU	Harmonic
91	802.11a	52	5124.80	46.29	54.00	-7.71	V	Avg.	Pass	-	Band Edge
	802.11a	52	10520.00	46.60	68.20	-21.60	V	Peak	Pass	-	Harmonic
92	802.11a	60	5351.84	48.07	54.00	-5.93	V	Avg.	Pass	-	Band Edge
	802.11a	60	15900.00	47.23	74.00	-26.77	H	Peak	Pass	-	Harmonic
93	802.11a	64	5350.10	53.18	54.00	-0.82	V	Avg.	Pass	-	Band Edge
	802.11a	64	10640.00	47.94	74.00	-26.06	V	Peak	Pass	-	Harmonic
94	802.11ac VHT20	52	5142.74	45.98	54.00	-8.02	V	Avg.	Pass	-	Band Edge
	802.11ac VHT20	52	10520.00	47.39	68.20	-20.81	V	Peak	Pass	-	Harmonic
95	802.11ac VHT20	60	5350.24	50.22	54.00	-3.78	V	Avg.	Pass	-	Band Edge
	802.11ac VHT20	60	10600.00	47.57	74.00	-26.43	H	Peak	Pass	-	Harmonic



Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
96	802.11ac VHT20	64	5350.94	51.31	54.00	-2.69	V	Avg.	Pass	-	Band Edge
	802.11ac VHT20	64	10640.00	47.42	74.00	-26.58	V	Peak	Pass	-	Harmonic
97	802.11ac VHT40	54	5350.94	52.75	54.00	-1.25	V	Avg.	Pass	-	Band Edge
	802.11ac VHT40	54	10540.00	47.26	68.20	-20.94	H	Peak	Pass	-	Harmonic
98	802.11ac VHT40	62	5350.20	52.94	54.00	-1.06	V	Avg.	Pass	-	Band Edge
	802.11ac VHT40	62	10620.00	47.96	74.00	-26.04	H	Peak	Pass	-	Harmonic
99	802.11ac VHT80	58	5351.03	53.00	54.00	-1.00	V	Avg.	Pass	-	Band Edge
	802.11ac VHT80	58	10580.00	47.69	68.20	-20.51	V	Peak	Pass	-	Harmonic
100	802.11be EHT20	52	5352.60	47.06	54.00	-6.94	V	Avg.	Pass	Full RU	Band Edge
	802.11be EHT20	52	10520.00	47.59	68.20	-20.61	H	Peak	Pass	Full RU	Harmonic
101	802.11be EHT20	60	5350.56	53.51	54.00	-0.49	V	Avg.	Pass	Full RU	Band Edge
	802.11be EHT20	60	10600.00	47.43	74.00	-26.57	V	Peak	Pass	Full RU	Harmonic
102	802.11be EHT20	64	5350.52	51.12	54.00	-2.88	V	Avg.	Pass	Full RU	Band Edge
	802.11be EHT20	64	10640.00	47.15	74.00	-26.85	H	Peak	Pass	Full RU	Harmonic
103	802.11be EHT40	54	5351.51	50.42	54.00	-3.58	V	Avg.	Pass	Full RU	Band Edge
	802.11be EHT40	54	10540.00	47.12	68.20	-21.08	V	Peak	Pass	Full RU	Harmonic
104	802.11be EHT40	62	5350.80	53.06	54.00	-0.94	V	Avg.	Pass	Full RU	Band Edge
	802.11be EHT40	62	10620.00	47.54	74.00	-26.46	V	Peak	Pass	Full RU	Harmonic
105	802.11be EHT80	58	5350.52	53.16	54.00	-0.84	V	Avg.	Pass	Full RU	Band Edge
	802.11be EHT80	58	10580.00	48.09	68.20	-20.11	H	Peak	Pass	Full RU	Harmonic
106	802.11ax HE20	52	10520.00	46.70	68.20	-21.50	H	Peak	Pass	Full RU	Harmonic
107	802.11ax HE20	64	5351.50	53.15	54.00	-0.85	V	Avg.	Pass	Full RU	Band Edge

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
108	802.11a	100	5459.95	48.08	54.00	-5.92	V	Avg.	Pass	-	Band Edge
	802.11a	100	16500.00	48.94	68.20	-19.26	V	Peak	Pass	-	Harmonic
109	802.11a	116	5452.58	45.20	54.00	-8.80	V	Avg.	Pass	-	Band Edge
	802.11a	116	16740.00	48.71	68.20	-19.49	V	Peak	Pass	-	Harmonic
110	802.11a	140	5725.48	61.44	68.20	-6.76	V	Peak	Pass	-	Band Edge
	802.11a	140	17100.00	49.23	68.20	-18.97	V	Peak	Pass	-	Harmonic
111	802.11a	144	5433.46	44.96	54.00	-9.04	H	Avg.	Pass	-	Band Edge
	802.11a	144	17160.00	48.64	68.20	-19.56	H	Peak	Pass	-	Harmonic
112	802.11ac VHT20	100	5468.20	63.07	68.20	-5.13	V	Peak	Pass	-	Band Edge
	802.11ac VHT20	100	16500.00	47.85	68.20	-20.35	V	Peak	Pass	-	Harmonic
113	802.11ac VHT20	116	5456.95	45.49	54.00	-8.51	V	Avg.	Pass	-	Band Edge
	802.11ac VHT20	116	16740.00	47.50	68.20	-20.70	V	Peak	Pass	-	Harmonic
114	802.11ac VHT20	140	5725.22	66.09	68.20	-2.11	V	Peak	Pass	-	Band Edge
	802.11ac VHT20	140	17100.00	48.44	68.20	-19.76	V	Peak	Pass	-	Harmonic
115	802.11ac VHT20	144	5436.19	44.81	54.00	-9.19	V	Avg.	Pass	-	Band Edge
	802.11ac VHT20	144	17160.00	48.59	68.20	-19.61	V	Peak	Pass	-	Harmonic
116	802.11ac VHT40	102	5459.76	53.40	54.00	-0.60	V	Avg.	Pass	-	Band Edge
	802.11ac VHT40	102	16530.00	47.86	68.20	-20.34	V	Peak	Pass	-	Harmonic
117	802.11ac VHT40	110	5457.20	52.16	54.00	-1.84	V	Avg.	Pass	-	Band Edge
	802.11ac VHT40	110	16650.00	48.42	68.20	-19.78	V	Peak	Pass	-	Harmonic
118	802.11ac VHT40	134	5733.84	63.98	68.20	-4.22	V	Peak	Pass	-	Band Edge
	802.11ac VHT40	134	17010.00	47.84	68.20	-20.36	V	Peak	Pass	-	Harmonic



Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
119	802.11ac VHT40	142	5457.25	45.18	54.00	-8.82	H	Avg.	Pass	-	Band Edge
	802.11ac VHT40	142	17130.00	49.00	68.20	-19.20	H	Peak	Pass	-	Harmonic
120	802.11ac VHT80	106	5450.80	52.33	54.00	-1.67	V	Avg.	Pass	-	Band Edge
	802.11ac VHT80	106	16590.00	48.24	68.20	-19.96	V	Peak	Pass	-	Harmonic
121	802.11ac VHT80	122	5457.90	52.16	54.00	-1.84	V	Avg.	Pass	-	Band Edge
	802.11ac VHT80	122	16830.00	47.83	68.20	-20.37	V	Peak	Pass	-	Harmonic
122	802.11ac VHT80	138	5851.00	60.45	68.20	-7.75	V	Peak	Pass	-	Band Edge
	802.11ac VHT80	138	17070.00	48.14	68.20	-20.06	H	Peak	Pass	-	Harmonic
123	802.11ac VHT160	114	5446.80	52.51	54.00	-1.49	V	Avg.	Pass	-	Band Edge
	802.11ac VHT160	114	16710.00	48.34	68.20	-19.86	H	Peak	Pass	-	Harmonic
124	802.11be EHT20	100	5468.95	63.99	68.20	-4.21	V	Peak	Pass	Full RU	Band Edge
	802.11be EHT20	100	16500.00	49.32	68.20	-18.88	H	Peak	Pass	Full RU	Harmonic
125	802.11be EHT20	116	5450.05	45.88	54.00	-8.12	V	Avg.	Pass	Full RU	Band Edge
	802.11be EHT20	116	16740.00	47.57	68.20	-20.63	V	Peak	Pass	Full RU	Harmonic
126	802.11be EHT20	140	5725.22	67.13	68.20	-1.07	V	Peak	Pass	Full RU	Band Edge
	802.11be EHT20	140	17100.00	48.12	68.20	-20.08	H	Peak	Pass	Full RU	Harmonic





Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
127	802.11be EHT20	144	5442.82	45.17	54.00	-8.83	H	Avg.	Pass	Full RU	Band Edge
	802.11be EHT20	144	17160.00	48.17	68.20	-20.03	V	Peak	Pass	Full RU	Harmonic
128	802.11be EHT40	102	5459.60	51.82	54.00	-2.18	V	Avg.	Pass	Full RU	Band Edge
	802.11be EHT40	102	16530.00	47.32	68.20	-20.88	V	Peak	Pass	Full RU	Harmonic
129	802.11be EHT40	110	5459.20	52.06	54.00	-1.94	V	Avg.	Pass	Full RU	Band Edge
	802.11be EHT40	110	16650.00	48.15	68.20	-20.05	V	Peak	Pass	Full RU	Harmonic
130	802.11be EHT40	134	5725.01	62.41	68.20	-5.79	V	Peak	Pass	Full RU	Band Edge
	802.11be EHT40	134	17010.00	48.04	68.20	-20.16	V	Peak	Pass	Full RU	Harmonic
131	802.11be EHT40	142	5447.11	45.44	54.00	-8.56	V	Avg.	Pass	Full RU	Band Edge
	802.11be EHT40	142	17130.00	48.30	68.20	-19.90	H	Peak	Pass	Full RU	Harmonic
132	802.11be EHT80	106	5458.54	52.69	54.00	-1.31	V	Avg.	Pass	Full RU	Band Edge
	802.11be EHT80	106	16590.00	48.21	68.20	-19.99	V	Peak	Pass	Full RU	Harmonic
133	802.11be EHT80	122	5457.90	52.15	54.00	-1.85	V	Avg.	Pass	Full RU	Band Edge
	802.11be EHT80	122	16830.00	48.70	68.20	-19.50	V	Peak	Pass	Full RU	Harmonic
134	802.11be EHT80	138	5444.77	46.19	54.00	-7.81	V	Avg.	Pass	Full RU	Band Edge
	802.11be EHT80	138	17070.00	48.75	68.20	-19.45	V	Peak	Pass	Full RU	Harmonic







Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
135	802.11be EHT160	114	5433.60	52.88	54.00	-1.12	V	Avg.	Pass	Full RU	Band Edge
	802.11be EHT160	114	16710.00	48.28	68.20	-19.92	H	Peak	Pass	Full RU	Harmonic
136	802.11be EHT240	122	5406.94	52.77	54.00	-1.23	V	Avg.	Pass	Full RU	Band Edge
	802.11be EHT240	122	16830.00	48.30	68.20	-19.90	V	Peak	Pass	Full RU	Harmonic
137	802.11ax HE20	100	5458.75	50.53	54.00	-3.47	V	Avg.	Pass	Full RU	Band Edge
138	802.11ax HE20	116	16740.00	48.30	68.20	-19.90	H	Peak	Pass	Full RU	Harmonic
139	802.11ax HE20	140	5725.16	66.45	68.20	-1.75	V	Peak	Pass	Full RU	Band Edge
140	802.11ax HE20	144	5443.21	44.87	54.00	-9.13	H	Avg.	Pass	Full RU	Band Edge
	802.11ax HE20	144	17160.00	48.64	68.20	-19.56	V	Peak	Pass	Full RU	Harmonic
141	SHF	38559.00	47.53	68.20	-20.67	V	Peak	Pass	Full RU	SHF	141
142	LF	40.67	33.68	40.00	-6.32	V	Peak	Pass	Full RU	LF	142





<Ant. 0>

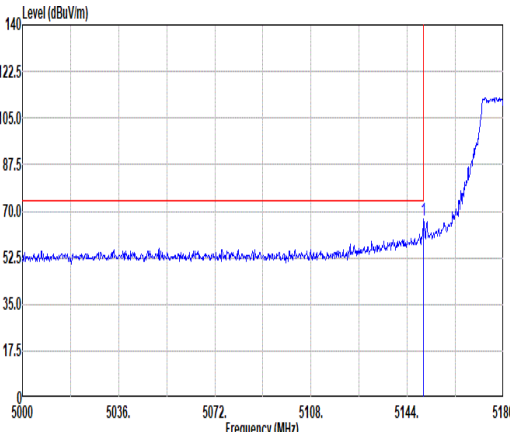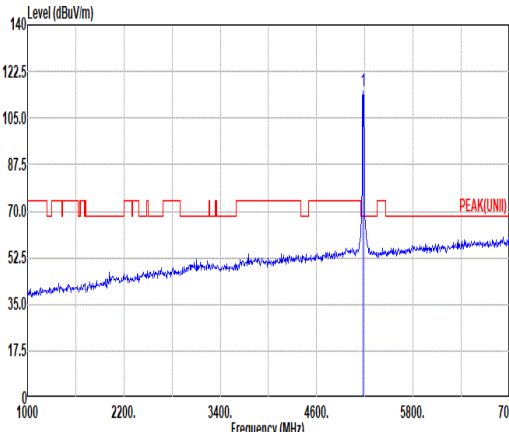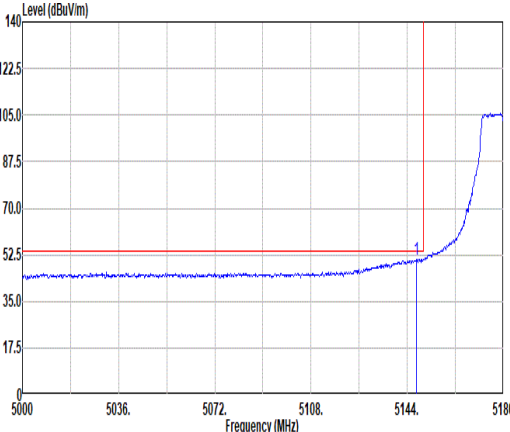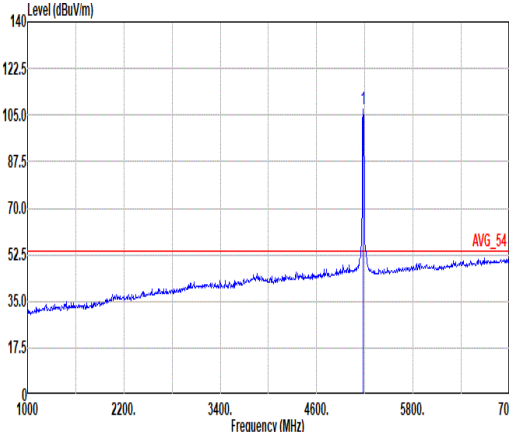		72																																																																																																	
Mode	Band Edge																																																																																																		
	U-NII-1_5.15-5.25_802.11a_CH36_5180MHz																																																																																																		
ANT	0																																																																																																		
Pol.	Horizontal						Fundamental																																																																																												
Peak																																																																																																			
	Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto						Site : 03CH16-HY Condition: PEAK(UNII) 3m 91200-1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto																																																																																												
<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5149.94</td><td>66.69</td><td>74.00</td><td>-7.31</td><td>51.90</td><td>33.00</td><td>11.18</td><td>29.39</td><td>0.00</td><td>388</td><td>136</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5149.94	66.69	74.00	-7.31	51.90	33.00	11.18	29.39	0.00	388	136	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5180.00</td><td>115.06</td><td>-----</td><td>-----</td><td>100.25</td><td>33.00</td><td>11.20</td><td>29.39</td><td>0.00</td><td>388</td><td>136</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5180.00	115.06	-----	-----	100.25	33.00	11.20	29.39	0.00	388	136	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5149.94	66.69	74.00	-7.31	51.90	33.00	11.18	29.39	0.00	388	136	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5180.00	115.06	-----	-----	100.25	33.00	11.20	29.39	0.00	388	136	PEAK																																																																																							
Avg																																																																																																			
	Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto						Site : 03CH16-HY Condition: AVG_54 3m 91200-1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto																																																																																												
<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5147.42</td><td>50.80</td><td>54.00</td><td>-3.20</td><td>36.02</td><td>32.99</td><td>11.18</td><td>29.39</td><td>0.00</td><td>388</td><td>136</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5147.42	50.80	54.00	-3.20	36.02	32.99	11.18	29.39	0.00	388	136	AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5180.00</td><td>107.01</td><td>-----</td><td>-----</td><td>92.20</td><td>33.00</td><td>11.20</td><td>29.39</td><td>0.00</td><td>388</td><td>136</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5180.00	107.01	-----	-----	92.20	33.00	11.20	29.39	0.00	388	136	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5147.42	50.80	54.00	-3.20	36.02	32.99	11.18	29.39	0.00	388	136	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5180.00	107.01	-----	-----	92.20	33.00	11.20	29.39	0.00	388	136	AVERAGE																																																																																							

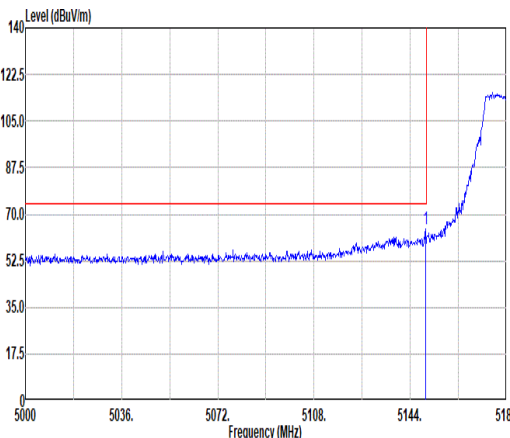
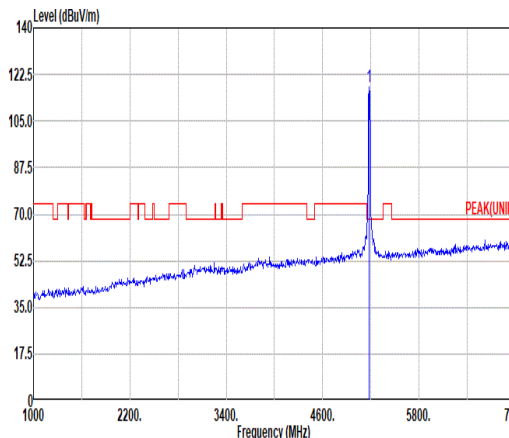
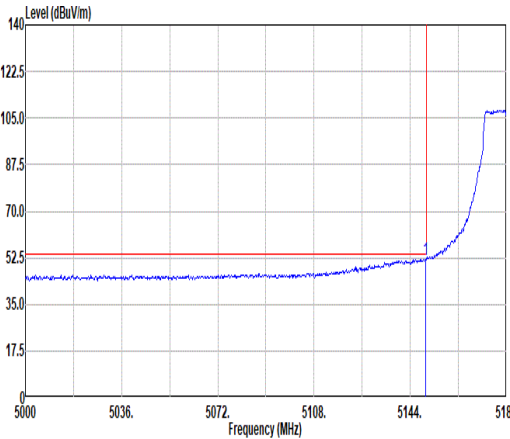
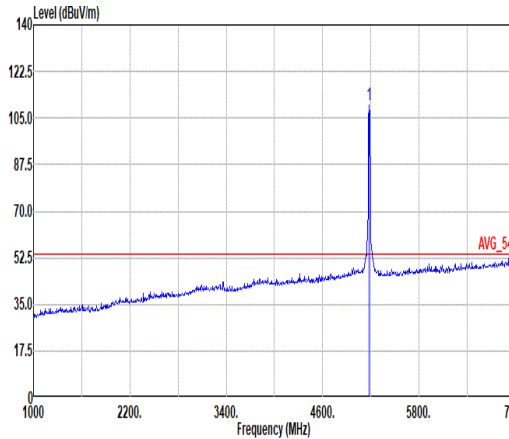


		72																																																																																																															
Mode	Band Edge																																																																																																																
	U-NII-1_5.15-5.25_802.11a_CH36_5180MHz																																																																																																																
ANT	0																																																																																																																
Pol.	Vertical						Fundamental																																																																																																										
Peak																																																																																																																	
	Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1522_240328 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto						Site : 03CH16-HY Condition: PEAK(UNII) 3m 91200-1522_240328 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto																																																																																																										
Avg																																																																																																																	
	Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1522_240328 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto						Site : 03CH16-HY Condition: AVG_54 3m 91200-1522_240328 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto																																																																																																										
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.76</td><td>64.27</td><td>74.00</td><td>-9.73</td><td>49.48</td><td>33.00</td><td>11.18</td><td>29.39</td><td>0.00</td><td>100</td><td>101</td><td>PEAK</td></tr></table>														Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5149.76	64.27	74.00	-9.73	49.48	33.00	11.18	29.39	0.00	100	101	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>118.07</td><td>-----</td><td>-----</td><td>103.25</td><td>33.00</td><td>11.21</td><td>29.39</td><td>0.00</td><td>100</td><td>101</td><td>PEAK</td></tr></table>														Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5180.00	118.07	-----	-----	103.25	33.00	11.21	29.39	0.00	100	101	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																							
1	5149.76	64.27	74.00	-9.73	49.48	33.00	11.18	29.39	0.00	100	101	PEAK																																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																							
1	5180.00	118.07	-----	-----	103.25	33.00	11.21	29.39	0.00	100	101	PEAK																																																																																																					



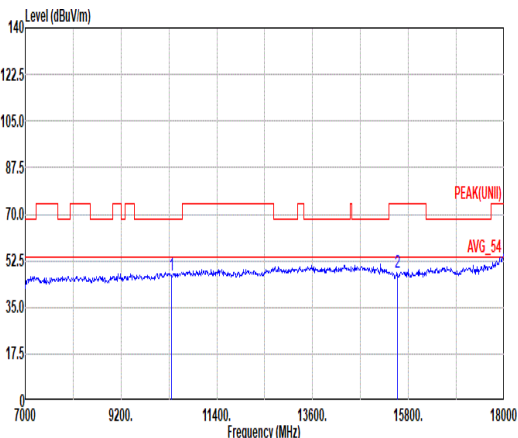
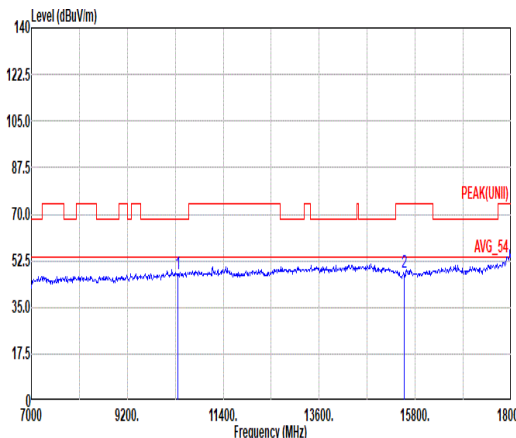


Mode	72																																																																																																																														
	Harmonic																																																																																																																														
	U-NII-1_5.15-5.25_802.11a_CH36_5180MHz																																																																																																																														
ANT	0																																																																																																																														
Pol.	Horizontal						Vertical																																																																																																																								
Peak Avg																																																																																																																															
	Site : 03CH16-HY Condition: PEAK(UNII) 3m 91200-1522_240328 HORIZONTAL						Site : 03CH16-HY Condition: PEAK(UNII) 3m 91200-1522_240328 VERTICAL																																																																																																																								
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10360.00</td><td>47.18</td><td>68.20</td><td>-21.02</td><td>58.42</td><td>38.60</td><td>15.81</td><td>66.53</td><td>0.88</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>15540.00</td><td>47.88</td><td>74.00</td><td>-26.12</td><td>56.03</td><td>37.80</td><td>19.50</td><td>66.34</td><td>0.89</td><td>--</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10360.00	47.18	68.20	-21.02	58.42	38.60	15.81	66.53	0.88	--	PEAK	2	15540.00	47.88	74.00	-26.12	56.03	37.80	19.50	66.34	0.89	--	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10360.00</td><td>47.58</td><td>68.20</td><td>-20.62</td><td>58.82</td><td>38.60</td><td>15.81</td><td>66.53</td><td>0.88</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>15540.00</td><td>47.83</td><td>74.00</td><td>-26.17</td><td>55.98</td><td>37.80</td><td>19.50</td><td>66.34</td><td>0.89</td><td>--</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10360.00	47.58	68.20	-20.62	58.82	38.60	15.81	66.53	0.88	--	PEAK	2	15540.00	47.83	74.00	-26.17	55.98	37.80	19.50	66.34	0.89	--	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																					
1	10360.00	47.18	68.20	-21.02	58.42	38.60	15.81	66.53	0.88	--	PEAK																																																																																																																				
2	15540.00	47.88	74.00	-26.12	56.03	37.80	19.50	66.34	0.89	--	PEAK																																																																																																																				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																					
1	10360.00	47.58	68.20	-20.62	58.82	38.60	15.81	66.53	0.88	--	PEAK																																																																																																																				
2	15540.00	47.83	74.00	-26.17	55.98	37.80	19.50	66.34	0.89	--	PEAK																																																																																																																				

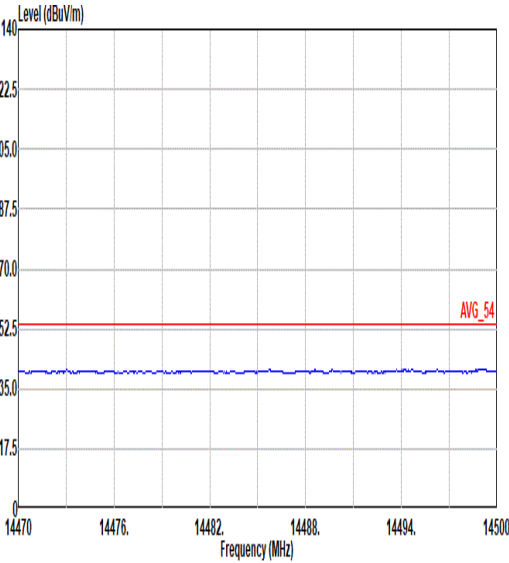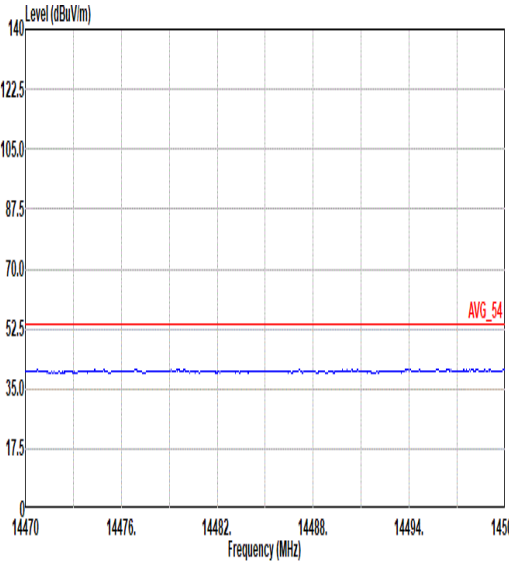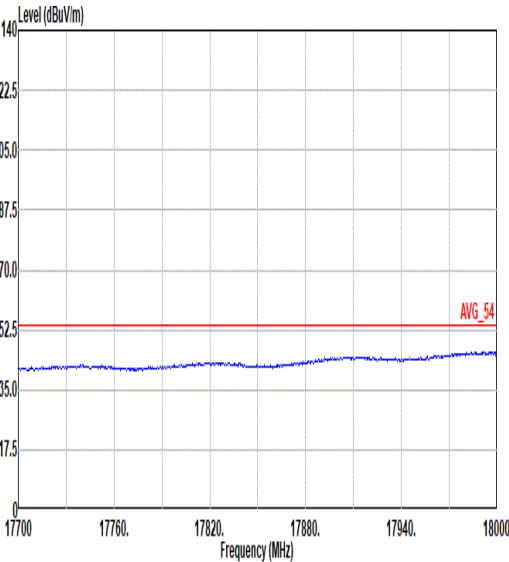
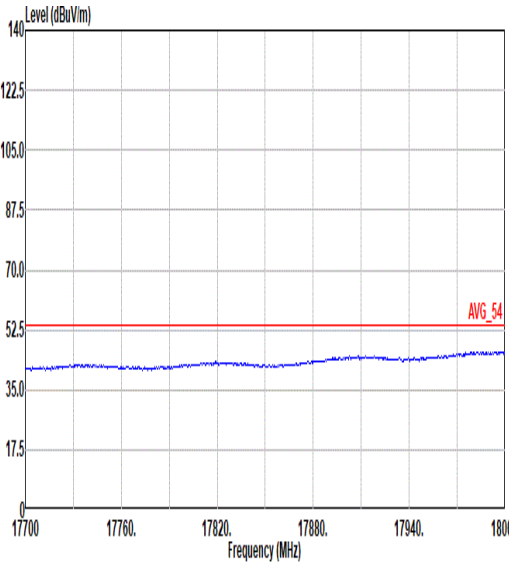


Mode	72	
	Harmonic	
	U-NII-1_5.15-5.25_802.11a_CH36_5180MHz	
ANT	0	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	 Site : 03CH16-HY Condition: AVG_54 3m 91280-1522_240328 HORIZONTAL	 Site : 03CH16-HY Condition: AVG_54 3m 91280-1522_240328 VERTICAL
	 Site : 03CH16-HY Condition: AVG_54 3m 91280-1522_240328 HORIZONTAL	 Site : 03CH16-HY Condition: AVG_54 3m 91280-1522_240328 VERTICAL

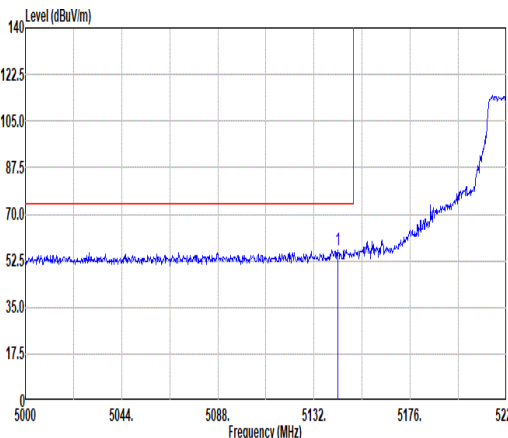
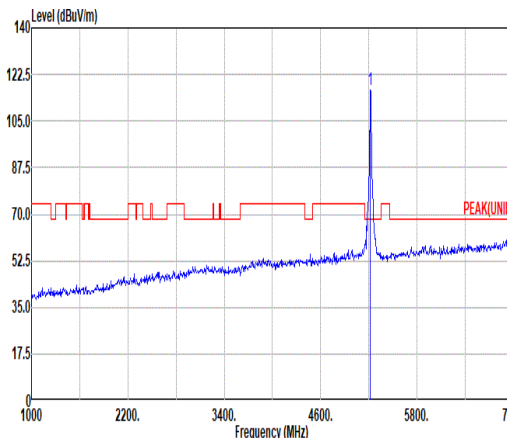
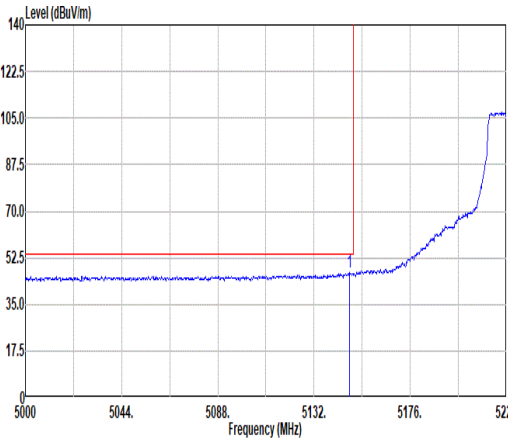
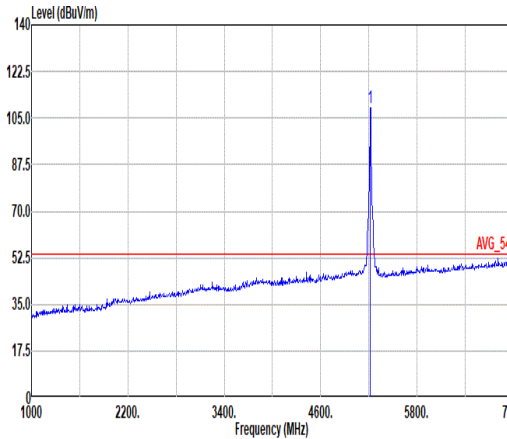


Mode	73																																																																																																		
	Band Edge - L																																																																																																		
	U-NII-1_5.15-5.25_802.11a_CH44_5220MHz																																																																																																		
ANT	0																																																																																																		
Pol.	Horizontal						Fundamental																																																																																												
Peak																																																																																																			
	Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5143.00</td><td>56.43</td><td>74.00</td><td>-17.57</td><td>41.66</td><td>32.99</td><td>11.17</td><td>29.39</td><td>0.00</td><td>400</td><td>135</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5143.00	56.43	74.00	-17.57	41.66	32.99	11.17	29.39	0.00	400	135	PEAK	Site : 03CH16-HY Condition: PEAK(UNII) 3m 91200-1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5220.00</td><td>116.56</td><td>-----</td><td>-----</td><td>101.74</td><td>32.96</td><td>11.24</td><td>29.38</td><td>0.00</td><td>400</td><td>135</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5220.00	116.56	-----	-----	101.74	32.96	11.24	29.38	0.00	400	135
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5143.00	56.43	74.00	-17.57	41.66	32.99	11.17	29.39	0.00	400	135	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5220.00	116.56	-----	-----	101.74	32.96	11.24	29.38	0.00	400	135	PEAK																																																																																							
Avg																																																																																																			
	Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5140.06</td><td>46.83</td><td>54.00</td><td>-7.17</td><td>32.04</td><td>33.00</td><td>11.18</td><td>29.39</td><td>0.00</td><td>400</td><td>135</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5140.06	46.83	54.00	-7.17	32.04	33.00	11.18	29.39	0.00	400	135	AVERAGE	Site : 03CH16-HY Condition: AVG_54 3m 91200-1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5220.00</td><td>108.93</td><td>-----</td><td>-----</td><td>94.12</td><td>32.95</td><td>11.24</td><td>29.38</td><td>0.00</td><td>400</td><td>135</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5220.00	108.93	-----	-----	94.12	32.95	11.24	29.38	0.00	400	135
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5140.06	46.83	54.00	-7.17	32.04	33.00	11.18	29.39	0.00	400	135	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5220.00	108.93	-----	-----	94.12	32.95	11.24	29.38	0.00	400	135	AVERAGE																																																																																							

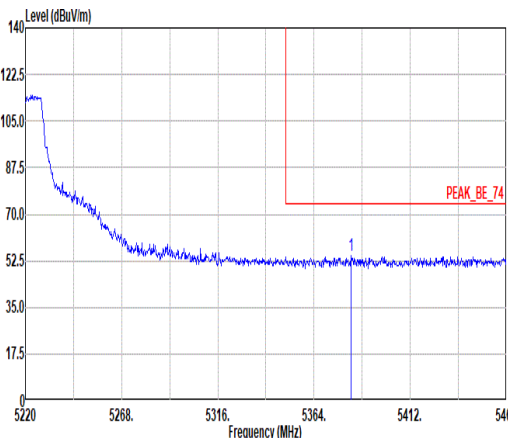
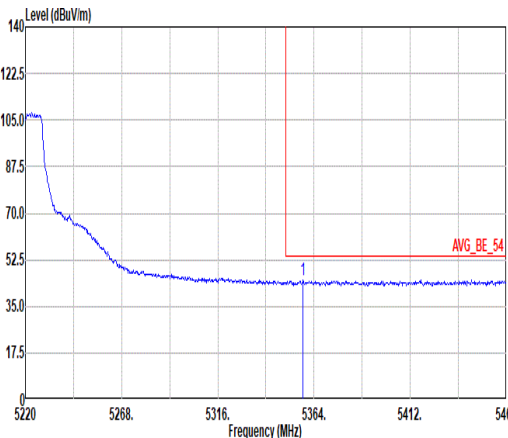


Mode	73																																																							
	Band Edge - R																																																							
	U-NII-1_5.15-5.25_802.11a_CH44_5220MHz																																																							
ANT	0																																																							
Pol.	Horizontal						Fundamental																																																	
Peak	 Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1522 240328 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5382.48</td><td>54.58</td><td>74.00</td><td>-19.42</td><td>39.75</td><td>32.80</td><td>11.39</td><td>29.36</td><td>0.00</td><td>400</td><td>135</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5382.48	54.58	74.00	-19.42	39.75	32.80	11.39	29.36	0.00	400	135	PEAK	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	5382.48	54.58	74.00	-19.42	39.75	32.80	11.39	29.36	0.00	400	135	PEAK																																												
Avg	 Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1522 240328 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5358.48</td><td>44.73</td><td>54.00</td><td>-9.27</td><td>29.93</td><td>32.80</td><td>11.37</td><td>29.37</td><td>0.00</td><td>400</td><td>135</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5358.48	44.73	54.00	-9.27	29.93	32.80	11.37	29.37	0.00	400	135	AVERAGE	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	5358.48	44.73	54.00	-9.27	29.93	32.80	11.37	29.37	0.00	400	135	AVERAGE																																												

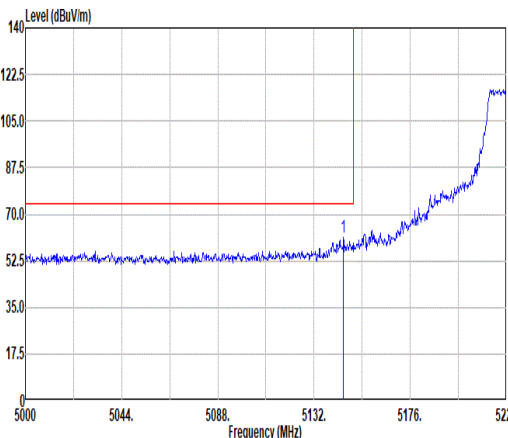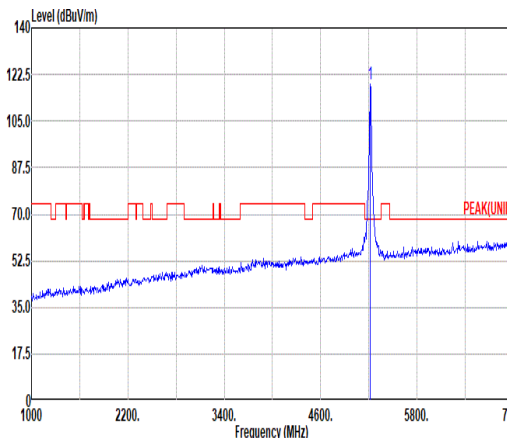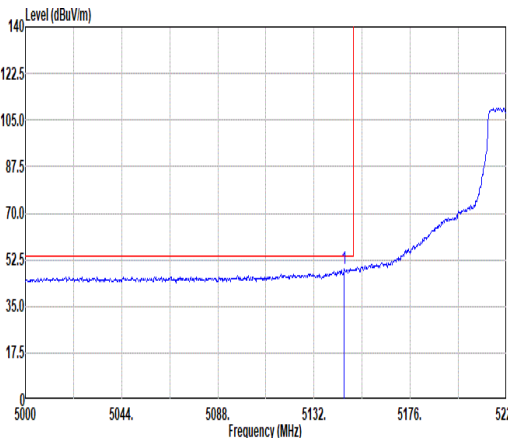
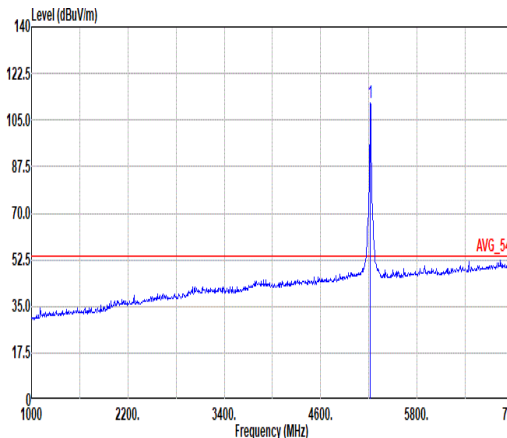


Mode	73																																																																																																														
	Band Edge - L																																																																																																														
	U-NII-1_5.15-5.25_802.11a_CH44_5220MHz																																																																																																														
ANT	0																																																																																																														
Pol.	Vertical						Fundamental																																																																																																								
Peak																																																																																																															
	Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1522_240328 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto						Site : 03CH16-HY Condition: PEAK(UNII) 3m 91200-1522_240328 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto																																																																																																								
Avg																																																																																																															
	Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1522_240328 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto						Site : 03CH16-HY Condition: AVG_54 3m 91200-1522_240328 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto																																																																																																								
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5145.42</td><td>61.10</td><td>74.00</td><td>-12.90</td><td>46.32</td><td>32.99</td><td>11.18</td><td>29.39</td><td>0.00</td><td>101</td><td>97</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5145.42	61.10	74.00	-12.90	46.32	32.99	11.18	29.39	0.00	101	97	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5220.00</td><td>118.95</td><td>-----</td><td>-----</td><td>104.12</td><td>32.98</td><td>11.23</td><td>29.38</td><td>0.00</td><td>101</td><td>97</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5220.00	118.95	-----	-----	104.12	32.98	11.23	29.38	0.00	101	97	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	5145.42	61.10	74.00	-12.90	46.32	32.99	11.18	29.39	0.00	101	97	PEAK																																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	5220.00	118.95	-----	-----	104.12	32.98	11.23	29.38	0.00	101	97	PEAK																																																																																																			
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5145.06</td><td>48.90</td><td>54.00</td><td>-5.10</td><td>34.12</td><td>32.99</td><td>11.18</td><td>29.39</td><td>0.00</td><td>101</td><td>97</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5145.06	48.90	54.00	-5.10	34.12	32.99	11.18	29.39	0.00	101	97	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5220.00</td><td>111.61</td><td>-----</td><td>-----</td><td>96.79</td><td>32.96</td><td>11.24</td><td>29.38</td><td>0.00</td><td>101</td><td>97</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5220.00	111.61	-----	-----	96.79	32.96	11.24	29.38	0.00	101	97	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	5145.06	48.90	54.00	-5.10	34.12	32.99	11.18	29.39	0.00	101	97	AVERAGE																																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	5220.00	111.61	-----	-----	96.79	32.96	11.24	29.38	0.00	101	97	AVERAGE																																																																																																			



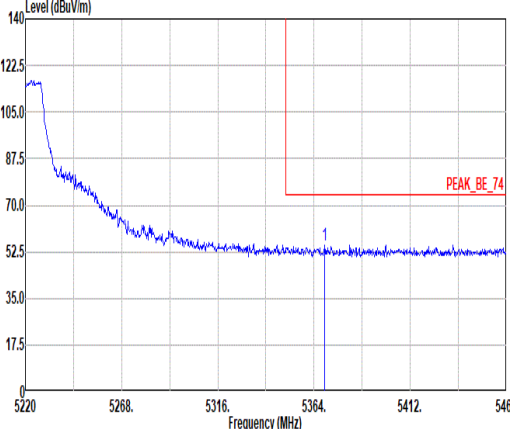
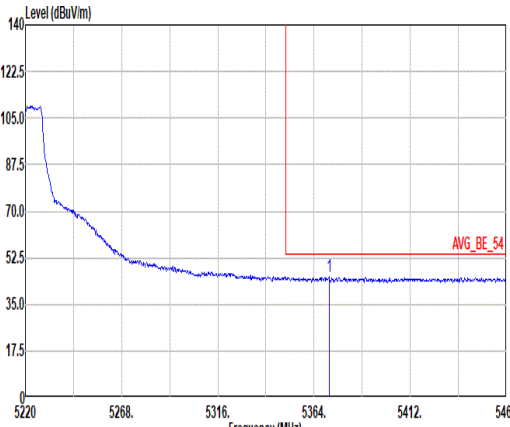


Mode	73																																																						
	Band Edge - R																																																						
	U-NII-1_5.15-5.25_802.11a_CH44_5220MHz																																																						
ANT	0																																																						
Pol.	Vertical						Fundamental																																																
Peak	 Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1522_240328 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5369.28</td><td>55.20</td><td>74.00</td><td>-18.80</td><td>40.39</td><td>32.00</td><td>11.38</td><td>29.37</td><td>0.00</td><td>101</td><td>97 PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5369.28	55.20	74.00	-18.80	40.39	32.00	11.38	29.37	0.00	101	97 PEAK	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	5369.28	55.20	74.00	-18.80	40.39	32.00	11.38	29.37	0.00	101	97 PEAK																																												
Avg	 Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1522_240328 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5371.44</td><td>45.20</td><td>54.00</td><td>-8.80</td><td>30.39</td><td>32.00</td><td>11.38</td><td>29.37</td><td>0.00</td><td>101</td><td>97 AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5371.44	45.20	54.00	-8.80	30.39	32.00	11.38	29.37	0.00	101	97 AVERAGE	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	5371.44	45.20	54.00	-8.80	30.39	32.00	11.38	29.37	0.00	101	97 AVERAGE																																												



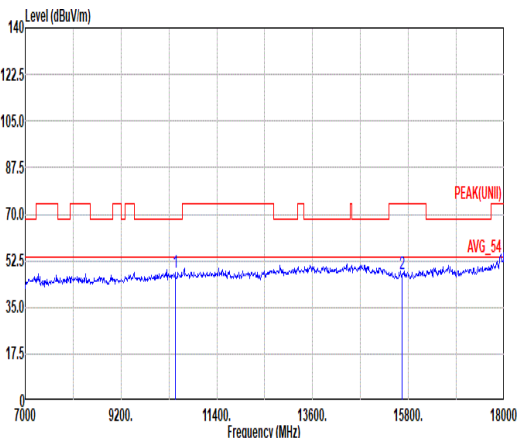
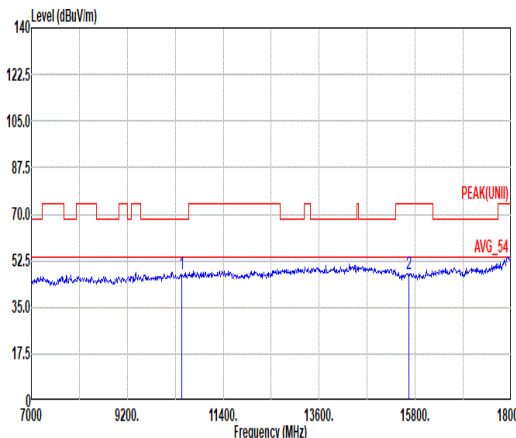


Mode	73																																																																																																					
	Harmonic																																																																																																					
	U-NII-1_5.15-5.25_802.11a_CH44_5220MHz																																																																																																					
ANT	0																																																																																																					
Pol.	Horizontal	Vertical																																																																																																				
Peak Avg	 Site : 03CH16-HY Condition: PEAK(UNII) 3m 91200-1522_240328 HORIZONTAL <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 10440.00</td><td>47.91</td><td>68.20</td><td>-20.29</td><td>59.27</td><td>38.52</td><td>15.87</td><td>66.47</td><td>0.72</td><td>-- PEAK</td></tr><tr><td>2 15668.00</td><td>47.77</td><td>74.00</td><td>-26.23</td><td>56.24</td><td>37.72</td><td>19.55</td><td>66.39</td><td>0.65</td><td>-- PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 10440.00	47.91	68.20	-20.29	59.27	38.52	15.87	66.47	0.72	-- PEAK	2 15668.00	47.77	74.00	-26.23	56.24	37.72	19.55	66.39	0.65	-- PEAK	 Site : 03CH16-HY Condition: PEAK(UNII) 3m 91200-1522_240328 VERTICAL <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 10440.00</td><td>47.29</td><td>68.20</td><td>-20.91</td><td>58.65</td><td>38.52</td><td>15.87</td><td>66.47</td><td>0.72</td><td>-- PEAK</td></tr><tr><td>2 15668.00</td><td>47.66</td><td>74.00</td><td>-26.34</td><td>56.13</td><td>37.72</td><td>19.55</td><td>66.39</td><td>0.65</td><td>-- PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 10440.00	47.29	68.20	-20.91	58.65	38.52	15.87	66.47	0.72	-- PEAK	2 15668.00	47.66	74.00	-26.34	56.13	37.72	19.55	66.39	0.65	-- PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																													
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1 10440.00	47.91	68.20	-20.29	59.27	38.52	15.87	66.47	0.72	-- PEAK																																																																																													
2 15668.00	47.77	74.00	-26.23	56.24	37.72	19.55	66.39	0.65	-- PEAK																																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																														
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1 10440.00	47.29	68.20	-20.91	58.65	38.52	15.87	66.47	0.72	-- PEAK																																																																																													
2 15668.00	47.66	74.00	-26.34	56.13	37.72	19.55	66.39	0.65	-- PEAK																																																																																													

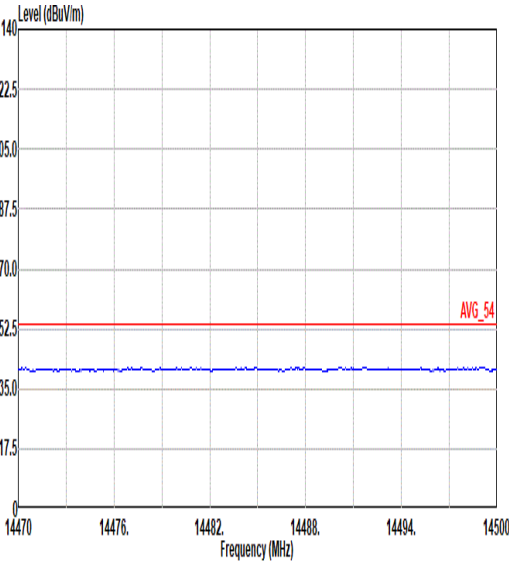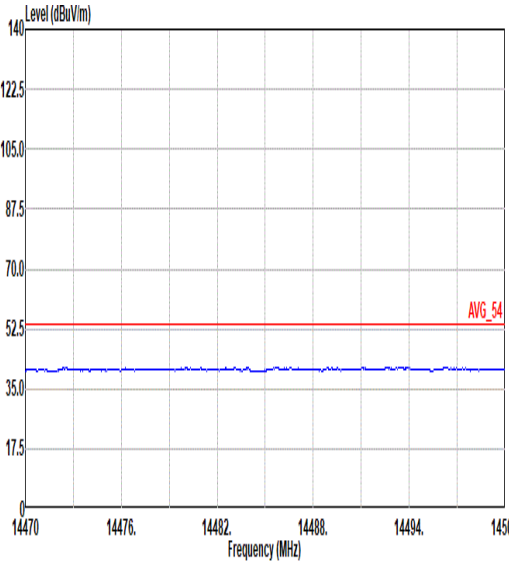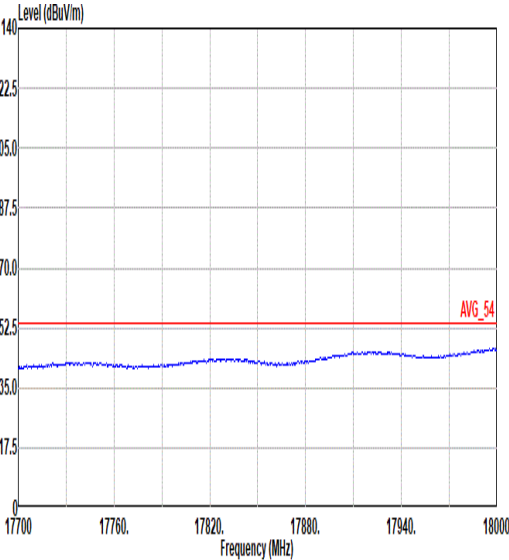
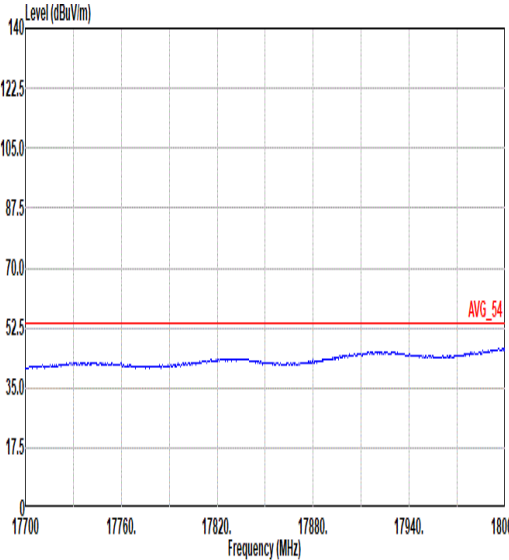


Mode	73	
	Harmonic	
	U-NII-1_5.15-5.25_802.11a_CH44_5220MHz	
ANT	0	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	 Site : 03CH16-HY Condition: AVG_54 3m 91280-1522_240328 HORIZONTAL	 Site : 03CH16-HY Condition: AVG_54 3m 91280-1522_240328 VERTICAL
	 Site : 03CH16-HY Condition: AVG_54 3m 91280-1522_240328 HORIZONTAL	 Site : 03CH16-HY Condition: AVG_54 3m 91280-1522_240328 VERTICAL

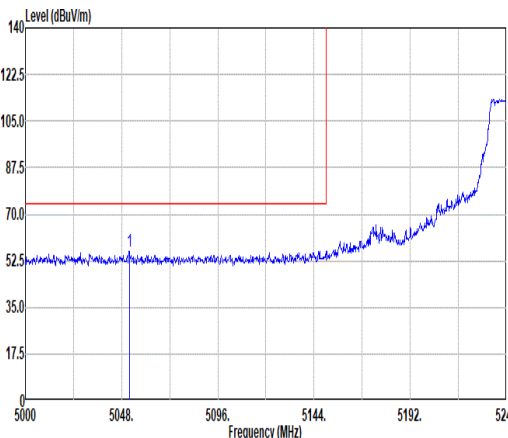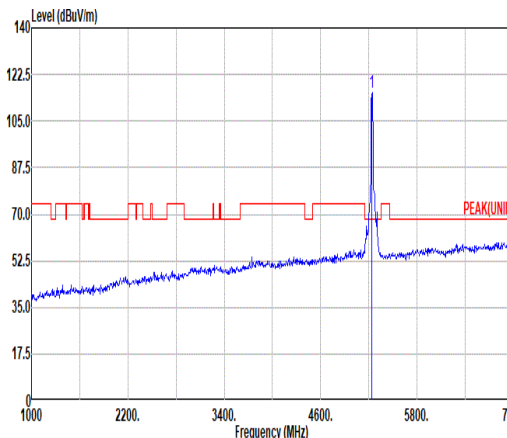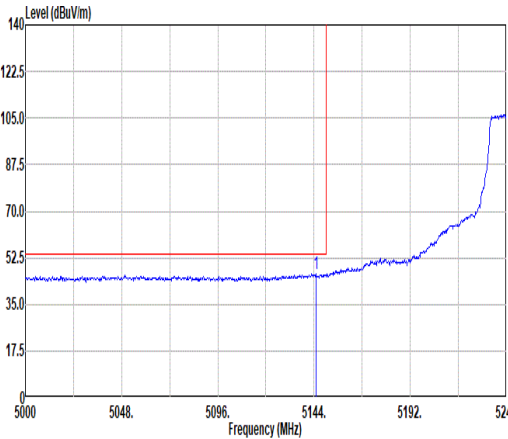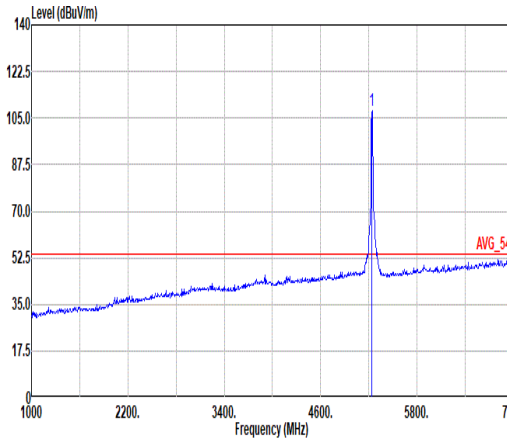

		74																																																					
Mode		Band Edge - L																																																					
		U-NII-1_5.15-5.25_802.11a_CH48_5240MHz																																																					
ANT		0																																																					
Pol.		Horizontal																																																					
Peak																																																							
	Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5051.84</td><td>56.01</td><td>74.00</td><td>-17.99</td><td>41.41</td><td>32.90</td><td>11.10</td><td>29.40</td><td>0.00</td><td>387</td><td>136</td><td>PEAK</td></tr></tbody></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5051.84	56.01	74.00	-17.99	41.41	32.90	11.10	29.40	0.00	387	136
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	5051.84	56.01	74.00	-17.99	41.41	32.90	11.10	29.40	0.00	387	136	PEAK																																											
Fundamental																																																							
	Site : 03CH16-HY Condition: PEAK(UNII) 3m 91200-1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5240.00</td><td>115.92</td><td>-----</td><td>-----</td><td>101.13</td><td>32.90</td><td>11.27</td><td>29.38</td><td>0.00</td><td>387</td><td>136</td><td>PEAK</td></tr></tbody></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5240.00	115.92	-----	-----	101.13	32.90	11.27	29.38	0.00	387	136
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	5240.00	115.92	-----	-----	101.13	32.90	11.27	29.38	0.00	387	136	PEAK																																											
Avg																																																							
	Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5144.96</td><td>46.37</td><td>54.00</td><td>-7.63</td><td>31.59</td><td>32.99</td><td>11.18</td><td>29.39</td><td>0.00</td><td>387</td><td>136</td><td>AVERAGE</td></tr></tbody></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5144.96	46.37	54.00	-7.63	31.59	32.99	11.18	29.39	0.00	387	136
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	5144.96	46.37	54.00	-7.63	31.59	32.99	11.18	29.39	0.00	387	136	AVERAGE																																											
Avg																																																							
	Site : 03CH16-HY Condition: AVG_54 3m 91200-1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5240.00</td><td>107.73</td><td>-----</td><td>-----</td><td>92.93</td><td>32.92</td><td>11.26</td><td>29.38</td><td>0.00</td><td>387</td><td>136</td><td>AVERAGE</td></tr></tbody></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5240.00	107.73	-----	-----	92.93	32.92	11.26	29.38	0.00	387	136
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	5240.00	107.73	-----	-----	92.93	32.92	11.26	29.38	0.00	387	136	AVERAGE																																											

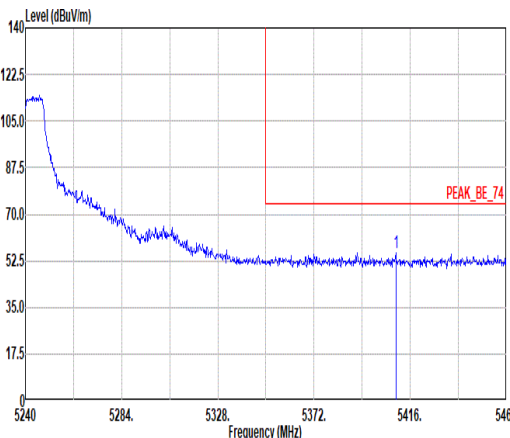
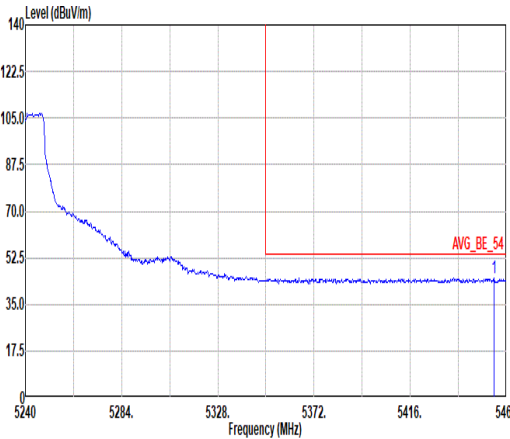


Mode	74																																																							
	Band Edge - R																																																							
	U-NII-1_5.15-5.25_802.11a_CH48_5240MHz																																																							
ANT	0																																																							
Pol.	Horizontal						Fundamental																																																	
Peak	 Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5409.40</td><td>55.42</td><td>74.00</td><td>-18.58</td><td>40.56</td><td>32.00</td><td>11.42</td><td>29.36</td><td>0.00</td><td>387</td><td>136</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5409.40	55.42	74.00	-18.58	40.56	32.00	11.42	29.36	0.00	387	136	PEAK	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	5409.40	55.42	74.00	-18.58	40.56	32.00	11.42	29.36	0.00	387	136	PEAK																																												
Avg	 Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5454.28</td><td>44.89</td><td>54.00</td><td>-9.11</td><td>29.97</td><td>32.00</td><td>11.48</td><td>29.36</td><td>0.00</td><td>387</td><td>136</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5454.28	44.89	54.00	-9.11	29.97	32.00	11.48	29.36	0.00	387	136	AVERAGE	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	5454.28	44.89	54.00	-9.11	29.97	32.00	11.48	29.36	0.00	387	136	AVERAGE																																												





Mode	74																																																																																																		
	Band Edge - L																																																																																																		
	U-NII-1_5.15-5.25_802.11a_CH48_5240MHz																																																																																																		
ANT	0																																																																																																		
Pol.	Vertical						Fundamental																																																																																												
Peak																																																																																																			
	Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1522_240328 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto						Site : 03CH16-HY Condition: PEAK(UNII) 3m 91200-1522_240328 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto																																																																																												
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5149.28</td><td>57.76</td><td>74.00</td><td>-16.24</td><td>42.97</td><td>33.00</td><td>11.18</td><td>29.39</td><td>0.00</td><td>100</td><td>104</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5149.28	57.76	74.00	-16.24	42.97	33.00	11.18	29.39	0.00	100	104	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5240.00</td><td>118.22</td><td>-----</td><td>-----</td><td>103.43</td><td>32.90</td><td>11.27</td><td>29.38</td><td>0.00</td><td>100</td><td>104</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5240.00	118.22	-----	-----	103.43	32.90	11.27	29.38	0.00	100	104
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5149.28	57.76	74.00	-16.24	42.97	33.00	11.18	29.39	0.00	100	104	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5240.00	118.22	-----	-----	103.43	32.90	11.27	29.38	0.00	100	104	PEAK																																																																																							
Avg																																																																																																			
	Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1522_240328 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto						Site : 03CH16-HY Condition: AVG_54 3m 91200-1522_240328 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto																																																																																												
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5150.00</td><td>47.30</td><td>54.00</td><td>-6.70</td><td>32.51</td><td>33.00</td><td>11.18</td><td>29.39</td><td>0.00</td><td>100</td><td>104</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5150.00	47.30	54.00	-6.70	32.51	33.00	11.18	29.39	0.00	100	104	AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5240.00</td><td>111.42</td><td>-----</td><td>-----</td><td>96.62</td><td>32.92</td><td>11.26</td><td>29.38</td><td>0.00</td><td>100</td><td>104</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5240.00	111.42	-----	-----	96.62	32.92	11.26	29.38	0.00	100	104
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5150.00	47.30	54.00	-6.70	32.51	33.00	11.18	29.39	0.00	100	104	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5240.00	111.42	-----	-----	96.62	32.92	11.26	29.38	0.00	100	104	AVERAGE																																																																																							



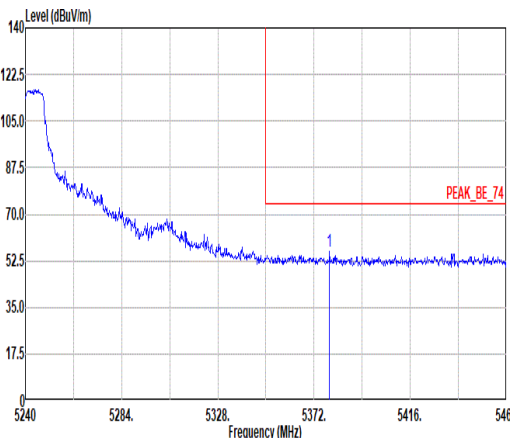
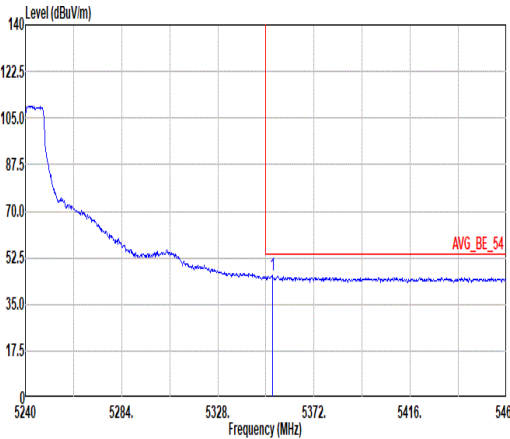


Mode	74																																																							
	Band Edge - R																																																							
	U-NII-1_5.15-5.25_802.11a_CH48_5240MHz																																																							
ANT	0																																																							
Pol.	Vertical						Fundamental																																																	
Peak	 Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1522_240328 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5379.04</td><td>56.03</td><td>74.00</td><td>-17.97</td><td>41.20</td><td>32.00</td><td>11.39</td><td>29.36</td><td>0.00</td><td>100</td><td>104</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5379.04	56.03	74.00	-17.97	41.20	32.00	11.39	29.36	0.00	100	104	PEAK	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	5379.04	56.03	74.00	-17.97	41.20	32.00	11.39	29.36	0.00	100	104	PEAK																																												
Avg	 Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1522_240328 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5352.06</td><td>45.83</td><td>54.00</td><td>-8.17</td><td>31.03</td><td>32.00</td><td>11.37</td><td>29.37</td><td>0.00</td><td>100</td><td>104</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5352.06	45.83	54.00	-8.17	31.03	32.00	11.37	29.37	0.00	100	104	AVERAGE	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	5352.06	45.83	54.00	-8.17	31.03	32.00	11.37	29.37	0.00	100	104	AVERAGE																																												



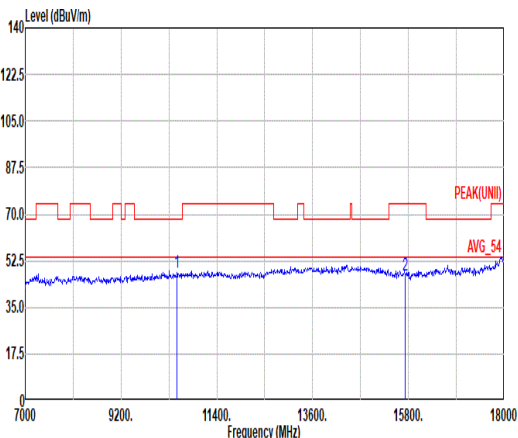
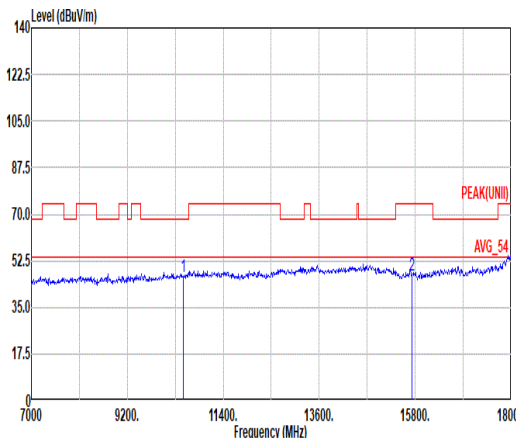


Mode	74																																																																	
	Harmonic																																																																	
	U-NII-1_5.15-5.25_802.11a_CH48_5240MHz																																																																	
ANT	0																																																																	
Pol.	Horizontal						Vertical																																																											
Peak Avg																																																																		
	Site : 03CH16-HY Condition: PEAK(UNII) 3m 91200-1522_240328 HORIZONTAL						Site : 03CH16-HY Condition: PEAK(UNII) 3m 91200-1522_240328 VERTICAL																																																											
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 10480.00</td><td>48.22</td><td>68.20</td><td>-19.98</td><td>59.60</td><td>38.44</td><td>15.90</td><td>66.44</td><td>0.72</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>2 15720.00</td><td>47.27</td><td>74.00</td><td>-26.73</td><td>55.71</td><td>37.76</td><td>19.57</td><td>66.42</td><td>0.65</td><td>--</td><td>--</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 10480.00	48.22	68.20	-19.98	59.60	38.44	15.90	66.44	0.72	--	--	PEAK	2 15720.00	47.27	74.00	-26.73	55.71	37.76	19.57	66.42	0.65	--	--	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																								
1 10480.00	48.22	68.20	-19.98	59.60	38.44	15.90	66.44	0.72	--	--	PEAK																																																							
2 15720.00	47.27	74.00	-26.73	55.71	37.76	19.57	66.42	0.65	--	--	PEAK																																																							

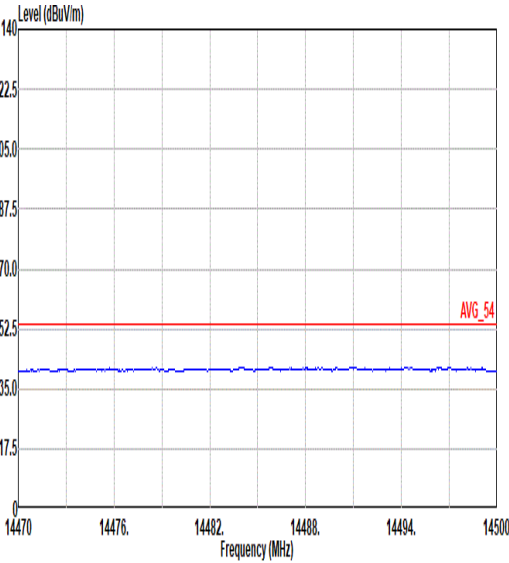
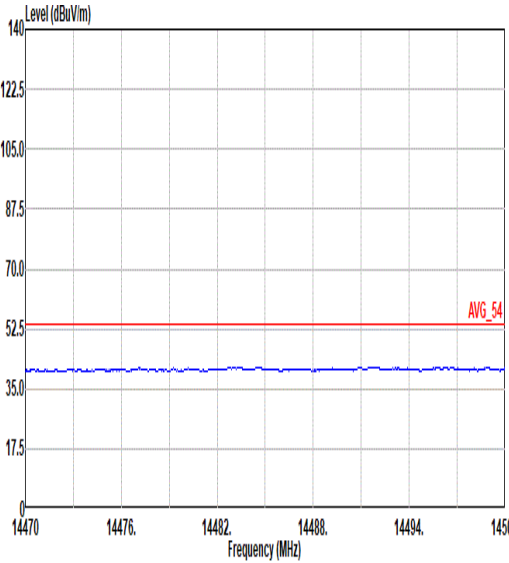
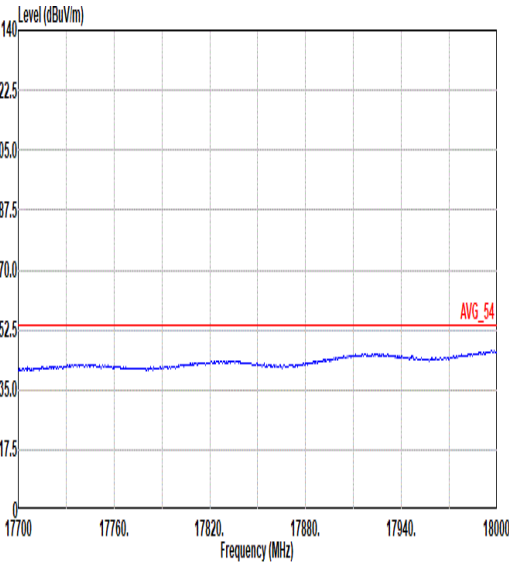
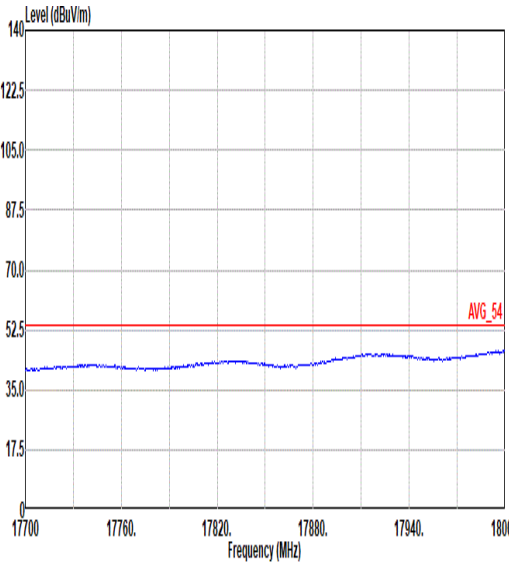


Mode	74	
	Harmonic	
	U-NII-1_5.15-5.25_802.11a_CH48_5240MHz	
ANT	0	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	 Site : 03CH16-HY Condition: AVG_54 3m 91280-1522_240328 HORIZONTAL	 Site : 03CH16-HY Condition: AVG_54 3m 91280-1522_240328 VERTICAL
	 Site : 03CH16-HY Condition: AVG_54 3m 91280-1522_240328 HORIZONTAL	 Site : 03CH16-HY Condition: AVG_54 3m 91280-1522_240328 VERTICAL

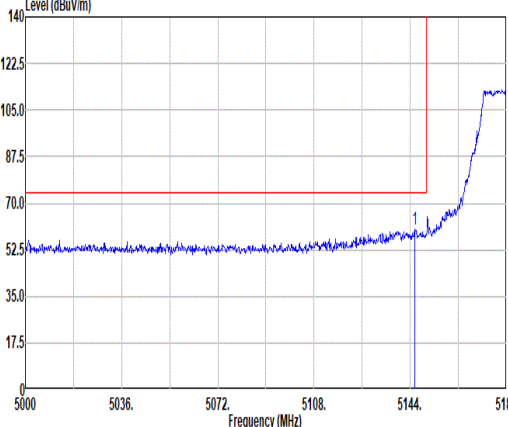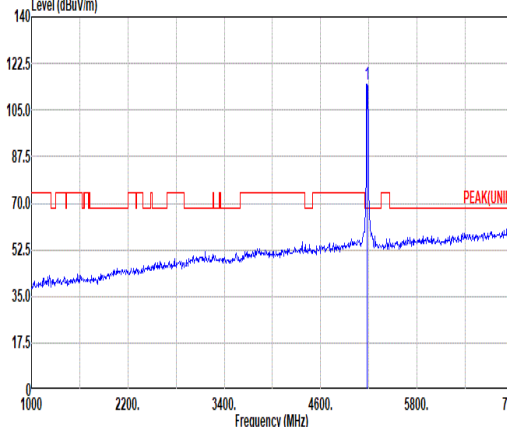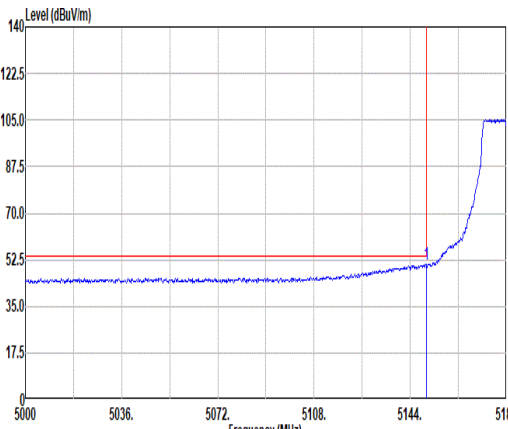
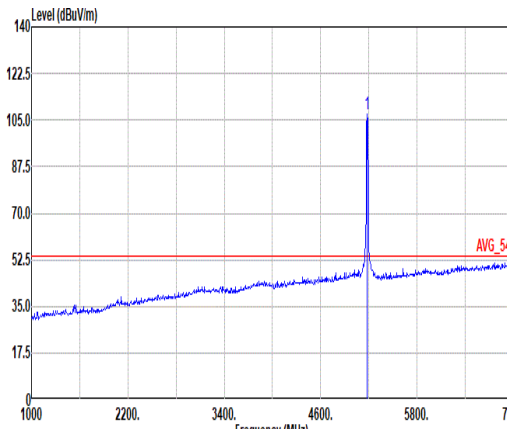


		75																																																									
Mode		Band Edge																																																									
		U-NII-1_5.15-5.25_802.11ac VHT20_CH36_5180MHz																																																									
ANT		0																																																									
Pol.		Horizontal																																																									
Peak																																																											
	Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5145.62</td><td>60.26</td><td>74.00</td><td>-13.74</td><td>45.48</td><td>32.99</td><td>11.18</td><td>29.39</td><td>0.00</td><td>390</td><td>137 PEAK</td></tr></tbody></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5145.62	60.26	74.00	-13.74	45.48	32.99	11.18	29.39	0.00	390
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																
1	5145.62	60.26	74.00	-13.74	45.48	32.99	11.18	29.39	0.00	390	137 PEAK																																																
Fundamental																																																											
	Site : 03CH16-HY Condition: PEAK(UNII) 3m 91200-1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5180.00</td><td>114.68</td><td>-----</td><td>-----</td><td>99.87</td><td>33.00</td><td>11.20</td><td>29.39</td><td>0.00</td><td>390</td><td>137 PEAK</td></tr></tbody></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5180.00	114.68	-----	-----	99.87	33.00	11.20	29.39	0.00	390
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																
1	5180.00	114.68	-----	-----	99.87	33.00	11.20	29.39	0.00	390	137 PEAK																																																
Avg																																																											
	Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5149.94</td><td>50.97</td><td>54.00</td><td>-3.03</td><td>36.18</td><td>33.00</td><td>11.18</td><td>29.39</td><td>0.00</td><td>390</td><td>137 AVERAGE</td></tr></tbody></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5149.94	50.97	54.00	-3.03	36.18	33.00	11.18	29.39	0.00	390
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																
1	5149.94	50.97	54.00	-3.03	36.18	33.00	11.18	29.39	0.00	390	137 AVERAGE																																																
Fundamental																																																											
	Site : 03CH16-HY Condition: AVG_54 3m 91200-1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5180.00</td><td>107.24</td><td>-----</td><td>-----</td><td>92.43</td><td>33.00</td><td>11.20</td><td>29.39</td><td>0.00</td><td>390</td><td>137 AVERAGE</td></tr></tbody></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5180.00	107.24	-----	-----	92.43	33.00	11.20	29.39	0.00	390
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																
1	5180.00	107.24	-----	-----	92.43	33.00	11.20	29.39	0.00	390	137 AVERAGE																																																

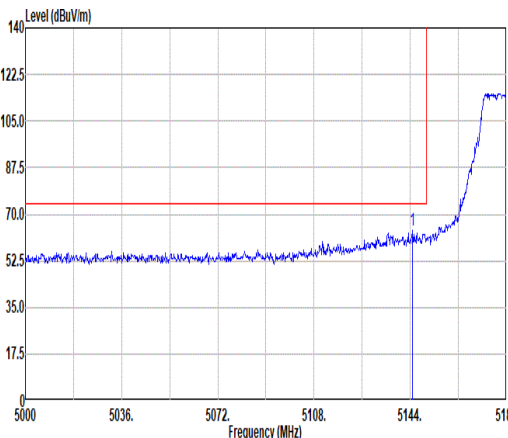
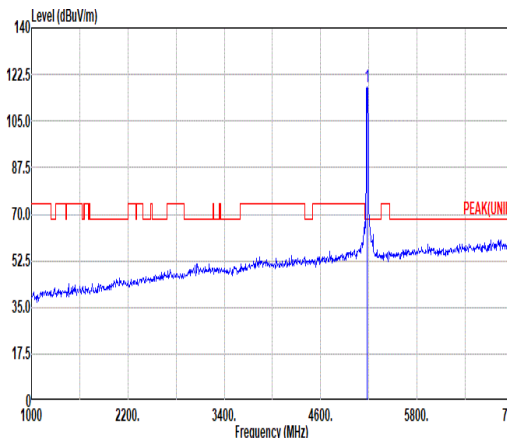
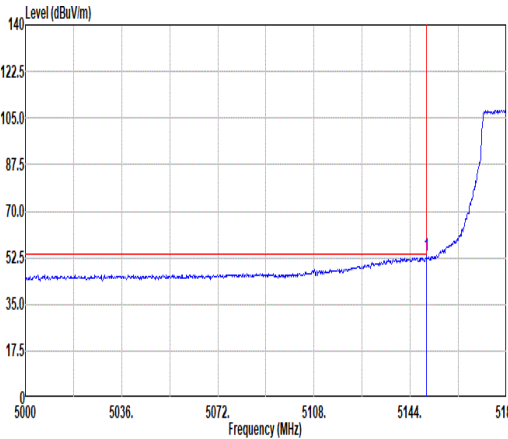
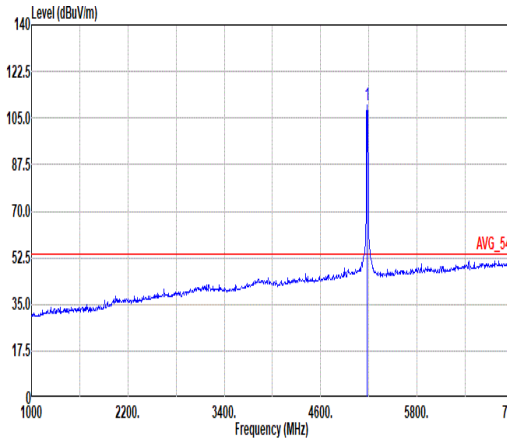


		75																																																																																																																							
Mode		Band Edge																																																																																																																							
		U-NII-1_5.15-5.25_802.11ac VHT20_CH36_5180MHz																																																																																																																							
ANT		0																																																																																																																							
Pol.	Vertical											Fundamental																																																																																																													
Peak																																																																																																																									
	Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1522_240328 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto											Site : 03CH16-HY Condition: PEAK(UNII) 3m 91200-1522_240328 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto																																																																																																													
		<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5144.90</td><td>63.89</td><td>74.00</td><td>-10.11</td><td>49.11</td><td>32.99</td><td>11.18</td><td>29.39</td><td>0.00</td><td>100</td><td>104</td><td>PEAK</td></tr></tbody></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5144.90	63.89	74.00	-10.11	49.11	32.99	11.18	29.39	0.00	100	104	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5180.00</td><td>117.73</td><td>-----</td><td>-----</td><td>102.92</td><td>33.00</td><td>11.20</td><td>29.39</td><td>0.00</td><td>100</td><td>104</td><td>PEAK</td></tr></tbody></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5180.00	117.73	-----	-----	102.92	33.00	11.20	29.39	0.00	100	104	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																														
1	5144.90	63.89	74.00	-10.11	49.11	32.99	11.18	29.39	0.00	100	104	PEAK																																																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																														
1	5180.00	117.73	-----	-----	102.92	33.00	11.20	29.39	0.00	100	104	PEAK																																																																																																													
Avg																																																																																																																									
	Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1522_240328 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto											Site : 03CH16-HY Condition: AVG_54 3m 91200-1522_240328 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto																																																																																																													
		<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5149.94</td><td>53.13</td><td>54.00</td><td>-0.87</td><td>38.34</td><td>33.00</td><td>11.18</td><td>29.39</td><td>0.00</td><td>100</td><td>104</td><td>AVERAGE</td></tr></tbody></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5149.94	53.13	54.00	-0.87	38.34	33.00	11.18	29.39	0.00	100	104	AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5180.00</td><td>109.79</td><td>-----</td><td>-----</td><td>94.98</td><td>33.00</td><td>11.20</td><td>29.39</td><td>0.00</td><td>100</td><td>104</td><td>AVERAGE</td></tr></tbody></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5180.00	109.79	-----	-----	94.98	33.00	11.20	29.39	0.00	100	104	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																														
1	5149.94	53.13	54.00	-0.87	38.34	33.00	11.18	29.39	0.00	100	104	AVERAGE																																																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																														
1	5180.00	109.79	-----	-----	94.98	33.00	11.20	29.39	0.00	100	104	AVERAGE																																																																																																													



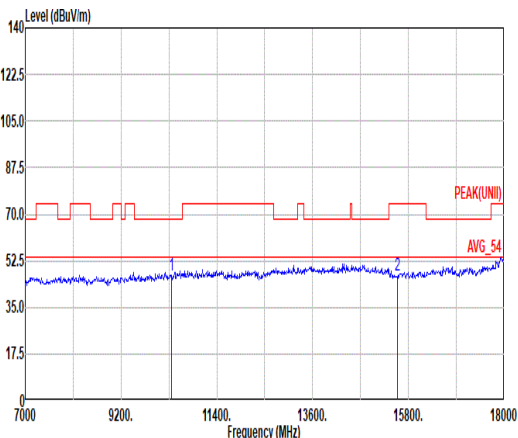
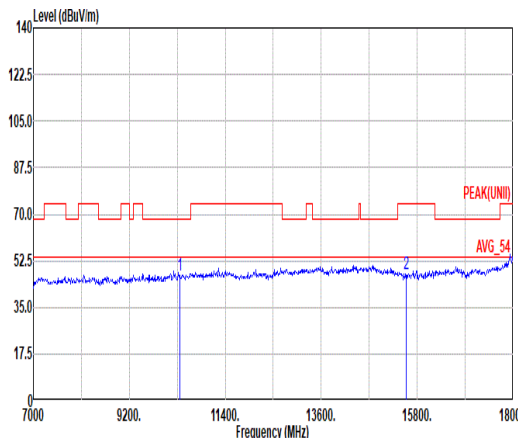


Mode	75																																																																	
	Harmonic																																																																	
	U-NII-1_5.15-5.25_802.11ac VHT20_CH36_5180MHz																																																																	
ANT	0																																																																	
Pol.	Horizontal						Vertical																																																											
Peak Avg																																																																		
	Site : 03CH16-HY Condition: PEAK(UNII) 3m 91200-1522_240328 HORIZONTAL																																																																	
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10360.00</td><td>47.01</td><td>68.20</td><td>-21.19</td><td>58.40</td><td>38.60</td><td>15.81</td><td>66.53</td><td>0.73</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>15540.00</td><td>46.98</td><td>74.00</td><td>-27.02</td><td>55.37</td><td>37.80</td><td>19.50</td><td>66.34</td><td>0.65</td><td>--</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10360.00	47.01	68.20	-21.19	58.40	38.60	15.81	66.53	0.73	--	PEAK	2	15540.00	46.98	74.00	-27.02	55.37	37.80	19.50	66.34	0.65	--
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																								
1	10360.00	47.01	68.20	-21.19	58.40	38.60	15.81	66.53	0.73	--	PEAK																																																							
2	15540.00	46.98	74.00	-27.02	55.37	37.80	19.50	66.34	0.65	--	PEAK																																																							
Site : 03CH16-HY Condition: PEAK(UNII) 3m 91200-1522_240328 VERTICAL																																																																		
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10360.00</td><td>47.17</td><td>68.20</td><td>-21.03</td><td>58.56</td><td>38.60</td><td>15.81</td><td>66.53</td><td>0.73</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>15540.00</td><td>47.74</td><td>74.00</td><td>-26.26</td><td>56.13</td><td>37.80</td><td>19.50</td><td>66.34</td><td>0.65</td><td>--</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10360.00	47.17	68.20	-21.03	58.56	38.60	15.81	66.53	0.73	--	PEAK	2	15540.00	47.74	74.00	-26.26	56.13	37.80	19.50	66.34	0.65	--	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																								
1	10360.00	47.17	68.20	-21.03	58.56	38.60	15.81	66.53	0.73	--	PEAK																																																							
2	15540.00	47.74	74.00	-26.26	56.13	37.80	19.50	66.34	0.65	--	PEAK																																																							

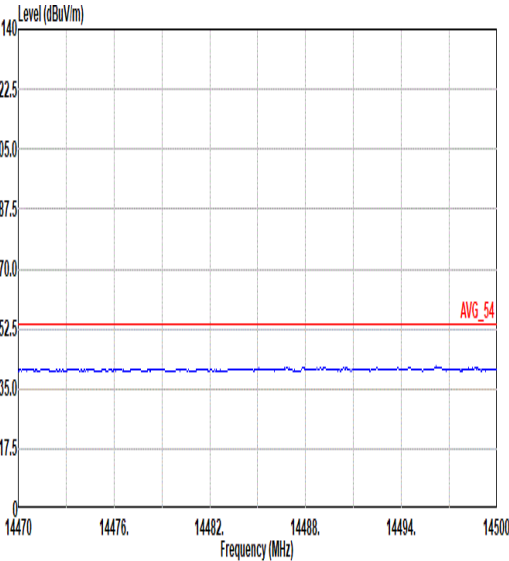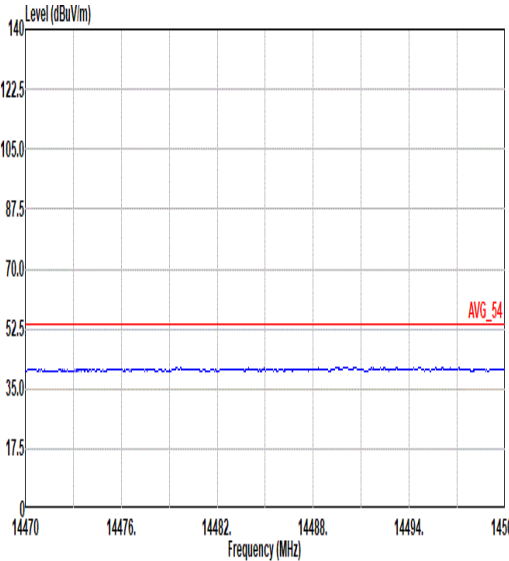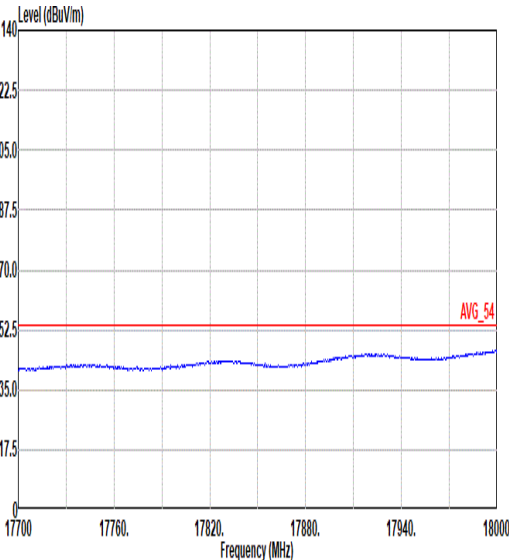
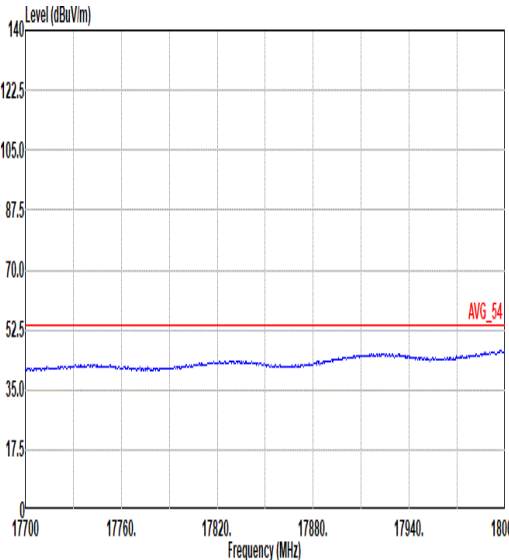


Mode	75	
	Harmonic	
	U-NII-1_5.15-5.25_802.11ac VHT20_CH36_5180MHz	
ANT	0	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	 Site : 03CH16-HY Condition: AVG_54 3m 91280-1522_240328 HORIZONTAL	 Site : 03CH16-HY Condition: AVG_54 3m 91280-1522_240328 VERTICAL
	 Site : 03CH16-HY Condition: AVG_54 3m 91280-1522_240328 HORIZONTAL	 Site : 03CH16-HY Condition: AVG_54 3m 91280-1522_240328 VERTICAL

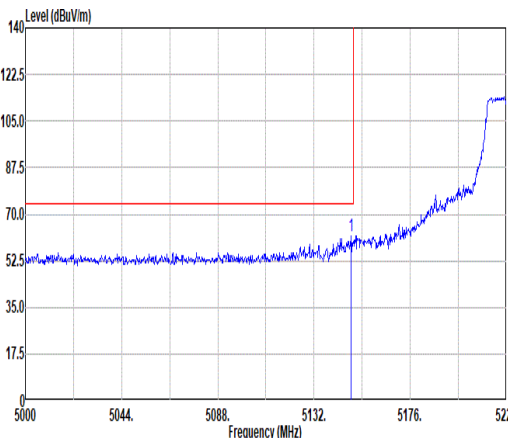
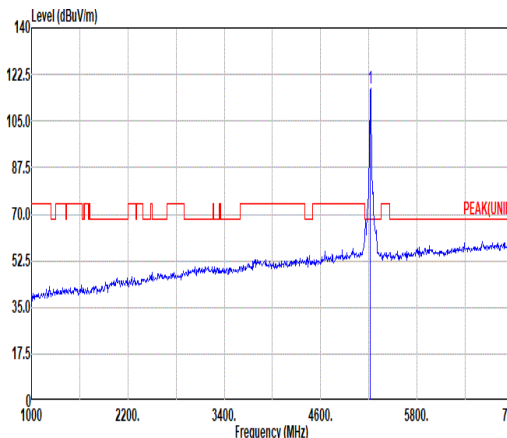
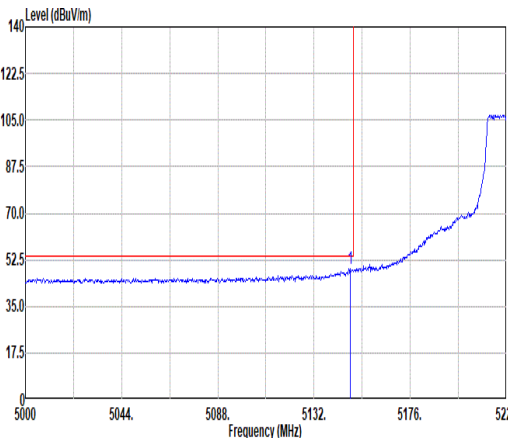
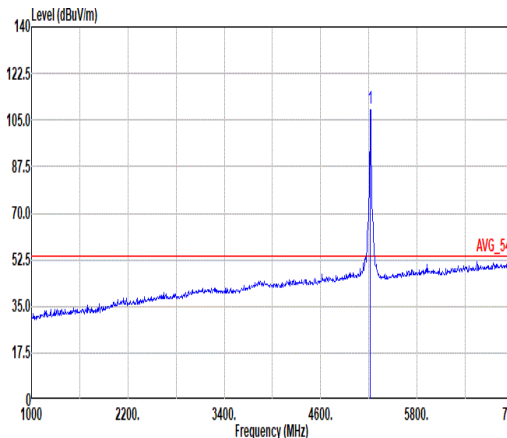


		76																																																									
Mode		Band Edge - L																																																									
		U-NII-1_5.15-5.25_802.11ac VHT20_CH44_5220MHz																																																									
ANT		0																																																									
Pol.		Horizontal																																																									
Peak																																																											
	Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5148.94</td><td>61.76</td><td>74.00</td><td>-12.24</td><td>46.97</td><td>33.00</td><td>11.18</td><td>29.39</td><td>0.00</td><td>400</td><td>135 PEAK</td></tr></tbody></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5148.94	61.76	74.00	-12.24	46.97	33.00	11.18	29.39	0.00	400
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																	
1	5148.94	61.76	74.00	-12.24	46.97	33.00	11.18	29.39	0.00	400	135 PEAK																																																
Fundamental																																																											
	Site : 03CH16-HY Condition: PEAK(UNII) 3m 91200-1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5220.00</td><td>117.25</td><td>-----</td><td>-----</td><td>102.44</td><td>32.95</td><td>11.24</td><td>29.38</td><td>0.00</td><td>400</td><td>135 PEAK</td></tr></tbody></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5220.00	117.25	-----	-----	102.44	32.95	11.24	29.38	0.00	400
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																	
1	5220.00	117.25	-----	-----	102.44	32.95	11.24	29.38	0.00	400	135 PEAK																																																
Avg																																																											
	Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5148.72</td><td>49.27</td><td>54.00</td><td>-4.73</td><td>34.48</td><td>33.00</td><td>11.18</td><td>29.39</td><td>0.00</td><td>400</td><td>135 AVERAGE</td></tr></tbody></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5148.72	49.27	54.00	-4.73	34.48	33.00	11.18	29.39	0.00	400
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																	
1	5148.72	49.27	54.00	-4.73	34.48	33.00	11.18	29.39	0.00	400	135 AVERAGE																																																
Avg																																																											
	Site : 03CH16-HY Condition: AVG_54 3m 91200-1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5220.00</td><td>109.17</td><td>-----</td><td>-----</td><td>94.36</td><td>32.95</td><td>11.24</td><td>29.38</td><td>0.00</td><td>400</td><td>135 AVERAGE</td></tr></tbody></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5220.00	109.17	-----	-----	94.36	32.95	11.24	29.38	0.00	400
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																	
1	5220.00	109.17	-----	-----	94.36	32.95	11.24	29.38	0.00	400	135 AVERAGE																																																

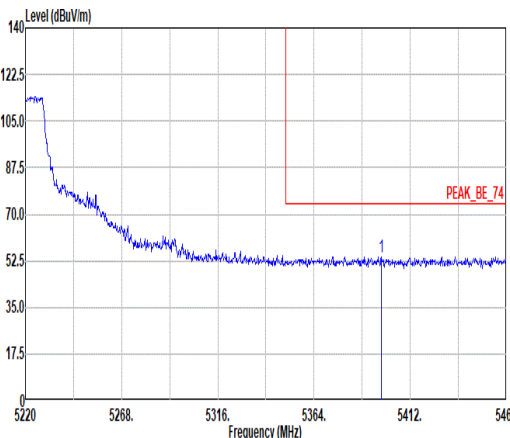
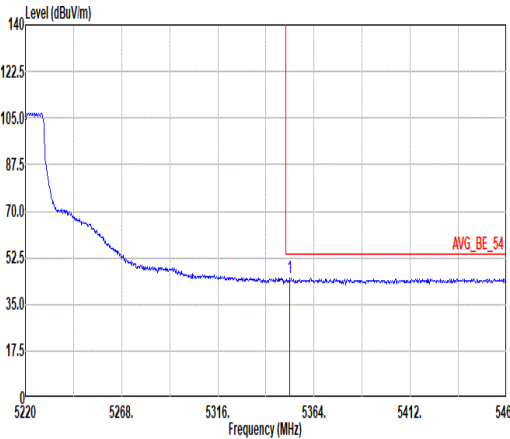


Mode	76																																																							
	Band Edge - R																																																							
	U-NII-1_5.15-5.25_802.11ac VHT20_CH44_5220MHz																																																							
ANT	0																																																							
Pol.	Horizontal						Fundamental																																																	
Peak	 Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1522 240328 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5397.60</td><td>54.03</td><td>74.00</td><td>-19.97</td><td>39.18</td><td>32.80</td><td>11.41</td><td>29.36</td><td>0.00</td><td>400</td><td>135</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5397.60	54.03	74.00	-19.97	39.18	32.80	11.41	29.36	0.00	400	135	PEAK	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	5397.60	54.03	74.00	-19.97	39.18	32.80	11.41	29.36	0.00	400	135	PEAK																																												
Avg	 Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1522 240328 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5352.00</td><td>44.93</td><td>54.00</td><td>-9.07</td><td>30.14</td><td>32.80</td><td>11.36</td><td>29.37</td><td>0.00</td><td>400</td><td>135</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5352.00	44.93	54.00	-9.07	30.14	32.80	11.36	29.37	0.00	400	135	AVERAGE	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	5352.00	44.93	54.00	-9.07	30.14	32.80	11.36	29.37	0.00	400	135	AVERAGE																																												

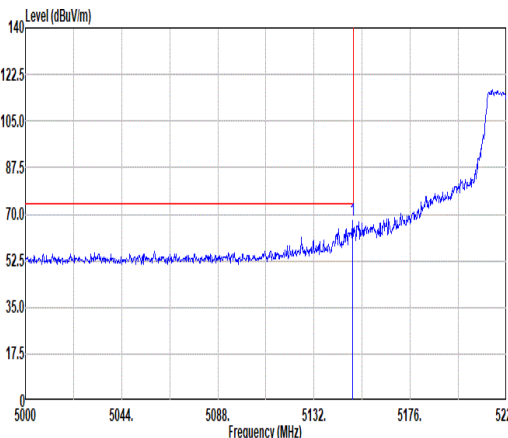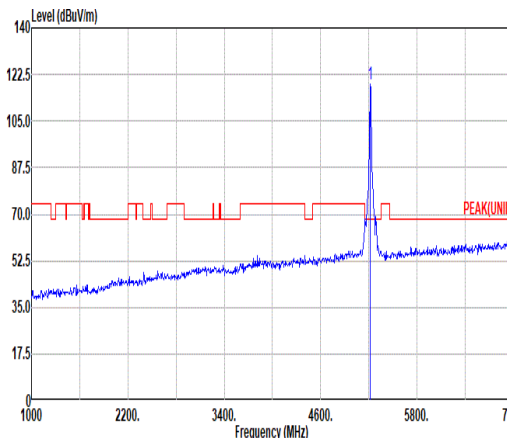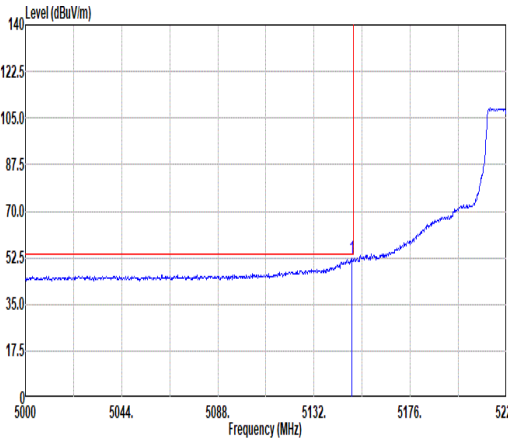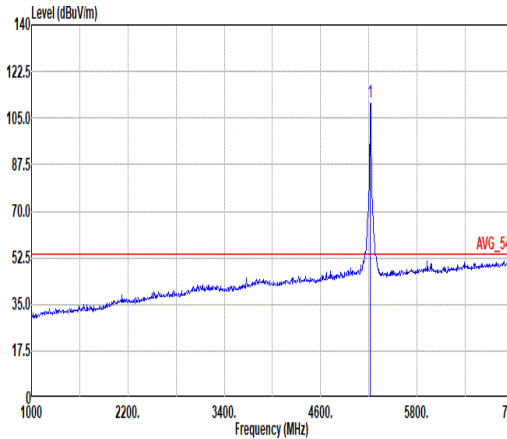

		76																																																																																																							
Mode		Band Edge - L																																																																																																							
		U-NII-1_5.15-5.25_802.11ac VHT20_CH44_5220MHz																																																																																																							
ANT		0																																																																																																							
Pol.		Vertical						Fundamental																																																																																																	
Peak																																																																																																									
	Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1522_240328 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto						Site : 03CH16-HY Condition: PEAK(UNII) 3m 91200-1522_240328 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto																																																																																																		
		<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.60</td><td>67.50</td><td>74.00</td><td>-6.50</td><td>52.71</td><td>33.00</td><td>11.18</td><td>29.39</td><td>0.00</td><td>100 89 PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5149.60	67.50	74.00	-6.50	52.71	33.00	11.18	29.39	0.00	100 89 PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5220.00</td><td>118.75</td><td>-----</td><td>-----</td><td>103.92</td><td>32.98</td><td>11.23</td><td>29.38</td><td>0.00</td><td>100 89 PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5220.00	118.75	-----	-----	103.92	32.98	11.23	29.38	0.00	100 89 PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																															
1	5149.60	67.50	74.00	-6.50	52.71	33.00	11.18	29.39	0.00	100 89 PEAK																																																																																															
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																															
1	5220.00	118.75	-----	-----	103.92	32.98	11.23	29.38	0.00	100 89 PEAK																																																																																															
Avg																																																																																																									
	Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1522_240328 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto						Site : 03CH16-HY Condition: AVG_54 3m 91200-1522_240328 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto																																																																																																		
		<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.16</td><td>52.32</td><td>54.00</td><td>-1.68</td><td>37.53</td><td>33.00</td><td>11.18</td><td>29.39</td><td>0.00</td><td>100 89 AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5149.16	52.32	54.00	-1.68	37.53	33.00	11.18	29.39	0.00	100 89 AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5220.00</td><td>110.75</td><td>-----</td><td>-----</td><td>95.94</td><td>32.95</td><td>11.24</td><td>29.38</td><td>0.00</td><td>100 89 AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5220.00	110.75	-----	-----	95.94	32.95	11.24	29.38	0.00	100 89 AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																															
1	5149.16	52.32	54.00	-1.68	37.53	33.00	11.18	29.39	0.00	100 89 AVERAGE																																																																																															
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																															
1	5220.00	110.75	-----	-----	95.94	32.95	11.24	29.38	0.00	100 89 AVERAGE																																																																																															

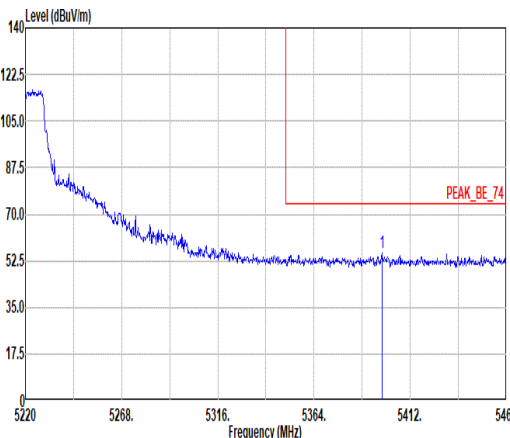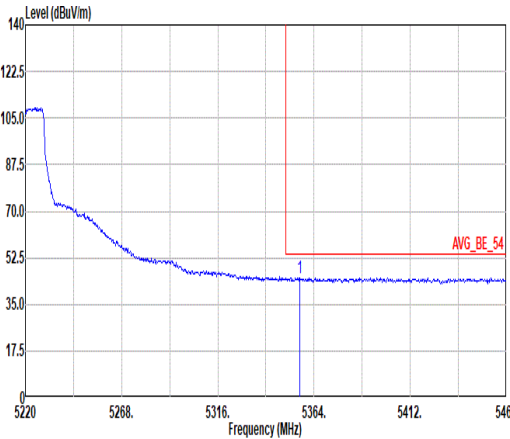

Mode	76																																																							
	Band Edge - R																																																							
	U-NII-1_5.15-5.25_802.11ac VHT20_CH44_5220MHz																																																							
ANT	0																																																							
Pol.	Vertical						Fundamental																																																	
Peak	 Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1522_240328 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 5397.84</td><td>55.24</td><td>74.00</td><td>-18.76</td><td>40.39</td><td>32.00</td><td>11.41</td><td>29.36</td><td>0.00</td><td>100</td><td>89</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 5397.84	55.24	74.00	-18.76	40.39	32.00	11.41	29.36	0.00	100	89	PEAK	Blank					
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	Remark																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																														
1 5397.84	55.24	74.00	-18.76	40.39	32.00	11.41	29.36	0.00	100	89	PEAK																																													
Avg	 Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1522_240328 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 5356.00</td><td>45.15</td><td>54.00</td><td>-8.85</td><td>30.35</td><td>32.00</td><td>11.37</td><td>29.37</td><td>0.00</td><td>100</td><td>89</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 5356.00	45.15	54.00	-8.85	30.35	32.00	11.37	29.37	0.00	100	89	AVERAGE	Blank					
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	Remark																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																														
1 5356.00	45.15	54.00	-8.85	30.35	32.00	11.37	29.37	0.00	100	89	AVERAGE																																													