

FCC Test Report (Spot Check)

Report No.: RF180102C33C-38

FCC ID: PZWBHT1800Q

Original FCC ID: PZWBHT1700BQL

Model: BHT-1800QWB-3

Series Model: BHT-1800QWB-1, BHT-1800QWB-2 (Refer to item 3.1 for the more details)

Received Date: Jan. 02, 2018

Test Date: Jan. 23 ~ Jul. 18, 2018

Issued Date: Jul. 24, 2018

Applicant: DENSO WAVE INCORPORATED

Address: 1, Yoshiike, Kusagi, Agui-cho, Chita-gun, Aichi, 470-2297 Japan

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan, R.O.C.

Test Location: No.19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City 33383, TAIWAN (R.O.C.)

**FCC Registration/
Designation Number:** 788550 / TW0003



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. This report should not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

Table of Contents

Release Control Record	3
1 Certificate of Conformity.....	4
2 Summary of Test Results	5
2.1 Measurement Uncertainty	5
2.2 Modification Record	5
3 General Information.....	6
3.1 General Description of EUT	6
3.2 Description of Test Modes	8
3.2.1 Test Mode Applicability and Tested Channel Detail.....	9
3.3 Duty Cycle of Test Signal	10
3.4 Description of Support Units	11
3.4.1 Configuration of System under Test	11
3.5 General Description of Applied Standards	11
4 Test Types and Results	12
4.1 6dB Bandwidth Measurement.....	12
4.1.1 Limits of 6dB Bandwidth Measurement.....	12
4.1.2 Test Setup.....	12
4.1.3 Test Instruments	12
4.1.4 Test Procedure	12
4.1.5 Deviation from Test Standard	12
4.1.6 EUT Operating Conditions.....	12
4.1.7 Test Result.....	13
4.2 Conducted Output Power Measurement.....	14
4.2.1 Limits of Conducted Output Power Measurement	14
4.2.2 Test Setup.....	14
4.2.3 Test Instruments	14
4.2.4 Test Procedures.....	14
4.2.5 Deviation from Test Standard	14
4.2.6 EUT Operating Conditions.....	14
4.2.7 Test Results	15
4.3 Power Spectral Density Measurement.....	17
4.3.1 Limits of Power Spectral Density Measurement	17
4.3.2 Test Setup.....	17
4.3.3 Test Instruments	17
4.3.4 Test Procedure	17
4.3.5 Deviation from Test Standard	17
4.3.6 EUT Operating Condition	17
4.3.7 Test Results	18
4.4 Conducted Out of Band Emission Measurement.....	19
4.4.1 Limits of Conducted Out of Band Emission Measurement	19
4.4.2 Test Setup.....	19
4.4.3 Test Instruments	19
4.4.4 Test Procedure	19
4.4.5 Deviation from Test Standard	19
4.4.6 EUT Operating Condition	20
4.4.7 Test Results	20
5 Pictures of Test Arrangements.....	22
Appendix – Information of the Testing Laboratories	23

Release Control Record

Issue No.	Description	Date Issued
RF180102C33C-38	Original release	Jul. 24, 2018

1 Certificate of Conformity

Product: Barcode Handy Terminal, 2D Code Handy Terminal

Brand: DENSO

Model: BHT-1800QWB-3

Series Model: BHT-1800QWB-1, BHT-1800QWB-2 (Refer to item 3.1 for the more details)

Sample Status: Engineering sample

Applicant: DENSO WAVE INCORPORATED

Test Date: Jan. 23 ~ Jul. 18, 2018

Standards: 47 CFR FCC Part 15, Subpart C (Section 15.247)
ANSI C63.10:2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

Prepared by : Pettie Chen, **Date:** Jul. 24, 2018
Pettie Chen / Senior Specialist

Approved by : Bruce Chen, **Date:** Jul. 24, 2018
Bruce Chen / Project Engineer

2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (Section 15.247)			
FCC Clause	Test Item	Result	Remarks
15.247(d)	Antenna Port Emission	Pass	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	Pass	Meet the requirement of limit.
15.247(b)	Conducted power	Pass	Meet the requirement of limit.
15.247(e)	Power Spectral Density	Pass	Meet the requirement of limit.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (\pm)
Conducted Emissions at mains ports	150kHz ~ 30MHz	2.94 dB
Radiated Emissions up to 1 GHz	30MHz ~ 200MHz	3.63 dB
	200MHz ~ 1000MHz	3.64 dB
Radiated Emissions above 1 GHz	1GHz ~ 18GHz	2.29 dB
	18GHz ~ 40GHz	2.29 dB

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	Barcode Handy Terminal, 2D Code Handy Terminal
Brand	DENSO
Model	BHT-1800QWB-3
Series Model	BHT-1800QWB-1, BHT-1800QWB-2
Model Difference	Refer to Note
Sample Status	Engineering sample
Power Supply Rating	3.85Vdc (battery) 12Vdc (Cradle)
Modulation Type	CCK, DQPSK, DBPSK for DSSS 16QAM, QPSK, BPSK for OFDM
Modulation Technology	DSSS, OFDM
Transfer Rate	802.11b: 11.0/ 5.5/ 2.0/ 1.0Mbps 802.11g: 54.0/ 48.0/ 36.0/ 24.0/ 18.0/ 12.0/ 9.0/ 6.0Mbps 802.11n: up to 150Mbps
Operating Frequency	2412 ~ 2462MHz
Number of Channel	11 for 802.11b, 802.11g, 802.11n (HT20) 7 for 802.11n (HT40)
Output Power	194.536mW
Antenna Type	Refer to note
Antenna Connector	Refer to note
Accessory Device	NA
Data Cable Supplied	NA

Note:

- Exhibit prepared for FCC Spot Check Verification report, the format, test items and amount of spot-check test data are decided by applicant's engineering judgment, for more details please refer to declaration letter exhibit.
- All models are listed as below.

Model Name	base module	CPU	Software	LCD	WLAN / NFC		Audio				
			OS	5"	WLAN	NFC	speaker	Main MIC	Sub MIC	Receiver	Ear phone
BHT-1800QWB-3	5inch WLAN/BT	APQ8009	Android	○	○	○	○	○	○	○	○
BHT-1800QWB-1	5inch WLAN/BT	APQ8009	Android	○	○		○				○
BHT-1800QWB-2	5inch WLAN/BT	APQ8009	Android	○	○		○	○	○	○	○

Model Name	base module	Sensor	Charge	Reading		
		IR Reader	wireless charge	2D	Camera (rear)	Camera (front)
BHT-1800QWB-3	5inch WLAN/BT	○	○	○	○	○
BHT-1800QWB-1	5inch WLAN/BT			○	○	
BHT-1800QWB-2	5inch WLAN/BT	○		○	○	○

*Model: BHT-1800QWB-3 was chosen for the final tests.

*NFC Limited module (include WPC) (Brand: DENSO, Model: DWI003, FCC ID: PZWDWI003) collocated in EUT (model: BHT-1800QWB-3).

3. The EUT provides 1 completed transmitter and 1 receiver.

Modulation Mode	TX Function
802.11b	1TX
802.11g	1TX
802.11n (HT20)	1TX
802.11n (HT40)	1TX

4. The EUT with follow antennas gain is listed as table below.

Brand	Antenna Gain(dBi) Including cable loss	Frequency range (MHz to MHz)	Antenna Type	Connector Type	Cable Loss(dB) (External only)	Cable Length (External only)
WHAYU	2.39	2.4~2.4835GHz	PIFA	Metal shrapnel	1	30cm
	5.03	5.15~5.25GHz	PIFA	Metal shrapnel	1.7	30cm
	4.89	5.25~5.35GHz	PIFA	Metal shrapnel	1.7	30cm
	4.98	5.47~5.725GHz	PIFA	Metal shrapnel	1.7	30cm
	4.11	5.725~5.850GHz	PIFA	Metal shrapnel	1.7	30cm

5. The EUT consumes power from the following battery.

Battery (For BHT-1800 Used)	
Brand	DENSO
Model	BT-180LA
Rating	2900mAh, 3.85Vdc, 11.165Wh

6. The client provides the following cradles for tests. (Support unit only)

LAN Cradle (For BHT-1800 Used) (Support unit)	
Brand	DENSO
Model	CU-BL-18
Output Power	12Vdc, 4.16A, 50W

USB Cradle (For BHT-1800 Used) (Support unit)	
Brand	DENSO
Model	CU-BU1-18
Output Power	12Vdc, 4.16A, 50W

Adapter for cradle (Support unit)	
Brand	FSP GROUP INC.
Model	FSP050-DBAE1
Input Power	100-240Vac, 1.5A, 50/60Hz
Output Power	12Vdc, 4.16A, 50W
Power Line	1.2m non-shielded DC cable with 1 core attached on adapter

*After pre-testing, USB cradle is the worst case for the final tests.

3.2 Description of Test Modes

11 channels are provided for 802.11b, 802.11g and 802.11n (HT20):

Channel	Frequency	Channel	Frequency
1	2412MHz	7	2442MHz
2	2417MHz	8	2447MHz
3	2422MHz	9	2452MHz
4	2427MHz	10	2457MHz
5	2432MHz	11	2462MHz
6	2437MHz		

7 channels are provided for 802.11n (HT40):

Channel	Frequency	Channel	Frequency
3	2422MHz	7	2442MHz
4	2427MHz	8	2447MHz
5	2432MHz	9	2452MHz
6	2437MHz		

3.2.1 Test Mode Applicability and Tested Channel Detail

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE \geq 1G	RE<1G	PLC	APCM	
A	-	-	-	√	Power from battery
B	-	-	-	-	Power from Cradle

Where **RE \geq 1G**: Radiated Emission above 1GHz & Bandedge Measurement
RE<1G: Radiated Emission below 1GHz

PLC: Power Line Conducted Emission
APCM: Antenna Port Conducted Measurement

Note: "-" means no effect.

Antenna Port Conducted Measurement:

- ☒ This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0
A	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0

Test Condition:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
APCM	25deg. C, 60%RH	120Vac, 60Hz	Chris Lin


3.3 Duty Cycle of Test Signal

Duty cycle of test signal is > 98 %, duty factor is not required.

Duty cycle of test signal is < 98%, duty factor shall be considered.

802.11b: Duty cycle = $8.215/8.425 = 0.975$, Duty factor = $10 * \log(1/0.975) = 0.11$

802.11g: Duty cycle = $1.355/1.585 = 0.855$, Duty factor = $10 * \log(1/0.855) = 0.68$

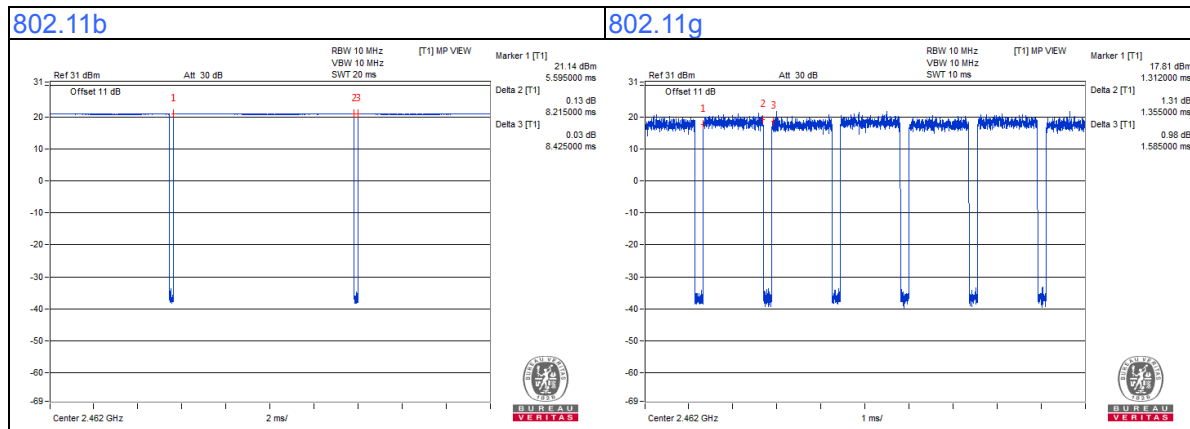

3.4 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Notebook	DELL	E5430	2RL3YW1	FCC DoC Approved	-
B.	Cradle	DENSO	CU-BU1-18	NA	NA	Provided by manufacturer
C.	Adapter	FSP GROUP INC.	FSP050-DBAE1	NA	NA	Provided by manufacturer

Note: All power cords of the above support units are non-shielded (1.8m).


ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	USB cable	1	0.5	Y	0	-
2.	DC cable	1	1.2	N	1	Provided by manufacturer

3.4.1 Configuration of System under Test

Test Mode A



Test Mode B

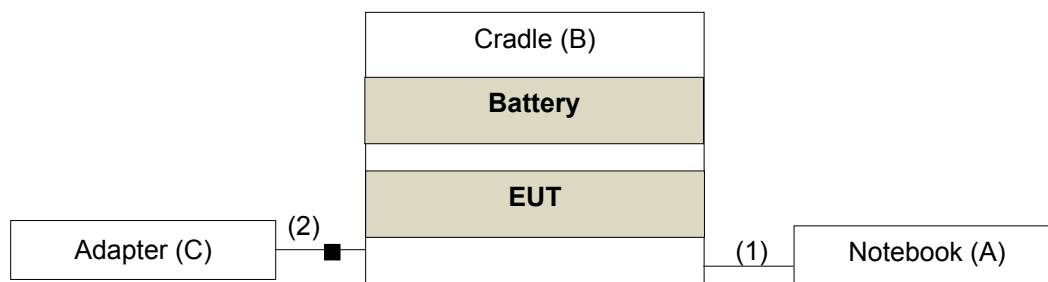

3.5 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C (15.247)

KDB 558074 D01 15.247 Meas Guidance v05

ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.


4 Test Types and Results

4.1 6dB Bandwidth Measurement

4.1.1 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.1.2 Test Setup



4.1.3 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100040	Aug. 18, 2017	Aug. 17, 2018
High Speed Peak Power Meter	ML2495A	0824012	Aug. 18, 2017	Aug. 17, 2018
Power Sensor	MA2411B	0738171	Aug. 18, 2017	Aug. 17, 2018

4.1.4 Test Procedure

- Set resolution bandwidth (RBW) = 100kHz
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = average.
- Trace mode = max hold.
- Sweep = auto couple.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

4.1.5 Deviation from Test Standard

No deviation.

4.1.6 EUT Operating Conditions


The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.1.7 Test Result

FCC ID: PZWBHT1700BQL (initial)

802.11b


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Minimum Limit (MHz)	Pass / Fail
11	2462	9.11	0.5	Pass

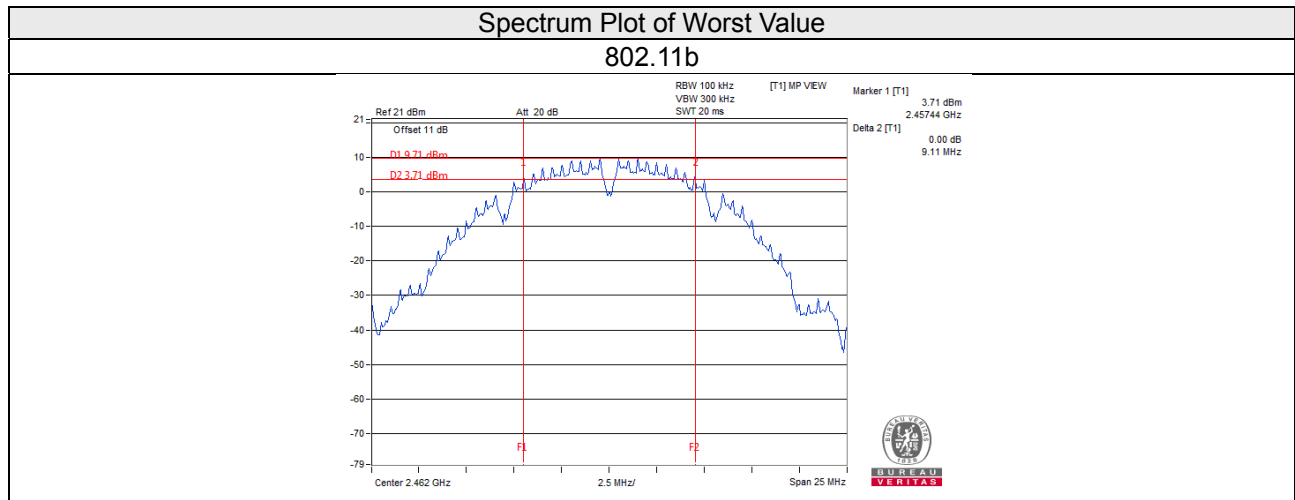

FCC ID: PZWBHT1800Q (new)

802.11b

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Minimum Limit (MHz)	Pass / Fail
11	2462	9.03	0.5	Pass

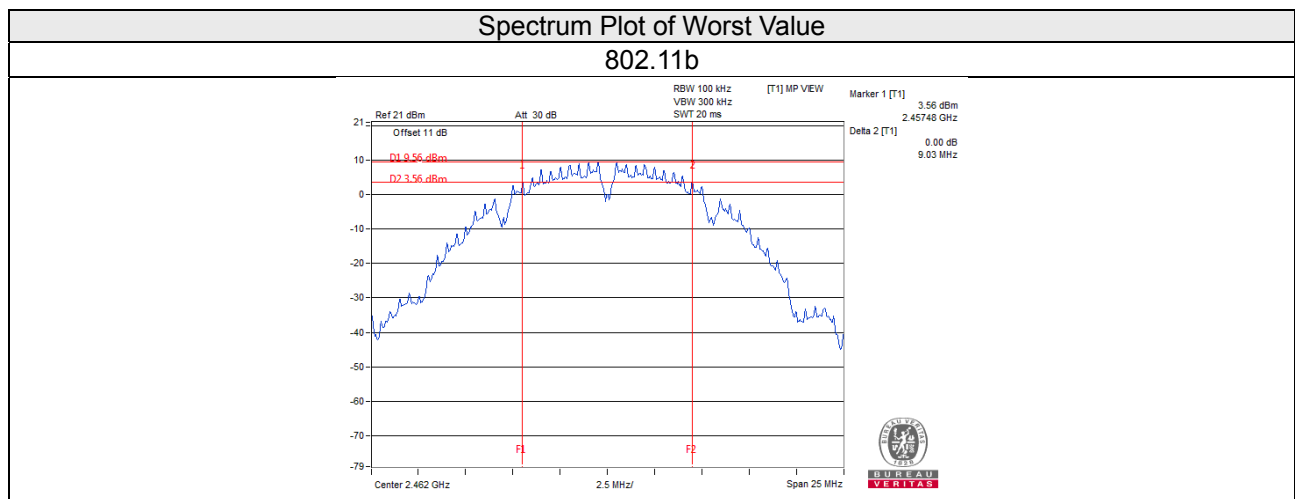


4.2 Conducted Output Power Measurement

4.2.1 Limits of Conducted Output Power Measurement

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30dBm)

4.2.2 Test Setup



4.2.3 Test Instruments

Refer to section 4.1.3 to get information of above instrument.

4.2.4 Test Procedures

A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the power level.

4.2.5 Deviation from Test Standard

No deviation.

4.2.6 EUT Operating Conditions

Same as Item 4.1.6.

4.2.7 Test Results

FCC ID: PZWBHT1700BQL (initial)

802.11b

Channel	Frequency (MHz)	Peak Power (mW)	Peak Power (dBm)	Limit (dBm)	Pass / Fail
1	2412	126.765	21.03	30	Pass
6	2437	127.057	21.04	30	Pass
11	2462	128.529	21.09	30	Pass

802.11g

Channel	Frequency (MHz)	Peak Power (mW)	Peak Power (dBm)	Limit (dBm)	Pass / Fail
1	2412	194.536	22.89	30	Pass
6	2437	190.985	22.81	30	Pass
11	2462	192.752	22.85	30	Pass

802.11b

Channel	Frequency (MHz)	Average Power (mW)	Average Power (dBm)
1	2412	76.033	18.81
6	2437	66.834	18.25
11	2462	65.013	18.13

802.11g

Channel	Frequency (MHz)	Average Power (mW)	Average Power (dBm)
1	2412	45.186	16.55
6	2437	46.774	16.70
11	2462	48.641	16.87

FCC ID: PZWBHT1800Q (new)

802.11b

Channel	Frequency (MHz)	Peak Power (mW)	Peak Power (dBm)	Limit (dBm)	Pass / Fail
1	2412	122.744	20.89	30	Pass
6	2437	124.451	20.95	30	Pass
11	2462	125.603	20.99	30	Pass

802.11g

Channel	Frequency (MHz)	Peak Power (mW)	Peak Power (dBm)	Limit (dBm)	Pass / Fail
1	2412	187.068	22.72	30	Pass
6	2437	185.353	22.68	30	Pass
11	2462	184.927	22.67	30	Pass

802.11b

Channel	Frequency (MHz)	Average Power (mW)	Average Power (dBm)
1	2412	72.111	18.58
6	2437	62.23	17.94
11	2462	61.235	17.87

802.11g


Channel	Frequency (MHz)	Average Power (mW)	Average Power (dBm)
1	2412	41.783	16.21
6	2437	43.053	16.34
11	2462	45.186	16.55

4.3 Power Spectral Density Measurement

4.3.1 Limits of Power Spectral Density Measurement

The Maximum of Power Spectral Density Measurement is 8dBm.

4.3.2 Test Setup



4.3.3 Test Instruments

Refer to section 4.1.3 to get information of above instrument.

4.3.4 Test Procedure

- Set analyzer center frequency to DTS channel center frequency.
- Set the span to 1.5 times the DTS bandwidth.
- Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- Set the VBW $\geq 3 \times \text{RBW}$.
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level within the RBW.

4.3.5 Deviation from Test Standard

No deviation.


4.3.6 EUT Operating Condition

Same as Item 4.1.6

4.3.7 Test Results


FCC ID: PZWBHT1700BQL (initial)

802.11b

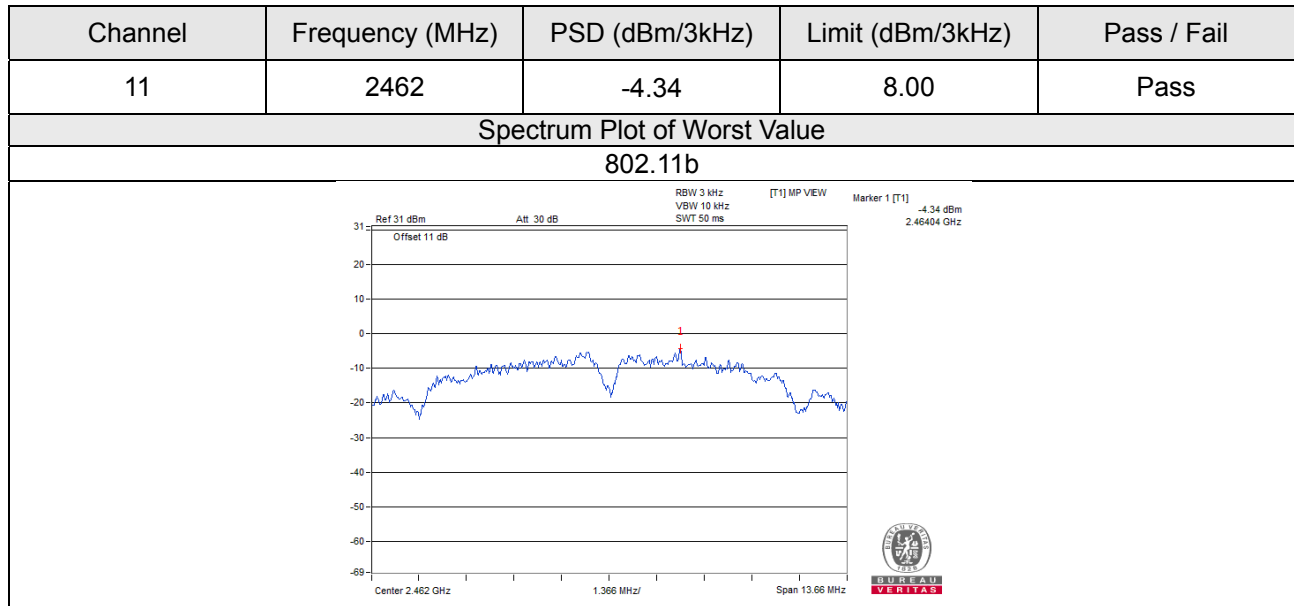

FCC ID: PZWBHT1800Q (new)

802.11b

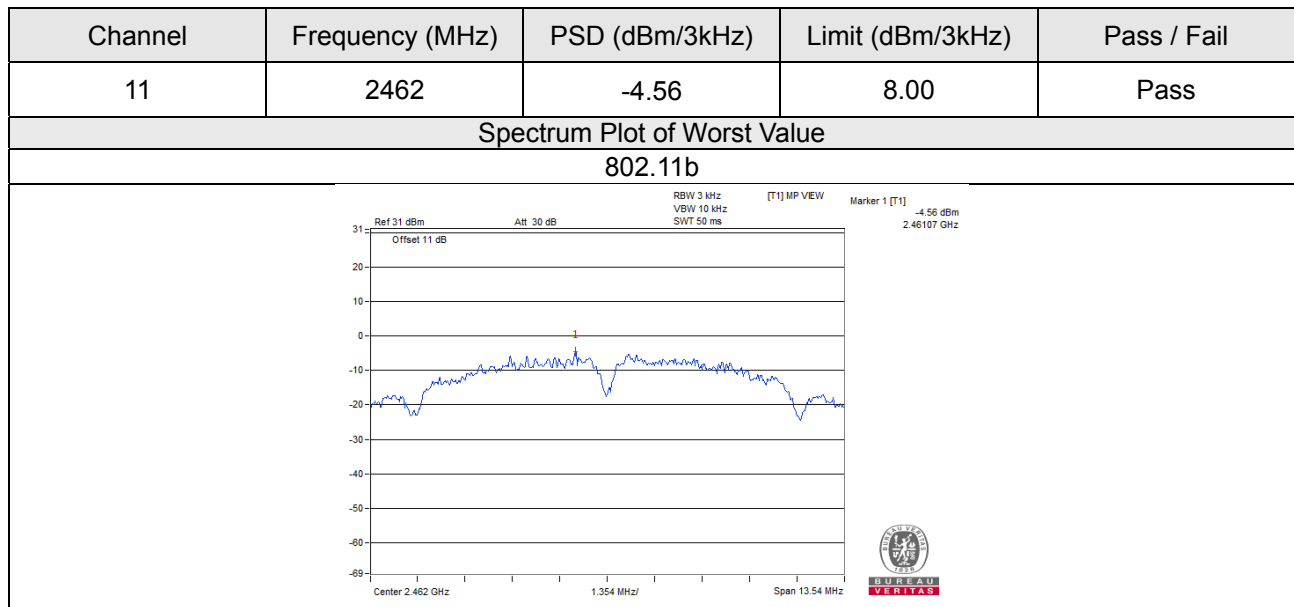


4.4 Conducted Out of Band Emission Measurement

4.4.1 Limits of Conducted Out of Band Emission Measurement

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.4.2 Test Setup



4.4.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.4.4 Test Procedure

MEASUREMENT PROCEDURE REF

- Set the RBW = 100 kHz.
- Set the VBW \geq 300 kHz.
- Detector = Peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

MEASUREMENT PROCEDURE OOB

- Set RBW = 100 kHz.
- Set VBW \geq 300 kHz.
- Ensure that the number of measurement points \geq span/RBW
- According to measurement points to set differ measurement span.
- Detector = Peak.
- Trace Mode = max hold.
- Sweep = auto couple.

4.4.5 Deviation from Test Standard

No deviation.

4.4.6 EUT Operating Condition


Same as Item 4.3.6

4.4.7 Test Results

The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement.


FCC ID: PZWBHT1700BQL (initial)

802.11b

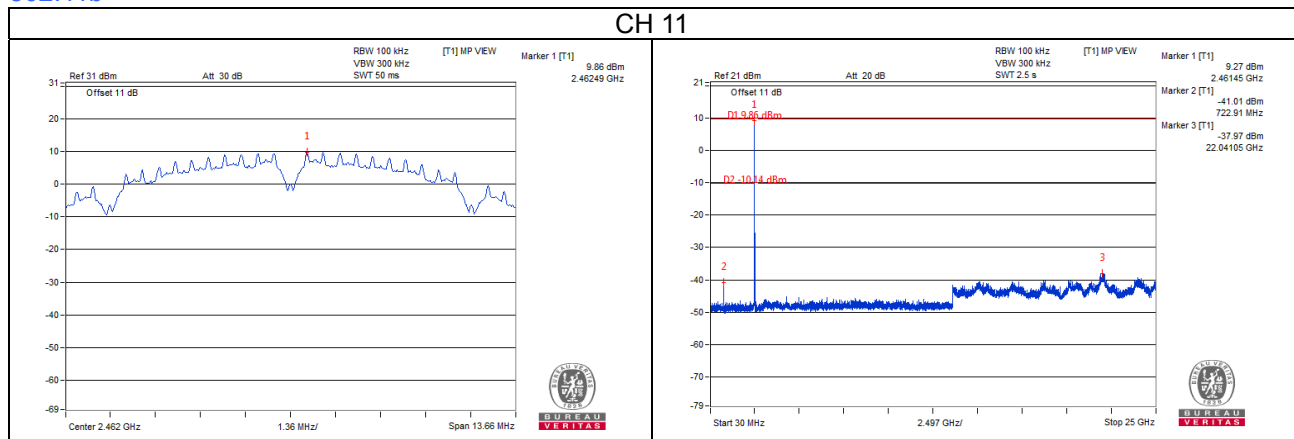

FCC ID: PZWBHT1800Q (new)

802.11b

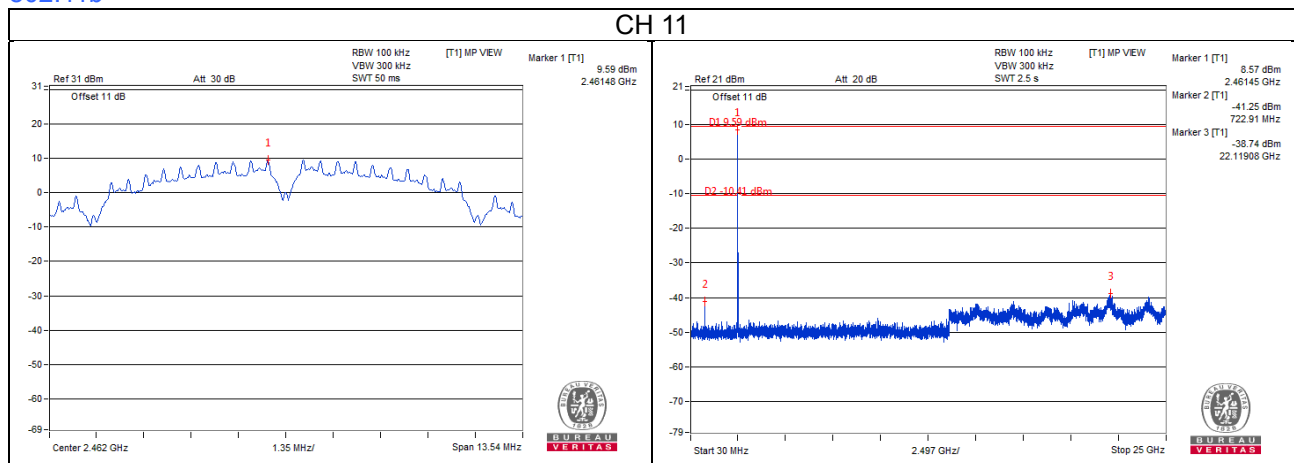

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---