

Date: 2025-03-20

SystemCheck_Head_750MHz**DUT: D750V3 - SN1099**


Communication System: CW; Frequency: 750.000 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: $f = 750.000$ MHz; $\sigma = 0.888$ S/m; $\epsilon_r = 42.3$
Ambient Temperature: 23.2°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(8.12, 8.81, 8.04); Calibrated: 2024-06-27
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2024-05-23
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: CW, 0--

Area Scan (40.0 mm x 90.0 mm): Measurement Grid: 10.0 mm x 15.0 mm
SAR (1g) = 0.414 W/kg; SAR (10g) = 0.281 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0mm x 1.5 mm
Power Drift = 0.01 dB
SAR (1g) = 0.426 W/kg; SAR (10g) = 0.284 W/kg
Smallest distance from peaks to all points 3 dB below = 16.1 mm
Ratio of SAR at M2 to SAR at M1 = 86.8 %

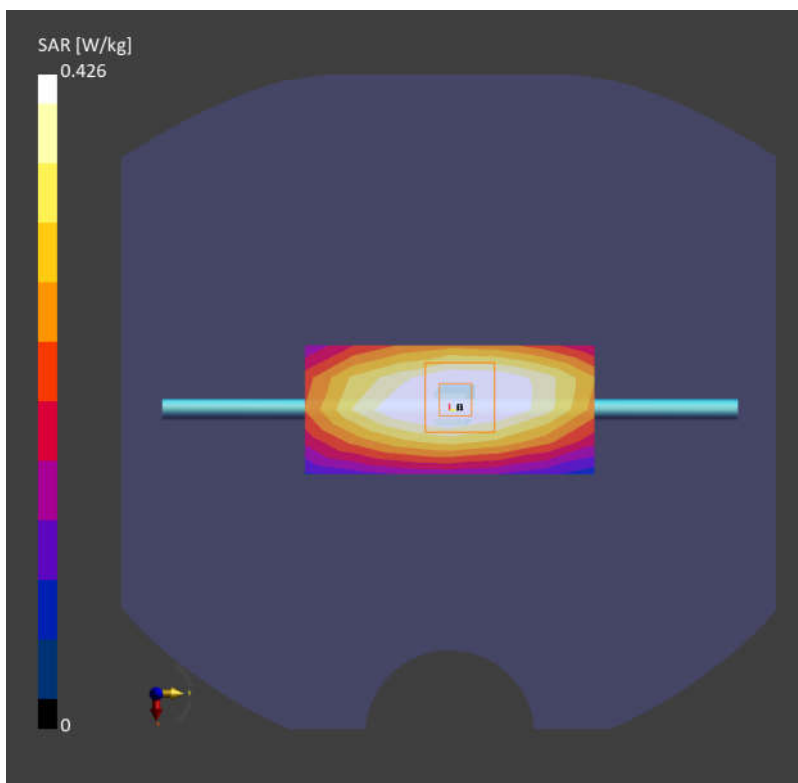

Date: 2025-03-22

SystemCheck_Head_835MHz**DUT: D835V2 - SN4d162**


Communication System: CW; Frequency: 835.000 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: $f = 835.000$ MHz; $\sigma = 0.911$ S/m; $\epsilon_r = 41.8$
Ambient Temperature: 23.1°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(7.76, 8.53, 7.85); Calibrated: 2024-06-27
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2024-05-23
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: CW, 0--

Area Scan (40.0 mm x 90.0 mm): Measurement Grid: 10.0 mm x 15.0 mm
SAR (1g) = 0.451 W/kg; SAR (10g) = 0.295 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0mm x 1.5 mm
Power Drift = 0.01 dB
SAR (1g) = 0.460 W/kg; SAR (10g) = 0.305 W/kg
Smallest distance from peaks to all points 3 dB below = 16.4 mm
Ratio of SAR at M2 to SAR at M1 = 87.8 %

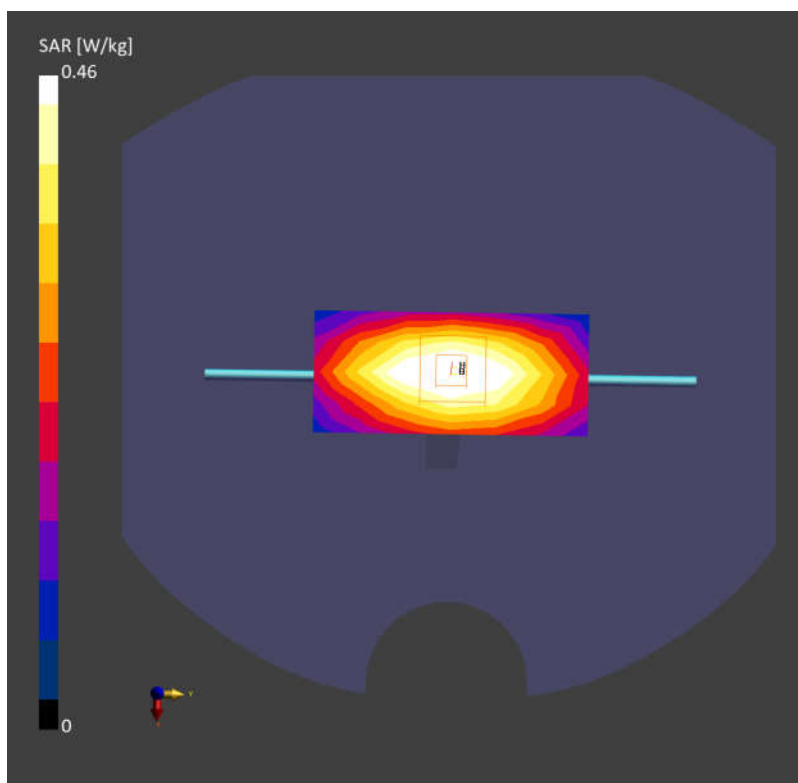

Date: 2025-03-24

SystemCheck_Head_1750MHz**DUT: D1750V2 - SN1137**


Communication System: CW; Frequency: 1750.000 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: $f = 1750.000$ MHz; $\sigma = 1.35$ S/m; $\epsilon_r = 40.6$
Ambient Temperature: 23.2°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(6.82, 7.54, 7.06); Calibrated: 2024-06-27
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2024-05-23
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: CW, 0--

Area Scan (40.0 mm x 90.0 mm): Measurement Grid: 10.0 mm x 15.0 mm
SAR (1g) = 1.79 W/kg; SAR (10g) = 0.951 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0mm x 1.5 mm
Power Drift = 0.01 dB
SAR (1g) = 1.83 W/kg; SAR (10g) = 0.984 W/kg
Smallest distance from peaks to all points 3 dB below = 10.8 mm
Ratio of SAR at M2 to SAR at M1 = 80.9 %

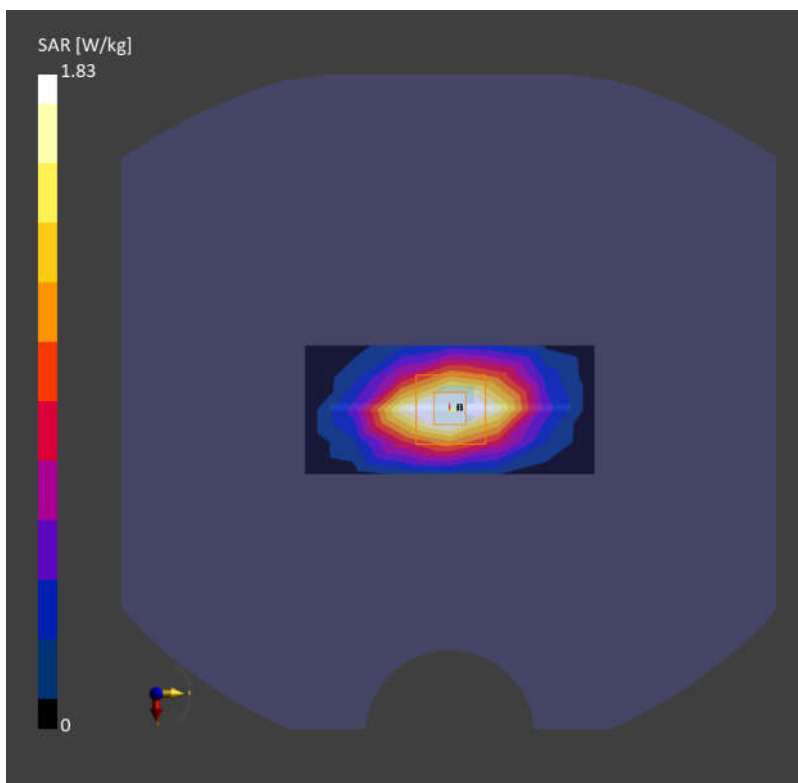

Date: 2025-03-26

SystemCheck_Head_1900MHz**DUT: D1900V2 - SN5d182**

Communication System: CW; Frequency: 1900.000 MHz; Duty Cycle: 1:1

Medium: HSL Medium parameters used: $f = 1900.000$ MHz; $\sigma = 1.41$ S/m; $\epsilon_r = 40.2$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(6.48, 7.12, 6.7); Calibrated: 2024-06-27
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2024-05-23
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: CW, 0--

Area Scan (40.0 mm x 90.0 mm): Measurement Grid: 10.0 mm x 15.0 mm

SAR (1g) = 1.76 W/kg; SAR (10g) = 0.927 W/kg;


Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0mm x 1.5 mm

Power Drift = 0.00 dB

SAR (1g) = 1.92 W/kg; SAR (10g) = 0.980 W/kg

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 78.7 %

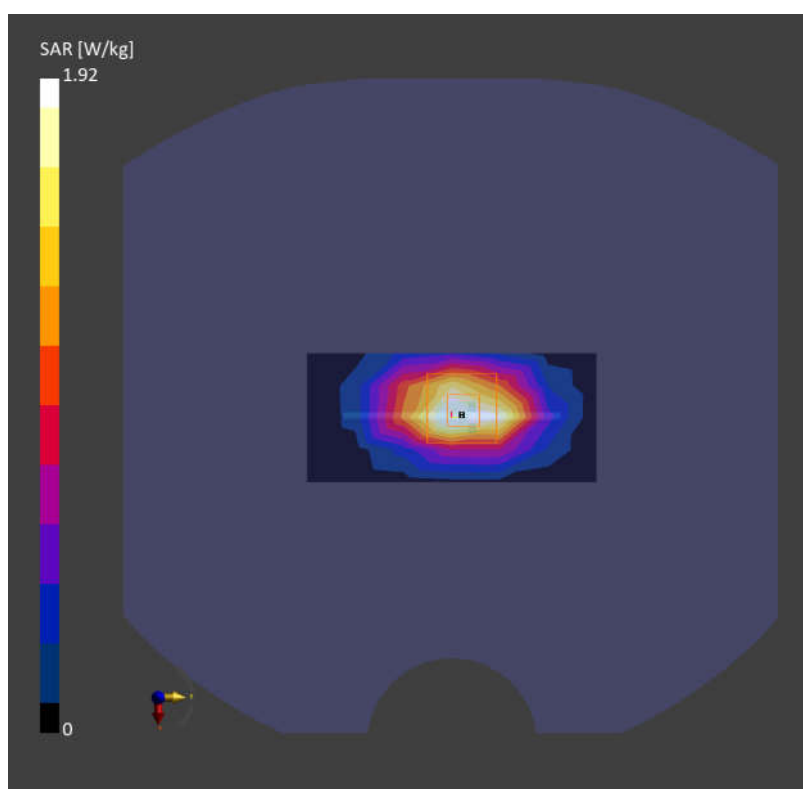

Date: 2025-03-28

SystemCheck_Head_2600MHz**DUT: D2600V2 - SN1112**


Communication System: CW; Frequency: 2600.000 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: $f = 2600.000$ MHz; $\sigma = 1.88$ S/m; $\epsilon_r = 39.2$
Ambient Temperature: 23.1°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(6.16, 6.71, 6.3); Calibrated: 2024-06-27
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2024-05-23
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: CW, 0--

Area Scan (40.0 mm x 96.0 mm): Measurement Grid: 10.0 mm x 12.0 mm
SAR (1g) = 2.37 W/kg; SAR (10g) = 1.09 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0mm x 1.5 mm
Power Drift = -0.01 dB
SAR (1g) = 2.59 W/kg; SAR (10g) = 1.17 W/kg
Smallest distance from peaks to all points 3 dB below = 9.0 mm
Ratio of SAR at M2 to SAR at M1 = 77.6 %

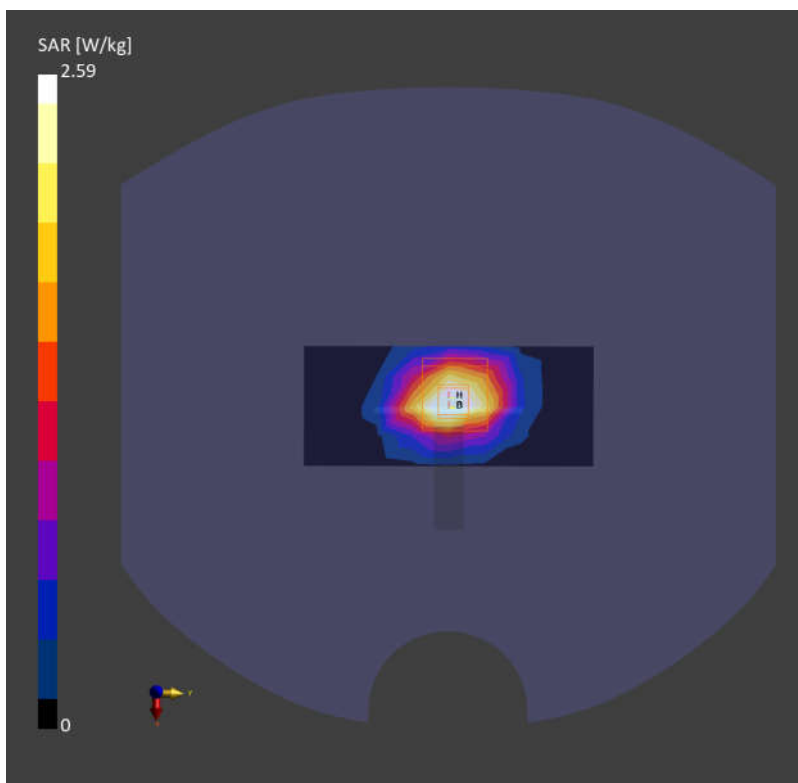

Date: 2025-03-30

SystemCheck_Head_3500MHz**DUT: D3500V2 - SN1037**


Communication System: CW; Frequency: 3500.000 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: $f = 3500.000$ MHz; $\sigma = 2.82$ S/m; $\epsilon_r = 38.5$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.9°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(5.49, 6.05, 5.64); Calibrated: 2024-06-27
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2024-05-23
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: CW, 0--

Area Scan (40.0 mm x 80.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 2.93 W/kg; SAR (10g) = 1.15 W/kg;

Zoom Scan (24.0 mm x 24.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0mmx 1.4 mm
Power Drift = 0.00 dB
SAR (1g) = 3.24 W/kg; SAR (10g) = 1.25 W/kg
Smallest distance from peaks to all points 3 dB below = 8.6 mm
Ratio of SAR at M2 to SAR at M1 = 76.4 %

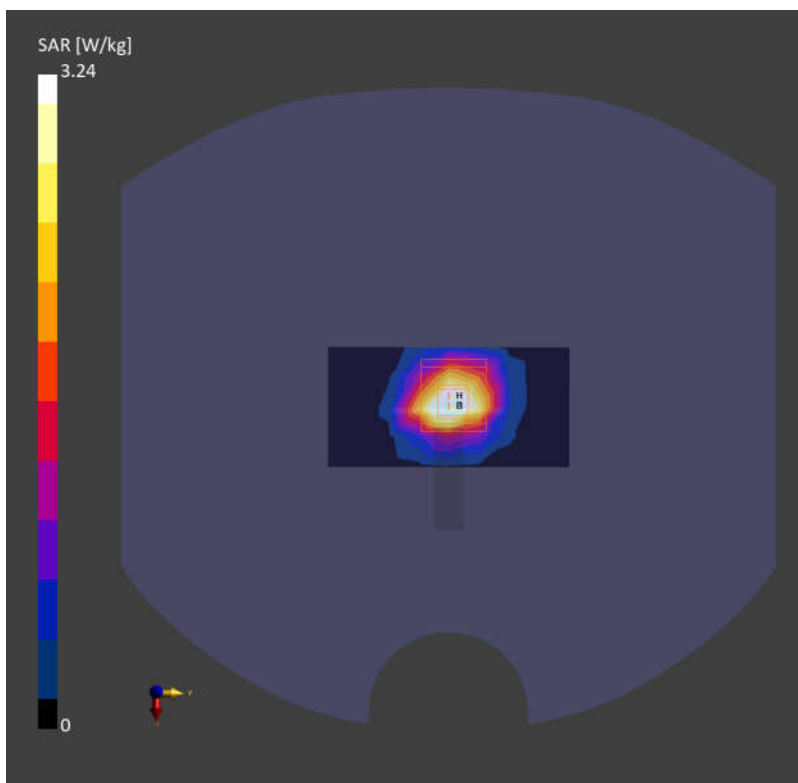

Date: 2025-04-01

SystemCheck_Head_3700MHz**DUT: D3700V2 - SN1008**

Communication System: CW; Frequency: 3700.000 MHz; Duty Cycle: 1:1

Medium: HSL Medium parameters used: $f = 3700.000$ MHz; $\sigma = 2.99$ S/m; $\epsilon_r = 38.3$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(5.18, 5.67, 5.29); Calibrated: 2024-06-27
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2024-05-23
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: CW, 0--

Area Scan (40.0 mm x 80.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 3.55 W/kg; SAR (10g) = 1.24 W/kg;


Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm): Measurement Grid: 4.0 mm x 4.0mm x 1.4 mm

Power Drift = -0.01 dB

SAR (1g) = 3.61 W/kg; SAR (10g) = 1.29 W/kg

Smallest distance from peaks to all points 3 dB below = 8.6 mm

Ratio of SAR at M2 to SAR at M1 = 78.7 %

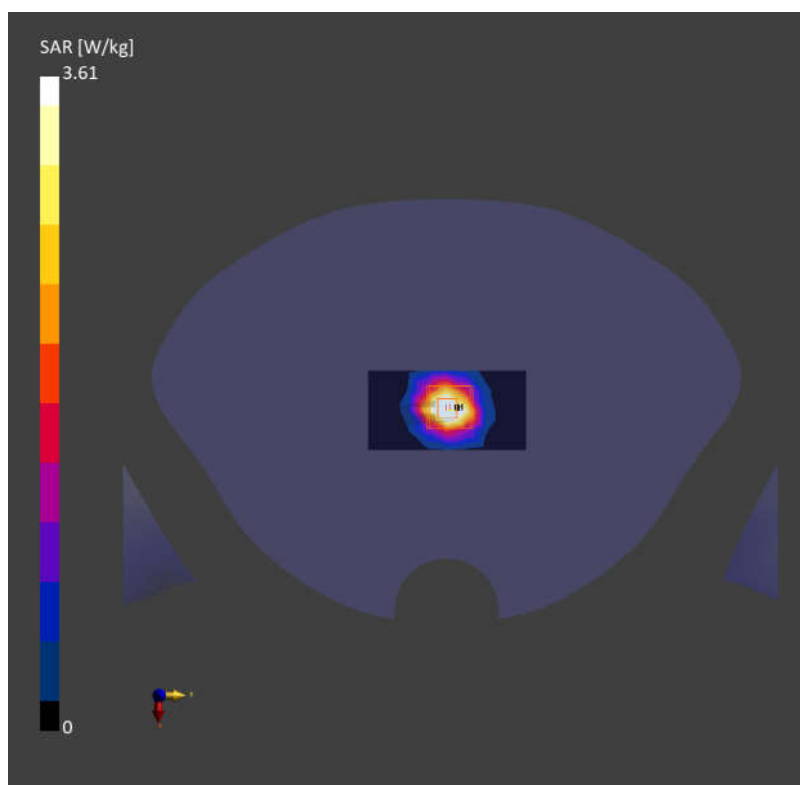

Date: 2025-04-01

SystemCheck_Head_3900MHz**DUT: D3900V2 - SN1048**


Communication System: CW; Frequency: 3900.000 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: $f = 3900.000$ MHz; $\sigma = 3.19$ S/m; $\epsilon_r = 38.0$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(5.5, 6.03, 5.62); Calibrated: 2024-06-27
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2024-05-23
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: CW, 0--

Area Scan (40.0 mm x 80.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 2.91 W/kg; SAR (10g) = 1.08 W/kg;

Zoom Scan (24.0 mm x 24.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0mmx 1.4 mm
Power Drift = -0.01 dB
SAR (1g) = 3.35 W/kg; SAR (10g) = 1.20 W/kg
Smallest distance from peaks to all points 3 dB below = 8.1 mm
Ratio of SAR at M2 to SAR at M1 = 71.5 %

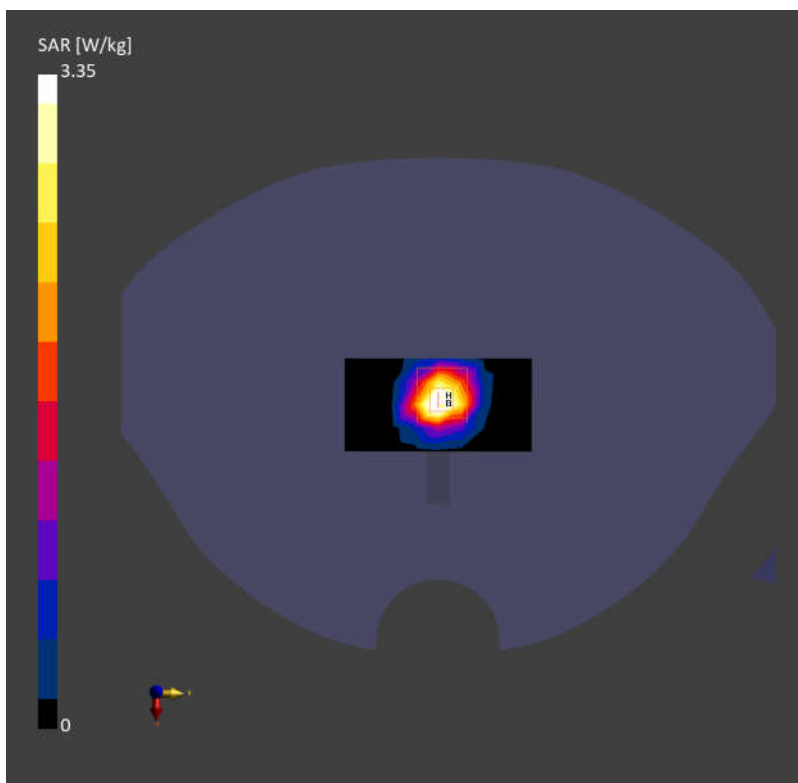

Date: 2025-04-03

SystemCheck_Head_750MHz**DUT: D750V3 - SN1099**


Communication System: CW; Frequency: 750.000 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: $f = 750.000$ MHz; $\sigma = 0.891$ S/m; $\epsilon_r = 42.5$
Ambient Temperature: 23.2°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(8.12, 8.81, 8.04); Calibrated: 2024-06-27
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2024-05-23
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: CW, 0--

Area Scan (40.0 mm x 90.0 mm): Measurement Grid: 10.0 mm x 15.0 mm
SAR (1g) = 0.410 W/kg; SAR (10g) = 0.278 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0mm x 1.5 mm
Power Drift = 0.01 dB
SAR (1g) = 0.427 W/kg; SAR (10g) = 0.285 W/kg
Smallest distance from peaks to all points 3 dB below = 15.6 mm
Ratio of SAR at M2 to SAR at M1 = 86.5 %

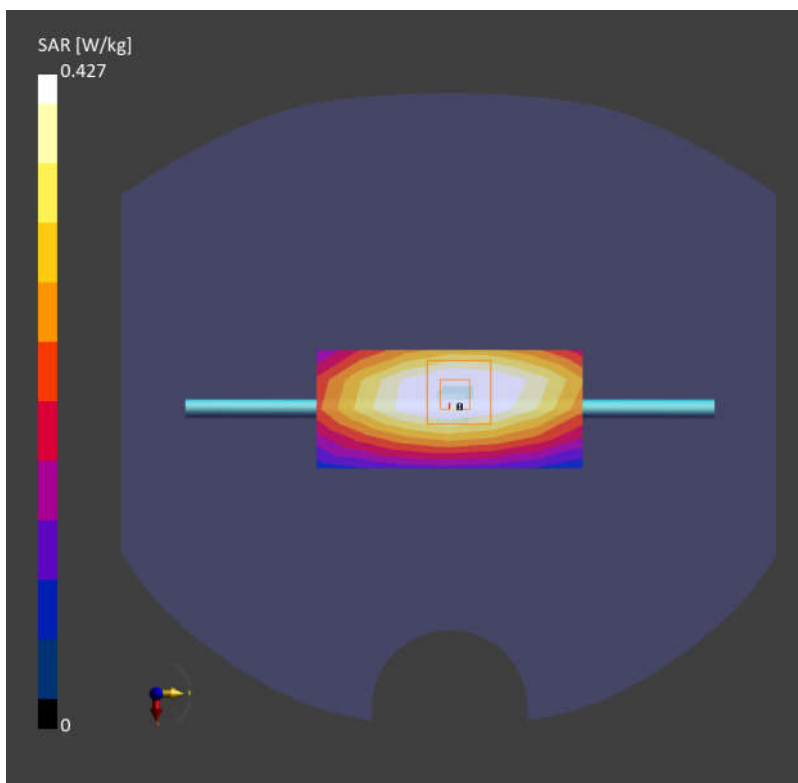

Date: 2025-04-05

SystemCheck_Head_835MHz**DUT: D835V2 - SN4d162**


Communication System: CW; Frequency: 835.000 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: $f = 835.000$ MHz; $\sigma = 0.912$ S/m; $\epsilon_r = 41.9$
Ambient Temperature: 23.4°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(7.76, 8.53, 7.85); Calibrated: 2024-06-27
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2024-05-23
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: CW, 0--

Area Scan (40.0 mm x 90.0 mm): Measurement Grid: 10.0 mm x 15.0 mm
SAR (1g) = 0.450 W/kg; SAR (10g) = 0.294 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0mm x 1.5 mm
Power Drift = -0.01 dB
SAR (1g) = 0.457 W/kg; SAR (10g) = 0.303 W/kg
Smallest distance from peaks to all points 3 dB below = 15.6 mm
Ratio of SAR at M2 to SAR at M1 = 88.2 %

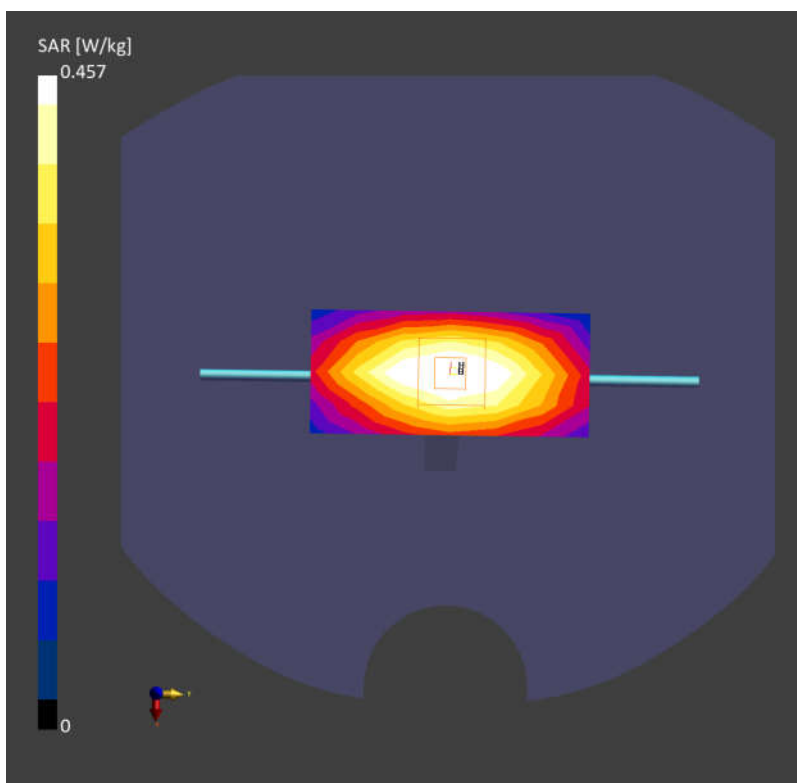

Date: 2025-04-07

SystemCheck_Head_1750MHz**DUT: D1750V2 - SN1137**


Communication System: CW; Frequency: 1750.000 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: $f = 1750.000$ MHz; $\sigma = 1.32$ S/m; $\epsilon_r = 40.3$
Ambient Temperature: 23.1°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(6.82, 7.54, 7.06); Calibrated: 2024-06-27
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2024-05-23
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: CW, 0--

Area Scan (40.0 mm x 90.0 mm): Measurement Grid: 10.0 mm x 15.0 mm
SAR (1g) = 1.76 W/kg; SAR (10g) = 0.943 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0mm x 1.5 mm
Power Drift = 0.01 dB
SAR (1g) = 1.83 W/kg; SAR (10g) = 0.982 W/kg
Smallest distance from peaks to all points 3 dB below = 9.6 mm
Ratio of SAR at M2 to SAR at M1 = 82.3 %

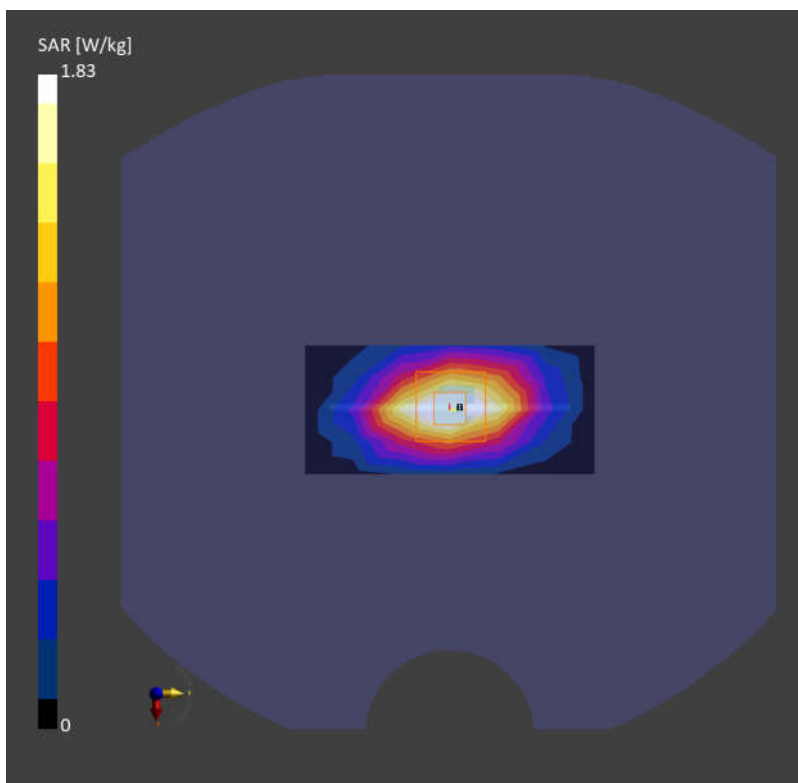

Date: 2025-04-09

SystemCheck_Head_1900MHz**DUT: D1900V2 - SN5d182**


Communication System: CW; Frequency: 1900.000 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: $f = 1900.000$ MHz; $\sigma = 1.43$ S/m; $\epsilon_r = 40.5$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(6.48, 7.12, 6.7); Calibrated: 2024-06-27
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2024-05-23
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: CW, 0--

Area Scan (40.0 mm x 90.0 mm): Measurement Grid: 10.0 mm x 15.0 mm
SAR (1g) = 1.76 W/kg; SAR (10g) = 0.928 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0mm x 1.5 mm
Power Drift = 0.07 dB
SAR (1g) = 1.92 W/kg; SAR (10g) = 0.977 W/kg
Smallest distance from peaks to all points 3 dB below = 9.6 mm
Ratio of SAR at M2 to SAR at M1 = 78.7 %

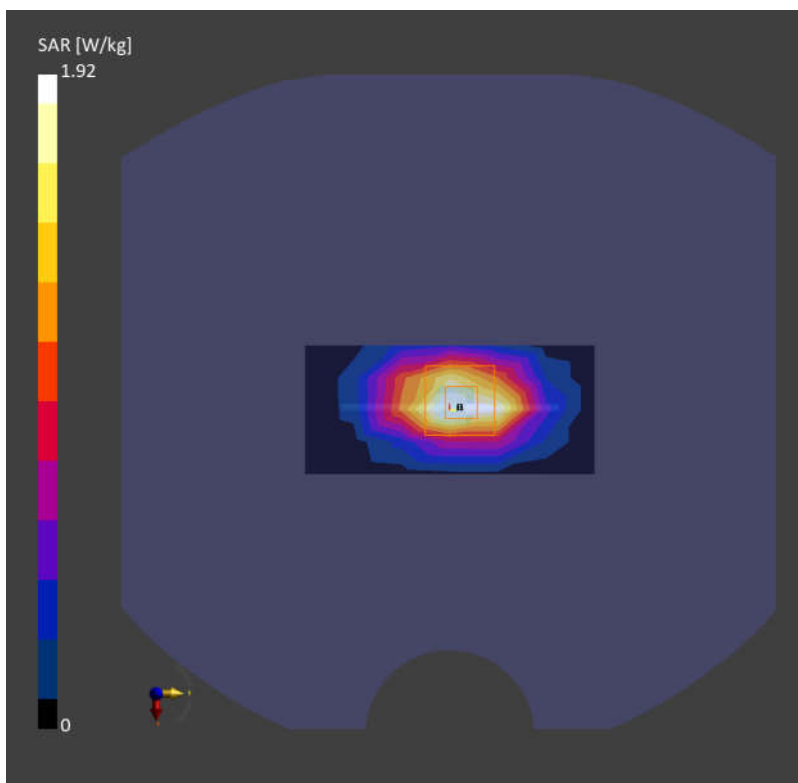

Date: 2025-04-11

SystemCheck_Head_2600MHz**DUT: D2600V2 - SN1112**


Communication System: CW; Frequency: 2600.000 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: $f = 2600.000$ MHz; $\sigma = 1.93$ S/m; $\epsilon_r = 38.2$
Ambient Temperature: 23.1°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(6.16, 6.71, 6.3); Calibrated: 2024-06-27
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2024-05-23
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: CW, 0--

Area Scan (40.0 mm x 96.0 mm): Measurement Grid: 10.0 mm x 12.0 mm
SAR (1g) = 2.37 W/kg; SAR (10g) = 1.10 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0mm x 1.5 mm
Power Drift = 0.01 dB
SAR (1g) = 2.60 W/kg; SAR (10g) = 1.17 W/kg
Smallest distance from peaks to all points 3 dB below = 9.0 mm
Ratio of SAR at M2 to SAR at M1 = 77.9 %

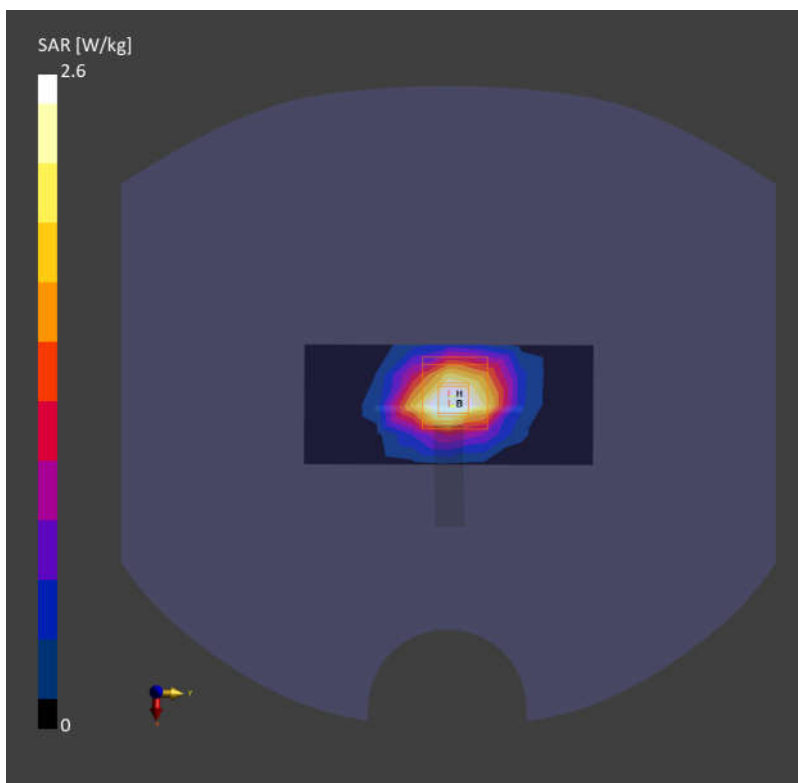

Date: 2025-04-13

SystemCheck_Head_3500MHz**DUT: D3500V2 - SN1037**


Communication System: CW; Frequency: 3500.000 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: $f = 3500.000$ MHz; $\sigma = 2.81$ S/m; $\epsilon_r = 38.7$
Ambient Temperature: 23.2°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(5.49, 6.05, 5.64); Calibrated: 2024-06-27
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2024-05-23
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: CW, 0--

Area Scan (40.0 mm x 80.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 2.94 W/kg; SAR (10g) = 1.15 W/kg;

Zoom Scan (24.0 mm x 24.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0mmx 1.4 mm
Power Drift = 0.01 dB
SAR (1g) = 3.23 W/kg; SAR (10g) = 1.25 W/kg
Smallest distance from peaks to all points 3 dB below = 8.6 mm
Ratio of SAR at M2 to SAR at M1 = 76.9 %

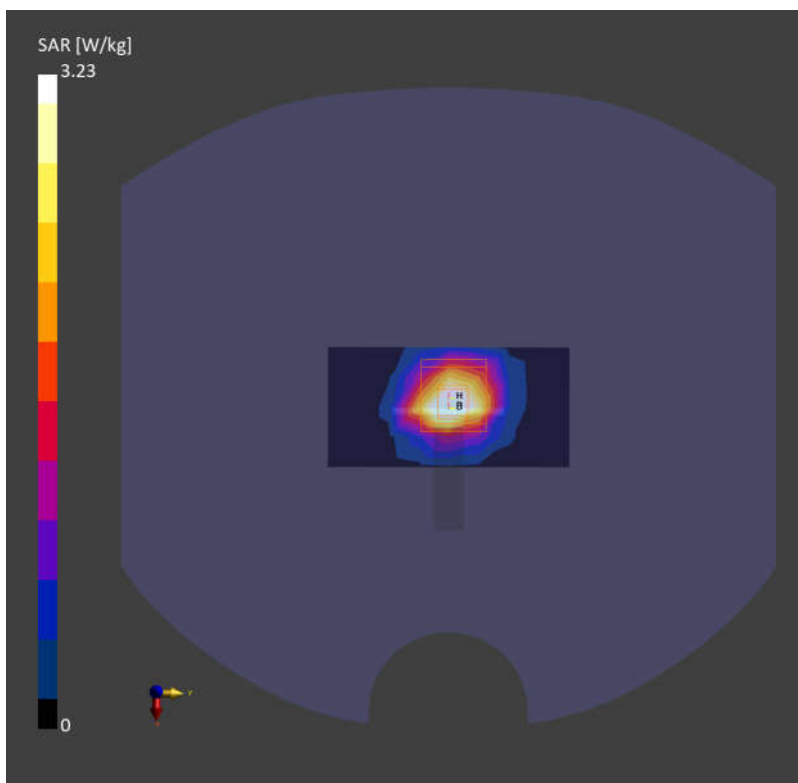

Date: 2025-04-15

System Check_Head_3700MHz**DUT: D3700V2 - SN1008**


Communication System: CW; Frequency: 3700.000 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: $f = 3700.000$ MHz; $\sigma = 2.99$ S/m; $\epsilon_r = 38.4$
Ambient Temperature: 23.4°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(5.18, 5.67, 5.29); Calibrated: 2024-06-27
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2024-05-23
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: CW, 0--

Area Scan (40.0 mm x 80.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 3.34 W/kg; SAR (10g) = 1.11 W/kg;

Zoom Scan (24.0 mm x 24.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0mm x 1.4 mm
Power Drift = -0.01 dB
SAR (1g) = 3.55 W/kg; SAR (10g) = 1.25 W/kg
Smallest distance from peaks to all points 3 dB below = 8.6 mm
Ratio of SAR at M2 to SAR at M1 = 75.5 %

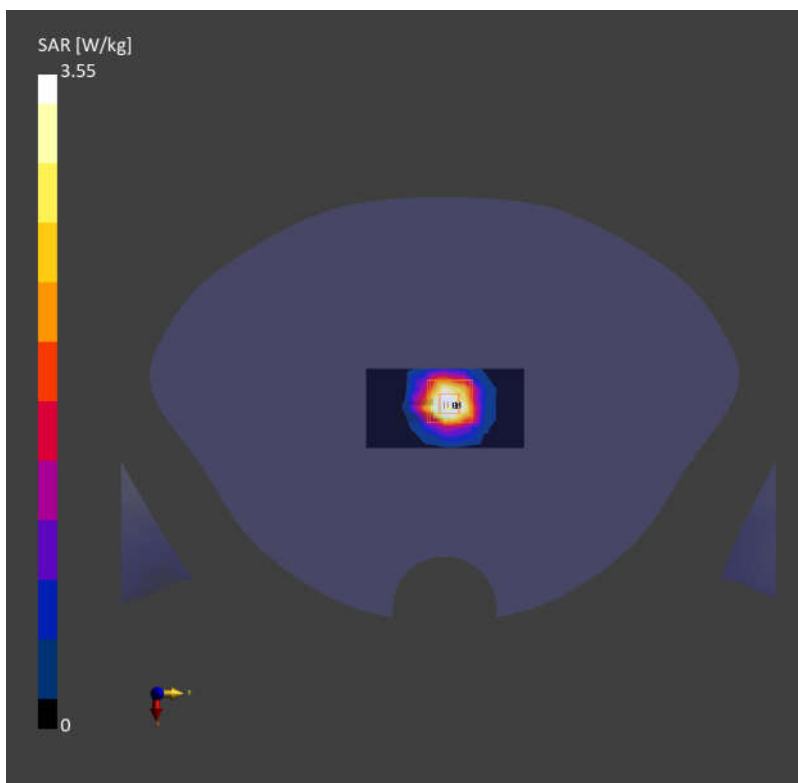

Date: 2025-04-15

SystemCheck_Head_3900MHz**DUT: D3900V2 - SN:1048**


Communication System: CW; Frequency: 3900.000 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: $f = 3900.000$ MHz; $\sigma = 3.18$ S/m; $\epsilon_r = 38.1$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(5.5, 6.03, 5.62); Calibrated: 2024-06-27
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2024-05-23
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: CW, 0--

Area Scan (40.0 mm x 80.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 2.88 W/kg; SAR (10g) = 1.07 W/kg;

Zoom Scan (24.0 mm x 24.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0mmx 1.4 mm
Power Drift = -0.01 dB
SAR (1g) = 3.32 W/kg; SAR (10g) = 1.19 W/kg
Smallest distance from peaks to all points 3 dB below = 8.1 mm
Ratio of SAR at M2 to SAR at M1 = 71.7 %

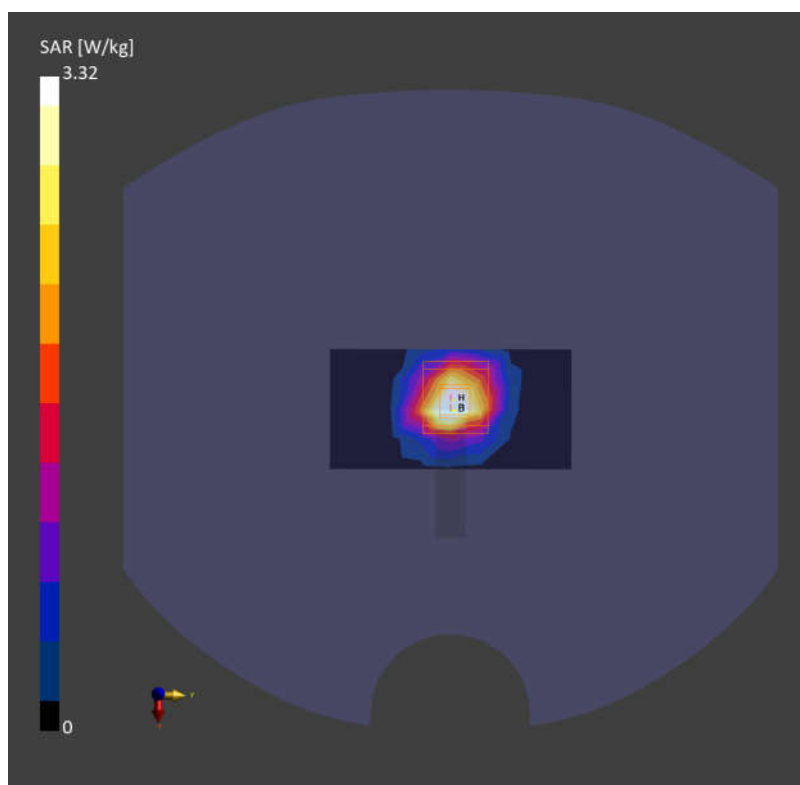

Date: 2025-04-16

SystemCheck_Head_2450MHz**DUT: D2450V2 - SN1095**


Communication System: CW; Frequency: 2450.000 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: $f = 2450.000$ MHz; $\sigma = 1.85$ S/m; $\epsilon_r = 39.1$
Ambient Temperature: 23.4°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(7.87, 7.72, 7.8); Calibrated: 2024-09-02
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2024-04-19
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 1753; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: CW, 0--

Area Scan (40.0 mm x 96.0 mm): Measurement Grid: 10.0 mm x 12.0 mm
SAR (1g) = 2.54 W/kg; SAR (10g) = 1.21 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0mm x 1.5 mm
Power Drift = -0.01 dB
SAR (1g) = 2.77 W/kg; SAR (10g) = 1.29 W/kg
Smallest distance from peaks to all points 3 dB below = 9.0 mm
Ratio of SAR at M2 to SAR at M1 = 79.3 %

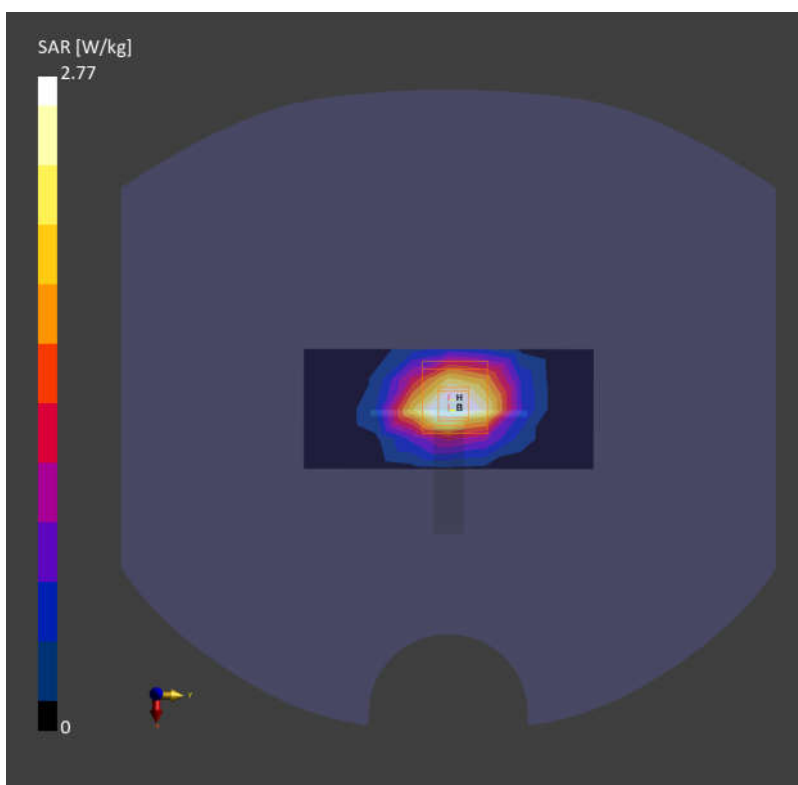

Date: 2025-04-16

SystemCheck_Head_5250MHz**DUT: D5GHzV2 - SN1113**


Communication System: CW; Frequency: 5250.000 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: $f = 5250.000$ MHz; $\sigma = 4.58$ S/m; $\epsilon_r = 35.7$
Ambient Temperature: 23.2°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(5.98, 5.87, 5.93); Calibrated: 2024-09-02
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2024-04-19
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 1753; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: CW, 0--

Area Scan (40.0 mm x 80.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 3.25 W/kg; SAR (10g) = 1.04 W/kg;

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0mm x 1.4 mm
Power Drift = -0.02 dB
SAR (1g) = 4.38 W/kg; SAR (10g) = 1.25 W/kg
Smallest distance from peaks to all points 3 dB below = 6.3 mm
Ratio of SAR at M2 to SAR at M1 = 61.5 %

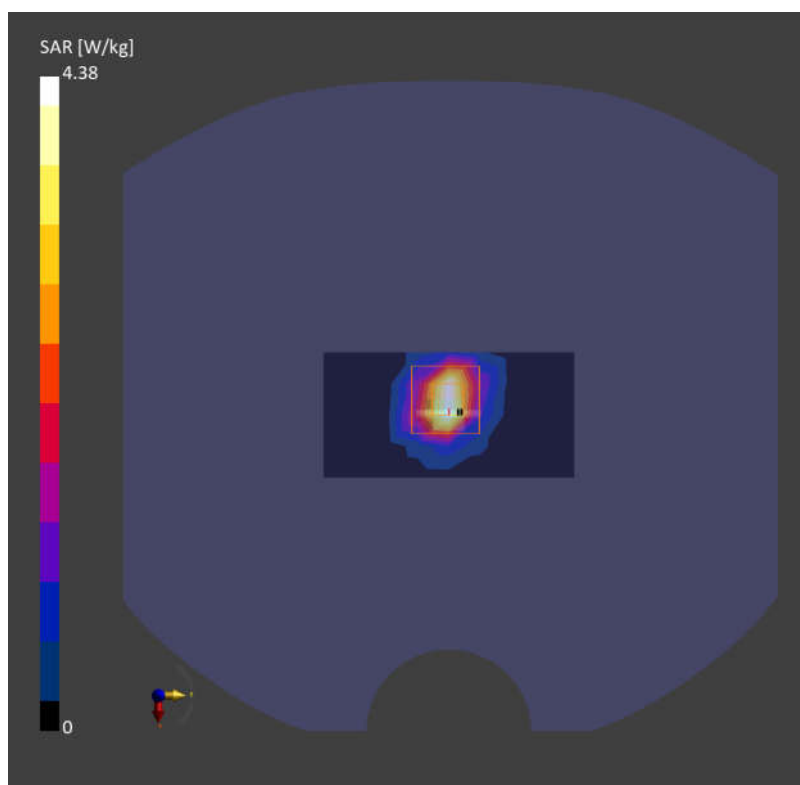

Date: 2025-04-17

SystemCheck_Head_5600MHz**DUT: D5GHzV2 - SN1113**


Communication System: CW; Frequency: 5600.000 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: $f = 5600.000$ MHz; $\sigma = 4.96$ S/m; $\epsilon_r = 35.0$
Ambient Temperature: 23.2°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(5.36, 5.26, 5.32); Calibrated: 2024-09-02
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2024-04-19
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 1753; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: CW, 0--

Area Scan (40.0 mm x 80.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 3.52 W/kg; SAR (10g) = 1.09 W/kg;

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0mm x 1.4 mm
Power Drift = -0.03 dB
SAR (1g) = 4.46 W/kg; SAR (10g) = 1.26 W/kg
Smallest distance from peaks to all points 3 dB below = 6.1 mm
Ratio of SAR at M2 to SAR at M1 = 60.4 %

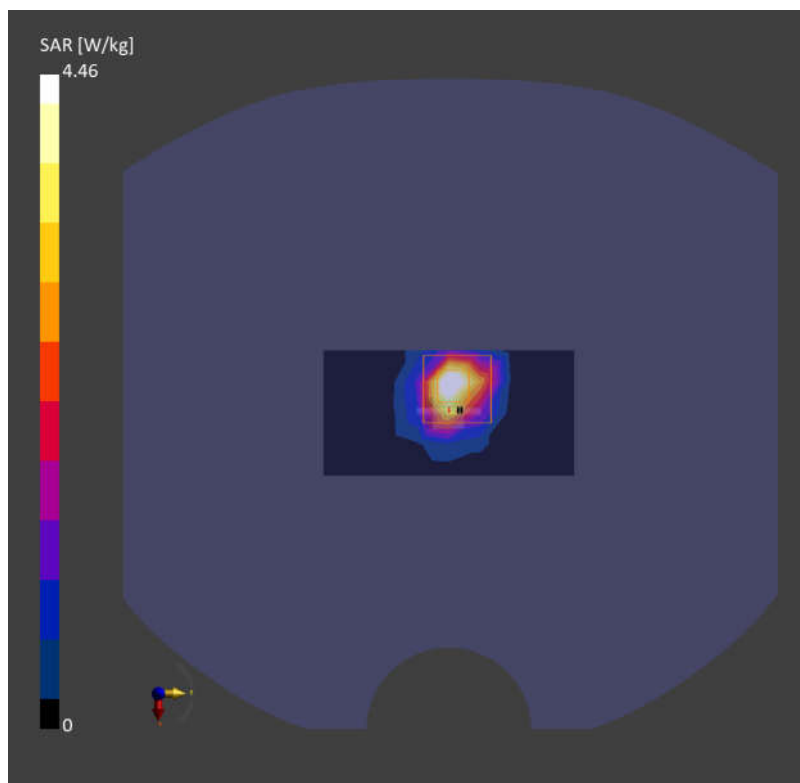

Date: 2025-04-17

SystemCheck_Head_5750MHz**DUT: D5GHzV2 - SN1113**


Communication System: CW; Frequency: 5750.000 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: $f = 5750.000$ MHz; $\sigma = 5.12$ S/m; $\epsilon_r = 34.1$
Ambient Temperature: 23.1°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(5.44, 5.34, 5.4); Calibrated: 2024-09-02
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2024-04-19
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 1753; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: CW, 0--

Area Scan (40.0 mm x 80.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 3.23 W/kg; SAR (10g) = 0.978 W/kg;

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0mm x 1.4 mm
Power Drift = -0.03 dB
SAR (1g) = 4.33 W/kg; SAR (10g) = 1.21 W/kg
Smallest distance from peaks to all points 3 dB below = 7.2 mm
Ratio of SAR at M2 to SAR at M1 = 60.0 %

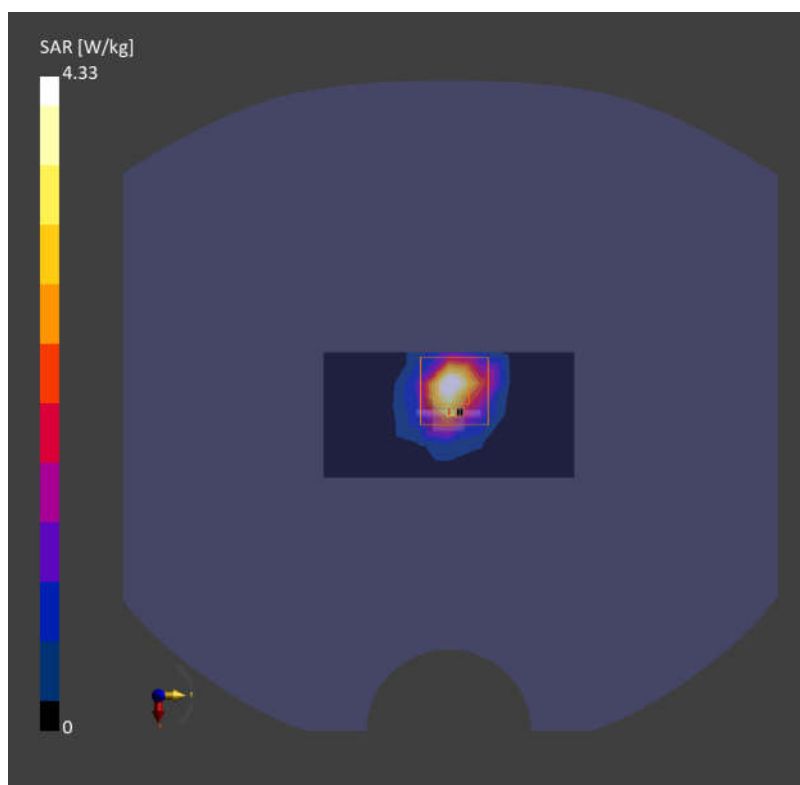

Date: 2025-04-23

System Check_Head_835MHz**DUT: D835V2 - SN4d162**


Communication System: CW; Frequency: 835.000 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: $f = 835.000$ MHz; $\sigma = 0.918$ S/m; $\epsilon_r = 42.0$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(7.76, 8.53, 7.85); Calibrated: 2024-06-27
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2024-05-23
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: CW, 0--

Area Scan (40.0 mm x 90.0 mm): Measurement Grid: 10.0 mm x 15.0 mm
SAR (1g) = 0.391 W/kg; SAR (10g) = 0.269 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0mm x 1.5 mm
Power Drift = 0.01 dB
SAR (1g) = 0.423 W/kg; SAR (10g) = 0.281 W/kg
Smallest distance from peaks to all points 3 dB below = 17.9 mm
Ratio of SAR at M2 to SAR at M1 = 86.8 %

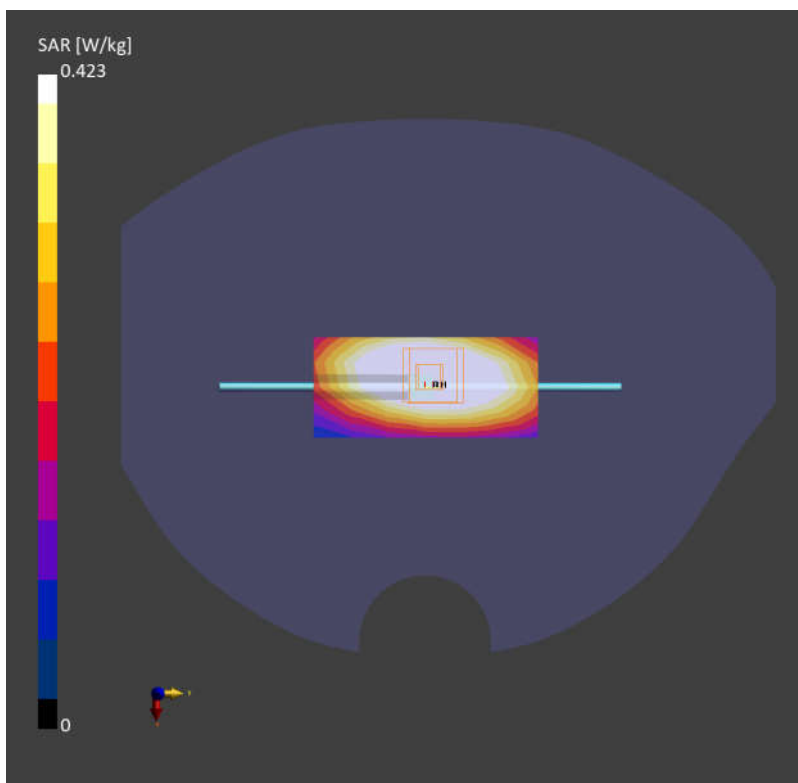

Date: 2025-04-24

System Check_Head_5250MHz**DUT: D5GHzV2 - SN1113**

Communication System: CW; Frequency: 5250.000 MHz; Duty Cycle: 1:1

Medium: HSL Medium parameters used: $f = 5250.000$ MHz; $\sigma = 4.64$ S/m; $\epsilon_r = 35.7$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(4.32, 4.72, 4.38); Calibrated: 2024-06-27
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2024-05-23
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: CW, 0--

Area Scan (40.0 mm x 80.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 3.74 W/kg; SAR (10g) = 1.09 W/kg;


Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0mm x 1.4 mm

Power Drift = 0.06 dB

SAR (1g) = 3.84 W/kg; SAR (10g) = 1.14 W/kg

Smallest distance from peaks to all points 3 dB below = 7.6 mm

Ratio of SAR at M2 to SAR at M1 = 68.0 %

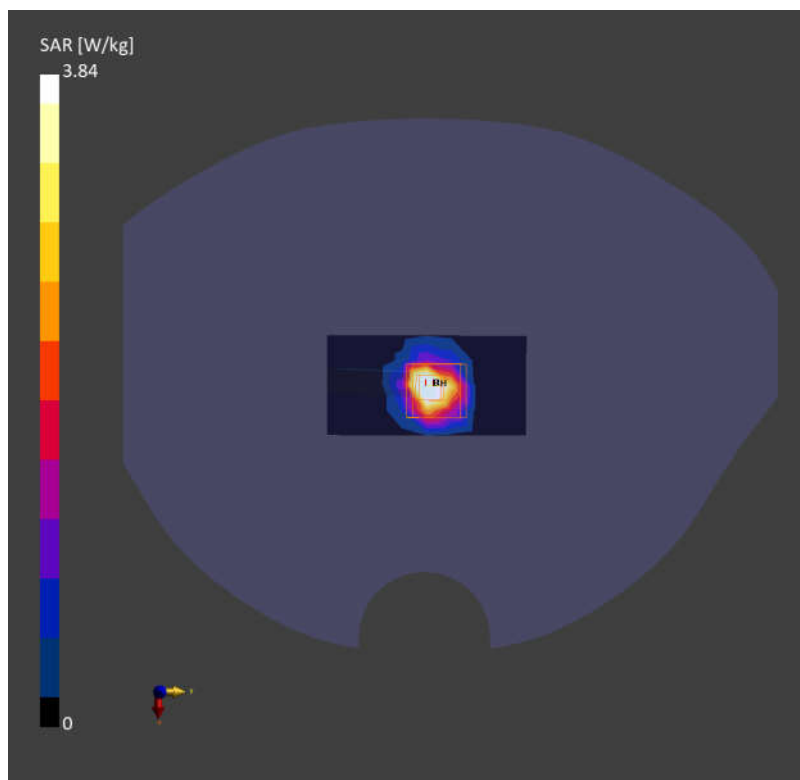

Date: 2025-04-24

System Check_Head_5600MHz**DUT: D5GHzV2 - SN1113**

Communication System: CW; Frequency: 5600.000 MHz; Duty Cycle: 1:1

Medium: HSL Medium parameters used: $f = 5600.000$ MHz; $\sigma = 4.99$ S/m; $\epsilon_r = 35.0$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(3.87, 4.18, 3.91); Calibrated: 2024-06-27
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2024-05-23
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: CW, 0--

Area Scan (40.0 mm x 80.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 3.78 W/kg; SAR (10g) = 1.10 W/kg;


Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0mm x 1.4 mm

Power Drift = 0.03 dB

SAR (1g) = 3.87 W/kg; SAR (10g) = 1.16 W/kg

Smallest distance from peaks to all points 3 dB below = 7.6 mm

Ratio of SAR at M2 to SAR at M1 = 65.2 %

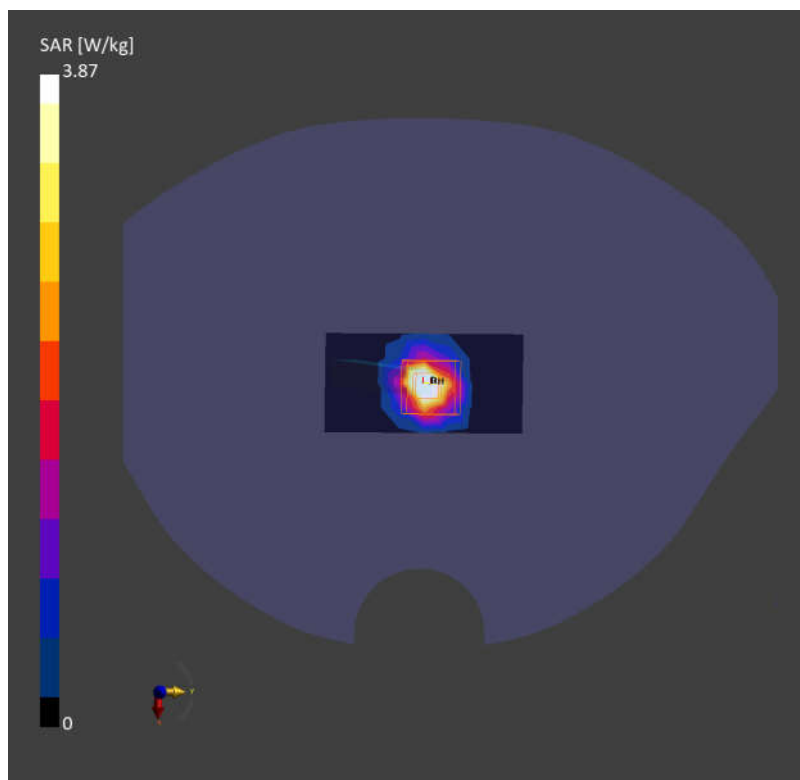

Date: 2025-04-24

System Check_Head_5750MHz**DUT: D5GHzV2 - SN1113**

Communication System: CW; Frequency: 5750.000 MHz; Duty Cycle: 1:1

Medium: HSL Medium parameters used: $f = 5750.000$ MHz; $\sigma = 5.22$ S/m; $\epsilon_r = 34.8$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(3.91, 4.24, 3.96); Calibrated: 2024-06-27
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2024-05-23
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: CW, 0--

Area Scan (40.0 mm x 80.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 3.78 W/kg; SAR (10g) = 1.07 W/kg;

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0mm x 1.4 mm

Power Drift = 0.07 dB

SAR (1g) = 3.78 W/kg; SAR (10g) = 1.10 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 64.1 %

