

TEST REPORT

Applicant	Icon Health and Fitness, Inc.
Address	1500 South 1000 West, Logan Utah, United States 84321

Manufacturer or Supplier	Icon Health and Fitness, Inc.
Address	1500 South 1000 West, Logan Utah, United States 84321
Product Name	Tablet
Brand Name	N/A
Model	MP10-Argon2
Additional Model & Model Difference	N/A
Date of tests	Jun. 18, 2020 ~ Sep. 04, 2020

The tests have been carried out according to the requirements of the following standard:

- ☒ **FCC Part 15, Subpart E, Section 15.407**
- ☒ **ANSI C63.10-2013**

CONCLUSION: The submitted sample was found to COMPLY with the test requirement

Tested by Lucas Chen Project Engineer / EMC Department	Approved by Glyn He Assistant Manager / EMC Department
	

Date: Sep. 25, 2020

This report is governed by, and incorporates by reference, CPS Conditions of Service as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

TABLE OF CONTENTS

RELEASE CONTROL RECORD	4
1. SUMMARY OF TEST RESULTS.....	5
1.1 MEASUREMENT UNCERTAINTY	5
2. GENERAL INFORMATION	6
2.1 GENERAL DESCRIPTION OF EUT.....	6
2.2 DESCRIPTION OF TEST MODES.....	7
2.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL	10
2.3 DUTY CYCLE OF TEST SIGNAL	12
2.4 DESCRIPTION OF SUPPORT UNITS.....	13
2.5 GENERAL DESCRIPTION OF APPLIED STANDARDS.....	13
3. TEST TYPES AND RESULTS.....	14
3.1 RADIATED EMISSION AND BANDEDGE MEASUREMENT	14
3.1.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT.....	14
3.1.2 LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS	15
3.1.3 TEST INSTRUMENTS.....	16
3.1.4 TEST PROCEDURES	17
3.1.5 DEVIATION FROM TEST STANDARD	17
3.1.6 TEST SETUP.....	18
3.1.7 EUT OPERATING CONDITION	19
3.1.8 TEST RESULTS	20
3.2 CONDUCTED EMISSION MEASUREMENT	75
3.2.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT	75
3.2.2 TEST INSTRUMENTS.....	75
3.2.3 TEST PROCEDURES	76
3.2.4 DEVIATION FROM TEST STANDARD	76
3.2.5 TEST SETUP.....	76
3.2.6 EUT OPERATING CONDITIONS	76
3.2.7 TEST RESULTS	77
3.3 TRANSMIT POWER MEASUREMENT	79

3.3.1	LIMITS OF TRANSMIT POWER MEASUREMENT	79
3.3.2	TEST SETUP	79
3.3.3	TEST INSTRUMENTS	80
3.3.4	TEST PROCEDURE	80
3.3.5	DEVIATION FROM TEST STANDARD	81
3.3.6	EUT OPERATING CONDITIONS	81
3.3.7	TEST RESULTS	82
3.4	PEAK POWER SPECTRAL DENSITY MEASUREMENT	93
3.4.1	LIMITS OF PEAK POWER SPECTRAL DENSITY MEASUREMENT	93
3.4.2	TEST SETUP	93
3.4.3	TEST INSTRUMENTS	93
3.4.4	TEST PROCEDURES	93
3.4.5	DEVIATION FROM TEST STANDARD	94
3.4.6	EUT OPERATING CONDITIONS	94
3.4.7	TEST RESULTS	95
3.5	FREQUENCY STABILITY	102
3.5.1	LIMITS OF FREQUENCY STABILITY MEASUREMENT	102
3.5.2	TEST SETUP	102
3.5.3	TEST INSTRUMENTS	102
3.5.4	TEST PROCEDURE	103
3.5.5	DEVIATION FROM TEST STANDARD	103
3.5.6	EUT OPERATING CONDITION	103
3.5.7	TEST RESULTS	104
4.	PHOTOGRAPHS OF THE TEST CONFIGURATION	107
5.	APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	108



Test Report No.: RF200618N021-4

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF200618N021-4	Original release.	Sep. 25, 2020

1. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC PART 15, SUBPART E (SECTION 15.407 UNDER NEW RULE)			
STANDARD SECTION	TEST TYPE	RESULT	REMARK
15.407(b)(6)	AC Power Conducted Emissions	PASS	Meet the requirement of limit.
15.407(b)(1/2/3/4/6)	Radiated Emissions & Band Edge Measurement	PASS	Meet the requirement of limit.
15.407(a)(1/2/3)	Max Average Transmit Power	PASS	Meet the requirement of limit.
15.407(a)(1/2/3)	Peak Power Spectral Density	PASS	Meet the requirement of limit.
15.407(g)	Frequency Stability	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	Antenna connector is i-pex not a standard connector.

1.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	9kHz~30MHz	2.70dB
Radiated emissions	9KHz ~ 30MHz	2.16dB
	30MHz ~ 1GMHz	3.60dB
	1GHz ~ 18GHz	4.82dB
	18GHz ~ 40GHz	5.00dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Tablet
BRAND	N/A
MODEL NO.	MP10-Argon2
FCC ID	OMC425339
POWER SUPPLY	DC 12V
MODULATION TYPE	64QAM, 16QAM, QPSK, BPSK for OFDM
MODULATION TECHNOLOGY	OFDM
TRANSFER RATE	802.11a: 54.0/ 48.0/ 36.0/ 24.0/ 18.0/ 12.0/ 9.0/ 6.0Mbps 802.11n: up to 150Mbps
OPERATING FREQUENCY	5180 ~ 5240MHz, 5260 ~ 5320MHz 5500 ~ 5700MHz, 5745 ~ 5825MHz
NUMBER OF CHANNEL	5180 ~ 5240MHz: 4 channels for 802.11a, 802.11n,11ac (20MHz) 2 channels for 802.11n (40MHz): 5260 ~ 5320MHz: 4 channels for 802.11a, 802.11n,11ac (20MHz) 2 channels for 802.11n (40MHz): 5500 ~ 5700MHz: (without open 5600~5650MHz) 11 channels for 802.11a, 802.11n,11ac (20MHz) 5 channels for 802.11n (40MHz) 5745 ~ 5825MHz: 5 channels for 802.11a, 802.11n,11ac (20MHz) 2 channels for 802.11n (40MHz)
CONDUCTED OUTPUT POWER	27.416mW for 5180 ~ 5240MHz (Maximum AVG Power) 27.164mW for 5260 ~ 5320MHz (Maximum AVG Power) 20.23mW for 5500 ~ 5700MHz (Maximum AVG Power) 30.061mW for 5745 ~ 5825MHz (Maximum AVG Power)
ANTENNA TYPE	5180 ~ 5240MHz: FPCB antenna with 2.93dBi gain 5260 ~ 5320MHz: FPCB antenna with 2.96dBi gain 5500 ~ 5700MHz: FPCB antenna with 3.82dBi gain 5745 ~ 5825MHz: FPCB antenna with 4.45dBi gain
I/O PORTS	Refer to user's manual
CABLE SUPPLIED	N/A

NOTES:

1. The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.
2. Please refer to the EUT photo document (Reference No.: 200618N021) for detailed product photo.
3. The EUT incorporates a SISO function. Physically, the EUT provides 1 completed transmitter and 1 receiver.

MODULATION MODE	FUNCTION
802.11a	1TX/1RX
802.11n (HT20)	1TX/1RX
802.11n (HT40)	1TX/1RX

2.2 DESCRIPTION OF TEST MODES

FOR 5150 ~ 5250MHz

4 channels are provided for 802.11a, 802.11n (HT20):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
36	5180 MHz	40	5200 MHz
44	5220 MHz	48	5240 MHz

2 channels are provided for 802.11n (HT40):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
38	5190 MHz	46	5230 MHz

FOR 5250 ~ 5350MHz

4 channels are provided for 802.11a, 802.11n (HT20):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
52	5260 MHz	56	5280 MHz
60	5300 MHz	64	5320 MHz

2 channels are provided for 802.11n (HT40), 802:

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
54	5270 MHz	62	5310 MHz

FOR 5470 ~ 5725MHz

11 channels are provided for 802.11a, 802.11n (HT20):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
100	5500 MHz	104	5520 MHz
108	5540 MHz	112	5560 MHz
116	5580 MHz	120	5600 MHz
124	5620 MHz	128	5640 MHz
132	5660 MHz	136	5680 MHz
140	5700 MHz	--	--

5 channels are provided for 802.11n (HT40):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
102	5510 MHz	110	5550 MHz
110	5590 MHz	126	5630 MHz
134	5670 MHz		

FOR 5725 ~ 5850MHz

5 channels are provided for 802.11a, 802.11n (HT20):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
149	5745MHz	153	5765MHz
157	5785MHz	161	5805MHz
165	5825MHz	--	--

2 channels are provided for 802.11n (HT40):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
151	5755MHz	159	5795MHz

2.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE $\geq$ 1G	RE<1G	PLC	APCM	
A	√	√	√	√	DC 12V from Adapter with wifi(5G) link

Where **RE $\geq$ 1G**: Radiated Emission above 1GHz

RE<1G: Radiated Emission below 1GHz

PLC: Power Line Conducted Emission

APCM: Antenna Port Conducted Measurement

NOTE:

1. The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on **X-plane**.

NOTE: “-” means no effect.

RADIATED EMISSION TEST (ABOVE 1GHz):

☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	FREQ. BAND (MHz)	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	802.11a	5150-5250	36 to 48	36, 40, 48	OFDM	BPSK	6.0
	802.11n (20MHz)		36 to 48	36, 40, 48	OFDM	BPSK	6.5
	802.11n (40MHz)		38 to 46	38, 46	OFDM	BPSK	13.5
	802.11a	5250-5350	52 to 64	52, 60, 64	OFDM	BPSK	6.0
	802.11n (20MHz)		52 to 64	52, 60, 64	OFDM	BPSK	6.5
	802.11n (40MHz)		54 to 62	54, 62	OFDM	BPSK	13.5
	802.11a	5470-5725	100 to 140	100, 116, 140	OFDM	BPSK	6.0
	802.11n (20MHz)		100 to 140	100, 116, 140	OFDM	BPSK	6.5
	802.11n (40MHz)		102 to 134	102, 110, 134	OFDM	BPSK	13.5
	802.11a	5725-5850	149 to 165	149, 157, 165	OFDM	BPSK	6.0
	802.11n (20MHz)		149 to 165	149, 157, 165	OFDM	BPSK	6.5
	802.11n (40MHz)		151 to 159	151, 159	OFDM	BPSK	13.5

RADIATED EMISSION TEST (BELOW 1GHz):

☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	FREQ. BAND (MHz)	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	802.11a	5150-5250 5470-5725 5725-5850	36 to 48 100 to 140 149 to 165	36	OFDM	BPSK	6.0

POWER LINE CONDUCTED EMISSION TEST:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	FREQ. BAND (MHz)	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	802.11a	5150-5250 5470-5725 5725-5850	36 to 48 100 to 140 149 to 165	36	OFDM	BPSK	6.0

ANTENNA PORT CONDUCTED MEASUREMENT:

- ☒ This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	FREQ. BAND (MHz)	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	802.11a	5150-5250	36 to 48	36, 40, 48	OFDM	BPSK	6.0
	802.11n (20MHz)		36 to 48	36, 40, 48	OFDM	BPSK	6.5
	802.11n (40MHz)		38 to 46	38, 46	OFDM	BPSK	13.5
	802.11a	5250-5350	52 to 64	52, 60, 64	OFDM	BPSK	6.0
	802.11n (20MHz)		52 to 64	52, 60, 64	OFDM	BPSK	6.5
	802.11n (40MHz)		54 to 62	54, 62	OFDM	BPSK	13.5
	802.11a	5470-5725	100 to 140	100, 116, 140	OFDM	BPSK	6.0
	802.11n (20MHz)		100 to 140	100, 116, 140	OFDM	BPSK	6.5
	802.11n (40MHz)		102 to 134	102, 110, 134	OFDM	BPSK	13.5
	802.11a	5725-5850	149 to 165	149, 157, 165	OFDM	BPSK	6.0
	802.11n (20MHz)		149 to 165	149, 157, 165	OFDM	BPSK	6.5
	802.11n (40MHz)		151 to 159	151, 159	OFDM	BPSK	13.5

TEST CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER(ADAPTER)	TESTED BY
RE<1G	24deg. C, 55%RH	DC 12V from Adapter	Hu
RE≥1G	24deg. C, 55%RH	DC 12V from Adapter	Hu
PLC	20deg. C, 56%RH	DC 12V from Adapter	Ming Bai
APCM	20deg. C, 55%RH	DC 12V from Adapter	Daniel



BUREAU
VERITAS

Test Report No.: RF200618N021-4

2.3 DUTY CYCLE OF TEST SIGNAL

802.11a: Duty cycle = $1.392/1.427 = 0.975$, Duty factor = $10 * \log(1/0.975) = 0.110$

802.11n (HT20): Duty cycle = $1.299/1.344 = 0.967$, Duty factor = $10 * \log(1/0.967) = 0.146$

802.11n (HT40): Duty cycle = $0.648/0.683 = 0.949$, Duty factor = $10 * \log(1/0.949) = 0.227$



2.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as a dependent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	Adapter	N/A	MPA-630	N/A	N/A

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	Unshielded, Non-Detachable, 180cm.

2.5 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specification of the EUT declared by the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart E (15.407)

789033 D02 General UNII Test Procedures New Rules v02r01

ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

3. TEST TYPES AND RESULTS

3.1 RADIATED EMISSION AND BANDEDGE MEASUREMENT

3.1.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table:

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTES:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 30dB under any condition of modulation.

3.1.2 LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS

APPLICABLE TO	LIMIT	
789033 D02 General UNII Test Procedures New Rules v02r01	FIELD STRENGTH AT 3m	
	PK: 74 (dBμV/m)	AV: 54 (dBμV/m)
APPLICABLE TO	EIRP LIMIT	EQUIVALENT FIELD STRENGTH AT 3m
15.407(b)(1)	PK: -27 (dBm/MHz)	PK: 68.2 (dBμV/m)
15.407(b)(2)		
15.407(b)(3)		
15.407(b)(4)	Note	Note

NOTE: For transmitters operating in the 5.725-5.85 GHz band:

Section 15.407(b)(4) specifies the unwanted emissions limit for the U-NII-3 band. A band emissions mask is specified in Section 15.407(b)(4)(i). An alternative to the band emissions mask is specified in Section 15.407(b)(4)(ii). The alternative limits are based on the highest antenna gain specified in the filing. There are also marketing and importation restrictions for the alternative limit.

15.407(b)(4)(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \quad \mu\text{V/m, where } P \text{ is the eirp (Watts).}$$

3.1.3 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESU40	100449	Mar. 18,20	Mar. 17,21
Signal and Spectrum Analyzer	Rohde&Schwarz	FSV7	102331	May 14, 20	May 13, 21
Active Loop Antenna (9KHz -30MHz)	SCHWARZBECK	FMZB 1519B	1519B-045	May 30,20	May 29,21
Amplifier (9KHz -1GHz)	Burgeon	BPA-530	100210	Mar. 15,20	Mar. 14,21
Bilog Antenna (20MHz -2GHz)	Teseq	CBL 6111D	30643	May 30,20	May 29,21
Horn Antenna (1GHz -18GHz)	ETS -Lindgren	3117	00062558	May 30,20	May 29,21
Horn Antenna (18GHz -40GHz)	SCHWARZBECK	BBHA 9170	BBHA9170147	May 10, 20	May 09, 21
3m Semi-anechoic Chamber	ETS-LINDGREN	9m*6m*6m	NSEMC003	May 23,20	May 22,21
Test Software	ADT	ADT_Radiated_V7.6.15.9.2	N/A	N/A	N/A
Broadband Preamplifier (1GHz~18GHz)	SCHWARZBECK	BBV9718	305	May 09,20	May 08,21
Pre-Amplifier (18GHz-40GHz)	EMCI	EMC 184045	980102	Mar. 04,20	Mar. 03,21
Test Software	ADT	ADT_Radiated_V7.6.15.9.2	N/A	N/A	N/A

NOTES:

1. The calibration interval of the above test instruments are 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
2. The horn antenna is used only for the measurement of emission frequency above 1GHz if tested.
3. The FCC Site Registration No. is 749762.

3.1.4 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 1.5 meters(above 1GHz) and 0.8 meters(below 1GHz) above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

NOTES:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or 10Hz(Duty cycle > 98%) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

3.1.5 DEVIATION FROM TEST STANDARD


No deviation.

3.1.6 TEST SETUP

Below 30MHz

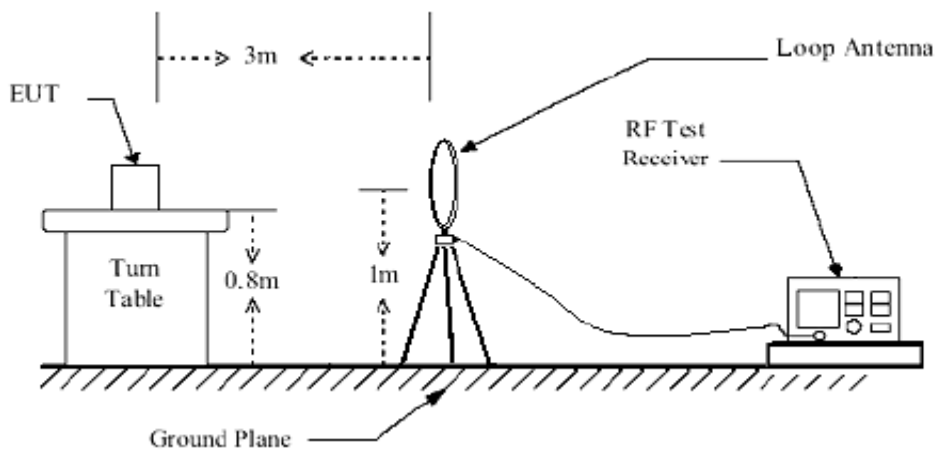


Below 1GHz test setup

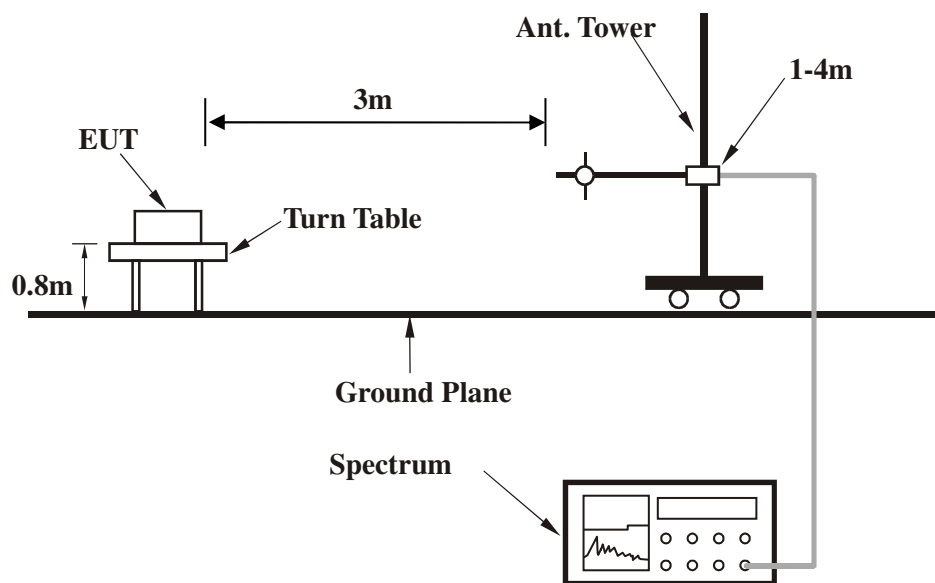

Note: For the actual test configuration, please refer to the attached file (Test Setup Photo).

Above 1GHz test setup

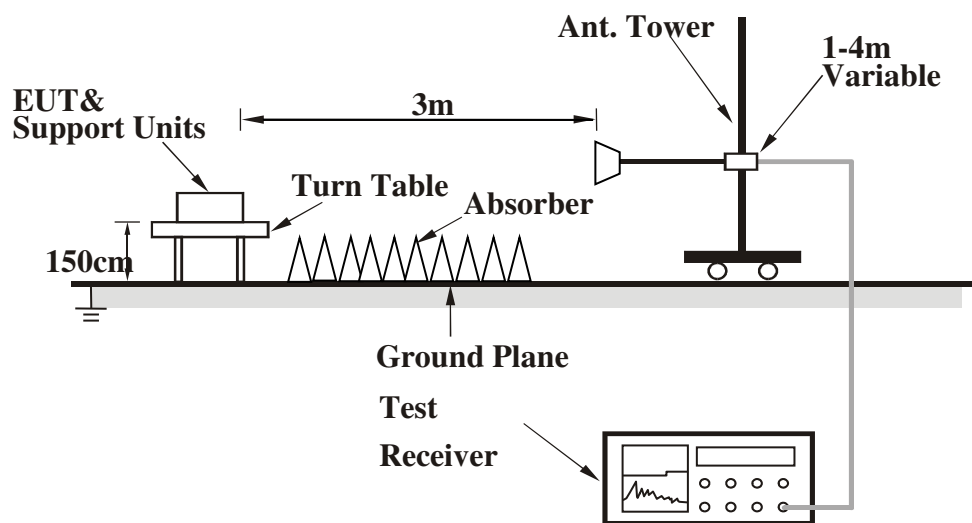

Note: For the actual test configuration, please refer to the attached file (Test Setup Photo).

3.1.7 EUT OPERATING CONDITION

- Set the EUT under full load condition and placed them on a testing table.
- Set the transmitter part of EUT under transmission condition continuously at specific channel frequency.
- The necessary accessories enable the EUT in full functions.

3.1.8 TEST RESULTS

BELOW 1GHz WORST-CASE DATA


802.11a

CHANNEL	TX Channel 36	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9KHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	30.00	17.63 QP	40.00	-22.37	1.00 H	152	29.77	-12.14
2	152.80	12.20 QP	43.50	-31.30	1.00 H	303	29.74	-17.54
3	409.29	27.18 QP	46.00	-18.82	1.00 H	179	38.51	-11.33
4	580.29	23.61 QP	46.00	-22.39	1.00 H	204	30.67	-7.06
5	741.96	24.39 QP	46.00	-21.61	1.00 H	82	27.98	-3.59
6	878.75	28.16 QP	46.00	-17.84	1.00 H	77	30.62	-2.46

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. 9KHz~30MHz have been test and test data more than 20dB margin.
5. Margin value = Emission level – Limit value.

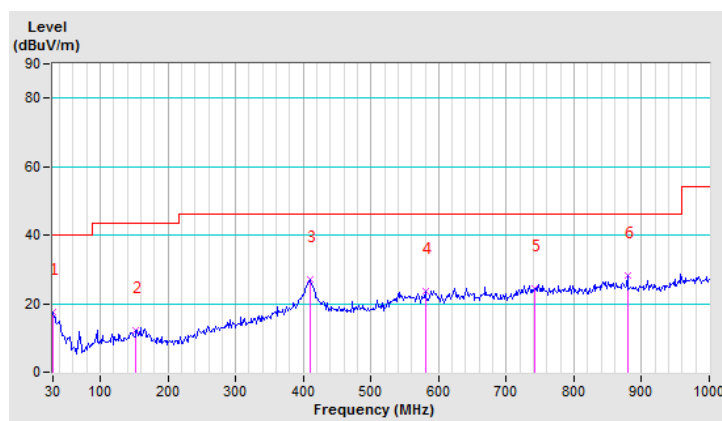


CHANNEL	TX Channel 36	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9KHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	31.55	24.05 QP	40.00	-15.95	1.00 V	61	36.77	-12.72
2	61.09	22.70 QP	40.00	-17.30	1.00 V	46	47.61	-24.91
3	406.19	21.33 QP	46.00	-24.67	1.00 V	34	32.75	-11.42
4	530.54	30.02 QP	46.00	-15.98	1.00 V	23	38.57	-8.55
5	597.39	26.93 QP	46.00	-19.07	1.00 V	12	33.73	-6.80
6	740.40	25.42 QP	46.00	-20.58	1.00 V	2	29.01	-3.59

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. 9KHz~30MHz have been test and test data more than 20dB margin.
5. Margin value = Emission level – Limit value.

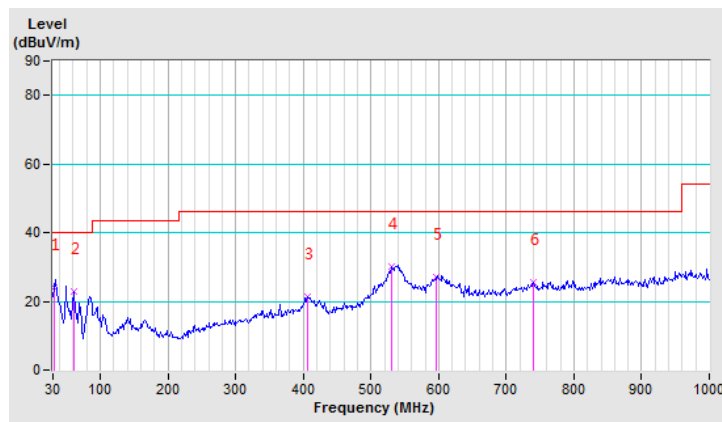

Band 1 (5150-5250MHz): ABOVE 1GHz DATA 802.11a

CHANNEL	TX Channel 36	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)


ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	56.19 PK	74.00	-17.81	1.00 H	131	47.39	8.80
2	5150.00	42.86 AV	54.00	-11.14	1.00 H	131	34.06	8.80
3	*5180.00	107.09 PK			1.00 H	131	98.27	8.82
4	*5180.00	95.45 AV			1.00 H	131	86.63	8.82
5	#10360.00	60.34 PK	68.20	-7.86	1.00 H	0	42.53	17.81
6	15540.00	67.70 PK	74.00	-6.30	1.00 H	0	43.61	24.09
7	15540.00	49.82 AV	54.00	-4.18	1.00 H	0	25.73	24.09
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	50.59 PK	74.00	-23.41	1.00 V	261	41.79	8.80
2	5150.00	37.98 AV	54.00	-16.02	1.00 V	261	29.18	8.80
3	*5180.00	98.87 PK			1.00 V	261	90.05	8.82
4	*5180.00	87.27 AV			1.00 V	261	78.45	8.82
5	#10360.00	59.87 PK	68.20	-8.33	1.00 V	0	42.06	17.81
6	15540.00	67.02 PK	74.00	-6.98	1.00 V	0	42.93	24.09
7	15540.00	50.35 AV	54.00	-3.65	1.00 V	0	26.26	24.09

REMARKS:


1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

Band edge Plot

5180MHz Horizontal

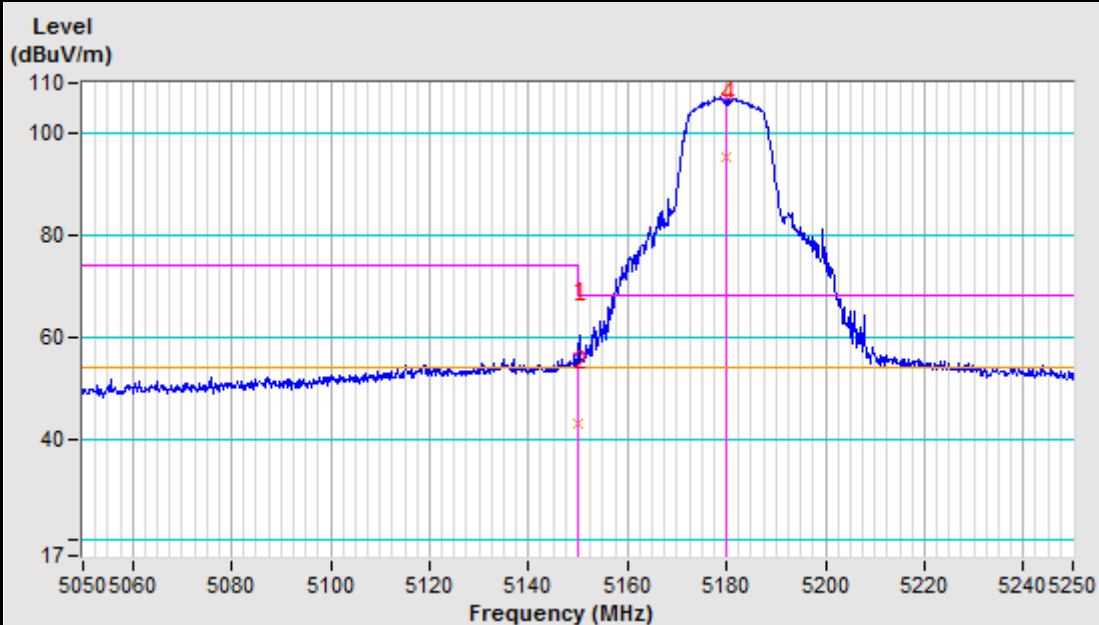

5180MHz Vertical

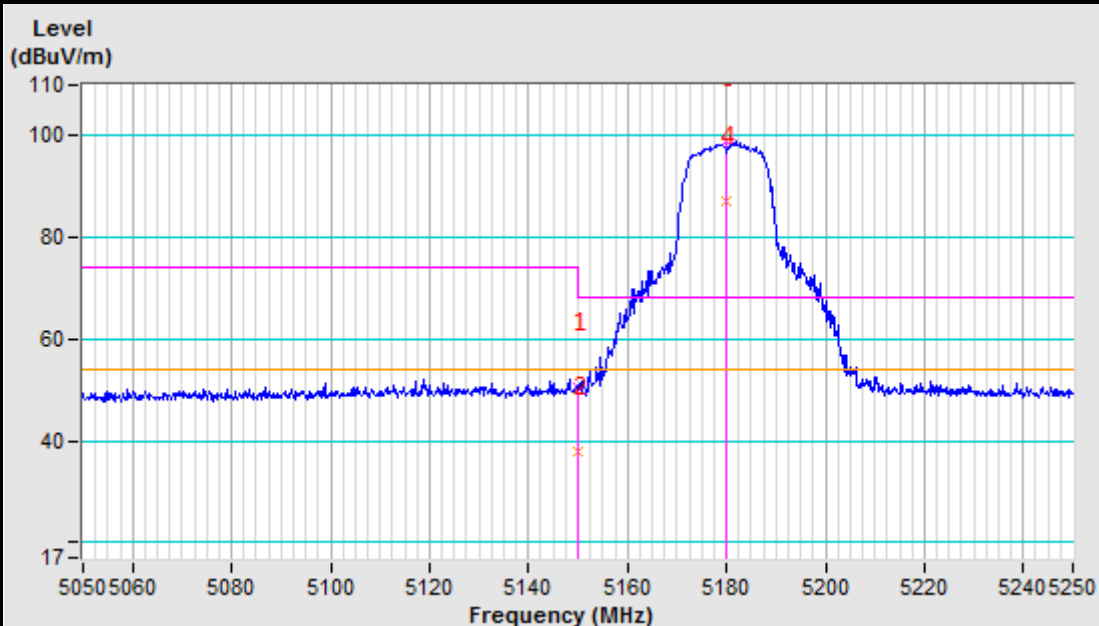

CHANNEL	TX Channel 40	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5120.00	53.04 PK	74.00	-20.96	1.00 H	187	44.27	8.77
2	5120.00	40.75 AV	54.00	-13.25	1.00 H	187	31.98	8.77
3	5150.00	55.62 PK	74.00	-18.38	1.00 H	140	46.82	8.80
4	5150.00	40.63 AV	54.00	-13.37	1.00 H	140	31.83	8.80
5	*5200.00	106.52 PK			1.00 H	140	97.67	8.85
6	*5200.00	94.03 AV			1.00 H	140	85.18	8.85
7	#10400.00	59.21 PK	68.20	-8.99	1.00 H	0	41.21	18.00
8	15600.00	66.56 PK	74.00	-7.44	1.00 H	0	42.35	24.21
9	15600.00	49.57 AV	54.00	-4.43	1.00 H	0	25.36	24.21
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5137.00	50.87 PK	74.00	-23.13	1.00 V	187	42.08	8.79
2	5137.00	38.03 AV	54.00	-15.97	1.00 V	187	29.24	8.79
3	5150.00	52.38 PK	74.00	-21.62	1.00 V	187	43.58	8.80
4	5150.00	38.37 AV	54.00	-15.63	1.00 V	187	29.57	8.80
5	*5200.00	101.58 PK			1.00 V	187	92.73	8.85
6	*5200.00	88.97 AV			1.00 V	187	80.12	8.85
7	#10400.00	59.66 PK	68.20	-8.54	1.00 V	0	41.66	18.00
8	15600.00	66.87 PK	74.00	-7.13	1.00 V	0	42.66	24.21
9	15600.00	50.62 AV	54.00	-3.38	1.00 V	0	26.41	24.21

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 48	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5133.00	52.04 PK	74.00	-21.96	1.00 H	96	43.26	8.78
2	5133.00	38.17 AV	54.00	-15.83	1.00 H	96	29.39	8.78
3	5150.00	52.13 PK	74.00	-21.87	1.00 H	96	43.33	8.80
4	5150.00	38.23 AV	54.00	-15.77	1.00 H	96	29.43	8.80
5	*5240.00	105.61 PK			1.00 H	96	96.73	8.88
6	*5240.00	93.03 AV			1.00 H	96	84.15	8.88
7	5350.00	53.39 PK	74.00	-20.61	1.00 H	96	44.41	8.98
8	5350.00	38.62 AV	54.00	-15.38	1.00 H	96	29.64	8.98
9	5367.00	53.25 PK	74.00	-20.75	1.00 H	96	44.25	9.00
10	5367.00	39.06 AV	54.00	-14.94	1.00 H	96	30.06	9.00
11	#10480.00	58.97 PK	68.20	-9.23	1.00 H	0	40.60	18.37
12	15720.00	64.62 PK	74.00	-9.38	1.00 H	0	40.19	24.43
13	15720.00	49.99 AV	54.00	-4.01	1.00 H	0	25.56	24.43
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5123.00	50.15 PK	74.00	-23.85	1.00 V	190	41.37	8.78
2	5123.00	37.77 AV	54.00	-16.23	1.00 V	190	28.99	8.78
3	5150.00	52.20 PK	74.00	-21.80	1.00 V	190	43.40	8.80
4	5150.00	37.17 AV	54.00	-16.83	1.00 V	190	28.37	8.80
5	*5240.00	101.47 PK			1.00 V	190	92.59	8.88
6	*5240.00	90.11 AV			1.00 V	190	81.23	8.88
7	5350.00	50.65 PK	74.00	-23.35	1.00 V	190	41.67	8.98
8	5350.00	38.72 AV	54.00	-15.28	1.00 V	190	29.74	8.98
9	5420.00	52.10 PK	74.00	-21.90	1.00 V	190	43.06	9.04
10	5420.00	38.22 AV	54.00	-15.78	1.00 V	190	29.18	9.04
11	#10480.00	58.85 PK	68.20	-9.35	1.00 V	0	40.48	18.37
12	15720.00	64.60 PK	74.00	-9.40	1.00 V	0	40.17	24.43
13	15720.00	49.03 AV	54.00	-4.97	1.00 V	0	24.60	24.43

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

802.11n (20MHz)

CHANNEL	TX Channel 36	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)


ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	57.71 PK	74.00	-16.29	1.00 H	144	48.91	8.80
2	5150.00	43.08 AV	54.00	-10.92	1.00 H	144	34.28	8.80
3	*5180.00	108.01 PK			1.00 H	144	99.19	8.82
4	*5180.00	96.34 AV			1.00 H	144	87.52	8.82
5	#10360.00	59.69 PK	68.20	-8.51	1.00 H	0	41.88	17.81
6	15540.00	66.94 PK	74.00	-7.06	1.00 H	0	42.85	24.09
7	15540.00	49.97 AV	54.00	-4.03	1.00 H	0	25.88	24.09
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	50.49 PK	74.00	-23.51	1.00 V	260	41.69	8.80
2	5150.00	38.36 AV	54.00	-15.64	1.00 V	260	29.56	8.80
3	*5180.00	99.09 PK			1.00 V	260	90.27	8.82
4	*5180.00	87.27 AV			1.00 V	260	78.45	8.82
5	#10360.00	60.32 PK	68.20	-7.88	1.00 V	0	42.51	17.81
6	15540.00	67.14 PK	74.00	-6.86	1.00 V	0	43.05	24.09
7	15540.00	49.88 AV	54.00	-4.12	1.00 V	0	25.79	24.09

REMARKS:


1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

Band edge Plot

5180MHz Horizontal

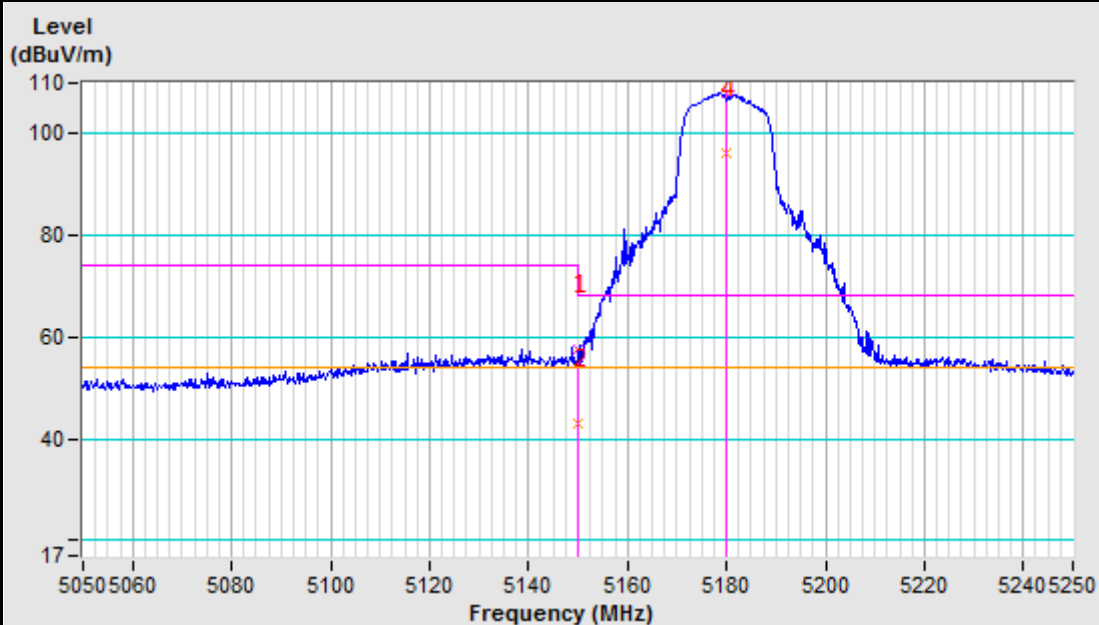

5180MHz Vertical

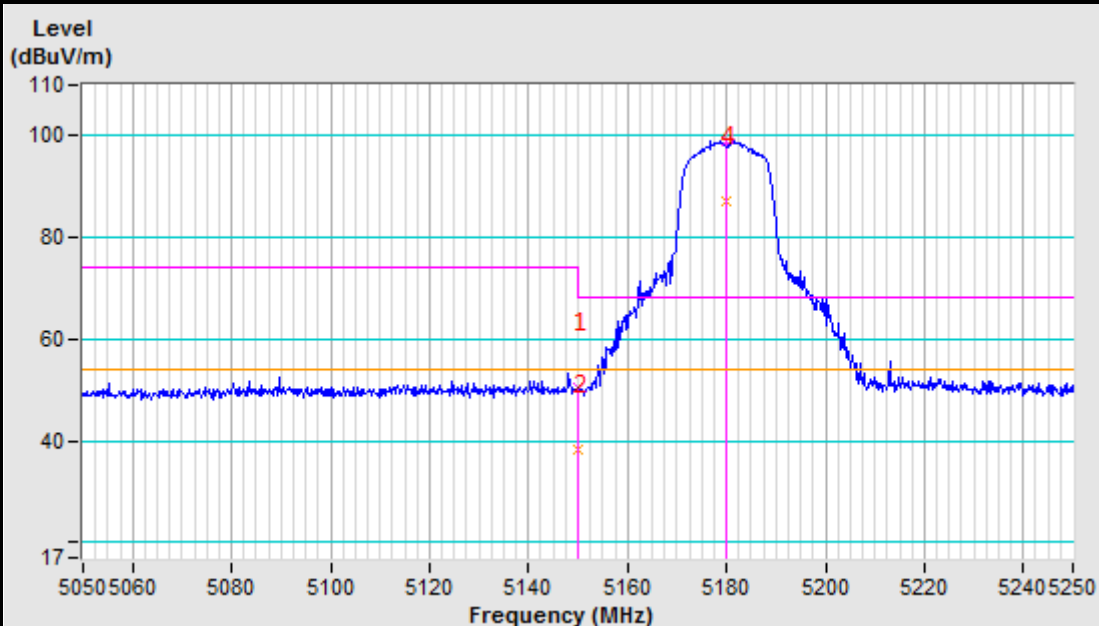

CHANNEL	TX Channel 40	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5137.00	52.06 PK	74.00	-21.94	1.00 H	97	43.27	8.79
2	5137.00	39.77 AV	54.00	-14.23	1.00 H	97	30.98	8.79
3	5150.00	54.30 PK	74.00	-19.70	1.00 H	97	45.50	8.80
4	5150.00	39.55 AV	54.00	-14.45	1.00 H	97	30.75	8.80
5	*5200.00	106.31 PK			1.00 H	97	97.46	8.85
6	*5200.00	93.06 AV			1.00 H	97	84.21	8.85
7	#10400.00	59.34 PK	68.20	-8.86	1.00 H	0	41.34	18.00
8	15600.00	66.62 PK	74.00	-7.38	1.00 H	0	42.41	24.21
9	15600.00	49.58 AV	54.00	-4.42	1.00 H	0	25.37	24.21
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5137.00	51.45 PK	74.00	-22.55	1.00 V	185	42.66	8.79
2	5137.00	38.65 AV	54.00	-15.35	1.00 V	185	29.86	8.79
3	5150.00	53.21 PK	74.00	-20.79	1.00 V	185	44.41	8.80
4	5150.00	38.66 AV	54.00	-15.34	1.00 V	185	29.86	8.80
5	*5200.00	101.24 PK			1.00 V	185	92.39	8.85
6	*5200.00	89.14 AV			1.00 V	185	80.29	8.85
7	#10400.00	59.58 PK	68.20	-8.62	1.00 V	0	41.58	18.00
8	15600.00	66.85 PK	74.00	-7.15	1.00 V	0	42.64	24.21
9	15600.00	50.12 AV	54.00	-3.88	1.00 V	0	25.91	24.21

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 48	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5135.00	52.46 PK	74.00	-21.54	1.00 H	100	43.67	8.79
2	5135.00	38.29 AV	54.00	-15.71	1.00 H	100	29.50	8.79
3	5150.00	54.85 PK	74.00	-19.15	1.00 H	100	46.05	8.80
4	5150.00	38.34 AV	54.00	-15.66	1.00 H	100	29.54	8.80
5	*5240.00	106.05 PK			1.00 H	100	97.17	8.88
6	*5240.00	93.88 AV			1.00 H	100	85.00	8.88
7	5350.00	54.38 PK	74.00	-19.62	1.00 H	100	45.40	8.98
8	5350.00	38.66 AV	54.00	-15.34	1.00 H	100	29.68	8.98
9	5365.00	55.11 PK	74.00	-18.89	1.00 H	100	46.12	8.99
10	5365.00	39.24 AV	54.00	-14.76	1.00 H	100	30.25	8.99
11	#10480.00	59.19 PK	68.20	-9.01	1.00 H	0	40.82	18.37
12	15720.00	65.55 PK	74.00	-8.45	1.00 H	0	41.12	24.43
13	15720.00	50.02 AV	54.00	-3.98	1.00 H	0	25.59	24.43
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5121.00	50.84 PK	74.00	-23.16	1.00 V	192	42.07	8.77
2	5121.00	38.14 AV	54.00	-15.86	1.00 V	192	29.37	8.77
3	5150.00	52.64 PK	74.00	-21.36	1.00 V	192	43.84	8.80
4	5150.00	37.34 AV	54.00	-16.66	1.00 V	192	28.54	8.80
5	*5240.00	101.31 PK			1.00 V	192	92.43	8.88
6	*5240.00	90.24 AV			1.00 V	192	81.36	8.88
7	5350.00	51.64 PK	74.00	-22.36	1.00 V	192	42.66	8.98
8	5350.00	38.77 AV	54.00	-15.23	1.00 V	192	29.79	8.98
9	5423.00	53.68 PK	74.00	-20.32	1.00 V	192	44.63	9.05
10	5423.00	38.39 AV	54.00	-15.61	1.00 V	192	29.34	9.05
11	#10480.00	59.11 PK	68.20	-9.09	1.00 V	0	40.74	18.37
12	15720.00	65.41 PK	74.00	-8.59	1.00 V	0	40.98	24.43
13	15720.00	49.11 AV	54.00	-4.89	1.00 V	0	24.68	24.43

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

802.11n (40MHz)

CHANNEL	TX Channel 38	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)


ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5148.20	69.57 PK	74.00	-4.43	1.00 H	145	60.77	8.80
2	5148.20	49.10 AV	54.00	-4.90	1.00 H	145	40.30	8.80
3	5150.00	67.23 PK	74.00	-6.77	1.00 H	145	58.43	8.80
4	5150.00	50.03 AV	54.00	-3.97	1.00 H	145	41.23	8.80
5	*5190.00	104.07 PK			1.00 H	145	95.24	8.83
6	*5190.00	90.33 AV			1.00 H	145	81.50	8.83
7	#10380.00	60.44 PK	68.20	-7.76	1.00 H	0	42.53	17.91
8	15570.00	67.42 PK	74.00	-6.58	1.00 H	0	43.27	24.15
9	15570.00	49.74 AV	54.00	-4.26	1.00 H	0	25.59	24.15
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	63.20 PK	74.00	-10.80	1.00 V	261	54.40	8.80
2	5150.00	46.12 AV	54.00	-7.88	1.00 V	261	37.32	8.80
3	*5190.00	96.71 PK			1.00 V	261	87.88	8.83
4	*5190.00	83.69 AV			1.00 V	261	74.86	8.83
5	#10380.00	59.91 PK	68.20	-8.29	1.00 V	0	42.00	17.91
6	15570.00	66.95 PK	74.00	-7.05	1.00 V	0	42.80	24.15
7	15570.00	50.12 AV	54.00	-3.88	1.00 V	0	25.97	24.15

REMARKS:


1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

Band edge Plot

5190MHz Horizontal

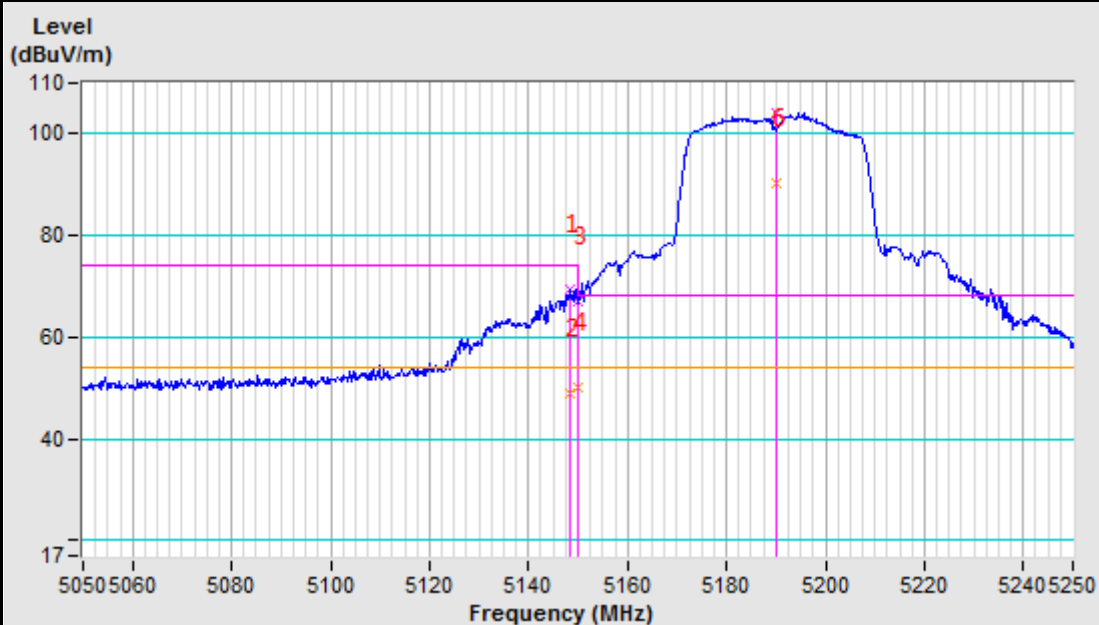

5190MHz Vertical

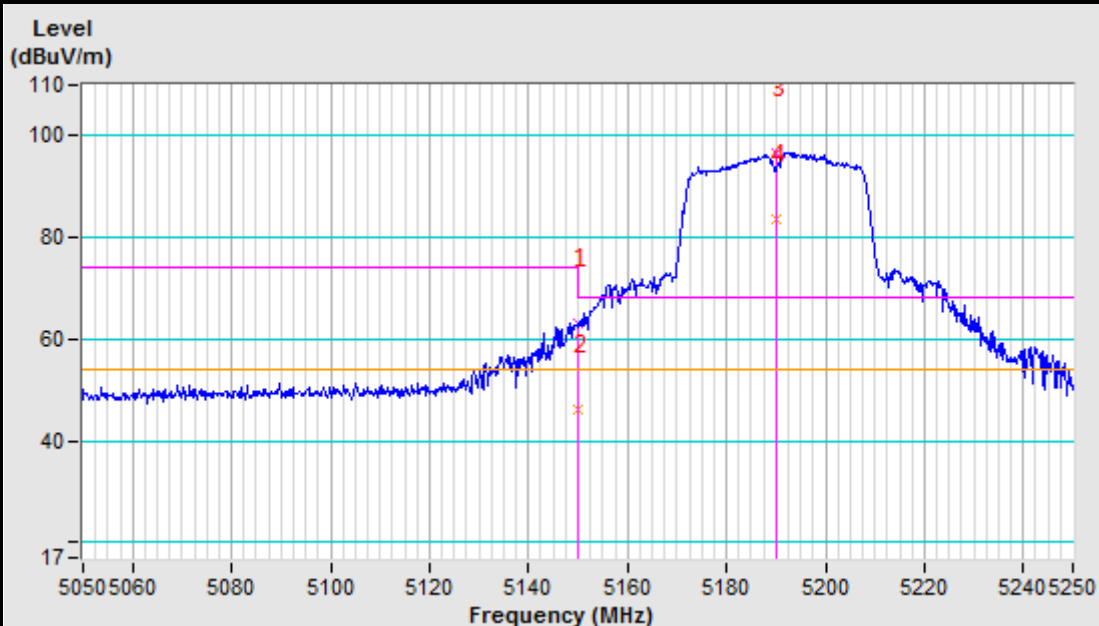

CHANNEL	TX Channel 46	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5135.00	50.49 PK	74.00	-23.51	1.00 H	95	41.70	8.79
2	5135.00	37.34 AV	54.00	-16.66	1.00 H	95	28.55	8.79
3	5150.00	51.22 PK	74.00	-22.78	1.00 H	95	42.42	8.80
4	5150.00	37.26 AV	54.00	-16.74	1.00 H	95	28.46	8.80
5	*5230.00	101.68 PK			1.00 H	95	92.81	8.87
6	*5230.00	87.36 AV			1.00 H	95	78.49	8.87
7	#10460.00	59.58 PK	68.20	-8.62	1.00 H	0	41.30	18.28
8	15690.00	66.23 PK	74.00	-7.77	1.00 H	0	41.86	24.37
9	15690.00	49.31 AV	54.00	-4.69	1.00 H	0	24.94	24.37
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5111.00	50.83 PK	74.00	-23.17	1.00 V	179	42.07	8.76
2	5111.00	37.54 AV	54.00	-16.46	1.00 V	179	28.78	8.76
3	5150.00	51.86 PK	74.00	-22.14	1.00 V	179	43.06	8.80
4	5150.00	37.67 AV	54.00	-16.33	1.00 V	179	28.87	8.80
5	*5230.00	101.70 PK			1.00 V	179	92.83	8.87
6	*5230.00	86.84 AV			1.00 V	179	77.97	8.87
7	#10460.00	59.44 PK	68.20	-8.76	1.00 V	0	41.16	18.28
8	15690.00	66.23 PK	74.00	-7.77	1.00 V	0	41.86	24.37
9	15690.00	49.27 AV	54.00	-4.73	1.00 V	0	24.90	24.37

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



**BUREAU
VERITAS**

Test Report No.: RF200618N021-4

Band 2 (5250-5350MHz): ABOVE 1GHz DATA 802.11a

CHANNEL	TX Channel 52	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5135.00	52.16 PK	74.00	-21.84	1.00 H	339	43.37	8.79
2	5135.00	38.19 AV	54.00	-15.81	1.00 H	339	29.40	8.79
3	5150.00	52.85 PK	74.00	-21.15	1.00 H	339	44.05	8.80
4	5150.00	37.78 AV	54.00	-16.22	1.00 H	339	28.98	8.80
5	*5260.00	105.85 PK			1.00 H	339	96.95	8.90
6	*5260.00	92.64 AV			1.00 H	339	83.74	8.90
7	5350.00	53.33 PK	74.00	-20.67	1.00 H	339	44.35	8.98
8	5350.00	38.59 AV	54.00	-15.41	1.00 H	339	29.61	8.98
9	5369.00	53.45 PK	74.00	-20.55	1.00 H	339	44.45	9.00
10	5369.00	38.89 AV	54.00	-15.11	1.00 H	339	29.89	9.00
11	#10520.00	59.08 PK	68.20	-9.12	1.00 H	0	40.56	18.52
12	15780.00	64.83 PK	74.00	-9.17	1.00 H	0	40.30	24.53
13	15780.00	48.59 AV	54.00	-5.41	1.00 H	0	24.06	24.53
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5131.00	50.61 PK	74.00	-23.39	1.00 V	178	41.83	8.78
2	5131.00	37.05 AV	54.00	-16.95	1.00 V	178	28.27	8.78
3	5150.00	50.58 PK	74.00	-23.42	1.00 V	178	41.78	8.80
4	5150.00	36.75 AV	54.00	-17.25	1.00 V	178	27.95	8.80
5	*5260.00	103.30 PK			1.00 V	178	94.40	8.90
6	*5260.00	90.02 AV			1.00 V	178	81.12	8.90
7	5350.00	52.98 PK	74.00	-21.02	1.00 V	178	44.00	8.98
8	5350.00	38.35 AV	54.00	-15.65	1.00 V	178	29.37	8.98
9	5442.00	52.21 PK	74.00	-21.79	1.00 V	178	43.15	9.06
10	5442.00	38.55 AV	54.00	-15.45	1.00 V	178	29.49	9.06
11	#10520.00	59.68 PK	68.20	-8.52	1.00 V	0	41.16	18.52
12	15780.00	66.38 PK	74.00	-7.62	1.00 V	0	41.85	24.53
13	15780.00	49.30 AV	54.00	-4.70	1.00 V	0	24.77	24.53

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

**Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch**

No. 96, Guantai Road (Houjie Section), Houjie
Town, Dongguan City, Guangdong Province.
523942. People's Republic of China.

Tel: +86 769 8998 2098
Fax: +86 769 8593 1080
Email: customerservice.dg@cn.bureauveritas.com

CHANNEL	TX Channel 60	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5300.00	108.74 PK			1.00 H	137	99.81	8.93
2	*5300.00	95.36 AV			1.00 H	137	86.43	8.93
3	5350.00	55.80 PK	74.00	-18.20	1.00 H	137	46.82	8.98
4	5350.00	43.53 AV	54.00	-10.47	1.00 H	137	34.55	8.98
5	5353.00	57.60 PK	74.00	-16.40	1.00 H	137	48.61	8.99
6	5353.00	43.17 AV	54.00	-10.83	1.00 H	137	34.18	8.99
7	10600.00	59.81 PK	74.00	-14.19	1.00 H	0	41.10	18.71
8	10600.00	45.89 AV	54.00	-8.11	1.00 H	0	27.18	18.71
9	15900.00	66.72 PK	74.00	-7.28	1.00 H	0	41.97	24.75
10	15900.00	49.64 AV	54.00	-4.36	1.00 H	0	24.89	24.75
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5300.00	103.12 PK			1.00 V	185	94.19	8.93
2	*5300.00	90.08 AV			1.00 V	185	81.15	8.93
3	5350.00	52.57 PK	74.00	-21.43	1.00 V	185	43.59	8.98
4	5350.00	39.81 AV	54.00	-14.19	1.00 V	185	30.83	8.98
5	5360.00	53.56 PK	74.00	-20.44	1.00 V	185	44.57	8.99
6	5360.00	39.60 AV	54.00	-14.40	1.00 V	185	30.61	8.99
7	10600.00	59.59 PK	74.00	-14.41	1.00 V	0	40.88	18.71
8	10600.00	45.72 AV	54.00	-8.28	1.00 V	0	27.01	18.71
9	15900.00	67.17 PK	74.00	-6.83	1.00 V	0	42.42	24.75
10	15900.00	49.65 AV	54.00	-4.35	1.00 V	0	24.90	24.75

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 64	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)


ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5320.00	105.88 PK			1.00 H	100	96.92	8.96
2	*5320.00	94.01 AV			1.00 H	100	85.05	8.96
3	5350.00	55.97 PK	74.00	-18.03	1.00 H	100	46.99	8.98
4	5350.00	42.73 AV	54.00	-11.27	1.00 H	100	33.75	8.98
5	10640.00	59.85 PK	74.00	-14.15	1.00 H	0	41.04	18.81
6	10640.00	45.86 AV	54.00	-8.14	1.00 H	0	27.05	18.81
7	15960.00	66.77 PK	74.00	-7.23	1.00 H	0	41.90	24.87
8	15960.00	49.63 AV	54.00	-4.37	1.00 H	0	24.76	24.87
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5320.00	101.93 PK			1.00 V	275	92.97	8.96
2	*5320.00	90.26 AV			1.00 V	275	81.30	8.96
3	5350.00	52.21 PK	74.00	-21.79	1.00 V	275	43.23	8.98
4	5350.00	40.35 AV	54.00	-13.65	1.00 V	275	31.37	8.98
5	10640.00	59.44 PK	74.00	-14.56	1.00 V	0	40.63	18.81
6	10640.00	45.65 AV	54.00	-8.35	1.00 V	0	26.84	18.81
7	15960.00	67.12 PK	74.00	-6.88	1.00 V	0	42.25	24.87
8	15960.00	49.61 AV	54.00	-4.39	1.00 V	0	24.74	24.87

REMARKS:


1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.

Band edge Plot

5320MHz Horizontal

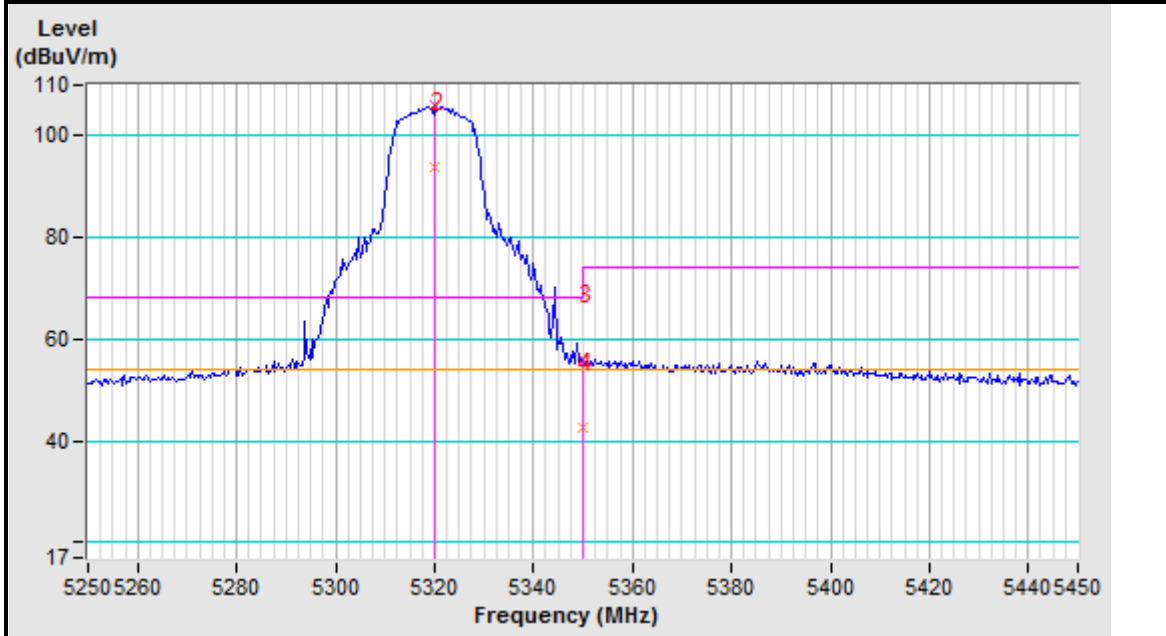

5320MHz Vertical

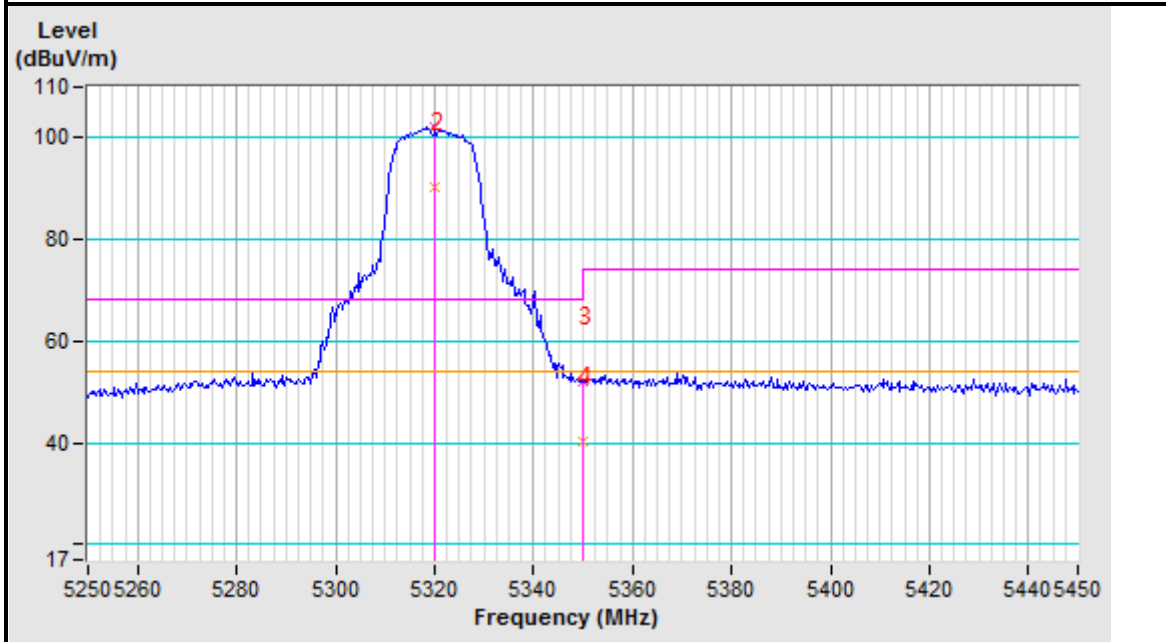

802.11n (20MHz)

CHANNEL	TX Channel 52	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5087.00	51.01 PK	74.00	-22.99	1.00 H	340	42.27	8.74
2	5087.00	37.71 AV	54.00	-16.29	1.00 H	340	28.97	8.74
3	5150.00	52.59 PK	74.00	-21.41	1.00 H	340	43.79	8.80
4	5150.00	37.90 AV	54.00	-16.10	1.00 H	340	29.10	8.80
5	*5260.00	106.27 PK			1.00 H	340	97.37	8.90
6	*5260.00	93.58 AV			1.00 H	340	84.68	8.90
7	5350.00	53.21 PK	74.00	-20.79	1.00 H	340	44.23	8.98
8	5350.00	38.24 AV	54.00	-15.76	1.00 H	340	29.26	8.98
9	5370.00	53.49 PK	74.00	-20.51	1.00 H	340	44.49	9.00
10	5370.00	38.91 AV	54.00	-15.09	1.00 H	340	29.91	9.00
11	#10520.00	59.19 PK	68.20	-9.01	1.00 H	0	40.67	18.52
12	15780.00	64.88 PK	74.00	-9.12	1.00 H	0	40.35	24.53
13	15780.00	48.63 AV	54.00	-5.37	1.00 H	0	24.10	24.53
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5133.00	51.66 PK	74.00	-22.34	1.00 V	177	42.88	8.78
2	5133.00	37.17 AV	54.00	-16.83	1.00 V	177	28.39	8.78
3	5150.00	51.55 PK	74.00	-22.45	1.00 V	177	42.75	8.80
4	5150.00	36.91 AV	54.00	-17.09	1.00 V	177	28.11	8.80
5	*5260.00	103.13 PK			1.00 V	177	94.23	8.90
6	*5260.00	90.11 AV			1.00 V	177	81.21	8.90
7	5350.00	53.19 PK	74.00	-20.81	1.00 V	177	44.21	8.98
8	5350.00	38.44 AV	54.00	-15.56	1.00 V	177	29.46	8.98
9	5440.00	52.32 PK	74.00	-21.68	1.00 V	177	43.25	9.07
10	5440.00	38.57 AV	54.00	-15.43	1.00 V	177	29.50	9.07
11	#10520.00	59.78 PK	68.20	-8.42	1.00 V	0	41.26	18.52
12	15780.00	66.41 PK	74.00	-7.59	1.00 V	0	41.88	24.53
13	15780.00	49.44 AV	54.00	-4.56	1.00 V	0	24.91	24.53

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 60	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5300.00	108.50 PK			1.00 H	139	99.57	8.93
2	*5300.00	95.92 AV			1.00 H	139	86.99	8.93
3	5350.00	58.16 PK	74.00	-15.84	1.00 H	139	49.18	8.98
4	5350.00	43.10 AV	54.00	-10.90	1.00 H	139	34.12	8.98
5	5355.00	58.88 PK	74.00	-15.12	1.00 H	139	49.89	8.99
6	5355.00	43.29 AV	54.00	-10.71	1.00 H	139	34.30	8.99
7	10600.00	59.88 PK	74.00	-14.12	1.00 H	0	41.17	18.71
8	10600.00	45.91 AV	54.00	-8.09	1.00 H	0	27.20	18.71
9	15900.00	66.74 PK	74.00	-7.26	1.00 H	0	41.99	24.75
10	15900.00	49.69 AV	54.00	-4.31	1.00 H	0	24.94	24.75
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5300.00	103.33 PK			1.00 V	187	94.40	8.93
2	*5300.00	90.19 AV			1.00 V	187	81.26	8.93
3	5350.00	53.17 PK	74.00	-20.83	1.00 V	187	44.19	8.98
4	5350.00	39.72 AV	54.00	-14.28	1.00 V	187	30.74	8.98
5	5366.00	53.88 PK	74.00	-20.12	1.00 V	187	44.88	9.00
6	5366.00	39.62 AV	54.00	-14.38	1.00 V	187	30.62	9.00
7	10600.00	59.71 PK	74.00	-14.29	1.00 V	0	41.00	18.71
8	10600.00	45.76 AV	54.00	-8.24	1.00 V	0	27.05	18.71
9	15900.00	66.97 PK	74.00	-7.03	1.00 V	0	42.22	24.75
10	15900.00	49.64 AV	54.00	-4.36	1.00 V	0	24.89	24.75

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 64	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)


ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5320.00	107.31 PK			1.00 H	352	98.35	8.96
2	*5320.00	95.09 AV			1.00 H	352	86.13	8.96
3	5350.00	58.34 PK	74.00	-15.66	1.00 H	352	49.36	8.98
4	5350.00	44.55 AV	54.00	-9.45	1.00 H	352	35.57	8.98
5	10640.00	60.15 PK	74.00	-13.85	1.00 H	0	41.34	18.81
6	10640.00	45.91 AV	54.00	-8.09	1.00 H	0	27.10	18.81
7	15960.00	66.93 PK	74.00	-7.07	1.00 H	0	42.06	24.87
8	15960.00	49.72 AV	54.00	-4.28	1.00 H	0	24.85	24.87
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5320.00	106.41 PK			1.00 V	183	97.45	8.96
2	*5320.00	94.12 AV			1.00 V	183	85.16	8.96
3	5350.00	57.06 PK	74.00	-16.94	1.00 V	183	48.08	8.98
4	5350.00	42.38 AV	54.00	-11.62	1.00 V	183	33.40	8.98
5	10640.00	59.47 PK	74.00	-14.53	1.00 V	0	40.66	18.81
6	10640.00	45.66 AV	54.00	-8.34	1.00 V	0	26.85	18.81
7	15960.00	67.14 PK	74.00	-6.86	1.00 V	0	42.27	24.87
8	15960.00	49.63 AV	54.00	-4.37	1.00 V	0	24.76	24.87

REMARKS:


1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.

Band edge Plot

5320MHz Horizontal

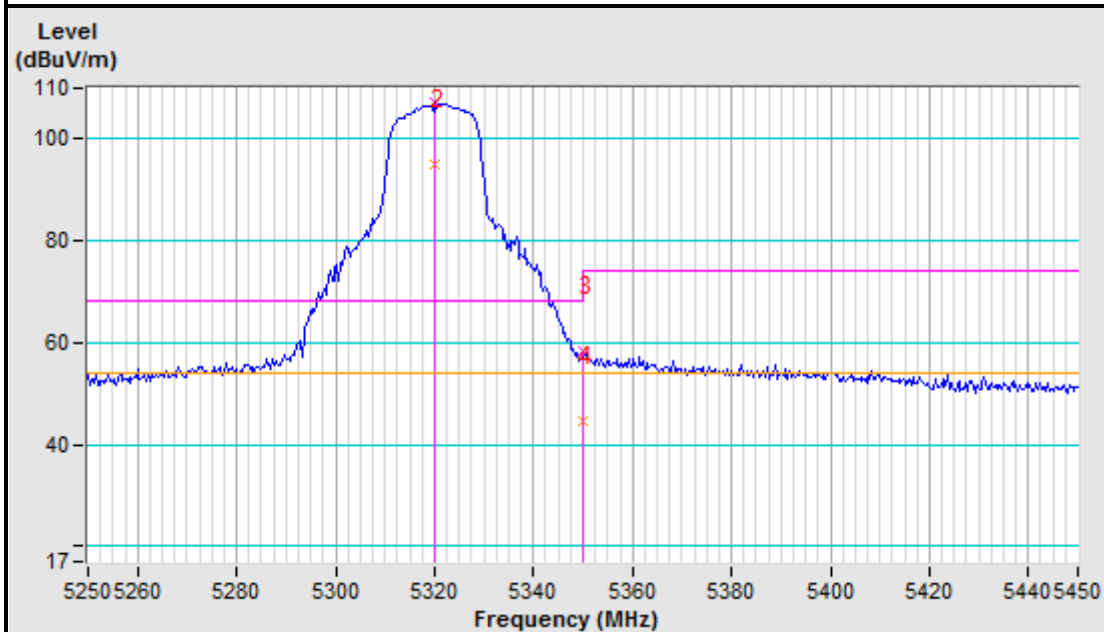

5320MHz Vertical

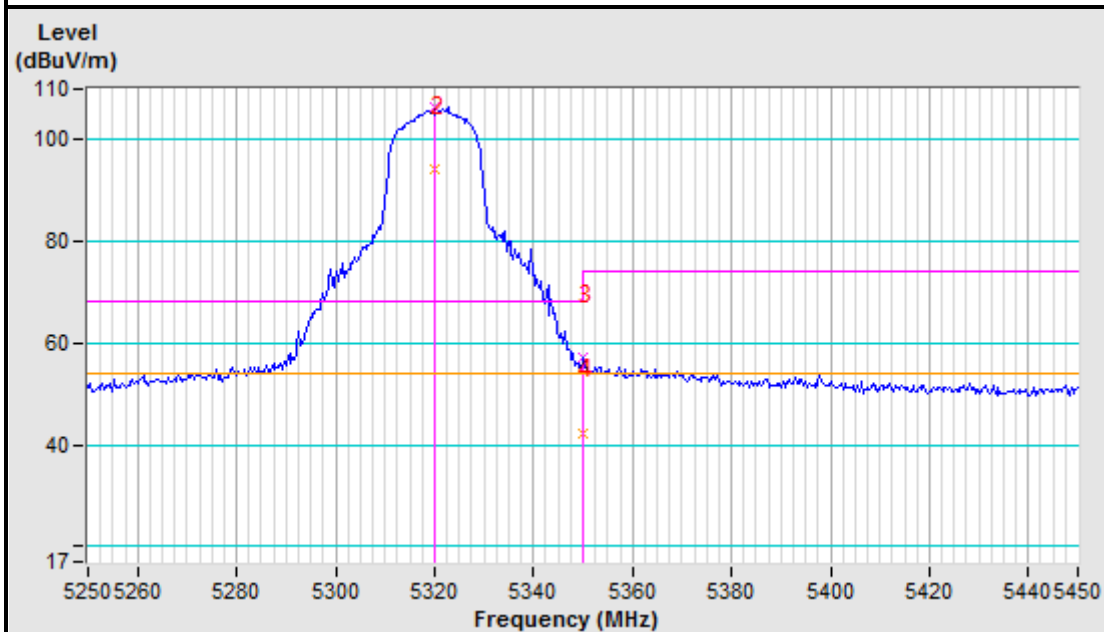

802.11n (40MHz)

CHANNEL	TX Channel 54	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5270.00	103.88 PK			1.00 H	144	94.97	8.91
2	*5270.00	89.93 AV			1.00 H	144	81.02	8.91
3	5350.00	55.24 PK	74.00	-18.76	1.00 H	144	46.26	8.98
4	5350.00	41.50 AV	54.00	-12.50	1.00 H	144	32.52	8.98
5	5418.00	55.20 PK	74.00	-18.80	1.00 H	144	46.15	9.05
6	5418.00	40.93 AV	54.00	-13.07	1.00 H	144	31.88	9.05
7	#10540.00	59.60 PK	68.20	-8.60	1.00 H	0	41.03	18.57
8	15810.00	65.05 PK	74.00	-8.95	1.00 H	0	40.46	24.59
9	15810.00	48.75 AV	54.00	-5.25	1.00 H	0	24.16	24.59
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5270.00	96.07 PK			1.00 V	178	87.16	8.91
2	*5270.00	81.51 AV			1.00 V	178	72.60	8.91
3	5350.00	51.49 PK	74.00	-22.51	1.00 V	178	42.51	8.98
4	5350.00	38.97 AV	54.00	-15.03	1.00 V	178	29.99	8.98
5	5417.00	52.81 PK	74.00	-21.19	1.00 V	178	43.76	9.05
6	5417.00	38.88 AV	54.00	-15.12	1.00 V	178	29.83	9.05
7	#10540.00	59.50 PK	68.20	-8.70	1.00 V	0	40.93	18.57
8	15810.00	66.09 PK	74.00	-7.91	1.00 V	0	41.50	24.59
9	15810.00	48.76 AV	54.00	-5.24	1.00 V	0	24.17	24.59

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 62	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)


ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5310.00	102.86 PK			1.00 H	101	93.91	8.95
2	*5310.00	88.99 AV			1.00 H	101	80.04	8.95
3	5350.00	67.22 PK	74.00	-6.78	1.00 H	101	58.24	8.98
4	5350.00	48.90 AV	54.00	-5.10	1.00 H	101	39.92	8.98
5	10620.00	60.17 PK	74.00	-13.83	1.00 H	0	41.41	18.76
6	10620.00	46.10 AV	54.00	-7.90	1.00 H	0	27.34	18.76
7	15930.00	66.97 PK	74.00	-7.03	1.00 H	0	42.16	24.81
8	15930.00	49.08 AV	54.00	-4.92	1.00 H	0	24.27	24.81
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5310.00	99.69 PK			1.00 V	217	90.74	8.95
2	*5310.00	85.85 AV			1.00 V	217	76.90	8.95
3	5350.00	64.19 PK	74.00	-9.81	1.00 V	217	55.21	8.98
4	5350.00	46.08 AV	54.00	-7.92	1.00 V	217	37.10	8.98
5	10620.00	59.57 PK	74.00	-14.43	1.00 V	0	40.81	18.76
6	10620.00	45.68 AV	54.00	-8.32	1.00 V	0	26.92	18.76
7	15930.00	66.13 PK	74.00	-7.87	1.00 V	0	41.32	24.81
8	15930.00	48.68 AV	54.00	-5.32	1.00 V	0	23.87	24.81

REMARKS:


1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.

Band edge Plot

5310MHz Horizontal

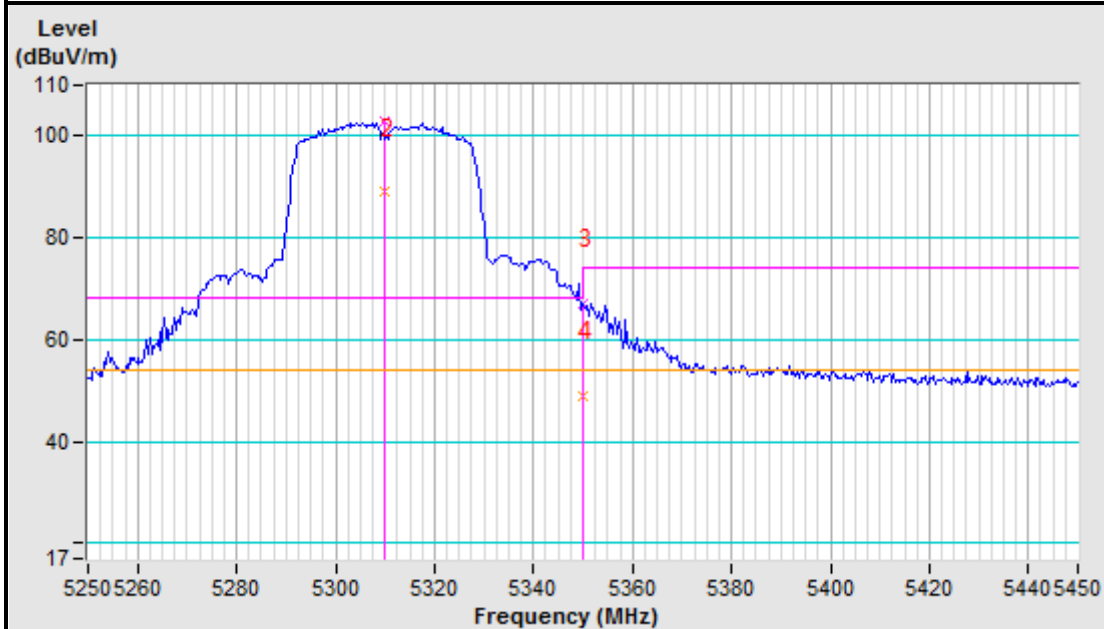

5310MHz Vertical

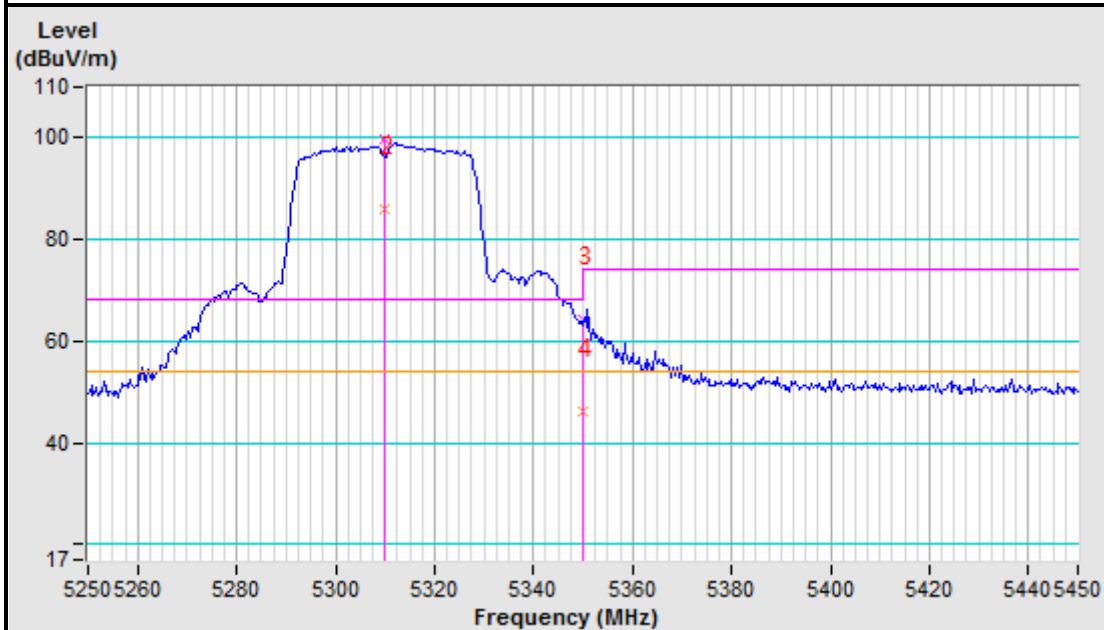

Band 3 (5470-5725MHz): ABOVE 1GHz DATA 802.11a

CHANNEL	TX Channel 100	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)


ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5470.00	55.76 PK	68.20	-12.44	1.00 H	150	46.67	9.09
2	*5500.00	102.67 PK			1.00 H	150	93.55	9.12
3	*5500.00	90.78 AV			1.00 H	150	81.66	9.12
4	11000.00	61.25 PK	74.00	-12.75	1.00 H	0	41.57	19.68
5	11000.00	47.06 AV	54.00	-6.94	1.00 H	0	27.38	19.68
6	#16500.00	65.18 PK	68.20	-3.02	1.00 H	0	39.75	25.43
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5470.00	52.63 PK	68.20	-15.57	1.00 V	164	43.54	9.09
2	*5500.00	100.42 PK			1.00 V	164	91.30	9.12
3	*5500.00	88.12 AV			1.00 V	164	79.00	9.12
4	11000.00	60.84 PK	74.00	-13.16	1.00 V	0	41.16	19.68
5	11000.00	46.99 AV	54.00	-7.01	1.00 V	0	27.31	19.68
6	#16500.00	64.39 PK	68.20	-3.81	1.00 V	0	38.96	25.43

REMARKS:


1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

Band edge Plot

5500MHz Horizontal

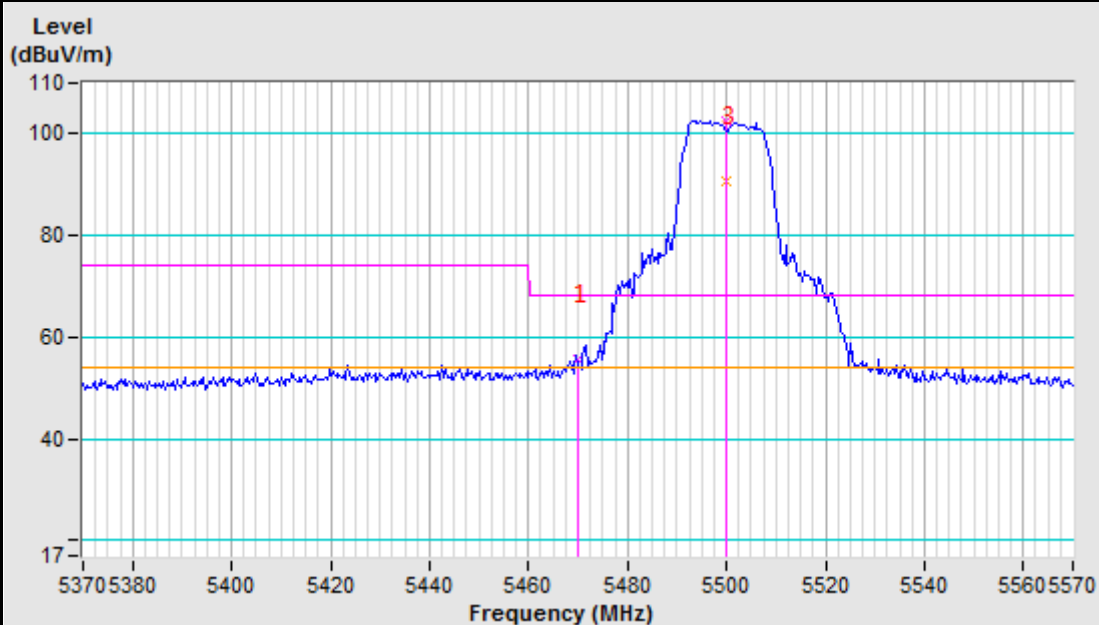

5500MHz Vertical

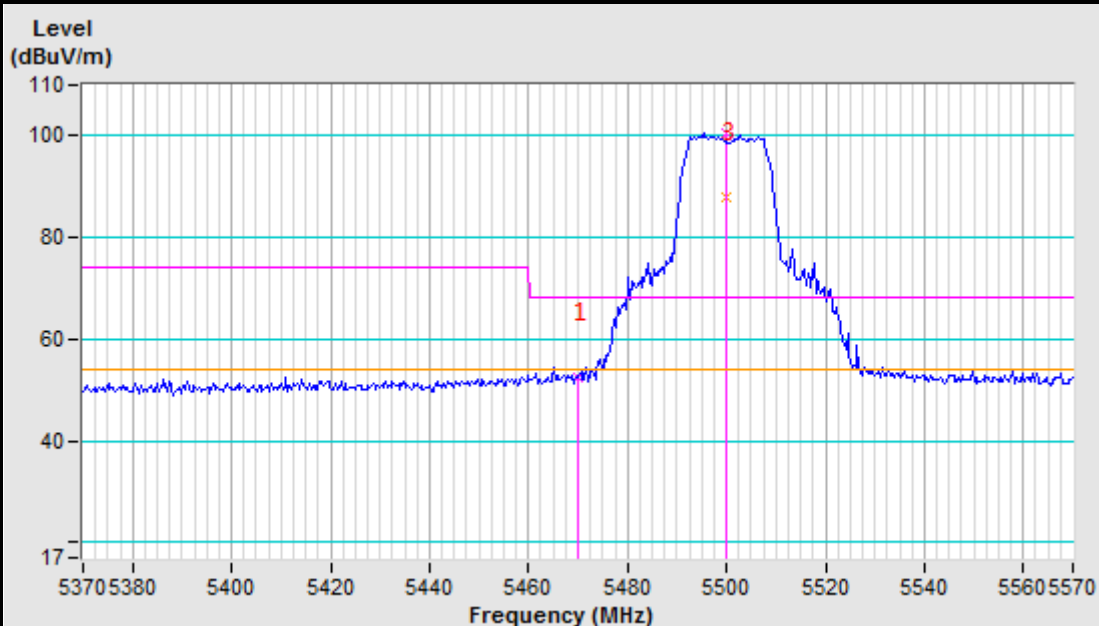

CHANNEL	TX Channel 116	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5470.00	52.17 PK	68.20	-16.03	1.00 H	144	43.08	9.09
2	*5580.00	103.72 PK			1.00 H	144	94.30	9.42
3	*5580.00	90.60 AV			1.00 H	144	81.18	9.42
4	11160.00	59.74 PK	74.00	-14.26	1.00 H	0	39.79	19.95
5	11160.00	46.53 AV	54.00	-7.47	1.00 H	0	26.58	19.95
6	#16740.00	65.14 PK	68.20	-3.06	1.00 H	0	38.94	26.20
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5470.00	50.07 PK	68.20	-18.13	1.00 V	153	40.98	9.09
2	*5580.00	96.94 PK			1.00 V	153	87.52	9.42
3	*5580.00	84.55 AV			1.00 V	153	75.13	9.42
4	11160.00	60.71 PK	74.00	-13.29	1.00 V	0	40.76	19.95
5	11160.00	46.82 AV	54.00	-7.18	1.00 V	0	26.87	19.95
6	#16740.00	64.33 PK	68.20	-3.87	1.00 V	0	38.13	26.20

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 140	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)


ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5700.00	106.23 PK			1.00 H	108	96.36	9.87
2	*5700.00	94.48 AV			1.00 H	108	84.61	9.87
3	#5725.00	61.88 PK	68.20	-6.32	1.00 H	108	51.92	9.96
4	11400.00	61.21 PK	74.00	-12.79	1.00 H	0	40.86	20.35
5	11400.00	46.98 AV	54.00	-7.02	1.00 H	0	26.63	20.35
6	#17100.00	65.12 PK	68.20	-3.08	1.00 H	0	37.98	27.14
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5700.00	100.36 PK			1.00 V	266	90.49	9.87
2	*5700.00	88.86 AV			1.00 V	266	78.99	9.87
3	#5725.00	56.79 PK	68.20	-11.41	1.00 V	266	46.83	9.96
4	11400.00	60.77 PK	74.00	-13.23	1.00 V	0	40.42	20.35
5	11400.00	46.88 AV	54.00	-7.12	1.00 V	0	26.53	20.35
6	#17100.00	64.41 PK	68.20	-3.79	1.00 V	0	37.27	27.14

REMARKS:


1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

Band edge Plot

5700MHz Horizontal

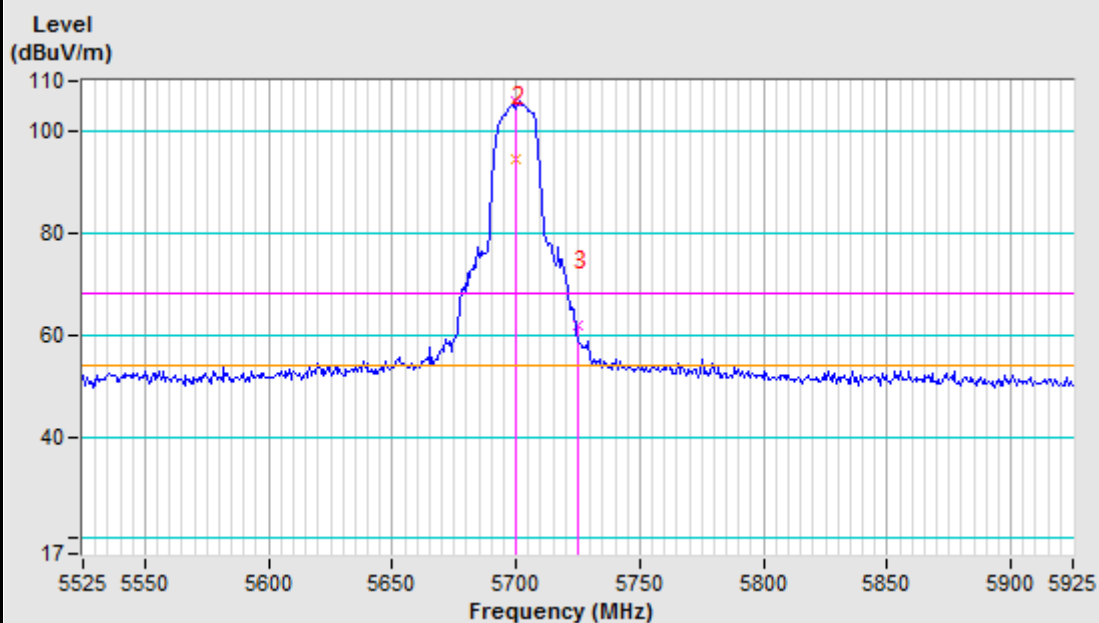

5700MHz Vertical

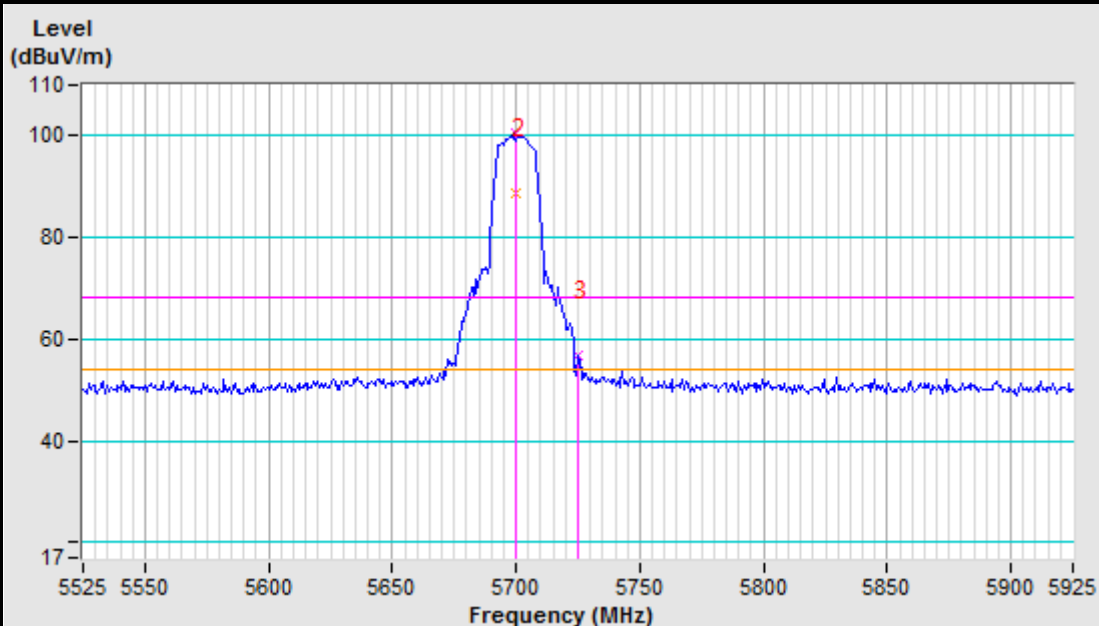

802.11n (20MHz)

CHANNEL	TX Channel 100	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)


ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5470.00	55.41 PK	68.20	-12.79	1.00 H	142	46.32	9.09
2	*5500.00	104.68 PK			1.00 H	142	95.56	9.12
3	*5500.00	92.19 AV			1.00 H	142	83.07	9.12
4	11000.00	61.27 PK	74.00	-12.73	1.00 H	0	41.59	19.68
5	11000.00	47.18 AV	54.00	-6.82	1.00 H	0	27.50	19.68
6	#16500.00	65.01 PK	68.20	-3.19	1.00 H	0	39.58	25.43
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5470.00	54.71 PK	68.20	-13.49	1.00 V	158	45.62	9.09
2	*5500.00	102.26 PK			1.00 V	158	93.14	9.12
3	*5500.00	90.05 AV			1.00 V	158	80.93	9.12
4	11000.00	60.62 PK	74.00	-13.38	1.00 V	0	40.94	19.68
5	11000.00	46.53 AV	54.00	-7.47	1.00 V	0	26.85	19.68
6	#16500.00	64.22 PK	68.20	-3.98	1.00 V	0	38.79	25.43

REMARKS:


1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

Band edge Plot

5500MHz Horizontal

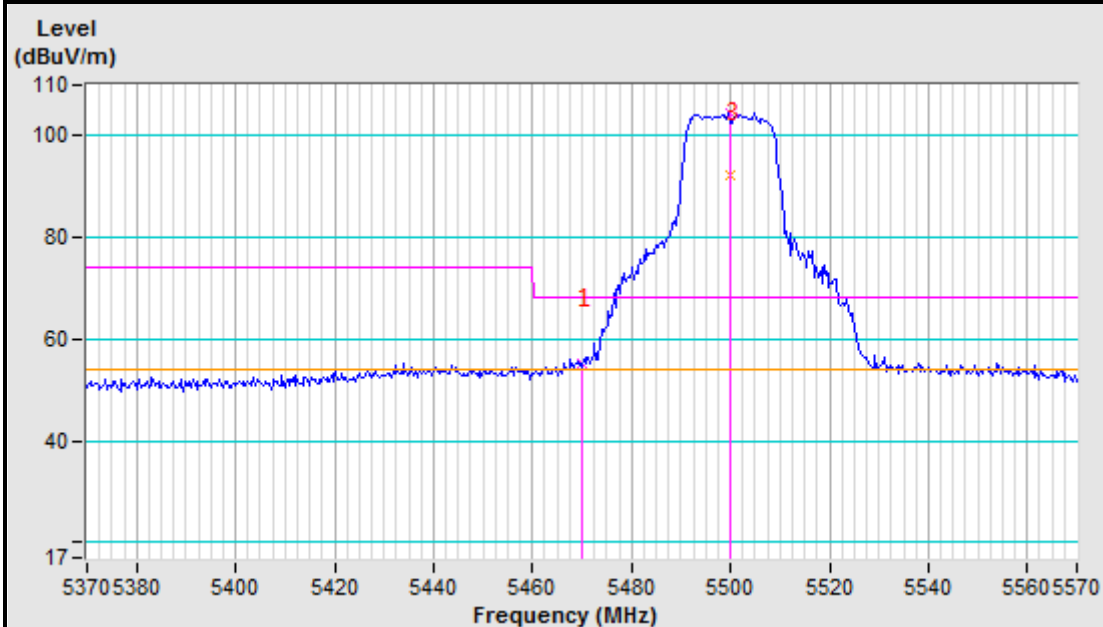

5500MHz Vertical

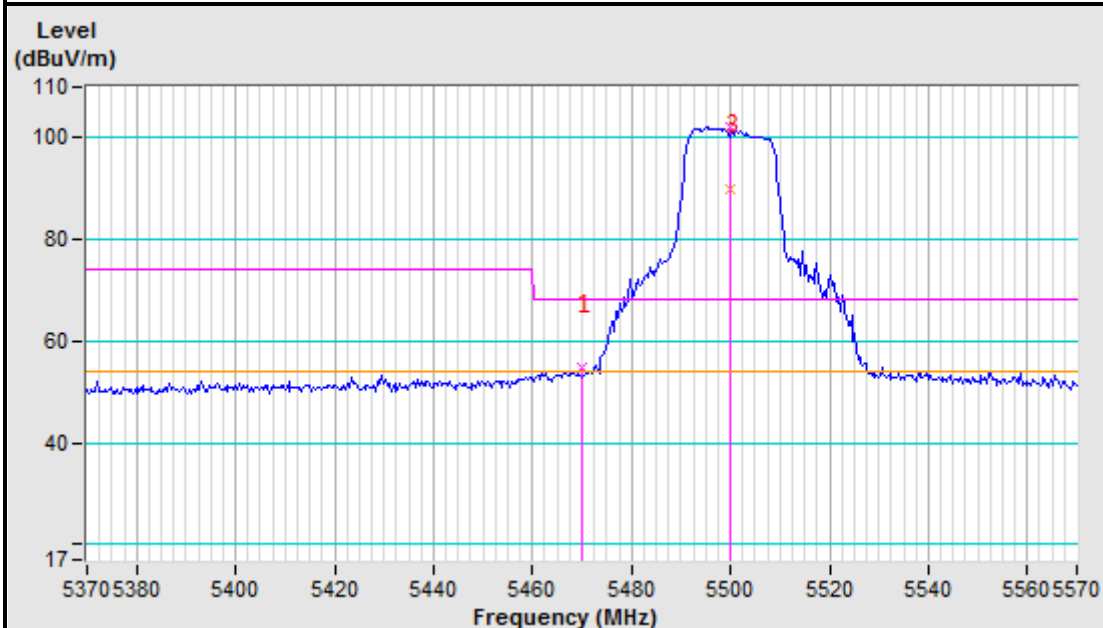

CHANNEL	TX Channel 116	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5470.00	52.96 PK	68.20	-15.24	1.00 H	145	43.87	9.09
2	*5580.00	103.43 PK			1.00 H	145	94.01	9.42
3	*5580.00	90.71 AV			1.00 H	145	81.29	9.42
4	11160.00	60.03 PK	74.00	-13.97	1.00 H	0	40.08	19.95
5	11160.00	46.44 AV	54.00	-7.56	1.00 H	0	26.49	19.95
6	#16740.00	64.86 PK	68.20	-3.34	1.00 H	0	38.66	26.20
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5470.00	50.82 PK	68.20	-17.38	1.00 V	173	41.73	9.09
2	*5580.00	96.79 PK			1.00 V	173	87.37	9.42
3	*5580.00	84.16 AV			1.00 V	173	74.74	9.42
4	11160.00	61.12 PK	74.00	-12.88	1.00 V	0	41.17	19.95
5	11160.00	46.86 AV	54.00	-7.14	1.00 V	0	26.91	19.95
6	#16740.00	64.23 PK	68.20	-3.97	1.00 V	0	38.03	26.20

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 140	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)


ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5700.00	106.31 PK			1.00 H	106	96.44	9.87
2	*5700.00	94.38 AV			1.00 H	106	84.51	9.87
3	#5725.00	63.65 PK	68.20	-4.55	1.00 H	106	53.69	9.96
4	11400.00	61.11 PK	74.00	-12.89	1.00 H	0	40.76	20.35
5	11400.00	46.94 AV	54.00	-7.06	1.00 H	0	26.59	20.35
6	#17100.00	65.00 PK	68.20	-3.20	1.00 H	0	37.86	27.14
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5700.00	102.38 PK			1.00 V	159	92.51	9.87
2	*5700.00	90.93 AV			1.00 V	159	81.06	9.87
3	#5725.00	58.61 PK	68.20	-9.59	1.00 V	159	48.65	9.96
4	11400.00	60.79 PK	74.00	-13.21	1.00 V	0	40.44	20.35
5	11400.00	47.02 AV	54.00	-6.98	1.00 V	0	26.67	20.35
6	#17100.00	64.43 PK	68.20	-3.77	1.00 V	0	37.29	27.14

REMARKS:


1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

Band edge Plot

5700MHz Horizontal

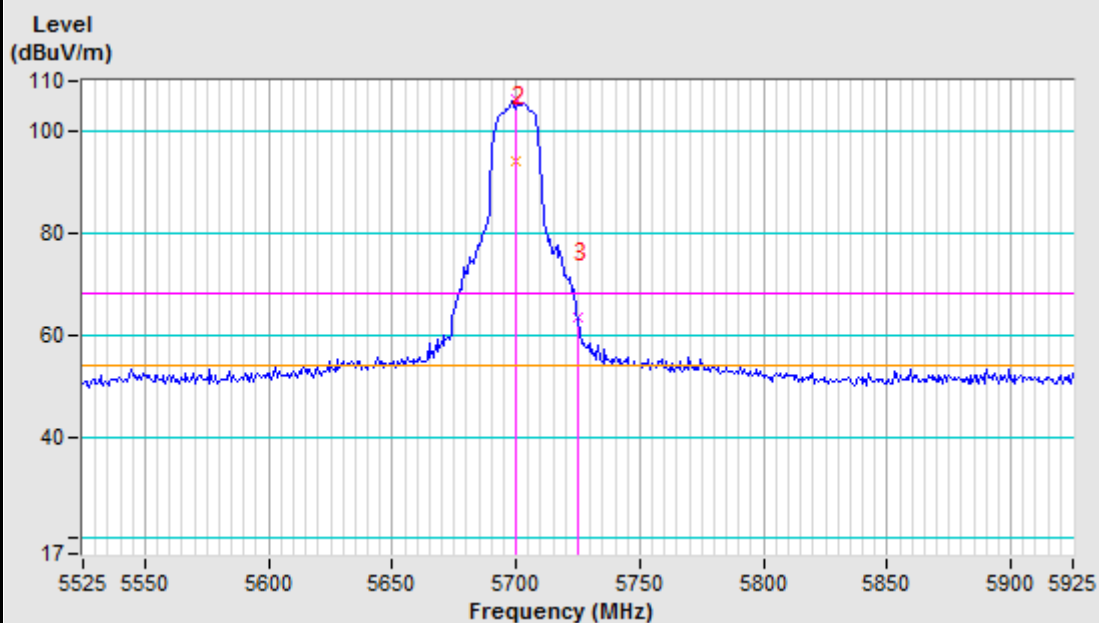

5700MHz Vertical

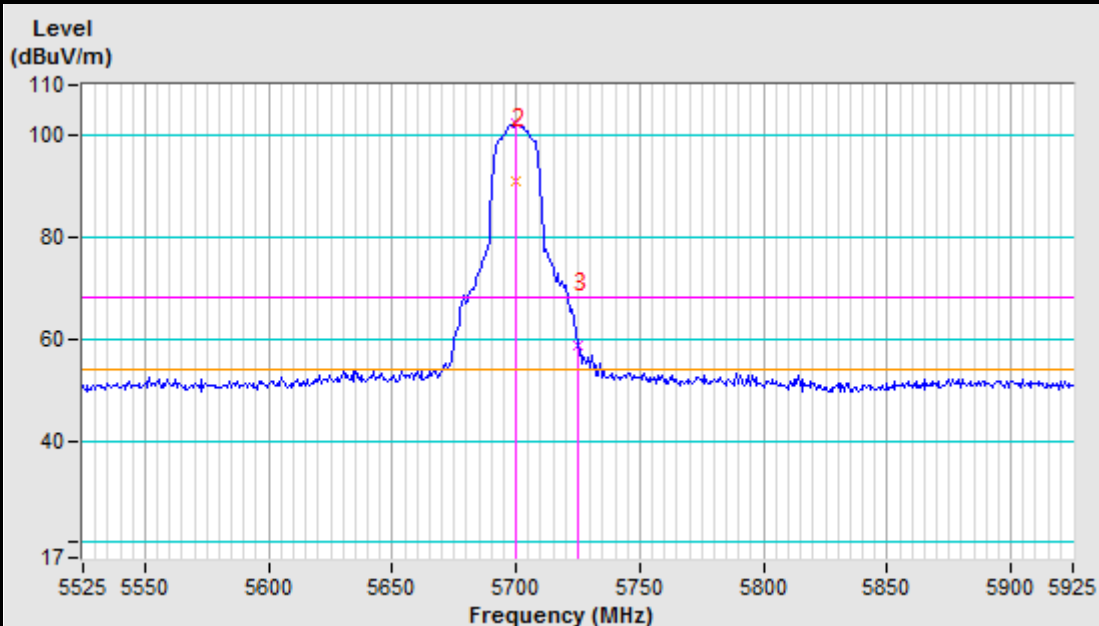

802.11n (40MHz)

CHANNEL	TX Channel 102	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)


ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5468.40	64.91 PK	68.20	-3.29	1.00 H	144	55.82	9.09
2	#5470.00	64.14 PK	68.20	-4.06	1.00 H	144	55.05	9.09
3	*5510.00	100.32 PK			1.00 H	144	91.16	9.16
4	*5510.00	86.26 AV			1.00 H	144	77.10	9.16
5	11020.00	61.34 PK	74.00	-12.66	1.00 H	0	41.63	19.71
6	11020.00	47.34 AV	54.00	-6.66	1.00 H	0	27.63	19.71
7	#16530.00	64.99 PK	68.20	-3.21	1.00 H	0	39.46	25.53
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5470.00	64.95 PK	68.20	-3.25	1.00 V	186	55.86	9.09
2	*5510.00	98.38 PK			1.00 V	186	89.22	9.16
3	*5510.00	84.72 AV			1.00 V	186	75.56	9.16
4	11020.00	60.20 PK	74.00	-13.80	1.00 V	0	40.49	19.71
5	11020.00	46.42 AV	54.00	-7.58	1.00 V	0	26.71	19.71
6	#16530.00	64.25 PK	68.20	-3.95	1.00 V	0	38.72	25.53

REMARKS:


1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

Band edge Plot

5510MHz Horizontal

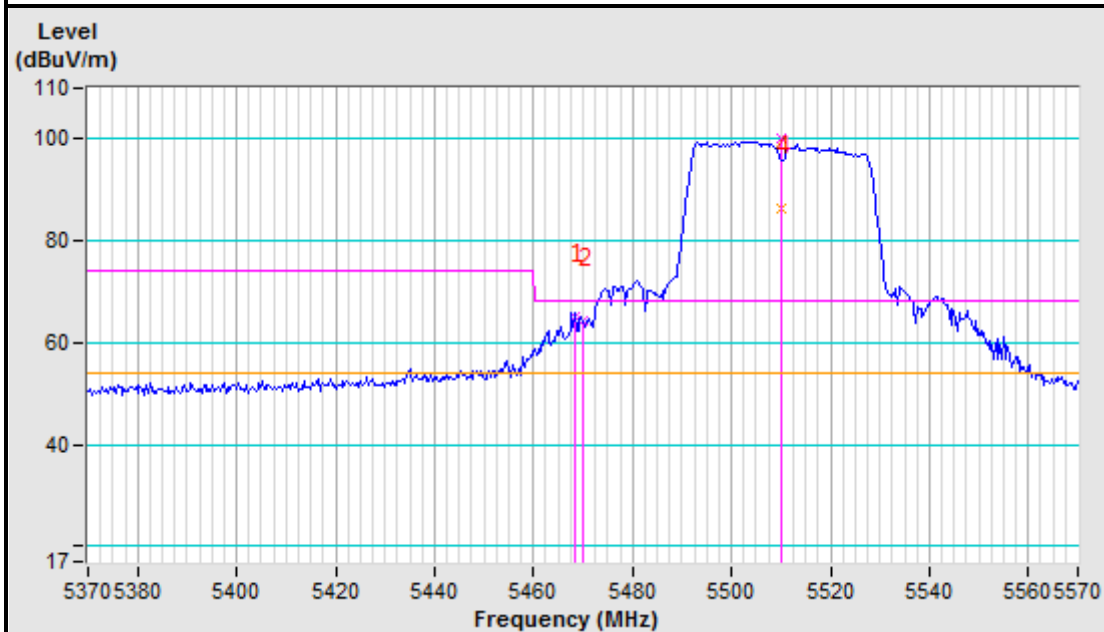

5510MHz Vertical

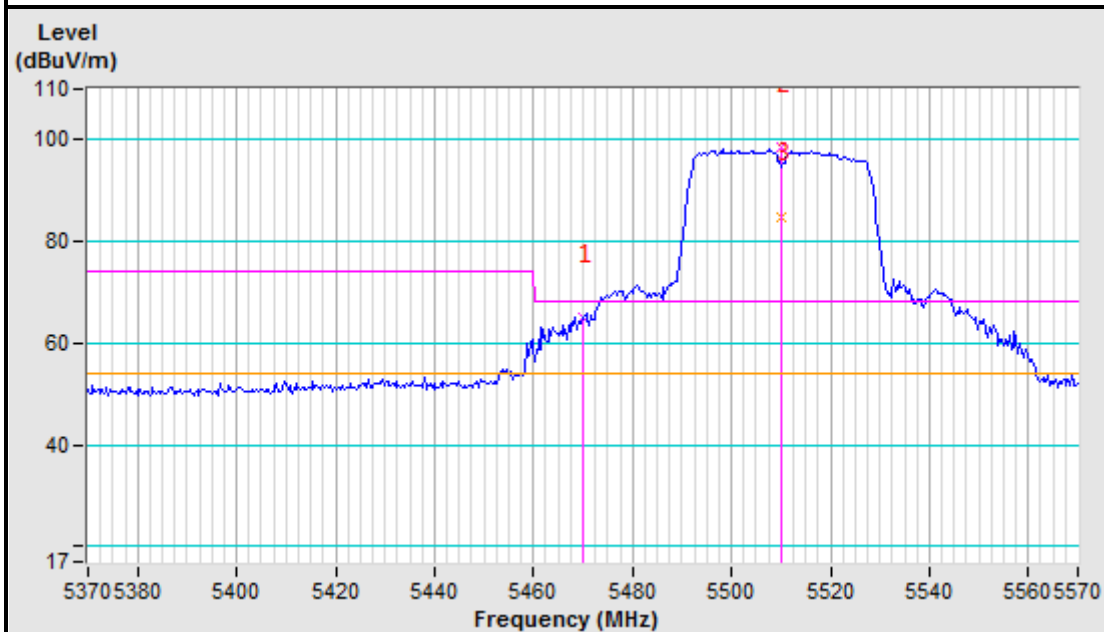

CHANNEL	TX Channel 110	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5470.00	52.87 PK	68.20	-15.33	1.00 H	138	43.78	9.09
2	*5550.00	101.35 PK			1.00 H	138	92.04	9.31
3	*5550.00	87.17 AV			1.00 H	138	77.86	9.31
4	11100.00	59.64 PK	74.00	-14.36	1.00 H	0	39.80	19.84
5	11100.00	45.26 AV	54.00	-8.74	1.00 H	0	25.42	19.84
6	#16650.00	64.77 PK	68.20	-3.43	1.00 H	0	38.86	25.91
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5470.00	51.36 PK	68.20	-16.84	1.00 V	174	42.27	9.09
2	*5550.00	95.38 PK			1.00 V	174	86.07	9.31
3	*5550.00	82.04 AV			1.00 V	174	72.73	9.31
4	11100.00	58.91 PK	74.00	-15.09	1.00 V	0	39.07	19.84
5	11100.00	45.33 AV	54.00	-8.67	1.00 V	0	25.49	19.84
6	#16650.00	64.19 PK	68.20	-4.01	1.00 V	0	38.28	25.91

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 134	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)


ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5670.00	104.07 PK			1.00 H	102	94.32	9.75
2	*5670.00	90.82 AV			1.00 H	102	81.07	9.75
3	#5725.00	60.72 PK	68.20	-7.48	1.00 H	102	50.76	9.96
4	11340.00	59.92 PK	74.00	-14.08	1.00 H	0	39.68	20.24
5	11340.00	45.89 AV	54.00	-8.11	1.00 H	0	25.65	20.24
6	#17010.00	64.96 PK	68.20	-3.24	1.00 H	0	37.93	27.03
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5670.00	100.66 PK			1.00 V	183	90.91	9.75
2	*5670.00	87.47 AV			1.00 V	183	77.72	9.75
3	#5725.00	56.56 PK	68.20	-11.64	1.00 V	183	46.60	9.96
4	11340.00	59.03 PK	74.00	-14.97	1.00 V	0	38.79	20.24
5	11340.00	45.65 AV	54.00	-8.35	1.00 V	0	25.41	20.24
6	#17010.00	64.88 PK	68.20	-3.32	1.00 V	0	37.85	27.03

REMARKS:


1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

Band edge Plot

5670MHz Horizontal

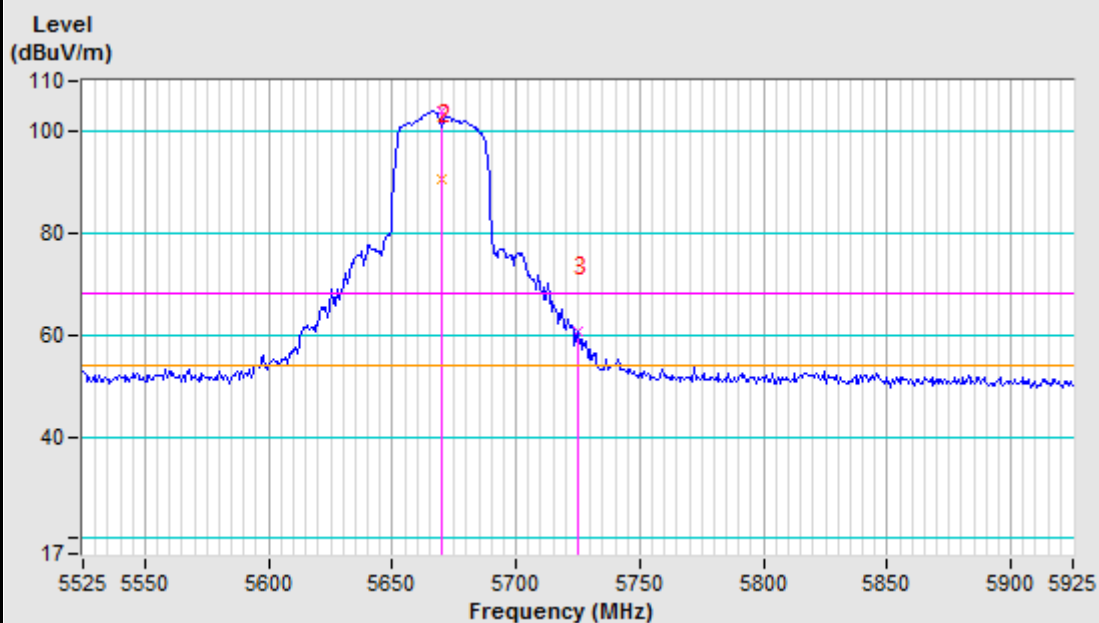

5670MHz Vertical

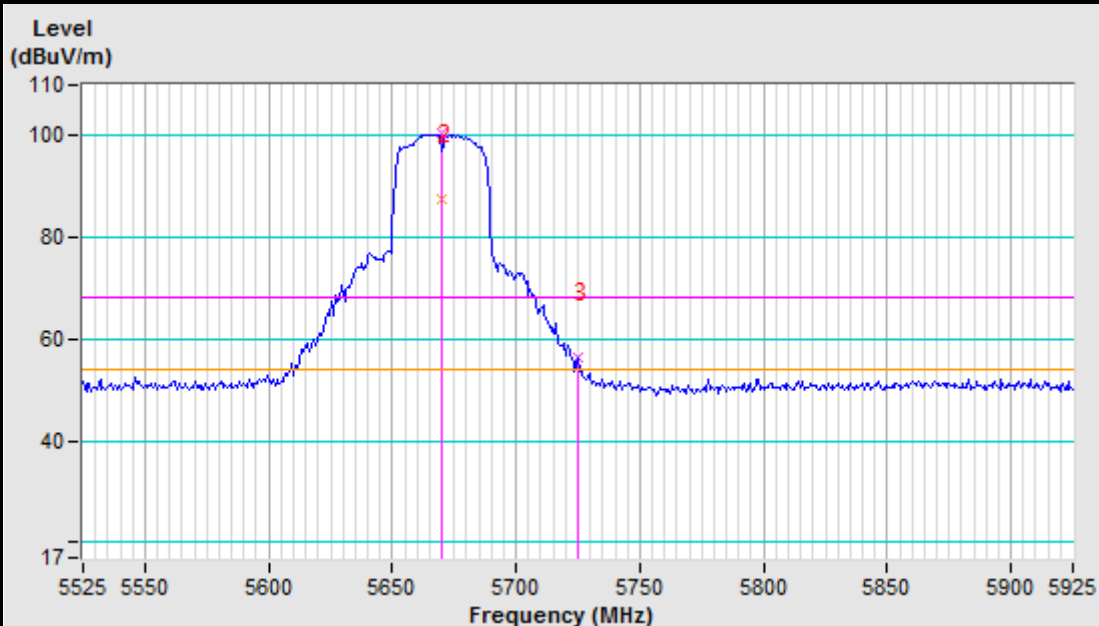

Band 4 (5725-5850MHz):

ABOVE 1GHz DATA

802.11a

CHANNEL	TX Channel 149	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)


ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5612.26	53.13 PK	68.20	-15.07	1.00 H	279	43.59	9.54
2	#5725.00	70.90 PK	122.20	-51.30	1.00 H	279	60.94	9.96
3	*5745.00	104.69 PK			1.00 H	279	94.66	10.03
4	*5745.00	87.01 AV			1.00 H	279	76.98	10.03
5	#5984.11	49.78 PK	68.20	-18.42	1.00 H	279	38.86	10.92
6	11490.00	54.35 PK	74.00	-19.65	1.00 H	0	33.86	20.49
7	11490.00	40.97 AV	54.00	-13.03	1.00 H	0	20.48	20.49
8	#17235.00	63.94 PK	68.20	-4.26	1.00 H	0	36.63	27.31
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5659.38	54.28 PK	75.16	-20.88	1.45 V	312	44.57	9.71
2	#5725.00	72.36 PK	122.20	-49.84	1.45 V	312	62.40	9.96
3	*5745.00	104.02 PK			1.45 V	312	93.99	10.03
4	*5745.00	86.96 AV			1.45 V	312	76.93	10.03
5	#5962.26	51.91 PK	68.20	-16.29	1.45 V	312	41.07	10.84
6	11490.00	52.58 PK	74.00	-21.42	1.00 V	0	32.09	20.49
7	11490.00	41.22 AV	54.00	-12.78	1.00 V	0	20.73	20.49
8	#17235.00	63.22 PK	68.20	-4.98	1.00 V	0	35.91	27.31

REMARKS:


1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

Band edge Plot

5745MHz Horizontal

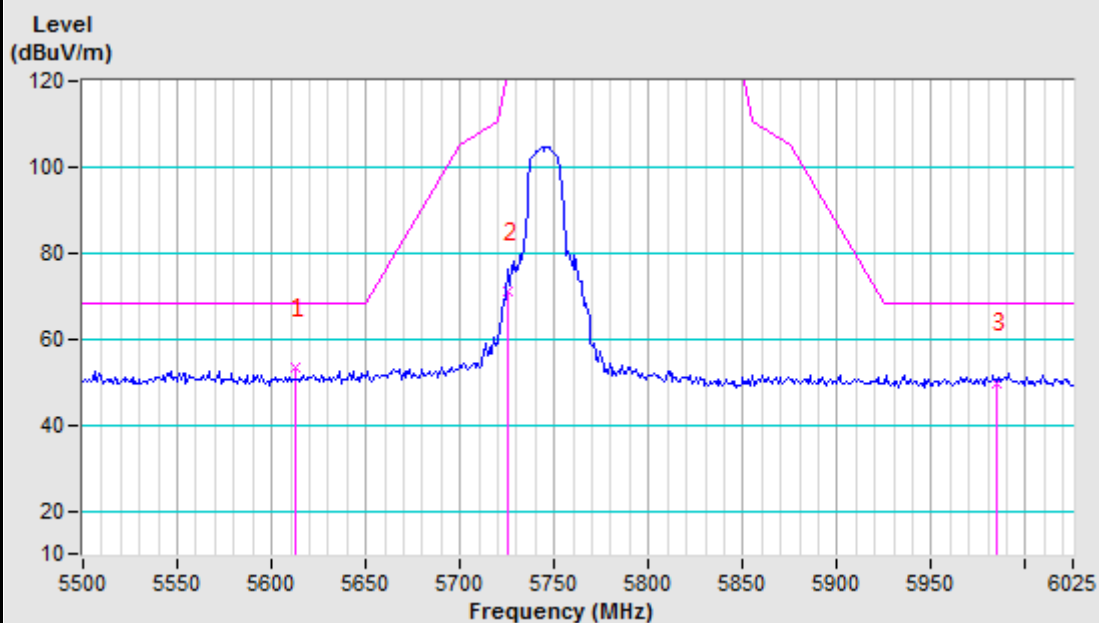

5745MHz Vertical

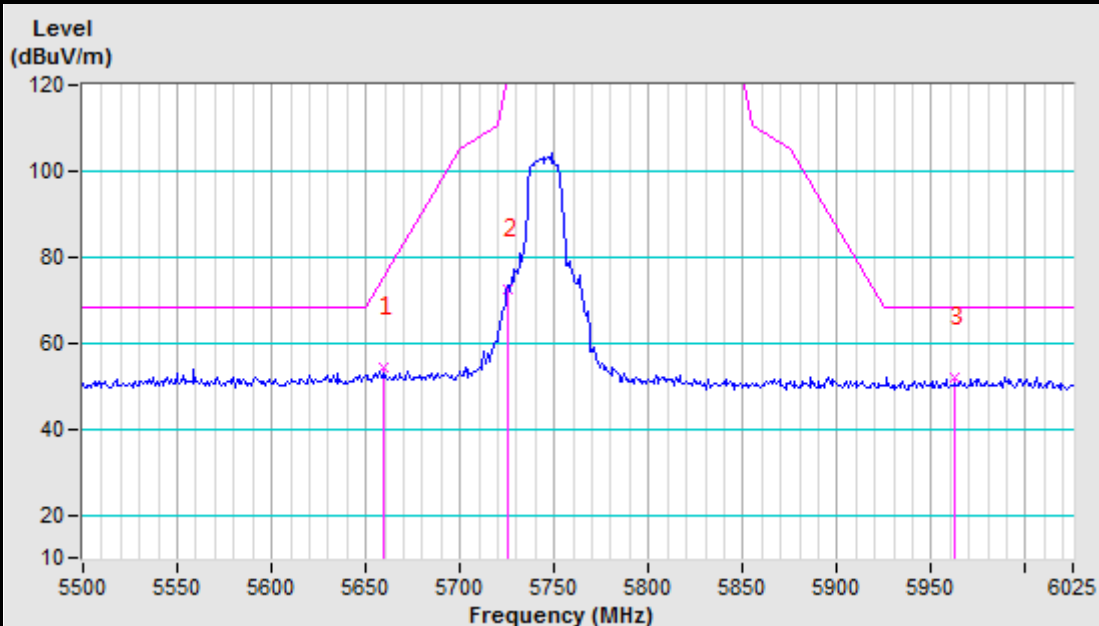

CHANNEL	TX Channel 157	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)


ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5592.55	51.96 PK	68.20	-16.24	1.56 H	279	42.49	9.47
2	#5714.54	54.09 PK	109.27	-55.18	1.56 H	279	44.18	9.91
3	*5785.00	103.33 PK			1.56 H	279	93.15	10.18
4	*5785.00	85.45 AV			1.56 H	279	75.27	10.18
5	#5991.35	52.47 PK	68.20	-15.73	1.56 H	279	41.52	10.95
6	11570.00	54.97 PK	74.00	-19.03	1.00 H	0	34.31	20.66
7	11570.00	43.91 AV	54.00	-10.09	1.00 H	0	23.25	20.66
8	#17355.00	61.91 PK	68.20	-6.29	1.00 H	0	34.45	27.46
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5561.42	53.33 PK	68.20	-14.87	1.35 V	44	43.98	9.35
2	#5689.30	53.31 PK	97.31	-44.00	1.35 V	44	43.48	9.83
3	*5785.00	105.42 PK			1.35 V	44	95.24	10.18
4	*5785.00	88.72 AV			1.35 V	44	78.54	10.18
5	#6007.33	52.62 PK	68.20	-15.58	1.35 V	44	41.62	11.00
6	11570.00	52.37 PK	74.00	-21.63	1.00 V	0	31.71	20.66
7	11570.00	42.88 AV	54.00	-11.12	1.00 V	0	22.22	20.66
8	#17355.00	62.44 PK	68.20	-5.76	1.00 V	0	34.98	27.46

REMARKS:


1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

Band edge Plot

5785MHz Horizontal

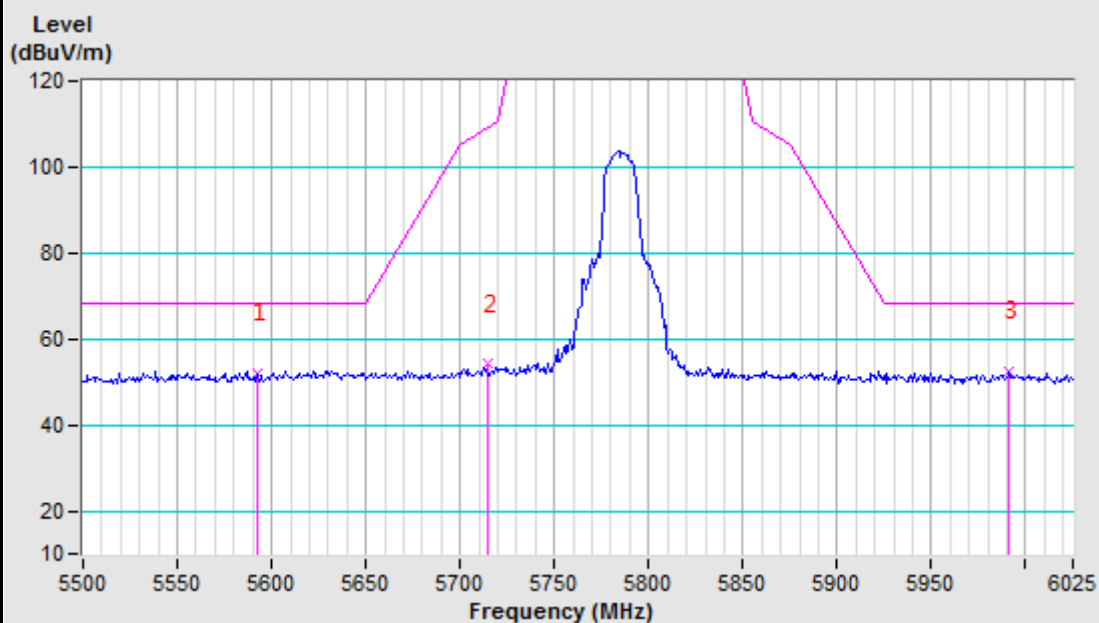

5785MHz Vertical

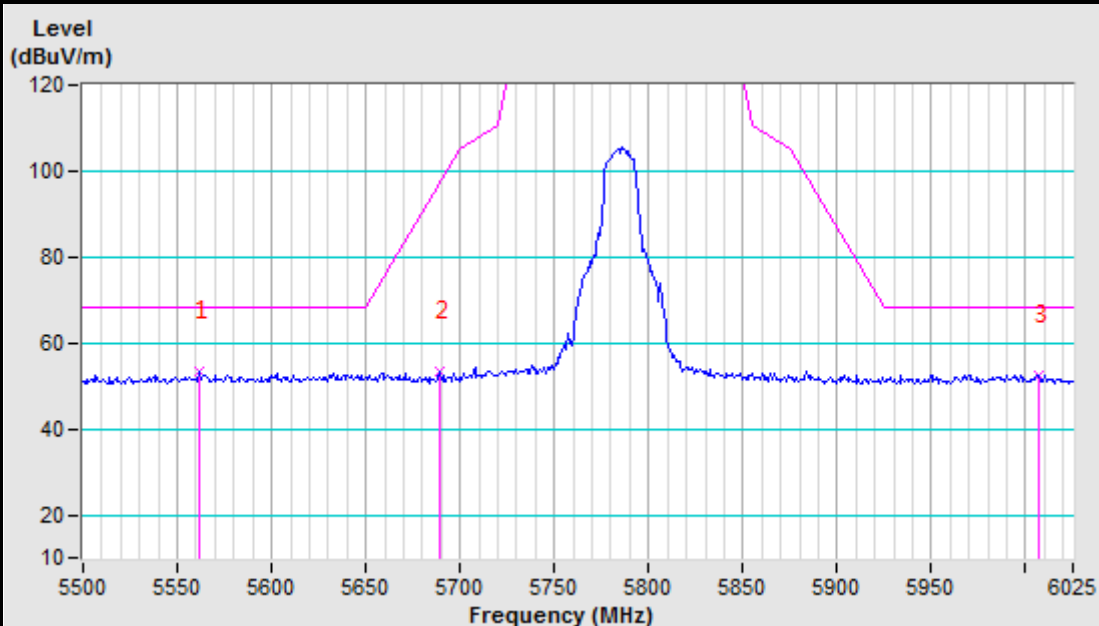

CHANNEL	TX Channel 165	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)


ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5625.36	53.11 PK	68.20	-15.09	1.23 H	285	43.53	9.58
2	*5825.00	102.97 PK			1.23 H	285	92.64	10.33
3	*5825.00	84.78 AV			1.23 H	285	74.45	10.33
4	#5850.00	59.52 PK	122.20	-62.68	1.23 H	285	49.10	10.42
5	#5976.20	51.70 PK	68.20	-16.50	1.23 H	285	40.81	10.89
6	11650.00	54.37 PK	74.00	-19.63	1.00 H	0	33.53	20.84
7	11650.00	39.39 AV	54.00	-14.61	1.00 H	0	18.55	20.84
8	#17475.00	61.97 PK	68.20	-6.23	1.00 H	0	34.36	27.61
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5689.30	53.31 PK	97.31	-44.00	1.35 V	0	43.48	9.83
2	*5825.00	104.87 PK			1.35 V	0	94.54	10.33
3	*5825.00	86.57 AV			1.35 V	0	76.24	10.33
4	#5850.00	60.67 PK	122.20	-61.53	1.35 V	0	50.25	10.42
5	#5905.53	54.07 PK	82.57	-28.50	1.35 V	0	43.44	10.63
6	11650.00	52.97 PK	74.00	-21.03	1.00 V	0	32.13	20.84
7	11650.00	40.67 AV	54.00	-13.33	1.00 V	0	19.83	20.84
8	#17475.00	62.85 PK	68.20	-5.35	1.00 V	0	35.24	27.61

REMARKS:


1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

Band edge Plot

5825MHz Horizontal

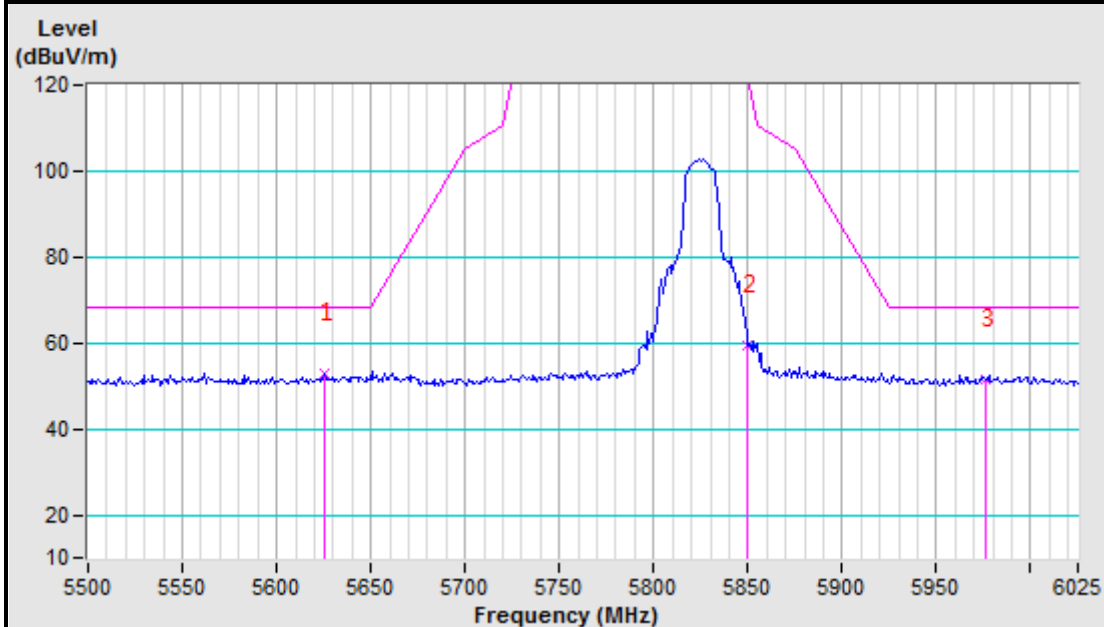

5825MHz Vertical

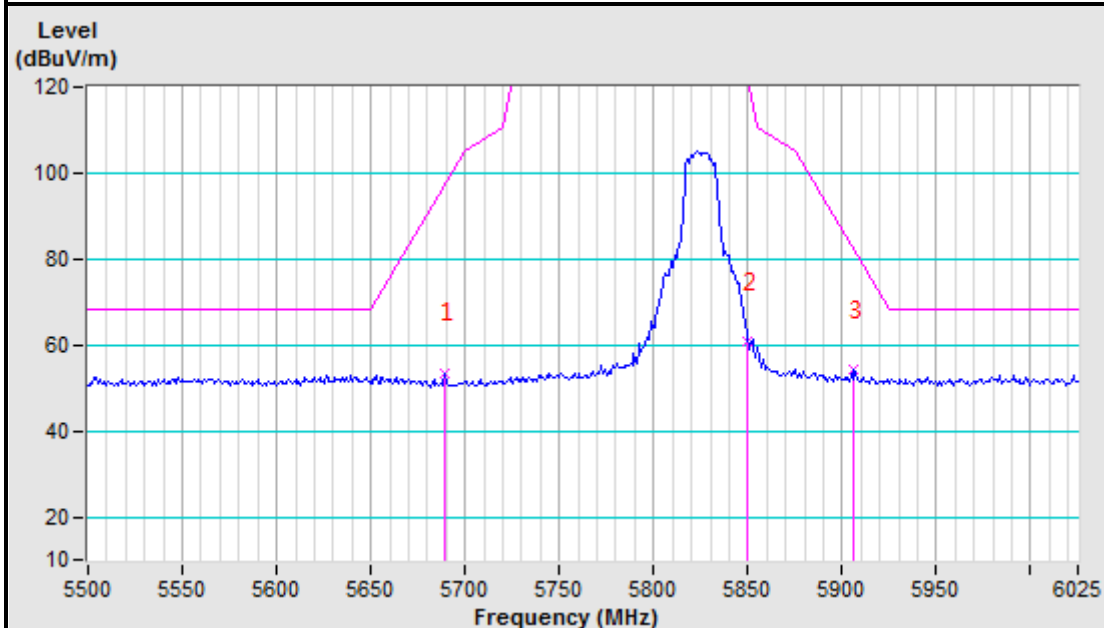

802.11n (20MHz)

CHANNEL	TX Channel 149	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)


ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5607.21	53.31 PK	68.20	-14.89	1.01 H	0	43.79	9.52
2	#5725.00	69.98 PK	122.20	-52.22	1.01 H	0	60.02	9.96
3	*5745.00	103.97 PK			1.01 H	0	93.94	10.03
4	*5745.00	85.29 AV			1.01 H	0	75.26	10.03
5	#5884.01	52.81 PK	98.51	-45.70	1.01 H	0	42.26	10.55
6	11490.00	52.37 PK	74.00	-21.63	1.00 H	0	31.88	20.49
7	11490.00	40.58 AV	54.00	-13.42	1.00 H	0	20.09	20.49
8	#17235.00	62.55 PK	68.20	-5.65	1.00 H	0	35.24	27.31
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5656.01	54.56 PK	72.66	-18.10	1.45 V	312	44.86	9.70
2	#5725.00	73.75 PK	122.20	-48.45	1.45 V	312	63.79	9.96
3	*5745.00	104.64 PK			1.45 V	312	94.61	10.03
4	*5745.00	86.27 AV			1.45 V	312	76.24	10.03
5	#5982.45	51.97 PK	68.20	-16.23	1.45 V	312	41.06	10.91
6	11490.00	53.91 PK	74.00	-20.09	1.00 V	0	33.42	20.49
7	11490.00	42.91 AV	54.00	-11.09	1.00 V	0	22.42	20.49
8	#17235.00	62.47 PK	68.20	-5.73	1.00 V	0	35.16	27.31

REMARKS:


1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

Band edge Plot

5745MHz Horizontal

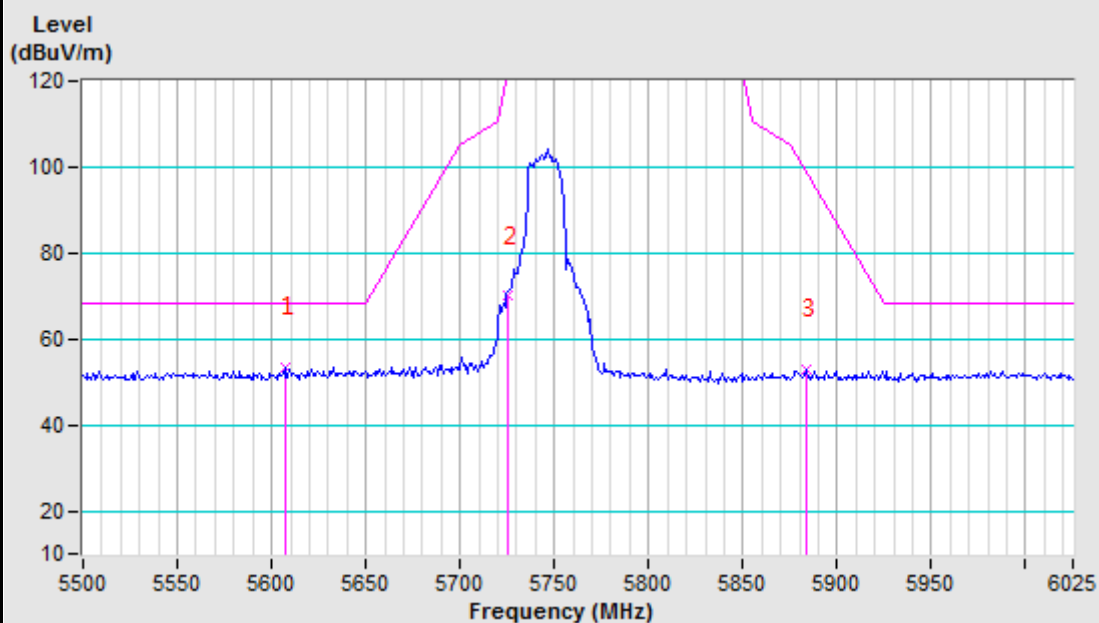

5745MHz Vertical

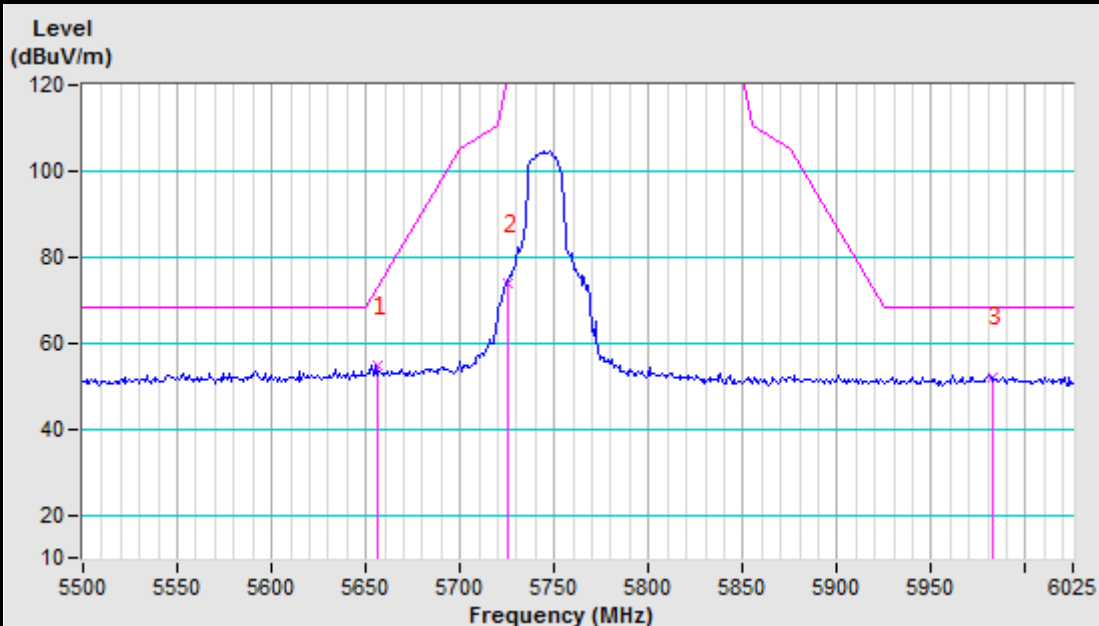

CHANNEL	TX Channel 157	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)


ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5617.79	53.30 PK	68.20	-14.90	1.07 H	0	43.75	9.55
2	#5675.84	52.94 PK	87.36	-34.42	1.07 H	0	43.17	9.77
3	*5785.00	103.12 PK			1.07 H	0	92.94	10.18
4	*5785.00	85.62 AV			1.07 H	0	75.44	10.18
5	#5837.38	53.13 PK	152.20	-99.07	1.07 H	0	42.76	10.37
6	11570.00	52.82 PK	74.00	-21.18	1.00 H	0	32.16	20.66
7	11570.00	41.66 AV	54.00	-12.34	1.00 H	0	21.00	20.66
8	#17355.00	63.85 PK	68.20	-4.35	1.00 H	0	36.39	27.46
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5588.87	54.06 PK	68.20	-14.14	1.48 V	355	44.61	9.45
2	*5785.00	104.77 PK			1.48 V	355	94.59	10.18
3	*5785.00	86.82 AV			1.48 V	355	76.64	10.18
4	#5895.12	53.60 PK	90.27	-36.67	1.48 V	355	43.01	10.59
5	#5921.20	53.02 PK	71.00	-17.98	1.48 V	355	42.33	10.69
6	11570.00	53.67 PK	74.00	-20.33	1.00 V	0	33.01	20.66
7	11570.00	43.28 AV	54.00	-10.72	1.00 V	0	22.62	20.66
8	#17355.00	62.94 PK	68.20	-5.26	1.00 V	0	35.48	27.46

REMARKS:


1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

Band edge Plot

5785MHz Horizontal

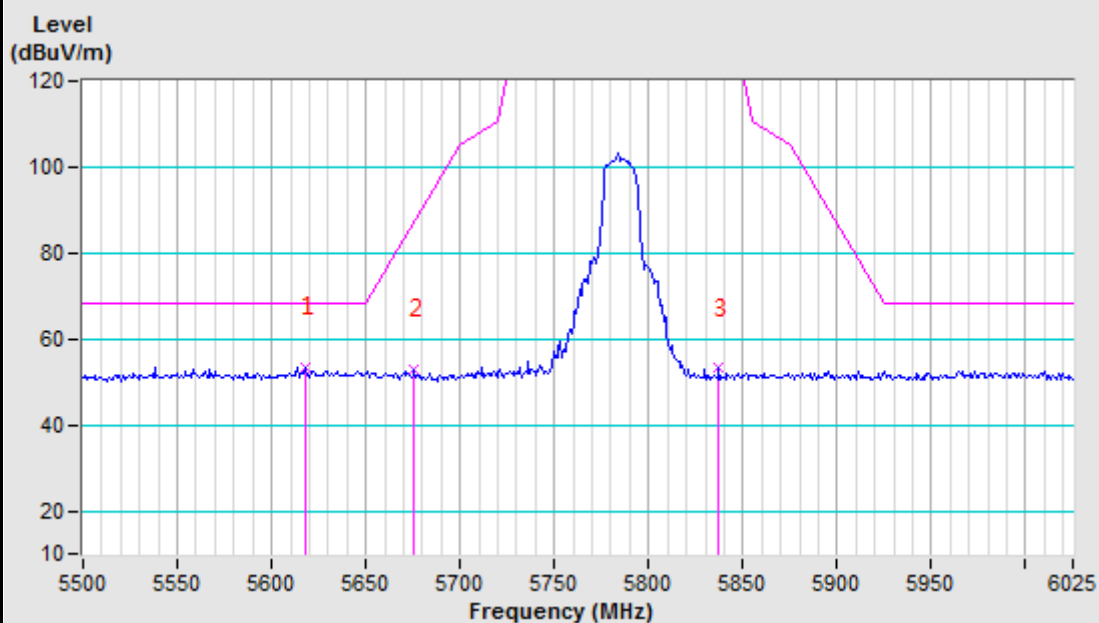

5785MHz Vertical

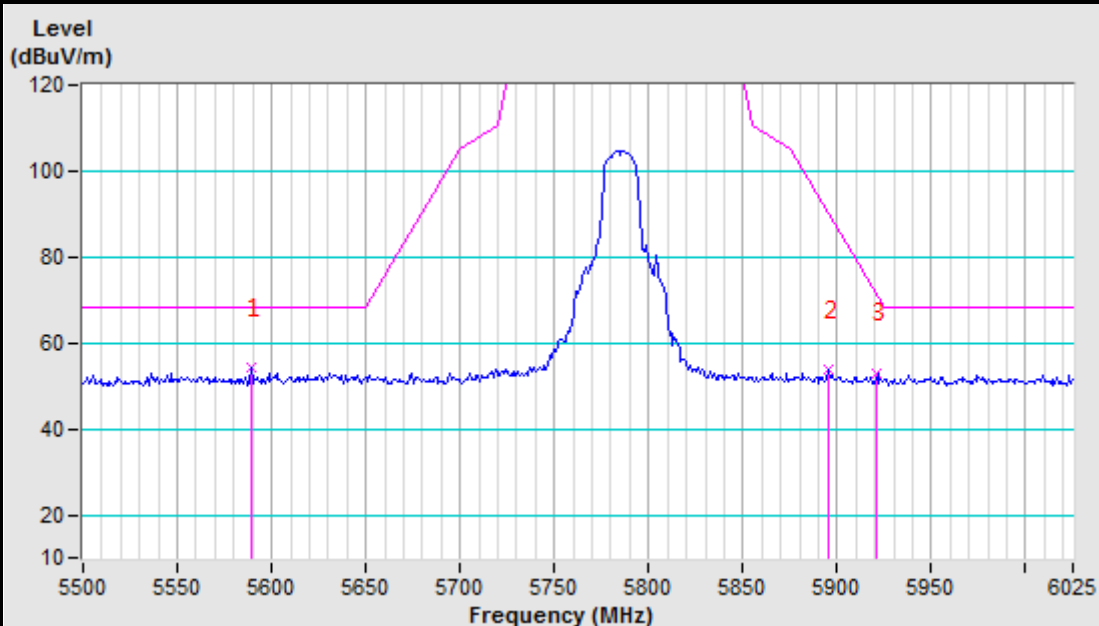

CHANNEL	TX Channel 165	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)


ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5649.76	52.45 PK	68.20	-15.75	1.00 H	0	42.77	9.68
2	*5825.00	101.12 PK			1.00 H	0	90.79	10.33
3	*5825.00	83.47 AV			1.00 H	0	73.14	10.33
4	#5850.00	60.67 PK	122.20	-61.53	1.00 H	0	50.25	10.42
5	#5980.41	52.90 PK	68.20	-15.30	1.00 H	0	41.99	10.91
6	11650.00	53.74 PK	74.00	-20.26	1.00 H	0	32.90	20.84
7	11650.00	43.85 AV	54.00	-10.15	1.00 H	0	23.01	20.84
8	#17475.00	62.55 PK	68.20	-5.65	1.00 H	0	34.94	27.61
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5597.60	52.18 PK	68.20	-16.02	1.00 V	354	42.70	9.48
2	*5825.00	104.26 PK			1.00 V	354	93.93	10.33
3	*5825.00	86.32 AV			1.00 V	354	75.99	10.33
4	#5850.00	64.46 PK	122.20	-57.74	1.00 V	354	54.04	10.42
5	#5988.82	53.04 PK	68.20	-15.16	1.00 V	354	42.10	10.94
6	11650.00	51.67 PK	74.00	-22.33	1.00 V	0	30.83	20.84
7	11650.00	40.34 AV	54.00	-13.66	1.00 V	0	19.50	20.84
8	#17475.00	61.91 PK	68.20	-6.29	1.00 V	0	34.30	27.61

REMARKS:


1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

Band edge Plot

5825MHz Horizontal

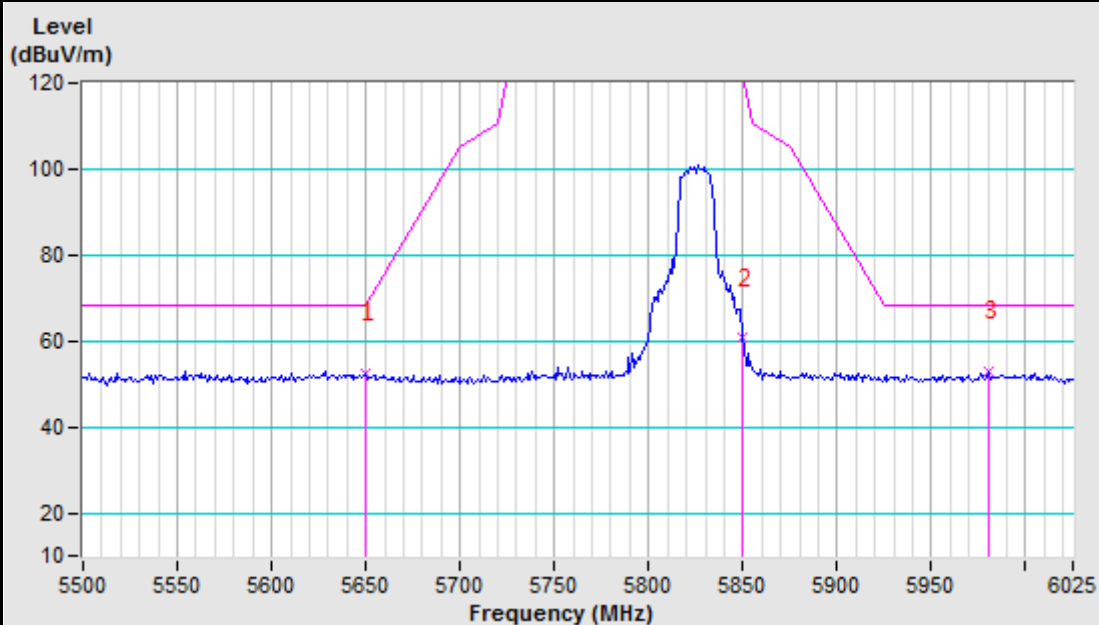

5825MHz Vertical

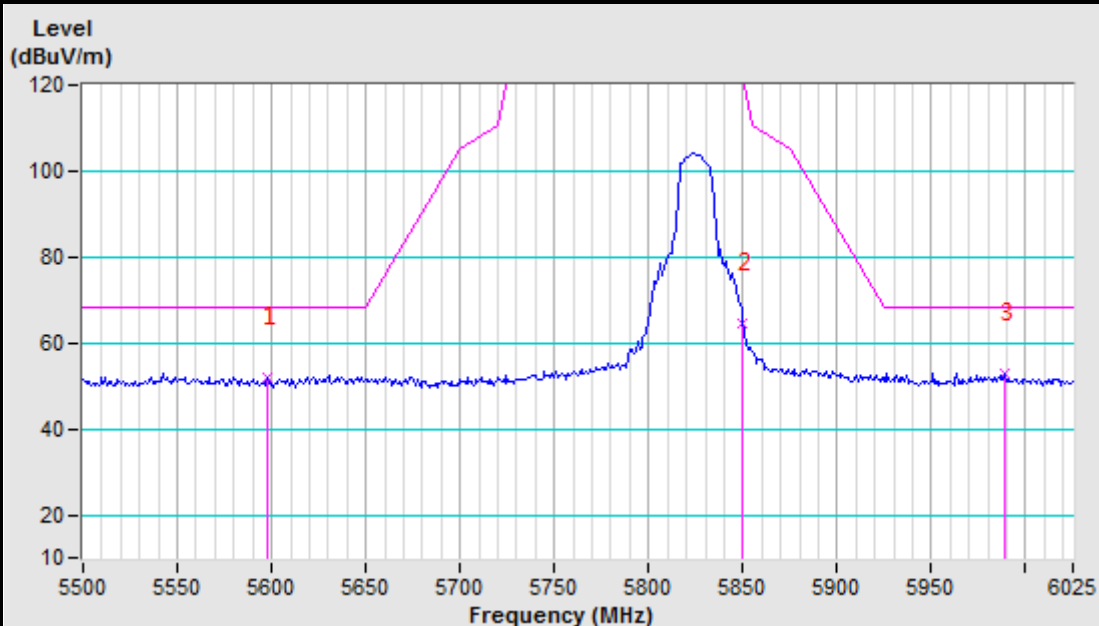

802.11n (40MHz)

CHANNEL	TX Channel 151	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)


ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5563.46	52.28 PK	68.20	-15.92	1.01 H	25	42.93	9.35
2	#5725.00	75.76 PK	122.20	-46.44	1.01 H	25	65.80	9.96
3	*5755.00	100.56 PK			1.01 H	25	90.49	10.07
4	*5755.00	82.17 AV			1.01 H	25	72.10	10.07
5	#5877.28	52.85 PK	103.51	-50.66	1.01 H	25	42.33	10.52
6	11510.00	52.37 PK	74.00	-21.63	1.00 H	0	31.84	20.53
7	11510.00	41.28 AV	54.00	-12.72	1.00 H	0	20.75	20.53
8	#17265.00	62.71 PK	68.20	-5.49	1.00 H	0	35.36	27.35
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5583.65	52.19 PK	68.20	-16.01	1.06 V	50	42.75	9.44
2	#5725.00	76.11 PK	122.20	-46.09	1.06 V	50	66.15	9.96
3	*5755.00	101.83 PK			1.06 V	50	91.76	10.07
4	*5755.00	83.62 AV			1.06 V	50	73.55	10.07
5	#5884.86	52.41 PK	97.88	-45.47	1.06 V	50	41.86	10.55
6	11510.00	52.37 PK	74.00	-21.63	1.00 V	0	31.84	20.53
7	11510.00	41.61 AV	54.00	-12.39	1.00 V	0	21.08	20.53
8	#17265.00	62.34 PK	68.20	-5.86	1.00 V	0	34.99	27.35

REMARKS:


1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. Margin value = Emission level – Limit value.
5. " * " : Fundamental frequency.
6. " # " : The radiated frequency is out of the restricted band.

Band edge Plot

5755MHz Horizontal

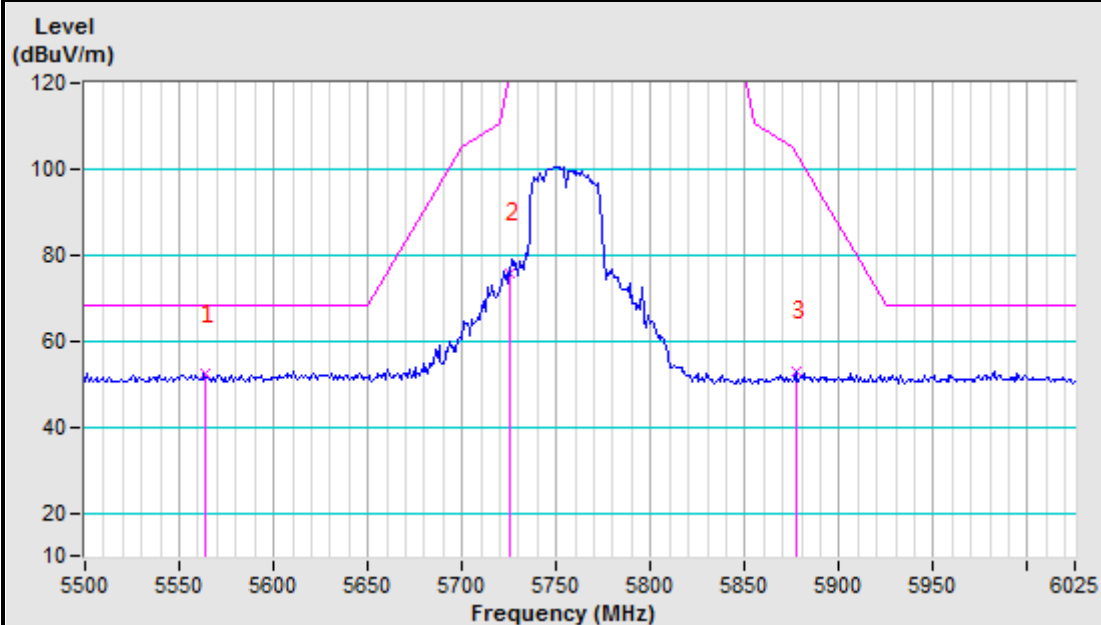

5755MHz Vertical

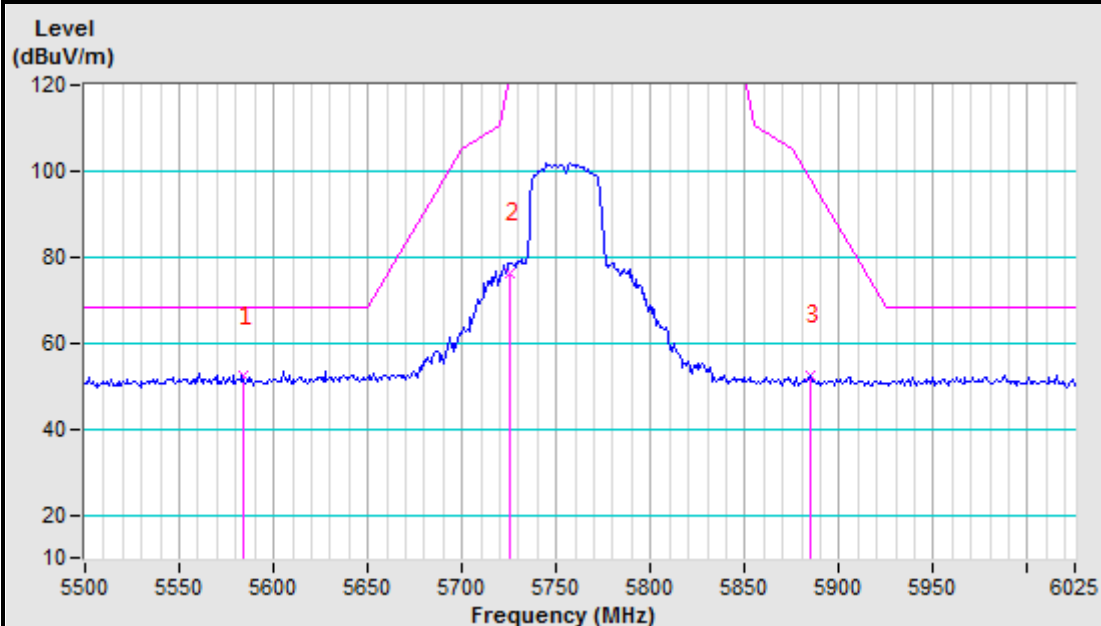

CHANNEL	TX Channel 159	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)


ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5649.76	53.67 PK	68.20	-14.53	1.00 H	0	43.99	9.68
2	*5795.00	98.73 PK			1.00 H	0	88.51	10.22
3	*5795.00	80.53 AV			1.00 H	0	70.31	10.22
4	#5850.00	55.80 PK	122.20	-66.40	1.00 H	0	45.38	10.42
5	#6011.54	52.61 PK	68.20	-15.59	1.00 H	0	41.59	11.02
6	11590.00	52.31 PK	74.00	-21.69	1.00 H	0	31.60	20.71
7	11590.00	41.34 AV	54.00	-12.66	1.00 H	0	20.63	20.71
8	#17385.00	61.37 PK	68.20	-6.83	1.00 H	0	33.87	27.50
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5634.62	53.03 PK	68.20	-15.17	1.48 V	354	43.41	9.62
2	*5795.00	100.92 PK			1.48 V	354	90.70	10.22
3	*5795.00	82.11 AV			1.48 V	354	71.89	10.22
4	#5850.00	57.94 PK	122.20	-64.26	1.48 V	354	47.52	10.42
5	#5982.93	52.73 PK	68.20	-15.47	1.48 V	354	41.81	10.92
6	11590.00	52.17 PK	74.00	-21.83	1.00 V	0	31.46	20.71
7	11590.00	40.14 AV	54.00	-13.86	1.00 V	0	19.43	20.71
8	#17385.00	62.37 PK	68.20	-5.83	1.00 V	0	34.87	27.50

REMARKS:


1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

Band edge Plot

5795MHz Horizontal

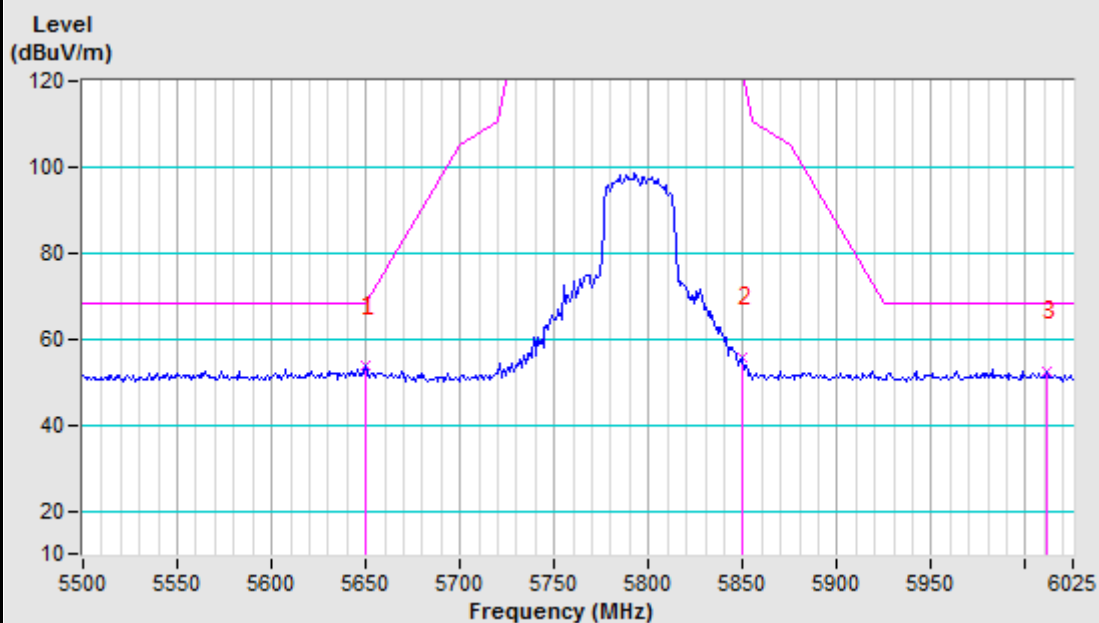

5795MHz Vertical

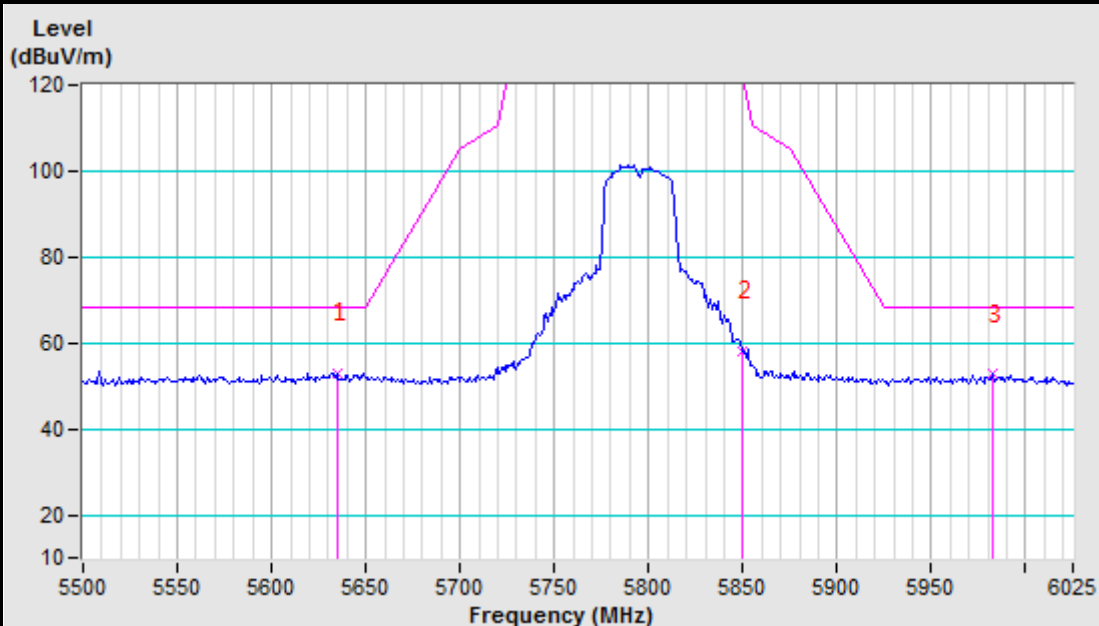

3.2 CONDUCTED EMISSION MEASUREMENT

3.2.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56	56 to 46
0.5 ~ 5	56	46
5 ~ 30	60	50

- NOTES:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

3.2.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESR7	101494	Mar. 18,20	Mar. 17,21
Artificial Mains Network	Rohde&Schwarz	ENV216	101173	Mar. 18,20	Mar. 17,21
Artificial Mains Network	Rohde&Schwarz	ESH3-Z5	100317	Mar. 18,20	Mar. 17,21
Voltage probe	SCHWARZBECK	TK 9421	TK 9421-176	Sep. 24,19	Sep. 23,20
Test software	ADT	ADT_Cond_V7.3.7	N/A	N/A	N/A

- NOTES:**
1. The test was performed in shielded room 553.
 2. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.

3.2.3 TEST PROCEDURES


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) were not recorded.

NOTE: All modes of operation were investigated and the worst-case emissions are reported.

3.2.4 DEVIATION FROM TEST STANDARD

No deviation.

3.2.5 TEST SETUP

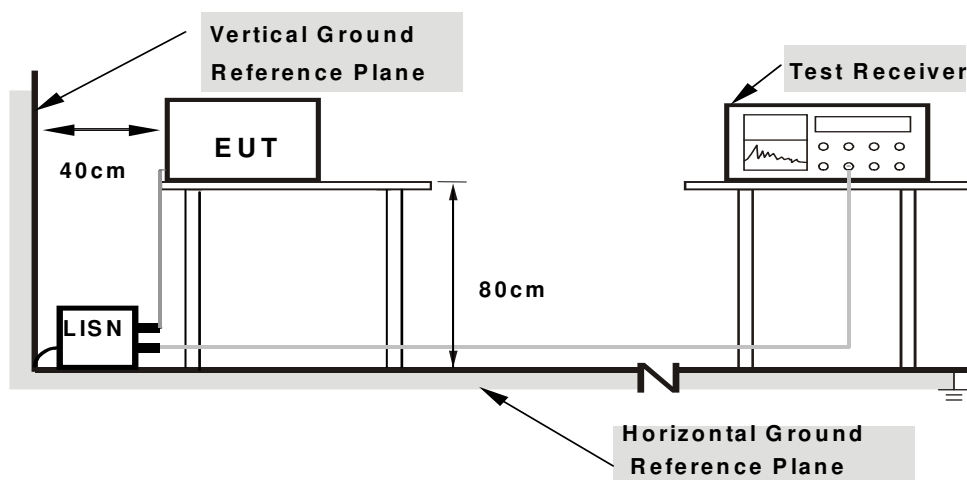

Note: 1.Support units were connected to second LISN.
2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

For the actual test configuration, please refer to the attached file (Test Setup Photo).

3.2.6 EUT OPERATING CONDITIONS

Same as 3.1.7


3.2.7 TEST RESULTS

CONDUCTED WORST-CASE DATA: 802.11a CH36

PHASE	Line	6dB BANDWIDTH	9kHz
-------	------	---------------	------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15225	9.79	44.10	26.03	53.89	35.82	65.88	55.88	-11.99	-20.06
2	0.19721	9.78	36.81	19.10	46.59	28.88	63.73	53.73	-17.14	-24.85
3	0.25545	9.78	29.92	13.76	39.70	23.54	61.58	51.58	-21.88	-28.04
4	0.30488	9.78	27.13	14.18	36.91	23.96	60.11	50.11	-23.20	-26.15
5	0.34975	9.79	27.45	15.84	37.24	25.63	58.97	48.97	-21.73	-23.34
6	14.86500	10.15	15.67	9.32	25.82	19.47	60.00	50.00	-34.18	-30.53


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. The emission levels of other frequencies were very low against the limit.
 3. Margin value = Emission level - Limit value
 4. Correction factor = Insertion loss + Cable loss
 5. Emission Level = Correction Factor + Reading Value.

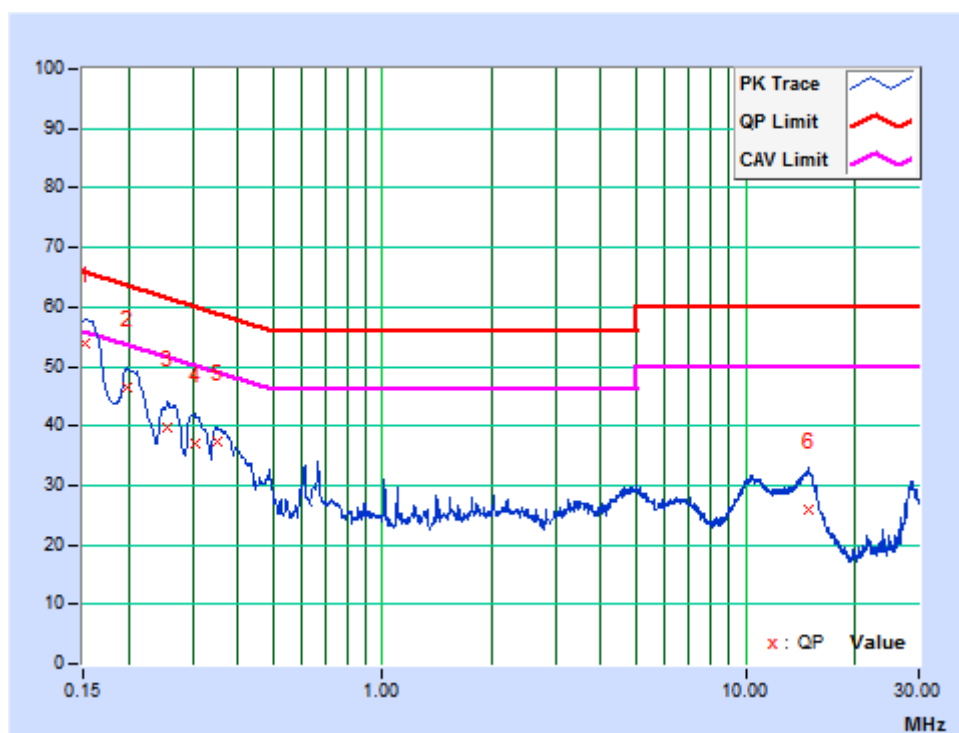

PHASE	Neutral	6dB BANDWIDTH	9kHz
-------	---------	---------------	------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15632	9.72	43.71	27.18	53.43	36.90	65.66	55.66	-12.23	-18.76
2	0.20627	9.71	36.76	23.48	46.47	33.19	63.35	53.35	-16.88	-20.16
3	0.26437	9.72	28.12	12.84	37.84	22.56	61.29	51.29	-23.46	-28.74
4	0.30894	9.72	24.87	9.33	34.59	19.05	60.00	50.00	-25.41	-30.95
5	3.73538	9.81	13.63	6.23	23.44	16.04	56.00	46.00	-32.56	-29.96
6	15.07200	10.16	14.91	8.75	25.07	18.91	60.00	50.00	-34.93	-31.09

REMARKS: 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

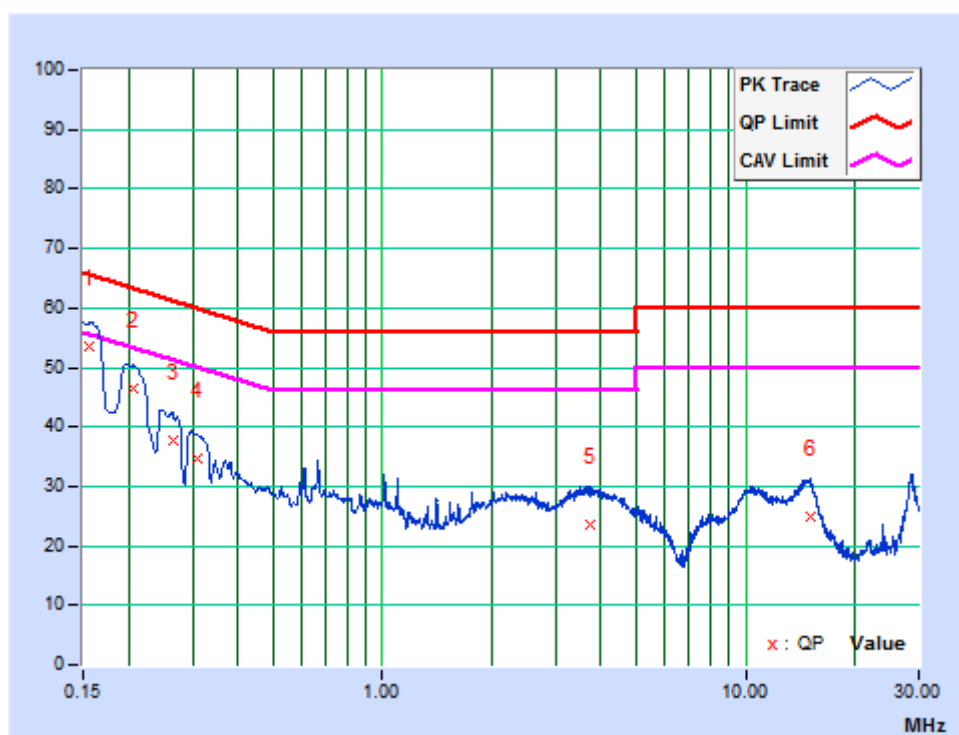


3.3 TRANSMIT POWER MEASUREMENT

3.3.1 LIMITS OF TRANSMIT POWER MEASUREMENT


Operation Band	EUT Category		LIMIT
U-NII-1		Outdoor Access Point	1 Watt (30 dBm) (Max. e.i.r.p $\leq$ 125mW(21 dBm) at any elevation angle above 30 degrees as measured from the horizon)
		Fixed point-to-point Access Point	1 Watt (30 dBm)
		Indoor Access Point	1 Watt (30 dBm)
	√	Mobile and Portable client device	250mW (24 dBm)
U-NII-2A	√		250mW(24dBm) or 11 dBm+10LogB*
U-NII-2C	√		250mW(24dBm) or 11 dBm+10LogB*
U-NII-3	√		1 Watt (30 dBm)

NOTE: 1. Where B is the 26dB emission bandwidth in MHz.

3.3.2 TEST SETUP

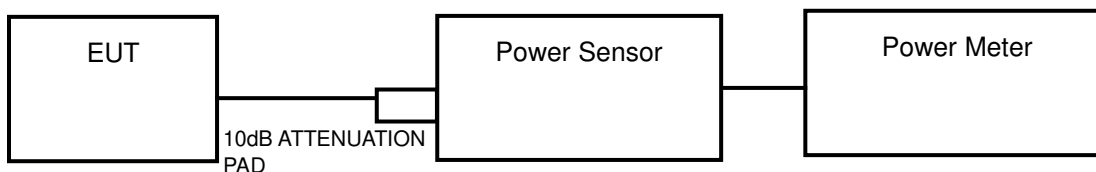

FOR 6/26dB BANDWIDTH



3.3.3 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Power Sensor	Keysight	U2021XA	MY55060016	N/A	N/A
Power Sensor	Keysight	U2021XA	MY55060018	Jun. 04,20	Jun. 03,21
Power Meter	Anritsu	ML2495A	1139001	Mar. 18,20	Mar. 17,21
Power Sensor	Anritsu	MA2411B	1531155	Mar. 18,20	Mar. 17,21
Digital Multimeter	FLUKE	15B	A1220010DG	N/A	N/A
Humid & Temp Programmable Tester	Haida	HD-225T	110807201	Oct.31,19	Oct. 30,20
Oscilloscope	Agilent	DSO9254A	MY51260160	Sep. 18,19	Sep. 17,20
Signal and Spectrum Analyzer	Rohde&Schwarz	FSV40	101094	Mar. 18,20	Mar. 17,21
Signal Generator	Agilent	N5183A	MY50140980	Sep. 19,19	Sep. 18,20
MXG-B RF Vector Signal Generator	Keysight	N5182B	MY56200288	Sep. 12,19	Sep. 11,20
Attenuator	MINI	BW-S10W2 +	S130129FGE2	N/A	N/A
DC Source	Keysight	E3642A	MY56146098	N/A	N/A

NOTES:

1. The test was performed in RF Oven room.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.

3.3.4 TEST PROCEDURE

FOR AVERAGE POWER MEASUREMENT

Method PM is used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

FOR 26dB BANDWIDTH

- 1) Set RBW = approximately 1% of the emission bandwidth.
- 2) Set the VBW > RBW.
- 3) Detector = RMS.
- 4) Trace mode = max hold.
- 5) Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

FOR 6dB BANDWIDTH

- 1) Set RBW = 100 kHz.
- 2) Set the video bandwidth (VBW) ≥ 3 RBW.
- 3) Detector = Peak.
- 4) Trace mode = max hold.
- 5) Sweep = auto couple.
- 6) Allow the trace to stabilize.
- 7) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

3.3.5 DEVIATION FROM TEST STANDARD

No deviation.

3.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.

3.3.7 TEST RESULTS

OUTPUT POWER:

802.11a

CHANNEL NUMBER	FREQ. (MHz)	AVG. CONDUCTED POWER (dBm)	AVG. CONDUCTED POWER (mW)	LIMIT (dBm)	PASS /FAIL
36	5180	13.61	22.961	24.00	PASS
40	5200	13.92	24.660	24.00	PASS
48	5240	13.75	23.714	24.00	PASS
52	5260	13.89	24.491	23.99	PASS
60	5300	13.69	23.388	23.98	PASS
64	5320	13.60	22.909	23.99	PASS
100	5500	12.61	18.239	24.00	PASS
116	5580	12.78	18.967	23.99	PASS
140	5700	12.54	17.947	24.00	PASS
149	5745	14.15	26.002	30.00	PASS
157	5785	14.78	30.061	30.00	PASS
165	5825	14.11	25.763	30.00	PASS

Note:

For 5260 ~ 5320MHz, 5500 ~ 5700MHz

1. $11\text{dBm} + 10\log(19.89) = 23.99\text{ dBm} < 24\text{dBm}$
2. $11\text{dBm} + 10\log(19.88) = 23.98\text{ dBm} < 24\text{dBm}$
3. $11\text{dBm} + 10\log(19.91) = 23.99\text{ dBm} < 24\text{dBm}$
4. $11\text{dBm} + 10\log(20.10) = 24.03\text{ dBm} > 24\text{dBm}$
5. $11\text{dBm} + 10\log(19.89) = 23.99\text{ dBm} < 24\text{dBm}$
6. $11\text{dBm} + 10\log(21.05) = 24.23\text{ dBm} > 24\text{dBm}$

802.11n (20MHz)

CHANNEL NUMBER	FREQ. (MHz)	AVG. CONDUCTED POWER (dBm)	AVG. CONDUCTED POWER (mW)	LIMIT (dBm)	PASS /FAIL
36	5180	14.14	25.942	24.00	PASS
40	5200	13.95	24.831	24.00	PASS
48	5240	14.04	25.351	24.00	PASS
52	5260	13.92	24.660	24.00	PASS
60	5300	13.97	24.946	24.00	PASS
64	5320	13.58	22.803	24.00	PASS
100	5500	12.56	18.030	24.00	PASS
116	5580	12.82	19.143	24.00	PASS
140	5700	13.06	20.230	24.00	PASS
149	5745	13.35	21.627	30.00	PASS
157	5785	13.62	23.014	30.00	PASS
165	5825	13.21	20.941	30.00	PASS

Note:

For 5260 ~ 5320MHz, 5500 ~ 5700MHz

11dBm + 10log (20.15) = 24.04 dBm > 24dBm

11dBm + 10log (20.21) = 24.06 dBm > 24dBm

11dBm + 10log (20.10) = 24.03 dBm > 24dBm

11dBm + 10log (20.39) = 24.09 dBm > 24dBm

11dBm + 10log (20.10) = 24.03 dBm > 24dBm

11dBm + 10log (25.07) = 24.99 dBm > 24dBm

802.11n (40MHz)

CHANNEL NUMBER	FREQ. (MHz)	AVG. CONDUCTED POWER (dBm)	AVG. CONDUCTED POWER (mW)	LIMIT (dBm)	PASS /FAIL
38	5190	12.74	18.793	24.00	PASS
46	5230	14.38	27.416	24.00	PASS
54	5270	14.34	27.164	24.00	PASS
62	5310	12.13	16.331	24.00	PASS
102	5510	9.89	9.750	24.00	PASS
110	5550	13.01	19.999	24.00	PASS
134	5670	12.97	19.815	24.00	PASS
151	5755	13.86	24.322	30.00	PASS
159	5795	13.18	20.797	30.00	PASS

Note:

For 5260 ~ 5320MHz, 5500 ~ 5700MHz

$11\text{dBm} + 10\log(50.50) = 28.03\text{ dBm} > 24\text{dBm}$

$11\text{dBm} + 10\log(49.91) = 27.98\text{ dBm} > 24\text{dBm}$

$11\text{dBm} + 10\log(41.22) = 27.15\text{ dBm} > 24\text{dBm}$

$11\text{dBm} + 10\log(45.18) = 27.55\text{ dBm} > 24\text{dBm}$

$11\text{dBm} + 10\log(67.51) = 29.29\text{ dBm} > 24\text{dBm}$

26dB BANDWIDTH:

802.11a

Channel Number	Freq. (MHz)	26dB DOWN BANDWIDTH (MHz)	PASS /FAIL
36	5180	19.95	PASS
40	5200	20.05	PASS
48	5240	20.16	PASS
52	5260	19.89	PASS
60	5300	19.88	PASS
64	5320	19.91	PASS
100	5500	20.10	PASS
116	5580	19.89	PASS
140	5700	21.05	PASS

802.11n (20MHz)

Channel Number	Freq. (MHz)	26dB DOWN BANDWIDTH (MHz)	PASS /FAIL
36	5180	22.64	PASS
40	5200	20.72	PASS
48	5240	20.26	PASS
52	5260	20.15	PASS
60	5300	20.21	PASS
64	5320	20.10	PASS
100	5500	20.39	PASS
116	5580	20.10	PASS
140	5700	25.07	PASS

802.11n (40MHz)

Channel Number	Freq. (MHz)	26dB DOWN BANDWIDTH (MHz)	PASS /FAIL
38	5190	54.31	PASS
46	5230	56.74	PASS
54	5270	50.50	PASS
62	5310	49.91	PASS
102	5510	41.22	PASS
110	5550	45.18	PASS
134	5670	41.88	PASS

6dB BANDWIDTH For 5725-5850MHz

802.11a

Channel Number	Freq. (MHz)	6dB DOWN BANDWIDTH (MHz)	PASS /FAIL
149	5745	15.69	PASS
157	5785	15.51	PASS
165	5825	15.77	PASS


802.11n (20M)

Channel Number	Freq. (MHz)	6dB DOWN BANDWIDTH (MHz)	PASS /FAIL
149	5745	15.99	PASS
157	5785	16.13	PASS
165	5825	16.17	PASS


802.11n (40M)

Channel Number	Freq. (MHz)	6dB DOWN BANDWIDTH (MHz)	PASS /FAIL
151	5755	35.57	PASS
159	5795	35.35	PASS


**26dB bandwidth Test Plot
For 5150-5250MHz**

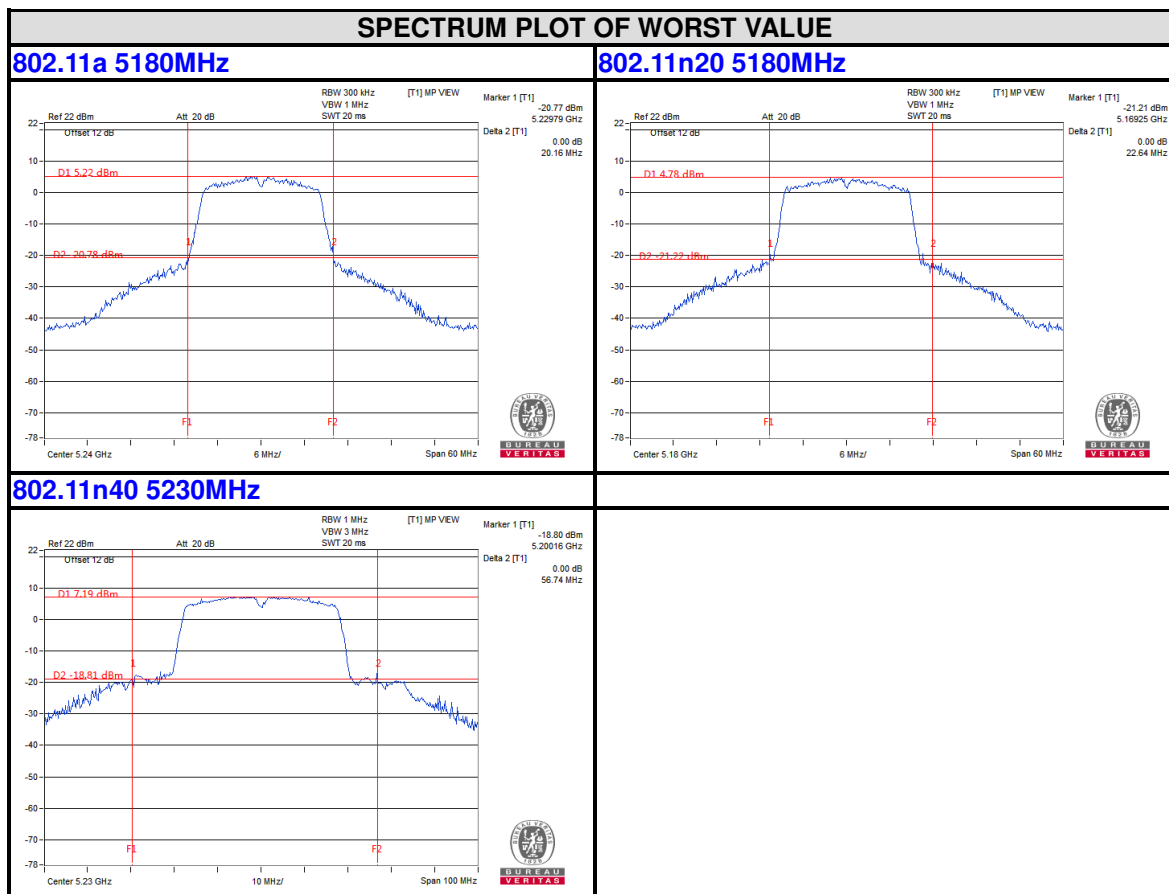


For 5250-5350MHz

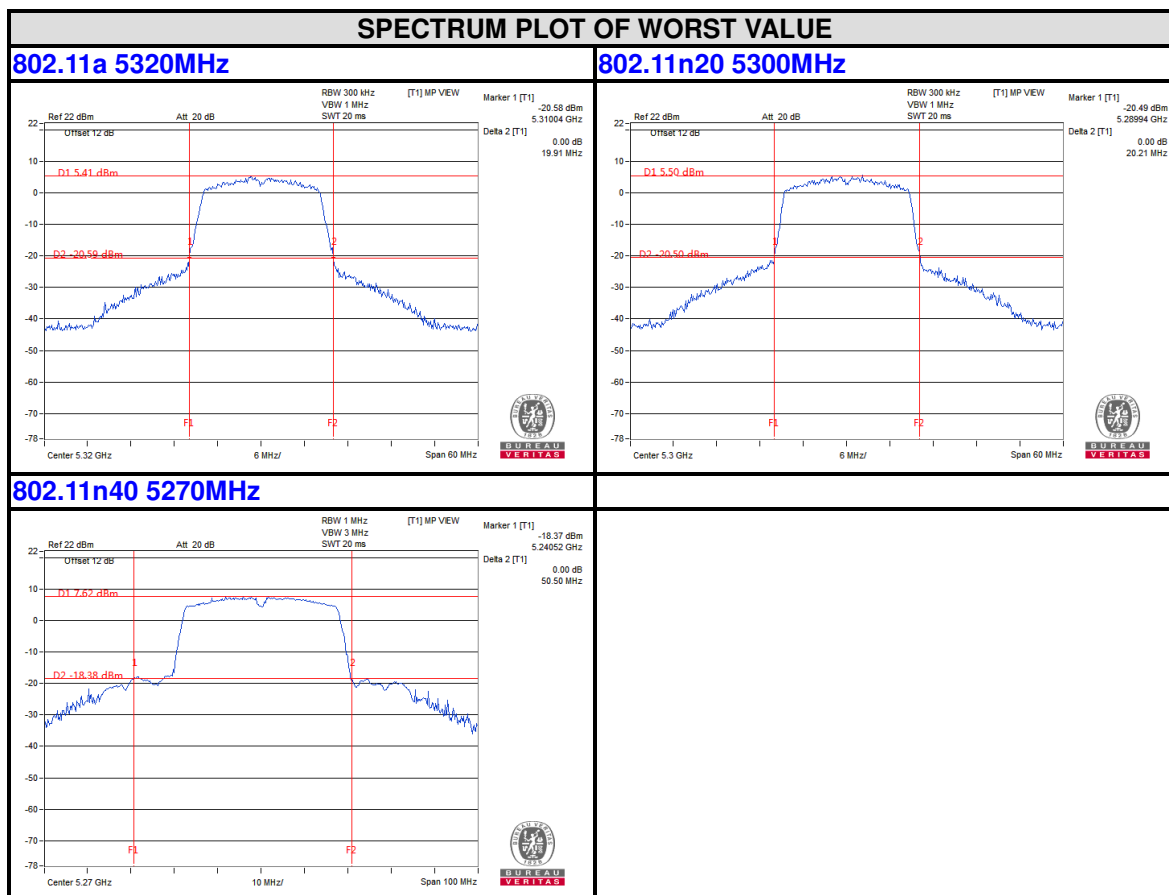

For 5470-5725MHz

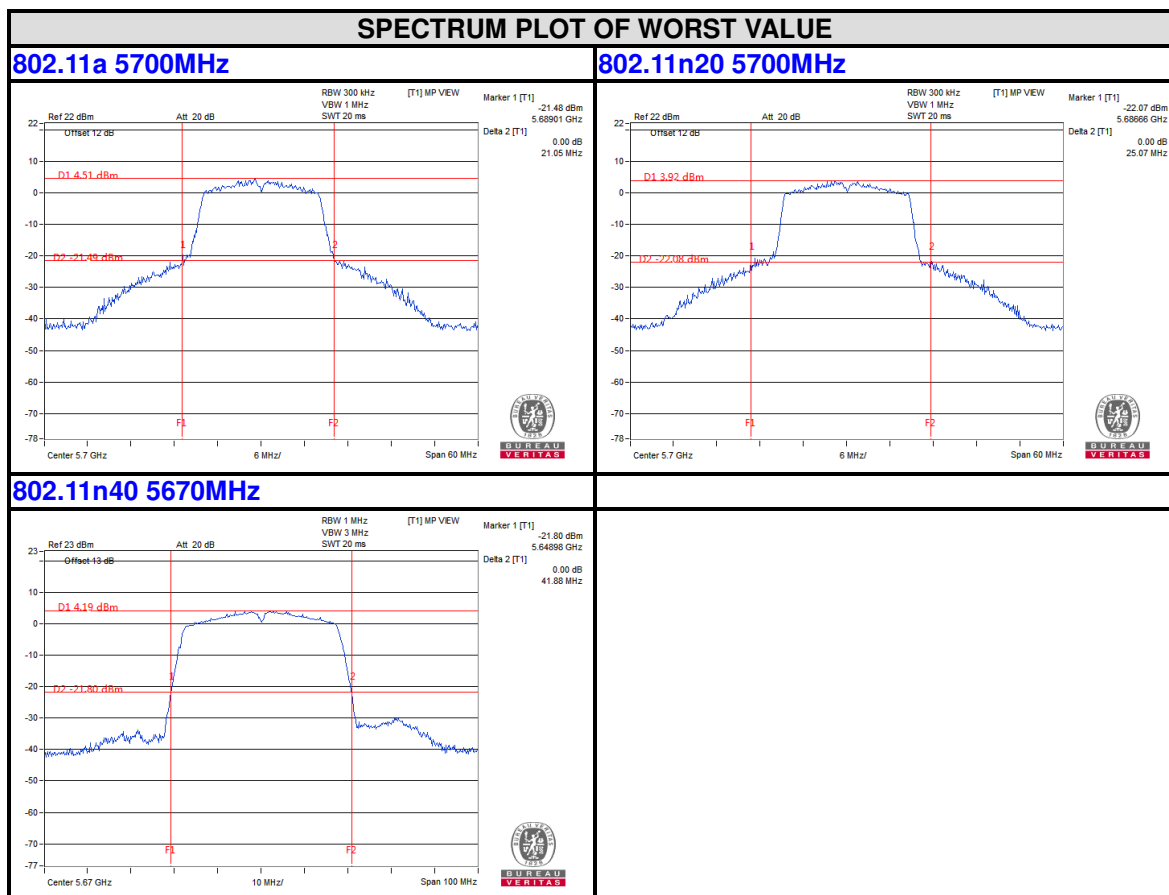

6dB BANDWIDTH For 5725-5850MHz

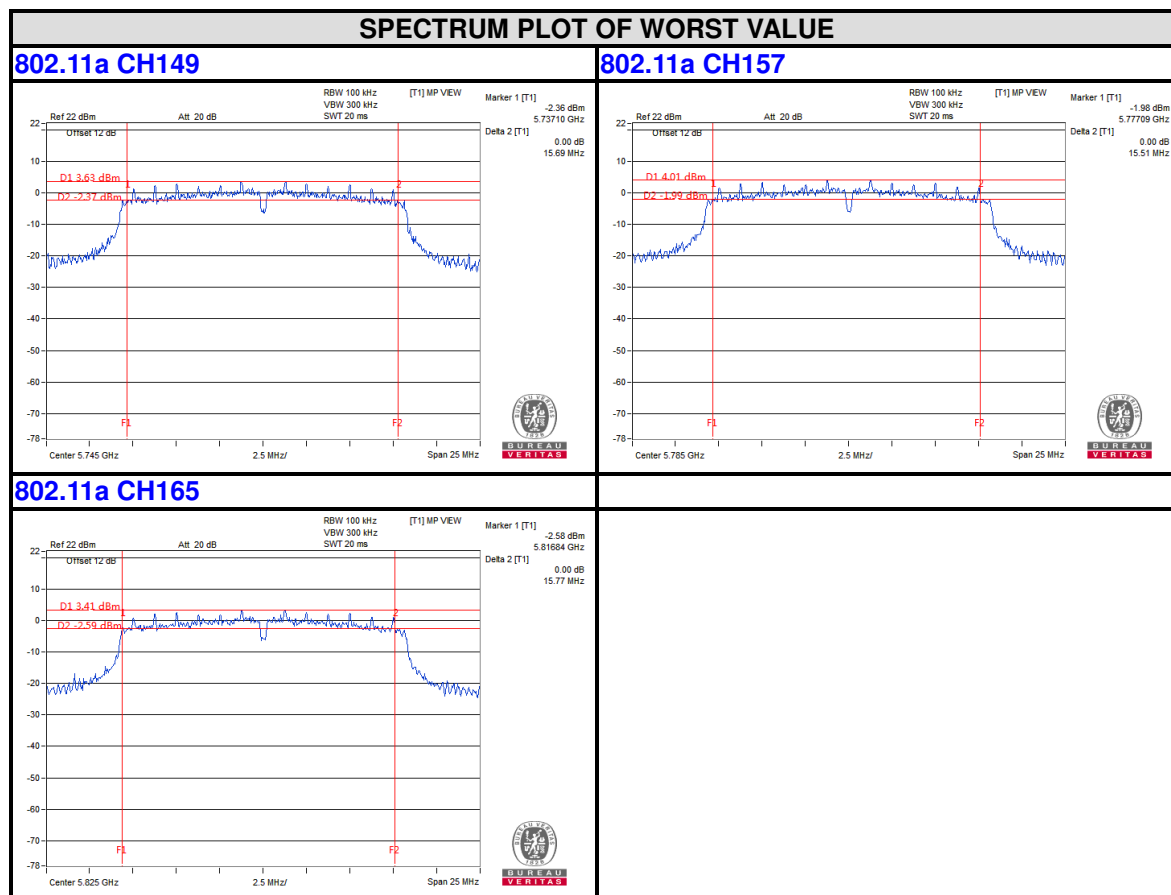




BUREAU
VERITAS


Test Report No.: RF200618N021-4

SPECTRUM PLOT OF WORST VALUE


802.11n20 CH149

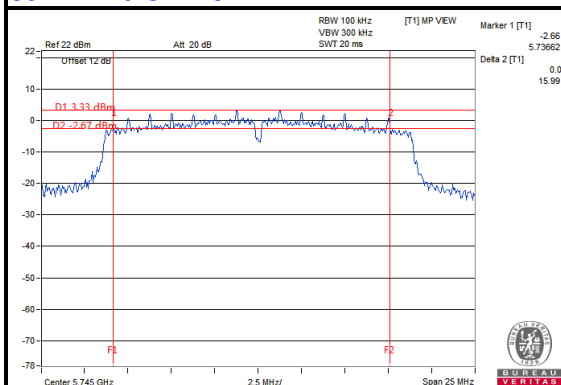

802.11n20 CH157

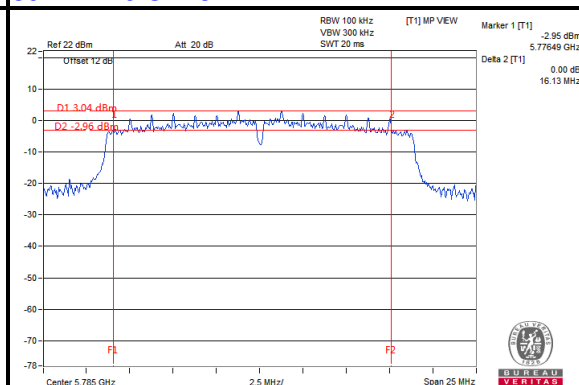


802.11n20 CH165

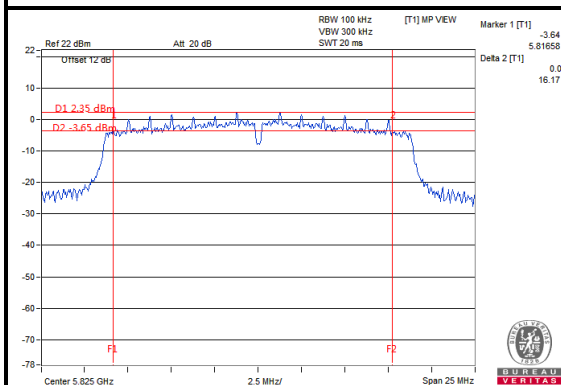


SPECTRUM PLOT OF WORST VALUE

802.11n40 CH151

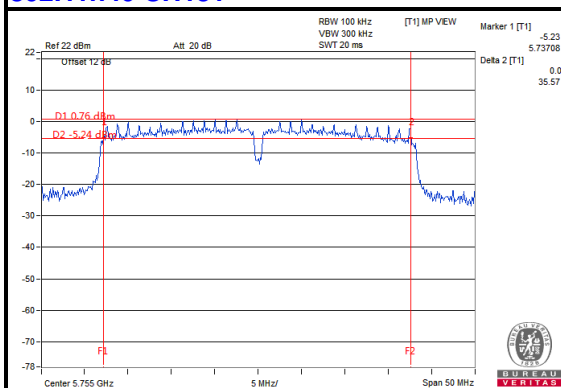

802.11n40 CH159

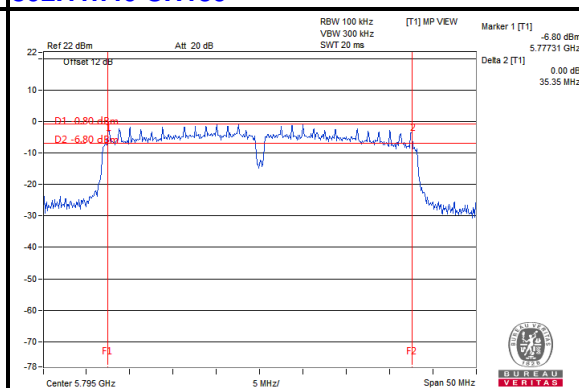

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 96, Guantai Road (Houjie Section), Houjie
Town, Dongguan City, Guangdong Province.
523942. People's Republic of China.


Tel: +86 769 8998 2098
Fax: +86 769 8593 1080
Email: customerservice.dg@cn.bureauveritas.com

3.4 PEAK POWER SPECTRAL DENSITY MEASUREMENT

3.4.1 LIMITS OF PEAK POWER SPECTRAL DENSITY MEASUREMENT

Operation Band	EUT Category		LIMIT
U-NII-1		Outdoor Access Point	17dBm/ MHz
		Fixed point-to-point Access Point	
		Indoor Access Point	
	√	Mobile and Portable client device	11dBm/ MHz
U-NII-2A	√		11dBm/ MHz
U-NII-2C	√		11dBm/ MHz
U-NII-3	√		30dBm/ 500kHz

3.4.2 TEST SETUP



3.4.3 TEST INSTRUMENTS

Refer to section 3.3.3 to get information of above instrument.

3.4.4 TEST PROCEDURES

For U-NII-1, U-NII-2A, U-NII-2C band:

Using method SA-2

- 1) Set span to encompass the entire emission bandwidth (EBW) of the signal.
- 2) Set RBW = 1MHz, Set VBW = 3 MHz, Detector = RMS
- 3) Set Channel power measure = 1MHz
- 4) Sweep time = auto, trigger set to "free run".
- 5) Trace average at least 100 traces in power averaging mode.
- 6) Record the max value and add 10 log (1/duty cycle)

For U-NII-3 band:

Using method SA-2

- 1) Set span to encompass the entire emission bandwidth (EBW) of the signal.
- 2) Set RBW = 300 kHz, Set VBW = 1 MHz, Detector = RMS
- 3) Set Channel power measure = 1MHz
- 4) Sweep time = auto, trigger set to "free run".
- 5) Trace average at least 100 traces in power averaging mode.
- 6) Record the max value and add 10 log (1/duty cycle)

3.4.5 DEVIATION FROM TEST STANDARD

No deviation.

3.4.6 EUT OPERATING CONDITIONS

Same as 3.3.6

3.4.7 TEST RESULTS

For U-NII-1, U-NII-2A & U-NII-2C, For U-NII-3:

802.11a

Channel	Frequency (MHz)	PSD W/O Duty Factor (dBm/MHz)	Duty Factor (dB)	PSD with Duty Factor (dBm/MHz)	MAX. Limit (dBm)	PASS / FAIL
36	5180	0.32	0.110	0.43	11.00	PASS
40	5200	0.77	0.110	0.88	11.00	PASS
48	5240	0.97	0.110	1.08	11.00	PASS
52	5260	0.92	0.110	1.03	11.00	PASS
60	5300	0.20	0.110	0.31	11.00	PASS
64	5320	0.96	0.110	1.07	11.00	PASS
100	5500	-1.31	0.110	-1.20	11.00	PASS
116	5580	-0.13	0.110	-0.02	11.00	PASS
140	5700	-0.12	0.110	-0.01	11.00	PASS

Note: Refer to section 2.3 for duty cycle spectrum plot.

Chan.	Freq. (MHz)	PSD (dBm/300kHz)	PSD (dBm/500kHz)	Duty Factor (dB)	Total PSD (dBm/500k Hz)	Limit (dBm/500kHz)	PASS / FAIL
149	5745	-6.09	-3.87	0.110	-3.76	30.00	PASS
157	5785	-5.59	-3.37	0.110	-3.26	30.00	PASS
165	5825	-6.27	-4.05	0.110	-3.94	30.00	PASS

Note: Refer to section 2.3 for duty cycle spectrum plot.

802.11n (20MHz)

Channel	Frequency (MHz)	PSD W/O Duty Factor (dBm/MHz)	Duty Factor (dB)	PSD with Duty Factor (dBm/MHz)	MAX. Limit (dBm)	PASS / FAIL
36	5180	0.69	0.146	0.84	11.00	PASS
40	5200	0.73	0.146	0.88	11.00	PASS
48	5240	0.75	0.146	0.90	11.00	PASS
52	5260	0.70	0.146	0.85	11.00	PASS
60	5300	1.12	0.146	1.27	11.00	PASS
64	5320	0.71	0.146	0.86	11.00	PASS
100	5500	-1.72	0.146	-1.57	11.00	PASS
116	5580	-0.38	0.146	-0.23	11.00	PASS
140	5700	-0.44	0.146	-0.29	11.00	PASS

Note: Refer to section 2.3 for duty cycle spectrum plot.

Chan.	Freq. (MHz)	PSD (dBm/300kHz)	PSD (dBm/500kHz)	Duty Factor (dB)	Total PSD (dBm/500kHz)	Limit (dBm/500kHz)	PASS / FAIL
149	5745	-6.67	-4.45	0.146	-4.30	30.00	PASS
157	5785	-6.75	-4.53	0.146	-4.38	30.00	PASS
165	5825	-7.56	-5.34	0.146	-5.19	30.00	PASS

Note: Refer to section 2.3 for duty cycle spectrum plot.

802.11n (40MHz)

Channel	Frequency (MHz)	PSD W/O Duty Factor (dBm/MHz)	Duty Factor (dB)	PSD with Duty Factor (dBm/MHz)	MAX. Limit (dBm)	PASS / FAIL
38	5190	-2.76	0.227	-2.53	11.00	PASS
46	5230	-2.84	0.227	-2.61	11.00	PASS
54	5270	-2.70	0.227	-2.47	11.00	PASS
62	5310	-3.00	0.227	-2.77	11.00	PASS
102	5510	-4.46	0.227	-4.23	11.00	PASS
110	5550	-3.49	0.227	-3.26	11.00	PASS
134	5670	-3.53	0.227	-3.30	11.00	PASS

Note: Refer to section 2.3 for duty cycle spectrum plot.


Chan.	Freq. (MHz)	PSD (dBm/300kHz)	PSD (dBm/500kHz)	Duty Factor (dB)	Total PSD (dBm/500k Hz)	Limit (dBm/500kHz)	PASS / FAIL
151	5755	-9.88	-7.66	0.227	-7.43	30.00	PASS
159	5795	-11.39	-9.17	0.227	-8.94	30.00	PASS

Note: Refer to section 2.3 for duty cycle spectrum plot.


PSD Test Plot

BAND 1


5150-5250MHz

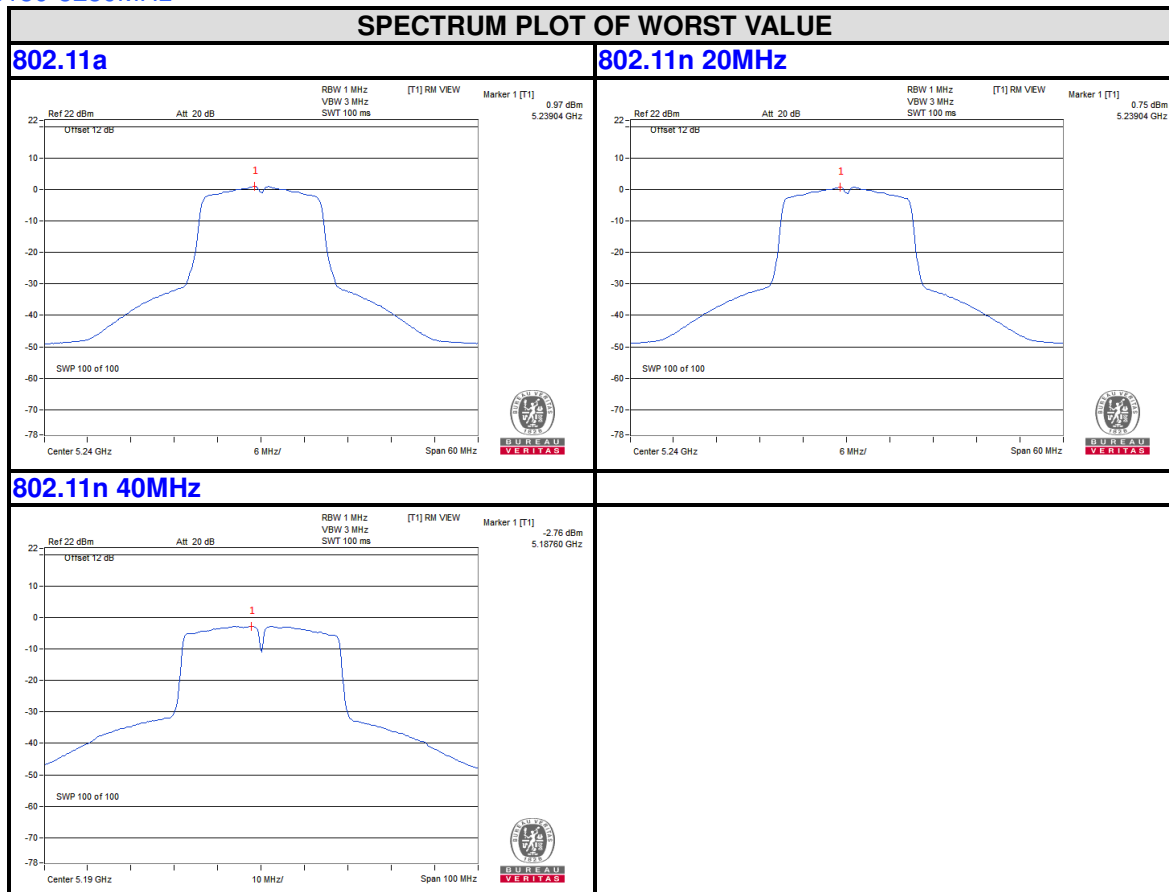


BAND 2
5250-5350MHz

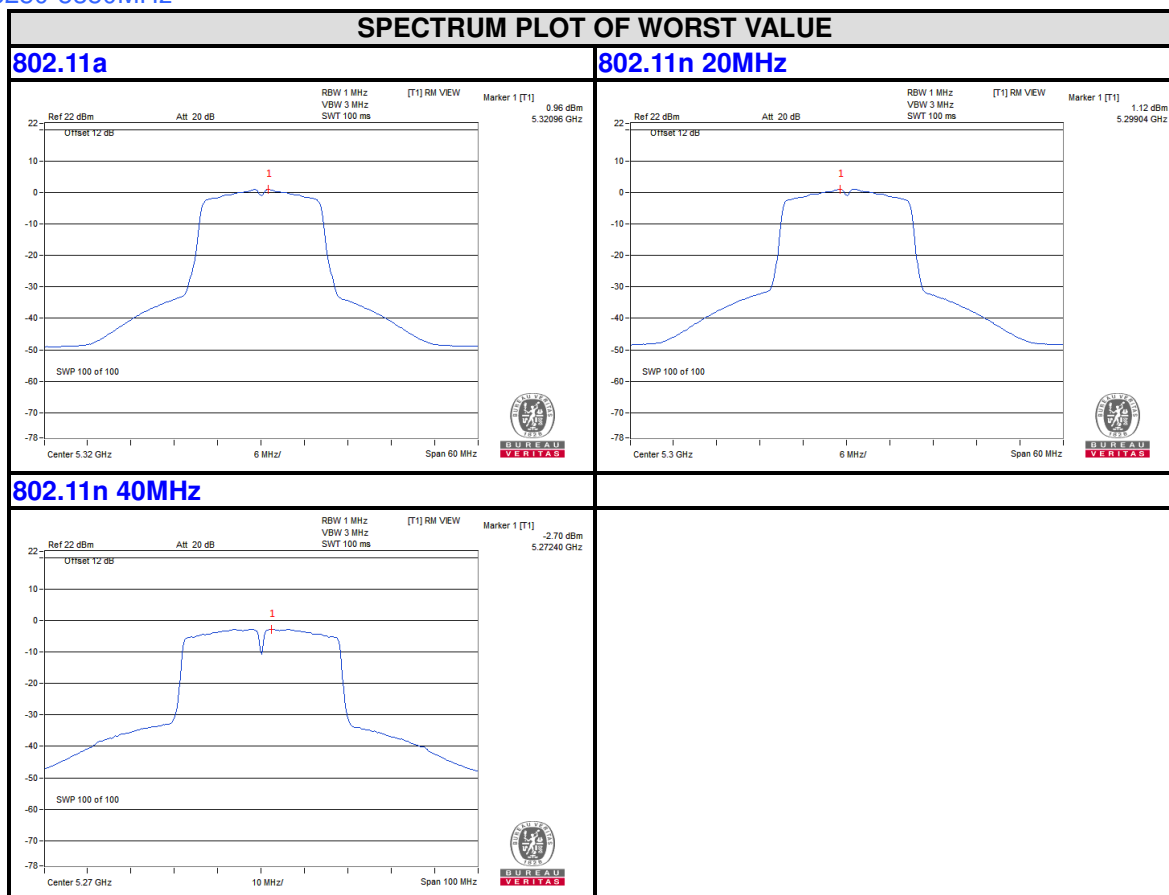

BAND 3
5470-5725MHz

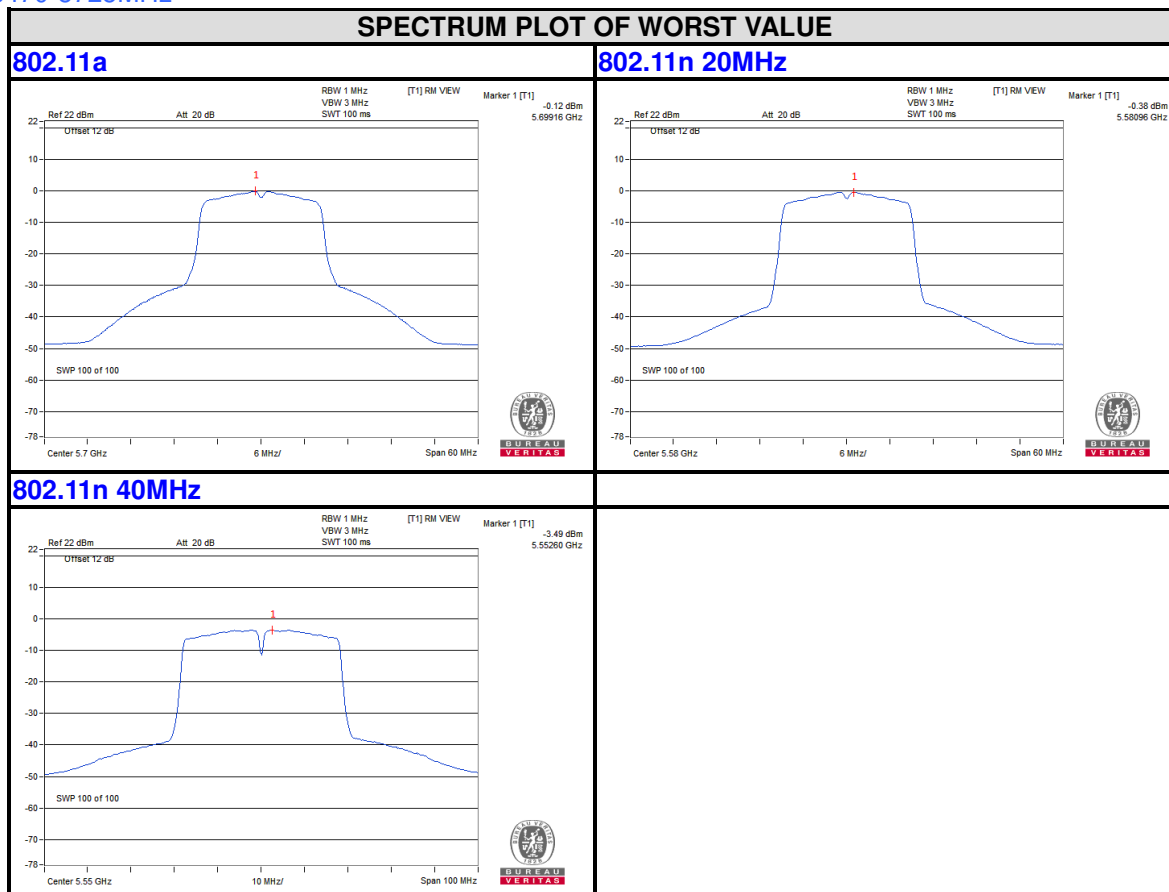

BAND4
5725-5850MHz

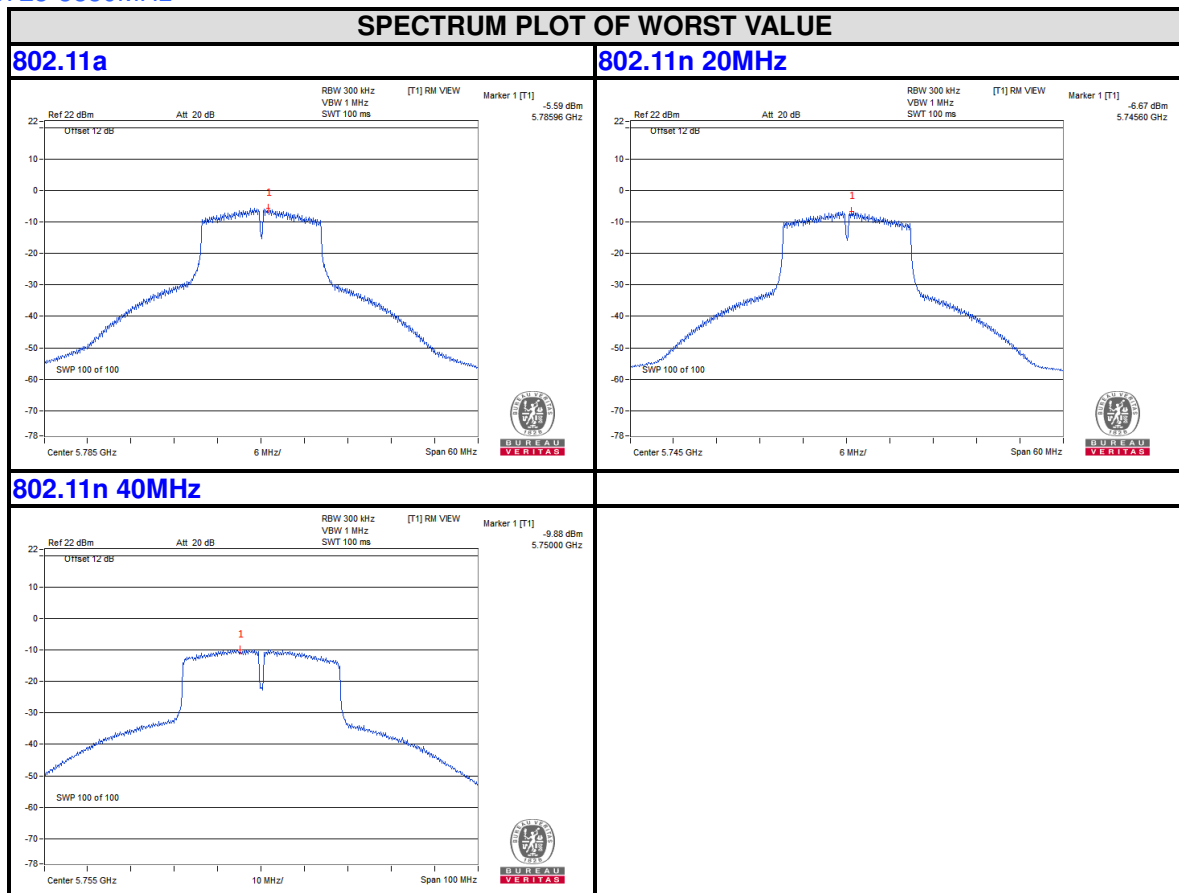


3.5 FREQUENCY STABILITY

3.5.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT

The frequency of the carrier signal shall be maintained within band of operation.

3.5.2 TEST SETUP

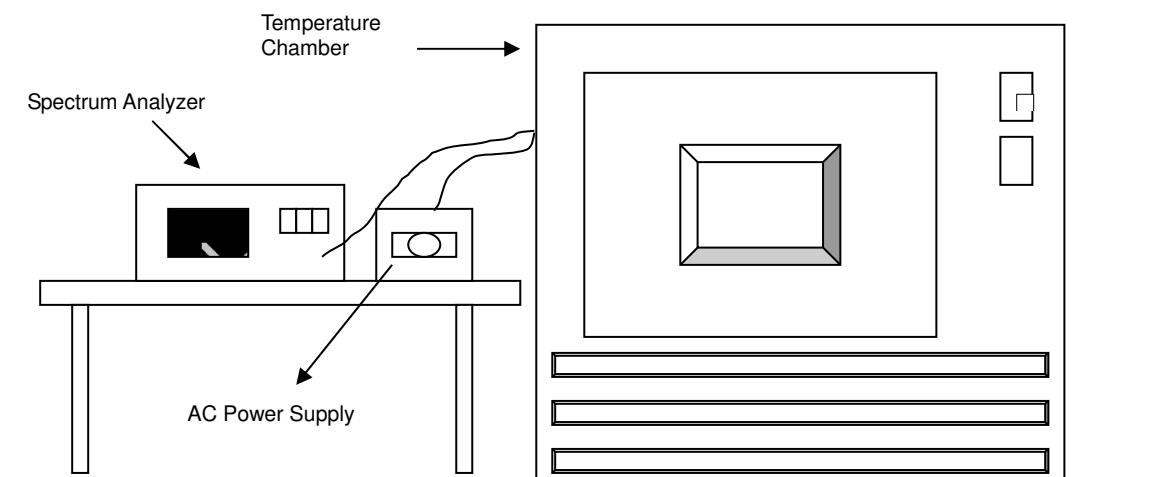

3.5.3 TEST INSTRUMENTS

Refer to section 3.3.3 to get information of above instrument.

3.5.4 TEST PROCEDURE

- a. The EUT was placed inside the environmental test chamber and powered by nominal AC voltage.
- b. Turn the EUT on and couple its output to a spectrum analyzer.
- c. Turn the EUT off and set the chamber to the highest temperature specified.
- d. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 2, 5, and 10 minutes.
- e. Repeat step 2 and 3 with the temperature chamber set to the lowest temperature.
- f. The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.

3.5.5 DEVIATION FROM TEST STANDARD

No deviation.

3.5.6 EUT OPERATING CONDITION


Set the EUT transmit at un-modulation mode to test frequency stability.

3.5.7 TEST RESULTS


FREQUENCY STABILITY VERSUS TEMP.									
OPERATING FREQUENCY: 5180MHz									
TEMP. (°C)	POWER SUPPLY (Vac)	0 MINUTE		2 MINUTE		5 MINUTE		10 MINUTE	
		Measured Frequency (MHz)	Frequency Drift	Measured Frequency (MHz)	Frequency Drift	Measured Frequency (MHz)	Frequency Drift	Measured Frequency (MHz)	Frequency Drift
50	120	5180.0150	0.0150	5180.0129	0.0129	5180.0103	0.0103	5180.0136	0.0136
40	120	5180.0046	0.0046	5180.0047	0.0047	5180.0040	0.0040	5180.0031	0.0031
30	120	5179.9927	-0.0073	5179.9931	-0.0069	5179.9908	-0.0092	5179.9923	-0.0077
20	120	5180.0027	0.0027	5180.0027	0.0027	5180.0046	0.0046	5180.0025	0.0025
10	120	5179.9823	-0.0177	5179.9800	-0.0200	5179.9802	-0.0198	5179.9784	-0.0216
0	120	5179.9835	-0.0165	5179.9793	-0.0207	5179.9822	-0.0178	5179.9825	-0.0175
-10	120	5180.0161	0.0161	5180.0148	0.0148	5180.0137	0.0137	5180.0131	0.0131
-20	120	5180.0001	0.0001	5179.9971	-0.0029	5179.9989	-0.0011	5179.9978	-0.0022
-30	120	5179.9961	-0.0039	5179.9936	-0.0064	5179.9942	-0.0058	5179.9972	-0.0028

FREQUENCY STABILITY VERSUS TEMP.									
OPERATING FREQUENCY: 5180MHz									
TEMP. (°C)	POWER SUPPLY (Vac)	0 MINUTE		2 MINUTE		5 MINUTE		10 MINUTE	
		Measured Frequency (MHz)	Frequency Drift	Measured Frequency (MHz)	Frequency Drift	Measured Frequency (MHz)	Frequency Drift	Measured Frequency (MHz)	Frequency Drift
20	138	5180.0026	0.0026	5180.0021	0.0021	5180.0048	0.0048	5180.0022	0.0022
	120	5180.0027	0.0027	5180.0027	0.0027	5180.0046	0.0046	5180.0025	0.0025
	102	5180.0030	0.0030	5180.0019	0.0019	5180.0038	0.0038	5180.0035	0.0035

Band 1
5150-5250MHz
99% Occupied Bandwidth Without over DFS Band

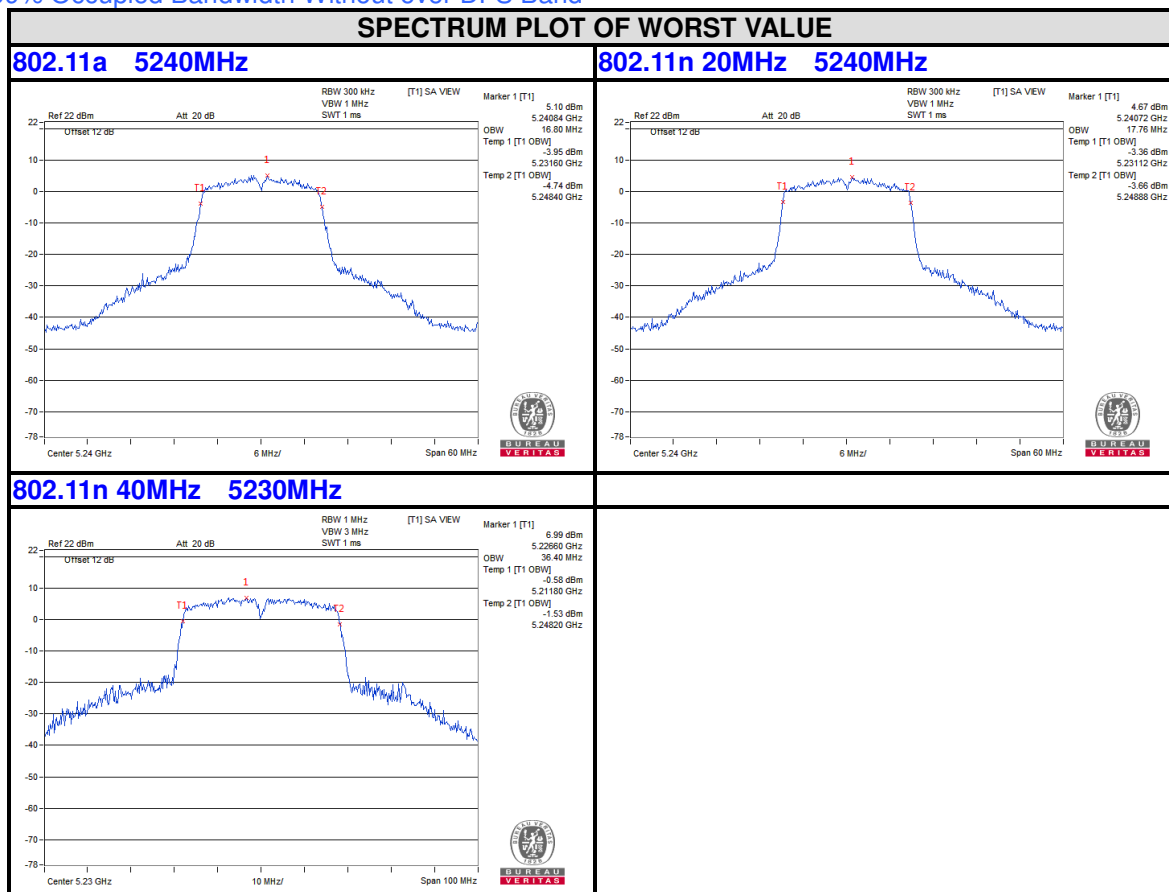

Band 2
5250-5350MHz
99% Occupied Bandwidth Without over Band 1

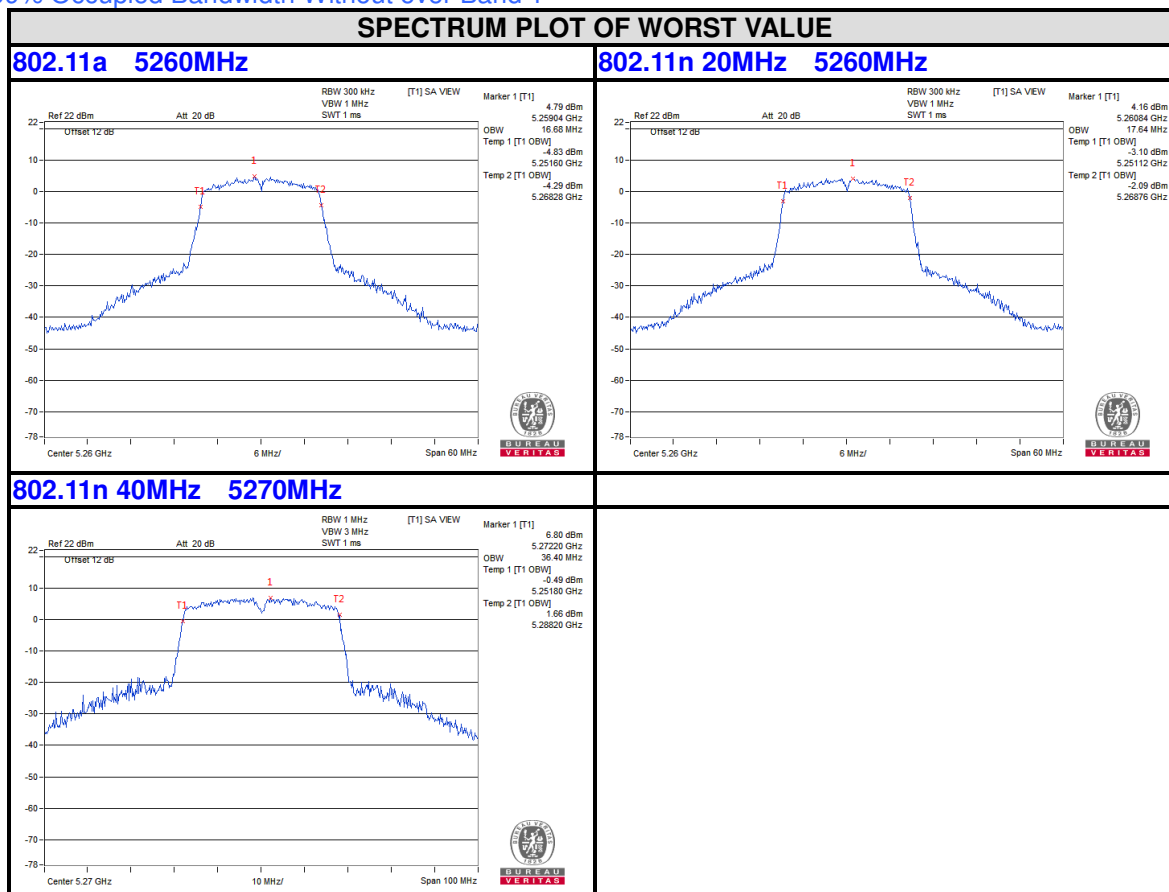



Test Report No.: RF200618N021-4

4. PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).

5. APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No modifications were made to the EUT by the lab during the test.

---END---