



Radio Test Report

Application for Grant of Equipment Authorization

**FCC Part 90 Subpart R
758MHz – 768MHz**

FCC ID: VBNFRBI-01

**Model: FRBI
Product Name: Flexi Multiradio BTS**

**APPLICANT: Nokia Solutions and Networks
6000 Connection Drive
Irving, TX 75039**

**TEST SITE(S): National Technical Systems - Plano
1701 E Plano Pkwy #150
Plano, TX 75074**

REPORT DATE: Apr 10, 2017

FINAL TEST DATES: March 28 – April 4, 2017

TOTAL NUMBER OF PAGES: 97

Prepared By:

**Armando Del Angel
EMI Project Engineer**

Approved By:

**Kimberly Zavala
Quality Assurance Manager**

Reviewed By:

**Jeffrey Viel
General Manager**

This report and the information contained herein represent the results of testing test articles identified and selected by the client performed to specifications and/or procedures selected by the client. National Technical Systems (NTS) makes no representations, expressed or implied, that such testing is adequate (or inadequate) to demonstrate efficiency, performance, reliability, or any other characteristic of the articles being tested, or similar products. This report should not be relied upon as an endorsement or certification by NTS of the equipment tested, nor does it represent any statement whatsoever as to its merchantability or fitness of the test article, or similar products, for a particular purpose. This report shall not be reproduced except in full.

REVISION HISTORY

Rev#	Date	Comments	Modified By
0	Apr 10, 2017	1 st release	Armando Del Angel
1	April 28, 2017	Fixed report per customer comments.	Armando Del Angel
2	May 3, 2017	Fixed Final comments.	Armando Del Angel

TABLE OF CONTENTS

REVISION HISTORY2

TABLE OF CONTENTS2

SCOPE.....3

OBJECTIVE4

STATEMENT OF COMPLIANCE4

DEVIATIONS FROM THE STANDARDS4

TEST RESULTS.....5

 FCC PART 90 SUBPART R (BASE STATIONS OPERATING IN 758MHZ-768MHZ BAND)5

 EXTREME CONDITIONS8

 MEASUREMENT UNCERTAINTIES8

EQUIPMENT UNDER TEST (EUT) DETAILS9

 GENERAL.....9

 ENCLOSURE.....10

 AUXILLARY EQUIPMENT10

 SUPPORT EQUIPMENT10

 EUT INTERFACE PORTS.....10

 EUT OPERATION12

 EUT FIRMWARE/SOFTWARE.....12

 MODIFICATIONS12

TESTING13

 GENERAL INFORMATION13

MEASUREMENT PROCEDURES14

TEST EQUIPMENT16

APPENDIX A TEST DATA17

 RF OUTPUT POWER18

 EMISSION BANDWIDTHS (26dB AND 99%)29

 ANTENNA PORT CONDUCTED BANDEDGE32

 TRANSMITTER ANTENNA PORT CONDUCTED SPURIOUS EMISSIONS43

 TRANSMITTER RADIATED SPURIOUS EMISSIONS55

 FREQUENCY STABILITY58

END OF REPORT.....96

SCOPE

Tests have been performed on Nokia Solutions and Networks product Flexi Multiradio BTS RRH Model FRBI, pursuant to the relevant requirements of the following standard(s) in order to obtain device certification against the regulatory requirements of the Federal Communications Commission.

- Code of Federal Regulations (CFR) Title 47 Part 2
- CFR Title 47 Part 90 Subpart R

Conducted and radiated emissions data has been collected, reduced, and analyzed within this report in accordance with measurement guidelines set forth in the following reference standards:

ANSI C63.4-2009
ANSI TIA-603-C
FCC KDB 971168 D01 v02r02

The intentional radiator above has been tested in a simulated typical installation to demonstrate compliance with the relevant FCC requirements.

Every practical effort was made to perform an impartial test using appropriate test equipment of known calibration. All pertinent factors have been applied to reach the determination of compliance.

The test results recorded herein are based on a single type test of Nokia Solutions and Networks product Flexi Multiradio BTS RRH Model FRBI and therefore apply only to the tested sample. The sample was selected and prepared by Hobert Smith of Nokia Solutions and Networks.

OBJECTIVE

The primary objective of the manufacturer is compliance with the regulations outlined in the previous section.

Prior to marketing in the USA, the device requires certification.

Certification is a procedure where the manufacturer submits test data and technical information to a certification body and receives a certificate or grant of equipment authorization upon successful completion of the certification body's review of the submitted documents. Once the equipment authorization has been obtained, the label indicating compliance must be attached to all identical units, which are subsequently manufactured.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product which may result in increased emissions should be checked to ensure compliance has been maintained (i.e., printed circuit board layout changes, different line filter, different power supply, harnessing or I/O cable changes, etc.).

Testing was performed only on Model FRBI. No additional models were described or supplied for testing.

STATEMENT OF COMPLIANCE

The tested sample of Nokia Solutions and Networks product Flexi Multiradio BTS RRH Model FRBI complied with the requirements of the standards and frequency bands declared in the scope of this test report.

Maintenance of compliance is the responsibility of the manufacturer. Any modifications to the product should be assessed to determine their potential impact on the compliance status of the device with respect to the standards detailed in this test report.

DEVIATIONS FROM THE STANDARDS

No deviations were made from the published requirements listed in the scope of this report.

TEST RESULTS

FCC Part 90 Subpart R (Base Stations Operating in 758MHz-768MHz band)

40 Watts Configuration (4X4 MIMO)

FCC	Description	Measured	Limit	Result
Transmitter Modulation, output power and other characteristics				
§90.531	Frequency range(s)	760.5MHz - 765.5MHz (5M LTE) 763.0MHz - 763.0MHz (10M LTE)	758MHz - 768MHz	Pass
§90.535	Modulation Type	QPSK, 16QAM, 64QAM, 256QAM (5M and 10M for each)	Digital	Pass
§90.542	Output Power	Conducted Output Power (Highest on Port 4) RMS: 46.08Bm ERP will depend on antenna gain (unknown)	FCC: 1000W ERP	Pass
N/A Informational	Peak to Average Ratio	8.11dB highest	--	--
§2.1049	Emission Bandwidth (99%)	4.4983MHz (5M LTE) 8.9977MHz (10M LTE)	Remain in Block	Pass
N/A Informational	Emission Bandwidth (26dB)	4.888MHz (5M LTE) 9.740MHz (10M LTE)	Remain in Block	Pass
Transmitter spurious emissions¹				
§90.543(e)(3)	At the antenna terminals (Note 1)	< -19.03dBm	-19.03 dBm (per TX chain)	Pass
	Field strength	40.292dBuV/m at 3m Eq. to -54.908dBm EIRP	-13 dBm EIRP	Pass
90.543(e)(1)	Maximum emissions in 769-775 MHz and 799- 805MHz bands	-41.616dBm for RBW of 100kHz is highest reading	-46dBm per 6.25kHz bandwidth or -40dBm for a RBW of 100kHz and 4 port MIMO (See Note 2)	Pass
§90.543(f)	Limitations within 1559MHz -1610MHz band	Conducted measurements on Port 2. No emissions observed above the instrumentation noise floor. Noise floor was more than 20dB below the required limit.	-70 dBW/MHz EIRP (wideband) -80 dBW/MHz EIRP (discrete)	Pass
Other details				
§90.539	Frequency stability	.00089ppm	1ppm	Pass
§1.1310	RF Exposure	N/A		Pass ³
Notes				
Note 1 – Based on 100kHz RBW. In 100kHz bands immediately outside and adjacent to the frequency block 30kHz RBW has been used.				
Note 2: The FCC section 90.543(e)(1) requires an emission limit of -46dBm for any 6.25 kHz bandwidth (i.e.: 76 + 10logP) between frequency bands 769-775 MHz and 799-805 MHz. Adjusting for the required measurement RBW and four port MIMO requirement the emission limit in these frequency ranges is -40 dBm [i.e.: Limit = -46 dBm/6.25kHz (FCC Limit) + 12dB (BW conversion 10 log [100kHz/6.25kHz]) – 6dB (4 port MIMO)].				
Note 3 – Applicant’s declaration on a separate exhibit based on hypothetical antenna gains.				

	Emission Designators			
	LTE-QPSK	LTE-16QAM	LTE-64QAM	LTE-256QAM
5M	4M89F9W	4M86F9W	4M87F9W	4M89F9W
10M	9M70F9W	9M65F9W	9M74F9W	9M71F9W

Note: Based on 26dB emission bandwidth for worst case representation.

60 Watts Configuration (2X2 MIMO)

FCC	Description	Measured	Limit	Result
Transmitter Modulation, output power and other characteristics				
§90.531	Frequency range(s)	760.5MHz - 765.5MHz (5M LTE) 763.0MHz - 763.0MHz (10M LTE)	758MHz - 768MHz	Pass
§90.535	Modulation Type	QPSK, 16QAM, 64QAM, 256QAM (5M and 10M for each)	Digital	Pass
§90.542	Output Power	Conducted Output Power (Highest on Port 1) RMS: 47.73Bm ERP will depend on antenna gain (unknown)	FCC: 1000W ERP	Pass
N/A Informational	Peak to Average Ratio	8.07dB highest @ 60W	--	--
§2.1049	Emission Bandwidth (99%)	4.4983MHz (5M LTE) 8.9977MHz (10M LTE)	Remain in Block	Pass
N/A Informational	Emission Bandwidth (26dB)	4.888MHz (5M LTE) 9.740MHz (10M LTE)	Remain in Block	Pass
Transmitter spurious emissions¹				
§90.543(e)	At the antenna terminals (Note 1)	< -19.03dBm	-19.03 dBm (per TX chain)	Pass
	Field strength	40.293dBuV/m at 3m Eq. to -54.904dBm EIRP	-13 dBm EIRP	Pass
90.543(e)(1)	Maximum emissions in 769-775 MHz and 799- 805MHz bands	-39.78dBm for RBW of 100kHz is the highest reading	-46dBm per 6.25kHz bandwidth or -37dBm for a RBW of 100kHz and 2 port MIMO (See Note 2)	Pass
§90.543(f)	Limitations within 1559MHz -1610MHz band	Conducted measurements on Port 1. No emissions observed above the instrumentation noise floor. Noise floor was more than 20dB below the required limit.	-70 dBW/MHz EIRP (wideband) -80 dBW/MHz EIRP (discrete)	Pass
Other details				
§90.539	Frequency stability	.00089ppm	1ppm	Pass
§1.1310	RF Exposure	N/A		Pass ³

Notes

Note 1 – Based on 100kHz RBW. In 100kHz bands immediately outside and adjacent to the frequency block 30kHz RBW has been used.
 Note 2: The FCC section 90.543(e)(1) requires an emission limit of -46dBm for any 6.25 kHz bandwidth (i.e.: $76 + 10\log(P)$) between frequency bands 769-775 MHz and 799-805 MHz. Adjusting for the required measurement RBW and two port MIMO requirement the emission limit in these frequency ranges is -37 dBm [i.e.: Limit = -46 dBm/6.25kHz (FCC Limit) + 12dB (BW conversion $10 \log [100\text{kHz}/6.25\text{kHz}] - 3\text{dB}$ (2 port MIMO))].
 Note 3 – Applicant’s declaration on a separate exhibit based on hypothetical antenna gains.

	Emission Designators			
	LTE-QPSK	LTE-16QAM	LTE-64QAM	LTE-256QAM
5M	4M88F9W	4M86F9W	4M87F9W	4M89F9W
10M	9M71F9W	9M71F9W	9M73F9W	9M70F9W

Note: Based on 26dB emission bandwidth for worst case representation.

EXTREME CONDITIONS

Frequency stability is determined over extremes of temperature and voltage. The extremes of voltage were 85 to 115 percent of the nominal value.

The extremes of temperature were -30°C to +50°C as specified in FCC §2.1055(a)(1).

MEASUREMENT UNCERTAINTIES

Measurement uncertainties of the test facility based on a 95% confidence level are as follows,

Test	Uncertainty
Radio frequency	± 0.2ppm
RF power conducted	±1.2 dB
RF power radiated	±3.3 dB
RF power density conducted	±1.2 dB
Spurious emissions conducted	±1.2 dB
Adjacent channel power	±0.4 dB
Spurious emissions radiated	±4 dB
Temperature	±1°C
Humidity	±1.6 %
Voltage (DC)	±0.2 %
Voltage (AC)	±0.3 %

EQUIPMENT UNDER TEST (EUT) DETAILS

GENERAL

The equipment under test (EUT) is a Nokia Solutions and Networks Flexi Multiradio Base Transceiver Station (BTS) Remote Radio Head (RRH) module, model FRBI which operates over 3 GPP frequency band 14 (BTS Rx: 788 to 798 MHz/BTS Tx: 758 to 768 MHz). The FRBI RRH, a 4T4R architecture supports either 2Tx/2Rx operation with 2x60W power amps (Tx pipes 1 and 4) or 4Tx/4Rx operation with 4x40W power amps (Tx PAs 1 and 4 are turned down to 40W). The FRBI can be operated as a 4x4 MIMO, 2x2 MIMO or as non-MIMO. Multi-carrier operation is supported.

The FRBI is multi-standard capable (GSM/EDGE/WCDMA/LTE), but for this effort only the LTE mode is tested. The FRBI supports four downlink modulation types for LTE (QPSK, 16QAM, 64QAM and 256QAM). The FRBI supports two LTE channel bandwidths (5 MHz and 10 MHz).

The FRBI has external interfaces including DC power, ground, TX/RX (Ant), external alarm (EAC), optical CPRI (OPT) and remote electrical tilt (RET). The RRH with applicable installation kit may be pole or wall mounted.

The FRBI LTE channel numbers and frequencies are as follows:

	Downlink EARFCN	Downlink Frequency (MHz)	LTE Channel Bandwidth	
			5 MHz	10 MHz
Band 14 2Tx/2Rx Mode (Ant 1, 4) 4Tx/4Rx Mode (Ant 1, 2, 3, 4)	5280	758.0	Band edge	Band edge
			
	5305	760.5	Bottom Ch	
			
	5330	763.0	Middle Ch	Bottom Ch Middle Ch Top Channel
			
	5355	765.5	Top Channel	
			
	5380	768.0	Band edge	Band edge

FRBI Downlink LTE Frequency Channels

The sample was received on March 27th, 2017 and tested on March 28th – April 4th, 2017. The EUT consisted of the following component(s):

Company	Model	Description	Part/Serial Number	FCC ID/IC Number
Nokia Solutions and Networks	FRBI	Flexi Multiradio BTS RRH	Part#: 474045A.101 Serial#: K9170427427	FCC ID: VBNFRBI-01 IC ID: N/A

ENCLOSURE

The EUT enclosure is made of heavy duty aluminum and measures approximately 12(W) x 7(D) x 24(H) inches.

AUXILLARY EQUIPMENT

Company	Model	Description	Part/Serial Number	FCC ID/IC Number
Finisar	FTLF8519P3BT L	CPRI SFP Module (Plugs into FRBI Opt Ports 1&2)	Part#: FTLF8519P3BTL (2 units per RRH) Serial#: NVR3DMT and NVR3DGB	N/A
Creowave Filters		758 to 768 MHz Carrier Reject/Blocking Filter*	Part#: CW-DPF-758-768-E4-M2 Serial#: 889004	N/A
*This filter was used in the RF conducted emission testing to reduce measurement instrumentation noise floor levels for the 799 to 805MHz and 1559 to 1610MHz frequency ranges.				

SUPPORT EQUIPMENT



Company	Model	Description	Part/Serial Number	FCC ID/IC Number
Nokia Solutions and Networks	F5SMF	Flexi System Module	Part#: 472181A.103	N/A
HP	Elite Book 6930p	Laptop PC	N/A	N/A

EUT INTERFACE PORTS

The I/O cabling configuration during testing was as follows:

Cable	Type	Shield	Length	Used in Test	Quantity	Termination
Power Input	Power	No	~ 3 m	Yes	1	Power Supply
Earth	Earth	No	~ 1 m	Yes	1	Lab earth ground
Antenna	RF	Yes	~ 3 m	Yes	4	50Ω Load
External Alarm	Signal	Yes	~ 3 m	Yes	1	Un-terminated
Remote Electrical Tilt	Signal	Yes	~ 3 m	Yes	1	Un-terminated
Multimode Optical	Optical	No	>6 m	Yes	2	System Module

The connector layout for FRBI is provided below:

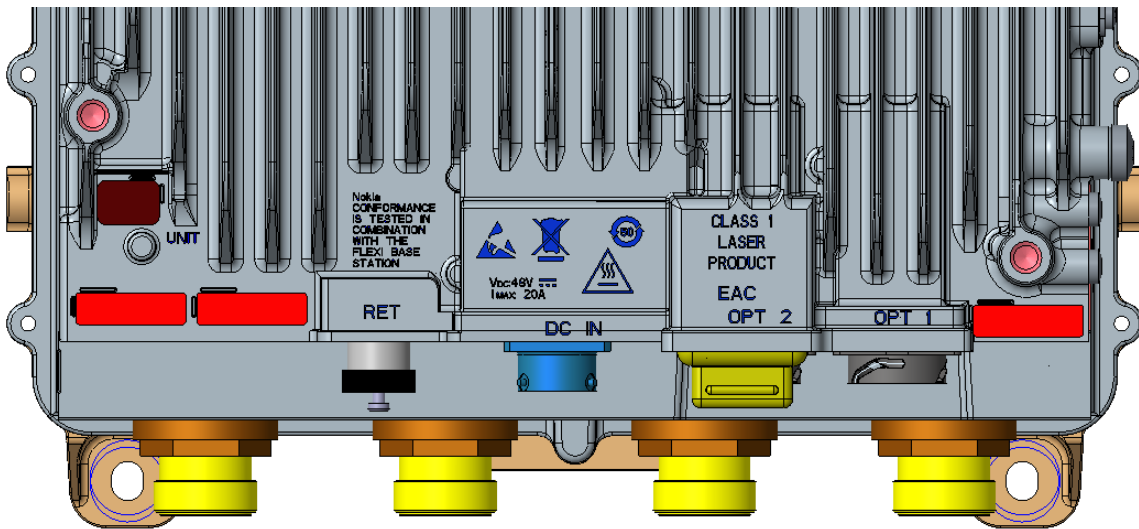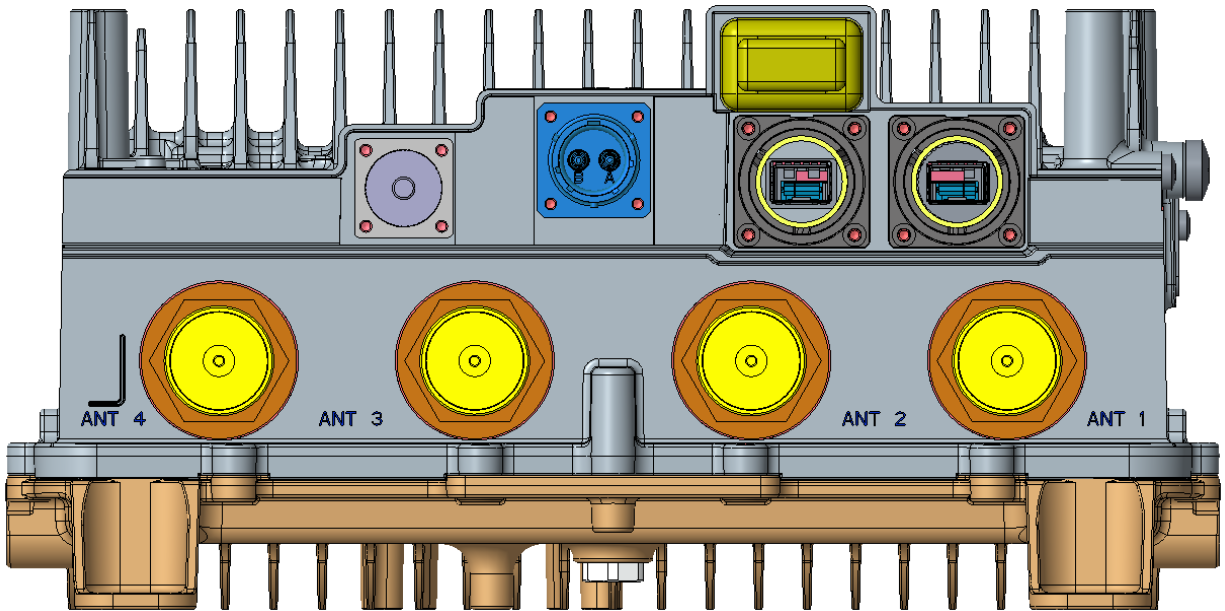

FRBI EXTERNAL INTERFACES

Name	Qty	Connector Type	Purpose (and Description)
DC In	1	Quick Disconnect	2-pole Power Circular Connector
GND	1	Screw lug (2xM5/1xM8)	Ground
ANT	4	4.3-10	RF signal for Transmitter/Receiver (50 Ohm)
Unit	1	LED	Unit Status LED
LMP	1	Card edge	Local Management/Test Port (Ethernet 10Base-T/100Base-Tx and others, not field accessible)
EAC	1	MDR14	External Alarm Interface (4 alarms)
OPT	2	SFP+ cage	Optical CPRI Interface
RET	1	8-pin circular connector conforming to IEC 60130-9 – Ed.3.0	AISG 2.0 to external devices

EUT OPERATION

During testing, the EUT was transmitting continuously with 100% duty-cycle at full power on all chains.

EUT FIRMWARE/SOFTWARE

The laptop PC connects to the FSMF System Module over the LMP (Ethernet) port. The system module controls the FRBI RRH via the optical (CPRI) interface. The laptop is used for changing configuration settings, monitoring tests and controlling the BTS. The following software versions are used for the FRBI testing:

- (1) RRH Unit Software: FRC37.02.R05D
- (2) System Module Software: FB_PS_REL_2016_10_096

NOKIA TEST EQUIPMENT

Test equipment supplied by the customer for LTE frequency error measurements for frequency stability testing for extreme voltages and extreme temperatures.

Nokia Asset Number	Description	Manufacturer	Model Number Serial Number	Calibration Due Date
NM04508*	MXA Signal Analyzer	Agilent	Model#: N9020A Serial#: US46220228	5/27/2017
*Test equipment supplied by customer for LTE frequency error measurements.				

MODIFICATIONS

No modifications were made to the EUT during testing.

TESTING

GENERAL INFORMATION

Antenna port measurements were taken at NTS Plano branch located at 1701 E Plano Pkwy #150 Plano, TX 75074.


Radiated spurious emissions measurements were taken at the NTS Plano Anechoic Chamber listed below. The sites conform to the requirements of ANSI C63.4-2009 *American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz* and CISPR 16-1-4:2007 - *Specification for radio disturbance and immunity measuring apparatus and methods Part 1-4: Radio disturbance and immunity measuring apparatus Ancillary equipment Radiated disturbances*. They are on file with the FCC and Industry Canada.

Site	Registration Numbers		Location
	FCC	Canada	
Chamber 1	A2LA Accredited Designation Number US1077	IC 4319A	1701 E Plano Pkwy #150 Plano, TX 75074.

Considerable engineering effort has been expended to ensure that the facilities conform to all pertinent requirements.

MEASUREMENT PROCEDURES

Output power, emission bandwidth, conducted spurious, conducted bandedge and carrier frequency stability measurements were all performed via a spectrum analyzer connected to the individual RF chains via a 40dB attenuator and an RF cable. The EUT was operating in 4x4 MIMO configuration or the 2x2 MIMO configuration (as required) at full power for all tests. While measuring one transmit chain, others were terminated with termination blocks. All measurements were corrected for the insertion loss of the attenuator and cable inserted between the RF port of the EUT and the spectrum analyzer. Simple test diagram is shown below.

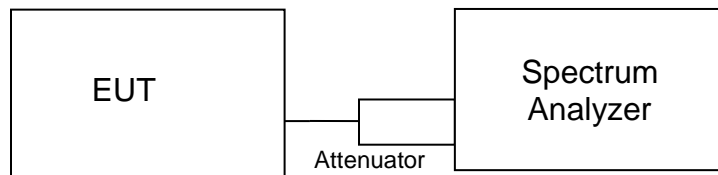

Test Configuration for Antenna Port Measurements

26dB emission bandwidth was measured in accordance with Section 4.1 of FCC KDB 971168 D01 v02r02. 99% occupied bandwidth was measured in accordance with Section 6.6 of RSS-Gen Issue 4. For both measurements an occupied bandwidth built-in function in the spectrum analyzer was used and Keysight Benchvue Software was used to capture the spectrum analyzer screenshots. Spectrum analyzer settings are shown on their corresponding plots in test results section.

Emissions at the band-edges were also captured with an Keysight Benchvue Software with settings described in the corresponding sections of the FCC and IC rules. A customer provided filter (Creowave Filter p/n: CW-DPF-758-768-E4-M2) with a 10 dB attenuator was used to make measurements in the 799 to 805MHz and 1559 to 1610MHz frequency ranges. This filter blocks RRH carrier power and allows the measurement instrumentation noise floor to be reduced to needed levels. The test setup insertion loss was characterized in the measurement band and was factored in via reference level offset of the spectrum analyzer. Spectrum analyzer settings are shown on their corresponding plots in test results section.

Peak and average output power measurements were performed in accordance with FCC KDB 971168 D01 v02r02. Measurements were performed with the built in power meter function found in the Spectrum analyzer and the screenshots were captured using Keysight Benchvue Software.

Peak to average power ratio was calculated in accordance with Section 5.7.2 of FCC KDB 971168 D01 v02r02.

Conducted spurious emissions were captured with TILE6 software which corrected the readings for cable loss and attenuator loss across the 9kHz-8GHz frequency span. Settings of the spectrum analyzer are described in the corresponding test result section.

For frequency stability, the EUT was placed inside a temperature chamber with all support and test equipment located outside of the chamber. Temperature was varied across the specified range in 10 degree increments and EUT was allowed enough time to stabilize at each temperature step. A signal analyzer as detailed in the test equipment section has been used for précised frequency error measurements.

Transmitter radiated spurious emissions measurements were made in accordance with ANSI C63.4-2009 by measuring the field strength of the emissions from the device at 3m test distance. The eirp limit as specified in the relevant rule part(s) is converted to a field strength at the test distance and the emissions from the EUT are then compared to that limit. Only emissions within 20dB of this limit are subjected to a substitution measurement in accordance with TIA-603-C-2004. Both preliminary and final measurements were performed at the same FCC listed test chamber. Preliminary scans were performed with TILE6 software. This software corrected the measurements for antenna factors, cable losses and pre-amplifier gains. Both polarizations of the receiving antenna were scanned from 30MHz to 8GHz with a peak detector (RBW=100kHz, VBW=300kHz, with trace max hold over multiple sweeps). Based on the preliminary scan results, frequencies of interest have been maximized via rotating the EUT 360 degrees and varying the height of the test antenna (1m to 4m). Final measurements were also taken with the peak detector as described above. A biconilog antenna was used for 30MHz-1GHz range. A double ridged waveguide horn antenna was used for 1-8GHz range. The antennas used to measure the radiated electric field strength are mounted on a non-conductive antenna mast equipped with a motor-drive to vary the antenna height. EUT was placed on a non-conductive RF transparent structure to provide 80cm height from the ground floor. A motorized turntable allowed it to be rotated during testing to determine the angle with the highest level of emissions.

Test Equipment

NTS Equipment #	Description	Manufacturer	Model	Calibration Duration	Calibration Due Date
E1529P	PSA	Agilent	E4446A	12 Months	4/4/2017
E1009P	PreAmp (1GHz-26.5GHz)	HP	8449B	12 Months	2/14/2018
E1279P	PreAmp (30MHz- 1GHz)	MITEQ	AM-1431-N- 1179SC	12 Months	9/26/2017
E1524P	Biconilog Antenna (30MHz-1GHz)	ETS Lindgren	3142D	12 Months	12/22/2017
E1149P	Horn Antenna (1GHz-18GHz)	EMCO	3115	12 Months	1/30/2018
E1447P	RMS Multimeter	Fluke	87V	12 Months	6/8/2017
ENV1195P	Climatic Chamber	Thermotron	SE-300-2-2	N/A	NCR
* NM04508	MXA Signal Analyzer	Agilent	N9020A	24 Months	5/27/2017

* Test equipment supplied by the customer for LTE frequency error measurements

Appendix A Test Data 40Watt Configuration

RF Output Power

RF output power has been measured in both Peak and RMS Average terms for each transmit chain at the center channel for all modulations and bandwidth modes.. Peak to average ratio (PAR) has been calculated as described in Section 5.7.2 of KDB971168 D01 v02r02 and all results are presented in tabular form below.

Results on center channel:


		LTE - QPSK			LTE - 16QAM			LTE - 64QAM			LTE - 256QAM		
		Peak (dBm)	Average (dBm)	PAR (dB)	Peak (dBm)	Average (dBm)	PAR (dB)	Peak (dBm)	Average (dBm)	PAR (dB)	Peak (dBm)	Average (dBm)	PAR (dB)
Port 1 Center Channel	5M	53.95	46.02	7.93	53.96	45.95	8.01	54.06	45.99	8.07	53.94	45.94	8
	10M	53.99	45.89	8.1	54	45.89	8.11	53.94	45.94	8	53.98	45.91	8.07
Port 2 Center Channel	5M	53.79	45.89	7.9	53.69	45.96	7.73	53.77	45.97	7.8	53.77	45.97	7.8
	10M	53.86	45.9	7.96	53.85	45.9	7.95	53.79	45.8	7.99	53.84	45.86	7.98
Port 3 Center Channel	5M	53.79	46	7.79	53.76	46.04	7.72	53.83	46.01	7.82	53.76	46.01	7.75
	10M	53.89	45.92	7.97	53.88	45.93	7.95	53.82	45.93	7.89	53.87	45.86	8.01
Port 4 Center Channel	5M	53.95	46.02	7.93	53.94	46.08	7.86	53.99	45.99	8	54	45.95	8.05
	10M	53.97	45.92	8.05	53.96	45.86	8.1	53.9	45.83	8.07	53.97	45.95	8.02
Combined Center Channel	5M	59.89	52	7.89	59.86	52.03	7.83	59.93	52.01	7.92	59.89	51.99	7.9
	10M	59.95	51.93	8.02	59.94	51.92	8.02	59.88	51.9	7.98	59.94	51.92	8.02


Based on the results above, Port 2 had the highest RMS average power and therefore it was selected for all the remaining antenna port tests on the product.

Subsequently output power levels on lowest and highest channels in 5MHz channel bandwidth mode were tested only at Port 2 and results presented below. 10MHz channel bandwidth mode had only 1 channel of operation at the center.


		LTE - QPSK			LTE - 16QAM			LTE - 64QAM			LTE - 256QAM		
		Peak (dBm)	Average (dBm)	PAR (dB)	Peak (dBm)	Average (dBm)	PAR (dB)	Peak (dBm)	Average (dBm)	PAR (dB)	Peak (dBm)	Average (dBm)	PAR (dB)
Port 2 Bottom Channel	5M	53.73	45.92	7.81	53.68	46.02	7.66	53.75	45.93	7.82	53.72	46	7.72
Port 2 Top Channel	5M	53.52	45.71	7.81	53.4	45.65	7.75	53.5	45.71	7.79	53.51	45.71	7.8


All corresponding plots included on the following pages. Total path loss of 39.9dB (Attenuator & RF cable) accounted in via reference level offset to the spectrum analyzer.

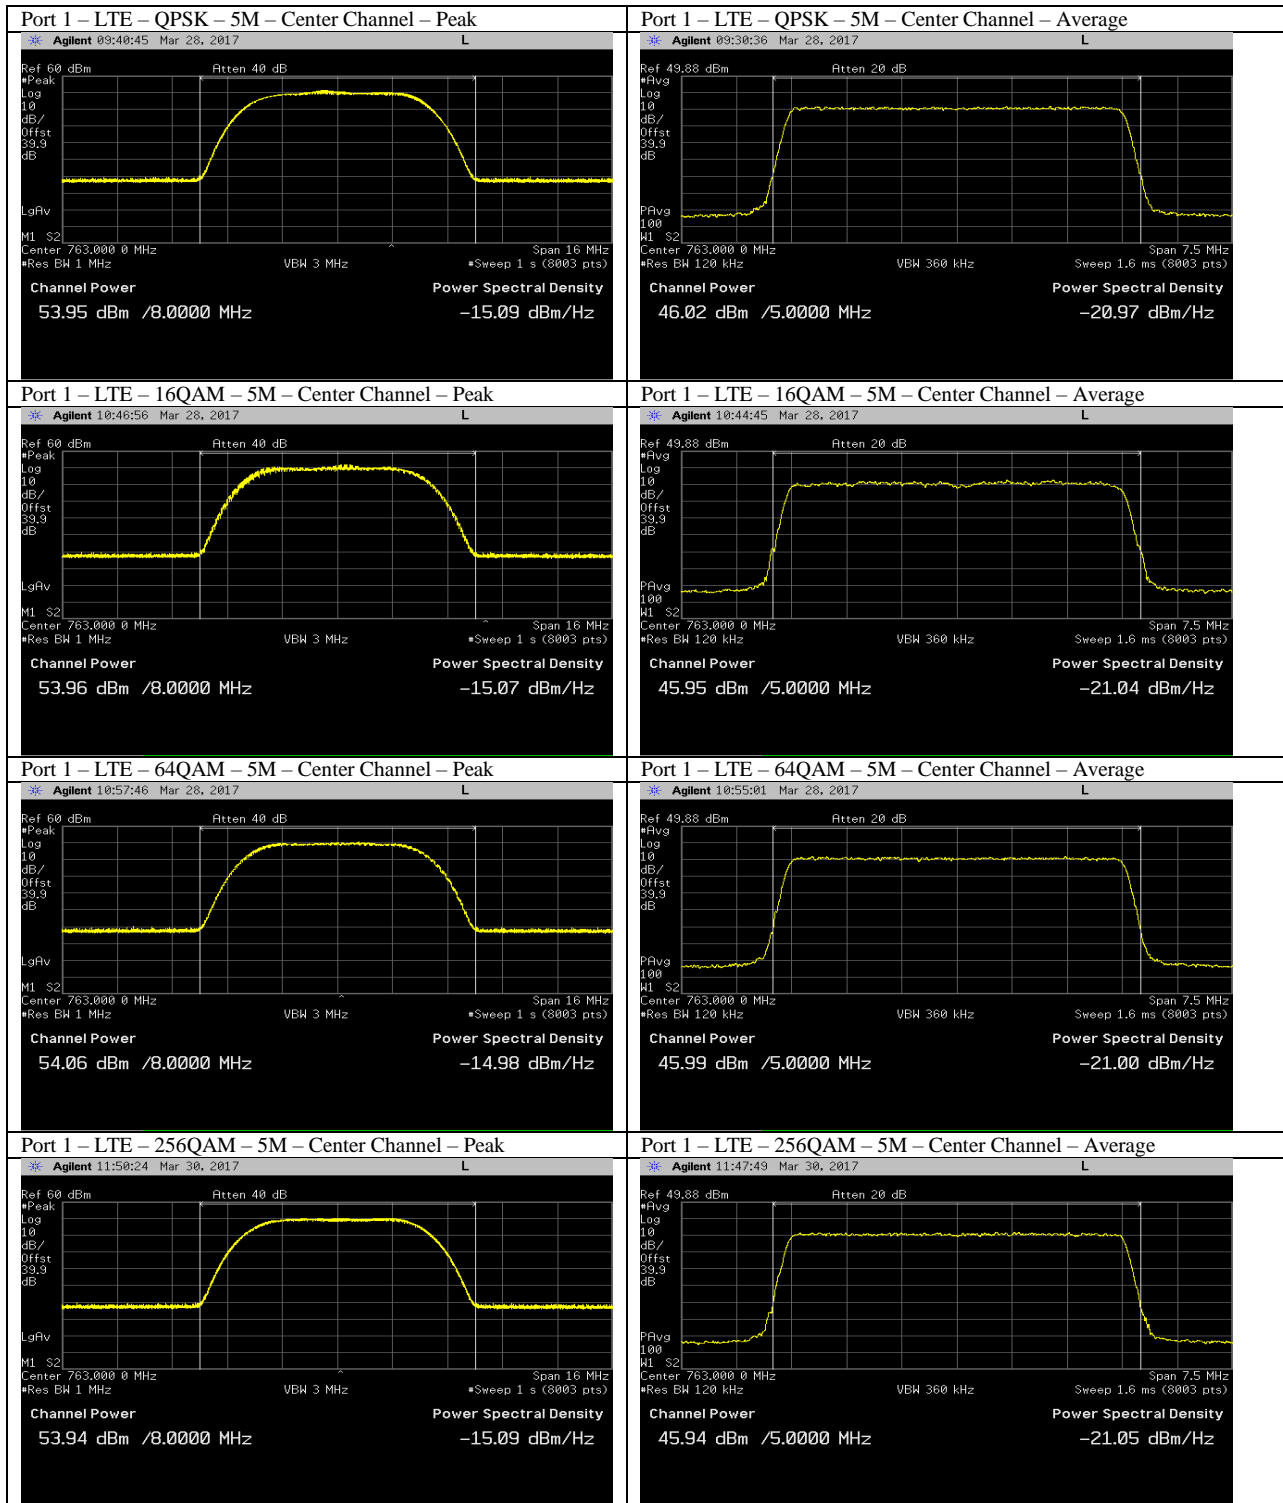

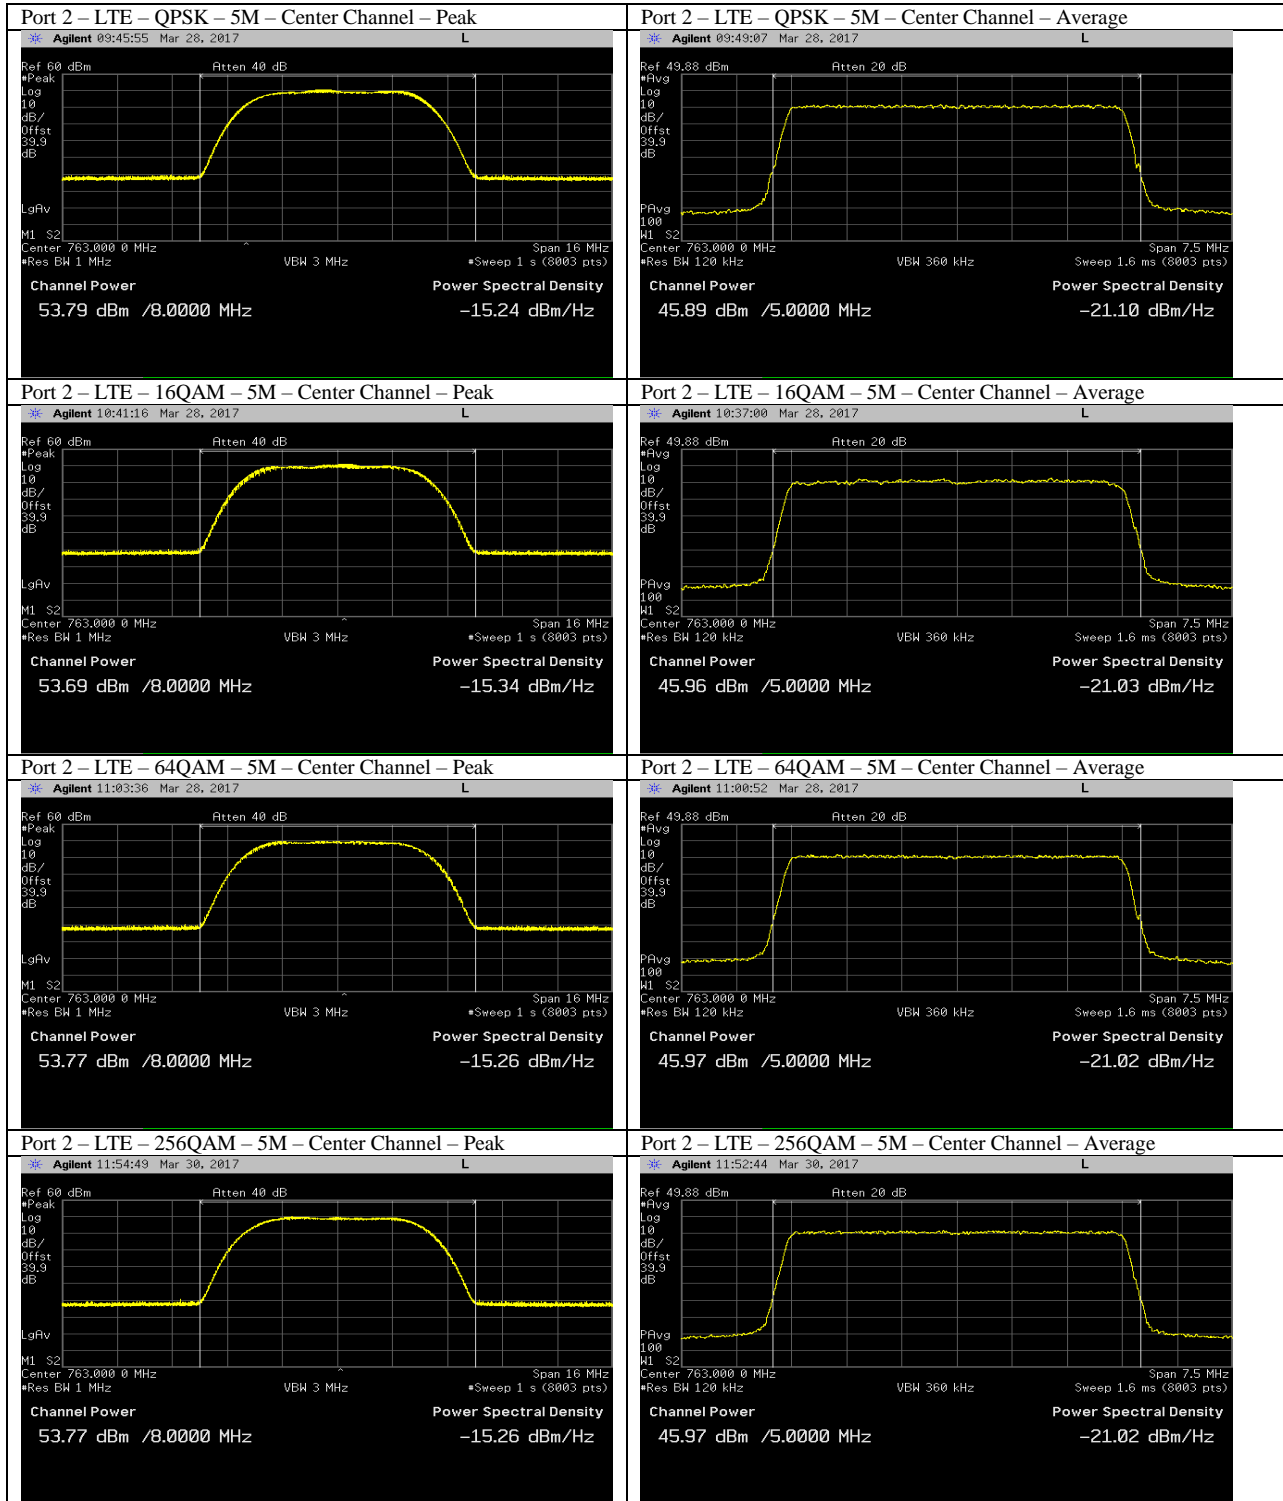





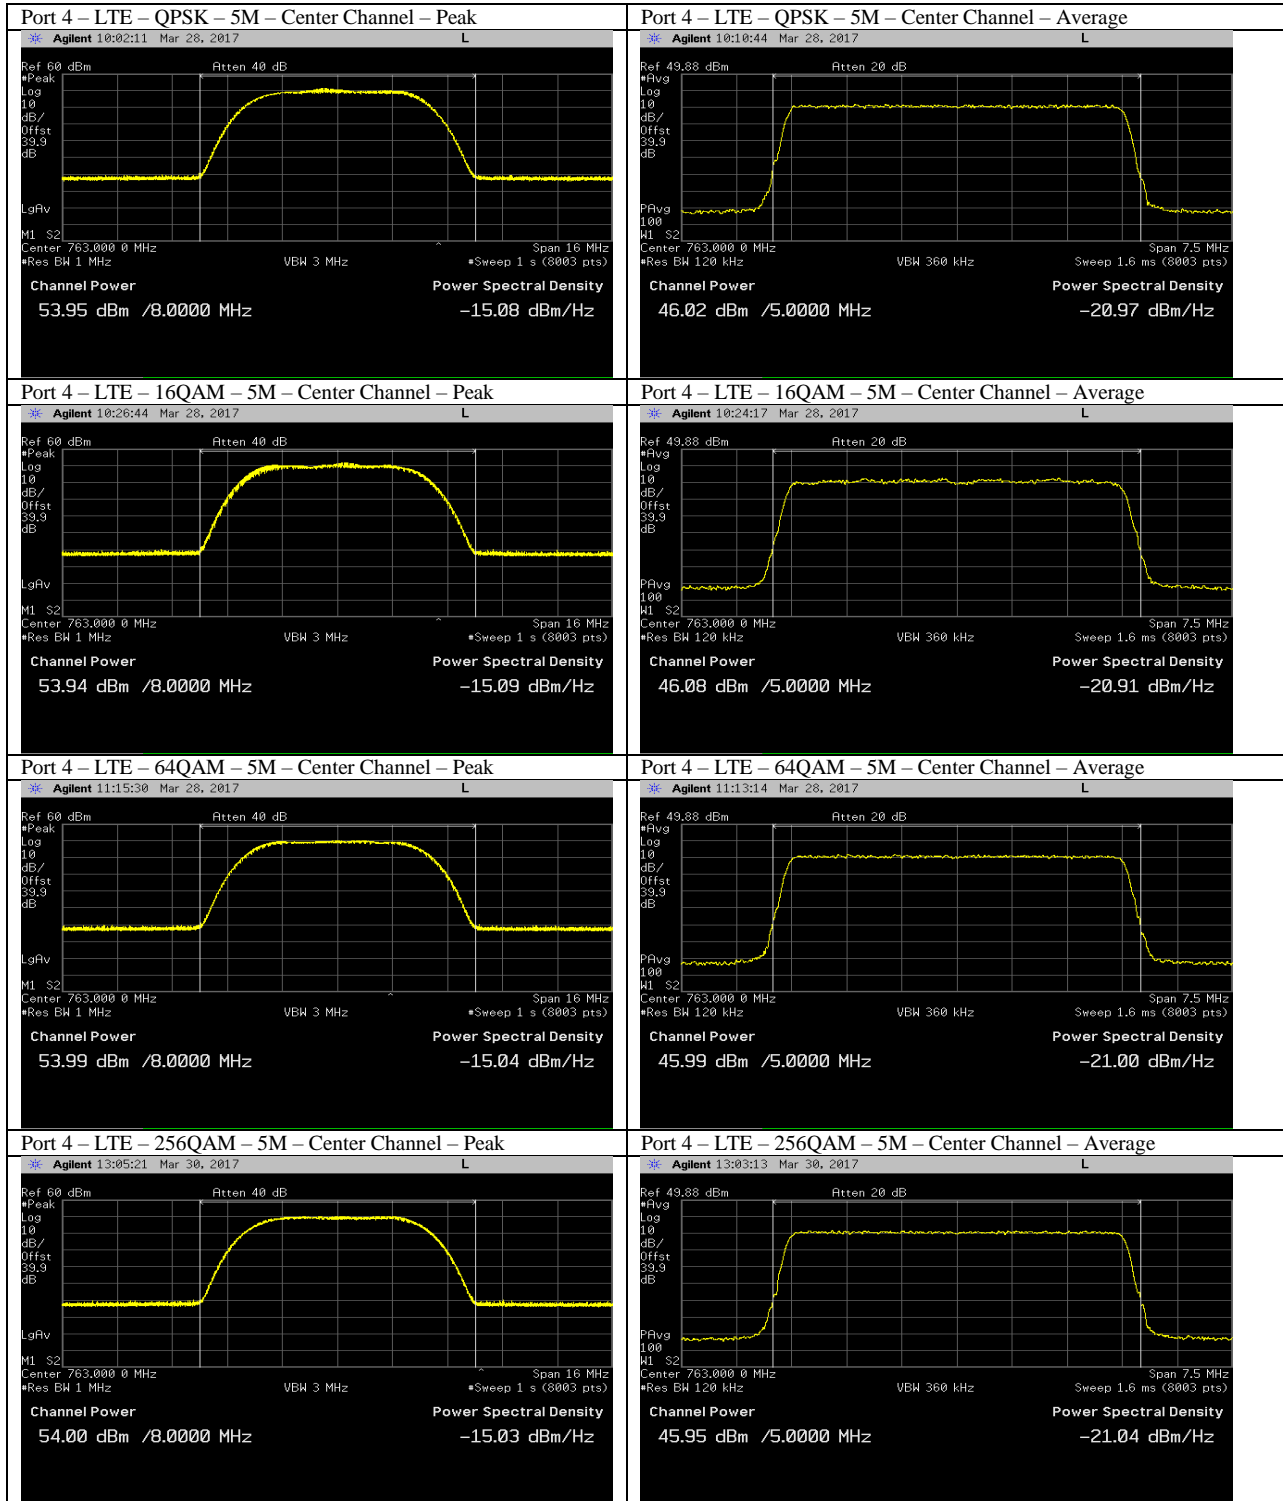


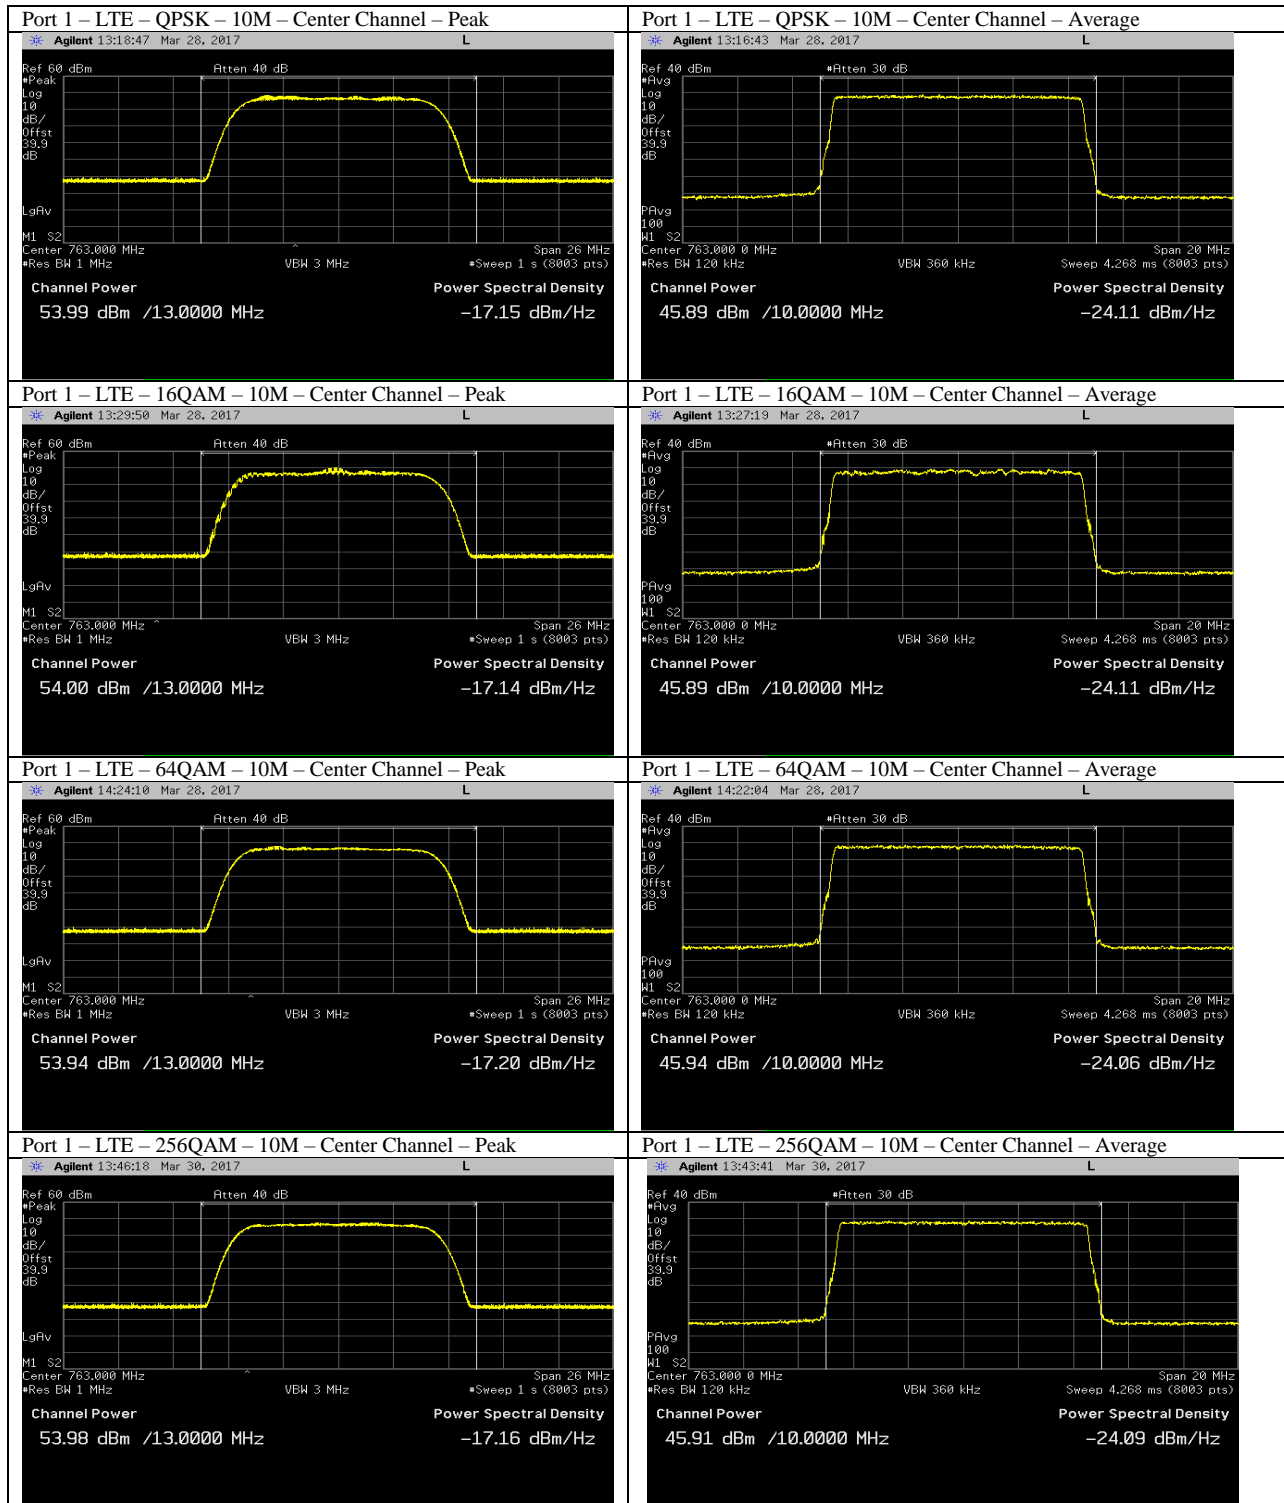




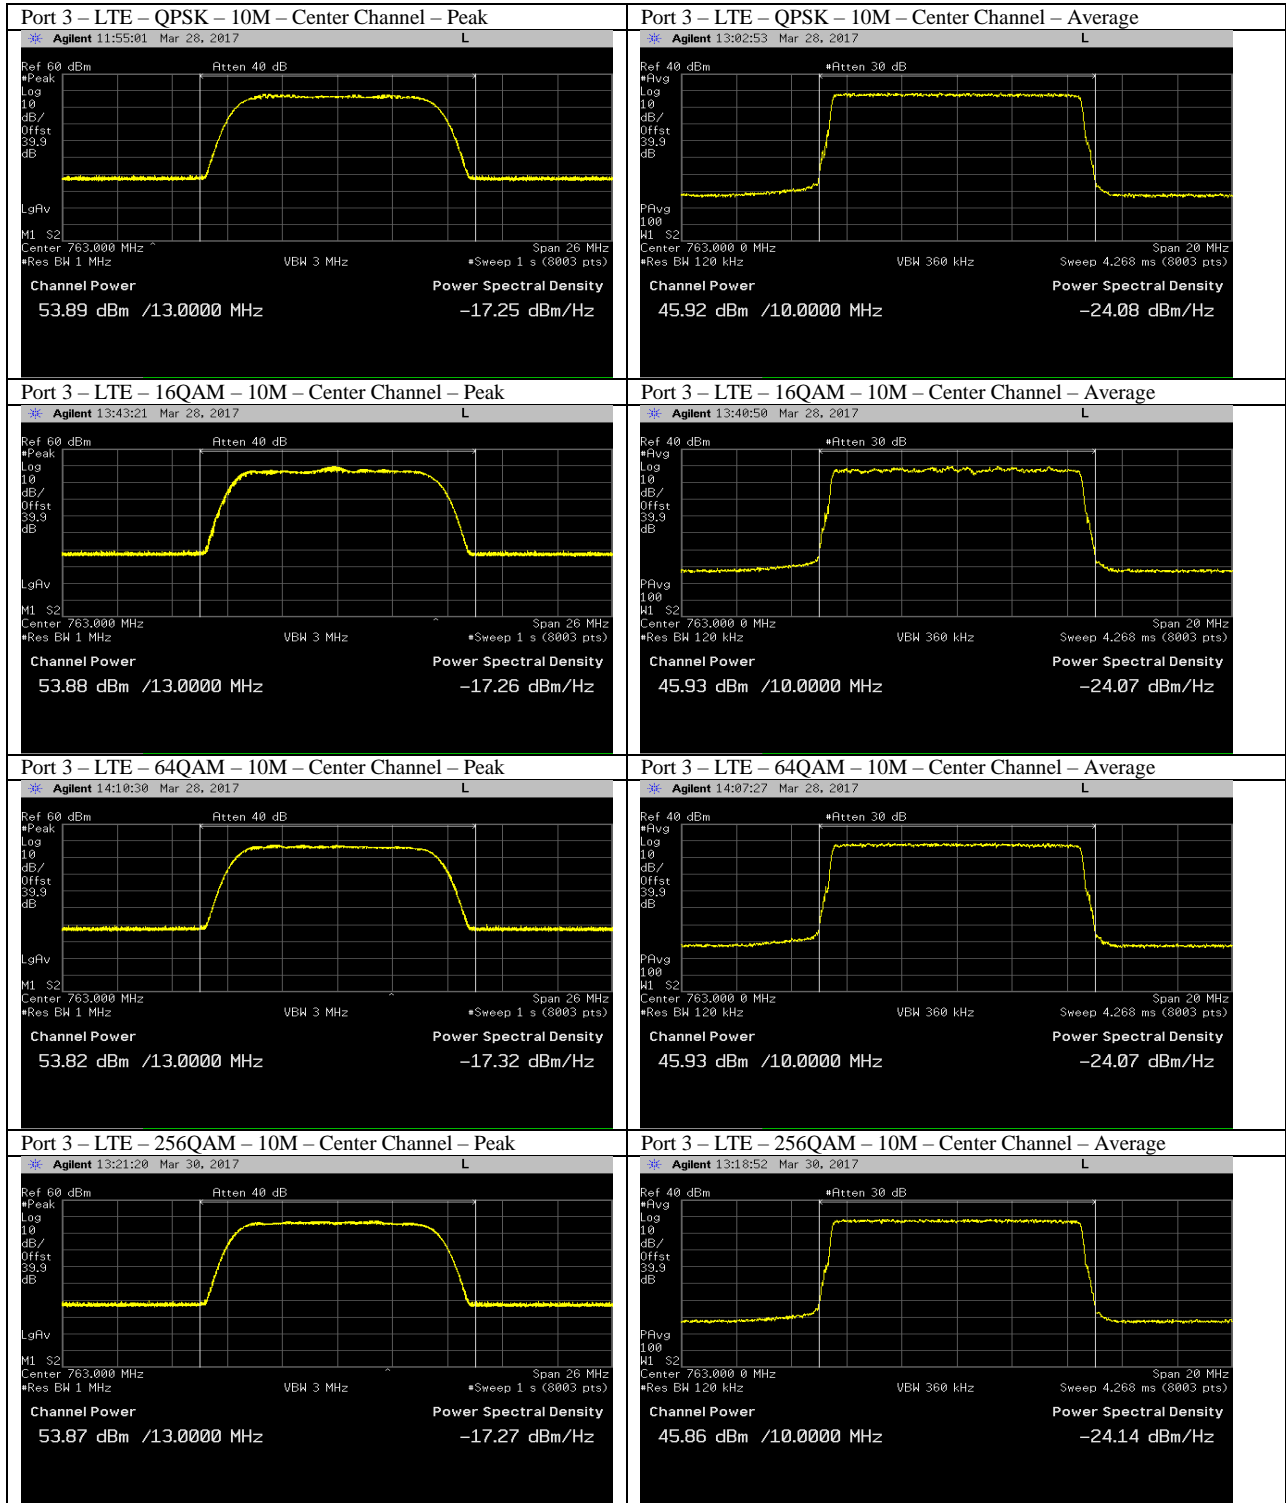

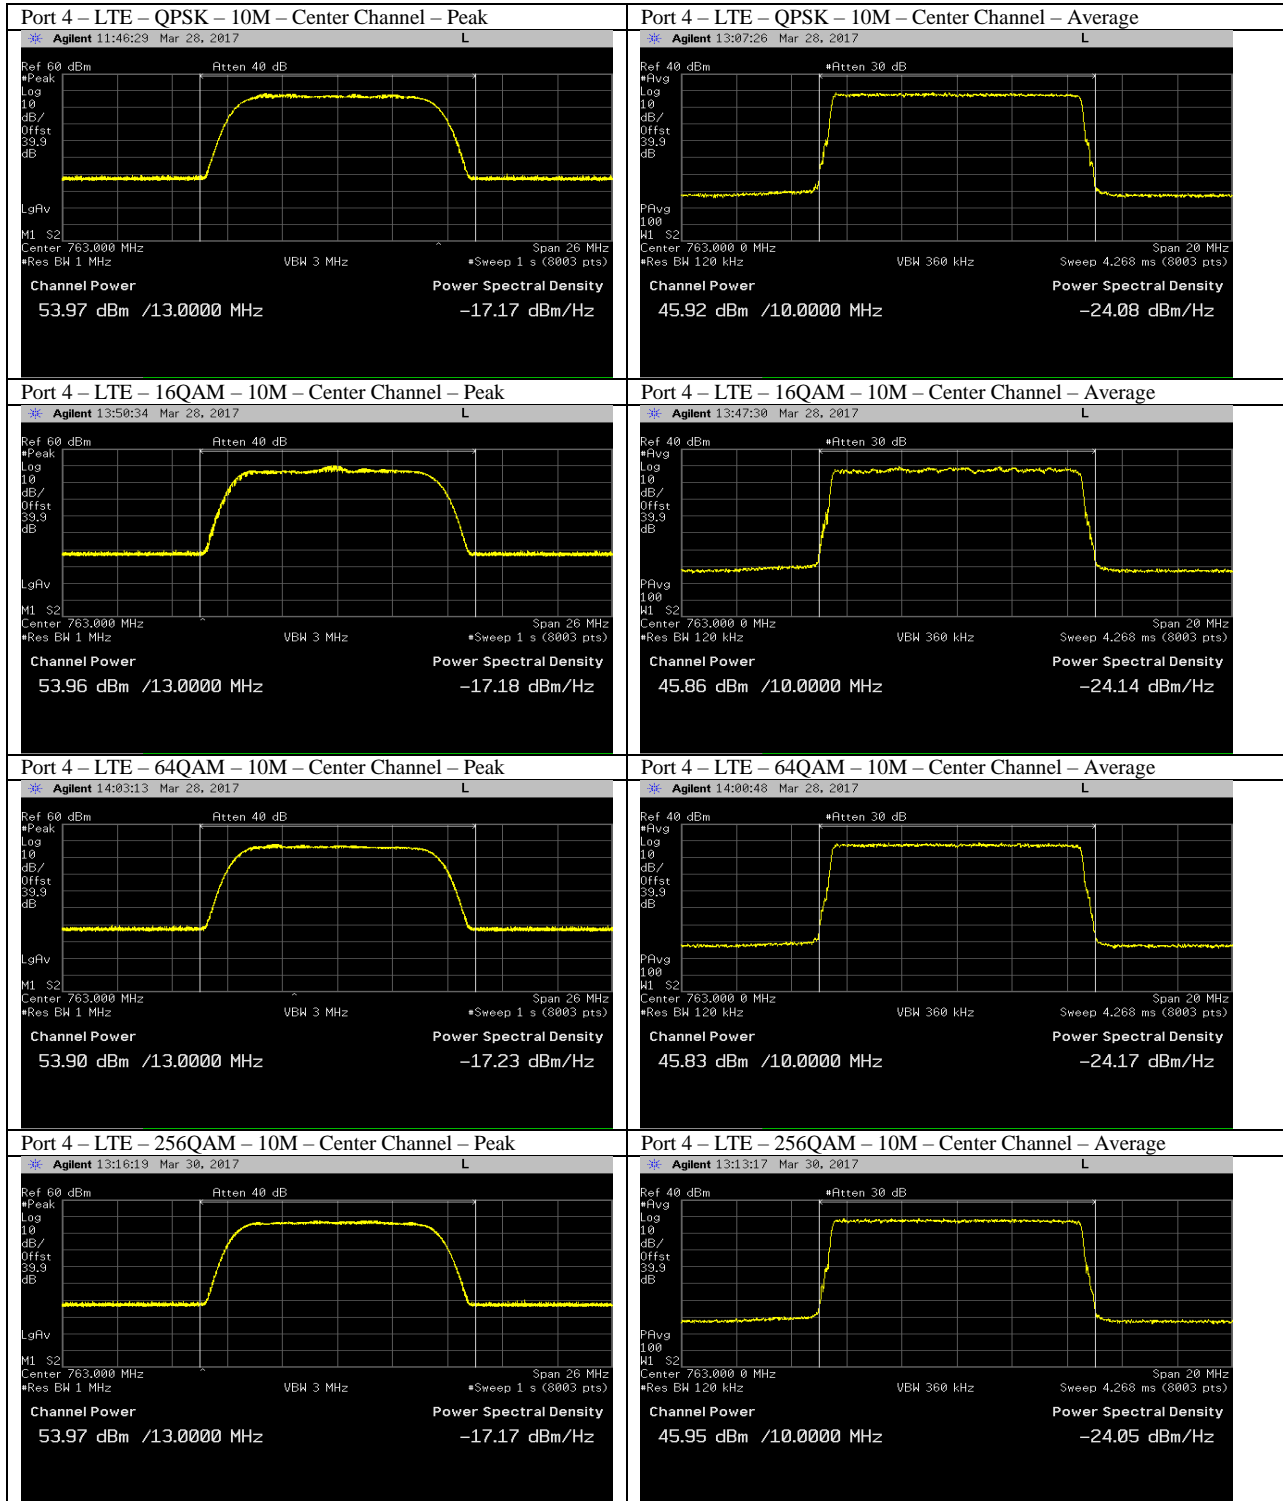

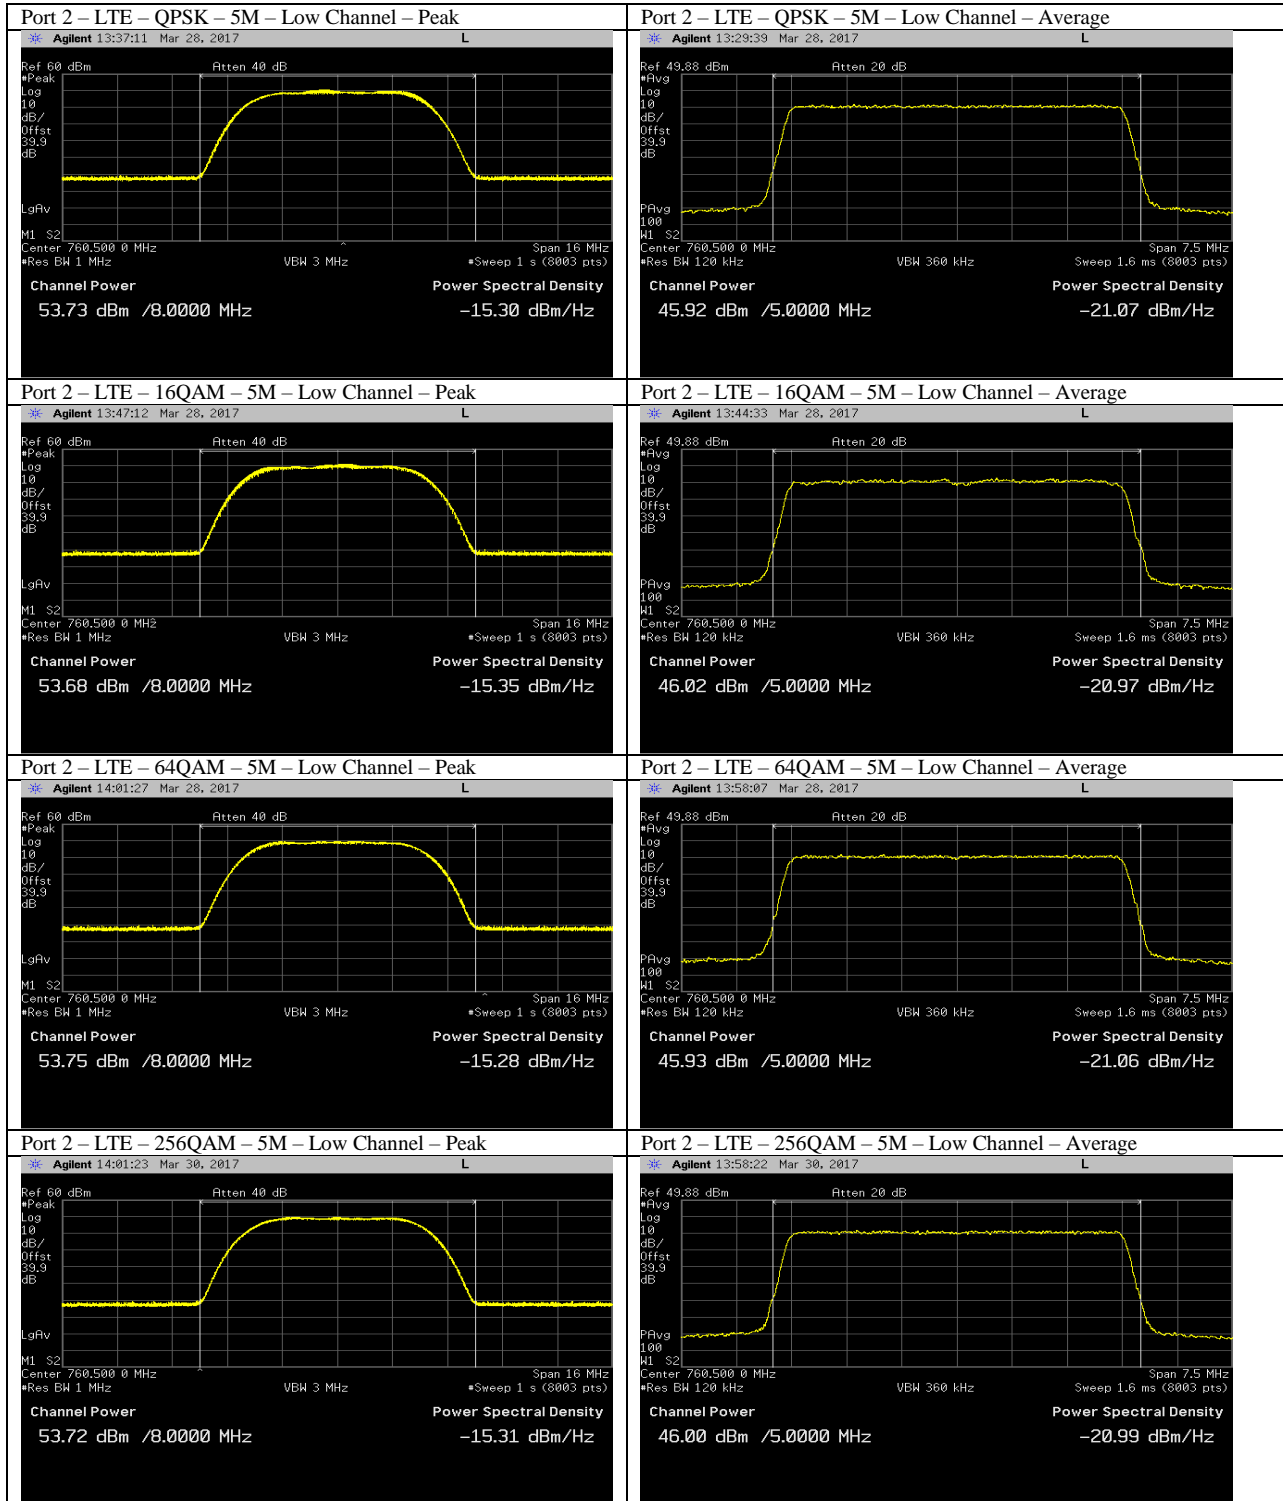

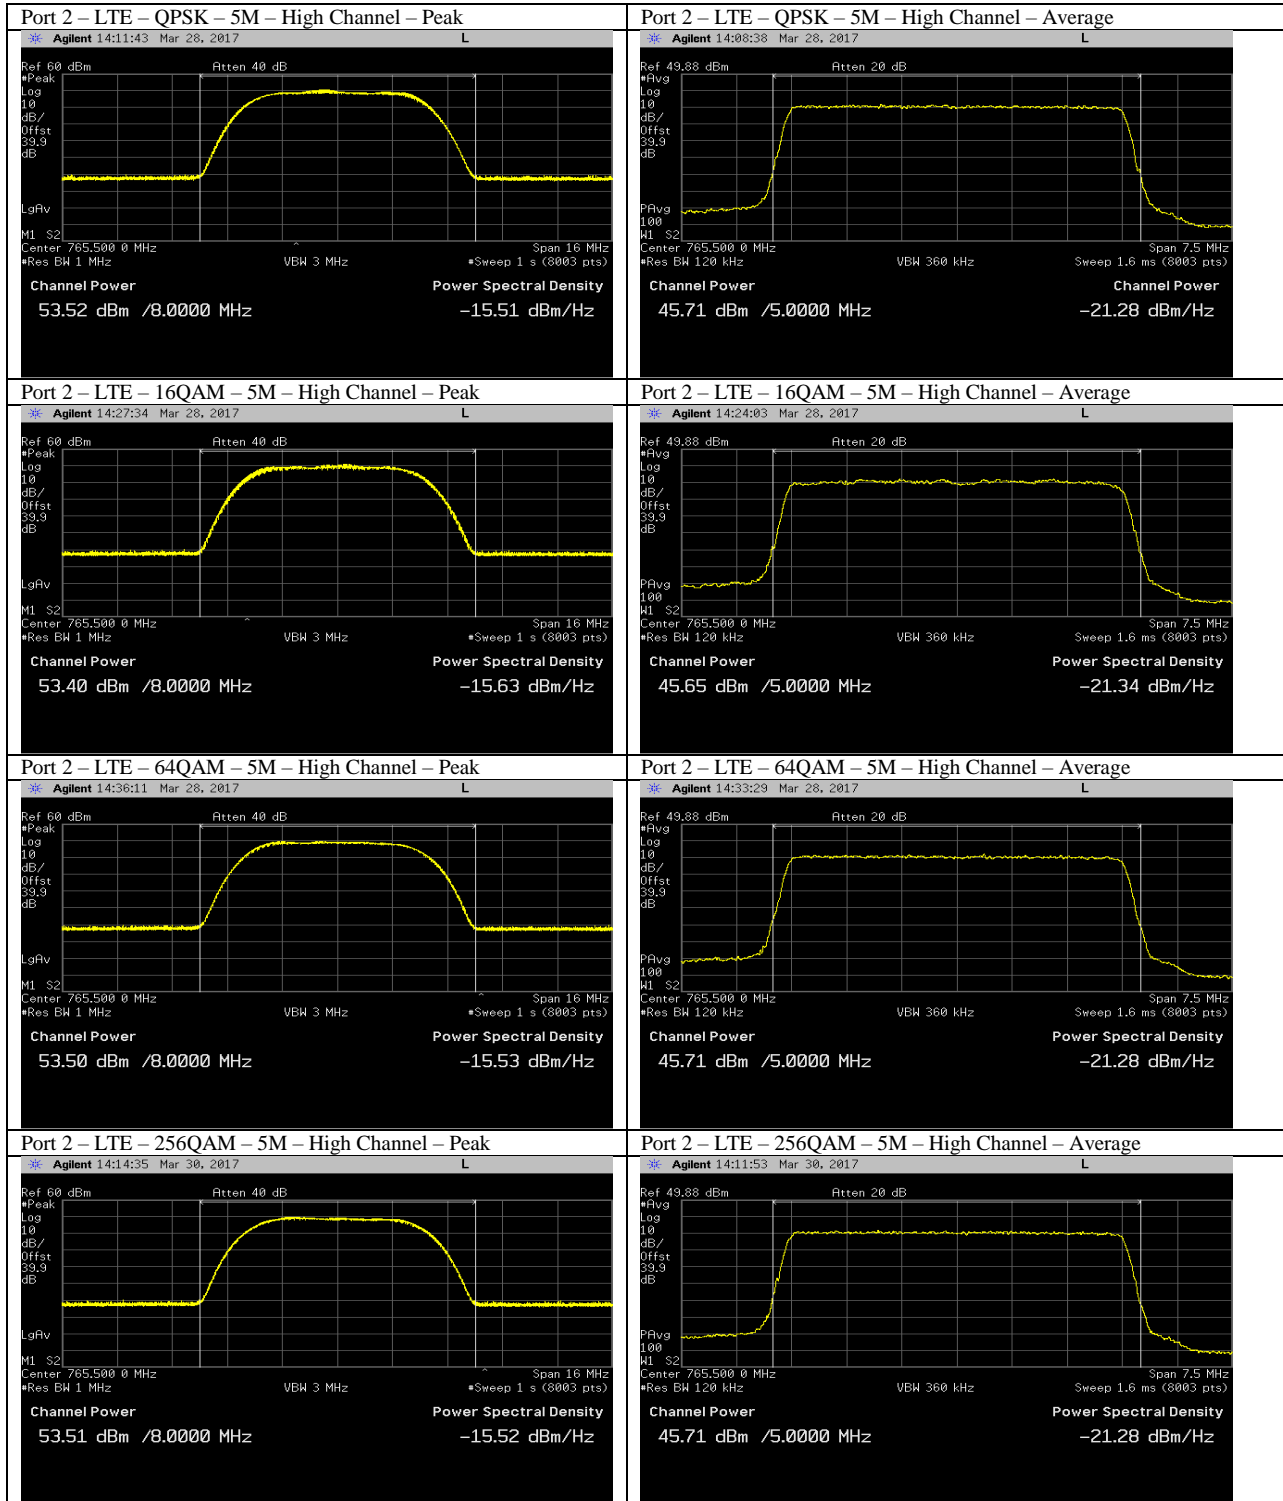


Emission Bandwidths (26dB and 99%)


Emissions bandwidths were measured at Port 2 on low and high channels in 5MHz channel bandwidth mode and on center channel in 10MHz channel bandwidth mode for all modulations and results presented below. Highest emission bandwidths are marked in bold.

	LTE - QPSK				LTE - 16QAM				LTE - 64QAM				LTE - 256QAM			
	Low		High		Low		High		Low		High		Low		High	
	26dB (MHz)	99% (MHz)	26dB (MHz)	99% (MHz)	26dB (MHz)	99% (MHz)	26dB (MHz)	99% (MHz)	26dB (MHz)	99% (MHz)	26dB (MHz)	99% (MHz)	26dB (MHz)	99% (MHz)	26dB (MHz)	99% (MHz)
5M	4.879	4.4881	4.88	4.4835	4.866	4.4676	4.861	4.4648	4.871	4.4983	4.86	4.4914	4.888	4.4961	4.879	4.4925

	LTE - QPSK		LTE - 16QAM		LTE - 64QAM		LTE - 256QAM	
	Center		Center		Center		Center	
	26dB (MHz)	99% (MHz)	26dB (MHz)	99% (MHz)	26dB (MHz)	99% (MHz)	26dB (MHz)	99% (MHz)
10M	9.698	8.9741	9.657	8.9977	9.74	8.9855	9.713	8.9697

Corresponding plots included on the following pages.

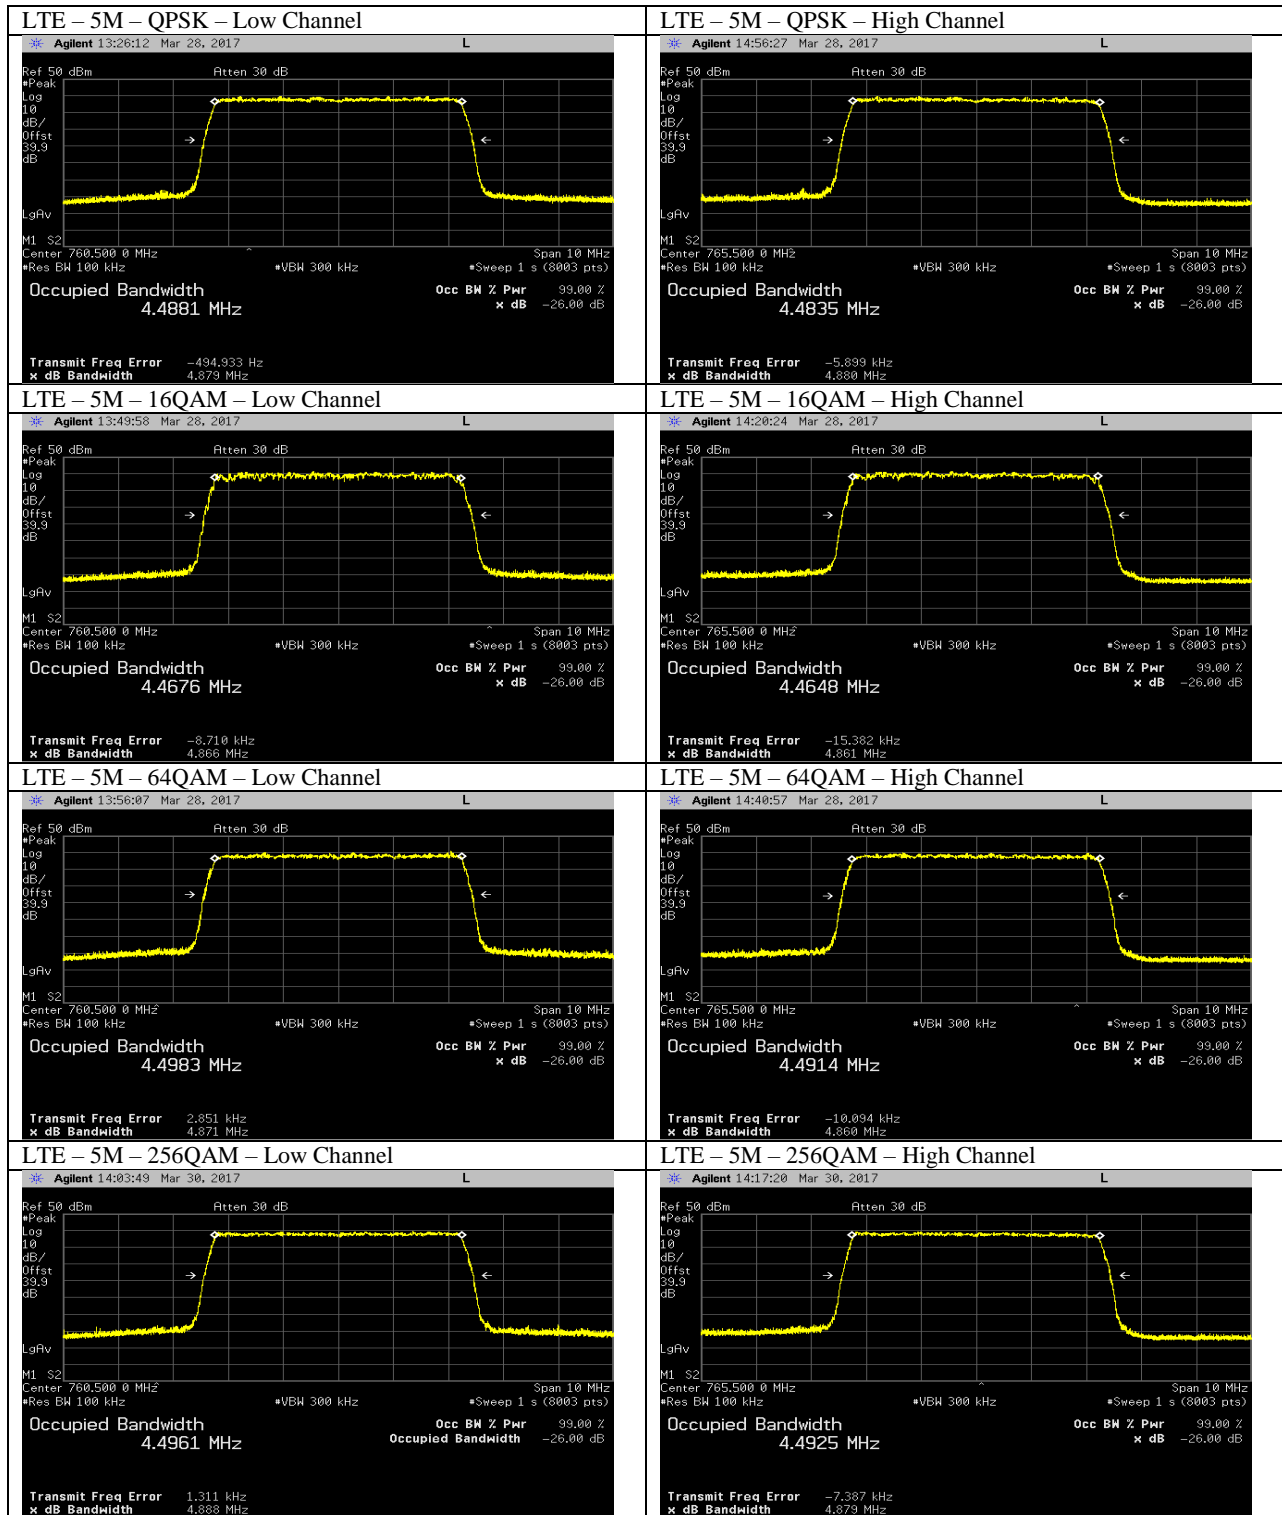

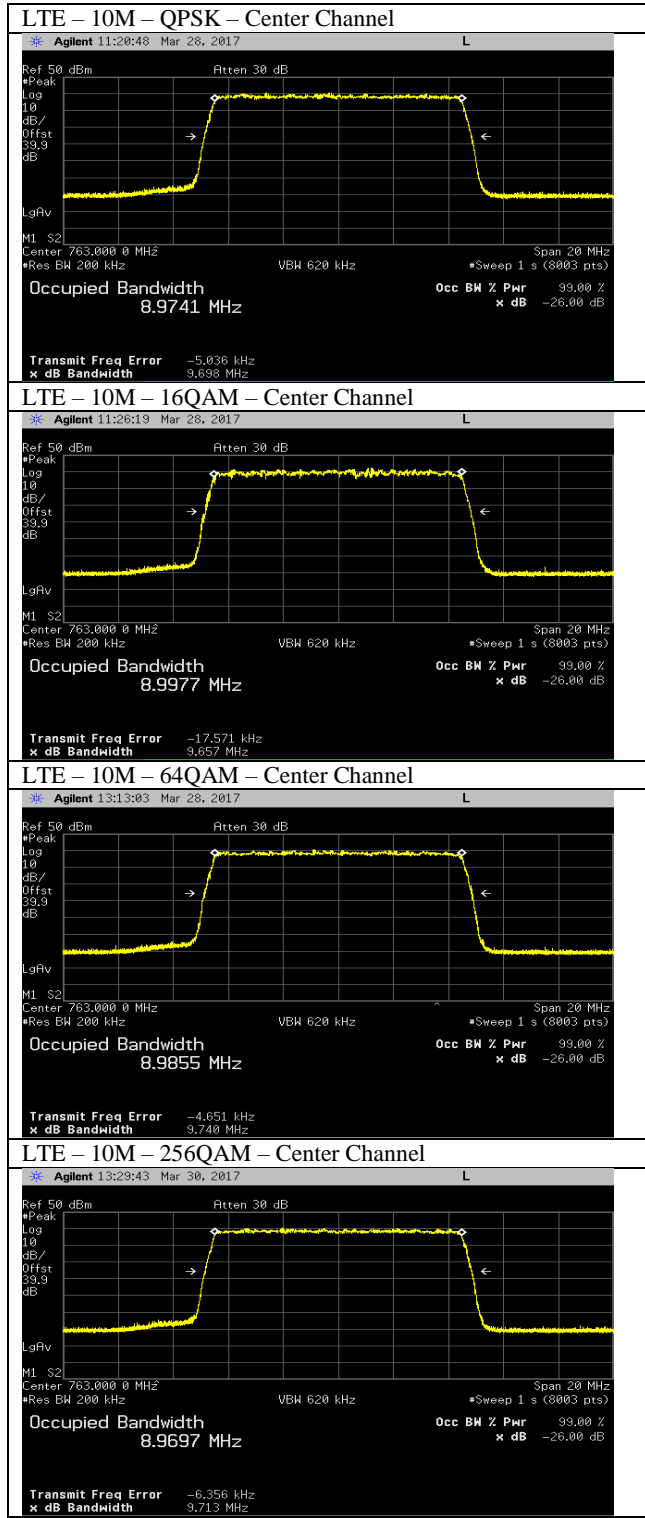

Antenna Port Conducted Bandedge

The FCC section 90.543(e)(3) limit is -13dBm for frequency ranges below 758MHz, above 805MHz and between 775MHz and 788MHz. The limit is further reduced by $10 \cdot \log(4)$ per FCC KDB 662911D01 v02r01 due to 4x4 MIMO operation, which brings it down to -19dBm.

In 5MHz channel bandwidth mode, low and high channels as well as dual carrier mode (low channel + high channel) configurations were tested. In 10MHz channel bandwidth mode, unit can only operate in single carrier mode at the center channel. All Measurements were performed on antenna Port 2.

Results summary:



	LTE - QPSK (dBm)		LTE - 16QAM (dBm)		LTE - 64QAM (dBm)		LTE - 256QAM (dBm)	
	Low	High	Low	High	Low	High	Low	High
5M	-24.862	-26.974	-25.859	-26.542	-25.473	-26.837	-25.388	-27.008
10M	-27.118	-29.445	-27.595	-28.584	-28.122	-29.569	-27.99	-28.523
5M Dual	-27.511	-28.807	-26.026	-29.477	-26.51	-30.104	-27.615	-28.854

All corresponding plots are included on the following pages.


Measurements performed in RMS average mode with 100kHz RBW and 300kHz VBW over 100 traces. In 100kHz bands immediately outside and adjacent to the frequency block, resolution bandwidth has been reduced to 30kHz as allowed in 90.543(e)(5).

Total path loss of 39.9dB accounted in via reference level offset to the spectrum analyzer.



5M - LTE - QPSK - Low

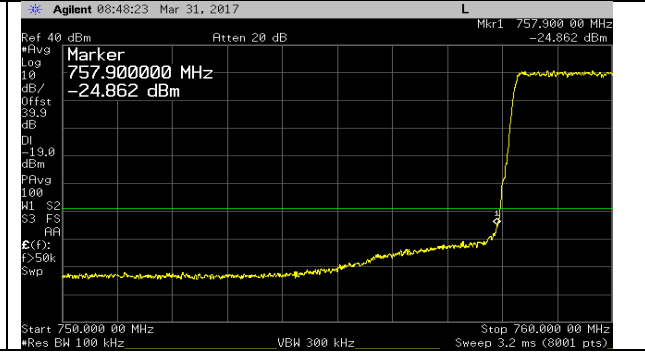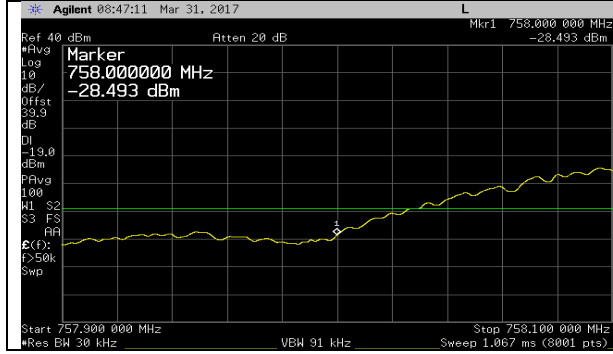



5M - LTE - 16QAM - Low

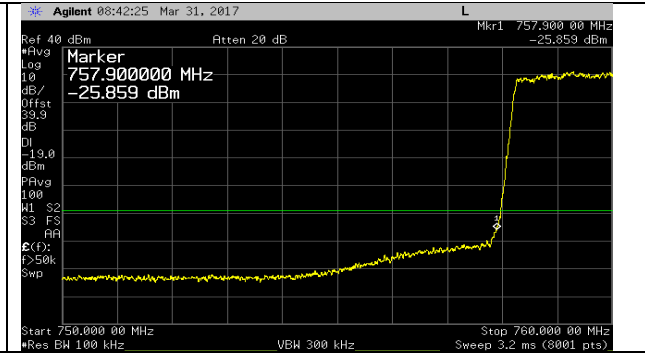



5M - LTE - 64QAM - Low

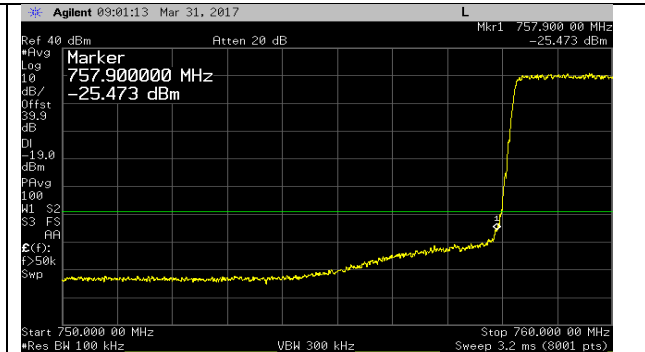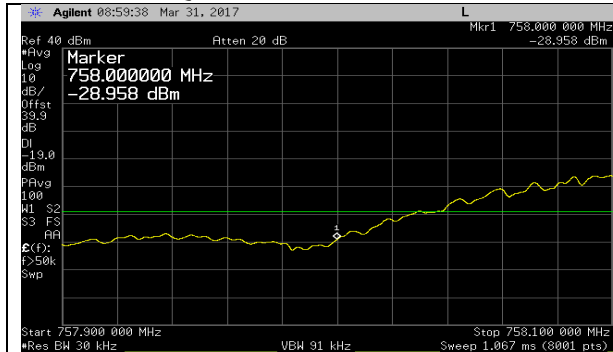




5M - LTE - 256QAM - Low

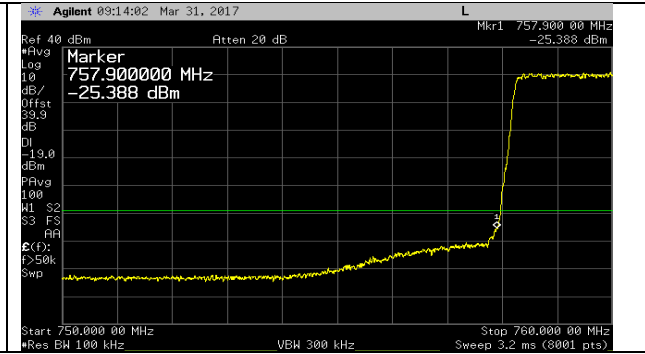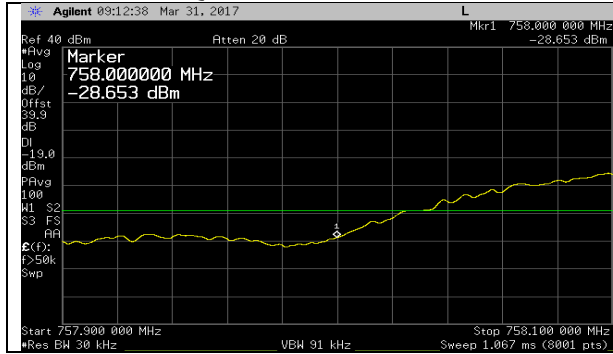




5M - LTE - QPSK - High

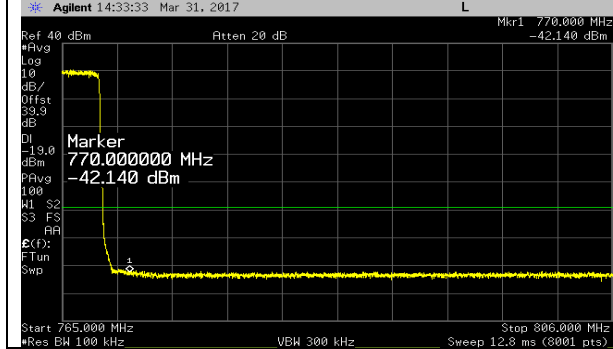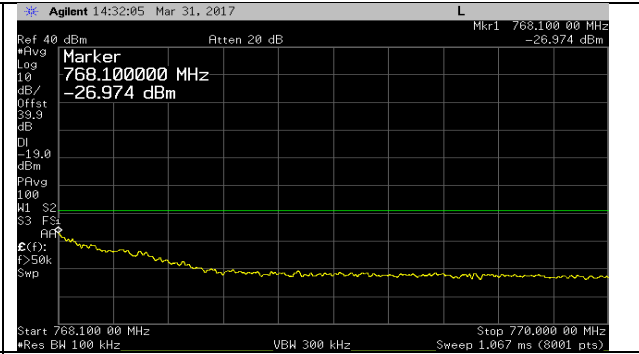



5M - LTE - 16QAM - High

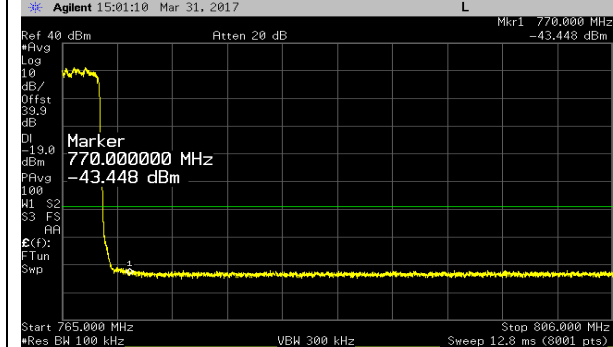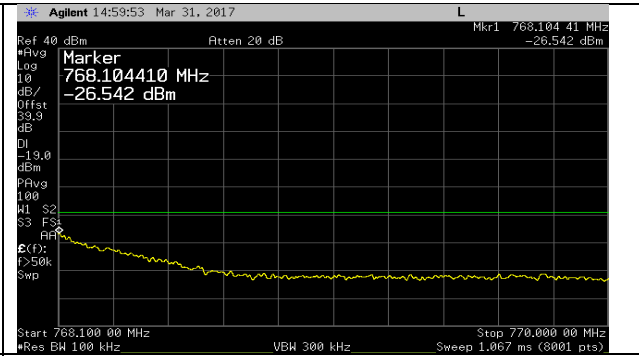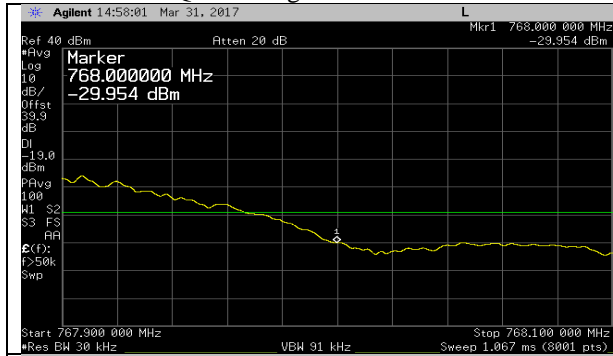



5M - LTE - 64QAM - High

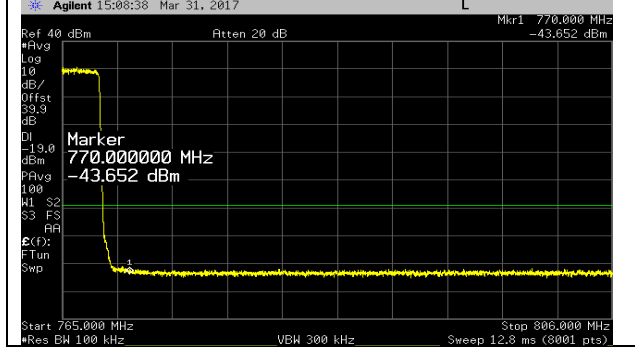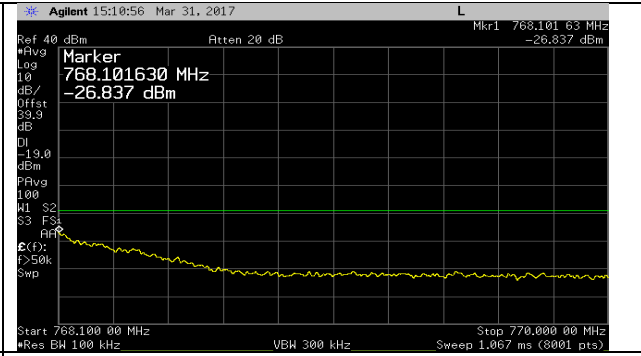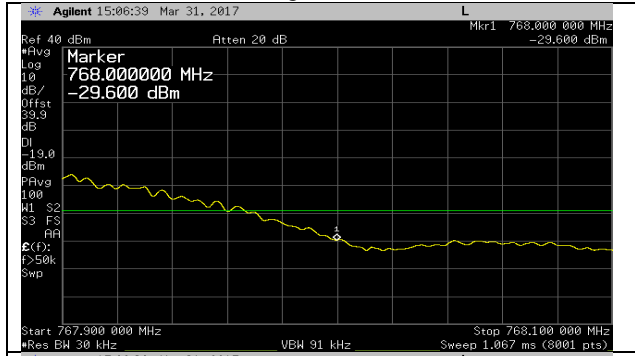


5M - LTE - 256QAM - High

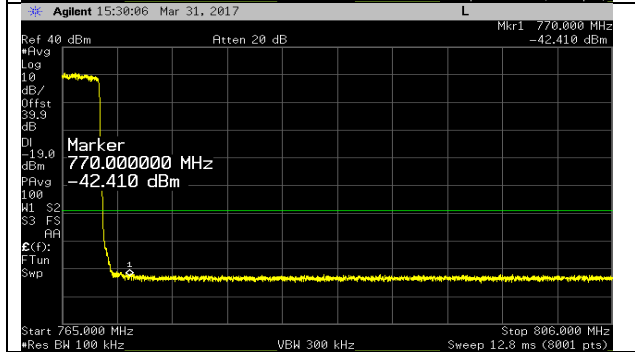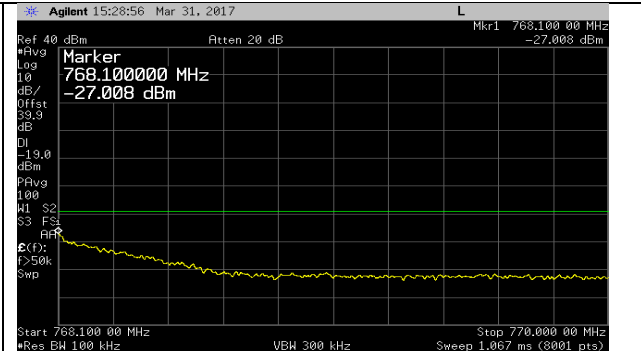


5M Dual Carrier – LTE – QPSK – Low

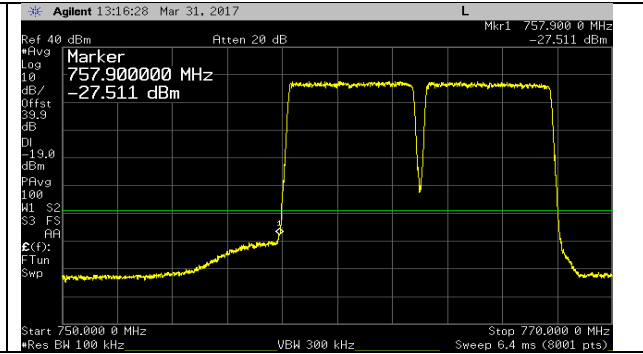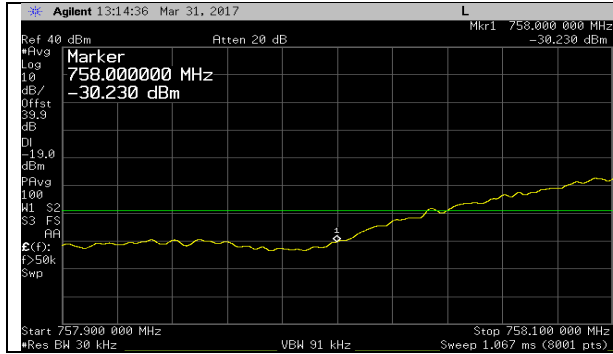


5M Dual Carrier – LTE – 16QAM – Low

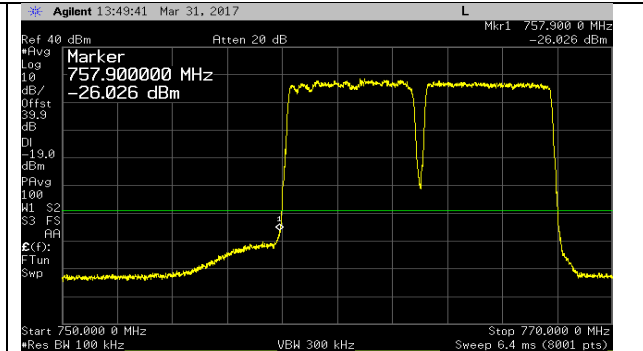




5M Dual Carrier – LTE – 64QAM – Low

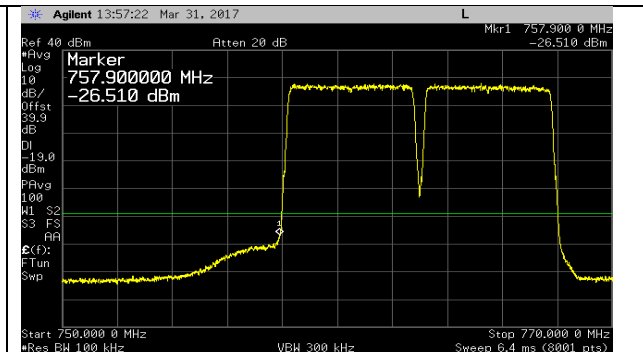



5M Dual Carrier – LTE – 256QAM – Low

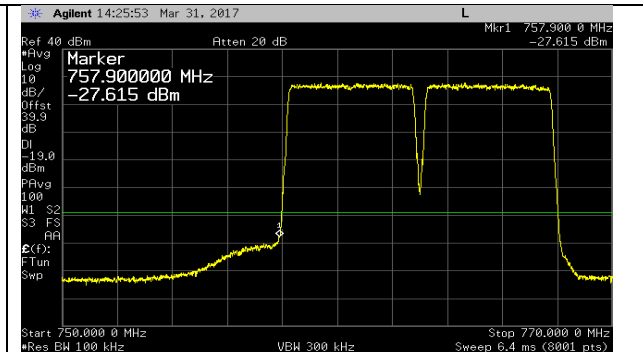



5M Dual Carrier – LTE – QPSK – High

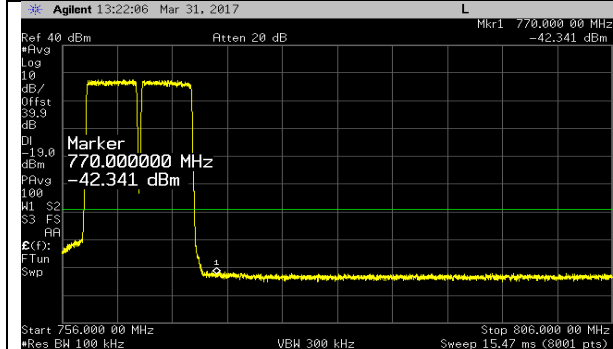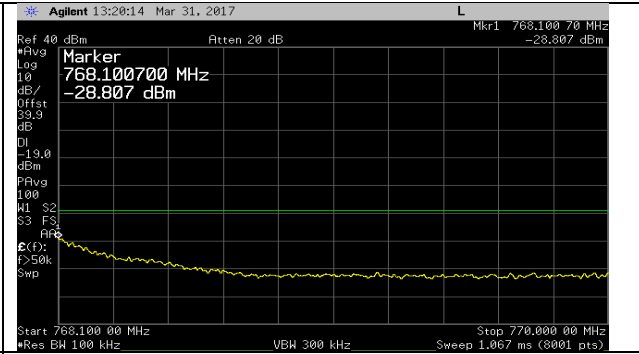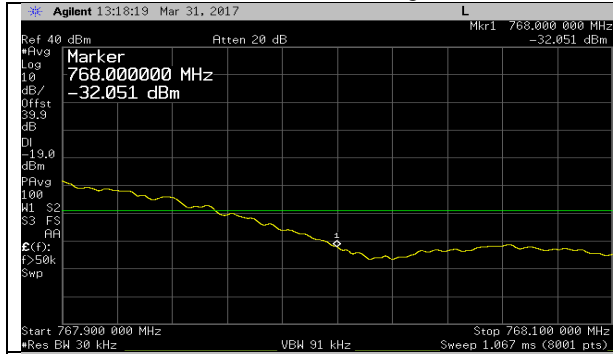



5M Dual Carrier – LTE – 16QAM – High

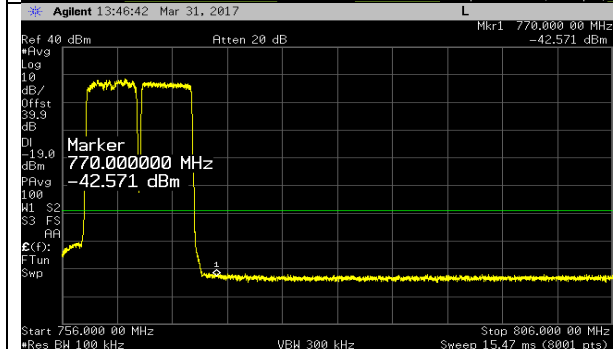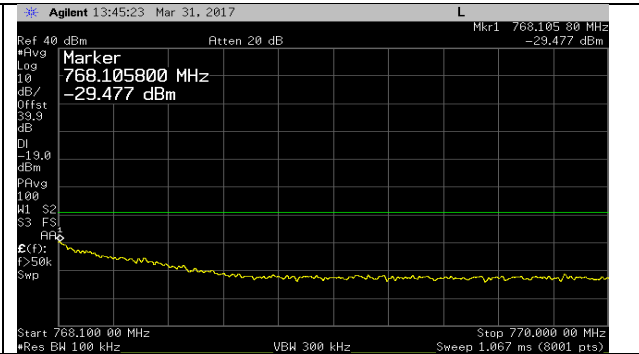



5M Dual Carrier – LTE – 64QAM – High

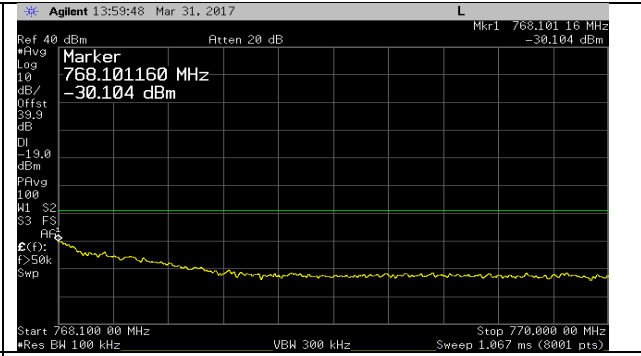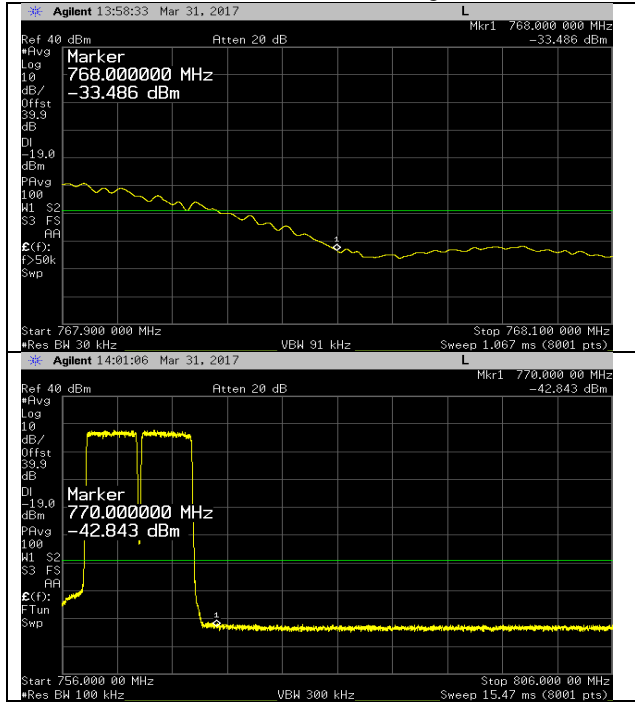



5M Dual Carrier – LTE – 256QAM – High

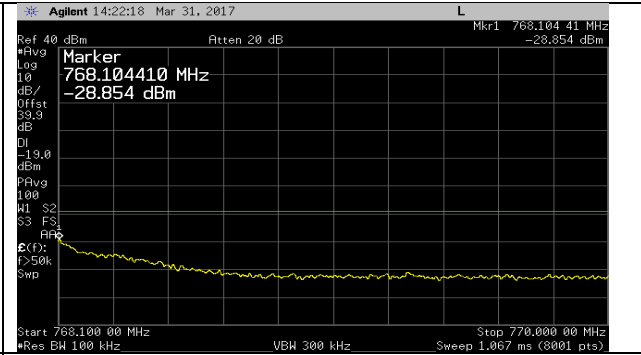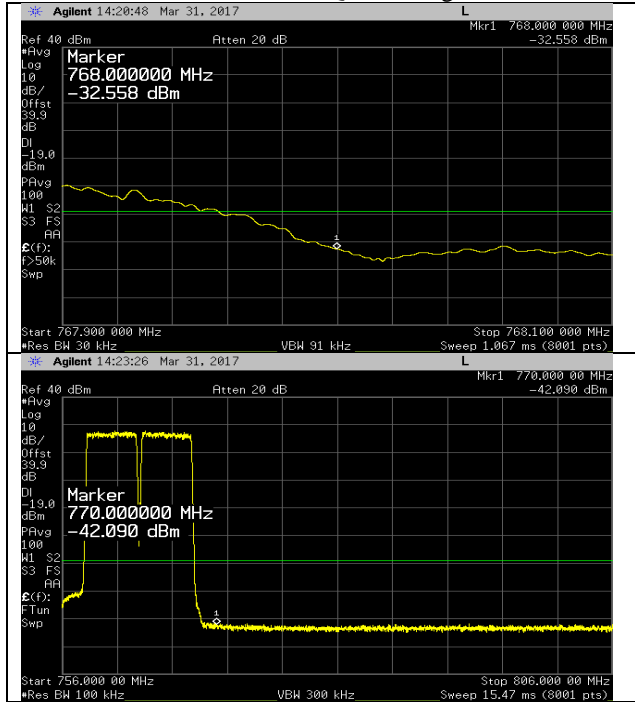



10M - LTE - QPSK - Low

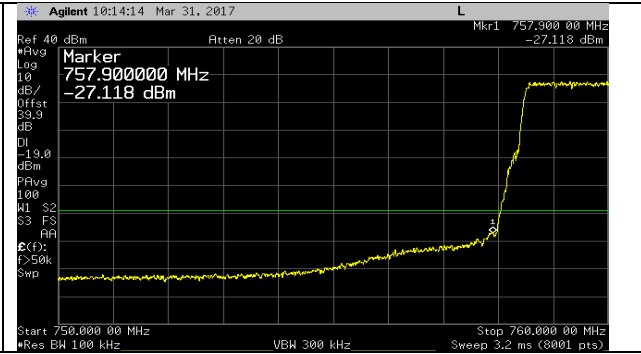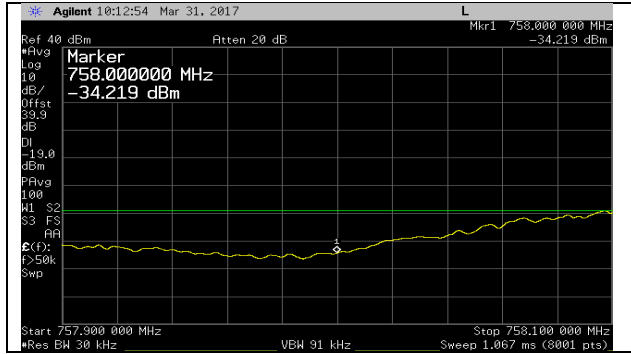



10M - LTE - 16QAM - Low

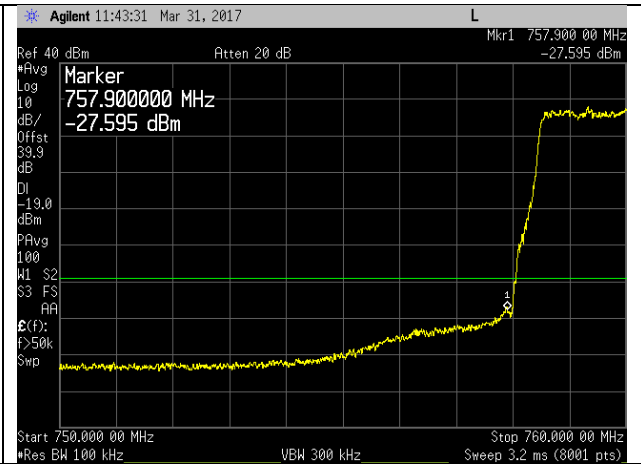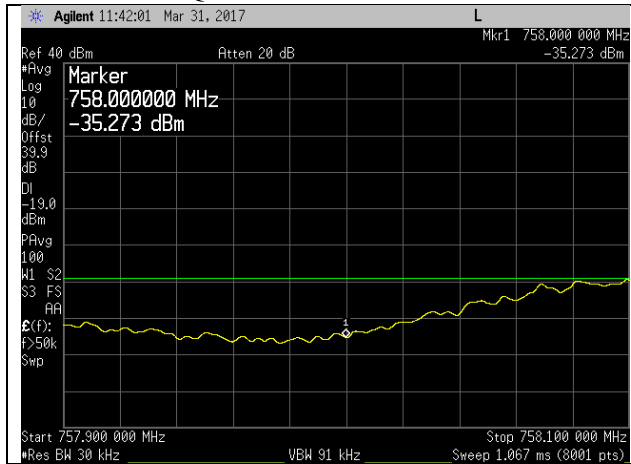




10M - LTE - 64QAM - Low

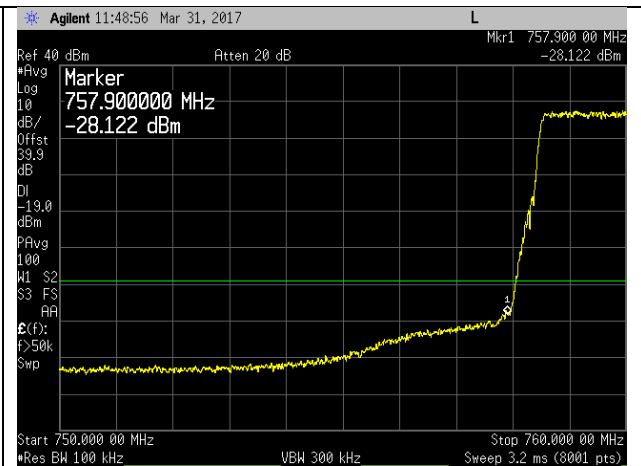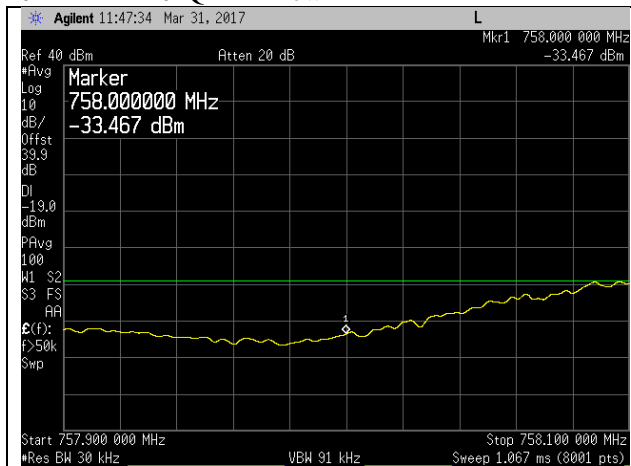




10M - LTE - 256QAM - Low

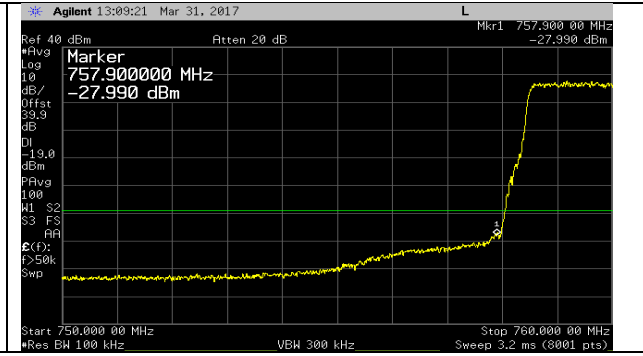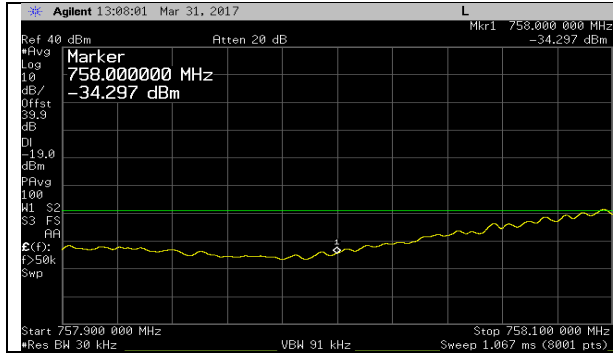




10M - LTE - QPSK - High

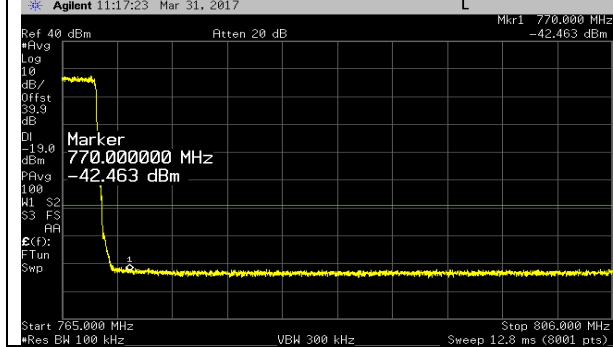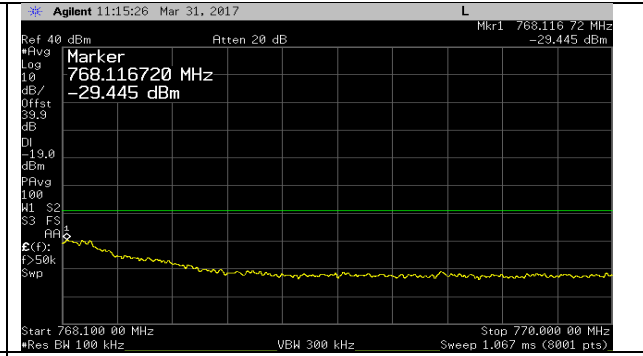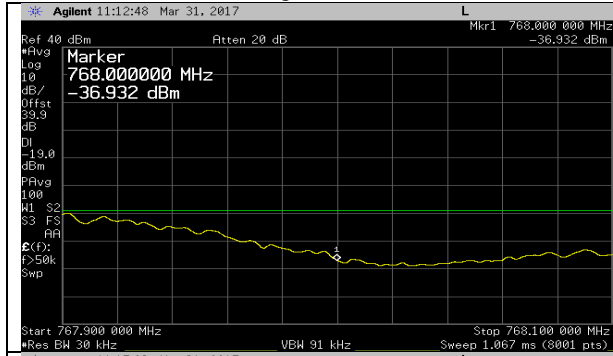



10M - LTE - 16QAM - High

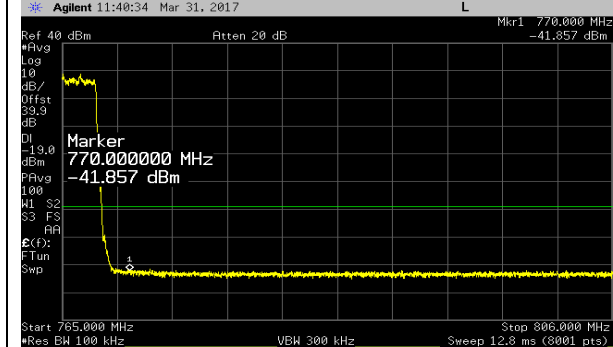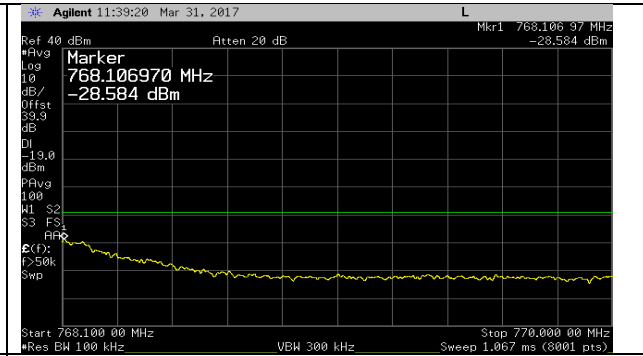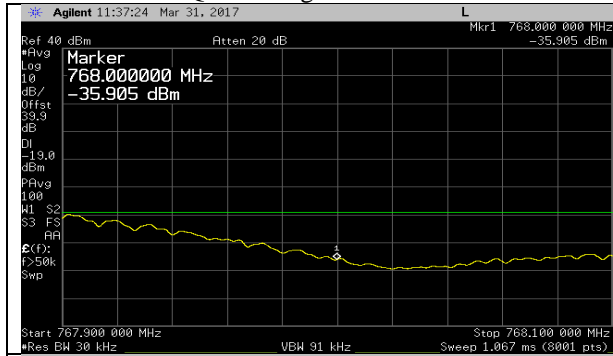

10M - LTE - 64QAM - High

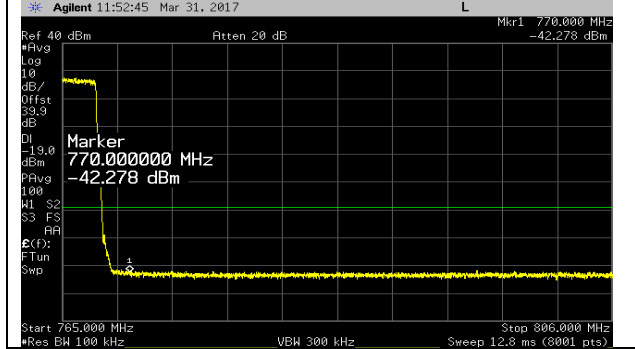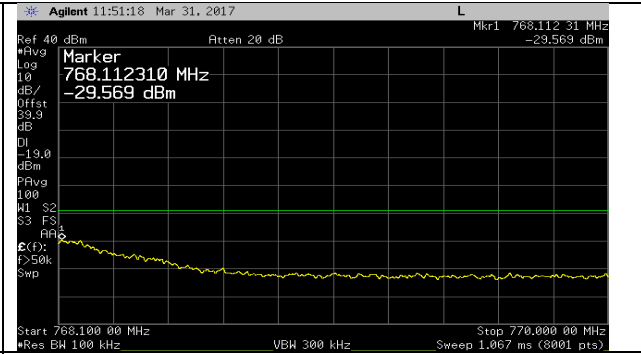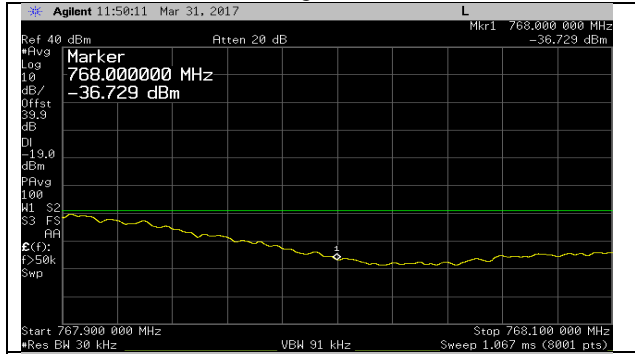

10M - LTE - 256QAM - High

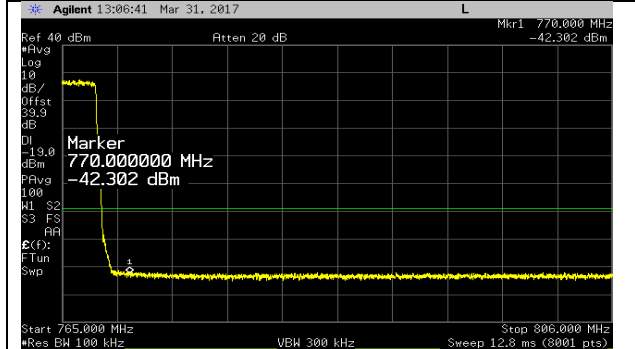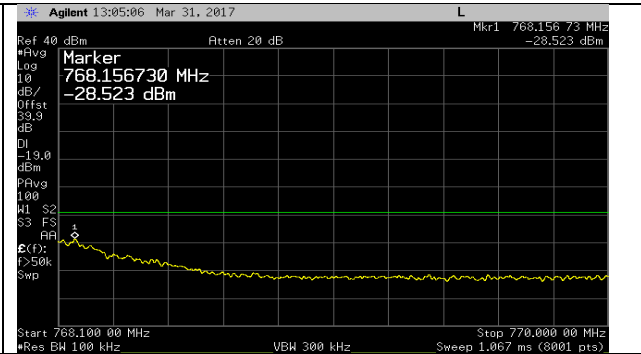

Transmitter Antenna Port Conducted Spurious Emissions


Tests performed at Port 2 on center channel for all modulations and bandwidth modes. Due to 4x4 MIMO operation, limit is -19.03dBm (-13dBm – $10 \cdot \log(4)$) per FCC KDB 662911D01 v02r01.

TILE6 measurement software was used during testing with the following settings:

Frequency Range	RBW	VBW	Number of data points	Divided into	Detector	Sweep Time	Max hold over
9kHz-150kHz	1kHz	3kHz	8000	1 segment	Peak	Auto	50 sweeps
150kHz-8GHz	100kHz	300kHz	8000	12 segments	Peak	Auto	50 sweeps

Corresponding plots are included on the following pages.

5M - LTE - QPSK

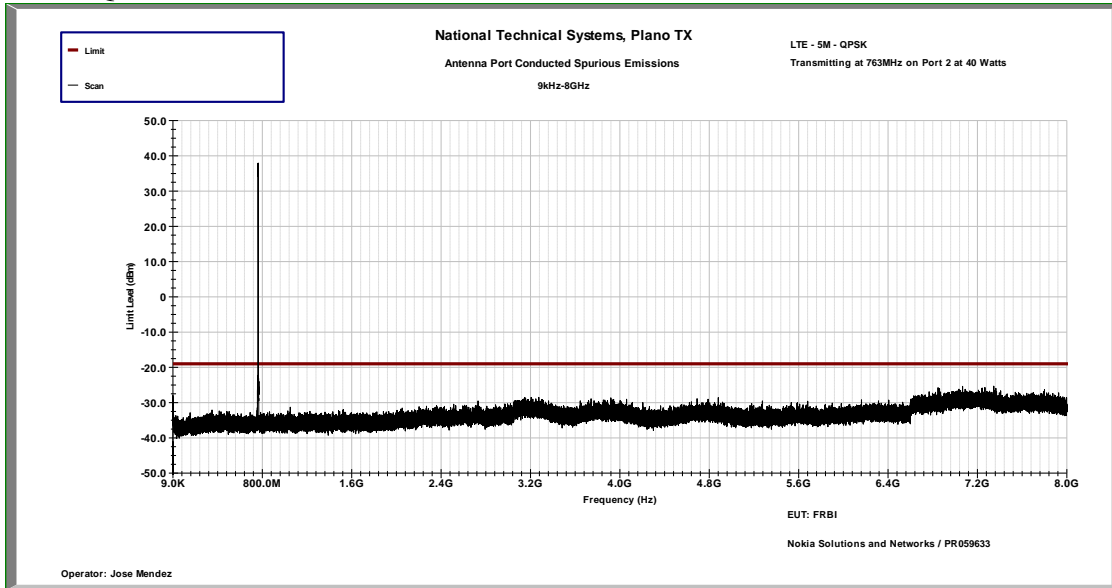

5M - LTE - 16QAM

