

Test Report

Report No. : CQASZ20190300002EX-01
Applicant: Grace Digital Inc.
Address of Applicant: 10531 4S Commons Drive #166 Suite #430 San Diego, CA 92127, United States
Manufacturer: NEO Telecom Corporation
Address of Manufacturer: 7F, 674-24, Anyang Dong, Manan Gu, Anyang City, Kyunggi Do South Korea
Equipment Under Test (EUT):
Product: EcoSoundstation
All Model No.: GDI-EXSNDST800, GDI-EXSNDST801, GDI-EXSNDST802, GDI-EXSNDST803, GDI-EXSNDST804, GDI-EXSNDST805, GDI-EXSNDST806, GDI-EXSNDST807, GDI-EXSNDST808, GDI-EXSNDST809, GDI-EXSNDST8010, GDI-EXSNDST811, GDI-EXSNDST812, GDI-EXSNDST813, GDI-EXSNDST814, GDI-EXSNDST815, GDI-EXSNDST816, GDI-EXSNDST817, GDI-EXSNDST818, GDI-EXSNDST819, GDI-EXSNDST820
Test Model No.: GDI-EXSNDST800
Brand Name: ECOXGEAR
FCC ID: 2AAUI-GDIEXSNDST
Standards: 47 CFR Part 15, Subpart C
Date of Test: 2019-03-08 to 2019-04-10
Date of Issue: 2019-04-10
Test Result : PASS*

Tested By:

Daisy Qin

(Daisy Qin)

Reviewed By:

Aaron Ma

(Aaron Ma)

Approved By:

Jack Ai

(Jack Ai)



* In the configuration tested, the EUT complied with the standards specified above.

The test report is effective only with both signature and specialized stamp, The result(s) shown in this report refer only to the sample(s) tested. Without written approval of CQA, this report can't be reproduced except in full.

1 Version

Revision History Of Report

Report No.	Version	Description	Issue Date
CQASZ20190300002EX-01	Rev.01	Initial report	2019-04-10

2 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15, Subpart C Section 15.203/15.247 (c)	ANSI C63.10 (2013)	PASS
AC Power Line Conducted Emission	47 CFR Part 15, Subpart C Section 15.207	ANSI C63.10 (2013)	PASS
Conducted Peak Output Power	47 CFR Part 15, Subpart C Section 15.247 (b)(1)	ANSI C63.10 (2013)	PASS
20dB Occupied Bandwidth	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10 (2013)	PASS
Carrier Frequencies Separation	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10 (2013)	PASS
Hopping Channel Number	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10 (2013)	PASS
Dwell Time	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10 (2013)	PASS
Pseudorandom Frequency Hopping Sequence	47 CFR Part 15, Subpart C Section 15.247(b)(4)&TCB Exclusion List (7 July 2002)	ANSI C63.10 (2013)	PASS
Band-edge for RF Conducted Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10 (2013)	PASS
RF Conducted Spurious Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10 (2013)	PASS
Radiated Spurious emissions	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 (2013)	PASS
Restricted bands around fundamental frequency (Radiated Emission)	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 (2013)	PASS

3 Contents

	Page
COVER PAGE	1
1 VERSION	2
2 TEST SUMMARY	3
3 CONTENTS	4
4 GENERAL INFORMATION	5
4.1 CLIENT INFORMATION	5
4.2 GENERAL DESCRIPTION OF EUT	5
4.3 TEST ENVIRONMENT	7
4.4 DESCRIPTION OF SUPPORT UNITS	7
4.5 STATEMENT OF THE MEASUREMENT UNCERTAINTY	8
4.6 TEST LOCATION	9
4.7 TEST FACILITY	9
4.8 ABNORMALITIES FROM STANDARD CONDITIONS	9
4.9 OTHER INFORMATION REQUESTED BY THE CUSTOMER	9
4.10 EQUIPMENT LIST	10
5 TEST RESULTS AND MEASUREMENT DATA	11
5.1 ANTENNA REQUIREMENT	11
5.2 CONDUCTED EMISSIONS	12
5.3 CONDUCTED PEAK OUTPUT POWER	16
5.4 20DB OCCUPY BANDWIDTH	21
5.5 FREQUENCIES SEPARATION	25
5.6 HOPPING CHANNEL NUMBER	27
5.7 DWELL TIME	29
5.8 BAND-EDGE FOR RF CONDUCTED EMISSIONS	33
5.9 SPURIOUS RF CONDUCTED EMISSIONS	39
5.10 OTHER REQUIREMENTS FREQUENCY HOPPING SPREAD SPECTRUM SYSTEM	50
5.11 RADIATED SPURIOUS EMISSION & RESTRICTED BANDS	52
5.11.1 Radiated Emission below 1GHz	55
5.11.2 Transmitter Emission above 1GHz	57
6 PHOTOGRAPHS - EUT TEST SETUP	60
6.1 RADIATED EMISSION	60
6.2 CONDUCTED EMISSION	61
7 PHOTOGRAPHS - EUT CONSTRUCTIONAL DETAILS	62

4 General Information

4.1 Client Information

Applicant:	Grace Digital Inc.
Address of Applicant:	10531 4S Commons Drive #166 Suite #430 San Diego, CA 92127, United States
Manufacturer:	NEO Telecom Corporation
Address of Manufacturer:	7F, 674-24, Anyang Dong, Manan Gu, Anyang City, Kyunggi Do South Korea

4.2 General Description of EUT

Product Name:	EcoSoundstation
All Model No.:	GDI-EXSNDST800, GDI-EXSNDST801, GDI-EXSNDST802, GDI-EXSNDST803, GDI-EXSNDST804, GDI-EXSNDST805, GDI-EXSNDST806, GDI-EXSNDST807, GDI-EXSNDST808, GDI-EXSNDST809, GDI-EXSNDST8010, GDI-EXSNDST811, GDI-EXSNDST812, GDI-EXSNDST813, GDI-EXSNDST814, GDI-EXSNDST815, GDI-EXSNDST816, GDI-EXSNDST817, GDI-EXSNDST818, GDI-EXSNDST819, GDI-EXSNDST820
Test Model No.:	GDI-EXSNDST800
Trade Mark:	ECOXGEAR
Hardware Version:	V1.0
Software Version:	V1.0
Operation Frequency:	2402MHz~2480MHz
Bluetooth Version:	V4.2
Modulation Technique:	Frequency Hopping Spread Spectrum(FHSS)
Modulation Type:	GFSK, $\pi/4$ DQPSK, 8DPSK
Transfer Rate:	1Mbps/2Mbps/3Mbps
Number of Channel:	79
Hopping Channel Type:	Adaptive Frequency Hopping systems
Product Type:	☒ Mobile ☐ Portable ☐ Fix Location
Antenna Type:	PCB antenna
Antenna Gain:	0dBi
EUT Power Supply:	battery:DC12V AC 120V 50/60Hz

Note:

There are many products, Only the model GDI-EXSNDST800 was tested, since the electrical circuit design, layout, components used and internal wiring were identical for the above models, with difference being color of appearance and model name.

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
0	2402MHz	20	2422MHz	40	2442MHz	60	2462MHz
1	2403MHz	21	2423MHz	41	2443MHz	61	2463MHz
2	2404MHz	22	2424MHz	42	2444MHz	62	2464MHz
3	2405MHz	23	2425MHz	43	2445MHz	63	2465MHz
4	2406MHz	24	2426MHz	44	2446MHz	64	2466MHz
5	2407MHz	25	2427MHz	45	2447MHz	65	2467MHz
6	2408MHz	26	2428MHz	46	2448MHz	66	2468MHz
7	2409MHz	27	2429MHz	47	2449MHz	67	2469MHz
8	2410MHz	28	2430MHz	48	2450MHz	68	2470MHz
9	2411MHz	29	2431MHz	49	2451MHz	69	2471MHz
10	2412MHz	30	2432MHz	50	2452MHz	70	2472MHz
11	2413MHz	31	2433MHz	51	2453MHz	71	2473MHz
12	2414MHz	32	2434MHz	52	2454MHz	72	2474MHz
13	2415MHz	33	2435MHz	53	2455MHz	73	2475MHz
14	2416MHz	34	2436MHz	54	2456MHz	74	2476MHz
15	2417MHz	35	2437MHz	55	2457MHz	75	2477MHz
16	2418MHz	36	2438MHz	56	2458MHz	76	2478MHz
17	2419MHz	37	2439MHz	57	2459MHz	77	2479MHz
18	2420MHz	38	2440MHz	58	2460MHz	78	2480MHz
19	2421MHz	39	2441MHz	59	2461MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The Lowest channel	2402MHz
The Middle channel	2441MHz
The Highest channel	2480MHz

4.3 Test Environment

Operating Environment:	
Temperature:	25.0 °C
Humidity:	53 % RH
Atmospheric Pressure:	995mbar
Test Mode:	Use test software to set the lowest frequency, the middle frequency and the highest frequency keep transmitting of the EUT.

4.4 Description of Support Units

The EUT has been tested with associated equipment below.

Description	Manufacturer	Model No.	Remark	FCC certification
/	/	/	/	/

4.5 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate.

The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities.

The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the **Shenzhen Huaxia Testing Technology Co., Ltd.** quality system acc. to DIN EN ISO/IEC 17025.

Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for CQA laboratory is reported:

No.	Item	Uncertainty	Notes
1	Radiated Emission (Below 1GHz)	±5.12dB	(1)
2	Radiated Emission (Above 1GHz)	±4.60dB	(1)
3	Conducted Disturbance (0.15~30MHz)	±3.34dB	(1)
4	Radio Frequency	3×10^{-8}	(1)
5	Duty cycle	0.6 %.	(1)
6	Occupied Bandwidth	1.1%	(1)
7	RF conducted power	0.86dB	(1)
8	RF power density	0.74	(1)
9	Conducted Spurious emissions	0.86dB	(1)
10	Temperature test	0.8℃	(1)
11	Humidity test	2.0%	(1)
12	Supply voltages	0.5 %.	(1)
13	time	0.6 %.	(1)
14	Frequency Error	5.5 Hz	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

4.6 Test Location

Shenzhen Huaxia Testing Technology Co., Ltd,

1F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street, Longhua District, Shenzhen, China

4.7 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

ISED#: 22984

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory is recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements

- **A2LA (Certificate No. 4742.01)**

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 4742.01.

- **FCC Registration No.: 522263**

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.:522263

4.8 Abnormalities from Standard Conditions

None.

4.9 Other Information Requested by the Customer

None.

4.10 Equipment List

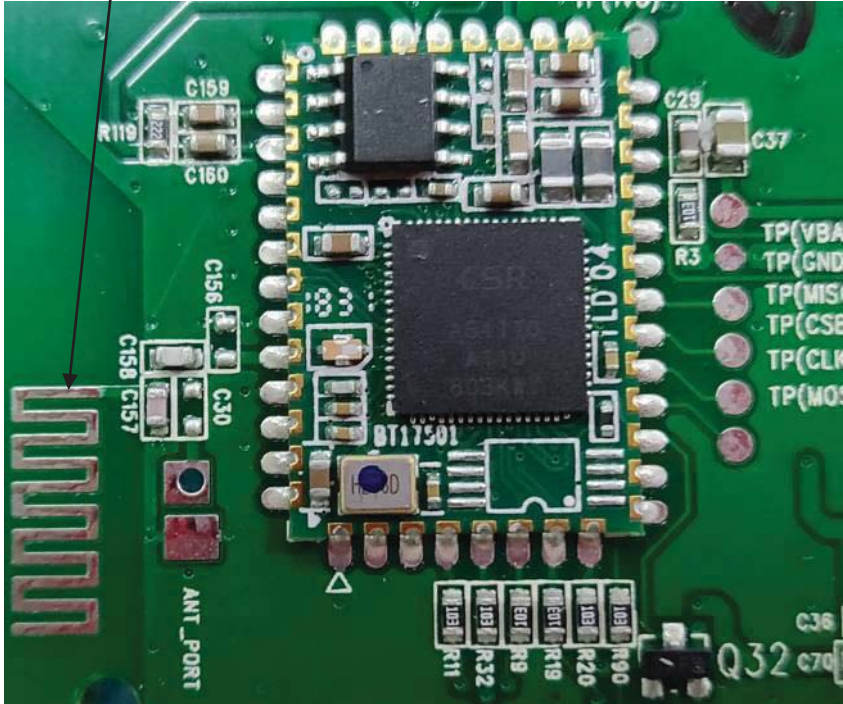
Test Equipment	Manufacturer	Model No.	Instrument No.	Calibration Date	Calibration Due Date
EMI Test Receiver	R&S	ESR7	CQA-005	2018/9/26	2019/9/25
Spectrum analyzer	R&S	FSU26	CQA-038	2018/10/28	2018/10/27
Preamplifier	MITEQ	AFS4-00010300-18-10P-4	CQA-035	2018/9/26	2019/9/25
Preamplifier	MITEQ	AMF-6D-02001800-29-20P	CQA-036	2018/11/2	2019/11/1
Loop antenna	Schwarzbeck	FMZB1516	CQA-087	2018/10/28	2020/10/27
Bilog Antenna	R&S	HL562	CQA-011	2018/9/26	2020/9/25
Horn Antenna	R&S	HF906	CQA-012	2018/9/26	2020/9/25
Horn Antenna	Schwarzbeck	BBHA 9170	CQA-088	2018/9/26	2020/9/25
Coaxial Cable (Above 1GHz)	CQA	N/A	C019	2018/9/26	2019/9/25
Coaxial Cable (Below 1GHz)	CQA	N/A	C020	2018/9/26	2019/9/25
Spectrum analyzer	Agilent	E4440A	CQA-103	2018/10/28	2018/10/27
Antenna Connector	CQA	RFC-01	CQA-080	2018/9/26	2019/9/25
RF cable(9KHz~40GHz)	CQA	RF-01	CQA-079	2018/9/26	2019/9/25
Power divider	MIDWEST	PWD-2533-02-SMA-79	CQA-067	2018/9/26	2019/9/25
EMI Test Receiver	R&S	ESPI3	CQA-013	2018/9/26	2019/9/25
LISN	R&S	ENV216	CQA-003	2018/11/5	2019/11/4
Coaxial cable	CQA	N/A	CQA-C009	2018/9/26	2019/9/25

Note:

The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

5 Test results and Measurement Data

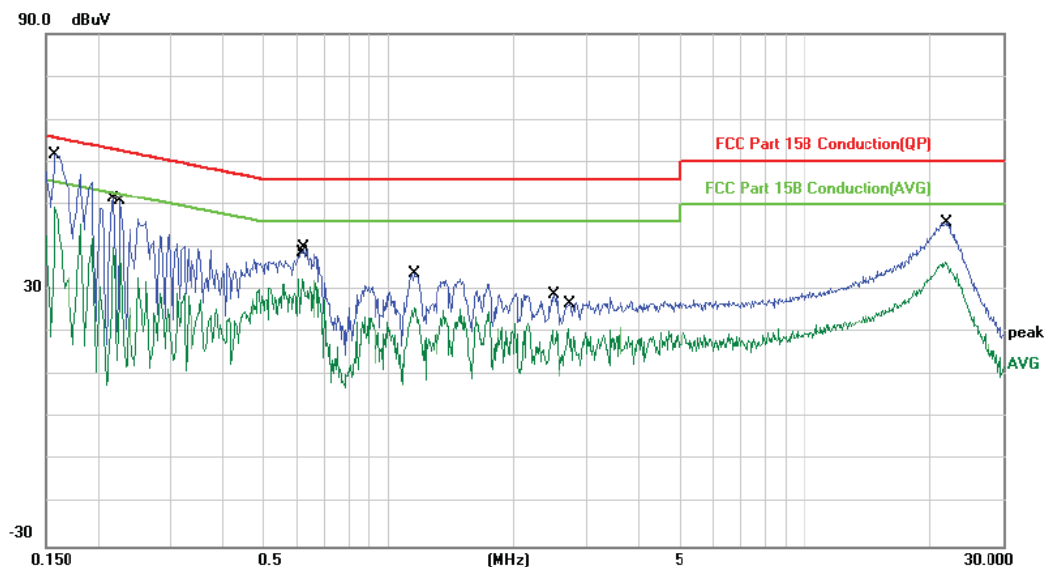
5.1 Antenna Requirement

Standard requirement:	47 CFR Part 15C Section 15.203 /247(c)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 15.247(b) (4) requirement: The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.	
EUT Antenna:	PCB ANTENNA 
The antenna is PCB antenna. The best case gain of the antenna is 0dBi.	

Exploratory Test Mode:	Non-hopping transmitting mode with all kind of modulation and all kind of data type at the lowest, middle, high channel.
Final Test Mode:	Through Pre-scan, find the DH5 of data type and GFSK modulation at the highest channel is the worst case. Only the worst case is recorded in the report.
Test Voltage:	AC 120V/60Hz
Test Results:	Pass

Measurement Data:

L line:

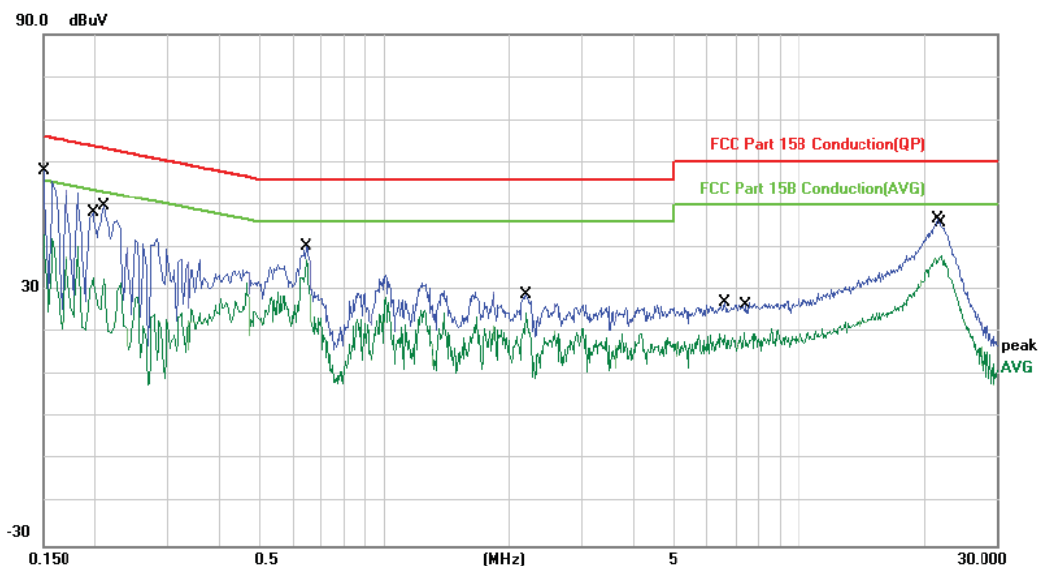


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1 *	0.1580	61.90	-0.13	61.77	65.56	-3.79	QP	
2	0.1580	49.37	-0.13	49.24	55.56	-6.32	AVG	
3	0.2180	40.21	-0.12	40.09	52.89	-12.80	AVG	
4	0.2260	51.01	-0.12	50.89	62.59	-11.70	QP	
5	0.6060	32.54	-0.04	32.50	46.00	-13.50	AVG	
6	0.6260	40.21	-0.05	40.16	56.00	-15.84	QP	
7	1.1500	33.90	-0.14	33.76	56.00	-22.24	QP	
8	1.1500	26.15	-0.14	26.01	46.00	-19.99	AVG	
9	2.4900	29.15	-0.17	28.98	56.00	-27.02	QP	
10	2.7139	21.05	-0.17	20.88	46.00	-25.12	AVG	
11	21.7420	36.86	-0.39	36.47	50.00	-13.53	AVG	
12	21.9060	46.30	-0.40	45.90	60.00	-14.10	QP	

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.

N line:

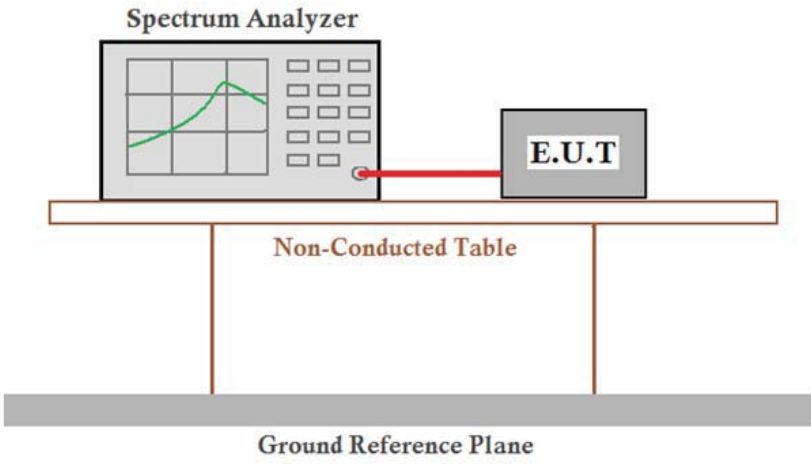


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	*	0.1499	58.25	-0.13	58.12	66.00	-7.88	QP	
2		0.1499	43.22	-0.13	43.09	56.00	-12.91	AVG	
3		0.1980	32.88	-0.13	32.75	53.69	-20.94	AVG	
4		0.2100	49.74	-0.13	49.61	63.20	-13.59	QP	
5		0.6460	40.41	-0.05	40.36	56.00	-15.64	QP	
6		0.6460	37.10	-0.05	37.05	46.00	-8.95	AVG	
7		2.1900	29.20	-0.24	28.96	56.00	-27.04	QP	
8		2.1900	24.89	-0.24	24.65	46.00	-21.35	AVG	
9		6.6259	27.38	-0.27	27.11	60.00	-32.89	QP	
10		7.3739	20.20	-0.28	19.92	50.00	-30.08	AVG	
11		21.6620	46.90	-0.39	46.51	60.00	-13.49	QP	
12		22.1540	38.67	-0.40	38.27	50.00	-11.73	AVG	

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.

5.3 Conducted Peak Output Power

Test Requirement:	47 CFR Part 15C Section 15.247 (b)(1)
Test Method:	ANSI C63.10:2013
Test Setup:	 Remark: Offset=Cable loss+ attenuation factor.
Limit:	30dBm
Exploratory Test Mode:	Non-hopping transmitting with all kind of modulation and all kind of data type
Final Test Mode:	Through Pre-scan, find the DH5 of data type is the worst case of GFSK modulation type, 2-DH5 of data type is the worst case of $\pi/4$ DQPSK modulation type, 3-DH5 of data type is the worst case of 8DPSK modulation type. Only the worst case is recorded in the report.
Test Results:	Pass

Measurement Data

GFSK mode			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	2.803	30.00	Pass
Middle	1.415	30.00	Pass
Highest	2.803	30.00	Pass
$\pi/4$ DQPSK mode			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	2.103	30.00	Pass
Middle	0.933	30.00	Pass
Highest	2.106	30.00	Pass
8DPSK mode			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	2.216	30.00	Pass
Middle	1.061	30.00	Pass
Highest	2.161	30.00	Pass

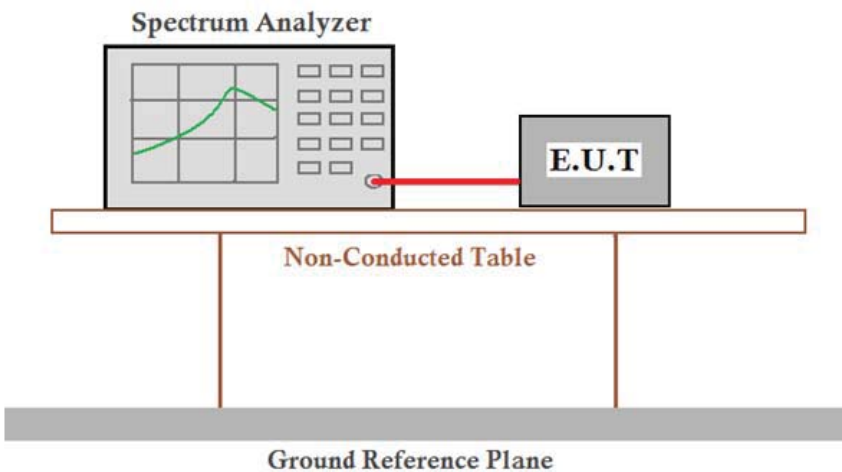
Test plot as follows:

Graphs	
GFSK/LCH	
GFSK/MCH	
GFSK/HCH	

$\pi/4$DQPSK/LCH		
$\pi/4$DQPSK/MCH		
$\pi/4$DQPSK/HCH		

8DPSK/LCH		
8DPSK/MCH		
8DPSK/HCH		

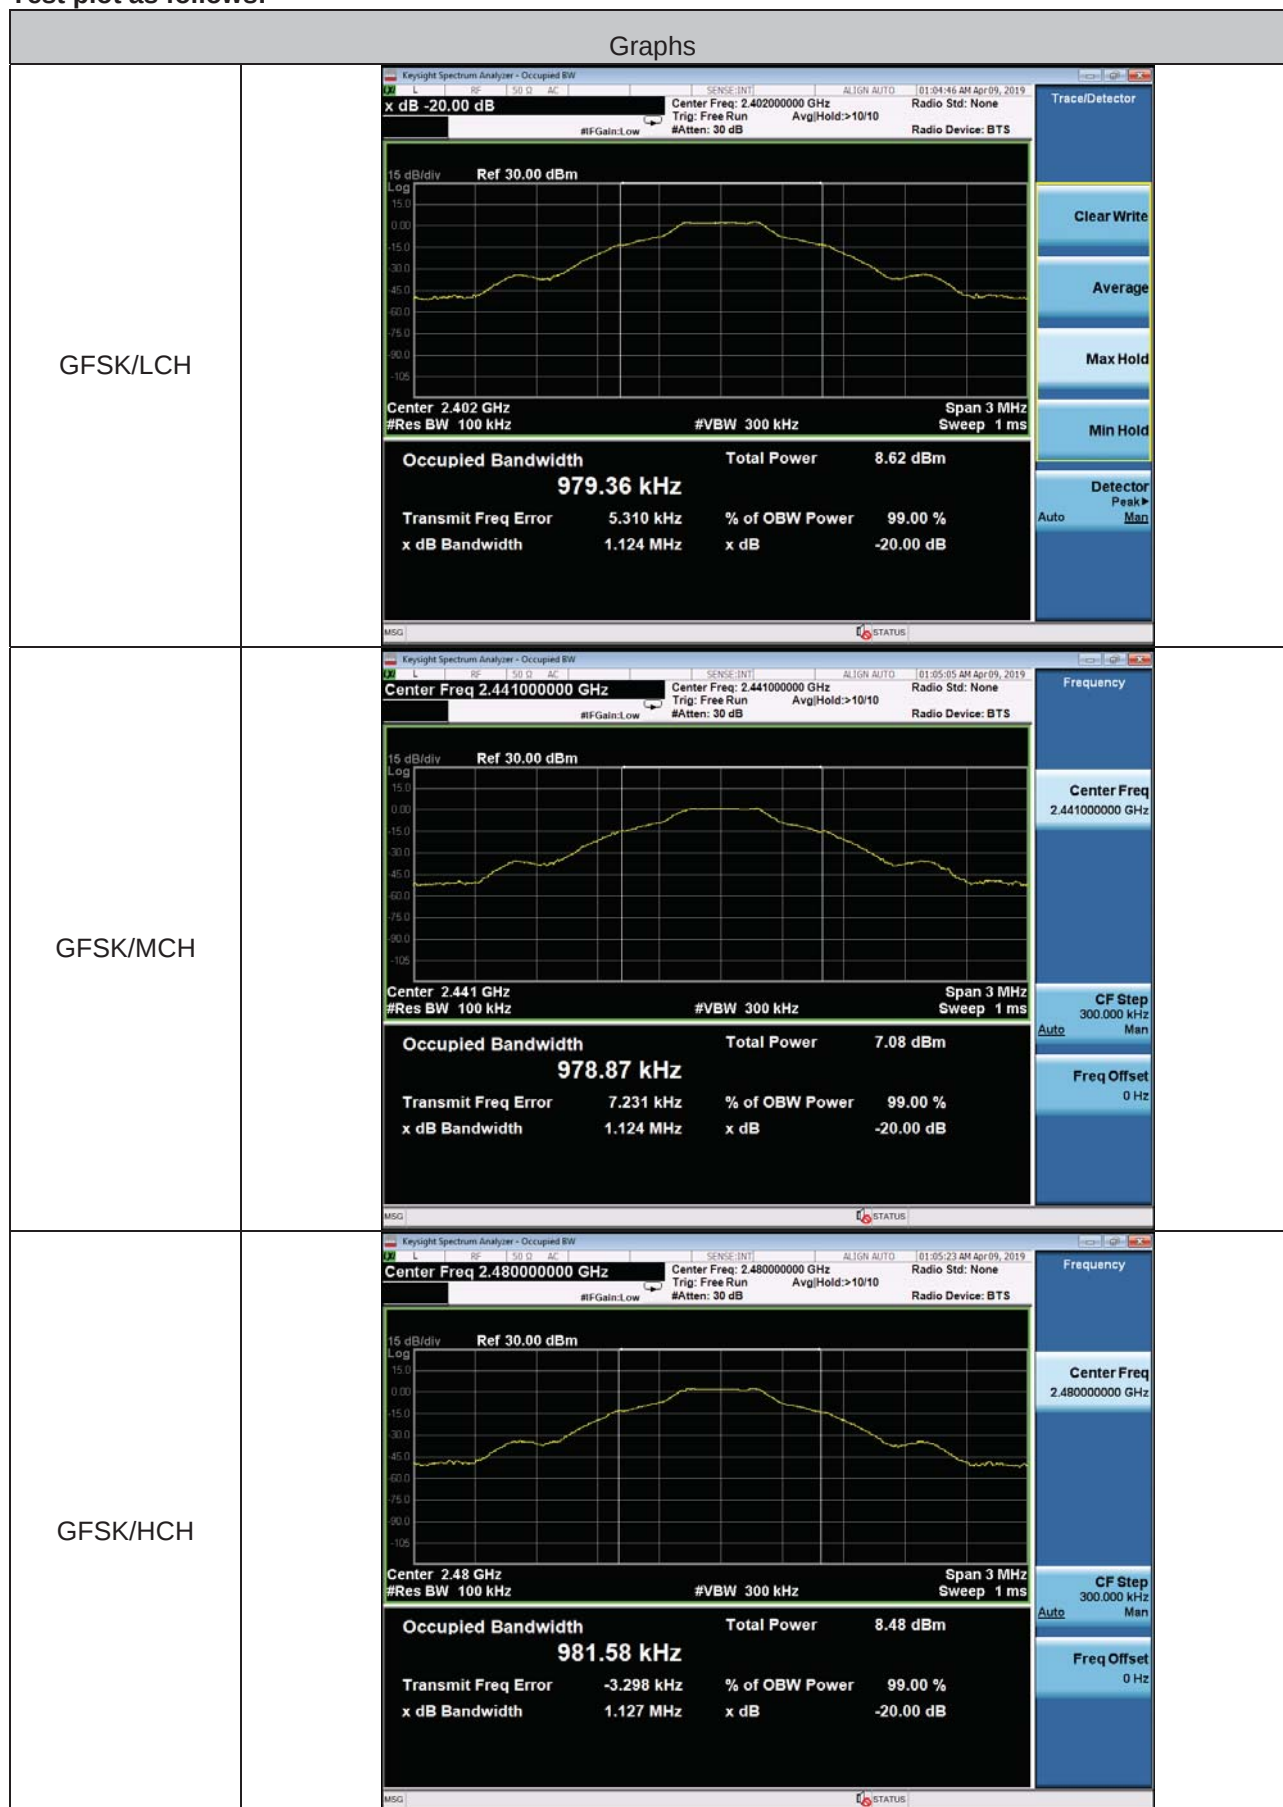
5.4 20dB Occupy Bandwidth

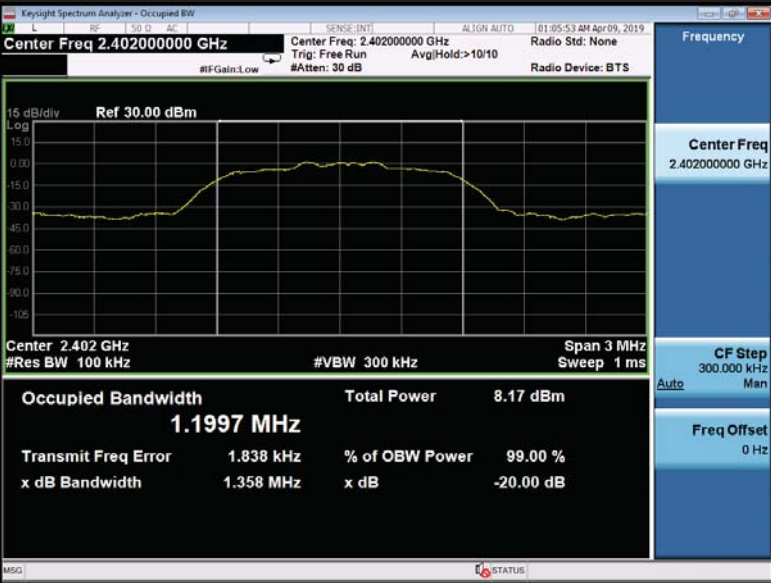
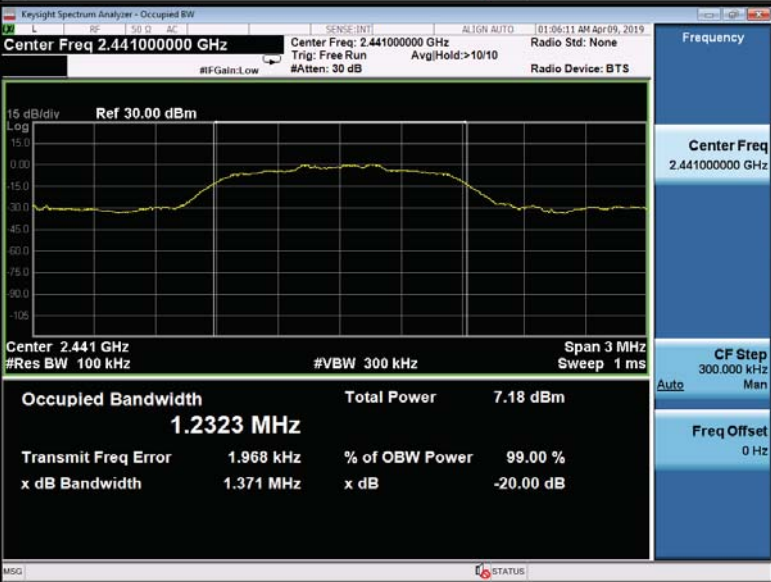
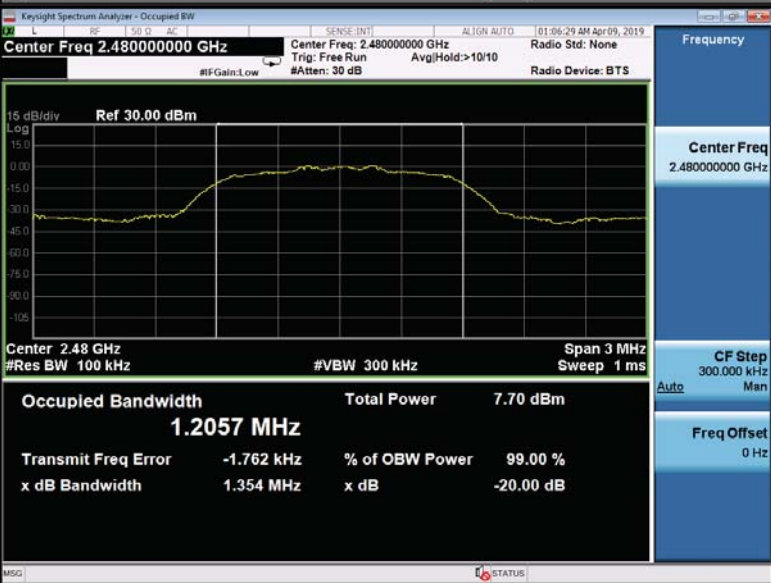
Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2013
Test Setup:	 Remark: Offset=Cable loss+ attenuation factor.
Limit:	NA
Exploratory Test Mode:	Non-hopping transmitting with all kind of modulation and all kind of data type
Final Test Mode:	Through Pre-scan, find the DH5 of data type is the worst case of GFSK modulation type, 2-DH5 of data type is the worst case of $\pi/4$ DQPSK modulation type, 3-DH5 of data type is the worst case of 8DPSK modulation type. Only the worst case is recorded in the report.
Test Results:	Pass

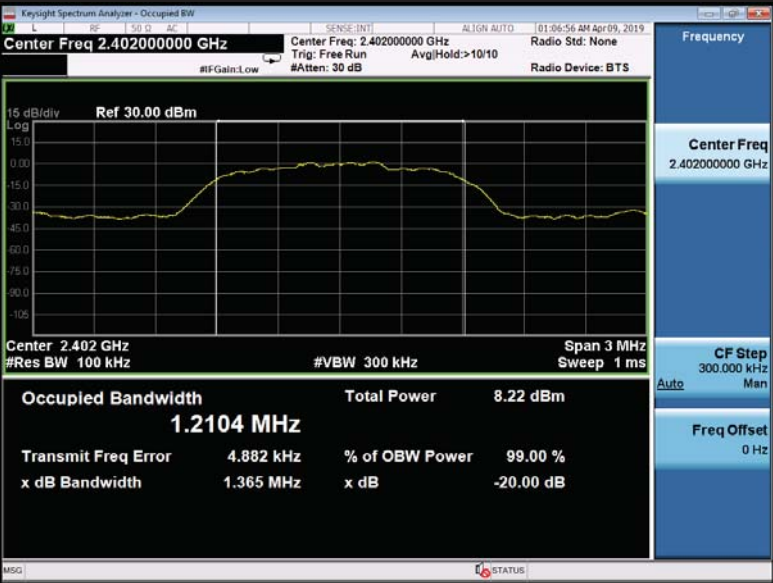
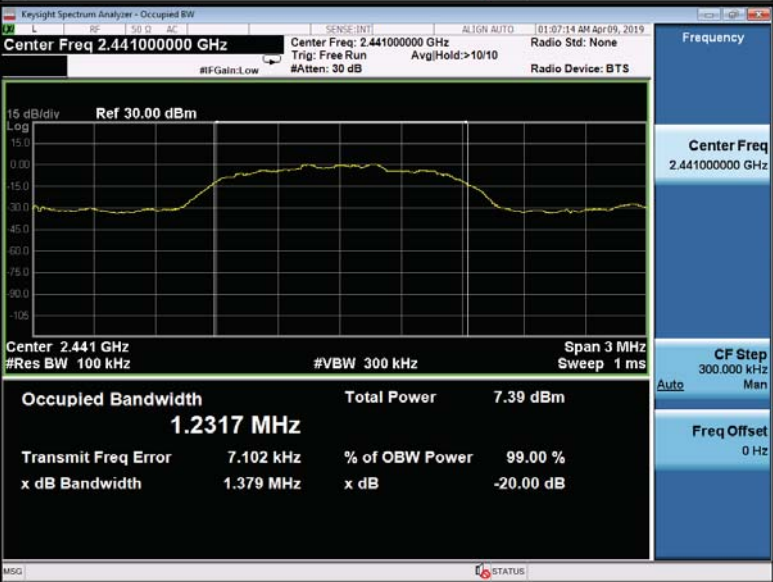
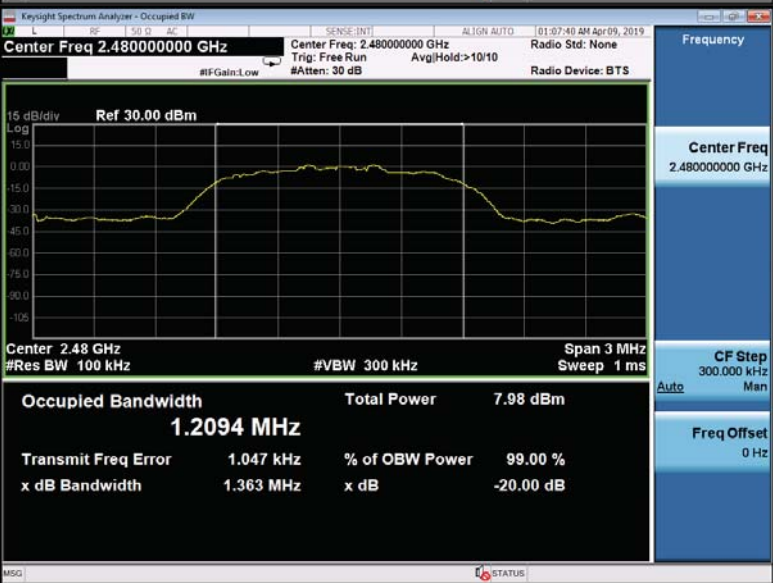
Measurement Data

Test channel	20dB Occupy Bandwidth (MHz)		
	GFSK	$\pi/4$ DQPSK	8DPSK
Lowest	1.124	1.358	1.365
Middle	1.124	1.371	1.379
Highest	1.127	1.354	1.363

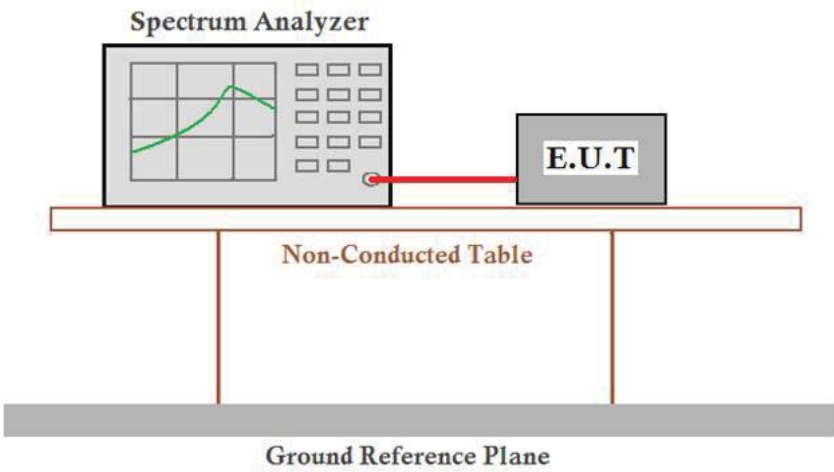
Test plot as follows:



$\pi/4$DQPSK/LCH	 Key parameters from the screenshot: - Center Freq: 2.402000000 GHz - Occupied Bandwidth: 1.1997 MHz - Total Power: 8.17 dBm - Transmit Freq Error: 1.838 kHz - x dB Bandwidth: 1.358 MHz
$\pi/4$DQPSK/MCH	 Key parameters from the screenshot: - Center Freq: 2.441000000 GHz - Occupied Bandwidth: 1.2323 MHz - Total Power: 7.18 dBm - Transmit Freq Error: 1.968 kHz - x dB Bandwidth: 1.371 MHz
$\pi/4$DQPSK/HCH	 Key parameters from the screenshot: - Center Freq: 2.480000000 GHz - Occupied Bandwidth: 1.2057 MHz - Total Power: 7.70 dBm - Transmit Freq Error: -1.762 kHz - x dB Bandwidth: 1.354 MHz

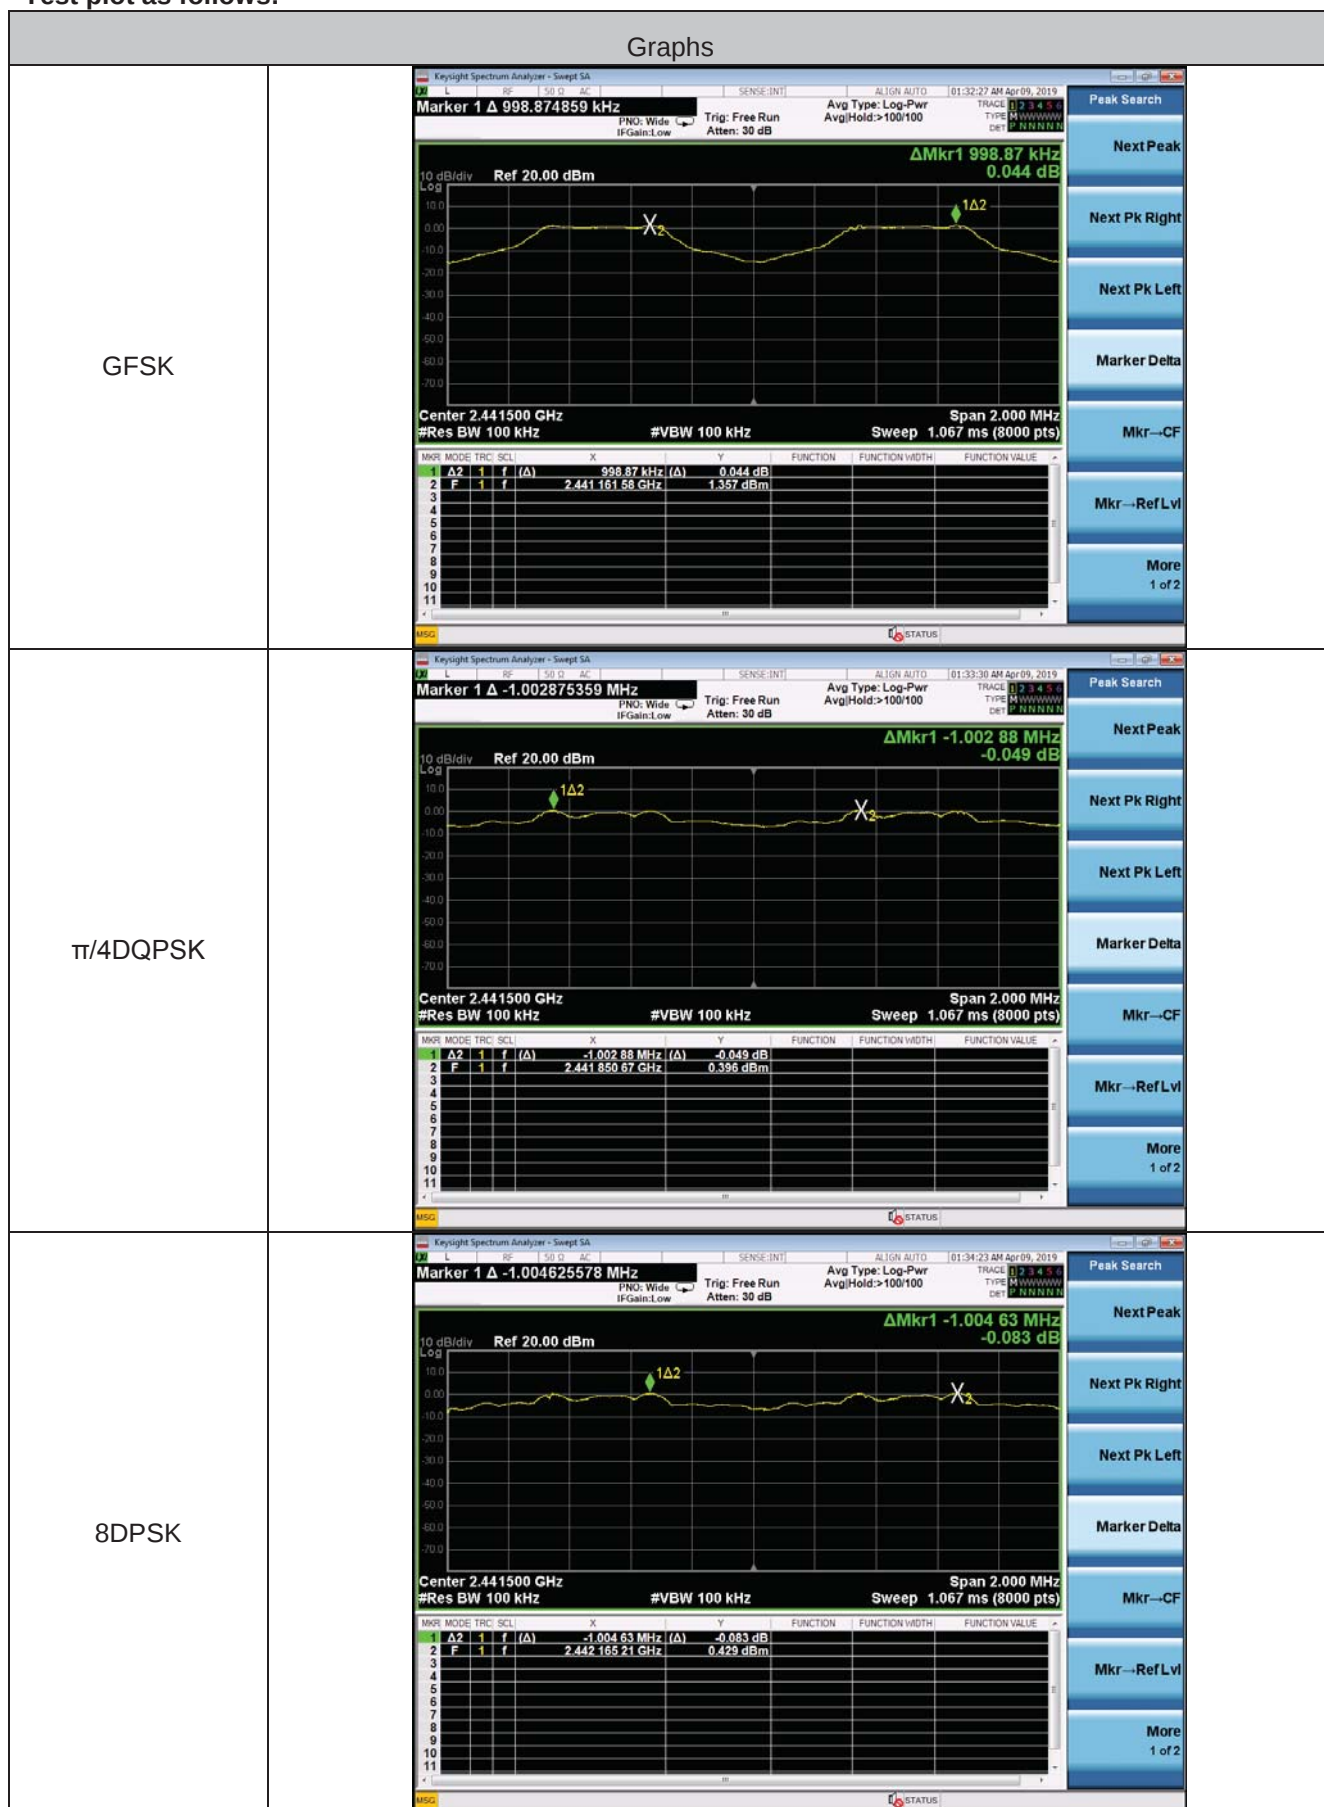
8DPSK/LCH	 KeySight Spectrum Analyzer - Occupied BW Center Freq 2.402000000 GHz Center Freq: 2.402000000 GHz Trig: Free Run Avg/Hold: >10/10 Radio Std: None Radio Device: BTS #F Gain: Low #Atten: 30 dB 15 dB/div Ref 30.00 dBm Log Center 2.402 GHz #Res BW 100 kHz #VBW 300 kHz Span 3 MHz Sweep 1 ms Occupied Bandwidth 1.2104 MHz Total Power 8.22 dBm Transmit Freq Error 4.882 kHz % of OBW Power 99.00 % x dB Bandwidth 1.365 MHz x dB -20.00 dB Frequency Center Freq 2.402000000 GHz CF Step 300.000 kHz Auto Man Freq Offset 0 Hz MSG STATUS
8DPSK/MCH	 KeySight Spectrum Analyzer - Occupied BW Center Freq 2.441000000 GHz Center Freq: 2.441000000 GHz Trig: Free Run Avg/Hold: >10/10 Radio Std: None Radio Device: BTS #F Gain: Low #Atten: 30 dB 15 dB/div Ref 30.00 dBm Log Center 2.441 GHz #Res BW 100 kHz #VBW 300 kHz Span 3 MHz Sweep 1 ms Occupied Bandwidth 1.2317 MHz Total Power 7.39 dBm Transmit Freq Error 7.102 kHz % of OBW Power 99.00 % x dB Bandwidth 1.379 MHz x dB -20.00 dB Frequency Center Freq 2.441000000 GHz CF Step 300.000 kHz Auto Man Freq Offset 0 Hz MSG STATUS
8DPSK/HCH	 KeySight Spectrum Analyzer - Occupied BW Center Freq 2.480000000 GHz Center Freq: 2.480000000 GHz Trig: Free Run Avg/Hold: >10/10 Radio Std: None Radio Device: BTS #F Gain: Low #Atten: 30 dB 15 dB/div Ref 30.00 dBm Log Center 2.48 GHz #Res BW 100 kHz #VBW 300 kHz Span 3 MHz Sweep 1 ms Occupied Bandwidth 1.2094 MHz Total Power 7.98 dBm Transmit Freq Error 1.047 kHz % of OBW Power 99.00 % x dB Bandwidth 1.363 MHz x dB -20.00 dB Frequency Center Freq 2.480000000 GHz CF Step 300.000 kHz Auto Man Freq Offset 0 Hz MSG STATUS

5.5 Frequencies Separation

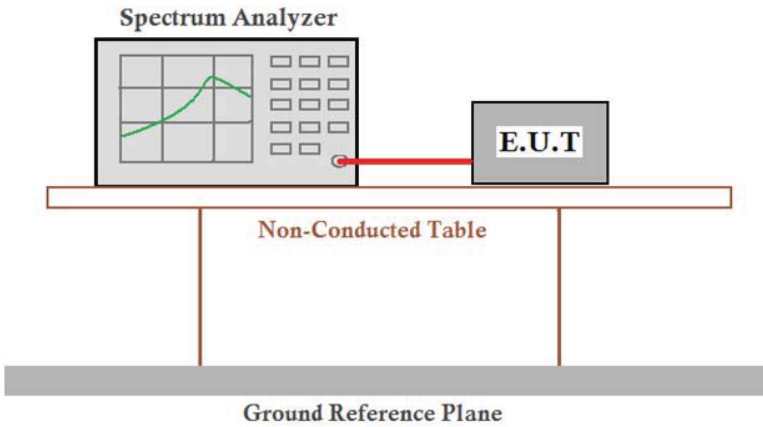
Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2013
Test Setup:	 Remark: Offset=Cable loss+ attenuation factor.
Limit:	2/3 of the 20dB bandwidth
	Remark: the transmission power is less than 0.125W.
Exploratory Test Mode:	Hopping transmitting with all kind of modulation and all kind of data type
Final Test Mode:	Through Pre-scan, find the DH5 of data type is the worst case of GFSK modulation type, 2-DH5 of data type is the worst case of $\pi/4$ DQPSK modulation type, 3-DH5 of data type is the worst case of 8DPSK modulation type. Only the worst case is recorded in the report.
Test Results:	Pass

Modulation	Channel	Channel Separation (MHz)	Limit(MHz)	Result
GFSK	CH39	0.99887	25KHz or 2/3*20dB bandwidth	Pass
	CH40			
$\pi/4$ DQPSK	CH39	1.00288	25KHz or 2/3*20dB bandwidth	Pass
	CH40			
8DPSK	CH39	1.00463	25KHz or 2/3*20dB bandwidth	Pass
	CH40			

Test plot as follows:



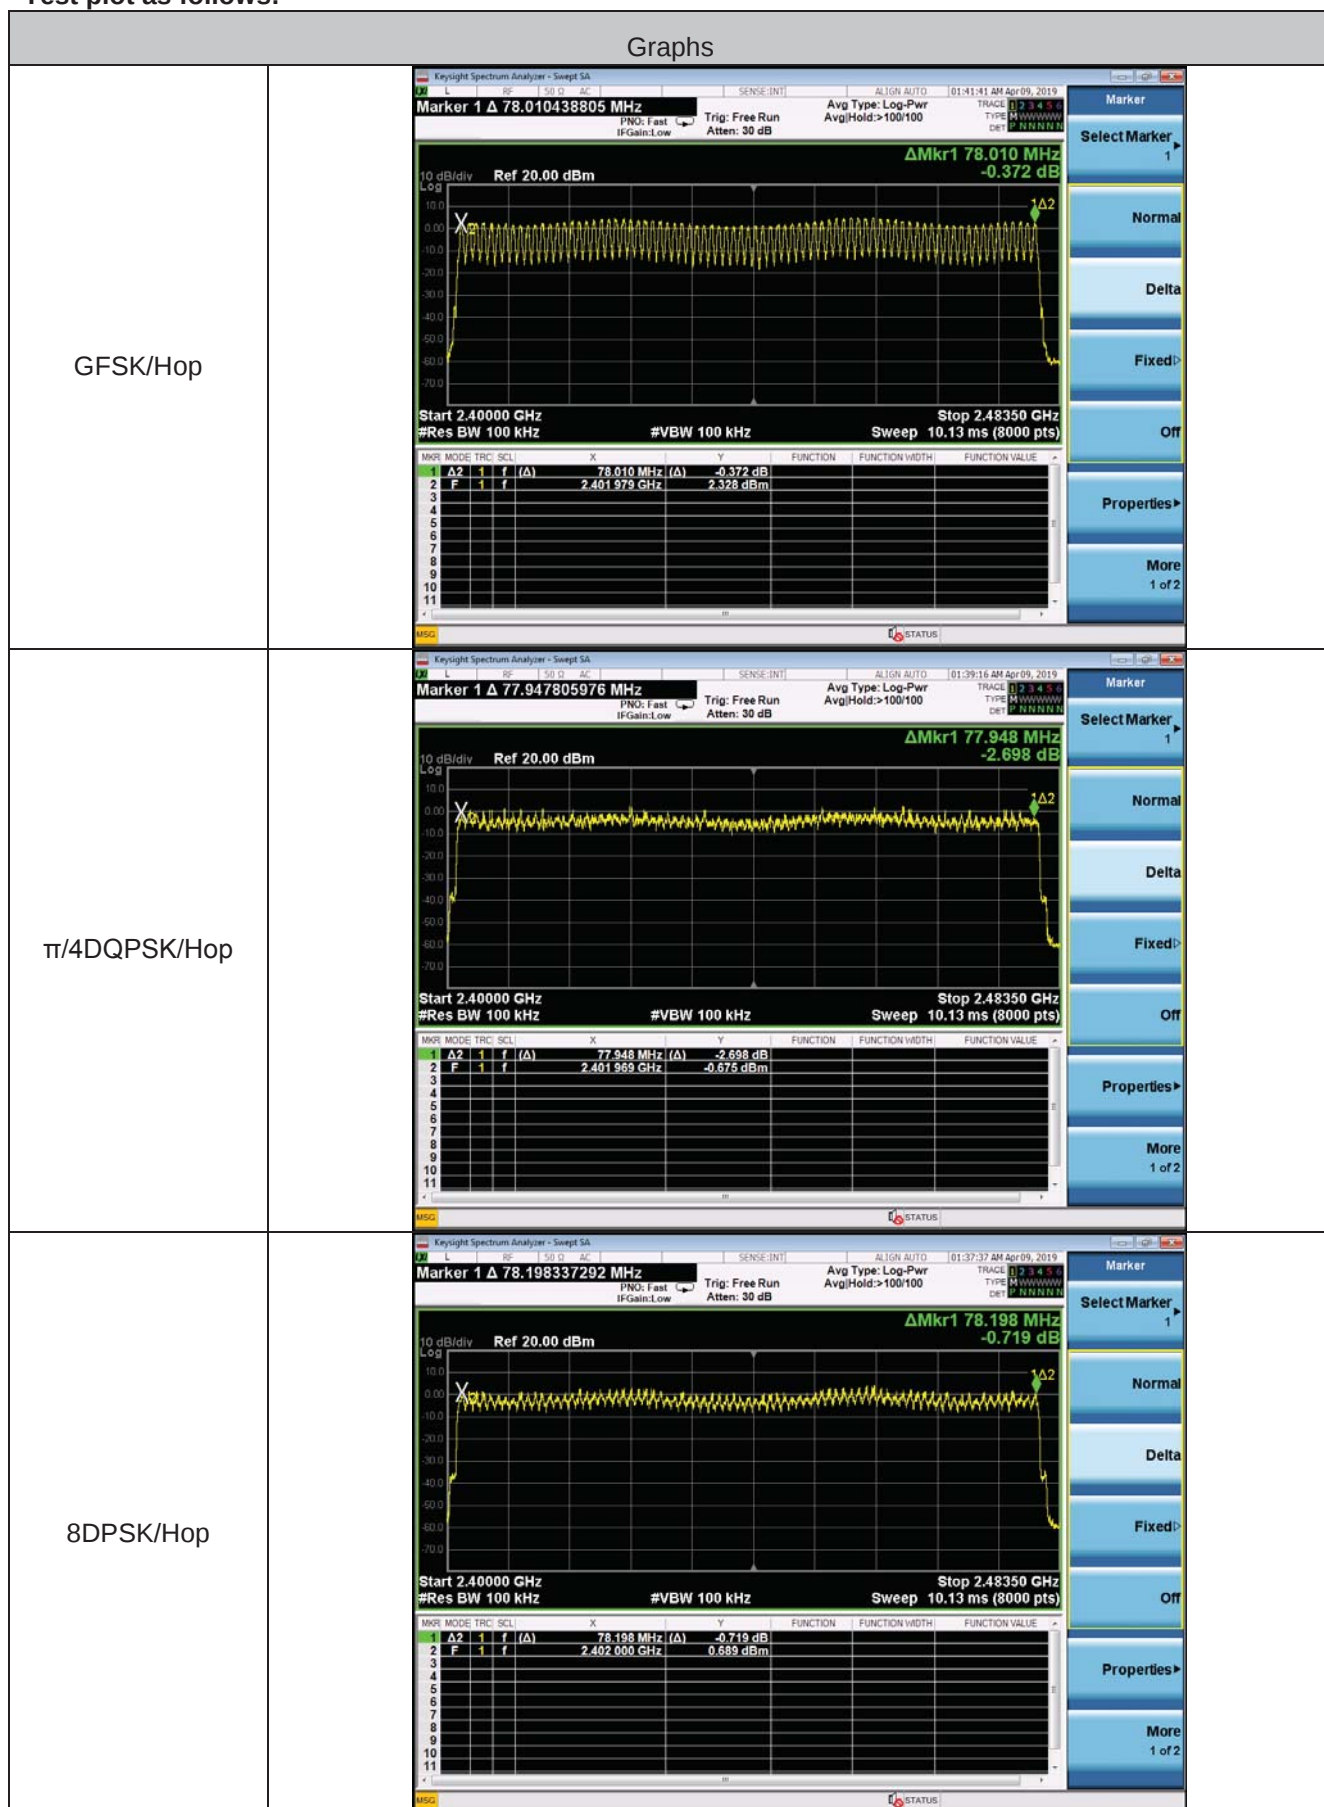
5.6 Hopping Channel Number

Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2013
Test Setup:	 Remark: Offset=Cable loss+ attenuation factor.
Limit:	At least 15 channels
Exploratory Test Mode:	hopping transmitting with all kind of modulation and all kind of data type
Final Test Mode:	Through Pre-scan, find the DH5 of data type is the worst case of GFSK modulation type, 2-DH5 of data type is the worst case of $\pi/4$ DQPSK modulation type, 3-DH5 of data type is the worst case of 8DPSK modulation type. Only the worst case is recorded in the report.
Test Results:	Pass

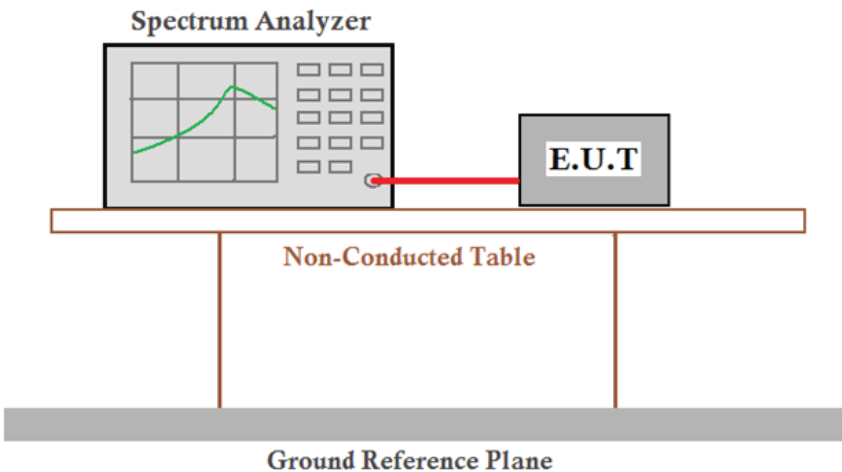
Measurement Data

Mode	Hopping channel numbers	Limit
GFSK	79	≥ 15
$\pi/4$ DQPSK	79	≥ 15
8DPSK	79	≥ 15

Test plot as follows:



5.7 Dwell Time

Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2013
Test Setup:	 Remark: Offset=Cable loss+ attenuation factor.
Test Mode:	Hopping transmitting with all kind of modulation and all kind of data type.
Limit:	0.4 Second
Test Results:	Pass

Measurement Data

Mode	Packet	Channel	Burst Width [ms/hop/ch]	Dwell Time[ms]	Limit (ms)
GFSK	DH1	MCH	0.3759	120.288	≤400
GFSK	DH3	MCH	1.6281	260.496	≤400
GFSK	DH5	MCH	2.884	307.627	≤400
π/4DQPSK	2DH1	MCH	0.384	122.880	≤400
π/4DQPSK	2DH3	MCH	1.6287	260.592	≤400
π/4DQPSK	2DH5	MCH	2.880	307.200	≤400
8DPSK	3DH1	MCH	0.3923	125.536	≤400
8DPSK	3DH3	MCH	1.6205	259.280	≤400
8DPSK	3DH5	MCH	2.8845	307.680	≤400

Remark:

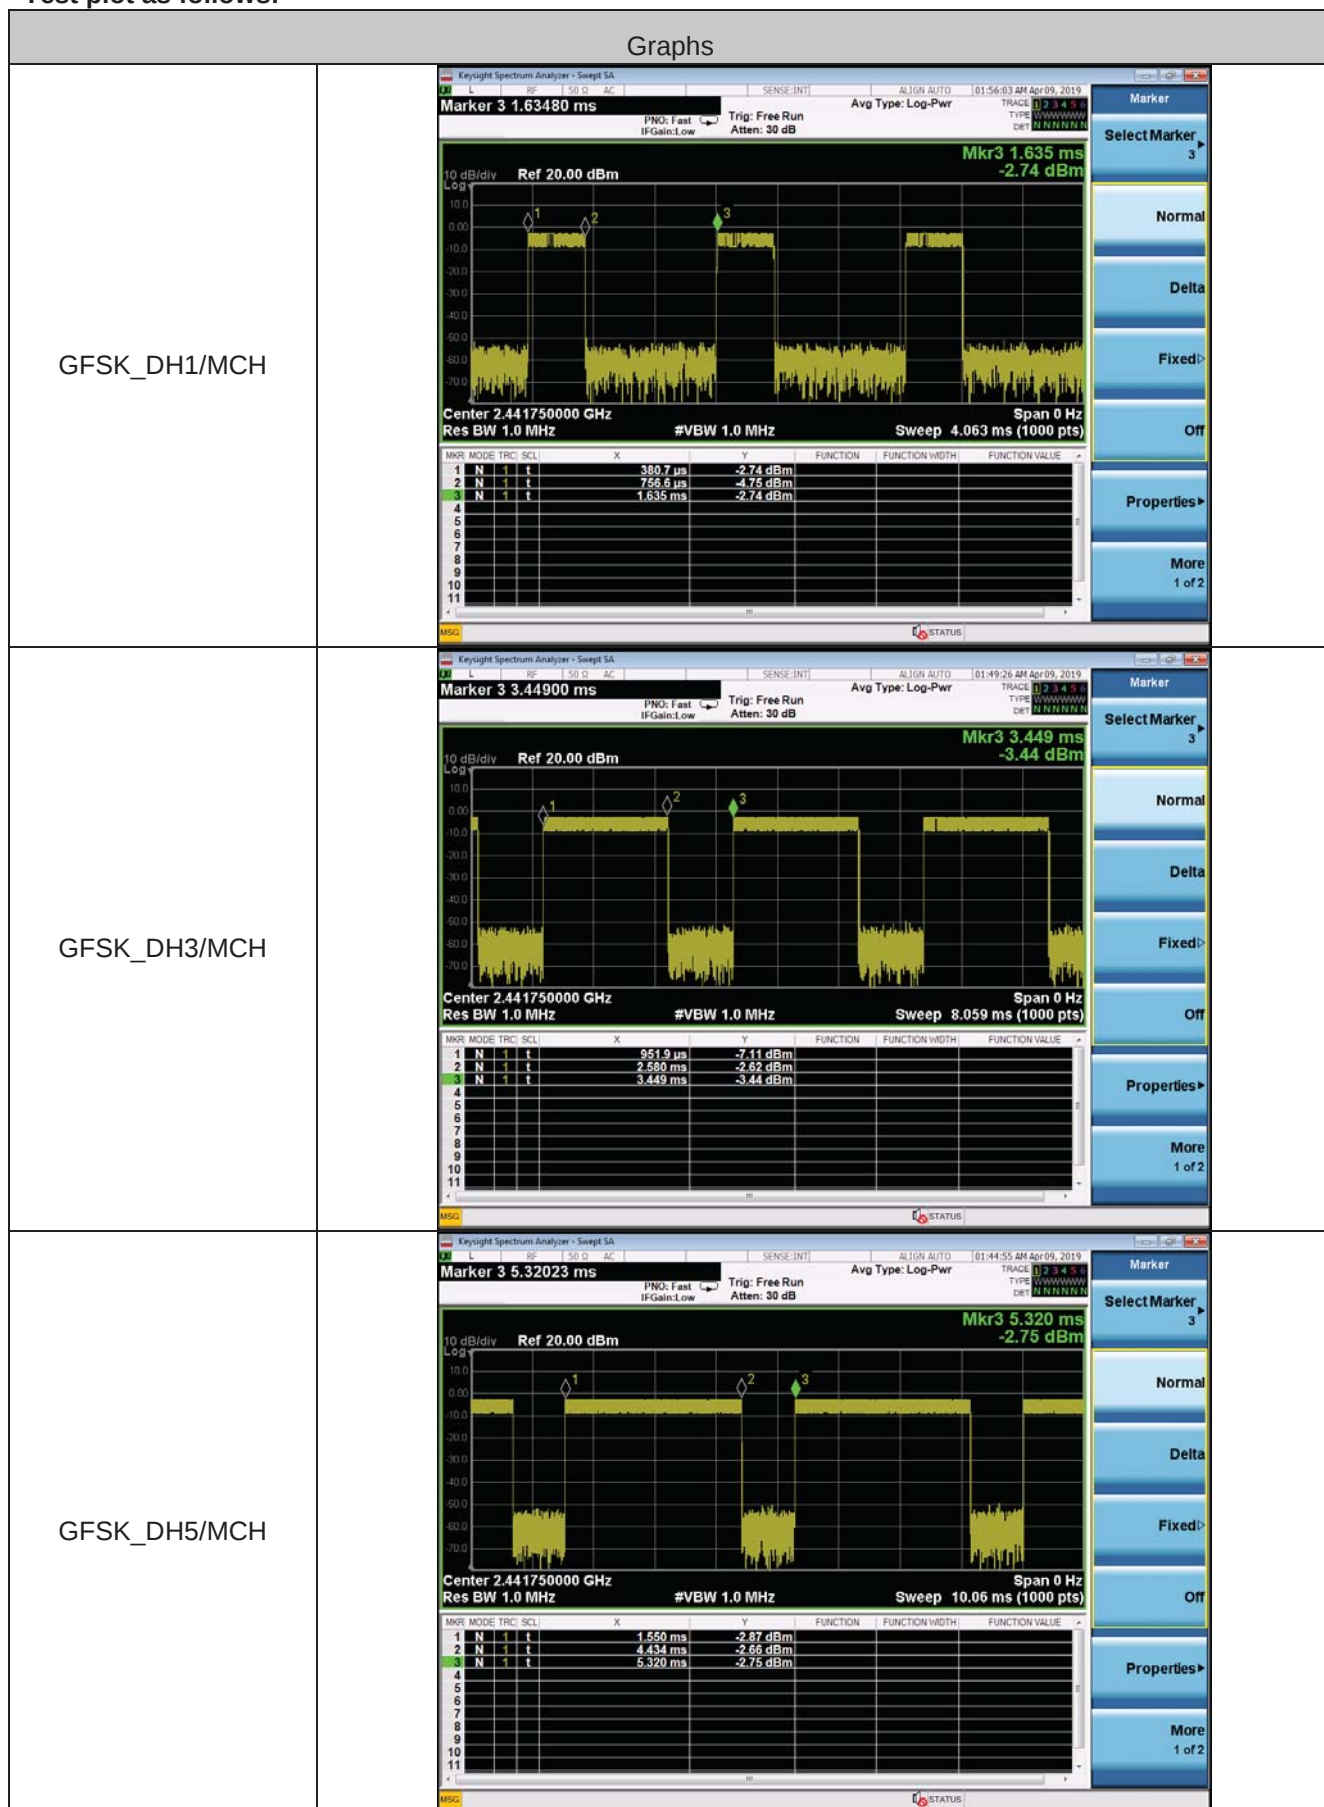
The test period: $T = 0.4 \text{ Second/Channel} \times 79 \text{ Channel} = 31.6 \text{ s}$

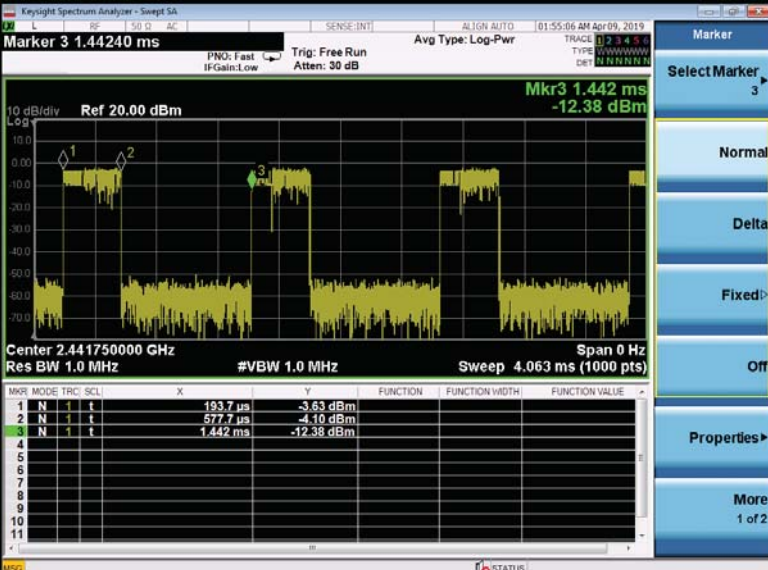
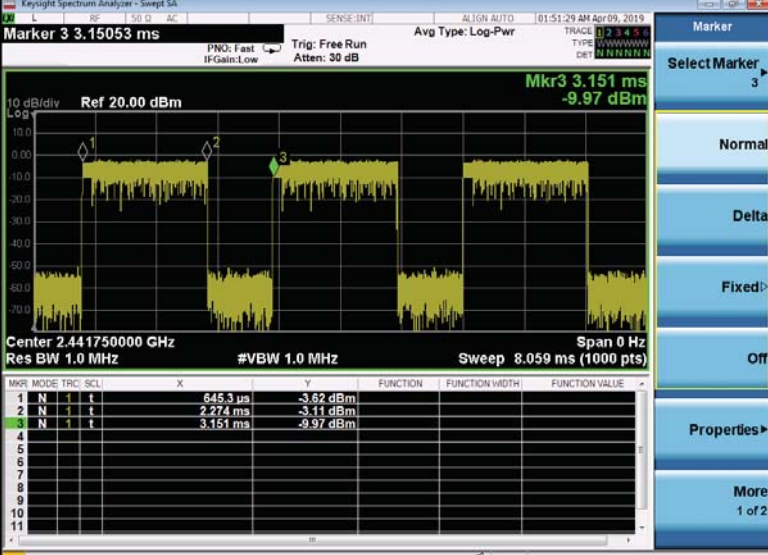
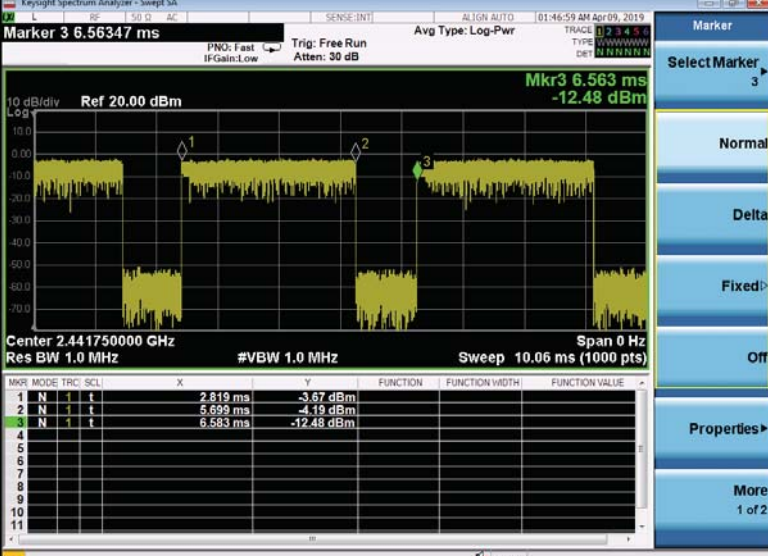
DH1/2DH1/3DH1 Dwell time = Burst Width(ms)*(1600/ (2*79))*31.6

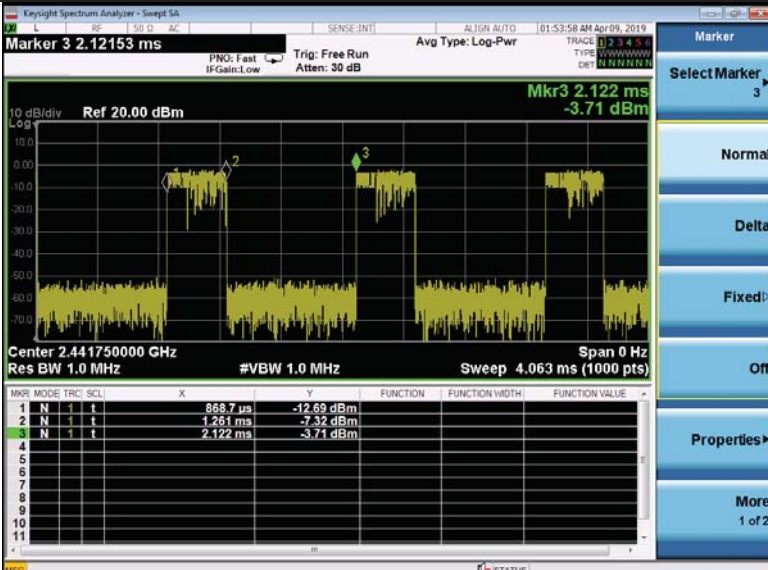
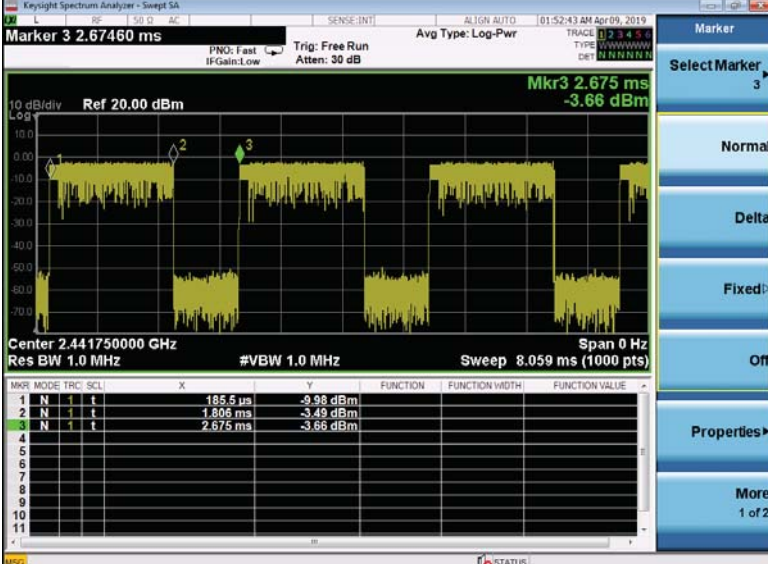
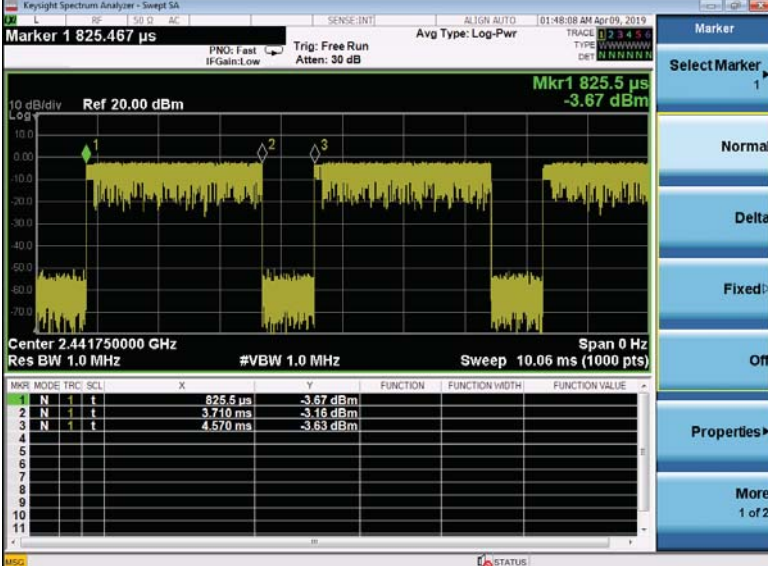
DH3/2DH3/3DH3 Dwell time = Burst Width (ms)*(1600/ (4*79))*31.6

DH5/2DH5/3DH5 Dwell time = Burst Width (ms)*(1600/ (6*79))*31.6

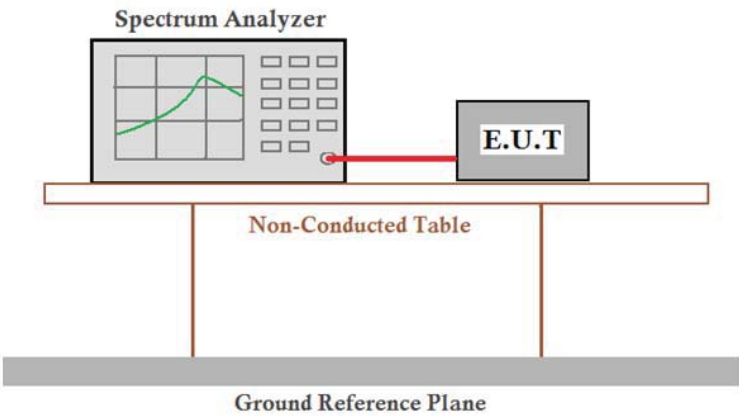
Test plot as follows:



$\pi/4$DQPSK _2DH1/MCH	 <table border="1"> <thead> <tr> <th>Marker</th> <th>Time</th> <th>Power</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>193.7 us</td> <td>-3.63 dBm</td> </tr> <tr> <td>2</td> <td>577.7 us</td> <td>-4.10 dBm</td> </tr> <tr> <td>3</td> <td>1.442 ms</td> <td>-12.38 dBm</td> </tr> </tbody> </table>	Marker	Time	Power	1	193.7 us	-3.63 dBm	2	577.7 us	-4.10 dBm	3	1.442 ms	-12.38 dBm	
Marker	Time	Power												
1	193.7 us	-3.63 dBm												
2	577.7 us	-4.10 dBm												
3	1.442 ms	-12.38 dBm												
$\pi/4$DQPSK _2DH3/MCH	 <table border="1"> <thead> <tr> <th>Marker</th> <th>Time</th> <th>Power</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>645.3 us</td> <td>-3.62 dBm</td> </tr> <tr> <td>2</td> <td>2.274 ms</td> <td>-3.11 dBm</td> </tr> <tr> <td>3</td> <td>3.151 ms</td> <td>-9.97 dBm</td> </tr> </tbody> </table>	Marker	Time	Power	1	645.3 us	-3.62 dBm	2	2.274 ms	-3.11 dBm	3	3.151 ms	-9.97 dBm	
Marker	Time	Power												
1	645.3 us	-3.62 dBm												
2	2.274 ms	-3.11 dBm												
3	3.151 ms	-9.97 dBm												
$\pi/4$DQPSK _2DH5/MCH	 <table border="1"> <thead> <tr> <th>Marker</th> <th>Time</th> <th>Power</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2.819 ms</td> <td>-3.67 dBm</td> </tr> <tr> <td>2</td> <td>5.699 ms</td> <td>-4.19 dBm</td> </tr> <tr> <td>3</td> <td>6.583 ms</td> <td>-12.48 dBm</td> </tr> </tbody> </table>	Marker	Time	Power	1	2.819 ms	-3.67 dBm	2	5.699 ms	-4.19 dBm	3	6.583 ms	-12.48 dBm	
Marker	Time	Power												
1	2.819 ms	-3.67 dBm												
2	5.699 ms	-4.19 dBm												
3	6.583 ms	-12.48 dBm												

8DPSK_3DH1/MCH	 Marker 3 2.12153 ms Ref 20.00 dBm Mkr3 2.122 ms -3.71 dBm Center 2.441750000 GHz Res BW 1.0 MHz #VBW 1.0 MHz Sweep 4.063 ms (1000 pts) <table><thead><tr><th>MRK</th><th>MODE</th><th>TRIG</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>t</td><td>868.7 μs</td><td>-12.69 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>t</td><td>1.261 ms</td><td>-7.32 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>t</td><td>2.122 ms</td><td>-3.71 dBm</td><td></td><td></td><td></td></tr></tbody></table>	MRK	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	t	868.7 μ s	-12.69 dBm				2	N	1	t	1.261 ms	-7.32 dBm				3	N	1	t	2.122 ms	-3.71 dBm			
MRK	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																													
1	N	1	t	868.7 μ s	-12.69 dBm																																
2	N	1	t	1.261 ms	-7.32 dBm																																
3	N	1	t	2.122 ms	-3.71 dBm																																
8DPSK_3DH3/MCH	 Marker 3 2.67460 ms Ref 20.00 dBm Mkr3 2.675 ms -3.66 dBm Center 2.441750000 GHz Res BW 1.0 MHz #VBW 1.0 MHz Sweep 8.059 ms (1000 pts) <table><thead><tr><th>MRK</th><th>MODE</th><th>TRIG</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>t</td><td>185.6 μs</td><td>-9.98 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>t</td><td>1.806 ms</td><td>-3.49 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>t</td><td>2.675 ms</td><td>-3.66 dBm</td><td></td><td></td><td></td></tr></tbody></table>	MRK	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	t	185.6 μ s	-9.98 dBm				2	N	1	t	1.806 ms	-3.49 dBm				3	N	1	t	2.675 ms	-3.66 dBm			
MRK	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																													
1	N	1	t	185.6 μ s	-9.98 dBm																																
2	N	1	t	1.806 ms	-3.49 dBm																																
3	N	1	t	2.675 ms	-3.66 dBm																																
8DPSK_3DH5/MCH	 Marker 1 825.467 μs Ref 20.00 dBm Mkr1 825.5 μs -3.67 dBm Center 2.441750000 GHz Res BW 1.0 MHz #VBW 1.0 MHz Sweep 10.06 ms (1000 pts) <table><thead><tr><th>MRK</th><th>MODE</th><th>TRIG</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>t</td><td>825.5 μs</td><td>-3.67 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>t</td><td>3.710 ms</td><td>-3.16 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>t</td><td>4.570 ms</td><td>-3.63 dBm</td><td></td><td></td><td></td></tr></tbody></table>	MRK	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	t	825.5 μ s	-3.67 dBm				2	N	1	t	3.710 ms	-3.16 dBm				3	N	1	t	4.570 ms	-3.63 dBm			
MRK	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																													
1	N	1	t	825.5 μ s	-3.67 dBm																																
2	N	1	t	3.710 ms	-3.16 dBm																																
3	N	1	t	4.570 ms	-3.63 dBm																																

5.8 Band-edge for RF Conducted Emissions

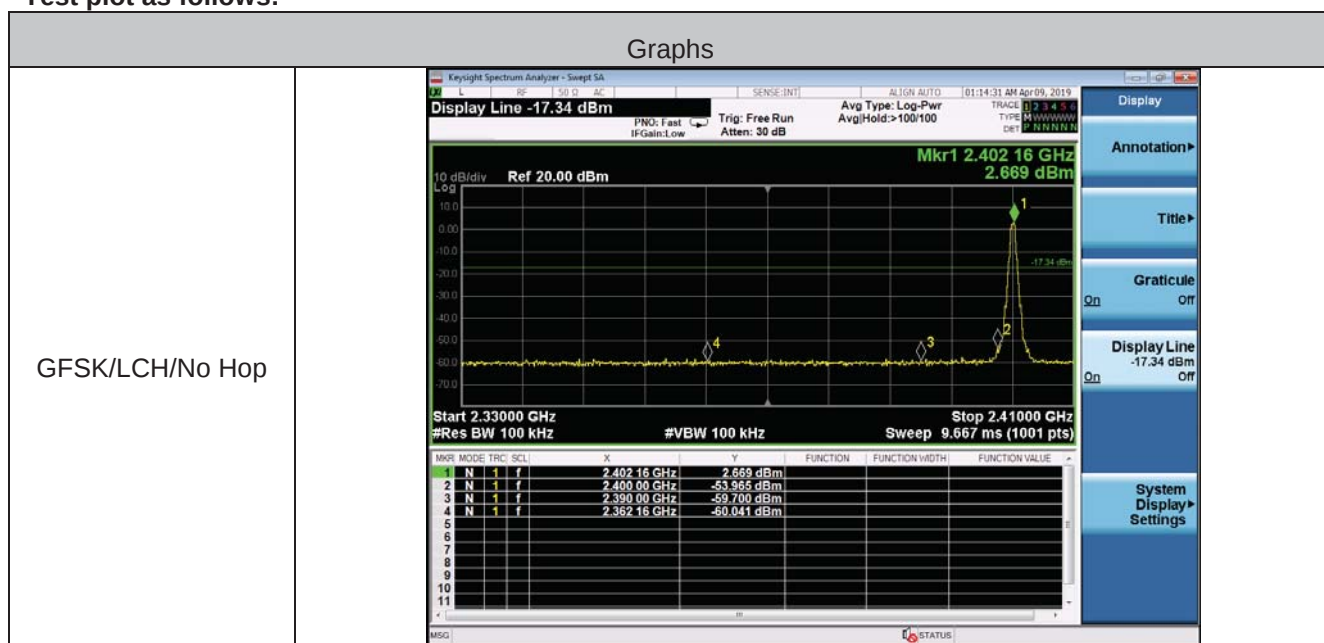
Test Requirement:	47 CFR Part 15C Section 15.247 (d)
Test Method:	ANSI C63.10:2013
Test Setup:	 Remark: Offset=cable loss+ attenuation factor.
Limit:	In any 100kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Exploratory Test Mode:	Hopping and Non-hopping transmitting with all kind of modulation and all kind of data type
Final Test Mode:	Through Pre-scan, find the DH5 of data type is the worst case of GFSK modulation type, 2-DH5 of data type is the worst case of $\pi/4$ DQPSK modulation type, 3-DH5 of data type is the worst case of 8DPSK modulation type. Only the worst case is recorded in the report.
Test Results:	Pass

Mode	Test Channel	Frequency [MHz]	Frequency Hopping	Emission Level [dBm]	Limit [dBm]	Result
GFSK	LCH	2390	Off	-59.70	-17.34	PASS
		2400	Off	-53.97	-17.34	PASS
		2390	On	-59.762	-17.55	PASS
		2400	On	-56.02	-17.55	PASS
GFSK	HCH	2483.5	Off	-58.93	-17.70	PASS
		2500	Off	-58.95	-17.70	PASS
		2483.5	On	-59.20	-17.34	PASS
		2500	On	-59.21	-17.34	PASS

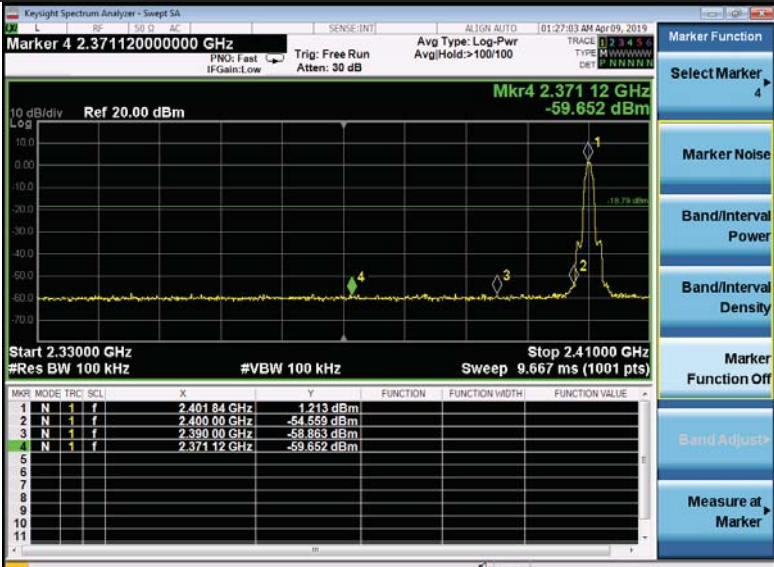
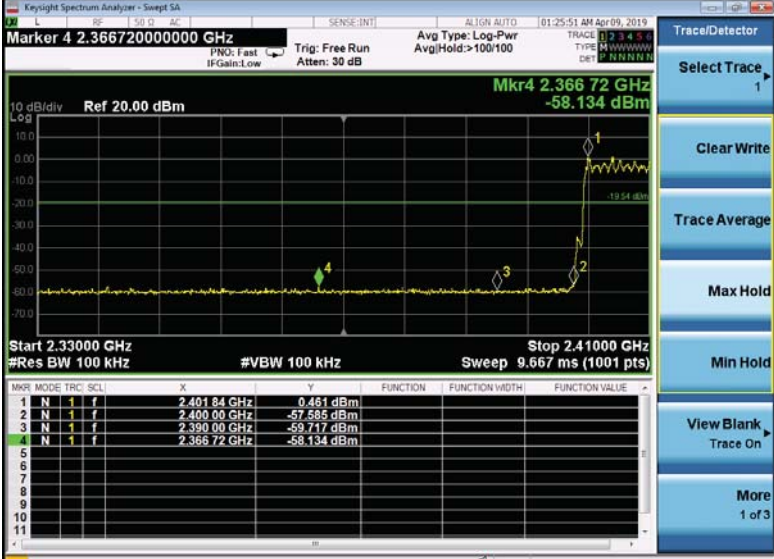
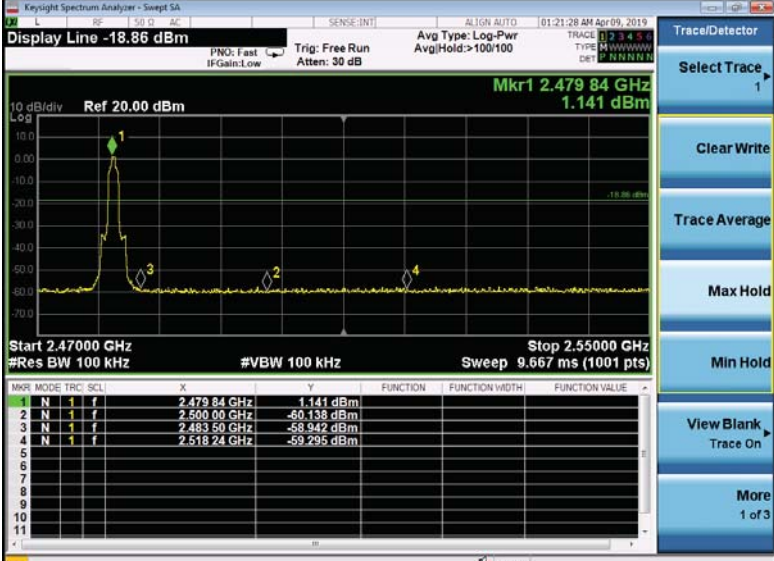
Mode	Test Channel	Frequency [MHz]	Frequency Hopping	Emission Level [dBm]	Limit [dBm]	Result
$\pi/4$ DQPSK	LCH	2390	Off	-58.86	-18.79	PASS
		2400	Off	-54.56	-18.79	PASS
		2390	On	-59.72	-19.54	PASS
		2400	On	-57.59	-19.54	PASS
$\pi/4$ DQPSK	HCH	2483.5	Off	-58.94	-18.86	PASS
		2500	Off	-60.14	-18.86	PASS
		2483.5	On	-59.19	-19.11	PASS
		2500	On	-59.49	-19.11	PASS

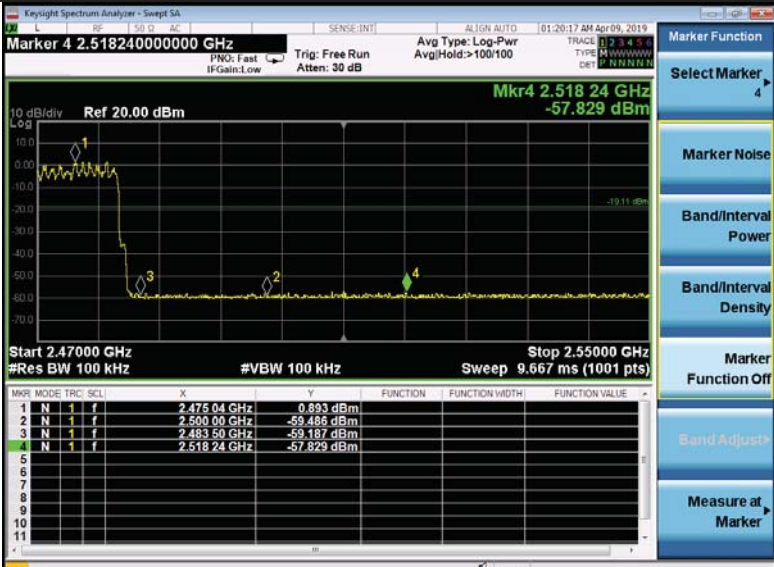
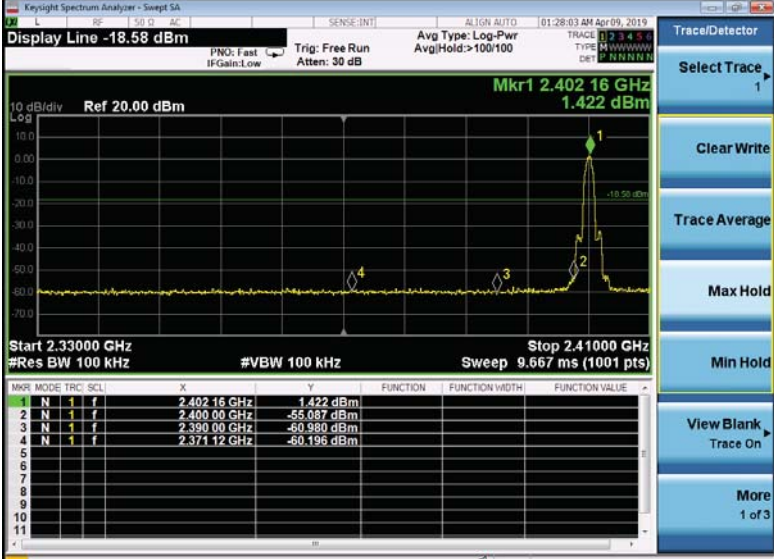
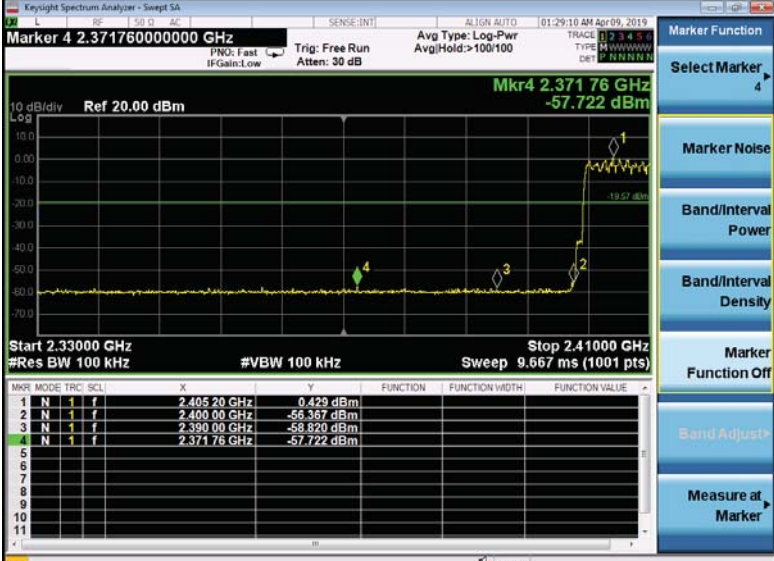
Mode	Test Channel	Frequency [MHz]	Frequency Hopping	Emission Level [dBm]	Limit [dBm]	Result
8DPSK	LCH	2390	Off	-60.98	-18.58	PASS
		2400	Off	-55.09	-18.58	PASS
		2390	On	-58.82	-19.57	PASS
		2400	On	-56.37	-19.57	PASS
8DPSK	HCH	2483.5	Off	-59.62	-19.96	PASS
		2500	Off	-59.58	-19.96	PASS
		2483.5	On	-58.51	-19.91	PASS
		2500	On	-58.95	-19.91	PASS

Test plot as follows:



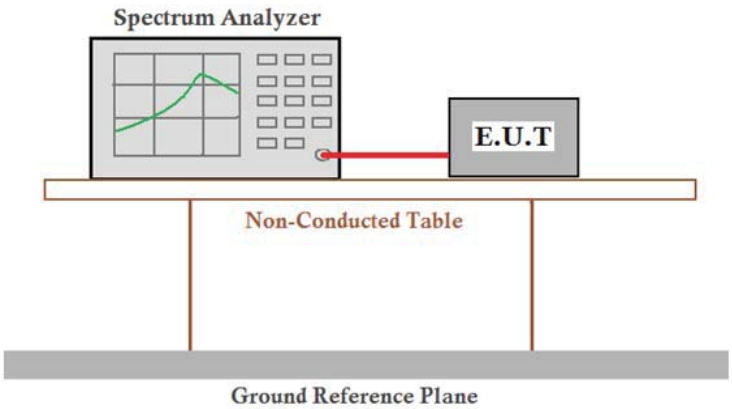
GFSK/LCH/Hop	Keysight Spectrum Analyzer - Swept SA Display Line -17.55 dBm Trig: Free Run Avg Type: Log-Pwr Atten: 30 dB Ref 20.00 dBm Mkr1 2.402 08 GHz 2.457 dBm Start 2.33000 GHz #Res BW 100 kHz #VBW 100 kHz Stop 2.41000 GHz Sweep 9.667 ms (1001 pts) <table><thead><tr><th>MNKR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.402 08 GHz</td><td>2.457 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.400 00 GHz</td><td>-55.021 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.390 00 GHz</td><td>-59.762 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.362 16 GHz</td><td>-60.293 dBm</td><td></td><td></td><td></td></tr></tbody></table> Display Annotation Title Graticule Display Line System Display Settings	MNKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.402 08 GHz	2.457 dBm				2	N	1	f	2.400 00 GHz	-55.021 dBm				3	N	1	f	2.390 00 GHz	-59.762 dBm				4	N	1	f	2.362 16 GHz	-60.293 dBm			
MNKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.402 08 GHz	2.457 dBm																																									
2	N	1	f	2.400 00 GHz	-55.021 dBm																																									
3	N	1	f	2.390 00 GHz	-59.762 dBm																																									
4	N	1	f	2.362 16 GHz	-60.293 dBm																																									
GFSK/HCH/No Hop	Keysight Spectrum Analyzer - Swept SA Marker 4 2.530000000000 GHz Trig: Free Run Avg Type: Log-Pwr Atten: 30 dB Ref 20.00 dBm Mkr4 2.530 00 GHz -58.758 dBm Start 2.47000 GHz #Res BW 100 kHz #VBW 100 kHz Stop 2.55000 GHz Sweep 9.667 ms (1001 pts) <table><thead><tr><th>MNKR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.479 92 GHz</td><td>2.321 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.500 00 GHz</td><td>-58.947 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.483 50 GHz</td><td>-58.929 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.530 00 GHz</td><td>-58.758 dBm</td><td></td><td></td><td></td></tr></tbody></table> Marker Function Select Marker Marker Noise Band/Interval Power Band/Interval Density Marker Function Off Band Adjust Measure at Marker	MNKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.479 92 GHz	2.321 dBm				2	N	1	f	2.500 00 GHz	-58.947 dBm				3	N	1	f	2.483 50 GHz	-58.929 dBm				4	N	1	f	2.530 00 GHz	-58.758 dBm			
MNKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.479 92 GHz	2.321 dBm																																									
2	N	1	f	2.500 00 GHz	-58.947 dBm																																									
3	N	1	f	2.483 50 GHz	-58.929 dBm																																									
4	N	1	f	2.530 00 GHz	-58.758 dBm																																									
GFSK/HCH/Hop	Keysight Spectrum Analyzer - Swept SA Marker 4 2.522400000000 GHz Trig: Free Run Avg Type: Log-Pwr Atten: 30 dB Ref 20.00 dBm Mkr4 2.522 40 GHz -58.104 dBm Start 2.47000 GHz #Res BW 100 kHz #VBW 100 kHz Stop 2.55000 GHz Sweep 9.667 ms (1001 pts) <table><thead><tr><th>MNKR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.476 00 GHz</td><td>2.665 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.500 00 GHz</td><td>-59.214 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.483 50 GHz</td><td>-59.197 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.522 40 GHz</td><td>-58.104 dBm</td><td></td><td></td><td></td></tr></tbody></table> Trace/Detector Select Trace Clear Write Trace Average Max Hold Min Hold View Blank Trace On More	MNKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.476 00 GHz	2.665 dBm				2	N	1	f	2.500 00 GHz	-59.214 dBm				3	N	1	f	2.483 50 GHz	-59.197 dBm				4	N	1	f	2.522 40 GHz	-58.104 dBm			
MNKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.476 00 GHz	2.665 dBm																																									
2	N	1	f	2.500 00 GHz	-59.214 dBm																																									
3	N	1	f	2.483 50 GHz	-59.197 dBm																																									
4	N	1	f	2.522 40 GHz	-58.104 dBm																																									

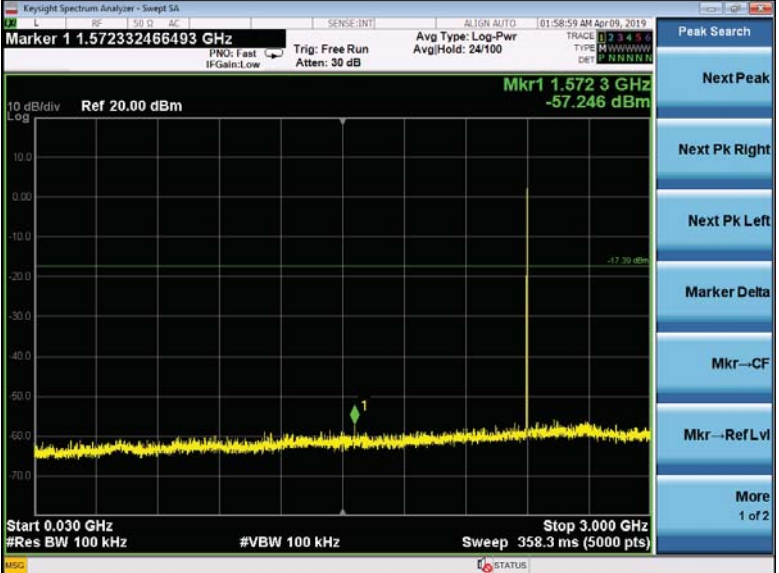
$\pi/4$ DQPSK/LCH/No Hop	 Marker 4 2.371120000000 GHz Mkr4 2.371 12 GHz -59.652 dBm Start 2.33000 GHz #Res BW 100 kHz Stop 2.41000 GHz #VBW 100 kHz Sweep 9.667 ms (1001 pts) <table><tr><th>Mkr</th><th>Mode</th><th>Trc</th><th>SCL</th><th>X</th><th>Y</th><th>Function</th><th>Function Width</th><th>Function Value</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.401 84 GHz</td><td>1.213 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.400 00 GHz</td><td>-54.559 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.390 00 GHz</td><td>-58.863 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.371 12 GHz</td><td>-59.652 dBm</td><td></td><td></td><td></td></tr></table>	Mkr	Mode	Trc	SCL	X	Y	Function	Function Width	Function Value	1	N	1	f	2.401 84 GHz	1.213 dBm				2	N	1	f	2.400 00 GHz	-54.559 dBm				3	N	1	f	2.390 00 GHz	-58.863 dBm				4	N	1	f	2.371 12 GHz	-59.652 dBm			
Mkr	Mode	Trc	SCL	X	Y	Function	Function Width	Function Value																																						
1	N	1	f	2.401 84 GHz	1.213 dBm																																									
2	N	1	f	2.400 00 GHz	-54.559 dBm																																									
3	N	1	f	2.390 00 GHz	-58.863 dBm																																									
4	N	1	f	2.371 12 GHz	-59.652 dBm																																									
$\pi/4$ DQPSK/LCH/Hop	 Marker 4 2.366720000000 GHz Mkr4 2.366 72 GHz -58.134 dBm Start 2.33000 GHz #Res BW 100 kHz Stop 2.41000 GHz #VBW 100 kHz Sweep 9.667 ms (1001 pts) <table><tr><th>Mkr</th><th>Mode</th><th>Trc</th><th>SCL</th><th>X</th><th>Y</th><th>Function</th><th>Function Width</th><th>Function Value</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.401 84 GHz</td><td>0.461 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.400 00 GHz</td><td>-57.585 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.390 00 GHz</td><td>-59.717 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.366 72 GHz</td><td>-58.134 dBm</td><td></td><td></td><td></td></tr></table>	Mkr	Mode	Trc	SCL	X	Y	Function	Function Width	Function Value	1	N	1	f	2.401 84 GHz	0.461 dBm				2	N	1	f	2.400 00 GHz	-57.585 dBm				3	N	1	f	2.390 00 GHz	-59.717 dBm				4	N	1	f	2.366 72 GHz	-58.134 dBm			
Mkr	Mode	Trc	SCL	X	Y	Function	Function Width	Function Value																																						
1	N	1	f	2.401 84 GHz	0.461 dBm																																									
2	N	1	f	2.400 00 GHz	-57.585 dBm																																									
3	N	1	f	2.390 00 GHz	-59.717 dBm																																									
4	N	1	f	2.366 72 GHz	-58.134 dBm																																									
$\pi/4$ DQPSK/HCH/No Hop	 Display Line -18.86 dBm Mkr1 2.479 84 GHz 1.141 dBm Start 2.47000 GHz #Res BW 100 kHz Stop 2.55000 GHz #VBW 100 kHz Sweep 9.667 ms (1001 pts) <table><tr><th>Mkr</th><th>Mode</th><th>Trc</th><th>SCL</th><th>X</th><th>Y</th><th>Function</th><th>Function Width</th><th>Function Value</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.479 84 GHz</td><td>1.141 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.500 00 GHz</td><td>-60.138 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.483 50 GHz</td><td>-58.942 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.518 24 GHz</td><td>-59.295 dBm</td><td></td><td></td><td></td></tr></table>	Mkr	Mode	Trc	SCL	X	Y	Function	Function Width	Function Value	1	N	1	f	2.479 84 GHz	1.141 dBm				2	N	1	f	2.500 00 GHz	-60.138 dBm				3	N	1	f	2.483 50 GHz	-58.942 dBm				4	N	1	f	2.518 24 GHz	-59.295 dBm			
Mkr	Mode	Trc	SCL	X	Y	Function	Function Width	Function Value																																						
1	N	1	f	2.479 84 GHz	1.141 dBm																																									
2	N	1	f	2.500 00 GHz	-60.138 dBm																																									
3	N	1	f	2.483 50 GHz	-58.942 dBm																																									
4	N	1	f	2.518 24 GHz	-59.295 dBm																																									

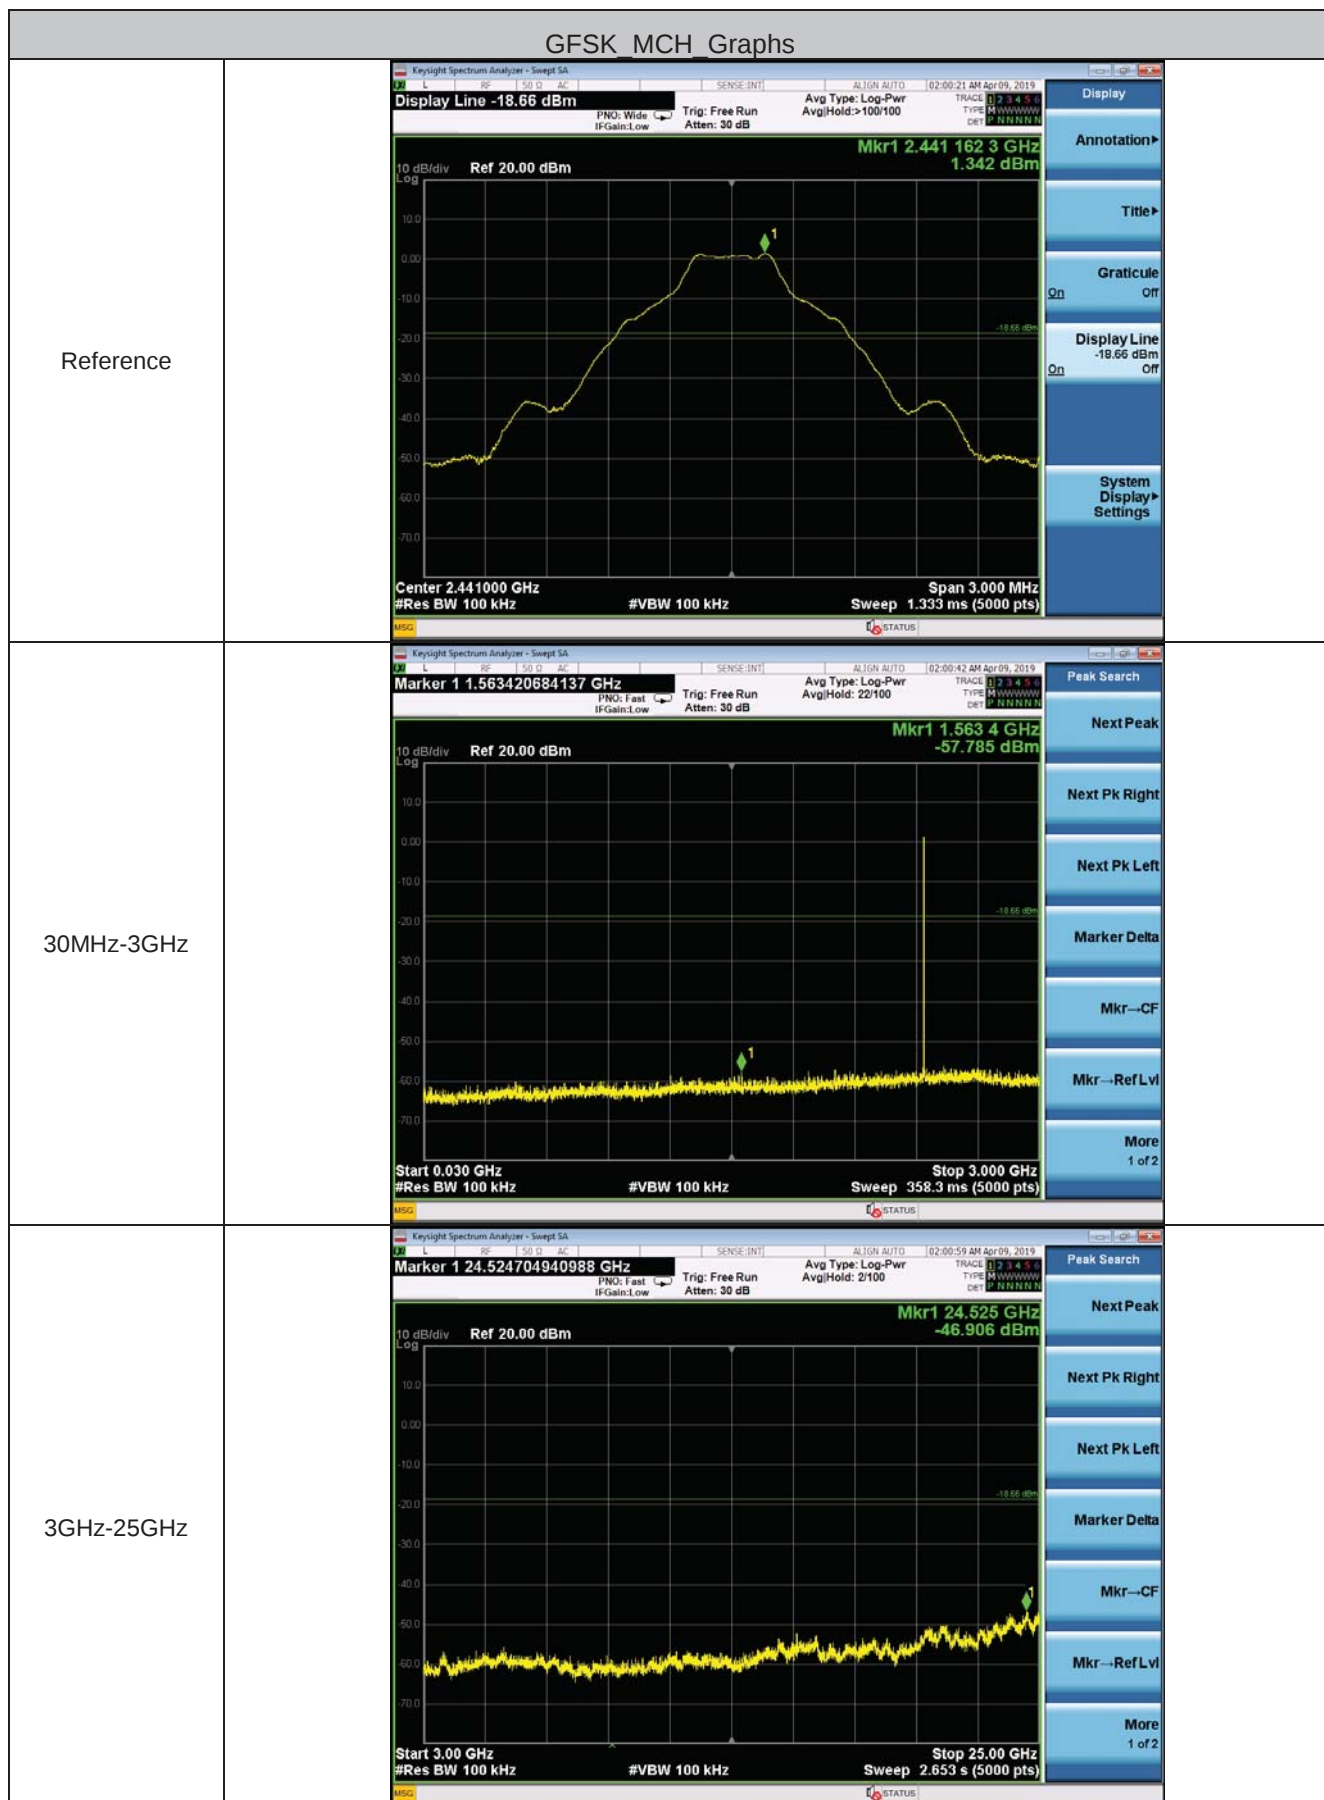
$\pi/4$ DQPSK/HCH/Hop	 Marker 4 2.51824000000 GHz Trig: Free Run Avg Type: Log-Pwr Avg/Hold: >100/100 Ref 20.00 dBm Mkr4 2.518 24 GHz -57.829 dBm Start 2.47000 GHz #Res BW 100 kHz #VBW 100 kHz Sweep 9.667 ms (1001 pts) <table><tr><th>MARKER</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.475 04 GHz</td><td>0.893 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.500 00 GHz</td><td>-59.486 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.483 50 GHz</td><td>-59.187 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.518 24 GHz</td><td>-57.829 dBm</td><td></td><td></td><td></td></tr></table>	MARKER	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.475 04 GHz	0.893 dBm				2	N	1	f	2.500 00 GHz	-59.486 dBm				3	N	1	f	2.483 50 GHz	-59.187 dBm				4	N	1	f	2.518 24 GHz	-57.829 dBm			
MARKER	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.475 04 GHz	0.893 dBm																																									
2	N	1	f	2.500 00 GHz	-59.486 dBm																																									
3	N	1	f	2.483 50 GHz	-59.187 dBm																																									
4	N	1	f	2.518 24 GHz	-57.829 dBm																																									
8DPSK/LCH/No Hop	 Display Line -18.58 dBm Trig: Free Run Avg Type: Log-Pwr Avg/Hold: >100/100 Ref 20.00 dBm Mkr1 2.402 16 GHz 1.422 dBm Start 2.33000 GHz #Res BW 100 kHz #VBW 100 kHz Sweep 9.667 ms (1001 pts) <table><tr><th>MARKER</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.402 16 GHz</td><td>1.422 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.400 00 GHz</td><td>-55.087 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.390 00 GHz</td><td>-60.980 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.371 12 GHz</td><td>-60.196 dBm</td><td></td><td></td><td></td></tr></table>	MARKER	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.402 16 GHz	1.422 dBm				2	N	1	f	2.400 00 GHz	-55.087 dBm				3	N	1	f	2.390 00 GHz	-60.980 dBm				4	N	1	f	2.371 12 GHz	-60.196 dBm			
MARKER	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.402 16 GHz	1.422 dBm																																									
2	N	1	f	2.400 00 GHz	-55.087 dBm																																									
3	N	1	f	2.390 00 GHz	-60.980 dBm																																									
4	N	1	f	2.371 12 GHz	-60.196 dBm																																									
8DPSK/LCH/Hop	 Marker 4 2.37176000000 GHz Trig: Free Run Avg Type: Log-Pwr Avg/Hold: >100/100 Ref 20.00 dBm Mkr4 2.371 76 GHz -57.722 dBm Start 2.33000 GHz #Res BW 100 kHz #VBW 100 kHz Sweep 9.667 ms (1001 pts) <table><tr><th>MARKER</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.405 20 GHz</td><td>0.429 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.400 00 GHz</td><td>-55.367 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.390 00 GHz</td><td>-58.820 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.371 76 GHz</td><td>-57.722 dBm</td><td></td><td></td><td></td></tr></table>	MARKER	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.405 20 GHz	0.429 dBm				2	N	1	f	2.400 00 GHz	-55.367 dBm				3	N	1	f	2.390 00 GHz	-58.820 dBm				4	N	1	f	2.371 76 GHz	-57.722 dBm			
MARKER	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.405 20 GHz	0.429 dBm																																									
2	N	1	f	2.400 00 GHz	-55.367 dBm																																									
3	N	1	f	2.390 00 GHz	-58.820 dBm																																									
4	N	1	f	2.371 76 GHz	-57.722 dBm																																									

8DPSK/HCH/No Hop	Keysight Spectrum Analyzer - Swept SA Display Line -19.96 dBm Trig: Free Run Atten: 30 dB Avg Type: Log-Pwr Avg/Hold: >100/100 01:23:19 AM Apr 09, 2019 Trace 1 4 5 6 TYPE: WWWWWW DET: PNNNNN 10 dB/div Log Ref 20.00 dBm Mkr1 2.480 08 GHz 1.046 dBm -19.96 dBm Start 2.47000 GHz #Res BW 100 kHz #VBW 100 kHz Stop 2.55000 GHz Sweep 9.667 ms (1001 pts) <table><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SC1</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.480 08 GHz</td><td>1.046 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.500 00 GHz</td><td>-59.582 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.483 50 GHz</td><td>-59.623 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.518 24 GHz</td><td>-59.496 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>6</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>7</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>8</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>9</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>10</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>11</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table> MSO STATUS Trace/Detector Select Trace 1 Clear Write Trace Average Max Hold Min Hold View Blank Trace On More 1 of 3	MNR	MODE	TRC	SC1	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.480 08 GHz	1.046 dBm				2	N	1	f	2.500 00 GHz	-59.582 dBm				3	N	1	f	2.483 50 GHz	-59.623 dBm				4	N	1	f	2.518 24 GHz	-59.496 dBm				5									6									7									8									9									10									11								
MNR	MODE	TRC	SC1	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																																																																					
1	N	1	f	2.480 08 GHz	1.046 dBm																																																																																																								
2	N	1	f	2.500 00 GHz	-59.582 dBm																																																																																																								
3	N	1	f	2.483 50 GHz	-59.623 dBm																																																																																																								
4	N	1	f	2.518 24 GHz	-59.496 dBm																																																																																																								
5																																																																																																													
6																																																																																																													
7																																																																																																													
8																																																																																																													
9																																																																																																													
10																																																																																																													
11																																																																																																													
8DPSK/HCH/Hop	Keysight Spectrum Analyzer - Swept SA Marker 4 2.5189600000000 GHz Trig: Free Run Atten: 30 dB Avg Type: Log-Pwr Avg/Hold: >100/100 01:24:23 AM Apr 09, 2019 Trace 1 4 5 6 TYPE: WWWWWW DET: PNNNNN 10 dB/div Log Ref 20.00 dBm Mkr4 2.518 96 GHz -58.124 dBm -19.96 dBm Start 2.47000 GHz #Res BW 100 kHz #VBW 100 kHz Stop 2.55000 GHz Sweep 9.667 ms (1001 pts) <table><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SC1</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.480 16 GHz</td><td>1.093 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.500 00 GHz</td><td>-59.945 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.483 50 GHz</td><td>-59.513 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.518 96 GHz</td><td>-58.124 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>6</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>7</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>8</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>9</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>10</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>11</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table> MSO STATUS Trace/Detector Select Trace 1 Clear Write Trace Average Max Hold Min Hold View Blank Trace On More 1 of 3	MNR	MODE	TRC	SC1	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.480 16 GHz	1.093 dBm				2	N	1	f	2.500 00 GHz	-59.945 dBm				3	N	1	f	2.483 50 GHz	-59.513 dBm				4	N	1	f	2.518 96 GHz	-58.124 dBm				5									6									7									8									9									10									11								
MNR	MODE	TRC	SC1	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																																																																					
1	N	1	f	2.480 16 GHz	1.093 dBm																																																																																																								
2	N	1	f	2.500 00 GHz	-59.945 dBm																																																																																																								
3	N	1	f	2.483 50 GHz	-59.513 dBm																																																																																																								
4	N	1	f	2.518 96 GHz	-58.124 dBm																																																																																																								
5																																																																																																													
6																																																																																																													
7																																																																																																													
8																																																																																																													
9																																																																																																													
10																																																																																																													
11																																																																																																													

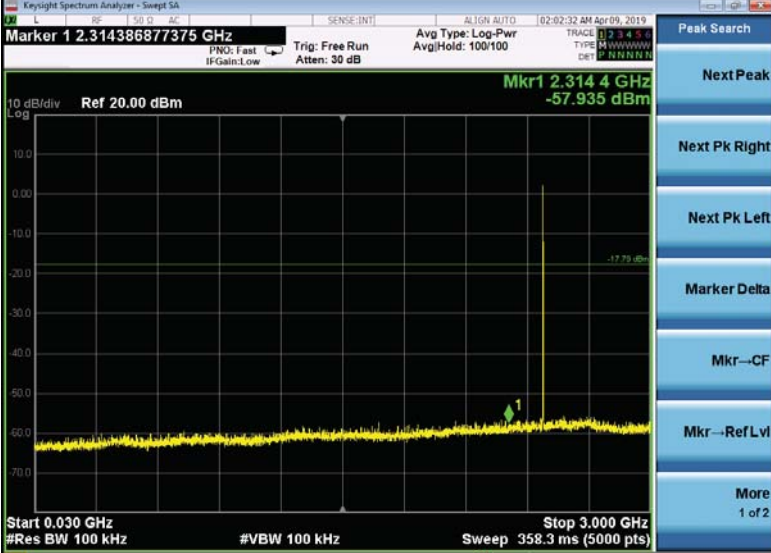
5.9 Spurious RF Conducted Emissions

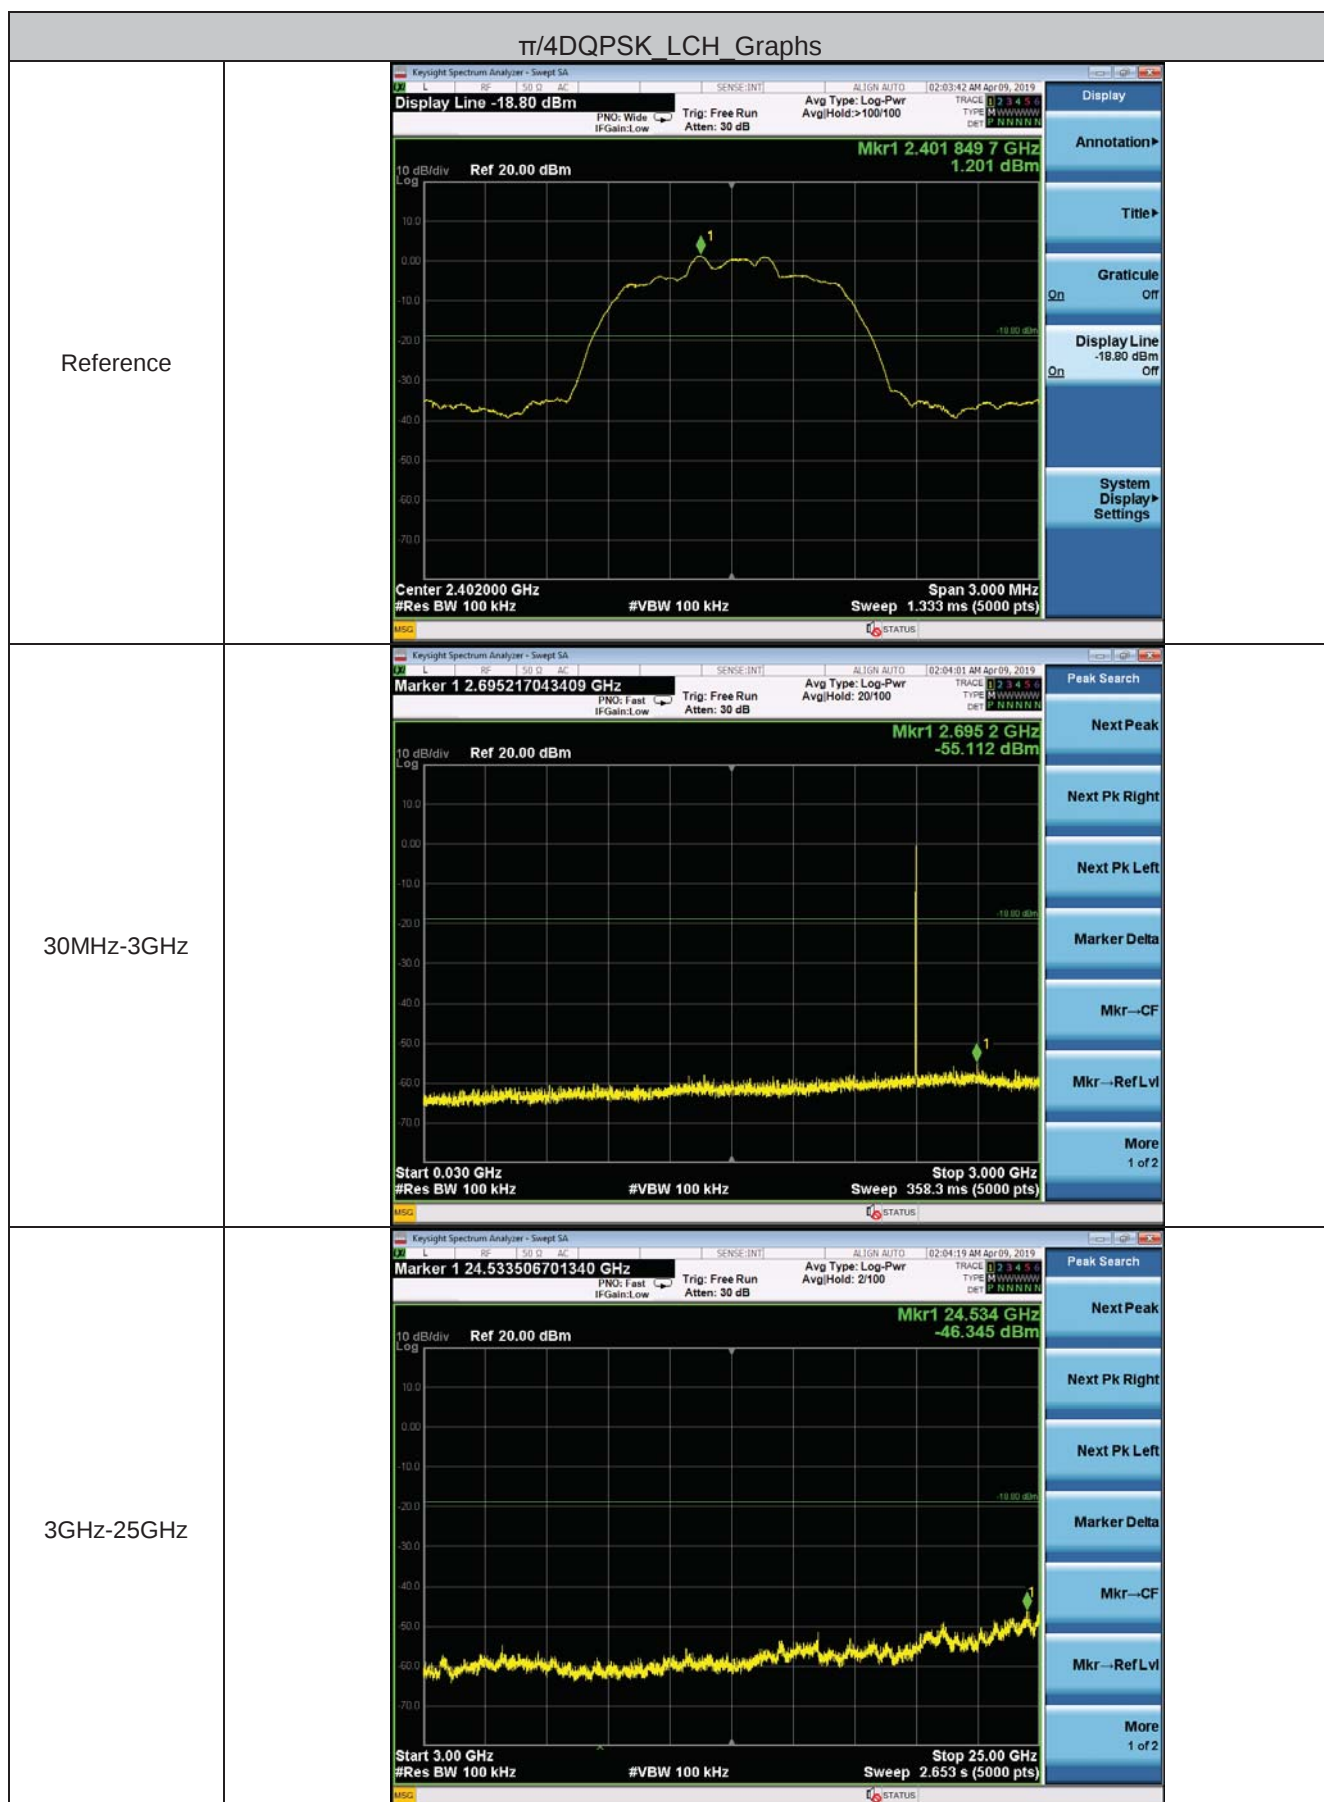
Test Requirement:	47 CFR Part 15C Section 15.247 (d)
Test Method:	ANSI C63.10:2013
Test Setup:	 Remark: Offset=cable loss+ attenuation factor.
Limit:	In any 100kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Exploratory Test Mode:	Non-hopping transmitting with all kind of modulation and all kind of data type
Final Test Mode:	Through Pre-scan, find the DH5 of data type is the worst case of GFSK modulation type, 2-DH5 of data type is the worst case of $\pi/4$ DQPSK modulation type, 3-DH5 of data type is the worst case of 8DPSK modulation type.
Test Results:	Pass

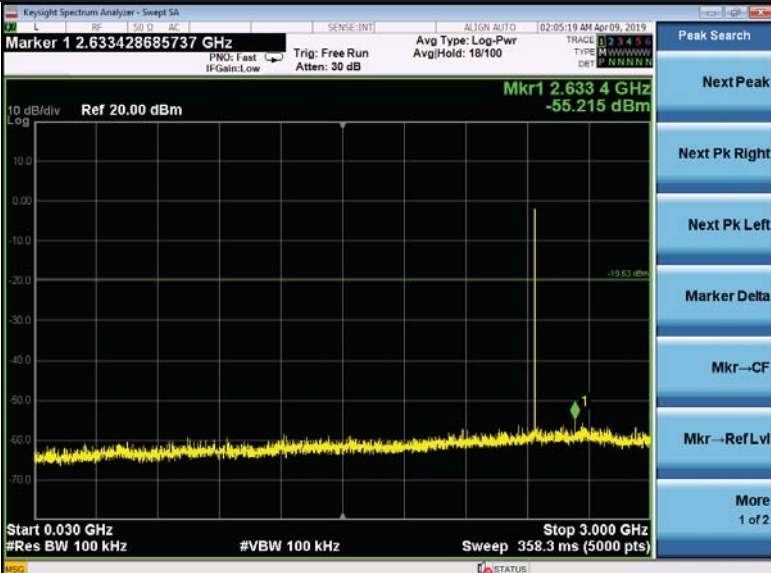
GFSK LCH Graphs		
Reference		 KeySight Spectrum Analyzer - Sweep SA Display Line -17.39 dBm PN0: Wide IFGain: Low Trig: Free Run Atten: 30 dB Avg Type: Log-Pwr Avg/Hold: >100/100 Trce 1 2 3 4 5 6 TYPE M W W W W W W W DET P N N N N N 10 dB/div Ref 20.00 dBm Mkr1 2.4021719 GHz 2.614 dBm Center 2.402000 GHz #Res BW 100 kHz #VBW 100 kHz Span 3.000 MHz Sweep 1.333 ms (5000 pts) MSGS STATUS Display Annotation Title Graticule Q0 Off Display Line -17.39 dBm On System Display Settings
30MHz-3GHz		 KeySight Spectrum Analyzer - Sweep SA Marker 1 1.57232466493 GHz PN0: Fast IFGain: Low Trig: Free Run Atten: 30 dB Avg Type: Log-Pwr Avg/Hold: 24/100 Trce 1 2 3 4 5 6 TYPE M W W W W W W W DET P N N N N N 10 dB/div Ref 20.00 dBm Mkr1 1.5723 GHz -57.246 dBm Start 0.030 GHz #Res BW 100 kHz #VBW 100 kHz Stop 3.000 GHz Sweep 358.3 ms (5000 pts) MSGS STATUS Peak Search Next Peak Next Pk Right Next Pk Left Marker Delta Mkr--CF Mkr--Ref Lvl More 1 of 2
3GHz-25GHz		 KeySight Spectrum Analyzer - Sweep SA Marker 1 24.436687337468 GHz PN0: Fast IFGain: Low Trig: Free Run Atten: 30 dB Avg Type: Log-Pwr Avg/Hold: 3/100 Trce 1 2 3 4 5 6 TYPE M W W W W W W W DET P N N N N N 10 dB/div Ref 20.00 dBm Mkr1 24.437 GHz -46.155 dBm Start 3.00 GHz #Res BW 100 kHz #VBW 100 kHz Stop 25.00 GHz Sweep 2.653 s (5000 pts) MSGS STATUS Peak Search Next Peak Next Pk Right Next Pk Left Marker Delta Mkr--CF Mkr--Ref Lvl More 1 of 2

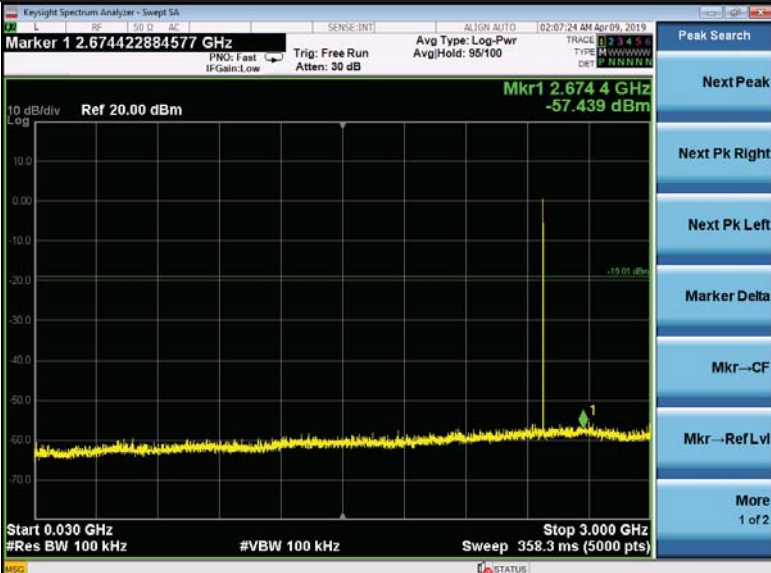


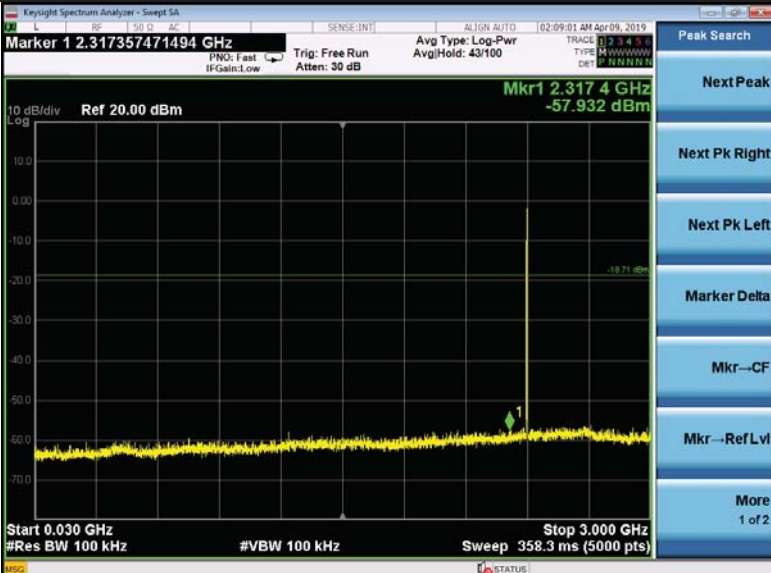
GFSK HCH Graphs

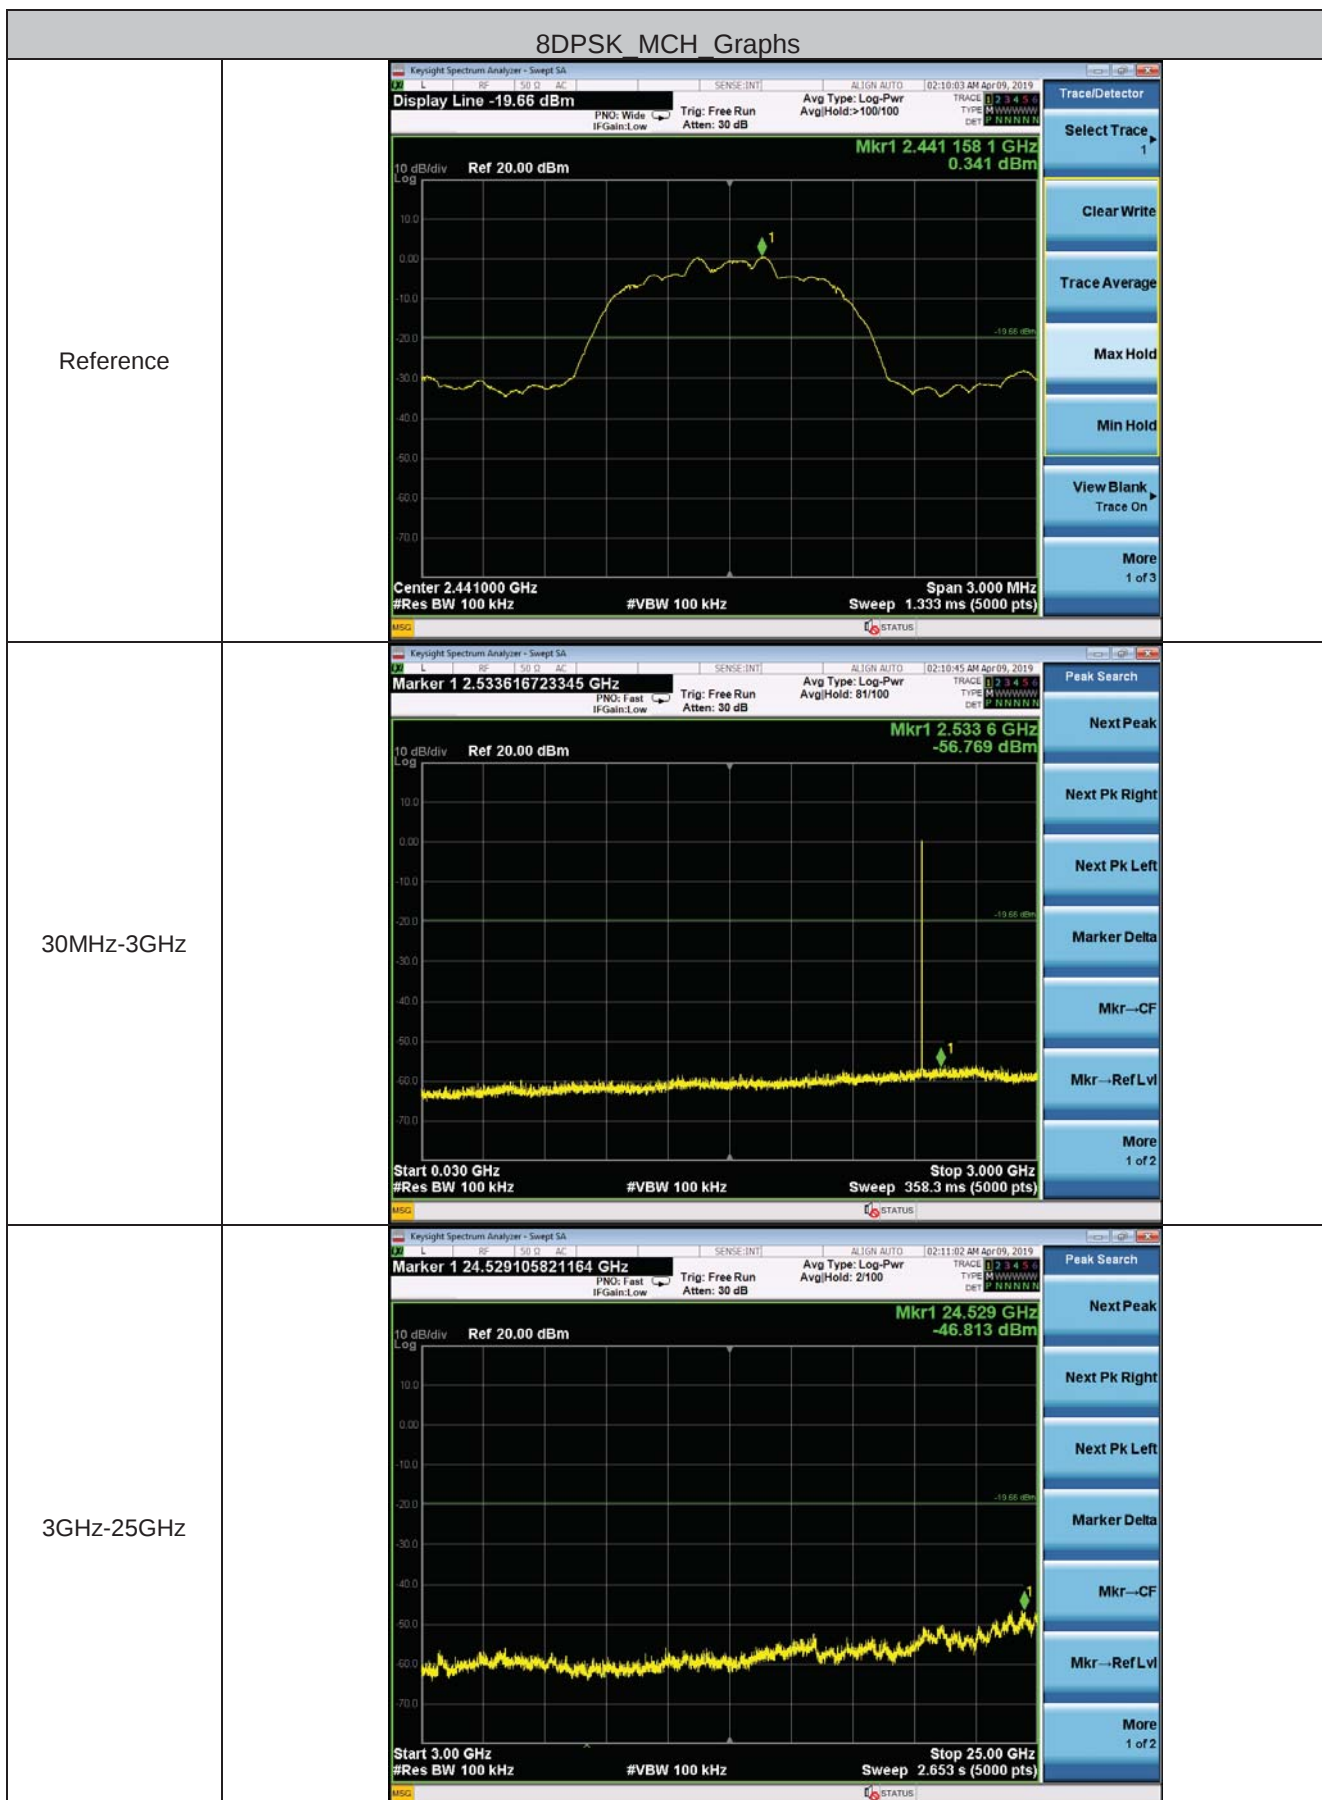
Reference	 KeySight Spectrum Analyzer - Swept SA Display Line -17.79 dBm Trig: Free Run Avg Type: Log-Pwr Mkr1 2.479 834 7 GHz 2.210 dBm Ref 20.00 dBm Center 2.480000 GHz Span 3.000 MHz #Res BW 100 kHz #VBW 100 kHz Sweep 1.333 ms (5000 pts) Trace/Detector Select Trace 1 Clear Write Trace Average Max Hold Min Hold View Blank Trace On More 1 of 3
30MHz-3GHz	 KeySight Spectrum Analyzer - Swept SA Marker 1 2.314386877375 GHz Trig: Free Run Avg Type: Log-Pwr Mkr1 2.314 4 GHz -57.935 dBm Ref 20.00 dBm Start 0.030 GHz Stop 3.000 GHz #Res BW 100 kHz #VBW 100 kHz Sweep 358.3 ms (5000 pts) Peak Search Next Peak Next Pk Right Next Pk Left Marker Delta Mkr→CF Mkr→Ref Lvl More 1 of 2
3GHz-25GHz	 KeySight Spectrum Analyzer - Swept SA Marker 1 24.590718143629 GHz Trig: Free Run Avg Type: Log-Pwr Mkr1 24.591 GHz -47.645 dBm Ref 20.00 dBm Start 3.000 GHz Stop 25.000 GHz #Res BW 100 kHz #VBW 100 kHz Sweep 2.653 s (5000 pts) Peak Search Next Peak Next Pk Right Next Pk Left Marker Delta Mkr→CF Mkr→Ref Lvl More 1 of 2

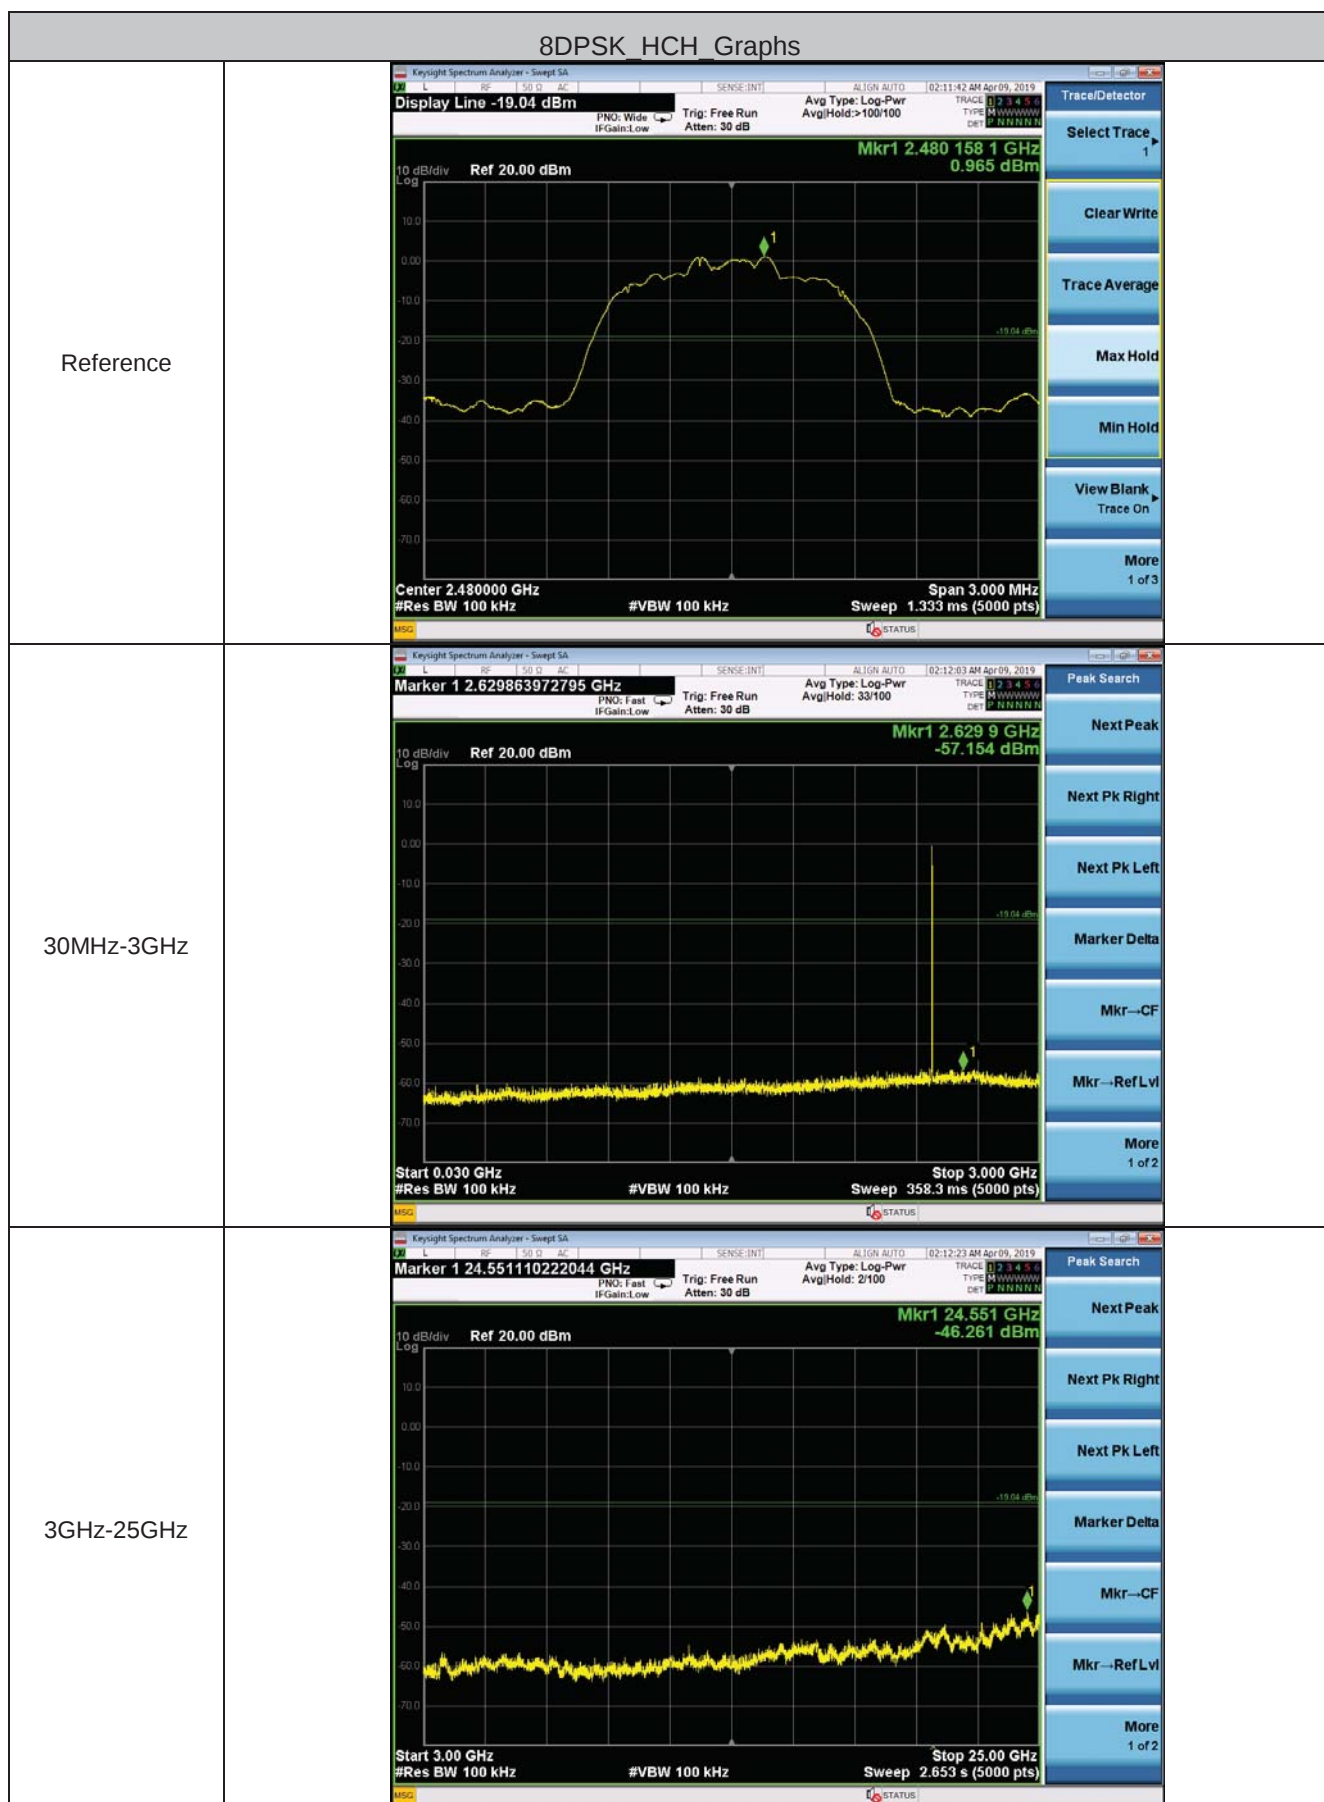


$\pi/4$ DQPSK MCH Graphs		
Reference		 KeySight Spectrum Analyzer - Swept SA Display Line -19.63 dBm PNO: Wide IF Gain: Low Trig: Free Run Atten: 30 dB Align: AUTO 02:05:01 AM Apr 09, 2019 Avg Type: Log-Pwr Avg/Hold: >100/100 TRACE 1 2 3 4 5 6 TYPE M W W W W W DET P N N N N N 10 dB/div Ref 20.00 dBm Log Mkr1 2.440 846 1 GHz 0.376 dBm -19.63 dBm Center 2.441000 GHz #Res BW 100 kHz #VBW 100 kHz Sweep 1.333 ms (5000 pts) Trace/Detector Select Trace 1 Clear Write Trace Average Max Hold Min Hold View Blank Trace On More 1 of 3
30MHz-3GHz		 KeySight Spectrum Analyzer - Swept SA Marker 1 2.633428685737 GHz PNO: Fast IF Gain: Low Trig: Free Run Atten: 30 dB Align: AUTO 02:05:19 AM Apr 09, 2019 Avg Type: Log-Pwr Avg/Hold: 18/100 TRACE 1 2 3 4 5 6 TYPE M W W W W W DET P N N N N N 10 dB/div Ref 20.00 dBm Log Mkr1 2.633 4 GHz -55.215 dBm -19.63 dBm Start 0.030 GHz #Res BW 100 kHz #VBW 100 kHz Sweep 358.3 ms (5000 pts) Peak Search Next Peak Next Pk Right Next Pk Left Marker Delta Mkr→CF Mkr→Ref Lvl More 1 of 2
3GHz-25GHz		 KeySight Spectrum Analyzer - Swept SA Marker 1 24.493898779756 GHz PNO: Fast IF Gain: Low Trig: Free Run Atten: 30 dB Align: AUTO 02:05:47 AM Apr 09, 2019 Avg Type: Log-Pwr Avg/Hold: 5/100 TRACE 1 2 3 4 5 6 TYPE M W W W W W DET P N N N N N 10 dB/div Ref 20.00 dBm Log Mkr1 24.494 GHz -45.449 dBm -19.63 dBm Start 3.00 GHz #Res BW 100 kHz #VBW 100 kHz Sweep 2.653 s (5000 pts) Peak Search Next Peak Next Pk Right Next Pk Left Marker Delta Mkr→CF Mkr→Ref Lvl More 1 of 2

$\pi/4$ DQPSK HCH Graphs		
Reference		
30MHz-3GHz		
3GHz-25GHz		

8DPSK LCH Graphs		
Reference		 Key features of the Reference graph: - Display Line: -18.71 dBm - Center: 2.402000 GHz - Span: 3.000 MHz - Marker 1: 2.4021611 GHz, 1.291 dBm - Ref: 20.00 dBm
30MHz-3GHz		 Key features of the 30MHz-3GHz graph: - Marker 1: 2.3174 GHz, -57.932 dBm - Start: 0.030 GHz - Stop: 3.000 GHz - Ref: 20.00 dBm
3GHz-25GHz		 Key features of the 3GHz-25GHz graph: - Marker 1: 24.498 GHz, -46.248 dBm - Start: 3.00 GHz - Stop: 25.00 GHz - Ref: 20.00 dBm





Remark:

Pre test 9kHz to 25GHz, find the highest point when testing, so only the worst data were shown in the test report. Per FCC Part 15.33 (a) and 15.31 (o) ,The amplitude of spurious emissions from intentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.

5.10 Other requirements Frequency Hopping Spread Spectrum System

Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1), (h) requirement:
	The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals. Frequency hopping spread spectrum systems are not required to employ all available hopping channels during each transmission. However, the system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this section should the transmitter be presented with a continuous data (or information) stream. In addition, a system employing short transmission bursts must comply with the definition of a frequency hopping system and must distribute its transmissions over the minimum number of hopping channels specified in this section. The incorporation of intelligence within a frequency hopping spread spectrum system that permits the system to recognize other users within the spectrum band so that it individually and independently chooses and adapts its hopsets to avoid hopping on occupied channels is permitted. The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.
	Compliance for section 15.247(a)(1)
	According to Bluetooth Core Specification, the pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONES; i.e. the shift register is initialized with nine ones. • Number of shift register stages: 9 • Length of pseudo-random sequence: $2^9 - 1 = 511$ bits • Longest sequence of zeros: 8 (non-inverted signal) <i>Linear Feedback Shift Register for Generation of the PRBS sequence</i> An example of Pseudorandom Frequency Hopping Sequence as follow: Each frequency used equally on the average by each transmitter. According to Bluetooth Core Specification, Bluetooth receivers are designed to have input and IF bandwidths that match the hopping channel bandwidths of any Bluetooth transmitters and shift frequencies in synchronization with the transmitted signals.
	Compliance for section 15.247(g)
	According to Bluetooth Core Specification, the Bluetooth system transmits the packet with the pseudorandom hopping frequency with a continuous data and the short burst transmission from the Bluetooth system is also transmitted under the frequency hopping system with the pseudorandom hopping frequency system.

Compliance for section 15.247(h)

According to Bluetooth Core specification, the Bluetooth system incorporates with an adaptive system to detect other user within the spectrum band so that it individually and independently to avoid hopping on the occupied channels.

According to the Bluetooth Core specification, the Bluetooth system is designed not have the ability to coordinated with other FHSS System in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitter.

5.11 Radiated Spurious Emission & Restricted bands

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205				
Test Method:	ANSI C63.10: 2013				
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)				
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Peak	100 kHz	300kHz	Peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average
Limit:	Frequency	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3
Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.					

Test Setup:

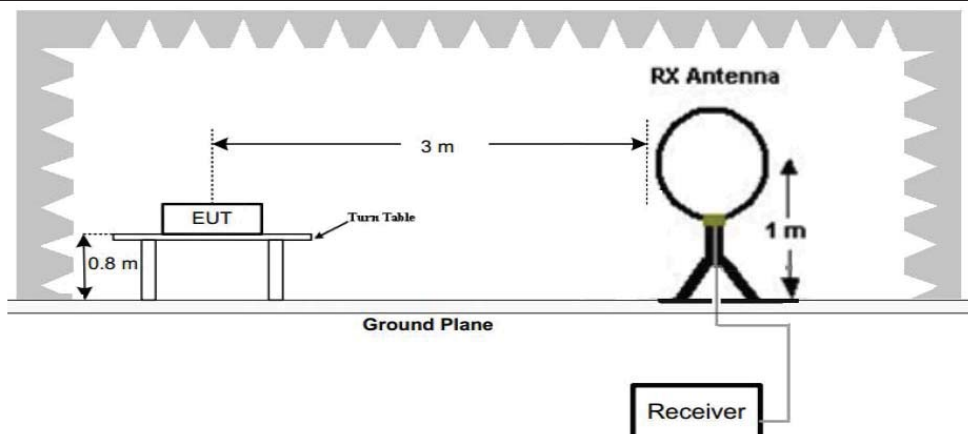


Figure 1. Below 30MHz

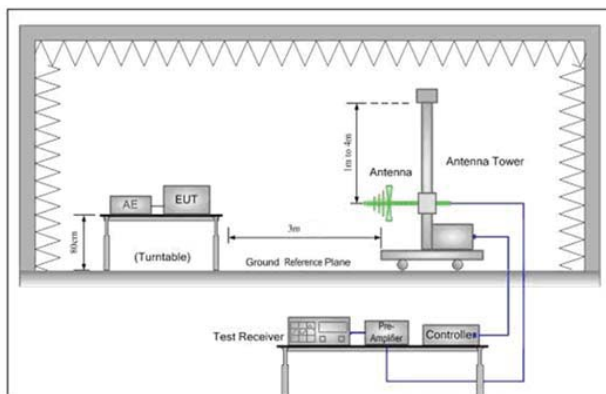


Figure 2. 30MHz to 1GHz

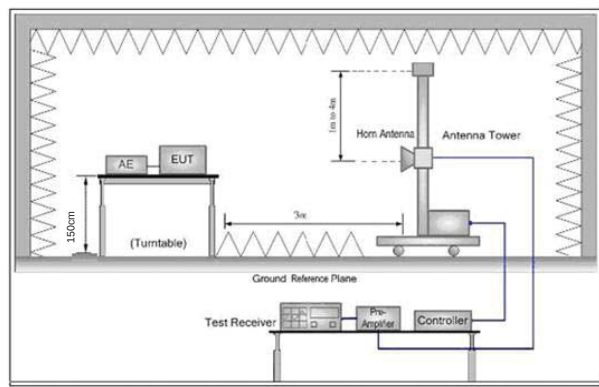


Figure 3. Above 1 GHz

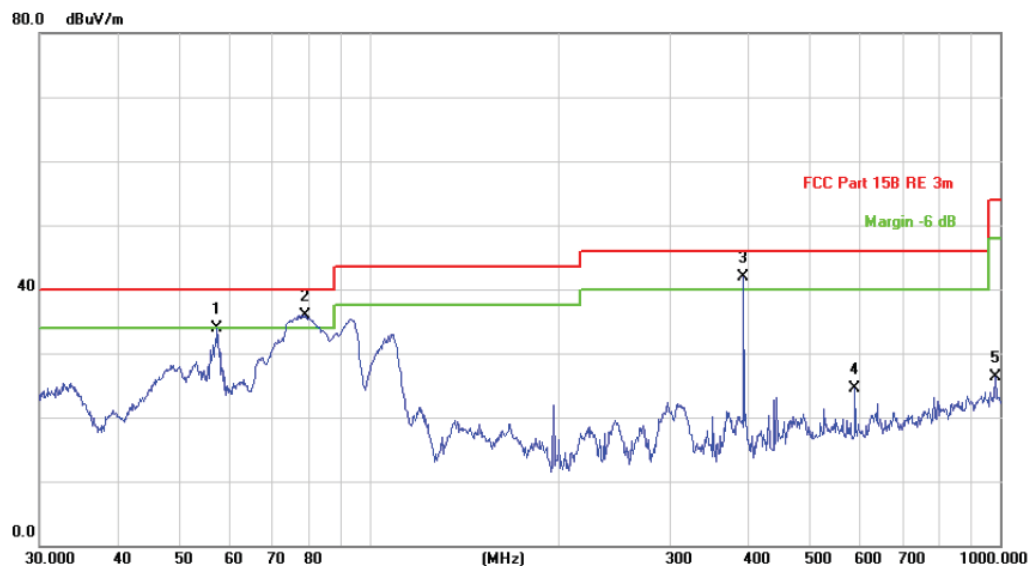
Test Procedure:

- a. 1) Below 1G: The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
2) Above 1G: The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
Note: For the radiated emission test above 1GHz:
Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

	d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. g. Test the EUT in the lowest channel (2402MHz), the middle channel (2441MHz), the Highest channel (2480MHz) h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case. i. Repeat above procedures until all frequencies measured was complete.
Exploratory Test Mode:	Non-hopping transmitting mode with all kind of modulation and all kind of data type Transmitting mode, Charge + Transmitting mode.
Final Test Mode:	Through Pre-scan, find the DH5 of data type and GFSK modulation is the worst case. Pretest the EUT at Transmitting mode and Charge + Transmitting mode, found the Charge + Transmitting mode which it is worse case For below 1GHz part, through pre-scan, the worst case is the highest channel. Only the worst case is recorded in the report.
Test Results:	Pass

5.11.1 Radiated Emission below 1GHz

30MHz~1GHz		
Test mode:	Charge + Transmitting	Vertical



No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		57.3922	53.15	-19.18	33.97	40.00	-6.03	peak		
2	!	78.9651	54.72	-18.90	35.82	40.00	-4.18	peak		
3	*	392.0951	51.03	-9.08	41.95	46.00	-4.05	peak		
4		588.9050	29.74	-5.16	24.58	46.00	-21.42	peak		
5		982.6200	25.63	0.62	26.25	54.00	-27.75	peak		

Remark:

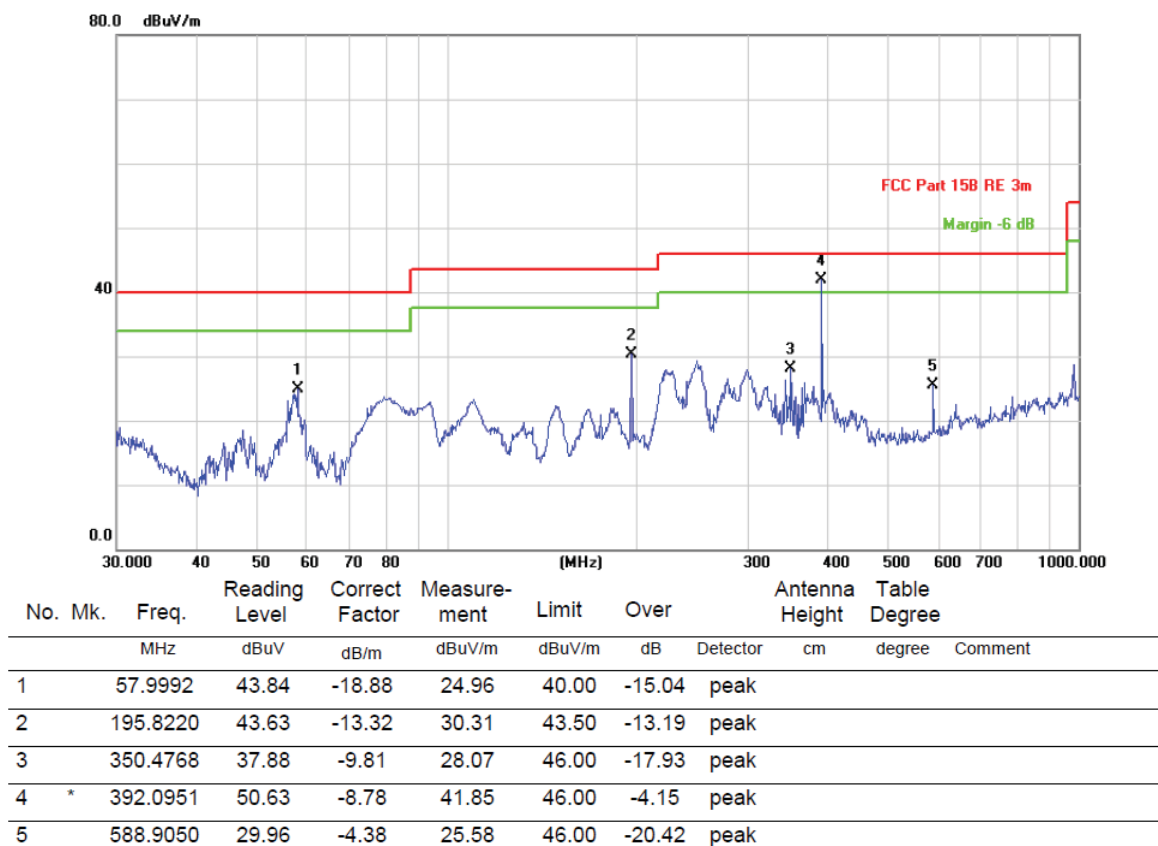
The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Factor= Antenna Factor + Cable Factor – Preamplifier Factor,

Level = Read Level + Factor,

Over Limit=Level-Limit Line.

Test mode:	Charge + Transmitting	Horizontal
------------	-----------------------	------------



Remark:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Factor= Antenna Factor + Cable Factor – Preamplifier Factor,

Level = Read Level + Factor,

Over Limit=Level-Limit Line.

5.11.2 Transmitter Emission above 1GHz

mode:		GFSK(DH5)		Test channel:		Lowest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
2390	53.24	-9.2	44.04	74	-29.96	Peak	H
2400	56.41	-9.39	47.02	74	-26.98	Peak	H
4804	51.99	-4.33	47.66	74	-26.34	Peak	H
7206	51.00	1.01	52.01	74	-21.99	Peak	H
2390	55.80	-9.2	46.60	74	-27.40	Peak	V
2400	56.24	-9.39	46.85	74	-27.15	Peak	V
4804	53.50	-4.33	49.17	74	-24.83	Peak	V
7206	50.68	1.01	51.69	74	-22.31	Peak	V

mode:		GFSK(DH5)		Test channel:		Middle	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
4882	52.21	-4.11	48.10	74	-25.90	Peak	H
7323	49.86	1.51	51.37	74	-22.63	Peak	H
4882	52.76	-4.11	48.65	74	-25.35	Peak	V
7323	49.27	1.51	50.78	74	-23.22	Peak	V

mode:		GFSK(DH5)		Test channel:		Highest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
2483.5	56.28	-9.29	46.99	74	-27.01	Peak	H
4960	51.87	-4.04	47.83	74	-26.17	Peak	H
7440	49.40	1.57	50.97	74	-23.03	Peak	H
2483.5	54.26	-9.29	44.97	74	-29.03	Peak	V
4960	50.99	-4.04	46.95	74	-27.05	Peak	V
7440	49.53	1.57	51.10	74	-22.90	Peak	V

mode:		$\pi/4$ DQPSK (2DH5)		Test channel:		Lowest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)		H/V
2390	56.23	-9.2	47.03	74	-26.97	Peak	H
2400	55.77	-9.39	46.38	74	-27.62	Peak	H
4804	52.82	-4.33	48.49	74	-25.51	Peak	H
7206	49.00	1.01	50.01	74	-23.99	Peak	H
2390	54.58	-9.2	45.38	74	-28.62	Peak	V
2400	56.54	-9.39	47.15	74	-26.85	Peak	V
4804	53.14	-4.33	48.81	74	-25.19	Peak	V
7206	51.05	1.01	52.06	74	-21.94	Peak	V

mode:		$\pi/4$ DQPSK (2DH5)		Test channel:		Middle	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)		H/V
4882	51.76	-4.11	47.65	74	-26.35	peak	H
7323	51.08	1.51	52.59	74	-21.41	peak	H
4882	52.64	-4.11	48.53	74	-25.47	peak	V
7323	49.32	1.51	50.83	74	-23.17	peak	V

mode:		$\pi/4$ DQPSK (2DH5)		Test channel:		Highest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)		H/V
2483.5	55.05	-9.29	45.76	74	-28.24	Peak	H
4960	52.46	-4.04	48.42	74	-25.58	Peak	H
7440	49.26	1.57	50.83	74	-23.17	Peak	H
2483.5	55.85	-9.29	46.56	74	-27.44	Peak	V
4960	50.27	-4.04	46.23	74	-27.77	Peak	V
7440	50.57	1.57	52.14	74	-21.86	Peak	V

mode:		8DPSK(3DH5)		Test channel:		Lowest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
2390	53.93	-9.2	44.73	74	-29.27	Peak	H
2400	55.76	-9.39	46.37	74	-27.63	Peak	H
4804	52.63	-4.33	48.30	74	-25.70	Peak	H
7206	49.39	1.01	50.40	74	-23.60	Peak	H
2390	55.57	-9.2	46.37	74	-27.63	Peak	V
2400	54.67	-9.39	45.28	74	-28.72	Peak	V
4804	53.29	-4.33	48.96	74	-25.04	Peak	V
7206	51.13	1.01	52.14	74	-21.86	Peak	V

mode:		8DPSK(3DH5)		Test channel:		Middle	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
4882	53.10	-4.11	48.99	74	-25.01	peak	H
7323	50.88	1.51	52.39	74	-21.61	peak	H
4882	53.96	-4.11	49.85	74	-24.15	peak	V
7323	51.17	1.51	52.68	74	-21.32	peak	V

Worse case mode:		8DPSK(3DH5)		Test channel:		Highest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
2483.5	56.00	-9.29	46.71	74	-27.29	Peak	H
4960	52.60	-4.04	48.56	74	-25.44	Peak	H
7440	51.18	1.57	52.75	74	-21.25	Peak	H
2483.5	54.39	-9.29	45.10	74	-28.90	Peak	V
4960	48.86	-4.04	44.82	74	-29.18	Peak	V
7440	50.16	1.57	51.73	74	-22.27	Peak	V

Remark:

- The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor
- Scan from 9kHz to 25GHz, the disturbance above 10GHz and below 30MHz was very low. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak measurements were shown in the report.

6 Photographs - EUT Test Setup

6.1 Radiated Emission



30MHz~1GHz



Above 1GHz

6.2 Conducted Emission



7 Photographs - EUT Constructional Details

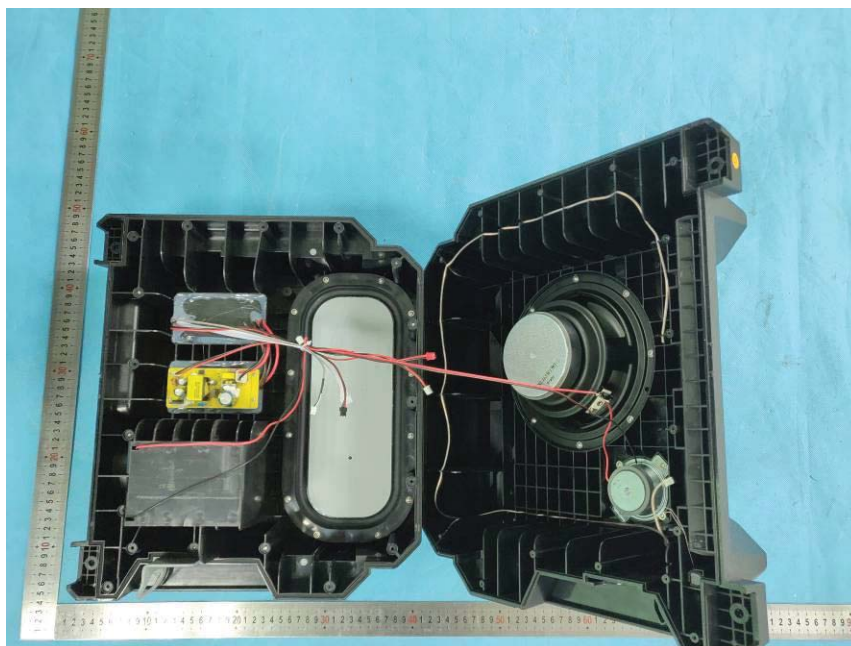
External photos

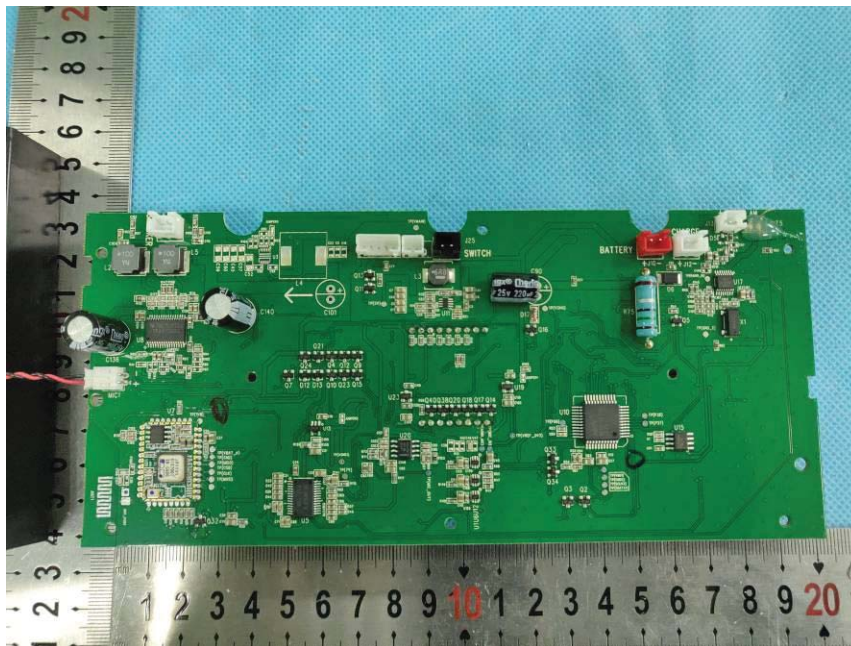


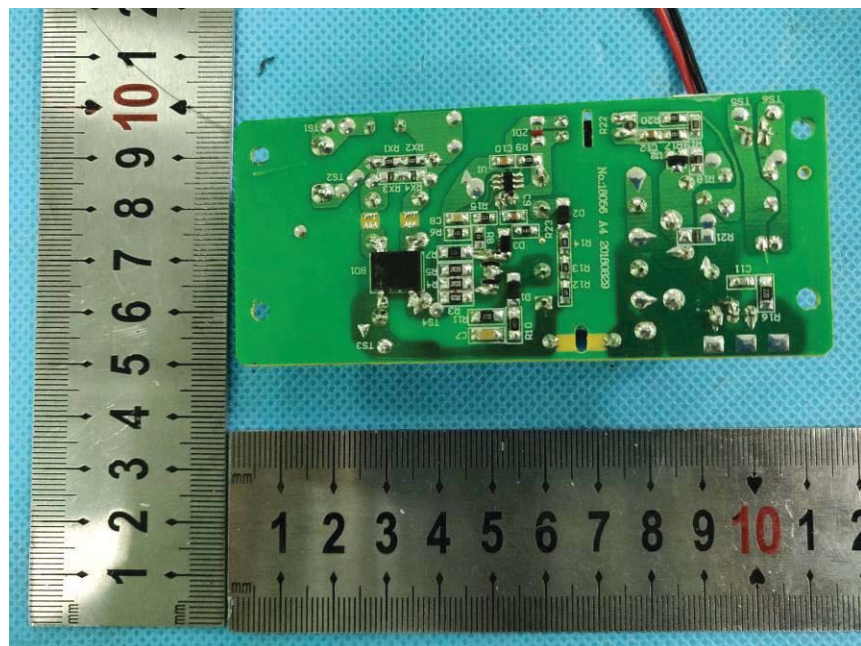
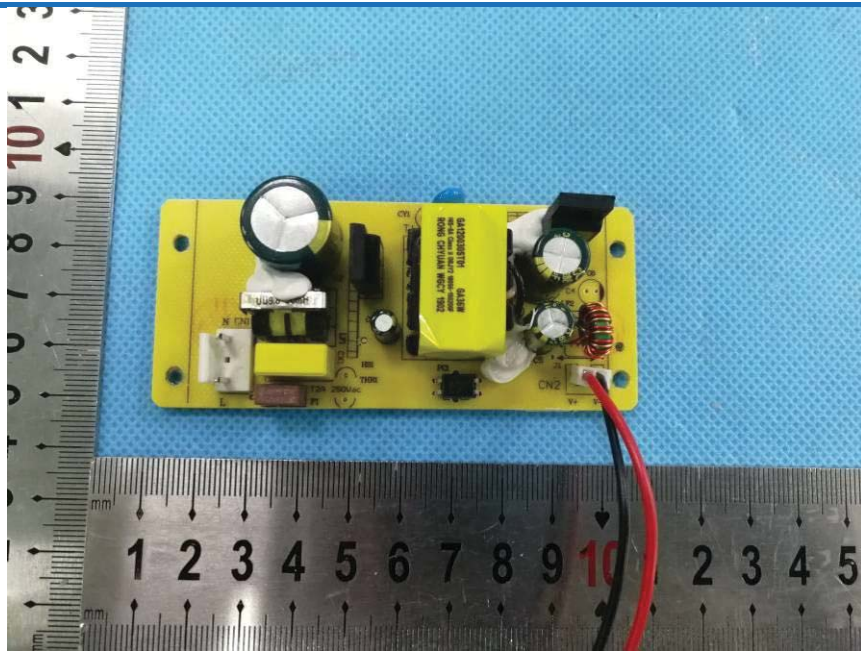


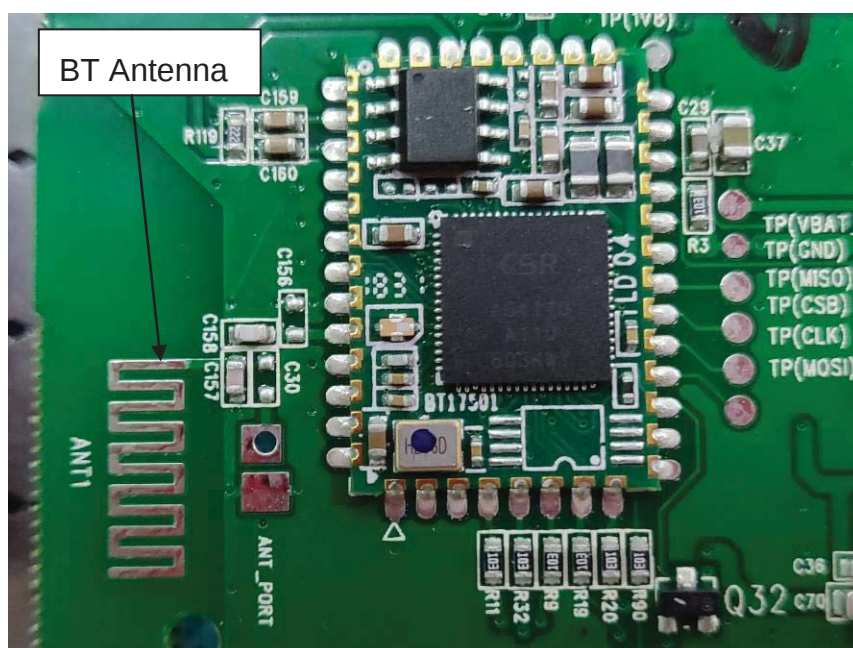












The End