


#### 4.1.5 TEST SETUP

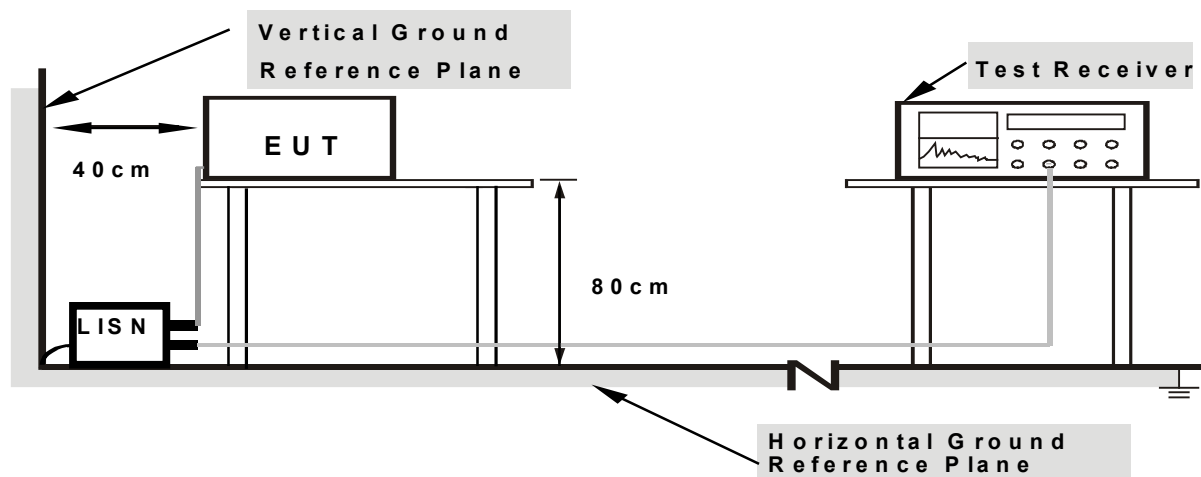

**Note:** 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

#### 4.1.6 EUT OPERATING CONDITIONS

- a. Turned on the power of all equipment.
- b. PC ran a test program to enable all functions.
- c. PC read and wrote messages from FDD, HDD and ext. FDD.
- d. EUT sent "H" character to PC.
- e. PC sent "H" messages to monitor and monitor displayed "H" patterns on screen.
- f. PC sent "H" messages to printer and printed them out.
- g. PC sent "1 kHz" audio messages to speaker.
- h. Repeated steps c-h.