



M. Flom Associates, Inc. - Global Compliance Center

3356 North San Marcos Place, Suite 107, Chandler, Arizona 85225-7176

www.mflom.com general@mflom.com (480) 926-3100, FAX: 926-3598

Certification

Of

FCC ID: ALH31251110

Receiver Model: TM-271A-1

to

Federal Communications Commission

Rule Parts 15.101, 15.121, Confidentiality

Date of Report: August 27, 2003

On the Behalf of the Applicant:

Kenwood USA Corporation

At the Request of:

P.O. JB-F-006

Kenwood USA Corporation
Communications Division
3975 Johns Creek Court, Suite 300
Suwanee, GA 30024

Attention of:

Joel E. Berger, Research & Development
JBerger@kenwoodusa.com
(678) 474-4722; FAX: -4731

Supervised By:

A handwritten signature in black ink that reads 'M. Flom P. Eng.' The signature is written in a cursive, flowing style.

Morton Flom, P. Eng.

Table of Contents

Rule	Description	Page
2.948	Description of Measurement Facilities	1
15.109	Receiver Spurious Emissions (Radiated)	6
15.121(b)	Scanning Receiver	11

Page Number 1 of 12.

Required information per ISO/IEC Guide 25-1990, paragraph 13.2:

a)

Test Report

b) Laboratory: M. Flom Associates, Inc.
(FCC: 31040/SIT) 3356 N. San Marcos Place, Suite 107
(Canada: IC 2044) Chandler, AZ 85225

c) Report Number: d0380073

d) Client: Kenwood USA Corporation
Communications Division
3975 Johns Creek Court, Suite 300
Suwanee, GA 30024

e) Identification: TM-271A-1
FCC ID: ALH31251110
Description: Amateur Transmitter with Scanning Receiver

f) EUT Condition: Not required unless specified in individual tests.

g) Report Date: August 27, 2003
EUT Received: August 4, 2003

h, j, k): As indicated in individual tests.

i) Sampling method: No sampling procedure used.

l) Uncertainty: In accordance with MFA internal quality manual.

m) Supervised by:




Morton Flom, P. Eng.

n) Results: The results presented in this report relate only to the item tested.

o) Reproduction: This report must not be reproduced, except in full, without written permission from this laboratory.

M. Flom Associates, Inc. is accredited by the American Association for Laboratory Accreditation (A2LA) as shown in the scope below.

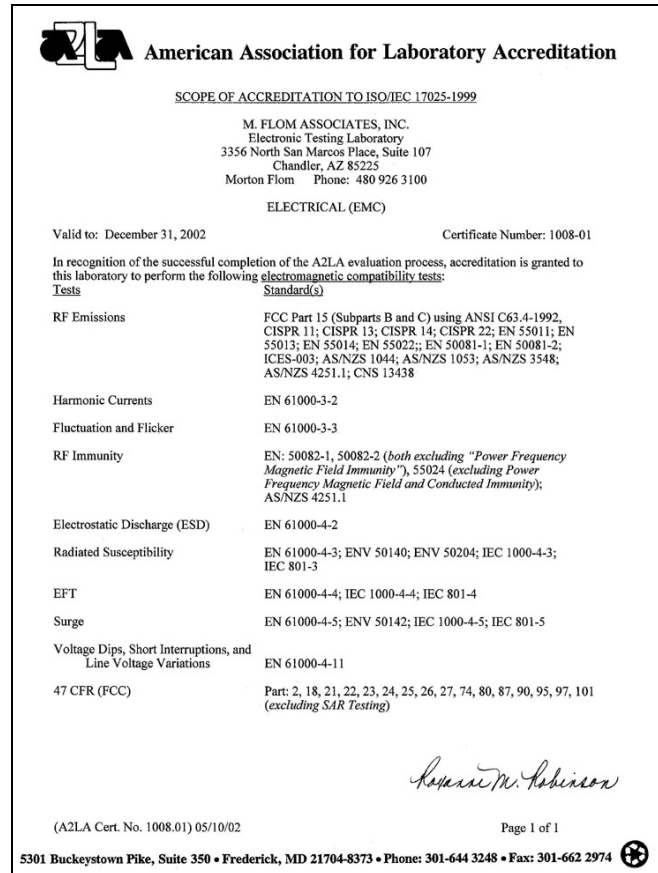

"This laboratory is accredited by the American Association for Laboratory Accreditation (A2LA) and the results shown in this report have been determined in accordance with the laboratory's terms of accreditation unless stated otherwise in the report."

Should this report contain any data for tests for which we are not accredited, or which have been undertaken by a subcontractor that is not A2LA accredited, such data would not covered by this laboratory's A2LA accreditation.

Page Number

3 of 12.

General Information**Part 2.948:****(a)(b) Description Of Measurement Facilities:**

File: 31040/SIT

A description of the measurement facilities was filed with the Commission and was found to be in compliance with the requirements of Section 2.948, by letter dated March 4, 2003. All pertinent changes will be reported to the Commission by up-date prior to March 2006.

(b)(4) Supporting Structures:

Sketch - Attached Exhibits

(b)(5)(6) Test Instrumentation:

List - See Exhibits

2.925: Identification of an Authorized Device:

Drawing - See Exhibits

Location of Label - See Photos

Name and Address of Applicant:

Kenwood USA Corporation
Communications Division
3975 Johns Creek Court, Suite 300
Suwanee, GA 30024

Page Number 4 of 12.
2.911:
2.1033(b)(6)

Technical Report

Manufacturer:

Kenwood Electronics Technologies PTE Ltd.
1 Ang Mo Kio Street 63
Singapore 569110

Trade Name:

Kenwood

FCC ID:

ALH31251110

Model Number:

TM-271A-1

Photographs:

See List of Exhibits

DUT Description:

This unit Passes

15.31: Measurement Standard & Procedure:

- ___ IEEE Standard 187 was used as a guide.
- ___ FCC Measurement Procedure MP-1
- x ANSI 63.4 (1992/2000) "Methods of measurement of radio-noise emissions from low-voltage electrical and electronic equipment in the range of 9 kHz to 40 GHz."
- ___

Page Number

5 of 12.

Expository Statement

- | | | |
|----|---|--------------------|
| 1. | Number of Bands | = 1 |
| 2. | Number of Channels | = 1 |
| 3. | Tuning Range, MHz | = 136 to 173.995 |
| 4. | Oscillator Range, MHz | = 86.05 to 124.045 |
| 5. | I.F., MHz | = 49.95 |
| 6. | Block Diagram | = Attached |
| 7. | For cellular receiver only, the radio transceiver meets the requirements of FCC Bulletin OET 53 ("Cellular System Mobile Stations-Land-System Compatibility Specification."). See attached affidavit. | |

15.203: Antenna Requirement:

- ☐ The antenna is permanently attached to the EUT
☐ The antenna uses a unique coupling
☐ The EUT must be professionally installed
☒ The antenna requirement does not apply

Supervised By:



Morton Flom, P. Eng.

Page Number 6 of 12.

Name of Test: Receiver Spurious Emissions (Radiated)

Specification:

15.109: Radiated Interference Limits
 15.33: Frequency Range of Radiated Measurements
 80.217: Suppression of Interference Aboard Ships

Guide: See measurement procedure below

Test Conditions: Standard Temperature & Humidity

Test Equipment: As per attached page

Search Antennas:

25 MHz - 300 MHz: Emco 3109 Biconical
 200 MHz - 1 GHz: Aprel 2001 Log Periodic
 1 GHz - 18 GHz: Emco 3115 Horn
 10 GHz - 40 GHz: Emco 3116 Horn with HP11970A Mixer


Measurement Procedure

1. At first, bench tests were performed to locate the spurious emissions at the antenna terminals.
2. In the field, tests were conducted over the range shown, The test sample was set up on a wooden turntable above ground, and at a distance of three meters from the antenna connected to the Spectrum Analyzer.
3. In order to obtain the maximum response at each frequency, the turntable was rotated, and the search antenna was raised and lowered. The EUT was also adjusted for maximum response. Tests were conducted in Horizontal & Vertical polarization modes.
4. The field strength was calculated from:

$$E \text{ } \mu\text{V/m @ 3 m} = \frac{\text{Log}_{10}^{-1}(\text{dB}_{\mu\text{V}} + \text{A.F.} + \text{C.L.})}{20}$$

5. Measurement Results: Attached for "Worst Case" conditions.

Radiated Test Setup

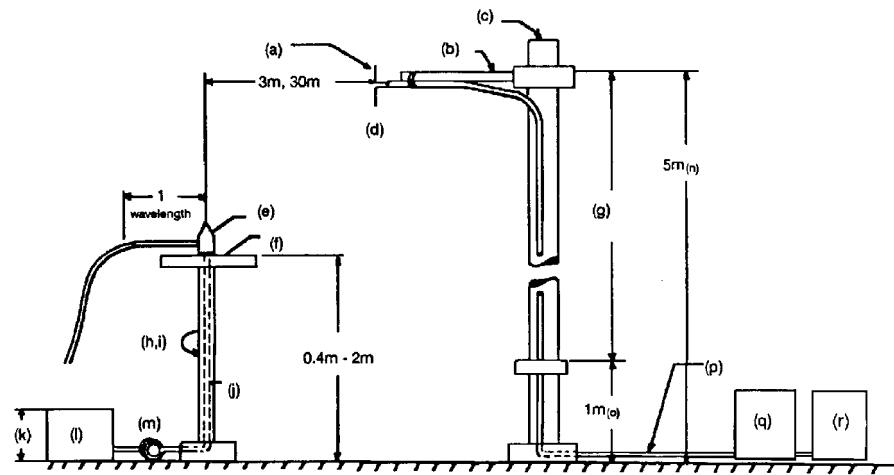

NOTES:

- (a) Search Antenna - Rotatable on boom
- (b) Non-metallic boom
- (c) Non-metallic mast
- (d) Adjustable horizontally
- (e) Equipment Under Test
- (f) Turntable
- (g) Boom adjustable in height.
- (h) External control cables routed horizontally at least one wavelength.
- (i) Rotatable
- (j) Cables routed through hollow turntable center
- (k) 30 cm or less
- (l) External power source
- (m) 10 cm diameter coil of excess cable
- (n) 25 cm (V), 1 m-7 m (V, H)
- (o) 25 cm from bottom end of 'V', 1m normally
- (p) Calibrated Cable at least 10m in length
- (q) Amplifier (optional)
- (r) Spectrum Analyzer

Asset	Description	s/n	Cycle	Last Cal
(as applicable)				
Transducer				
i00088	EMCO 3109-B 25MHz-300MHz	2336	12 mo.	Sep-02
i00089	April 2001 200MHz-1GHz	001500	12 mo.	Sep-02
i00103	EMCO 3115 1GHz-18GHz	9208-3925	12 mo.	Sep-02
i00065	EMCO 3301-B Active Monopole	2635	12 mo.	Sep-02
Amplifier				
i00028	HP 8449A	2749A00121	12 mo.	Mar-03
Spectrum Analyzer				
i00029	HP 8563E	3213A00104	12 mo.	Jan-03
i00033	HP 85462A	3625A00357	12 mo.	Jan-03
i00048	HP 8566B	2511AD1467	6 mo.	Jul-03
Miscellaneous				
Microphone		_____		
Antenna		_____		
All Ports Terminated		_____		

Page Number

8 of 12.

Test Setup:

Radiated Emissions



Page Number 9 of 12.

Name of Test: Receiver Spurious Emissions (Radiated)

Measurement Details

Site Reference	=	31040/SIT
Spectrum Searched	=	0 to 10 x F _R
Worst Case	=	V
Limits	=	15.109(a) (Attached)
All Other Emissions	=	20 dB or More Below Limit

Tests were conducted with:

- a. All controls and switches operated.
- b. Half-wave dipole antenna or manufacturer/applicant supplied antenna.

Sample Calculation:

$$\begin{aligned}
 \text{Emission Frequency, MHz} &= 186.000000 \\
 \text{Level} &= \text{Log}_{10}^{-1} \left(\frac{8.93 + 18.57}{20} \right) \\
 \text{Level, } \mu\text{V/m @ 3m} &= 23.71
 \end{aligned}$$

Measurement Results = Attached

Note: Worst Case of Scan and Non-Scan Modes Reported.

Page Number 10 of 12.

Name of Test: Receiver Spurious Emissions (Radiated)

Rule 15.109(a) Limits:

Frequency, MHz	Field Strength $\mu\text{V/m}$	Distance, m
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

g0380334: 2003-Aug-19 Tue 12:41:00

State: 0:General

Frequency Tuned, MHz	Frequency Emission, MHz	Level, dBuV	@ m	C.F., dB	$\mu\text{V/m}$	@ m
136.050000	186.000000	8.93	3	18.57	23.71	3
155.050000	204.996667	10.1	3	19.53	30.3	3
173.950000	223.900000	15.1	3	20.35	59.22	3
136.050000	372.003334	3.27	3	24.91	25.64	3
155.050000	410.003334	5.77	3	26.32	40.23	3
173.950000	447.801667	10.6	3	26.38	70.63	3
136.050000	558.005001	4.1	3	28.47	42.51	3
155.050000	615.005001	5.77	3	30.31	63.68	3
173.950000	671.701667	4.77	3	30.8	60.05	3
136.050000	744.006668	4.1	3	31.86	62.81	3
155.050000	820.006668	2.43	3	32.54	56.04	3
173.950000	895.601667	3.6	3	32.68	65.16	3
136.050000	930.008335	4.1	3	35.68	97.5	3
155.050000	1025.008335	1.43	3	34.78	64.64	3
173.950000	1119.501667	4.27	3	36.14	104.83	3

All other emissions in the required measurement range were more that 20 dB below the required limits.



Performed By:

David Lee

Page Number 11 of 12.

Name of Test: Scanning Receivers Cellular Band Rejection

Specification: FCC: 47 CFR 15.121(b)

Test Equipment: As per attached page


Guide: **47 CFR 15.121(b):** Except as provided in paragraph (c) of this section, scanning receivers shall reject any signals from Cellular Radiotelephone Service frequency bands that are 38 dB or higher based upon a 12 dB SINAD measurement, which is considered the threshold where a signal can be clearly discerned from any interference that may be present.

Warning: Modification of this device to receive cellular radiotelephone service signals is prohibited under FCC rules and federal law.

Measurement Procedure

1. Equipment was connected as illustrated in the block diagram.
2. A standard signal was applied to the receiver input terminals.
3. Receiver output audio output was adjusted for rated output and with distortion no greater than 10%.
4. The RF Signal generator was adjusted to produce 12dB SINAD without the audio output power dropping by more than 3dB.
5. This was repeated at three frequencies across all bands to establish a reference sensitivity level. The reference sensitivity taken was the lowest, or worst-case sensitivity for all of the bands.
6. The output of the signal generator was then adjusted to a level of +60dB above the reference level sensitivity established in step 5 and set to the first of three frequencies in the cellular subscriber transmit band.
7. Receiver squelch threshold, the signal level required to open the squelch, should be set to open no greater than +20dB above the reference sensitivity.
8. The receiver was then put in the scanning mode and allowed to scan across it's complete receive range.
9. If the receiver unsquelched or stopped on any frequency, the displayed frequency was recorded. The signal generator was then adjusted in output level until a 12dB SINAD from the receiver was produced. The signal generator level associated with this response was also noted.
10. This procedure was repeated for three frequencies in the cellular base station transmit band.
11. The difference in between the signal generator output for any response recorded and the reference sensitivity is the rejection ratio.

Scanning Receiver:

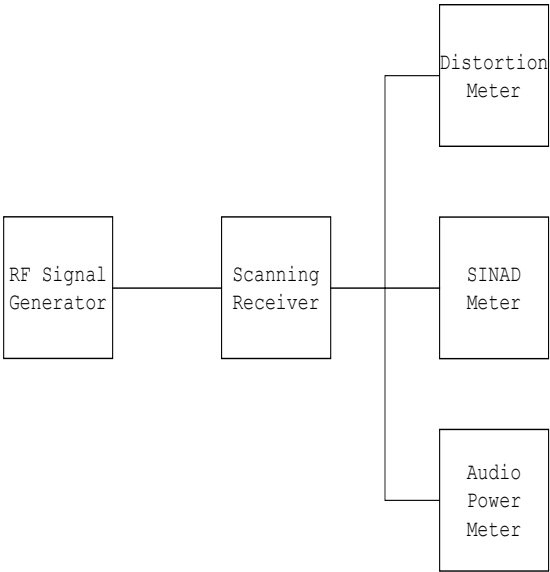

Reference Level Sensitivity measured in step 5 = -110

Frequency of EUT, MHz	Image Frequency	Level for 12 dB SINAD, dBm	Rejection, dB
136.050	824.04	-110	>38
	836.40		
	848.97		
155.050	824.04	-110	>38
	836.40		
	848.97		
173.950	824.04	-110	>38
	836.40		
	848.97		

Performed By:
END OF TEST REPORT

David Lee

The applicant has been cautioned as to the following:

15.21 Information to User.

The users manual or instruction manual for an intentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

15.27(a) Special Accessories.

Equipment marketed to a consumer must be capable of complying with the necessary regulations in the configuration in which the equipment is marketed. Where special accessories, such as shielded cables and/or special connectors are required to enable an unintentional or intentional radiator to comply with the emission limits in this part, the equipment must be marketed with, i.e. shipped and sold with, those special accessories. However, in lieu of shipping or packaging the special accessories with the unintentional or intentional radiator, the responsible party may employ other methods of ensuring that the special accessories are provided to the consumer, without additional charge.

Information detailing any alternative method used to supply the special accessories for a grant of equipment authorization or retained in the verification records, as appropriate. The party responsible for the equipment, as detailed in § 2.909 of this chapter, shall ensure that these special accessories are provided with the equipment. The instruction manual for such devices shall include appropriate instructions on the first page of text concerned with the installation of the device that these special accessories must be used with the device. It is the responsibility of the user to use the needed special accessories supplied with the equipment.

Labeling of Scanning Receivers

Rule 15.19(a)(3) 2-Part Statement: Conspicuous Location on Unit

'This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions (1) This device may not cause harmful interference; and (2) this device must accept any interference including interference that may cause undesired operation.'

Rule Part 15.121(f): Permanently Affixed to Unit Must Be on Device:

'WARNING: Modification of this device to receive cellular radiotelephone service signals is prohibited under FCC Rules and Federal Law.'

Rule 15.21: Can Be in Manual. Show What Page and Extract It

'Information to User: The User's Manual or Instruction Manual for an intentional or unintentional radiator shall caution the User that changes or modifications not expressly approved by the party responsible for compliance could void the User's authority to operate the equipment.'

"Permanently affixed" means that the label is etched, engrave, stamped, silkscreened, indelibly printed or otherwise permanently marked on a permanently attached part of the equipment or on a nameplate of metal plastic or other material fastened to the equipment by welding, riveting, or permanent adhesive. The label shall be designed to last the expected lifetime of the equipment in the environment in which the equipment may be operated and must not be readily detachable. The label shall not be a stick-on, paper label.

Statement of Compliance

This is to certify:

That, on the basis of the measurements made, the equipment tested is capable
of complying with the requirements of

FCC Rule Part 15, Subpart B x

FCC Rule Part 15, Subpart C

Using ANSI C63.4-1992/2000 draft in effect as of this date, under normal
operation, with the usual maintenance.

That the data contained herein is a summary (worst case) of that obtained on
several randomly-selected production samples.

That the equipment meets or exceeds the requirements of Part 15.

List of Exhibits
(FCC **Certification** (Receivers) - Revised 9/28/98)

Applicant: Kenwood USA Corporation

Equipment: TM-271A-1
ALH31251110

By Applicant:

If Applicable: Subsection 2.1033

- | | |
|---|---|
| 1. Letter Of Authorization | x |
| 2. Attestations | x |
| 3. Identification Label Drawing | |
| <u>x</u> Label | |
| <u>x</u> Location of Label | |
| <u>x</u> Compliance Statement | |
| <u>x</u> Location of Compliance Statement | |
| 4. Documentation: 2.1033(b) | |
| (3) User Manual | x |
| (4) Operational Description | x |
| (5) Block Diagram | x |
| (5) Schematic Diagram | x |
| (7) Photographs | x |
| 5. Request for Confidentiality | x |

By M.F.A. Inc.

A. Statement of Compliance