

Product	Tablet	Temperature	25°C
Test Engineer	Cloud Guo	Relative Humidity	56%
Test Site	AC2	Test Date	2019/04/23
Test Mode	802.11n-HT40	Test Channel	102
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	7477.0	35.9	11.9	47.8	74.0	-26.2	Peak	Horizontal
	8225.0	36.5	12.2	48.7	74.0	-25.3	Peak	Horizontal
*	9942.0	35.1	16.1	51.2	68.2	-17.0	Peak	Horizontal
*	12823.5	34.4	17.5	51.9	68.2	-16.3	Peak	Horizontal
	7409.0	36.4	11.7	48.1	74.0	-25.9	Peak	Vertical
	8225.0	36.5	12.2	48.7	74.0	-25.3	Peak	Vertical
*	10469.0	35.6	16.7	52.3	68.2	-15.9	Peak	Vertical
*	12900.0	33.5	17.6	51.1	68.2	-17.1	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Tablet	Temperature	25°C
Test Engineer	Cloud Guo	Relative Humidity	56%
Test Site	AC2	Test Date	2019/04/23
Test Mode	802.11n-HT40	Test Channel	110
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	7434.5	35.9	11.9	47.8	74.0	-26.2	Peak	Horizontal
	8191.0	36.4	12.5	48.9	74.0	-25.1	Peak	Horizontal
*	10282.0	34.6	16.7	51.3	68.2	-16.9	Peak	Horizontal
*	12917.0	34.6	17.8	52.4	68.2	-15.8	Peak	Horizontal
	7562.0	36.1	11.9	48.0	74.0	-26.0	Peak	Vertical
	8199.5	36.2	12.4	48.6	74.0	-25.4	Peak	Vertical
*	9636.0	35.6	15.6	51.2	68.2	-17.0	Peak	Vertical
*	12976.5	34.5	17.8	52.3	68.2	-15.9	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Tablet	Temperature	25°C
Test Engineer	Cloud Guo	Relative Humidity	56%
Test Site	AC2	Test Date	2019/04/23
Test Mode	802.11n-HT40	Test Channel	118
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	7434.5	35.9	11.9	47.8	74.0	-26.2	Peak	Horizontal
	8174.0	36.9	12.4	49.3	74.0	-24.7	Peak	Horizontal
*	9976.0	35.7	15.9	51.6	68.2	-16.6	Peak	Horizontal
*	13129.5	34.9	18.1	53.0	68.2	-15.2	Peak	Horizontal
	7672.5	35.8	11.7	47.5	74.0	-26.5	Peak	Vertical
	8140.0	35.9	12.5	48.4	74.0	-25.6	Peak	Vertical
*	10384.0	33.9	16.9	50.8	68.2	-17.4	Peak	Vertical
*	12900.0	34.1	17.6	51.7	68.2	-16.5	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Tablet	Temperature	25°C
Test Engineer	Cloud Guo	Relative Humidity	56%
Test Site	AC2	Test Date	2019/04/23
Test Mode	802.11n-HT40	Test Channel	134
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	7494.0	35.6	12.0	47.6	74.0	-26.4	Peak	Horizontal
	8199.5	36.2	12.4	48.6	74.0	-25.4	Peak	Horizontal
*	9967.5	35.0	16.0	51.0	68.2	-17.2	Peak	Horizontal
*	12832.0	34.4	17.4	51.8	68.2	-16.4	Peak	Horizontal
	7706.5	37.3	11.7	49.0	74.0	-25.0	Peak	Vertical
	8148.5	37.2	12.4	49.6	74.0	-24.4	Peak	Vertical
*	10341.5	34.8	16.8	51.6	68.2	-16.6	Peak	Vertical
*	13027.5	33.7	18.0	51.7	68.2	-16.5	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Tablet	Temperature	25°C
Test Engineer	Cloud Guo	Relative Humidity	56%
Test Site	AC2	Test Date	2019/04/23
Test Mode	802.11n-HT40	Test Channel	151
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	7536.5	35.8	11.9	47.7	74.0	-26.3	Peak	Horizontal
	8412.0	36.3	12.2	48.5	74.0	-25.5	Peak	Horizontal
*	9916.5	35.2	16.0	51.2	68.2	-17.0	Peak	Horizontal
*	12866.0	34.9	17.7	52.6	68.2	-15.6	Peak	Horizontal
	7383.5	36.5	11.7	48.2	74.0	-25.8	Peak	Vertical
	8318.5	36.8	12.3	49.1	74.0	-24.9	Peak	Vertical
*	10239.5	35.3	16.5	51.8	68.2	-16.4	Peak	Vertical
*	13112.5	34.6	18.1	52.7	68.2	-15.5	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Tablet	Temperature	25°C
Test Engineer	Cloud Guo	Relative Humidity	56%
Test Site	AC2	Test Date	2019/04/23
Test Mode	802.11n-HT40	Test Channel	159
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	7375.0	36.3	11.7	48.0	74.0	-26.0	Peak	Horizontal
	8208.0	36.4	12.3	48.7	74.0	-25.3	Peak	Horizontal
*	9627.5	35.6	15.6	51.2	68.2	-17.0	Peak	Horizontal
*	13036.0	34.6	18.0	52.6	68.2	-15.6	Peak	Horizontal
	7655.5	36.7	11.6	48.3	74.0	-25.7	Peak	Vertical
	8242.0	35.7	12.3	48.0	74.0	-26.0	Peak	Vertical
*	10171.5	34.2	16.4	50.6	68.2	-17.6	Peak	Vertical
*	12900.0	33.8	17.6	51.4	68.2	-16.8	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Tablet	Temperature	25°C
Test Engineer	Cloud Guo	Relative Humidity	56%
Test Site	AC2	Test Date	2019/04/23
Test Mode	802.11ac-VHT20	Test Channel	36
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	7468.5	36.7	11.8	48.5	74.0	-25.5	Peak	Horizontal
	8242.0	35.7	12.3	48.0	74.0	-26.0	Peak	Horizontal
*	10120.5	35.2	16.2	51.4	68.2	-16.8	Peak	Horizontal
*	12959.5	34.0	17.7	51.7	68.2	-16.5	Peak	Horizontal
	7587.5	36.1	11.8	47.9	74.0	-26.1	Peak	Vertical
	8327.0	37.4	12.2	49.6	74.0	-24.4	Peak	Vertical
*	9840.0	35.1	16.1	51.2	68.2	-17.0	Peak	Vertical
*	13146.5	33.9	18.1	52.0	68.2	-16.2	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Tablet	Temperature	25°C
Test Engineer	Cloud Guo	Relative Humidity	56%
Test Site	AC2	Test Date	2019/04/23
Test Mode	802.11ac-VHT20	Test Channel	44
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	7587.5	35.9	11.8	47.7	74.0	-26.3	Peak	Horizontal
	8318.5	36.5	12.3	48.8	74.0	-25.2	Peak	Horizontal
*	9908.0	34.4	16.0	50.4	68.2	-17.8	Peak	Horizontal
*	12849.0	35.4	17.4	52.8	68.2	-15.4	Peak	Horizontal
	7332.5	35.6	11.7	47.3	74.0	-26.7	Peak	Vertical
	8318.5	36.5	12.3	48.8	74.0	-25.2	Peak	Vertical
*	10358.5	35.1	16.8	51.9	68.2	-16.3	Peak	Vertical
*	12849.0	35.4	17.4	52.8	68.2	-15.4	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Tablet	Temperature	25°C
Test Engineer	Cloud Guo	Relative Humidity	56%
Test Site	AC2	Test Date	2019/04/23
Test Mode	802.11ac-VHT20	Test Channel	48
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	7383.5	36.2	11.7	47.9	74.0	-26.1	Peak	Horizontal
	8242.0	35.5	12.3	47.8	74.0	-26.2	Peak	Horizontal
*	10367.0	36.6	16.9	53.5	68.2	-14.7	Peak	Horizontal
*	12891.5	33.0	17.6	50.6	68.2	-17.6	Peak	Horizontal
	7341.0	36.5	11.7	48.2	74.0	-25.8	Peak	Vertical
	8131.5	35.9	12.6	48.5	74.0	-25.5	Peak	Vertical
*	10367.0	36.6	16.9	53.5	68.2	-14.7	Peak	Vertical
*	12798.0	35.4	17.5	52.9	68.2	-15.3	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Tablet	Temperature	25°C
Test Engineer	Cloud Guo	Relative Humidity	56%
Test Site	AC2	Test Date	2019/04/23
Test Mode	802.11ac-VHT20	Test Channel	52
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	7298.5	35.0	11.7	46.7	74.0	-27.3	Peak	Horizontal
	8242.0	35.5	12.3	47.8	74.0	-26.2	Peak	Horizontal
*	9933.5	33.9	16.1	50.0	68.2	-18.2	Peak	Horizontal
*	13044.5	32.6	18.0	50.6	68.2	-17.6	Peak	Horizontal
	7579.0	35.6	11.8	47.4	74.0	-26.6	Peak	Vertical
	8250.5	35.7	12.3	48.0	74.0	-26.0	Peak	Vertical
*	10341.5	34.9	16.8	51.7	68.2	-16.5	Peak	Vertical
*	12866.0	34.7	17.7	52.4	68.2	-15.8	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Tablet	Temperature	25°C
Test Engineer	Cloud Guo	Relative Humidity	56%
Test Site	AC2	Test Date	2019/04/23
Test Mode	802.11ac-VHT20	Test Channel	60
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	7502.5	35.5	12.0	47.5	74.0	-26.5	Peak	Horizontal
	8216.5	36.2	12.3	48.5	74.0	-25.5	Peak	Horizontal
*	10163.0	34.6	16.5	51.1	68.2	-17.1	Peak	Horizontal
*	12934.0	34.6	17.7	52.3	68.2	-15.9	Peak	Horizontal
	7732.0	35.2	11.9	47.1	74.0	-26.9	Peak	Vertical
	8191.0	35.1	12.5	47.6	74.0	-26.4	Peak	Vertical
*	9678.5	34.7	15.4	50.1	68.2	-18.1	Peak	Vertical
*	13010.5	34.2	17.9	52.1	68.2	-16.1	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Tablet	Temperature	25°C
Test Engineer	Cloud Guo	Relative Humidity	56%
Test Site	AC2	Test Date	2019/04/23
Test Mode	802.11ac-VHT20	Test Channel	64
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	7664.0	35.9	11.7	47.6	74.0	-26.4	Peak	Horizontal
	8199.5	36.5	12.4	48.9	74.0	-25.1	Peak	Horizontal
*	9882.5	34.0	16.1	50.1	68.2	-18.1	Peak	Horizontal
*	12874.5	34.4	17.7	52.1	68.2	-16.1	Peak	Horizontal
	7434.5	35.1	11.9	47.0	74.0	-27.0	Peak	Vertical
	8276.0	35.0	12.0	47.0	74.0	-27.0	Peak	Vertical
*	10367.0	34.0	16.9	50.9	68.2	-17.3	Peak	Vertical
*	13070.0	32.9	17.9	50.8	68.2	-17.4	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Tablet	Temperature	25°C
Test Engineer	Cloud Guo	Relative Humidity	56%
Test Site	AC2	Test Date	2019/04/23
Test Mode	802.11ac-VHT20	Test Channel	100
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	7400.5	35.8	11.7	47.5	74.0	-26.5	Peak	Horizontal
	8199.5	36.5	12.4	48.9	74.0	-25.1	Peak	Horizontal
*	9857.0	35.2	16.0	51.2	68.2	-17.0	Peak	Horizontal
*	12798.0	34.8	17.5	52.3	68.2	-15.9	Peak	Horizontal
	7477.0	35.2	11.9	47.1	74.0	-26.9	Peak	Vertical
	8233.5	35.5	12.3	47.8	74.0	-26.2	Peak	Vertical
*	9908.0	34.7	16.0	50.7	68.2	-17.5	Peak	Vertical
*	13027.5	33.5	18.0	51.5	68.2	-16.7	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Tablet	Temperature	25°C
Test Engineer	Cloud Guo	Relative Humidity	56%
Test Site	AC2	Test Date	2019/04/23
Test Mode	802.11ac-VHT20	Test Channel	116
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	7375.0	35.4	11.7	47.1	74.0	-26.9	Peak	Horizontal
	8157.0	35.5	12.4	47.9	74.0	-26.1	Peak	Horizontal
*	9976.0	33.9	15.9	49.8	68.2	-18.4	Peak	Horizontal
*	12815.0	33.5	17.6	51.1	68.2	-17.1	Peak	Horizontal
	7341.0	35.1	11.7	46.8	74.0	-27.2	Peak	Vertical
	8157.0	35.0	12.4	47.4	74.0	-26.6	Peak	Vertical
*	10528.5	33.6	17.2	50.8	68.2	-17.4	Peak	Vertical
*	13163.5	33.9	18.2	52.1	68.2	-16.1	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Tablet	Temperature	25°C
Test Engineer	Cloud Guo	Relative Humidity	56%
Test Site	AC2	Test Date	2019/04/23
Test Mode	802.11ac-VHT20	Test Channel	120
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	7579.0	36.3	11.8	48.1	74.0	-25.9	Peak	Horizontal
	8242.0	36.2	12.3	48.5	74.0	-25.5	Peak	Horizontal
*	10222.5	35.5	16.5	52.0	68.2	-16.2	Peak	Horizontal
*	13044.5	34.5	18.0	52.5	68.2	-15.7	Peak	Horizontal
	7426.0	35.9	11.9	47.8	74.0	-26.2	Peak	Vertical
	8454.5	35.6	12.3	47.9	74.0	-26.1	Peak	Vertical
*	10273.5	35.7	16.7	52.4	68.2	-15.8	Peak	Vertical
*	12857.5	34.7	17.5	52.2	68.2	-16.0	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Tablet	Temperature	25°C
Test Engineer	Cloud Guo	Relative Humidity	56%
Test Site	AC2	Test Date	2019/04/23
Test Mode	802.11ac-VHT20	Test Channel	140
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	7553.5	36.6	11.9	48.5	74.0	-25.5	Peak	Horizontal
	8216.5	36.4	12.3	48.7	74.0	-25.3	Peak	Horizontal
*	9831.5	34.5	16.1	50.6	68.2	-17.6	Peak	Horizontal
*	12976.5	34.8	17.8	52.6	68.2	-15.6	Peak	Horizontal
	7553.5	36.6	11.9	48.5	74.0	-25.5	Peak	Vertical
	8369.5	36.7	12.3	49.0	74.0	-25.0	Peak	Vertical
*	9942.0	35.3	16.1	51.4	68.2	-16.8	Peak	Vertical
*	13078.5	33.8	18.0	51.8	68.2	-16.4	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Tablet	Temperature	25°C
Test Engineer	Cloud Guo	Relative Humidity	56%
Test Site	AC2	Test Date	2019/04/23
Test Mode	802.11ac-VHT20	Test Channel	149
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	7460.0	36.8	11.8	48.6	74.0	-25.4	Peak	Horizontal
	8344.0	36.8	12.0	48.8	74.0	-25.2	Peak	Horizontal
*	9678.5	35.0	15.4	50.4	68.2	-17.8	Peak	Horizontal
*	12883.0	33.5	17.6	51.1	68.2	-17.1	Peak	Horizontal
	7460.0	36.8	11.8	48.6	74.0	-25.4	Peak	Vertical
	8344.0	36.8	12.0	48.8	74.0	-25.2	Peak	Vertical
*	9891.0	34.8	16.2	51.0	68.2	-17.2	Peak	Vertical
*	12781.0	34.4	17.4	51.8	68.2	-16.4	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Tablet	Temperature	25°C
Test Engineer	Cloud Guo	Relative Humidity	56%
Test Site	AC2	Test Date	2019/04/23
Test Mode	802.11ac-VHT20	Test Channel	157
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	7519.5	34.6	11.9	46.5	74.0	-27.5	Peak	Horizontal
	8395.0	35.9	12.2	48.1	74.0	-25.9	Peak	Horizontal
*	9925.0	34.6	16.0	50.6	68.2	-17.6	Peak	Horizontal
*	13053.0	32.6	17.9	50.5	68.2	-17.7	Peak	Horizontal
	7698.0	35.6	11.7	47.3	74.0	-26.7	Peak	Vertical
	8335.5	35.3	12.1	47.4	74.0	-26.6	Peak	Vertical
*	9865.5	34.1	16.1	50.2	68.2	-18.0	Peak	Vertical
*	12976.5	33.8	17.8	51.6	68.2	-16.6	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Tablet	Temperature	25°C
Test Engineer	Cloud Guo	Relative Humidity	56%
Test Site	AC2	Test Date	2019/04/23
Test Mode	802.11ac-VHT20	Test Channel	165
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	7324.0	36.4	11.7	48.1	74.0	-25.9	Peak	Horizontal
	8488.5	35.8	12.5	48.3	74.0	-25.7	Peak	Horizontal
*	9763.5	34.7	15.9	50.6	68.2	-17.6	Peak	Horizontal
*	12857.5	34.6	17.5	52.1	68.2	-16.1	Peak	Horizontal
	7494.0	35.4	12.0	47.4	74.0	-26.6	Peak	Vertical
	8225.0	37.1	12.2	49.3	74.0	-24.7	Peak	Vertical
*	10307.5	34.7	16.6	51.3	68.2	-16.9	Peak	Vertical
*	13010.5	34.1	17.9	52.0	68.2	-16.2	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Tablet	Temperature	25°C
Test Engineer	Cloud Guo	Relative Humidity	56%
Test Site	AC2	Test Date	2019/04/23
Test Mode	802.11ac-VHT40	Test Channel	38
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	7545.0	35.3	11.9	47.2	74.0	-26.8	Peak	Horizontal
	8242.0	35.8	12.3	48.1	74.0	-25.9	Peak	Horizontal
*	9916.5	34.8	16.0	50.8	68.2	-17.4	Peak	Horizontal
*	12985.0	33.9	17.9	51.8	68.2	-16.4	Peak	Horizontal
	7723.5	36.0	11.8	47.8	74.0	-26.2	Peak	Vertical
	8386.5	36.2	12.3	48.5	74.0	-25.5	Peak	Vertical
*	10316.0	34.9	16.6	51.5	68.2	-16.7	Peak	Vertical
*	12874.5	32.9	17.7	50.6	68.2	-17.6	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Tablet	Temperature	25°C
Test Engineer	Cloud Guo	Relative Humidity	56%
Test Site	AC2	Test Date	2019/04/23
Test Mode	802.11ac-VHT40	Test Channel	46
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	7545.0	35.7	11.9	47.6	74.0	-26.4	Peak	Horizontal
	8480.0	35.5	12.5	48.0	74.0	-26.0	Peak	Horizontal
*	10367.0	34.8	16.9	51.7	68.2	-16.5	Peak	Horizontal
*	12968.0	34.4	17.8	52.2	68.2	-16.0	Peak	Horizontal
	7494.0	35.6	12.0	47.6	74.0	-26.4	Peak	Vertical
	8148.5	35.8	12.4	48.2	74.0	-25.8	Peak	Vertical
*	10282.0	35.3	16.7	52.0	68.2	-16.2	Peak	Vertical
*	13078.5	34.6	18.0	52.6	68.2	-15.6	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Tablet	Temperature	25°C
Test Engineer	Cloud Guo	Relative Humidity	56%
Test Site	AC2	Test Date	2019/04/23
Test Mode	802.11ac-VHT40	Test Channel	54
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	7324.0	35.7	11.7	47.4	74.0	-26.6	Peak	Horizontal
	8318.5	35.5	12.3	47.8	74.0	-26.2	Peak	Horizontal
*	9959.0	34.8	16.0	50.8	68.2	-17.4	Peak	Horizontal
*	12806.5	34.6	17.6	52.2	68.2	-16.0	Peak	Horizontal
	7681.0	36.0	11.8	47.8	74.0	-26.2	Peak	Vertical
	8250.5	35.8	12.3	48.1	74.0	-25.9	Peak	Vertical
*	9933.5	34.5	16.1	50.6	68.2	-17.6	Peak	Vertical
*	12959.5	34.4	17.7	52.1	68.2	-16.1	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Tablet	Temperature	25°C
Test Engineer	Cloud Guo	Relative Humidity	56%
Test Site	AC2	Test Date	2019/04/23
Test Mode	802.11ac-VHT40	Test Channel	62
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	7307.0	36.0	11.7	47.7	74.0	-26.3	Peak	Horizontal
	8233.5	36.3	12.3	48.6	74.0	-25.4	Peak	Horizontal
*	9738.0	34.8	15.7	50.5	68.2	-17.7	Peak	Horizontal
*	12806.5	34.5	17.6	52.1	68.2	-16.1	Peak	Horizontal
	7460.0	36.5	11.8	48.3	74.0	-25.7	Peak	Vertical
	8310.0	35.9	12.4	48.3	74.0	-25.7	Peak	Vertical
*	9993.0	35.0	16.1	51.1	68.2	-17.1	Peak	Vertical
*	13027.5	34.5	18.0	52.5	68.2	-15.7	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Tablet	Temperature	25°C
Test Engineer	Cloud Guo	Relative Humidity	56%
Test Site	AC2	Test Date	2019/04/23
Test Mode	802.11ac-VHT40	Test Channel	102
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	7485.5	36.3	11.9	48.2	74.0	-25.8	Peak	Horizontal
	8242.0	35.5	12.3	47.8	74.0	-26.2	Peak	Horizontal
*	9942.0	34.5	16.1	50.6	68.2	-17.6	Peak	Horizontal
*	12976.5	33.0	17.8	50.8	68.2	-17.4	Peak	Horizontal
	7426.0	34.9	11.9	46.8	74.0	-27.2	Peak	Vertical
	8242.0	34.3	12.3	46.6	74.0	-27.4	Peak	Vertical
*	10307.5	34.2	16.6	50.8	68.2	-17.4	Peak	Vertical
*	12968.0	34.2	17.8	52.0	68.2	-16.2	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Tablet	Temperature	25°C
Test Engineer	Cloud Guo	Relative Humidity	56%
Test Site	AC2	Test Date	2019/04/23
Test Mode	802.11ac-VHT40	Test Channel	110
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	7426.0	34.6	11.9	46.5	74.0	-27.5	Peak	Horizontal
	8216.5	35.8	12.3	48.1	74.0	-25.9	Peak	Horizontal
*	9848.5	34.8	16.1	50.9	68.2	-17.3	Peak	Horizontal
*	12781.0	34.3	17.4	51.7	68.2	-16.5	Peak	Horizontal
	7426.0	34.8	11.9	46.7	74.0	-27.3	Peak	Vertical
	8276.0	34.9	12.0	46.9	74.0	-27.1	Peak	Vertical
*	9831.5	35.0	16.1	51.1	68.2	-17.1	Peak	Vertical
*	13112.5	34.3	18.1	52.4	68.2	-15.8	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Tablet	Temperature	25°C
Test Engineer	Cloud Guo	Relative Humidity	56%
Test Site	AC2	Test Date	2019/04/23
Test Mode	802.11ac-VHT40	Test Channel	118
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	7681.0	35.9	11.8	47.7	74.0	-26.3	Peak	Horizontal
	8259.0	35.7	12.2	47.9	74.0	-26.1	Peak	Horizontal
*	9984.5	34.9	16.0	50.9	68.2	-17.3	Peak	Horizontal
*	12798.0	34.5	17.5	52.0	68.2	-16.2	Peak	Horizontal
	7621.5	37.1	11.8	48.9	74.0	-25.1	Peak	Vertical
	8267.5	36.4	12.1	48.5	74.0	-25.5	Peak	Vertical
*	9967.5	35.0	16.0	51.0	68.2	-17.2	Peak	Vertical
*	13078.5	34.5	18.0	52.5	68.2	-15.7	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Tablet	Temperature	25°C
Test Engineer	Cloud Guo	Relative Humidity	56%
Test Site	AC2	Test Date	2019/04/23
Test Mode	802.11ac-VHT40	Test Channel	134
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	7400.5	36.4	11.7	48.1	74.0	-25.9	Peak	Horizontal
	8301.5	35.5	12.2	47.7	74.0	-26.3	Peak	Horizontal
*	10137.5	34.3	16.2	50.5	68.2	-17.7	Peak	Horizontal
*	13078.5	32.9	18.0	50.9	68.2	-17.3	Peak	Horizontal
	7630.0	35.7	11.7	47.4	74.0	-26.6	Peak	Vertical
	8497.0	35.4	12.6	48.0	74.0	-26.0	Peak	Vertical
*	10265.0	33.9	16.6	50.5	68.2	-17.7	Peak	Vertical
*	12832.0	34.0	17.4	51.4	68.2	-16.8	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Tablet	Temperature	25°C
Test Engineer	Cloud Guo	Relative Humidity	56%
Test Site	AC2	Test Date	2019/04/23
Test Mode	802.11ac-VHT40	Test Channel	151
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	7349.5	36.3	11.7	48.0	74.0	-26.0	Peak	Horizontal
	8488.5	35.1	12.5	47.6	74.0	-26.4	Peak	Horizontal
*	10010.0	35.1	16.1	51.2	68.2	-17.0	Peak	Horizontal
*	12849.0	34.4	17.4	51.8	68.2	-16.4	Peak	Horizontal
	7400.5	35.2	11.7	46.9	74.0	-27.1	Peak	Vertical
	8267.5	37.1	12.1	49.2	74.0	-24.8	Peak	Vertical
*	10375.5	33.5	16.9	50.4	68.2	-17.8	Peak	Vertical
*	13002.0	33.7	17.8	51.5	68.2	-16.7	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Tablet	Temperature	25°C
Test Engineer	Cloud Guo	Relative Humidity	56%
Test Site	AC2	Test Date	2019/04/23
Test Mode	802.11ac-VHT40	Test Channel	159
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	7477.0	35.6	11.9	47.5	74.0	-26.5	Peak	Horizontal
	8131.5	35.6	12.6	48.2	74.0	-25.8	Peak	Horizontal
*	9687.0	35.4	15.6	51.0	68.2	-17.2	Peak	Horizontal
*	13002.0	34.6	17.8	52.4	68.2	-15.8	Peak	Horizontal
	7604.5	35.0	11.8	46.8	74.0	-27.2	Peak	Vertical
	8242.0	35.7	12.3	48.0	74.0	-26.0	Peak	Vertical
*	10418.0	33.7	16.8	50.5	68.2	-17.7	Peak	Vertical
*	13163.5	33.3	18.2	51.5	68.2	-16.7	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Tablet	Temperature	25°C
Test Engineer	Cloud Guo	Relative Humidity	56%
Test Site	AC2	Test Date	2019/04/23
Test Mode	802.11ac-VHT80	Test Channel	42
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	7494.0	35.6	12.0	47.6	74.0	-26.4	Peak	Horizontal
	8242.0	35.7	12.3	48.0	74.0	-26.0	Peak	Horizontal
*	10341.5	34.7	16.8	51.5	68.2	-16.7	Peak	Horizontal
*	13044.5	33.8	18.0	51.8	68.2	-16.4	Peak	Horizontal
	7468.5	35.4	11.8	47.2	74.0	-26.8	Peak	Vertical
	8429.0	35.5	12.4	47.9	74.0	-26.1	Peak	Vertical
*	10350.0	33.2	16.8	50.0	68.2	-18.2	Peak	Vertical
*	12798.0	33.2	17.5	50.7	68.2	-17.5	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Tablet	Temperature	25°C
Test Engineer	Cloud Guo	Relative Humidity	56%
Test Site	AC2	Test Date	2019/04/23
Test Mode	802.11ac-VHT80	Test Channel	58
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	7502.5	35.7	12.0	47.7	74.0	-26.3	Peak	Horizontal
	8174.0	36.1	12.4	48.5	74.0	-25.5	Peak	Horizontal
*	10248.0	34.5	16.5	51.0	68.2	-17.2	Peak	Horizontal
*	12815.0	34.3	17.6	51.9	68.2	-16.3	Peak	Horizontal
	7579.0	35.6	11.8	47.4	74.0	-26.6	Peak	Vertical
	8497.0	35.6	12.6	48.2	74.0	-25.8	Peak	Vertical
*	10001.5	34.5	16.1	50.6	68.2	-17.6	Peak	Vertical
*	13019.0	34.0	18.0	52.0	68.2	-16.2	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Tablet	Temperature	25°C
Test Engineer	Cloud Guo	Relative Humidity	56%
Test Site	AC2	Test Date	2019/04/23
Test Mode	802.11ac-VHT80	Test Channel	106
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	7460.0	35.9	11.8	47.7	74.0	-26.3	Peak	Horizontal
	8174.0	35.2	12.4	47.6	74.0	-26.4	Peak	Horizontal
*	9857.0	33.8	16.0	49.8	68.2	-18.4	Peak	Horizontal
*	12900.0	33.5	17.6	51.1	68.2	-17.1	Peak	Horizontal
	7502.5	36.4	12.0	48.4	74.0	-25.6	Peak	Vertical
	8208.0	36.0	12.3	48.3	74.0	-25.7	Peak	Vertical
*	10214.0	34.8	16.5	51.3	68.2	-16.9	Peak	Vertical
*	12857.5	34.5	17.5	52.0	68.2	-16.2	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Tablet	Temperature	25°C
Test Engineer	Cloud Guo	Relative Humidity	56%
Test Site	AC2	Test Date	2019/04/23
Test Mode	802.11ac-VHT80	Test Channel	122
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	7358.0	36.1	11.7	47.8	74.0	-26.2	Peak	Horizontal
	8454.5	35.4	12.3	47.7	74.0	-26.3	Peak	Horizontal
*	9891.0	34.6	16.2	50.8	68.2	-17.4	Peak	Horizontal
*	12951.0	32.6	17.7	50.3	68.2	-17.9	Peak	Horizontal
	7494.0	35.8	12.0	47.8	74.0	-26.2	Peak	Vertical
	8242.0	35.5	12.3	47.8	74.0	-26.2	Peak	Vertical
*	10401.0	34.1	16.8	50.9	68.2	-17.3	Peak	Vertical
*	12789.5	34.0	17.4	51.4	68.2	-16.8	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Tablet	Temperature	25°C
Test Engineer	Cloud Guo	Relative Humidity	56%
Test Site	AC2	Test Date	2019/04/23
Test Mode	802.11ac-VHT80	Test Channel	155
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	7570.5	36.4	11.8	48.2	74.0	-25.8	Peak	Horizontal
	8361.0	36.1	12.2	48.3	74.0	-25.7	Peak	Horizontal
*	10401.0	34.1	16.8	50.9	68.2	-17.3	Peak	Horizontal
*	13214.5	33.0	18.3	51.3	68.2	-16.9	Peak	Horizontal
	7332.5	35.0	11.7	46.7	74.0	-27.3	Peak	Vertical
	8318.5	35.2	12.3	47.5	74.0	-26.5	Peak	Vertical
*	10384.0	34.2	16.9	51.1	68.2	-17.1	Peak	Vertical
*	12781.0	33.5	17.4	50.9	68.2	-17.3	Peak	Vertical


Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

The Worst Case of Radiated Emission below 1GHz:

Site: AC2	Time: 2019/04/21 - 20:37
Limit: FCC_Part15.209_RE(3m)	Engineer: Messiah Li
Probe: VULB9162_0.03-8GHz	Polarity: Horizontal
EUT: Tablet	Power: By Battery
Worst Case Mode: Transmit by 802.11a at Channel 5180MHz	

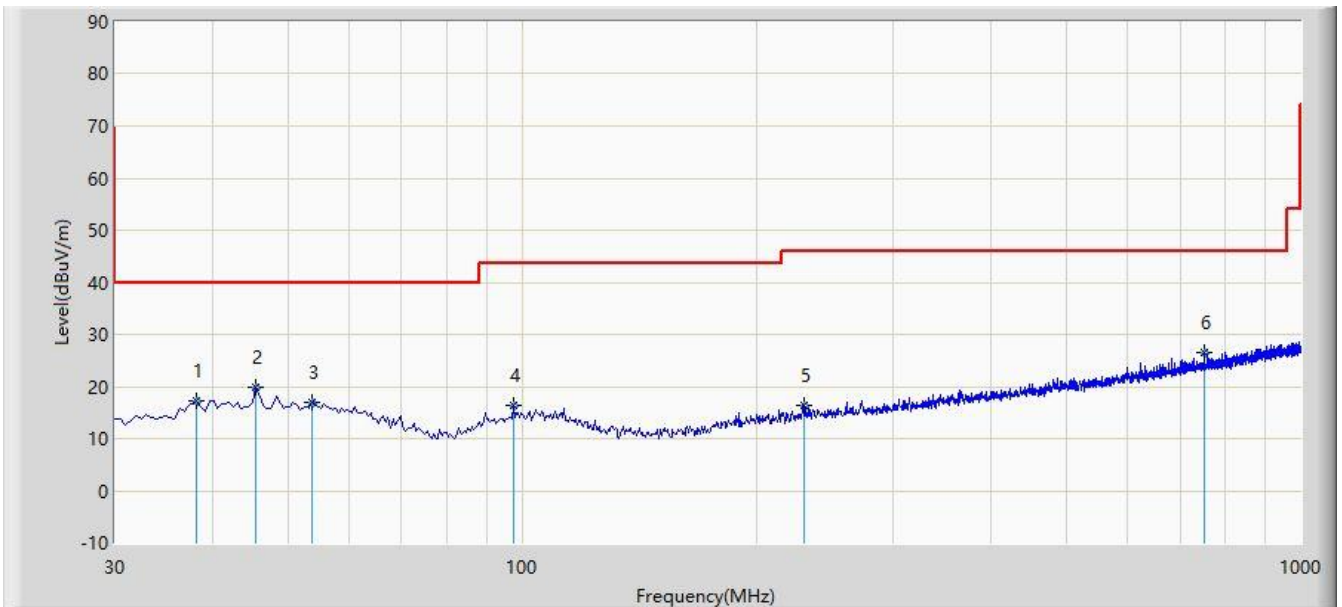


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			38.245	17.389	3.933	-22.611	40.000	13.455	QP
2			45.520	19.940	5.112	-20.060	40.000	14.828	QP
3			53.765	16.962	2.190	-23.038	40.000	14.772	QP
4			97.415	16.244	3.723	-27.256	43.500	12.521	QP
5			229.820	16.495	3.636	-29.505	46.000	12.859	QP
6		*	753.135	26.528	4.713	-19.472	46.000	21.816	QP

Note 1: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Note 2: The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible (the test frequency range: 9kHz ~ 30MHz, 18GHz ~ 40GHz), therefore no data appear in the report.

Site: AC2	Time: 2019/04/21 - 20:39
Limit: FCC_Part15.209_RE(3m)	Engineer: Messiah Li
Probe: VULB9162_0.03-8GHz	Polarity: Vertical
EUT: Tablet	Power: By Battery
Worst Case Mode: Transmit by 802.11a at Channel 5180MHz	

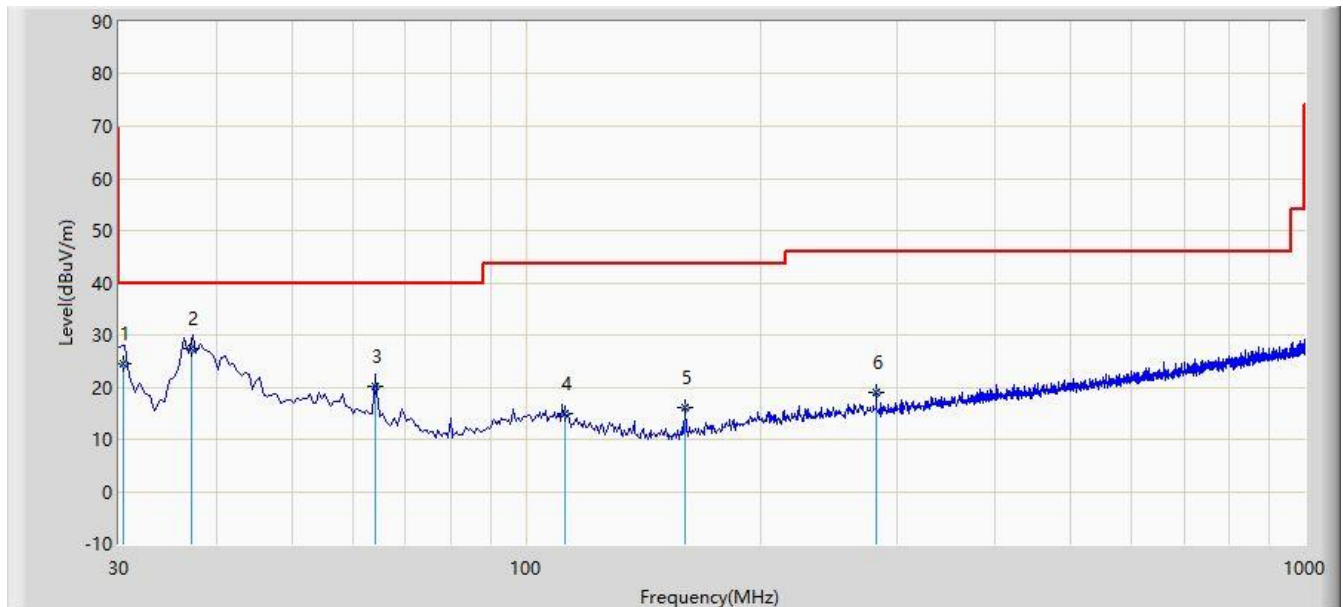

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			30.420	24.451	12.410	-15.549	40.000	12.041	QP
2		*	37.250	27.530	14.250	-12.470	40.000	13.280	QP
3			63.980	20.016	7.240	-19.984	40.000	12.777	QP
4			112.450	15.011	2.645	-28.489	43.500	12.365	QP
5			159.980	15.972	6.299	-27.528	43.500	9.673	QP
6			281.715	18.940	4.956	-27.060	46.000	13.985	QP

Note 1: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Note 2: The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible (the test frequency range: 9kHz ~ 30MHz, 18GHz ~ 40GHz), therefore no data appear in the report.

7.9. Radiated RestrictedBand Edge Measurement

7.9.1.Test Limit

For 15.205 Requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42-16.423	399.9 - 410	4.5-5.15
¹ 0.495 - 0.505	16.69475-16.69525	608 - 614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960 - 1240	7.25-7.75
4.125-4.128	25.5 -25.67	1300 - 1427	8.025 - 8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660 - 1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123 - 138	2200 - 2300	14.47-14.5
8.291-8.294	149.9-150.05	2310–2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5 - 2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690 - 2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260 - 3267	23.6-24.0
12.29-12.293	167.72-173.2	3332 - 3339	31.2-31.8
12.51975-12.52025	240 - 285	3345.8 - 3358	36.43-36.5
12.57675-12.57725	322-335.4	3600 - 4400	(²)
13.36-13.41	--	--	--

For 15.407(b) Requirement:

For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceedan e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.725-5.85 GHz band: All emissions within the frequency range

from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of -17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of -27 dBm/MHz.

Refer to KDB 789033 D02v02r01 G)2)c), as specified in § 15.407(b), emissions above 1000 MHz that are outside of the restricted bands are subject to a maximum emission limit of -27 dBm/MHz (or -17 dBm/MHz as specified in § 15.407(b)(4)). However, an out-of-band emission that complies with both the peak and average limits of § 15.209 is not required to satisfy the -27 dBm/MHz or -17 dBm/MHz maximum emission limit.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency (MHz)	Field Strength (μ V/m)	Measured Distance (m)
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

For RSS-Gen Section 8.10 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 8.10 of RSS-Gen, must also comply with the radiated emission limits specified in Section 8.9.

Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.009 - 0.110	149.9 - 150.05	9.0 - 9.2
0.495 - 0.505	156.52475 - 156.525225	9.3 - 9.5
2.1735 - 2.1905	156.7 - 156.9	10.6 - 12.7
3.020 - 3.026	162.0125 - 167.17	13.25 - 13.4
4.125 - 4.128	167.72 - 173.2	14.47 - 14.5
4.17725 - 4.17775	240 - 285	15.35 - 16.2
4.20725 - 4.20775	322 - 335.4	17.7 - 21.4
5.677 - 5.683	399.9 - 410	22.01 - 23.12
6.215 - 6.218	608 - 614	23.6 - 24.0
6.26775 - 6.26825	960 - 1427	31.2 - 31.8
6.31175 - 6.31225	1435 - 1626.5	36.43 - 36.5
8.291 - 8.294	1645.5 - 1646.5	Above 38.6
8.362 - 8.366	1660 - 1710	--
8.37625 - 8.38675	1718.8 -1722.2	
8.41425 - 8.41475	2200 - 2300	
12.29 - 12.293	2310 -2390	
12.51975 - 12.52025	2483.5 -2500	
12.57675 - 12.57725	2655 - 2900	
13.36 -13.41	3260 - 3267	
16.42 - 16.423	3332 -3339	
16.69475 - 16.69525	3345.8 - 3358	
16.80425 - 16.80475	3500 - 4400	
25.5 - 25.67	4500 - 5150	
37.5 - 38.25	5350 - 5460	
73 - 74.6	7250 - 7750	
74.8 - 75.2	8025 - 8500	
108 - 138		

All out of band emissions appearing in a restricted band as specified in Section 8.10 of the RSS-Gen must not exceed the limits shown in Table per Section 8.9.

RSS-Gen Section 8.9			
Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Magnetic Field Strength (H-Field) ($\mu\text{A/m}$)	Measured Distance (m)
0.009 - 0.4901	--	6.37/F (F in kHz)	300
0.490 - 1.705	--	6.37/F (F in kHz)	30
1.705 - 30	--	0.08	30
30 - 88	100	--	3
88 - 216	150	--	3
216 - 960	200	--	3
Above 960	500	--	3

7.9.2. Test Procedure Used

ANSI C63.10 - Section 6.3 (General Requirements)

ANSI C63.10 - Section 6.6 (Standard test method above 1GHz)


7.9.3. Test Setting

Peak Measurements above 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = Peak
5. Sweep time = Auto couple
6. Trace mode = Max hold
7. Trace was allowed to stabilize


Average Measurements above 1GHz (Method VB)

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; if the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10Hz
4. If the EUT duty cycle is $< 98\%$, set VBW $\geq 1/T$. T is the minimum transmission duration
5. Detector = Peak
6. Sweep time = Auto
7. Trace mode = Max hold
8. Trace was allowed to stabilize

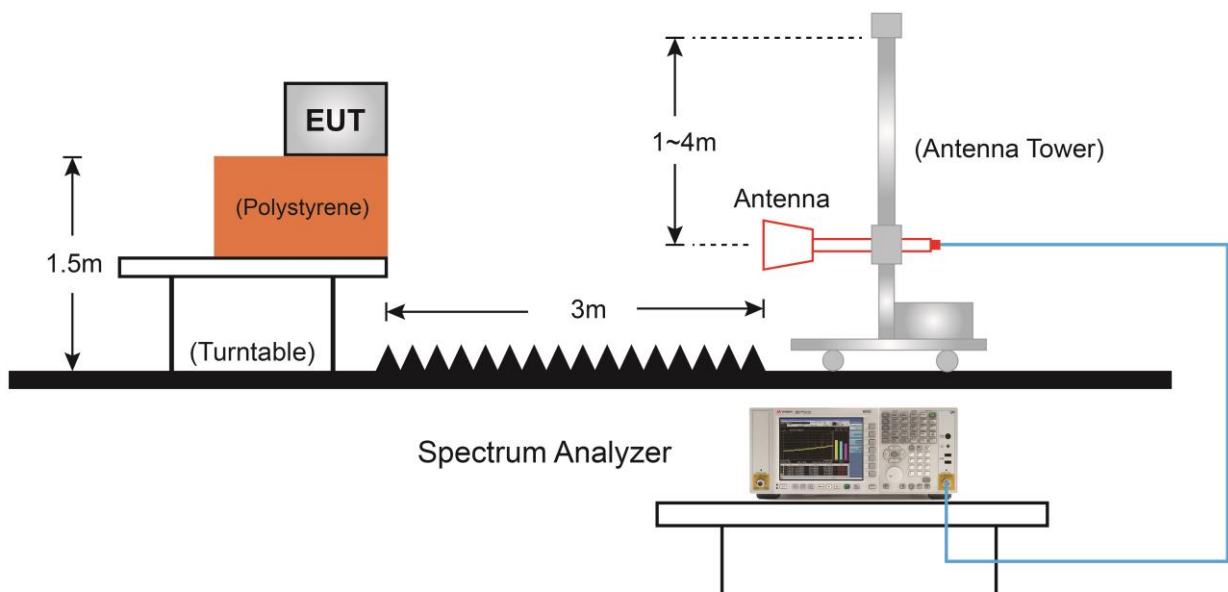7.9.4.Test Setup

7.9.5.Test Result

Site: AC2	Time: 2019/04/23 - 02:18
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Tablet	Power: By Battery
Test Mode: Transmit by 802.11a at Channel 5180MHz	

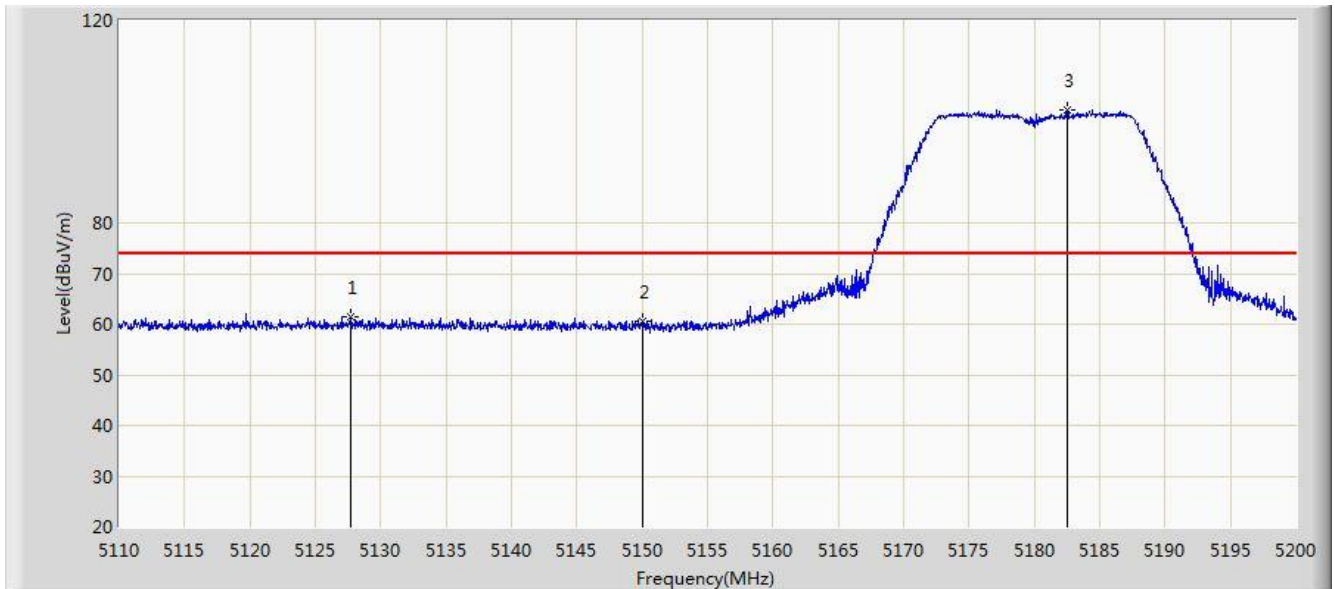


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5127.730	61.513	54.903	-12.487	74.000	6.610	PK
2			5150.000	60.570	54.173	-13.430	74.000	6.398	PK
3		*	5182.495	102.417	95.833	N/A	N/A	6.584	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/04/23 - 02:20
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Tablet	Power: By Battery
Test Mode: Transmit by 802.11a at Channel 5180MHz	

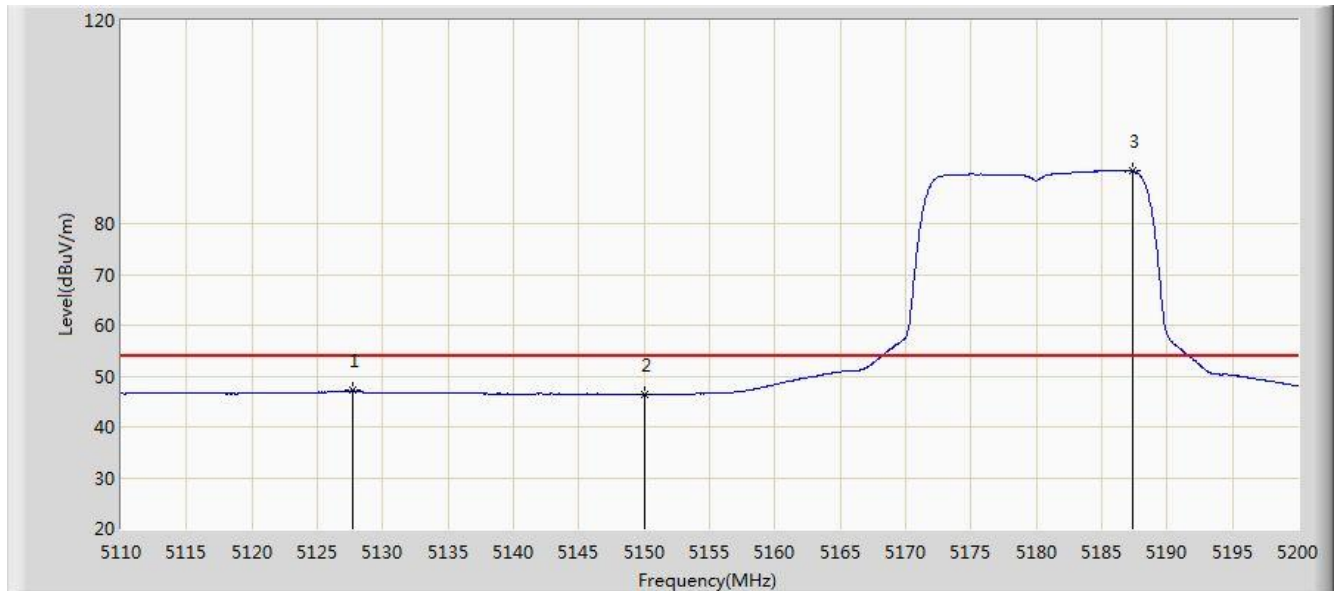


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5127.730	47.110	40.500	-6.890	54.000	6.610	AV
2			5150.000	46.490	40.093	-7.510	54.000	6.398	AV
3		*	5187.355	90.352	83.816	N/A	N/A	6.536	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/04/23 - 02:21
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Tablet	Power: By Battery
Test Mode: Transmit by 802.11a at Channel 5180MHz	

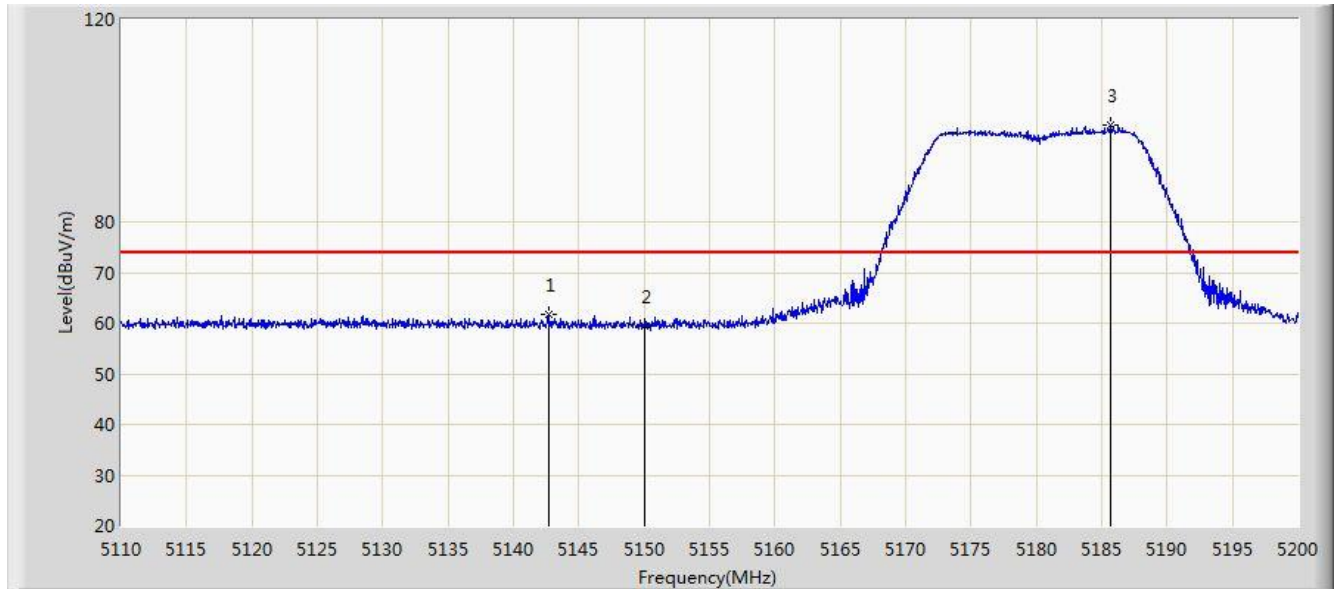


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5142.670	61.773	55.302	-12.227	74.000	6.471	PK
2			5150.000	59.449	53.052	-14.551	74.000	6.398	PK
3		*	5185.645	99.115	92.562	N/A	N/A	6.554	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/04/23 - 02:23
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Tablet	Power: By Battery
Test Mode: Transmit by 802.11a at Channel 5180MHz	

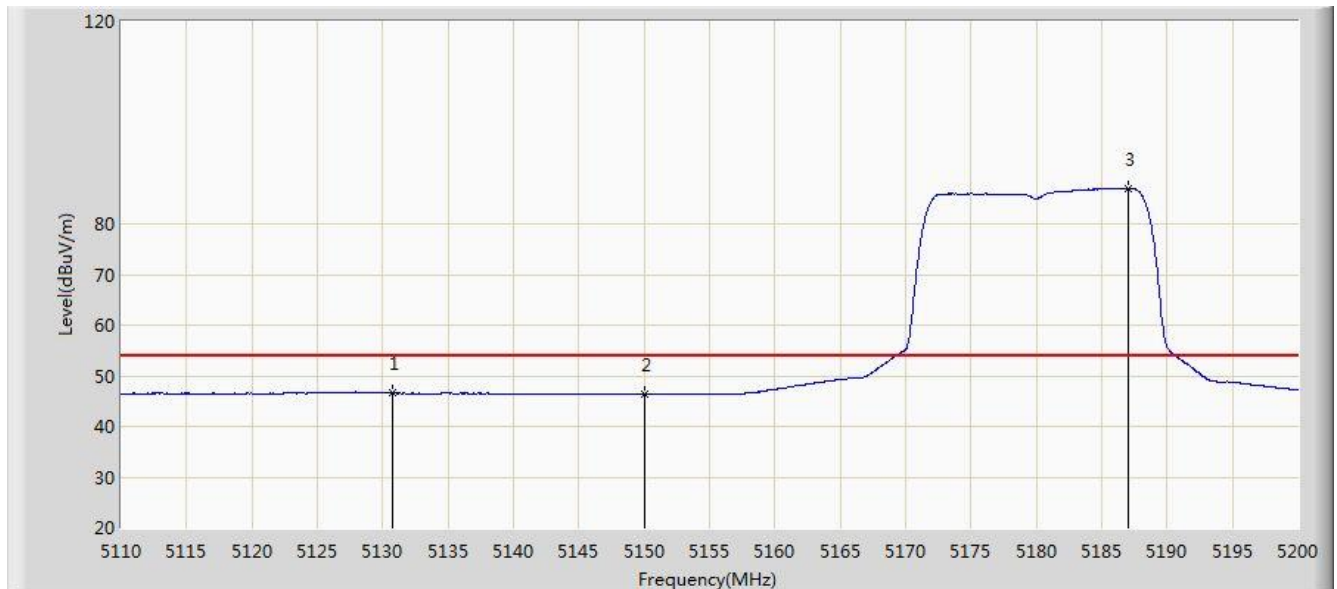


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5130.745	46.580	39.939	-7.420	54.000	6.641	AV
2			5150.000	46.302	39.905	-7.698	54.000	6.398	AV
3		*	5186.995	86.928	80.388	N/A	N/A	6.539	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/04/23 - 02:25
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Tablet	Power: By Battery
Test Mode: Transmit by 802.11a at Channel 5320MHz	

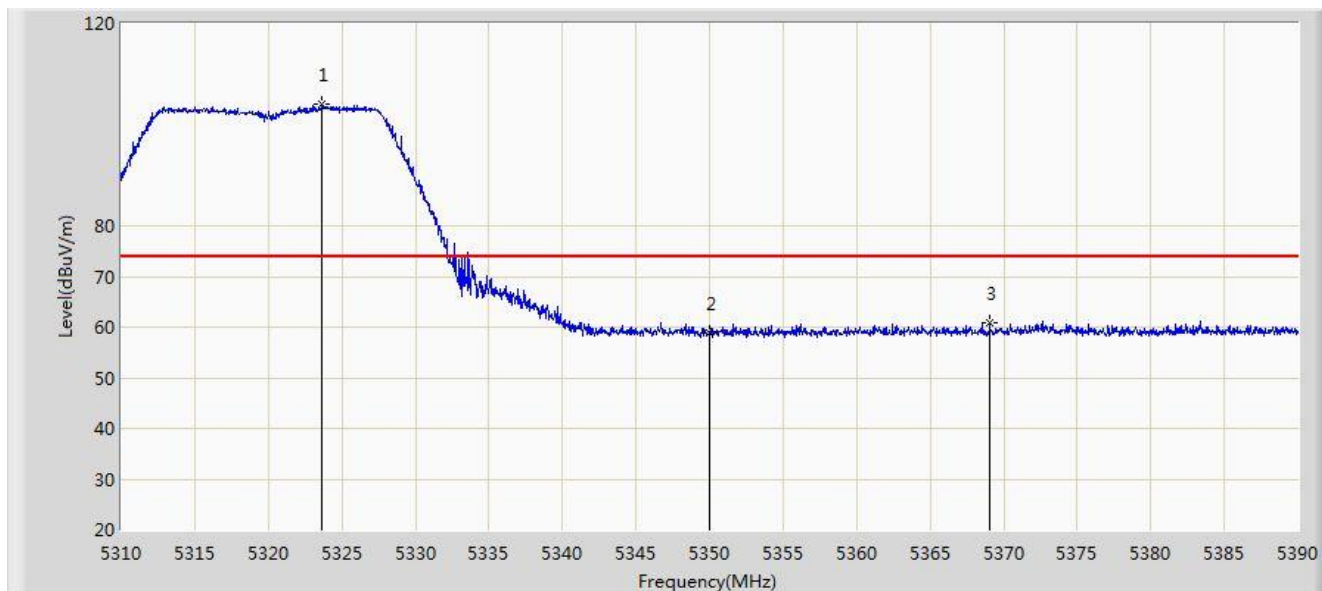


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5323.680	104.196	97.853	N/A	N/A	6.343	PK
2			5350.000	58.706	52.379	-15.294	74.000	6.327	PK
3			5369.040	60.992	54.541	-13.008	74.000	6.451	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/04/23 - 02:29
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Tablet	Power: By Battery
Test Mode: Transmit by 802.11a at Channel 5320MHz	

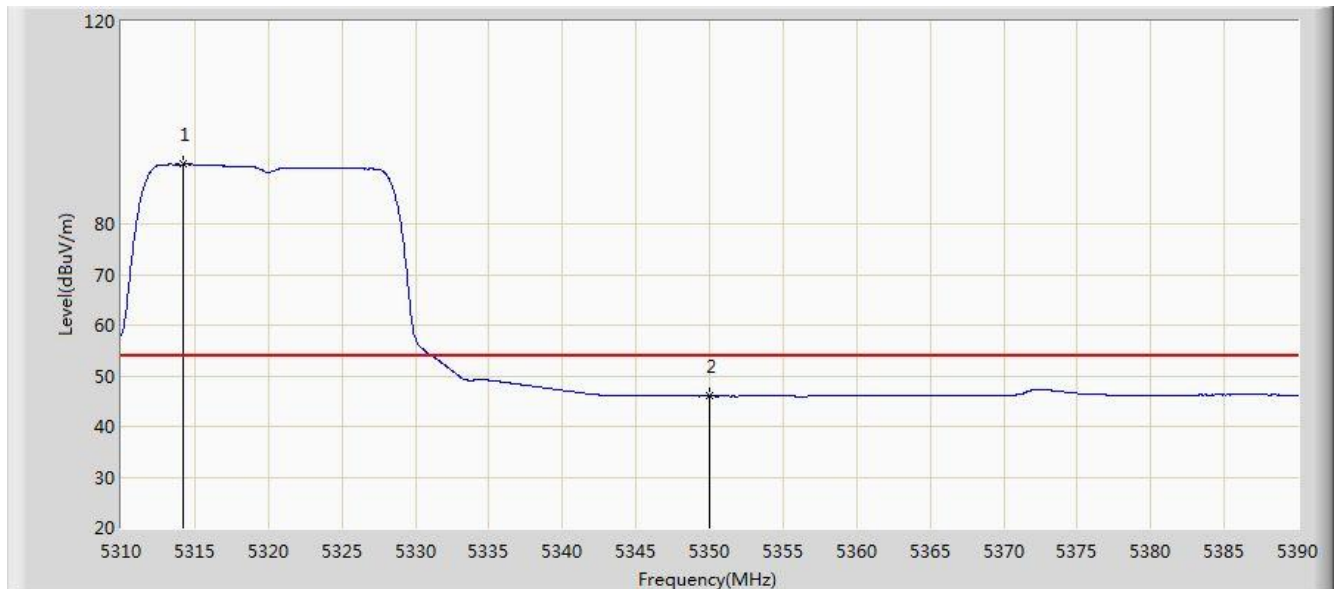


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5314.200	91.747	85.413	N/A	N/A	6.333	AV
2			5350.000	45.994	39.667	-8.006	54.000	6.327	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/04/23 - 02:29
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Tablet	Power: By Battery
Test Mode: Transmit by 802.11a at Channel 5320MHz	

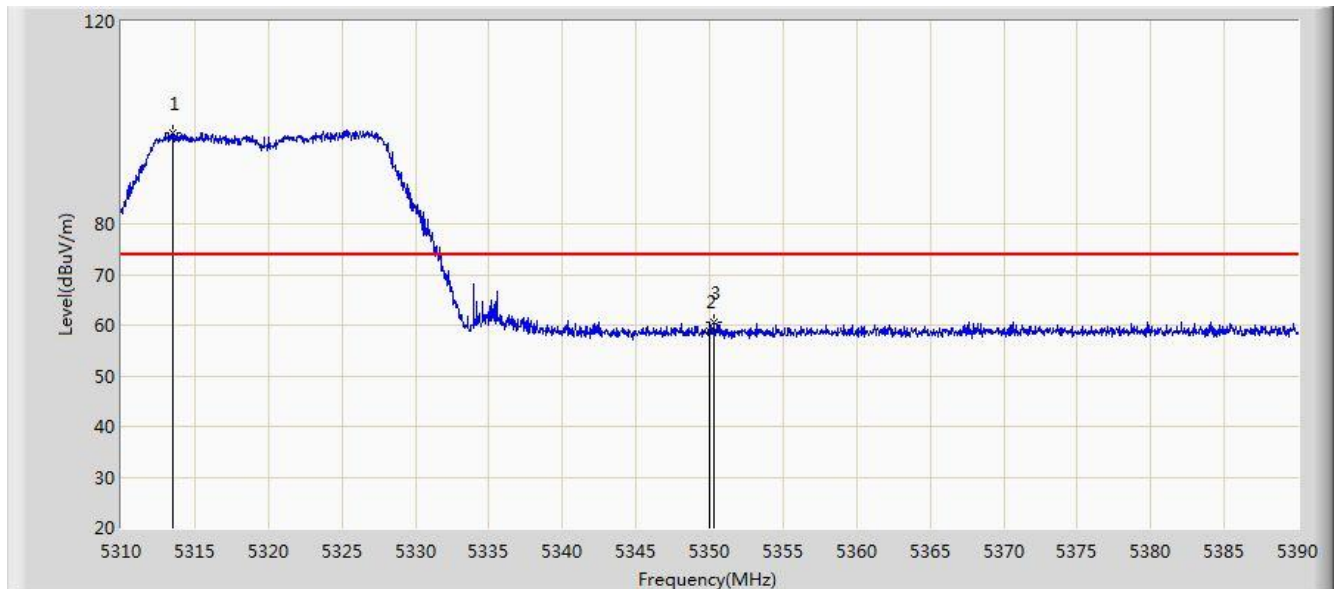


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5313.520	97.894	91.563	N/A	N/A	6.330	PK
2			5350.000	58.795	52.468	-15.205	74.000	6.327	PK
3			5350.320	60.580	54.253	-13.420	74.000	6.328	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/04/23 - 02:31
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Tablet	Power: By Battery
Test Mode: Transmit by 802.11a at Channel 5320MHz	

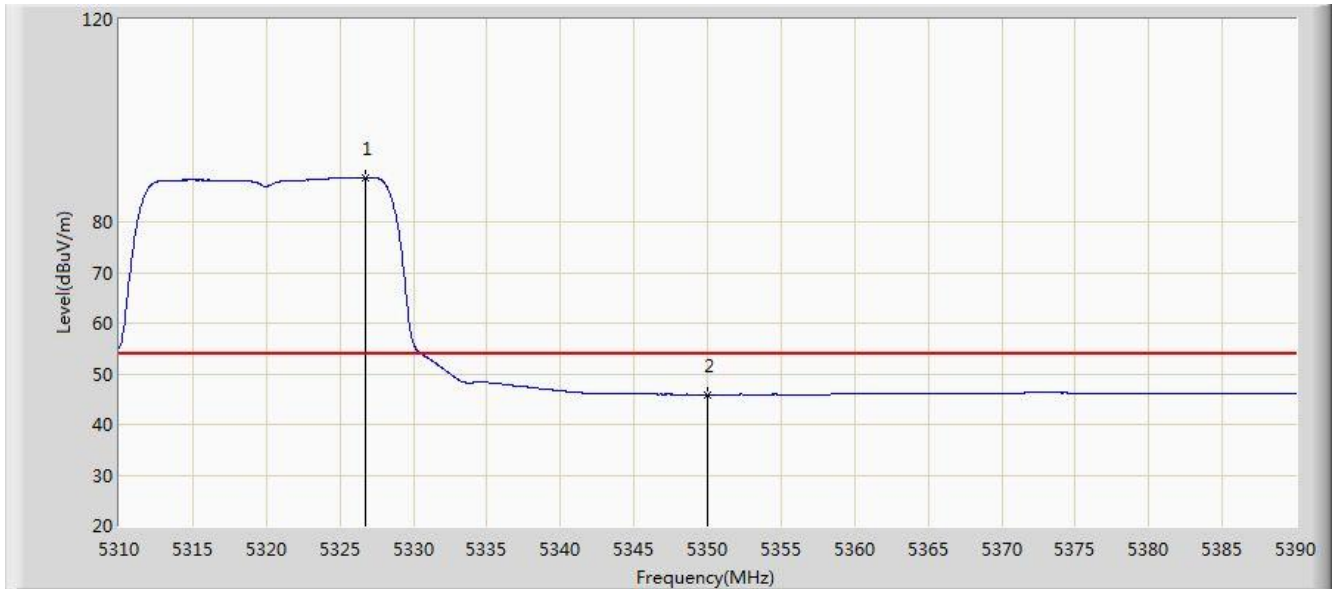


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5326.760	88.729	82.389	N/A	N/A	6.340	AV
2			5350.000	45.900	39.573	-8.100	54.000	6.327	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/04/23 - 02:32
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Tablet	Power: By Battery
Test Mode: Transmit by 802.11a at Channel 5500MHz	

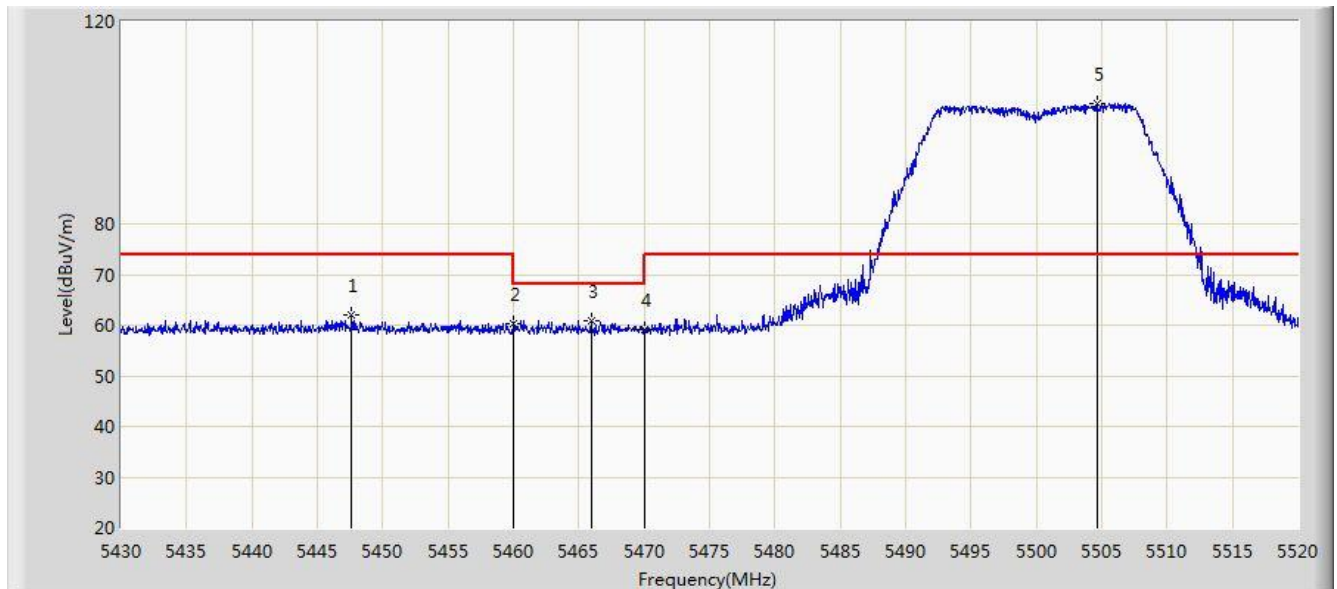


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5447.640	62.040	55.427	-11.960	74.000	6.613	PK
2			5460.000	60.389	53.777	-13.611	74.000	6.612	PK
3			5465.955	61.005	54.420	-7.195	68.200	6.585	PK
4			5470.000	59.106	52.539	-9.094	68.200	6.567	PK
5		*	5504.655	103.830	97.089	N/A	N/A	6.741	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/04/23 - 02:33
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Tablet	Power: By Battery
Test Mode: Transmit by 802.11a at Channel 5500MHz	

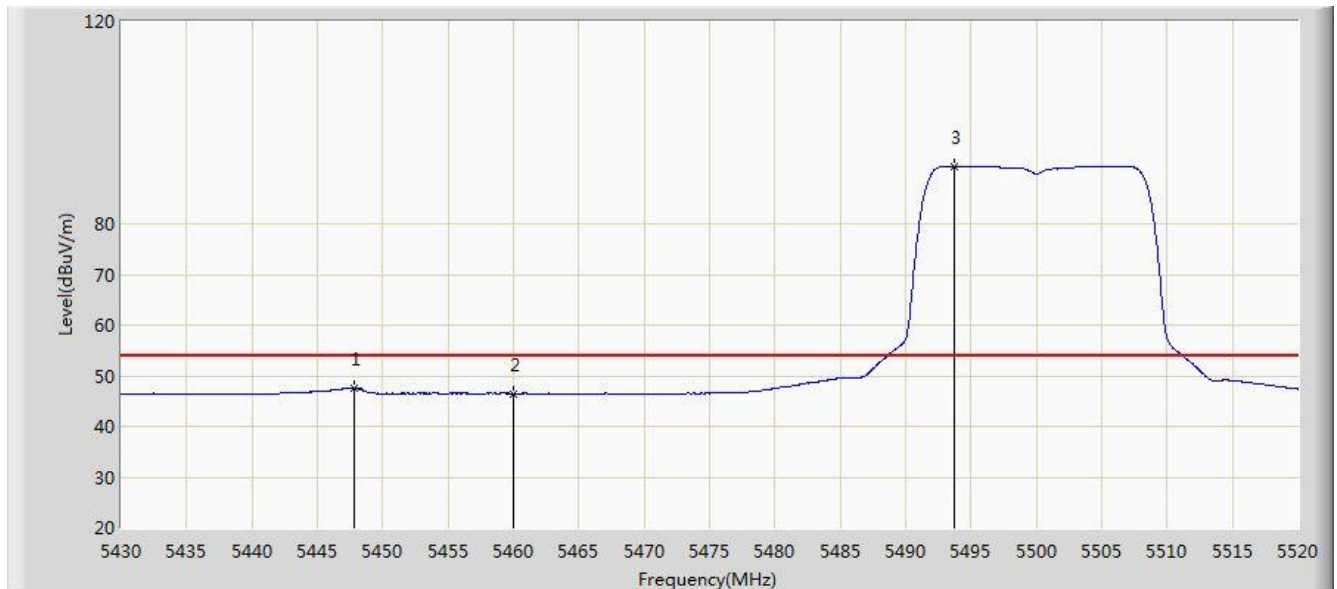


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5447.865	47.551	40.937	-6.449	54.000	6.614	AV
2			5460.000	46.508	39.896	-7.492	54.000	6.612	AV
3		*	5493.765	91.321	84.659	N/A	N/A	6.662	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/04/23 - 02:34
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Tablet	Power: By Battery
Test Mode: Transmit by 802.11a at Channel 5500MHz	

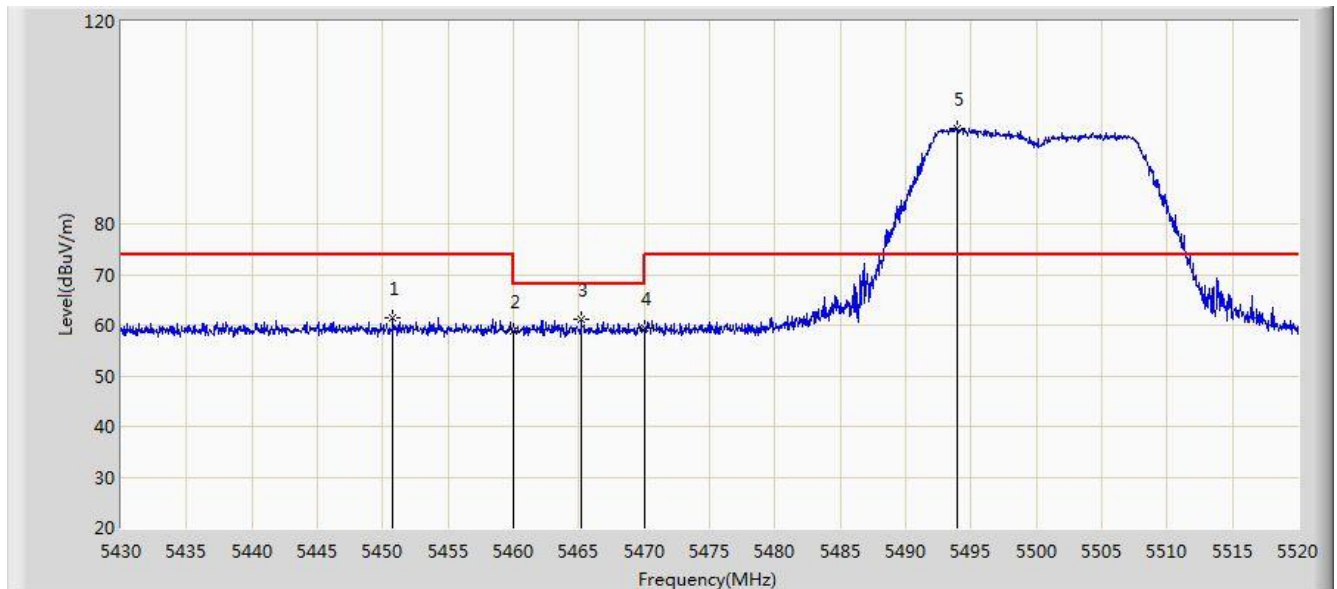


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5450.790	61.584	54.958	-12.416	74.000	6.625	PK
2			5460.000	58.703	52.091	-15.297	74.000	6.612	PK
3			5465.190	61.199	54.610	-7.001	68.200	6.588	PK
4			5470.000	59.305	52.738	-8.895	68.200	6.567	PK
5		*	5493.900	98.728	92.065	N/A	N/A	6.663	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/04/23 - 02:35
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Tablet	Power: By Battery
Test Mode: Transmit by 802.11a at Channel 5500MHz	

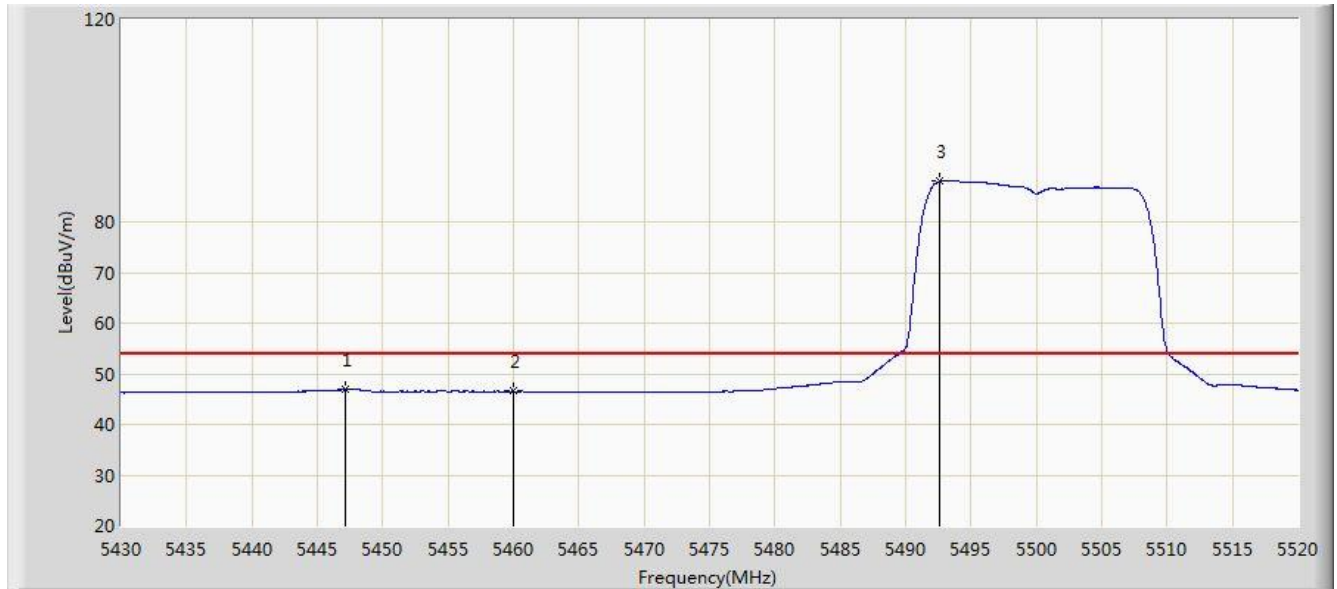


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5447.190	46.875	40.264	-7.125	54.000	6.611	AV
2			5460.000	46.535	39.923	-7.465	54.000	6.612	AV
3		*	5492.640	87.983	81.329	N/A	N/A	6.654	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/04/23 - 02:36
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Tablet	Power: By Battery
Test Mode: Transmit by 802.11a at Channel 5700MHz	

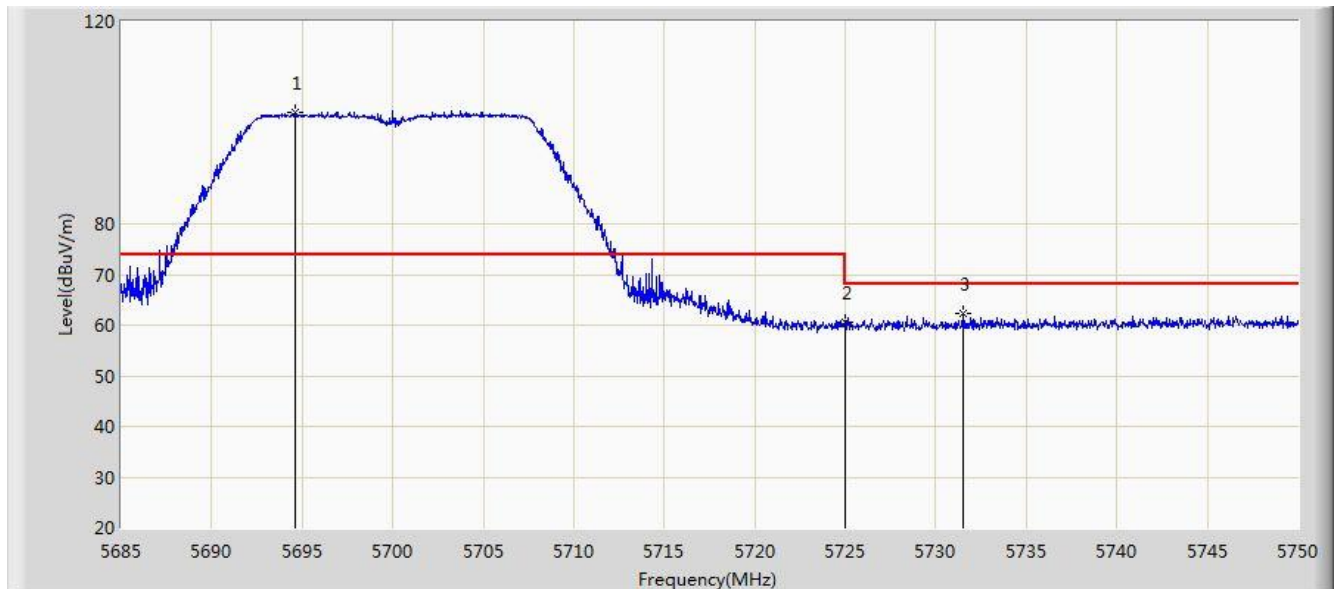


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5694.587	102.086	95.218	N/A	N/A	6.868	PK
2			5725.000	60.521	53.654	-7.679	68.200	6.867	PK
3			5731.475	62.222	55.324	-5.978	68.200	6.897	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/04/23 - 02:39
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Tablet	Power: By Battery
Test Mode: Transmit by 802.11a at Channel 5700MHz	

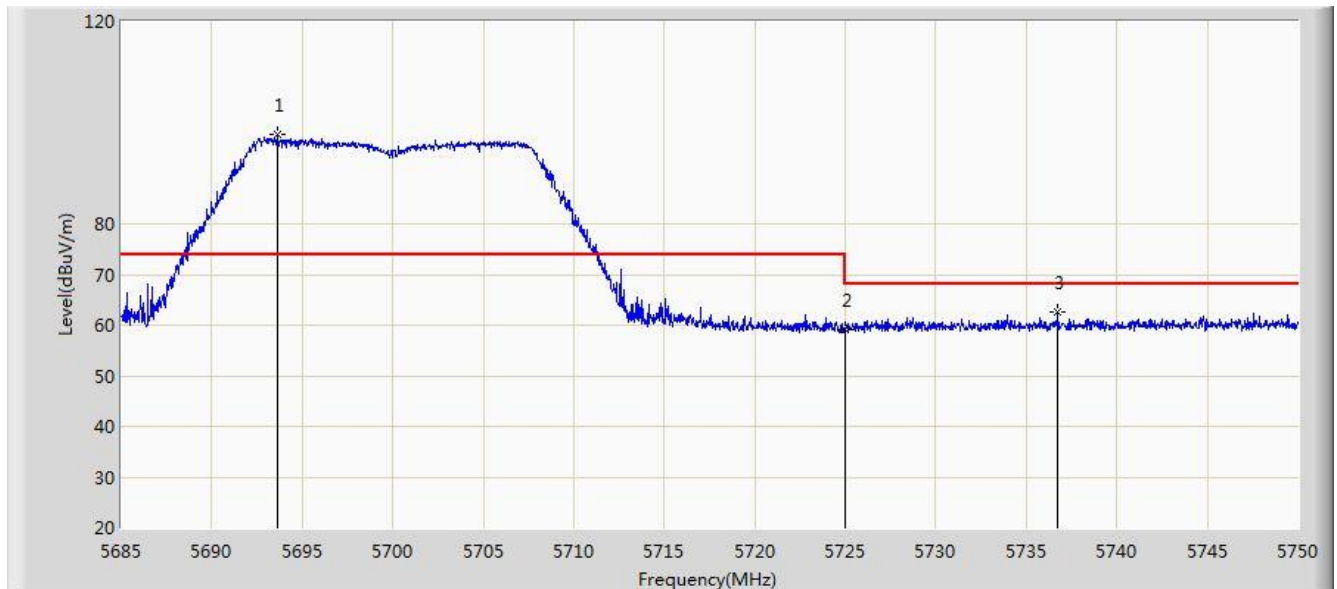


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5693.645	97.567	90.706	N/A	N/A	6.861	PK
2			5725.000	59.254	52.387	-8.946	68.200	6.867	PK
3			5736.740	62.684	55.750	-5.516	68.200	6.934	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/04/23 - 02:40
Limit: FCC_Part15.407_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Tablet	Power: By Battery
Test Mode: Transmit by 802.11a at Channel 5745MHz	

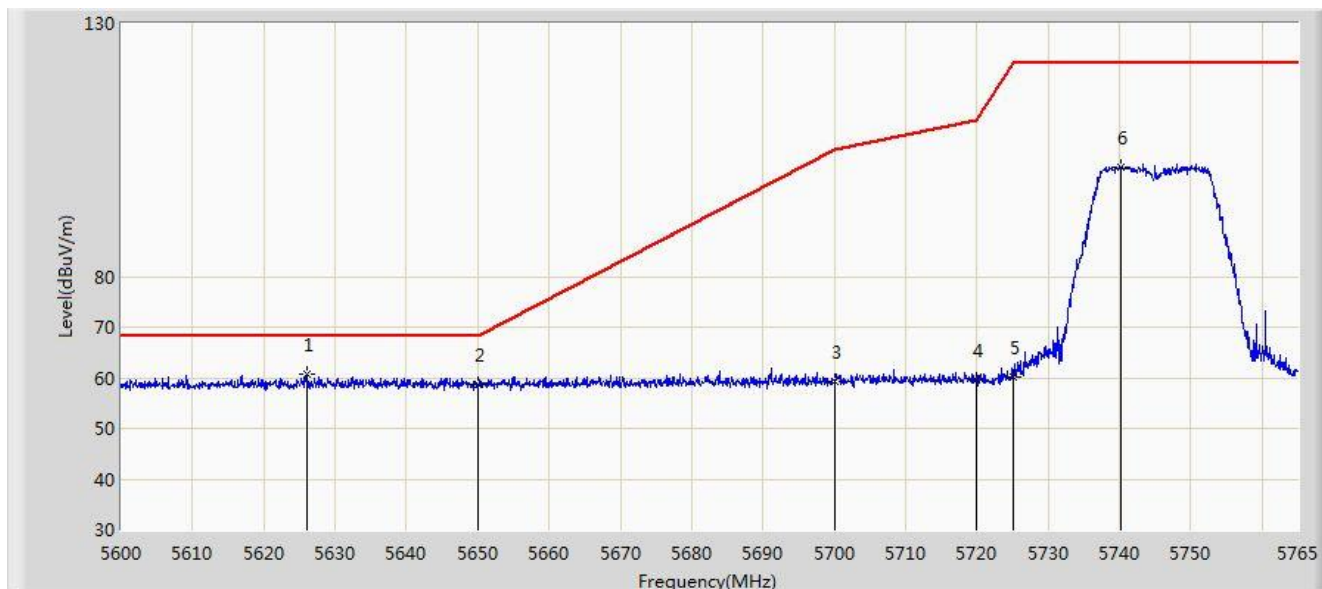


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5626.152	60.762	54.026	-7.438	68.200	6.736	PK
2			5650.000	58.586	51.793	-9.614	68.200	6.793	PK
3			5700.000	59.249	52.340	-45.951	105.200	6.909	PK
4			5720.000	59.687	52.783	-51.113	110.800	6.904	PK
5			5725.000	60.180	53.313	-62.020	122.200	6.867	PK
6			5740.167	101.663	94.706	N/A	N/A	6.956	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/04/23 - 02:42
Limit: FCC_Part15.407_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Tablet	Power: By Battery
Test Mode: Transmit by 802.11a at Channel 5745MHz	

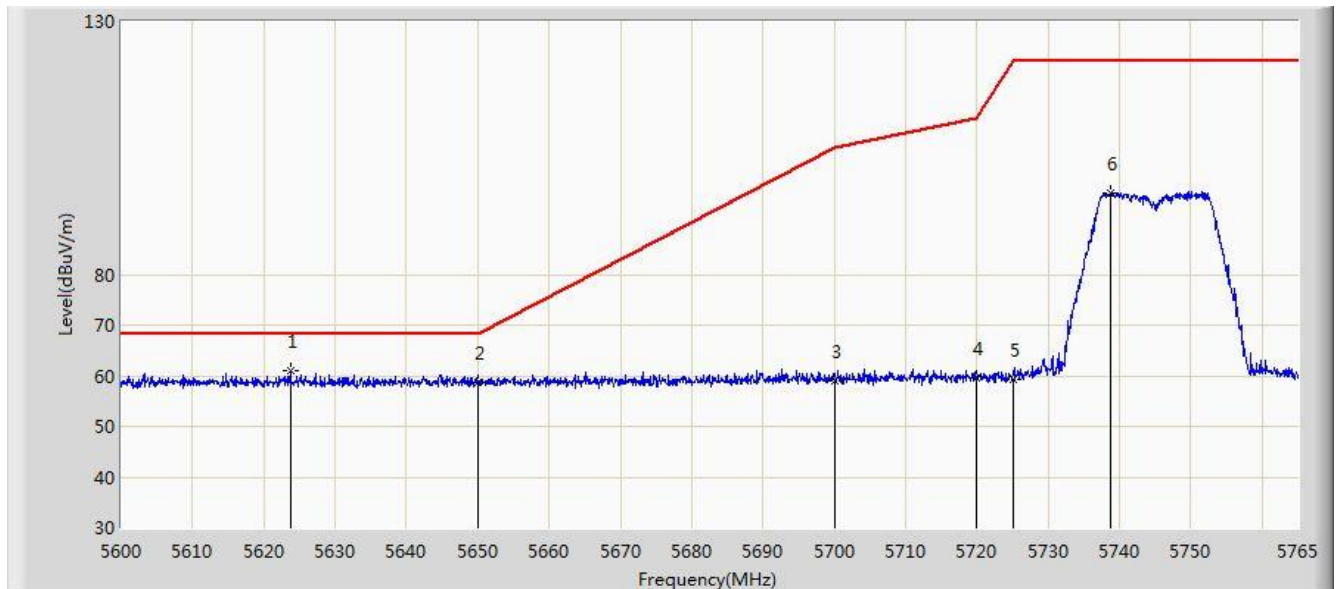


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5623.678	61.085	54.364	-7.115	68.200	6.720	PK
2			5650.000	58.797	52.004	-9.403	68.200	6.793	PK
3			5700.000	59.005	52.096	-46.195	105.200	6.909	PK
4			5720.000	59.464	52.560	-51.336	110.800	6.904	PK
5			5725.000	59.368	52.501	-62.832	122.200	6.867	PK
6			5738.765	96.060	89.112	N/A	N/A	6.948	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/04/23 - 02:43
Limit: FCC_Part15.407_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Tablet	Power: By Battery
Test Mode: Transmit by 802.11a at Channel 5825MHz	

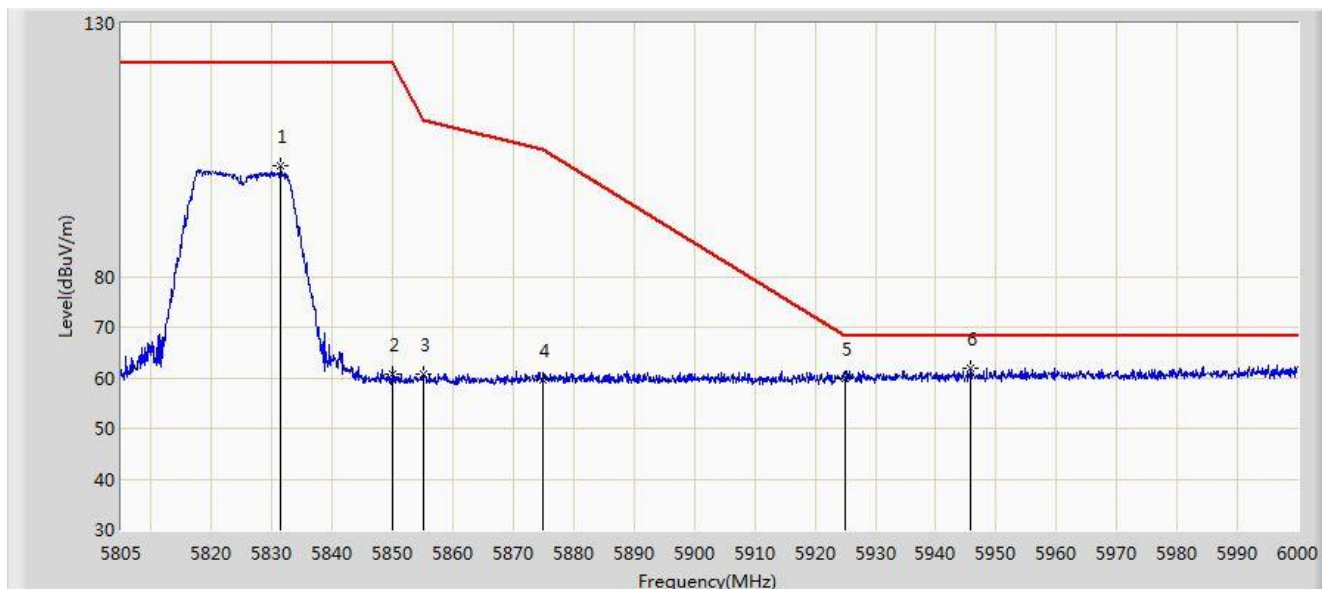


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5831.422	101.768	94.393	N/A	N/A	7.375	PK
2			5850.000	60.721	53.391	-61.479	122.200	7.331	PK
3			5855.000	60.588	53.260	-50.212	110.800	7.327	PK
4			5875.000	59.422	52.008	-45.778	105.200	7.414	PK
5			5925.000	59.916	52.616	-8.284	68.200	7.299	PK
6		*	5945.790	61.780	54.289	-6.420	68.200	7.491	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/04/23 - 02:45
Limit: FCC_Part15.407_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Tablet	Power: By Battery
Test Mode: Transmit by 802.11a at Channel 5825MHz	

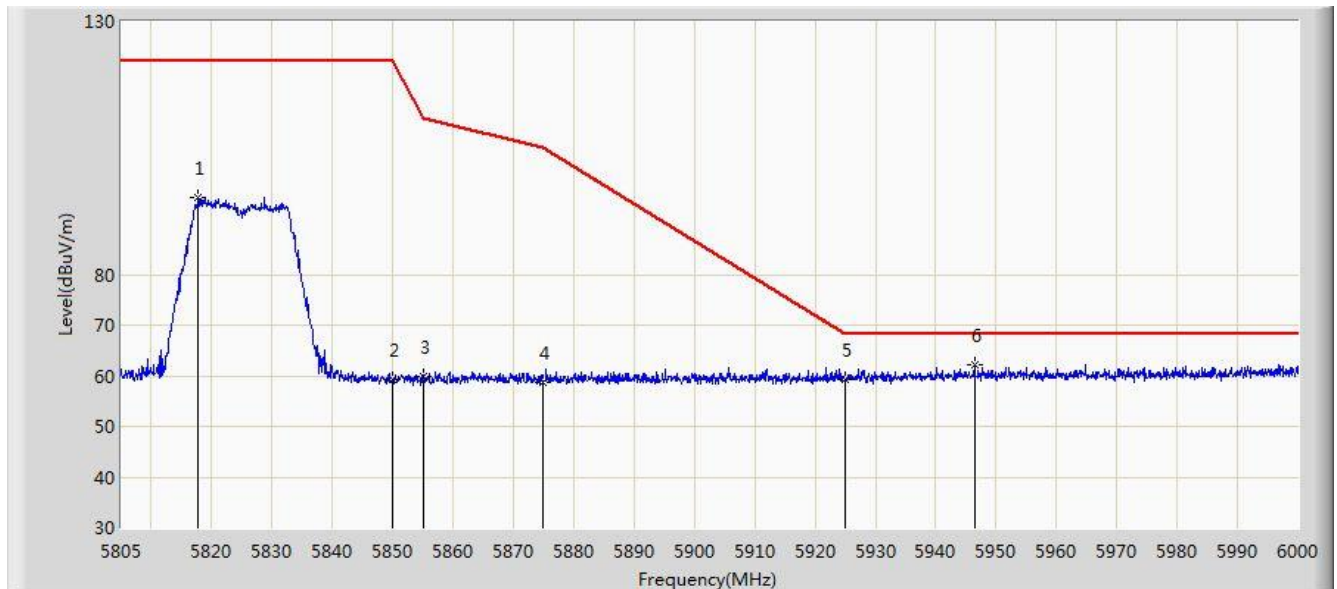


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5817.772	95.209	87.977	N/A	N/A	7.232	PK
2			5850.000	59.132	51.802	-63.068	122.200	7.331	PK
3			5855.000	59.974	52.646	-50.826	110.800	7.327	PK
4			5875.000	58.562	51.148	-46.638	105.200	7.414	PK
5			5925.000	59.150	51.850	-9.050	68.200	7.299	PK
6		*	5946.375	62.166	54.668	-6.034	68.200	7.499	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/04/23 - 02:46
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Tablet	Power: By Battery
Test Mode: Transmit by 802.11n-HT20 at Channel 5180MHz	

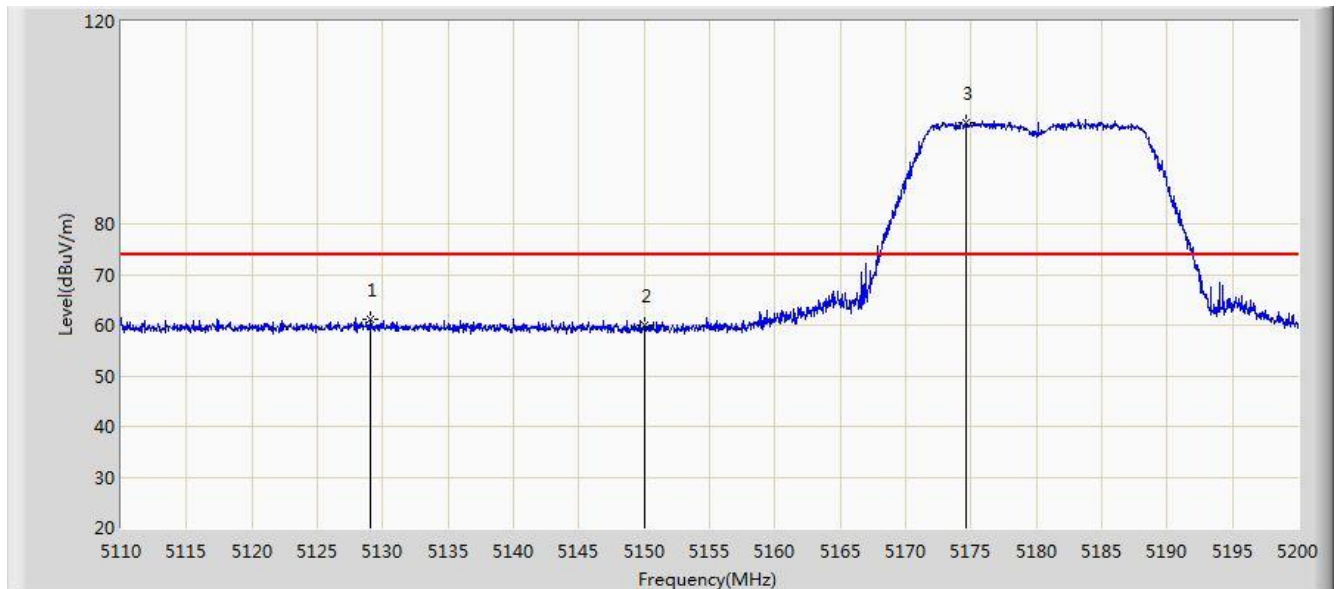


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5129.080	61.303	54.679	-12.697	74.000	6.623	PK
2			5150.000	59.913	53.516	-14.087	74.000	6.398	PK
3		*	5174.575	100.003	93.486	N/A	N/A	6.518	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/04/23 - 02:48
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Tablet	Power: By Battery
Test Mode: Transmit by 802.11n-HT20 at Channel 5180MHz	

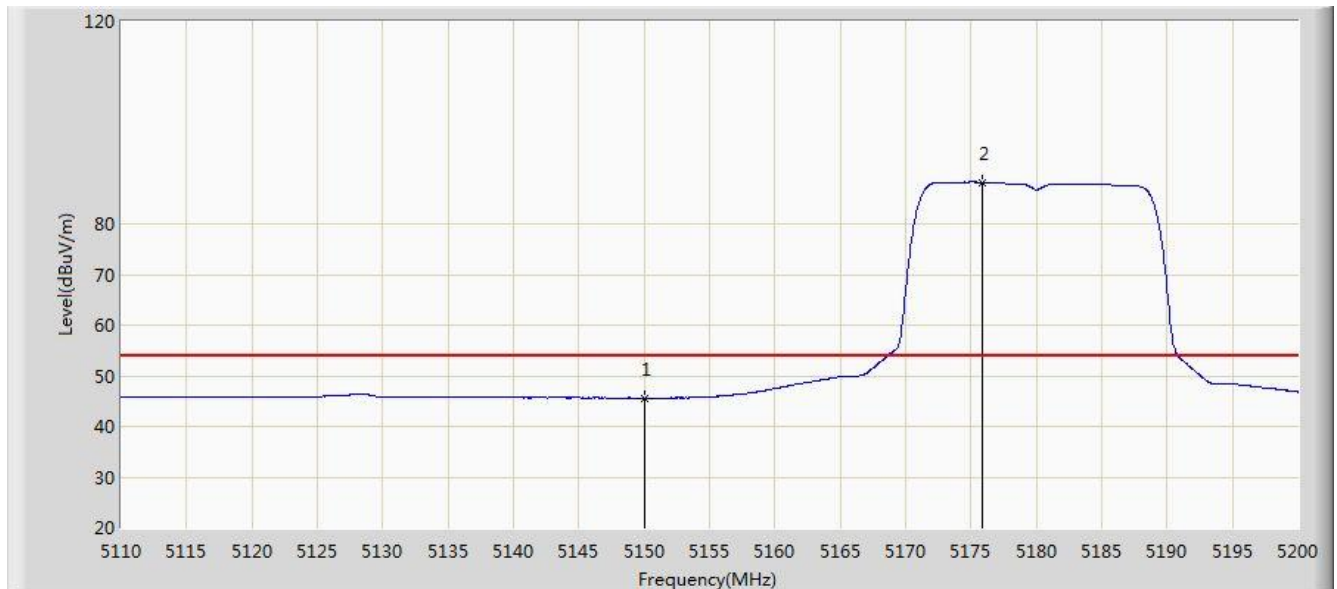


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	45.565	39.168	-8.435	54.000	6.398	AV
2		*	5175.880	88.244	81.714	N/A	N/A	6.530	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/04/23 - 02:48
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Tablet	Power: By Battery
Test Mode: Transmit by 802.11n-HT20 at Channel 5180MHz	

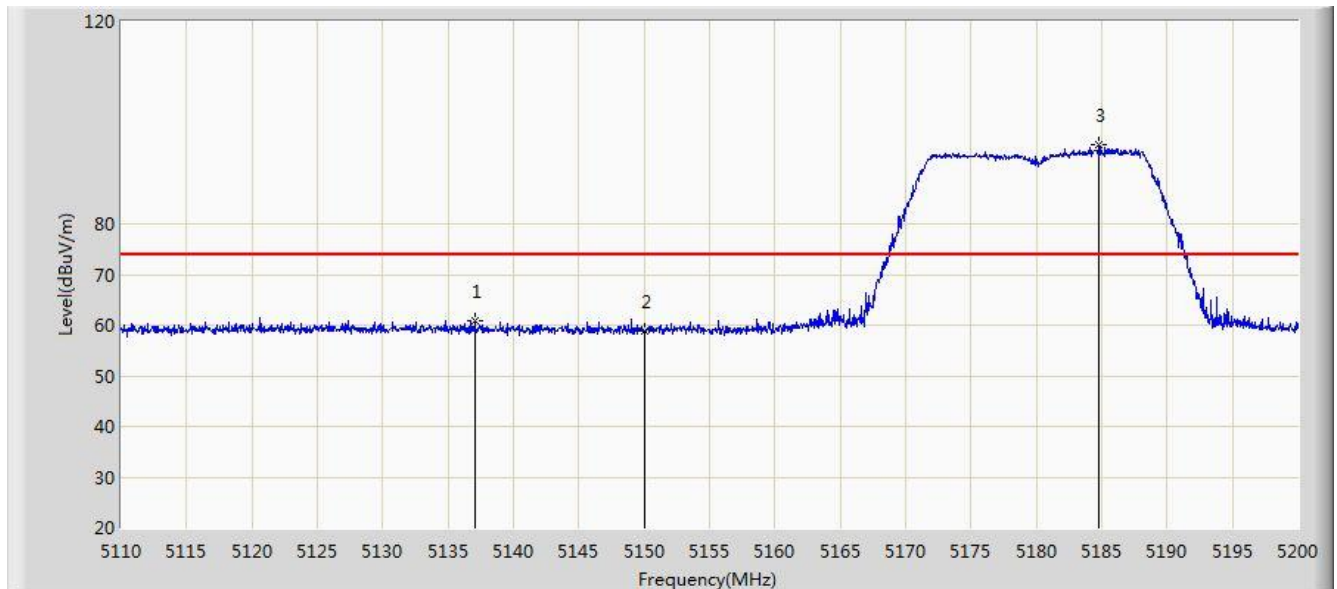


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5137.045	60.980	54.424	-13.020	74.000	6.556	PK
2			5150.000	58.732	52.335	-15.268	74.000	6.398	PK
3		*	5184.790	95.583	89.021	N/A	N/A	6.562	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/04/23 - 02:51
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Tablet	Power: By Battery
Test Mode: Transmit by 802.11n-HT20 at Channel 5180MHz	

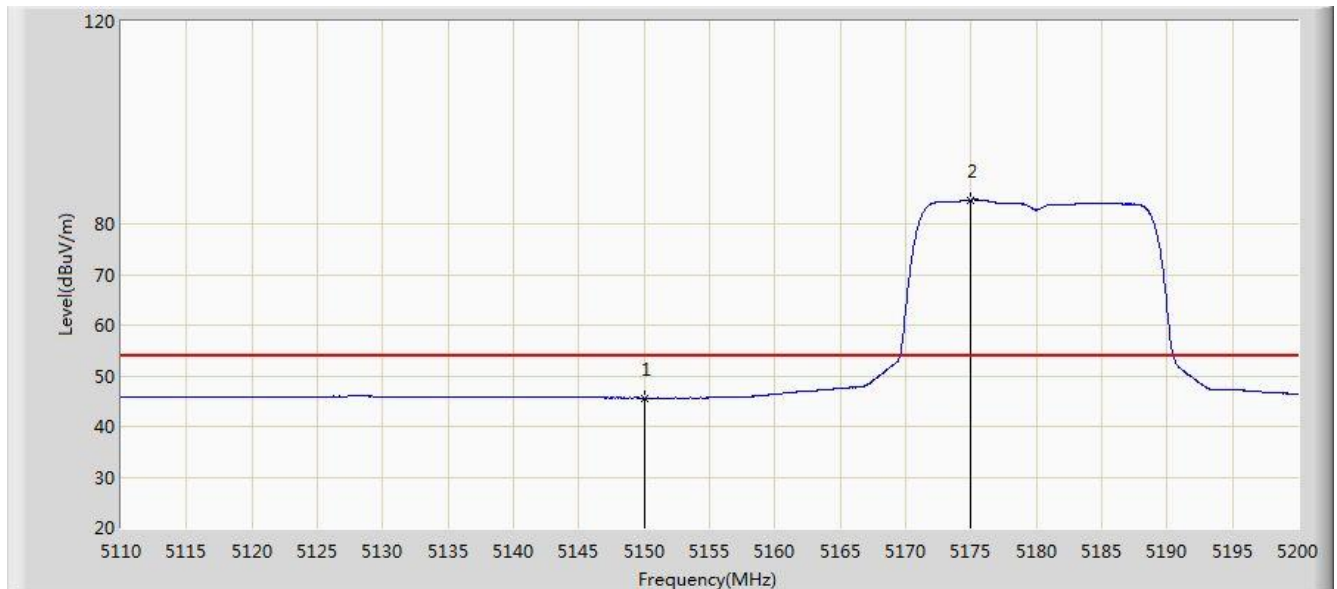


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	45.626	39.229	-8.374	54.000	6.398	AV
2		*	5174.935	84.761	78.240	N/A	N/A	6.521	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/04/23 - 02:52
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Tablet	Power: By Battery
Test Mode: Transmit by 802.11n-HT20 at Channel 5320MHz	

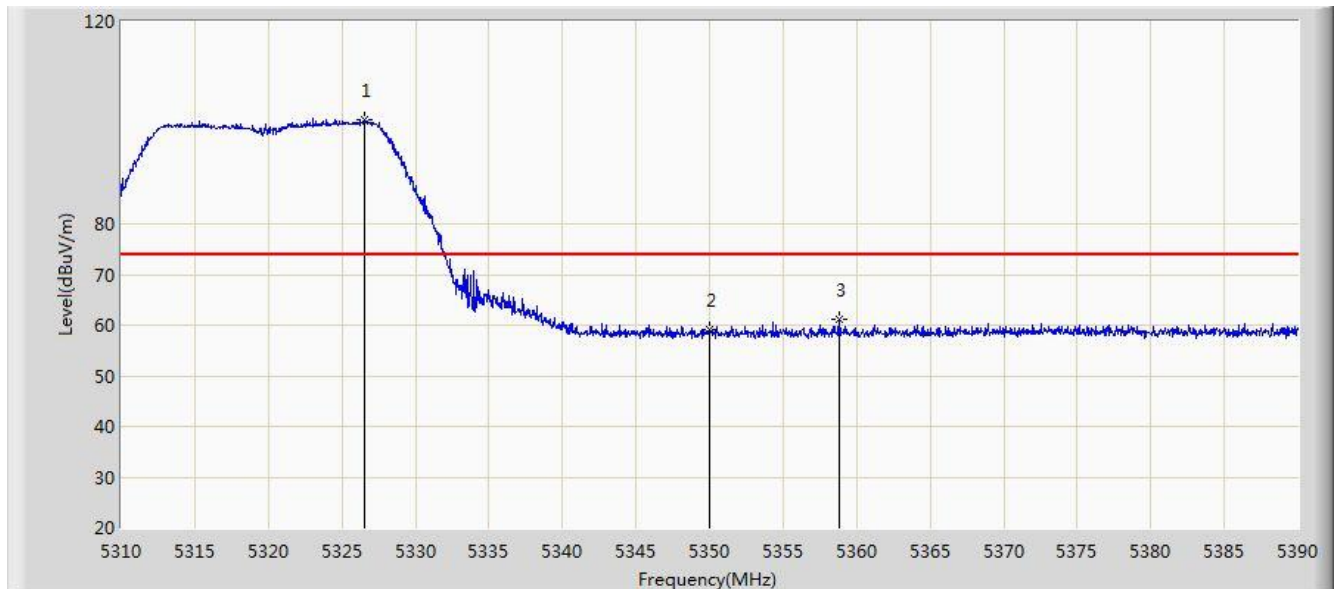


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5326.560	100.681	94.341	N/A	N/A	6.340	PK
2			5350.000	59.238	52.911	-14.762	74.000	6.327	PK
3			5358.840	61.104	54.727	-12.896	74.000	6.377	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/04/23 - 02:56
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Tablet	Power: By Battery
Test Mode: Transmit by 802.11n-HT20 at Channel 5320MHz	

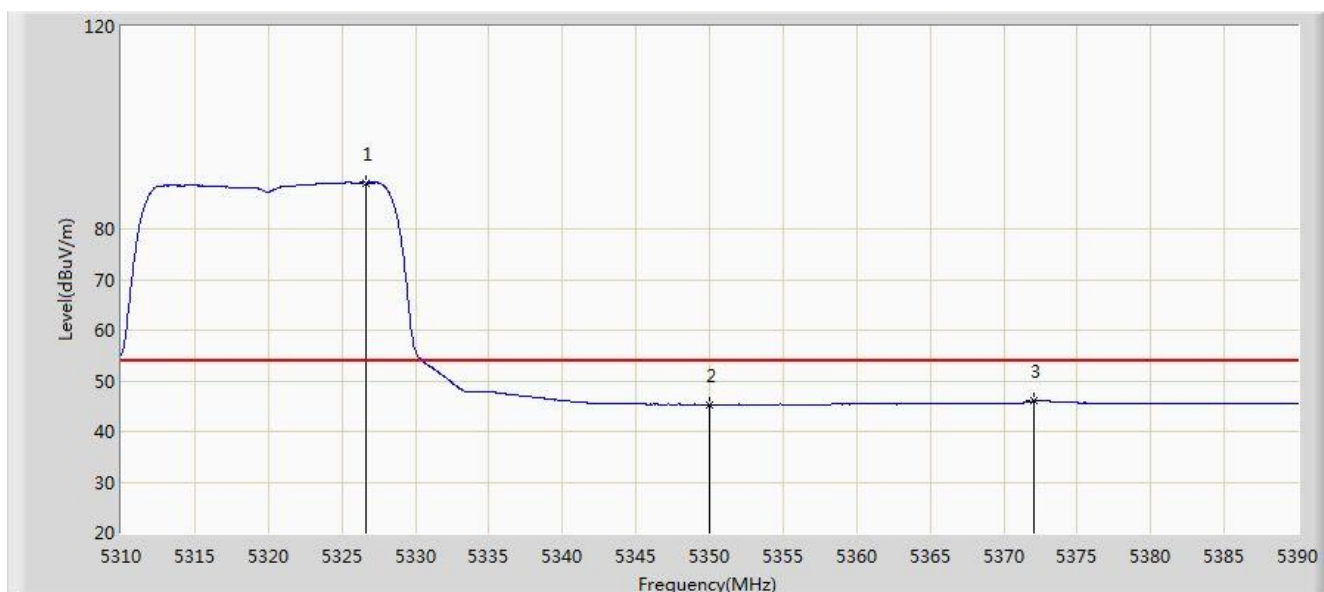


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5326.640	89.108	82.768	N/A	N/A	6.340	AV
2			5350.000	45.292	38.965	-8.708	54.000	6.327	AV
3			5372.040	46.026	39.567	-7.974	54.000	6.458	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/04/23 - 02:56
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Tablet	Power: By Battery
Test Mode: Transmit by 802.11n-HT20 at Channel 5320MHz	

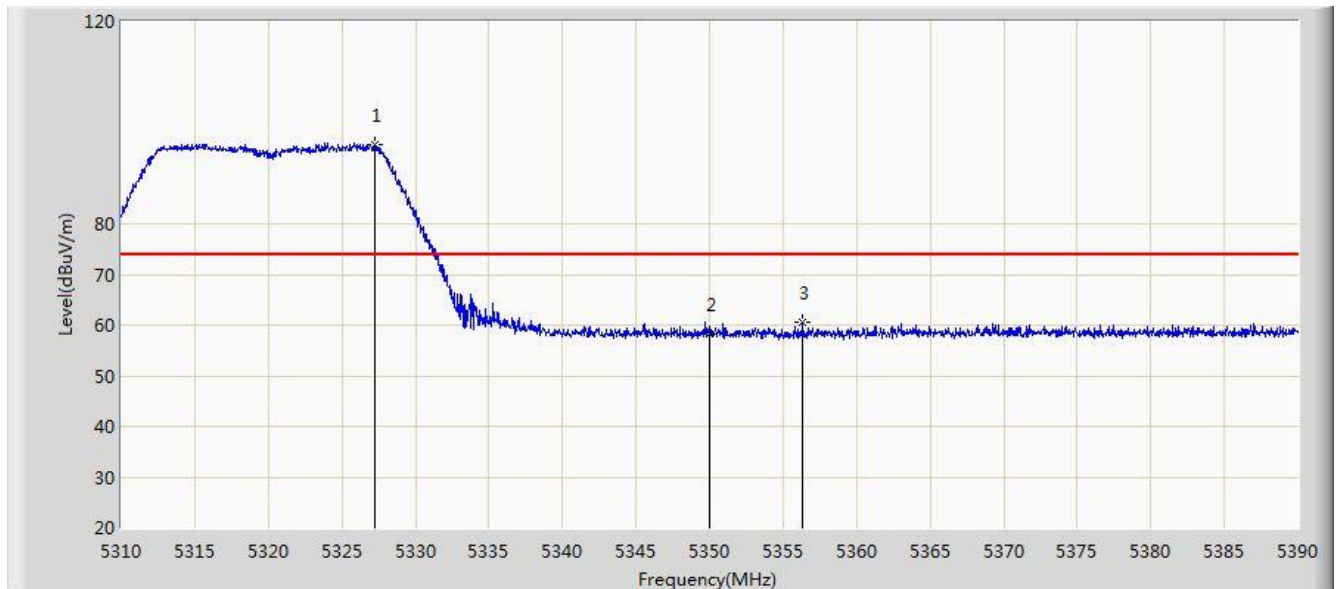


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5327.200	95.774	89.435	N/A	N/A	6.340	PK
2			5350.000	58.334	52.007	-15.666	74.000	6.327	PK
3			5356.360	60.455	54.096	-13.545	74.000	6.358	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/04/23 - 02:58
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Tablet	Power: By Battery
Test Mode: Transmit by 802.11n-HT20 at Channel 5320MHz	

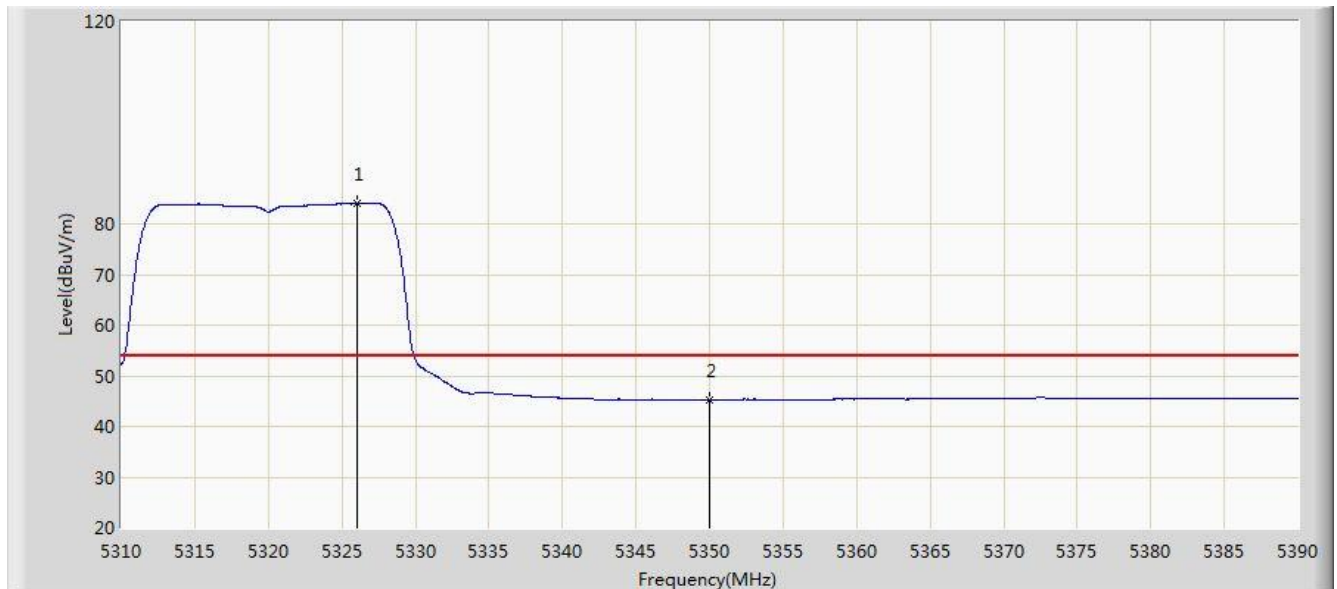


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5326.000	83.931	77.590	N/A	N/A	6.341	AV
2			5350.000	45.247	38.920	-8.753	54.000	6.327	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/04/23 - 02:59
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Tablet	Power: By Battery
Test Mode: Transmit by 802.11n-HT20at Channel 5500MHz	

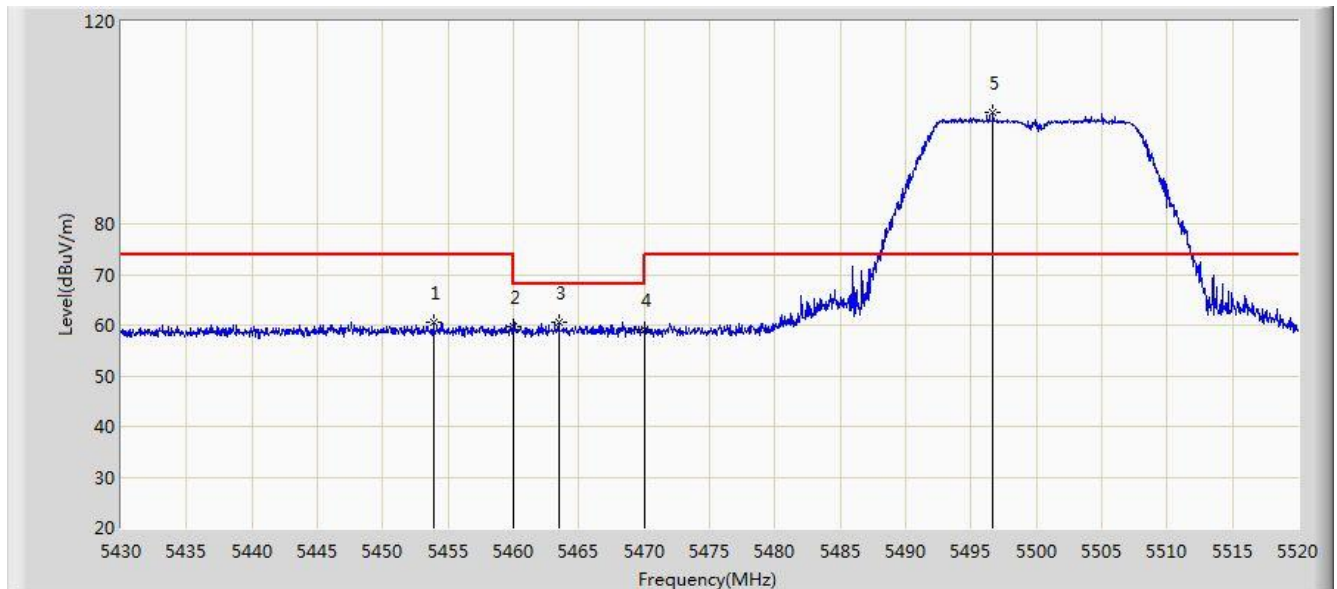


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5453.895	60.705	54.067	-13.295	74.000	6.639	PK
2			5460.000	59.681	53.069	-14.319	74.000	6.612	PK
3			5463.480	60.631	54.034	-7.569	68.200	6.597	PK
4			5470.000	59.089	52.522	-9.111	68.200	6.567	PK
5		*	5496.690	101.929	95.246	N/A	N/A	6.683	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/04/23 - 03:00
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Tablet	Power: By Battery
Test Mode: Transmit by 802.11n-HT20 at Channel 5500MHz	

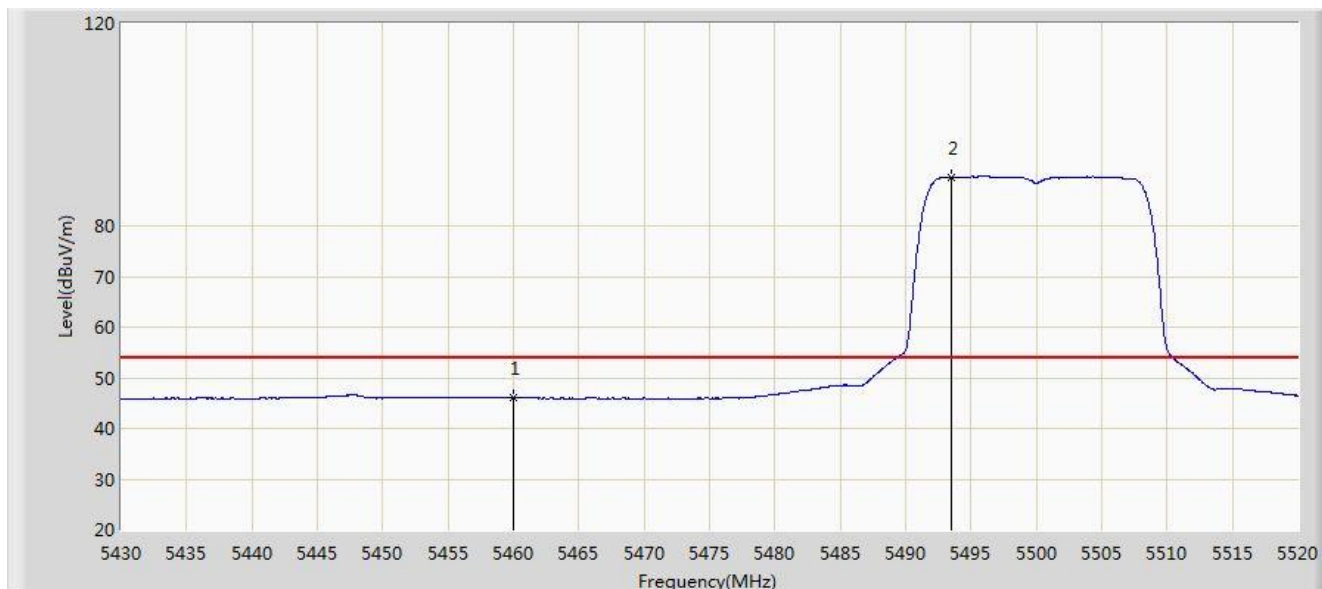


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	46.061	39.449	-7.939	54.000	6.612	AV
2		*	5493.495	89.574	82.914	N/A	N/A	6.660	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/04/23 - 03:00
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Tablet	Power: By Battery
Test Mode: Transmit by 802.11n-HT20 at Channel 5500MHz	

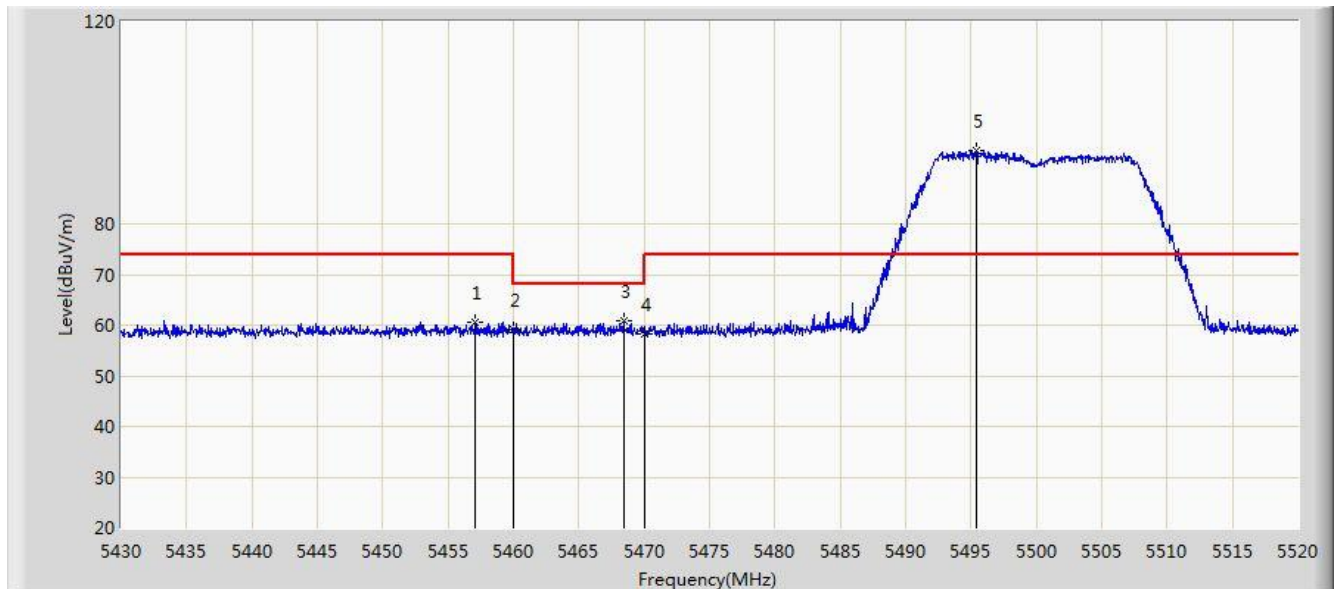


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5457.090	60.612	53.986	-13.388	74.000	6.626	PK
2			5460.000	59.036	52.424	-14.964	74.000	6.612	PK
3			5468.430	60.948	54.374	-7.252	68.200	6.574	PK
4			5470.000	58.172	51.605	-10.028	68.200	6.567	PK
5		*	5495.430	94.410	87.736	N/A	N/A	6.674	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/04/23 - 03:01
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Tablet	Power: By Battery
Test Mode: Transmit by 802.11n-HT20 at Channel 5500MHz	

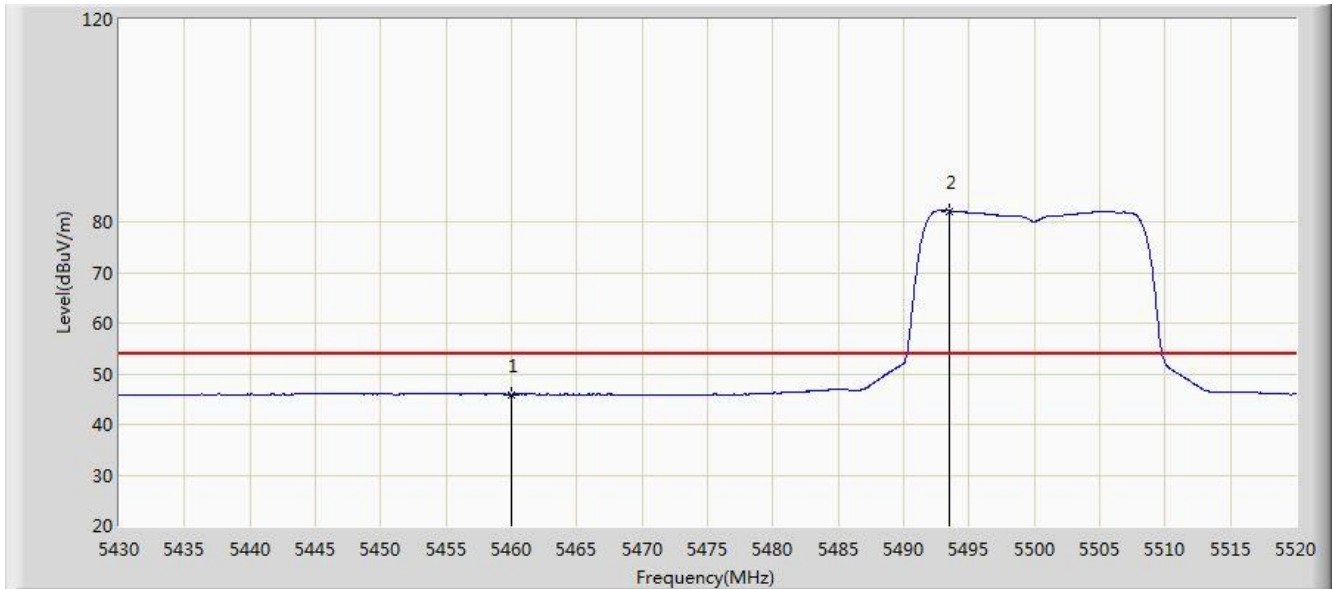


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	45.938	39.326	-8.062	54.000	6.612	AV
2		*	5493.495	82.163	75.503	N/A	N/A	6.660	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/04/23 - 03:02
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Tablet	Power: By Battery
Test Mode: Transmit by 802.11n-HT20at Channel 5700MHz	

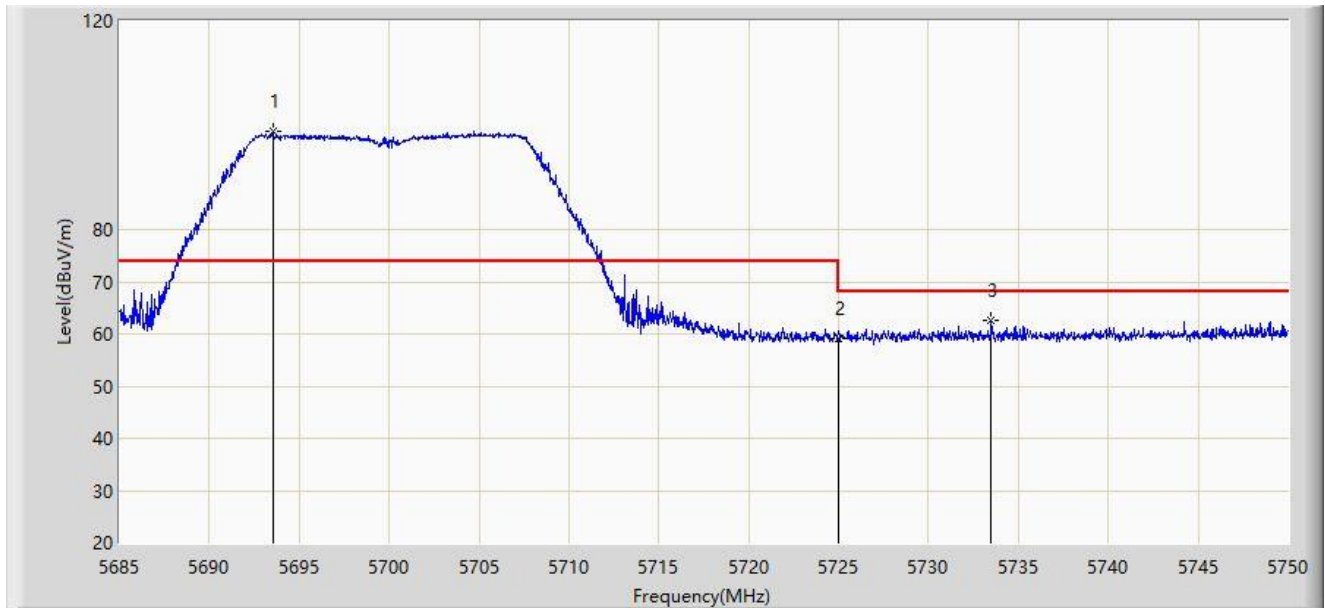


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5693.515	98.833	91.973	N/A	N/A	6.859	PK
2			5725.000	59.038	52.171	-9.162	68.200	6.867	PK
3			5733.458	62.613	55.702	-5.587	68.200	6.911	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/04/23 - 03:03
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Tablet	Power: By Battery
Test Mode: Transmit by 802.11n-HT20at Channel 5700MHz	

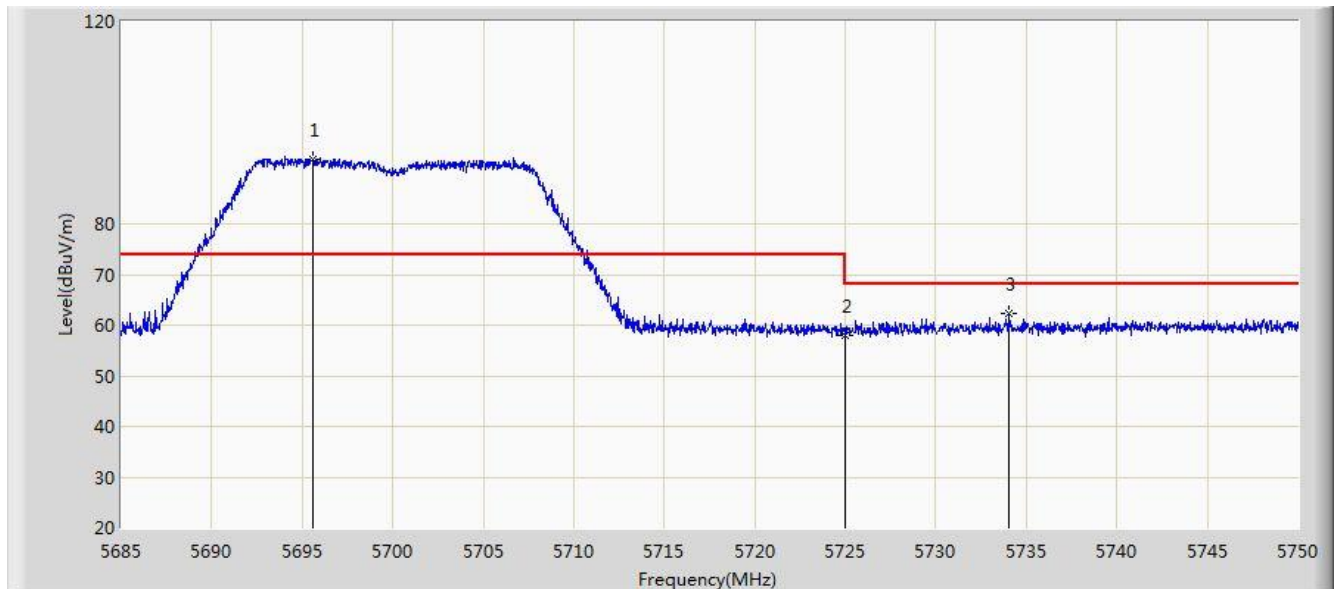


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5695.627	92.853	85.977	N/A	N/A	6.876	PK
2			5725.000	57.885	51.018	-10.315	68.200	6.867	PK
3			5734.075	62.326	55.411	-5.874	68.200	6.916	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/04/23 - 03:05
Limit: FCC_Part15.407_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Tablet	Power: By Battery
Test Mode: Transmit by 802.11n-HT20at Channel 5745MHz	

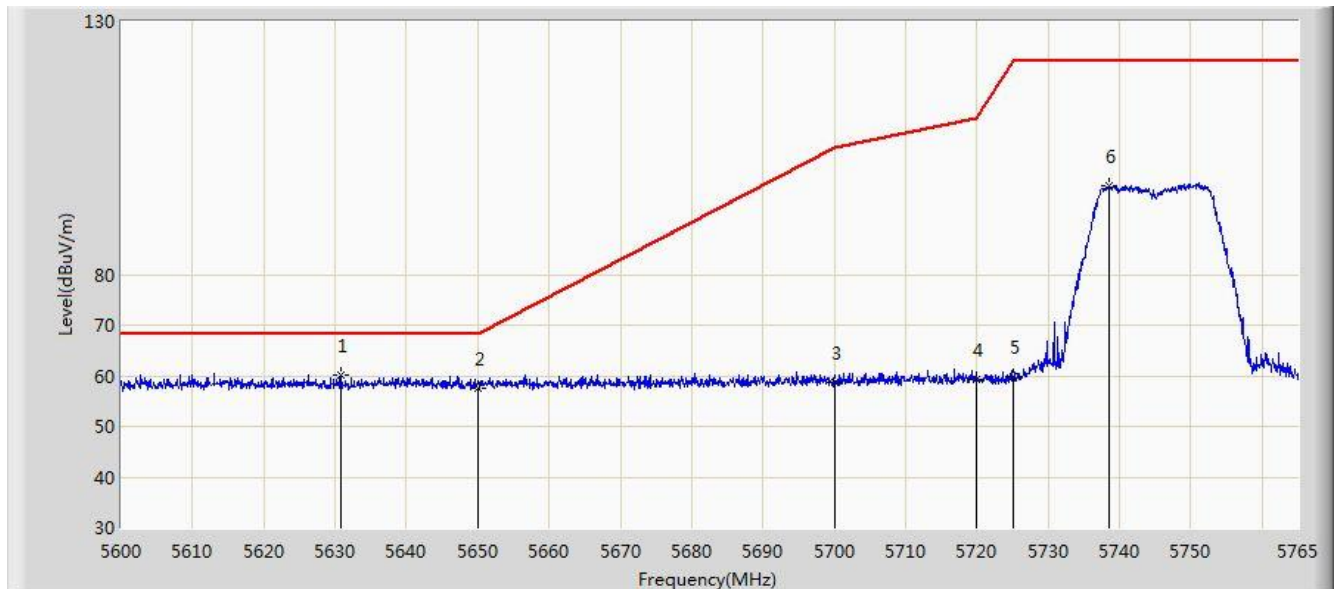


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5630.855	60.236	53.470	-7.964	68.200	6.767	PK
2			5650.000	57.449	50.656	-10.751	68.200	6.793	PK
3			5700.000	58.608	51.699	-46.592	105.200	6.909	PK
4			5720.000	59.399	52.495	-51.401	110.800	6.904	PK
5			5725.000	59.870	53.003	-62.330	122.200	6.867	PK
6			5738.435	97.657	90.711	N/A	N/A	6.945	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/04/23 - 03:06
Limit: FCC_Part15.407_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Tablet	Power: By Battery
Test Mode: Transmit by 802.11n-HT20at Channel 5745MHz	

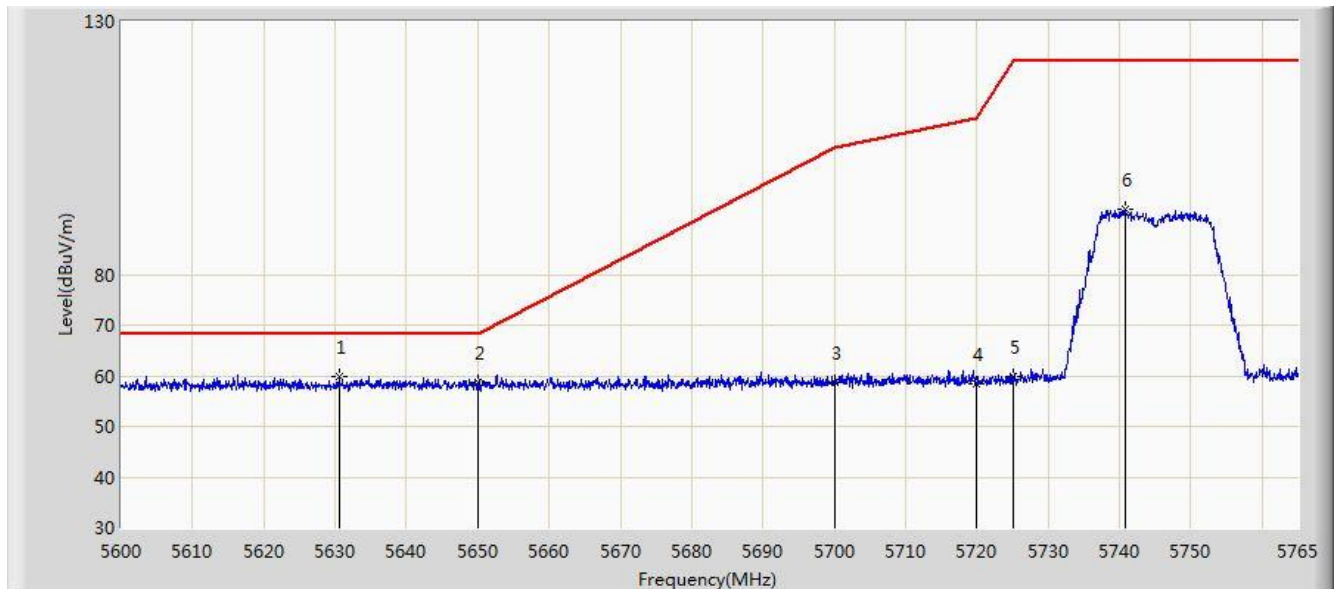


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5630.525	59.823	53.059	-8.377	68.200	6.764	PK
2			5650.000	58.586	51.793	-9.614	68.200	6.793	PK
3			5700.000	58.703	51.794	-46.497	105.200	6.909	PK
4			5720.000	58.487	51.583	-52.313	110.800	6.904	PK
5			5725.000	59.906	53.039	-62.294	122.200	6.867	PK
6			5740.828	92.948	85.987	N/A	N/A	6.961	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/04/23 - 03:07
Limit: FCC_Part15.407_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Tablet	Power: By Battery
Test Mode: Transmit by 802.11n-HT20at Channel 5825MHz	

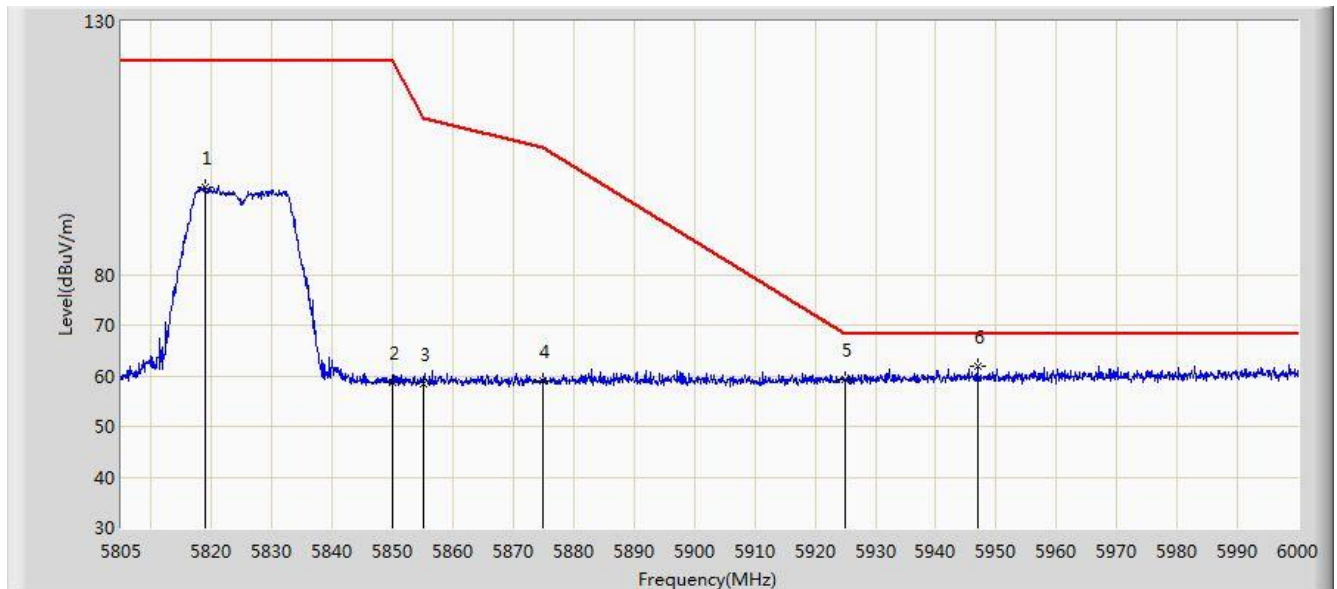


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5818.845	97.269	90.021	N/A	N/A	7.248	PK
2			5850.000	58.717	51.387	-63.483	122.200	7.331	PK
3			5855.000	58.406	51.078	-52.394	110.800	7.327	PK
4			5875.000	59.123	51.709	-46.077	105.200	7.414	PK
5			5925.000	59.235	51.935	-8.965	68.200	7.299	PK
6		*	5946.862	61.880	54.376	-6.320	68.200	7.505	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/04/23 - 03:08
Limit: FCC_Part15.407_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Tablet	Power: By Battery
Test Mode: Transmit by 802.11n-HT20at Channel 5825MHz	

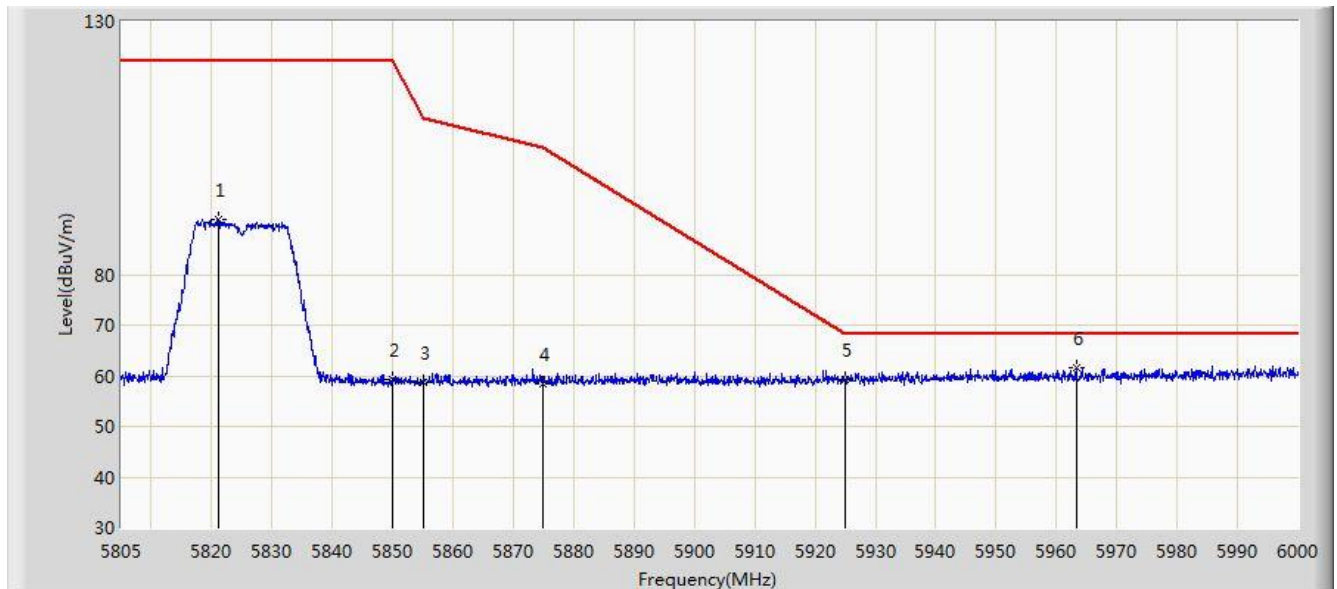


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5821.185	90.735	83.452	N/A	N/A	7.283	PK
2			5850.000	59.251	51.921	-62.949	122.200	7.331	PK
3			5855.000	58.808	51.480	-51.992	110.800	7.327	PK
4			5875.000	58.497	51.083	-46.703	105.200	7.414	PK
5			5925.000	59.307	52.007	-8.893	68.200	7.299	PK
6		*	5963.243	61.555	54.158	-6.645	68.200	7.396	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/04/23 - 03:09
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Tablet	Power: By Battery
Test Mode: Transmit by 802.11n-HT40 at Channel 5190MHz	

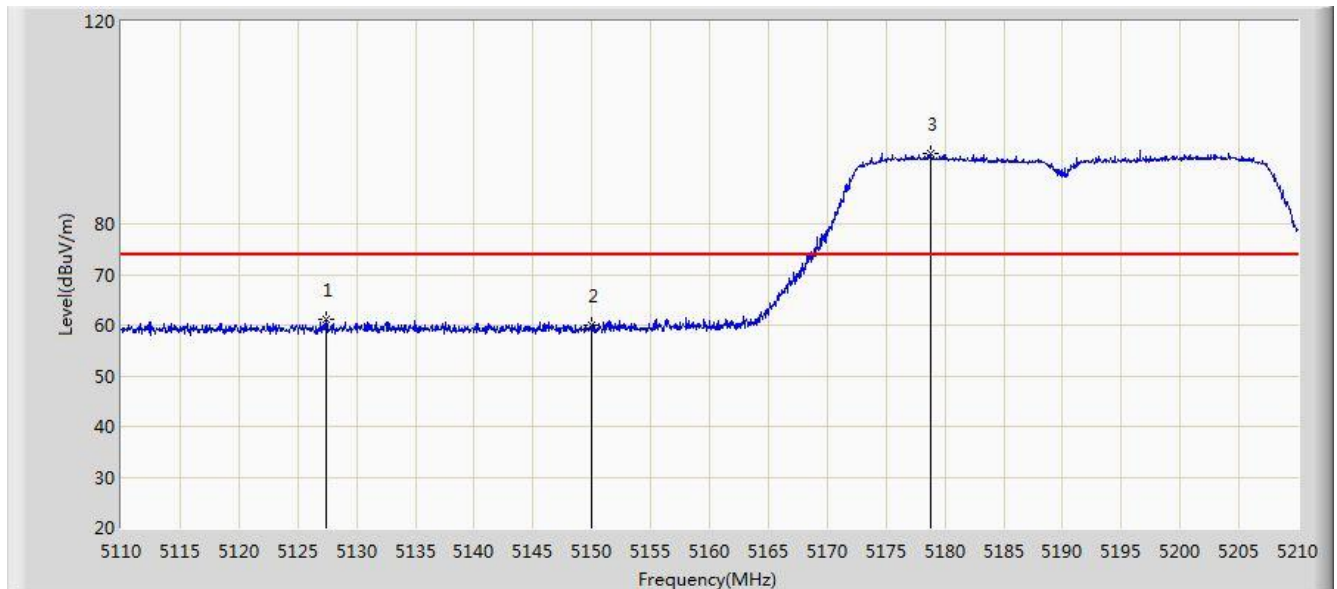


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5127.450	61.086	54.479	-12.914	74.000	6.607	PK
2			5150.000	59.940	53.543	-14.060	74.000	6.398	PK
3		*	5178.850	94.026	87.467	N/A	N/A	6.558	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/04/23 - 03:15
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Tablet	Power: By Battery
Test Mode: Transmit by 802.11n-HT40 at Channel 5190MHz	

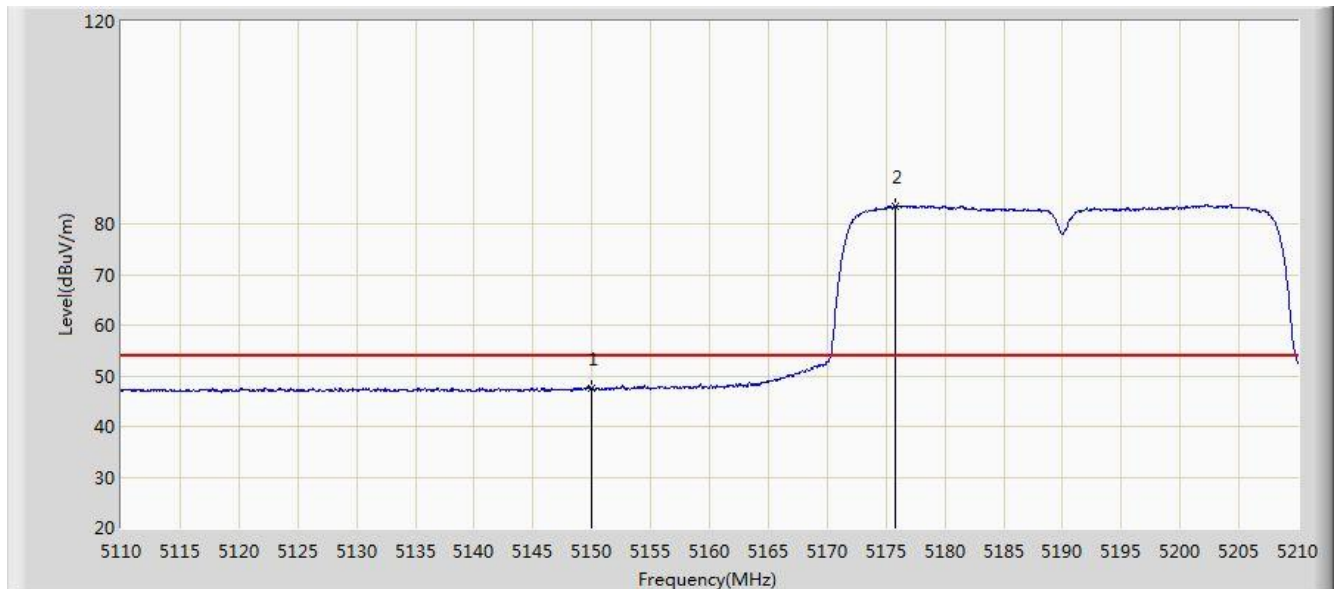


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	47.575	41.178	-6.425	54.000	6.398	AV
2		*	5175.850	83.555	77.025	N/A	N/A	6.529	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/04/23 - 03:16
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Tablet	Power: By Battery
Test Mode: Transmit by 802.11n-HT40 at Channel 5190MHz	

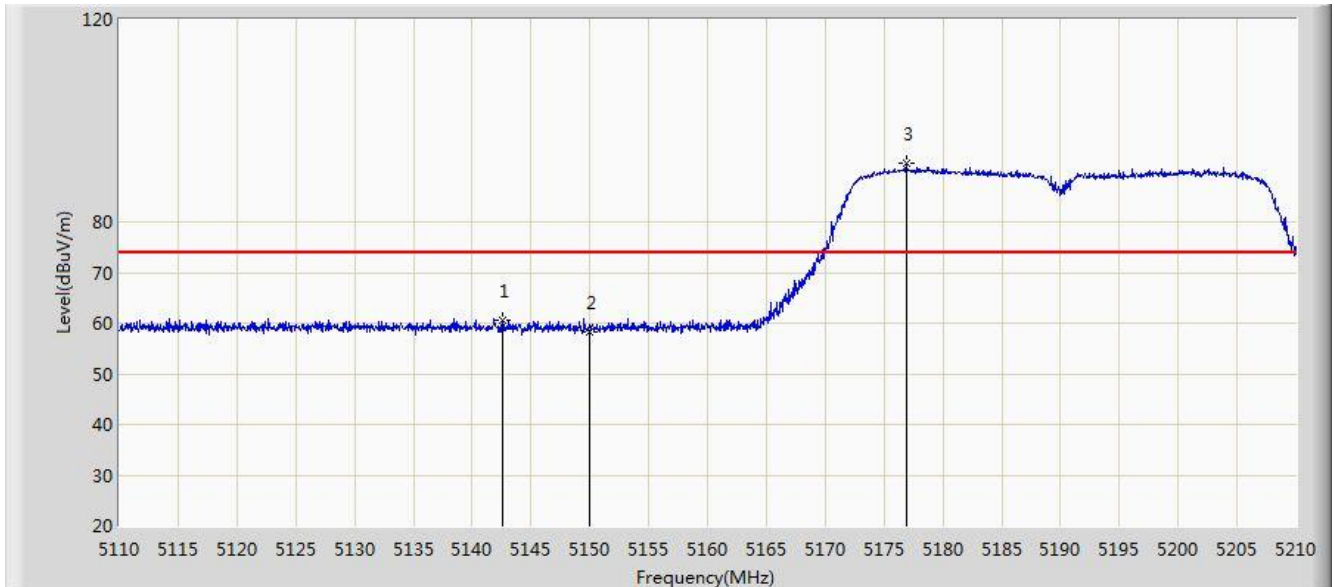


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5142.600	60.595	54.123	-13.405	74.000	6.472	PK
2			5150.000	58.206	51.809	-15.794	74.000	6.398	PK
3		*	5176.900	91.514	84.974	N/A	N/A	6.540	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/04/23 - 03:18
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Tablet	Power: By Battery
Test Mode: Transmit by 802.11n-HT40 at Channel 5190MHz	

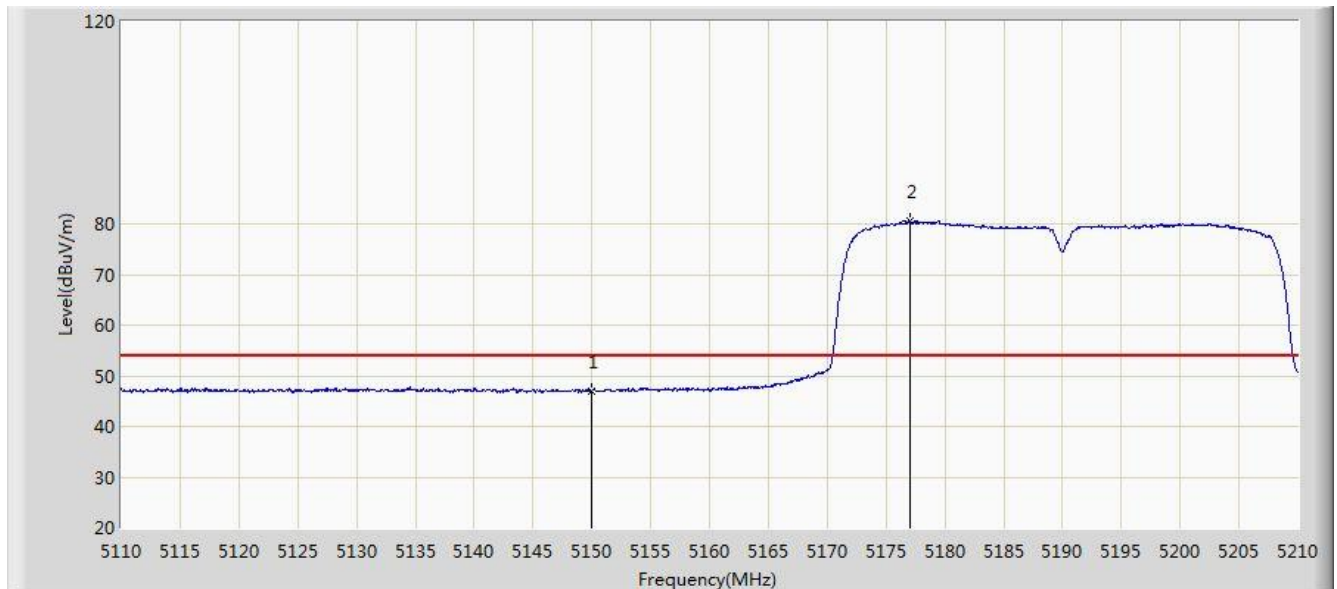


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	47.072	40.675	-6.928	54.000	6.398	AV
2		*	5177.000	80.491	73.950	N/A	N/A	6.540	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/04/23 - 03:19
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Tablet	Power: By Battery
Test Mode: Transmit by 802.11n-HT40 at Channel 5310MHz	

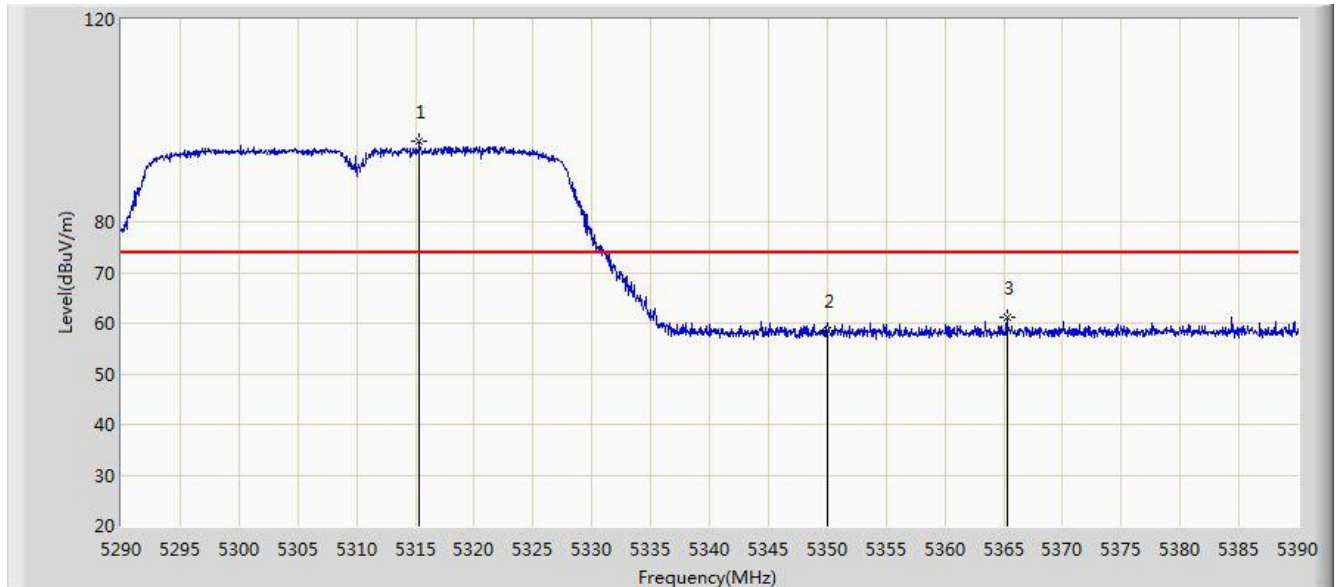


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5315.350	96.074	89.736	N/A	N/A	6.338	PK
2			5350.000	58.532	52.205	-15.468	74.000	6.327	PK
3			5365.300	61.093	54.669	-12.907	74.000	6.424	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/04/23 - 03:21
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Tablet	Power: By Battery
Test Mode: Transmit by 802.11n-HT40 at Channel 5310MHz	

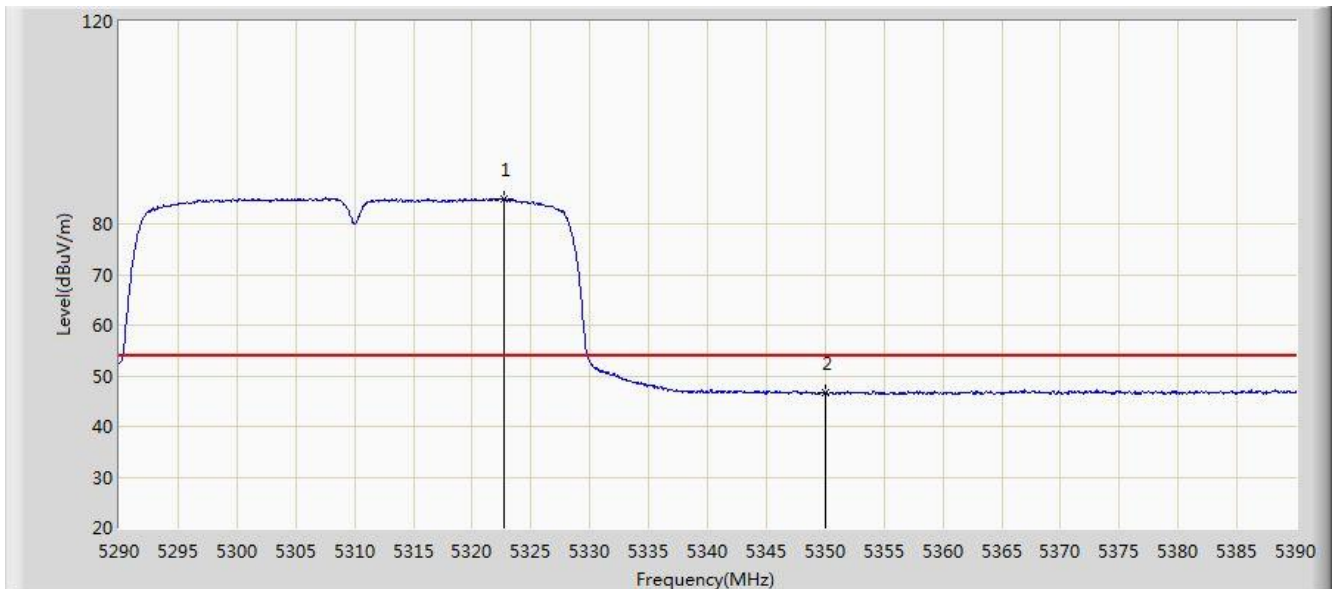


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5322.750	84.886	78.542	N/A	N/A	6.344	AV
2			5350.000	46.769	40.442	-7.231	54.000	6.327	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/04/23 - 03:21
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Tablet	Power: By Battery
Test Mode: Transmit by 802.11n-HT40 at Channel 5310MHz	

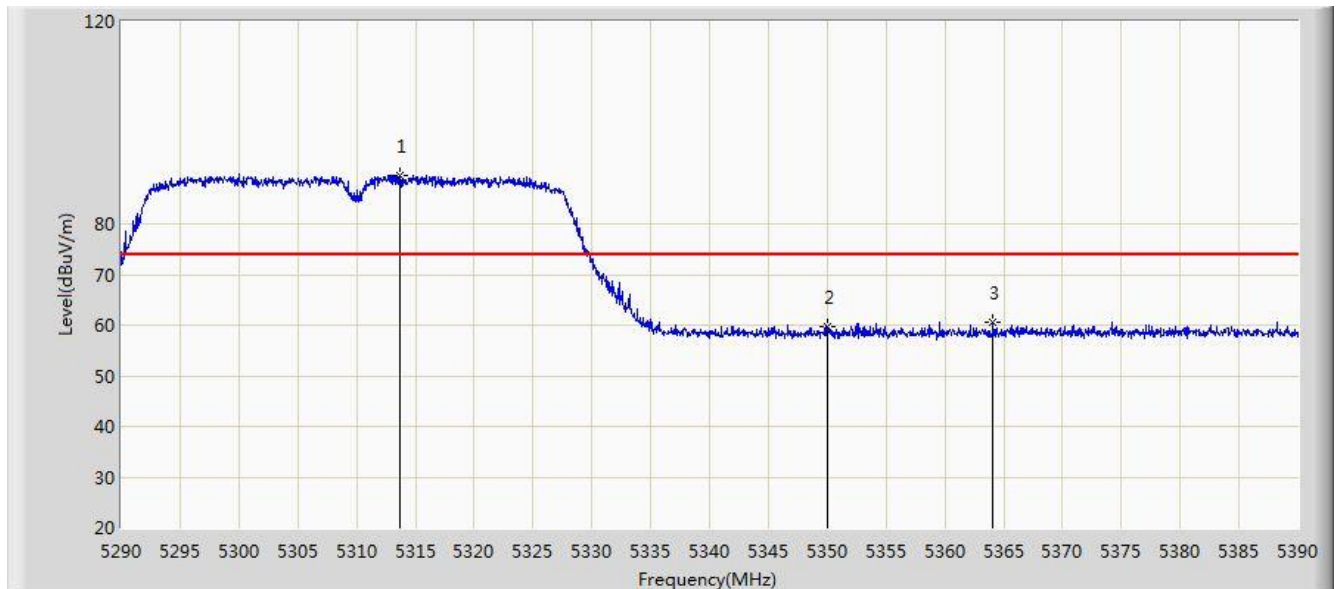


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5313.650	89.582	83.251	N/A	N/A	6.331	PK
2			5350.000	59.731	53.404	-14.269	74.000	6.327	PK
3			5364.100	60.533	54.118	-13.467	74.000	6.415	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/04/23 - 03:22
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Tablet	Power: By Battery
Test Mode: Transmit by 802.11n-HT40 at Channel 5310MHz	

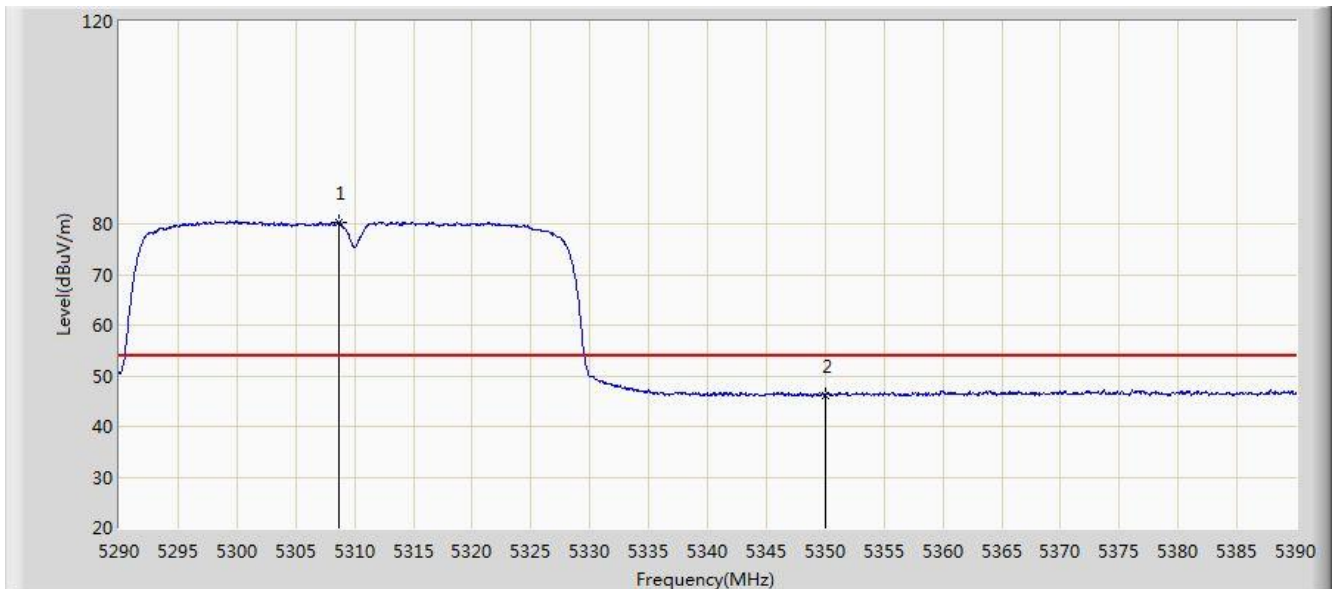


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5308.650	80.419	74.105	N/A	N/A	6.315	AV
2			5350.000	46.227	39.900	-7.773	54.000	6.327	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/04/23 - 03:22
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Tablet	Power: By Battery
Test Mode: Transmit by 802.11n-HT40 at Channel 5510MHz	

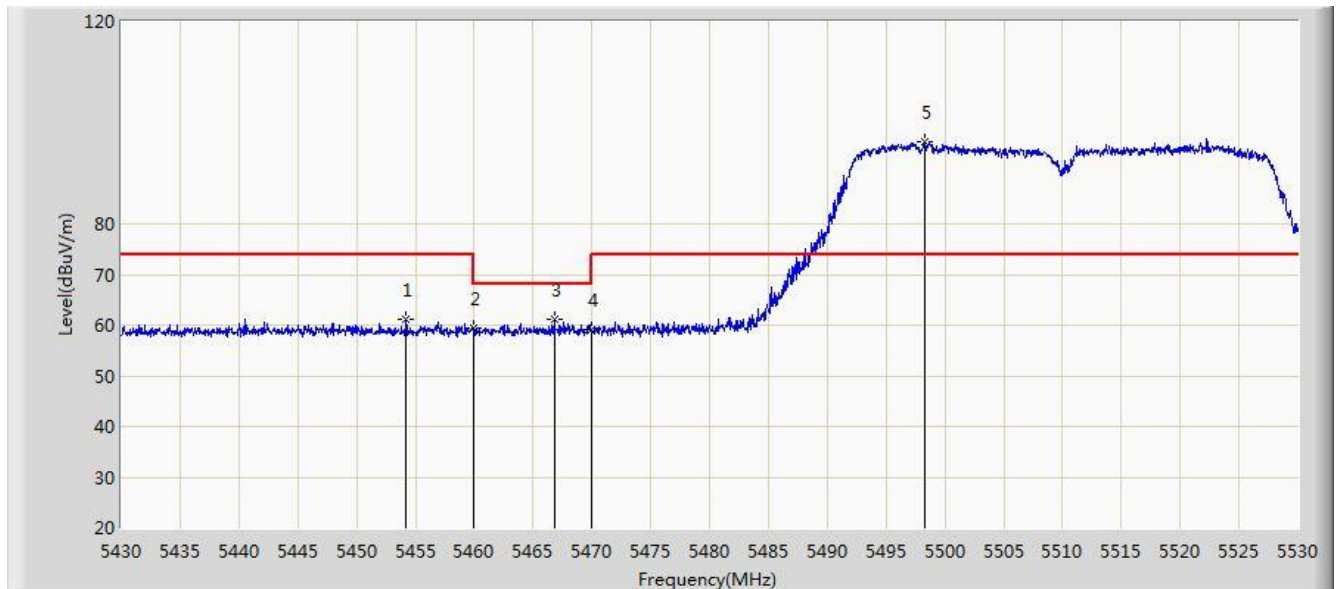


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5454.200	61.037	54.399	-12.963	74.000	6.638	PK
2			5460.000	59.278	52.666	-14.722	74.000	6.612	PK
3			5466.800	61.136	54.555	-7.064	68.200	6.582	PK
4			5470.000	58.996	52.429	-9.204	68.200	6.567	PK
5		*	5498.300	96.337	89.642	N/A	N/A	6.696	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/04/23 - 03:25
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Tablet	Power: By Battery
Test Mode: Transmit by 802.11n-HT40 at Channel 5510MHz	

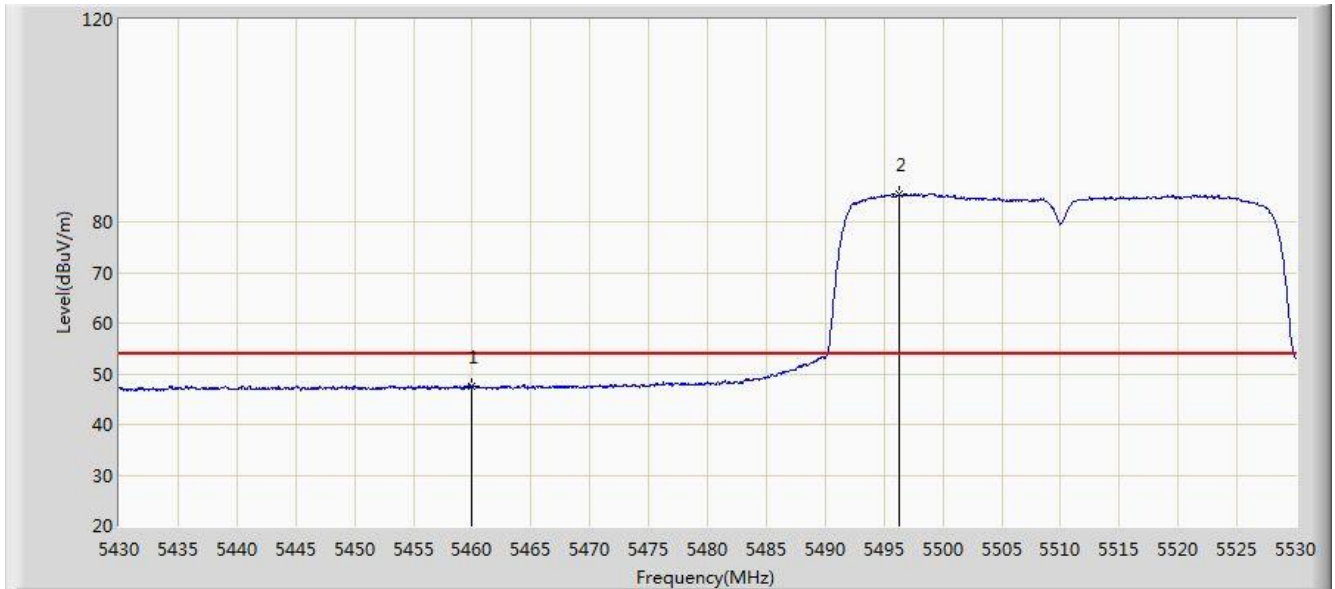


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	47.424	40.812	-6.576	54.000	6.612	AV
2		*	5496.300	85.394	78.713	N/A	N/A	6.680	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/04/23 - 03:25
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Tablet	Power: By Battery
Test Mode: Transmit by 802.11n-HT40 at Channel 5510MHz	

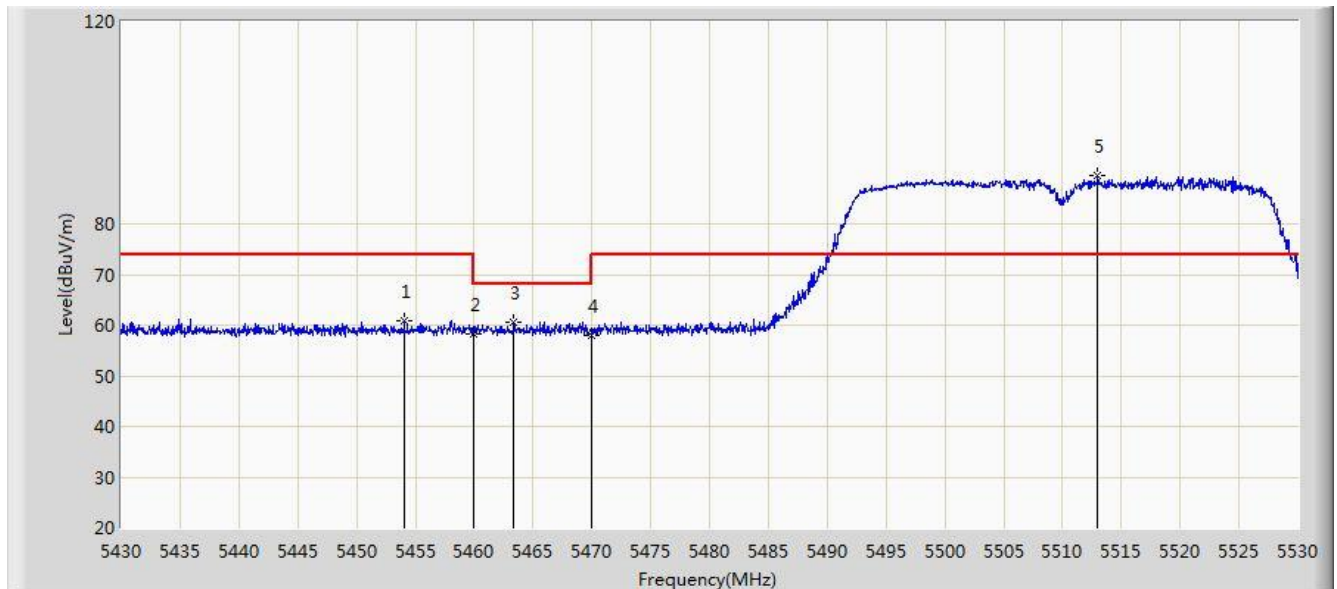


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5454.050	60.946	54.307	-13.054	74.000	6.639	PK
2			5460.000	58.279	51.667	-15.721	74.000	6.612	PK
3			5463.350	60.542	53.945	-7.658	68.200	6.597	PK
4			5470.000	58.008	51.441	-10.192	68.200	6.567	PK
5		*	5513.000	89.432	82.707	N/A	N/A	6.725	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/04/23 - 03:26
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Tablet	Power: By Battery
Test Mode: Transmit by 802.11n-HT40 at Channel 5510MHz	

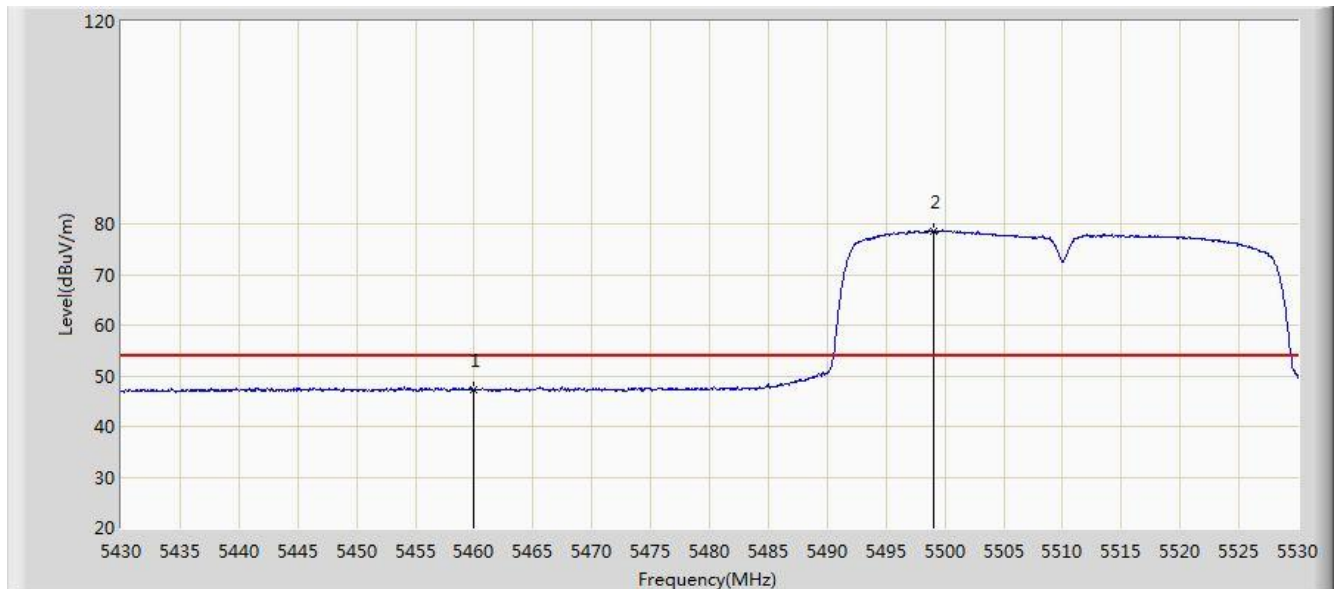


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	47.176	40.564	-6.824	54.000	6.612	AV
2		*	5499.000	78.654	71.954	N/A	N/A	6.700	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/04/23 - 03:27
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Tablet	Power: By Battery
Test Mode: Transmit by 802.11n-HT40 at Channel 5670MHz	

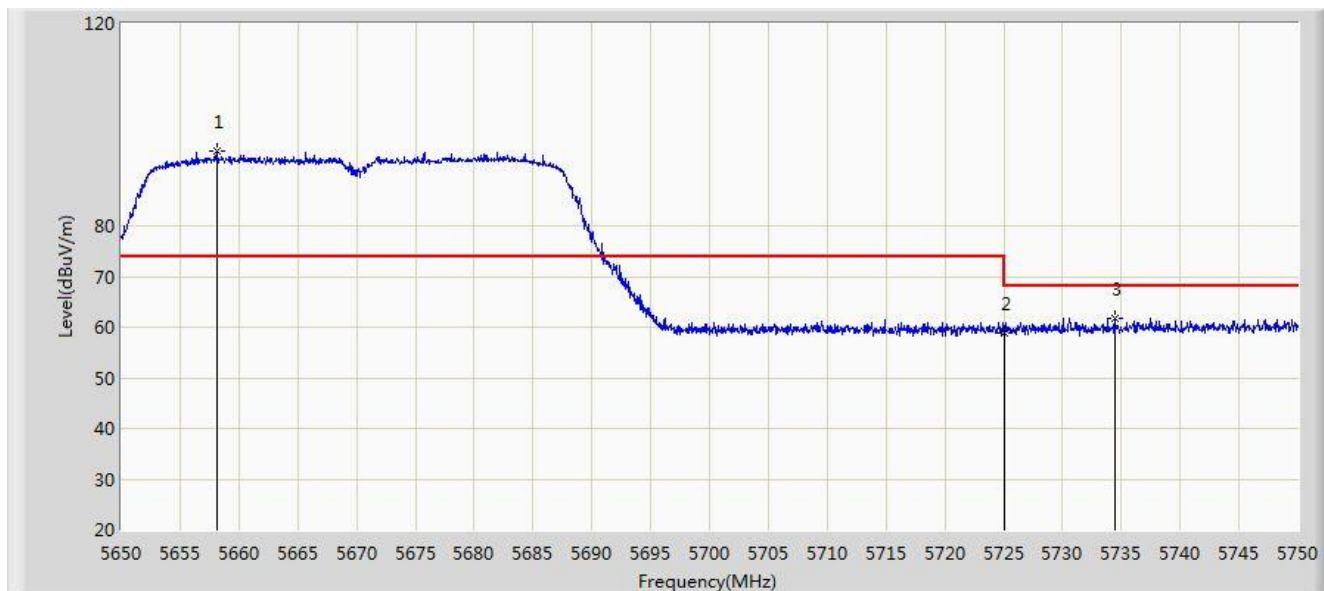


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5658.100	94.918	88.155	N/A	N/A	6.763	PK
2			5725.000	58.718	51.851	-9.482	68.200	6.867	PK
3			5734.400	61.812	54.894	-6.388	68.200	6.918	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/04/23 - 03:29
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Tablet	Power: By Battery
Test Mode: Transmit by 802.11n-HT40 at Channel 5670MHz	

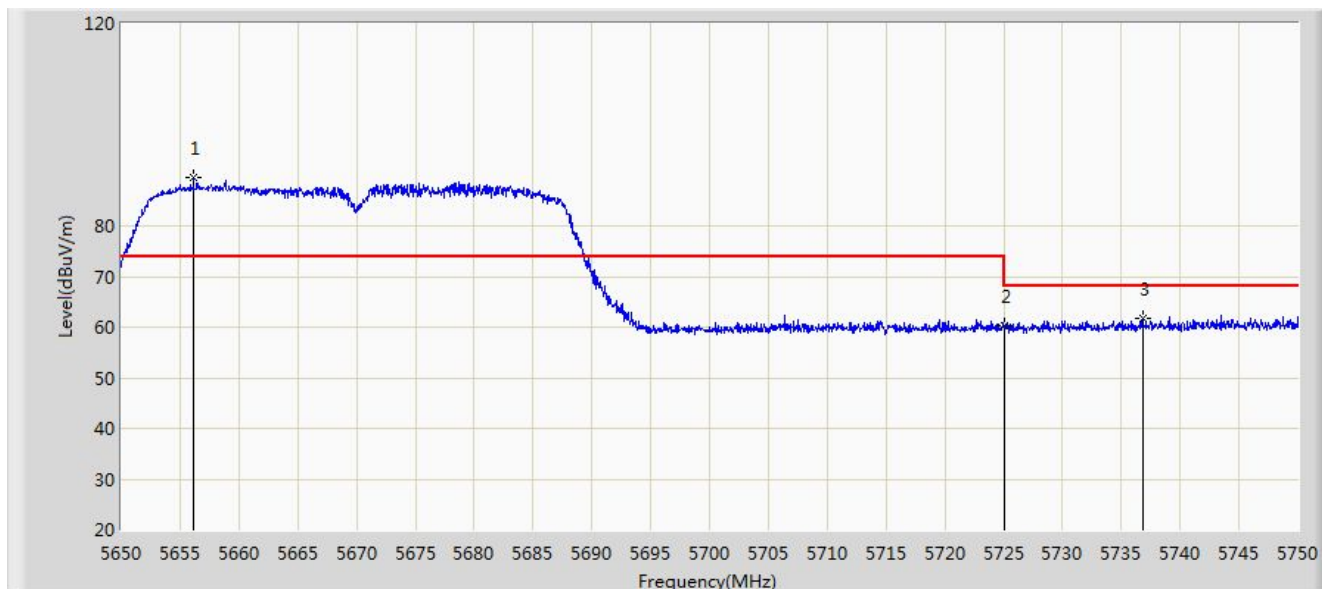


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5656.150	89.600	82.830	N/A	N/A	6.770	PK
2			5725.000	60.291	53.424	-7.909	68.200	6.867	PK
3			5736.800	61.819	54.885	-6.381	68.200	6.934	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/04/23 - 03:32
Limit: FCC_Part15.407_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Tablet	Power: By Battery
Test Mode: Transmit by 802.11n-HT40 at Channel 5755MHz	

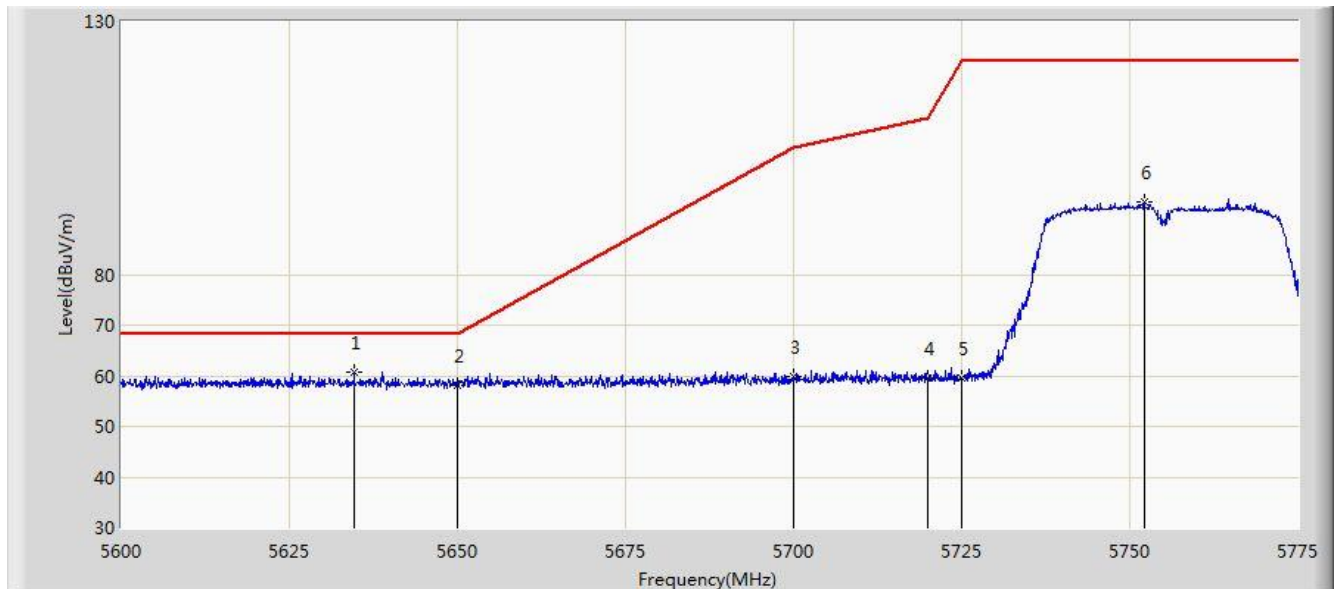


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5634.650	60.621	53.830	-7.579	68.200	6.791	PK
2			5650.000	58.046	51.253	-10.154	68.200	6.793	PK
3			5700.000	59.732	52.823	-45.468	105.200	6.909	PK
4			5720.000	59.498	52.594	-51.302	110.800	6.904	PK
5			5725.000	59.630	52.763	-62.570	122.200	6.867	PK
6			5752.163	94.365	87.277	N/A	N/A	7.088	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/04/23 - 03:34
Limit: FCC_Part15.407_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Tablet	Power: By Battery
Test Mode: Transmit by 802.11n-HT40 at Channel 5755MHz	

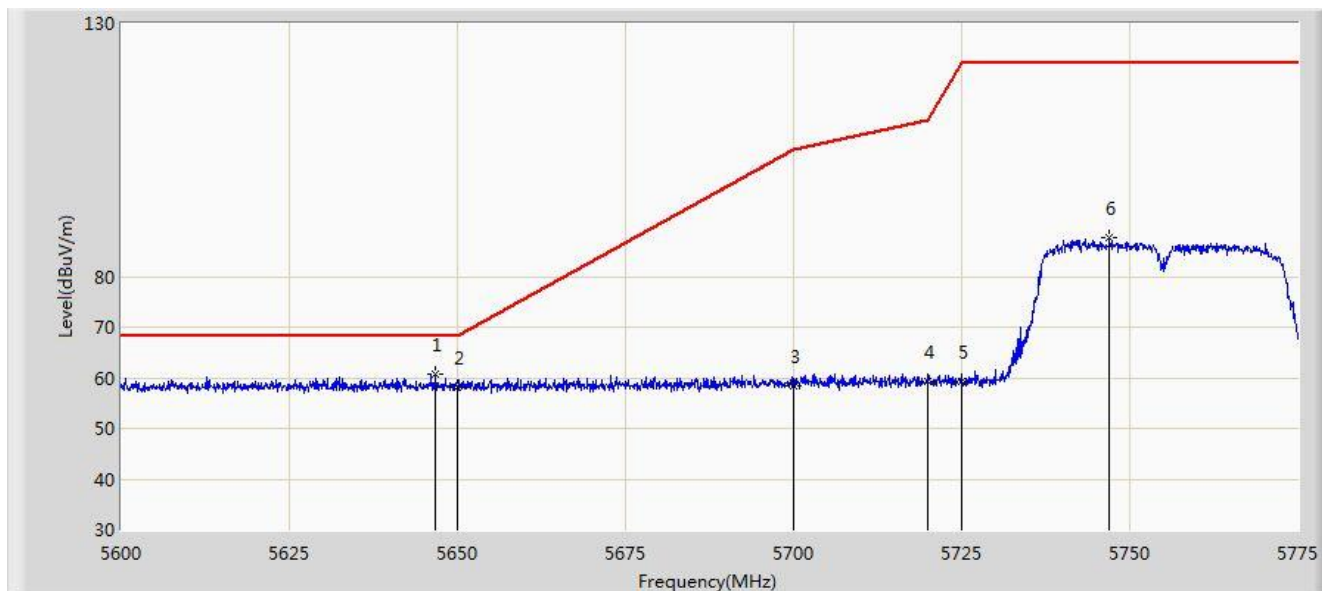


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5646.812	60.623	53.816	-7.577	68.200	6.807	PK
2			5650.000	58.109	51.316	-10.091	68.200	6.793	PK
3			5700.000	58.525	51.616	-46.675	105.200	6.909	PK
4			5720.000	59.236	52.332	-51.564	110.800	6.904	PK
5			5725.000	59.288	52.421	-62.912	122.200	6.867	PK
6			5747.000	87.632	80.608	N/A	N/A	7.024	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/04/23 - 03:34
Limit: FCC_Part15.407_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Tablet	Power: By Battery
Test Mode: Transmit by 802.11n-HT40 at Channel 5795MHz	

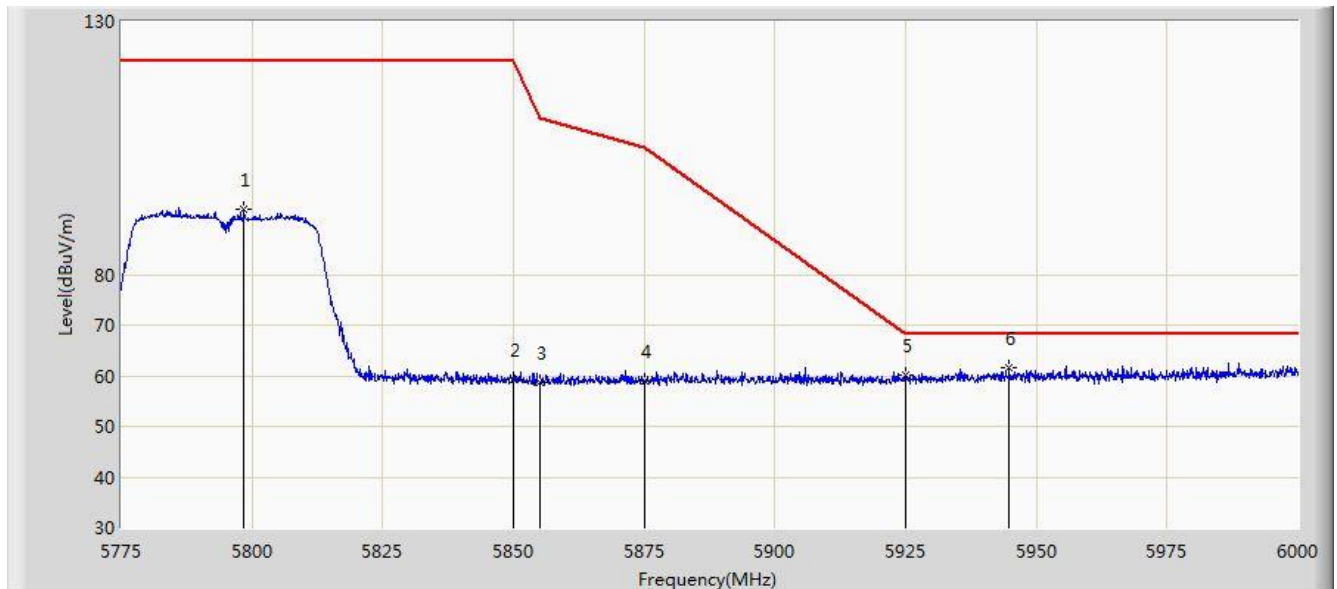


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5798.400	92.769	85.712	N/A	N/A	7.056	PK
2			5850.000	59.309	51.979	-62.891	122.200	7.331	PK
3			5855.000	58.768	51.440	-52.032	110.800	7.327	PK
4			5875.000	58.851	51.437	-46.349	105.200	7.414	PK
5			5925.000	60.085	52.785	-8.115	68.200	7.299	PK
6		*	5944.763	61.680	54.201	-6.520	68.200	7.479	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/04/23 - 03:36
Limit: FCC_Part15.407_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Tablet	Power: By Battery
Test Mode: Transmit by 802.11n-HT40 at Channel 5795MHz	

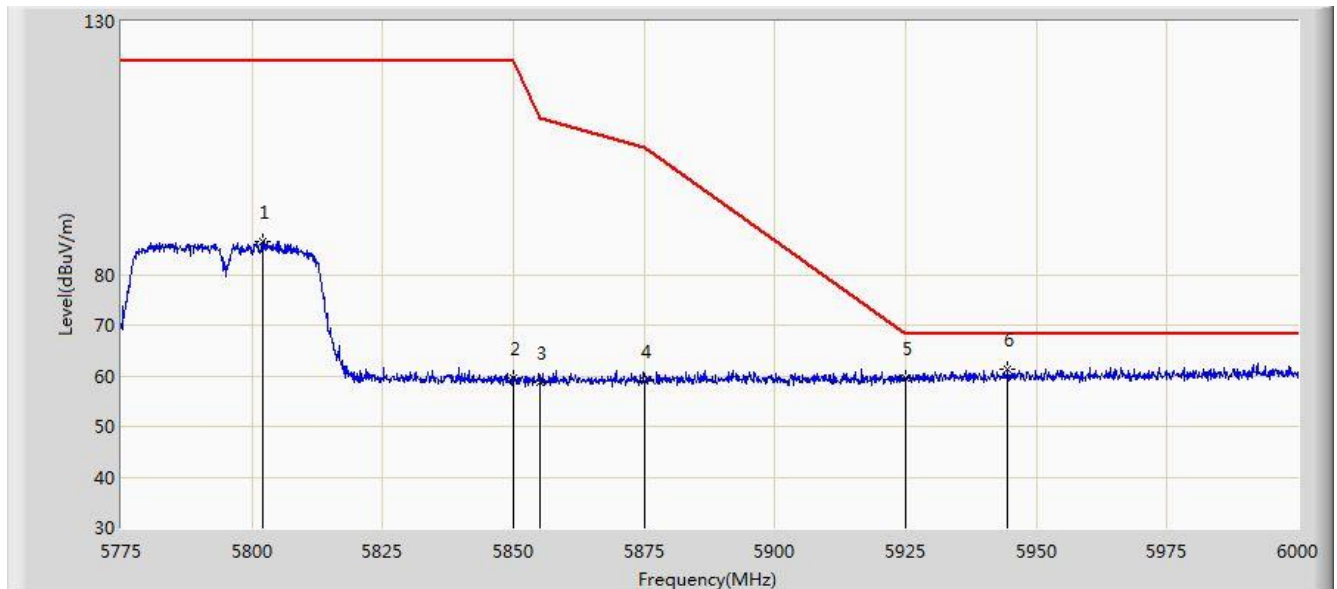


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5802.112	86.591	79.513	N/A	N/A	7.078	PK
2			5850.000	59.632	52.302	-62.568	122.200	7.331	PK
3			5855.000	58.621	51.293	-52.179	110.800	7.327	PK
4			5875.000	59.126	51.712	-46.074	105.200	7.414	PK
5			5925.000	59.510	52.210	-8.690	68.200	7.299	PK
6		*	5944.538	61.407	53.931	-6.793	68.200	7.477	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/04/23 - 03:38
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Tablet	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5180MHz	

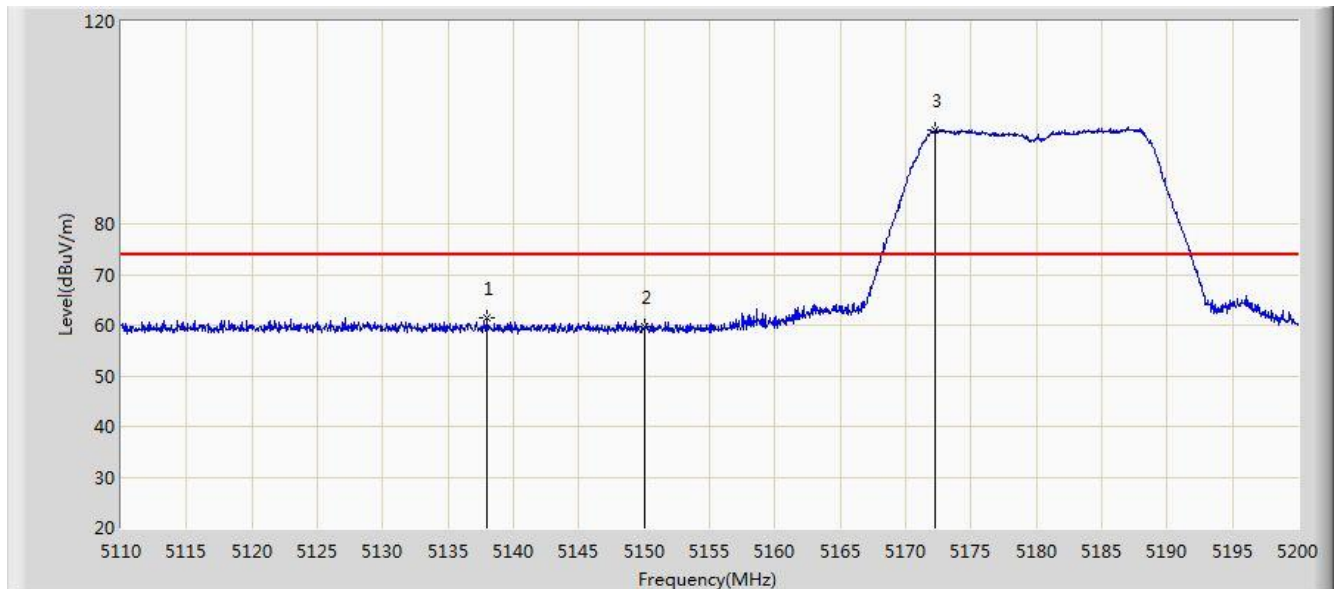


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5137.990	61.455	54.913	-12.545	74.000	6.542	PK
2			5150.000	59.668	53.271	-14.332	74.000	6.398	PK
3		*	5172.280	98.501	92.006	N/A	N/A	6.496	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/04/23 - 03:42
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Tablet	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5180MHz	

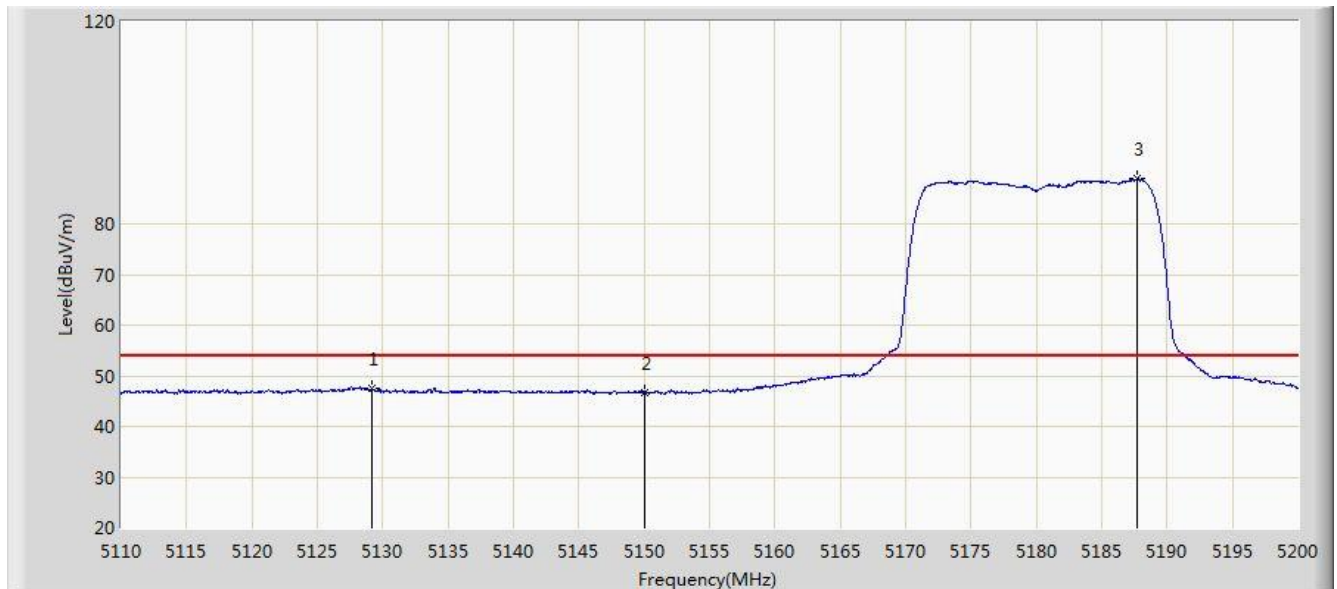


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5129.125	47.523	40.899	-6.477	54.000	6.625	AV
2			5150.000	46.751	40.354	-7.249	54.000	6.398	AV
3		*	5187.760	88.917	82.385	N/A	N/A	6.531	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/04/23 - 03:43
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Tablet	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5180MHz	

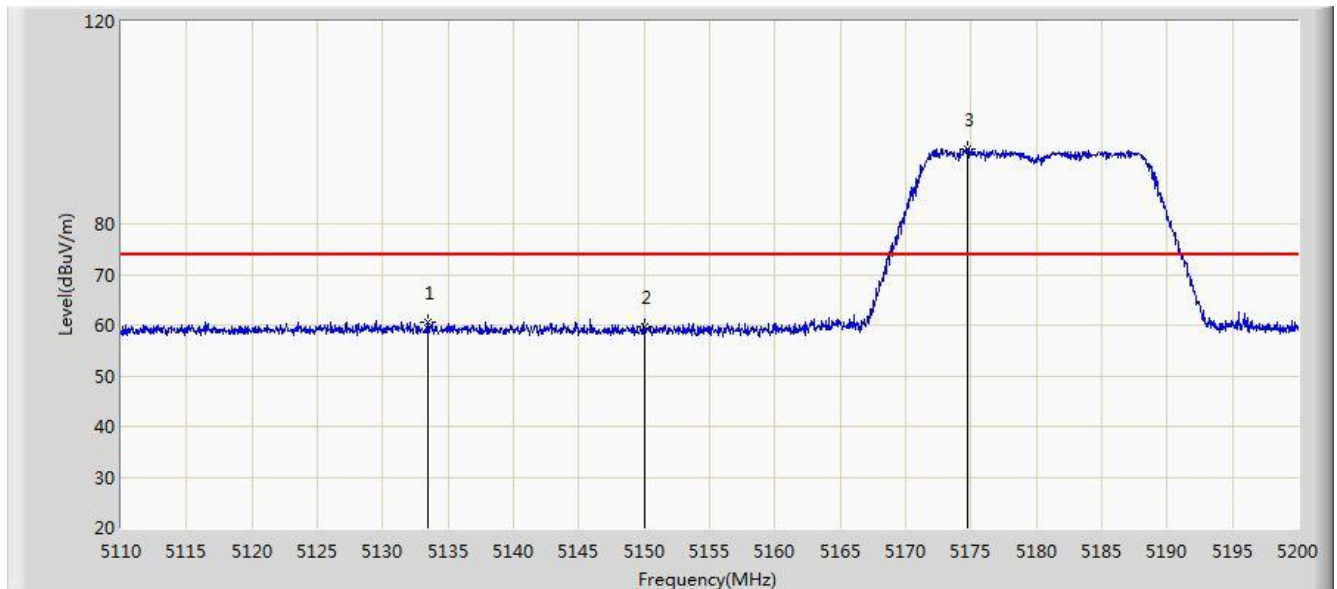


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5133.490	60.720	54.113	-13.280	74.000	6.607	PK
2			5150.000	59.664	53.267	-14.336	74.000	6.398	PK
3		*	5174.710	94.703	88.184	N/A	N/A	6.518	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/04/23 - 03:44
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Tablet	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5180MHz	

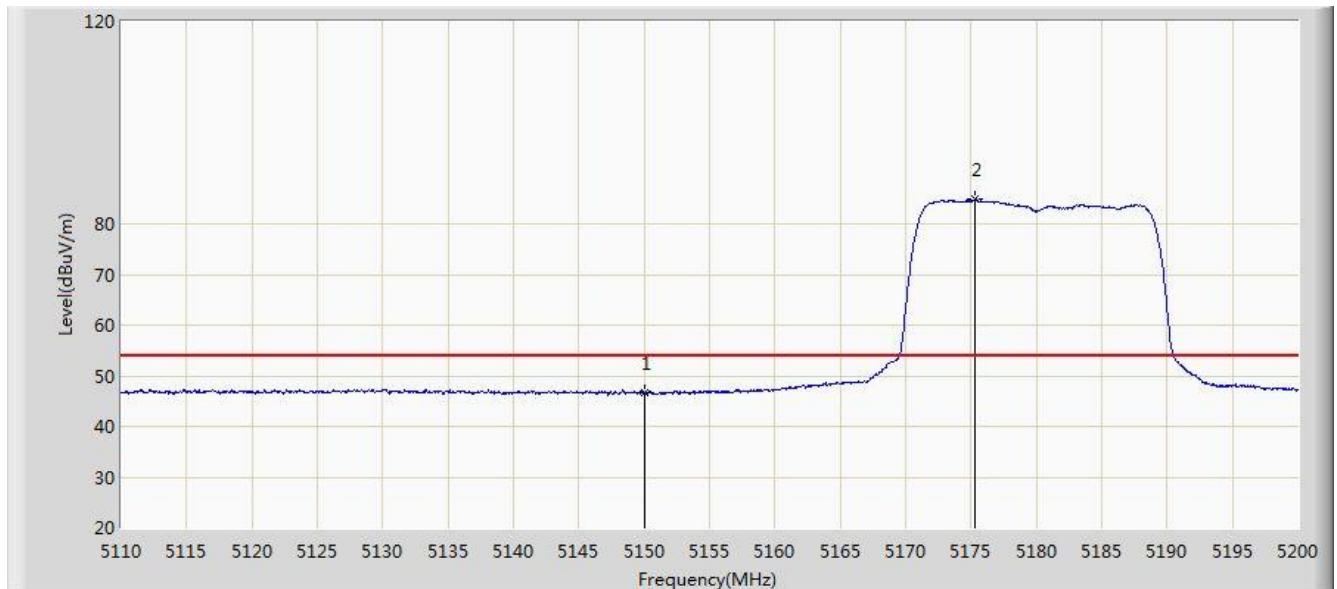


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	46.660	40.263	-7.340	54.000	6.398	AV
2		*	5175.295	84.818	78.294	N/A	N/A	6.524	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/04/23 - 03:45
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Tablet	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5320MHz	

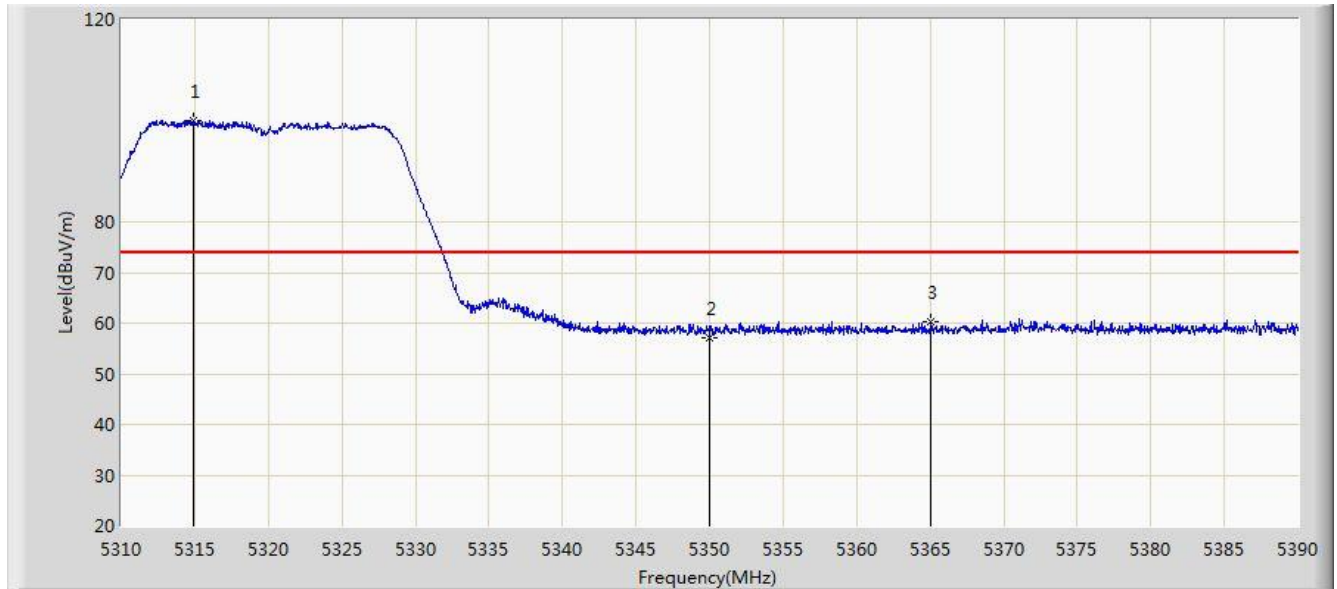


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5314.920	100.071	93.734	N/A	N/A	6.337	PK
2			5350.000	57.231	50.904	-16.769	74.000	6.327	PK
3			5365.040	60.411	53.989	-13.589	74.000	6.422	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/04/23 - 03:47
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Tablet	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5320MHz	

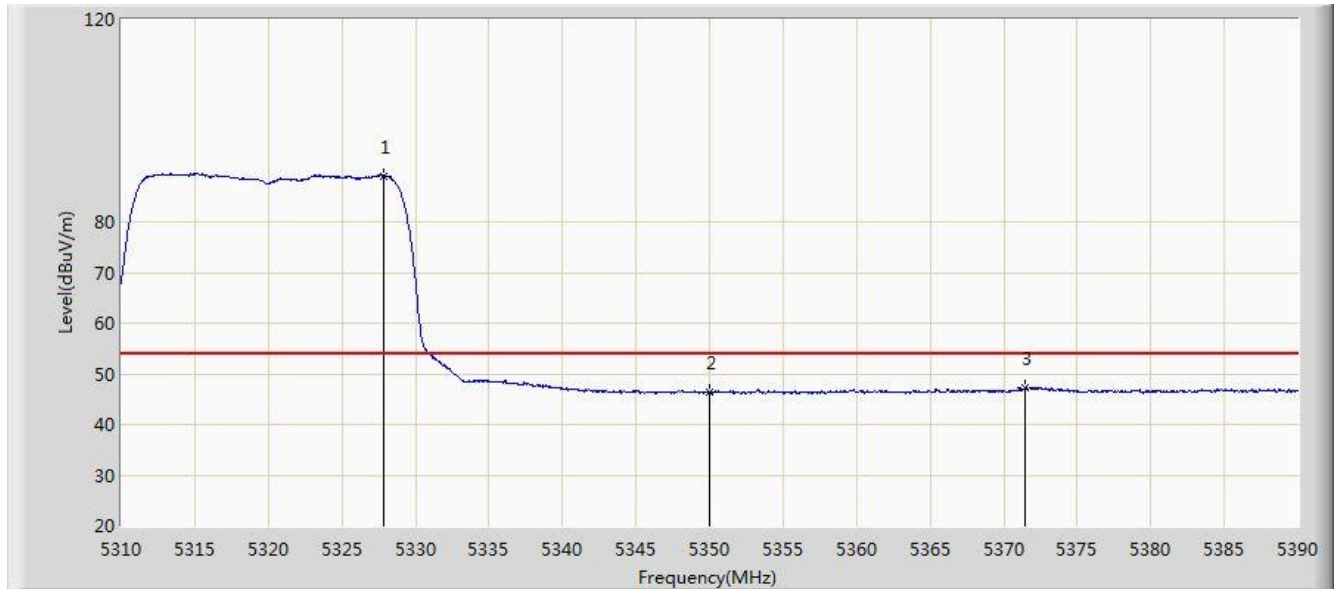


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5327.880	89.127	82.788	N/A	N/A	6.339	AV
2			5350.000	46.431	40.104	-7.569	54.000	6.327	AV
3			5371.440	47.195	40.738	-6.805	54.000	6.457	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/04/23 - 03:48
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Tablet	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5320MHz	

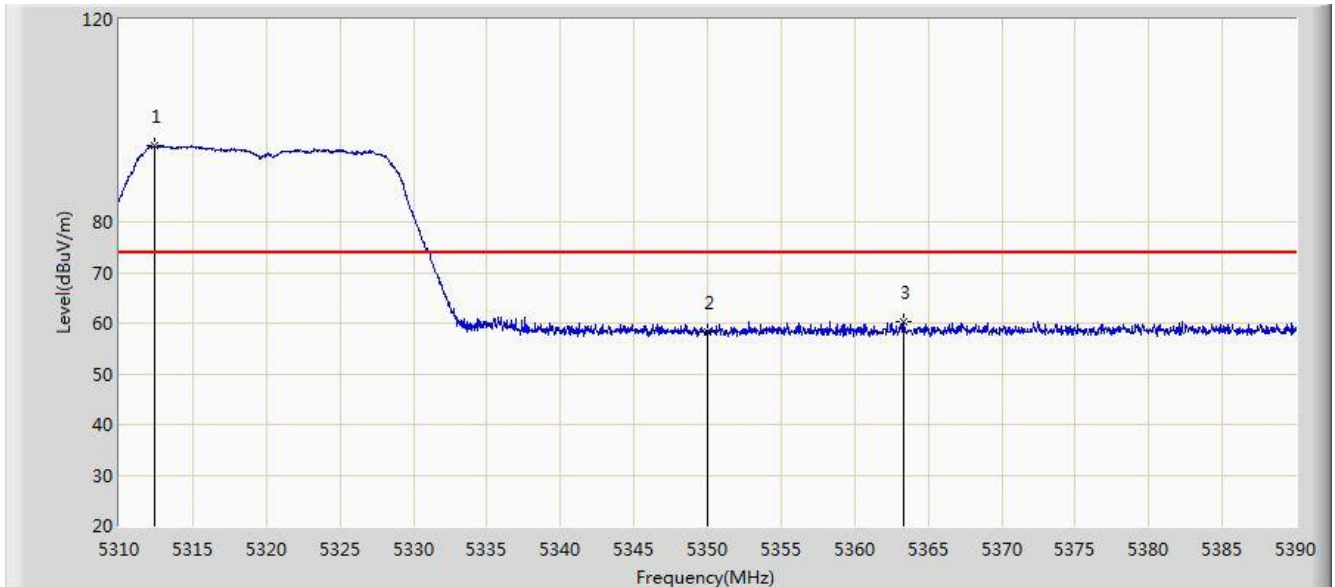


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5312.360	95.105	88.778	N/A	N/A	6.327	PK
2			5350.000	58.129	51.802	-15.871	74.000	6.327	PK
3			5363.320	60.281	53.871	-13.719	74.000	6.410	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/04/23 - 03:49
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Tablet	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5320MHz	

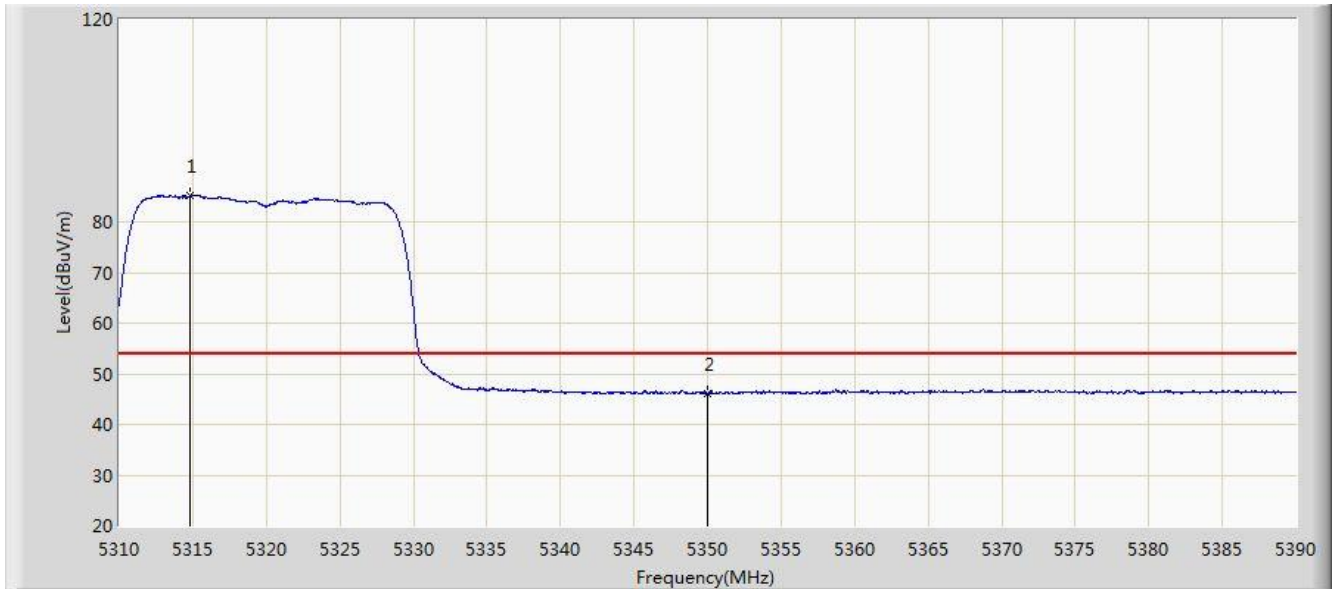


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5314.800	85.152	78.816	N/A	N/A	6.336	AV
2			5350.000	46.112	39.785	-7.888	54.000	6.327	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/04/23 - 03:50
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Tablet	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5500MHz	

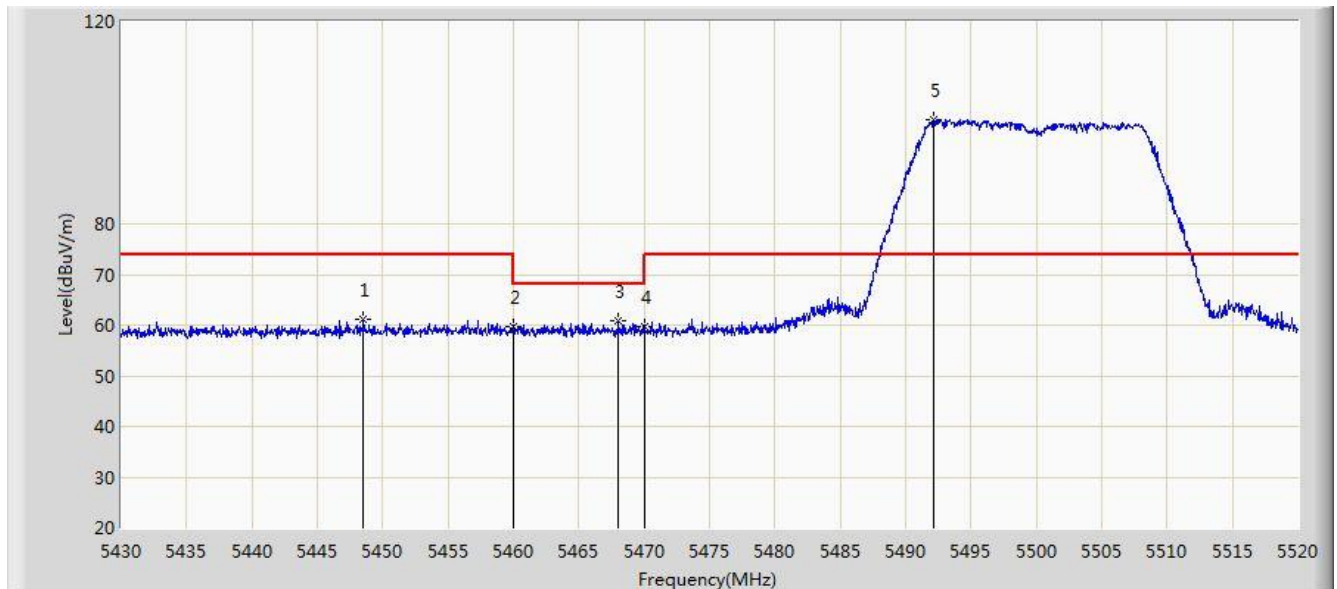


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5448.540	61.277	54.660	-12.723	74.000	6.617	PK
2			5460.000	59.621	53.009	-14.379	74.000	6.612	PK
3			5468.025	60.877	54.301	-7.323	68.200	6.576	PK
4			5470.000	59.753	53.186	-8.447	68.200	6.567	PK
5		*	5492.190	100.621	93.970	N/A	N/A	6.651	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/04/23 - 03:52
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Tablet	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5500MHz	

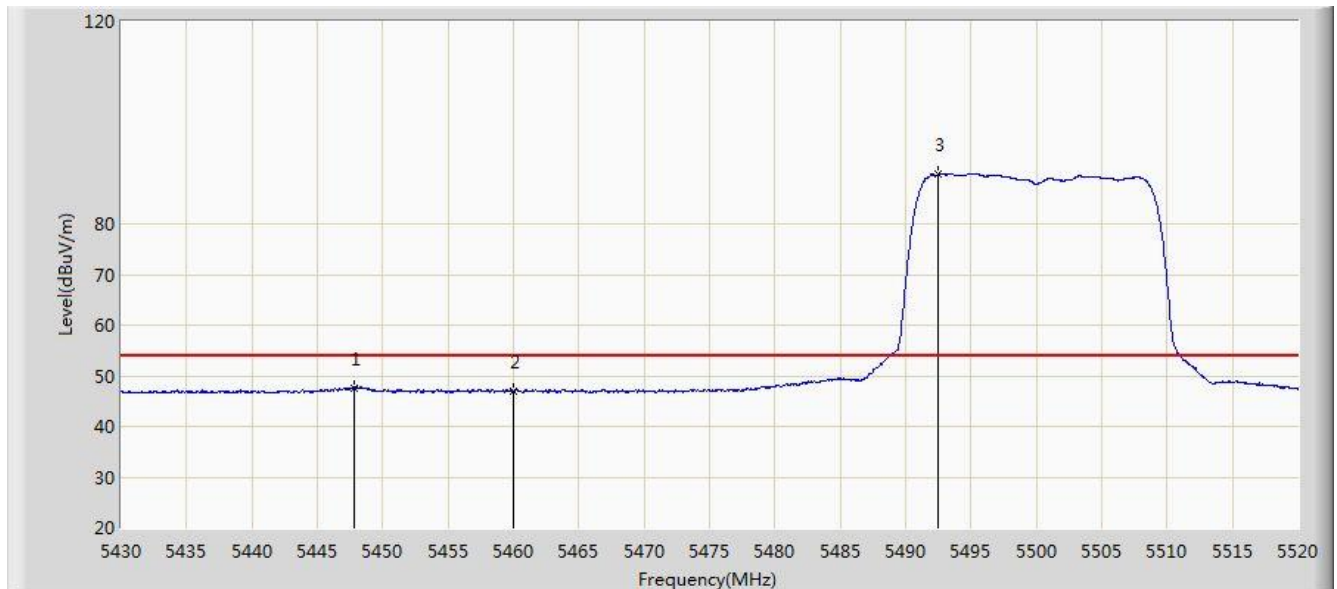


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5447.865	47.609	40.995	-6.391	54.000	6.614	AV
2			5460.000	46.943	40.331	-7.057	54.000	6.612	AV
3		*	5492.505	89.721	83.068	N/A	N/A	6.653	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/04/23 - 03:52
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Tablet	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5500MHz	

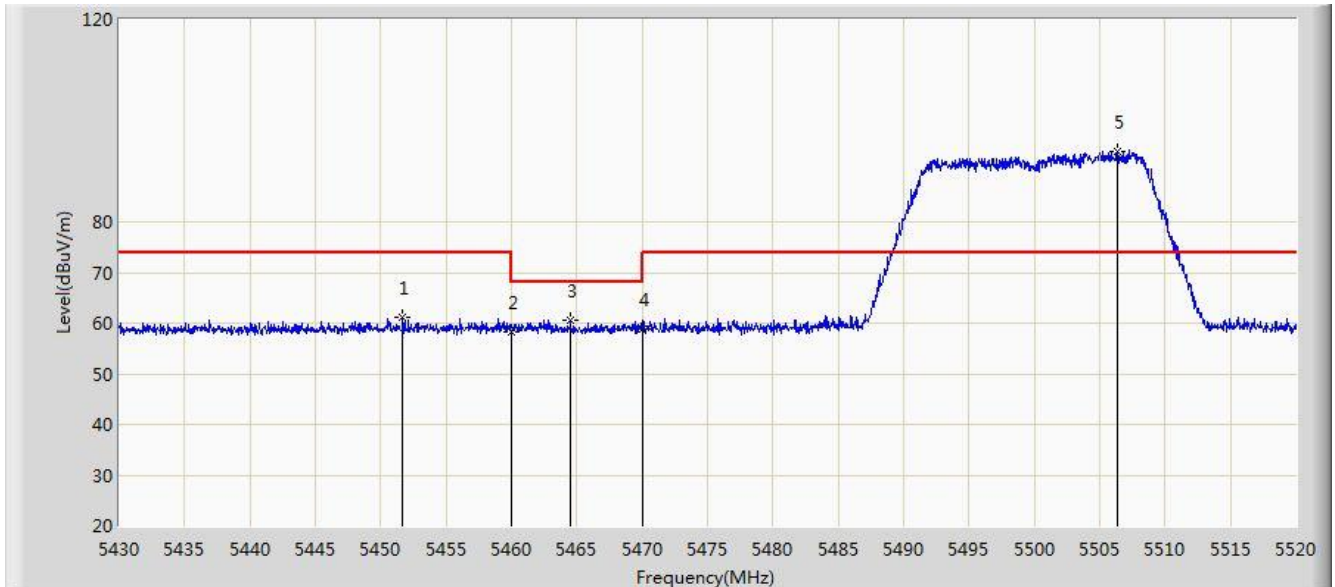


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5451.645	61.298	54.669	-12.702	74.000	6.630	PK
2			5460.000	58.208	51.596	-15.792	74.000	6.612	PK
3			5464.515	60.705	54.113	-7.495	68.200	6.592	PK
4			5470.000	58.738	52.171	-9.462	68.200	6.567	PK
5		*	5506.365	93.805	87.065	N/A	N/A	6.741	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/04/23 - 03:54
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Tablet	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5500MHz	

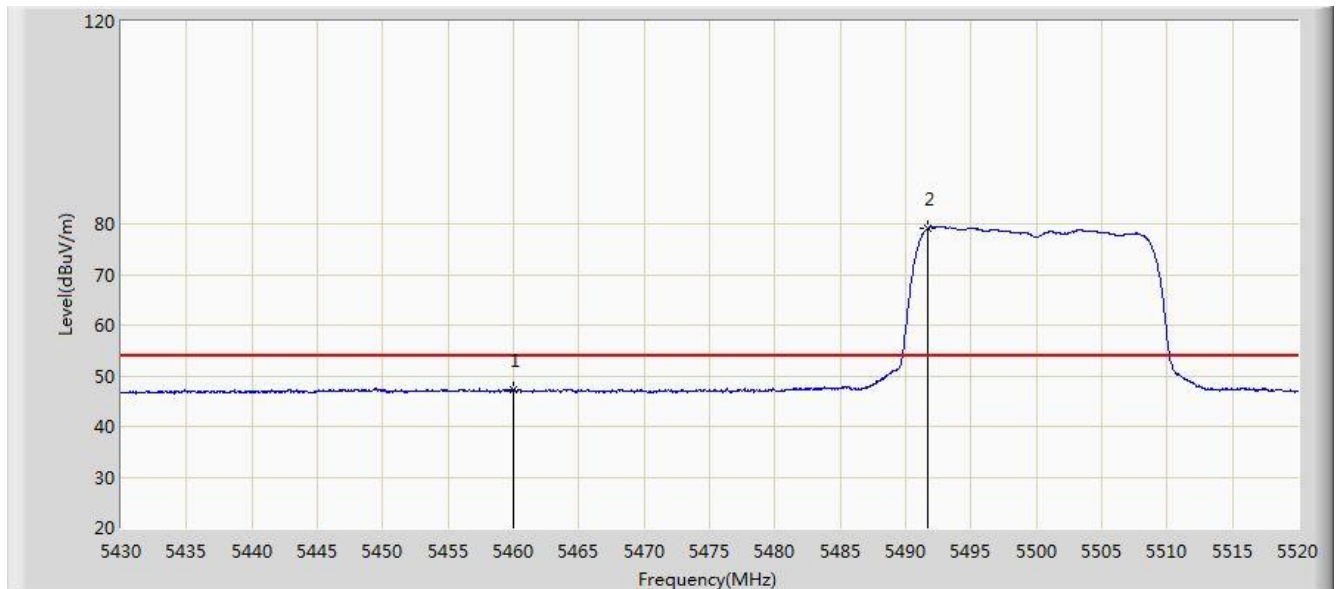


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	47.131	40.519	-6.869	54.000	6.612	AV
2		*	5491.740	79.188	72.540	N/A	N/A	6.647	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/04/23 - 03:54
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Tablet	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5700MHz	

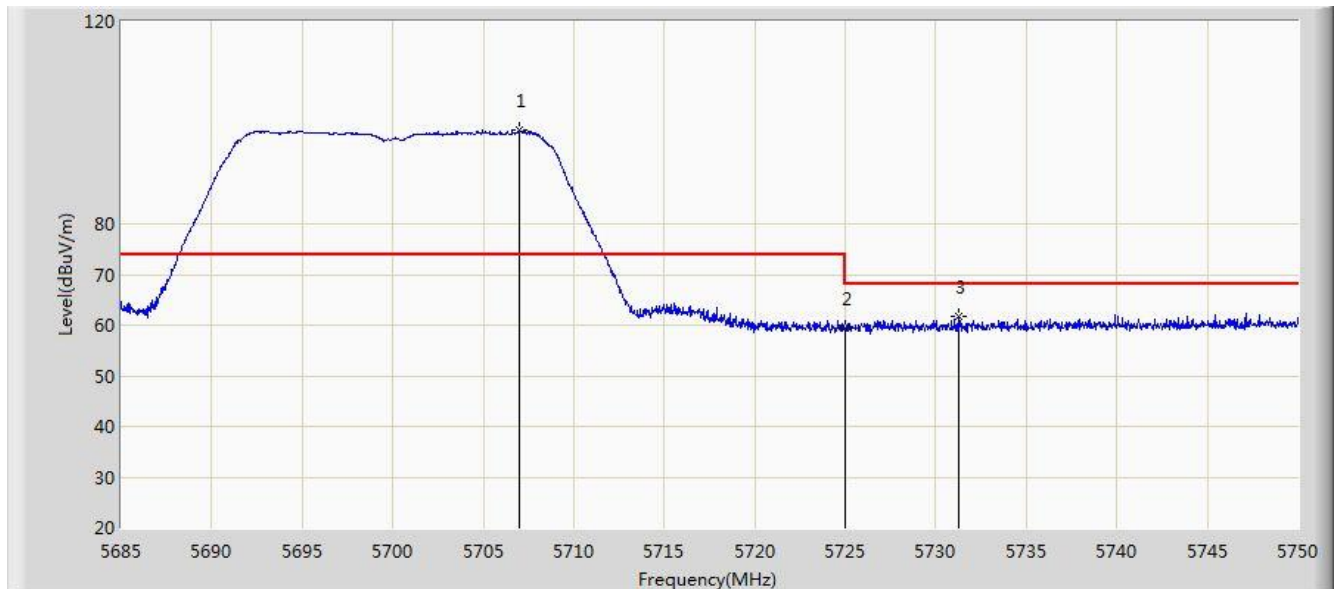


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5707.002	98.643	91.675	N/A	N/A	6.969	PK
2			5725.000	59.440	52.573	-8.760	68.200	6.867	PK
3			5731.248	61.597	54.701	-6.603	68.200	6.896	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/04/23 - 03:57
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Tablet	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5700MHz	

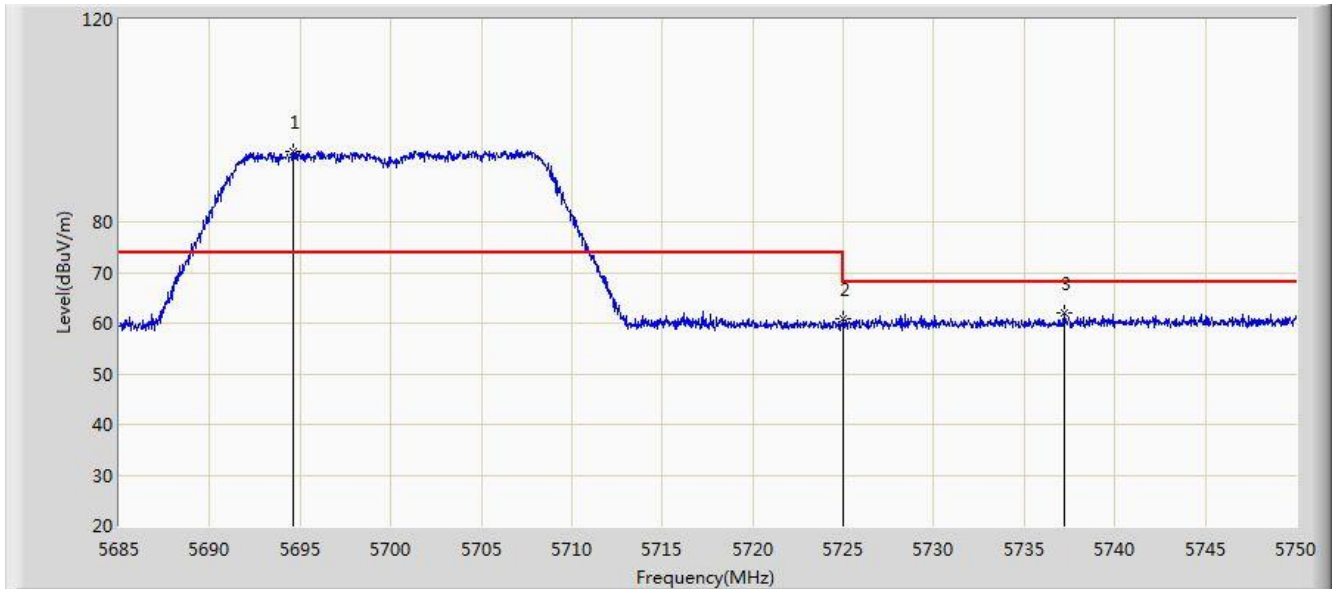


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5694.620	93.808	86.940	N/A	N/A	6.868	PK
2			5725.000	60.732	53.865	-7.468	68.200	6.867	PK
3			5737.195	61.918	54.981	-6.282	68.200	6.938	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/04/23 - 03:58
Limit: FCC_Part15.407_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Tablet	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5745MHz	

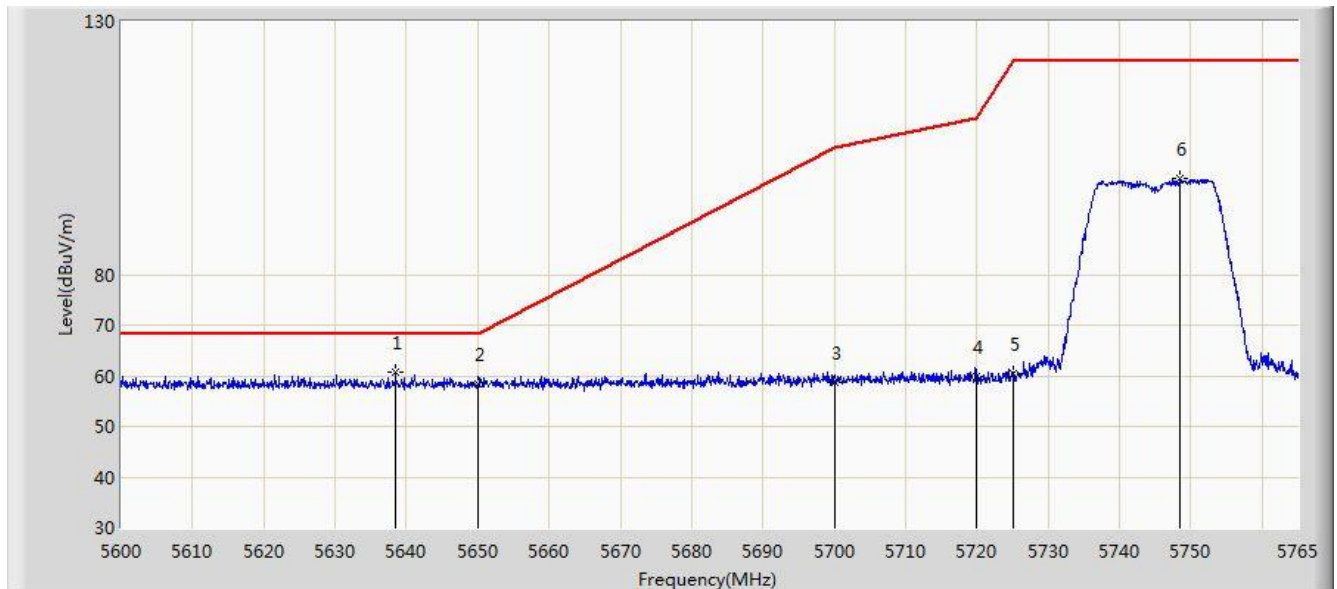


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5638.445	60.670	53.855	-7.530	68.200	6.815	PK
2			5650.000	58.527	51.734	-9.673	68.200	6.793	PK
3			5700.000	58.691	51.782	-46.509	105.200	6.909	PK
4			5720.000	59.717	52.813	-51.083	110.800	6.904	PK
5			5725.000	60.472	53.605	-61.728	122.200	6.867	PK
6			5748.500	98.849	91.806	N/A	N/A	7.042	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/04/23 - 04:00
Limit: FCC_Part15.407_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Tablet	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5745MHz	

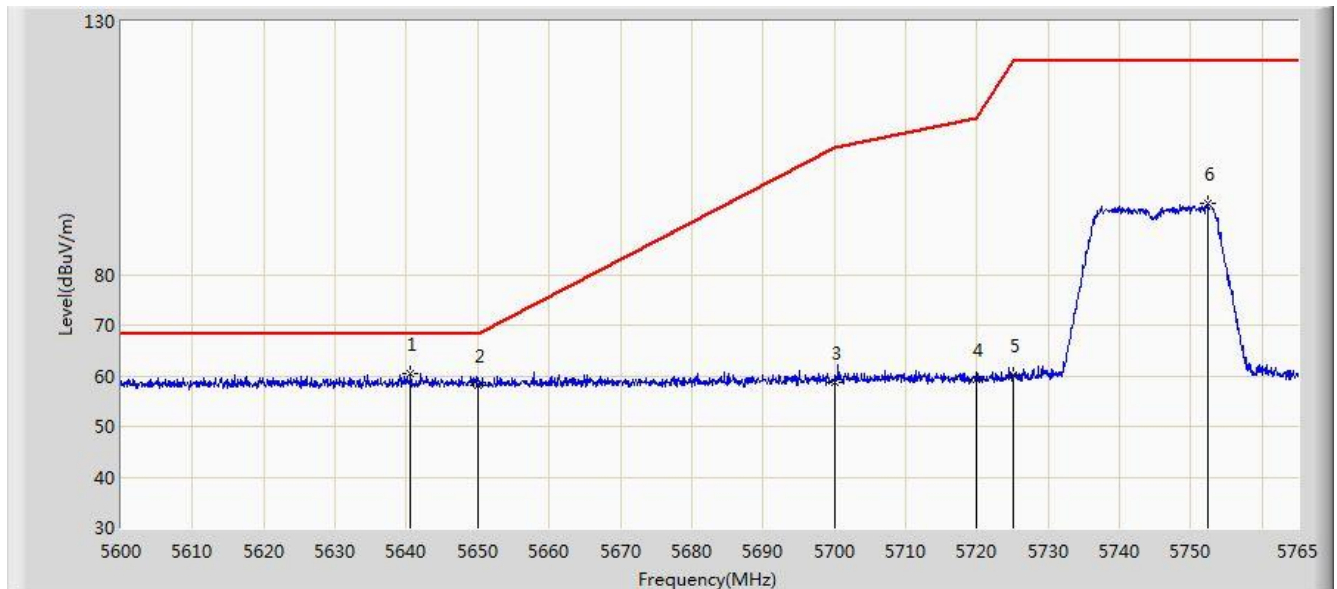


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5640.507	60.382	53.553	-7.818	68.200	6.829	PK
2			5650.000	57.978	51.185	-10.222	68.200	6.793	PK
3			5700.000	58.685	51.776	-46.515	105.200	6.909	PK
4			5720.000	59.371	52.467	-51.429	110.800	6.904	PK
5			5725.000	60.289	53.422	-61.911	122.200	6.867	PK
6			5752.295	93.971	86.882	N/A	N/A	7.089	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/04/23 - 04:01
Limit: FCC_Part15.407_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Tablet	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5825MHz	

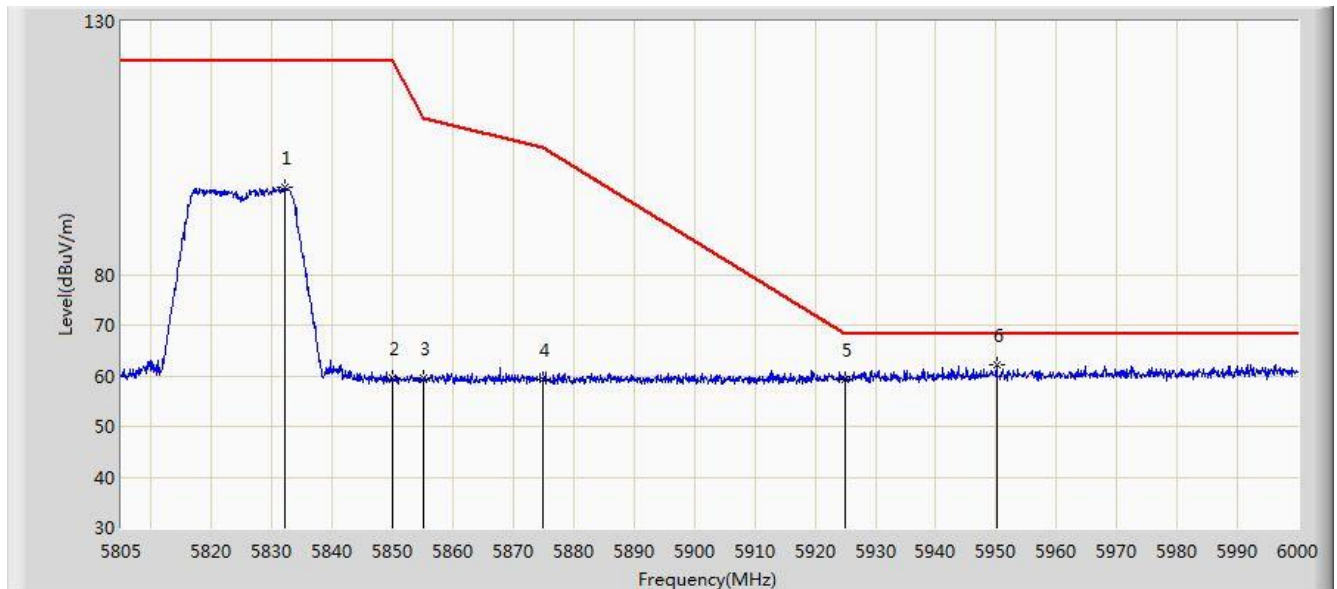


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5832.007	97.278	89.905	N/A	N/A	7.374	PK
2			5850.000	59.506	52.176	-62.694	122.200	7.331	PK
3			5855.000	59.545	52.217	-51.255	110.800	7.327	PK
4			5875.000	59.229	51.815	-45.971	105.200	7.414	PK
5			5925.000	59.375	52.075	-8.825	68.200	7.299	PK
6		*	5950.080	62.161	54.681	-6.039	68.200	7.481	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/04/23 - 04:03
Limit: FCC_Part15.407_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Tablet	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5825MHz	

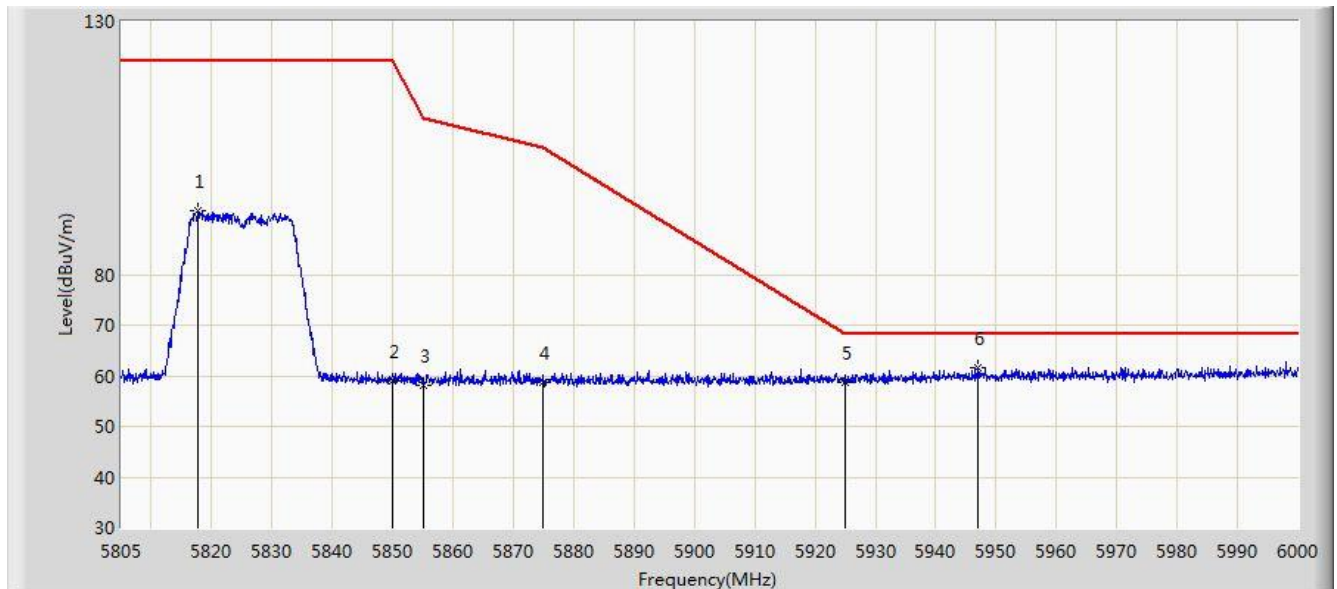


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5817.772	92.590	85.358	N/A	N/A	7.232	PK
2			5850.000	59.091	51.761	-63.109	122.200	7.331	PK
3			5855.000	58.214	50.886	-52.586	110.800	7.327	PK
4			5875.000	58.734	51.320	-46.466	105.200	7.414	PK
5			5925.000	58.553	51.253	-9.647	68.200	7.299	PK
6		*	5947.058	61.577	54.072	-6.623	68.200	7.506	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/04/23 - 04:05
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Tablet	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5190MHz	

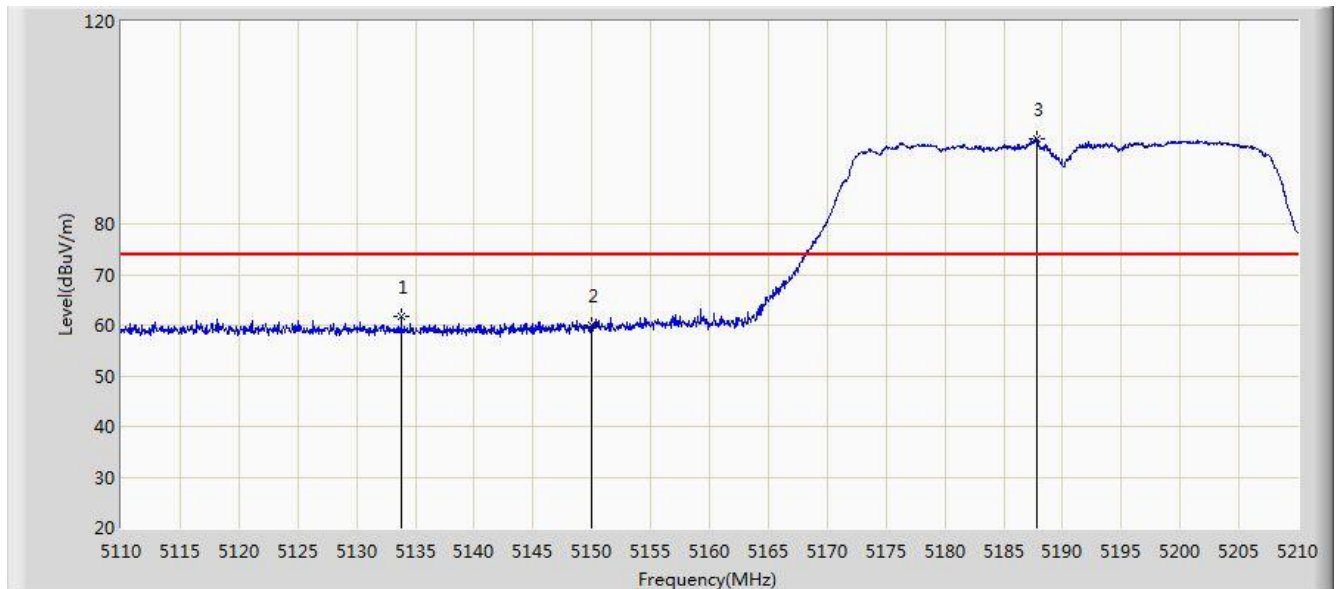


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5133.800	61.809	55.206	-12.191	74.000	6.602	PK
2			5150.000	60.133	53.736	-13.867	74.000	6.398	PK
3		*	5187.850	96.895	90.364	N/A	N/A	6.531	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/04/23 - 04:08
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Tablet	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5190MHz	

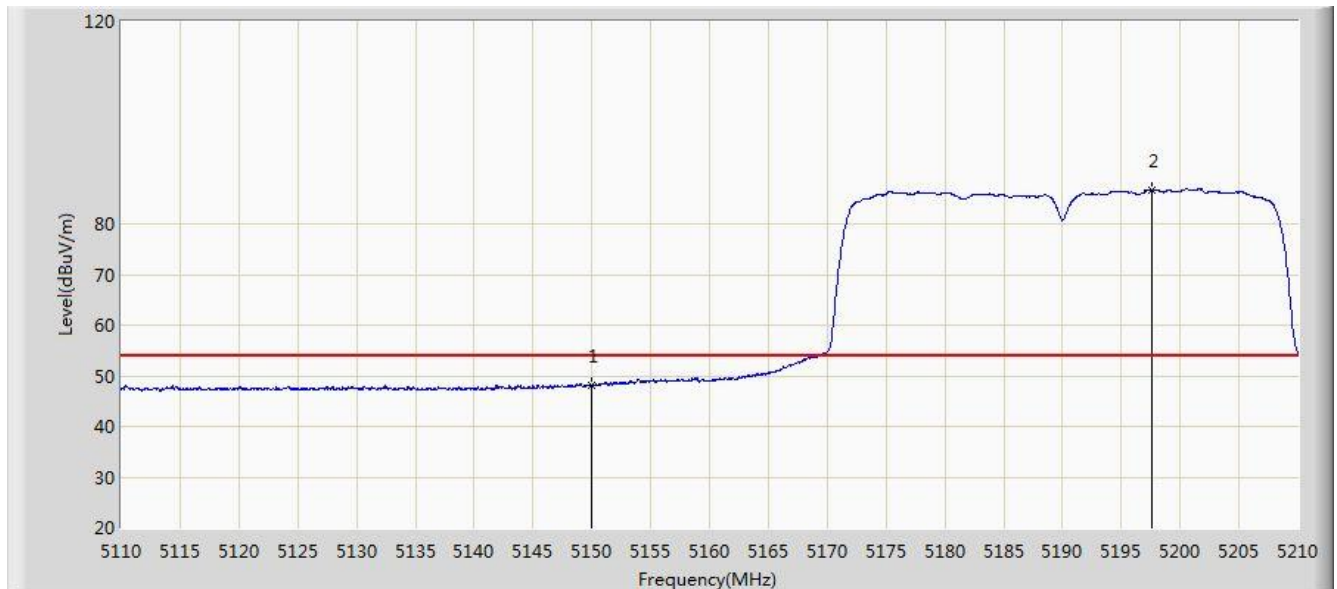


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	48.207	41.810	-5.793	54.000	6.398	AV
2		*	5197.650	86.746	80.310	N/A	N/A	6.435	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/04/23 - 04:09
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Tablet	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5190MHz	

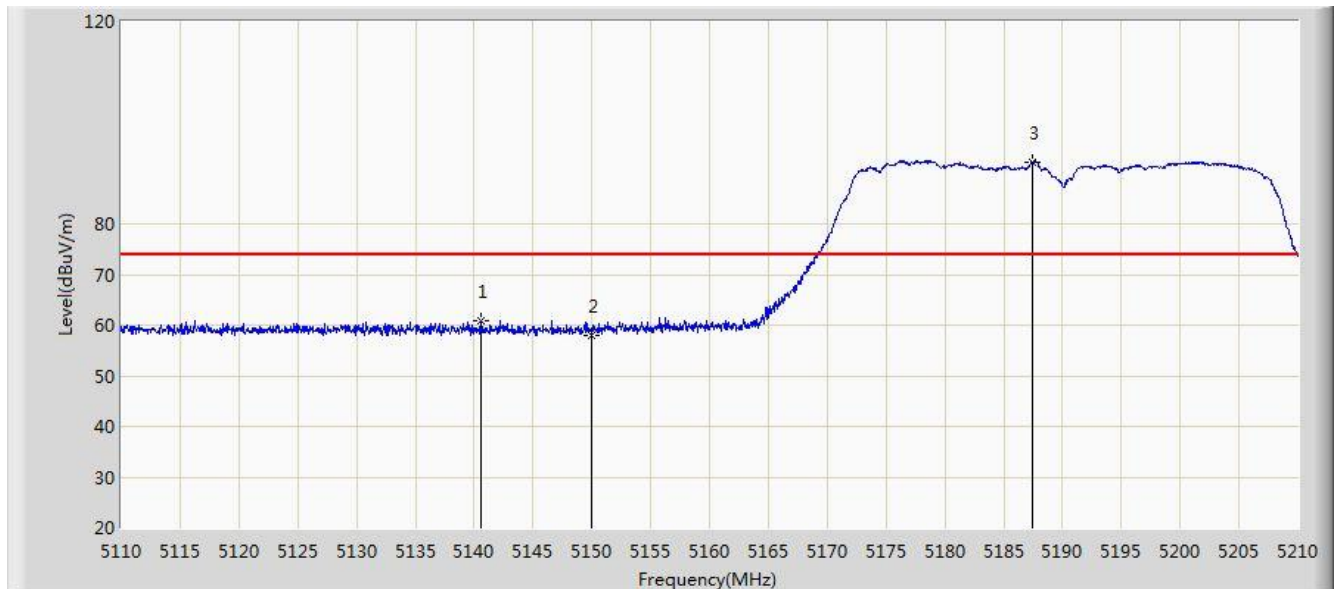


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5140.600	60.865	54.363	-13.135	74.000	6.502	PK
2			5150.000	58.112	51.715	-15.888	74.000	6.398	PK
3		*	5187.500	92.271	85.736	N/A	N/A	6.534	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/04/23 - 04:11
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Tablet	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5190MHz	

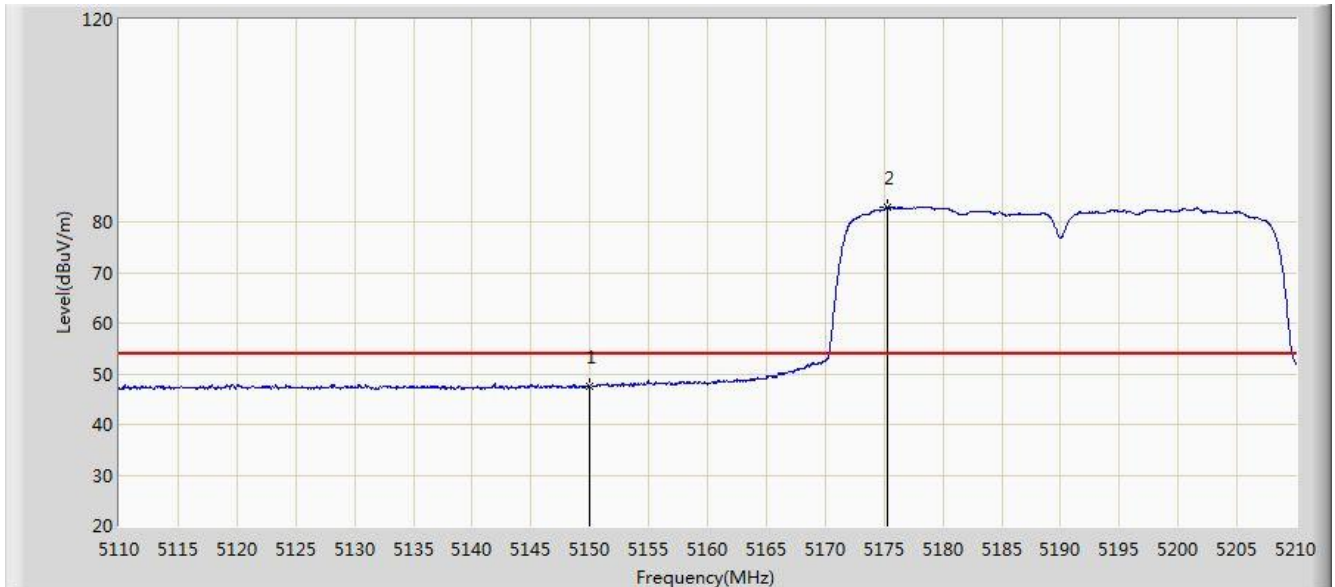


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	47.677	41.280	-6.323	54.000	6.398	AV
2		*	5175.250	82.926	76.402	N/A	N/A	6.524	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/04/23 - 04:11
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Tablet	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5310MHz	

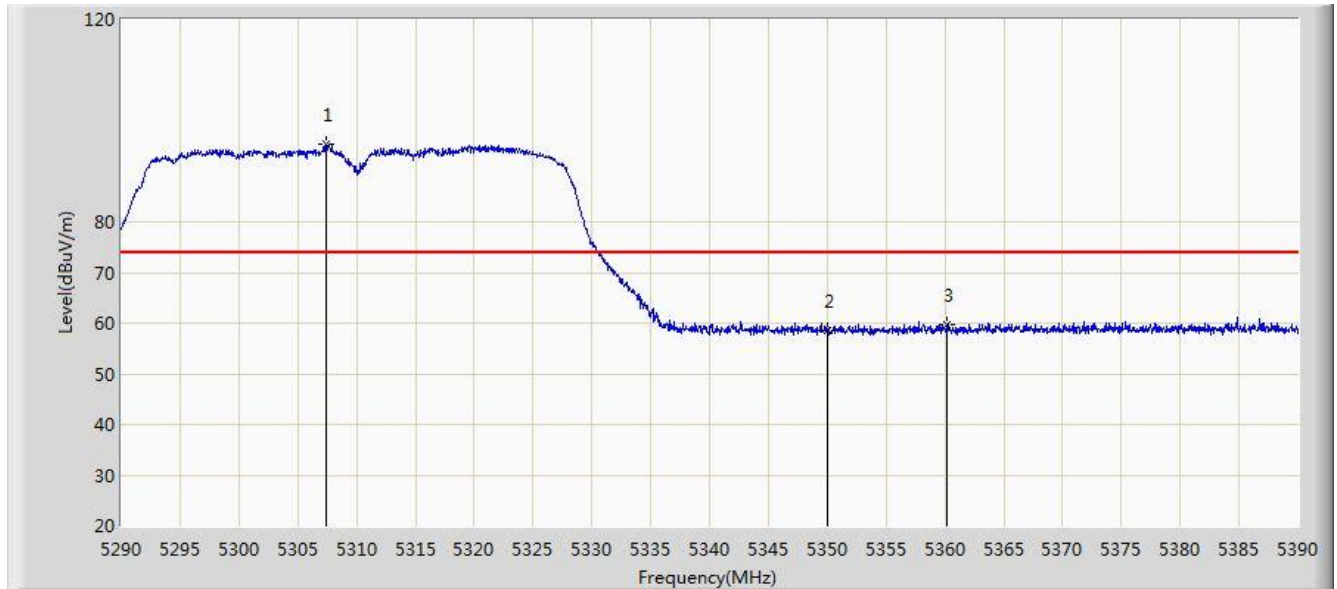


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5307.400	95.251	88.941	N/A	N/A	6.310	PK
2			5350.000	58.648	52.321	-15.352	74.000	6.327	PK
3			5360.150	59.775	53.389	-14.225	74.000	6.386	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/04/23 - 04:14
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Tablet	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5310MHz	

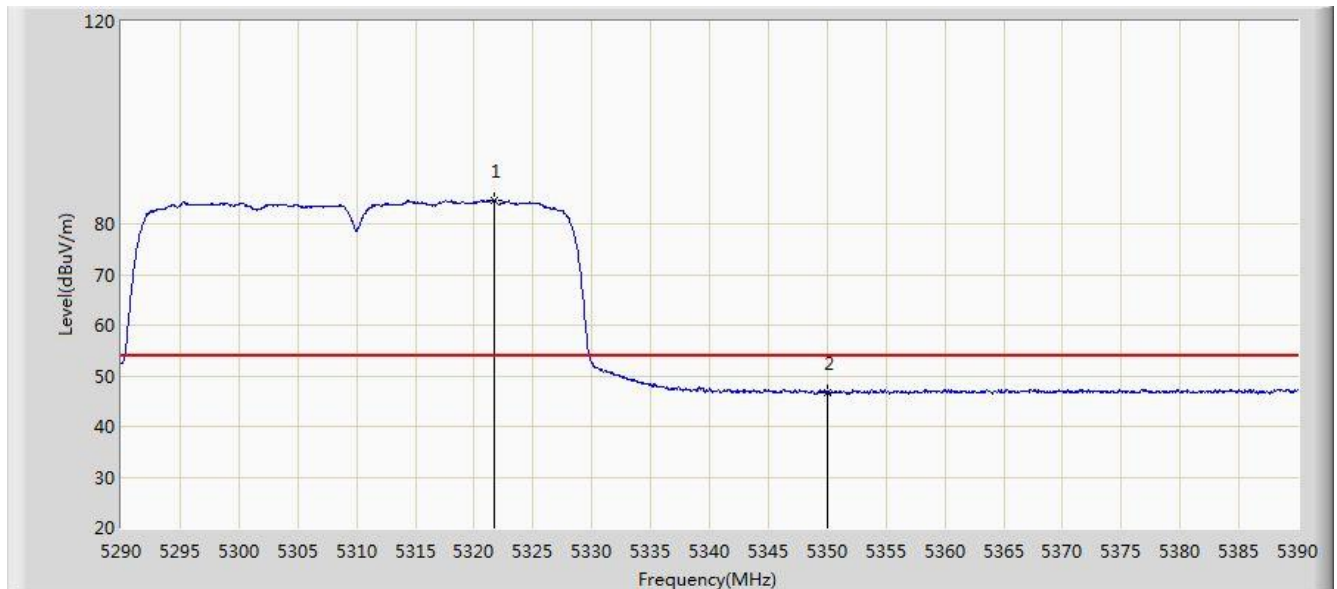


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5321.650	84.763	78.418	N/A	N/A	6.345	AV
2			5350.000	46.657	40.330	-7.343	54.000	6.327	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/04/23 - 04:14
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Tablet	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5310MHz	

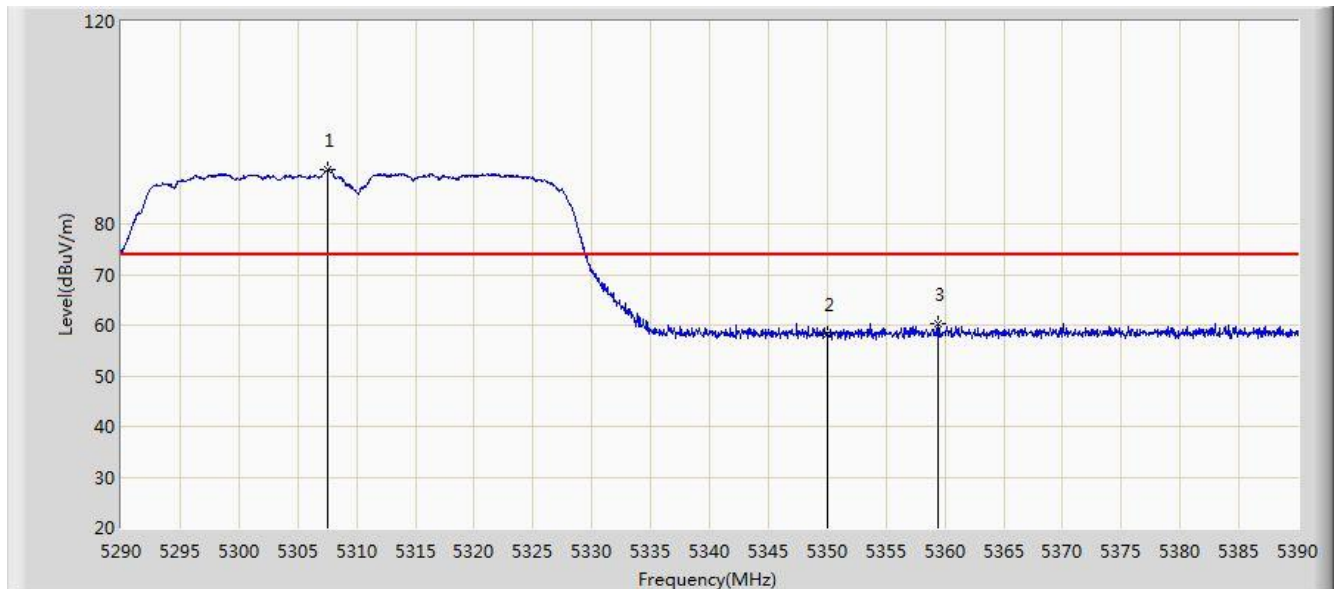


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5307.550	90.841	84.530	N/A	N/A	6.311	PK
2			5350.000	58.213	51.886	-15.787	74.000	6.327	PK
3			5359.400	60.318	53.937	-13.682	74.000	6.381	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/04/23 - 04:15
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Tablet	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5310MHz	

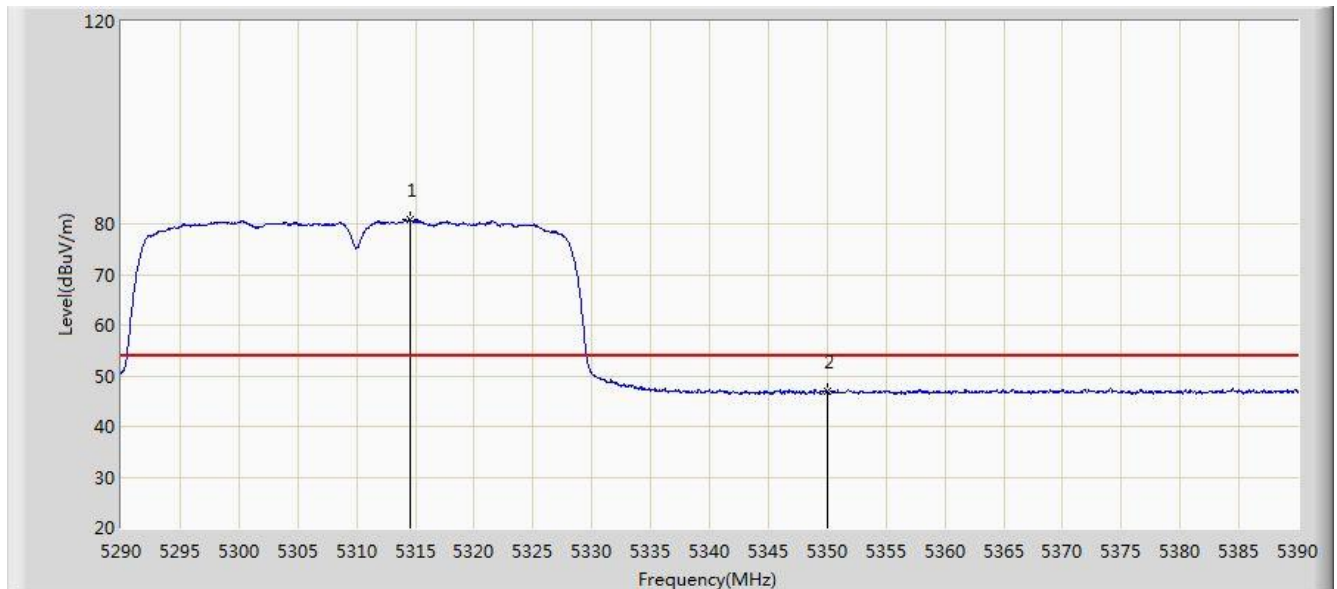


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5314.500	80.782	74.447	N/A	N/A	6.335	AV
2			5350.000	46.991	40.664	-7.009	54.000	6.327	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/04/23 - 04:16
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Tablet	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5510MHz	

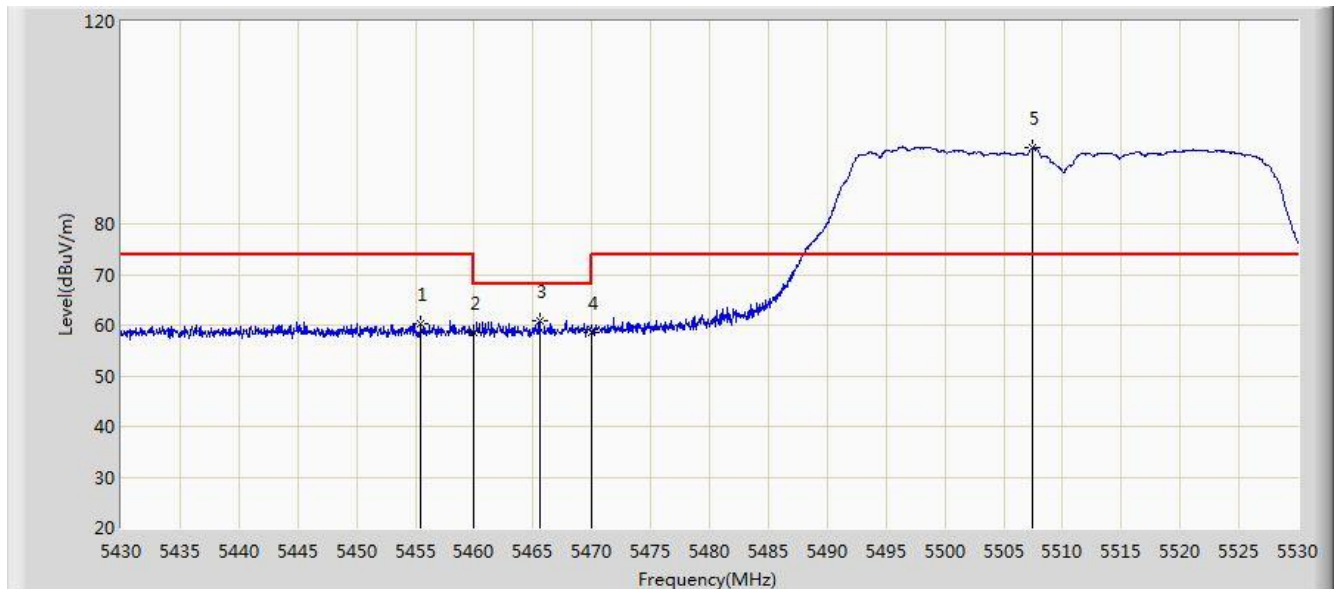


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5455.500	60.261	53.628	-13.739	74.000	6.633	PK
2			5460.000	58.660	52.048	-15.340	74.000	6.612	PK
3			5465.550	60.725	54.138	-7.475	68.200	6.588	PK
4			5470.000	58.481	51.914	-9.719	68.200	6.567	PK
5		*	5507.500	95.008	88.270	N/A	N/A	6.737	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/04/23 - 04:19
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Tablet	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5510MHz	

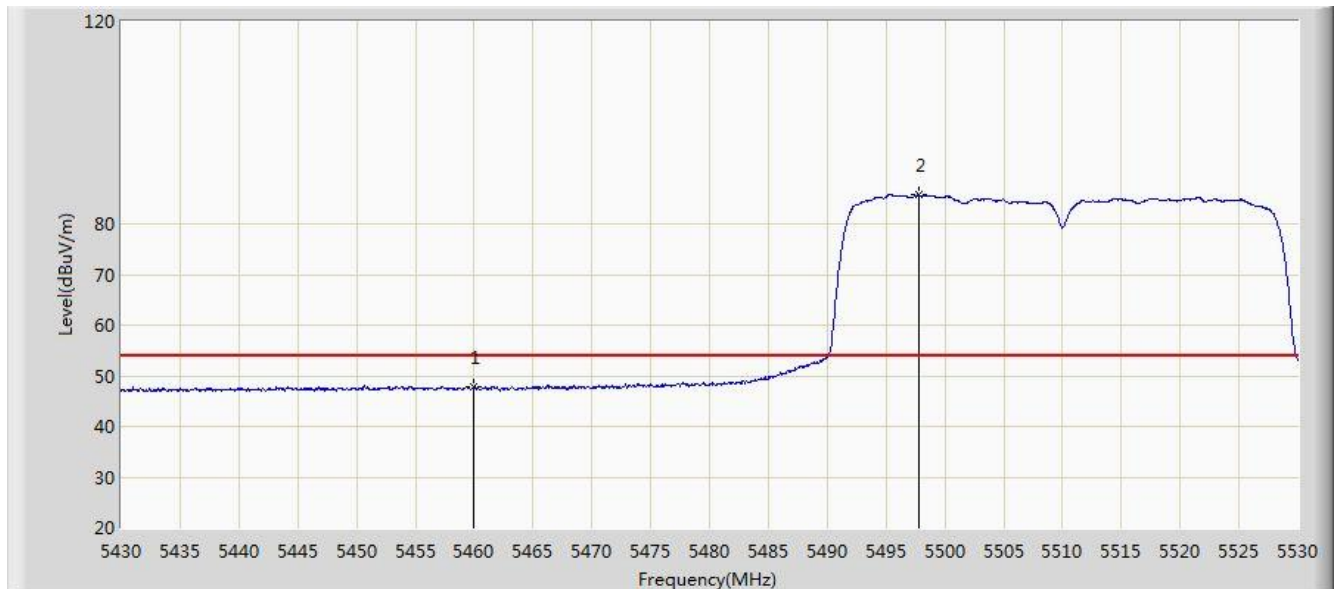


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	47.705	41.093	-6.295	54.000	6.612	AV
2		*	5497.750	85.701	79.010	N/A	N/A	6.691	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/04/23 - 04:20
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Tablet	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5510MHz	

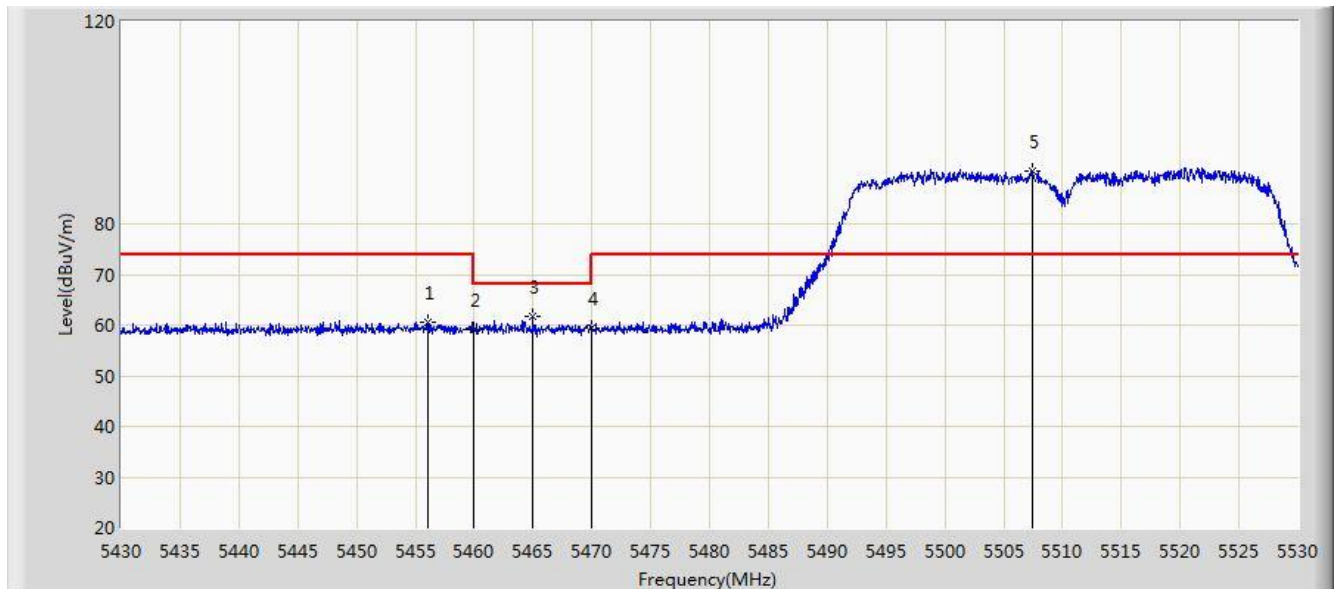


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5456.100	60.565	53.935	-13.435	74.000	6.631	PK
2			5460.000	59.019	52.407	-14.981	74.000	6.612	PK
3			5465.000	61.635	55.045	-6.565	68.200	6.590	PK
4			5470.000	59.557	52.990	-8.643	68.200	6.567	PK
5		*	5507.500	90.400	83.662	N/A	N/A	6.737	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/04/23 - 04:21
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Tablet	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5510MHz	

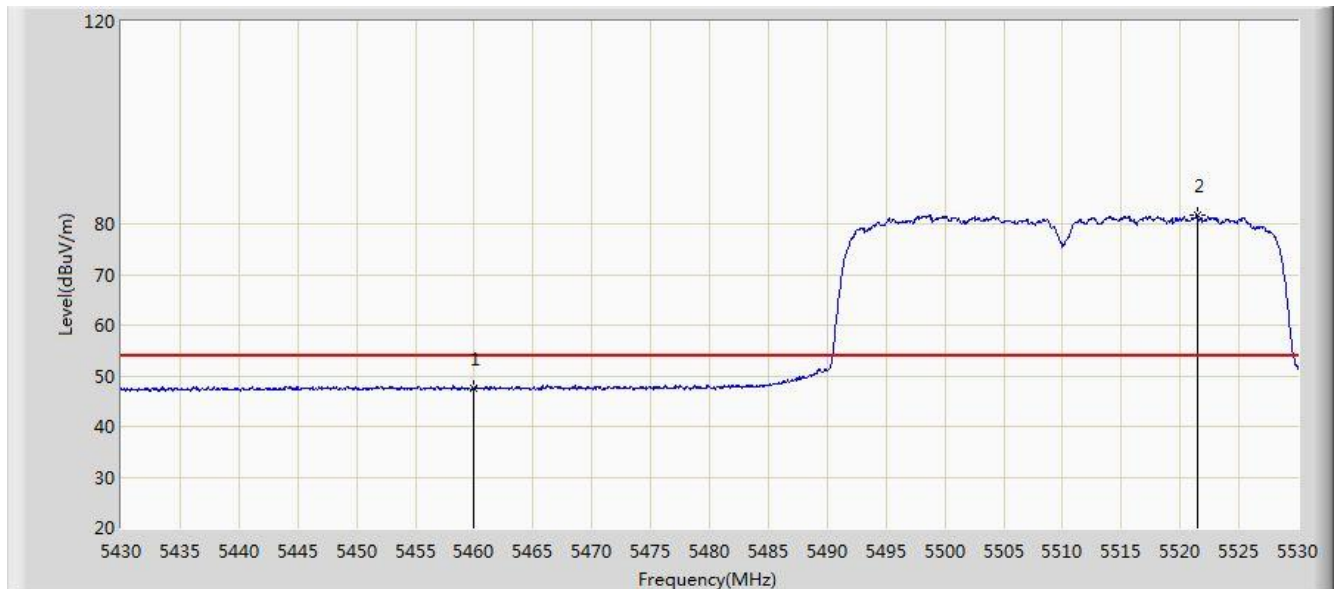


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	47.621	41.009	-6.379	54.000	6.612	AV
2		*	5521.450	81.681	74.977	N/A	N/A	6.704	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/04/23 - 04:23
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Tablet	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5670MHz	

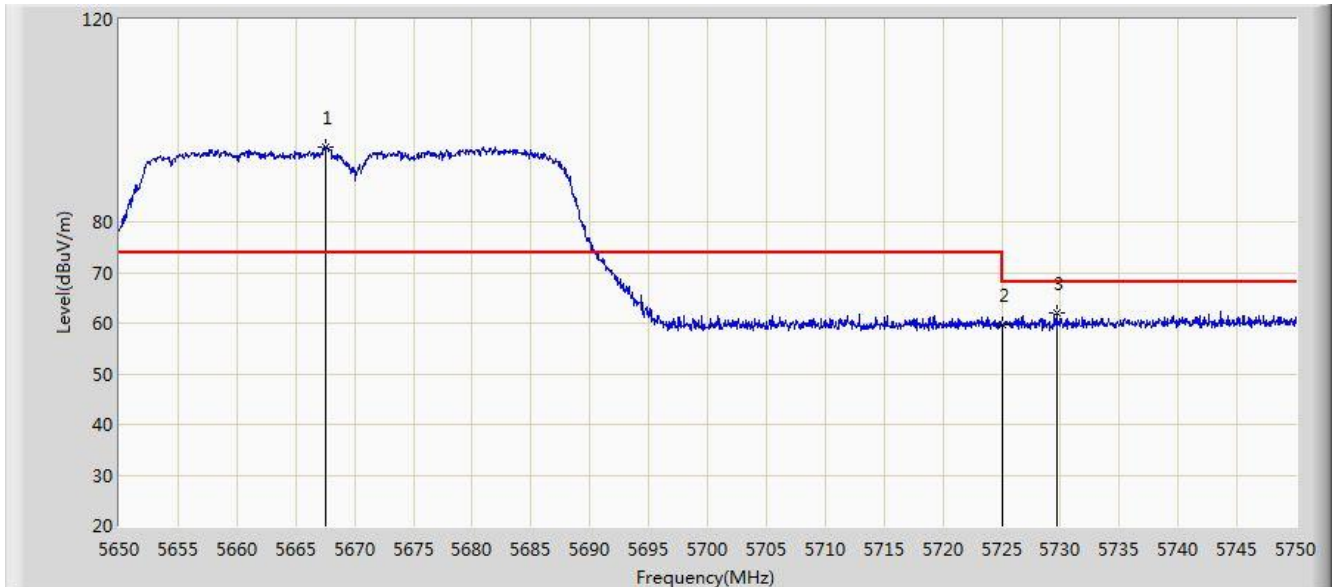


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5667.500	94.734	87.999	N/A	N/A	6.735	PK
2			5725.000	59.728	52.861	-8.472	68.200	6.867	PK
3			5729.650	61.923	55.038	-6.277	68.200	6.886	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/04/23 - 04:25
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Tablet	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5670MHz	

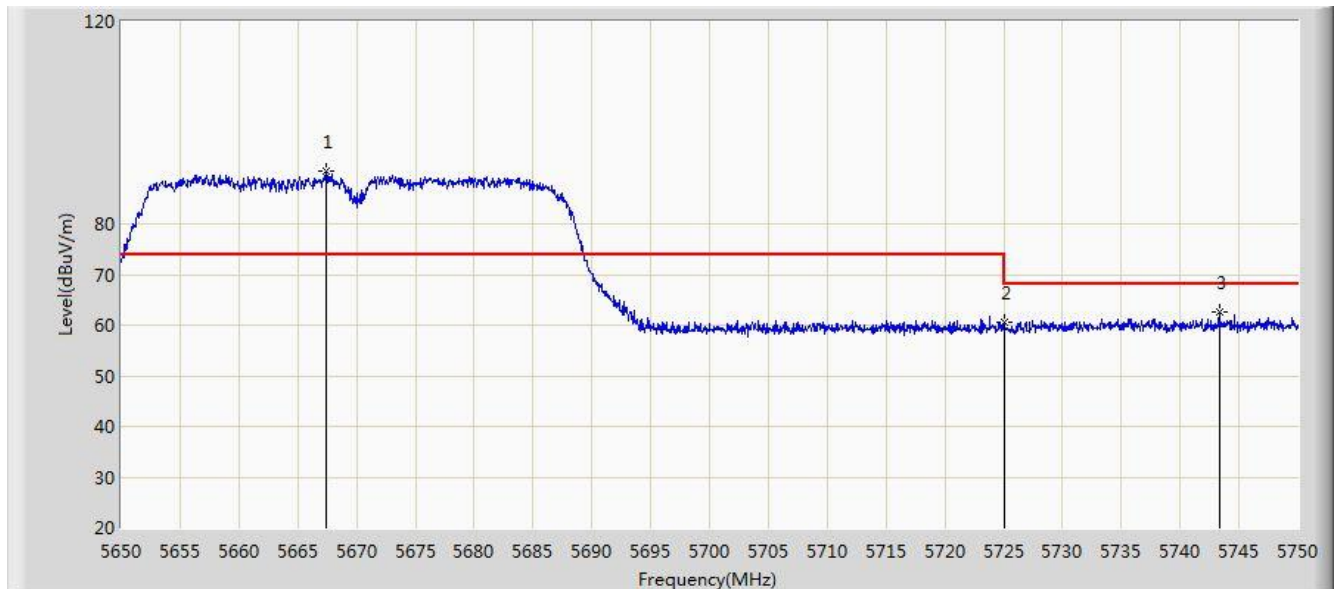


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5667.450	90.383	83.648	N/A	N/A	6.735	PK
2			5725.000	60.484	53.617	-7.716	68.200	6.867	PK
3			5743.300	62.612	55.633	-5.588	68.200	6.979	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/04/23 - 04:26
Limit: FCC_Part15.407_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Tablet	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5755MHz	

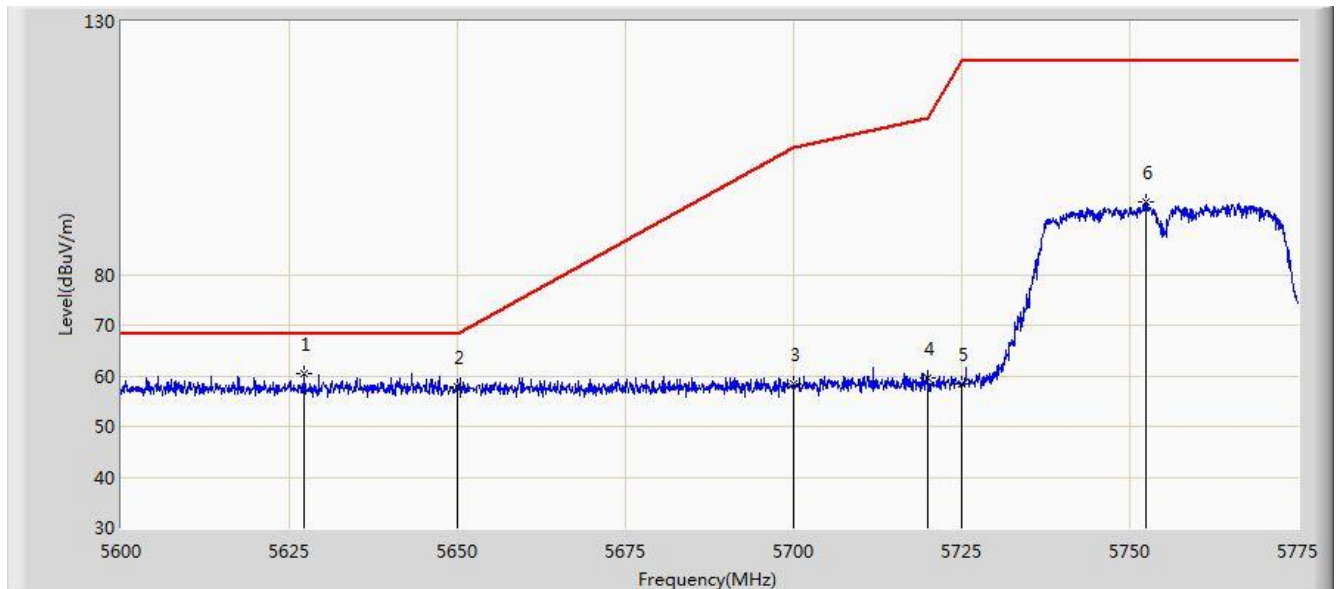


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5627.125	60.549	53.807	-7.651	68.200	6.742	PK
2			5650.000	57.950	51.157	-10.250	68.200	6.793	PK
3			5700.000	58.310	51.401	-46.890	105.200	6.909	PK
4			5720.000	59.572	52.668	-51.228	110.800	6.904	PK
5			5725.000	58.480	51.613	-63.720	122.200	6.867	PK
6			5752.425	94.484	87.393	N/A	N/A	7.091	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/04/23 - 04:27
Limit: FCC_Part15.407_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Tablet	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5755MHz	

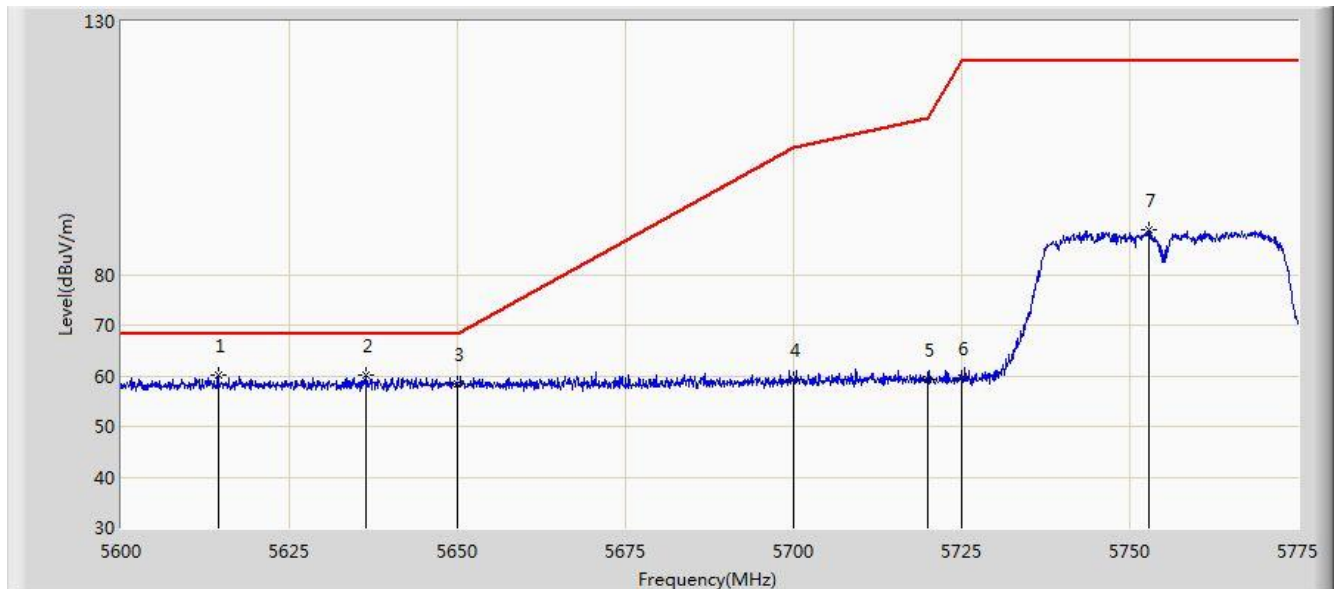


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5614.437	60.274	53.588	-7.926	68.200	6.686	PK
2			5636.487	60.186	53.383	-8.014	68.200	6.802	PK
3			5650.000	58.549	51.756	-9.651	68.200	6.793	PK
4			5700.000	59.186	52.277	-46.014	105.200	6.909	PK
5			5720.000	59.401	52.497	-51.399	110.800	6.904	PK
6			5725.000	59.485	52.618	-62.715	122.200	6.867	PK
7			5752.775	88.936	81.841	N/A	N/A	7.095	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/04/23 - 04:29
Limit: FCC_Part15.407_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Tablet	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5795MHz	

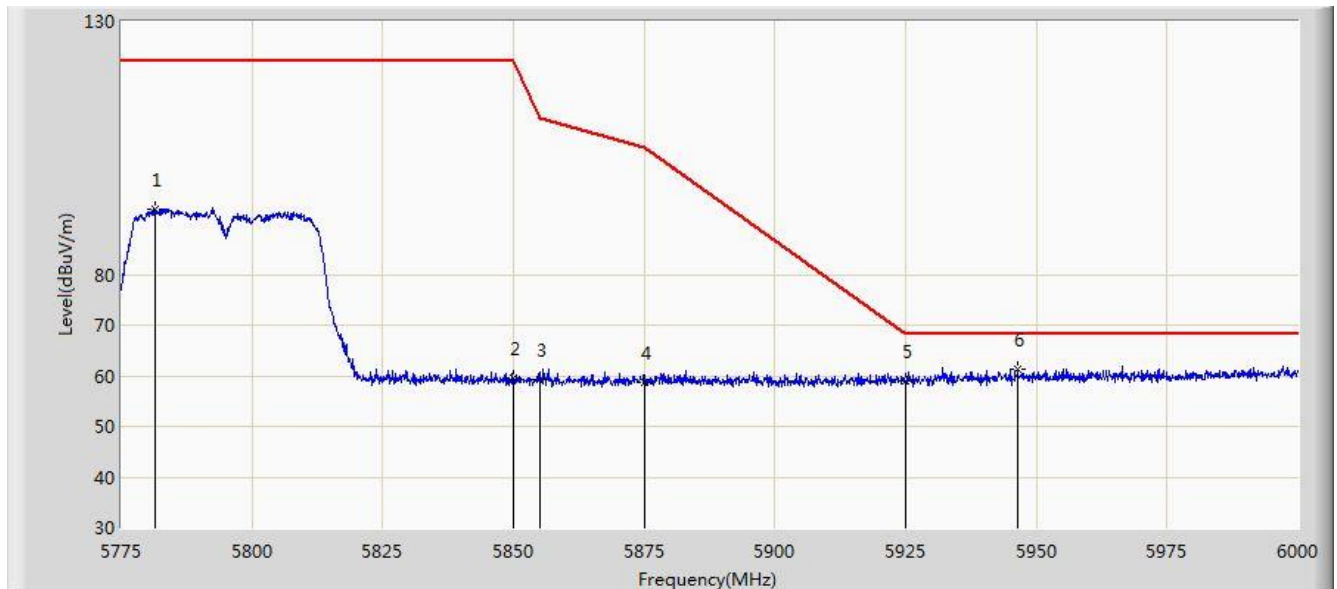


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5781.525	92.962	85.806	N/A	N/A	7.156	PK
2			5850.000	59.503	52.173	-62.697	122.200	7.331	PK
3			5855.000	59.350	52.022	-51.450	110.800	7.327	PK
4			5875.000	58.693	51.279	-46.507	105.200	7.414	PK
5			5925.000	58.901	51.601	-9.299	68.200	7.299	PK
6		*	5946.450	61.269	53.770	-6.931	68.200	7.500	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/04/23 - 04:30
Limit: FCC_Part15.407_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Tablet	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5795MHz	

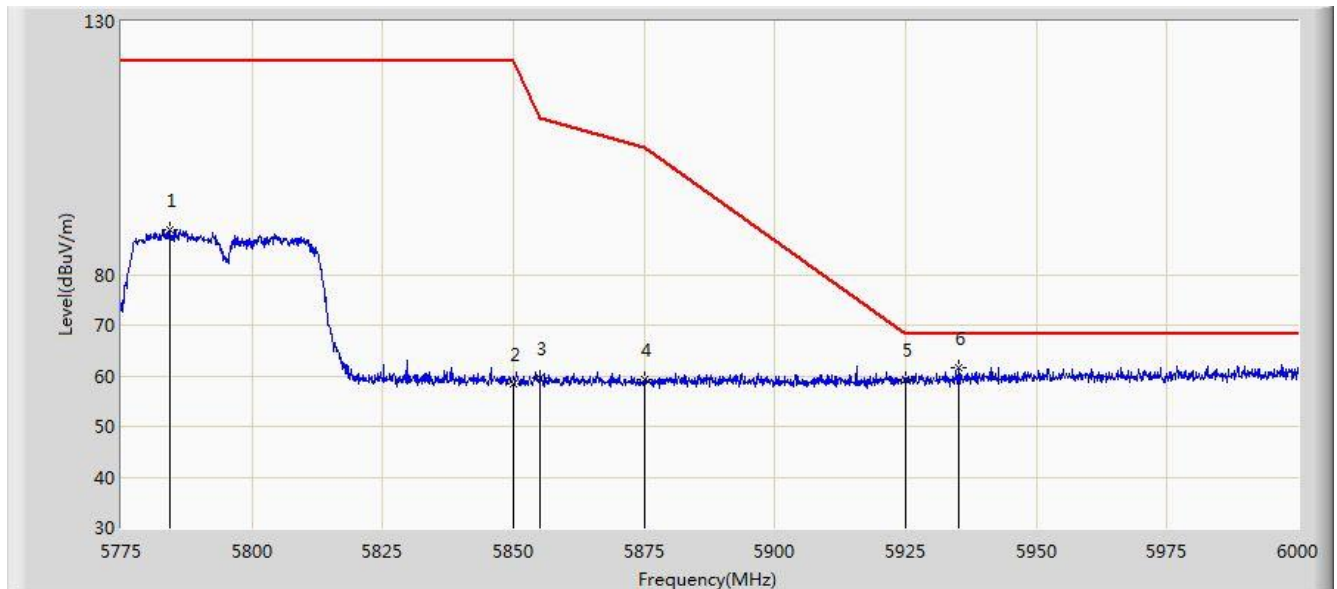


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5784.225	88.898	81.769	N/A	N/A	7.129	PK
2			5850.000	58.502	51.172	-63.698	122.200	7.331	PK
3			5855.000	59.634	52.306	-51.166	110.800	7.327	PK
4			5875.000	59.239	51.825	-45.961	105.200	7.414	PK
5			5925.000	59.350	52.050	-8.850	68.200	7.299	PK
6		*	5935.087	61.562	54.199	-6.638	68.200	7.363	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/04/23 - 04:32
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Tablet	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5210MHz	

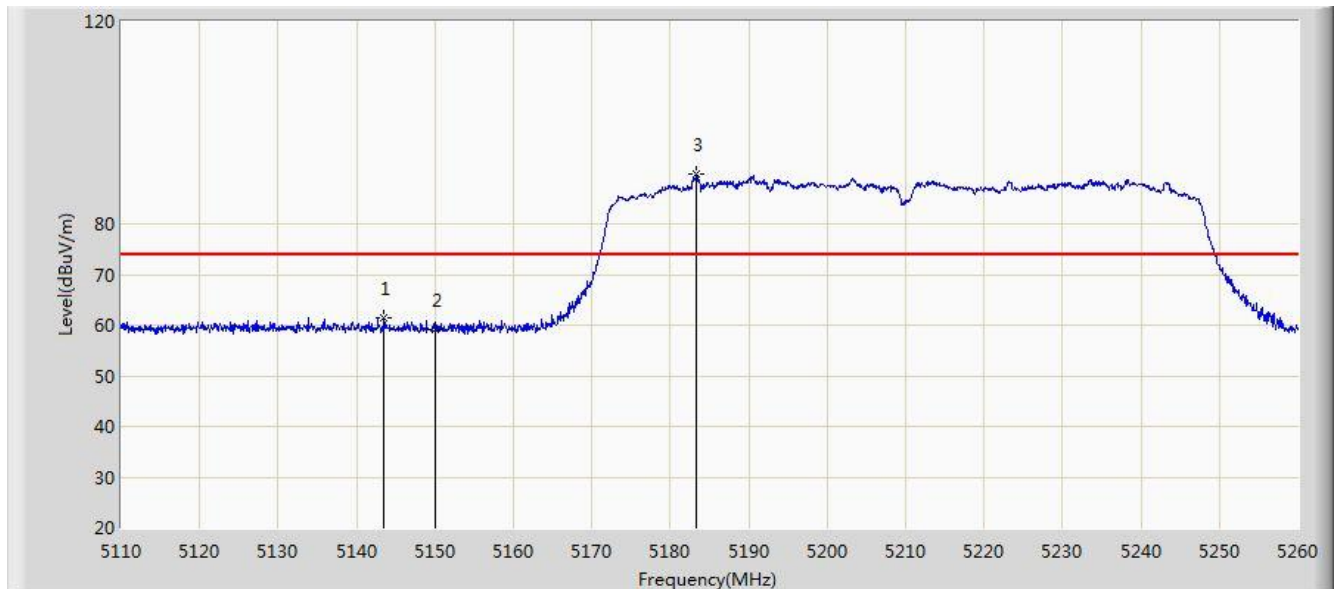


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5143.525	61.508	55.050	-12.492	74.000	6.458	PK
2			5150.000	59.124	52.727	-14.876	74.000	6.398	PK
3		*	5183.350	89.807	83.231	N/A	N/A	6.577	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/04/23 - 04:35
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Tablet	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5210MHz	

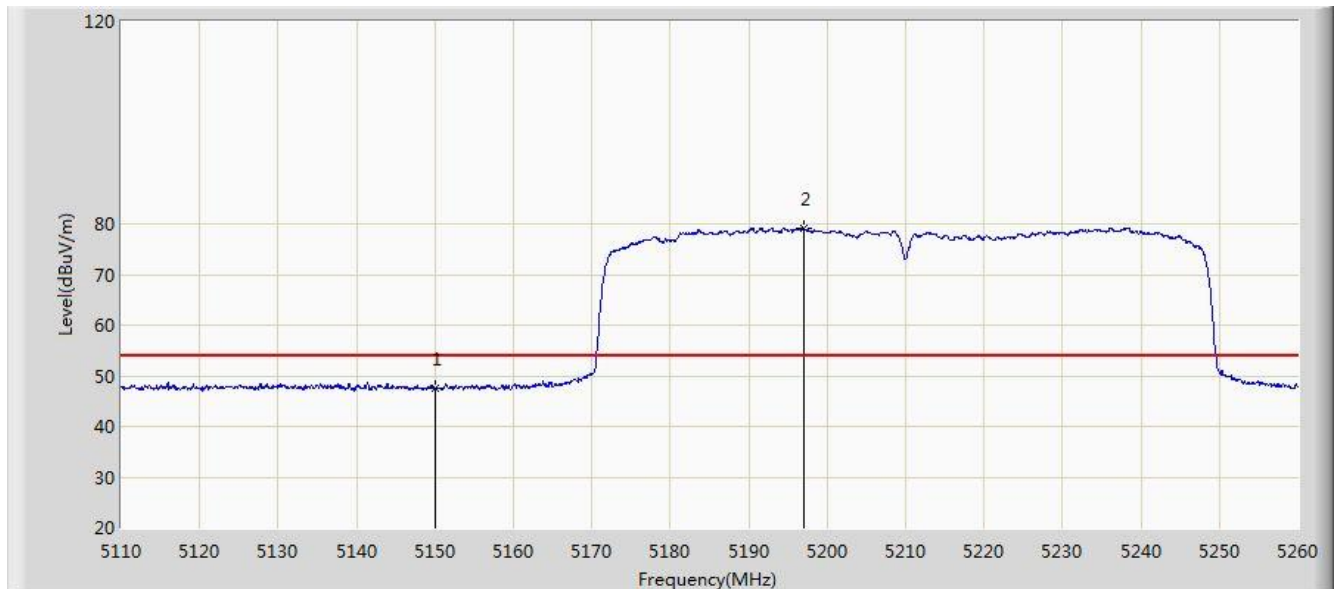


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	47.674	41.277	-6.326	54.000	6.398	AV
2		*	5197.000	79.223	72.781	N/A	N/A	6.442	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/04/23 - 04:35
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Tablet	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5210MHz	

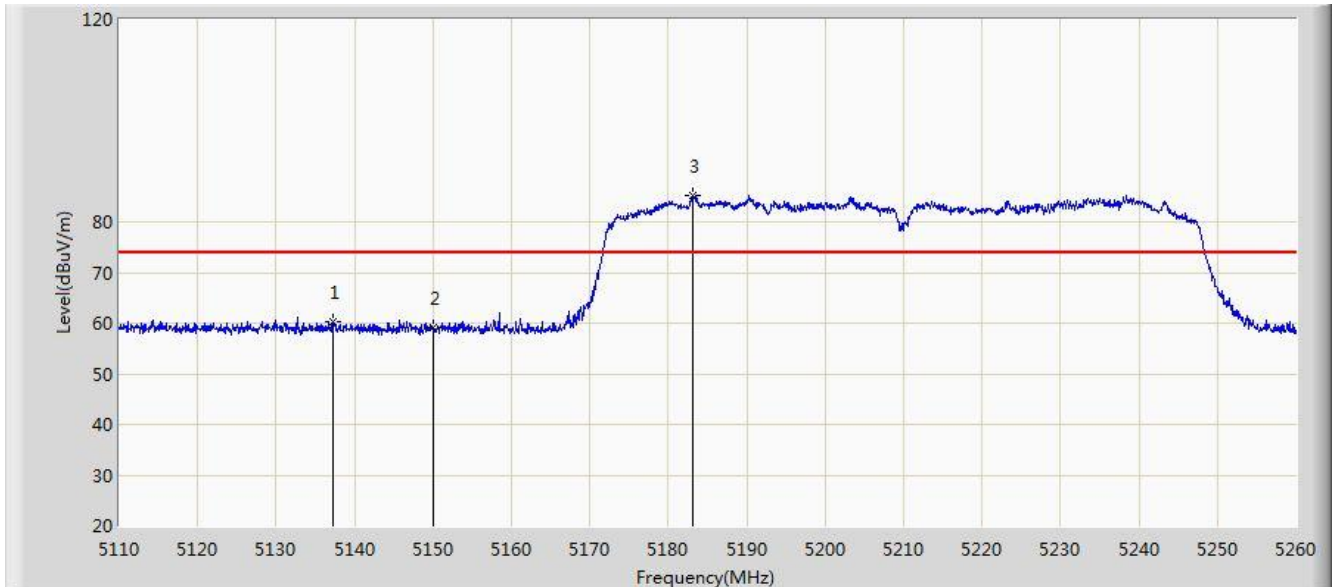


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5137.300	60.307	53.755	-13.693	74.000	6.552	PK
2			5150.000	59.043	52.646	-14.957	74.000	6.398	PK
3		*	5183.125	85.095	78.517	N/A	N/A	6.578	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/04/23 - 04:37
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Tablet	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5210MHz	

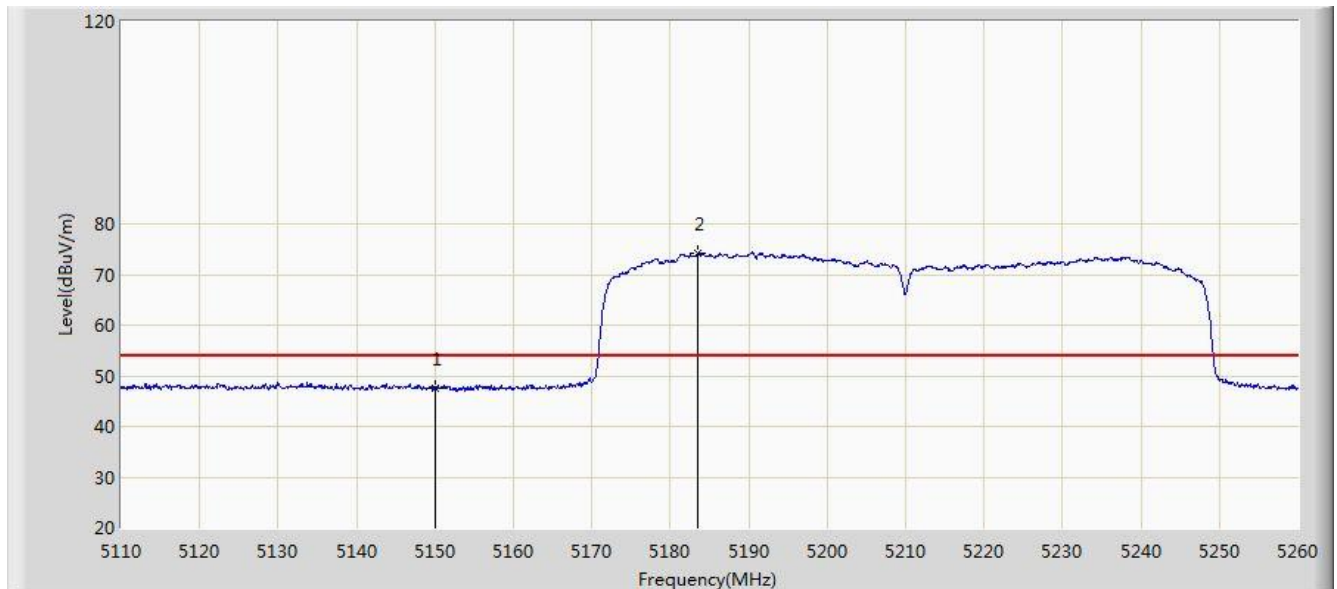


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	47.530	41.133	-6.470	54.000	6.398	AV
2		*	5183.575	74.296	67.722	N/A	N/A	6.574	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/04/23 - 04:37
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Tablet	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5290MHz	

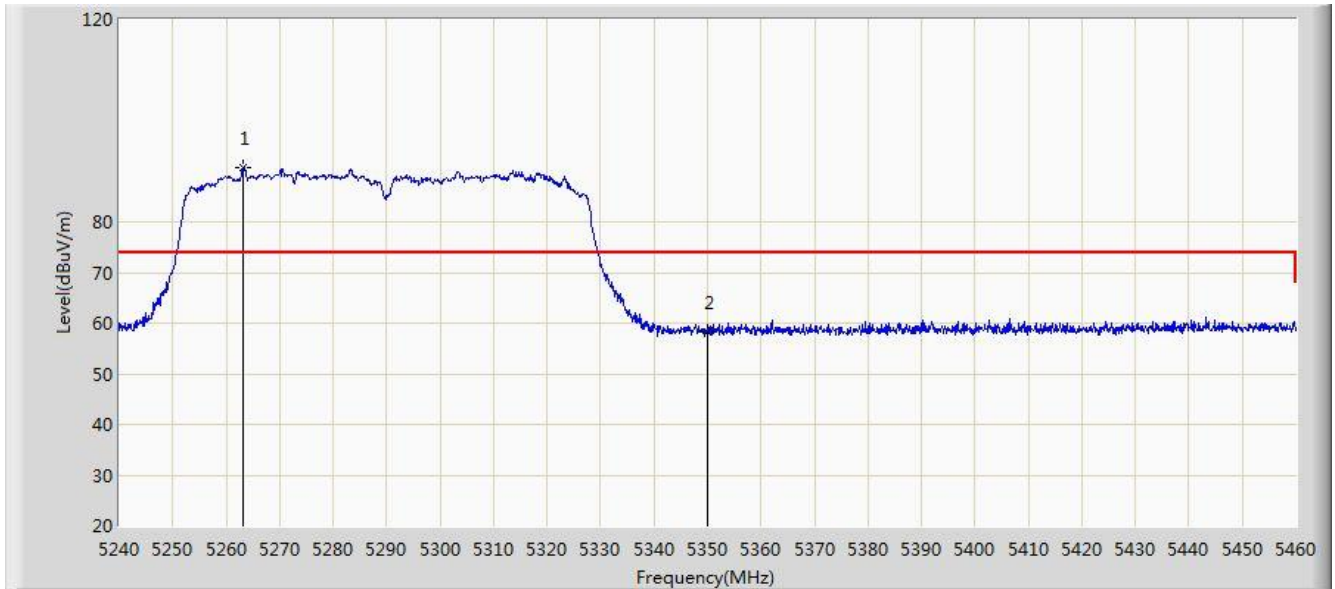


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5263.210	90.591	84.247	N/A	N/A	6.345	PK
2			5350.000	58.383	52.056	-15.617	74.000	6.327	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/04/23 - 04:39
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Tablet	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5290MHz	

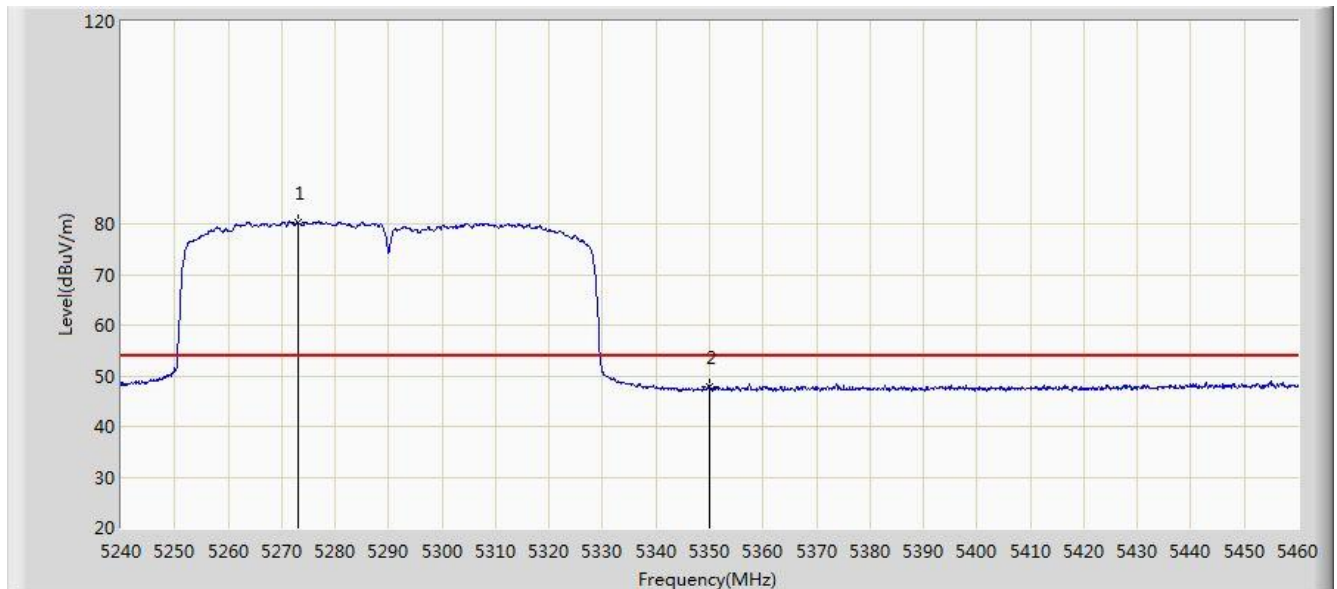


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5273.000	80.405	74.116	N/A	N/A	6.289	AV
2			5350.000	47.688	41.361	-6.312	54.000	6.327	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/04/23 - 04:39
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Tablet	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5290MHz	

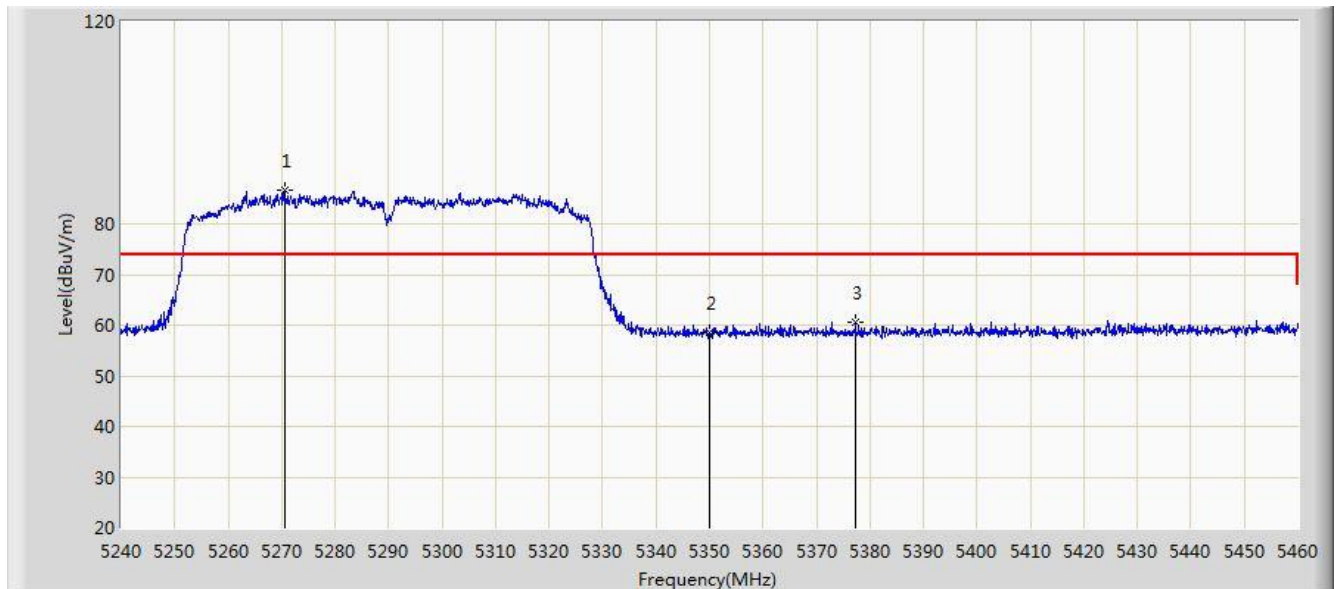


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5270.470	86.768	80.465	N/A	N/A	6.303	PK
2			5350.000	58.636	52.309	-15.364	74.000	6.327	PK
3			5377.280	60.523	54.052	-13.477	74.000	6.471	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/04/23 - 04:41
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Tablet	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5290MHz	

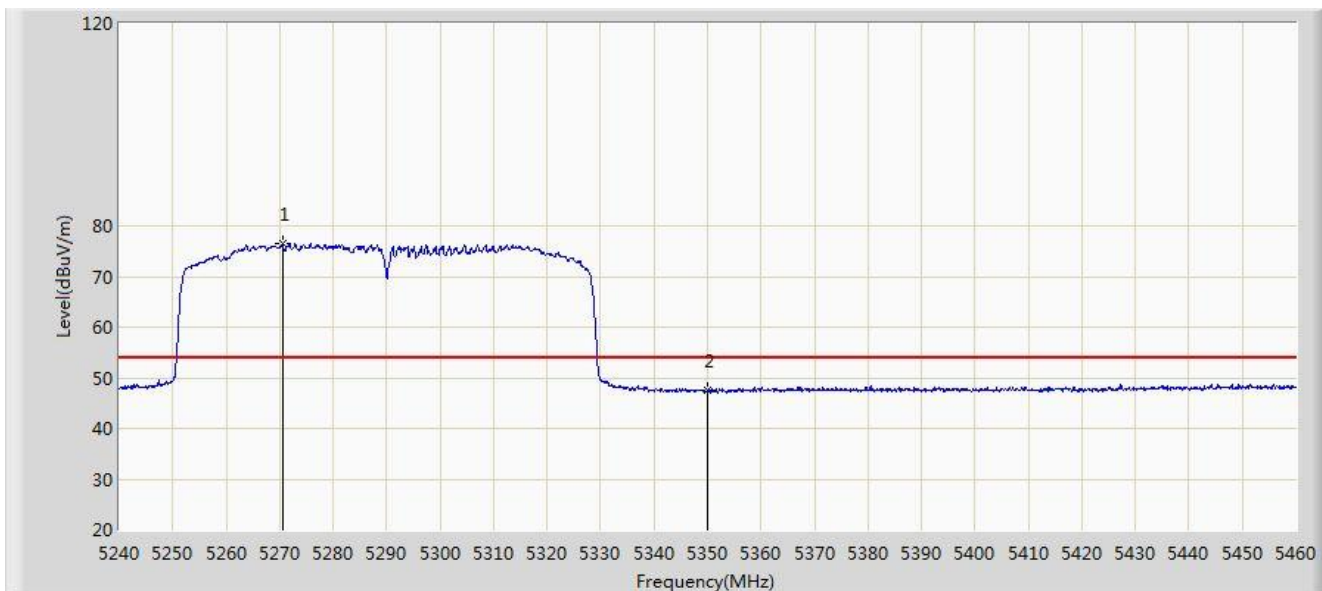


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5270.470	76.564	70.261	N/A	N/A	6.303	AV
2			5350.000	47.401	41.074	-6.599	54.000	6.327	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/04/23 - 04:41
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Tablet	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5530MHz	

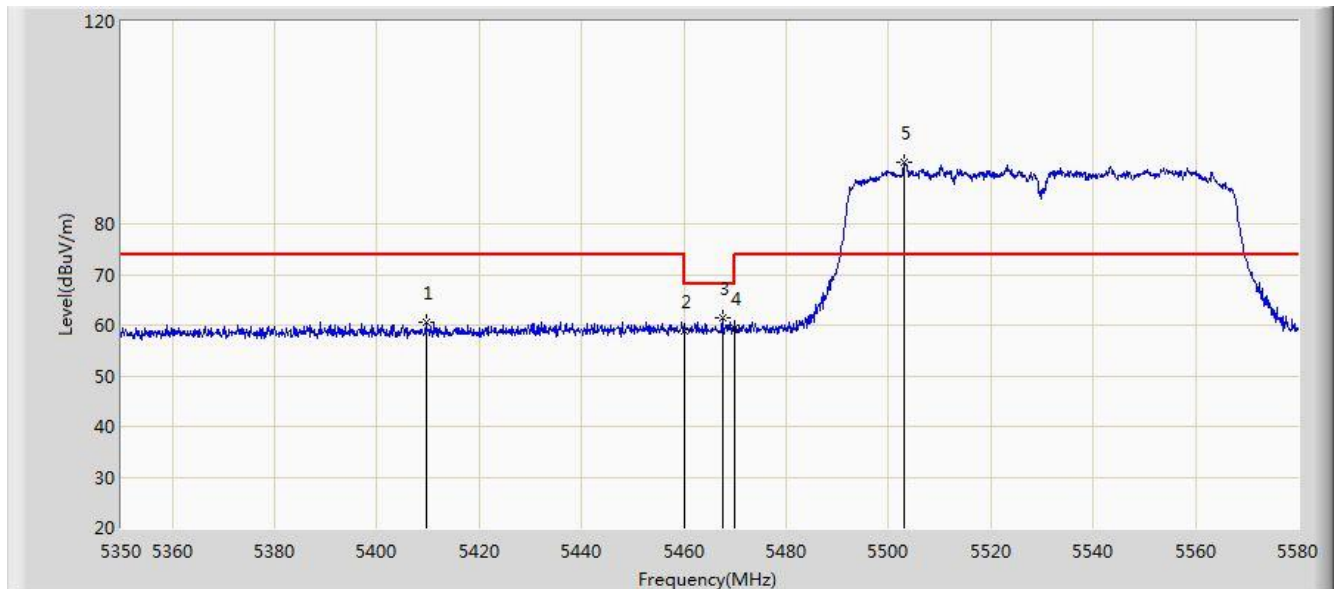


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5409.570	60.608	54.173	-13.392	74.000	6.435	PK
2			5460.000	58.730	52.118	-15.270	74.000	6.612	PK
3			5467.530	61.588	55.010	-6.612	68.200	6.579	PK
4			5470.000	59.407	52.840	-8.793	68.200	6.567	PK
5		*	5503.180	92.196	85.465	N/A	N/A	6.731	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/04/23 - 04:44
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Tablet	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5530MHz	

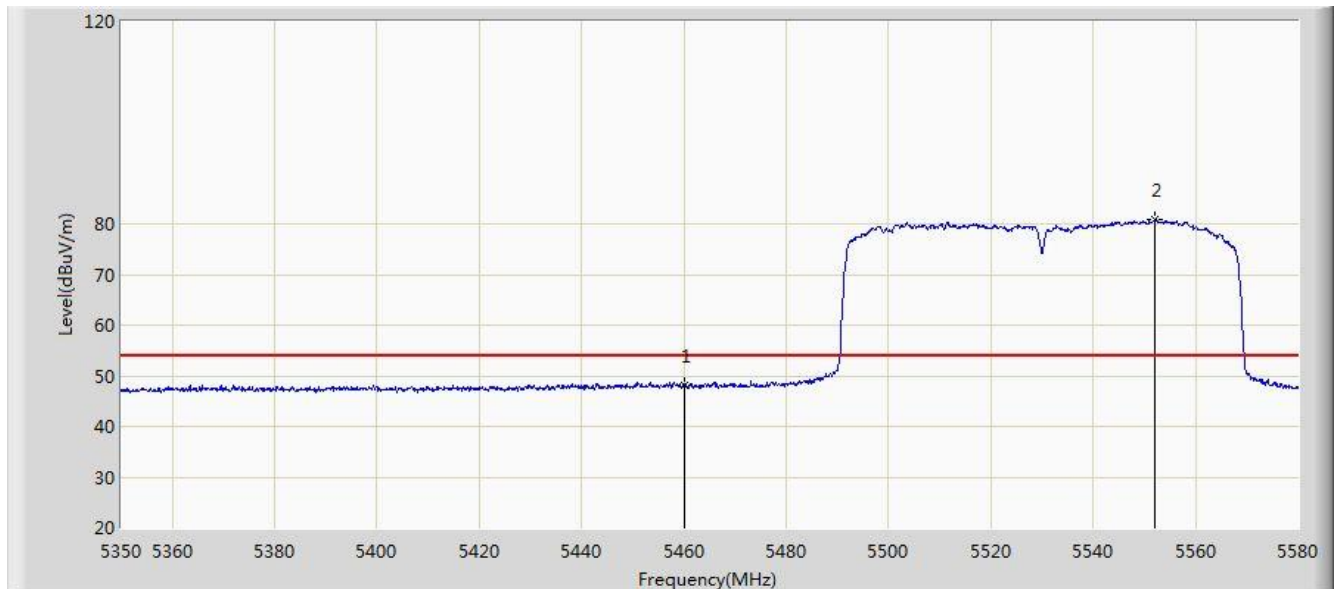


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	48.222	41.610	-5.778	54.000	6.612	AV
2		*	5552.170	80.849	74.191	N/A	N/A	6.658	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/04/23 - 04:45
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Tablet	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5530MHz	

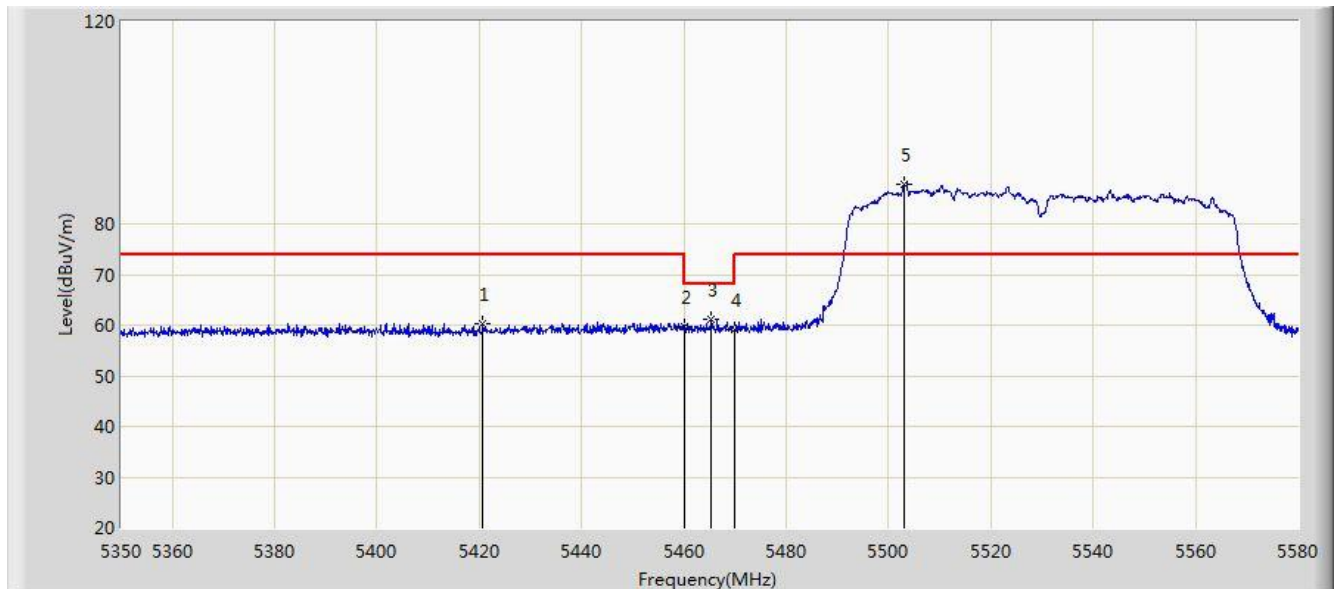


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5420.725	60.357	53.943	-13.643	74.000	6.413	PK
2			5460.000	59.566	52.954	-14.434	74.000	6.612	PK
3			5465.345	61.131	54.543	-7.069	68.200	6.588	PK
4			5470.000	59.246	52.679	-8.954	68.200	6.567	PK
5		*	5503.180	87.957	81.226	N/A	N/A	6.731	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/04/23 - 04:46
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Tablet	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5530MHz	

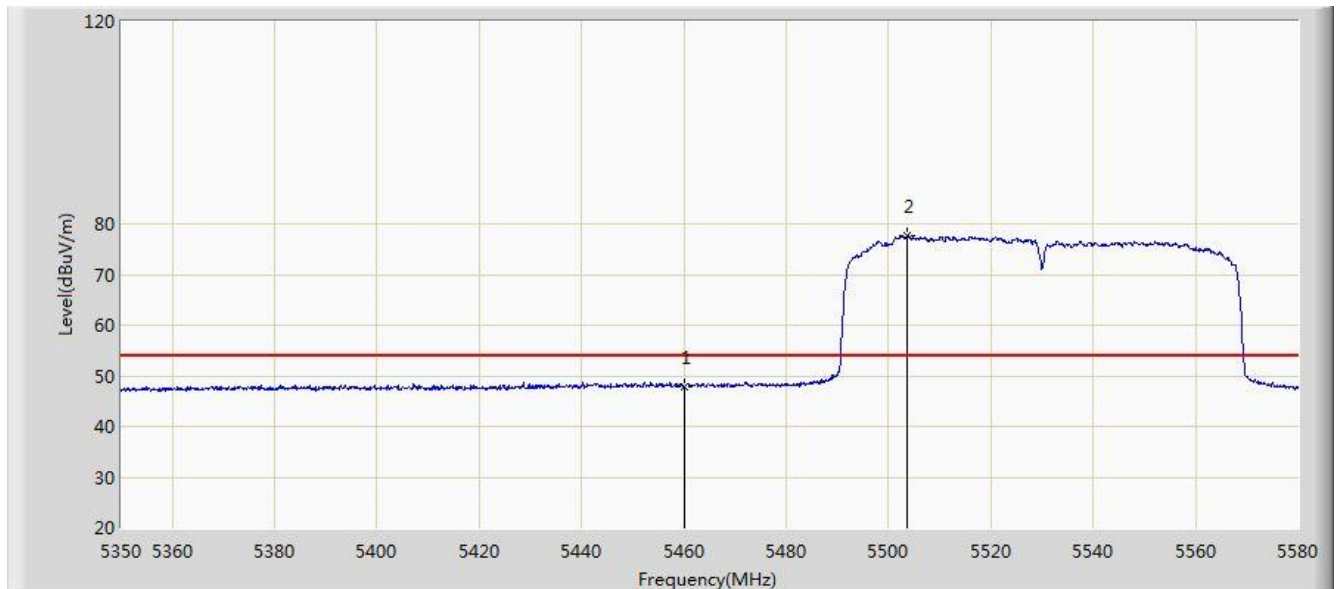


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	47.863	41.251	-6.137	54.000	6.612	AV
2		*	5503.525	77.652	70.919	N/A	N/A	6.732	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/04/23 - 04:47
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Tablet	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5610MHz	

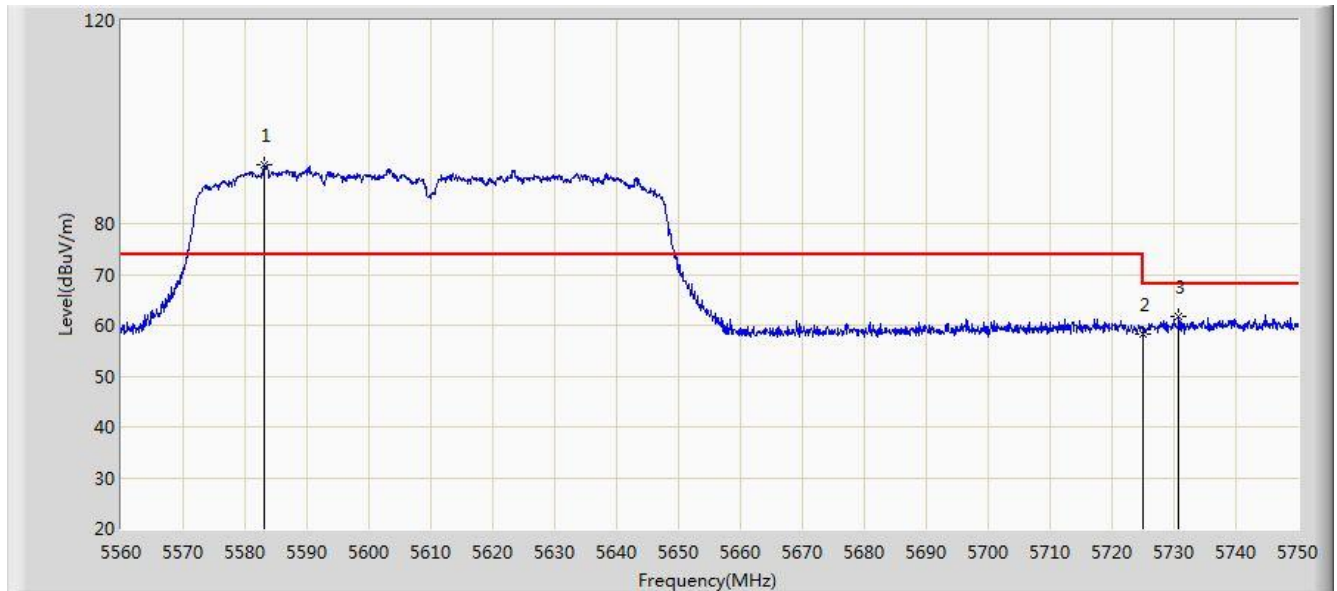


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5583.180	91.696	84.963	N/A	N/A	6.733	PK
2			5725.000	58.177	51.310	-10.023	68.200	6.867	PK
3			5730.715	61.715	54.823	-6.485	68.200	6.892	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/04/23 - 04:48
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Tablet	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5610MHz	

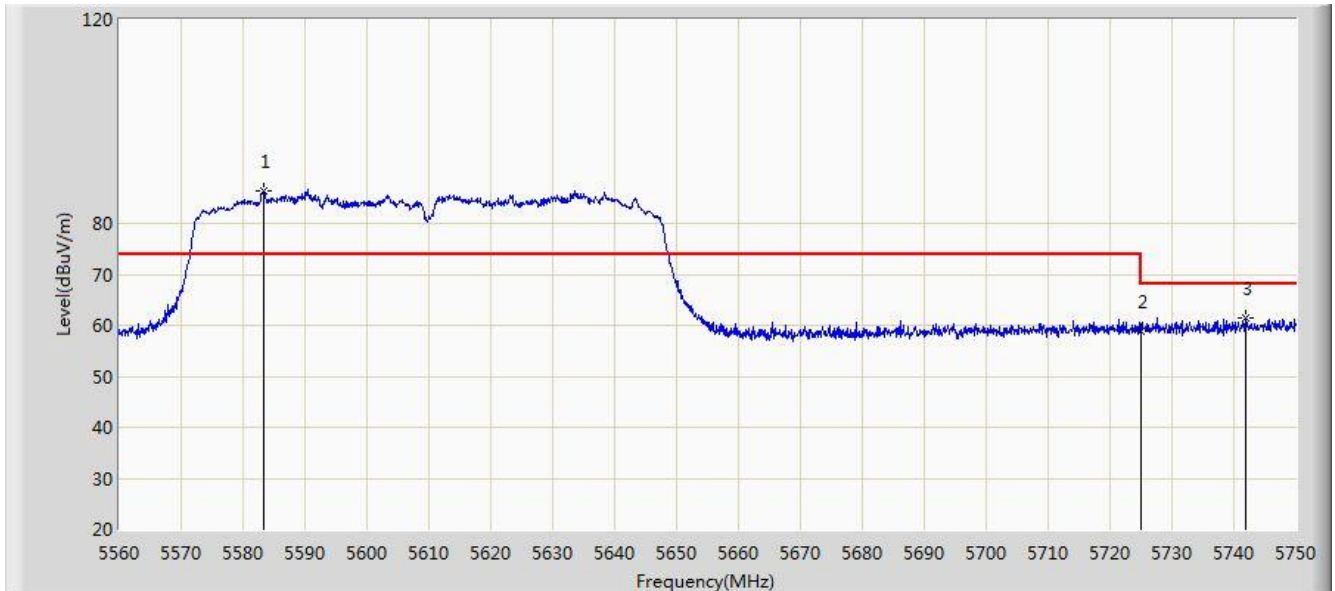


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	5583.370	86.466	79.734	N/A	N/A	6.732	PK
2			5725.000	58.869	52.002	-9.331	68.200	6.867	PK
3			5742.020	61.537	54.568	-6.663	68.200	6.969	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/04/23 - 04:49
Limit: FCC_Part15.407_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Tablet	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5775MHz	

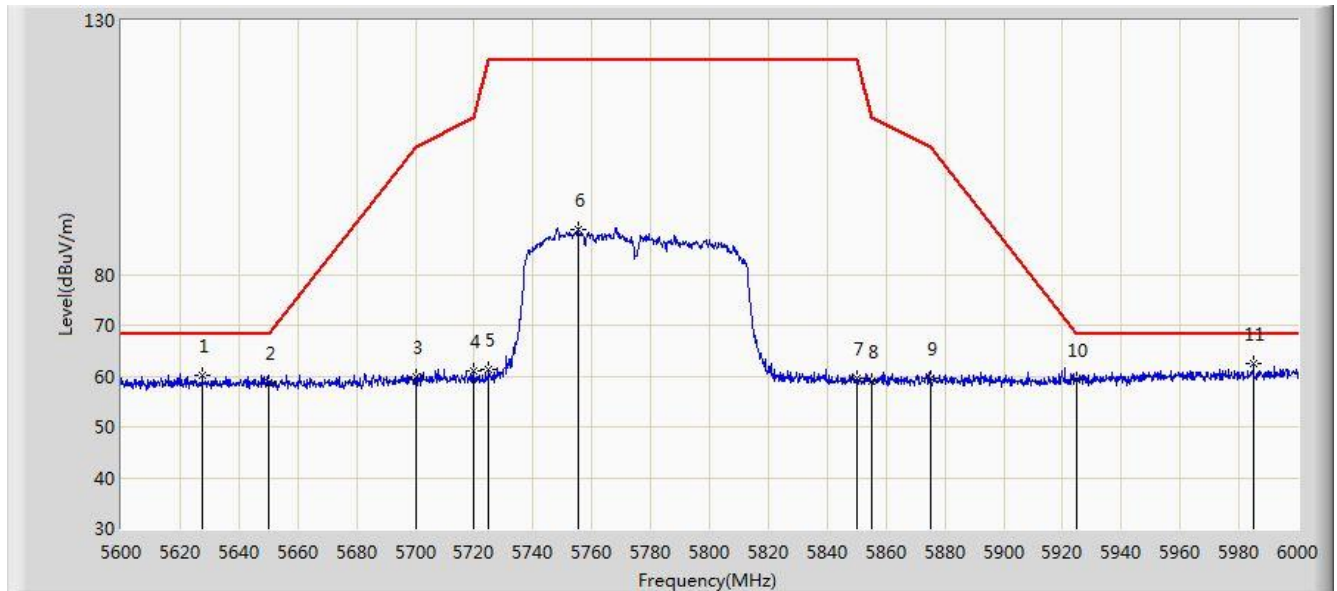


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5627.600	60.066	53.321	-8.134	68.200	6.745	PK
2			5650.000	58.583	51.790	-9.617	68.200	6.793	PK
3			5700.000	59.789	52.880	-45.411	105.200	6.909	PK
4			5720.000	60.956	54.052	-49.844	110.800	6.904	PK
5			5725.000	61.300	54.433	-60.900	122.200	6.867	PK
6			5755.600	88.936	81.806	N/A	N/A	7.130	PK
7			5850.000	59.667	52.337	-62.533	122.200	7.331	PK
8			5855.000	59.061	51.733	-51.739	110.800	7.327	PK
9			5875.000	59.479	52.065	-45.721	105.200	7.414	PK
10			5925.000	59.347	52.047	-8.853	68.200	7.299	PK
11		*	5985.000	62.333	54.955	-5.867	68.200	7.378	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/04/23 - 04:52
Limit: FCC_Part15.407_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Tablet	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5775MHz	

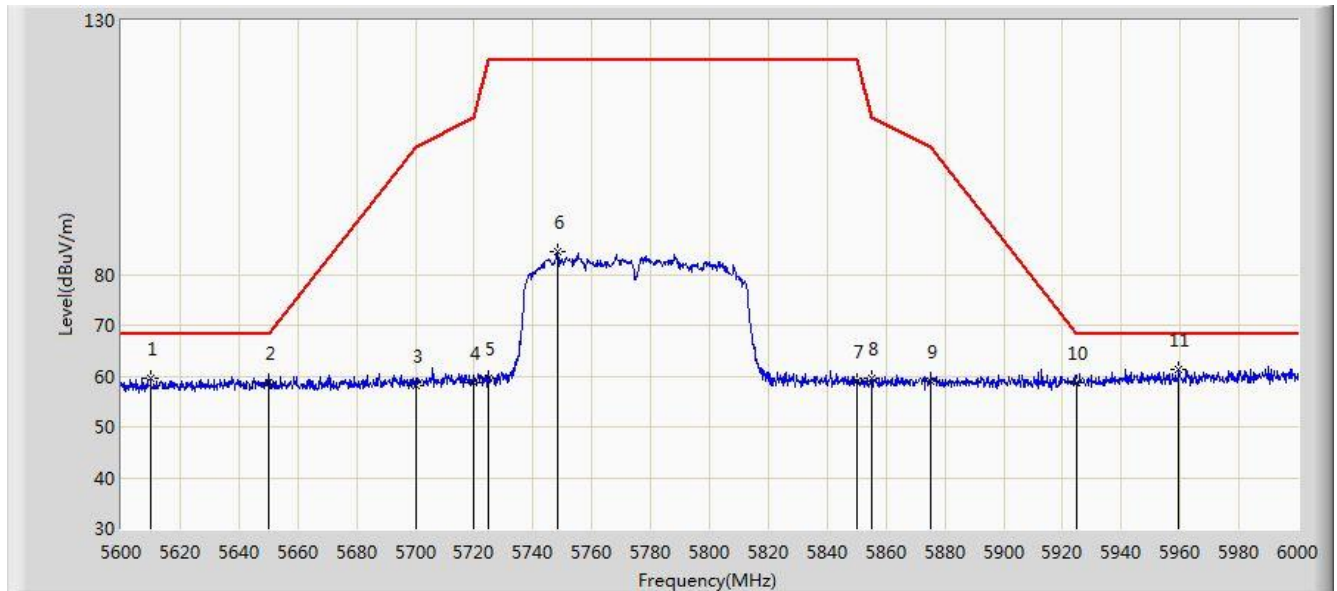

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5610.000	59.662	52.991	-8.538	68.200	6.671	PK
2			5650.000	58.590	51.797	-9.610	68.200	6.793	PK
3			5700.000	58.233	51.324	-46.967	105.200	6.909	PK
4			5720.000	58.633	51.729	-52.167	110.800	6.904	PK
5			5725.000	59.499	52.632	-62.701	122.200	6.867	PK
6			5748.400	84.413	77.372	N/A	N/A	7.041	PK
7			5850.000	59.114	51.784	-63.086	122.200	7.331	PK
8			5855.000	59.586	52.258	-51.214	110.800	7.327	PK
9			5875.000	59.073	51.659	-46.127	105.200	7.414	PK
10			5925.000	58.611	51.311	-9.589	68.200	7.299	PK
11		*	5959.600	61.222	53.803	-6.978	68.200	7.420	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)