

# FCC SAR EVALUATION REPORT

**In accordance with the requirements of  
FCC 47 CFR Part 2(2.1093), ANSI/IEEE C95.1-1992 and  
IEEE Std 1528-2013**

**Product Name :** 4G Feature Phone

**Brand Name :** LOGIC , UNONU, iSWAG

**Model Name :** B7 Pro

**Family Model :** U7 Max

**Report No. :** S23102401505001

**FCC ID :** O552402723

**Prepared for**

SWAGTEK

10205 NW 19th Street STE101 Miami, FL 33172

**Prepared by**

Shenzhen NTEK Testing Technology Co., Ltd.

1/F, Building E, Fenda Science Park, Sanwei Community,  
Xixiang Street Bao'an District, Shenzhen 518126 P.R. China

Tel. 400-800-6106, 0755-2320 0050, 0755-2320 0090

Website: <http://www.ntek.org.cn>

## TEST RESULT CERTIFICATION

**Applicant's name .....** SWAGTEK

Address..... 10205 NW 19th Street STE101Miami, FL 33172

**Manufacturer's Name .** SWAGTEK

Address..... 10205 NW 19th Street STE101Miami, FL 33172

**Product description**

Product name ..... 4G Feature Phone

Brand Name ..... LOGIC , UNONU, iSWAG

Model and/or type reference ..... B7 Pro

Family Model ..... U7 Max

FCC 47 CFR Part 2(2.1093)

ANSI/IEEE C95.1-1992

**Standards .....** IEEE Std 1528-2013

Published RF exposure KDB procedures

This device described above has been tested by Shenzhen NTEK. In accordance with the measurement methods and procedures specified in IEEE Std 1528-2013 and KDB 865664 D01. Testing has shown that this device is capable of compliance with localized specific absorption rate (SAR) specified in FCC 47 CFR Part 2(2.1093) and ANSI/IEEE C95.1-1992. The test results in this report apply only to the tested sample of the stated device/equipment. Other similar device/equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

This report shall not be reproduced except in full, without the written approval of Shenzhen NTEK, this document may be altered or revised by Shenzhen NTEK, personal only, and shall be noted in the revision of the document.

Test Sample Number ..... S231024015007

**Date of Test**

Date (s) of performance of tests... Oct. 24, 2023 ~ Nov. 03, 2023

Date of Issue ..... Feb. 22, 2024

Test Result..... **Pass**

Prepared : Jack Li  
By : Jack Li  
(Project Engineer)

Reviewed : Aaron Cheng  
By : Aaron Cheng  
(Supervisor)

Approved : Alex Li  
By : Alex Li  
(Manager)

## ※ ※ Revision History ※ ※

REV.	DESCRIPTION	ISSUED DATE	REMARK
Rev.1.0	Initial Test Report Release	Feb. 22, 2024	Jack Li

## TABLE OF CONTENTS

1.	General Information .....	6
1.1.	RF exposure limits.....	6
1.2.	Statement of Compliance .....	7
1.3.	EUT Description .....	7
1.4.	Test specification(s) .....	8
1.5.	Ambient Condition.....	9
2.	SAR Measurement System .....	10
2.1.	SATIMO SAR Measurement Set-up Diagram .....	10
2.2.	Robot .....	11
2.3.	E-Field Probe.....	12
2.3.1.	E-Field Probe Calibration .....	12
2.4.	SAM phantoms .....	13
2.4.1.	Technical Data .....	14
2.5.	Device Holder .....	15
2.6.	Test Equipment List .....	16
3.	SAR Measurement Procedures .....	19
3.1.	Power Reference .....	19
3.2.	Area scan & Zoom scan.....	19
3.3.	Description of interpolation/extrapolation scheme .....	21
3.4.	Volumetric Scan.....	21
3.5.	Power Drift .....	21
4.	System Verification Procedure .....	22
4.1.	Tissue Verification .....	22
4.1.1.	Tissue Dielectric Parameter Check Results .....	23
4.2.	System Verification Procedure .....	24
4.2.1.	System Verification Results .....	25
5.	SAR Measurement variability and uncertainty .....	26
5.1.	SAR measurement variability.....	26
5.2.	SAR measurement uncertainty .....	26
6.	RF Exposure Positions .....	27
6.1.	Ear and handset reference point .....	27
6.2.	Definition of the cheek position .....	27
6.3.	Definition of the tilt position .....	29
6.4.	Body Worn Accessory .....	29
6.5.	Wireless Router Devices .....	30
7.	RF Output Power .....	31
7.1.	GSM Conducted Power .....	31
7.2.	WCDMA Conducted Power .....	31
7.3.	LTE Conducted Power .....	33

7.4. WLAN & Bluetooth Output Power .....	50
7.5. NFC .....	51
8. Antenna Location.....	52
9. Stand-alone SAR test exclusion.....	52
10. SAR Results .....	53
10.1. SAR measurement Result.....	53
10.1.1. SAR measurement Result of GSM850.....	53
10.1.2. SAR measurement Result of GSM1900.....	54
10.1.3. SAR measurement Result of WCDMA Band 2 .....	55
10.1.4. SAR measurement Result of WCDMA Band 5 .....	56
10.1.5. SAR measurement Result of LTE Band 2 .....	57
10.1.6. SAR measurement Result of LTE Band 4 .....	59
10.1.7. SAR measurement Result of LTE Band 5 .....	61
10.1.8. SAR measurement Result of LTE Band 7 .....	63
10.1.9. SAR measurement Result of LTE Band 12 .....	65
10.1.10. SAR measurement Result of LTE Band 13 .....	67
10.1.11. SAR measurement Result of LTE Band 17 .....	69
10.1.12. SAR measurement Result of LTE Band 66 .....	71
10.1.13. SAR measurement Result of LTE Band 71 .....	73
10.1.14. SAR measurement Result of WLAN2.4G .....	75
10.1.15. SAR measurement Result of WLAN5.2G .....	76
10.1.16. SAR measurement Result of WLAN5.8G .....	77
10.2. Simultaneous Transmission Analysis.....	78
1. Appendix A. Photo documentation.....	79
2. Appendix B. System Check Plots .....	80
1. Appendix C. Plots of High SAR Measurement.....	97
2. Appendix D. Calibration Certificate .....	162

## 1. General Information

### 1.1. RF exposure limits

(A).Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

(B).Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

NOTE: **Whole-Body SAR** is averaged over the entire body, **partial-body SAR** is averaged over any 1 gram of tissue defined as a tissue volume in the shape of a cube. **SAR for hands, wrists, feet and ankles** is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

#### Occupational/Controlled Environments:

Are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure, (i.e. as a result of employment or occupation).

#### General Population/Uncontrolled Environments:

Are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

#### NOTE

#### HEAD AND TRUNK LIMIT

1.6 W/kg

APPLIED TO THIS EUT

## 1.2. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for B7 Pro are as follows.

RF Exposure Conditions	Max Reported SAR Value(W/kg)	
1-g Head	0.543	
1-g Body-Worn (Separation distance of 10mm)	1.149	
1-g Hotspot (Separation distance of 10mm)	1.149	
Max Simultaneous Tx	Head	0.732
	Body-Worn	1.343
	Hotspot	1.343

Note: The Max Simultaneous Tx is calculated based on the same configuration and test position.

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR Part 2(2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE Std 1528-2013 & KDB 865664 D01.

## 1.3. EUT Description

Device Information	
Product Name	4G Feature Phone
Brand Name	LOGIC , UNONU, iSWAG
Model Name	B7 Pro
Family Model	U7 Max
Model Difference	All models are the same circuit and RF module, except the model name.
FCC ID	O552402723
Device Phase	Identical Prototype
Exposure Category	General population / Uncontrolled environment
Antenna Type	PIFA Antenna
Battery Information	DC 3.8V, 2000mAh, 7.6Wh
HW Version	MM3138_MB_V1.0
SW Version	L_B7PRO_IS
Device Operating Configurations	
Supporting Mode(s)	GSM850/1900,WCDMABand2/5,LTEBand2/4/5/7/12/13/17/66/71, WLAN 2.4G/5G, Bluetooth, NFC
Test Modulation	GSM(GMSK/8PSK), WCDMA(QPSK), LTE(QPSK/16QAM), WLAN(DSSS/OFDM), Bluetooth(GFSK, π/4-DQPSK, 8DPSK) , NFC(ASK)
Device Class	B

	Band	Tx (MHz)	Rx (MHz)
Operating Frequency Range(s)	GSM 850	824-849	869-894
	GSM 1900	1850-1910	1930-1990
	WCDMA Band 2	1850-1910	1930-1990
	WCDMA Band 5	824-849	869-894
	LTE Band 2	1850-1910	1930-1990
	LTE Band 4	1710-1755	2110-2155
	LTE Band 5	824-849	869-894
	LTE Band 7	2500-2570	2620-2690
	LTE Band 12	699-716	729-746
	LTE Band 13	777-787	746-756
	LTE Band 17	704-716	734-746
	LTE Band 66	1710-1780	2110-2200
	LTE Band 71	663-698	617-652
	WLAN 2.4G		2412-2462
	WLAN 5.2G		5180-5240
	WLAN 5.8G		5745-5825
	Bluetooth		2402-2480
	NFC		13.56
GPRS Multislot Class(12)	Max Number of Timeslots in Uplink	4	
	Max Number of Timeslots in Downlink	4	
	Max Total Timeslot	5	
EGPRS Multislot Class(12)	Max Number of Timeslots in Uplink	4	
	Max Number of Timeslots in Downlink	4	
	Max Total Timeslot	5	
Power Class	4, tested with power level 5(GSM 850)		
	1, tested with power level 0(GSM 1900)		
	3, tested with power control "all 1"(WCDMA Band 2)		
	3, tested with power control "all 1"(WCDMA Band 5)		
	3, tested with power control all Max.(LTE Band 2)		
	3, tested with power control all Max.(LTE Band 4)		
	3, tested with power control all Max.(LTE Band 5)		
	3, tested with power control all Max.(LTE Band 7)		
	3, tested with power control all Max.(LTE Band 12)		
	3, tested with power control all Max.(LTE Band 13)		
	3, tested with power control all Max.(LTE Band 17)		
	3, tested with power control all Max.(LTE Band 66)		
	3, tested with power control all Max.(LTE Band 71)		

#### 1.4. Test specification(s)


FCC 47 CFR Part 2(2.1093)
ANSI/IEEE C95.1-1992
IEEE Std 1528-2013
KDB 865664 D01 SAR measurement 100 MHz to 6 GHz
KDB 865664 D02 RF Exposure Reporting
KDB 447498 D01 General RF Exposure Guidance
KDB 248227 D01 802.11 Wi-Fi SAR
KDB 941225 D01 3G SAR Procedures
KDB 941225 D05 SAR for LTE Devices
KDB 941225 D06 Hotspot SAR
KDB 648474 D04 Handset SAR

### 1.5. Ambient Condition

Ambient temperature	20°C – 24°C
Relative Humidity	30% – 70%

## 2. SAR Measurement System

### 2.1. SATIMO SAR Measurement Set-up Diagram

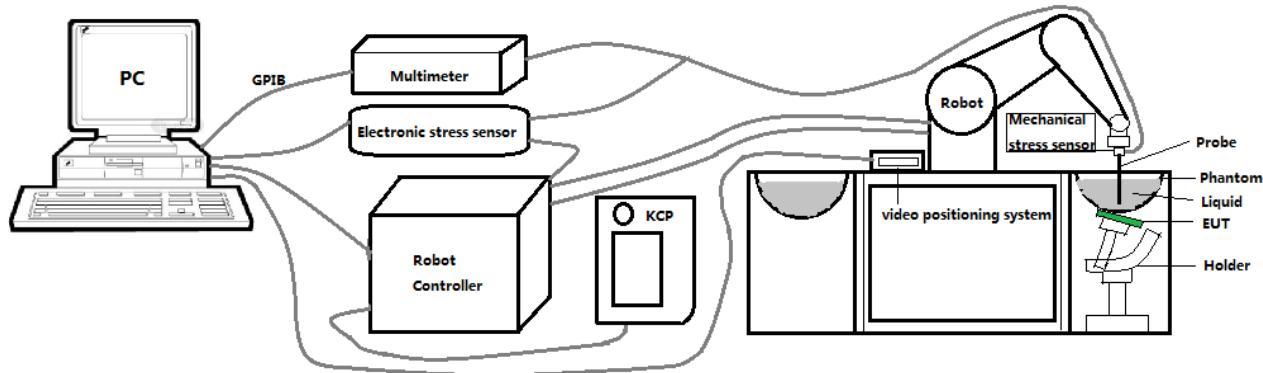

These measurements were performed with the automated near-field scanning system OPENSAR from SATIMO. The system is based on a high precision robot (working range: 901 mm), which positions the probes with a positional repeatability of better than  $\pm 0.03$  mm. The SAR measurements were conducted with dosimetric probe (manufactured by SATIMO), designed in the classical triangular configuration and optimized for dosimetric evaluation.

The first step of the field measurement is the evaluation of the voltages induced on the probe by the device under test. Probe diode detectors are nonlinear. Below the diode compression point, the output voltage is proportional to the square of the applied E-field; above the diode compression point, it is linear to the applied E-field. The compression point depends on the diode, and a calibration procedure is necessary for each sensor of the probe.

The Keithley multimeter reads the voltage of each sensor and send these three values to the PC. The corresponding E field value is calculated using the probe calibration factors, which are stored in the working directory. This evaluation includes linearization of the diode characteristics. The field calculation is done separately for each sensor. Each component of the E field is displayed on the "Dipole Area Scan Interface" and the total E field is displayed on the "3D Interface"

## 2.2. Robot

The SATIMO SAR system uses the high precision robots from KUKA. For the 6-axis controller system, the robot controller version (KUKA) from KUKA is used. The KUKA robot series have many features that are important for our application:



- High precision (repeatability  $\pm 0.03$  mm)
- High reliability (industrial design)
- Jerk-free straight movements
- Low ELF interference (the closed metallic construction shields against motor control fields)

### 2.3. E-Field Probe

This E-field detection probe is composed of three orthogonal dipoles linked to special Schottky diodes with low detection thresholds. The probe allows the measurement of electric fields in liquids such as the one defined in the IEEE and CENELEC standards.

For the measurements the Specific Dosimetric E-Field Probe 3423-EPGO-426 with following specifications is used



- Dynamic range: 0.01-100 W/kg
  - Tip Diameter : 2.5 mm
  - Distance between probe tip and sensor center: 1 mm
  - Distance between sensor center and the inner phantom surface: 2 mm (repeatability better than  $\pm 1$  mm).
  - Probe linearity:  $\pm 0.06$  dB
  - Axial isotropy:  $\pm 0.01$  dB
  - Hemispherical Isotropy:  $\pm 0.01$  dB
  - Calibration range: 650MHz to 5900MHz for head & body simulating liquid.
  - Lower detection limit: 8mW/kg
- Angle between probe axis (evaluation axis) and surface normal line: less than 30°.

#### 2.3.1. E-Field Probe Calibration

Each probe needs to be calibrated according to a dosimetric assessment procedure with accuracy better than  $\pm 10\%$ . The spherical isotropy shall be evaluated and within  $\pm 0.25$ dB. The sensitivity parameters (Norm X, Norm Y, and Norm Z), the diode compression parameter (DCP) and the conversion factor (Conv F) of the probe are tested. The calibration data can be referred to appendix D of this report.

## 2.4. SAM phantoms


Photo of SAM phantom SN 16/15 SAM119



The SAM phantom is used to measure the SAR relative to people exposed to electro-magnetic field radiated by Smart Phones.

#### **2.4.1. Technical Data**

Serial Number	Shell thickness	Filling volume	Dimensions	Positionner Material	Permittivity	Loss Tangent
SN 16/15 SAM119	2 mm ±0.2 mm	27 liters	Length:1000 mm Width:500 mm Height:200 mm	Gelcoat with fiberglass	3.4	0.02

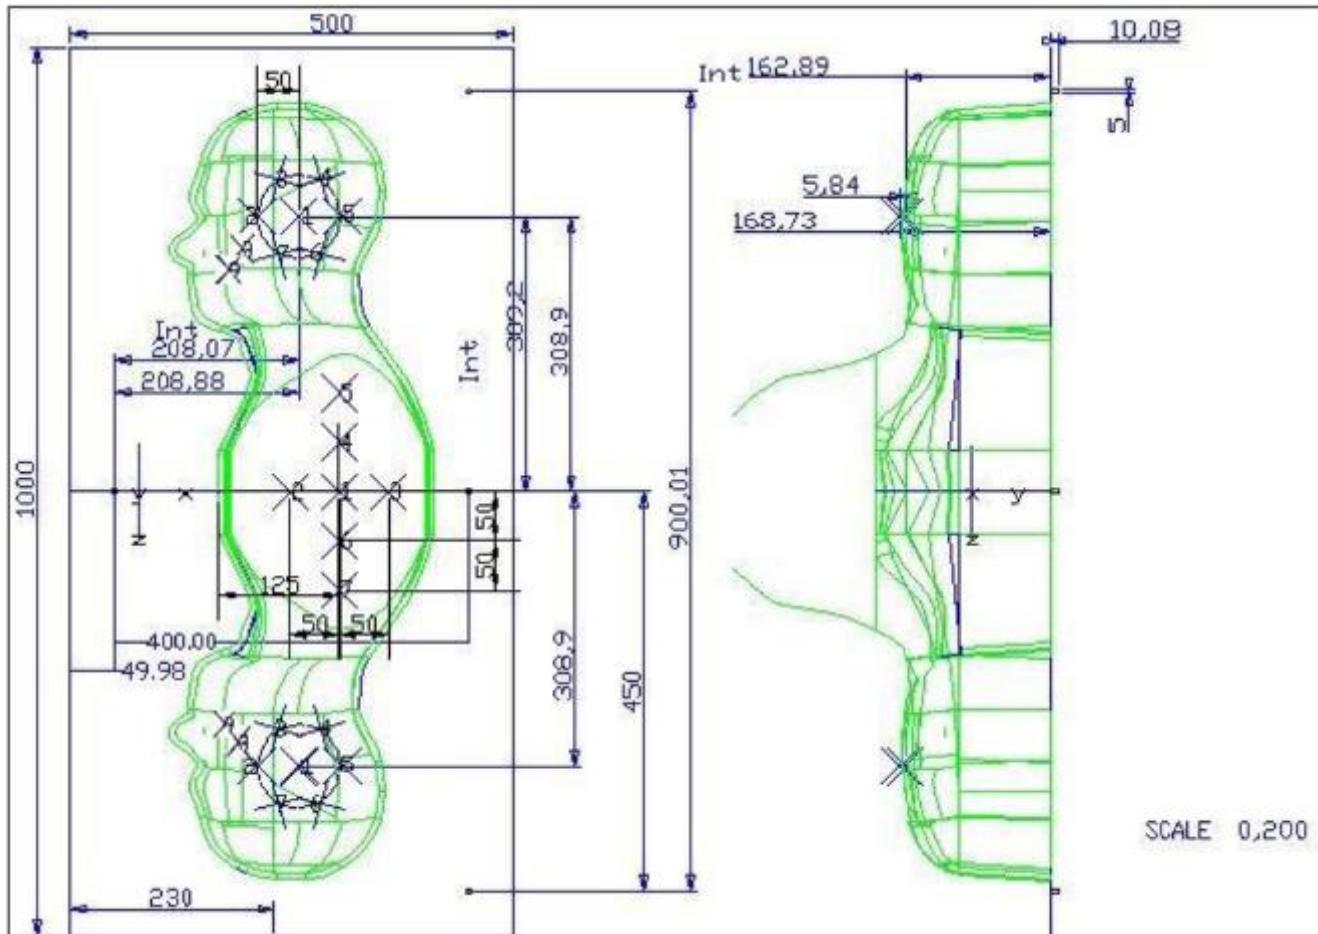


Serial Number	Left Head(mm)		Right Head(mm)		Flat Part(mm)	
SN 16/15 SAM119	2	2.02	2	2.08	1	2.09
	3	2.05	3	2.06	2	2.06
	4	2.07	4	2.07	3	2.08
	5	2.08	5	2.08	4	2.10
	6	2.05	6	2.07	5	2.10
	7	2.05	7	2.05	6	2.07
	8	2.07	8	2.06	7	2.07
	9	2.08	9	2.06	-	-

The test, based on ultrasonic system, allows measuring the thickness with an accuracy of 10 µm.

## 2.5. Device Holder

The positioning system allows obtaining cheek and tilting position with a very good accuracy. In compliance with CENELEC, the tilt angle uncertainty is lower than 1 degree.

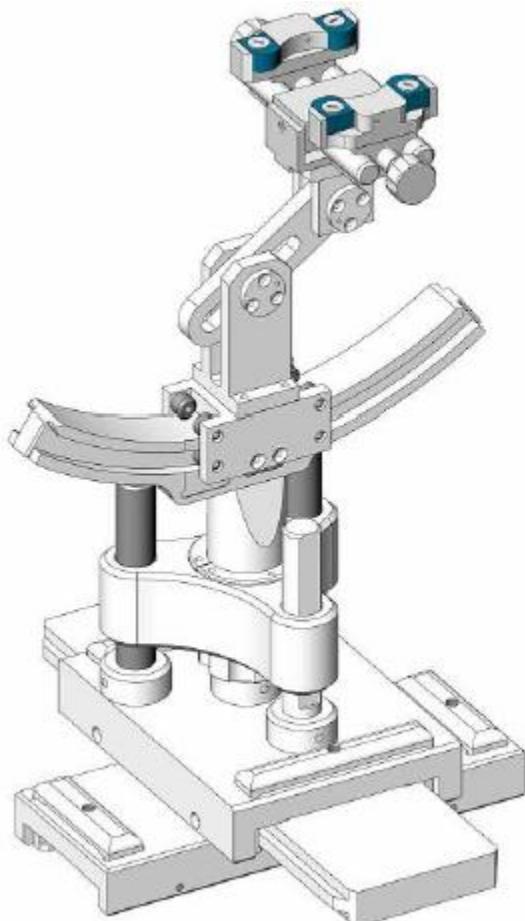

Serial Number	Holder Material	Permittivity	Loss Tangent
SN 16/15 MSH100	Delrin	3.7	0.005

## 2.6. Test Equipment List

This table gives a complete overview of the SAR measurement equipment.

Devices used during the test described are marked

	Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
					Last Cal.	Due Date
<input checked="" type="checkbox"/>	MVG	E FIELD PROBE	SSE2	3423-EPGO-426	Sep. 18, 2023	Sep. 17, 2024
<input checked="" type="checkbox"/>	MVG	750 MHz Dipole	SID750	SN 03/15 DIP 0G750-355	Mar. 01, 2021	Feb. 28, 2024
<input checked="" type="checkbox"/>	MVG	835 MHz Dipole	SID835	SN 03/15 DIP 0G835-347	Mar. 01, 2021	Feb. 28, 2024
<input type="checkbox"/>	MVG	900 MHz Dipole	SID900	SN 03/15 DIP 0G900-348	Mar. 01, 2021	Feb. 28, 2024
<input checked="" type="checkbox"/>	MVG	1800 MHz Dipole	SID1800	SN 03/15 DIP 1G800-349	Mar. 01, 2021	Feb. 28, 2024
<input checked="" type="checkbox"/>	MVG	1900 MHz Dipole	SID1900	SN 03/15 DIP 1G900-350	Mar. 01, 2021	Feb. 28, 2024
<input type="checkbox"/>	MVG	2000 MHz Dipole	SID2000	SN 03/15 DIP 2G000-351	Mar. 01, 2021	Feb. 28, 2024
<input type="checkbox"/>	MVG	2300 MHz Dipole	SID2300	SN 03/16 DIP 2G300-358	Mar. 01, 2021	Feb. 28, 2024
<input checked="" type="checkbox"/>	MVG	2450 MHz Dipole	SID2450	SN 03/15 DIP 2G450-352	Mar. 01, 2021	Feb. 28, 2024
<input checked="" type="checkbox"/>	MVG	2600 MHz Dipole	SID2600	SN 03/15 DIP 2G600-356	Mar. 01, 2021	Feb. 28, 2024
<input type="checkbox"/>	MVG	3500 MHz Dipole	SID3500	SN 09/12 DIP 3G500-360	Oct. 15, 2022	Oct. 14, 2025
<input checked="" type="checkbox"/>	MVG	5000 MHz Dipole	SWG5500	SN 13/14 WGA 33	Mar. 01, 2021	Feb. 28, 2024
<input checked="" type="checkbox"/>	MVG	Liquid measurement Kit	SCLMP	SN 21/15 OCPG 72	NCR	NCR
<input checked="" type="checkbox"/>	MVG	Power Amplifier	N.A	AMPLISAR_28/14_003	NCR	NCR
<input checked="" type="checkbox"/>	KEITHLEY	Millivoltmeter	2000	4072790	NCR	NCR
<input checked="" type="checkbox"/>	R&S	Universal radio communication tester	CMU200	117858	May 29, 2023	May 28, 2024
<input checked="" type="checkbox"/>	R&S	Wideband radio communication	CMW500	103917	May 29, 2023	May 28, 2024

		tester				
<input checked="" type="checkbox"/>	HP	Network Analyzer	8753D	3410J01136	May 29, 2023	May 28, 2024
<input checked="" type="checkbox"/>	Agilent	MXG Vector Signal Generator	N5182A	MY47070317	May 29, 2023	May 28, 2024
<input checked="" type="checkbox"/>	Agilent	Power meter	E4419B	MY45102538	May 29, 2023	May 28, 2024
<input checked="" type="checkbox"/>	Agilent	Power sensor	E9301A	MY41495644	May 29, 2023	May 28, 2024
<input checked="" type="checkbox"/>	Agilent	Power sensor	E9301A	US39212148	May 29, 2023	May 28, 2024
<input checked="" type="checkbox"/>	MCLI/USA	Directional Coupler	CB11-20	0D2L51502	Jul. 04, 2023	Jul. 03, 2024
<input checked="" type="checkbox"/>	N/A	Thermometer	N/A	LES-085	Mar. 27, 2023	Mar. 26, 2026
<input checked="" type="checkbox"/>	MVG	SAM Phantom	SSM2	SN 16/15 SAM119	NCR	NCR
<input checked="" type="checkbox"/>	MVG	Device Holder	SMPPD	SN 16/15 MSH100	NCR	NCR
<input checked="" type="checkbox"/>	Shenzhen Tianxu Communication Technology Co., Ltd.	Human Simulating Liquid	Head 750	Head 750	NCR	NCR
<input checked="" type="checkbox"/>	Shenzhen Tianxu Communication Technology Co., Ltd.	Human Simulating Liquid	Head 835	Head 835	NCR	NCR
<input checked="" type="checkbox"/>	Shenzhen Tianxu Communication Technology Co., Ltd.	Human Simulating Liquid	Head 1800	Head 1800	NCR	NCR
<input checked="" type="checkbox"/>	Shenzhen Tianxu Communication Technology Co., Ltd.	Human Simulating Liquid	Head 1900	Head 1900	NCR	NCR
<input checked="" type="checkbox"/>	Shenzhen Tianxu Communication	Human Simulating Liquid	Head 2450	Head 2450	NCR	NCR

	Technology Co., Ltd.					
☒	Shenzhen Tianxu Communication Technology Co., Ltd.	Human Simulating Liquid	Head 2600	Head 2600	NCR	NCR
☒	Shenzhen Tianxu Communication Technology Co., Ltd.	Human Simulating Liquid	Head 5200	Head 5200	NCR	NCR
☒	Shenzhen Tianxu Communication Technology Co., Ltd.	Human Simulating Liquid	Head 5800	Head 5800	NCR	NCR

### 3. SAR Measurement Procedures

The measurement procedures are as follows:

<Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For Wi-Fi/BT power measurement, use engineering software to configure EUT Wi-Fi/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band.
- (d) Connect EUT RF port through RF cable to the power meter, and measure Wi-Fi/BT output power.

<SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT Wi-Fi/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix A demonstrates.
- (c) Set scan area, grid size and other setting on the OPENSAR software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band.
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg.

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

#### 3.1. Power Reference

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

#### 3.2. Area scan & Zoom scan

The area scan is a 2D scan to find the hot spot location on the DUT. The zoom scan is a 3D scan

above the hot spot to calculate the 1g and 10g SAR value.

Measurement of the SAR distribution with a grid of 8 to 16 mm \* 8 to 16 mm and a constant distance to the inner surface of the phantom. Since the sensors cannot directly measure at the inner phantom surface, the values between the sensors and the inner phantom surface are extrapolated. With these values the area of the maximum SAR is calculated by an interpolation scheme. Around this point, a cube of 30 \* 30 \* 30 mm or 32 \* 32 \* 32 mm is assessed by measuring 5 or 8 \* 5 or 8 \* 4 or 5 mm. With these data, the peak spatial-average SAR value can be calculated.

From the scanned SAR distribution, identify the position of the maximum SAR value, in addition identify the positions of any local maxima with SAR values within 2 dB of the maximum value that will not be within the zoom scan of other peaks; additional peaks shall be measured only when the primary peak is within 2 dB of the SAR compliance limit (e.g., 1 W/kg for 1,6 W/kg 1 g limit, or 1,26 W/kg for 2 W/kg, 10 g limit).

Area scan & Zoom scan scan parameters extracted from FCC KDB 865664 D01 SAR measurement 100 MHz to 6 GHz.

		$\leq 3$ GHz	$> 3$ GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface		$5 \pm 1$ mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location		$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
		$\leq 2$ GHz: $\leq 15$ mm $2 - 3$ GHz: $\leq 12$ mm	$3 - 4$ GHz: $\leq 12$ mm $4 - 6$ GHz: $\leq 10$ mm
Maximum area scan spatial resolution: $\Delta x_{\text{Area}}, \Delta y_{\text{Area}}$		When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$		$\leq 2$ GHz: $\leq 8$ mm $2 - 3$ GHz: $\leq 5$ mm*	$3 - 4$ GHz: $\leq 5$ mm* $4 - 6$ GHz: $\leq 4$ mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$	$\leq 5$ mm	$3 - 4$ GHz: $\leq 4$ mm $4 - 5$ GHz: $\leq 3$ mm $5 - 6$ GHz: $\leq 2$ mm
	graded grid	$\Delta z_{\text{Zoom}}(1)$ : between 1 <sup>st</sup> two points closest to phantom surface $\Delta z_{\text{Zoom}}(n>1)$ : between subsequent points	$\leq 4$ mm $\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$
Minimum zoom scan volume	x, y, z	$\geq 30$ mm	$3 - 4$ GHz: $\geq 28$ mm $4 - 5$ GHz: $\geq 25$ mm $5 - 6$ GHz: $\geq 22$ mm
Note: $\delta$ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.			
* When zoom scan is required and the <u>reported</u> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is $\leq 1.4$ W/kg, $\leq 8$ mm, $\leq 7$ mm and $\leq 5$ mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.			

### 3.3. Description of interpolation/extrapolation scheme

The local SAR inside the phantom is measured using small dipole sensing elements inside a probe body. The probe tip must not be in contact with the phantom surface in order to minimise measurements errors, but the highest local SAR will occur at the surface of the phantom.

An extrapolation is used to determine these highest local SAR values. The extrapolation is based on a fourth-order least-square polynomial fit of measured data. The local SAR value is then extrapolated from the liquid surface with a 1 mm step.

The measurements have to be performed over a limited time (due to the duration of the battery) so the step of measurement is high. It could vary between 5 and 8 mm. To obtain an accurate assessment of the maximum SAR averaged over 10 grams and 1 gram requires a very fine resolution in the three dimensional scanned data array.

### 3.4. Volumetric Scan

The volumetric scan consists of a full 3D scan over a specific area. This 3D scan is useful for multi Tx SAR measurement. Indeed, it is possible with OpenSAR to add, point by point, several volumetric scans to calculate the SAR value of the combined measurement as it is defined in the standard IEEE1528 and IEC62209.

### 3.5. Power Drift

All SAR testing is under the EUT installed full charged battery and transmit maximum output power. In OpenSAR measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in V/m. If the power drifts more than  $\pm 5\%$ , the SAR will be retested.


## 4. System Verification Procedure

### 4.1. Tissue Verification

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Ingredients (% of weight)	Head Tissue									
Frequency Band (MHz)	750	835	900	1800	1900	2000	2450	2600	5200	5800
Water	34.40	34.40	34.40	55.36	55.36	57.87	57.87	57.87	65.53	65.53
NaCl	0.79	0.79	0.79	0.35	0.35	0.16	0.16	0.16	0.00	0.00
1,2-Propanediol	64.81	64.81	64.81	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Triton X-100	0.00	0.00	0.00	30.45	30.45	19.97	19.97	19.97	24.24	24.24
DGBE	0.00	0.00	0.00	13.84	13.84	22.00	22.00	22.00	10.23	10.23

For SAR measurement of the field distribution inside the phantom, the phantom must be filled with homogeneous tissue simulating liquid to a depth of at least 15 cm. For head SAR testing, the liquid depth from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm.

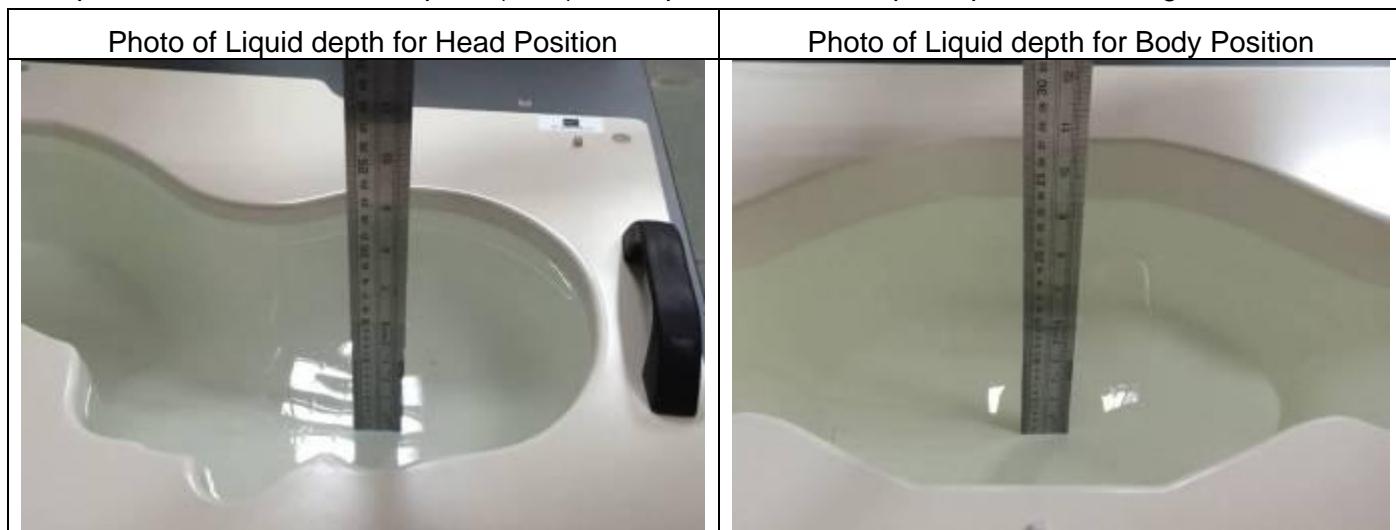

#### 4.1.1. Tissue Dielectric Parameter Check Results

The simulating liquids should be checked at the beginning of a series of SAR measurements to determine if the dielectric parameter are within the tolerances of the specified target values. The measured conductivity and relative permittivity should be within  $\pm 5\%$  of the target values.


Tissue Type	Measured Frequency (MHz)	Target Tissue		Measured Tissue		Liquid Temp.	Test Date
		$\epsilon_r$ ( $\pm 5\%$ )	$\sigma$ (S/m) ( $\pm 5\%$ )	$\epsilon_r$	$\sigma$ (S/m)		
Head 750	750	41.96 (39.86~44.06)	0.89 (0.85~0.93)	42.33	0.93	21.8 °C	Oct. 26, 2023
Head 850	835	41.50 (39.43~43.58)	0.90 (0.86~0.95)	41.42	0.90	21.2 °C	Nov. 02, 2023
Head 1800	1800	40.00 (38.00~42.00)	1.40 (1.33~1.47)	40.06	1.43	21.5 °C	Oct. 31, 2023
Head 1900	1900	40.00 (38.00~42.00)	1.40 (1.33~1.47)	39.02	1.44	21.7 °C	Oct. 24, 2023
Head 2450	2450	39.20 (37.24~41.16)	1.80 (1.71~1.89)	38.73	1.80	21.7 °C	Oct. 28, 2023
Head 2600	2600	39.01 (37.06~40.96)	1.96 (1.86~2.06)	38.57	1.91	21.1 °C	Oct. 29, 2023
Head 5200	5200	36.00 (34.20~37.80)	4.66 (4.43~4.89)	35.66	4.53	21.2 °C	Nov. 01, 2023
Head 5800	5800	35.30 (33.54~37.07)	5.27 (5.01~5.53)	35.03	5.10	21.3 °C	Nov. 03, 2023

NOTE: The dielectric parameters of the tissue-equivalent liquid should be measured under similar ambient conditions and within 2 °C of the conditions expected during the SAR evaluation to satisfy protocol requirements.

## 4.2. System Verification Procedure

The system verification is performed for verifying the accuracy of the complete measurement system and performance of the software. The dipole is connected to the signal source consisting of signal generator and amplifier via a directional coupler, N-connector cable and adaption to SMA. It is fed with a power of 100mW (below 5GHz) or 100mW (above 5GHz). To adjust this power a power meter is used. The power sensor is connected to the cable before the system verification to measure the power at this point and do adjustments at the signal generator. At the outputs of the directional coupler both return loss as well as forward power are controlled during the system verification to make sure that emitted power at the dipole is kept constant. This can also be checked by the power drift measurement after the test (result on plot).

The system verification is shown as below picture:

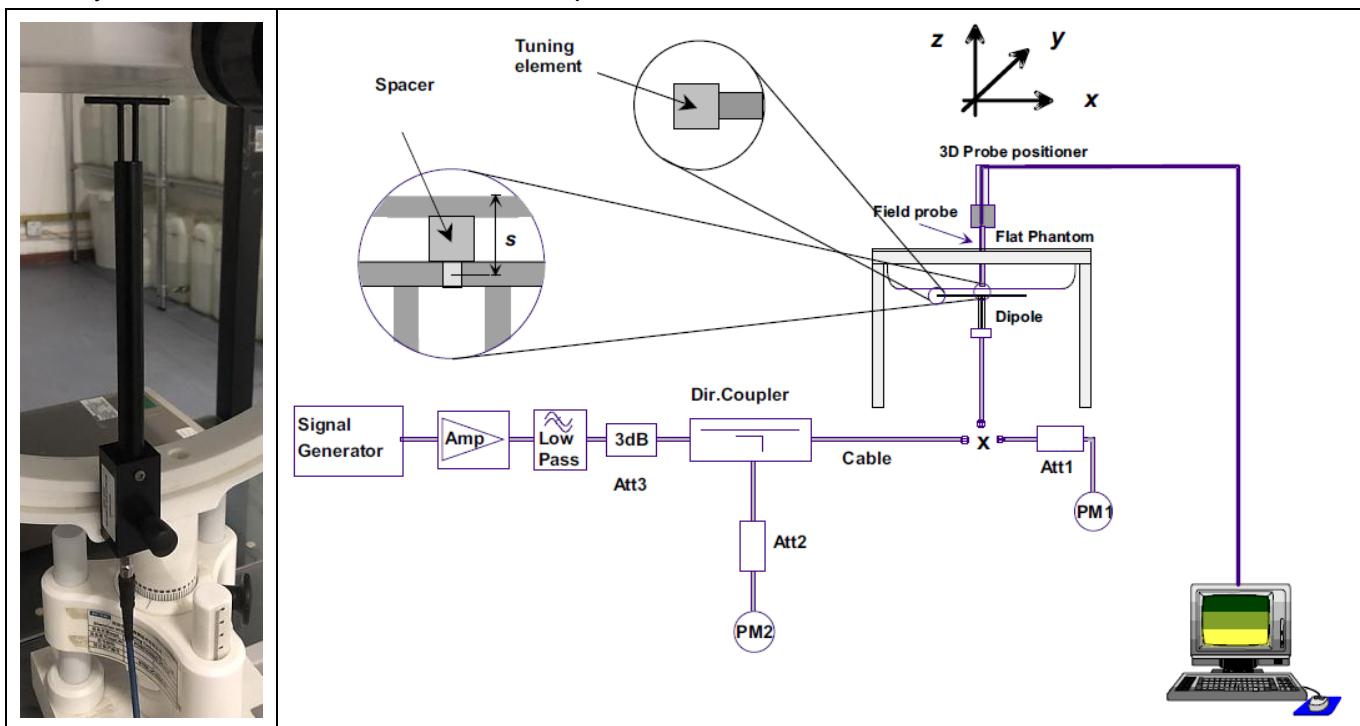

#### **4.2.1. System Verification Results**

Comparing to the original SAR value provided by SATIMO, the verification data should be within its specification of  $\pm 10\%$ . Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance verification can meet the variation criterion and the plots can be referred to Appendix B of this report.

## 5. SAR Measurement variability and uncertainty

### 5.1. SAR measurement variability

Per KDB865664 D01 SAR measurement 100 MHz to 6 GHz, SAR measurement variability must be assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. The additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg (~ 10% from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20.

### 5.2. SAR measurement uncertainty

Per KDB865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg, the extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. The equivalent ratio (1.5/1.6) is applied to extremity and occupational exposure conditions.

## 6. RF Exposure Positions

### 6.1. Ear and handset reference point

Figure 6.1.1 shows the front, back, and side views of the SAM phantom. The center-of-mouth reference point is labeled “M”, the left ear reference point (ERP) is marked “LE”, and the right ERP is marked “RE”.

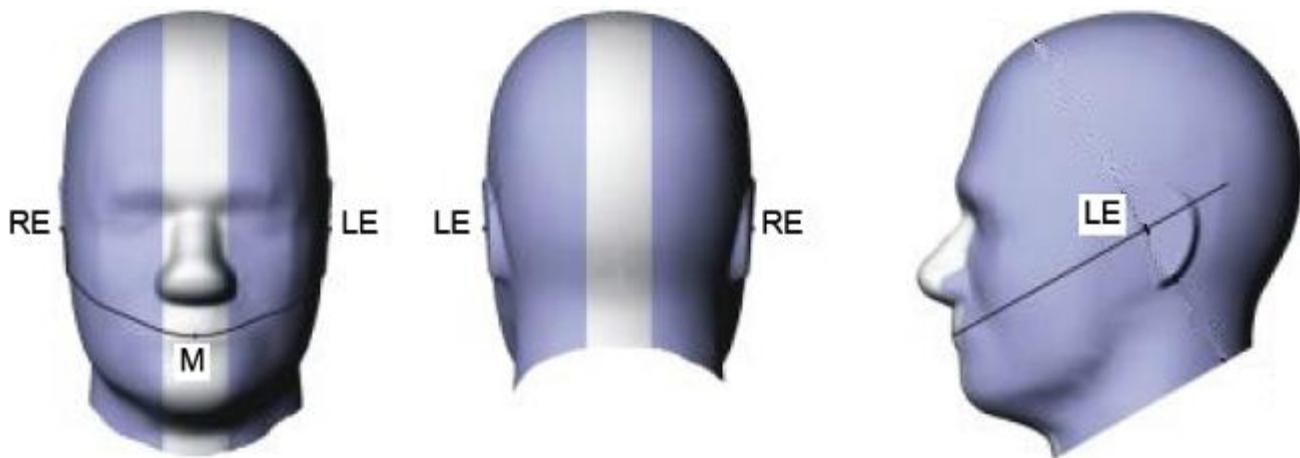


Fig 6.1.1 Front, back, and side views of SAM phantom

### 6.2. Definition of the cheek position

1. Define two imaginary lines on the handset, the vertical centerline and the horizontal line. The vertical centerline passes through two points on the front side of the handset: the midpoint of the width  $w_t$  of the handset at the level of the acoustic output (point A in Figure 6.2.1 and Figure 6.2.2), and the midpoint of the width  $w_b$  of the bottom of the handset (point B). The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output (see Figure 6.2.1). The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset (see Figure 6.2.2), especially for clamshell handsets, handsets with flip covers, and other irregularly-shaped handsets.
2. Position the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 6.2.3), such that the plane defined by the vertical centerline and the horizontal line of the handset is approximately parallel to the sagittal plane of the phantom.
3. Translate the handset towards the phantom along the line passing through RE and LE until handset point A touches the pinna at the ERP
4. While maintaining the handset in this plane, rotate it around the LE-RE line until the vertical centerline is in the plane normal to the plane containing B-M and N-F lines, i.e., the Reference Plane.
5. Rotate the handset around the vertical centerline until the handset (horizontal line) is parallel to the N-F line.

6. While maintaining the vertical centerline in the Reference Plane, keeping point A on the line passing through RE and LE, and maintaining the handset contact with the pinna, rotate the handset about the N-F line until any point on the handset is in contact with a phantom point below the pinna on the cheek. See Figure 6.2.3. The actual rotation angles should be documented in the test report.

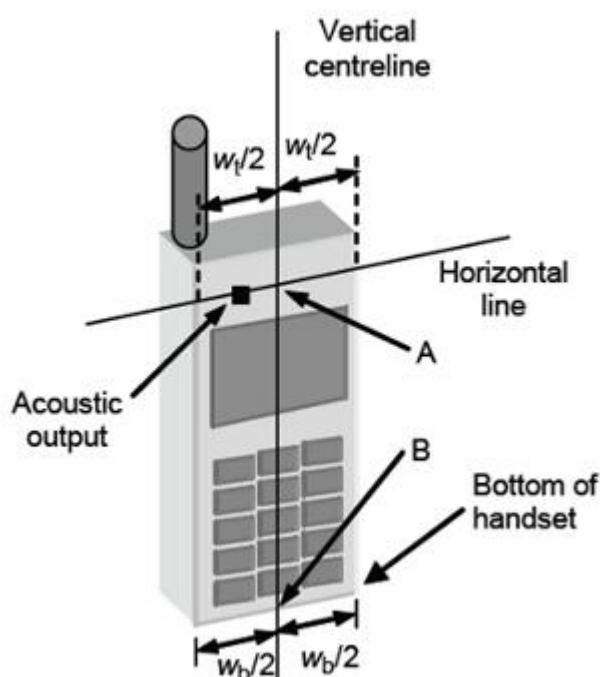


Fig 6.2.1 Handset vertical and horizontal reference lines—"fixed case"

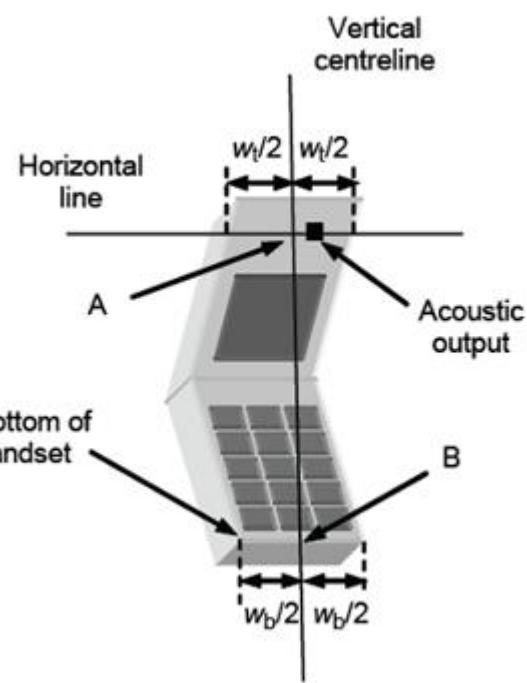


Fig 6.2.2 Handset vertical and horizontal reference lines—"clam-shell case"

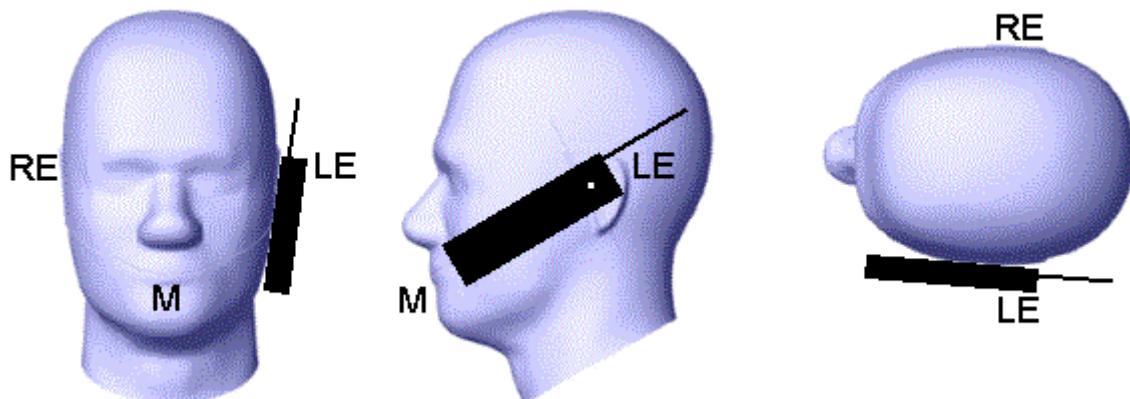


Fig 6.2.3 cheek or touch position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which establish the Reference Plane for handset positioning, are indicated.

### 6.3. Definition of the tilt position

1. While maintaining the orientation of the handset, retract the handset parallel to the reference plane far enough away from the phantom to enable a rotation of the device by 15 degree.
2. Rotate the Handset around the horizontal line by 15 degree (see Figure 6.3.1).
3. While maintaining the orientation of the handset, move the handset towards the phantom on a line passing through RE and LE until any part of the handset touches the ear. The tilt position is obtained when the contact is on the pinna. If the contact is at any location other than the pinna, e.g., the antenna with the back of the phantom head, the angle of the handset shall be reduced. In this case, the tilt position is obtained if any part of the handset is in contact with the pinna as well as a second part of the handset is in contact with the phantom, e.g., the antenna with the back of the head.

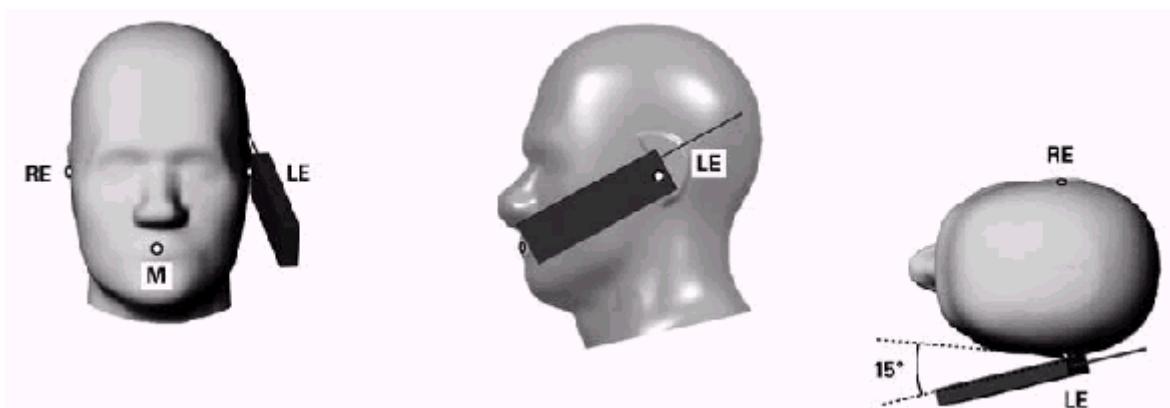


Figure 6.3.1 – Tilt position of the wireless device on the left side of SAM

### 6.4. Body Worn Accessory

1. Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 6.4.1). Per KDB 648474 D04, body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB 447498 D01 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for body-worn accessory, measured without a headset connected to the handset is < 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a handset attached to the handset.
2. Accessories for body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest

spacing to the body. Then multiple accessories that contain metallic components are tested with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-chip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

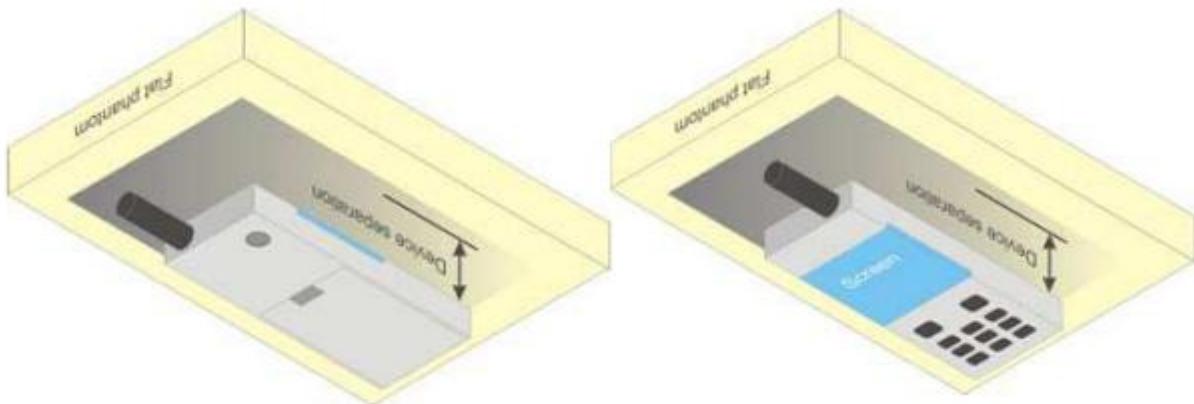


Figure 6.4.1 – Test positions for body-worn devices

## 6.5. Wireless Router Devices

Some battery-operated handsets have the capability to transmit and receive user through simultaneous transmission of WLAN simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06 where SAR test considerations for handsets ( $L \times W \geq 9 \text{ cm} \times 5 \text{ cm}$ ) are based on a composite test separation distance of 10mm from the front, back and edges of the device containing transmitting antennas within 2.5cm of their edges, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WLAN transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WLAN transmitter according to FCC KDB Publication 447498 D01 publication procedures. The “Portable Hotspot” feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.

## 7. RF Output Power

### 7.1. GSM Conducted Power

Band GSM850	Burst-Averaged output Power (dBm)				Frame-Averaged output Power (dBm)			
	Tune-up	128	189	251	Tune-up	128	189	251
Frequency (MHz)	(dBm)	824.2	836.4	848.8	(dBm)	824.2	836.4	848.8
GSM (GMSK)		33.00	32.67	32.56		23.97	23.64	23.53
GPRS(GMSK,1 Tx slot)	33.00	32.57	32.52	32.51	23.97	23.54	23.49	23.48
GPRS(GMSK,2 Tx slot)	31.50	31.03	30.88	30.86	25.48	25.01	24.86	24.84
GPRS(GMSK,3 Tx slot)	29.00	28.88	28.70	28.69	24.74	24.62	24.44	24.43
GPRS(GMSK,4 Tx slot)	28.00	27.77	27.65	27.59	24.99	24.76	24.64	24.58
EGPRS(8PSK,1 Tx slot)	28.00	27.72	27.10	27.89	18.97	18.69	18.07	18.86
EGPRS(8PSK,2 Tx slot)	25.50	25.35	25.41	25.25	19.48	19.33	19.39	19.23
EGPRS(8PSK,3 Tx slot)	24.00	22.95	22.83	23.55	19.74	18.69	18.57	19.29
EGPRS(8PSK,4 Tx slot)	22.00	21.61	21.71	21.89	18.99	18.60	18.70	18.88
Band GSM1900	Burst-Averaged output Power (dBm)				Frame-Averaged output Power (dBm)			
Tx Channel	(dBm)	512	661	810	(dBm)	512	661	810
Frequency (MHz)		1850.2	1880	1909.8		1850.2	1880	1909.8
GSM (GMSK)	30.50	30.25	30.06	29.63	21.47	21.22	21.03	20.60
GPRS(GMSK,1 Tx slot)	30.50	30.28	30.08	29.62	21.47	21.25	21.05	20.59
GPRS(GMSK,2 Tx slot)	29.00	28.62	28.30	27.83	22.98	22.60	22.28	21.81
GPRS(GMSK,3 Tx slot)	26.50	26.42	26.17	25.66	22.24	22.16	21.91	21.40
GPRS(GMSK,4 Tx slot)	25.50	25.33	25.05	24.55	22.49	22.32	22.04	21.54
EGPRS(8PSK,1 Tx slot)	27.00	26.66	26.59	26.66	17.97	17.63	17.56	17.63
EGPRS(8PSK,2 Tx slot)	25.00	24.64	24.79	24.77	18.98	18.62	18.77	18.75
EGPRS(8PSK,3 Tx slot)	23.00	22.13	22.24	22.83	18.74	17.87	17.98	18.57
EGPRS(8PSK,4 Tx slot)	22.00	21.33	21.76	21.44	18.99	18.32	18.75	18.43

### 7.2. WCDMA Conducted Power

WCDMA Band 2		Burst-Averaged output Power (dBm)		
Tx Channel		Tune-up	9262	9400
			1852.4	1880
Frequency (MHz)			1907.6	
RMC12.2K		23.50	23.05	23.44
HSDPA Sub 1		23.50	23.09	23.15
HSDPA Sub 2		23.00	22.60	22.71
			22.95	

HSDPA Sub 3	22.00	21.56	21.53	21.98
HSDPA Sub 4	22.00	21.74	21.73	21.71
HSUPA Sub 1	23.50	22.34	22.89	23.19
HSUPA Sub 2	23.50	21.78	23.03	23.25
HSUPA Sub 3	22.50	21.16	21.80	22.13
HSUPA Sub 4	23.50	22.55	23.11	23.38
HSUPA Sub 5	23.00	21.63	22.32	22.61
WCDMA Band 5	Burst-Averaged output Power (dBm)			
Tx Channel	Tune-up (dBm)	4132	4182	4233
Frequency (MHz)		826.4	836.4	846.6
RMC12.2K	24.00	23.99	23.90	23.86
HSDPA Sub 1	24.50	24.01	23.93	23.88
HSDPA Sub 2	24.00	23.51	23.54	23.53
HSDPA Sub 3	23.00	22.64	22.62	22.43
HSDPA Sub 4	23.00	22.54	22.18	22.36
HSUPA Sub 1	24.00	22.74	23.79	23.74
HSUPA Sub 2	24.00	23.29	23.86	23.87
HSUPA Sub 3	23.00	22.33	22.64	22.66
HSUPA Sub 4	24.00	23.51	23.96	23.90
HSUPA Sub 5	23.50	22.63	23.15	23.21

### 7.3. LTE Conducted Power

Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		18607/1850.7	18900/1880	19193/1909.3
LTE Band 2	1.4MHz	QPSK	1	0	24.00	23.55	23.47	23.76
			1	2	24.00	23.72	23.61	23.94
			1	5	24.00	23.47	23.45	23.76
			3	0	24.00	23.56	23.45	23.87
			3	1	24.00	23.61	23.51	23.89
			3	2	24.00	23.53	23.49	23.83
			6	0	23.00	22.51	22.45	22.84
		16QAM	1	0	23.50	22.37	22.51	22.92
			1	2	23.50	22.54	22.67	23.08
			1	5	23.50	22.35	22.57	22.93
			3	0	23.50	22.72	22.58	23.06
			3	1	23.50	22.70	22.61	23.08
			3	2	23.50	22.74	22.56	23.09
			6	0	22.50	21.75	21.61	22.02
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		18615/1851.5	18900/1880	19185/1908.5
LTE Band 2	3MHz	QPSK	1	0	24.50	23.58	23.39	23.81
			1	7	24.50	23.74	23.74	24.28
			1	14	24.50	23.52	23.42	23.85
			8	0	23.00	22.50	22.41	22.82
			8	4	23.00	22.48	22.42	22.82
			8	7	23.00	22.49	22.41	22.78
			15	0	23.00	22.46	22.37	22.74
		16QAM	1	0	23.50	22.94	22.54	22.65
			1	7	23.50	23.24	22.85	22.83
			1	14	23.50	22.87	22.58	22.67
			8	0	22.00	21.53	21.37	21.78
			8	4	22.00	21.54	21.41	21.80
			8	7	22.00	21.54	21.39	21.79
			15	0	22.00	21.52	21.31	21.84
Band	Band	Modulation	RB		Tune-up	Channel/Frequency(MHz)		

	Width		Configuration		(dBm)			
			RB Size	RB Offset		18625/1852.5	18900/1880	19175/1907.5
LTE Band 2	5MHz	QPSK	1	0	24.50	23.42	23.37	23.77
			1	12	24.50	23.86	23.67	24.18
			1	24	24.50	23.39	23.42	23.72
			12	0	23.00	22.39	22.38	22.79
			12	6	23.00	22.52	22.44	22.83
			12	11	23.00	22.49	22.42	22.79
			25	0	23.00	22.48	22.42	22.83
		16QAM	1	0	23.50	22.94	22.63	23.03
			1	12	23.50	23.40	22.94	23.35
			1	24	23.50	22.96	22.70	23.02
			12	0	22.00	21.44	21.39	21.87
			12	6	22.00	21.58	21.39	21.94
			12	11	22.00	21.52	21.41	21.85
			25	0	22.00	21.44	21.46	21.78
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		18650/1855	18900/1880	19150/1905
LTE Band 2	10MHz	QPSK	1	0	24.00	23.50	23.40	23.75
			1	24	24.00	23.64	23.59	23.94
			1	49	24.00	23.54	23.55	23.83
			25	0	23.00	22.49	22.40	22.94
			25	12	23.00	22.52	22.45	22.83
			25	24	23.00	22.55	22.45	22.88
			50	0	23.00	22.52	22.39	22.89
		16QAM	1	0	23.50	22.64	22.25	23.12
			1	24	23.50	22.81	22.39	23.29
			1	49	23.50	22.65	22.34	23.18
			25	0	22.00	21.53	21.38	21.90
			25	12	22.00	21.58	21.44	21.85
			25	24	22.00	21.62	21.44	21.92
			50	0	22.00	21.60	21.39	21.89
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		18675/1857.5	18900/1880	19125/1902.5
LTE	15MHz	QPSK	1	0	24.50	23.44	23.32	23.65

Band 2		16QAM	1	37	24.50	23.72	23.73	24.06
			1	74	24.50	23.34	23.51	23.77
			36	0	23.00	22.54	22.44	22.78
			36	18	23.00	22.52	22.49	22.83
			36	37	23.00	22.57	22.58	22.83
			75	0	23.00	22.57	22.48	22.86
			1	0	23.50	22.57	22.66	22.78
			1	37	23.50	22.93	23.06	23.25
			1	74	23.50	22.49	22.88	22.90
			36	0	22.00	21.50	21.47	21.89
			36	18	22.00	21.55	21.54	21.90
			36	37	22.00	21.51	21.60	21.93
			75	0	22.00	21.60	21.48	21.86
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		18700/1860	18900/1880	19100/1900
LTE Band 2	20MHz	QPSK	1	0	24.00	23.30	23.15	23.39
			1	49	24.00	23.62	23.59	23.88
			1	99	24.00	23.23	23.43	23.63
			50	0	23.00	22.46	22.37	22.64
			50	24	23.00	22.53	22.45	22.77
			50	49	23.00	22.51	22.54	22.69
			100	0	23.00	22.48	22.43	22.68
		16QAM	1	0	23.50	22.62	22.39	22.62
			1	49	23.50	22.94	22.81	23.04
			1	99	23.50	22.52	22.68	22.83
			50	0	22.00	21.52	21.36	21.75
			50	24	22.00	21.59	21.45	21.83
			50	49	22.00	21.58	21.53	21.70
			100	0	22.00	21.53	21.44	21.71

Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		19957/1710.7	20175/1732.5	20393/1754.3
LTE Band 4	1.4MHz	QPSK	1	0	25.00	24.07	24.58	24.65
			1	2	25.00	24.27	24.73	24.78
			1	5	25.00	24.12	24.56	24.65
			3	0	25.00	24.17	24.65	24.69

			3	1	25.00	24.12	24.67	24.72
			3	2	25.00	24.11	24.67	24.72
			6	0	24.00	23.08	23.60	23.70
		16QAM	1	0	24.00	22.92	23.73	23.78
			1	2	24.00	23.09	23.89	23.87
			1	5	24.00	22.94	23.78	23.77
			3	0	24.00	23.27	23.80	23.86
			3	1	24.00	23.27	23.80	23.90
			3	2	24.00	23.36	23.82	23.88
			6	0	23.00	22.28	22.79	22.80
			RB Configuration		Tune-up	Channel/Frequency(MHz)		
LTE Band 4	3MHz	QPSK	RB Size	RB Offset	(dBm)	19965/1711.5	20175/1732.5	20385/1753.5
			1	0	25.50	24.13	24.59	24.74
			1	7	25.50	24.17	25.21	24.97
			1	14	25.50	24.18	24.62	24.72
			8	0	24.00	23.12	23.64	23.75
			8	4	24.00	23.17	23.69	23.78
			8	7	24.00	23.18	23.67	23.72
		16QAM	15	0	24.00	23.17	23.62	23.69
			1	0	24.50	23.53	23.76	23.60
			1	7	24.50	23.86	24.12	23.79
			1	14	24.50	23.58	23.83	23.48
			8	0	23.00	22.16	22.66	22.71
			8	4	23.00	22.20	22.69	22.70
			8	7	23.00	22.20	22.67	22.70
			15	0	23.00	22.21	22.61	22.71
LTE Band 4	5MHz	QPSK	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset	(dBm)	19975/1712.5	20175/1732.5	20375/1752.5
			1	0	25.50	24.00	24.49	24.60
			1	12	25.50	24.44	24.93	25.03
			1	24	25.50	24.06	24.61	24.52
			12	0	24.00	23.11	23.60	23.65
			12	6	24.00	23.23	23.69	23.75
		16QAM	12	11	24.00	23.23	23.70	23.66
			25	0	24.00	23.19	23.68	23.68
			1	0	24.50	23.54	23.74	23.72

			1	12	24.50	24.02	24.02	24.10
			1	24	24.50	23.61	23.93	23.79
			12	0	23.00	22.16	22.55	22.75
			12	6	23.00	22.25	22.64	22.77
			12	11	23.00	22.25	22.63	22.71
			25	0	23.00	22.18	22.71	22.64
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		20000/1715	20175/1732.5	20350/1750
LTE Band 4	10MHz	QPSK	1	0	25.00	24.16	24.43	24.31
			1	24	25.00	24.45	24.76	24.49
			1	49	25.00	24.43	24.63	24.29
			25	0	24.00	23.17	23.55	23.55
			25	12	24.00	23.26	23.73	23.62
			25	24	24.00	23.38	23.75	23.58
			50	0	24.00	23.25	23.67	23.65
		16QAM	1	0	24.00	22.99	23.59	23.47
			1	24	24.00	23.19	23.83	23.52
			1	49	24.00	23.16	23.68	23.46
			25	0	23.00	22.20	22.53	22.49
			25	12	23.00	22.28	22.65	22.54
			25	24	23.00	22.38	22.66	22.48
			50	0	23.00	22.26	22.62	22.71
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		20025/1717.5	20175/1732.5	20325/1747.5
LTE Band 4	15MHz	QPSK	1	0	25.00	24.06	23.85	24.12
			1	37	25.00	24.62	24.52	24.49
			1	74	25.00	24.39	24.08	24.14
			36	0	23.50	23.20	23.28	23.31
			36	18	23.50	23.36	23.37	23.41
			36	37	23.50	23.43	23.29	23.35
			75	0	23.50	23.33	23.43	23.48
		16QAM	1	0	24.00	23.16	23.02	23.50
			1	37	24.00	23.44	23.52	23.83
			1	74	24.00	23.45	23.20	23.47
			36	0	22.50	22.24	22.14	22.30
			36	18	22.50	22.36	22.29	22.43

			36	37	22.50	22.42	22.46	22.41
			75	0	22.50	22.21	22.38	22.39
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		20050/1720	20175/1732.5	20300/1745
LTE Band 4	20MHz	QPSK	1	0	24.50	23.78	23.64	23.90
			1	49	24.50	23.98	24.31	24.37
			1	99	24.50	23.93	24.10	24.06
			50	0	23.50	22.63	23.05	23.16
			50	24	23.50	23.07	23.17	23.28
			50	49	23.50	22.97	23.24	23.29
			100	0	23.50	22.82	23.12	23.18
		16QAM	1	0	24.00	22.64	22.90	23.23
			1	49	24.00	23.12	23.51	23.77
			1	99	24.00	23.15	23.33	23.31
			50	0	22.50	21.62	22.08	22.24
			50	24	22.50	21.88	22.28	22.34
			50	49	22.50	21.98	22.27	22.35
			100	0	22.50	21.84	22.17	22.24

Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		20407/824.7	20525/836.5	20643/848.3
LTE Band 5	1.4MHz	QPSK	1	0	24.50	24.11	24.23	24.13
			1	2	24.50	24.31	24.31	24.28
			1	5	24.50	24.21	24.20	24.13
			3	0	24.50	24.20	24.23	24.15
			3	1	24.50	24.17	24.23	24.19
			3	2	24.50	24.16	24.22	24.15
			6	0	23.50	23.20	23.28	23.14
		16QAM	1	0	23.50	23.30	23.00	23.16
			1	2	23.50	23.41	23.10	23.26
			1	5	23.50	23.38	22.96	23.18
			3	0	23.50	23.43	23.32	23.21
			3	1	23.50	23.47	23.31	23.30
			3	2	23.50	23.39	23.36	23.28
			6	0	22.50	22.36	22.41	22.30
Band	Band	Modulation	RB		Tune-up	Channel/Frequency(MHz)		

	Width		Configuration		(dBm)			
			RB Size	RB Offset		20415/825.5	20525/836.5	20635/847.5
LTE Band 5	3MHz	QPSK	1	0	25.00	24.20	24.29	24.15
			1	7	25.00	24.59	24.56	24.32
			1	14	25.00	24.37	24.31	23.94
			8	0	23.50	23.23	23.27	23.13
			8	4	23.50	23.21	23.33	23.20
			8	7	23.50	23.29	23.28	23.08
			15	0	23.50	23.21	23.23	23.04
		16QAM	1	0	24.00	23.39	23.05	23.36
			1	7	24.00	23.77	23.32	23.60
			1	14	24.00	23.46	22.92	23.27
			8	0	22.50	22.26	22.22	22.00
			8	4	22.50	22.30	22.26	22.07
			8	7	22.50	22.29	22.22	22.06
			15	0	22.50	22.17	22.28	22.13
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		20425/826.5	20525/836.5	20625/846.5
LTE Band 5	5MHz	QPSK	1	0	25.00	24.14	23.76	23.61
			1	12	25.00	24.50	24.15	23.98
			1	24	25.00	24.17	23.65	23.59
			12	0	23.50	23.17	22.69	22.62
			12	6	23.50	23.13	22.93	22.83
			12	11	23.50	23.13	22.77	22.71
			25	0	23.50	23.03	22.85	22.70
		16QAM	1	0	24.00	23.35	22.97	22.76
			1	12	24.00	23.87	23.34	23.26
			1	24	24.00	23.37	22.91	22.79
			12	0	22.50	22.09	21.74	21.73
			12	6	22.50	22.10	21.78	21.77
			12	11	22.50	21.92	21.74	21.66
			25	0	22.50	22.01	21.93	21.73
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		20450/829	20525/836.5	20600/844
LTE	10MHz	QPSK	1	0	24.50	24.15	23.80	23.71

Band 5			1	24	24.50	23.98	23.82	23.74
			1	49	24.50	23.91	23.70	23.67
			25	0	23.00	22.94	22.79	22.64
			25	12	23.00	22.92	22.76	22.67
			25	24	23.00	23.00	22.82	22.65
			50	0	23.00	22.93	22.79	22.66
		16QAM	1	0	23.50	23.09	22.92	22.51
			1	24	23.50	23.26	22.93	22.53
			1	49	23.50	23.16	22.81	22.48
			25	0	22.50	22.05	21.78	21.64
			25	12	22.50	21.89	21.75	21.63
			25	24	22.50	21.89	21.84	21.68
			50	0	22.00	21.88	21.82	21.62

Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		20775/2502.5	21100/2535	21425/2567.5
LTE Band 7	5MHz	QPSK	1	0	24.00	23.40	22.88	23.16
			1	12	24.00	23.88	23.33	23.73
			1	24	24.00	23.34	22.91	23.23
			12	0	23.00	22.53	22.03	22.32
			12	6	23.00	22.54	22.07	22.40
			12	11	23.00	22.49	22.09	22.37
			25	0	23.00	22.53	22.07	22.37
		16QAM	1	0	23.00	22.83	22.27	22.49
			1	12	23.00	22.92	22.75	22.86
			1	24	23.00	22.44	22.22	22.57
			12	0	21.50	21.17	20.98	21.39
			12	6	21.50	21.18	21.04	21.46
			12	11	21.50	21.08	21.04	21.46
			25	0	21.50	21.20	21.10	21.37
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		20800/2505	21100/2535	21400/2565
LTE Band 7	10MHz	QPSK	1	0	23.50	23.10	22.91	23.22
			1	24	23.50	23.13	23.10	23.40
			1	49	23.50	23.14	22.97	23.39
			25	0	22.50	21.99	22.06	22.35

			25	12	22.50	21.98	22.11	22.35
			25	24	22.50	22.00	22.08	22.42
			50	0	22.50	22.02	22.04	22.37
		16QAM	1	0	23.00	21.88	22.14	22.12
			1	24	23.00	22.77	22.31	22.22
			1	49	23.00	22.49	22.18	22.25
			25	0	21.50	21.18	21.03	21.34
			25	12	21.50	21.10	21.08	21.35
			25	24	21.50	21.23	21.09	21.40
			50	0	21.50	21.10	21.11	21.38
			RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
LTE Band 7	15MHz	Modulation	RB Size	RB Offset		20825/2507.5	21100/2535	21375/2562.5
			1	0	24.00	22.93	22.89	23.01
			1	37	24.00	23.18	23.30	23.50
			1	74	24.00	22.81	22.93	23.26
			36	0	22.50	21.98	22.01	22.28
			36	18	22.50	21.98	22.07	22.38
			36	37	22.50	21.99	22.09	22.42
			75	0	22.50	22.02	22.13	22.43
		Modulation	1	0	23.00	22.32	22.13	22.18
			1	37	23.00	22.66	22.41	22.70
			1	74	23.00	22.25	22.15	22.41
			36	0	21.50	21.00	21.08	21.26
			36	18	21.50	21.03	21.13	21.34
			36	37	21.50	21.04	21.19	21.36
			75	0	21.50	20.98	21.10	21.39
			RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
LTE Band 7	20MHz	Modulation	RB Size	RB Offset		20850/2510	21100/2535	21350/2560
			1	0	23.50	22.81	22.69	22.85
			1	49	23.50	23.08	23.11	23.29
			1	99	23.50	22.75	22.86	23.18
			50	0	22.50	21.91	21.92	22.19
			50	24	22.50	21.94	22.05	22.33
			50	49	22.50	21.96	22.10	22.31
			100	0	22.50	21.94	22.00	22.27
		16QAM	1	0	23.00	22.06	22.10	22.13

			1	49	23.00	22.31	22.48	22.62
			1	99	23.00	22.02	22.20	22.48
			50	0	21.50	20.94	21.04	21.19
			50	24	21.50	20.99	21.09	21.33
			50	49	21.50	21.01	21.15	21.30
			100	0	21.50	20.92	21.05	21.28

Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		23017/699.7	23095/707.5	23173/715.3
LTE Band 12	1.4MHz	QPSK	1	0	24.00	23.43	23.44	22.93
			1	2	24.00	23.59	23.57	23.12
			1	5	24.00	23.43	23.42	22.87
			3	0	23.50	23.44	23.46	22.83
			3	1	23.50	23.44	23.48	22.82
			3	2	23.50	23.46	23.47	22.84
			6	0	22.50	22.42	22.40	21.81
		16QAM	1	0	23.00	22.22	22.48	21.87
			1	2	23.00	22.37	22.53	21.98
			1	5	23.00	22.24	22.33	21.86
			3	0	23.00	22.53	22.56	22.00
			3	1	23.00	22.55	22.36	22.00
			3	2	23.00	22.62	22.34	22.00
			6	0	22.00	21.55	21.37	20.89
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		23025/700.5	23095/707.5	23165/714.5
LTE Band 12	3MHz	QPSK	1	0	24.00	23.55	23.51	23.30
			1	7	24.00	23.97	23.69	23.49
			1	14	24.00	23.61	23.34	23.20
			8	0	22.50	22.46	22.46	22.27
			8	4	22.50	22.46	22.48	22.31
			8	7	22.50	22.48	22.44	22.27
			15	0	22.50	22.48	22.40	22.17
		16QAM	1	0	23.50	22.34	22.82	22.09
			1	7	23.50	22.84	23.04	22.40
			1	14	23.50	22.35	22.76	22.13
			8	0	21.50	21.39	21.45	21.06

			8	4	21.50	21.46	21.47	21.23
			8	7	21.50	21.40	21.43	20.95
			15	0	22.00	21.51	21.38	20.95
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		23035/701.5	23095/707.5	23155/713.5
LTE Band 12	5MHz	QPSK	1	0	24.00	23.32	23.39	23.26
			1	12	24.00	23.64	23.78	23.60
			1	24	24.00	23.35	23.33	23.23
			12	0	23.00	22.50	22.43	22.35
			12	6	23.00	22.54	22.46	22.40
			12	11	23.00	22.46	22.38	22.28
			25	0	22.50	22.48	22.45	22.36
		16QAM	1	0	23.50	22.59	22.89	22.52
			1	12	23.50	23.16	23.22	22.83
			1	24	23.50	22.66	22.79	22.48
			12	0	22.00	21.54	21.43	21.30
			12	6	22.00	21.58	21.50	21.31
			12	11	22.00	21.47	21.39	21.24
			25	0	21.50	21.45	21.41	21.33
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		23060/704	23095/707.5	23130/711
LTE Band 12	10MHz	QPSK	1	0	24.00	23.47	23.43	23.41
			1	24	24.00	23.65	23.51	23.47
			1	49	24.00	23.47	23.37	23.31
			25	0	23.00	22.53	22.43	22.45
			25	12	23.00	22.48	22.41	22.37
			25	24	23.00	22.50	22.39	22.33
			50	0	23.00	22.56	22.38	22.43
		16QAM	1	0	23.00	22.25	22.75	22.56
			1	24	23.00	22.42	22.88	22.60
			1	49	23.00	22.26	22.72	22.40
			25	0	21.50	21.48	21.41	21.44
			25	12	21.50	21.46	21.45	21.33
			25	24	21.50	21.48	21.37	21.34
			50	0	21.50	21.48	21.35	21.42

Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		23205/779.5	23230/782	23255/784.5
LTE Band 13	5MHz	QPSK	1	0	24.00	23.17	23.21	22.93
			1	12	24.00	23.63	23.60	23.22
			1	24	24.00	23.32	23.33	22.91
			12	0	23.00	22.29	22.44	21.92
			12	6	23.00	22.42	22.56	22.06
			12	11	23.00	22.35	22.46	22.16
			25	0	22.50	22.39	22.43	22.16
		16QAM	1	0	23.50	22.54	22.15	22.16
			1	12	23.50	23.12	22.74	22.52
			1	24	23.50	22.87	22.16	22.24
			12	0	21.50	21.24	20.97	20.86
			12	6	21.50	21.43	21.01	21.04
			12	11	21.50	21.37	21.09	21.11
			25	0	21.50	21.31	21.14	21.05
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		N/A	23230/782	N/A
LTE Band 13	10MHz	QPSK	1	0	24.00	N/A	23.37	N/A
			1	24	24.00	N/A	23.58	N/A
			1	49	24.00	N/A	23.55	N/A
			25	0	23.00	N/A	22.52	N/A
			25	12	23.00	N/A	22.50	N/A
			25	24	23.00	N/A	22.67	N/A
			50	0	23.00	N/A	22.58	N/A
		16QAM	1	0	22.50	N/A	22.06	N/A
			1	24	22.50	N/A	22.43	N/A
			1	49	22.50	N/A	22.39	N/A
			25	0	22.00	N/A	21.53	N/A
			25	12	22.00	N/A	21.49	N/A
			25	24	22.00	N/A	21.68	N/A
			50	0	22.00	N/A	21.57	N/A

Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB	RB		23755/706.5	23790/710	23825/713.5

			Size	Offset				
LTE Band 17	5MHz	QPSK	1	0	24.00	23.37	23.75	23.63
			1	12	24.00	23.22	23.63	23.15
			1	24	24.00	23.21	23.52	23.42
			12	0	23.00	22.42	22.33	22.31
			12	6	23.00	22.31	22.25	22.22
			12	11	23.00	22.51	22.32	22.13
			25	0	22.50	22.41	22.41	22.23
		16QAM	1	0	23.00	22.91	22.42	22.16
			1	12	23.00	22.72	22.23	22.22
			1	24	23.00	22.36	22.24	22.23
			12	0	22.00	21.92	21.32	21.24
			12	6	22.00	21.82	21.34	21.24
			12	11	22.00	21.31	21.32	21.36
			25	0	22.00	21.72	21.53	21.43
			RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
Band	Band Width	Modulation	RB Size	RB Offset		23780/709	23790/710	23800/711
LTE Band 17	10MHz	QPSK	1	0	24.00	23.76	23.53	23.47
			1	24	24.00	23.61	23.39	23.32
			1	49	24.00	23.42	23.15	23.21
			25	0	22.50	22.33	22.43	22.43
			25	12	22.50	22.14	22.22	22.33
			25	24	22.50	22.37	22.33	22.12
			50	0	22.50	22.44	22.31	22.11
		16QAM	1	0	23.00	22.41	22.92	22.83
			1	24	23.00	22.33	22.63	22.63
			1	49	23.00	22.22	22.61	22.62
			25	0	22.00	21.93	21.36	21.43
			25	12	22.00	21.52	21.22	21.53
			25	24	22.00	21.42	21.21	21.12
			50	0	21.50	21.46	21.23	21.43

Band	Band Width	Modulation	RB Configuration		Tune-u p (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		131979/1710.7	132322/1745	132665/1779.3
LTE Band	1.4MHz	QPSK	1	0	25.50	24.40	24.95	24.93
			1	2	25.50	24.53	25.09	25.05

66		16QAM	1	5	25.50	24.46	24.96	24.96
			3	0	25.00	24.42	24.99	24.83
			3	1	25.00	24.44	24.96	24.84
			3	2	25.00	24.40	25.00	24.80
			6	0	24.50	23.43	23.99	24.01
			1	0	24.50	23.45	24.06	23.60
			1	2	24.50	23.60	24.18	23.74
			1	5	24.50	23.47	24.05	23.58
			3	0	24.50	23.60	24.15	23.89
			3	1	24.50	23.60	24.24	23.93
			3	2	24.50	23.58	24.15	23.93
			6	0	23.50	22.58	23.07	22.98
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		131987/1711.5	132322/1745	132657/1778.5
LTE Band 66	3MHz	QPSK	1	0	25.50	24.46	25.00	25.03
			1	7	25.50	24.74	25.07	25.26
			1	14	25.50	24.56	24.94	24.98
			8	0	24.50	23.42	23.94	23.97
			8	4	24.50	23.43	24.01	24.02
			8	7	24.50	23.47	23.99	23.97
			15	0	24.00	23.43	23.96	23.95
		16QAM	1	0	25.00	23.25	24.29	23.98
			1	7	25.00	23.33	24.53	24.26
			1	14	25.00	23.27	24.26	23.92
			8	0	23.00	22.41	22.94	22.89
			8	4	23.00	22.43	22.97	22.89
			8	7	23.00	22.43	22.94	22.85
			15	0	23.00	22.47	22.95	22.79
			RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
Band	Band Width	Modulation	RB Size	RB Offset		131997/1712.5	132322/1745	132647/1777.5
LTE Band 66	5MHz	QPSK	1	0	25.50	24.34	24.94	24.95
			1	12	25.50	24.64	25.32	25.31
			1	24	25.50	24.40	24.91	24.92
			12	0	24.00	23.38	23.90	23.92
			12	6	24.00	23.47	24.00	23.95
			12	11	24.00	23.46	23.96	23.87

			25	0	24.00	23.48	23.97	23.90
		16QAM	1	0	24.50	23.79	24.17	24.02
			1	12	24.50	24.19	24.48	24.37
			1	24	24.50	23.89	24.10	23.92
			12	0	23.00	22.40	22.88	22.90
			12	6	23.00	22.49	22.95	22.90
			12	11	23.00	22.45	22.87	22.86
			25	0	23.00	22.42	22.94	22.80
			RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
LTE Band 66	10MHz	Modulation	RB Size	RB Offset		132022/1715	132322/1745	132622/1775
			1	0	25.50	24.46	25.01	25.02
			1	24	25.50	24.70	25.16	25.14
			1	49	25.50	24.75	25.04	24.95
			25	0	24.50	23.51	23.99	24.06
			25	12	24.50	23.52	23.97	23.95
			25	24	24.50	23.59	24.03	23.96
			50	0	24.50	23.56	24.01	23.99
LTE Band 66	15MHz	Modulation	1	0	24.50	23.49	23.77	24.18
			1	24	24.50	23.75	23.89	24.29
			1	49	24.50	23.74	23.72	24.10
			25	0	23.00	22.46	22.96	22.98
			25	12	23.00	22.50	22.92	22.88
			25	24	23.00	22.61	23.00	22.89
			50	0	23.00	22.58	22.98	22.89
			RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
LTE Band 66	15MHz	Modulation	RB Size	RB Offset		132047/1717.5	132322/1745	132597/1772.5
			1	0	25.50	24.40	24.83	24.95
			1	37	25.50	24.84	25.16	25.34
			1	74	25.50	24.73	24.88	24.90
			36	0	24.50	23.49	24.11	24.17
			36	18	24.50	23.62	24.11	24.14
			36	37	24.50	23.72	24.11	24.08
			75	0	24.50	23.67	24.10	24.14
		Modulation	1	0	24.50	23.50	23.94	24.14
			1	37	24.50	23.95	24.33	24.41
			1	74	24.50	23.78	23.95	24.04

			36	0	23.50	22.52	22.94	23.06
			36	18	23.50	22.64	22.97	23.04
			36	37	23.50	22.78	22.99	22.98
			75	0	23.50	22.57	23.04	23.02
Band	Band Width	Modulation	RB Configuration		Tune-up p (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		132072/1720	132322/1745	132572/1770
LTE Band 66	20MHz	QPSK	1	0	25.50	24.19	24.68	24.79
			1	49	25.50	24.70	25.12	25.16
			1	99	25.50	24.70	24.85	24.82
			50	0	24.50	23.41	23.92	23.97
			50	24	24.50	23.58	24.02	23.97
			50	49	24.50	23.72	23.94	23.91
			100	0	24.00	23.55	23.96	23.94
		16QAM	1	0	24.50	23.35	23.95	23.80
			1	49	24.50	23.86	24.29	24.15
			1	99	24.50	23.90	24.01	23.80
			50	0	23.00	22.45	22.92	22.90
			50	24	23.00	22.61	23.00	22.89
			50	49	23.00	22.77	22.95	22.81
			100	0	23.00	22.55	22.94	22.81

Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		133147/665.5	133297/680.5	133447/695.5
LTE Band 71	5MHz	QPSK	1	0	24.50	23.85	23.67	23.43
			1	12	24.50	24.15	24.02	23.91
			1	24	24.50	23.82	23.59	23.62
			12	0	23.00	22.63	22.63	22.48
			12	6	23.00	22.79	22.64	22.53
			12	11	23.00	22.75	22.63	22.51
			25	0	23.00	22.68	22.64	22.51
		16QAM	1	0	23.50	22.83	22.75	22.52
			1	12	23.50	23.35	23.07	22.81
			1	24	23.50	22.94	22.64	22.52
			12	0	22.00	21.53	21.53	21.45
			12	6	22.00	21.64	21.52	21.48
			12	11	22.00	21.65	21.52	21.43

			25	0	22.00	21.55	21.58	21.36
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		133172/668	133297/680.5	133422/693
LTE Band 71	10MHz	QPSK	1	0	24.50	24.02	23.77	23.46
			1	24	24.50	24.12	23.86	23.60
			1	49	24.50	23.88	23.66	23.69
			25	0	23.00	22.61	22.70	22.56
			25	12	23.00	22.77	22.63	22.53
			25	24	23.00	22.82	22.59	22.42
			50	0	23.00	22.73	22.65	22.50
		16QAM	1	0	23.00	22.61	22.47	22.75
			1	24	23.00	22.85	22.42	22.82
			1	49	23.00	22.80	22.29	22.67
			25	0	22.00	21.54	21.64	21.54
			25	12	22.00	21.65	21.54	21.44
			25	24	22.00	21.77	21.55	21.32
			50	0	22.00	21.67	21.57	21.41
LTE Band 71	15MHz	QPSK	1	0	24.50	23.78	23.68	23.52
			1	37	24.50	24.23	23.85	23.88
			1	74	24.50	23.72	23.46	23.69
			36	0	23.00	22.86	22.84	22.66
			36	18	23.00	22.95	22.83	22.63
			36	37	23.00	22.89	22.77	22.65
			75	0	23.00	22.85	22.83	22.74
		16QAM	1	0	23.50	22.65	22.91	22.46
			1	37	23.50	23.10	22.89	22.66
			1	74	23.50	22.70	22.75	22.41
			36	0	22.00	21.66	21.73	21.64
			36	18	22.00	21.79	21.69	21.58
			36	37	22.00	21.76	21.62	21.56
			75	0	22.00	21.76	21.69	21.61
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		

			RB Size	RB Offset		133222/673	133322/683	133372/688
LTE Band 71	20MHz	QPSK	1	0	24.00	23.58	23.60	23.48
			1	49	24.00	23.88	23.84	23.63
			1	99	24.00	23.51	23.55	23.57
			50	0	23.00	22.55	22.63	22.49
			50	24	23.00	22.77	22.58	22.54
			50	49	23.00	22.66	22.45	22.46
			100	0	23.00	22.58	22.55	22.44
		16QAM	1	0	23.00	22.44	22.64	22.56
			1	49	23.00	22.93	22.74	22.83
			1	99	23.00	22.48	22.44	22.45
			50	0	22.00	21.48	21.63	21.47
			50	24	22.00	21.67	21.57	21.49
			50	49	22.00	21.56	21.41	21.40
			100	0	22.00	21.51	21.49	21.35

#### 7.4. WLAN & Bluetooth Output Power

Mode	Channel	Frequency (MHz)	Tune-up (dBm)	Output Power (dBm)
802.11b	1	2412	14.50	14.25
	6	2437	14.50	13.79
	11	2462	14.50	13.57
802.11g	1	2412	12.00	10.14
	6	2437	12.00	11.70
	11	2462	12.00	11.62
802.11n HT20	1	2412	12.00	10.49
	6	2437	12.00	11.60
	11	2462	12.00	11.65
802.11n HT40	3	2422	12.00	11.61
	6	2437	12.00	11.38
	9	2452	12.00	10.99

NOTE: Power measurement results of WLAN 2.4G.

Mode	Channel	Frequency (MHz)	Tune-up (dBm)	Output Power (dBm)
802.11a	36	5180	13.00	12.17
	40	5200	13.00	12.57

	48	5240	13.00	12.43
802.11n HT20	36	5180	13.00	12.43
	40	5200	13.00	12.58
	48	5240	13.00	12.82
802.11n HT40	38	5190	12.00	10.68
	46	5230	12.00	11.75

NOTE: Power measurement results of WLAN 5.2G.

Mode	Channel	Frequency (MHz)	Tune-up (dBm)	Output Power (dBm)
802.11a	149	5745	13.00	12.46
	157	5785	13.00	12.40
	165	5825	13.00	12.59
802.11n HT20	149	5745	12.00	11.84
	157	5785	12.00	11.69
	165	5825	12.00	11.94
802.11n HT40	151	5755	14.00	13.38
	159	5795	14.00	13.65

NOTE: Power measurement results of WLAN 5.8G.

BR+EDR	Output Power (dBm)				
	Channel	Tune-up (dBm)	Data Rates		
			1M	2M	3M
	0CH	4.00	3.84	3.22	3.10
	39CH	5.00	4.94	3.86	4.05
	78CH	4.00	3.43	2.24	2.76


BLE	Channel	Tune-up (dBm)	Output Power (dBm)
			1M
	0CH	5.00	4.03
	19CH	5.50	5.15
	39CH	4.00	3.38

NOTE: Power measurement results of Bluetooth.

## 7.5. NFC

The power is too low, so SAR testing is not necessary.

## 8. Antenna Location

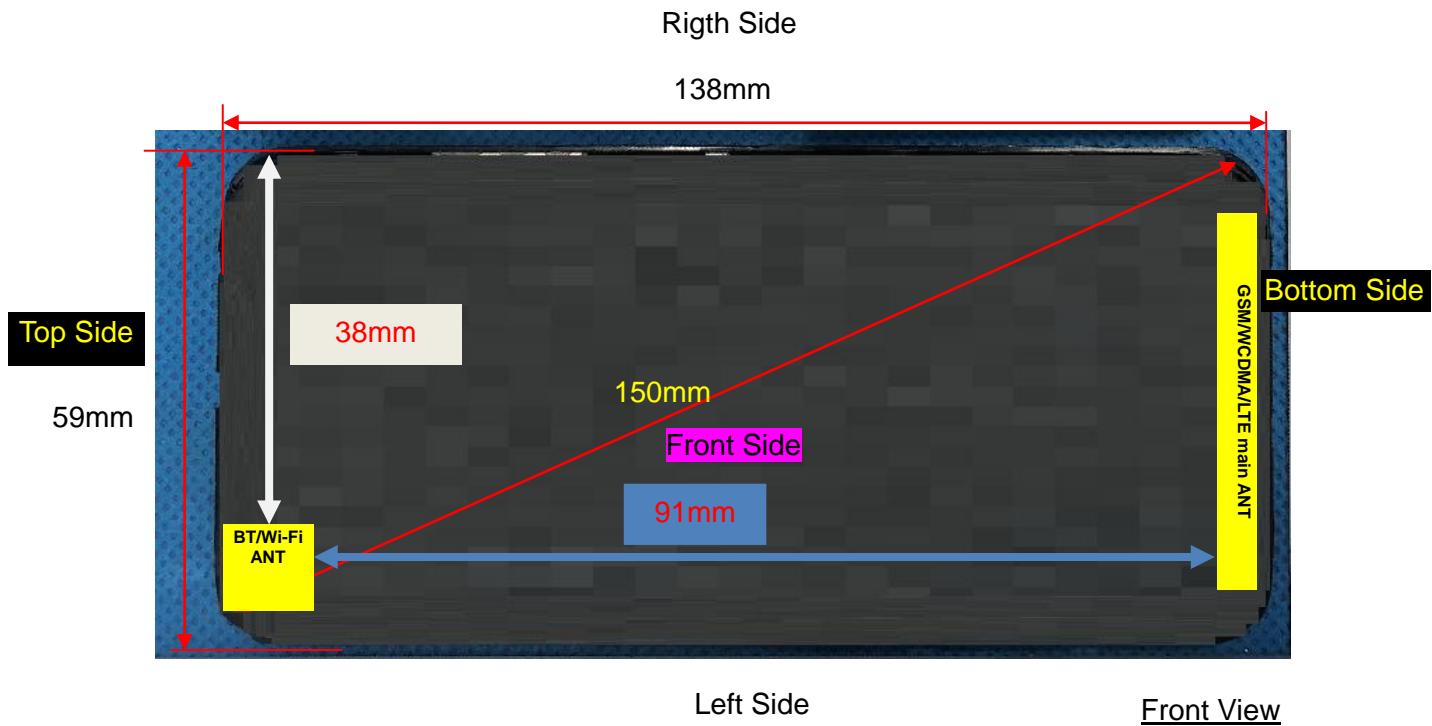

Note: Since the confidentiality request of EUT, the antenna location example diagram see as above.

Distance of the Antenna to the EUT surface/edge						
Antennas	Front Side	Back Side	Left Side	Right Side	Top Side	Bottom Side
WWAN Main ANT	≤ 25mm	≤ 25mm	≤ 25mm	≤ 25mm	> 25mm	≤ 25mm
WLAN & Bluetooth	≤ 25mm	≤ 25mm	≤ 25mm	> 25mm	≤ 25mm	> 25mm
Positions for SAR tests						
Antennas	Front Side	Back Side	Left Side	Right Side	Top Side	Bottom Side
WWAN Main ANT	Yes	Yes	Yes	Yes	NO	Yes
WLAN & Bluetooth	Yes	Yes	Yes	NO	Yes	NO

## 9. Stand-alone SAR test exclusion

Refer to FCC KDB 447498D01, the 1-g SAR and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f_{(\text{GHz})}}]$   
≤ 3.0 for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where:

- $f_{(\text{GHz})}$  is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

Mode	P <sub>max</sub>	P <sub>max</sub>	Distance	f	Calculation	SAR Exclusion	SAR test

	(dBm)	(mW)	(mm)	(GHz)	Result	threshold	exclusion
Bluetooth	5.50	3.55	5	2.480	1.1	3	Yes

NOTE: Standalone SAR test exclusion for Bluetooth.

When standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] * [\sqrt{f_{(\text{GHz})}/x}] \text{ W/kg}$  for test separation distances  $\leq 50\text{mm}$ , where  $x = 7.5$  for 1-g SAR and  $x = 18.75$  for 10-g SAR.

When the minimum test separation distance is  $< 5 \text{ mm}$ , a distance of 5 mm is applied to determine SAR test exclusion.

Mode	Position	P <sub>max</sub> (dBm)	P <sub>max</sub> (mW)	Distance (mm)	f (GHz)	x	Estimated SAR (W/Kg)
Bluetooth	Head	5.50	3.55	5	2.48	7.5	0.149
Bluetooth	Body	5.50	3.55	10	2.48	7.5	0.074
Bluetooth	Hotspot	5.50	3.55	10	2.48	7.5	0.074

NOTE: Estimated SAR calculation for Bluetooth

## 10. SAR Results

### 10.1. SAR measurement Result

#### 10.1.1. SAR measurement Result of GSM850

Test Position of Head	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
Left Cheek	189/836.4	GPRS(GMSK 2TS)	0.471	0.328	0.22	30.88	31.50	0.543	2023/11/02	1#
Left Tilt 15 Degree	189/836.4	GPRS(GMSK 2TS)	0.256	0.173	-1.92	30.88	31.50	0.295	2023/11/02	
Right Cheek	189/836.4	GPRS(GMSK 2TS)	0.440	0.297	-0.41	30.88	31.50	0.508	2023/11/02	
Right Tilt 15 Degree	189/836.4	GPRS(GMSK 2TS)	0.214	0.143	3.98	30.88	31.50	0.247	2023/11/02	

NOTE: Head SAR test results of GSM850.

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date	Plot
			1g	10g						
Front Side	189/836.4	GPRS(GMSK 2TS)	0.336	0.236	0.39	30.88	31.50	0.388	2023/11/02	
Back Side	189/836.4	GPRS(GMSK 2TS)	0.559	0.396	-4.70	30.88	31.50	0.645	2023/11/02	2#

NOTE: Body-Worn SAR test results of GSM850

Test Position of Hotspot with 10mm	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
Front Side	189/836.4	GPRS(GMSK 2TS)	0.336	0.236	0.39	30.88	31.50	0.388	2023/11/02	
Back Side	189/836.4	GPRS(GMSK 2TS)	0.559	0.396	-4.70	30.88	31.50	0.645	2023/11/02	2#
Left Side	189/836.4	GPRS(GMSK 2TS)	0.168	0.114	-2.28	30.88	31.50	0.194	2023/11/02	
Right Side	189/836.4	GPRS(GMSK 2TS)	0.174	0.117	0.89	30.88	31.50	0.201	2023/11/02	
Bottom Side	189/836.4	GPRS(GMSK 2TS)	0.300	0.202	-3.45	30.88	31.50	0.346	2023/11/02	

NOTE: Hotspot SAR test results of GSM850

#### 10.1.2. SAR measurement Result of GSM1900

Test Position of Head	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
Left Cheek	661/1880	GPRS(GMSK 2TS)	0.141	0.091	1.42	28.30	29.00	0.166	2023/10/24	3#
Left Tilt 15 Degree	661/1880	GPRS(GMSK 2TS)	0.082	0.052	-3.69	28.30	29.00	0.096	2023/10/24	
Right Cheek	661/1880	GPRS(GMSK 2TS)	0.123	0.079	0.54	28.30	29.00	0.145	2023/10/24	
Right Tilt 15 Degree	661/1880	GPRS(GMSK 2TS)	0.057	0.035	0.04	28.30	29.00	0.067	2023/10/24	

NOTE: Head SAR test results of GSM1900

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date	Plot
			1g	10g						
Front Side	661/1880	GPRS(GMSK 2TS)	0.360	0.192	2.17	28.30	29.00	0.423	2023/10/24	
Back Side	661/1880	GPRS(GMSK 2TS)	0.550	0.299	-0.29	28.30	29.00	0.646	2023/10/24	4#

NOTE: Body-Worn SAR test results of GSM1900

Test Position of Hotspot with 10mm	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Pilot
			1-g	10-g						
Front Side	661/1880	GPRS(GMSK 2TS)	0.360	0.192	2.17	28.30	29.00	0.423	2023/10/24	
Back Side	661/1880	GPRS(GMSK 2TS)	0.550	0.299	-0.29	28.30	29.00	0.646	2023/10/24	4#
Left Side	661/1880	GPRS(GMSK 2TS)	0.174	0.094	1.60	28.30	29.00	0.204	2023/10/24	
Right Side	661/1880	GPRS(GMSK 2TS)	0.180	0.096	-2.18	28.30	29.00	0.211	2023/10/24	
Bottom Side	661/1880	GPRS(GMSK 2TS)	0.280	0.148	-0.10	28.30	29.00	0.329	2023/10/24	

NOTE: Hotspot SAR test results of GSM1900

### 10.1.3. SAR measurement Result of WCDMA Band 2

Test Position of Head	Test channel /Freq	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
Left Cheek	9400/1880	RMC12.2K	0.215	0.132	2.02	23.44	23.50	0.218	2023/10/24	5#
Left Tilt 15 Degree	9400/1880	RMC12.2K	0.123	0.072	0.20	23.44	23.50	0.125	2023/10/24	
Right Cheek	9400/1880	RMC12.2K	0.200	0.122	-2.37	23.44	23.50	0.203	2023/10/24	
Right Tilt 15 Degree	9400/1880	RMC12.2K	0.110	0.067	2.83	23.44	23.50	0.112	2023/10/24	

NOTE: Head SAR test results of WCDMA Band 2

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power	Conducted power	Tune-up power	Scaled SAR 1g (W/Kg)	Date	Plot
			1g	10g	Drift ( $\pm 5\%$ )	(dBm)	(dBm)			

Front Side	9400/1880	RMC12.2K	0.468	0.248	2.71	23.44	23.50	0.475	2023/10/24	
Back Side	9400/1880	RMC12.2K	0.763	0.417	-0.09	23.44	23.50	0.774	2023/10/24	6#

NOTE: Body-Worn SAR test results of WCDMA Band 2

Test Position of Hotspot with 10mm	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tuned-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
Front Side	9400/1880	RMC12.2K	0.468	0.248	2.71	23.44	23.50	0.475	2023/10/24	
Back Side	9400/1880	RMC12.2K	0.763	0.417	-0.09	23.44	23.50	0.774	2023/10/24	6#
Left Side	9400/1880	RMC12.2K	0.231	0.126	-3.64	23.44	23.50	0.234	2023/10/24	
Right Side	9400/1880	RMC12.2K	0.234	0.125	3.87	23.44	23.50	0.237	2023/10/24	
Bottom Side	9400/1880	RMC12.2K	0.400	0.212	3.52	23.44	23.50	0.406	2023/10/24	

NOTE: Hotspot SAR test results of WCDMA Band 2

#### **10.1.4. SAR measurement Result of WCDMA Band 5**

Test Position of Head	Test channel /Freq	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
Left Cheek	4182/836.4	RMC12.2K	0.203	0.147	0.69	23.90	24.00	0.208	2023/11/02	7#
Left Tilt 15 Degree	4182/836.4	RMC12.2K	0.103	0.075	1.54	23.90	24.00	0.105	2023/11/02	
Right Cheek	4182/836.4	RMC12.2K	0.191	0.131	2.77	23.90	24.00	0.195	2023/11/02	
Right Tilt 15 Degree	4182/836.4	RMC12.2K	0.090	0.065	-0.02	23.90	24.00	0.092	2023/11/02	

NOTE: Head SAR test results of WCDMA Band 5

with 10mm								(W/Kg)		
Front Side	4182/836.4	RMC12.2K	0.204	0.142	-1.60	23.90	24.00	0.209	2023/11/02	
Back Side	4182/836.4	RMC12.2K	0.301	0.220	-0.66	23.90	24.00	0.308	2023/11/02	8#

NOTE: Body-Worn SAR test results of WCDMA Band 5

Test Position of Hotspot with 10mm	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
Front Side	4182/836.4	RMC12.2K	0.204	0.142	-1.60	23.90	24.00	0.209	2023/11/02	
Back Side	4182/836.4	RMC12.2K	0.301	0.220	-0.66	23.90	24.00	0.308	2023/11/02	8#
Left Side	4182/836.4	RMC12.2K	0.085	0.062	-2.40	23.90	24.00	0.087	2023/11/02	
Right Side	4182/836.4	RMC12.2K	0.093	0.067	3.37	23.90	24.00	0.095	2023/11/02	
Bottom Side	4182/836.4	RMC12.2K	0.165	0.121	2.84	23.90	24.00	0.169	2023/11/02	

NOTE: Hotspot SAR test results of WCDMA Band 5

#### 10.1.5. SAR measurement Result of LTE Band 2

Test Position of Head	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
1RB										
Left Cheek	18900/1880	20M QPSK(1,49)	0.223	0.138	3.38	23.59	24.00	0.245	2023/10/24	15#
Left Tilt 15 Degree	18900/1880	20M QPSK(1,49)	0.126	0.076	0.11	23.59	24.00	0.138	2023/10/24	
Right Cheek	18900/1880	20M QPSK(1,49)	0.199	0.118	1.60	23.59	24.00	0.219	2023/10/24	
Right Tilt 15	18900/1880	20M QPSK(1,49)	0.097	0.057	-1.69	23.59	24.00	0.107	2023/10/24	

Degree										
50%RB										
Left Cheek	18900/1880	20M QPSK(50,24)	0.123	0.082	-3.55	22.45	23.00	0.140	2023/10/24	
Left Tilt 15 Degree	18900/1880	20M QPSK(50,24)	0.068	0.039	-2.65	22.45	23.00	0.077	2023/10/24	
Right Cheek	18900/1880	20M QPSK(50,24)	0.108	0.069	2.04	22.45	23.00	0.123	2023/10/24	
Right Tilt 15 Degree	18900/1880	20M QPSK(50,24)	0.050	0.032	-0.63	22.45	23.00	0.057	2023/10/24	

NOTE: Head SAR test results of LTE Band 2

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date	Plot
			1g	10g						
1RB										
Front Side	18900/1880	20M QPSK(1,49)	0.534	0.291	-3.67	23.59	24.00	0.587	2023/10/24	
Back Side	18900/1880	20M QPSK(1,49)	0.845	0.460	-1.46	23.59	24.00	0.929	2023/10/24	16#
Back Side	18700/1860	20M QPSK(1,49)	0.833	0.466	-0.50	23.62	24.00	0.909	2023/10/24	
Back Side	19100/1900	20M QPSK(1,49)	0.719	0.392	2.04	23.88	24.00	0.739	2023/10/24	
BackSide Repeated	18900/1880	20M QPSK(1,49)	0.840	0.456	0.69	23.59	24.00	0.923	2023/10/24	
50%RB										
Front Side	18900/1880	20M QPSK(50,24)	0.311	0.172	-3.70	22.45	23.00	0.353	2023/10/24	
Back Side	18900/1880	20M QPSK(50,24)	0.440	0.258	-2.97	22.45	23.00	0.499	2023/10/24	

NOTE: Body-Worn SAR test results of LTE Band 2

Test Position of Hotspot with 10mm	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducte d Power (dBm)	Tune-u p Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
1RB										
Front Side	18900/1880	20M QPSK(1,49)	0.534	0.291	-3.67	23.59	24.00	0.587	2023/10/24	

Back Side	18900/1880	20M QPSK(1,49)	0.845	0.460	-1.46	23.59	24.00	0.929	2023/10/24	16#
Left Side	18900/1880	20M QPSK(1,49)	0.258	0.140	0.20	23.59	24.00	0.284	2023/10/24	
Right Side	18900/1880	20M QPSK(1,49)	0.255	0.137	-2.36	23.59	24.00	0.280	2023/10/24	
Bottom Side	18900/1880	20M QPSK(1,49)	0.430	0.227	1.98	23.59	24.00	0.473	2023/10/24	
Back Side	18700/1860	20M QPSK(1,49)	0.833	0.466	-0.50	23.62	24.00	0.909	2023/10/24	
Back Side	19100/1900	20M QPSK(1,49)	0.719	0.392	2.04	23.88	24.00	0.739	2023/10/24	
BackSide Repeated	18900/1880	20M QPSK(1,49)	0.840	0.456	0.69	23.59	24.00	0.923	2023/10/24	
<b>50%RB</b>										
Front Side	18900/1880	20M QPSK(50,24)	0.311	0.172	-3.70	22.45	23.00	0.353	2023/10/24	
Back Side	18900/1880	20M QPSK(50,24)	0.440	0.258	-2.97	22.45	23.00	0.499	2023/10/24	
Left Side	18900/1880	20M QPSK(50,24)	0.138	0.072	2.10	22.45	23.00	0.157	2023/10/24	
Right Side	18900/1880	20M QPSK(50,24)	0.134	0.079	-1.40	22.45	23.00	0.152	2023/10/24	
Bottom Side	18900/1880	20M QPSK(50,24)	0.225	0.133	-1.58	22.45	23.00	0.255	2023/10/24	
<b>100%RB</b>										
Back Side	18900/1880	20M QPSK(100,0)	0.320	0.193	1.23	22.43	23.00	0.365	2023/10/24	

NOTE: Hotspot SAR test results of LTE Band 2

#### 10.1.6. SAR measurement Result of LTE Band 4

Test Position of Head	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
<b>1RB</b>										
Left Cheek	20175/1732.5	20M QPSK(1,49)	0.316	0.203	-2.59	24.31	24.50	0.330	2023/10/31	17#
Left Tilt 15 Degree	20175/1732.5	20M QPSK(1,49)	0.171	0.109	-1.24	24.31	24.50	0.179	2023/10/31	
Right	20175/1732.5	20M	0.280	0.176	1.54	24.31	24.50	0.293	2023/10/31	

Cheek		QPSK(1,49)								
Right Tilt 15 Degree	20175/1732.5	20M QPSK(1,49)	0.154	0.098	1.11	24.31	24.50	0.161	2023/10/31	
50%RB										
Left Cheek	20175/1732.5	20M QPSK(50,49)	0.166	0.119	-3.68	23.24	23.50	0.176	2023/10/31	
Left Tilt 15 Degree	20175/1732.5	20M QPSK(50,49)	0.098	0.058	4.09	23.24	23.50	0.104	2023/10/31	
Right Cheek	20175/1732.5	20M QPSK(50,49)	0.157	0.099	-1.17	23.24	23.50	0.167	2023/10/31	
Right Tilt 15 Degree	20175/1732.5	20M QPSK(50,49)	0.084	0.053	2.48	23.24	23.50	0.089	2023/10/31	

NOTE: Head SAR test results of LTE Band 4

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date	Plot
			1g	10g						
1RB										
Front Side	20175/1732.5	20M QPSK(1,49)	0.678	0.373	-2.85	24.31	24.50	0.708	2023/10/31	
Back Side	20175/1732.5	20M QPSK(1,49)	1.100	0.637	-0.40	24.31	24.50	1.149	2023/10/31	18#
Back Side	20050/1720	20M QPSK(1,49)	0.986	0.568	-1.68	23.98	24.50	1.111	2023/10/31	
Back Side	20300/1745	20M QPSK(1,49)	1.031	0.593	2.05	24.37	24.50	1.062	2023/10/31	
BackSide Repeated	20175/1732.5	20M QPSK(1,49)	1.089	0.621	1.05	24.31	24.50	1.138	2023/10/31	
50%RB										
Front Side	20175/1732.5	20M QPSK(50,49)	0.404	0.208	2.52	23.24	23.50	0.429	2023/10/31	
Back Side	20175/1732.5	20M QPSK(50,49)	0.596	0.375	0.49	23.24	23.50	0.633	2023/10/31	

NOTE: Body-Worn SAR test results of LTE Band 4

10mm										
1RB										
Front Side	20175/1732.5	20M QPSK(1,49)	0.678	0.373	-2.85	24.31	24.50	0.708	2023/10/31	
Back Side	20175/1732.5	20M QPSK(1,49)	1.100	0.637	-0.40	24.31	24.50	1.149	2023/10/31	18#
Left Side	20175/1732.5	20M QPSK(1,49)	0.333	0.185	3.98	24.31	24.50	0.348	2023/10/31	
Right Side	20175/1732.5	20M QPSK(1,49)	0.345	0.200	2.46	24.31	24.50	0.360	2023/10/31	
Bottom Side	20175/1732.5	20M QPSK(1,49)	0.570	0.330	-0.78	24.31	24.50	0.595	2023/10/31	
Back Side	20050/1720	20M QPSK(1,49)	0.986	0.568	-1.68	23.98	24.50	1.111	2023/10/31	
Back Side	20300/1745	20M QPSK(1,49)	1.031	0.593	2.05	24.37	24.50	1.062	2023/10/31	
BackSide Repeated	20175/1732.5	20M QPSK(1,49)	1.089	0.621	1.05	24.31	24.50	1.138	2023/10/31	
50%RB										
Front Side	20175/1732.5	20M QPSK(50,49)	0.404	0.208	2.52	23.24	23.50	0.429	2023/10/31	
Back Side	20175/1732.5	20M QPSK(50,49)	0.596	0.375	0.49	23.24	23.50	0.633	2023/10/31	
Left Side	20175/1732.5	20M QPSK(50,49)	0.174	0.105	4.07	23.24	23.50	0.185	2023/10/31	
Right Side	20175/1732.5	20M QPSK(50,49)	0.202	0.119	3.46	23.24	23.50	0.214	2023/10/31	
Bottom Side	20175/1732.5	20M QPSK(50,49)	0.332	0.166	3.31	23.24	23.50	0.352	2023/10/31	
100%RB										
Back Side	20175/1732.5	20M QPSK(100,0)	0.398	0.291	0.63	23.12	23.50	0.434	2023/10/31	

NOTE: Hotspot SAR test results of LTE Band 4

#### 10.1.7. SAR measurement Result of LTE Band 5

Test Position of Head	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
1RB										
Left Cheek	20525/836.5	10M QPSK(1,0)	0.228	0.161	0.63	23.80	24.50	0.268	2023/11/02	19#

Left Tilt 15 Degree	20525/836.5	10M QPSK(1,0)	0.120	0.081	-0.46	23.80	24.50	0.141	2023/11/02	
Right Cheek	20525/836.5	10M QPSK(1,0)	0.204	0.140	-0.75	23.80	24.50	0.240	2023/11/02	
Right Tilt 15 Degree	20525/836.5	10M QPSK(1,0)	0.103	0.071	0.81	23.80	24.50	0.121	2023/11/02	
50%RB										
Left Cheek	20525/836.5	10M QPSK(25,24)	0.124	0.091	3.37	22.82	23.00	0.129	2023/11/02	
Left Tilt 15 Degree	20525/836.5	10M QPSK(25,24)	0.062	0.045	3.26	22.82	23.00	0.065	2023/11/02	
Right Cheek	20525/836.5	10M QPSK(25,24)	0.103	0.082	-0.52	22.82	23.00	0.107	2023/11/02	
Right Tilt 15 Degree	20525/836.5	10M QPSK(25,24)	0.055	0.036	-2.10	22.82	23.00	0.057	2023/11/02	

NOTE: Head SAR test results of LTE Band 5

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift ( $\pm 5\%$ )	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date	Plot
			1g	10g						
1RB										
Front Side	20525/836.5	10M QPSK(1,0)	0.210	0.149	0.53	23.80	24.50	0.247	2023/11/02	
Back Side	20525/836.5	10M QPSK(1,0)	0.333	0.238	-0.28	23.80	24.50	0.391	2023/11/02	20#
50%RB										
Front Side	20525/836.5	10M QPSK(25,24)	0.117	0.079	-4.78	22.82	23.00	0.122	2023/11/02	
Back Side	20525/836.5	10M QPSK(25,24)	0.179	0.143	4.88	22.82	23.00	0.187	2023/11/02	

NOTE: Body-Worn SAR test results of LTE Band 5

Test Position of Hotspot with 10mm	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
1RB										
Front Side	20525/836.5	10M QPSK(1,0)	0.210	0.149	0.53	23.80	24.50	0.247	2023/11/02	
Back Side	20525/836.5	10M QPSK(1,0)	0.333	0.238	-0.28	23.80	24.50	0.391	2023/11/02	20#
Left Side	20525/836.5	10M QPSK(1,0)	0.087	0.069	0.29	23.80	24.50	0.102	2023/11/02	
Right Side	20525/836.5	10M QPSK(1,0)	0.102	0.073	2.32	23.80	24.50	0.120	2023/11/02	
Bottom Side	20525/836.5	10M QPSK(1,0)	0.180	0.127	0.54	23.80	24.50	0.211	2023/11/02	
50%RB										
Front Side	20525/836.5	10M QPSK(25,24)	0.117	0.079	-4.78	22.82	23.00	0.122	2023/11/02	
Back Side	20525/836.5	10M QPSK(25,24)	0.179	0.143	4.88	22.82	23.00	0.187	2023/11/02	
Left Side	20525/836.5	10M QPSK(25,24)	0.044	0.040	-1.17	22.82	23.00	0.046	2023/11/02	
Right Side	20525/836.5	10M QPSK(25,24)	0.060	0.052	3.38	22.82	23.00	0.063	2023/11/02	
Bottom Side	20525/836.5	10M QPSK(25,24)	0.092	0.066	2.08	22.82	23.00	0.096	2023/11/02	

NOTE: Hotspot SAR test results of LTE Band 5

#### 10.1.8. SAR measurement Result of LTE Band 7

Test Position of Head	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
1RB										
Left Cheek	21100/2535	20M QPSK(1,49)	0.076	0.046	1.26	23.11	23.50	0.083	2023/10/29	21#

Left Tilt 15 Degree	21100/2535	20M QPSK(1,49)	0.043	0.025	-0.07	23.11	23.50	0.047	2023/10/29	
Right Cheek	21100/2535	20M QPSK(1,49)	0.070	0.042	-1.45	23.11	23.50	0.077	2023/10/29	
Right Tilt 15 Degree	21100/2535	20M QPSK(1,49)	0.038	0.023	1.11	23.11	23.50	0.042	2023/10/29	
50%RB										
Left Cheek	21100/2535	20M QPSK(50,24)	0.040	0.026	-0.07	22.05	22.50	0.044	2023/10/29	
Left Tilt 15 Degree	21100/2535	20M QPSK(50,24)	0.024	0.015	2.88	22.05	22.50	0.027	2023/10/29	
Right Cheek	21100/2535	20M QPSK(50,24)	0.036	0.022	-4.08	22.05	22.50	0.040	2023/10/29	
Right Tilt 15 Degree	21100/2535	20M QPSK(50,24)	0.021	0.012	1.96	22.05	22.50	0.023	2023/10/29	

NOTE: Head SAR test results of LTE Band 7

Test Position of Body-Worn with 10mm	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
1RB										
Front Side	21100/2535	20M QPSK(1,49)	0.480	0.253	-3.33	23.11	23.50	0.525	2023/10/29	
Back Side	21100/2535	20M QPSK(1,49)	0.793	0.426	1.72	23.11	23.50	0.868	2023/10/29	
Back Side	20850/2510	20M QPSK(1,49)	0.813	0.443	-2.57	23.08	23.50	0.896	2023/10/29	22#
Back Side	21350/2560	20M QPSK(1,49)	0.685	0.374	1.24	23.29	23.50	0.719	2023/10/29	
BackSide Repeated	20850/2510	20M QPSK(1,49)	0.785	0.430	0.87	23.08	23.50	0.865	2023/10/29	
50%RB										
Front Side	21100/2535	20M QPSK(50,24)	0.267	0.140	-2.38	22.05	22.50	0.296	2023/10/29	
Back Side	21100/2535	20M QPSK(50,24)	0.428	0.215	-4.79	22.05	22.50	0.475	2023/10/29	

NOTE: Body-Worn SAR test results of LTE Band 7

Test	Test channel	Mode	SAR Value	Power	Conducted	Tune-up	Scaled	Date	Plot
------	--------------	------	-----------	-------	-----------	---------	--------	------	------

Position of Hotspot with 10mm	/Freq.		(W/kg)		Drift(%)	Power (dBm)	Power (dBm)	SAR 1-g (W/Kg)	
			1-g	10-g					
1RB									
Front Side	21100/2535	20M QPSK(1,49)	0.480	0.253	-3.33	23.11	23.50	0.525	2023/10/29
Back Side	21100/2535	20M QPSK(1,49)	0.793	0.426	1.72	23.11	23.50	0.868	2023/10/29
Left Side	21100/2535	20M QPSK(1,49)	0.252	0.131	-3.56	23.11	23.50	0.276	2023/10/29
Right Side	21100/2535	20M QPSK(1,49)	0.243	0.129	0.09	23.11	23.50	0.266	2023/10/29
Bottom Side	21100/2535	20M QPSK(1,49)	0.400	0.204	1.23	23.11	23.50	0.438	2023/10/29
Back Side	20850/2510	20M QPSK(1,49)	0.813	0.443	-2.57	23.08	23.50	0.896	2023/10/29
Back Side	21350/2560	20M QPSK(1,49)	0.685	0.374	1.24	23.29	23.50	0.719	2023/10/29
BackSide Repeated	20850/2510	20M QPSK(1,49)	0.785	0.430	0.87	23.08	23.50	0.865	2023/10/29
50%RB									
Front Side	21100/2535	20M QPSK(50,24)	0.267	0.140	-2.38	22.05	22.50	0.296	2023/10/29
Back Side	21100/2535	20M QPSK(50,24)	0.428	0.215	-4.79	22.05	22.50	0.475	2023/10/29
Left Side	21100/2535	20M QPSK(50,24)	0.133	0.068	2.13	22.05	22.50	0.148	2023/10/29
Right Side	21100/2535	20M QPSK(50,24)	0.129	0.068	3.24	22.05	22.50	0.143	2023/10/29
Bottom Side	21100/2535	20M QPSK(50,24)	0.201	0.113	-3.15	22.05	22.50	0.223	2023/10/29
100%RB									
Back Side	21100/2535	20M QPSK(100,0)	0.302	0.163	0.12	22.00	22.50	0.339	2023/10/29

NOTE: Hotspot SAR test results of LTE Band 7

#### 10.1.9. SAR measurement Result of LTE Band 12

Test	Test	Mode	SAR Value	Power	Conducted	Tune-up	Scaled	Date	Plot
------	------	------	-----------	-------	-----------	---------	--------	------	------

Position of Head	channel /Freq.		(W/kg)		Drift(%)	Power (dBm)	Power (dBm)	SAR 1-g (W/Kg)		
			1-g	10-g						
1RB										
Left Cheek	23095/707.5	10M QPSK(1,24)	0.331	0.246	0.04	23.51	24.00	0.371	2023/10/26	23#
Left Tilt 15 Degree	23095/707.5	10M QPSK(1,24)	0.191	0.138	-2.92	23.51	24.00	0.214	2023/10/26	
Right Cheek	23095/707.5	10M QPSK(1,24)	0.307	0.217	3.34	23.51	24.00	0.344	2023/10/26	
Right Tilt 15 Degree	23095/707.5	10M QPSK(1,24)	0.157	0.112	2.57	23.51	24.00	0.176	2023/10/26	
50%RB										
Left Cheek	23095/707.5	10M QPSK(25,0)	0.167	0.126	0.11	22.43	23.00	0.190	2023/10/26	
Left Tilt 15 Degree	23095/707.5	10M QPSK(25,0)	0.098	0.080	-4.43	22.43	23.00	0.112	2023/10/26	
Right Cheek	23095/707.5	10M QPSK(25,0)	0.163	0.128	-2.84	22.43	23.00	0.186	2023/10/26	
Right Tilt 15 Degree	23095/707.5	10M QPSK(25,0)	0.079	0.067	4.09	22.43	23.00	0.090	2023/10/26	

NOTE: Head SAR test results of LTE Band 12

Test Position of Body-Worn with 10mm	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
1RB										
Front Side	23095/707.5	10M QPSK(1,24)	0.240	0.171	3.36	23.51	24.00	0.269	2023/10/26	
Back Side	23095/707.5	10M QPSK(1,24)	0.387	0.290	-1.22	23.51	24.00	0.433	2023/10/26	24#
50%RB										
Front Side	23095/707.5	10M QPSK(25,0)	0.127	0.088	4.37	22.43	23.00	0.145	2023/10/26	
Back Side	23095/707.5	10M QPSK(25,0)	0.204	0.168	-4.45	22.43	23.00	0.233	2023/10/26	

NOTE: Body-Worn SAR test results of LTE Band 12

Test	Test	Mode	SAR Value	Power	Conducted	Tune-up	Scaled	Date	Plot
------	------	------	-----------	-------	-----------	---------	--------	------	------

Position of Hotspot with 10mm	channel /Freq.		(W/kg)		Drift(%)	Power (dBm)	Power (dBm)	SAR 1-g (W/Kg)	
			1-g	10-g					
1RB									
Front Side	23095/707.5	10M QPSK(1,24)	0.240	0.171	3.36	23.51	24.00	0.269	2023/10/26
Back Side	23095/707.5	10M QPSK(1,24)	0.387	0.290	-1.22	23.51	24.00	0.433	2023/10/26
Left Side	23095/707.5	10M QPSK(1,24)	0.129	0.096	-1.61	23.51	24.00	0.144	2023/10/26
Right Side	23095/707.5	10M QPSK(1,24)	0.125	0.094	0.08	23.51	24.00	0.140	2023/10/26
Bottom Side	23095/707.5	10M QPSK(1,24)	0.205	0.154	2.62	23.51	24.00	0.229	2023/10/26
50%RB									
Front Side	23095/707.5	10M QPSK(25,0)	0.127	0.088	4.37	22.43	23.00	0.145	2023/10/26
Back Side	23095/707.5	10M QPSK(25,0)	0.204	0.168	-4.45	22.43	23.00	0.233	2023/10/26
Left Side	23095/707.5	10M QPSK(25,0)	0.071	0.057	-3.02	22.43	23.00	0.081	2023/10/26
Right Side	23095/707.5	10M QPSK(25,0)	0.068	0.050	-0.63	22.43	23.00	0.078	2023/10/26
Bottom Side	23095/707.5	10M QPSK(25,0)	0.119	0.089	-3.93	22.43	23.00	0.136	2023/10/26

NOTE: Hotspot SAR test results of LTE Band 12

#### 10.1.10. SAR measurement Result of LTE Band 13

Test Position of Head	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
1RB										
Left Cheek	23230/782	10M QPSK(1,24)	0.369	0.270	-1.42	23.58	24.00	0.406	2023/10/26	25#
Left Tilt	23230/782	10M QPSK(1,24)	0.201	0.144	1.43	23.58	24.00	0.221	2023/10/26	

15 Degree										
Right Cheek	23230/782	10M QPSK(1,24)	0.335	0.238	0.26	23.58	24.00	0.369	2023/10/26	
Right Tilt 15 Degree	23230/782	10M QPSK(1,24)	0.154	0.107	3.33	23.58	24.00	0.170	2023/10/26	

## 50%RB

Left Cheek	23230/782	10M QPSK(25,24)	0.219	0.145	4.81	22.67	23.00	0.236	2023/10/26	
Left Tilt 15 Degree	23230/782	10M QPSK(25,24)	0.106	0.085	2.28	22.67	23.00	0.114	2023/10/26	
Right Cheek	23230/782	10M QPSK(25,24)	0.179	0.138	-2.45	22.67	23.00	0.193	2023/10/26	
Right Tilt 15 Degree	23230/782	10M QPSK(25,24)	0.080	0.056	1.31	22.67	23.00	0.086	2023/10/26	

NOTE: Head SAR test results of LTE Band 13

Test Position of Body-Worn with 10mm	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
1RB										
Front Side	23230/782	10M QPSK(1,24)	0.342	0.239	-2.82	23.58	24.00	0.377	2023/10/26	
Back Side	23230/782	10M QPSK(1,24)	0.539	0.392	-0.98	23.58	24.00	0.594	2023/10/26	26#
50%RB										
Front Side	23230/782	10M QPSK(25,24)	0.197	0.120	3.80	22.67	23.00	0.213	2023/10/26	
Back Side	23230/782	10M QPSK(25,24)	0.283	0.202	3.19	22.67	23.00	0.305	2023/10/26	

NOTE: Body-Worn SAR test results of LTE Band 13

Test Position of Hotspot with 10mm	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
1RB										
Front	23230/782	10M QPSK(1,24)	0.342	0.239	-2.82	23.58	24.00	0.377	2023/10/26	

Side										
Back Side	23230/782	10M QPSK(1,24)	0.539	0.392	-0.98	23.58	24.00	0.594	2023/10/26	26#
Left Side	23230/782	10M QPSK(1,24)	0.168	0.122	2.80	23.58	24.00	0.185	2023/10/26	
Right Side	23230/782	10M QPSK(1,24)	0.162	0.114	-1.91	23.58	24.00	0.178	2023/10/26	
Bottom Side	23230/782	10M QPSK(1,24)	0.270	0.189	-0.36	23.58	24.00	0.297	2023/10/26	
<b>50%RB</b>										
Front Side	23230/782	10M QPSK(25,24)	0.197	0.120	3.80	22.67	23.00	0.213	2023/10/26	
Back Side	23230/782	10M QPSK(25,24)	0.283	0.202	3.19	22.67	23.00	0.305	2023/10/26	
Left Side	23230/782	10M QPSK(25,24)	0.095	0.066	-3.40	22.67	23.00	0.102	2023/10/26	
Right Side	23230/782	10M QPSK(25,24)	0.089	0.058	-0.94	22.67	23.00	0.096	2023/10/26	
Bottom Side	23230/782	10M QPSK(25,24)	0.135	0.096	2.28	22.67	23.00	0.146	2023/10/26	

NOTE: Hotspot SAR test results of LTE Band 13

#### 10.1.11. SAR measurement Result of LTE Band 17

Test Position of Head	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
<b>1RB</b>										
Left Cheek	23790/710	10M QPSK(1,0)	0.354	0.270	1.27	23.53	24.00	0.394	2023/10/26	27#
Left Tilt 15 Degree	23790/710	10M QPSK(1,0)	0.179	0.132	3.47	23.53	24.00	0.199	2023/10/26	
Right Cheek	23790/710	10M QPSK(1,0)	0.314	0.232	3.42	23.53	24.00	0.350	2023/10/26	
Right Tilt 15 Degree	23790/710	10M QPSK(1,0)	0.164	0.120	1.32	23.53	24.00	0.183	2023/10/26	

50%RB									
Left Cheek	23790/710	10M QPSK(25,0)	0.195	0.158	4.69	22.43	22.50	0.198	2023/10/26
Left Tilt 15 Degree	23790/710	10M QPSK(25,0)	0.097	0.078	0.85	22.43	22.50	0.099	2023/10/26
Right Cheek	23790/710	10M QPSK(25,0)	0.181	0.128	4.89	22.43	22.50	0.184	2023/10/26
Right Tilt 15 Degree	23790/710	10M QPSK(25,0)	0.089	0.069	-3.93	22.43	22.50	0.090	2023/10/26

NOTE: Head SAR test results of LTE Band 17

Test Position of Body-Worn with 10mm	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
1RB										
Front Side	23790/710	10M QPSK(1,0)	0.312	0.229	-3.35	23.53	24.00	0.348	2023/10/26	
Back Side	23790/710	10M QPSK(1,0)	0.477	0.358	0.77	23.53	24.00	0.532	2023/10/26	28#

### 50%RB

Front Side	23790/710	10M QPSK(25,0)	0.161	0.120	4.50	22.43	22.50	0.164	2023/10/26	
Back Side	23790/710	10M QPSK(25,0)	0.276	0.208	3.22	22.43	22.50	0.280	2023/10/26	

NOTE: Body-Worn SAR test results of LTE Band 17

Test Position of Hotspot with 10mm	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
1RB										
Front Side	23790/710	10M QPSK(1,0)	0.312	0.229	-3.35	23.53	24.00	0.348	2023/10/26	
Back Side	23790/710	10M QPSK(1,0)	0.477	0.358	0.77	23.53	24.00	0.532	2023/10/26	28#

### 1RB

Left Side	23790/710	10M QPSK(1,0)	0.147	0.106	2.50	23.53	24.00	0.164	2023/10/26	
Right Side	23790/710	10M QPSK(1,0)	0.150	0.113	-1.86	23.53	24.00	0.167	2023/10/26	

Bottom Side	23790/710	10M QPSK(1,0)	0.255	0.182	2.15	23.53	24.00	0.284	2023/10/26	
50%RB										
Front Side	23790/710	10M QPSK(25,0)	0.161	0.120	4.50	22.43	22.50	0.164	2023/10/26	
Back Side	23790/710	10M QPSK(25,0)	0.276	0.208	3.22	22.43	22.50	0.280	2023/10/26	
Left Side	23790/710	10M QPSK(25,0)	0.079	0.063	1.14	22.43	22.50	0.080	2023/10/26	
Right Side	23790/710	10M QPSK(25,0)	0.078	0.059	-0.33	22.43	22.50	0.079	2023/10/26	
Bottom Side	23790/710	10M QPSK(25,0)	0.134	0.097	0.20	22.43	22.50	0.136	2023/10/26	

NOTE: Hotspot SAR test results of LTE Band 17

#### 10.1.12. SAR measurement Result of LTE Band 66

Test Position of Head	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
1RB										
Left Cheek	132322/1745	20M QPSK(1,49)	0.179	0.116	3.84	25.12	25.50	0.195	2023/10/31	31#
Left Tilt 15 Degree	132322/1745	20M QPSK(1,49)	0.102	0.064	1.60	25.12	25.50	0.111	2023/10/31	
Right Cheek	132322/1745	20M QPSK(1,49)	0.155	0.097	-3.02	25.12	25.50	0.169	2023/10/31	
Right Tilt 15 Degree	132322/1745	20M QPSK(1,49)	0.076	0.048	-3.29	25.12	25.50	0.083	2023/10/31	
50%RB										
Left Cheek	132322/1745	20M QPSK(50,24)	0.094	0.062	-4.82	24.02	24.50	0.105	2023/10/31	
Left Tilt 15 Degree	132322/1745	20M QPSK(50,24)	0.053	0.033	-0.79	24.02	24.50	0.059	2023/10/31	
Right	132322/1745	20M QPSK(50,24)	0.084	0.053	-4.48	24.02	24.50	0.094	2023/10/31	

Cheek									
Right Tilt 15 Degree	132322/1745	20M QPSK(50,24)	0.044	0.026	-0.44	24.02	24.50	0.049	2023/10/31

NOTE: Head SAR test results of LTE Band 66

Test Position of Body-Worn with 10mm	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
1RB										
Front Side	132322/1745	20M QPSK(1,49)	0.354	0.200	-1.51	25.12	25.50	0.386	2023/10/31	
Back Side	132322/1745	20M QPSK(1,49)	0.553	0.316	-0.50	25.12	25.50	0.604	2023/10/31	32#
50%RB										
Front Side	132322/1745	20M QPSK(50,24)	0.210	0.108	-0.72	24.02	24.50	0.235	2023/10/31	
Back Side	132322/1745	20M QPSK(50,24)	0.327	0.178	-1.89	24.02	24.50	0.365	2023/10/31	

NOTE: Body-Worn SAR test results of LTE Band 66

Test Position of Hotspot with 10mm	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
1RB										
Front Side	132322/1745	20M QPSK(1,49)	0.354	0.200	-1.51	25.12	25.50	0.386	2023/10/31	
Back Side	132322/1745	20M QPSK(1,49)	0.553	0.316	-0.50	25.12	25.50	0.604	2023/10/31	32#
Left Side	132322/1745	20M QPSK(1,49)	0.177	0.099	2.58	25.12	25.50	0.193	2023/10/31	
Right Side	132322/1745	20M QPSK(1,49)	0.180	0.101	-0.55	25.12	25.50	0.196	2023/10/31	
Bottom Side	132322/1745	20M QPSK(1,49)	0.300	0.170	-1.83	25.12	25.50	0.327	2023/10/31	
50%RB										
Front Side	132322/1745	20M QPSK(50,24)	0.210	0.108	-0.72	24.02	24.50	0.235	2023/10/31	
Back Side	132322/1745	20M QPSK(50,24)	0.327	0.178	-1.89	24.02	24.50	0.365	2023/10/31	

Left Side	132322/1745	20M QPSK(50,24)	0.106	0.053	-1.96	24.02	24.50	0.118	2023/10/31	
Right Side	132322/1745	20M QPSK(50,24)	0.102	0.056	3.71	24.02	24.50	0.114	2023/10/31	
Bottom Side	132322/1745	20M QPSK(50,24)	0.175	0.102	0.60	24.02	24.50	0.195	2023/10/31	

NOTE: Hotspot SAR test results of LTE Band 66

#### 10.1.13. SAR measurement Result of LTE Band 71

Test Position of Head	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
1RB										
Left Cheek	133322/683	20M QPSK(1,49)	0.394	0.299	0.60	23.84	24.00	0.409	2023/10/26	29#
Left Tilt 15 Degree	133322/683	20M QPSK(1,49)	0.236	0.177	2.42	23.84	24.00	0.245	2023/10/26	
Right Cheek	133322/683	20M QPSK(1,49)	0.355	0.264	3.95	23.84	24.00	0.368	2023/10/26	
Right Tilt 15 Degree	133322/683	20M QPSK(1,49)	0.184	0.135	-3.45	23.84	24.00	0.191	2023/10/26	
50%RB										
Left Cheek	133322/683	20M QPSK(50,24)	0.222	0.175	-2.31	22.58	23.00	0.245	2023/10/26	
Left Tilt 15 Degree	133322/683	20M QPSK(50,24)	0.130	0.102	4.94	22.58	23.00	0.143	2023/10/26	
Right Cheek	133322/683	20M QPSK(50,24)	0.198	0.142	-3.31	22.58	23.00	0.218	2023/10/26	
Right Tilt 15 Degree	133322/683	20M QPSK(50,24)	0.109	0.068	3.09	22.58	23.00	0.120	2023/10/26	

NOTE: Head SAR test results of LTE Band 71

Test	Test	Mode	SAR Value	Power	Conducted	Tune-up	Scaled	Date	Plot
------	------	------	-----------	-------	-----------	---------	--------	------	------

Position of Body-Worn with 10mm	channel /Freq.		(W/kg)		Drift(%)	Power (dBm)	Power (dBm)	SAR 1-g (W/Kg)		
			1-g	10-g						
1RB										
Front Side	133322/683	20M QPSK(1,49)	0.132	0.082	3.07	23.84	24.00	0.137	2023/10/26	
Back Side	133322/683	20M QPSK(1,49)	0.202	0.132	-1.21	23.84	24.00	0.210	2023/10/26	30#
50%RB										
Front Side	133322/683	20M QPSK(50,24)	0.073	0.046	4.08	22.58	23.00	0.080	2023/10/26	
Back Side	133322/683	20M QPSK(50,24)	0.110	0.075	4.18	22.58	23.00	0.121	2023/10/26	

NOTE: Body-Worn SAR test results of LTE Band 71

Test Position of Hotspot with 10mm	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
1RB										
Front Side	133322/683	20M QPSK(1,49)	0.132	0.082	3.07	23.84	24.00	0.137	2023/10/26	
Back Side	133322/683	20M QPSK(1,49)	0.202	0.132	-1.21	23.84	24.00	0.210	2023/10/26	30#
Left Side	133322/683	20M QPSK(1,49)	0.072	0.045	0.86	23.84	24.00	0.075	2023/10/26	
Right Side	133322/683	20M QPSK(1,49)	0.069	0.045	1.27	23.84	24.00	0.072	2023/10/26	
Bottom Side	133322/683	20M QPSK(1,49)	0.120	0.077	-1.88	23.84	24.00	0.125	2023/10/26	
50%RB										
Front Side	133322/683	20M QPSK(50,24)	0.073	0.046	4.08	22.58	23.00	0.080	2023/10/26	
Back Side	133322/683	20M QPSK(50,24)	0.110	0.075	4.18	22.58	23.00	0.121	2023/10/26	
Left Side	133322/683	20M QPSK(50,24)	0.043	0.027	2.32	22.58	23.00	0.047	2023/10/26	
Right Side	133322/683	20M QPSK(50,24)	0.039	0.026	0.18	22.58	23.00	0.043	2023/10/26	
Bottom Side	133322/683	20M QPSK(50,24)	0.065	0.043	-0.79	22.58	23.00	0.072	2023/10/26	

NOTE: Hotspot SAR test results of LTE Band 71

#### 10.1.14. SAR measurement Result of WLAN2.4G

Test Position of Head	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
Left Cheek	1/2412	802.11b	0.075	0.045	-0.25	14.25	14.50	0.079	2023/10/28	13#
Left Tilt 15 Degree	1/2412	802.11b	0.039	0.023	3.44	14.25	14.50	0.041	2023/10/28	
Right Cheek	1/2412	802.11b	0.067	0.039	-2.24	14.25	14.50	0.071	2023/10/28	
Right Tilt 15 Degree	1/2412	802.11b	0.035	0.020	0.19	14.25	14.50	0.037	2023/10/28	

NOTE: Head SAR test results of WLAN2.4G

Test Position of Body-Worn with 10mm	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
Front Side	1/2412	802.11b	0.042	0.027	0.73	14.25	14.50	0.044	2023/10/28	
Back Side	1/2412	802.11b	0.050	0.033	1.14	14.25	14.50	0.053	2023/10/28	14#

NOTE: Body-worn SAR test results of WLAN2.4G

Test Position of Hotspot with 10mm	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
Front Side	1/2412	802.11b	0.042	0.027	0.73	14.25	14.50	0.044	2023/10/28	
Back Side	1/2412	802.11b	0.050	0.033	1.14	14.25	14.50	0.053	2023/10/28	14#
Left Side	1/2412	802.11b	0.015	0.013	-0.64	14.25	14.50	0.016	2023/10/28	
Top Side	1/2412	802.11b	0.024	0.016	-3.51	14.25	14.50	0.025	2023/10/28	

NOTE: Hotspot SAR test results of WLAN2.4G

### 10.1.15. SAR measurement Result of WLAN5.2G

Test Position of Head	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
Left Cheek	48/5240	802.11n HT20	0.181	0.108	2.08	12.82	13.00	0.189	2023/11/01	9#
Left Tilt 15 Degree	48/5240	802.11n HT20	0.103	0.060	3.00	12.82	13.00	0.107	2023/11/01	
Right Cheek	48/5240	802.11n HT20	0.161	0.092	-2.71	12.82	13.00	0.168	2023/11/01	
Right Tilt 15 Degree	48/5240	802.11n HT20	0.086	0.050	1.21	12.82	13.00	0.090	2023/11/01	

NOTE: Head SAR test results of WLAN5.2G

Test Position of Body-Worn with 10mm	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
Front Side	48/5240	802.11n HT20	0.120	0.063	-1.70	12.82	13.00	0.125	2023/11/01	
Back Side	48/5240	802.11n HT20	0.186	0.103	1.01	12.82	13.00	0.194	2023/11/01	11#

NOTE: Body-worn SAR test results of WLAN5.2G

Test Position of Hotspot with 10mm	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
Front Side	48/5240	802.11n HT20	0.120	0.063	-1.70	12.82	13.00	0.125	2023/11/01	
Back Side	48/5240	802.11n HT20	0.186	0.103	1.01	12.82	13.00	0.194	2023/11/01	11#
Left Side	48/5240	802.11n HT20	0.063	0.033	-3.28	12.82	13.00	0.066	2023/11/01	
Top	48/5240	802.11n HT20	0.066	0.035	1.38	12.82	13.00	0.069	2023/11/01	

Side									
------	--	--	--	--	--	--	--	--	--

NOTE: Hotspot SAR test results of WLAN5.2G

#### 10.1.16. SAR measurement Result of WLAN5.8G

Test Position of Head	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
Left Cheek	159/5795	802.11n HT40	0.156	0.092	3.48	13.65	14.00	0.169	2023/11/03	10#
Left Tilt 15 Degree	159/5795	802.11n HT40	0.083	0.048	-2.57	13.65	14.00	0.090	2023/11/03	
Right Cheek	159/5795	802.11n HT40	0.146	0.084	-1.87	13.65	14.00	0.158	2023/11/03	
Right Tilt 15 Degree	159/5795	802.11n HT40	0.069	0.039	2.31	13.65	14.00	0.075	2023/11/03	

NOTE: Head SAR test results of WLAN5.8G

Test Position of Body-Worn with 10mm	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
Front Side	159/5795	802.11n HT40	0.108	0.071	3.92	13.65	14.00	0.117	2023/11/03	
Back Side	159/5795	802.11n HT40	0.139	0.093	-0.81	13.65	14.00	0.151	2023/11/03	12#

NOTE: Body-worn SAR test results of WLAN5.8G

Test Position of Hotspot with 10mm	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
Front Side	159/5795	802.11n HT40	0.108	0.071	3.92	13.65	14.00	0.117	2023/11/03	
Back Side	159/5795	802.11n HT40	0.139	0.093	-0.81	13.65	14.00	0.151	2023/11/03	12#

Left Side	159/5795	802.11n HT40	0.051	0.032	1.74	13.65	14.00	0.055	2023/11/03	
Top Side	159/5795	802.11n HT40	0.048	0.030	0.34	13.65	14.00	0.052	2023/11/03	

NOTE: Hotspot SAR test results of WLAN5.8G

## 10.2. Simultaneous Transmission Analysis

Per KDB 447498 D01, simultaneous transmission SAR is compliant if,

- 1) Scalar SAR summation < 1.6W/kg.
- 2) SPLSR =  $(\text{SAR}_1 + \text{SAR}_2)^{1.5} / (\text{min. separation distance, mm})$ , and the peak separation distance is determined from the square root of  $[(x_1-x_2)^2 + (y_1-y_2)^2 + (z_1-z_2)^2]$ , where  $(x_1, y_1, z_1)$  and  $(x_2, y_2, z_2)$  are the coordinates of the extrapolated peak SAR locations in the zoom scan. If  $\text{SPLSR} \leq 0.04$ , simultaneously transmission SAR measurement is not necessary.

Test Position		Scaled SAR <sub>MAX</sub>		$\Sigma 1\text{-g SAR}$ (W/Kg)	SPLSR	Remark
		WWAN	DTS			
Head	Left Cheek	0.543	0.079	0.622	N/A	N/A
	Left Tilt 15 Degree	0.295	0.041	0.336	N/A	N/A
	Right Cheek	0.508	0.071	0.579	N/A	N/A
	Right Tilt 15 Degree	0.247	0.037	0.284	N/A	N/A
Body-Worn	Front Side	0.708	0.044	0.752	N/A	N/A
	Back Side	1.149	0.053	1.202	N/A	N/A
Hotspot	Front Side	0.708	0.044	0.752	N/A	N/A
	Back Side	1.149	0.053	1.202	N/A	N/A
	Left Side	0.348	0.016	0.364	N/A	N/A
	Right Side	0.360	N/A	0.360	N/A	N/A
	Top Side	N/A	0.025	0.025	N/A	N/A
	Bottom Side	0.595	N/A	0.595	N/A	N/A

Test Position		Scaled SAR <sub>MAX</sub>		$\Sigma 1\text{-g SAR}$ (W/Kg)	SPLSR	Remark
		WWAN	NII			
Head	Left Cheek	0.543	0.189	0.732	N/A	N/A
	Left Tilt 15 Degree	0.295	0.107	0.402	N/A	N/A

	Right Cheek	0.508	0.168	0.676	N/A	N/A
	Right Tilt 15 Degree	0.247	0.090	0.337	N/A	N/A
Body-Worn	Front Side	0.708	0.125	0.833	N/A	N/A
	Back Side	1.149	0.194	1.343	N/A	N/A
Hotspot	Front Side	0.708	0.125	0.833	N/A	N/A
	Back Side	1.149	0.194	1.343	N/A	N/A
	Left Side	0.348	0.066	0.414	N/A	N/A
	Right Side	0.360	N/A	0.360	N/A	N/A
	Top Side	N/A	0.069	0.069	N/A	N/A
	Bottom Side	0.595	N/A	0.595	N/A	N/A

Test Position		Scaled SAR <sub>MAX</sub>		$\Sigma$ 1-g SAR (W/Kg)	SPLSR	Remark
		WWAN	DSS			
Head	Left Cheek	0.543	0.149	0.692	N/A	N/A
	Left Tilt 15 Degree	0.295	0.149	0.444	N/A	N/A
	Right Cheek	0.508	0.149	0.657	N/A	N/A
	Right Tilt 15 Degree	0.247	0.149	0.396	N/A	N/A
Body-Worn	Front Side	0.708	0.074	0.782	N/A	N/A
	Back Side	1.149	0.074	1.223	N/A	N/A
Hotspot	Front Side	0.708	0.074	0.782	N/A	N/A
	Back Side	1.149	0.074	1.223	N/A	N/A
	Left Side	0.348	0.074	0.422	N/A	N/A
	Right Side	0.360	N/A	0.360	N/A	N/A
	Top Side	N/A	0.074	0.074	N/A	N/A
	Bottom Side	0.595	N/A	0.595	N/A	N/A

## 1. Appendix A. Photo documentation

Refer to appendix Test Setup photo---SAR

## 2. Appendix B. System Check Plots

### Table of contents

**MEASUREMENT 1 System Performance Check - 750MHz**

**MEASUREMENT 2 System Performance Check - 835MHz**

**MEASUREMENT 3 System Performance Check - 1800MHz**

**MEASUREMENT 4 System Performance Check - 1900MHz**

**MEASUREMENT 5 System Performance Check - 2450MHz**

**MEASUREMENT 6 System Performance Check - 2600MHz**

**MEASUREMENT 7 System Performance Check - 5200MHz**

**MEASUREMENT 8 System Performance Check - 5800MHz**

# MEASUREMENT 1


Date of measurement: 26/10/2023

## A. Experimental conditions.

<u>Area Scan</u>	<u><math>dx=15\text{mm}</math> <math>dy=15\text{mm}</math>, <math>h= 5.00 \text{ mm}</math></u>
<u>ZoomScan</u>	<u><math>5\times 5\times 7, dx=8\text{mm}</math> <math>dy=8\text{mm}</math> <math>dz=5\text{mm}</math></u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW750</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.37</u>

## B. SAR Measurement Results



<b>Frequency (MHz)</b>	750.000000
<b>Relative permittivity (real part)</b>	42.327147
<b>Relative permittivity (imaginary part)</b>	22.234427
<b>Conductivity (S/m)</b>	0.926434
<b>Variation (%)</b>	2.730000

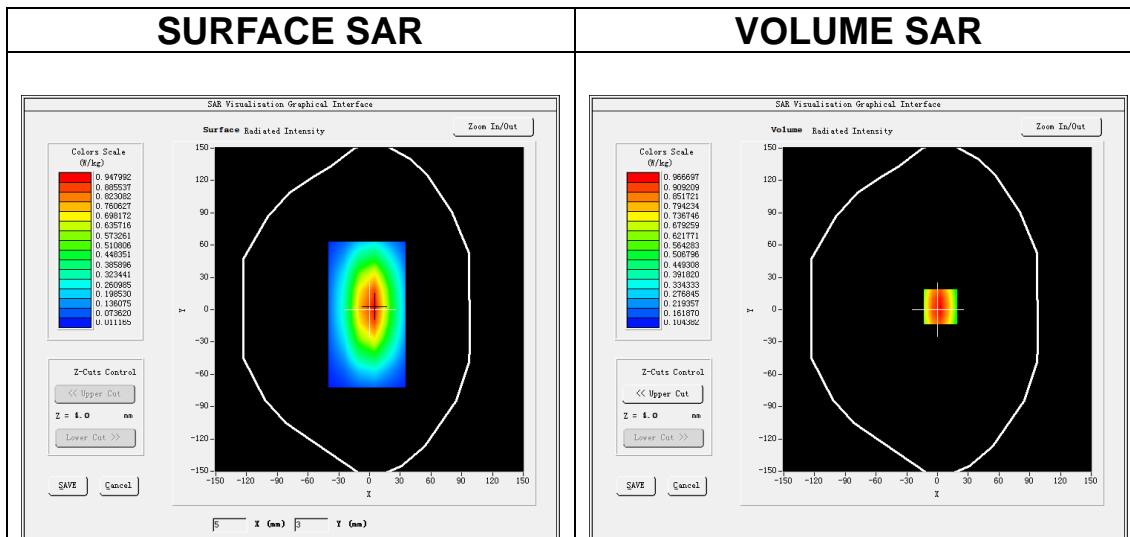

**Maximum location: X=3.00, Y=3.00**

**SAR Peak: 1.30 W/kg**

<b>SAR 10g (W/Kg)</b>	0.522332
<b>SAR 1g (W/Kg)</b>	0.793321

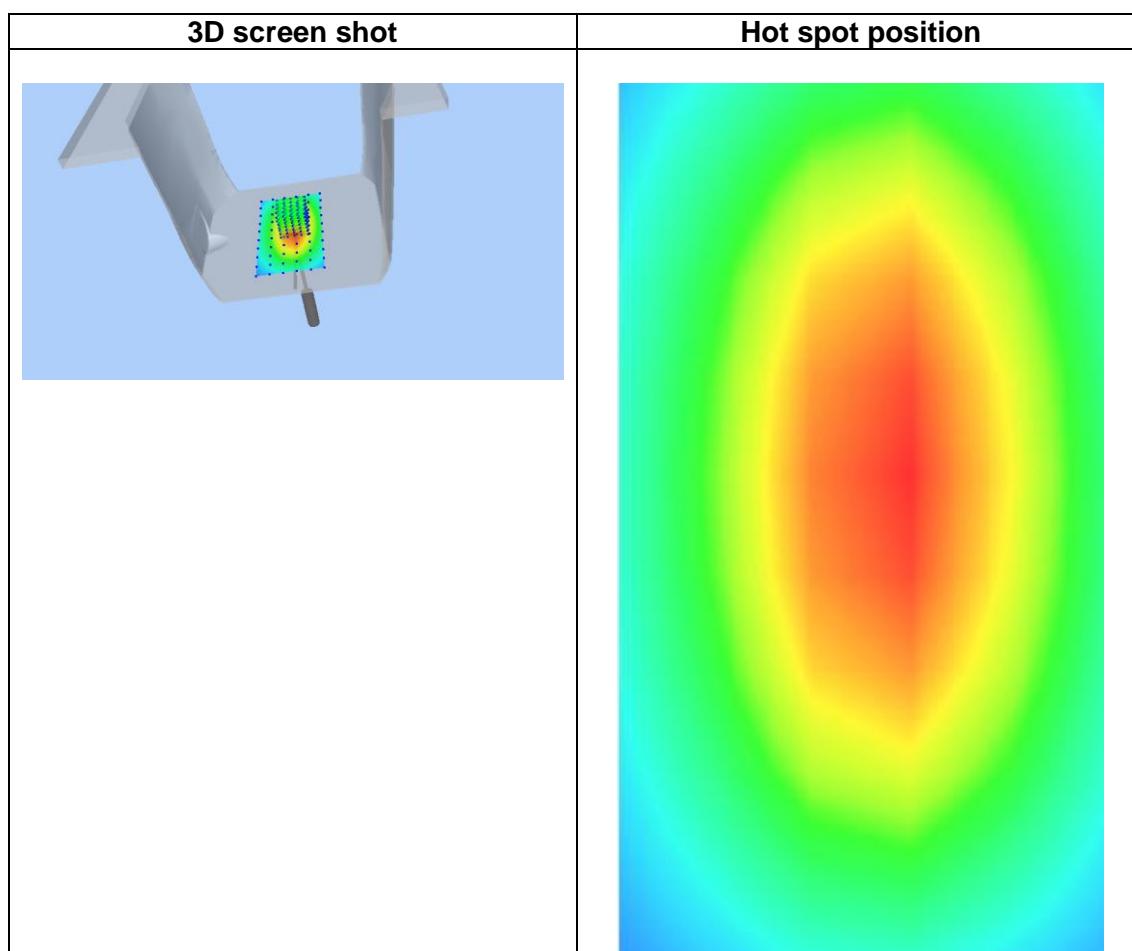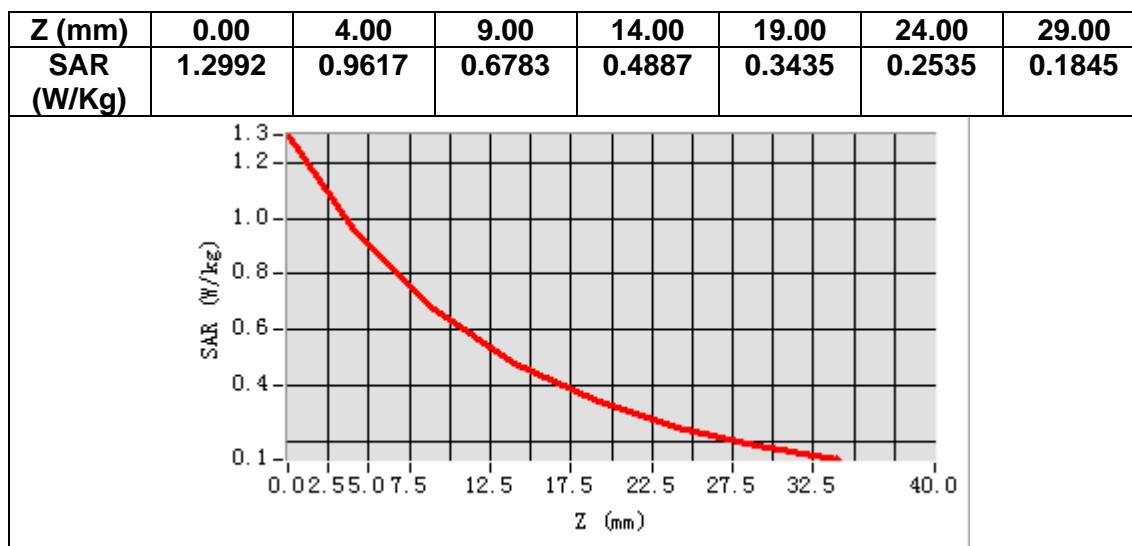

## MEASUREMENT 2


Date of measurement: 2/11/2023

### A. Experimental conditions.

<u>Area Scan</u>	<u><math>dx=15\text{mm}</math> <math>dy=15\text{mm}</math>, <math>h= 5.00 \text{ mm}</math></u>
<u>ZoomScan</u>	<u><math>5\times 5\times 7, dx=8\text{mm}</math> <math>dy=8\text{mm}</math> <math>dz=5\text{mm}</math></u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW835</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.32</u>



### B. SAR Measurement Results

<b>Frequency (MHz)</b>	835.000000
<b>Relative permittivity (real part)</b>	41.421516
<b>Relative permittivity (imaginary part)</b>	19.303838
<b>Conductivity (S/m)</b>	0.895484
<b>Variation (%)</b>	-2.720000

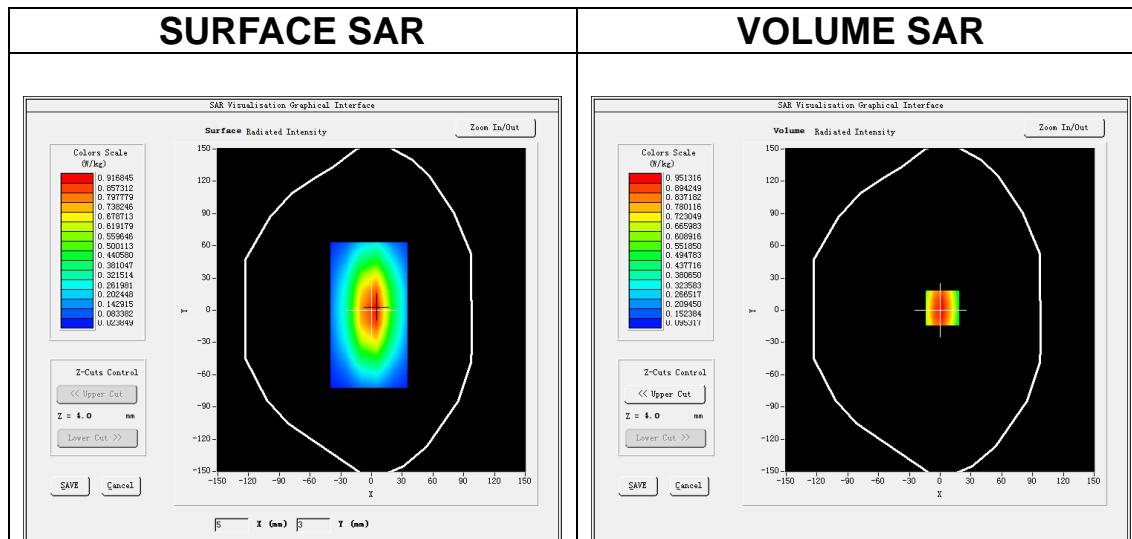

**Maximum location: X=2.00, Y=2.00**  
**SAR Peak: 1.29 W/kg**

<b>SAR 10g (W/Kg)</b>	0.645333
<b>SAR 1g (W/Kg)</b>	1.029172

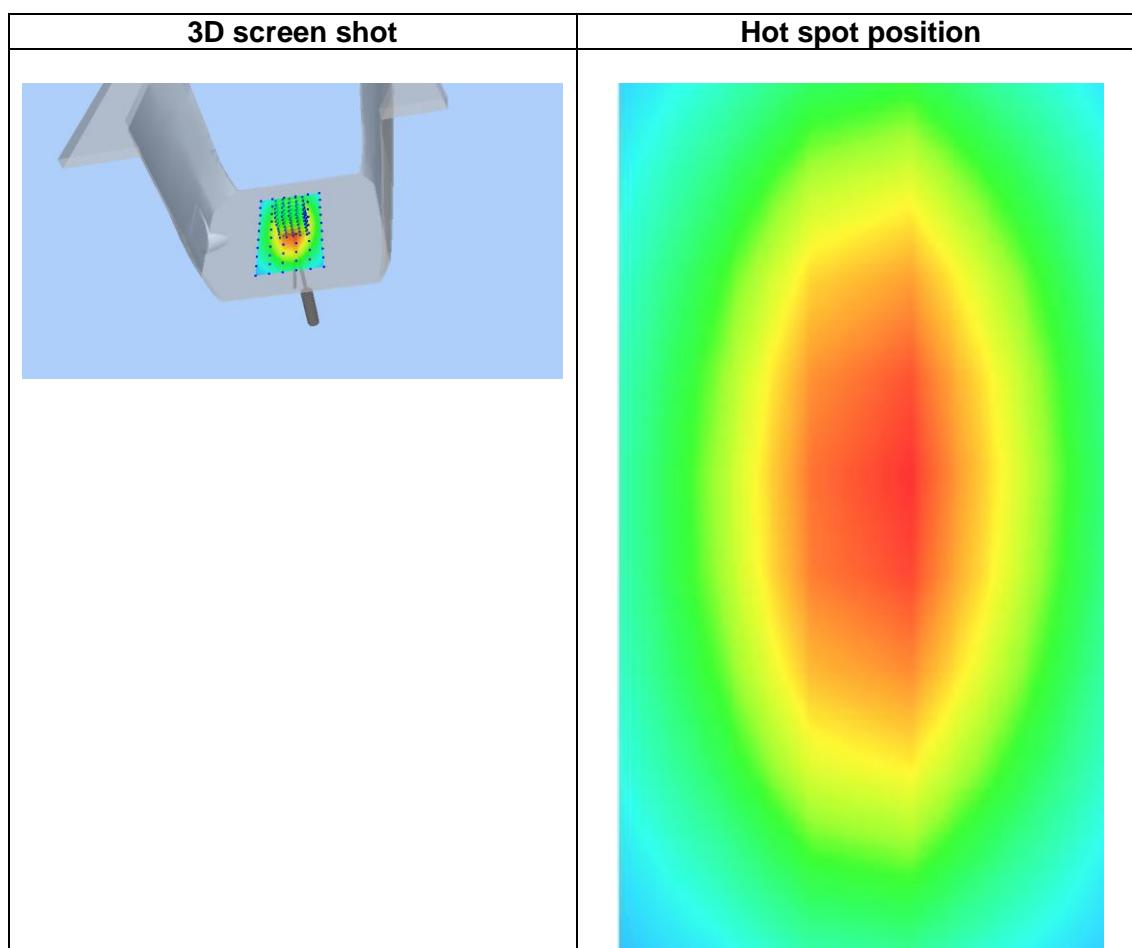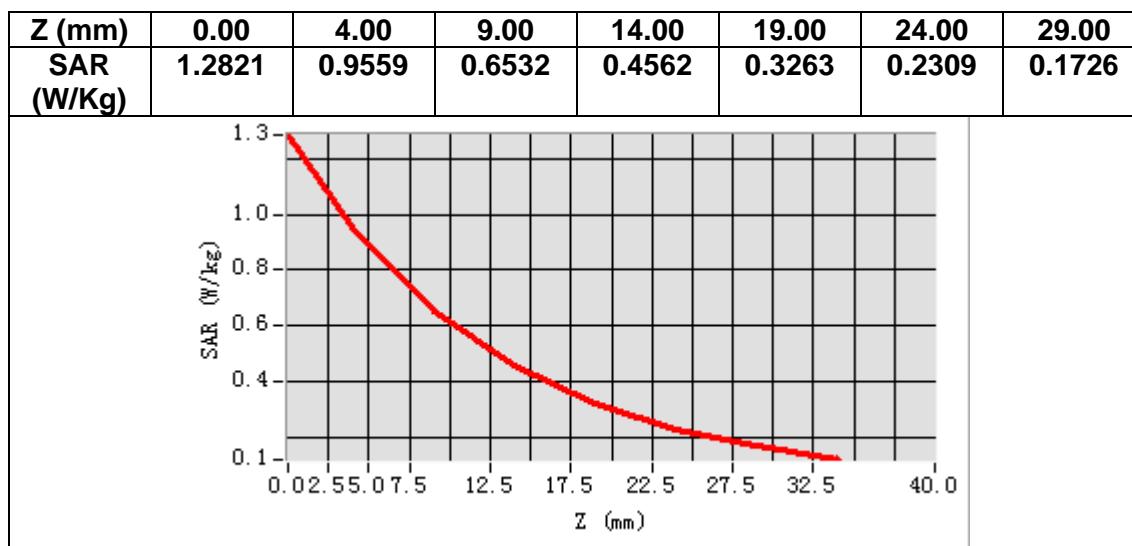

## MEASUREMENT 3


Date of measurement: 31/10/2023

### A. Experimental conditions.

<u>Area Scan</u>	<u><math>dx=15\text{mm}</math> <math>dy=15\text{mm}</math>, <math>h= 5.00 \text{ mm}</math></u>
<u>ZoomScan</u>	<u><math>5\times 5\times 7</math>, <math>dx=8\text{mm}</math> <math>dy=8\text{mm}</math> <math>dz=5\text{mm}</math></u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW1800</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.45</u>



### B. SAR Measurement Results

<b>Frequency (MHz)</b>	1800.000000
<b>Relative permittivity (real part)</b>	40.056022
<b>Relative permittivity (imaginary part)</b>	14.318645
<b>Conductivity (S/m)</b>	1.431865
<b>Variation (%)</b>	2.980000

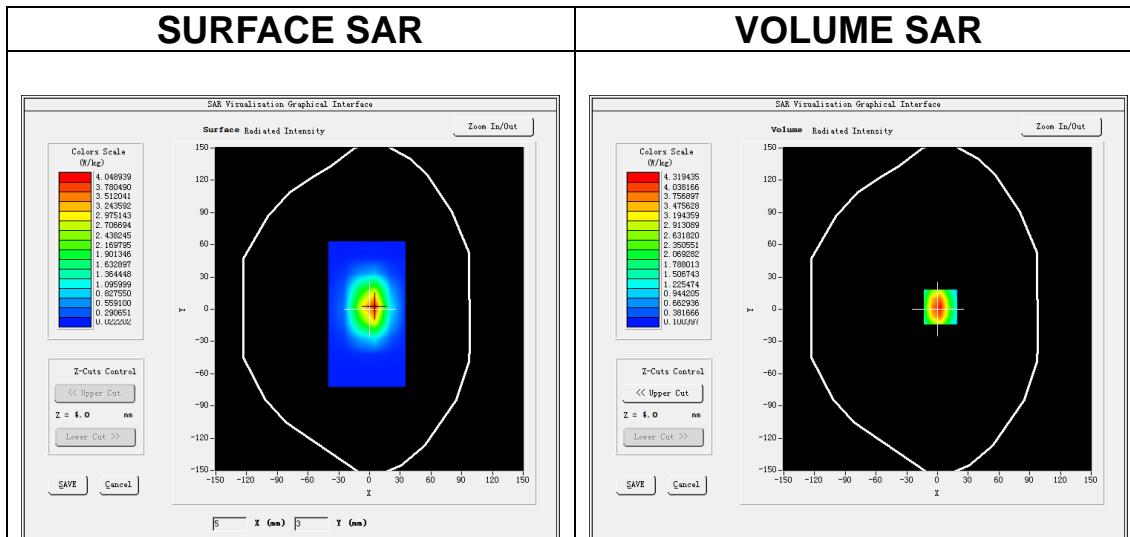

**Maximum location: X=3.00, Y=2.00**  
**SAR Peak: 6.82 W/kg**

<b>SAR 10g (W/Kg)</b>	2.077307
<b>SAR 1g (W/Kg)</b>	4.003066

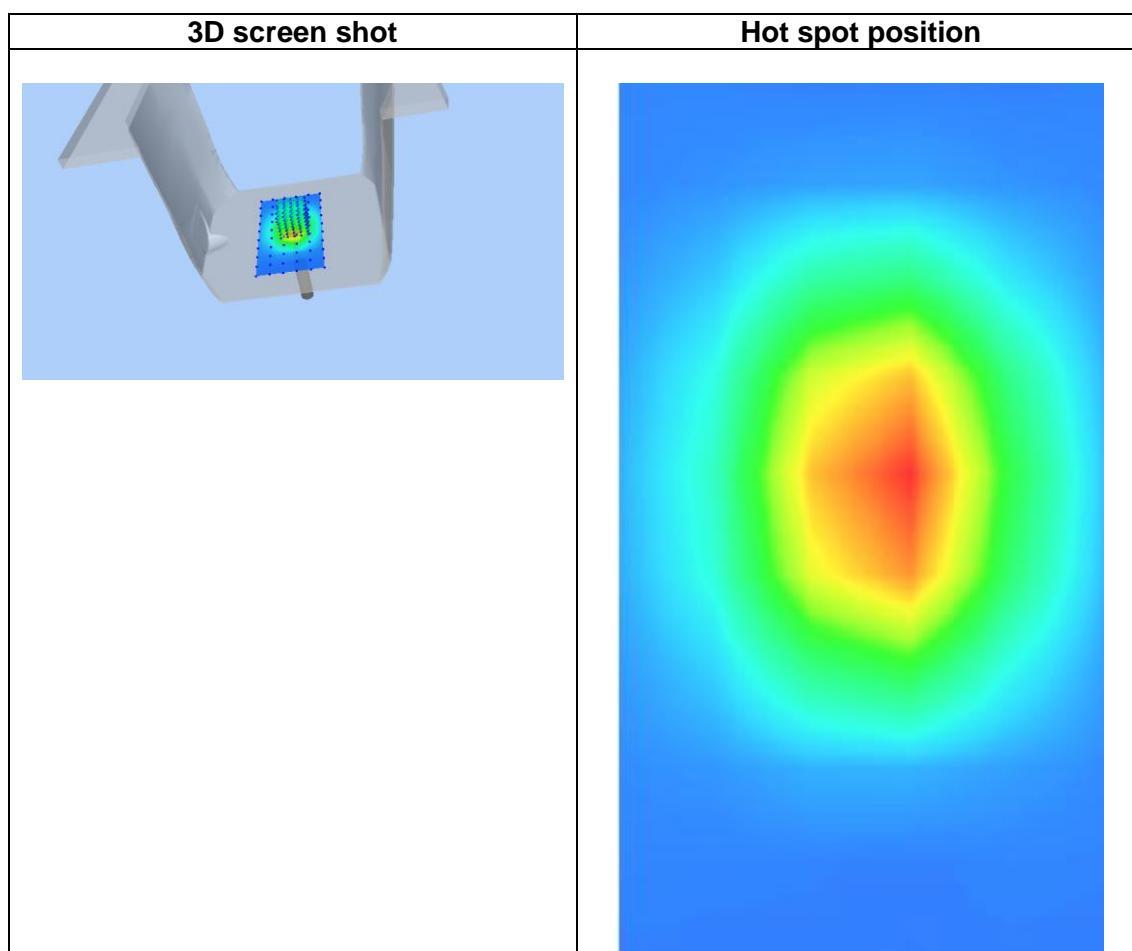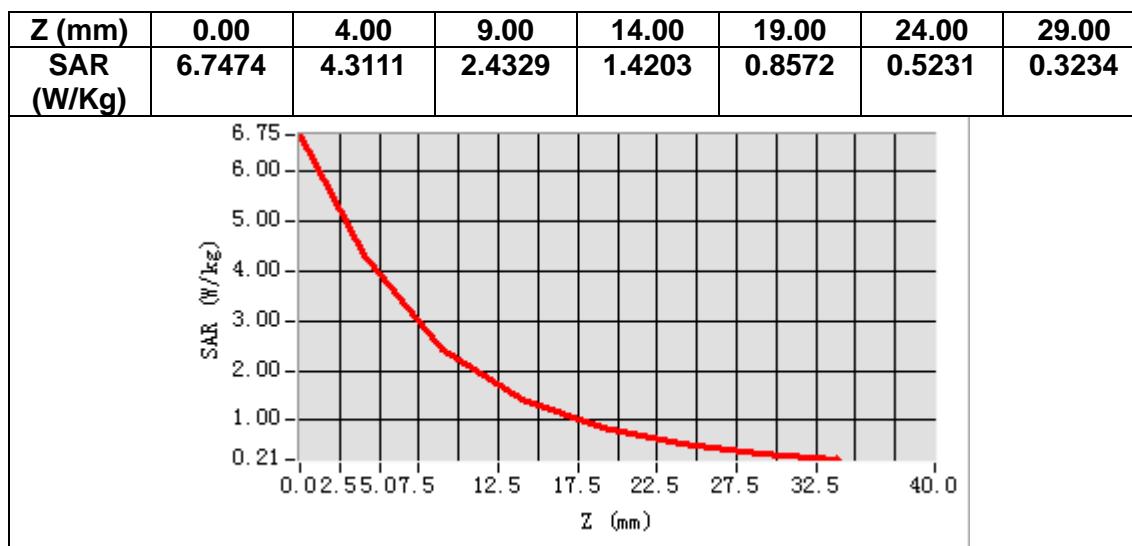

## MEASUREMENT 4


Date of measurement: 24/10/2023

### A. Experimental conditions.

<u>Area Scan</u>	<u><math>dx=15\text{mm}</math> <math>dy=15\text{mm}</math>, <math>h= 5.00 \text{ mm}</math></u>
<u>ZoomScan</u>	<u><math>5\times 5\times 7</math>, <math>dx=8\text{mm}</math> <math>dy=8\text{mm}</math> <math>dz=5\text{mm}</math></u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW1900</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.63</u>



### B. SAR Measurement Results

<b>Frequency (MHz)</b>	1900.000000
<b>Relative permittivity (real part)</b>	39.022879
<b>Relative permittivity (imaginary part)</b>	13.628442
<b>Conductivity (S/m)</b>	1.438558
<b>Variation (%)</b>	2.220000

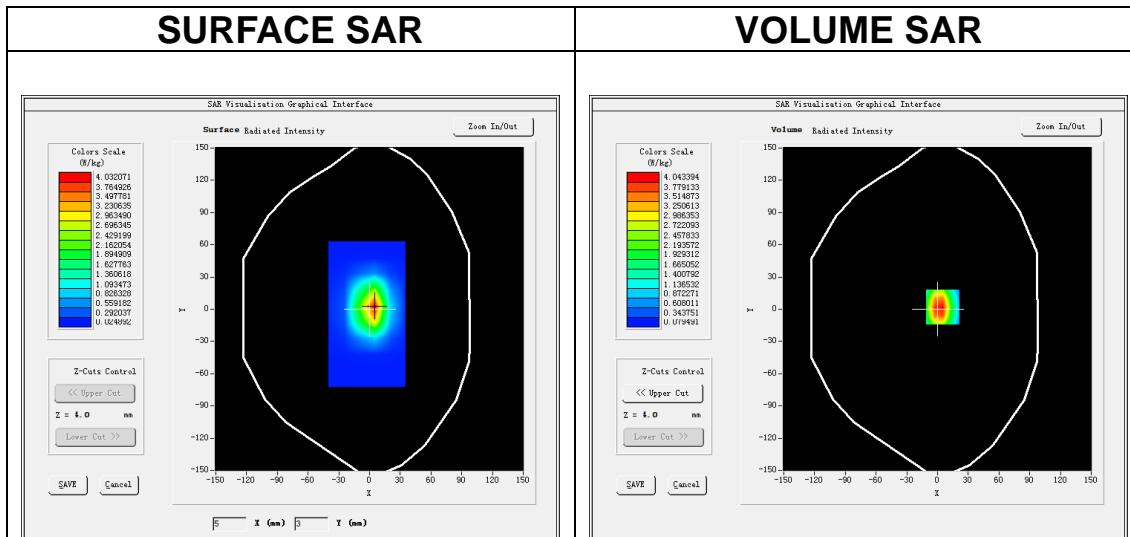

**Maximum location: X=5.00, Y=2.00**  
**SAR Peak: 6.70 W/kg**

<b>SAR 10g (W/Kg)</b>	2.004347
<b>SAR 1g (W/Kg)</b>	4.344221

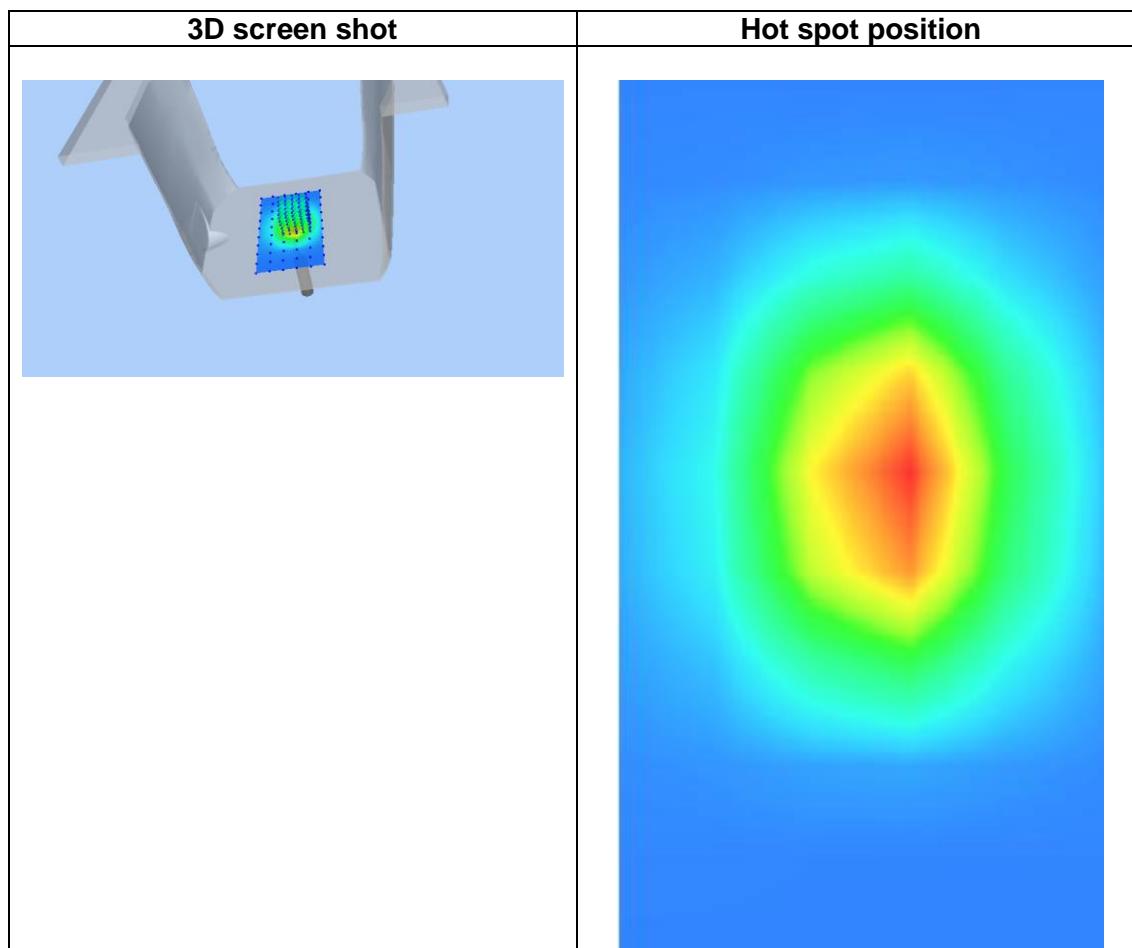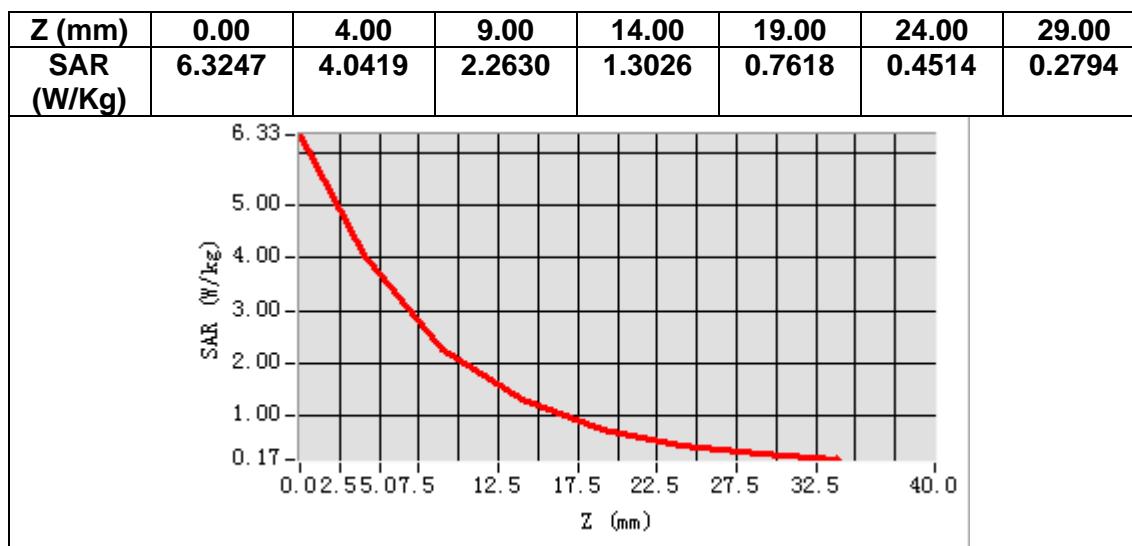

## MEASUREMENT 5


Date of measurement: 28/10/2023

### A. Experimental conditions.

<u>Area Scan</u>	<u><math>dx=12mm</math> <math>dy=12mm</math>, <math>h= 5.00 mm</math></u>
<u>ZoomScan</u>	<u><math>7x7x7, dx=5mm</math> <math>dy=5mm</math> <math>dz=5mm</math></u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW2450</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.85</u>



### B. SAR Measurement Results

<b>Frequency (MHz)</b>	2450.000000
<b>Relative permittivity (real part)</b>	38.728633
<b>Relative permittivity (imaginary part)</b>	13.215610
<b>Conductivity (S/m)</b>	1.798791
<b>Variation (%)</b>	1.290000

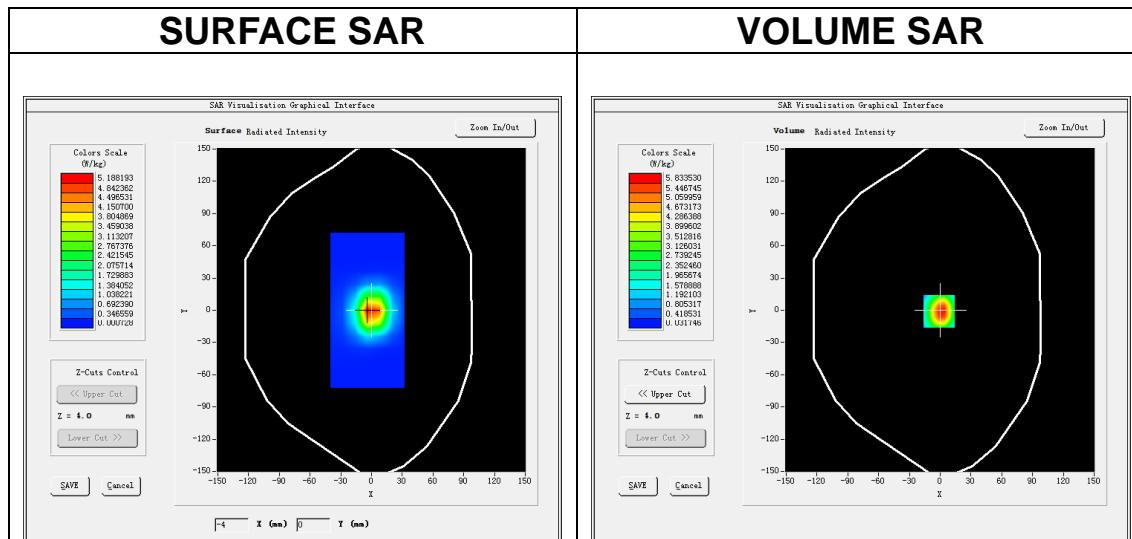

**Maximum location: X=-1.00, Y=-1.00**  
**SAR Peak: 9.83 W/kg**

<b>SAR 10g (W/Kg)</b>	2.379106
<b>SAR 1g (W/Kg)</b>	5.488340

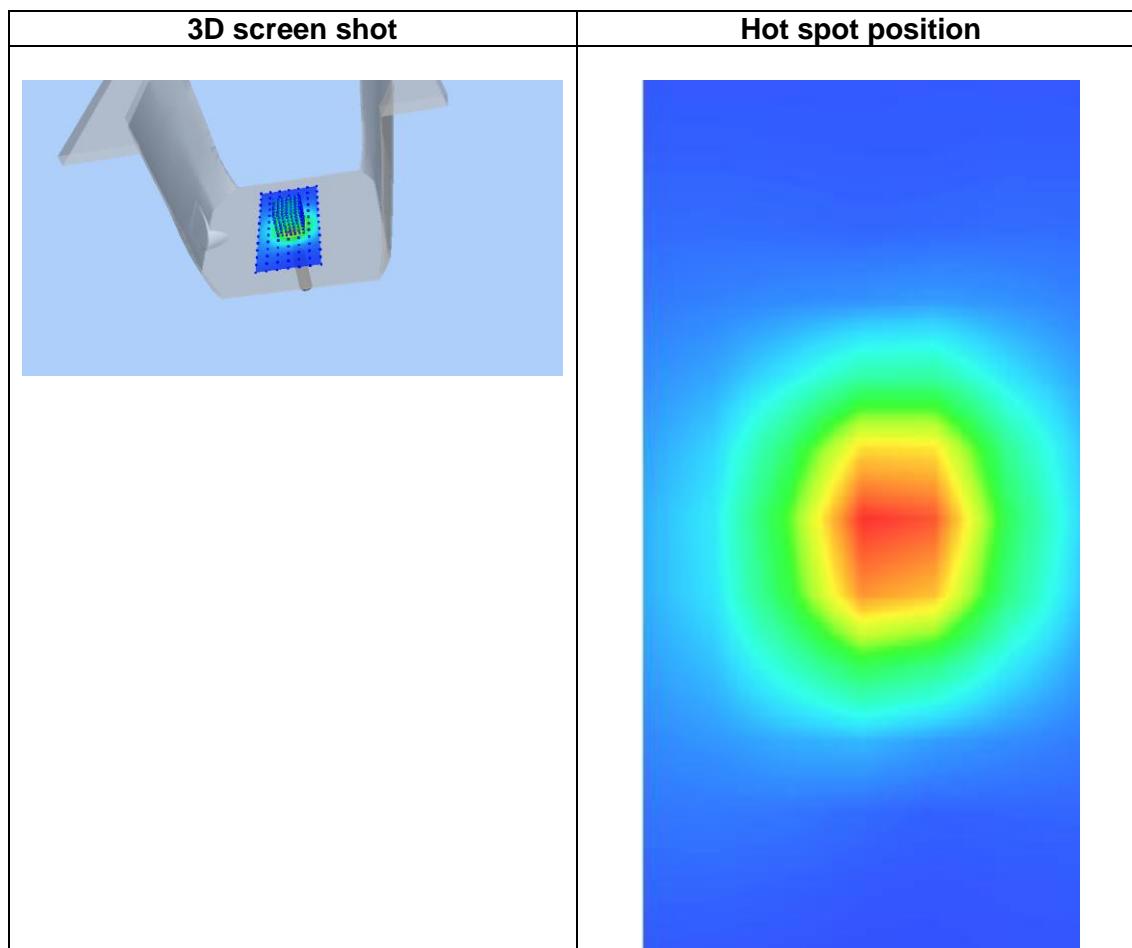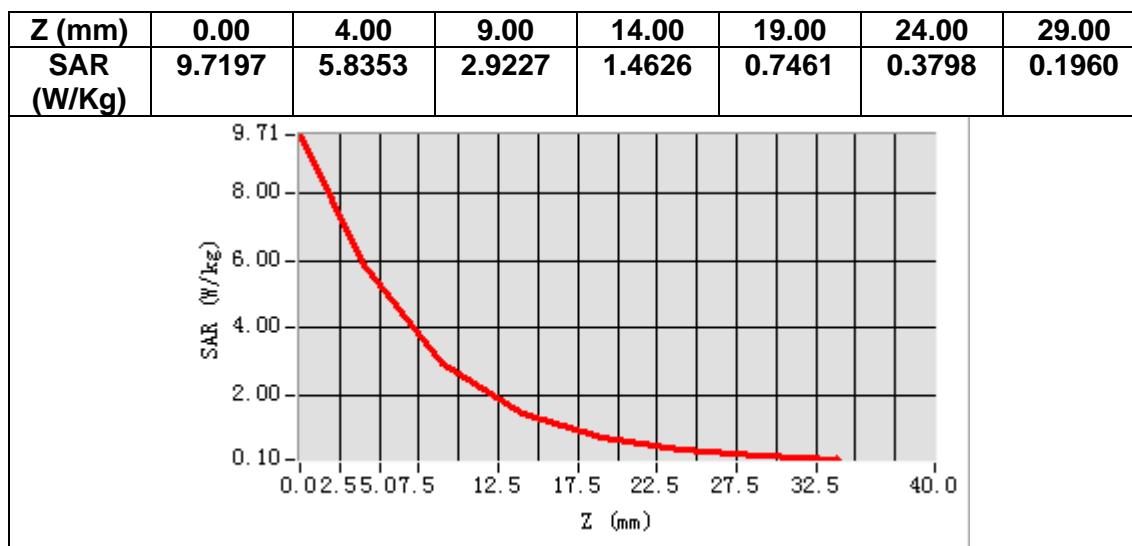

## MEASUREMENT 6


Date of measurement: 29/10/2023

### A. Experimental conditions.

<u>Area Scan</u>	<u><math>dx=12\text{mm}</math> <math>dy=12\text{mm}</math>, <math>h= 5.00 \text{ mm}</math></u>
<u>ZoomScan</u>	<u><math>7\times 7\times 7</math>, <math>dx=5\text{mm}</math> <math>dy=5\text{mm}</math> <math>dz=5\text{mm}</math></u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW2600</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.65</u>

### B. SAR Measurement Results



<b>Frequency (MHz)</b>	2600.000000
<b>Relative permittivity (real part)</b>	38.574072
<b>Relative permittivity (imaginary part)</b>	13.237614
<b>Conductivity (S/m)</b>	1.912100
<b>Variation (%)</b>	0.250000

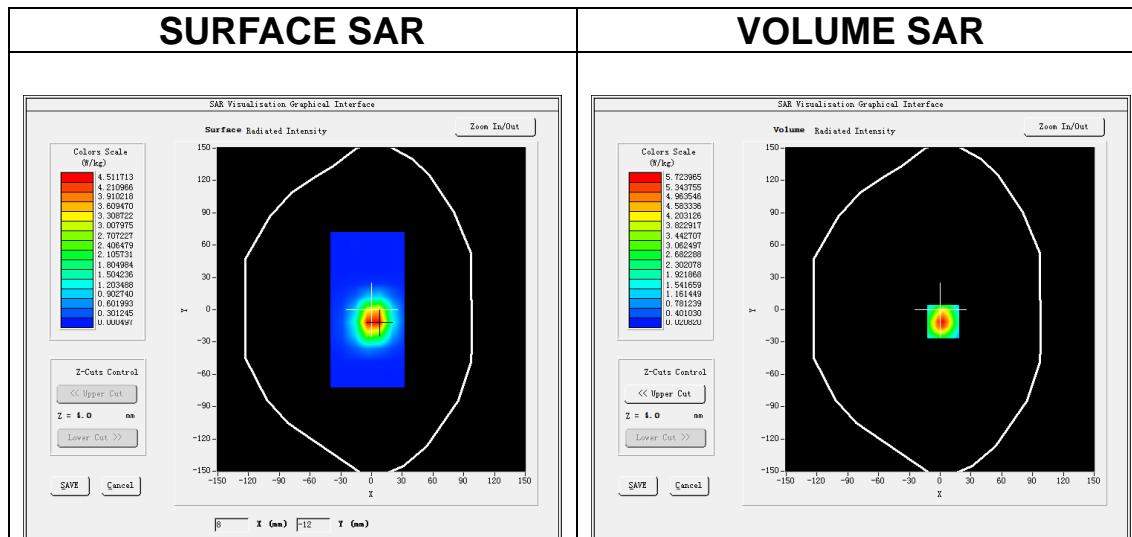

**Maximum location: X=3.00, Y=-11.00**

**SAR Peak: 10.29 W/kg**

<b>SAR 10g (W/Kg)</b>	2.403037
<b>SAR 1g (W/Kg)</b>	5.782199

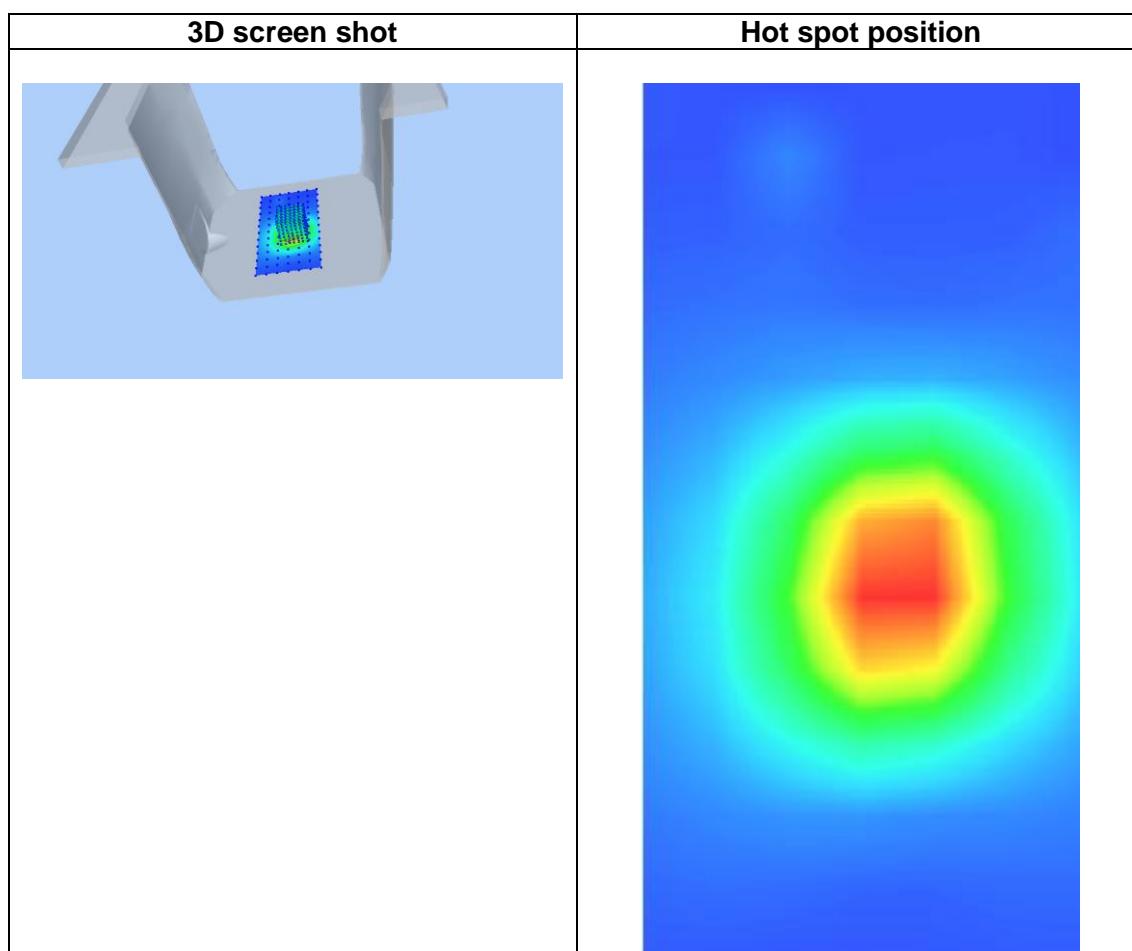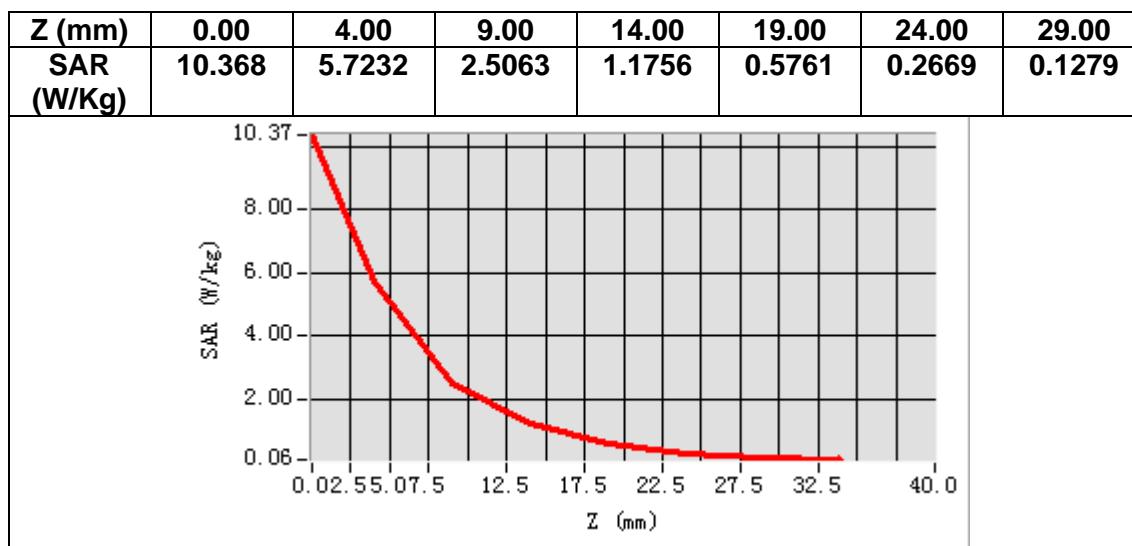

## MEASUREMENT 7


Date of measurement: 1/11/2023

### A. Experimental conditions.

<u>Area Scan</u>	<u><math>dx=10\text{mm}</math> <math>dy=10\text{mm}</math>, <math>h= 2.00 \text{ mm}</math></u>
<u>ZoomScan</u>	<u><math>7\times7\times12, dx=4\text{mm}</math> <math>dy=4\text{mm}</math> <math>dz=2\text{mm}</math></u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW5200</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.07</u>

### B. SAR Measurement Results



<b>Frequency (MHz)</b>	5200.000000
<b>Relative permittivity (real part)</b>	35.658553
<b>Relative permittivity (imaginary part)</b>	15.695970
<b>Conductivity (S/m)</b>	4.534391
<b>Variation (%)</b>	2.800000

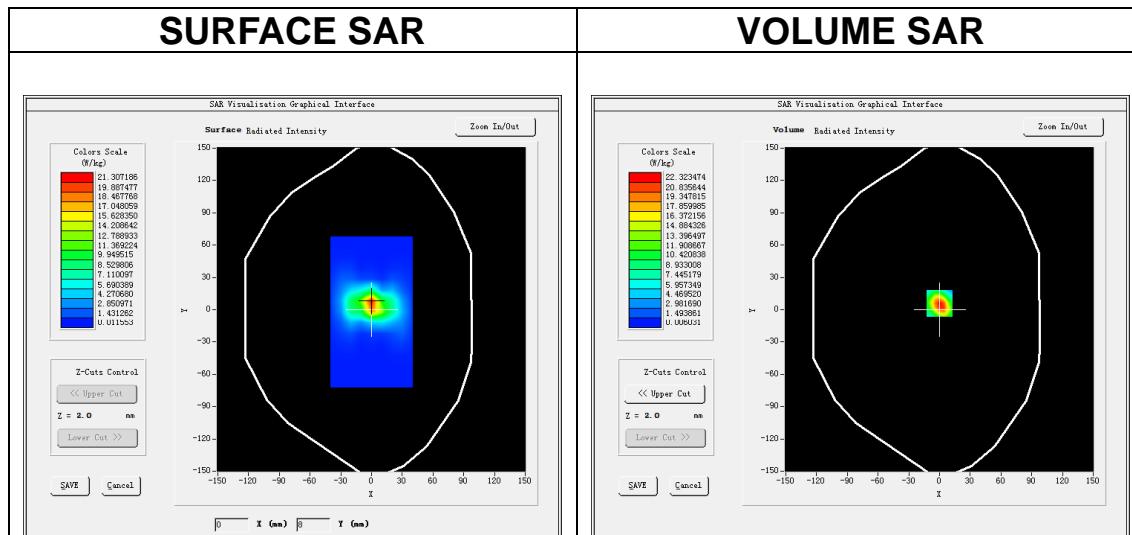

**Maximum location: X=0.00, Y=6.00**

**SAR Peak: 40.06 W/kg**

<b>SAR 10g (W/Kg)</b>	5.388162
<b>SAR 1g (W/Kg)</b>	16.237032

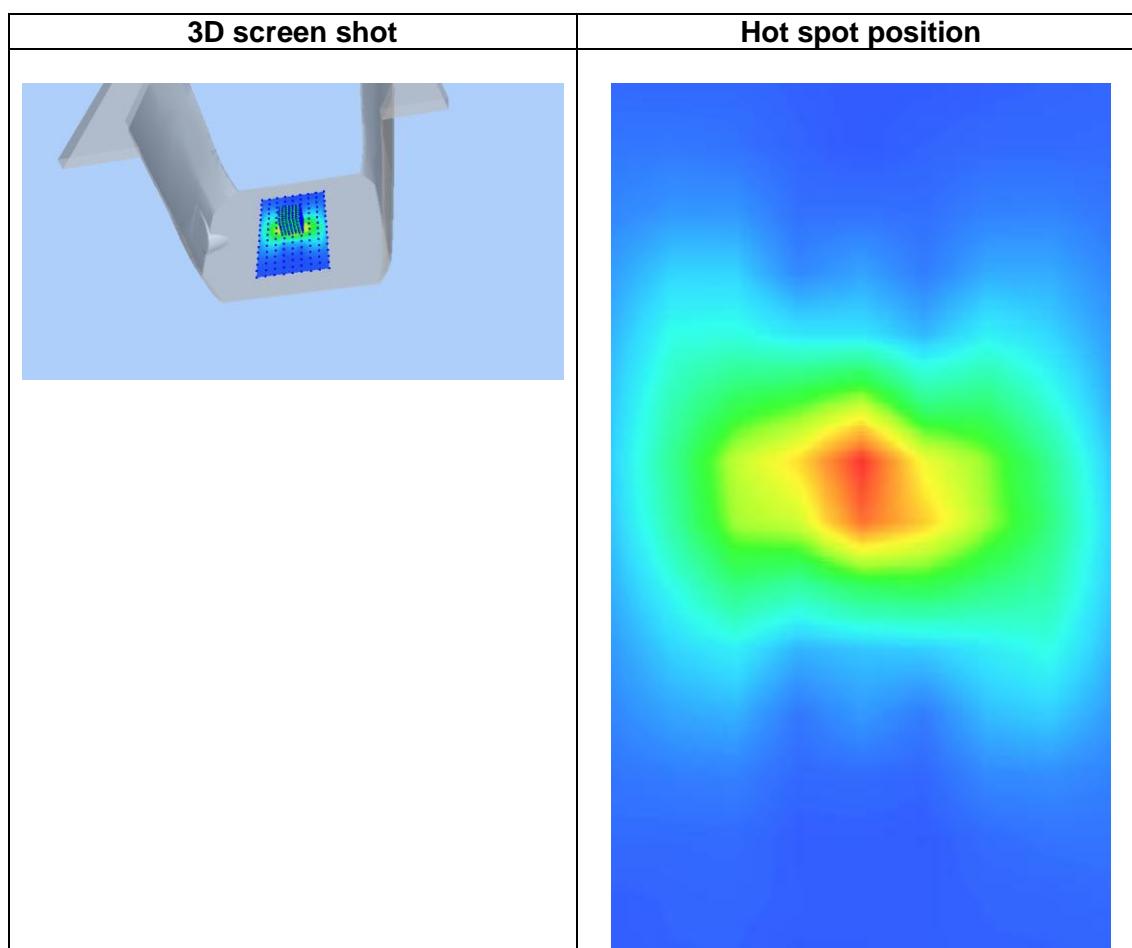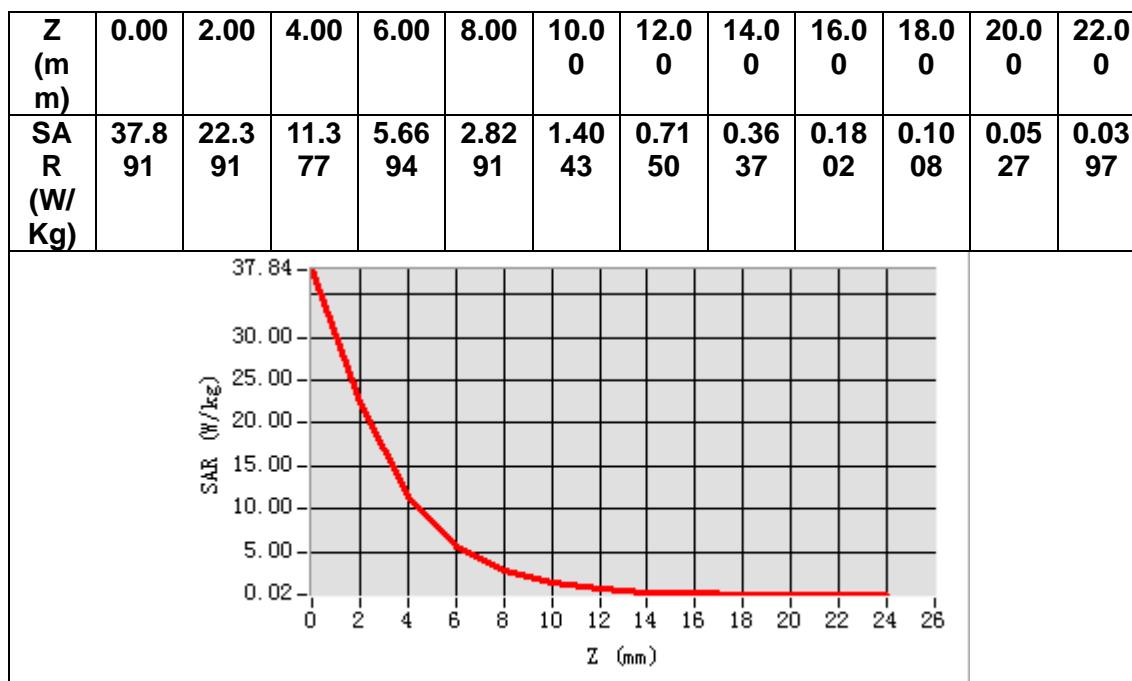

## MEASUREMENT 8


Date of measurement: 3/11/2023

### A. Experimental conditions.

<u>Area Scan</u>	<u><math>dx=10\text{mm}</math> <math>dy=10\text{mm}</math>, <math>h= 2.00 \text{ mm}</math></u>
<u>ZoomScan</u>	<u><math>7\times7\times12, dx=4\text{mm}</math> <math>dy=4\text{mm}</math> <math>dz=2\text{mm}</math></u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW5800</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.04</u>

### B. SAR Measurement Results



<b>Frequency (MHz)</b>	5800.000000
<b>Relative permittivity (real part)</b>	35.029853
<b>Relative permittivity (imaginary part)</b>	15.827948
<b>Conductivity (S/m)</b>	5.100117
<b>Variation (%)</b>	-0.500000

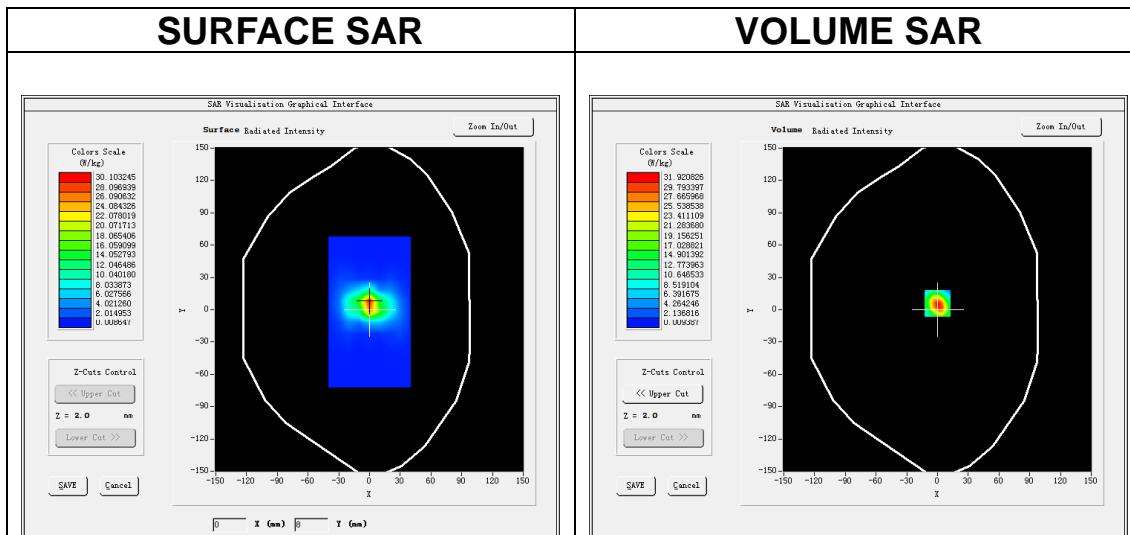

**Maximum location: X=0.00, Y=6.00**

**SAR Peak: 57.37 W/kg**

<b>SAR 10g (W/Kg)</b>	5.665228
<b>SAR 1g (W/Kg)</b>	16.775190

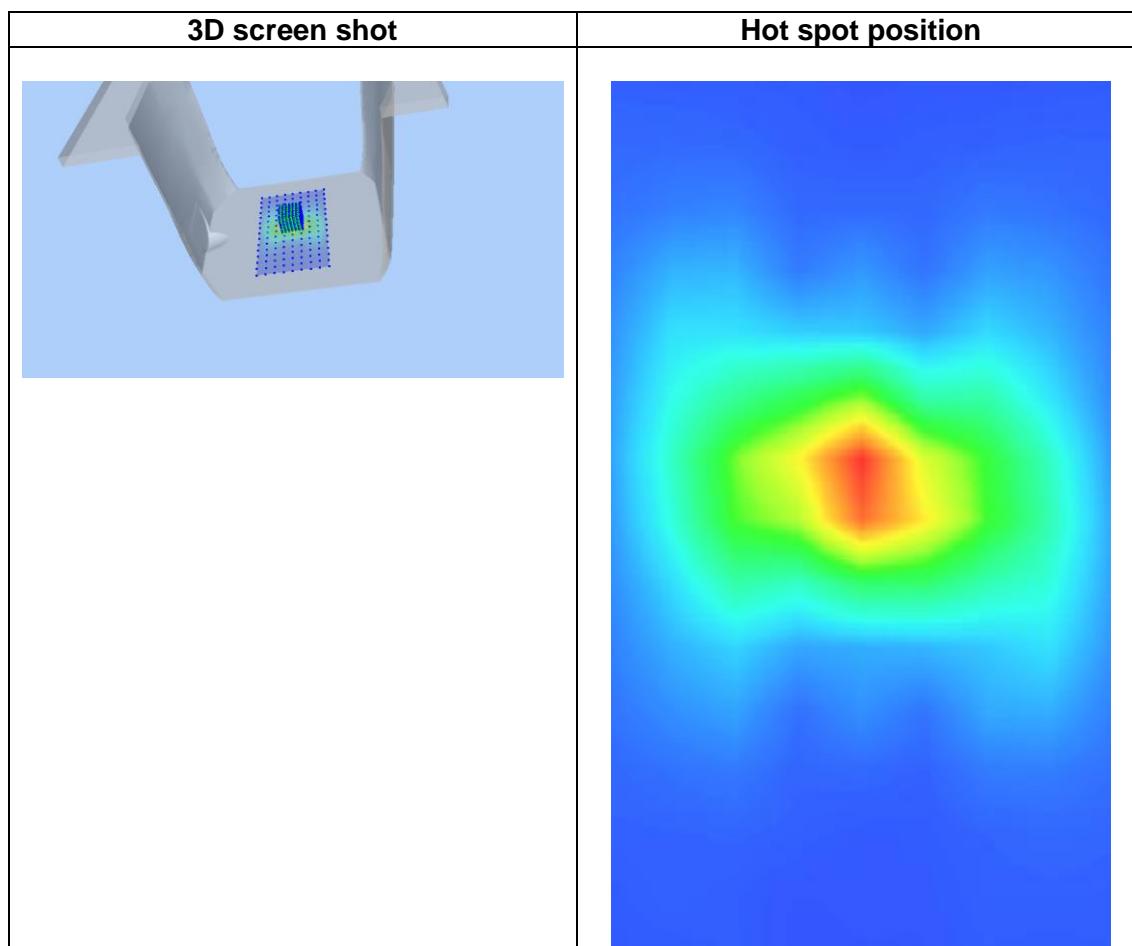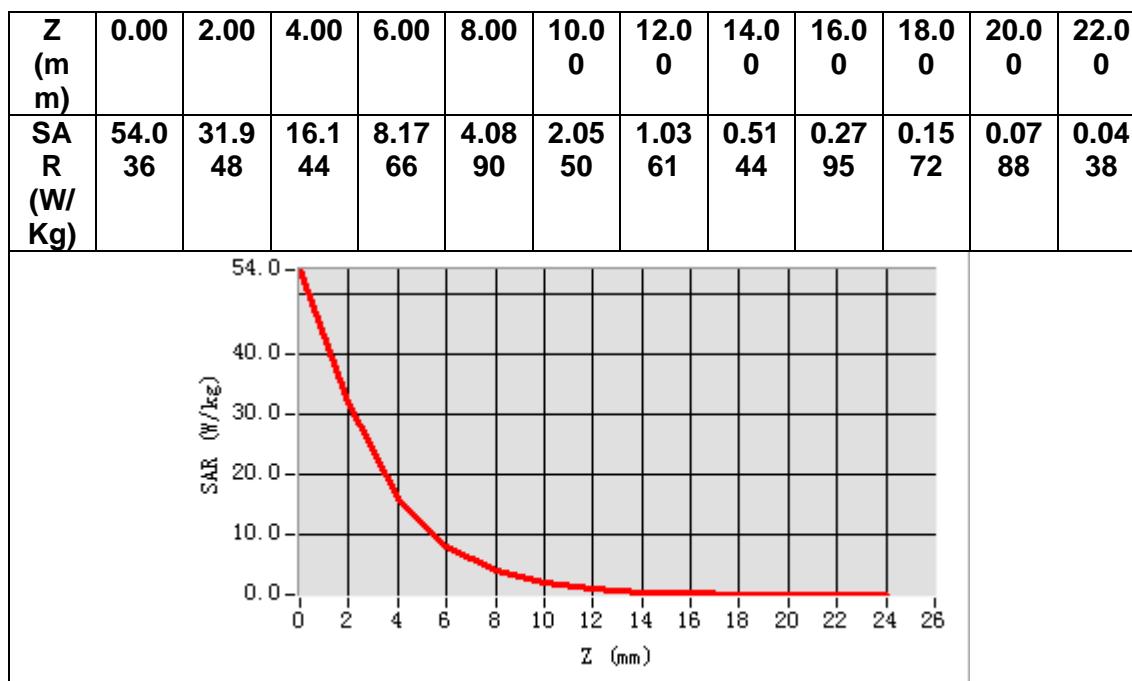

## 1. Appendix C. Plots of High SAR Measurement

### Table of contents

MEASUREMENT 1 GSM 850 Head

MEASUREMENT 2 GSM 850 Body

MEASUREMENT 3 GSM 1900 Head

MEASUREMENT 4 GSM 1900 Body

MEASUREMENT 5 WCDMA Band 2 Head

MEASUREMENT 6 WCDMA Band 2 Body

MEASUREMENT 7 WCDMA Band 5 Head

MEASUREMENT 8 WCDMA Band 5 Body

MEASUREMENT 9 WLAN 5.2G Head

MEASUREMENT 10 WLAN 5.8G Head

MEASUREMENT 11 WLAN 5.2G Body

MEASUREMENT 12 WLAN 5.8G Body

MEASUREMENT 13 WLAN 2.4G Head

MEASUREMENT 14 WLAN 2.4G Body

MEASUREMENT 15 LTE Band 2 Head

MEASUREMENT 16 LTE Band 2 Body

MEASUREMENT 17 LTE Band 4 Head

MEASUREMENT 18 LTE Band 4 Body

MEASUREMENT 19 LTE Band 5 Head

MEASUREMENT 20 LTE Band 5 Body

MEASUREMENT 21 LTE Band 7 Head

MEASUREMENT 22 LTE Band 7 Body

MEASUREMENT 23 LTE Band 12 Head

MEASUREMENT 24 LTE Band 12 Body

MEASUREMENT 25 LTE Band 13 Head

MEASUREMENT 26 LTE Band 13 Body

MEASUREMENT 27 LTE Band 17 Head

MEASUREMENT 28 LTE Band 17 Body

MEASUREMENT 29 LTE Band 71 Head

MEASUREMENT 30 LTE Band 71 Body

MEASUREMENT 31 LTE Band 66 Head

MEASUREMENT 32 LTE Band 66 Body

# MEASUREMENT 1


Date of measurement: 2/11/2023

## A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>GSM850</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>TDMA (Crest factor: 4.0)</u>
<u>ConvF</u>	<u>2.32</u>



## B. SAR Measurement Results

<b>Frequency (MHz)</b>	836.400000
<b>Relative permittivity (real part)</b>	41.430595
<b>Relative permittivity (imaginary part)</b>	19.311037
<b>Conductivity (S/m)</b>	0.897320
<b>Variation (%)</b>	0.220000

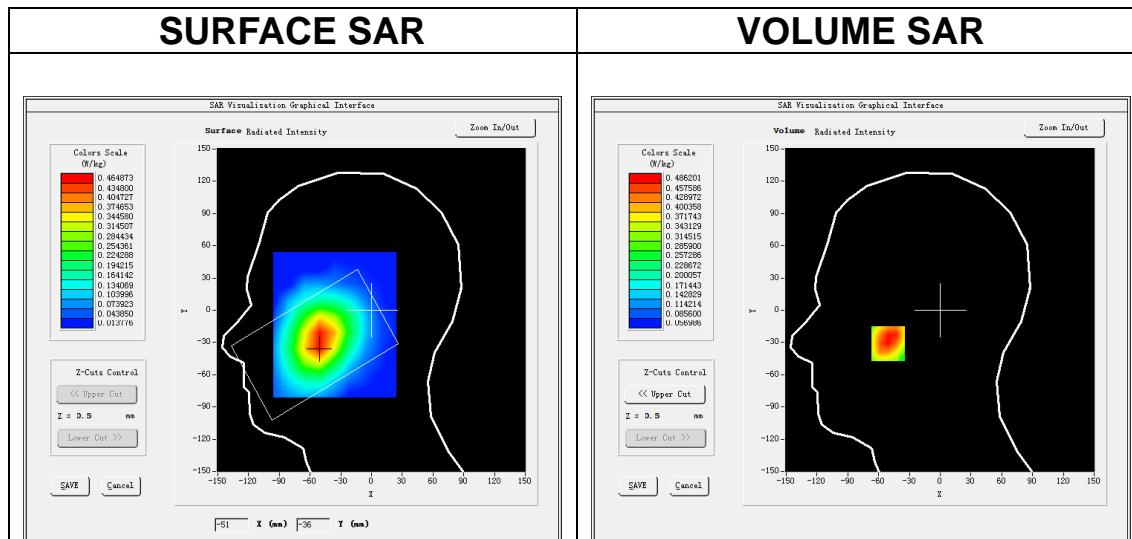

**Maximum location: X=-51.00, Y=-31.00**  
**SAR Peak: 0.68 W/kg**

<b>SAR 10g (W/Kg)</b>	0.328175
<b>SAR 1g (W/Kg)</b>	0.471463

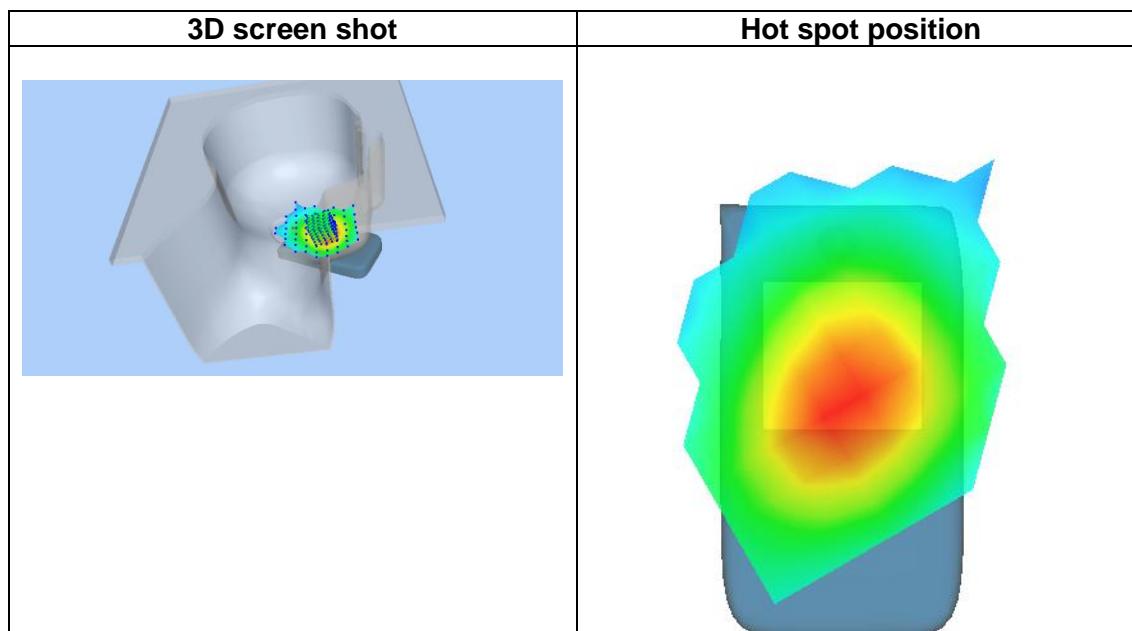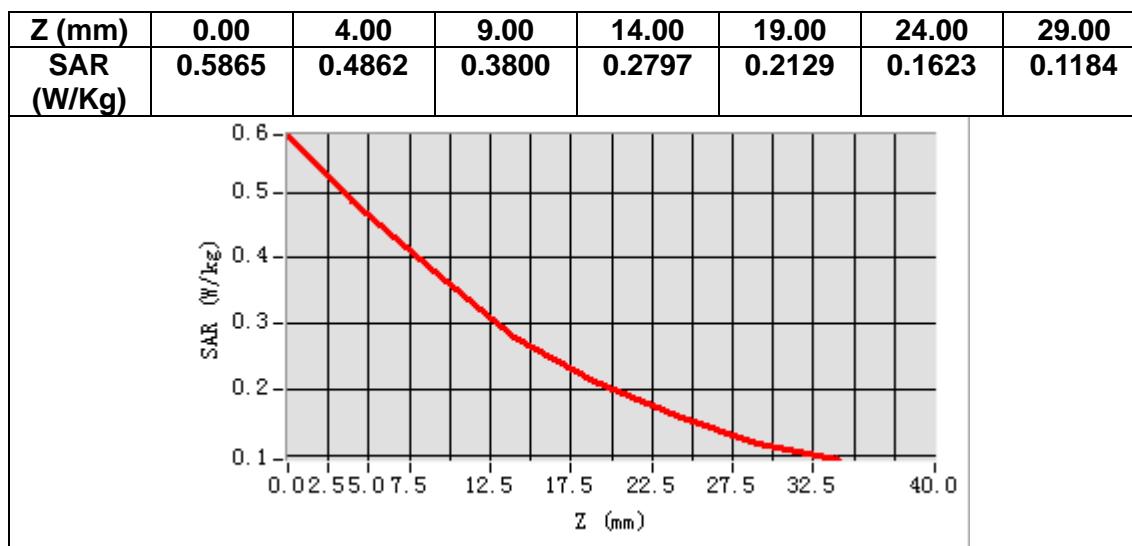

## MEASUREMENT 2


Date of measurement: 2/11/2023

### A. Experimental conditions.

<u>Area Scan</u>	<u><math>dx=15\text{mm}</math> <math>dy=15\text{mm}</math>, <math>h= 5.00 \text{ mm}</math></u>
<u>ZoomScan</u>	<u><math>5\times 5\times 7, dx=8\text{mm}</math> <math>dy=8\text{mm}</math> <math>dz=5\text{mm}</math></u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>GSM850</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>TDMA (Crest factor: 4.0)</u>
<u>ConvF</u>	<u>2.32</u>



### B. SAR Measurement Results

<b>Frequency (MHz)</b>	836.400000
<b>Relative permittivity (real part)</b>	41.430595
<b>Relative permittivity (imaginary part)</b>	19.311037
<b>Conductivity (S/m)</b>	0.897320
<b>Variation (%)</b>	-4.700000

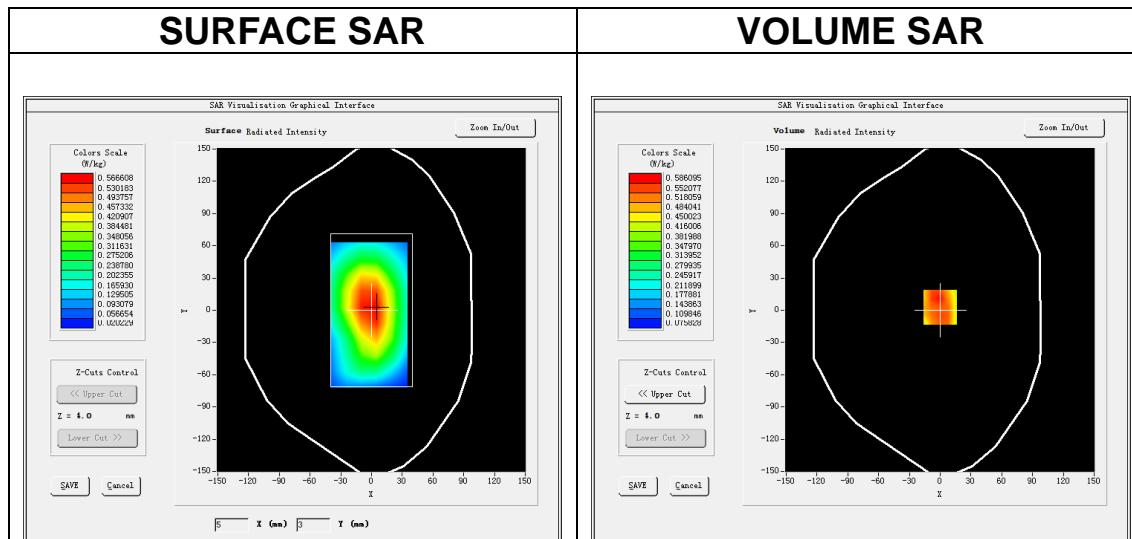

**Maximum location: X=0.00, Y=3.00**  
**SAR Peak: 0.77 W/kg**

<b>SAR 10g (W/Kg)</b>	0.395582
<b>SAR 1g (W/Kg)</b>	0.558690

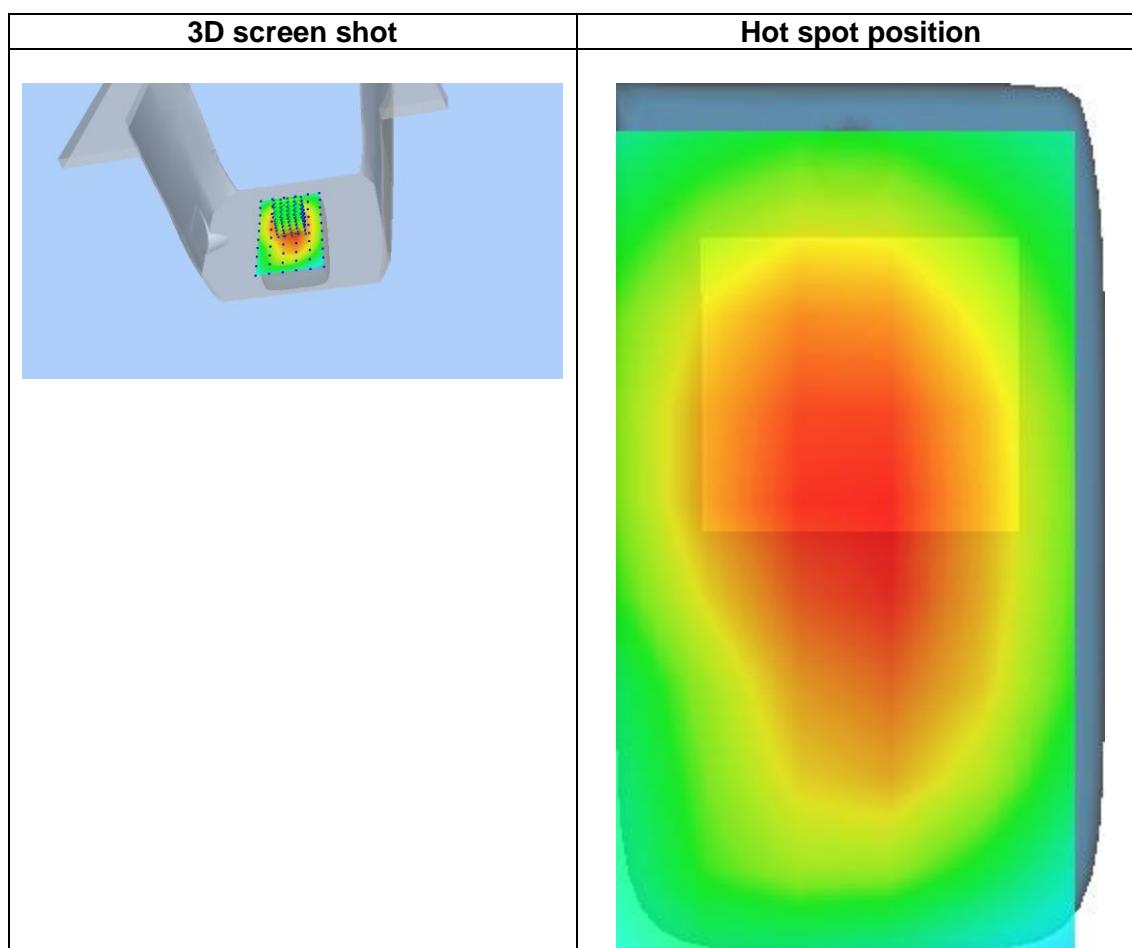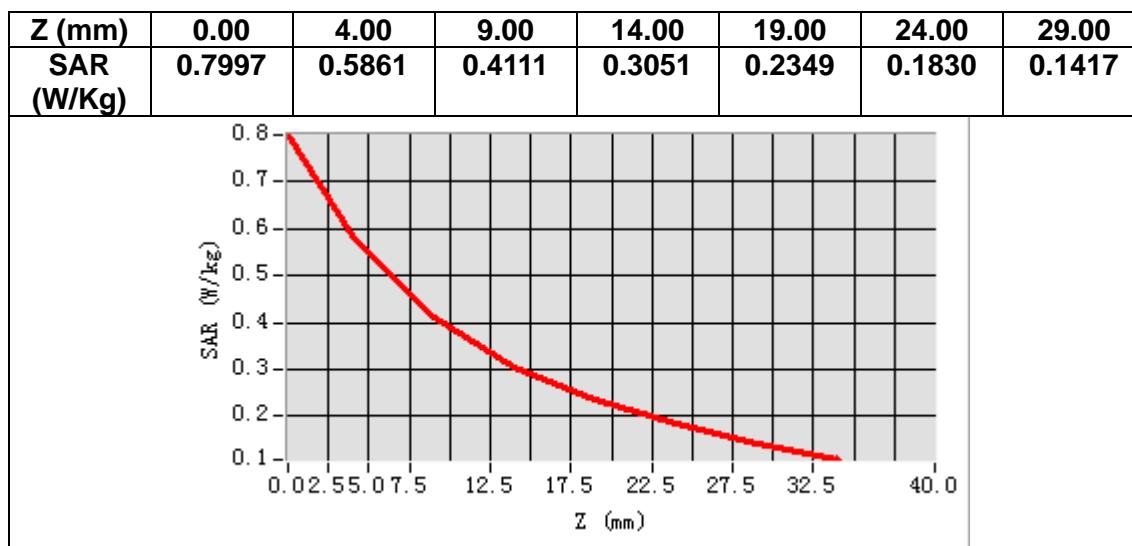

## MEASUREMENT 3


Date of measurement: 24/10/2023

### A. Experimental conditions.

<u>Area Scan</u>	<u><math>dx=15\text{mm}</math> <math>dy=15\text{mm}</math>, <math>h= 5.00 \text{ mm}</math></u>
<u>ZoomScan</u>	<u><math>5\times 5\times 7, dx=8\text{mm}</math> <math>dy=8\text{mm}</math> <math>dz=5\text{mm}</math></u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>GSM1900</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>TDMA (Crest factor: 4.0)</u>
<u>ConvF</u>	<u>2.63</u>



### B. SAR Measurement Results

<b>Frequency (MHz)</b>	1880.000000
<b>Relative permittivity (real part)</b>	39.098179
<b>Relative permittivity (imaginary part)</b>	13.676342
<b>Conductivity (S/m)</b>	1.428418
<b>Variation (%)</b>	1.420000

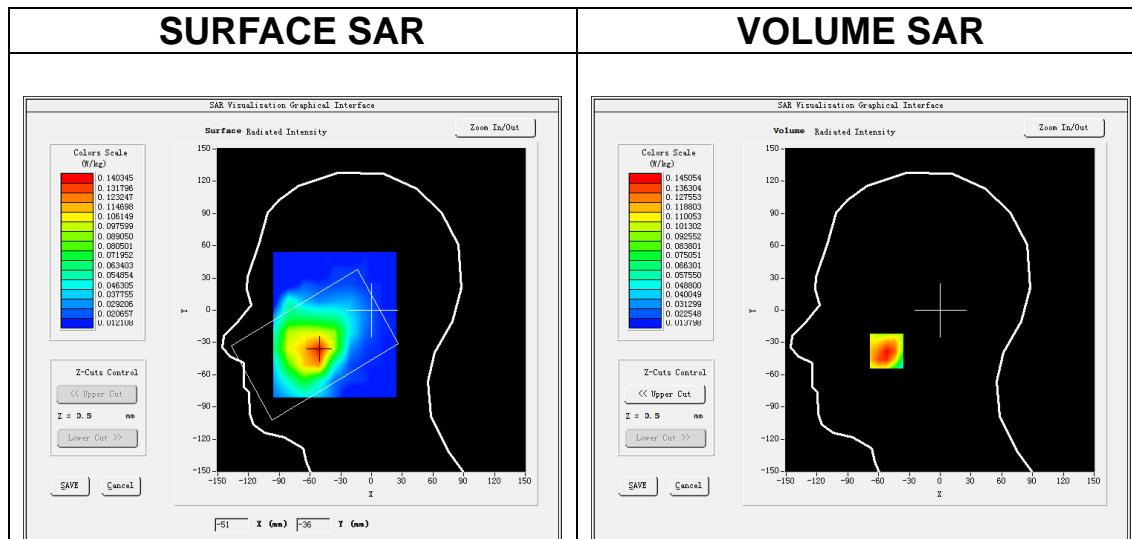

**Maximum location: X=-52.00, Y=-38.00**  
**SAR Peak: 0.19 W/kg**

<b>SAR 10g (W/Kg)</b>	0.090823
<b>SAR 1g (W/Kg)</b>	0.140889

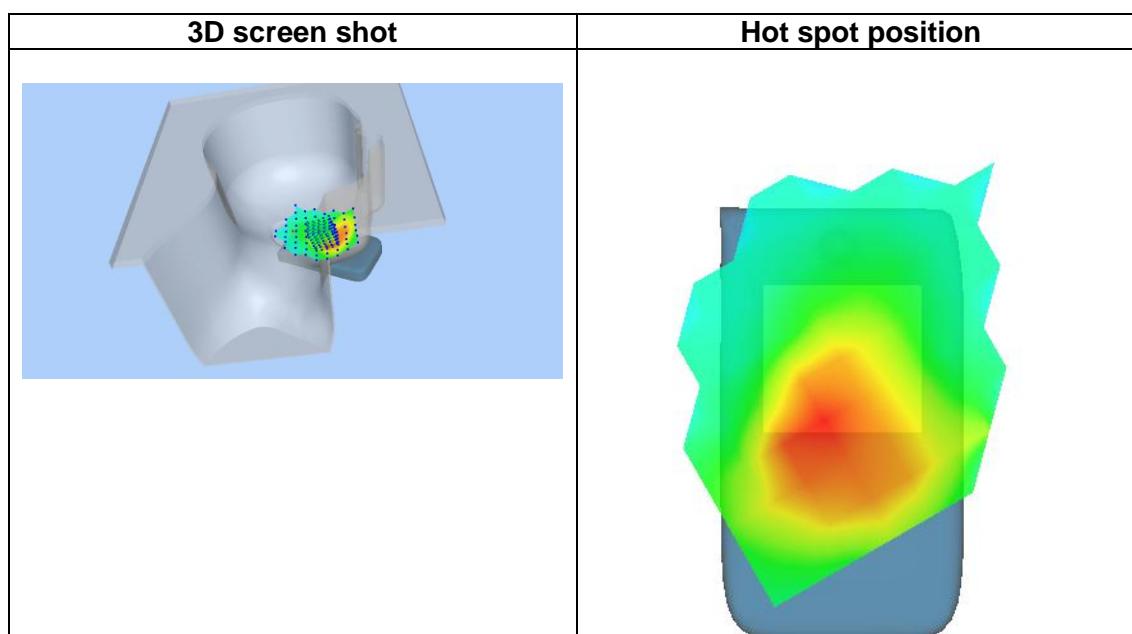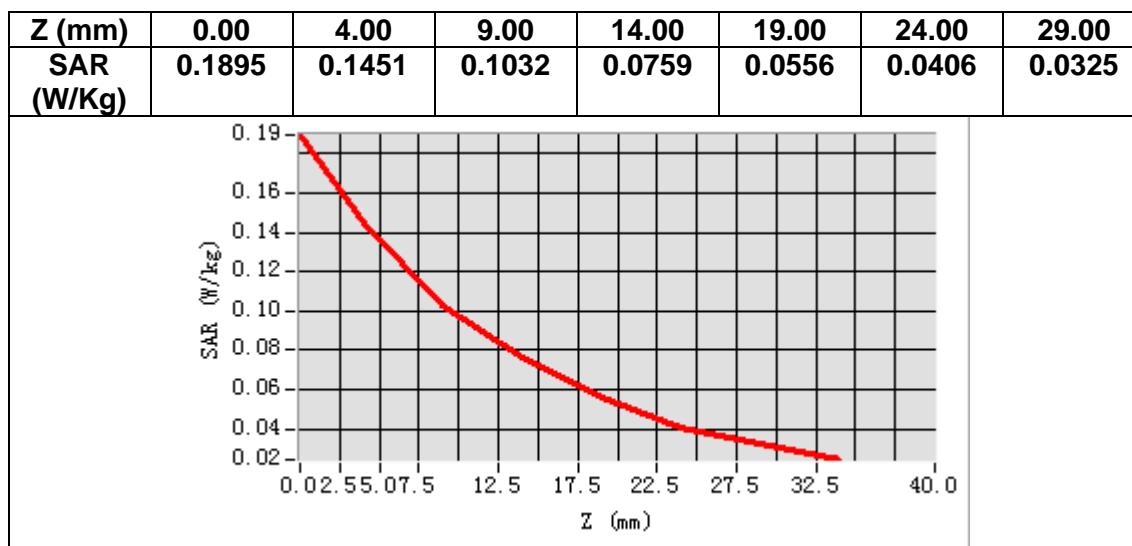

## MEASUREMENT 4


Date of measurement: 24/10/2023

### A. Experimental conditions.

<u>Area Scan</u>	<u><math>dx=15\text{mm}</math> <math>dy=15\text{mm}</math>, <math>h= 5.00 \text{ mm}</math></u>
<u>ZoomScan</u>	<u><math>5\times 5\times 7, dx=8\text{mm}</math> <math>dy=8\text{mm}</math> <math>dz=5\text{mm}</math></u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>GSM1900</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>TDMA (Crest factor: 4.0)</u>
<u>ConvF</u>	<u>2.63</u>



### B. SAR Measurement Results

<b>Frequency (MHz)</b>	1880.000000
<b>Relative permittivity (real part)</b>	39.098179
<b>Relative permittivity (imaginary part)</b>	13.676342
<b>Conductivity (S/m)</b>	1.428418
<b>Variation (%)</b>	-0.290000

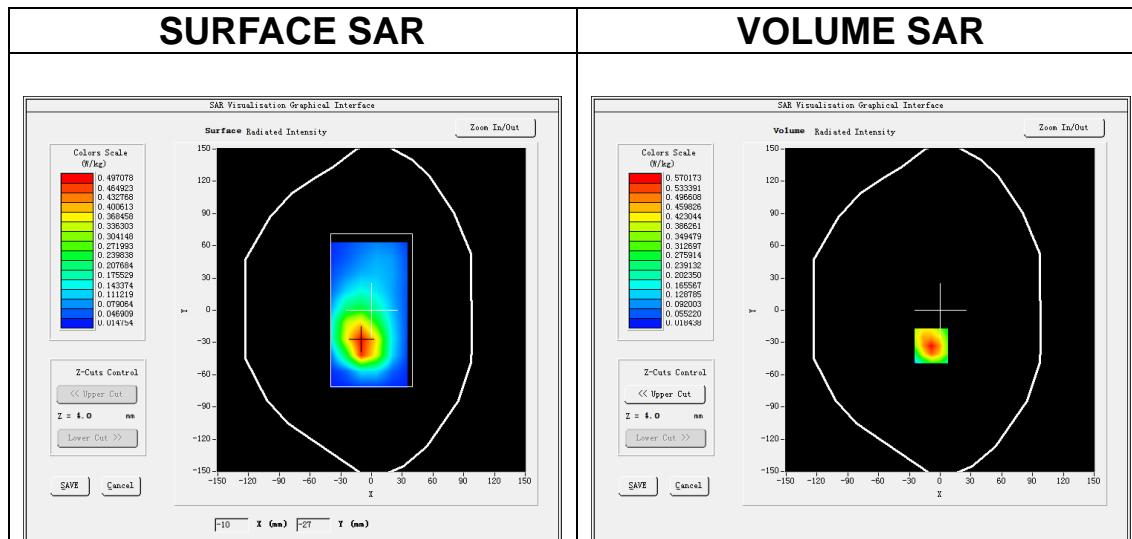

**Maximum location: X=-9.00, Y=-33.00**  
**SAR Peak: 0.91 W/kg**

<b>SAR 10g (W/Kg)</b>	0.299212
<b>SAR 1g (W/Kg)</b>	0.549679

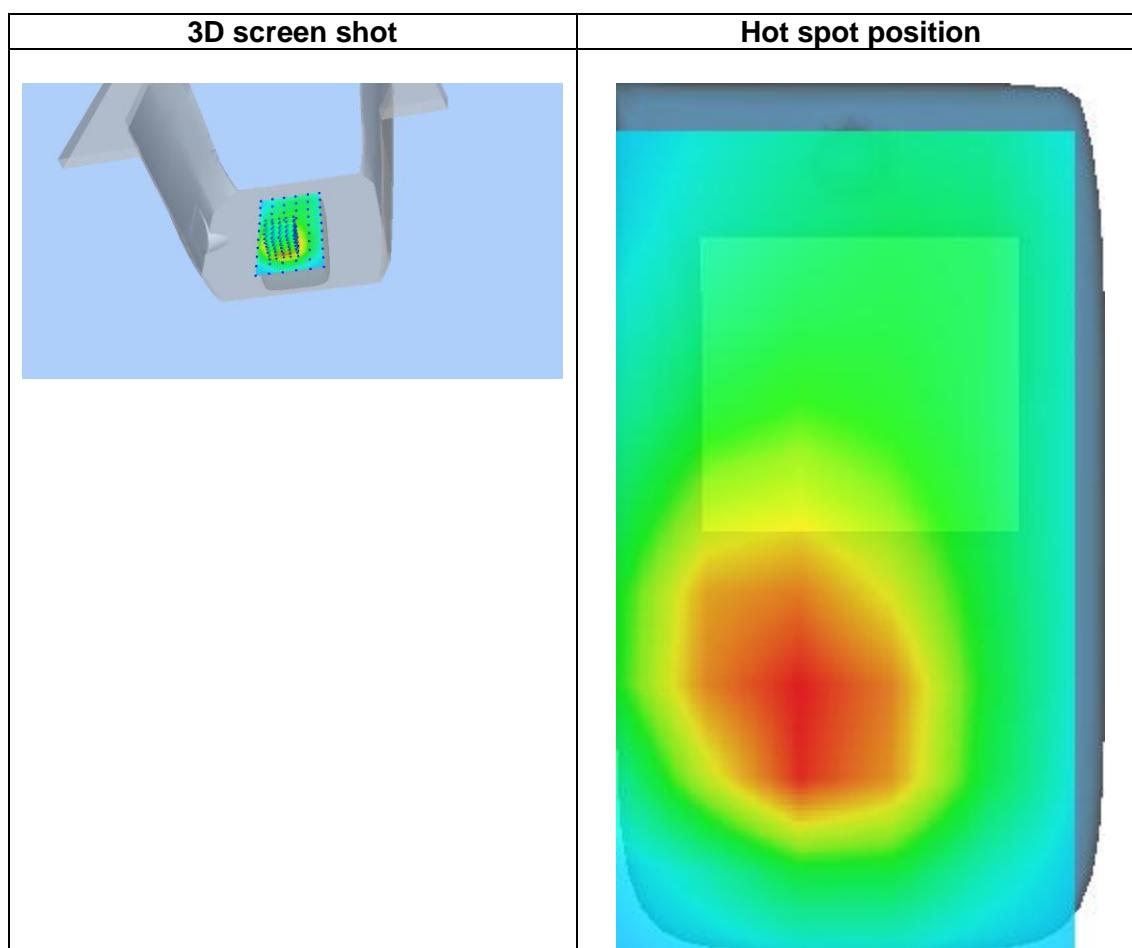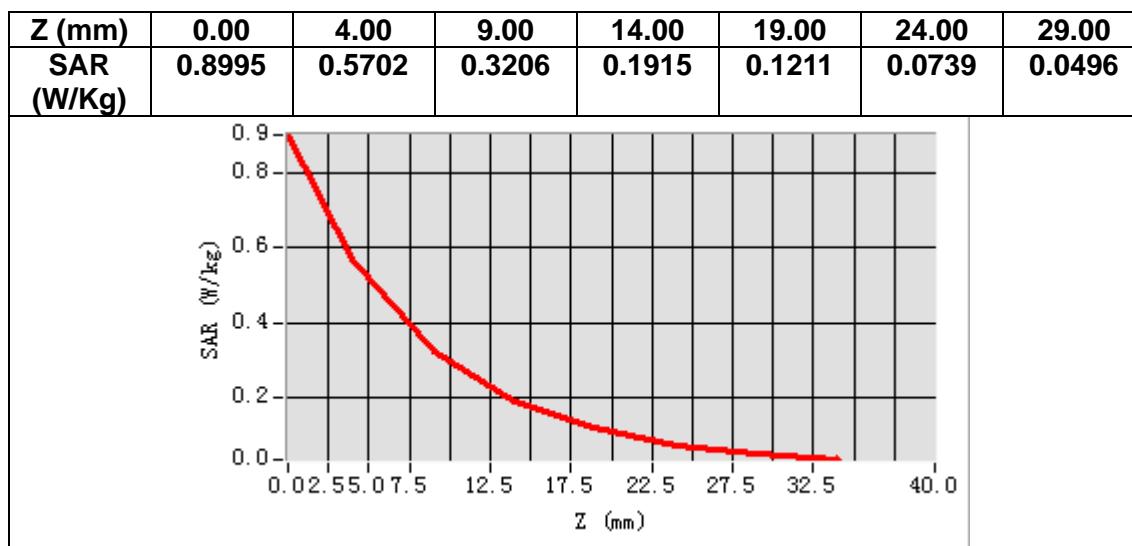

## MEASUREMENT 5


Date of measurement: 24/10/2023

### A. Experimental conditions.

<u>Area Scan</u>	<u><math>dx=15\text{mm}</math> <math>dy=15\text{mm}</math>, <math>h= 5.00 \text{ mm}</math></u>
<u>ZoomScan</u>	<u><math>5\times 5\times 7, dx=8\text{mm}</math> <math>dy=8\text{mm}</math> <math>dz=5\text{mm}</math></u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>Band2 WCDMA1900</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>WCDMA (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.63</u>

### B. SAR Measurement Results

<b>Frequency (MHz)</b>	1880.000000
<b>Relative permittivity (real part)</b>	39.098179
<b>Relative permittivity (imaginary part)</b>	13.676342
<b>Conductivity (S/m)</b>	1.428418
<b>Variation (%)</b>	2.020000

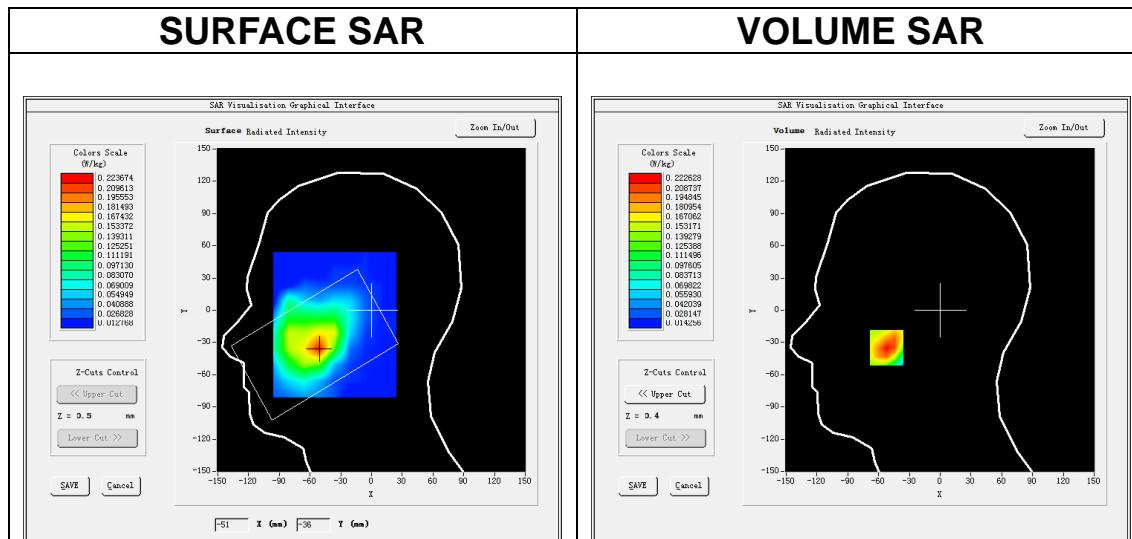

**Maximum location: X=-52.00, Y=-35.00**  
**SAR Peak: 0.30 W/kg**

<b>SAR 10g (W/Kg)</b>	0.132036
<b>SAR 1g (W/Kg)</b>	0.214601

