



ZHONGHAN

FCC TEST REPORT

Report No..... : ZHT-241113113W01-1

Product..... : Wireless Charging

Trademark..... :

Model(s)..... : W119

Model difference..... : /

Applicant..... : JiangXi Kingtron Technology Co.,Ltd

Address..... : Luoxin Tech, industrial Park, 2nd District, Quannan Industrial Park,
Gangzhou, Jiangxi, China.341800

Manufacturer..... : JiangXi Kingtron Technology Co.,Ltd

Address..... : Luoxin Tech, industrial Park, 2nd District, Quannan Industrial Park,
Gangzhou, Jiangxi, China.341800

Prepared by..... : Guangdong Zhonghan Testing Technology Co., Ltd.

Address..... : Room 104, Building 1, Yibaolai Industrial Park, Qiaotou Community, Fuhai
Street, Bao'an District, Shenzhen, Guangdong, China

Date of Receipt..... : Nov. 13, 2024

Date of Test(s)..... : Nov. 13, 2024 - Dec. 23, 2024

Date of Issue..... : Dec. 23, 2024

Test Standard(s)..... : FCC CFR Title 47 Part 15 Subpart C

Test procedure..... : KDB 680106 D01 v04

In the configuration tested, the EUT complied with the standards specified above.

Tested by:

Kimi Lu

Kimi Lu/ Engineer

Reviewed by:

Baret Wu

Baret Wu/ Director

Approved by:

Levi Lee

Levi Lee/ Manager

Note: The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report shall not be reproduced except in full, without prior written approval of ZHT. This document may be altered or revised by ZHT, personnel only, and shall be noted in the revision of the document



0755-27782934



admin@zht-lab.cn





http://www.zht-lab.cn



ZHONGHAN

FCC ID:2BBEH-W119

Product Name:	Wireless Charging
Product Model No.:	W119
Model Difference:	/
Transmitting mode:	Keep the EUT in continuously wireless charging mode
Power supply:	Input: 5 V  3 A, 9 V  2 A Output: 15 W (MAX)

Test Modes:

Mode 1 AC Adapter + Wireless charging mode (5W)

Mode 2 AC Adapter + Wireless charging mode (10W)

Mode 3 AC Adapter + Wireless charging mode (15W)

Remark: All full load, half load, and no-load tests have been conducted in each mode, only the worst-case was recorded in the report. Mode 3 full load is the worst mode.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	Wireless charging load	/	EESON	N/A	AE
E-2	AC Adapter	Xiaomi	MDY-12-ED	N/A	AE

1 Measuring Standard

KDB 680106 D01 Wireless Power Transfer v04

2 Requirements

According to the item 5 of KDB 680106 D01 v04:

Inductive wireless power transfer applications that meet all of the following requirements are excluded from submitting an RF exposure evaluation.

Requirements of section 3 of KDB 680106 D01	Yes/ No	Description
Mobile Device and Portable Device Configurations	Yes	Mobile Device
Equipment Authorization Procedures for Devices Operating at Frequencies Below 4 MHz	Yes	The device operate in the frequency range 111kHz-205kHz
RF Exposure compliance may be ensured only for a minimum conditions at smaller distances can still be considered unlikely separation distance that is greater than 20 cm, while use	No	The EUT H-field and E-field strengths at 20 cm surrounding the device.

Limits

The criteria listed in the following table shall be used to evaluate the environment impact of human exposure to radio frequency (RF) radiation as specified in 1.1307(b)


Limits for Maximum Permissible Exposure (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3-3.0	614	1.63	*(100)	6
3.0-30	1842/f	4.89/f	*(900/f ²)	6
30-300	61.4	0.163	1.0	6
300-1500	/	/	f/300	6
1500-100,000	/	/	5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30

F=frequency in MHz
 *=Plane-wave equivalent power density
 RF exposure compliance will need to be determined with respect to 1.1307(c) and (d) of the FCC rules. The emissions should be within the limits at 300kHz in Table 1 of 1.1310 (use the 300kHz limits for 150kHz: 614V/m, 1.63A/m).

3 Test Setup

For mobile exposure conditions:

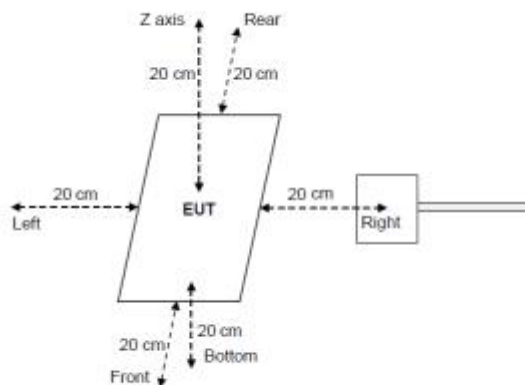

4 Test Procedure

- 1) The RF exposure test was performed in anechoic chamber.
- 2) The measurement probe was placed at test distance (20 cm from all sides and 20 cm from the top) which is between the edge of the charger and the geometric center of probe.
- 3) The highest emission level was recorded and compared with limit as soon as measurement of each points (A, B, C, D, E) were completed.
- 4) The EUT was measured according to the dictates of KDB 680106 D01 v04.

Remark: The EUT' s test position A, B, C, D and E is valid for the E and H field measurements.

5 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	H-field	$\pm 0.7\text{dB}$
2	E-field	$\pm 1.06\text{dB}$

Decision Rule

- ☒ Uncertainty is not included
☐ Uncertainty is included



ZHONGHAN

6. Test Instruments list

Test Equipment	Manufacturer	Model No.	SN.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
Magnetic Amplitude and Gradient Probe System	SPEAG	MAGPy-8H3D+E3D V2& MAGPy-DAS V2	SZ186-06& 3061	Feb. 26, 2024	Feb. 25, 2025



7. Test Result

E-Filed Strength at 20 cm from the edges surrounding the EUT (V/m)

Frequency Range (MHz)	Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	50%Limits (V/m)	Limits (V/m)	test result
0.111-0.205	0.24	0.57	0.63	0.74	0.87	307	614	PASS

H-Filed Strength at 20 cm from the edges surrounding the EUT (A/m)

Frequency Range (MHz)	Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	50%Limits (V/m)	Limits (A/m)	test result
0.111-0.205	0.37	0.79	0.68	0.51	0.58	0.815	1.63	PASS



ZHONGHAN

6 Test Set-up Photo

