
	と 知 J HNDLOGY		
	TEST REPOR	Т	
FCC ID	2AEN5-ATX		
Test Report No:	TCT220617E035		
Date of issue:	Jun. 27, 2022		
Testing laboratory:	SHENZHEN TONGCE TESTING	G LAB	
Testing location/ address:	TCT Testing Industrial Park Fuq Street, Bao'an District Shenzher Republic of China		
Applicant's name::	Urbanista AB	(\mathcal{G})	
Address:	Master Samuelsgatan 10, 1 Tr, S	Stockholm, Sweden	
Manufacturer's name :	Urbanista AB		
Address:	Master Samuelsgatan 10, 1 Tr, S	Stockholm, Sweden	
Standard(s):	FCC CFR Title 47 Part 1.1307		
Product Name::	True Wireless Earbuds		
Trade Mark:	Urbanista		
Model/Type reference :	Urbanista Austin		
Rating(s):	Rechargeable Li-ion Battery DC	3.7V	
Date of receipt of test item	Jun. 17, 2022		
Date (s) of performance of test:	Jun. 17, 2022 ~ Jun. 27, 2022		
Tested by (+signature) :	Aaron MO	Aaron No NGC	
Check by (+signature) :	Beryl ZHAO	Boy that I TO	FSTIN
Approved by (+signature):	Tomsin	Tomsin 24	84
TONGCE TESTING LAB. TH	oduced except in full, without the his document may be altered or r ly, and shall be noted in the revis	evised by SHENZHEN	FONGCE

Report No.: TCT220617E035

Table of Contents

1.	General Product Information			3
	1.1. EUT description	<u>ko)</u>		3
	1.2. Model(s) list			3
2.	General Information			4
	2.1. Test environment and mode			4
	2.2. Description of Support Units			
3.	Facilities and Accreditations			5
	3.1. Facilities			5
	3.2. Location			5
4.	Test Results and Measurement Data	<u>(</u> C)	<u>(201)</u>	6



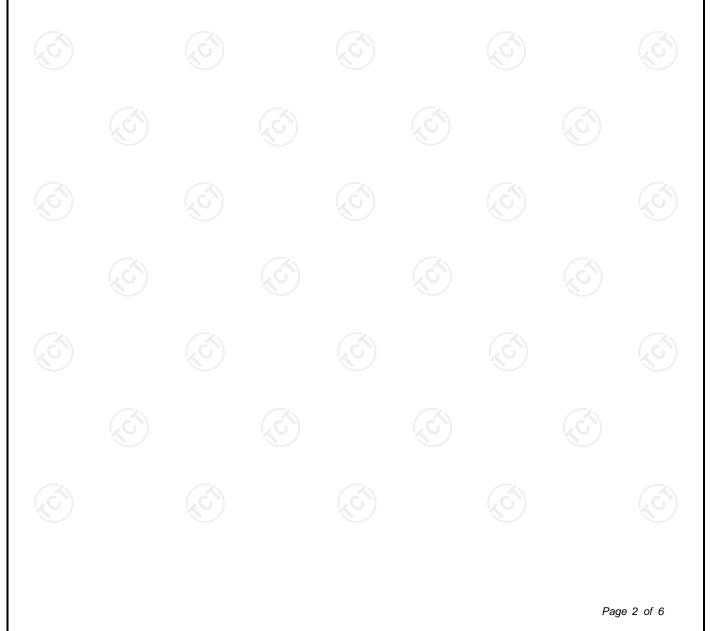

1. General Product Information

1.1. EUT description

Product Name:	True Wireless Earbuds	Z)	(c ¹)
Model/Type reference:	Urbanista Austin		
Sample Number	TCT220617E016-0101		
Operation Frequency:	2402MHz~2480MHz		
Modulation Type:	For BT: GFSK, π/4-DQPSK For BLE: GFSK	A	
Antenna Type:	Chip Antenna		
Antenna Gain:	1.15dBi		
Rating(s):	Rechargeable Li-ion Battery DC 3.7		

Note: The antenna gain listed in this report is provided by applicant, and the test laboratory is not responsible for this parameter.



Report No.: TCT220617E035

2. General Information

2.1. Test environment and mode

	Normal conditio	n	
	+25ºC		
	DC 3.7V	(\mathcal{C}
	56%		
	1008 mbar		
Keep the E	UT in continuous transmi	tting by select	channel
	Keep the E	+25°C DC 3.7V 56% 1008 mbar	DC 3.7V 56%

2.2. Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Equipment	Model No.	Serial No.	FCC ID	Trade Name
Adapter	JD-050200	20120109075767 35	1	JD
Madai				N. C

Note:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.

- 2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.
- 3. For conducted measurements (Output Power, 20dB Occupied Bandwidth, Carrier Frequencies Separation, Hopping Channel Number, Dwell Time, Spurious Emissions), the antenna of EUT is connected to the test equipment via temporary antenna connector, the antenna connector is soldered on the antenna port of EUT, and the temporary antenna connector is listed in the Test Instruments.

Report No.: TCT220617E035



3. Facilities and Accreditations

3.1. Facilities

The test facility is recognized, certified, or accredited by the following organizations:

• FCC - Registration No.: 645098

SHENZHEN TONGCE TESTING LAB

Designation Number: CN1205

The testing lab has been registered and fully described in a report with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files.

- IC Registration No.: 10668A-1
- SHENZHEN TONGCE TESTING LAB
- CAB identifier: CN0031

The testing lab has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing.

3.2. Location

SHENZHEN TONGCE TESTING LAB

Address: TCT Testing Industrial Park Fuqiao 5th Industrial Zone, Fuhai Street, Bao'an District Shenzhen, Guangdong, 518103, People's Republic of China TEL: +86-755-27673339



4. Test Results and Measurement Data

According to § 15.247(i) and § 1.1307b(1), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the commission's guidance.

The 1-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

[(max. power of channel, including tune-up tolerance, mW) / (min. test separation distance, mm)] $\cdot [\sqrt{f(GHz)}] \le 3.0$ for 1-g SAR, where

- f(GHz) is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- When the minimum test separation distance is < 5 mm, a distance of 5 mm according is applied to determine SAR test exclusion.
- The result is rounded to one decimal place for comparison

•	BDR+EDR:

TCT通测检测 TESTING CENTRE TECHNOLOGY

Tune Max. Max. exclusion									
Channel	Frequency (GHz)	Max. Power (dBm)	Tune up Power (dBm)	Max. Tune up Power (dBm)	Max. Tune up Power (mW)	Test distance (mm)	Result	exclusion thresholds for 1-g SAR	
CH 78	2.48	3.70	3±1	4	2.51	5	0.79	3.0	

BLE:

K)	Channel	Frequency (GHz)	Max. Power (dBm)	Tune up Power (dBm)	Max. Tune up Power (dBm)	Max. Tune up Power (mW)	Test distance (mm)	Result	exclusion thresholds for 1-g SAR
$\mathbf{\mathbf{\mathbf{\mathbf{\mathbf{\mathbf{\mathbf{\mathbf{\mathbf{\mathbf{\mathbf{\mathbf{\mathbf{\mathbf{\mathbf{\mathbf{\mathbf{\mathbf{$	CH 39	2.48	2.86	2±1	3	2	5	0.63	3.0

Result:

Base on the calculation value, No SAR measurement is required.

****END OF REPORT*****