

Test Plot 1#: Wi-Fi 2.4G_Mode B_Body Right_Middle Channel**DUT: HD Music Player; Type: HiBy R6; Serial: 18011200520**

Communication System: IEEE 802.11b WiFi 2.4 GHz; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.936$ S/m; $\epsilon_r = 52.618$; $\rho = 1000$ kg/m³

Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.05, 4.05, 4.05); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (121x51x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0294 W/kg

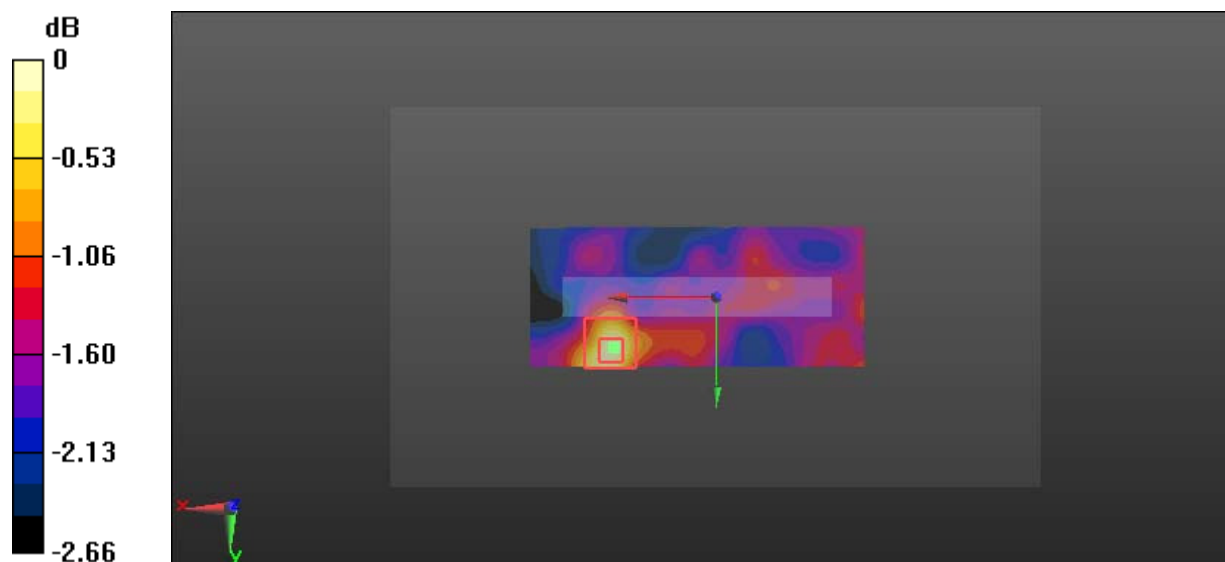
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.543 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.0300 W/kg

SAR(1 g) = 0.027 W/kg; SAR(10 g) = 0.025 W/kg

Maximum value of SAR (measured) = 0.0305 W/kg



0 dB = 0.0305 W/kg = -15.16 dBW/kg

Test Plot 2#: Wi-Fi 2.4G_Mode B_Body Back_Middle Channel**DUT: HD Music Player; Type: HiBy R6; Serial: 18011200520**

Communication System: IEEE 802.11b WiFi 2.4 GHz; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.936$ S/m; $\epsilon_r = 52.618$; $\rho = 1000$ kg/m³

Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.05, 4.05, 4.05); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (121x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.497 W/kg

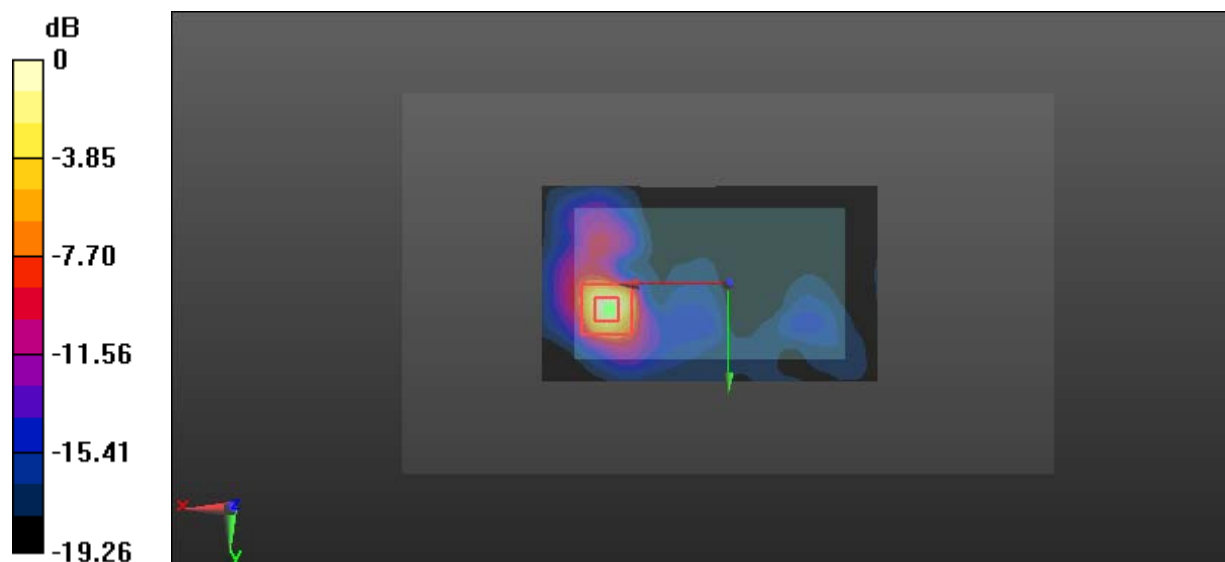
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.177 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.762 W/kg

SAR(1 g) = 0.307 W/kg; SAR(10 g) = 0.111 W/kg

Maximum value of SAR (measured) = 0.487 W/kg



0 dB = 0.487 W/kg = -3.12 dBW/kg

Test Plot 3#: Wi-Fi 2.4G_Mode B_Body Front_Middle Channel**DUT: HD Music Player; Type: HiBy R6; Serial: 18011200520**

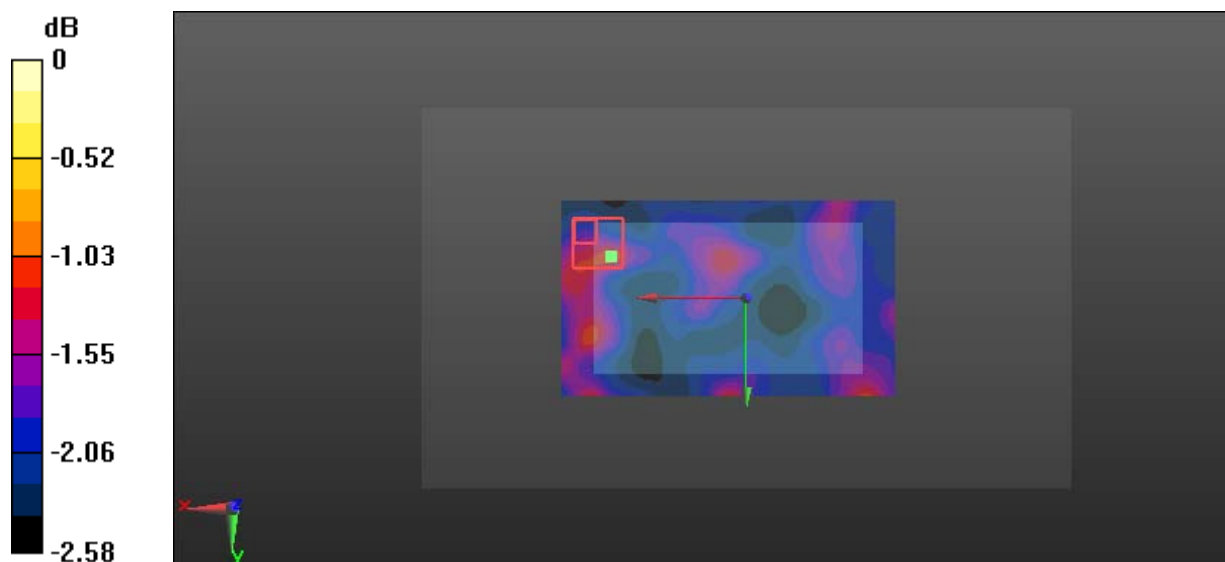
Communication System: IEEE 802.11b WiFi 2.4 GHz; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437 \text{ MHz}$; $\sigma = 1.936 \text{ S/m}$; $\epsilon_r = 52.618$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.05, 4.05, 4.05); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (121x71x1): Interpolated grid: $dx=1.200 \text{ mm}$, $dy=1.200 \text{ mm}$ Maximum value of SAR (interpolated) = 0.0421 W/kg **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 4.742 V/m ; Power Drift = -0.05 dB Peak SAR (extrapolated) = 0.0530 W/kg **SAR(1 g) = 0.045 W/kg ; SAR(10 g) = 0.040 W/kg** Maximum value of SAR (measured) = 0.0534 W/kg  $0 \text{ dB} = 0.0534 \text{ W/kg} = -12.72 \text{ dBW/kg}$

Test Plot 4#: Wi-Fi 2.4G_Mode B_Body Top_Middle Channel**DUT: HD Music Player; Type: HiBy R6; Serial: 18011200520**

Communication System: IEEE 802.11b WiFi 2.4 GHz; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.936$ S/m; $\epsilon_r = 52.618$; $\rho = 1000$ kg/m³

Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.05, 4.05, 4.05); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (61x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0269 W/kg

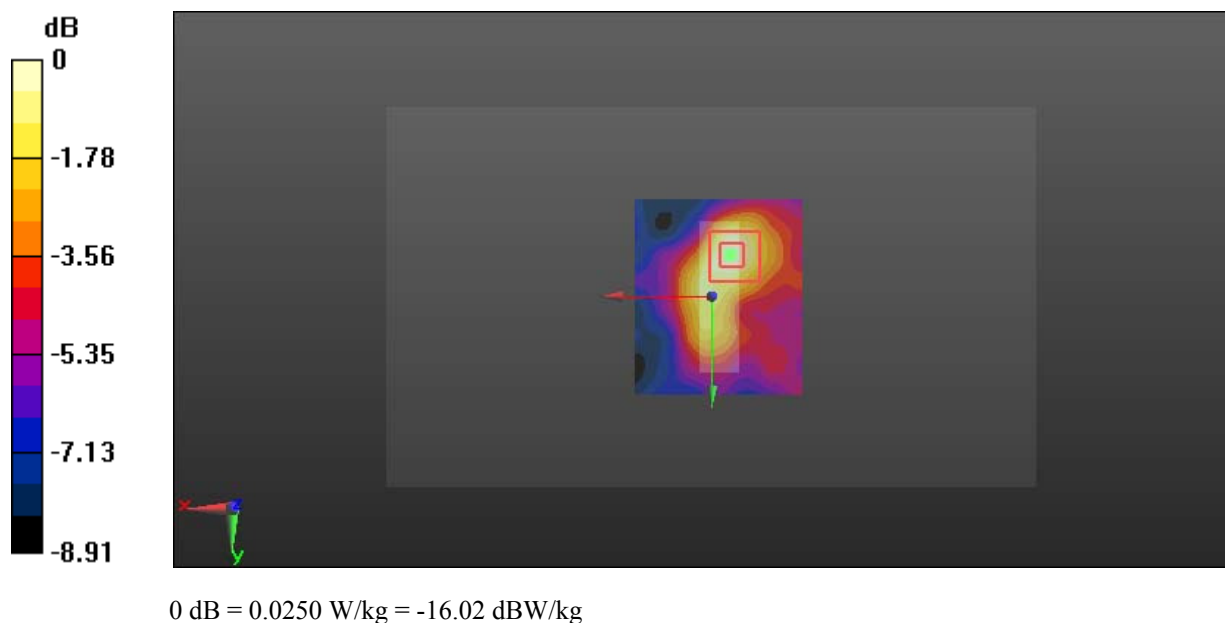
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.808 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.0300 W/kg

SAR(1 g) = 0.018 W/kg; SAR(10 g) = 0.013 W/kg

Maximum value of SAR (measured) = 0.0250 W/kg



Test Plot 5#: Wi-Fi 5.8G_Mode A_Body Left_Middle Channel**DUT: HD Music Player; Type: HiBy R6; Serial: 18011200520**

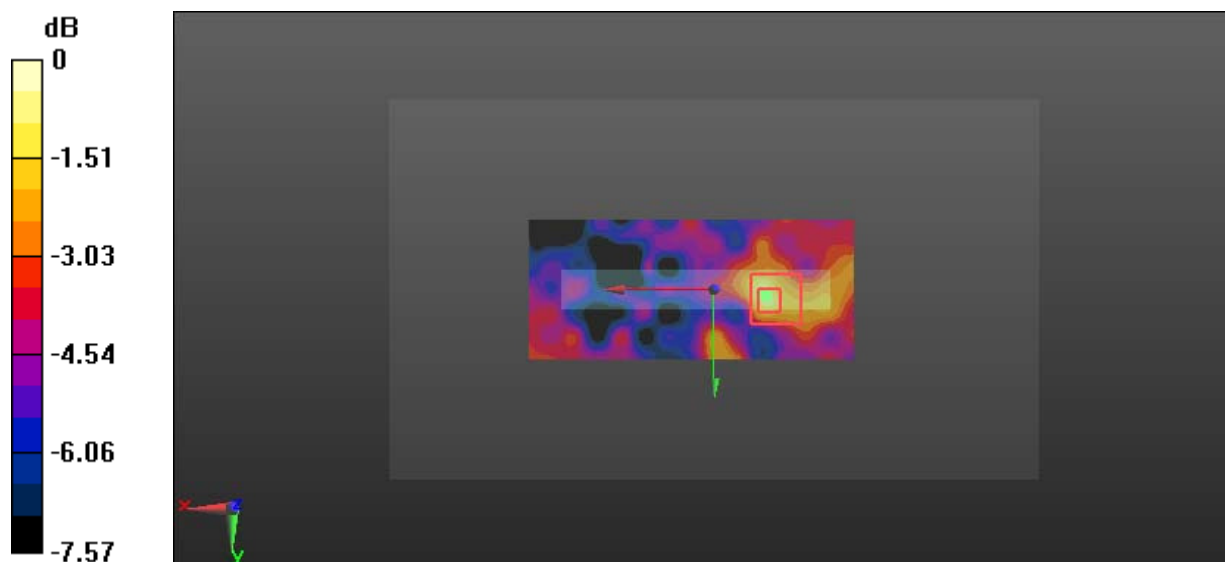
Communication System: IEEE 802.11a WiFi 5.8 GHz; Frequency: 5785 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5785 \text{ MHz}$; $\sigma = 6.196 \text{ S/m}$; $\epsilon_r = 49.15$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(4.35, 4.35, 4.35); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (141x61x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$ Maximum value of SAR (interpolated) = 0.0339 W/kg **Zoom Scan (7x7x6)/Cube 0:** Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=2\text{mm}$ Reference Value = 1.483 V/m ; Power Drift = 0.09 dB Peak SAR (extrapolated) = 0.116 W/kg **SAR(1 g) = 0.026 W/kg ; SAR(10 g) = 0.020 W/kg** Maximum value of SAR (measured) = 0.0398 W/kg  $0 \text{ dB} = 0.0398 \text{ W/kg} = -14.00 \text{ dBW/kg}$

Test Plot 6#: Wi-Fi 5.8G_Mode A_Body Back_Low Channel**DUT: HD Music Player; Type: HiBy R6; Serial: 18011200520**

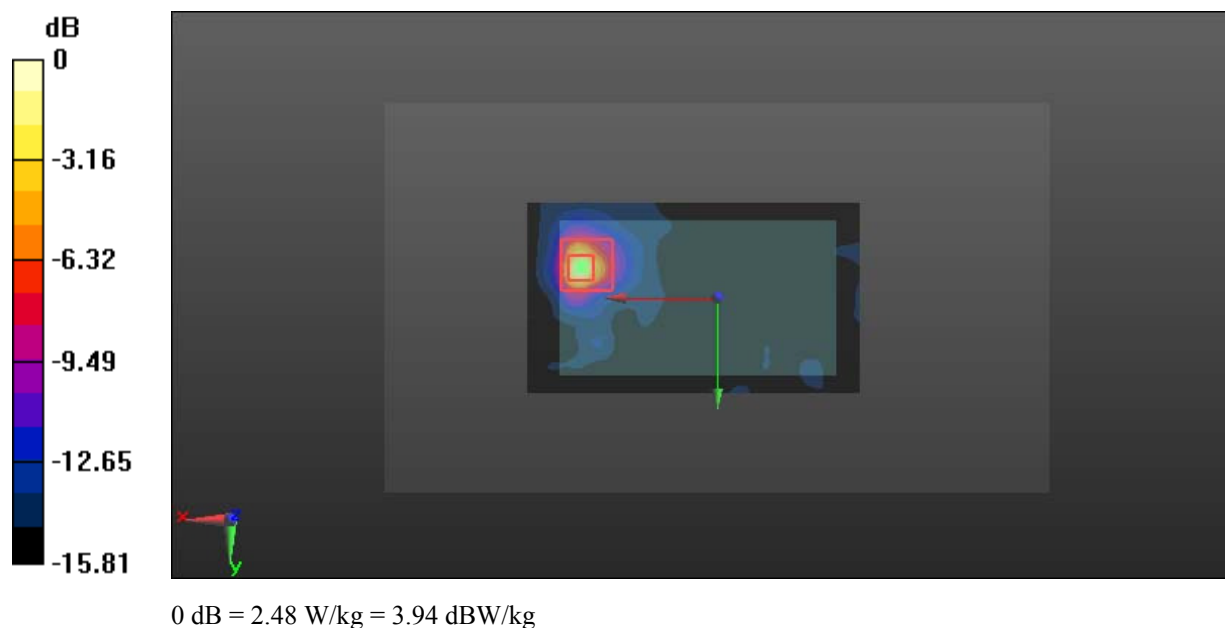
Communication System: IEEE 802.11a WiFi 5.8 GHz; Frequency: 5745 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5745 \text{ MHz}$; $\sigma = 6.068 \text{ S/m}$; $\epsilon_r = 49.418$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(4.35, 4.35, 4.35); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (141x81x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$ Maximum value of SAR (interpolated) = 3.98 W/kg **Zoom Scan (7x7x6)/Cube 0:** Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=2\text{mm}$ Reference Value = 3.958 V/m ; Power Drift = -0.18 dB Peak SAR (extrapolated) = 5.46 W/kg **SAR(1 g) = 0.932 W/kg ; SAR(10 g) = 0.285 W/kg** Maximum value of SAR (measured) = 2.48 W/kg 

Test Plot 7#: Wi-Fi 5.8G_Mode A_Body Back_Middle Channel**DUT: HD Music Player; Type: HiBy R6; Serial: 18011200520**

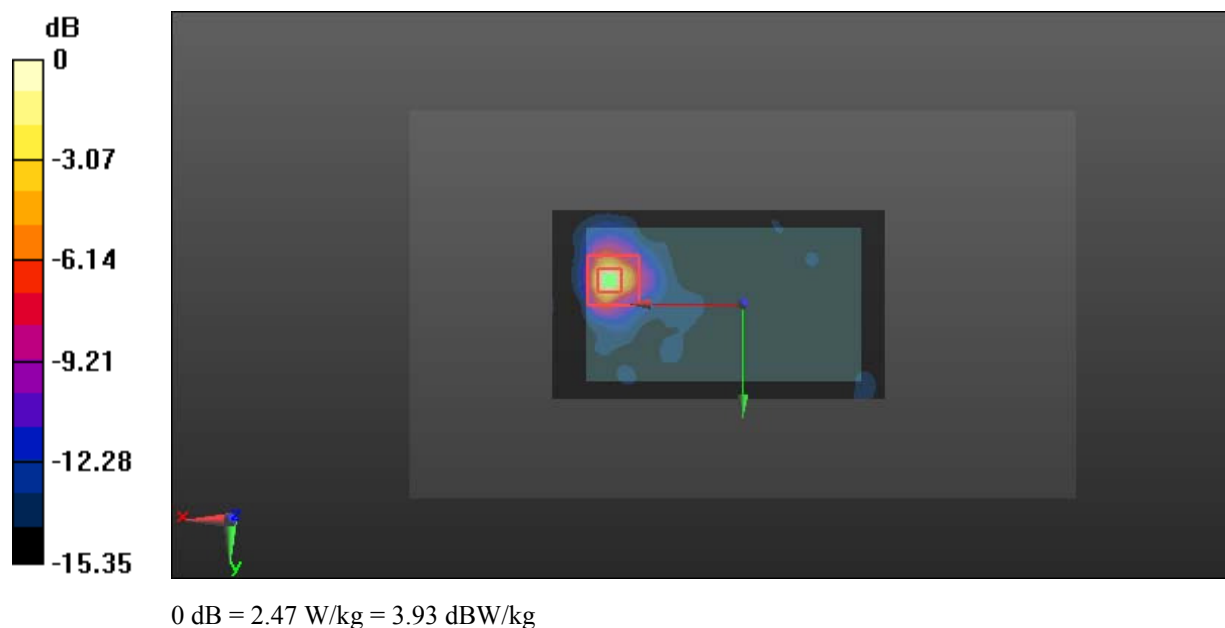
Communication System: IEEE 802.11a WiFi 5.8 GHz; Frequency: 5785 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5785 \text{ MHz}$; $\sigma = 6.196 \text{ S/m}$; $\epsilon_r = 49.15$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(4.35, 4.35, 4.35); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (141x81x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$ Maximum value of SAR (interpolated) = 3.35 W/kg **Zoom Scan (7x7x6)/Cube 0:** Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=2\text{mm}$ Reference Value = 2.895 V/m ; Power Drift = 0.11 dB Peak SAR (extrapolated) = 4.76 W/kg **SAR(1 g) = 0.919 W/kg ; SAR(10 g) = 0.304 W/kg** Maximum value of SAR (measured) = 2.47 W/kg 

Test Plot 8#: Wi-Fi 5.8G_Mode A_Body Back_High Channel**DUT: HD Music Player; Type: HiBy R6; Serial: 18011200520**

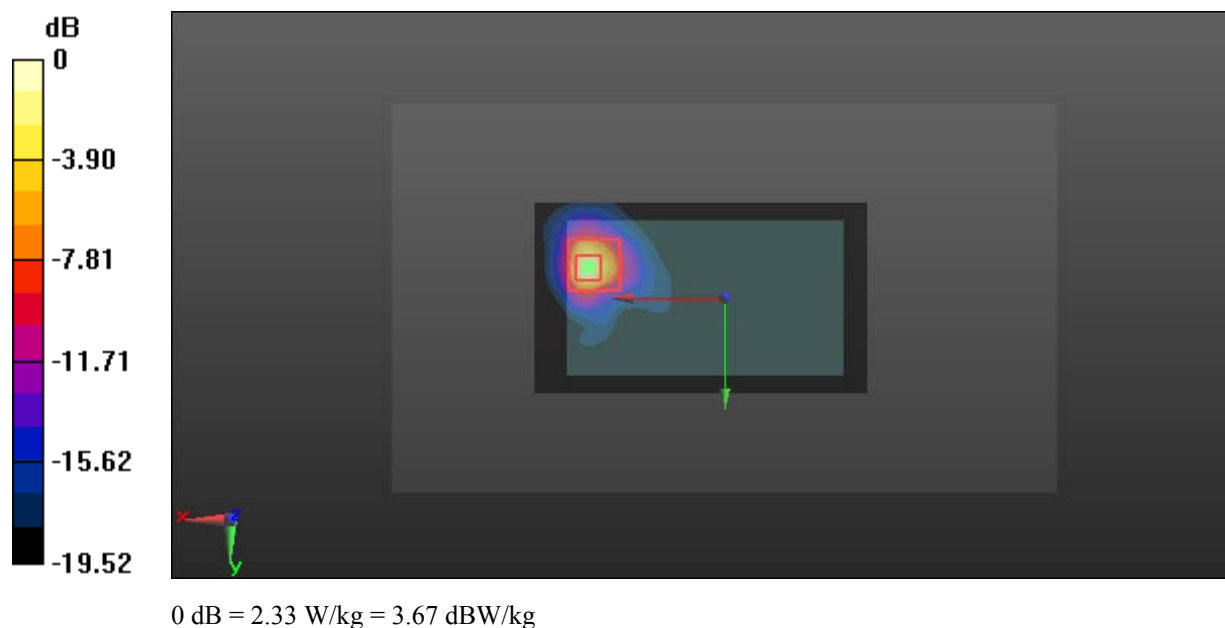
Communication System: IEEE 802.11a WiFi 5.8 GHz; Frequency: 5825 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5825 \text{ MHz}$; $\sigma = 6.147 \text{ S/m}$; $\epsilon_r = 49.102$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(4.35, 4.35, 4.35); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (141x81x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$ Maximum value of SAR (interpolated) = 3.37 W/kg **Zoom Scan (7x7x6)/Cube 0:** Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=2\text{mm}$ Reference Value = 2.701 V/m ; Power Drift = 0.03 dB Peak SAR (extrapolated) = 4.75 W/kg **SAR(1 g) = 0.918 W/kg ; SAR(10 g) = 0.309 W/kg** Maximum value of SAR (measured) = 2.33 W/kg 

Test Plot 9#: Wi-Fi 5.8G_Mode A_Body Top_High Channel**DUT: HD Music Player; Type: HiBy R6; Serial: 18011200520**

Communication System: IEEE 802.11a WiFi 5.8 GHz; Frequency: 5785 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5785 \text{ MHz}$; $\sigma = 6.196 \text{ S/m}$; $\epsilon_r = 49.15$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(4.35, 4.35, 4.35); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (61x91x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$ Maximum value of SAR (interpolated) = 0.164 W/kg **Zoom Scan (7x7x6)/Cube 0:** Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=2\text{mm}$ Reference Value = 3.089 V/m ; Power Drift = -0.11 dB Peak SAR (extrapolated) = 0.268 W/kg **SAR(1 g) = 0.080 W/kg ; SAR(10 g) = 0.047 W/kg** Maximum value of SAR (measured) = 0.158 W/kg 