

# **RW8822-50B1**

## **IEEE 802.11a/b/g/n/ac 2T2R+Bluetooth 5.0 Combo Module**

### **DISCLAIMER AND COPYRIGHT NOTICE**

Information in this document, including URL references, is subject to change without notice.

This document is provided “As if” with no whatsoever, including any warranty of merchantability, noninfringement, fitness for any purpose, or any warranty otherwise arising out of any proposal, specification or samples.

All liability, including liability for infringement of any proprietary rights, relating to use of information in this document is disclaimed. No licenses express or implied, by estoppel or otherwise, to any intellectual property rights are granted herein.

The Bluetooth logo and symbol belong to the Bluetooth SIG Inc.

The Wi-Fi Alliance Member Logo is a trademark of the Wi-Fi Alliance.

All trade names, trademarks and registered trademarks mentioned in this document are property of their respective owners, and are hereby acknowledged.

Copyright ITON Technology Corp. All rights reserved.

## Table of Contents

|                                           |    |
|-------------------------------------------|----|
| 1. Device Overview .....                  | 4  |
| 1.1 Descriptions .....                    | 4  |
| 1.2 Features .....                        | 4  |
| 1.2.1 General Features .....              | 4  |
| 1.2.2 Wi-Fi Key Features .....            | 4  |
| 1.2.3 Bluetooth Key Features .....        | 5  |
| 1.3 Functional Block Diagram .....        | 5  |
| 2. Pin Configuration and Functions .....  | 6  |
| 2.1 Module Pin Diagram .....              | 6  |
| 2.2 Pin Functions .....                   | 6  |
| 3. Specifications .....                   | 9  |
| 3.1 General Characteristics .....         | 9  |
| 3.2 RF Characteristics .....              | 10 |
| 3.2.1 Receiver RF Specifications .....    | 10 |
| 3.2.2 Transmitter RF Specifications ..... | 12 |
| 3.2.3 Bluetooth RF Specifications .....   | 15 |
| 4. Application and Implementation .....   | 17 |
| 4.1 Application Diagram .....             | 17 |
| 5. Mechanical and Package .....           | 18 |
| 5.1 Mechanical Size .....                 | 18 |
| 5.2 Recommended Land Pattern .....        | 18 |
| 5.3 Package Information .....             | 19 |

|                               |    |
|-------------------------------|----|
| 6. Thermal Reflow .....       | 19 |
| 7. Ordering Information ..... | 20 |
| 8. Revision History .....     | 20 |

ITON

## 1. Device Overview

### 1.1 Descriptions

The RW8822-50B1 is a highly integrated module that supports 2T2R 802.11 a/b/g/n/ac with Wireless LAN (WLAN) SDIO (SDIO 1.1/2.0/3.0) interface controller and Bluetooth 5.0 HS-UART interface controller. The high speed FFT/IFFT paths, combined with BPSK, QPSK, 16QAM, 64QAM and 256QAM modulation of the individual subcarriers, and compatible coding rate of 1/2, 2/3, 3/4, 5/6, provide up to 866.7Mbps for IEEE 802.11ac MIMO OFDM. The RW8822-50B1 MAC supports 802.11e for multimedia applications, 802.11i and WAPI for security.

The RW8822-50B1 provides a complete solution for a high-performance integrated wireless and Bluetooth device.

### 1.2 Features

#### 1.2.1 General Features

- Supports 3.3V power supply
- Complies with SDIO 1.1/2.0/3.0 for WLAN with clock rate up to 208MHz
- CMOS MAC, Baseband PHY and RF in a single module for IEEE 802.11a/b/g/n/ac compatible WLAN
- IEEE 802.11i (WPA, WPA2). Open, shared key, and pair-wise key authentication services
- Multiple BSSID feature allows the module to assume multiple MAC identities when used as a wireless bridge
- Wi-Fi Direct supports wireless peer to peer application
- IEEE802.11h DFS,TPC,Spectrum Measurement

#### 1.2.2 Wi-Fi Key Features

- IEEE 802.11a/b/g/n/ac compatible WLAN
- IEEE 802.11ac MIMO OFDM
- IEEE 802.11n MIMO OFDM
- Supports 2.4Ghz and 5Ghz band channels
- 20MHz / 40MHz / 80MHz bandwidth transmission
- Maximum data rate 54Mbps in 802.11g, 300Mbps in 802.11n and 866.7Mbps in 802.11ac
- OFDM with BPSK, QPSK, 16QAM, 64QAM and 256QAM modulation. Convolutional Coding Rate: 1/2, 2/3, 3/4, and 5/6
- DSSS with DBPSK and DQPSK, CCK modulation with long and short preamble

- Support STBC,LDPC

### 1.2.3 Bluetooth Key Features

- Supports Bluetooth 5.0 system
- Compatible with Bluetooth V2.1 systems
- Enhanced BT/Wi-Fi Coexistence Control to improve transmission quality in different profiles
- Dual Mode support: Simultaneous LE and BR/EDR
- Integrated internal Class 1, Class 2, and Class 3 PA
- Supports Enhanced Power Control
- Supports Bluetooth Low Energy
- Integrated 32K oscillator for power management
- Complies with HS-UART with configurable baud rate for Bluetooth

### 1.3 Functional Block Diagram

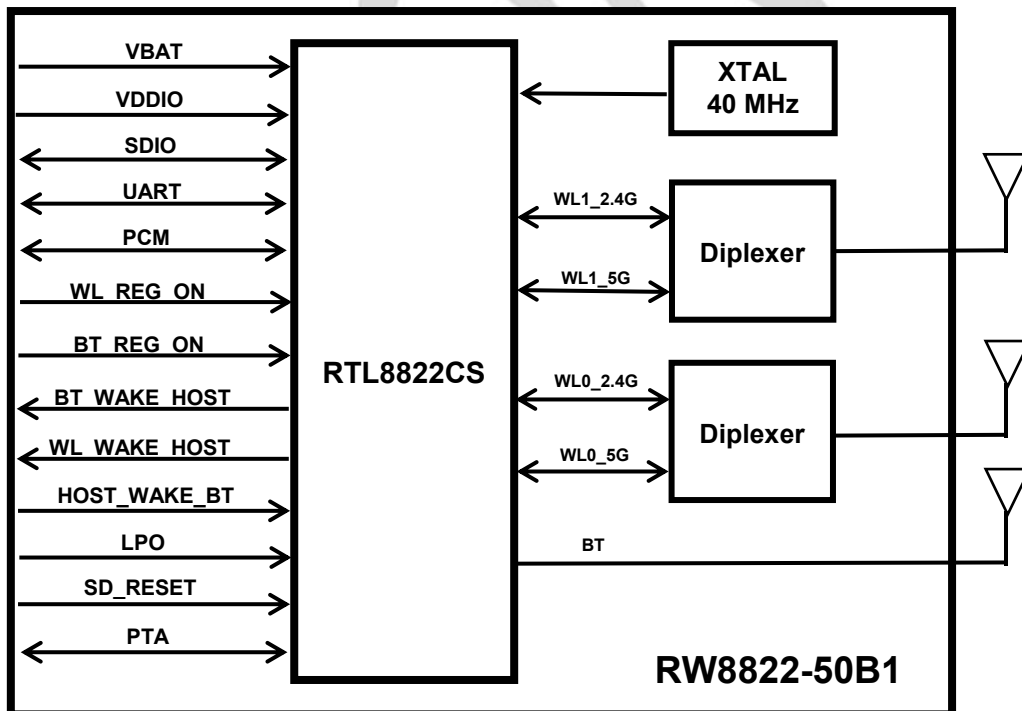


Figure 1. Block Diagram of RW8822-50B1

## 2. Pin Configuration and Functions

### 2.1 Module Pin Diagram

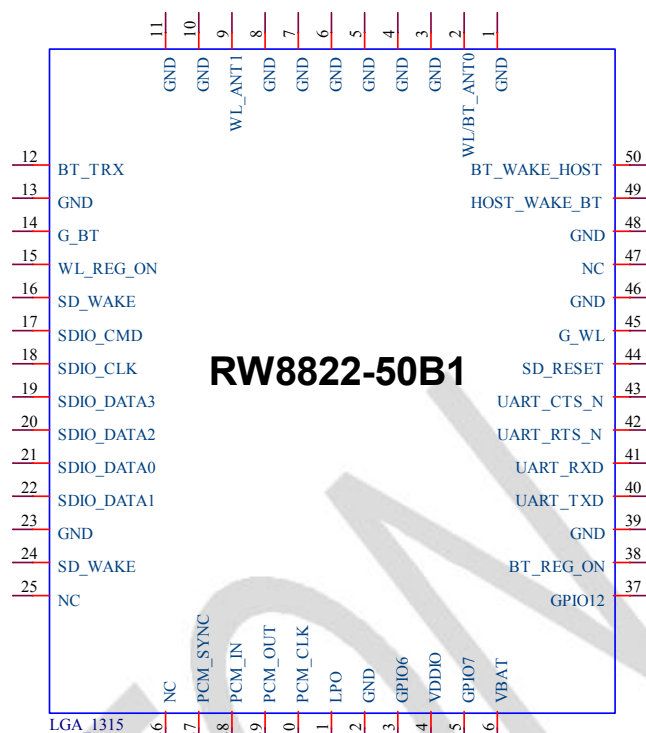


Figure 2.Pin Diagram of RW8822-50B1

### 2.2 Pin Functions

| Pin | Name       | Description                                                                                                       |
|-----|------------|-------------------------------------------------------------------------------------------------------------------|
| 1   | GND        | Ground                                                                                                            |
| 2   | WL/BT_ANT0 | RF input/output of path S1 WLAN(3 Antennas Version)<br>RF input/output of path S1 WLAN and BT(2 Antennas Version) |
| 3   | GND        | Ground                                                                                                            |
| 4   | GND        | Ground                                                                                                            |
| 5   | GND        | Ground                                                                                                            |
| 6   | GND        | Ground                                                                                                            |
| 7   | GND        | Ground                                                                                                            |
| 8   | GND        | Ground                                                                                                            |
| 9   | WL_ANT1    | RF input/output of path S0 WLAN                                                                                   |
| 10  | GND        | Ground                                                                                                            |

|    |            |                                                                                                                                                                         |
|----|------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 11 | GND        | Ground                                                                                                                                                                  |
| 12 | BT_TRX     | RF input/output port for BT(3 Antennas Version)                                                                                                                         |
| 13 | GND        | Ground                                                                                                                                                                  |
| 14 | G_BT       | No connect, keep floating                                                                                                                                               |
| 15 | WL_REG_ON  | This pin can externally shut down the RW8822-50B1 WLAN function when WL_REG_ON is pulled low.                                                                           |
| 16 | SD_WAKE    | Output and open drain active low signal. This signal is used to request that the system return from a sleep/suspended state to service a function initiated wake event. |
| 17 | SDIO_CMD   | SDIO command input                                                                                                                                                      |
| 18 | SDIO_CLK   | SDIO clock input                                                                                                                                                        |
| 19 | SDIO_DATA3 | SDIO port data 3                                                                                                                                                        |
| 20 | SDIO_DATA2 | SDIO port data 2                                                                                                                                                        |
| 21 | SDIO_DATA0 | SDIO port data 0                                                                                                                                                        |
| 22 | SDIO_DATA1 | SDIO port data 1                                                                                                                                                        |
| 23 | GND        | Ground                                                                                                                                                                  |
| 24 | SD_WAKE    | Output and open drain active low signal. This signal is used to request that the system return from a sleep/suspended state to service a function initiated wake event. |
| 25 | NC         | No connect, keep floating                                                                                                                                               |
| 26 | NC         | No connect, keep floating                                                                                                                                               |
| 27 | PCM_SYNC   | PCM sync signal                                                                                                                                                         |
| 28 | PCM_IN     | PCM data input                                                                                                                                                          |
| 29 | PCM_OUT    | PCM data output                                                                                                                                                         |
| 30 | PCM_CLK    | PCM clock                                                                                                                                                               |
| 31 | LPO        | External 32K or RTC clock input                                                                                                                                         |
| 32 | GND        | Ground                                                                                                                                                                  |
| 33 | GPIO6      | This Pin can be used to PTA interface. When use 2-wire UART mode, it is LTECOEX_UART_RX. When use 3-wire GPIO mode, it is LTE_RX.                                       |
| 34 | VDDIO      | Power supply for GPIOs, SUS_CLK, EESK, CHIIP_EN. 3.3V or 1.8V is alternative.                                                                                           |

|    |              |                                                                                                                                                                                                                                                   |
|----|--------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 35 | GPIO7        | This Pin can be used to PTA interface. When use 2-wire UART mode, it is LTECOEX_UART_TX. When use 3-wire GPIO mode, it is LTE_TX.                                                                                                                 |
| 36 | VBAT         | 3.3V power supply                                                                                                                                                                                                                                 |
| 37 | GPIO12       | This Pin can be used to PTA interface. When use 3-wire GPIO mode, it is WLAN Priority.                                                                                                                                                            |
| 38 | BT_REG_ON    | <p>This pin can externally shut down the RW8822-50B1 BT function when BT_REG_ON is pulled low, UART interface will be also disabled.</p> <p>This pin can be also defined as the BT Radio-off function with host interface remaining connected</p> |
| 39 | GND          | Ground                                                                                                                                                                                                                                            |
| 40 | UART_TXD     | BT High-Speed UART Data Out                                                                                                                                                                                                                       |
| 41 | UART_RXD     | BT High-Speed UART Data In                                                                                                                                                                                                                        |
| 42 | UART_RTS_N   | BT High-Speed UART RTS                                                                                                                                                                                                                            |
| 43 | UART_CTS_N   | BT High-Speed UART CTS                                                                                                                                                                                                                            |
| 44 | SD_RESET     | Input and active low signal, this signal can externally shut down the module. When this pin is pulled low, SDIO interface will be disabled.                                                                                                       |
| 45 | G_WL         | WL TEST_MODE_SEL<br>0: Normal operation mode; 1: Test/Debug mode                                                                                                                                                                                  |
| 46 | GND          | Ground                                                                                                                                                                                                                                            |
| 47 | NC           | No connect, keep floating                                                                                                                                                                                                                         |
| 48 | GND          | Ground                                                                                                                                                                                                                                            |
| 49 | HOST_WAKE_BT | Input signal, Host wake up BT                                                                                                                                                                                                                     |
| 50 | BT_WAKE_HOST | Output signal, BT wake up host                                                                                                                                                                                                                    |



### 3. Specifications

#### 3.1 General Characteristics

| Category        | Descriptions                                                                                                                                                                                                                                                     |
|-----------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Dimension       | L*W*H :15.0mm (±0.3mm)*13.0mm (±0.3mm)*2.4mm (±0.2mm)                                                                                                                                                                                                            |
| Chip-set        | RTL8822CS                                                                                                                                                                                                                                                        |
| Standard        | IEEE 802.11a/b/g/n/ac+BT 5.0                                                                                                                                                                                                                                     |
| Modulation Type | CCK, OFDM (16 QAM/64 QAM/256 QAM)                                                                                                                                                                                                                                |
| Frequency Band  | 2400~2500MHz,4900-5845MHz                                                                                                                                                                                                                                        |
| Interface       | WLAN: SDIO, Bluetooth: UART                                                                                                                                                                                                                                      |
| Data Security   | WEP,WPA/WPA2                                                                                                                                                                                                                                                     |
| Transmit Power  | 2.4G:<br>11b 11M:19.5±2dBm<br>11g 54M:18±2dBm<br>11n HT20 MCS7:17±2dBm<br>11n HT40 MCS7:17±2dBm<br>5G:<br>11a 54M:17±2dBm<br>11n HT20 MCS7:16±2dBm<br>11n HT40 MCS7:16±2dBm<br>11ac VHT80 MCS9:14.5±2dBm                                                         |
| Rx Sensitivity  | 2.4G:<br>11b 11M:-86dBm@8% PER<br>11g 54M: -75dBm@10% PER<br>11n HT20 MCS7: -70dBm@10% PER<br>11n HT40 MCS7: -68dBm@10% PER<br>5G:<br>11a 54M:-75dBm@10% PER<br>11n HT20 MCS7: -70dBm@10% PER<br>11n HT40 MCS7: -68dBm@10% PER<br>11ac VTH80 MCS9:-59dBm@10% PER |
| Data Rate       | 802.11b [11,5.5,2 and 1Mbps]<br>802.11g [54,48,36,24,18,12,9&6Mbps]<br>802.11n HT20:up to 144.4Mbps<br>802.11n HT40:up to 300Mbps<br>802.11ac VHT80:up to 866.7Mbps                                                                                              |
| Frequency Error | 2.4GHz:<±25 ppm(11b),<±20 ppm(11g/n);5GHz:<±20 ppm                                                                                                                                                                                                               |

|                     |                              |
|---------------------|------------------------------|
| Ambient Temperature | 0℃~70℃                       |
| Storage Temperature | -40℃~85℃                     |
| Antenna             | External PF antenna          |
| Operating System    | Linux                        |
| Operating Voltage   | VBAT:3.3V;VDDIO:1.8V or 3.3V |

## 3.2 RF Characteristics

All measurements are made under nominal supply voltage, room temperature and conducted conditions at each antenna port rather than antenna.

### 3.2.1 Receiver RF Specifications

| Parameter               | Conditions       |                                        | Min. | Nom. | Max. | Unit |
|-------------------------|------------------|----------------------------------------|------|------|------|------|
| Receive input frequency |                  |                                        |      |      |      |      |
| 2.4GHz                  | 802.11b/g/n mode |                                        | 2400 | -    | 2500 | MHz  |
| Receiver sensitivity    |                  |                                        |      |      |      |      |
| 802.11b                 | 1Mbps            | FER<8%,<br>Packet size=<br>1,024bytes  | -    | -    | -82  | dBm  |
|                         | 2Mbps            |                                        | -    | -    | -80  | dBm  |
|                         | 5.5Mbps          |                                        | -    | -    | -78  | dBm  |
|                         | 11Mbps           |                                        | -    | -    | -76  | dBm  |
| 802.11g                 | 6Mbps            | PER<10%,<br>Packet size=<br>1,024bytes | -    | -    | -82  | dBm  |
|                         | 9Mbps            |                                        | -    | -    | -81  | dBm  |
|                         | 12Mbps           |                                        | -    | -    | -79  | dBm  |
|                         | 18Mbps           |                                        | -    | -    | -77  | dBm  |
|                         | 24Mbps           |                                        | -    | -    | -74  | dBm  |
|                         | 36Mbps           |                                        | -    | -    | -70  | dBm  |
|                         | 48Mbps           |                                        | -    | -    | -66  | dBm  |
|                         | 54Mbps           |                                        | -    | -    | -65  | dBm  |
| 802.11n<br>(HT20)       | MCS0.            | PER<10%,<br>Packet size=<br>4,096bytes | -    | -    | -80  | dBm  |
|                         | MCS1.            |                                        | -    | -    | -77  | dBm  |
|                         | MCS2             |                                        | -    | -    | -75  | dBm  |
|                         | MCS3.            |                                        | -    | -    | -72  | dBm  |
|                         | MCS4.            |                                        | -    | -    | -68  | dBm  |
|                         | MCS5.            |                                        | -    | -    | -64  | dBm  |
|                         | MCS6.            |                                        | -    | -    | -63  | dBm  |
|                         | MCS7.            |                                        | -    | -    | -62  | dBm  |

|                     |         |                                        |     |   |     |     |
|---------------------|---------|----------------------------------------|-----|---|-----|-----|
| 802.11n<br>(HT40)   | MCS0.   | PER<10%,<br>Packet size=<br>4,096bytes | -   | - | -77 | dBm |
|                     | MCS1.   |                                        | -   | - | -74 | dBm |
|                     | MCS2    |                                        | -   | - | -72 | dBm |
|                     | MCS3.   |                                        | -   | - | -69 | dBm |
|                     | MCS4.   |                                        | -   | - | -65 | dBm |
|                     | MCS5.   |                                        | -   | - | -61 | dBm |
|                     | MCS6.   |                                        | -   | - | -60 | dBm |
|                     | MCS7.   |                                        | -   | - | -59 | dBm |
| Maximum input level |         |                                        |     |   |     |     |
| 802.11b             | FER<8%  |                                        | -10 | - | -   | dBm |
| 802.11g             | FER<10% |                                        | -20 | - | -   | dBm |
| 802.11n             | FER<10% |                                        | -30 |   |     | dBm |

| Parameter               | Conditions           |                                        | Min. | Nom. | Max. | Unit |
|-------------------------|----------------------|----------------------------------------|------|------|------|------|
| Receive input frequency |                      |                                        |      |      |      |      |
| 5GHz                    | 802.11a/n/ac<br>mode |                                        | 4900 | -    | 5845 | MHz  |
| Receiver sensitivity    |                      |                                        |      |      |      |      |
| 802.11a                 | 6Mbps                | FER<10%,<br>Packet size=<br>1,024bytes | -    | -    | -82  | dBm  |
|                         | 9Mbps                |                                        | -    | -    | -81  | dBm  |
|                         | 12Mbps               |                                        | -    | -    | -79  | dBm  |
|                         | 18Mbps               |                                        | -    | -    | -77  | dBm  |
|                         | 24Mbps               |                                        | -    | -    | -74  | dBm  |
|                         | 36Mbps               |                                        | -    | -    | -70  | dBm  |
|                         | 48Mbps               |                                        | -    | -    | -66  | dBm  |
|                         | 54Mbps               |                                        | -    | -    | -65  | dBm  |
| 802.11n<br>(HT20)       | 6Mbps                | PER<10%,<br>Packet size=<br>4,096bytes | -    | -    | -80  | dBm  |
|                         | 9Mbps                |                                        | -    | -    | -77  | dBm  |
|                         | 12Mbps               |                                        | -    | -    | -75  | dBm  |
|                         | 18Mbps               |                                        | -    | -    | -72  | dBm  |
|                         | 24Mbps               |                                        | -    | -    | -68  | dBm  |
|                         | 36Mbps               |                                        | -    | -    | -64  | dBm  |
|                         | 48Mbps               |                                        | -    | -    | -63  | dBm  |
|                         | 54Mbps               |                                        | -    | -    | -62  | dBm  |
| 802.11n<br>(HT40)       | MCS0.                | PER<10%,                               | -    | -    | -77  | dBm  |
|                         | MCS1.                |                                        | -    | -    | -74  | dBm  |
|                         | MCS2                 |                                        | -    | -    | -72  | dBm  |

|                     |         |                                        |     |   |     |     |
|---------------------|---------|----------------------------------------|-----|---|-----|-----|
|                     | MCS3.   | Packet size=<br>4,096bytes             | -   | - | -69 | dBm |
|                     | MCS4.   |                                        | -   | - | -65 | dBm |
|                     | MCS5.   |                                        | -   | - | -61 | dBm |
|                     | MCS6.   |                                        | -   | - | -60 | dBm |
|                     | MCS7.   |                                        | -   | - | -59 | dBm |
| 802.11ac<br>(VHT80) | MCS0.   | PER<10%,<br>Packet size=<br>4,096bytes | -   | - | -76 | dBm |
|                     | MCS1.   |                                        | -   | - | -73 | dBm |
|                     | MCS2.   |                                        | -   | - | -71 | dBm |
|                     | MCS3.   |                                        | -   | - | -68 | dBm |
|                     | MCS4.   |                                        | -   | - | -64 | dBm |
|                     | MCS5.   |                                        | -   | - | -60 | dBm |
|                     | MCS6.   |                                        | -   | - | -59 | dBm |
|                     | MCS7.   |                                        | -   | - | -58 | dBm |
|                     | MCS8.   |                                        | -   | - | -53 | dBm |
|                     | MCS9.   |                                        | -   | - | -51 | dBm |
| Maximum input level |         |                                        |     |   |     |     |
| 802.11a             | FER<10% |                                        | -30 | - | -   | dBm |
| 802.11n             | FER<10% |                                        | -30 | - | -   | dBm |
| 802.11ac            | FER<10% |                                        | -30 | - | -   | dBm |

### 3.2.2 Transmitter RF Specifications

| Parameter               | Condition                                                                                    | Min. | Nom. | Max. | Unit. |
|-------------------------|----------------------------------------------------------------------------------------------|------|------|------|-------|
| Receive input frequency |                                                                                              |      |      |      |       |
| 802.11b/g/n             | 2.4GHz                                                                                       | 2400 | -    | 2500 | MHz   |
| Transmit power          |                                                                                              |      |      |      |       |
| 802.11b                 | 11Mbps                                                                                       | 17   | 19   | 21   | dBm   |
| 802.11g                 | 54Mbps                                                                                       | 16   | 18   | 20   | dBm   |
| 802.11n                 | HT20, MCS7                                                                                   | 15   | 17   | 19   | dBm   |
|                         | HT40, MCS7                                                                                   | 15   | 17   | 19   | dBm   |
| Spectrum mask           |                                                                                              |      |      |      |       |
| 802.11b                 | $f_c - 22\text{MHz} < f < f_c - 11\text{MHz} \& f_c + 11\text{MHz} < f < f_c + 22\text{MHz}$ | -    | -    | -30  | dBr   |
|                         | $f_c - 55\text{MHz} < f < f_c - 22\text{MHz} \& f_c + 22\text{MHz} < f < f_c + 55\text{MHz}$ | -    | -    | -50  | dBr   |
| 802.11g                 | $f_c \pm 9\text{MHz}$                                                                        | -    | -    | 0    | dBr   |

|                               |                        |     |   |     |     |
|-------------------------------|------------------------|-----|---|-----|-----|
|                               | $f_c \pm 11\text{MHz}$ | -   | - | -20 | dBr |
|                               | $f_c \pm 20\text{MHz}$ | -   | - | -28 | dBr |
|                               | $f_c \pm 30\text{MHz}$ | -   | - | -40 | dBr |
| 802.11n                       | $f_c \pm 9\text{MHz}$  | -   | - | 0   | dBr |
|                               | $f_c \pm 11\text{MHz}$ | -   | - | -20 | dBr |
|                               | $f_c \pm 20\text{MHz}$ | -   | - | -28 | dBr |
|                               | $f_c \pm 30\text{MHz}$ | -   | - | -45 | dBr |
| Center frequency tolerance    |                        |     |   |     |     |
| 802.11b                       |                        | -25 | - | +25 | pmm |
| 802.11g/n                     |                        | -20 | - | +20 | pmm |
| EVM (Error Vector Magnitude)* |                        |     |   |     |     |
| 802.11b                       | 1Mbps                  | -   | - | 35  | %   |
|                               | 2Mbps                  | -   | - | 35  | %   |
|                               | 5.5Mbps                | -   | - | 35  | %   |
|                               | 11Mbps                 | -   | - | 35  | %   |
| 802.11g                       | 6Mbps                  | -   | - | -5  | %   |
|                               | 9Mbps                  | -   | - | -8  | dB  |
|                               | 12Mbps                 | -   | - | -10 | dB  |
|                               | 18Mbps                 | -   | - | -13 | dB  |
|                               | 24Mbps                 | -   | - | -16 | dB  |
|                               | 36Mbps                 | -   | - | -19 | dB  |
|                               | 48Mbps                 | -   | - | -22 | dB  |
|                               | 54Mbps                 | -   | - | -25 | dB  |
| 802.11n                       | MCS0.                  | -   | - | -5  | dB  |
|                               | MCS1.                  | -   | - | -10 | dB  |
|                               | MCS2                   | -   | - | -13 | dB  |
|                               | MCS3.                  | -   | - | -16 | dB  |
|                               | MCS4.                  | -   | - | -19 | dB  |
|                               | MCS5.                  | -   | - | -22 | dB  |
|                               | MCS6.                  | -   | - | -25 | dB  |
|                               | MCS7.                  | -   | - | -28 | dB  |
| Remarks                       |                        |     |   |     |     |

EVM :

<Test condition>

Method: composite EVM method.

Phase correction: Symbol-by-symbol correction.

Channel estimation: Raw channel estimate Raw Long Symbols.

Symbol timing correction: on.

Frequency Sync: Long training symbol.

| Parameter                     | Condition               | Min. | Nom. | Max. | Unit. |
|-------------------------------|-------------------------|------|------|------|-------|
| Receive input frequency       |                         |      |      |      |       |
| 802.11a/n/ac                  | 5GHz                    | 4900 | -    | 5845 | MHz   |
| Transmit power                |                         |      |      |      |       |
| 802.11a                       | 54Mbps                  | 15   | 17   | 19   | dBm   |
| 802.11n                       | HT20, MCS7              | 14   | 16   | 18   | dBm   |
|                               | HT40, MCS7              | 14   | 16   | 18   | dBm   |
| 802.11ac                      | VHT20,MCS8              | 13   | 15   | 17   | dBm   |
|                               | VHT40,MCS9              | 12.5 | 14.5 | 16.5 | dBm   |
|                               | VHT80,MCS9              | 12.5 | 14.5 | 16.5 | dBm   |
| Spectrum mask                 |                         |      |      |      |       |
| 802.11a                       | $f_c \pm 9\text{MHz}$   | -    | -    | 0    | dBr   |
|                               | $f_c \pm 11\text{MHz}$  | -    | -    | -20  | dBr   |
|                               | $f_c \pm 20\text{MHz}$  | -    | -    | -28  | dBr   |
|                               | $f_c \pm 30\text{MHz}$  | -    | -    | -40  | dBr   |
| 802.11n                       | $f_c \pm 9\text{MHz}$   | -    | -    | 0    | dBr   |
|                               | $f_c \pm 11\text{MHz}$  | -    | -    | -20  | dBr   |
|                               | $f_c \pm 20\text{MHz}$  | -    | -    | -28  | dBr   |
|                               | $f_c \pm 30\text{MHz}$  | -    | -    | -45  | dBr   |
| 802.11ac (VHT80)              | $f_c \pm 39\text{MHz}$  | -    | -    | 0    | dBr   |
|                               | $f_c \pm 41\text{MHz}$  | -    | -    | -20  | dBr   |
|                               | $f_c \pm 80\text{MHz}$  | -    | -    | -28  | dBr   |
|                               | $f_c \pm 120\text{MHz}$ | -    | -    | -40  | dBr   |
| Center frequency tolerance    |                         |      |      |      |       |
| 802.11a/n/ac                  |                         | -20  | -    | +20  | pmm   |
| EVM (Error Vector Magnitude)* |                         |      |      |      |       |
| 802.11a                       | 6Mbps                   | -    | -    | -5   | %     |
|                               | 9Mbps                   | -    | -    | -8   | dB    |
|                               | 12Mbps                  | -    | -    | -10  | dB    |

|                                                                                                                                                                                                                                                      |        |   |   |     |    |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|---|---|-----|----|
|                                                                                                                                                                                                                                                      | 18Mbps | - | - | -13 | dB |
|                                                                                                                                                                                                                                                      | 24Mbps | - | - | -16 | dB |
|                                                                                                                                                                                                                                                      | 36Mbps | - | - | -19 | dB |
|                                                                                                                                                                                                                                                      | 48Mbps | - | - | -22 | dB |
|                                                                                                                                                                                                                                                      | 54Mbps | - | - | -25 | dB |
| 802.11n                                                                                                                                                                                                                                              | MCS0.  | - | - | -5  | dB |
|                                                                                                                                                                                                                                                      | MCS1.  | - | - | -10 | dB |
|                                                                                                                                                                                                                                                      | MCS2   | - | - | -13 | dB |
|                                                                                                                                                                                                                                                      | MCS3.  | - | - | -16 | dB |
|                                                                                                                                                                                                                                                      | MCS4.  | - | - | -19 | dB |
|                                                                                                                                                                                                                                                      | MCS5.  | - | - | -22 | dB |
|                                                                                                                                                                                                                                                      | MCS6.  | - | - | -25 | dB |
|                                                                                                                                                                                                                                                      | MCS7.  | - | - | -28 | dB |
| 802.11ac                                                                                                                                                                                                                                             | MCS0.  | - | - | -5  | dB |
|                                                                                                                                                                                                                                                      | MCS1.  | - | - | -10 | dB |
|                                                                                                                                                                                                                                                      | MCS2   | - | - | -13 | dB |
|                                                                                                                                                                                                                                                      | MCS3.  | - | - | -16 | dB |
|                                                                                                                                                                                                                                                      | MCS4.  | - | - | -19 | dB |
|                                                                                                                                                                                                                                                      | MCS5.  | - | - | -22 | dB |
|                                                                                                                                                                                                                                                      | MCS6.  | - | - | -25 | dB |
|                                                                                                                                                                                                                                                      | MCS7.  | - | - | -27 | dB |
|                                                                                                                                                                                                                                                      | MCS8.  | - | - | -30 | dB |
|                                                                                                                                                                                                                                                      | MCS9.  | - | - | -32 | dB |
| <b>Remarks</b>                                                                                                                                                                                                                                       |        |   |   |     |    |
| EVM :<br><Test condition><br>Method: composite EVM method.<br>Phase correction: Symbol-by-symbol correction.<br>Channel estimation: Raw channel estimate Raw Long Symbols.<br>Symbol timing correction: on.<br>Frequency Sync: Long training symbol. |        |   |   |     |    |

### 3.2.3 Bluetooth RF Specifications

| Parameter       | Conditions | Minimum | Typical | Maximum | Unit |
|-----------------|------------|---------|---------|---------|------|
| Frequency range |            | 2402    |         | 2480    | MHz  |

|                                  |        |     |     |    |     |
|----------------------------------|--------|-----|-----|----|-----|
| RX sensitivity                   | 1 Mbps | -   | -85 | -  | dBm |
|                                  | 2 Mbps | -   | -85 | -  | dBm |
|                                  | 3 Mbps | -   | -85 | -  | dBm |
| Initial carrier frequency offset |        | -24 | 5   | 24 | KHz |
| Output power                     | BR/EDR | 0   | 4   | 8  | dBm |
|                                  | LE     | 0   | 4   | 8  | dBm |

ITON



## 4. Application and Implementation

### 4.1 Application Diagram


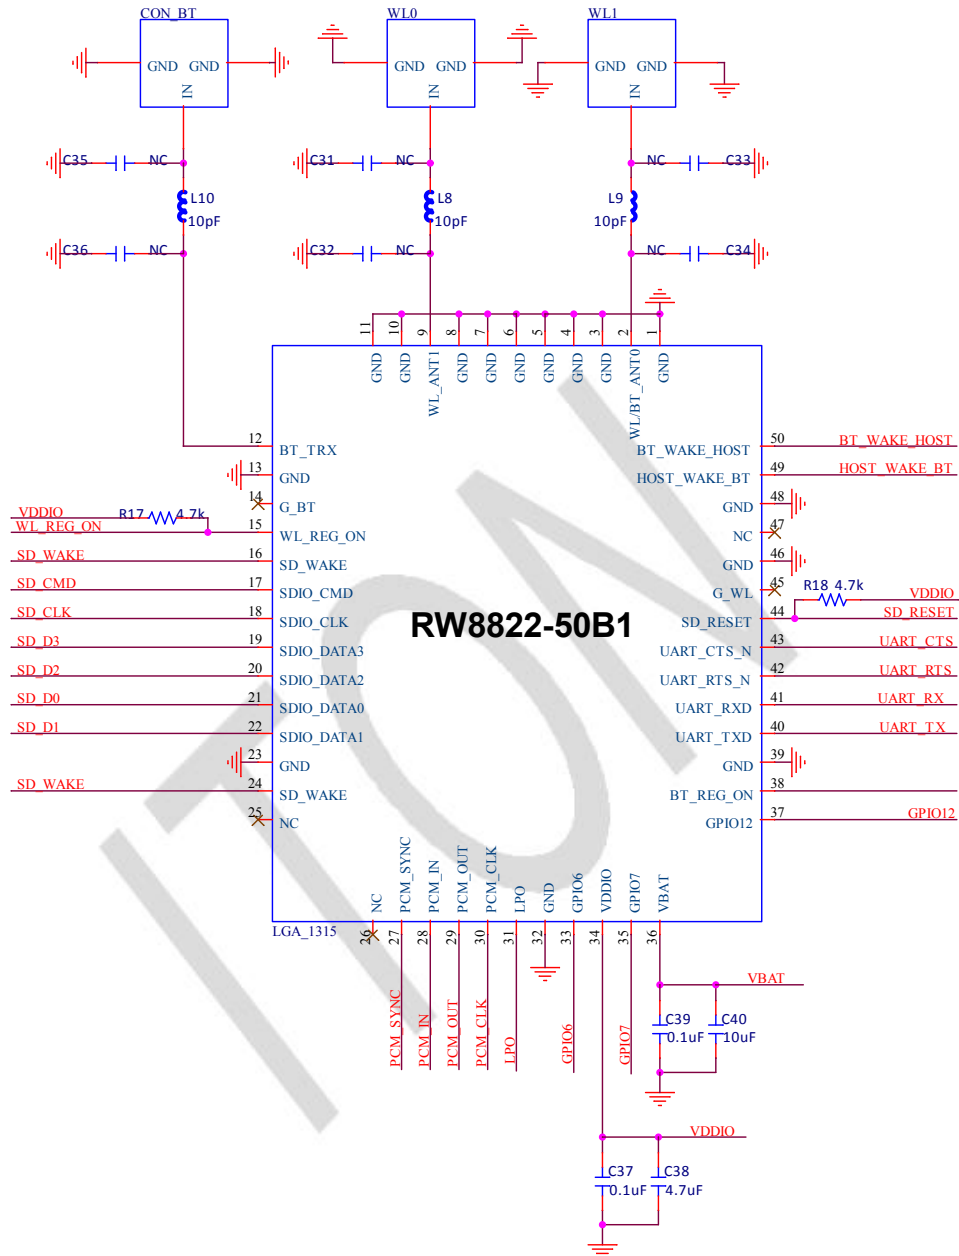


Figure 3. Application Schematic Diagram of RW8822-50B1

## 5. Mechanical and Package

### 5.1 Mechanical Size

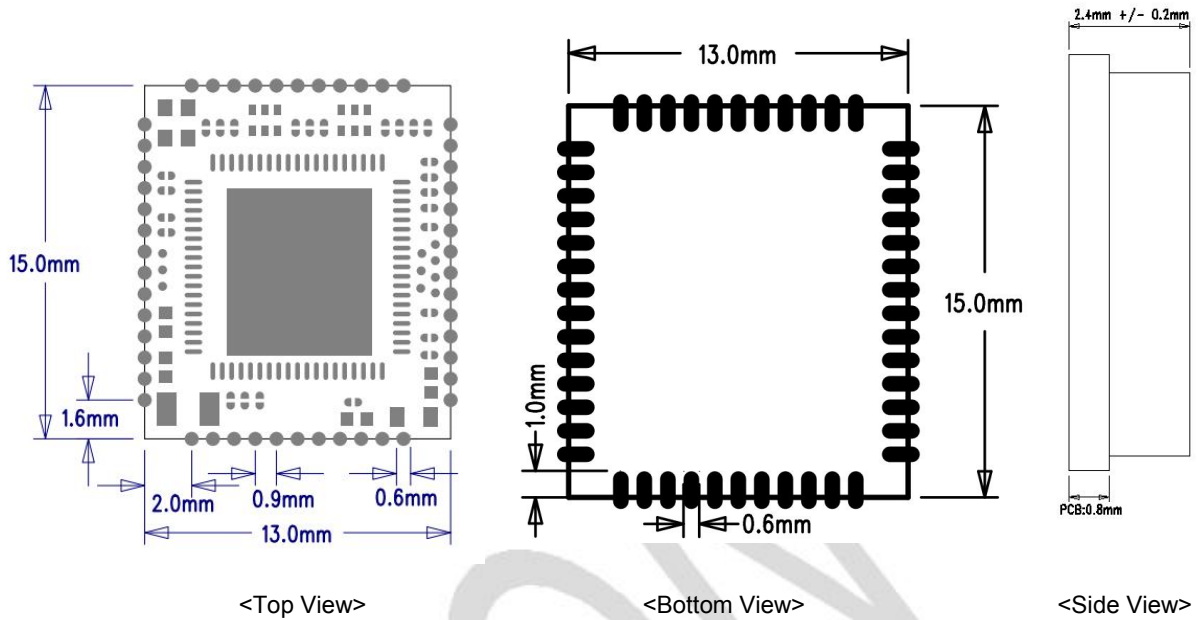

Note: L\*W\*H: 15.0mm ( $\pm 0.3$ mm)\*13.0mm ( $\pm 0.3$ mm)\*2.4mm ( $\pm 0.2$ mm)

Figure 4. Mechanical Size of RW8822-50B1

### 5.2 Recommended Land Pattern

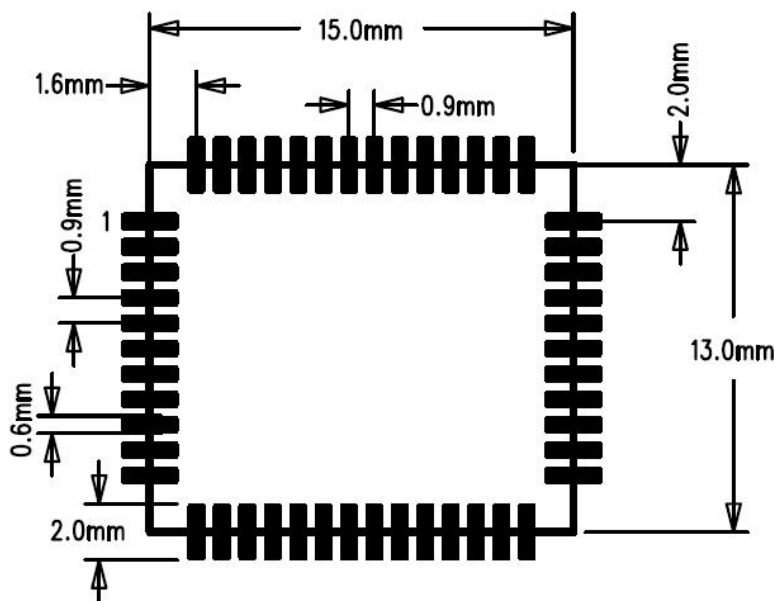


Figure 5. Recommended Land Pattern of RW8822-50B1

### 5.3 Package Information

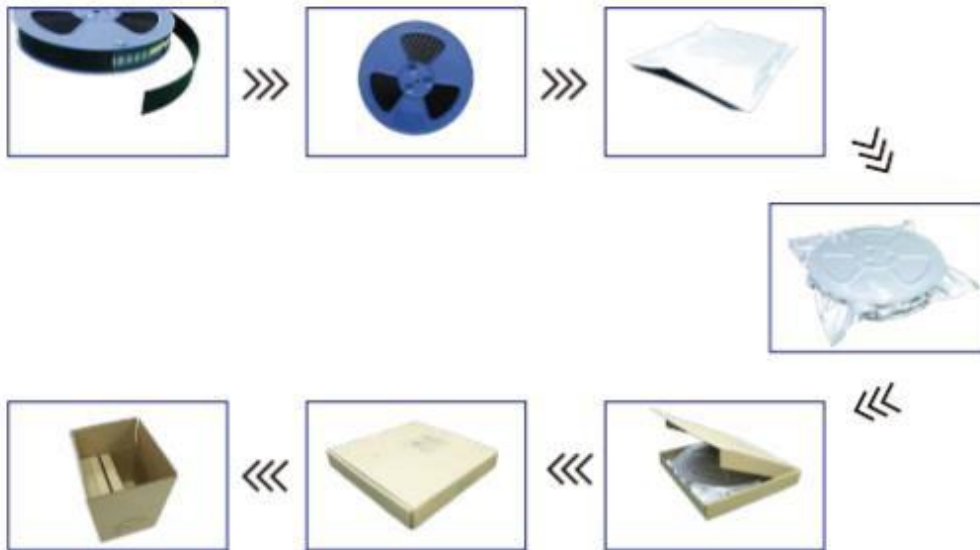


Figure 6. Brief Packaging Process of RW8822-50B1 Modules

### 6. Thermal Reflow

Referred to IPC/JEDEC standard.

Peak temperature: <250°C

Number of times: ≤2

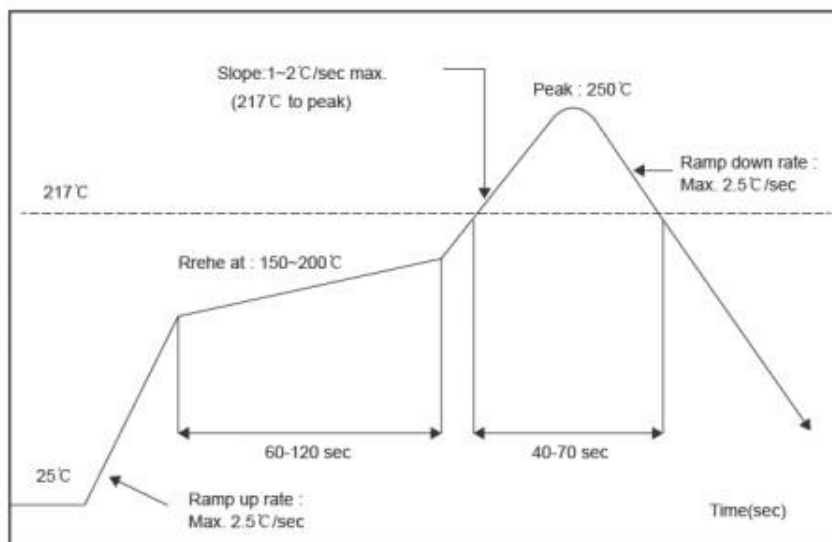


Figure 7. Recommended Reflow for Lead Free Solder

Note: The module is recommended not to go through reflow over twice.

## 7. Ordering Information

| Part NO.    | Working Voltage | ANT        | Shielding Cover | Remark |
|-------------|-----------------|------------|-----------------|--------|
| RW8822-50B1 | 3.3V            | 2 antennas | Included        | SDIO   |
| RW8822-50B2 | 3.3V            | 3 antennas | Included        | SDIO   |

## 8. Revision History

| Version | Change Content            | Reviser | Date      |
|---------|---------------------------|---------|-----------|
| V0.1    | Draft Version             | Phil Ye | 2022.3.31 |
| V1.0    | Initial Version           | Phil Ye | 2022.5.12 |
| V1.1    | Changed Pin15 description | Phil Ye | 2022.5.12 |
|         |                           |         |           |

# **Product specification**

PRODUCT NAME:2.4/5GAntenna

Model :RF11C02085S

Applicant : ItonTechnologyCorp

Address : 7 Floor East, Building C, Shenzhen International Innovation  
Center, No.1006 Shennan Rd. Futian Dis


# Contents

|                                    |   |
|------------------------------------|---|
| 1. Specification.....              | 3 |
| 2. Finished picture.....           | 4 |
| 3. Network analyzer test data..... | 4 |
| 4. Efficiency.....                 | 5 |
| 5. 3D Raditation Pattern.....      | 6 |
| 6. ROHS / Raw material list.....   | 8 |

## 1.Specification

| Main technical specifications |                     |
|-------------------------------|---------------------|
| Frequency Range (MHZ)         | 2400~2500,5150-5845 |
| Impedance( $\Omega$ )         | 50                  |
| Peak Gain(dBi)                | 3.3                 |
| VSWR                          | $\leq 2.0$          |
| Admitted Power                | 1W                  |
| Polarization                  | Linear,Vertical     |
| Radiation                     | Omni-directional    |
| Connector Type                | Cable+Connector     |
| Physical Properties           |                     |
| Antenna cover                 | FPC                 |
| Operating Temp                | -20℃~+70℃           |
| Storage Temp                  | -20℃~+70℃           |

## 2.Finished picture

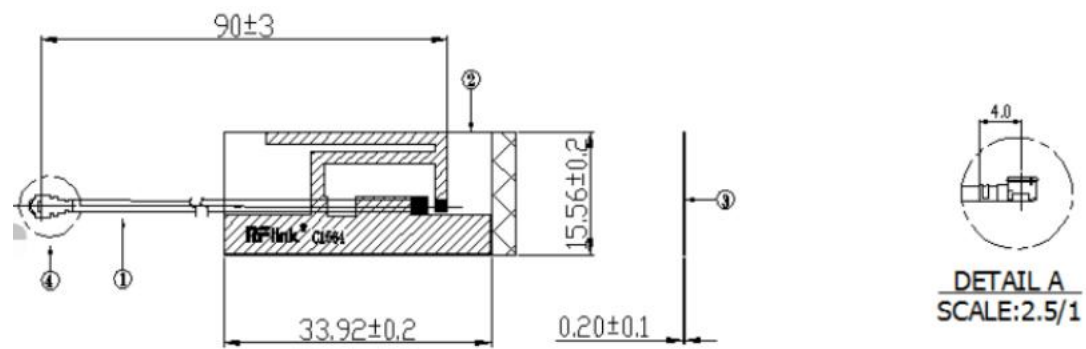


## 3.Network analyzer test data







#### 4.Efficiency

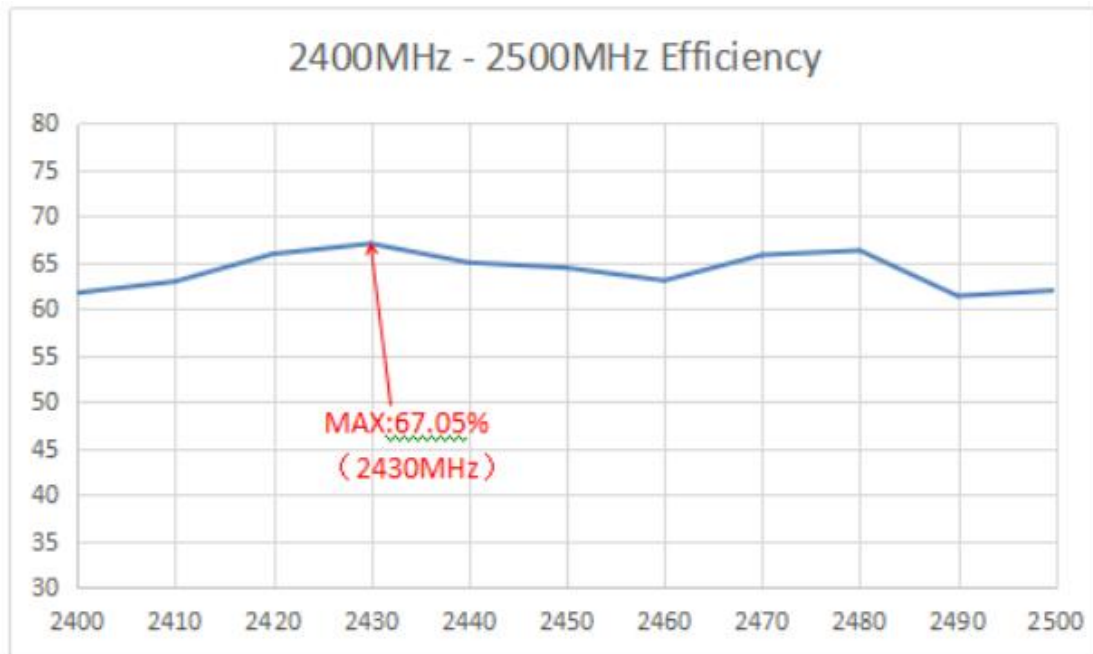


## 5.3D Raditation Pattern

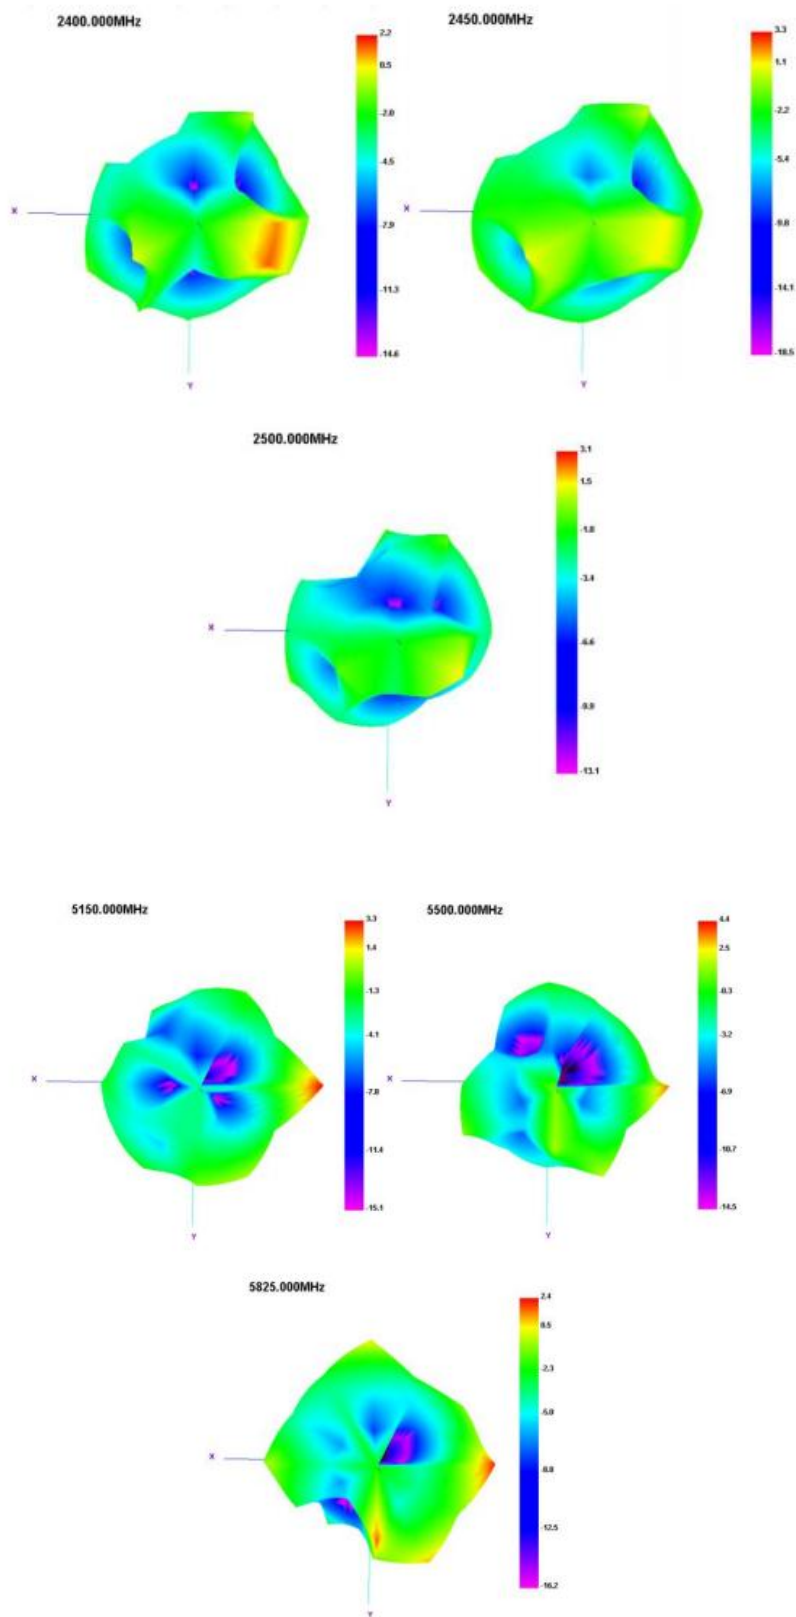


2.4G 高中低三个频点 XOZ 面 (E1 面) 增益图




5G 高中低三个频点 XOZ 面 (E1 面) 增益图




Horizontal




Horizontal




2.4G 高中低三个频点 XOY 面 (H 面) 增益图




5G 高中低三个频点 XOY 面 (H 面) 增益图



2.4G 高中低三个频点 YOZ 面 (E2 面) 增益图

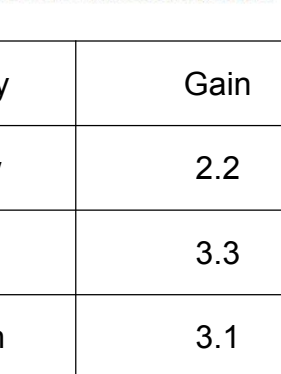

5G 高中低三个频点 YOZ 面 (E2 面) 增益图

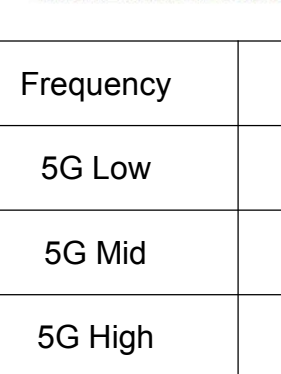

| Frequency | Gain | Frequency | Gain |
|-----------|------|-----------|------|
| 2.4G Low  | 2.2  | 5G Low    | 3.3  |
| 2.4G Mid  | 3.3  | 5G Mid    | 3.3  |
| 2.4G High | 3.1  | 5G High   | 2.4  |

## 6.ROHS / Raw material list

RF11C02085S RoHS compliant

| No. | Component Name | Raw material main material | Quantity | Unit | Material Manufacturers | UL certification No. | Remarks |
|-----|----------------|----------------------------|----------|------|------------------------|----------------------|---------|
| 1   | 1.13 cable     | Tin plating/FPE            | 1        | PCS  | Kai Bo/Hai Lian Tong   | /                    |         |
| 2   | FPC            | PI                         | 1        | PCS  | Dong Zhi Yu/Ying Tong  | /                    |         |
| 3   | Connector      | Copper                     | 1        | PCS  | Ke Xin Cheng           | /                    |         |

## FCC

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment

### **\*RF warning for Mobile device:**

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

The OEM must certify the final end product to comply with unintentional radiators (FCC Sections 15.107 and 15.109) before declaring compliance of the final product to Part 15 of the FCC rules and regulations. Integration into devices that are directly or indirectly connected to AC lines must add with Class II Permissive Change.

The OEM must comply with the FCC labeling requirements. If the module's label is not visible when installed, then an additional permanent label must be applied on the outside of the finished product which states: "Contains transmitter module FCC ID: VYV-RW8822-50B1".

Additionally, the following statement should be included on the label and in the final product's user manual:

"This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:


- (1) This device may not cause harmful interferences, and
  - (2) this device must accept any interference received, including interference that may cause undesired operation."
- The module is limited to installation in applications. Separate approval is required for all other operating configurations, including portable configuration with respect to Part 2.1093 and different antenna configurations. A module or modules can only be used without additional authorizations if they have been tested and granted under the same intended end - use operational conditions, including simultaneous transmission operations. When they have not been tested and

granted in this manner, additional testing and/or FCC application filing may be required. The most straightforward approach to address additional testing conditions is to have the grantee responsible for the certification of at least one of the modules submit a permissive change application. When having a module grantee file a permissive change is not practical or feasible, the following guidance provides some additional options for host manufacturers. Integrations using modules where additional testing and/or FCC application filing(s) may be required are: (A) a module used in devices requiring additional RF exposure compliance information (e.g., MPE evaluation or SAR testing); (B) limited and/or split modules not meeting all of the module requirements; and (C) simultaneous transmissions for independent collocated transmitters not previously granted together. This Module is full modular approval, it is limited to OEM installation ONLY. Integration into devices that are directly or indirectly connected to AC lines must add with Class II Permissive Change. (OEM) Integrator has to assure compliance of the entire end product include the integrated Module.


Additional measurements (15B) and/or equipment authorizations (e.g. Verification) may need to be addressed depending on co-location or simultaneous transmission issues if applicable. (OEM) Integrator is reminded to assure that these installation instructions will not be made available to the end user

## FPC antenna specification

You can see antenna size is 33.92mm\*15.56mm\* From below Specification.

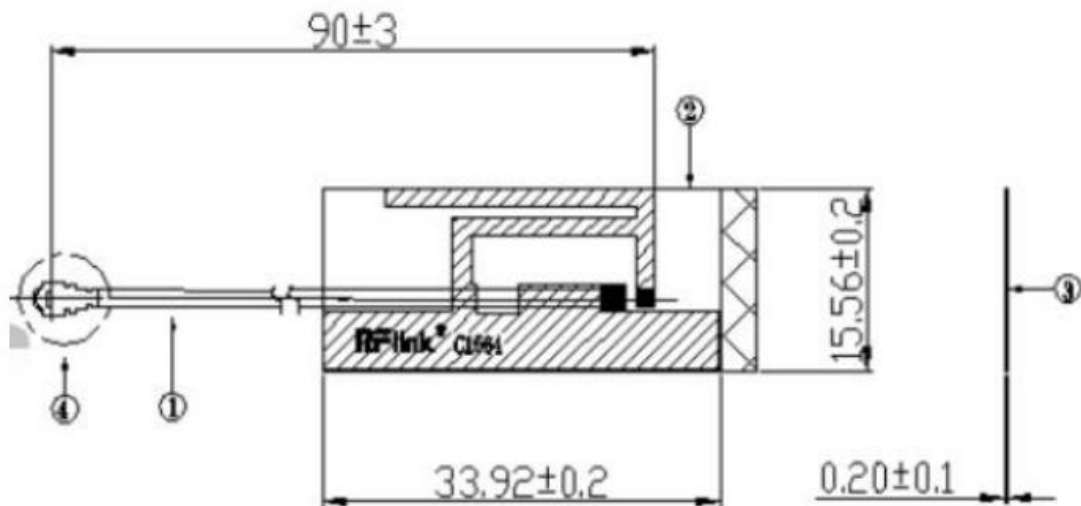

Please refer to the chart below for PCB size of RF line terminal.

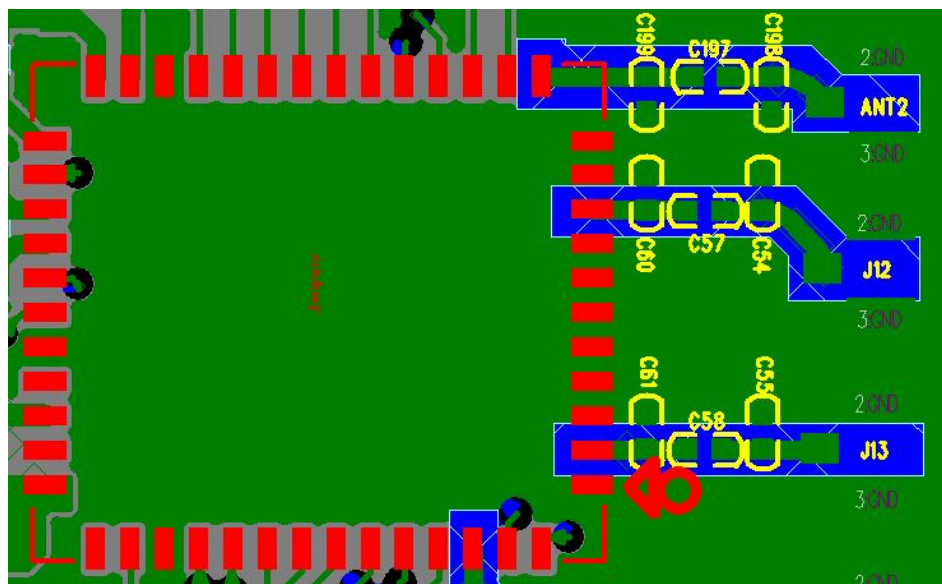

Scrape a GND off the side of the J12 ,J13 and ANT2,connect the FPC antenna to the PCB at the position of the J12 ,J13 and ANT2 connector.

[The line between the FPC antenna and the WiFi module] must be 50 ohm.

C57 ,C58 and C197 are 0R resistors.