

Page 191 of 263

Test Laboratory: AGC Lab Date: Mar. 02, 2024

LTE Band 4 High-Body-Back (1 RB#0)

DUT: 4G smart PAD, Tablet; Type: AGM_PAD_P2

Communication System: LTE; Communication System Band: LTE Band 4; Duty Cycle:1:1; Conv.F=2.17; Frequency: 1745 MHz; Medium parameters used: f = 1750 MHz; $\sigma = 1.34$ mho/m; $\epsilon = 41.68$; $\rho = 1000$ kg/m³;

Phantom section: Flat Section

Ambient temperature ($^{\circ}$): 21.1, Liquid temperature ($^{\circ}$): 20.9

SATIMO Configuration:

Probe: SSE2; Calibrated: May 31, 2023; Serial No.: 2023-EPGO-414


• Sensor-Surface: 4mm (Mechanical Surface Detection)

• Phantom: ELLI39 Phantom

• Measurement SW: OpenSAR V4_02_35


Configuration/ LTE Band 4 High -Body-Back/Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/ LTE Band 4 High -Body-Back/Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5m;

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	ELLI
Device Position	Body Back
Band	LTE Band 4
Channels	High
Signal	OFDM (Crest factor: 1.0)

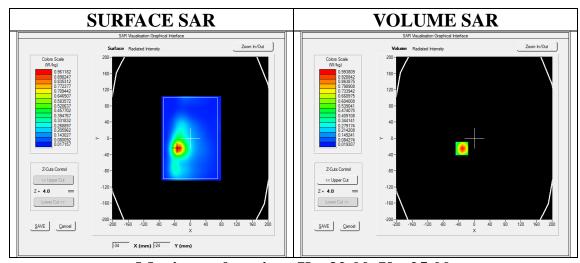



Maximum location: X=-32.00, Y=-25.00 SAR Peak: 1.57 W/kg

SAR 10g (W/Kg)	0.497783
SAR 1g (W/Kg)	0.941442





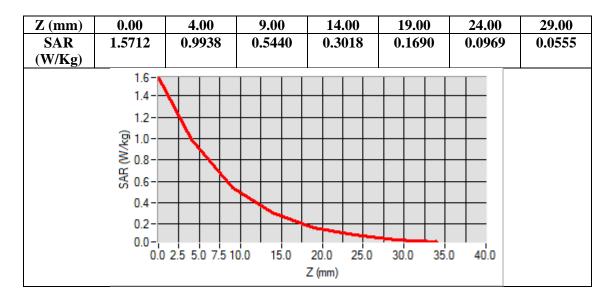

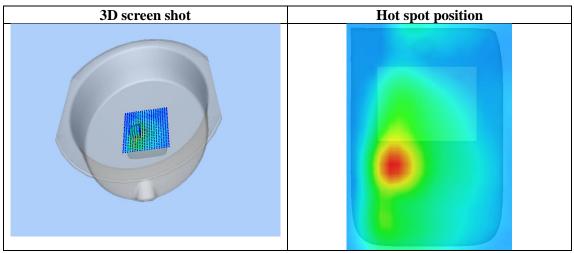



Page 193 of 263

Test Laboratory: AGC Lab Date: Mar. 02, 2024

LTE Band 4 Mid-Body-Back (1 RB#0)

DUT: 4G smart PAD, Tablet; Type: AGM_PAD_P2W

Communication System: LTE; Communication System Band: LTE Band 4; Duty Cycle:1:1; Conv.F=2.17;

Frequency: 1732.5 MHz; Medium parameters used: f = 1750 MHz; $\sigma = 1.32$ mho/m; $\epsilon r = 42.66$; $\rho = 1000$ kg/m³;

Phantom section: Flat Section

Ambient temperature ($^{\circ}$): 21.1, Liquid temperature ($^{\circ}$): 20.9

SATIMO Configuration:

Probe: SSE2; Calibrated: May 31, 2023; Serial No.: 2023-EPGO-414


• Sensor-Surface: 4mm (Mechanical Surface Detection)

• Phantom: ELLI39 Phantom

• Measurement SW: OpenSAR V4_02_35


Configuration/ LTE Band 4 Mid -Body-Back/Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/ LTE Band 4 Mid -Body-Back/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5m;

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	ELLI
Device Position	Body Back
Band	LTE Band 4
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

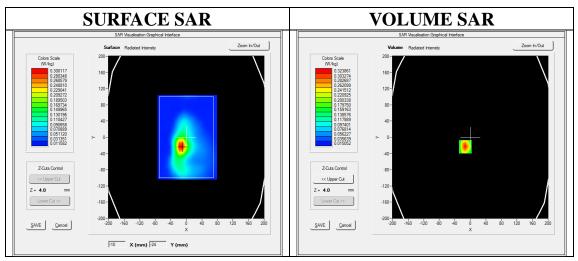



Maximum location: X=-13.00, Y=-23.00 SAR Peak: 0.50 W/kg

SAR 10g (W/Kg)	0.165723
SAR 1g (W/Kg)	0.305748





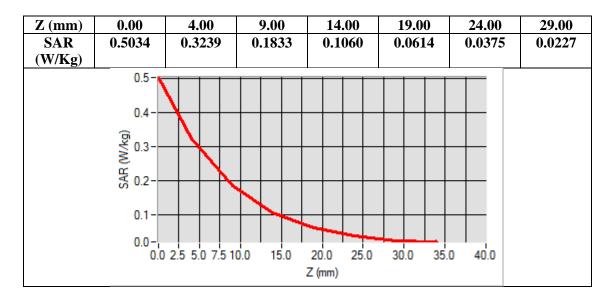

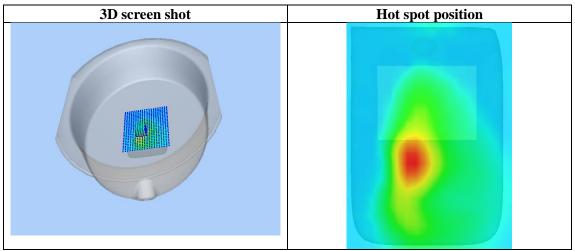



Page 195 of 263

Test Laboratory: AGC Lab Date: Feb. 01, 2024

LTE Band 5 Mid-Body-Back (1 RB#0)

DUT: 4G smart PAD, Tablet; Type: AGM_PAD_P2

Communication System: LTE; Communication System Band: LTE Band 5; Duty Cycle:1:1; Conv.F=2.02 Frequency:836.5 MHz; Medium parameters used: f = 835 MHz; $\sigma = 0.92$ mho/m; $\epsilon r = 41.39$; $\rho = 1000$ kg/m³;

Phantom section: Flat Section

Ambient temperature (°C): 20.8, Liquid temperature (°C): 20.3

SATIMO Configuration:

Probe: SSE2; Calibrated: May 31, 2023; Serial No.: 2023-EPGO-414


• Sensor-Surface: 4mm (Mechanical Surface Detection)

• Phantom: ELLI39 Phantom

• Measurement SW: OpenSAR V4_02_35


Configuration/ LTE Band 5 Mid-Body-Back/Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/ LTE Band 5 Mid-Body-Back/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5m;

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	ELLI
Device Position	Body Back
Band	LTE Band 5
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

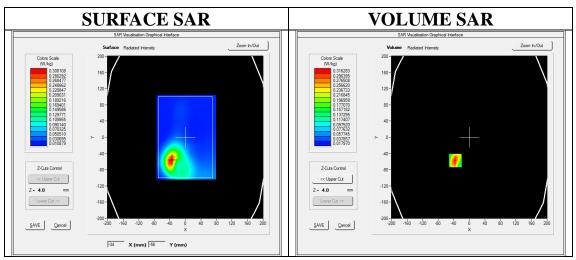



Maximum location: X=-36.00, Y=-57.00 SAR Peak: 0.48 W/kg

SAR 10g (W/Kg)	0.174272
SAR 1g (W/Kg)	0.300641





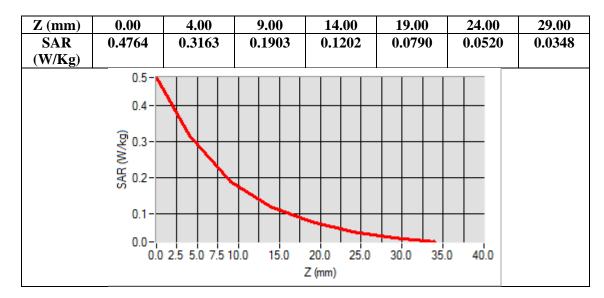

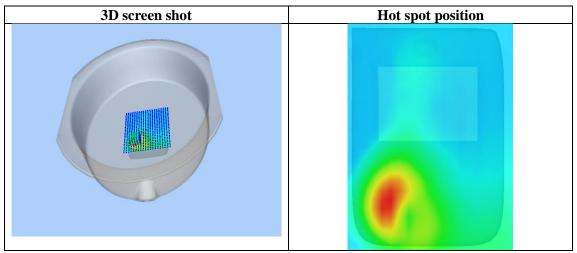



Page 197 of 263

Test Laboratory: AGC Lab Date: Feb. 01, 2024

LTE Band 5 Mid-Body-Back (1 RB#0)

DUT: 4G smart PAD, Tablet; Type: AGM_PAD_P2W

Communication System: LTE; Communication System Band: LTE Band 5; Duty Cycle:1:1; Conv.F=2.02 Frequency:836.5 MHz; Medium parameters used: f = 835 MHz; $\sigma = 0.92$ mho/m; $\epsilon r = 41.39$; $\rho = 1000$ kg/m³;

Phantom section: Flat Section

Ambient temperature (°C): 20.8, Liquid temperature (°C): 20.3

SATIMO Configuration:

Probe: SSE2; Calibrated: May 31, 2023; Serial No.: 2023-EPGO-414


• Sensor-Surface: 4mm (Mechanical Surface Detection)

• Phantom: ELLI39 Phantom

• Measurement SW: OpenSAR V4_02_35


Configuration/ LTE Band 5 Mid-Body-Back/Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/ LTE Band 5 Mid-Body-Back/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5m;

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	ELLI
Device Position	Body Back
Band	LTE Band 5
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

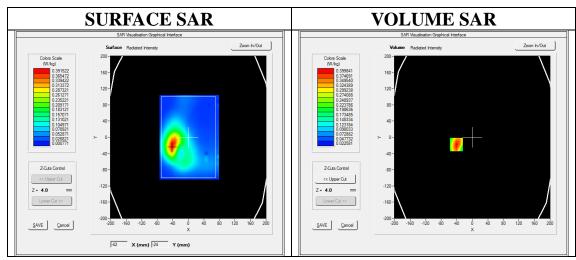



Maximum location: X=-41.00, Y=-18.00 SAR Peak: 0.55 W/kg

SAR 10g (W/Kg)	0.248806
SAR 1g (W/Kg)	0.382368





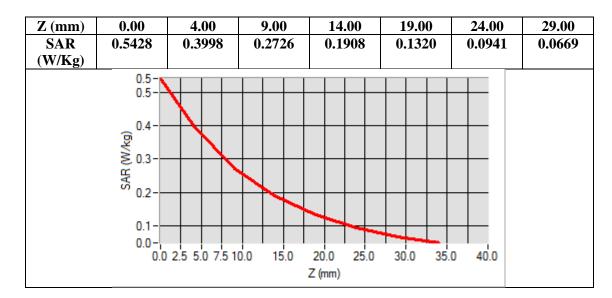

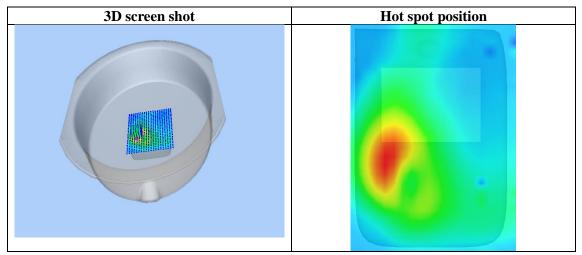



Page 199 of 263

Test Laboratory: AGC Lab Date: Feb. 19, 2024

LTE Band 7 Mid-Body-Back (1RB#0)

DUT: 4G smart PAD, Tablet; Type: AGM_PAD_P2

Communication System: LTE; Communication System Band: LTE Band 7; Duty Cycle:1:1; Conv.F=2.13 Frequency: 2535MHz; Medium parameters used: f = 2600 MHz; $\sigma = 1.93 mho/m$; $\epsilon r = 41.72$; $\rho = 1000 kg/m^3$;

Phantom section: Flat Section

Ambient temperature (°C): 20.8, Liquid temperature (°C): 20.4

SATIMO Configuration:

Probe: SSE2; Calibrated: May 31, 2023; Serial No.: 2023-EPGO-414


• Sensor-Surface: 4mm (Mechanical Surface Detection)

• Phantom: ELLI39 Phantom

• Measurement SW: OpenSAR V4_02_35


Configuration/ LTE BAND 7 Mid-Body-Back / Area Scan: Measurement grid: dx=10mm, y=10mm Configuration/ LTE BAND 7 Mid-Body-Back / Zoom Scan: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	7x7x7,dx=5mm dy=5mm dz=5mm
Phantom	ELLI
Device Position	Body Back
Band	LTE BAND 7
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

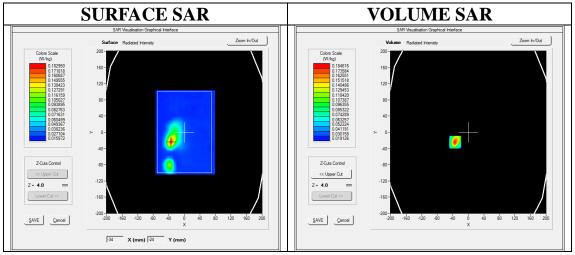



Maximum location: X=-34.00, Y=-24.00 SAR Peak: 0.33 W/kg

SAR 10g (W/Kg)	0.077992
SAR 1g (W/Kg)	0.170178





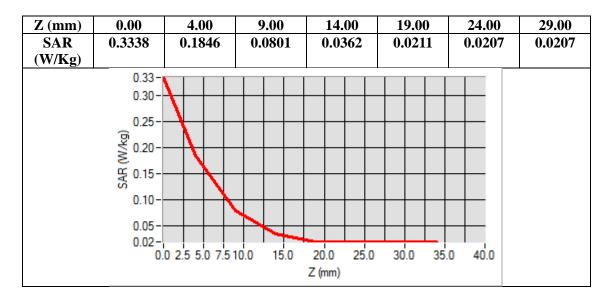

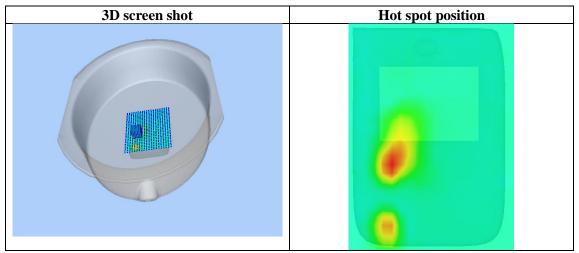



Page 201 of 263

Test Laboratory: AGC Lab Date: Feb. 19, 2024

LTE Band 7 Mid-Body-Back (1RB#0)

DUT: 4G smart PAD, Tablet; Type: AGM_PAD_P2W

Communication System: LTE; Communication System Band: LTE Band 7; Duty Cycle:1:1; Conv.F=2.13 Frequency: 2535MHz; Medium parameters used: f = 2600 MHz; $\sigma = 1.93 mho/m$; $\epsilon r = 41.72$; $\rho = 1000 kg/m^3$;

Phantom section: Flat Section

Ambient temperature (°C): 20.8, Liquid temperature (°C): 20.4

SATIMO Configuration:

Probe: SSE2; Calibrated: May 31, 2023; Serial No.: 2023-EPGO-414


• Sensor-Surface: 4mm (Mechanical Surface Detection)

• Phantom: ELLI39 Phantom

• Measurement SW: OpenSAR V4_02_35


Configuration/ LTE BAND 7 Mid-Body-Back / Area Scan: Measurement grid: dx=10mm, y=10mm Configuration/ LTE BAND 7 Mid-Body-Back / Zoom Scan: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	7x7x7,dx=5mm dy=5mm dz=5mm
Phantom	ELLI
Device Position	Body Back
Band	LTE BAND 7
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

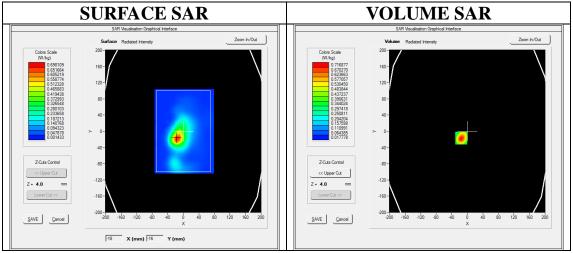



Maximum location: X=-16.00, Y=-17.00 SAR Peak: 1.24 W/kg

SAR 10g (W/Kg)	0.322932
SAR 1g (W/Kg)	0.675366





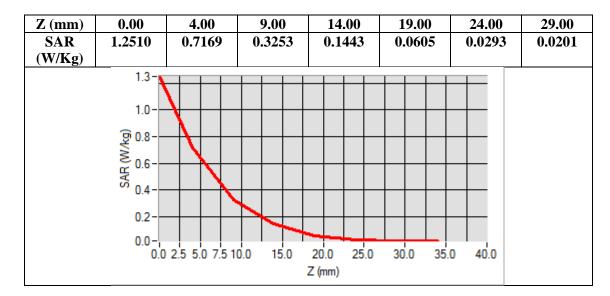

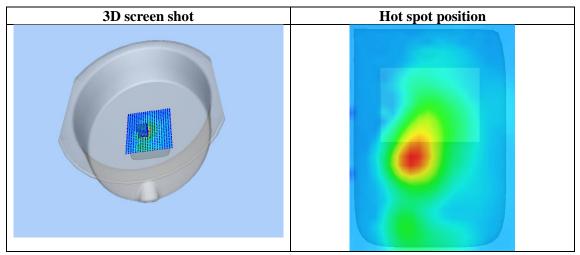



Page 203 of 263

Test Laboratory: AGC Lab Date: Feb. 03, 2024

LTE Band 12 Mid-Body-Back (1 RB#0)

DUT: 4G smart PAD, Tablet; Type: AGM_PAD_P2

Communication System: LTE; Communication System Band: LTE Band 12; Duty Cycle:1:1; Conv.F=1.95; Frequency: 707.5 MHz; Medium parameters used: f = 750 MHz; $\sigma = 0.82$ mho/m; $\epsilon = 44.39$; $\rho = 1000$ kg/m³;

Phantom section: Flat Section

Ambient temperature ($^{\circ}$): 21.2, Liquid temperature ($^{\circ}$): 20.8

SATIMO Configuration:

Probe: SSE2; Calibrated: May 31, 2023; Serial No.: 2023-EPGO-414


• Sensor-Surface: 4mm (Mechanical Surface Detection)

• Phantom: ELLI39 Phantom

• Measurement SW: OpenSAR V4_02_35


Configuration/ LTE Band 12 Mid-Body-Back/Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/ LTE Band 12 Mid-Body-Back/Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5m;

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	ELLI
Device Position	Body Back
Band	LTE Band 12
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

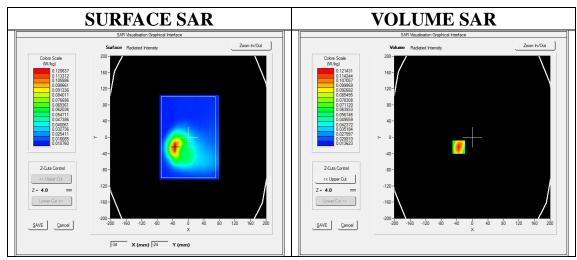



Maximum location: X=-35.00, Y=-24.00 SAR Peak: 0.18 W/kg

SAR 10g (W/Kg)	0.070778
SAR 1g (W/Kg)	0.121600





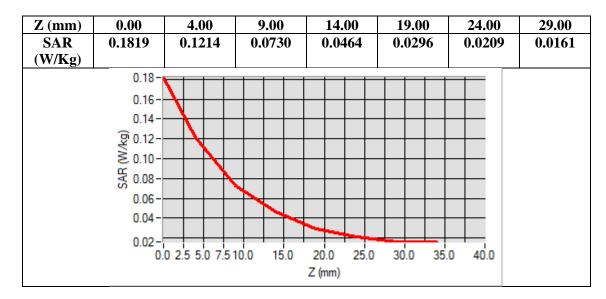

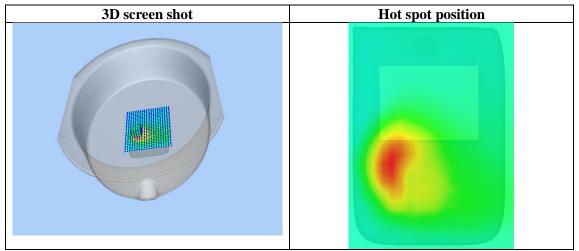



Page 205 of 263

Test Laboratory: AGC Lab Date: Feb. 03, 2024

LTE Band 12 Mid-Body-Back (1 RB#0)

DUT: 4G smart PAD, Tablet; Type: AGM_PAD_P2W

Communication System: LTE; Communication System Band: LTE Band 12; Duty Cycle:1:1; Conv.F=1.95; Frequency: 707.5 MHz; Medium parameters used: f = 750 MHz; $\sigma = 0.82$ mho/m; $\epsilon r = 44.39$; $\rho = 1000$ kg/m³;

Phantom section: Flat Section

Ambient temperature ($^{\circ}$): 21.2, Liquid temperature ($^{\circ}$): 20.8

SATIMO Configuration:

Probe: SSE2; Calibrated: May 31, 2023; Serial No.: 2023-EPGO-414


• Sensor-Surface: 4mm (Mechanical Surface Detection)

• Phantom: ELLI39 Phantom

• Measurement SW: OpenSAR V4_02_35

Configuration/ LTE Band 12 Mid-Body-Back/Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/ LTE Band 12 Mid-Body-Back/Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5m;

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	ELLI
Device Position	Body Back
Band	LTE Band 12
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

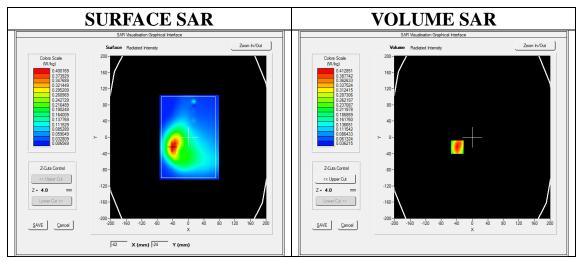


Maximum location: X=-39.00, Y=-24.00 SAR Peak: 0.58 W/kg


SAR 10g (W/Kg)	0.265471
SAR 1g (W/Kg)	0.418000


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/





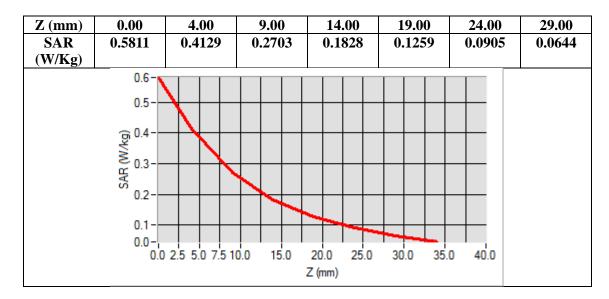

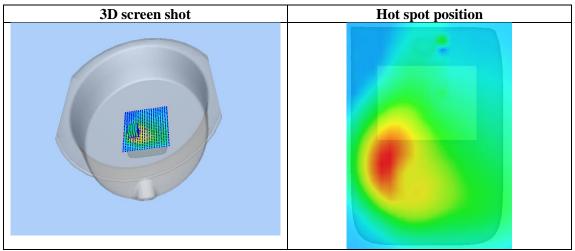



Page 207 of 263

Test Laboratory: AGC Lab Date: Feb. 03, 2024

LTE Band 17 Mid-Body-Back (1 RB#0)

DUT: 4G smart PAD, Tablet; Type: AGM_PAD_P2

Communication System: LTE; Communication System Band: LTE Band 17; Duty Cycle:1:1; Conv.F=1.95; Frequency: 710 MHz; Medium parameters used: f = 750 MHz; $\sigma = 0.85$ mho/m; $\epsilon = 43.26$; $\rho = 1000$ kg/m³;

Phantom section: Flat Section

Ambient temperature (°C): 21.2, Liquid temperature (°C): 20.8

SATIMO Configuration:

Probe: SSE2; Calibrated: May 31, 2023; Serial No.: 2023-EPGO-414


• Sensor-Surface: 4mm (Mechanical Surface Detection)

• Phantom: ELLI39 Phantom

• Measurement SW: OpenSAR V4_02_35


Configuration/ LTE Band 17 Mid-Body-Back/Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/ LTE Band 17 Mid-Body-Back/Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5m;

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	ELLI
Device Position	Body Back
Band	LTE Band 17
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

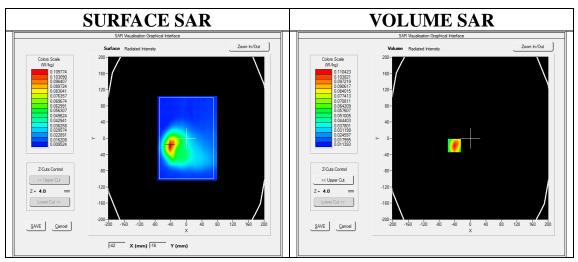



Maximum location: X=-41.00, Y=-18.00 SAR Peak: 0.16 W/kg

SAR 10g (W/Kg)	0.065124
SAR 1g (W/Kg)	0.111115





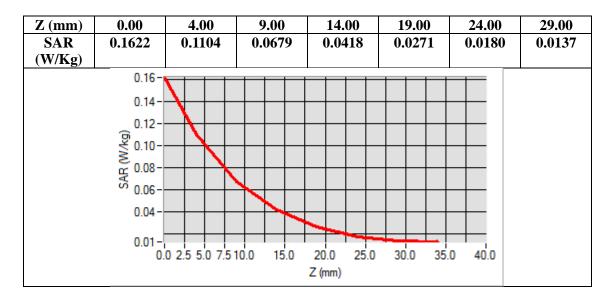

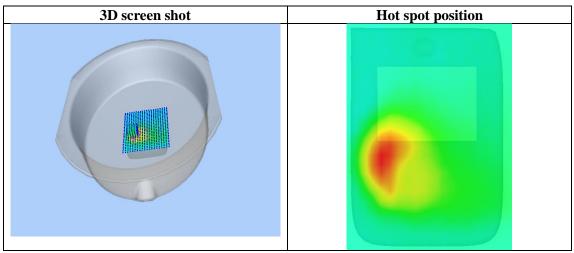



Page 209 of 263

Test Laboratory: AGC Lab Date: Feb. 03, 2024

LTE Band 17 Mid-Body-Front (1 RB#0)

DUT: 4G smart PAD, Tablet; Type: AGM_PAD_P2W

Communication System: LTE; Communication System Band: LTE Band 17; Duty Cycle:1:1; Conv.F=1.95; Frequency: 710 MHz; Medium parameters used: f = 750 MHz; $\sigma = 0.85$ mho/m; $\epsilon = 43.26$; $\rho = 1000$ kg/m³;

Phantom section: Flat Section

Ambient temperature (°C): 21.2, Liquid temperature (°C): 20.8

SATIMO Configuration:

Probe: SSE2; Calibrated: May 31, 2023; Serial No.: 2023-EPGO-414


• Sensor-Surface: 4mm (Mechanical Surface Detection)

• Phantom: ELLI39 Phantom

• Measurement SW: OpenSAR V4_02_35


Configuration/ LTE Band 17 Mid-Body-Front/Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/ LTE Band 17 Mid-Body-Front/Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5m;

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	ELLI
Device Position	Body Front
Band	LTE Band 17
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

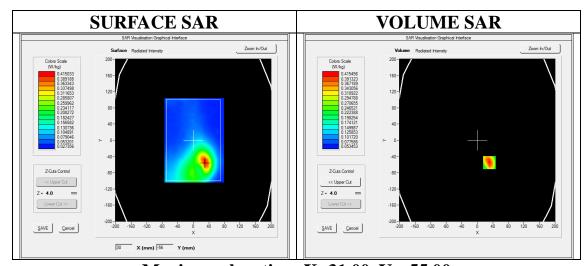



Maximum location: X=31.00, Y=-55.00 SAR Peak: 0.58 W/kg

SAR 10g (W/Kg)	0.271378
SAR 1g (W/Kg)	0.418884





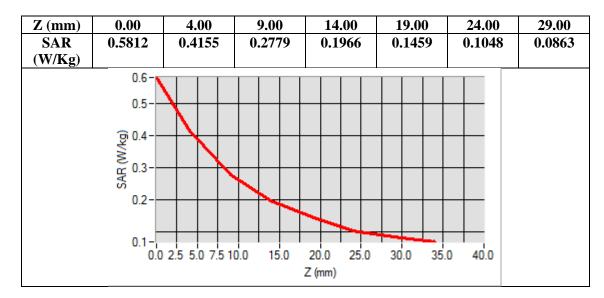

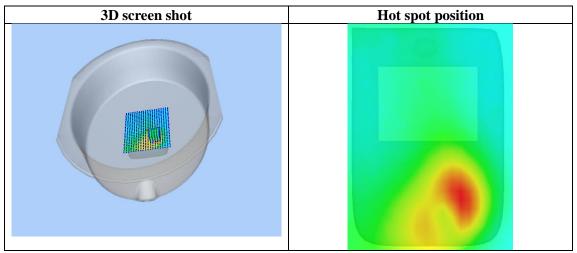



Page 211 of 263

Test Laboratory: AGC Lab Date: Feb. 01, 2024

LTE Band 26a Mid-Body-Back (1 RB#0)

DUT: 4G smart PAD, Tablet; Type: AGM_PAD_P2

Communication System: LTE; Communication System Band: LTE Band 26a; Duty Cycle:1:1; Conv.F=2.02 Frequency:836.5 MHz; Medium parameters used: f = 835 MHz; $\sigma = 0.92$ mho/m; $\epsilon r = 41.39$; $\rho = 1000$ kg/m³;

Phantom section: Flat Section

Ambient temperature ($^{\circ}$ C): 20.8, Liquid temperature ($^{\circ}$ C): 20.3

SATIMO Configuration:

Probe: SSE2; Calibrated: May 31, 2023; Serial No.: 2023-EPGO-414


• Sensor-Surface: 4mm (Mechanical Surface Detection)

• Phantom: ELLI39 Phantom

• Measurement SW: OpenSAR V4_02_35


Configuration/ LTE Band 26a Mid-Body-Back/Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/ LTE Band 26a Mid-Body-Back/Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5m;

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	ELLI
Device Position	Body Back
Band	LTE Band 26a
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

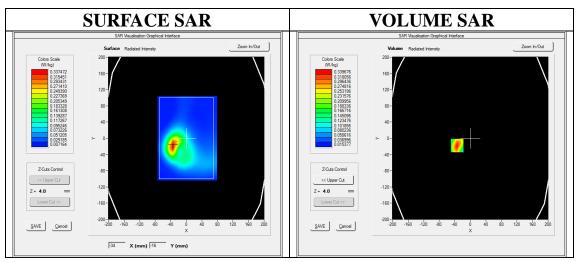



Maximum location: X=-34.00, Y=-18.00 SAR Peak: 0.50 W/kg

SAR 10g (W/Kg)	0.185323
SAR 1g (W/Kg)	0.320101





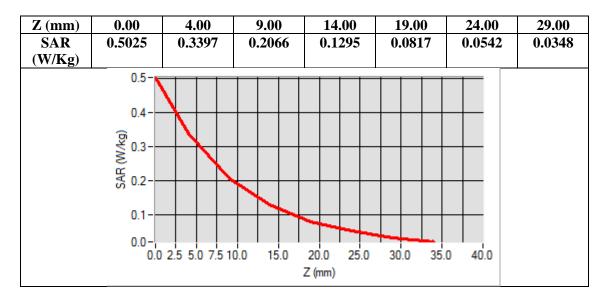

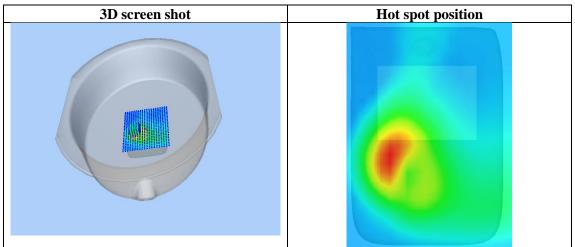



Page 213 of 263

Test Laboratory: AGC Lab Date: Feb. 01, 2024

LTE Band 26a Mid-Body-Front (1 RB#0)

DUT: 4G smart PAD, Tablet; Type: AGM_PAD_P2W

Communication System: LTE; Communication System Band: LTE Band 26a; Duty Cycle:1:1; Conv.F=2.02 Frequency:836.5 MHz; Medium parameters used: f = 835 MHz; $\sigma = 0.92$ mho/m; $\epsilon r = 41.39$; $\rho = 1000$ kg/m³;

Phantom section: Flat Section

Ambient temperature ($^{\circ}$ C): 20.8, Liquid temperature ($^{\circ}$ C): 20.3

SATIMO Configuration:

Probe: SSE2; Calibrated: May 31, 2023; Serial No.: 2023-EPGO-414


• Sensor-Surface: 4mm (Mechanical Surface Detection)

• Phantom: ELLI39 Phantom

• Measurement SW: OpenSAR V4_02_35


Configuration/ LTE Band 26a Mid-Body-Front/Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/ LTE Band 26a Mid-Body-Front/Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5m;

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	ELLI
Device Position	Body Front
Band	LTE Band 26a
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

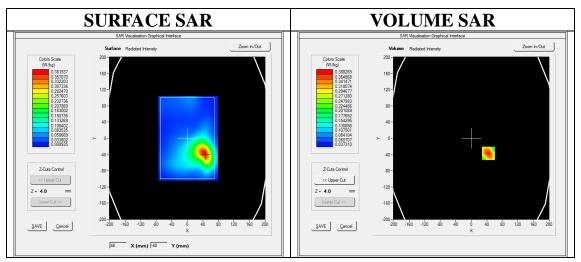



Maximum location: X=44.00, Y=-37.00 SAR Peak: 0.53 W/kg

SAR 10g (W/Kg)	0.246862
SAR 1g (W/Kg)	0.372877





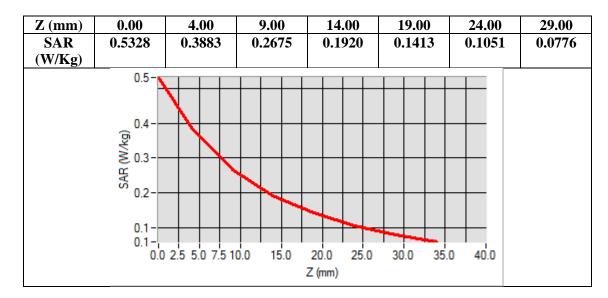

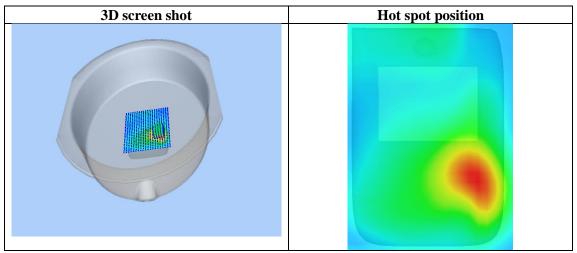



Page 215 of 263

Test Laboratory: AGC Lab Date: Feb. 01, 2024

LTE Band 26b Mid-Body-Back (1 RB#0)

DUT: 4G smart PAD, Tablet; Type: AGM_PAD_P2

Communication System: LTE; Communication System Band: LTE Band 26b; Duty Cycle:1:1; Conv.F=2.02 Frequency: 821.5 MHz; Medium parameters used: f = 835 MHz; $\sigma = 0.87$ mho/m; $\epsilon r = 43.26$; $\rho = 1000$ kg/m³;

Phantom section: Flat Section

Ambient temperature ($^{\circ}$ C): 20.8, Liquid temperature ($^{\circ}$ C): 20.3

SATIMO Configuration:

Probe: SSE2; Calibrated: May 31, 2023; Serial No.: 2023-EPGO-414


• Sensor-Surface: 4mm (Mechanical Surface Detection)

• Phantom: ELLI39 Phantom

• Measurement SW: OpenSAR V4_02_35


Configuration/ LTE Band 26b Mid-Body-Back/Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/ LTE Band 26b Mid-Body-Back/Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5m;

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	ELLI
Device Position	Body Back
Band	LTE Band 26b
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

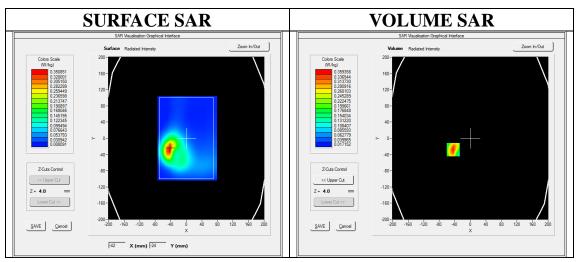



Maximum location: X=-44.00, Y=-28.00 SAR Peak: 0.53 W/kg

SAR 10g (W/Kg)	0.195524
SAR 1g (W/Kg)	0.339401





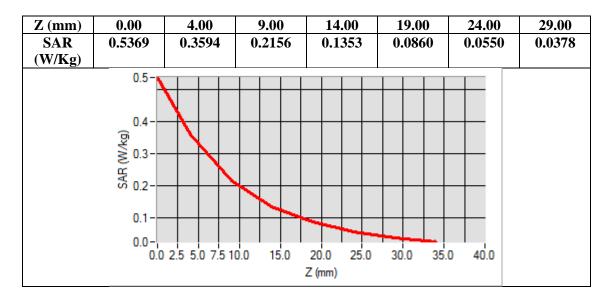

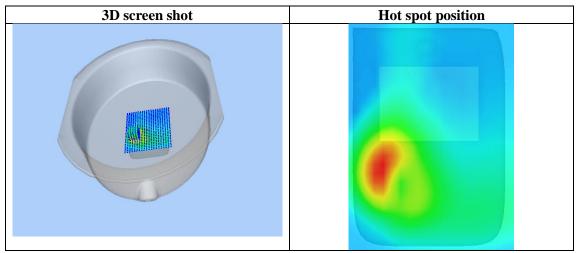



Page 217 of 263

Test Laboratory: AGC Lab Date: Feb. 01, 2024

LTE Band 26b Mid-Body-Back (1 RB#0)

DUT: 4G smart PAD, Tablet; Type: AGM_PAD_P2W

Communication System: LTE; Communication System Band: LTE Band 26b; Duty Cycle:1:1; Conv.F=2.02 Frequency: 821.5 MHz; Medium parameters used: f = 835 MHz; $\sigma = 0.87$ mho/m; $\epsilon r = 43.26$; $\rho = 1000$ kg/m³;

Phantom section: Flat Section

Ambient temperature ($^{\circ}$ C): 20.8, Liquid temperature ($^{\circ}$ C): 20.3

SATIMO Configuration:

Probe: SSE2; Calibrated: May 31, 2023; Serial No.: 2023-EPGO-414


• Sensor-Surface: 4mm (Mechanical Surface Detection)

• Phantom: ELLI39 Phantom

• Measurement SW: OpenSAR V4_02_35


Configuration/ LTE Band 26b Mid-Body-Back/Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/ LTE Band 26b Mid-Body-Back/Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5m;

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	ELLI
Device Position	Body Back
Band	LTE Band 26b
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

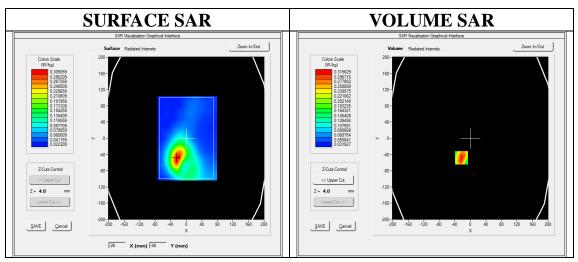



Maximum location: X=-23.00, Y=-48.00 SAR Peak: 0.44 W/kg

SAR 10g (W/Kg)	0.202374
SAR 1g (W/Kg)	0.303077





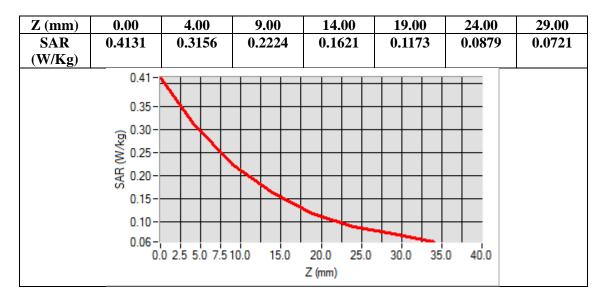

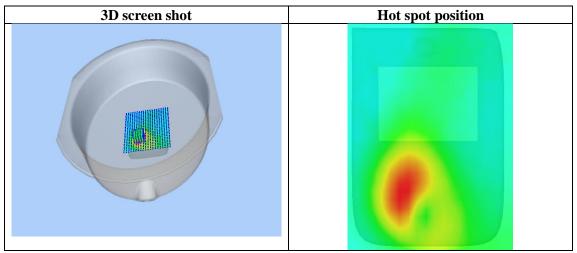



Page 219 of 263

Test Laboratory: AGC Lab Date: Feb. 19, 2024

LTE Band 38 Mid-Body-Back (1RB#0)

DUT: 4G smart PAD, Tablet; Type: AGM_PAD_P2

Communication System: LTE; Communication System Band: LTE Band 38; Duty Cycle:1:1.58; Conv.F=2.13 Frequency: 2595MHz; Medium parameters used: f = 2600 MHz; $\sigma = 1.96 \text{ mho/m}$; $\epsilon = 39.67$; $\rho = 1000 \text{ kg/m}^3$;

Phantom section: Flat Section

Ambient temperature ($^{\circ}$): 20.8, Liquid temperature ($^{\circ}$): 20.4

SATIMO Configuration:

Probe: SSE2; Calibrated: May 31, 2023; Serial No.: 2023-EPGO-414


• Sensor-Surface: 4mm (Mechanical Surface Detection)

• Phantom: ELLI39 Phantom

Measurement SW: OpenSAR V4_02_35

Configuration/ LTE BAND 38 Mid-Body-Back /Area Scan: Measurement grid: dx=10mm, y=10mm Configuration/ LTE BAND 38 Mid-Body-Back /Zoom Scan: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	7x7x7,dx=5mm dy=5mm dz=5mm
Phantom	ELLI
Device Position	Body Back
Band	LTE BAND 38
Channels	Middle
Signal	Crest factor: 1.58

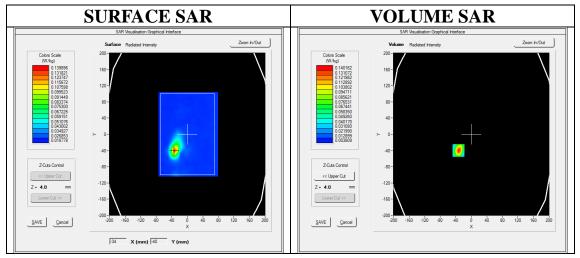


Maximum location: X=-33.00, Y=-40.00


SAR Peak: 0.34 W/kg

SAR 10g (W/Kg)	0.058659
Drik 10g (Wils)	0.030037
SAR 1g (W/Kg)	0.131633
SAN IG (W/NG)	0.131033





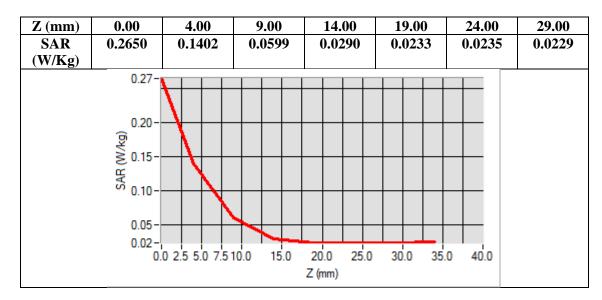

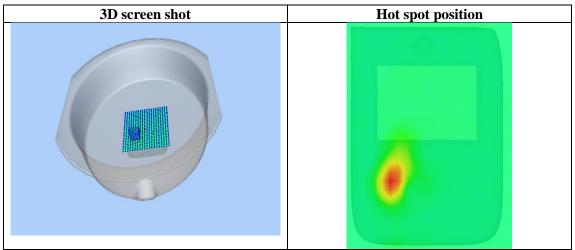



Page 221 of 263

Test Laboratory: AGC Lab Date: Feb. 19, 2024

LTE Band 38 Mid-Body-Back (1RB#0)

DUT: 4G smart PAD, Tablet; Type: AGM_PAD_P2W

Communication System: LTE; Communication System Band: LTE Band 38; Duty Cycle:1:1.58; Conv.F=2.13 Frequency: 2595MHz; Medium parameters used: f = 2600 MHz; $\sigma = 1.96 \text{ mho/m}$; $\epsilon = 39.67$; $\rho = 1000 \text{ kg/m}^3$;

Phantom section: Flat Section

Ambient temperature ($^{\circ}$): 20.8, Liquid temperature ($^{\circ}$): 20.4

SATIMO Configuration:

Probe: SSE2; Calibrated: May 31, 2023; Serial No.: 2023-EPGO-414


• Sensor-Surface: 4mm (Mechanical Surface Detection)

• Phantom: ELLI39 Phantom

Measurement SW: OpenSAR V4_02_35

Configuration/ LTE BAND 38 Mid-Body-Back /Area Scan: Measurement grid: dx=10mm, y=10mm Configuration/ LTE BAND 38 Mid-Body-Back /Zoom Scan: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	7x7x7,dx=5mm dy=5mm dz=5mm
Phantom	ELLI
Device Position	Body Back
Band	LTE BAND 38
Channels	Middle
Signal	Crest factor: 1.58

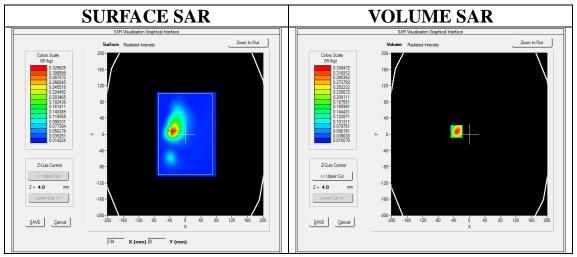


Maximum location: X=-33.00, Y=7.00


SAR Peak: 0.60 W/kg

SAR 10g (W/Kg)	0.149115
SAR 1g (W/Kg)	0.319282





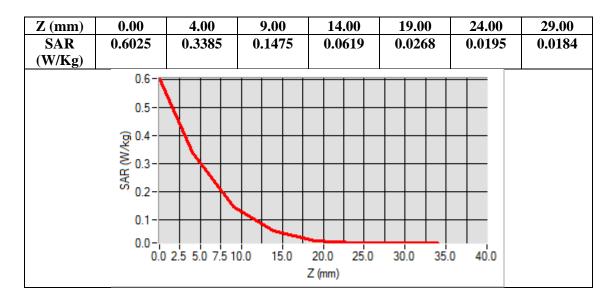

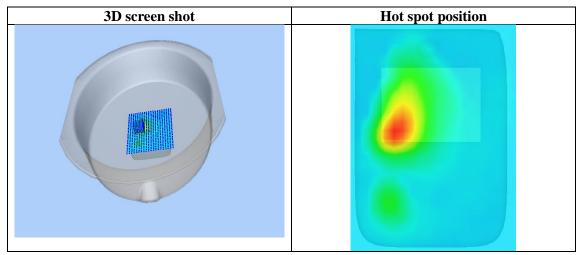



Page 223 of 263

Test Laboratory: AGC Lab Date: Feb. 04, 2024

LTE Band 40- Lower Side Mid-Body- Back (1 RB#0) DUT: 4G smart PAD, Tablet; Type: AGM_PAD_P2

Communication System: LTE; Communication System Band: LTE Band 40-Upper Side; Duty Cycle: 1:1.58;

Conv.F=2.33

Frequency: 2310 MHz; Medium parameters used: f = 2300 MHz; $\sigma = 1.70$ mho/m; $\epsilon r = 37.66$; $\rho = 1000$ kg/m³;

Phantom section: Flat Section

Ambient temperature (°C): 21.9, Liquid temperature (°C): 21.4

SATIMO Configuration:

• Probe: SSE2; Calibrated: May 31, 2023; Serial No.: 2023-EPGO-414


• Sensor-Surface: 4mm (Mechanical Surface Detection)

• Phantom: ELLI39 Phantom

Measurement SW: OpenSAR V4_02_35


Configuration/ LTE Band 40- Lower Side Mid-Body- Back/Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/ LTE Band 40- Lower Side Mid-Body- Back/Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5mm;

111,	
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	7x7x7,dx=5mm dy=5mm dz=5mm
Phantom	ELLI
Device Position	Body Back
Band	LTE Band 40- Lower Side
Channels	Middle
Signal	Crest factor: 1.58

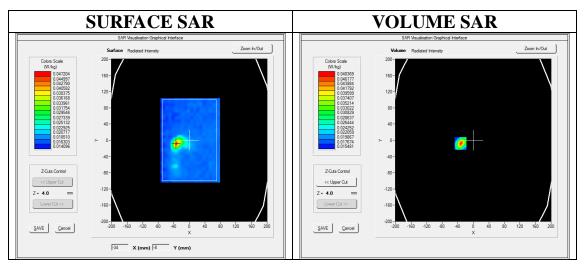



Maximum location: X=-33.00, Y=-8.00 SAR Peak: 0.10 W/kg

SAR 10g (W/Kg)	0.025938
SAR 1g (W/Kg)	0.046903





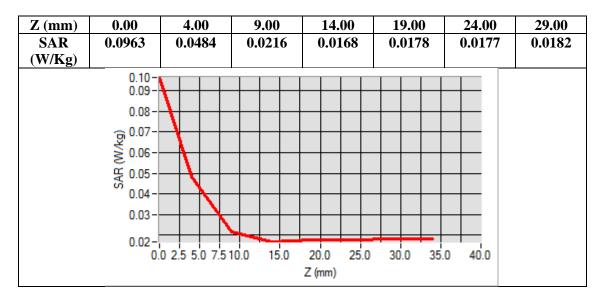

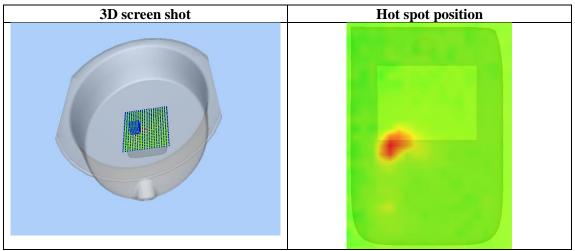



Page 225 of 263

Test Laboratory: AGC Lab Date: Feb. 04, 2024

LTE Band 40- Lower Side Mid-Body- Back (1 RB#0)
DUT: 4G smart PAD, Tablet; Type: AGM_PAD_P2W

Communication System: LTE; Communication System Band: LTE Band 40-Upper Side; Duty Cycle:1:1.58;

Conv.F=2.33

Frequency: 2310 MHz; Medium parameters used: f = 2300 MHz; $\sigma = 1.70$ mho/m; $\epsilon r = 37.66$; $\rho = 1000$ kg/m³;

Phantom section: Flat Section

Ambient temperature ($^{\circ}$): 21.9, Liquid temperature ($^{\circ}$): 21.4

SATIMO Configuration:

• Probe: SSE2; Calibrated: May 31, 2023; Serial No.: 2023-EPGO-414


• Sensor-Surface: 4mm (Mechanical Surface Detection)

• Phantom: ELLI39 Phantom

Measurement SW: OpenSAR V4_02_35


Configuration/ LTE Band 40- Lower Side Mid-Body- Back/Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/ LTE Band 40- Lower Side Mid-Body- Back/Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5mm;

,	
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	7x7x7,dx=5mm dy=5mm dz=5mm
Phantom	ELLI
Device Position	Body Back
Band	LTE Band 40- Lower Side
Channels	Middle
Signal	Crest factor: 1.58

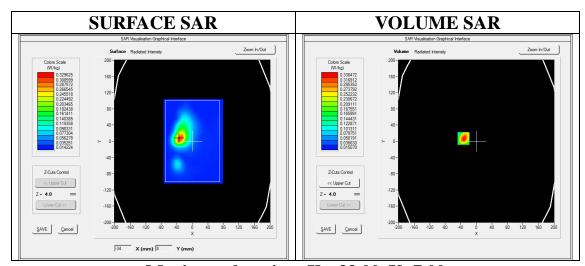



Maximum location: X=-33.00, Y=7.00 SAR Peak: 0.60 W/kg

SAR 10g (W/Kg)	0.149115
SAR 1g (W/Kg)	0.319282





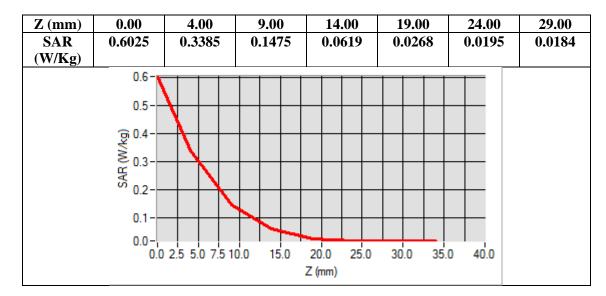

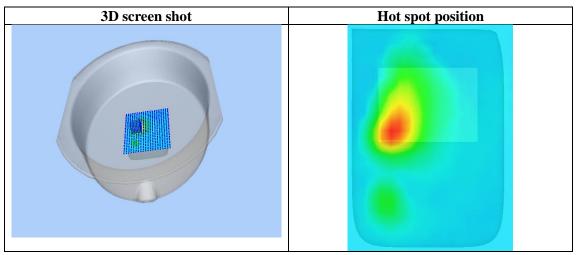



Page 227 of 263

Test Laboratory: AGC Lab Date: Feb. 04, 2024

LTE Band 40-Upper Side Mid-Body- Back (1 RB#0) DUT: 4G smart PAD, Tablet; Type: AGM_PAD_P2

Communication System: LTE; Communication System Band: LTE Band 40-Upper Side; Duty Cycle:1:1.58;

Conv.F=2.33

Frequency: 2355 MHz; Medium parameters used: f = 2300 MHz; $\sigma = 1.73$ mho/m; $\epsilon r = 36.92$; $\rho = 1000$ kg/m³;

Phantom section: Flat Section

Ambient temperature ($^{\circ}$ C): 21.9, Liquid temperature ($^{\circ}$ C): 21.4

SATIMO Configuration:

• Probe: SSE2; Calibrated: May 31, 2023; Serial No.: 2023-EPGO-414


• Sensor-Surface: 4mm (Mechanical Surface Detection)

• Phantom: ELLI39 Phantom

Measurement SW: OpenSAR V4_02_35

Configuration/ LTE Band 40-Upper Side Mid-Body- Back/Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/ LTE Band 40-Upper Side Mid-Body- Back/Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5mm;

111,	
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	7x7x7,dx=5mm dy=5mm dz=5mm
Phantom	ELLI
Device Position	Body Back
Band	LTE Band 40-Upper Side
Channels	Middle
Signal	Crest factor: 1.58

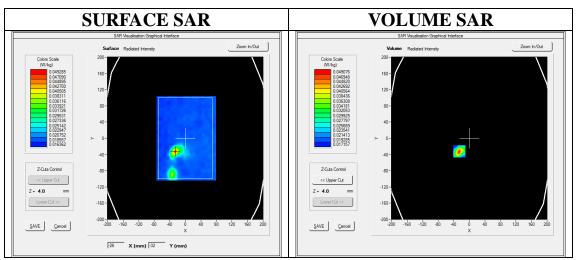


Maximum location: X=-26.00, Y=-32.00 SAR Peak: 0.10 W/kg


SAR 10g (W/Kg)	0.027501
SAR 1g (W/Kg)	0.049094


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Web: http://www.agccert.com/





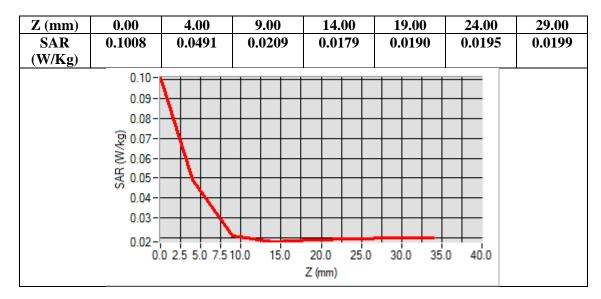

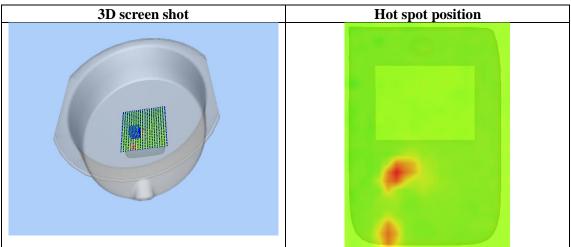



Page 229 of 263

Test Laboratory: AGC Lab Date: Feb. 04, 2024

LTE Band 40-Upper Side Mid-Body- Back (1 RB#0)
DUT: 4G smart PAD, Tablet; Type: AGM_PAD_P2W

Communication System: LTE; Communication System Band: LTE Band 40-Upper Side; Duty Cycle:1:1.58;

Conv.F=2.33

Frequency: 2355 MHz; Medium parameters used: f = 2300 MHz; $\sigma = 1.73$ mho/m; $\epsilon r = 36.92$; $\rho = 1000$ kg/m³;

Phantom section: Flat Section

Ambient temperature ($^{\circ}$): 21.9, Liquid temperature ($^{\circ}$): 21.4

SATIMO Configuration:

Probe: SSE2; Calibrated: May 31, 2023; Serial No.: 2023-EPGO-414


• Sensor-Surface: 4mm (Mechanical Surface Detection)

• Phantom: ELLI39 Phantom

Measurement SW: OpenSAR V4_02_35


Configuration/ LTE Band 40-Upper Side Mid-Body- Back/Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/ LTE Band 40-Upper Side Mid-Body- Back/Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5mm;

111,	
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	7x7x7,dx=5mm dy=5mm dz=5mm
Phantom	ELLI
Device Position	Body Back
Band	LTE Band 40-Upper Side
Channels	Middle
Signal	Crest factor: 1.58

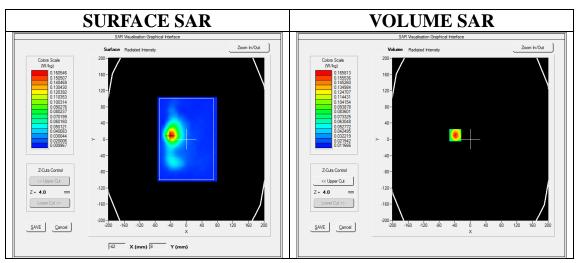



Maximum location: X=-39.00, Y=10.00 SAR Peak: 0.29 W/kg

SAR 10g (W/Kg)	0.076400
SAR 1g (W/Kg)	0.155172





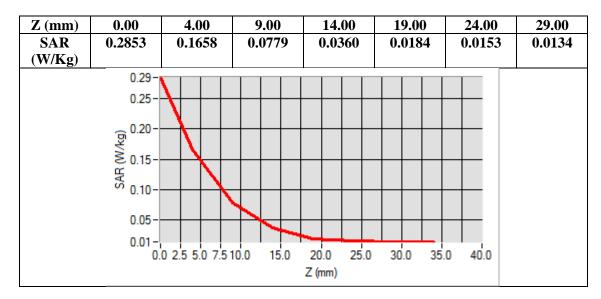

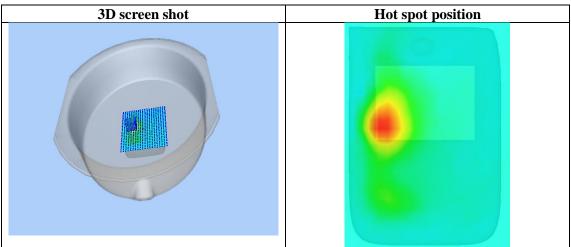



Page 231 of 263

Test Laboratory: AGC Lab Date: Feb. 19, 2024

LTE Band 41 Mid- Edge 2(Right) (1RB#0)

DUT: 4G smart PAD, Tablet; Type: AGM_PAD_P2

Communication System: LTE; Communication System Band: LTE Band 41; Duty Cycle:1:1.58; Conv.F=2.13 Frequency: 2593MHz; Medium parameters used: f = 2600 MHz; $\sigma = 1.95 \text{ mho/m}$; $\epsilon = 40.19$; $\rho = 1000 \text{ kg/m}^3$;

Phantom section: Flat Section

Ambient temperature (°C): 20.8, Liquid temperature (°C): 20.4

SATIMO Configuration:

Probe: SSE2; Calibrated: May 31, 2023; Serial No.: 2023-EPGO-414


• Sensor-Surface: 4mm (Mechanical Surface Detection)

• Phantom: ELLI39 Phantom

Measurement SW: OpenSAR V4_02_35


Configuration/ LTE BAND 41 Mid- Edge 2(Right)/Area Scan: Measurement grid: dx=10mm, y=10mm Configuration/ LTE BAND 41 Mid- Edge 2(Right)/Zoom Scan: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	7x7x7,dx=5mm dy=5mm dz=5mm
Phantom	ELLI
Device Position	Edge 2(Right)
Band	LTE BAND 41
Channels	Middle
Signal	OFDM (Crest factor: 1.58)

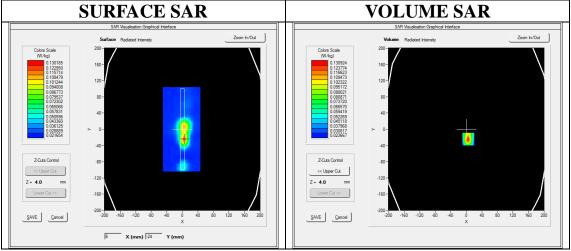



Maximum location: X=5.00, Y=-24.00 SAR Peak: 0.22 W/kg

SAR 10g (W/Kg)	0.061471
SAR 1g (W/Kg)	0.121659





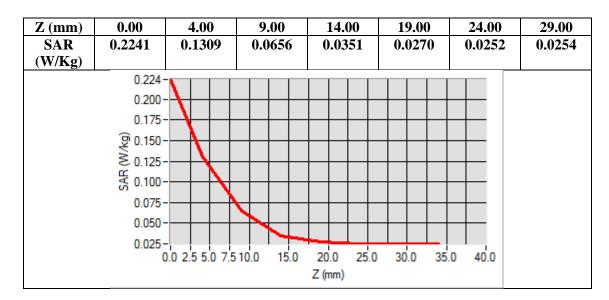

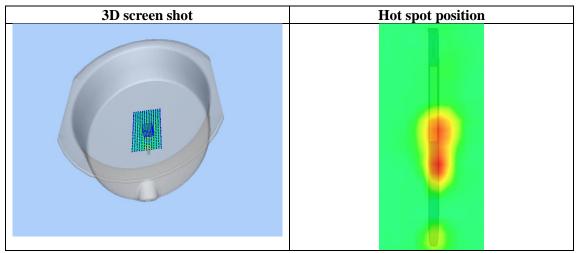



Page 233 of 263

Test Laboratory: AGC Lab Date: Feb. 19, 2024

LTE Band 41 Mid- Body-Back (1RB#0)

DUT: 4G smart PAD, Tablet; Type: AGM_PAD_P2W

Communication System: LTE; Communication System Band: LTE Band 41; Duty Cycle:1:1.58; Conv.F=2.13 Frequency: 2593MHz; Medium parameters used: f = 2600 MHz; $\sigma = 1.95 \text{ mho/m}$; $\epsilon = 40.19$; $\rho = 1000 \text{ kg/m}^3$;

Phantom section: Flat Section

Ambient temperature ($^{\circ}$): 20.8, Liquid temperature ($^{\circ}$): 20.4

SATIMO Configuration:

Probe: SSE2; Calibrated: May 31, 2023; Serial No.: 2023-EPGO-414


• Sensor-Surface: 4mm (Mechanical Surface Detection)

• Phantom: ELLI39 Phantom

Measurement SW: OpenSAR V4_02_35


Configuration/ LTE BAND 41 Mid-Body-Back/Area Scan: Measurement grid: dx=10mm, y=10mm Configuration/ LTE BAND 41 Mid-Body-Back/Zoom Scan: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	7x7x7,dx=5mm dy=5mm dz=5mm
Phantom	ELLI
Device Position	Body Back
Band	LTE BAND 41
Channels	Middle
Signal	OFDM (Crest factor: 1.58)

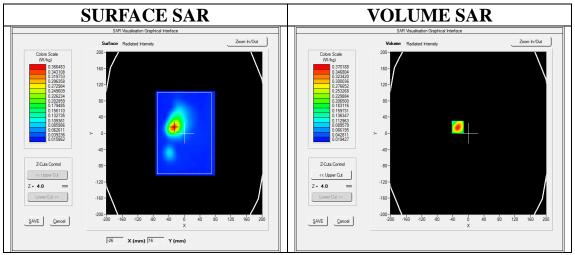



Maximum location: X=-27.00, Y=15.00 SAR Peak: 0.65 W/kg

SAR 10g (W/Kg)	0.164631
SAR 1g (W/Kg)	0.348854





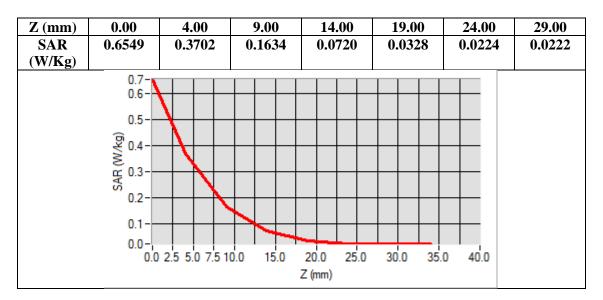

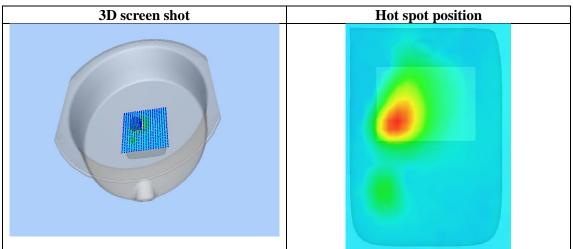



Page 235 of 263

Test Laboratory: AGC Lab Date: Mar. 02, 2024

LTE Band 66 High-Body-Back (1 RB#0)

DUT: 4G smart PAD, Tablet; Type: AGM_PAD_P2

Communication System: LTE; Communication System Band: LTE Band 66; Duty Cycle:1:1; Conv.F=2.17; Frequency: 1770 MHz; Medium parameters used: f = 1750 MHz; $\sigma = 1.39$ mho/m; $\epsilon = 38.67$; $\rho = 1000$ kg/m³;

Phantom section: Flat Section

Ambient temperature ($^{\circ}$): 21.1, Liquid temperature ($^{\circ}$): 20.9

SATIMO Configuration:

Probe: SSE2; Calibrated: May 31, 2023; Serial No.: 2023-EPGO-414


• Sensor-Surface: 4mm (Mechanical Surface Detection)

• Phantom: ELLI39 Phantom

• Measurement SW: OpenSAR V4_02_35


Configuration/ LTE Band 66 High -Body-Back/Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/ LTE Band 66 High -Body-Back/Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5m;

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	ELLI
Device Position	Body Back
Band	LTE Band 66
Channels	High
Signal	OFDM (Crest factor: 1.0)

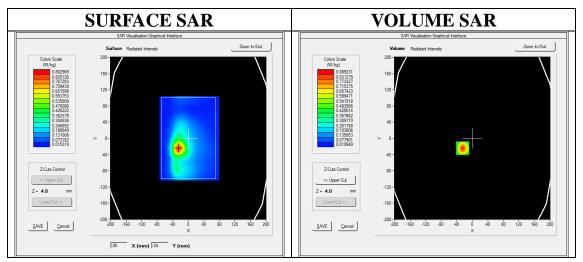



Maximum location: X=-25.00, Y=-24.00 SAR Peak: 1.41 W/kg

SAR 10g (W/Kg)	0.445260
SAR 1g (W/Kg)	0.843584





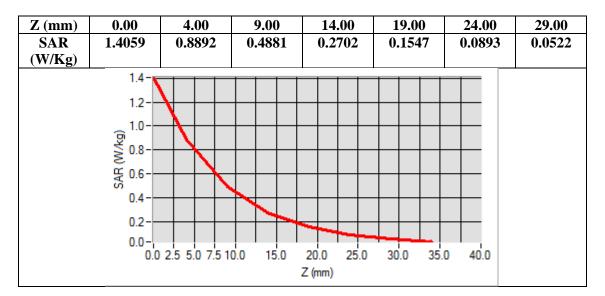

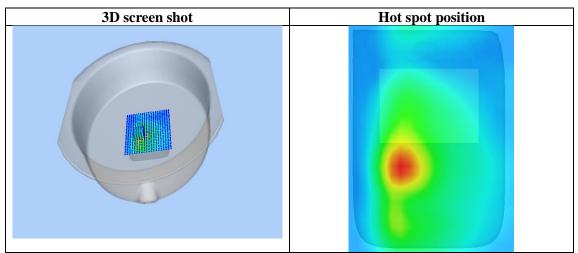



Page 237 of 263

Test Laboratory: AGC Lab Date: Mar. 02, 2024

LTE Band 66 Mid-Body-Back (1 RB#0)

DUT: 4G smart PAD, Tablet; Type: AGM_PAD_P2W

Communication System: LTE; Communication System Band: LTE Band 66; Duty Cycle:1:1; Conv.F=2.17; Frequency: 1755 MHz; Medium parameters used: f = 1750 MHz; $\sigma = 1.37$ mho/m; $\epsilon r = 39.46$; $\rho = 1000$ kg/m³;

Phantom section: Flat Section

Ambient temperature ($^{\circ}$): 21.1, Liquid temperature ($^{\circ}$): 20.9

SATIMO Configuration:

Probe: SSE2; Calibrated: May 31, 2023; Serial No.: 2023-EPGO-414


• Sensor-Surface: 4mm (Mechanical Surface Detection)

• Phantom: ELLI39 Phantom

• Measurement SW: OpenSAR V4_02_35

Configuration/ LTE Band 66 Mid -Body-Back/Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/ LTE Band 66 Mid -Body-Back/Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5m;


Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	ELLI
Device Position	Body Back
Band	LTE Band 66
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

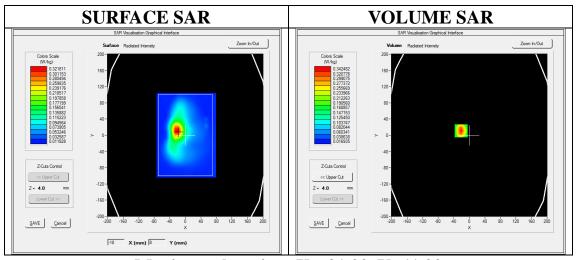


Maximum location: X=-21.00, Y=11.00


SAR Peak: 0.53 W/kg

SAR 10g (W/Kg)	0.177129
SAR 1g (W/Kg)	0.323973





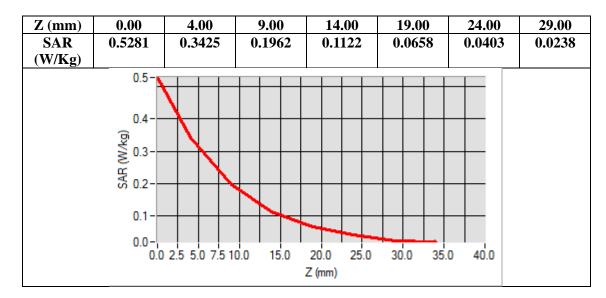

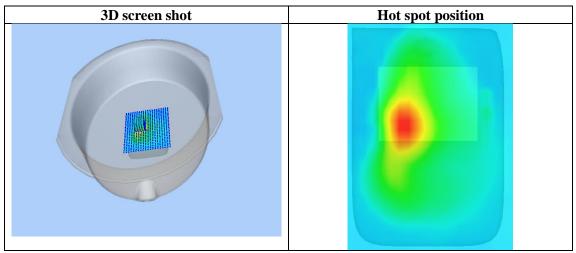



Page 239 of 263

WIFI MODE

Test Laboratory: AGC Lab Date: Feb. 18, 2024

802.11b Mid-Body-Worn- Back

DUT: 4G smart PAD, Tablet; Type: AGM_PAD_P2

Communication System: Wi-Fi; Communication System Band: 802.11b; Duty Cycle: 1:1; Conv.F=2.29; Frequency: 2437 MHz; Medium parameters used: f = 2450 MHz; $\sigma = 1.73 \text{mho/m}$; $\epsilon = 39.63$; $\rho = 1000 \text{ kg/m}^3$;

Phantom section: Flat Section

Ambient temperature (°C):21.7, Liquid temperature (°C): 21.3

SATIMO Configuration:

Probe: SSE2; Calibrated: May 31, 2023; Serial No.: 2023-EPGO-414


Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: ELLI39 Phantom

• Measurement SW: OpenSAR V4_02_35


Configuration/802.11b Mid- Body- Back /Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/802.11b Mid- Body- Back /Zoom Scan: Measurement grid: dx=5mm, dy=5mm, dz=5mm;

Area Scan	dx=8mm dy=8mm, h= 5.00 mm						
ZoomScan	7x7x7,dx=5mm dy=5mm dz=5mm						
Phantom	ELLI						
Device Position	Position Body Back						
Band	2450MHz						
Channels	Middle						
Signal	Crest factor: 1.0						

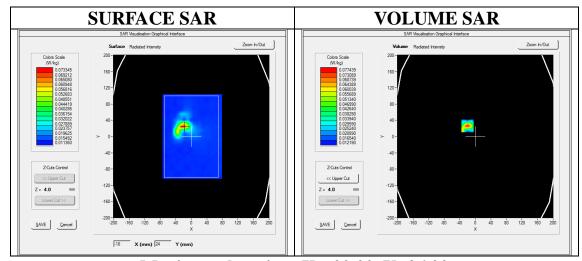



Maximum location: X=-20.00, Y=26.00 SAR Peak: 0.14 W/kg

SAR 10g (W/Kg)	0.032846
SAR 1g (W/Kg)	0.069940





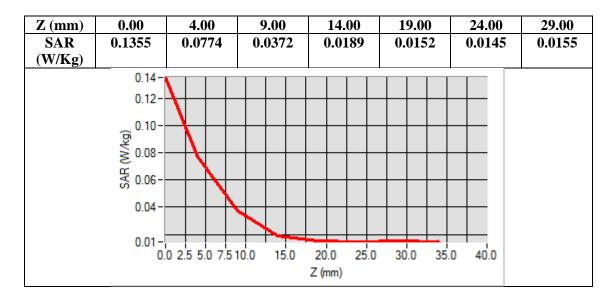

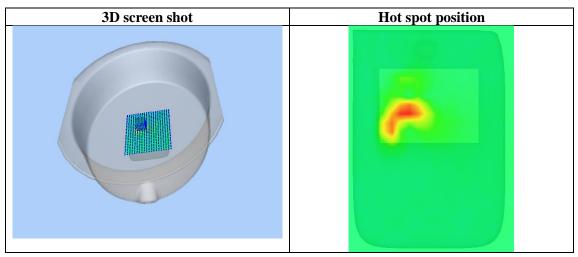



Page 241 of 263

Test Laboratory: AGC Lab Date: Feb. 18, 2024

802.11b Mid-Edge 2(Right)

DUT: 4G smart PAD, Tablet; Type: AGM_PAD_P2W

Communication System: Wi-Fi; Communication System Band: 802.11b; Duty Cycle: 1:1; Conv.F=2.29; Frequency: 2437 MHz; Medium parameters used: f = 2450 MHz; $\sigma = 1.73 \text{mho/m}$; $\epsilon = 39.63$; $\rho = 1000 \text{ kg/m}^3$;

Phantom section: Flat Section

Ambient temperature (°C):21.7, Liquid temperature (°C): 21.3

SATIMO Configuration:

Probe: SSE2; Calibrated: May 31, 2023; Serial No.: 2023-EPGO-414


Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: ELLI39 Phantom

• Measurement SW: OpenSAR V4_02_35


Configuration/802.11b Mid- Edge 2(Right) /Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/802.11b Mid- Edge 2(Right) /Zoom Scan: Measurement grid: dx=5mm, dy=5mm, dz=5mm;

Area Scan	dx=8mm dy=8mm, h= 5.00 mm					
ZoomScan	7x7x7,dx=5mm dy=5mm dz=5mm					
Phantom	ELLI					
Device Position	Edge 2(Right)					
Band	2450MHz					
Channels	Middle					
Signal	Crest factor: 1.0					

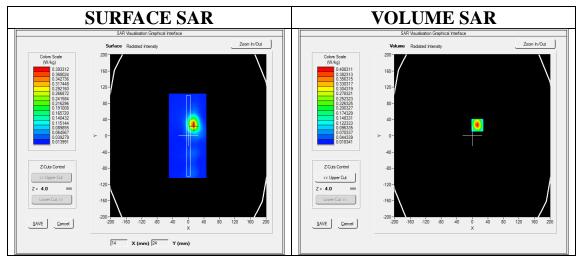



Maximum location: X=13.00, Y=26.00 SAR Peak: 0.71 W/kg

	0
SAR 10g (W/Kg)	0.165191
SAR 1g (W/Kg)	0.374668





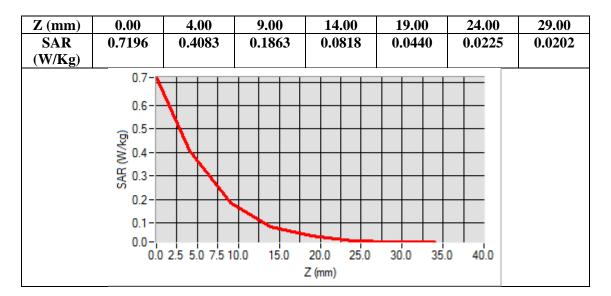

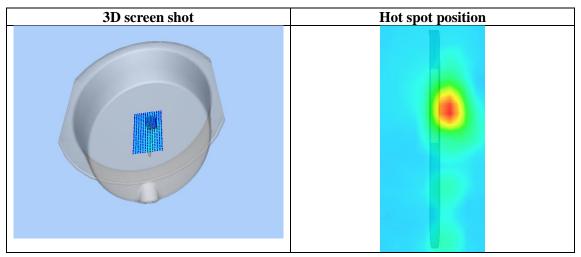



Date: Feb. 28, 2024

Page 243 of 263

5.2GHz 802.11n(40) Test Laboratory: AGC Lab 802.11n(40) CH38- Body-Back

DUT: 4G smart PAD, Tablet; Type: AGM_PAD_P2

Communication System: Wi-Fi; Communication System Band: 802.11n(40); Duty Cycle: 1:1; Conv.F=2.35; Frequency: 5190MHz; Medium parameters used: f = 5200 MHz; $\sigma = 4.51 \text{mho/m}$; $\epsilon = 36.69$; $\rho = 1000 \text{ kg/m}^3$;

Phantom section: Flat Section

Ambient temperature (°C): 20.8, Liquid temperature (°C): 20.3

SATIMO Configuration:

• Probe: SSE2; Calibrated: May 31, 2023; Serial No.: 2023-EPGO-414


• Sensor-Surface: 4mm (Mechanical Surface Detection)

• Phantom: ELLI39 Phantom

• Measurement SW: OpenSAR V4_02_35

Configuration/802.11n(40) CH38- Body-Back /Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/802.11n(40) CH38- Body-Back /Zoom Scan: Measurement grid: dx=4mm,dy=4mm, dz=2mm

Area Scan	sam_direct_droit2_surf8mm.txt					
ZoomScan	7x7x12 dx=4mm dy=4mm dz=2mm					
Phantom	ELLI					
Device Position	Body Back					
Band	5200MHz					
Channels	CH38					
Signal	Crest factor: 1.0					

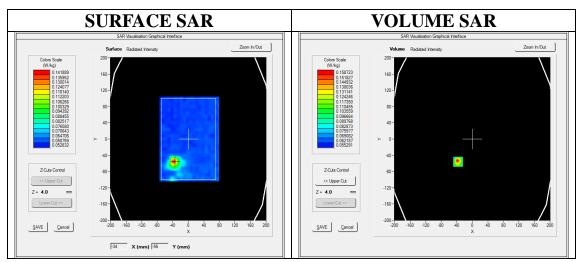


Maximum location: X=-37.00, Y=-56.00 SAR Peak: 0.40 W/kg

SAR 10g (W/Kg)	0.089429		
SAR 1g (W/Kg)	0.163095		


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/





Z (m m) SA R (W/ Kg)	0.00 0.39 75	4.00 0.15 87	6.00 0.08 65	8.00 0.07 21	10.0 0 0.06 17	12.0 0 0.06 03	14.0 0 0.06 02	16.0 0 0.06 17	18.0 0 0.05 94	20.0 0 0.05 94	22.0 0 0.06 07	24.0 0 0.06 14
		0.40 0.35 0.30 0.25 0.20 0.15 0.06		4 6	8 1	0 12 Z (m	14 16 m)	18 20) 22 2	4 26		

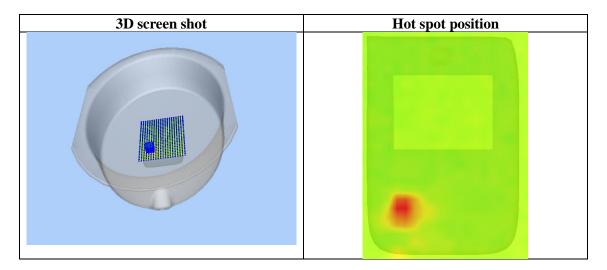



Page 245 of 263

Test Laboratory: AGC Lab Date: Feb. 28, 2024

802.11n(40) CH38- Edge 2(Right)

DUT: 4G smart PAD, Tablet; Type: AGM_PAD_P2W

Communication System: Wi-Fi; Communication System Band: 802.11n(40); Duty Cycle: 1:1; Conv.F=2.35; Frequency: 5190MHz; Medium parameters used: f = 5200 MHz; $\sigma = 4.51 \text{mho/m}$; $\epsilon = 36.69$; $\rho = 1000 \text{ kg/m}^3$;

Phantom section: Flat Section

Ambient temperature (°C): 20.8, Liquid temperature (°C): 20.3

SATIMO Configuration:

Probe: SSE2; Calibrated: May 31, 2023; Serial No.: 2023-EPGO-414


• Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: ELLI39 Phantom

Measurement SW: OpenSAR V4_02_35

Configuration/802.11n(40) CH38- Edge 2(Right) /Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/802.11n(40) CH38- Edge 2(Right) /Zoom Scan: Measurement grid: dx=4mm,dy=4mm, dz=2mm

Area Scan	sam_direct_droit2_surf8mm.txt				
ZoomScan	7x7x12 dx=4mm dy=4mm dz=2mm				
Phantom	ELLI				
Device Position	Edge 2(Right)				
Band	Band 5200MHz				
Channels	CH38				
Signal	Crest factor: 1.0				

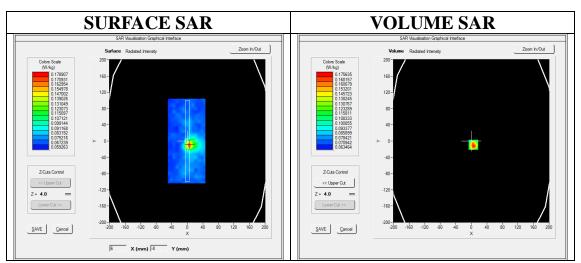


Maximum location: X=5.00, Y=-9.00 SAR Peak: 0.43 W/kg

SAR 10g (W/Kg)	0.107600
SAR 1g (W/Kg)	0.181723


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/





Z (m m) SA R (W/ Kg)	0.00 0.45 04	4.00 0.17 56	6.00 0.08 62	8.00 0.08 30	10.0 0 0.07 22	12.0 0 0.07 76	14.0 0 0.06 80	16.0 0 0.06 99	18.0 0 0.07 52	20.0 0 0.07 16	22.0 0 0.07 03	24.0 0 0.07 35
8/	,	0.45 0.40 0.35 0.30 0.25 0.20 0.15 0.07		4 6	8 1	0 12 Z (m	14 16 nm)	18 20) 22 2	4 26		

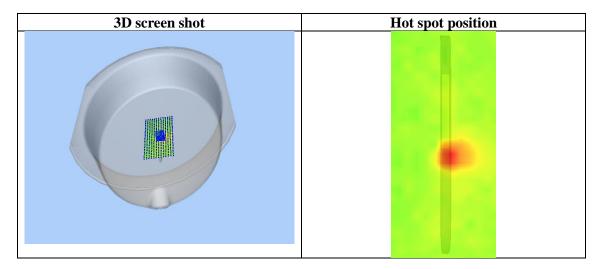



Page 247 of 263

5.8GHz 802.11a

Test Laboratory: AGC Lab Date: Feb. 29, 2024

802.11a CH157- Edge 2(Right)

DUT: 4G smart PAD, Tablet; Type: AGM_PAD_P2

Communication System: Wi-Fi; Communication System Band: 802.11a; Duty Cycle: 1:1; Conv.F=1.41; Frequency: 5785MHz; Medium parameters used: f = 5800 MHz; $\sigma = 5.18 \text{mho/m}$; $\epsilon = 35.37$; $\rho = 1000 \text{ kg/m}^3$;

Phantom section: Flat Section

Ambient temperature (°C): 20.1, Liquid temperature (°C): 19.7

SATIMO Configuration:

• Probe: SSE2; Calibrated: May 31, 2023; Serial No.: 2023-EPGO-414


• Sensor-Surface: 4mm (Mechanical Surface Detection)

• Phantom: ELLI39 Phantom

• Measurement SW: OpenSAR V4_02_35

Configuration/ 802.11a CH157- Edge 2(Right) /Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/ 802.11a CH157- Edge 2(Right) /Zoom Scan: Measurement grid: dx=4mm,dy=4mm, dz=2mm

Area Scan	sam_direct_droit2_surf8mm.txt					
ZoomScan	7x7x12 dx=4mm dy=4mm dz=2mm					
Phantom	ELLI					
Device Position	Edge 2(Right)					
Band	5800MHz					
Channels	Middle					
Signal	Crest factor: 1.0					

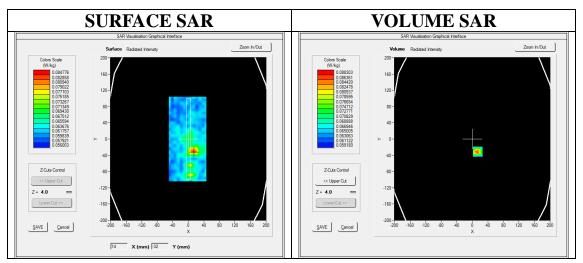


Maximum location: X=14.00, Y=-31.00 SAR Peak: 0.16 W/kg

SAR 10g (W/Kg)	0.072259
SAR 1g (W/Kg)	0.086721


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Web: http://www.agccert.com/





Z (m m) SA R (W/ Kg)	0.00 0.16 14	0.08 83	6.00 0.06 68	8.00 0.06 74	10.0 0 0.06 35	12.0 0 0.06 51	14.0 0 0.06 59	16.0 0 0.07 05	18.0 0 0.06 77	20.0 0 0.06 76	22.0 0 0.07 03	24.0 0 0.06 92
		0.16 0.12 0.10 0.08 0.06		4 6	8 1	0 12 Z (m	14 16 nm)	18 20) 22 2	4 26		

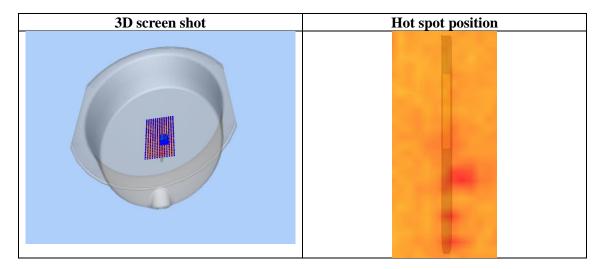



Page 249 of 263

Test Laboratory: AGC Lab

802.11a CH157- Edge 2(Right)

Date: Feb. 29, 2024

DUT: 4G smart PAD, Tablet; Type: AGM_PAD_P2W

Communication System: Wi-Fi; Communication System Band: 802.11a; Duty Cycle: 1:1; Conv.F=1.41; Frequency: 5785MHz; Medium parameters used: f = 5800 MHz; $\sigma = 5.18 \text{mho/m}$; $\epsilon = 35.37$; $\rho = 1000 \text{ kg/m}^3$;

Phantom section: Flat Section

Ambient temperature (°C): 20.1, Liquid temperature (°C): 19.7

SATIMO Configuration:

Probe: SSE2; Calibrated: May 31, 2023; Serial No.: 2023-EPGO-414


• Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: ELLI39 Phantom

Measurement SW: OpenSAR V4_02_35


Configuration/ 802.11a CH157- Edge 2(Right) /Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/ 802.11a CH157- Edge 2(Right) /Zoom Scan: Measurement grid: dx=4mm,dy=4mm, dz=2mm

Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	7x7x12 dx=4mm dy=4mm dz=2mm
Phantom	ELLI
Device Position	Edge 2(Right)
Band	5800MHz
Channels	Middle
Signal	Crest factor: 1.0

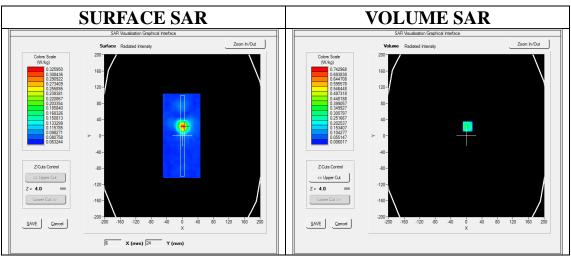


Maximum location: X=3.00, Y=23.00 SAR Peak: 1.00 W/kg

SAR 10g (W/Kg) 0.171644 SAR 1g (W/Kg) 0.366767





Z (m m) SA R (W/ Kg)	1.02 15	0.34 49	0.16 85	8.00 0.08 82	10.0 0 0.07 46	12.0 0 0.08 11	14.0 0 0.07 82	16.0 0 0.07 67	18.0 0 0.07 45	20.0 0 0.07 67	22.0 0 0.08 33	24.0 0 0.08 00
		0.8- 0.8- 0.6- 0.4- 0.2- 0.1-		4 6	8 1	0 12 Z (mr	14 16 m)	18 20	22 2	4 26		

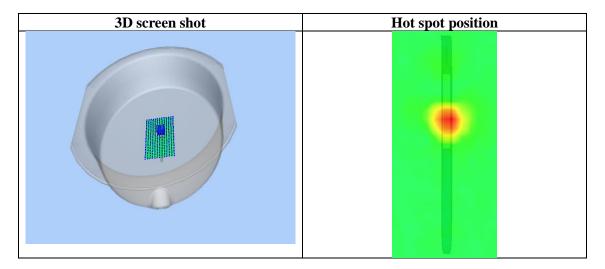



Page 251 of 263

Repeated SAR

Test Laboratory: AGC Lab Date: Mar. 01, 2024

WCDMA Band II High-Edge 2(RMC)

DUT: 4G smart PAD, Tablet; Type: AGM_PAD_P2

Communication System: UMTS; Communication System Band: Band II UTRA/FDD ;Duty Cycle:1:1; Conv.F=2.15 Frequency: 1907.6 MHz; Medium parameters used: f = 1900 MHz; $\sigma = 1.43 \text{ mho/m}$; $\epsilon r = 38.41$; $\rho = 1000 \text{ kg/m}^3$;

Phantom section: Flat Section

Ambient temperature (°C): 20.9, Liquid temperature (°C): 20.7

SATIMO Configuration:

• Probe: SSE2; Calibrated: May 31, 2023; Serial No.: 2023-EPGO-414


• Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: ELLI39 Phantom

Measurement SW: OpenSAR V4_02_35


Configuration/ WCDMA band II High -Edge 2/Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/ WCDMA band II High -Edge 2/Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5mm;

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	ELLI
Device Position	Edge 2
Band	WCDMA band II
Channels	High
Signal	CDMA (Crest factor: 1.0)

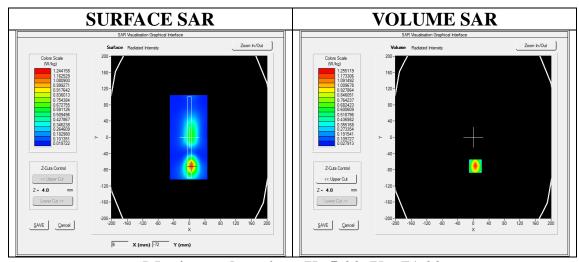



Maximum location: X=5.00, Y=-71.00 SAR Peak: 1.90 W/kg

SAR 10g (W/Kg)	0.614217		
SAR 1g (W/Kg)	1.166524		





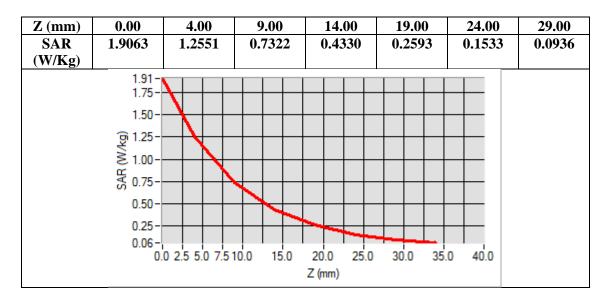

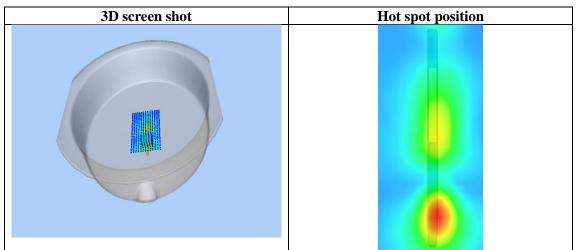



Page 253 of 263

Test Laboratory: AGC Lab Date: Mar. 02, 2024

WCDMA Band IV High -Body-Towards Grounds (RMC) DUT: 4G smart PAD, Tablet; Type: AGM_PAD_P2

Communication System: UMTS; Communication System Band: BAND IV UTRA/FDD; Duty Cycle:1: 1; Conv.F=2.17; Frequency: 1752.6 MHz; Medium parameters used: f = 1750 MHz; $\sigma = 1.36 \text{mho/m}$; $\epsilon = 40.39$; $\rho = 1000 \text{ kg/m}^3$;

Phantom section: Flat Section

Ambient temperature (°C): 21.1, Liquid temperature (°C): 20.9

SATIMO Configuration:

Probe: SSE2; Calibrated: May 31, 2023; Serial No.: 2023-EPGO-414


• Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: ELLI39 Phantom

Measurement SW: OpenSAR V4_02_35


Configuration/ WCDMA Band IV High -Body-Back/Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/ WCDMA Band IV High -Body-Back/Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5mm;

Area Scan	dx=8mm dy=8mm, h= 5.00 mm		
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete		
Phantom	ELLI		
Device Position	Body Back		
Band	WCDMA Band IV		
Channels	High		
Signal	CDMA (Crest factor: 1.0)		

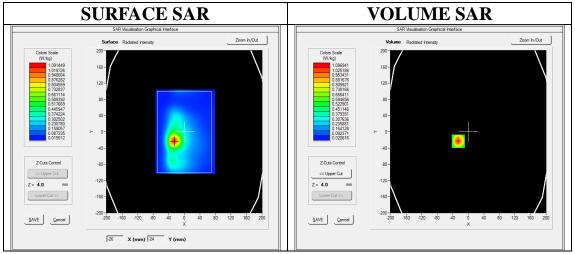



Maximum location: X=-26.00, Y=-23.00 SAR Peak: 1.72 W/kg

SAR 10g (W/Kg)	0.552124
SAR 1g (W/Kg)	1.035152





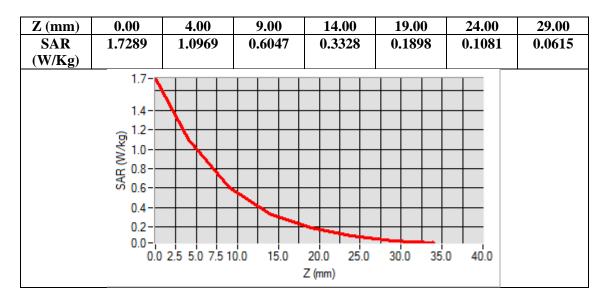

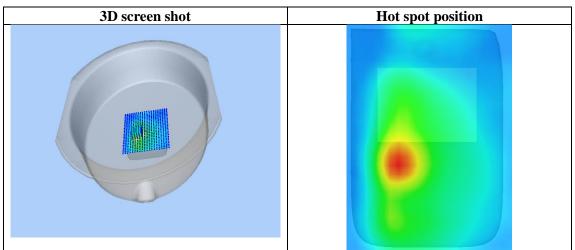



Page 255 of 263

Test Laboratory: AGC Lab Date: Mar. 02, 2024

LTE Band 4 High-Body-Back (1 RB#0)

DUT: 4G smart PAD, Tablet; Type: AGM_PAD_P2

Communication System: LTE; Communication System Band: LTE Band 4; Duty Cycle:1:1; Conv.F=2.17; Frequency: 1745 MHz; Medium parameters used: f = 1750 MHz; $\sigma = 1.34$ mho/m; $\epsilon = 41.68$; $\rho = 1000$ kg/m³;

Phantom section: Flat Section

Ambient temperature ($^{\circ}$): 21.1, Liquid temperature ($^{\circ}$): 20.9

SATIMO Configuration:

Probe: SSE2; Calibrated: May 31, 2023; Serial No.: 2023-EPGO-414


• Sensor-Surface: 4mm (Mechanical Surface Detection)

• Phantom: ELLI39 Phantom

• Measurement SW: OpenSAR V4_02_35


Configuration/ LTE Band 4 High -Body-Back/Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/ LTE Band 4 High -Body-Back/Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5m;

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	ELLI
Device Position	Body Back
Band	LTE Band 4
Channels	High
Signal	OFDM (Crest factor: 1.0)

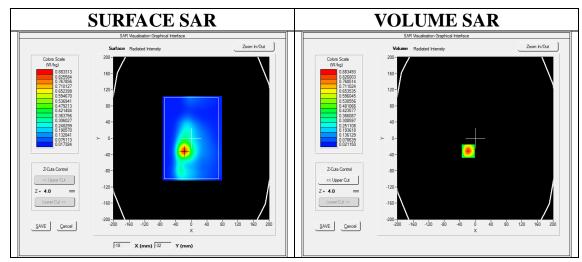



Maximum location: X=-18.00, Y=-32.00 SAR Peak: 1.39 W/kg

SAR 10g (W/Kg)	0.443874
SAR 1g (W/Kg)	0.837973





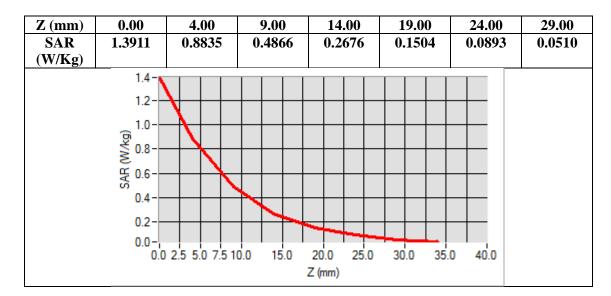

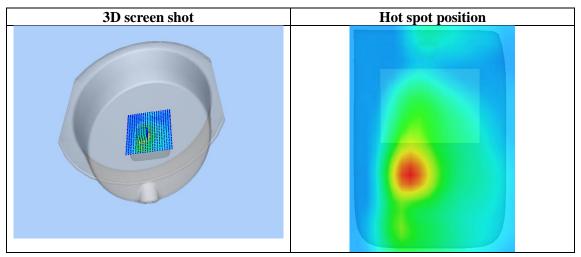



Page 257 of 263

Test Laboratory: AGC Lab Date: Mar. 02, 2024

LTE Band 66 High-Body-Back (1 RB#0)

DUT: 4G smart PAD, Tablet; Type: AGM_PAD_P2

Communication System: LTE; Communication System Band: LTE Band 66; Duty Cycle:1:1; Conv.F=2.17; Frequency: 1770 MHz; Medium parameters used: f = 1750 MHz; $\sigma = 1.39$ mho/m; $\epsilon r = 38.67$; $\rho = 1000$ kg/m³;

Phantom section: Flat Section

Ambient temperature ($^{\circ}$): 21.1, Liquid temperature ($^{\circ}$): 20.9

SATIMO Configuration:

Probe: SSE2; Calibrated: May 31, 2023; Serial No.: 2023-EPGO-414


• Sensor-Surface: 4mm (Mechanical Surface Detection)

• Phantom: ELLI39 Phantom

• Measurement SW: OpenSAR V4_02_35


Configuration/ LTE Band 66 High -Body-Back/Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/ LTE Band 66 High -Body-Back/Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5m;

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	ELLI
Device Position	Body Back
Band	LTE Band 66
Channels	High
Signal	OFDM (Crest factor: 1.0)

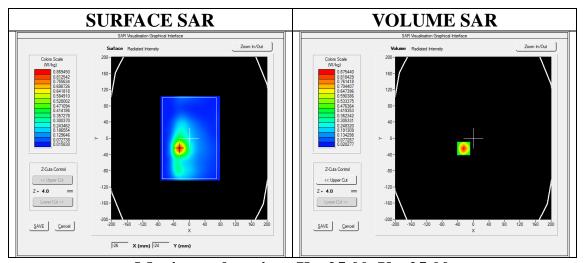



Maximum location: X=-25.00, Y=-25.00 SAR Peak: 1.38 W/kg

SAR 10g (W/Kg)	0.438302
SAR 1g (W/Kg)	0.828124





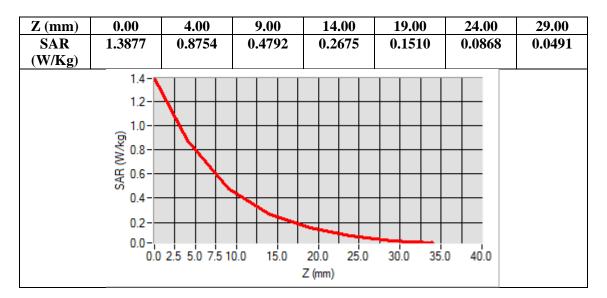

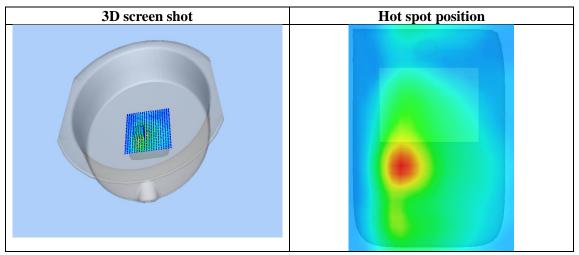





Page 259 of 263


APPENDIX C. TEST SETUP PHOTOGRAPHS

Body Back 10mm

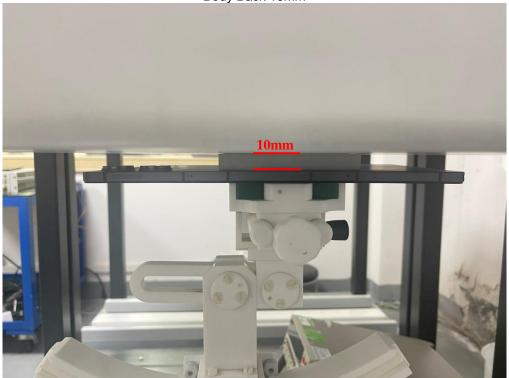

Body Front 10mm

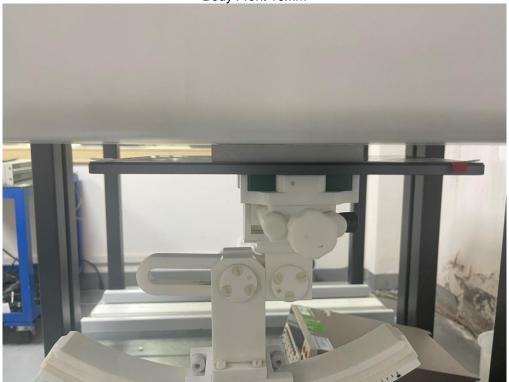





Edge 2(Right) 10mm-Hotspot Mode










Page 261 of 263

DEPTH OF THE LIQUID IN THE PHANTOM—ZOOM IN

Note: The position used in the measurement were according to IEEE 1528-2013

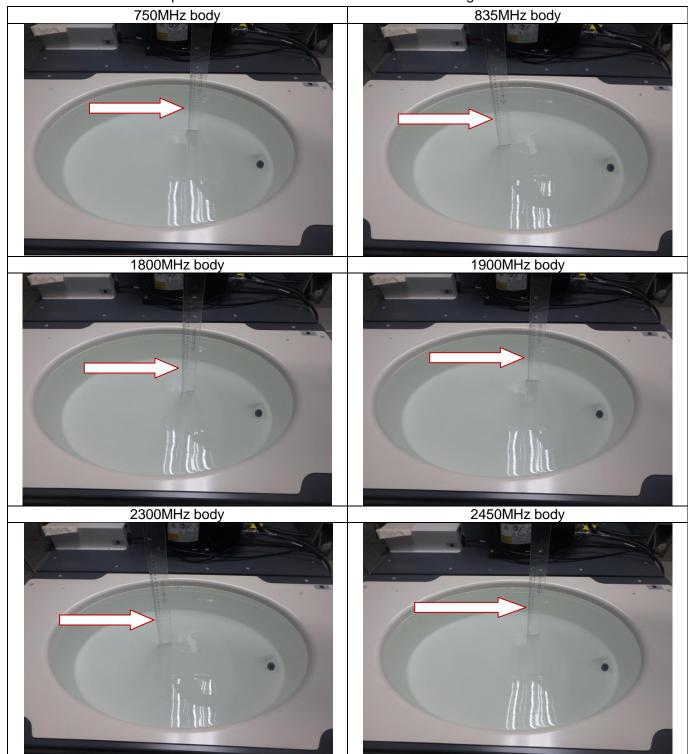


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/



Page 262 of 263

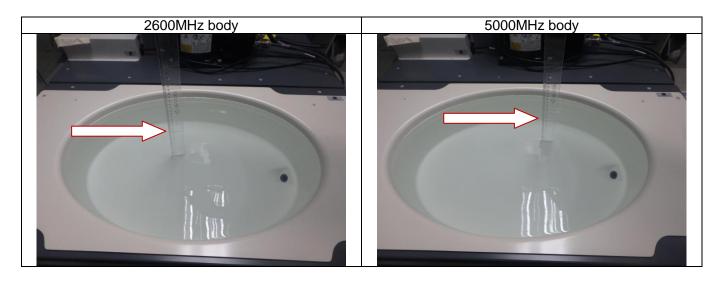



Page 263 of 263

APPENDIX D. CALIBRATION DATA

Refer to Attached files.

----END OF REPORT----



Conditions of Issuance of Test Reports

- 1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").
- 2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.
- 3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.
- 4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.
- 5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.
- 6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.
- 7.Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.
- 8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.
- 9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.