

2021/05/24

Initial draft.

2021/08/24

- 1.Remove ED3、ED4、L2、C6、C7 for optim ize eye diagrams (HS).
- 2.Reserved LDO circuit for VBUS drop voltage issue.
- 3.Add R19、R20 100R for I2C damping.
- 4.Remove test point I2C1_SCL、I2C1_SDA.
- 5.Add test point D+/D- for factory demand.
- 6.RF tunning value.
R16 change 0R to 2.2nH.

2021/11/18


- 1.R17、R18 change 2.2K to 2.7K for XBOX.
- 2.Add ED3、ED4 for customer demand.
- 3.EMI test pass.
L1 change Bead to 0R.

2021/12/17










- 1.R19、R20 from NC to 100R for XBOX.

Provided By Ampacs Corporation
For ITS Use Only


Approved by	Checked by	Designer	AMPACS CORPORATION		
Eddie		Elaine	Project Number RIG700AB_HX_TX		
			Size Custom	Title History	Rev 2C
			Date: Friday, December 17, 2021		Sheet 1 of 4

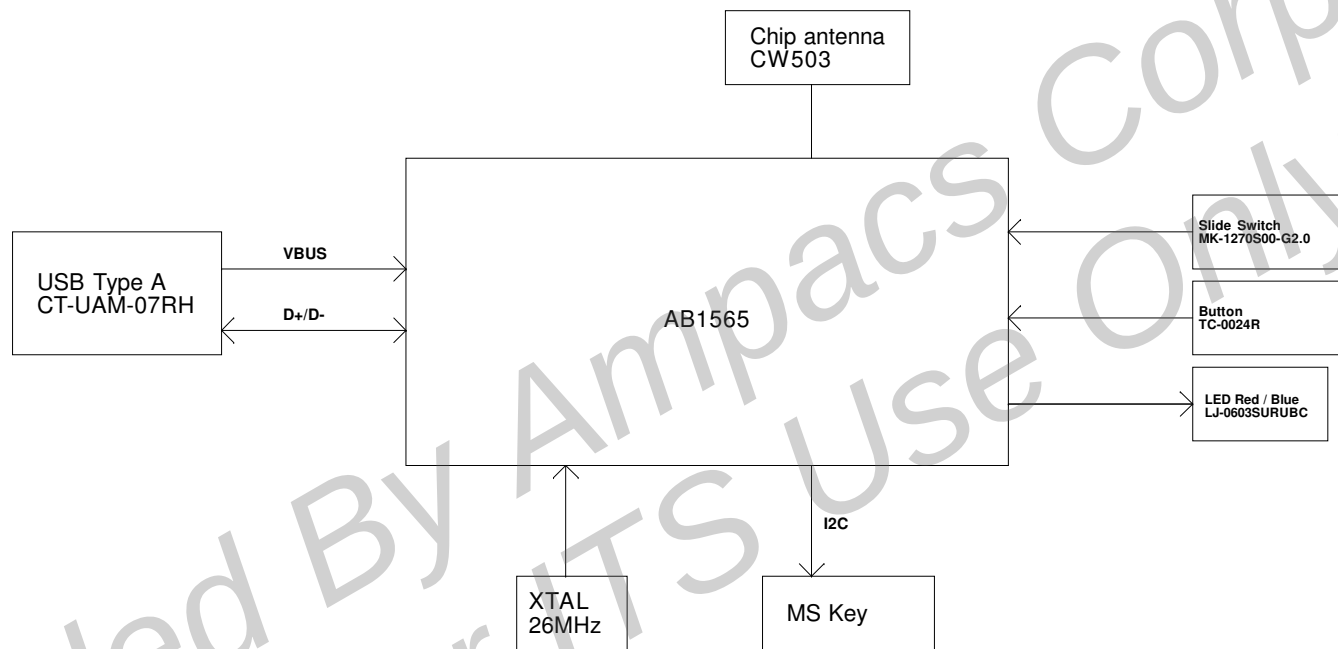

Approved by	Checked by	Designer	AMPACS CORPORATION		
Eddie		Elaine	Project Number RIG700AB_HX_TX		
			Size Custom	Title Block Diagram	Rev 2C
			Date: Friday, December 17, 2021		
		Sheet 2 of 4			

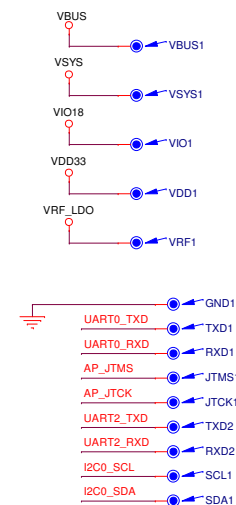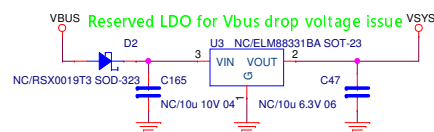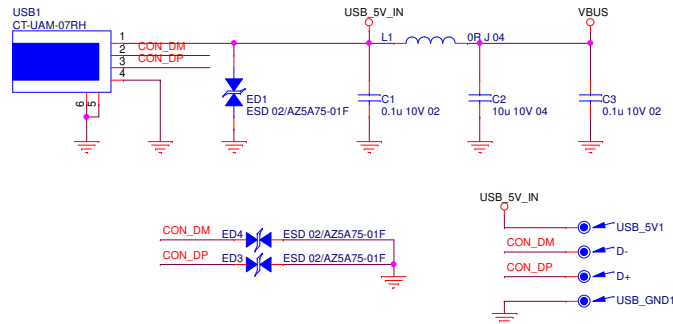

Approved by	Checked by	Designer	AMPACS CORPORATION		
Eddie		Elaine	Project Number RIG700AB_HX_TX		
			Size Custom	Title AB1565_Main	Rev 20
			Date: Friday, December 17, 2021		Sheet 3 of 4

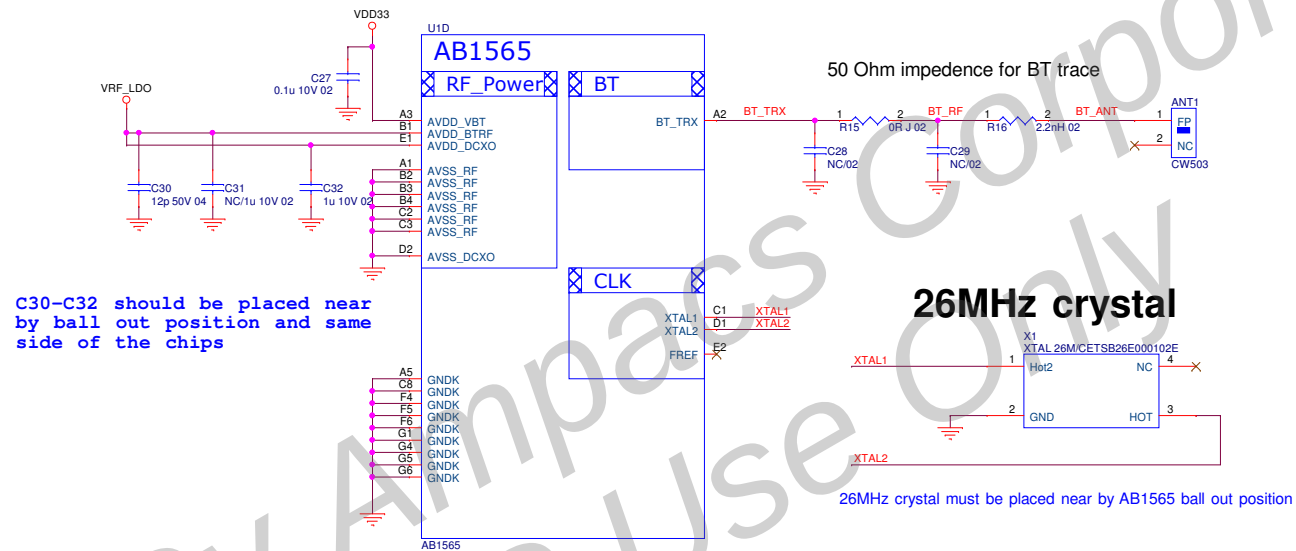

Approved by	Checked by	Designer	AMPACS CORPORATION		
Eddie		Elaine	Project Number RIG700AB_HX_TX		
			Size Custom	Title AB1565_RF	Rev 2C
			Date: Friday, December 17, 2021		Sheet 4 of 4