



ONE PLUS ONE
Wireless Communication

Shenzhen OnePlusOne Wireless Communication Technology Co.,Ltd.

承认书

APPROVAL SHEET

客户 Customer	
项目名 Project	GS3
料号 Part NO.	
规格 Specification	BT Antennas

APPROVAL			
OnePlusOne:			
RF Check	ME Check	QC Check	Confirm By
Customer:			
EE Check	PM Check	QC Check	Confirm By

Date:	Revision:	Updates and changes:	Issued by:
2024.4.15	A	Initial sheet	Haiou.Zhu
Project:GS3		Author:	File Name:
Date: 2024-4-15		Haiou.Zhu	GS3_APP_A.doc
Revision:		A	
CONFIDENTIAL			
Shenzhen OnePlusOne Wireless Communication Technology Co.,Ltd.			
深圳市宝安区航城街道航城锦驰产业园 B1 栋 7 楼			

Contents

1 ANTENNA DESCRIPTION 2

1.1 Part number3

1.2 Antenna pictures 3

2 ELECTRICAL PERFORMANCE3

2.1 Specification 3

2.2 Measurement Set-up 3

2.2.1 VSWR and Return Loss 3

2.2.2 Efficiency and Gain 3

3 REFERENCE MEASUREMENT DATA 4

3.1 Passive4

3.2 Active 4

4 MECHANICAL DESCRIPTION7

4.1 Drawings7

1 Antenna description

It summarize BT 5.3 antennas for project GS3 antenna’s frequency band is 2400-2480MHz. BT 5.3 antenna’s type is Monopole

Project:GS3	Author: Haiou.Zhu	File Name: GS3_APP_A.doc
Date: 2024-4-15		
Revision:	A	
CONFIDENTIAL Shenzhen OnePlusOne Wireless Communication Technology Co.,Ltd. 深圳市宝安区航城街道航城锦驰产业园 B1 栋 7 楼		

1.1 Part number

Part number of antenna: GS3

1.2 Antenna pictures



2 Electrical Performance

2.1 Specification

BT	
Frequency Range	2400MHz~2500MHz
Return Loss	<-5
Efficiency	>25

2.2 Measurement Set-up

2.2.1 VSWR and Return Loss

VSWR measurements (S_{11}) were performed using an Agilent ENA series Network Analyzer and the previously described test fixture. Coaxial chokes were used to mitigate surface currents on the outside of the cabling. The testing was performed in free space.


2.2.2 Efficiency and Gain

The gain of the antenna was measured in OPO’s 3D anechoic chamber in Shenzhen, China. The chamber is a ETS system capable of doing tests from 380MHz to 6GHz. Coaxial chokes on the feed cable were used to mitigate surface currents during passive tests. The measurement results are calibrated using dipole standards. For TRP and TIS the chamber uses a 8960 / MT8820C to establish the connection with the mobile device and read the power.

Project:GS3	Author: Haiou.Zhu	File Name: GS3_APP_A.doc
Date: 2024-4-15		
Revision:	A	
CONFIDENTIAL Shenzhen OnePlusOne Wireless Communication Technology Co.,Ltd. 深圳市宝安区航城街道航城锦驰产业园 B1 栋 7 楼		

3 Reference measurement data

3.1 Passive

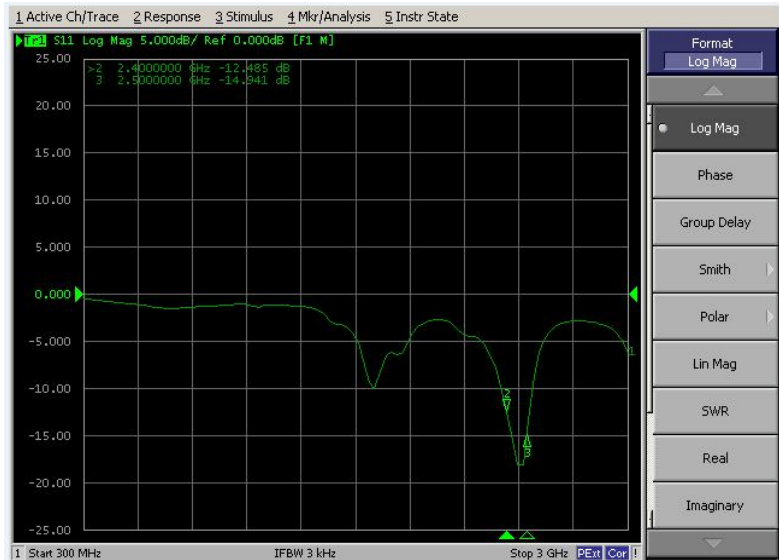


Return SWR

3.2 Active


Test Result	Bluetooth TRP		
	0	39	78
Frequency (MHz)	2402	2441	2480
Txp Ave (dBm)	-4.99	-4.07	-4.09
NHPRP (dBm)	NULL	NULL	NULL
MAX (dBm)	-1.49	-0.44	-0.28
EIRP peak	-1.49	-0.44	-0.28
Min (dBm)	-13.09	-12.09	-13.55
Attenuation Horizontal		43.67	43.01

Project:GS3	Author: Haiou.Zhu	File Name: GS3_APP_A.doc
Date: 2024-4-15		
Revision:	A	
CONFIDENTIAL Shenzhen OnePlusOne Wireless Communication Technology Co.,Ltd. 深圳市宝安区航城街道航城锦驰产业园 B1 栋 7 楼		


Bluetooth 0 TRP Phi=45

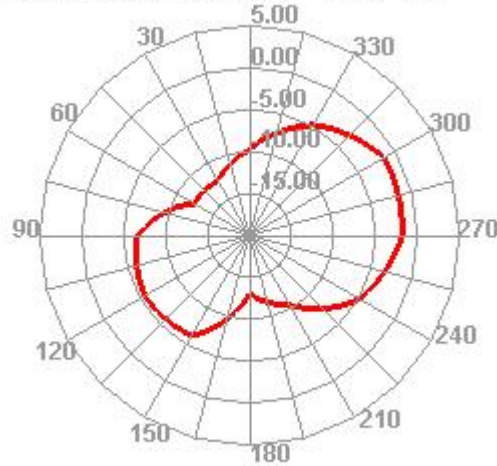

Bluetooth 39 TRP Phi=45

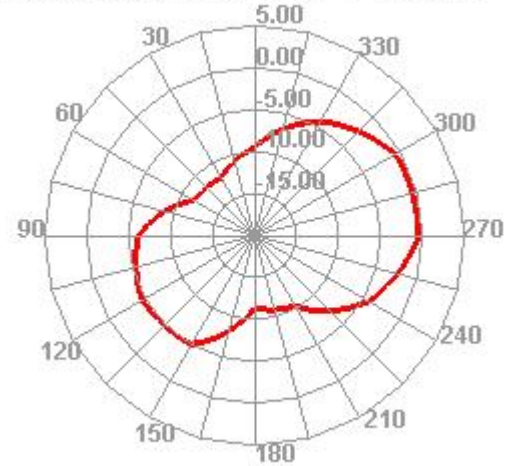

Bluetooth 78 TRP Phi=45

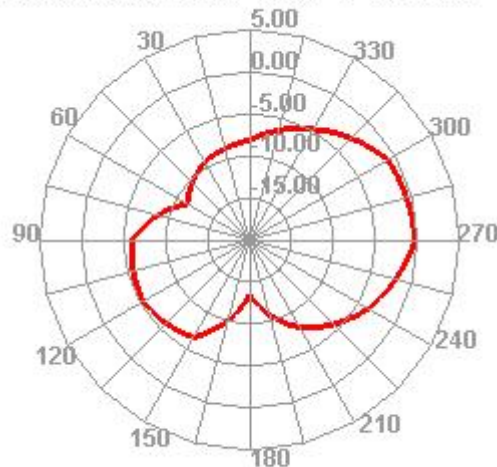

Passive Test For BT			
Freq (MHz)	Effi (%)	Effi (dB)	Gain (dBi)
2400	25.67	-5.91	-1.16
2410	23.08	-6.37	-1.63
2420	22.4	-6.5	-1.69
2430	18.61	-7.3	-2.48
2440	22.47	-6.48	-1.59
2450	19.74	-7.05	-2.16
2460	23.88	-6.22	-1.29
2470	18.07	-7.43	-2.76
2480	22.83	-6.41	-1.88
2490	18.32	-7.37	-3.07
2500	20.56	-6.87	-2.96

Project:GS3	Author: Haiou.Zhu	File Name: GS3_APP_A.doc
Date: 2024-4-15		
Revision:	A	
CONFIDENTIAL Shenzhen OnePlusOne Wireless Communication Technology Co.,Ltd. 深圳市宝安区航城街道航城锦驰产业园 B1 栋 7 楼		

Project:GS3	Author: Haiou.Zhu	File Name: GS3_APP_A.doc
Date: 2024-4-15		
Revision:	A	
CONFIDENTIAL Shenzhen OnePlusOne Wireless Communication Technology Co.,Ltd. 深圳市宝安区航城街道航城锦驰产业园 B1 栋 7 楼		

4 Mechanical description

4.1 Drawings

