

Case No. : <u>GTS20250325005-4-04</u>	
Ambient Condition: <u>22</u> °C, <u>51</u> %RH	
According Standard: <u>■Part15E</u>	
Test Date: <u>2025.4.9</u>	Test Engineer: <u>Evan ouyang</u>


Appendix F.1: Occupied channel bandwidth

Test Result


TestMode	Antenna	Freq(MHz)	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11A	Ant1	5745	16.717	5736.5704	5753.2874	---	---
		5785	16.706	5776.5797	5793.2857	---	---
		5825	16.708	5816.5939	5833.3019	---	---
11N20SISO	Ant1	5745	17.814	5736.0129	5753.8269	---	---
		5785	17.804	5776.0218	5793.8258	---	---
		5825	17.788	5816.0240	5833.8120	---	---

Test Graphs


11A_Ant1_5745

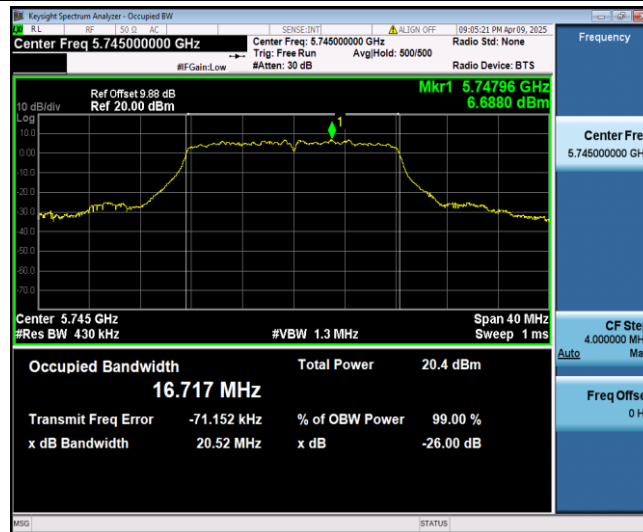


11A_Ant1_5785

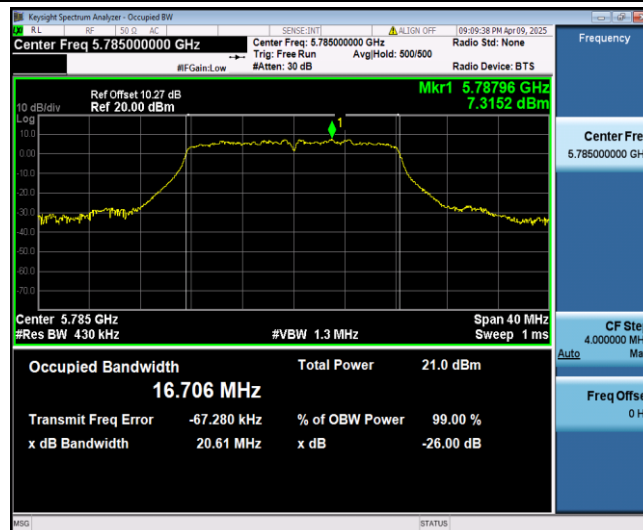


11A_Ant1_5825

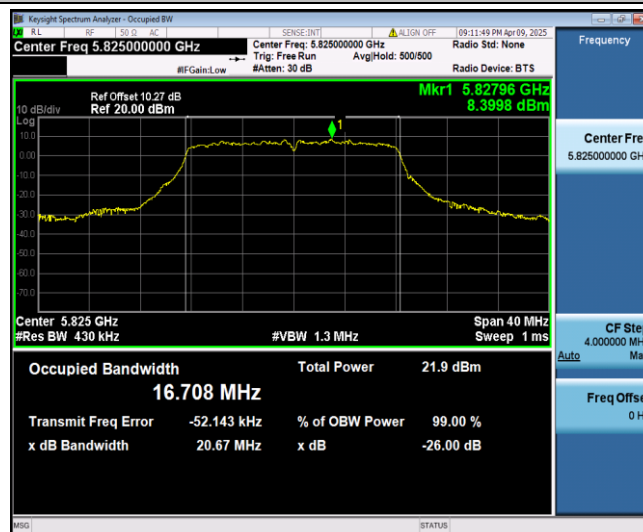


11N20SISO_Ant1_5745

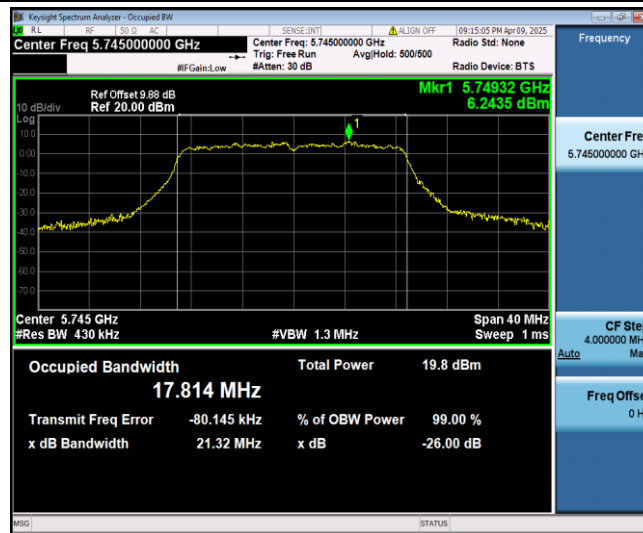

11N20SISO_Ant1_5785

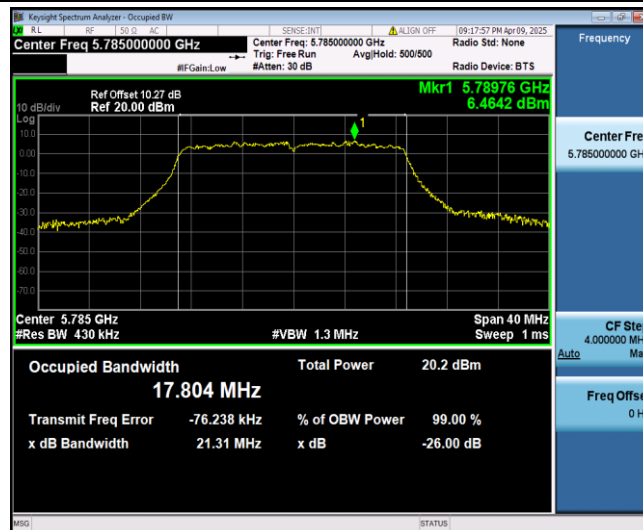

11N20SISO_Ant1_5825

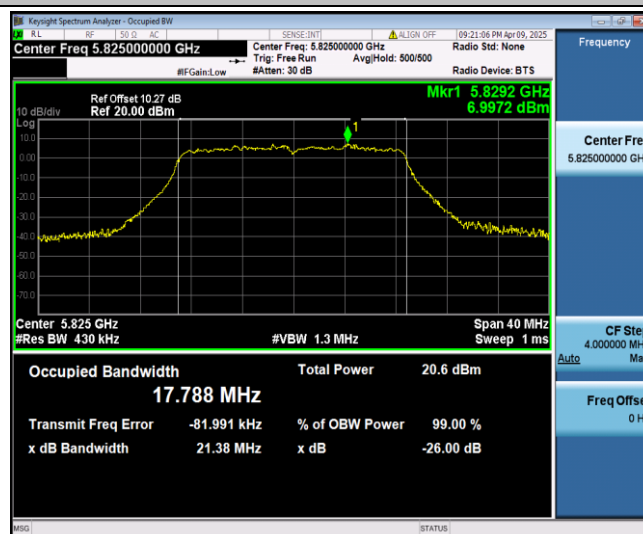


Appendix F.2: Min emission bandwidth

Test Result B4


TestMode	Antenna	Freq(MHz)	6db EBW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11A	Ant1	5745	16.520	5736.680	5753.200	0.5	PASS
		5785	16.520	5776.680	5793.200	0.5	PASS
		5825	16.520	5816.680	5833.200	0.5	PASS
11N20SISO	Ant1	5745	17.720	5736.080	5753.800	0.5	PASS
		5785	17.720	5776.080	5793.800	0.5	PASS
		5825	17.680	5816.080	5833.760	0.5	PASS

Test Graphs B4


11A_Ant1_5745

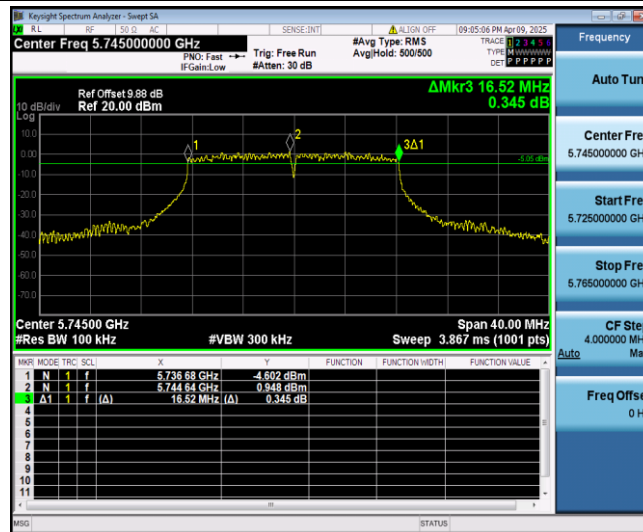


11A_Ant1_5785

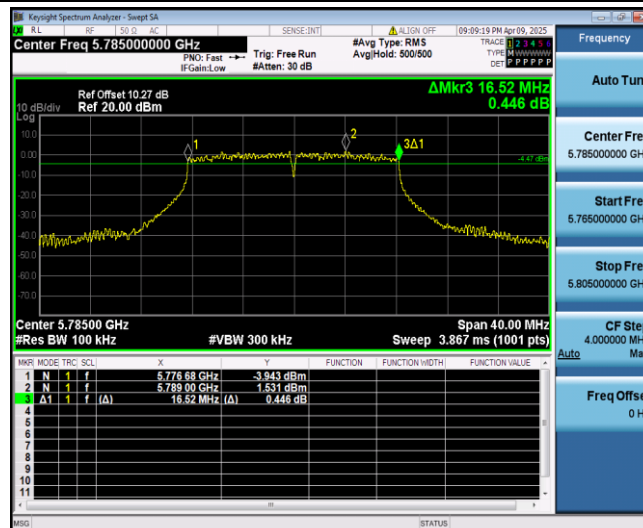


11A_Ant1_5825

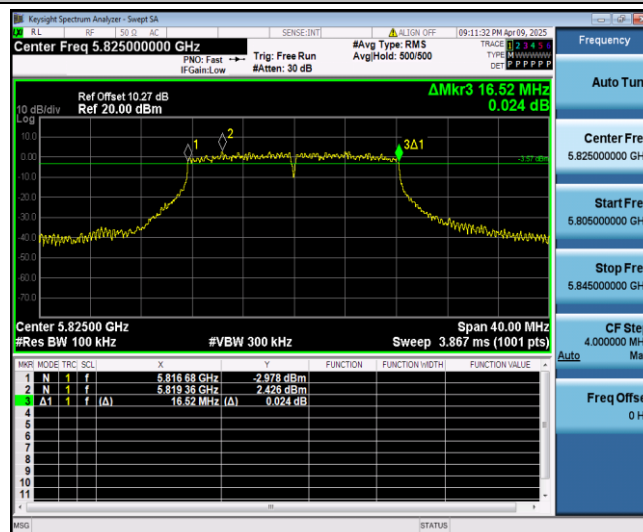


11N20SISO_Ant1_5745

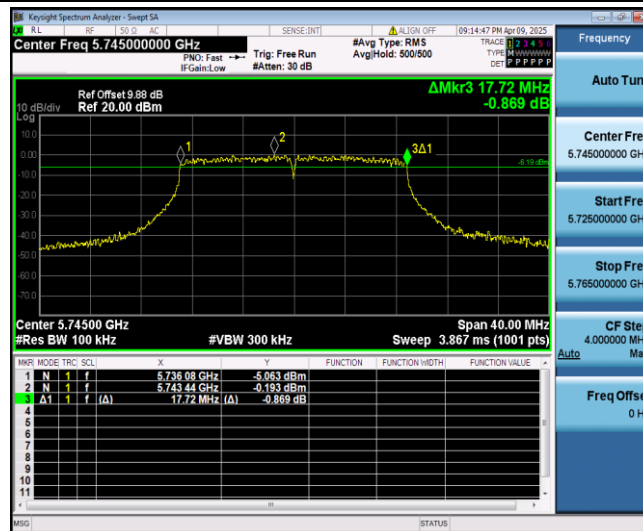

11N20SISO_Ant1_5785

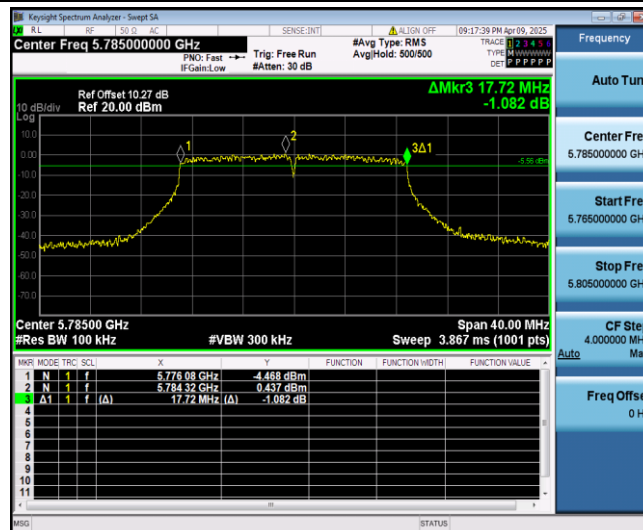

11N20SISO_Ant1_5825

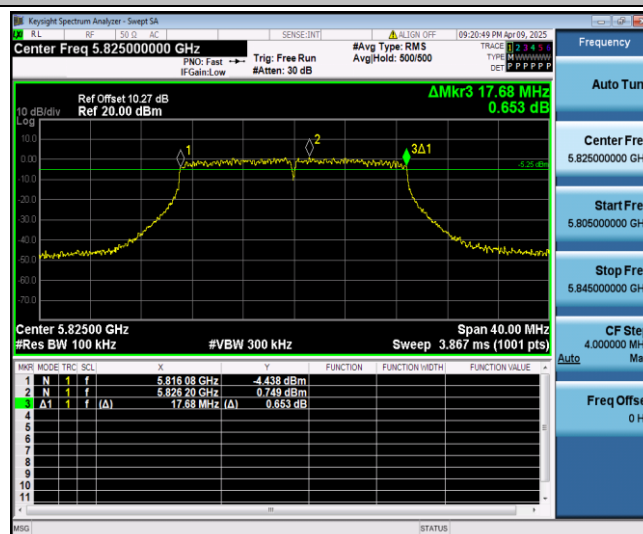


Appendix F.3: Duty Cycle

Test Result


TestMode	Antenna	Freq(MHz)	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]	Duty Cycle Factor[dB]	1/T Factor[KHz]
11A	Ant1	5745	30.00	30.00	100.00	0.00	0.03
		5785	30.00	30.00	100.00	0.00	0.03
		5825	30.00	30.00	100.00	0.00	0.03
11N20SISO	Ant1	5745	30.00	30.00	100.00	0.00	0.03
		5785	30.00	30.00	100.00	0.00	0.03
		5825	30.00	30.00	100.00	0.00	0.03

Test Graphs


11A_Ant1_5745

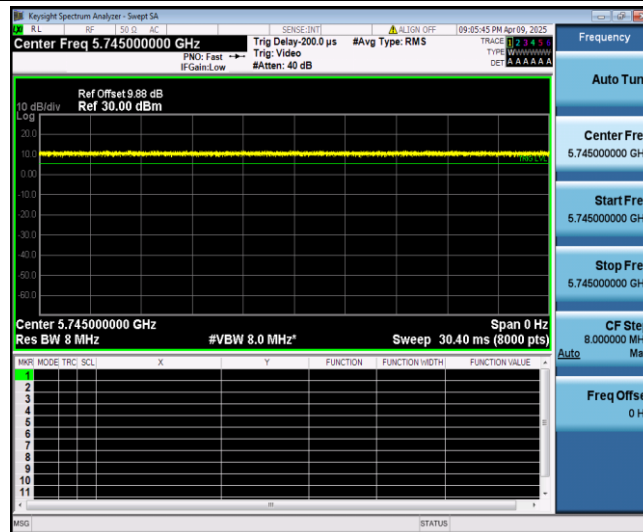


11A_Ant1_5785

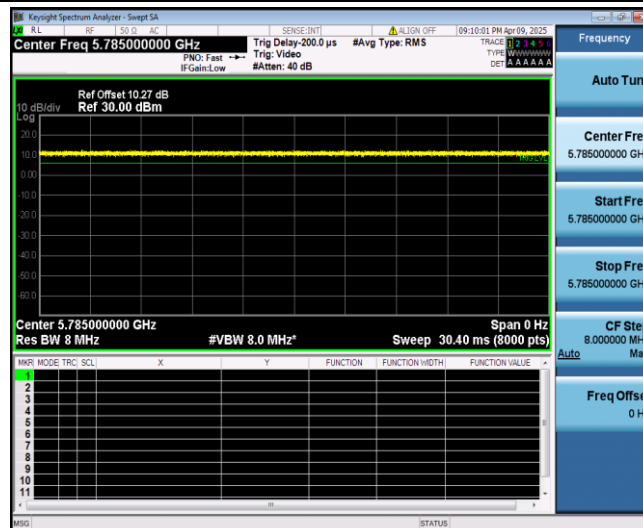


11A_Ant1_5825

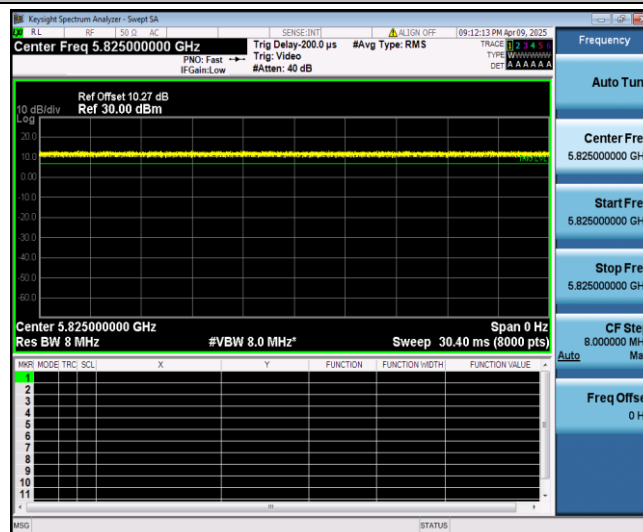


11N20SISO_Ant1_5745

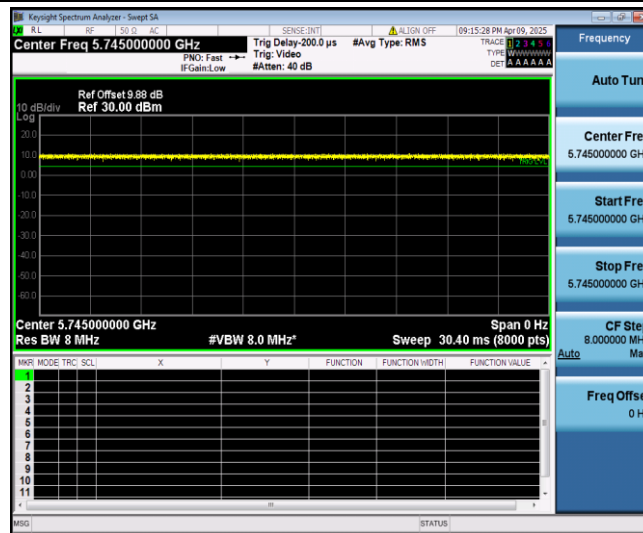

11N20SISO_Ant1_5785

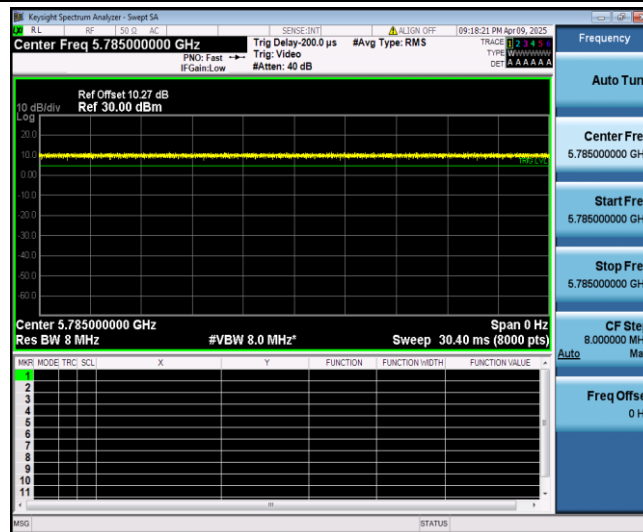

11N20SISO_Ant1_5825

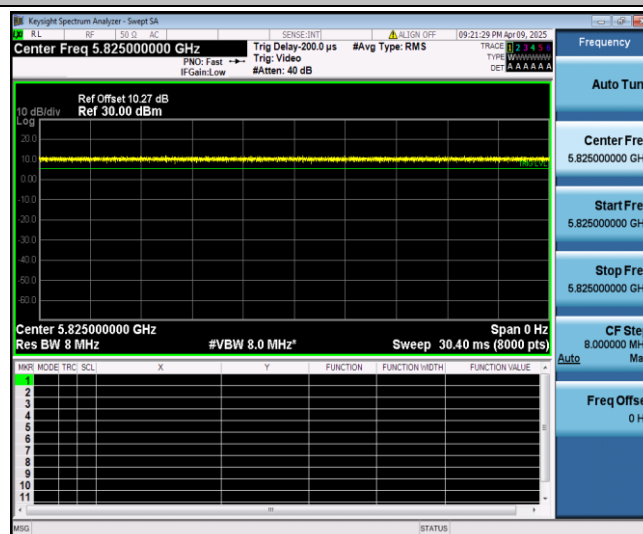

Appendix F.4: Maximum conducted output power

Test Result Channel Power

Test Mode	Antenna	Freq(MHz)	Channel Power [dBm]	Duty Cycle [%]	DC Factor [dBm]	Result [dBm]	Limit [dBm]	Verdict
11A	Ant1	5745	16.47	100.00	0.00	16.47	≤29.53	PASS
		5785	16.94	100.00	0.00	16.94	≤29.53	PASS
		5825	16.81	100.00	0.00	16.81	≤29.53	PASS
11N20SISO	Ant1	5745	16.69	100.00	0.00	16.69	≤29.53	PASS
		5785	16.15	100.00	0.00	16.15	≤29.53	PASS
		5825	16.53	100.00	0.00	16.53	≤29.53	PASS

Appendix F.5: Maximum power spectral density

Test Result

TestMode	Antenna	Freq(MHz)	Result [dBm/MHz]	Limit[dBm/MHz]	Verdict
11A	Ant1	5745	-0.66	≤29.53	PASS
		5785	-0.11	≤29.53	PASS
		5825	0.56	≤29.53	PASS
11N20SISO	Ant1	5745	-2.09	≤29.53	PASS
		5785	-1.54	≤29.53	PASS
		5825	-1.10	≤29.53	PASS

Note: 1.The Result and Limit Unit is dBm/500 kHz in the band 5.725–5.85 GHz.

2.The Duty Cycle Factor and RBW Factor is compensated in the graph.

Test Graphs


11A_Ant1_5745




11A_Ant1_5785




11A_Ant1_5825

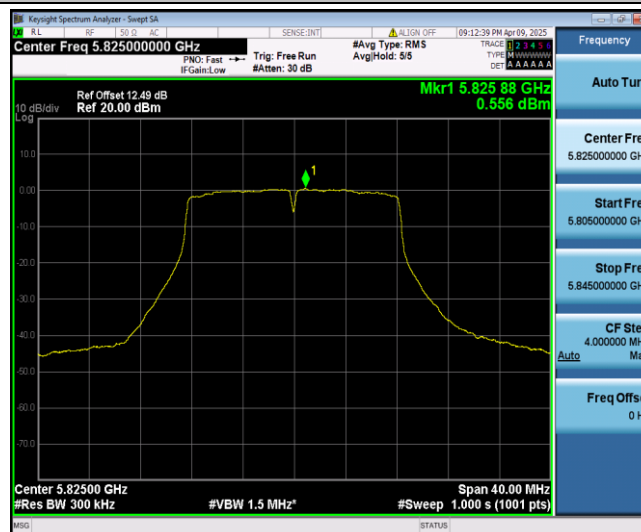


11N20SISO_Ant1_5745

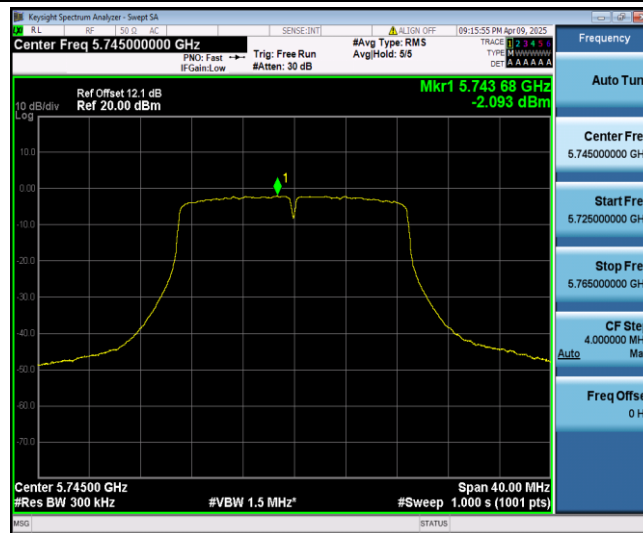

11N20SISO_Ant1_5785

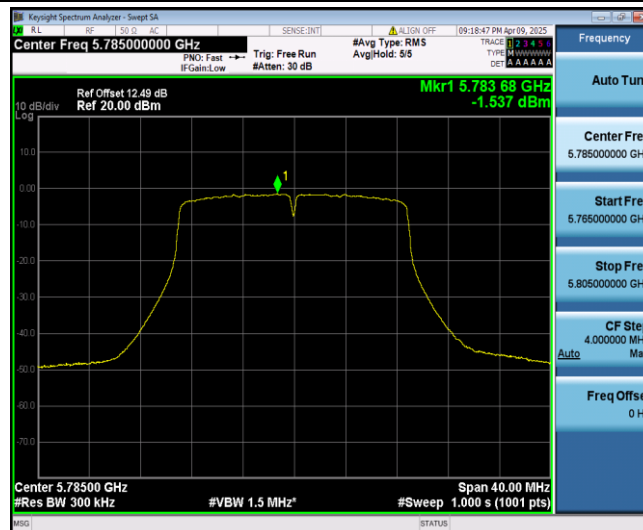

11N20SISO_Ant1_5825

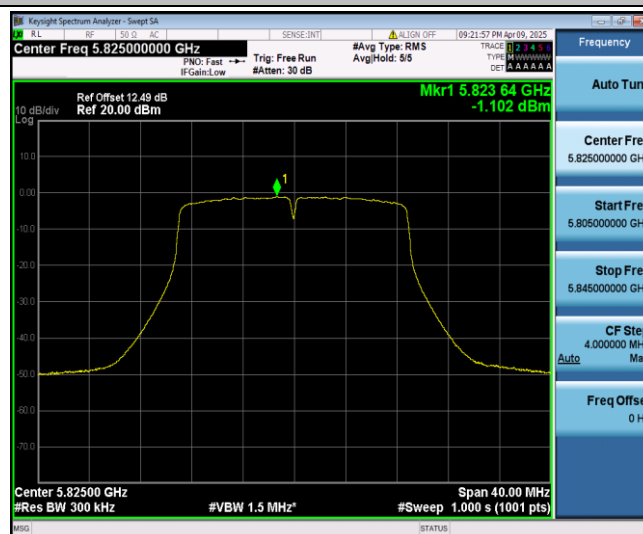

Appendix F.6: Band edge measurements

Test Result B4


TestMode	Antenna	ChName	Freq(MHz)	FreqRange [MHz]	Result [dBm]	Limit [dBm]	Verdict
11A	Ant1	Low	5745	5650~5700	-40.54	≤ -26.87	PASS
				5700~5720	-38.67	≤ 10.44	PASS
				5720~5725	-34.74	≤ 16.34	PASS
				5760~5650	-38.77	≤ -27	PASS
		High	5825	5850~5855	-37.49	≤ 15.73	PASS
				5855~5875	-38.26	≤ 10.55	PASS
				5875~5925	-39.11	≤ -26.31	PASS
				5925~5935	-37.94	≤ -27	PASS
11N20SI SO	Ant1	Low	5745	5650~5700	-39.15	≤ -25.85	PASS
				5700~5720	-38.53	≤ 10.38	PASS
				5720~5725	-36.3	≤ 16.34	PASS
				5760~5650	-38.53	≤ -27	PASS
		High	5825	5850~5855	-38.34	≤ 16.03	PASS
				5855~5875	-37.87	≤ 10.21	PASS
				5875~5925	-39.1	≤ -26.41	PASS
				5925~5935	-37.78	≤ -27	PASS

Test Graphs B4


11A_Ant1_Low_5745



11A_Ant1_High_5825

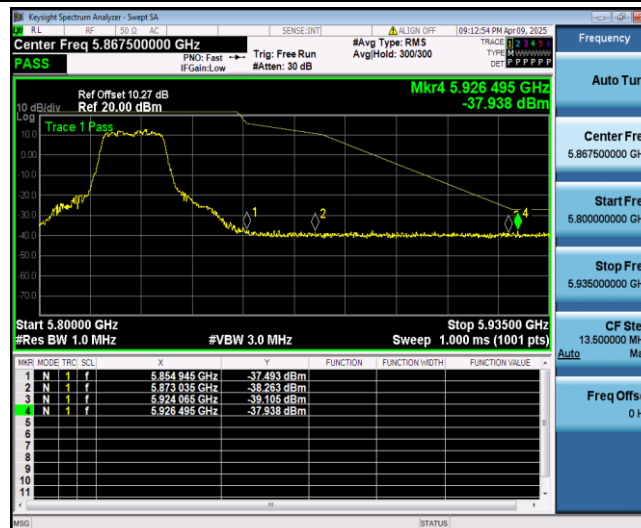

11N20SISO_Ant1_Low_5745

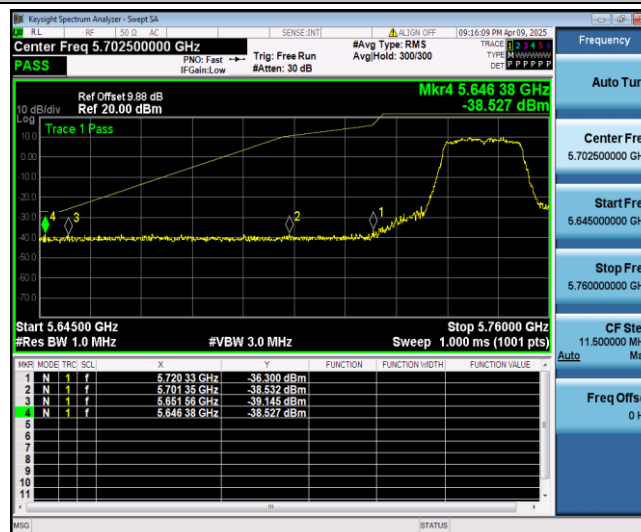



Appendix F.7: Conducted Spurious Emission

Test Result


TestMode	Antenna	Freq(MHz)	FreqRange [MHz]	Max. Fre [MHz]	Max. Level [dBm]	Limit [dBm]	Verdict
11A	Ant1	5745	30~5650	5344.83	-40.69	≤-27	PASS
			5925~27000	25717.94	-31.08	≤-27	PASS
		5785	30~5650	3051.87	-40.03	≤-27	PASS
			5925~27000	26588.34	-31.14	≤-27	PASS
		5825	30~5650	5445.81	-40.65	≤-27	PASS
			5925~27000	25621.7	-31.47	≤-27	PASS
11N20SISO	Ant1	5745	30~5650	5379.12	-40.61	≤-27	PASS
			5925~27000	25028.79	-32.22	≤-27	PASS
		5785	30~5650	3048.69	-39.57	≤-27	PASS
			5925~27000	26134.52	-31.29	≤-27	PASS
		5825	30~5650	2655.48	-39.91	≤-27	PASS
			5925~27000	25599.22	-31.07	≤-27	PASS

Test Graphs

11A_Ant1_5745_30-5650




11A_Ant1_5745_5925-27000

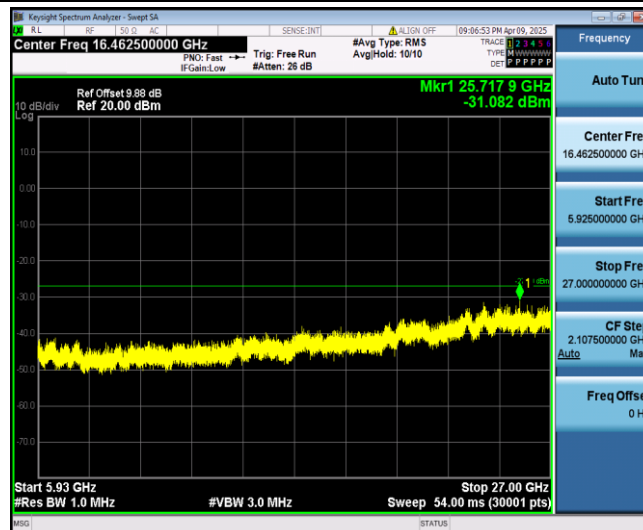


11A_Ant1_5785_30-5650




11A_Ant1_5785_5925-27000

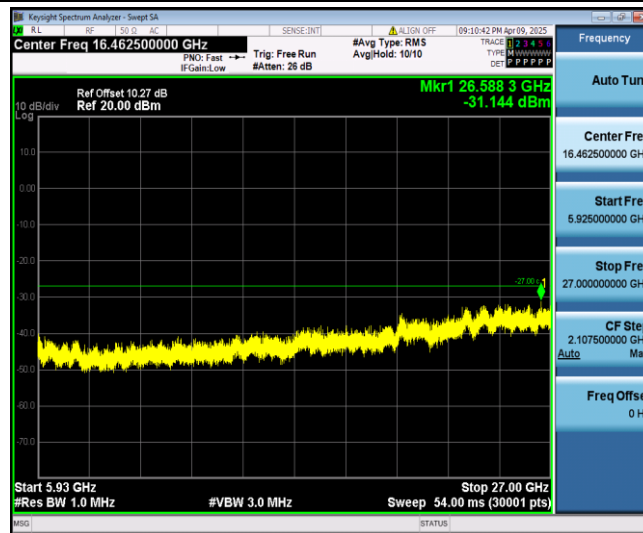


11A_Ant1_5825_30~5650

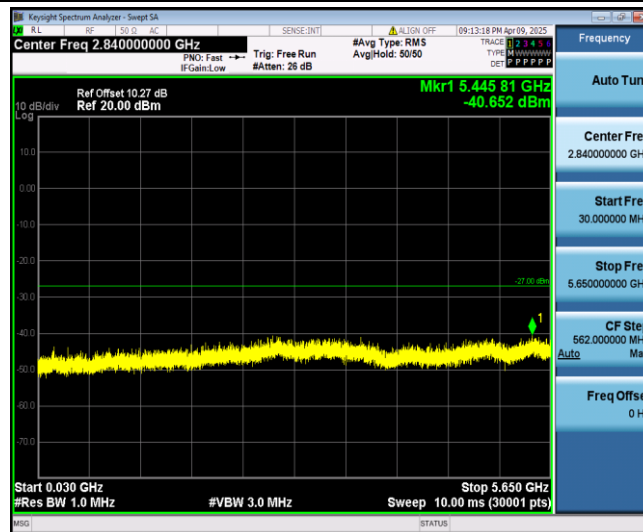


11A_Ant1_5825_5925~27000

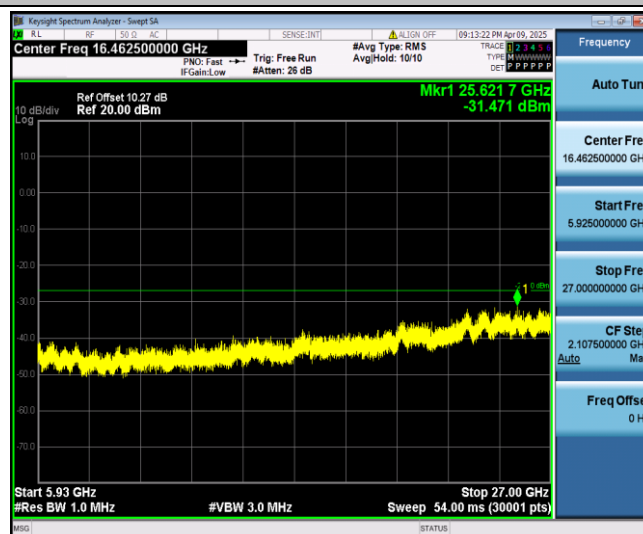


11N20SISO_Ant1_5745_30~5650

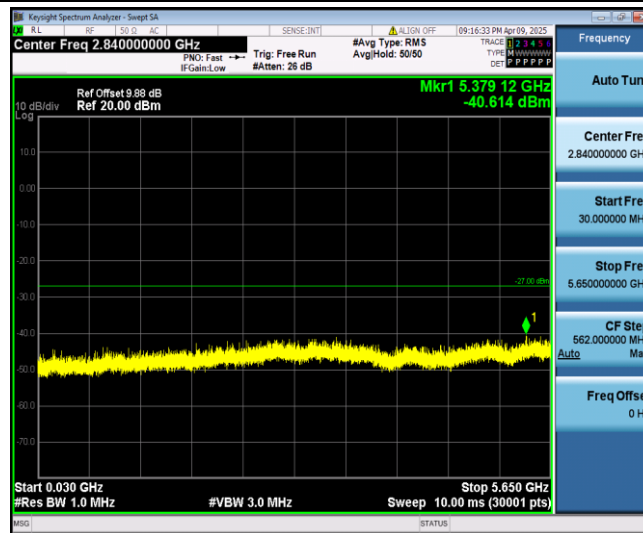


11N20SISO_Ant1_5745_5925~27000

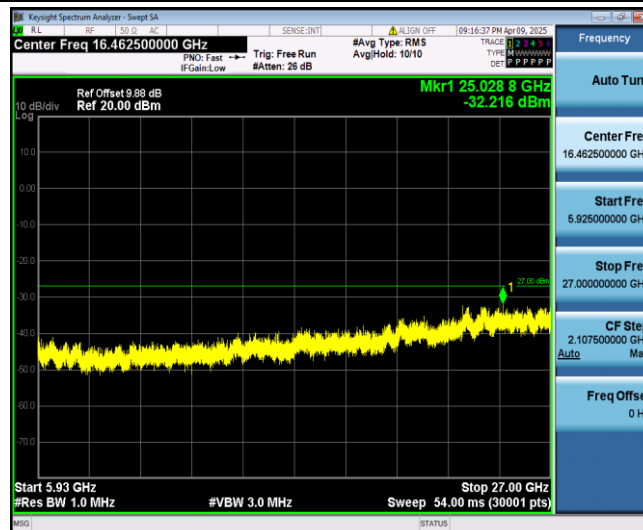


11N20SISO_Ant1_5785_30~5650

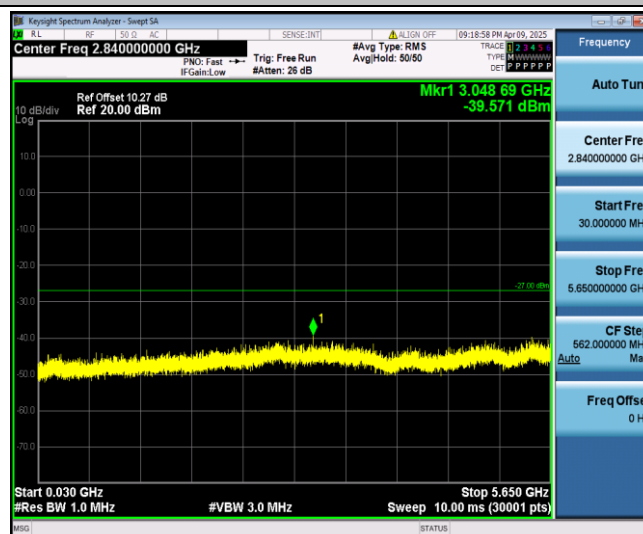


11N20SISO_Ant1_5785_5925~27000

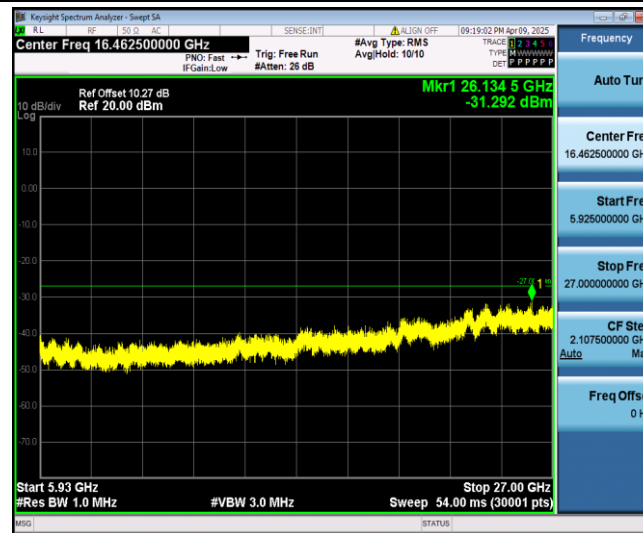

11N20SISO_Ant1_5825_30~5650

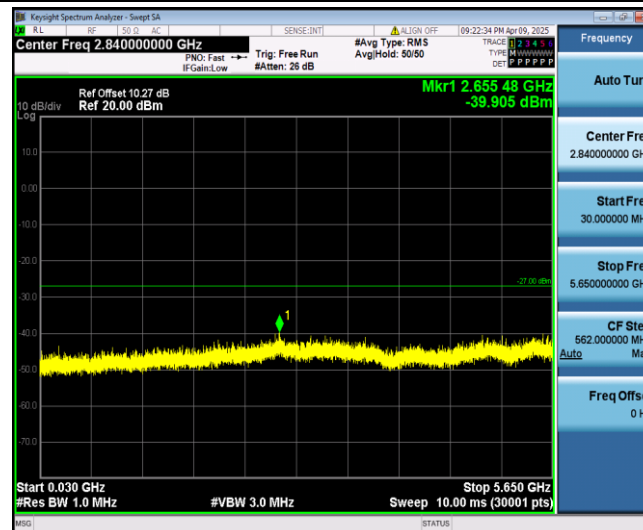

11N20SISO_Ant1_5825_5925~27000

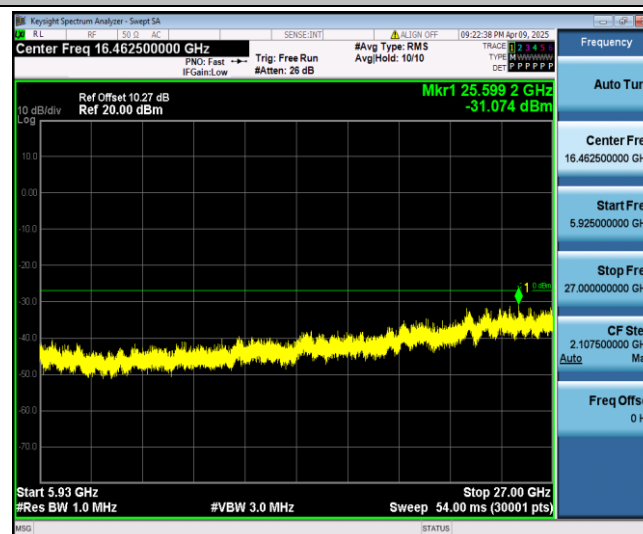

Appendix F.8: Emissions in Restricted Bands

Test Result


TestMode	Antenna	ChName	Freq(MHz)	Detector	Freq [MHz]	Result [dBm]	Limit [dBm]	Result [dBuV/m]	Limit [dBuV/m]	Verdict
11A	Ant1	Low	5745	Peak	5650.000	-43.18 4	≤-27.00	---	---	PASS
				Peak	5700.000	-41.27	≤10.00	---	---	PASS
				Peak	5720.000	-40.84	≤15.60	---	---	PASS
				Peak	5725.000	-32.39	≤27.00	- - -	- - -	PASS
		High	5825	Peak	5850.000	-35.48	≤27.00	---	---	PASS
				Peak	5855.000	-36.18	≤15.60	---	---	PASS
				Peak	5875.000	-37.07	≤10.00	---	---	PASS
				Peak	5925.000	-39.91	≤-27.00	- - -	- - -	PASS
11N20SIS O	Ant1	Low	5745	Peak	5650.000	-42.64 5	≤-27.00	---	---	PASS
				Peak	5700.000	-43.47	≤10.00	---	---	PASS
				Peak	5720.000	-40.17	≤15.60	---	---	PASS
				Peak	5725.000	-37.76	≤27.00	- - -	- - -	PASS
		High	5825	Peak	5850.000	-39.24 7	≤27.00	---	---	PASS
				Peak	5855.000	-38.14	≤15.60	---	---	PASS
				Peak	5875.000	-37.5	≤10.00	---	---	PASS
				Peak	5925.000	-38.34	≤-27.00	- - -	- - -	PASS

Note:


1. The Antenna Gain is compensated in the graph.
2. The Duty Cycle Factor and RBW Factor is compensated in the graph.
3. For transmitters operating in 5150-5350 GHz band and 5470-5725 GHz band: The limit in dBm for average detector is conversion from 54dBuV/m, according to 15.209(a). The limit in dBm for peak detector is 20dB above the limit of average detector in dBm.

Test Graphs

11A_Ant1_Low_5745_Peak

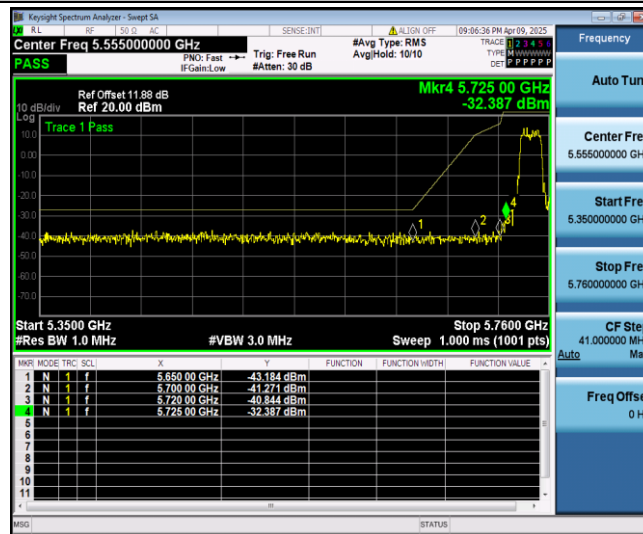

11A_Ant1_High_5825_Peak

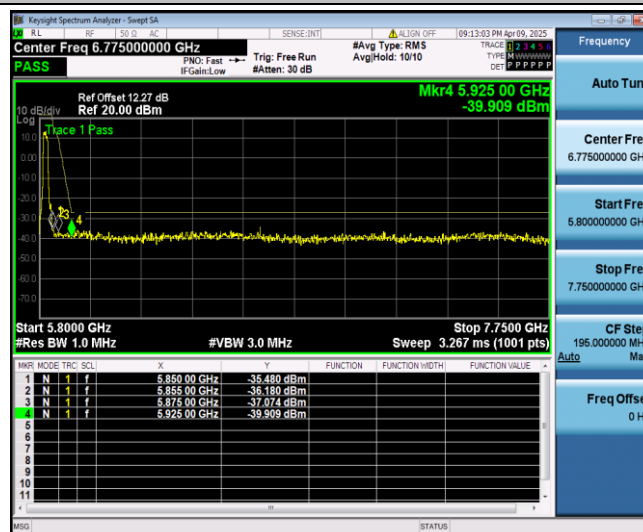

11N20SISO_Ant1_Low_5745_Peak

