



FCC TEST REPORT

REPORT NO.: RF920831R01

MODEL NO.: GL2454MU-01

RECEIVED: August 31, 2003

TESTED: Sep. 14~Sep.15, 2003

APPLICANT: GLOBAL SUN TECHNOLOGY INC.

ADDRESS: NO.13 Tung Yuan Rd., Jung Li Industrial Park
Jung Li City, Tao Yuan Hsien , Taiwan

ISSUED BY: Advance Data Technology Corporation

LAB LOCATION: 47 14th Lin, Chiapau Tsun, Linko, Taipei,
Taiwan, R.O.C.

This test report consists of 63 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA, NVLAP or any government agencies. The test results in the report only apply to the tested sample.



0528
ILAC MRA



Lab Code: 200102-0

Table of Contents

1	CERTIFICATION	4
2	SUMMARY OF TEST RESULTS	5
3	GENERAL INFORMATION	6
3.1	GENERAL DESCRIPTION OF EUT	6
3.2	DESCRIPTION OF TEST MODES	7
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS	7
3.4	DESCRIPTION OF SUPPORT UNITS	8
4	TEST TYPES AND RESULTS	9
4.1	CONDUCTED EMISSION MEASUREMENT	9
4.4.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT	9
4.4.2	TEST INSTRUMENTS	9
4.4.3	TEST PROCEDURES	10
4.4.4	TEST SETUP	10
4.4.5	EUT OPERATING CONDITIONS	11
4.4.6	TEST RESULTS	12
4.2	RADIATED EMISSION MEASUREMENT	18
4.4.7	LIMITS OF RADIATED EMISSION MEASUREMENT	18
4.4.8	TEST INSTRUMENTS	19
4.4.9	TEST PROCEDURES	20
4.4.10	TEST SETUP	21
4.4.11	EUT OPERATING CONDITIONS	21
4.4.12	TEST RESULTS	22
4.4.13	TEST RESULTS (FOR CCK)	24
4.4.14	TEST RESULTS (FOR OFDM)	27
4.3	6dB BANDWIDTH MEASUREMENT	30
4.4.15	LIMITS OF 6dB BANDWIDTH MEASUREMENT	30
4.4.16	TEST INSTRUMENTS	30
4.4.17	TEST PROCEDURE	31
4.4.18	TEST SETUP	31
4.4.19	EUT OPERATING CONDITIONS	31
4.4.20	TEST RESULTS (FOR CCK)	32
4.4.21	TEST RESULTS (FOR OFDM)	36
4.4	MAXIMUM PEAK OUTPUT POWER	40
4.4.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT	40
4.4.2	TEST INSTRUMENTS	40



4.4.3	TEST PROCEDURES	41
4.4.4	DEVIATION FROM TEST STANDARD	41
4.4.5	TEST SETUP	41
4.4.6	EUT OPERATING CONDITIONS	41
4.4.7	TEST RESULTS (FOR CCK)	42
4.4.8	TEST RESULTS (FOR OFDM)	42
4.5	POWER SPECTRAL DENSITY MEASUREMENT	43
4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	43
4.5.2	TEST INSTRUMENTS	43
4.5.3	TEST PROCEDURE	44
4.5.4	TEST SETUP	44
4.5.5	EUT OPERATING CONDITIONS	44
4.5.6	TEST RESULTS (FOR CCK)	45
4.5.7	TEST RESULTS (FOR OFDM)	49
4.6	BAND EDGES MEASUREMENT	53
4.6.1	LIMITS OF BAND EDGES MEASUREMENT	53
4.6.2	TEST INSTRUMENTS	53
4.6.3	TEST PROCEDURE	53
4.6.4	EUT OPERATING CONDITION	53
4.6.5	TEST RESULTS (FOR CCK)	54
4.6.6	TEST RESULTS (FOR OFDM)	57
4.7	ANTENNA REQUIREMENT	60
4.7.1	STANDARD APPLICABLE	60
4.7.2	ANTENNA CONNECTED CONSTRUCTION	60
5	PHOTOGRAPHS OF THE TEST CONFIGURATION	61
6	INFORMATION ON THE TESTING LABORATORIES	63



1 CERTIFICATION

PRODUCT : HighSpeed 2.4GHz Wireless USB Adapter
BRAND NAME : GLOBAL SUN
OEM BRAND NAME : D-Link
MODEL NO. : GL2454MU-01
OEM MODEL NO. : DWL-G120
APPLICANT : GLOBAL SUN TECHNOLOGY INC.
TEST ITEM : ENGINEERING SAMPLE
STANDARDS : 47 CFR Part 15, Subpart C (Section 15.247)
ANSI C63.4-1992

We, **Advance Data Technology Corporation**, hereby certify that one sample of the designation has been tested in our facility from Sep.15, 2003 to Sep.16, 2003, the test record, data evaluation and Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions herein specified.

PREPARED BY:

A handwritten signature in black ink, appearing to read 'Stephanie Hung', written over a horizontal line.

Stephanie Hung

DATE: September 16, 2003

APPROVED BY:

A handwritten signature in black ink, appearing to read 'Dr. Alan Lane JVP', written over a horizontal line.

Dr. Alan Lane JVP

DATE: September 16, 2003

2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: 47 CFR Part 15, Subpart C			
Standard Section	Test Type and Limit	Result	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit Minimum passing margin is -16.17dB at 0.209MHz
15.247(a)(2)	Spectrum Bandwidth of a Direct Sequence Spread Spectrum System Limit: min. 500kHz	PASS	Meet the requirement of limit
15.247(b)	Maximum Peak Output Power Limit: max. 30dBm	PASS	Meet the requirement of limit
15.247(c)	Transmitter Radiated Emissions Limit: Table 15.209	PASS	Meet the requirement of limit Minimum passing margin is -1.30dB at 4924.00MHz
15.247(d)	Power Spectral Density Limit: max. 8dBm	PASS	Meet the requirement of limit
15.247(c)	Band Edge Measurement Limit: 20 dB less than the peak value of fundamental frequency	PASS	Meet the requirement of limit

3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	HighSpeed 2.4GHz Wireless USB Adapter
MODEL NO.	GL2454MU- 0I (for brand GLOBAL SUN)
OEM MODEL NO.	DWL-G120 (for brand D-Link)
POWER SUPPLY	5VDC from host equipment
MODULATION TYPE	BPSK, QPSK, CCK, 16QAM, 64QAM
RADIO TECHNOLOGY	DSSS, OFDM
TRANSFER RATE	up to 54Mbps
FREQUENCY RANGE	2412MHz ~ 2462MHz
NUMBER OF CHANNEL	11
OUTPUT POWER	19.84dBm
ANTENNA TYPE	Dipole antenna
DATA CABLE	1.8m (Shielded)
I/O PORTS	USB
ASSOCIATED DEVICES	NA

NOTE:

1. Model DWL-G120, GL2454MU-0I are identical to each other except for their model number, product name and brand name due to marketing requirement.

BRAND	Model
D-Link	DWL-G120
GLOBAL SUN	GL2454MU-0I

2. For more detailed features description, please refer to the manufacturer's specifications or User's Manual.

3.2 DESCRIPTION OF TEST MODES

Eleven channels are provided to this EUT.

Channel	Frequency	Channel	Frequency
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

NOTE:

1. Below 1GHz, the channel 1, 6, and 11 were pre-tested in chamber. The channel 11, worst case one, was chosen for final test.
2. Above 1GHz, the channel 1, 6, and 11 were tested individually.
3. Transfer rate, 11Mbps with CCK technique and 6Mbps with OFDM technique, the worst case, were chosen for final test.

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a HighSpeed 2.4GHz Wireless USB Adapter. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC 47 CFR Part 15, Subpart C. (15.247)
ANSI C63.4 : 1992

All tests have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.



3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	NOTEBOOK	COMPAQ	N800C	470048-515	DOC
2	PRINTER	EPSON	LQ-300+	DCGY017076	FCC DOC APPROVED
3	600 Ω load	NA	NA	NA	NA

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA
2	1.2m braid shielded wire, terminated with DB25 and Centronics connector via metallic frame, w/o core
3	NA

NOTE: All power cords of the above support units are non shielded (1.8m).

4 TEST TYPES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.4.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.4.2 TEST INSTRUMENTS


DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
ROHDE & SCHWARZ Test Receiver	ESCS 30	838251/021	Jan. 20, 2004
ROHDE & SCHWARZ Artificial Mains Network (for EUT)	ESH3-Z5	100218	Dec. 18, 2003
ROHDE & SCHWARZ Artificial Mains Network (for peripherals)	ESH3-Z5	100219	Dec. 18, 2003
ROHDE & SCHWARZ Artificial Mains Network (for peripherals)	ESH3-Z5	100220	Dec. 18, 2003
ROHDE & SCHWARZ 4-wire ISN	ENY41	837032/016	Nov. 29 2003
ROHDE & SCHWARZ 2-wire ISN	ENY22	837497/016	Nov. 29 2003
Software	Cond-V2M3	NA	NA
RF cable (JYEBAO)	5D-FB	Cable-C10.01	May. 01, 2004
SUHNTER Terminator (For ROHDE & SCHWARZ LISN)	65BNC-5001	E1-010770	Mar. 24, 2004
SUHNTER Terminator (For ROHDE & SCHWARZ LISN)	65BNC-5001	E1-010773	Apr. 06, 2004

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. “*”: These equipment are used for conducted telecom port test only (if tested).
 3. The test was performed in ADT Shielded Room No. 10.
 4. The VCCI Site Registration No. is C-1312.

4.4.3 TEST PROCEDURES

- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150 kHz to 30 MHz was searched. Emission levels over 10dB under the prescribed limits could not be reported

4.4.4 TEST SETUP

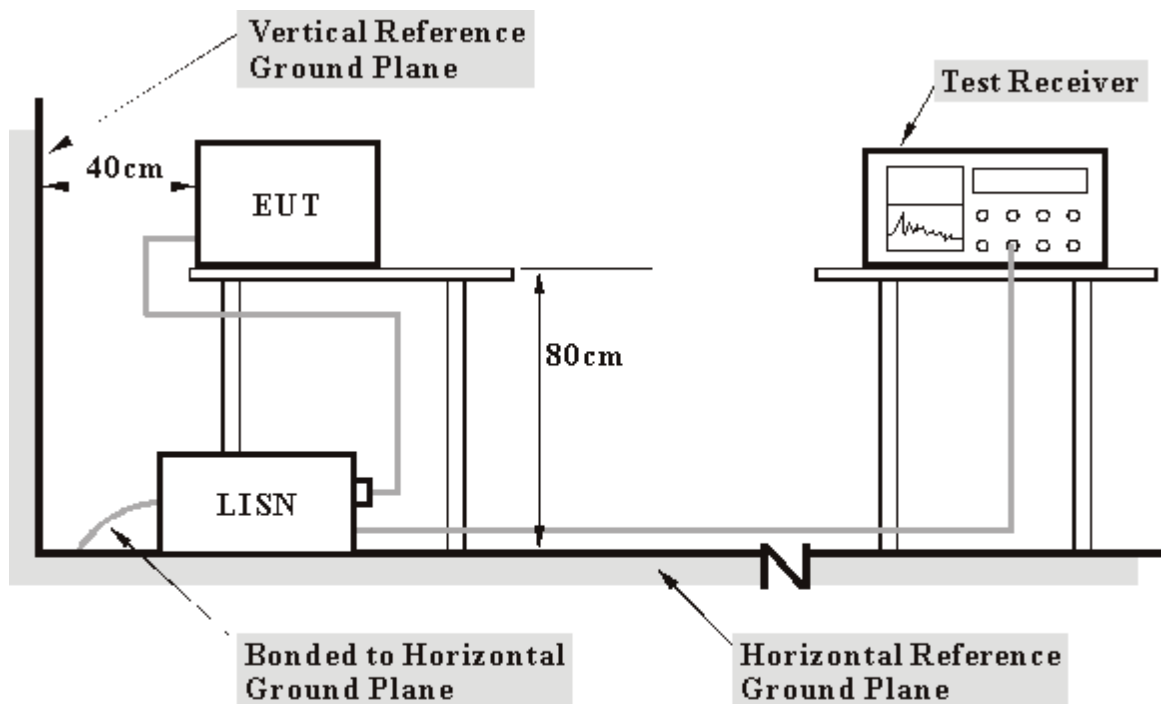

- Note:**
- Support units were connected to second LISN.
 - Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.



4.4.5

EUT OPERATING CONDITIONS

- a. Connected the EUT to a computer system placed on a testing table.
- b. The computer system ran a test program to enable EUT under transmission/receiving condition continuously at specific channel frequency.
- c. The computer system sent "H" messages to its screen.
- d. The computer system sent "H" messages to modem.
- e. The computer system sent "H" messages to printer , and the printer prints them on paper.


4.4.6 TEST RESULTS

EUT	HighSpeed 2.4GHz Wireless USB Adapter	MODEL	GL2454MU-0I
MODE	Channel 1	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	26 deg. C, 60%RH, 991 hPa	TESTED BY: Steven Lu	

No	Freq.	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.216	0.06	45.49	-	45.55	-	62.98	52.98	-17.43	-
2	0.318	0.06	35.48	-	35.54	-	59.76	49.76	-24.22	-
3	0.421	0.06	33.89	-	33.95	-	57.42	47.42	-23.47	-
4	4.430	0.24	24.92	-	25.16	-	56.00	46.00	-30.84	-
5	12.953	0.50	38.08	-	38.58	-	60.00	50.00	-21.42	-
6	19.633	0.63	34.53	-	35.16	-	60.00	50.00	-24.84	-

NOTE:

1. QP. and AV. are abbreviations of quasi-peak and average individually.
2. "-": NA
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Emission Level = Reading Value + Correction Factor.

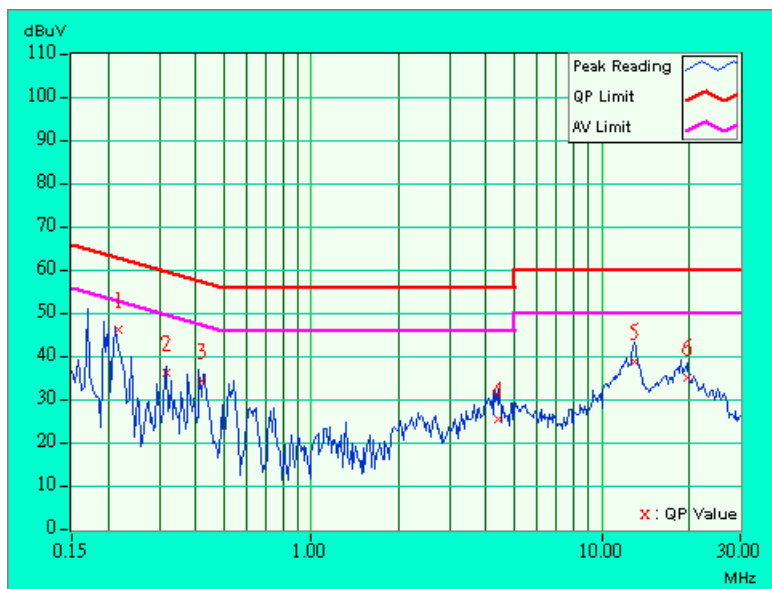


EUT	HighSpeed 2.4GHz Wireless USB Adapter	MODEL	GL2454MU-0I
MODE	Channel 1	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	26 deg. C, 60%RH, 991 hPa	TESTED BY: Steven Lu	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.209	0.05	47.01	-	47.06	-	63.23	53.23	-16.17	-
2	0.315	0.05	35.48	-	35.53	-	59.84	49.84	-24.31	-
3	0.420	0.05	36.41	-	36.46	-	57.46	47.46	-20.99	-
4	0.531	0.07	31.03	-	31.10	-	56.00	46.00	-24.90	-
5	13.164	0.45	38.60	-	39.05	-	60.00	50.00	-20.95	-
6	19.633	0.51	34.51	-	35.02	-	60.00	50.00	-24.98	-

NOTE:

1. QP. and AV. are abbreviations of quasi-peak and average individually.
2. "-": NA
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Emission Level = Reading Value + Correction Factor.

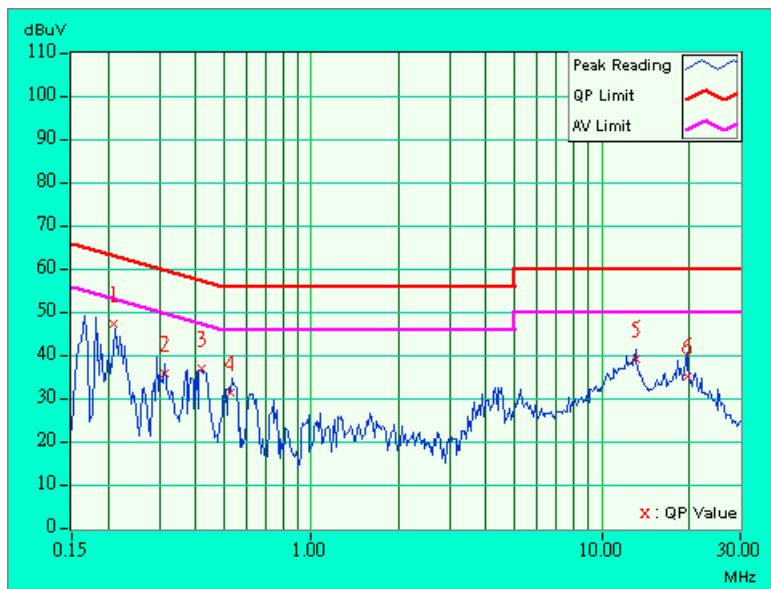


EUT	HighSpeed 2.4GHz Wireless USB Adapter	MODEL	GL2454MU-0I
MODE	Channel 6	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	26 deg. C, 60%RH, 991 hPa	TESTED BY: Steven Lu	

No	Freq.	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.209	0.06	46.29	-	46.35	-	63.23	53.23	-16.88	-
2	0.416	0.06	34.01	-	34.07	-	57.54	47.54	-23.46	-
3	0.541	0.08	32.29	-	32.37	-	56.00	46.00	-23.63	-
4	4.395	0.23	21.91	-	22.14	-	56.00	46.00	-33.86	-
5	13.125	0.50	32.33	-	32.83	-	60.00	50.00	-27.17	-
6	19.566	0.63	34.01	-	34.64	-	60.00	50.00	-25.36	-

NOTE:

1. QP. and AV. are abbreviations of quasi-peak and average individually.
2. "-": NA
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Emission Level = Reading Value + Correction Factor.

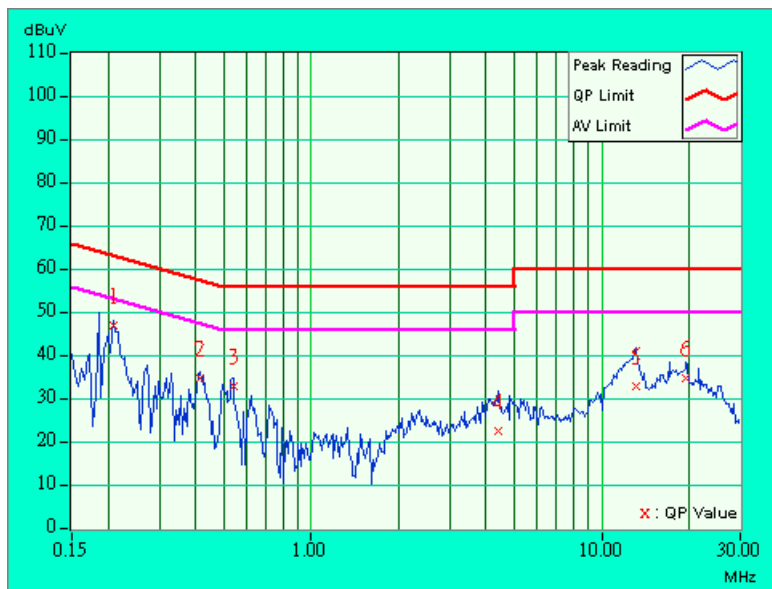


EUT	HighSpeed 2.4GHz Wireless USB Adapter	MODEL	GL2454MU-01
MODE	Channel 6	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	26 deg. C, 60%RH, 991 hPa	TESTED BY: Steven Lu	

No	Freq.	Corr. Factor	Reading Value [dB (Uv)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.217	0.05	45.09	-	45.14	-	62.92	52.92	-17.78	-
2	0.291	0.05	29.83	-	29.88	-	60.51	50.51	-30.63	-
3	0.420	0.05	36.52	-	36.57	-	57.46	47.46	-20.88	-
4	4.441	0.22	25.19	-	25.41	-	56.00	46.00	-30.59	-
5	13.059	0.45	38.46	-	38.91	-	60.00	50.00	-21.09	-
6	19.566	0.51	33.79	-	34.30	-	60.00	50.00	-25.70	-

NOTE:

1. QP. and AV. are abbreviations of quasi-peak and average individually.
2. "-": NA
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Emission Level = Reading Value + Correction Factor.

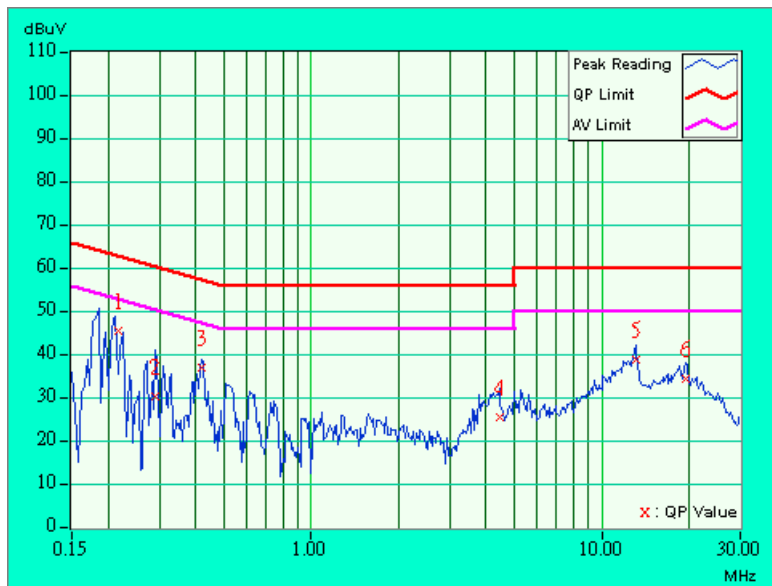


EUT	HighSpeed 2.4GHz Wireless USB Adapter	MODEL	GL2454MU-01
MODE	Channel 11	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	26 deg. C, 60%RH, 991 hPa	TESTED BY: Steven Lu	

No	Freq.	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.207	0.06	45.58	-	45.64	-	63.33	53.33	-17.69	-
2	0.322	0.06	35.34	-	35.40	-	59.66	49.66	-24.26	-
3	0.423	0.06	33.34	-	33.40	-	57.38	47.38	-23.98	-
4	3.910	0.22	22.20	-	22.42	-	56.00	46.00	-33.58	-
5	13.063	0.50	37.15	-	37.65	-	60.00	50.00	-22.35	-
6	19.492	0.63	34.32	-	34.95	-	60.00	50.00	-25.05	-

NOTE:

1. QP. and AV. are abbreviations of quasi-peak and average individually.
2. "-": NA
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Emission Level = Reading Value + Correction Factor.

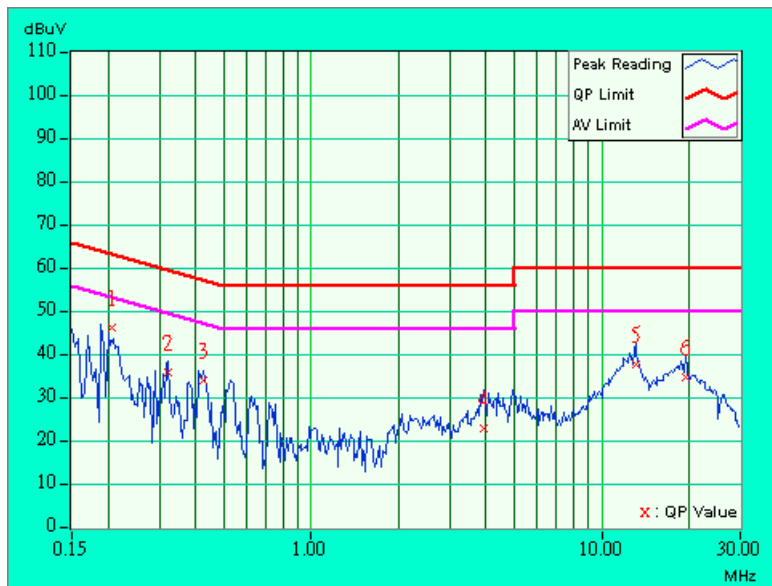


EUT	HighSpeed 2.4GHz Wireless USB Adapter	MODEL	GL2454MU-01
MODE	Channel 11	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Netural (N)
ENVIRONMENTAL CONDITIONS	26 deg. C, 60%RH, 991 hPa	TESTED BY: Steven Lu	

No	Freq.	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.216	0.05	45.91	-	45.96	-	62.96	52.96	-17.00	-
2	0.425	0.05	35.72	-	35.77	-	57.35	47.35	-21.58	-
3	0.528	0.07	31.75	-	31.82	-	56.00	46.00	-24.18	-
4	4.086	0.21	24.58	-	24.79	-	56.00	46.00	-31.21	-
5	13.063	0.45	37.01	-	37.46	-	60.00	50.00	-22.54	-
6	19.633	0.51	34.29	-	34.80	-	60.00	50.00	-25.20	-

NOTE:

1. QP. and AV. are abbreviations of quasi-peak and average individually.
2. "-": NA
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Emission Level = Reading Value + Correction Factor.

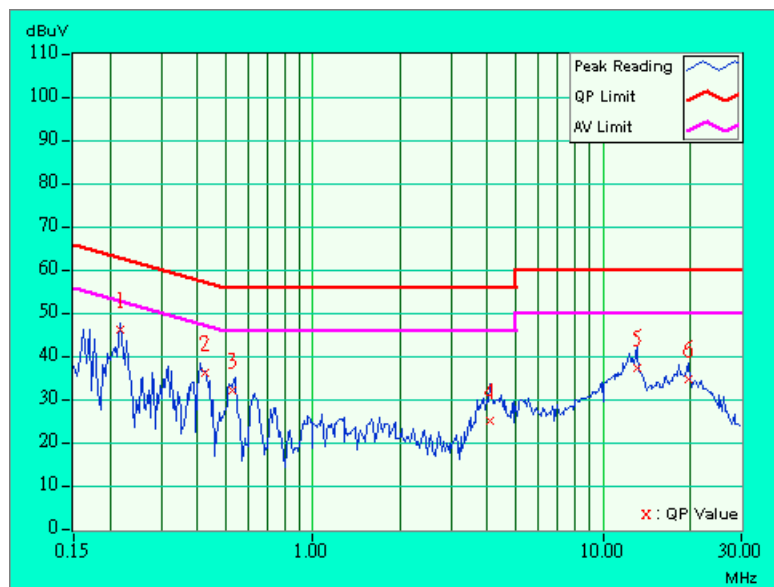

4.2 RADIATED EMISSION MEASUREMENT

4.4.7 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



4.4.8 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
*HP Spectrum Analyzer	8590L	3520A00667	Aug. 28, 2004
*CHASE Preamplifier	CPA9231A/4	3215	Nov. 06, 2003
* HP Preamplifier	8449B	3008A01201	Dec. 01, 2003
* HP Preamplifier	8449B	3008A01292	Aug. 11, 2004
* ROHDE & SCHWARZ TEST RECEIVER	ESVS10	846285/012	Aug. 28, 2004
* ROHDE & SCHWARZ TEST RECEIVER	ESMI	839013/007 839379/002	Feb. 13, 2004
SCHAFFNER Tunable Dipole Antenna	VHBA 9123	459	Nov. 22, 2003
SCHWARZBECK Tunable Dipole Antenna	UHA 9105	977	
* CHASE BILOG Antenna	CBL6112B	2751	Mar. 21, 2004
* SCHWARZBECK Horn Antenna	BBHA9120-D1	D130	Jun. 30, 2004
* EMCO Horn Antenna	3115	9312-4192	Mar. 23 2004
* CHANCE Turn Table & Tower Controller	ACS-I	NA	NA
* Software	ADT_Radiate d_V5.14	NA	NA
* ANRITSU RF Switches	MP59B	M51167	Aug. 16, 2004
* TIMES RF cable	LMR-600	CABLE-ST6-01	Aug. 12, 2004

- NOTE:** 1. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.
2. "*" = These equipment are used for the final measurement.
3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
4. The test was performed in ADT Open Site No. 6.
5. The VCCI Site Registration No. is R-728.


4.4.9 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 300 Hz for Average detection (AV) at frequency above 1GHz.

4.4.10 TEST SETUP

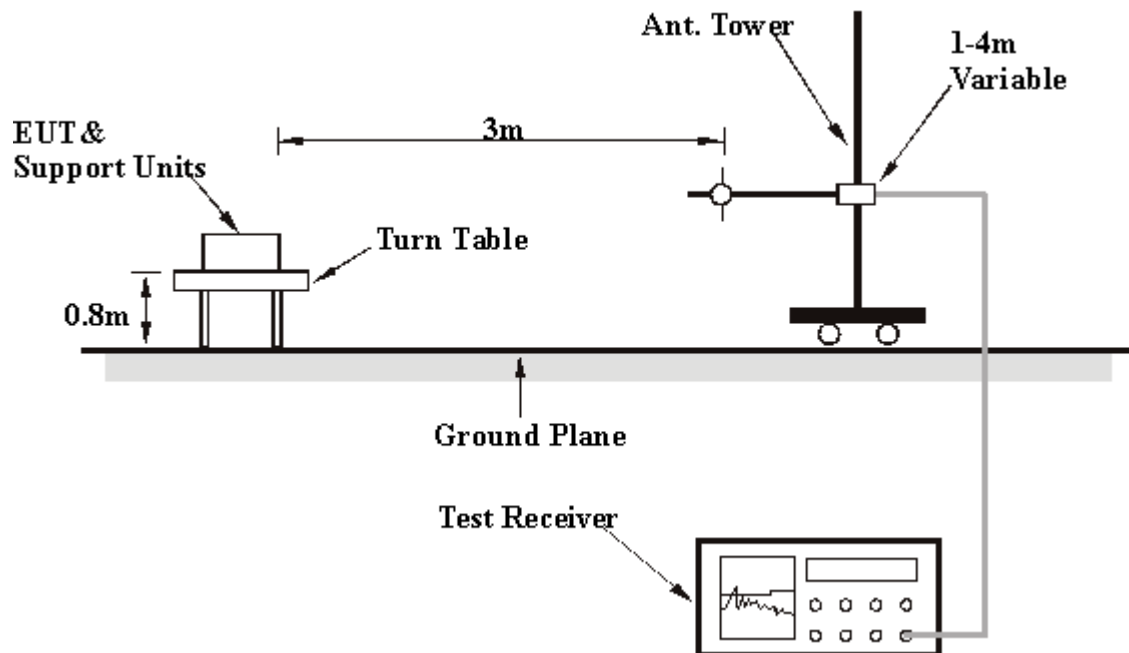

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.4.11 EUT OPERATING CONDITIONS

Same as 4.1.5

4.4.12 TEST RESULTS

EUT	HighSpeed 2.4GHz Wireless USB Adapter	MODEL	GL2454MU-0I
MODE	Channel 11	FREQUENCY RANGE	Below 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	26 deg. C, 65 % RH, 991 hPa	TESTED BY: Steven Lu	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	119.42	28.9 QP	43.50	-14.60	2.50 H	298	16.60	12.30
2	164.13	27.0 QP	43.50	-16.50	1.75 H	109	13.10	13.90
3	208.84	28.9 QP	43.50	-14.60	1.00 H	196	17.30	11.60
4	239.94	41.8 QP	46.00	-4.20	1.25 H	193	28.60	13.20
5	300.20	34.8 QP	46.00	-11.20	1.00 H	184	19.70	15.10
6	319.64	40.1 QP	46.00	-5.90	1.00 H	178	24.50	15.60
7	350.74	30.1 QP	46.00	-15.90	1.00 H	91	13.70	16.40
8	399.34	33.1 QP	46.00	-12.90	1.00 H	154	15.40	17.70
9	440.16	29.7 QP	46.00	-16.30	1.75 H	196	10.70	19.00
10	480.98	38.7 QP	46.00	-7.30	1.00 H	160	18.90	19.70
11	510.14	33.3 QP	46.00	-12.70	1.00 H	166	13.10	20.20
12	564.57	27.3 QP	46.00	-18.70	1.75 H	211	5.70	21.60
13	630.66	31.5 QP	46.00	-14.50	1.00 H	46	8.50	23.00

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

EUT	HighSpeed 2.4GHz Wireless USB Adapter	MODEL	GL2454MU-0I
MODE	Channel 11	FREQUENCY RANGE	Below 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	26 deg. C, 60 % RH, 991 hPa	TESTED BY: Steven Lu	

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	119.42	33.4 QP	43.50	-10.10	1.00 V	202	21.10	12.30
2	160.24	27.5 QP	43.50	-16.00	1.00 V	82	13.20	14.30
3	208.84	28.9 QP	43.50	-14.60	1.00 V	49	17.20	11.60
4	239.94	36.7 QP	46.00	-9.30	1.00 V	166	23.50	13.20
5	298.26	31.4 QP	46.00	-14.60	1.25 V	142	16.40	15.10
6	350.74	31.5 QP	46.00	-14.50	1.50 V	106	15.10	16.40
7	399.34	34.5 QP	46.00	-11.50	1.25 V	184	16.80	17.70
8	432.38	30.0 QP	46.00	-16.00	1.50 V	343	11.20	18.70
9	480.98	38.1 QP	46.00	-7.90	1.25 V	271	18.30	19.70
10	584.01	31.7 QP	46.00	-14.30	1.00 V	19	9.60	22.10
11	630.66	31.1 QP	46.00	-14.90	1.50 V	142	8.10	23.00
12	665.65	32.7 QP	46.00	-13.30	1.25 V	97	9.20	23.50
13	681.20	31.5 QP	46.00	-14.50	1.00 V	40	7.80	23.70

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

4.4.13 TEST RESULTS (FOR CCK)

EUT	HighSpeed 2.4GHz Wireless USB Adapter	MODEL	GL2454MU-01
MODE	Channel 1	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25 deg. C, 65 % RH, 991 hPa	TESTED BY: Steven Lu	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2412.00	104.9 PK			1.16 H	228	73.40	31.50
1	*2412.00	96.8 AV			1.16 H	228	65.30	31.50
2	4824.00	51.0 PK	74.00	-23.00	1.05 H	169	13.20	37.90
2	4824.00	46.1 AV	54.00	-7.90	1.05 H	169	8.20	37.90
3	7236.00	51.2 PK	74.00	-22.80	1.00 H	223	9.00	42.20
3	7236.00	40.7 AV	54.00	-13.30	1.00 H	223	-1.50	42.20
4	9648.00	52.7 PK	74.00	-21.30	1.73 H	217	8.20	44.50
4	9648.00	41.0 AV	54.00	-13.00	1.73 H	217	-3.50	44.50

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	54.2 PK	74.00	-19.80	1.50 V	80	22.70	31.50
1	2390.00	46.2 AV	54.00	-7.80	1.50 V	80	14.70	31.50
2	*2412.00	110.0 PK			1.50 V	80	78.50	31.50
2	*2412.00	101.7 AV			1.50 V	80	70.20	31.50
3	4824.00	52.6 PK	74.00	-21.40	1.44 V	167	14.70	37.90
3	4824.00	47.3 AV	54.00	-6.70	1.44 V	167	9.40	37.90
4	7236.00	52.1 PK	74.00	-21.90	1.32 V	210	9.90	42.20
4	7236.00	39.9 AV	54.00	-14.10	1.32 V	210	-2.30	42.20
5	9648.00	55.0 PK	74.00	-19.00	1.11 V	183	10.50	44.50
5	9648.00	43.7 AV	54.00	-10.30	1.11 V	183	-0.80	44.50

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “ : Fundamental frequency

EUT	HighSpeed 2.4GHz Wireless USB Adapter	MODEL	GL2454MU-01
MODE	Channel 6	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	26 deg. C, 65 % RH, 991 hPa	TESTED BY: Steven Lu	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	104.2 PK			1.03 H	125	72.70	31.50
1	*2437.00	96.6 AV			1.03 H	125	65.10	31.50
2	4874.00	51.7 PK	74.00	-22.30	1.75 H	75	13.70	37.90
2	4874.00	45.7 AV	54.00	-8.30	1.75 H	75	7.80	37.90
3	7311.00	51.9 PK	74.00	-22.10	1.54 H	196	9.60	42.30
3	7311.00	40.9 AV	54.00	-13.10	1.54 H	196	-1.50	42.30
4	9748.00	53.6 PK	74.00	-20.40	1.47 H	227	8.70	44.80
4	9748.00	42.3 AV	54.00	-11.70	1.47 H	227	-2.50	44.80

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	112.4 PK			1.22 V	186	80.80	31.50
1	*2437.00	104.4 AV			1.22 V	186	72.80	31.50
2	4874.00	59.0 PK	74.00	-15.00	1.44 V	64	21.10	37.90
2	4874.00	47.8 AV	54.00	-6.20	1.44 V	64	9.90	37.90
3	7311.00	51.1 PK	74.00	-22.90	1.63 V	152	8.80	42.30
3	7311.00	40.0 AV	54.00	-14.00	1.63 V	152	-2.40	42.30
4	9748.00	53.3 PK	74.00	-20.70	1.30 V	177	8.50	44.80
4	9748.00	44.6 AV	54.00	-9.40	1.30 V	177	-0.20	44.80

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * ” : Fundamental frequency

EUT	HighSpeed 2.4GHz Wireless USB Adapter	MODEL	GL2454MU-01
MODE	Channel 11	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	26 deg. C, 65 % RH, 991 hPa	TESTED BY: Steven Lu	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	108.2 PK			1.12 H	226	76.70	31.60
1	*2462.00	100.1 AV			1.12 H	226	68.50	31.60
2	2483.50	54.7 PK	74.00	-19.30	1.12 H	226	23.10	31.60
2	2483.50	46.6 AV	54.00	-7.40	1.12 H	226	15.00	31.60
3	4824.00	51.0 PK	74.00	-23.00	1.06 H	167	13.20	37.90
3	4824.00	45.8 AV	54.00	-8.20	1.06 H	167	7.90	37.90
4	7386.53	50.6 PK	74.00	-23.40	1.42 H	168	8.20	42.40
5	9848.00	54.9 PK	74.00	-19.10	1.47 H	230	9.90	45.00
5	9848.00	43.8 AV	54.00	-10.20	1.47 H	230	-1.20	45.00

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	113.7 PK			1.00 V	156	82.20	31.60
1	*2462.00	105.2 AV			1.00 V	156	73.70	31.60
2	2483.50	60.2 PK	74.00	-13.80	1.00 V	156	28.60	31.60
2	2483.50	51.7 AV	54.00	-2.30	1.00 V	156	20.10	31.60
3	4924.00	65.5 PK	74.00	-8.50	1.43 V	86	27.50	38.00
3	4924.00	52.7 AV	54.00	-1.30	1.43 V	86	14.70	38.00
4	7384.00	53.0 PK	74.00	-21.00	1.15 V	238	10.60	42.40
4	7384.00	42.0 AV	54.00	-12.00	1.15 V	238	-0.40	42.40
5	9848.00	54.8 PK	74.00	-19.20	1.43 V	163	9.80	45.00
5	9848.00	45.0 AV	54.00	-9.00	1.43 V	163	0.00	45.00

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * ” : Fundamental frequency

4.4.14 TEST RESULTS (FOR OFDM)

EUT	HighSpeed 2.4GHz Wireless USB Adapter	MODEL	GL2454MU-01
MODE	Channel 1	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	26 deg. C, 65 % RH, 991 hPa	TESTED BY: Steven Lu	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2412.00	100.7 PK			1.02 H	170	69.20	31.50
1	*2412.00	92.1 AV			1.02 H	170	60.60	31.50
2	4824.00	47.0 PK	74.00	-27.00	1.11 H	278	9.20	37.90
3	9648.00	52.9 PK	74.00	-21.10	1.00 H	83	8.40	44.50
3	9648.00	41.7 AV	54.00	-12.30	1.00 H	83	-2.80	44.50

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	58.60 PK	74.00	-15.40	1.51 V	76	27.10	31.50
1	2390.00	49.1 AV	54.00	-4.90	1.51 V	76	17.60	31.50
2	*2412.00	105.7 PK			1.51 V	76	74.20	31.50
2	*2412.00	96.3 AV			1.51 V	76	64.80	31.50
3	4824.00	52.1 PK	74.00	-21.90	1.35 V	300	14.20	37.90
3	4824.00	46.7 AV	54.00	-7.30	1.35 V	300	8.90	37.90
4	9648.00	53.7 PK	74.00	-20.30	1.08 V	184	9.20	44.50
4	9648.00	43.7 AV	54.00	-10.30	1.08 V	184	-0.80	44.50

REMARKS:

- 1.Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
- 2.Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
- 3.The other emission levels were very low against the limit.
- 4.Margin value = Emission level – Limit value.
- 5.“ * “ : Fundamental frequency

EUT	HighSpeed 2.4GHz Wireless USB Adapter	MODEL	GL2454MU-01
MODE	Channel 6	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	26 deg. C, 65 % RH, 991 hPa	TESTED BY: Steven Lu	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	98.8 PK			1.07 H	230	67.20	31.50
1	*2437.00	89.9 AV			1.07 H	230	58.40	31.50
2	4874.00	50.2 PK	74.00	-23.80	1.31 H	164	12.20	37.90
3	9748.00	52.0 PK	74.00	-22.00	1.24 H	209	7.20	44.80
3	9748.00	41.6 AV	54.00	-12.40	1.24 H	209	-3.20	44.80

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	103.9 PK			1.81 V	267	72.40	31.50
1	*2437.00	94.7 AV			1.81 V	267	63.20	31.50
2	4874.00	52.0 PK	74.00	-22.00	1.76 V	322	14.10	37.90
2	4874.00	48.8 AV	54.00	-5.20	1.76 V	322	10.90	37.90
3	9748.00	54.3 PK	74.00	-19.70	1.44 V	164	9.50	44.80
3	9748.00	45.2 AV	54.00	-8.80	1.44 V	164	0.40	44.80

REMARKS:

- 1.Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
- 2.Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
- 3.The other emission levels were very low against the limit.
- 4.Margin value = Emission level – Limit value.
- 5.“ * ” : Fundamental frequency

EUT	HighSpeed 2.4GHz Wireless USB Adapter	MODEL	GL2454MU-01
MODE	Channel 11	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	26 deg. C, 65 % RH, 991 hPa	TESTED BY: Steven Lu	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	101.4 PK			1.15 H	228	69.90	31.60
1	*2462.00	92.2 AV			1.15 H	228	60.70	31.60
2	4924.00	49.2 PK	74.00	-24.80	1.23 H	214	11.20	38.00
3	9848.00	54.4 PK	74.00	-19.60	1.30 H	230	9.40	45.00
3	9848.00	44.1 AV	54.00	-9.90	1.30 H	230	-1.00	45.00

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	108.1 PK			1.18 V	187	76.50	31.60
1	*2462.00	98.3 AV			1.18 V	187	66.70	31.60
2	2483.50	62.1 PK	74.00	-11.90	1.18 V	187	30.50	31.60
2	2483.50	52.3 AV	54.00	-1.70	1.18 V	187	20.70	31.60
3	4924.00	54.4 PK	74.00	-19.60	1.82 V	301	16.40	38.00
3	4924.00	49.1 AV	54.00	-4.90	1.82 V	301	11.10	38.00
4	9848.00	54.9 PK	74.00	-19.10	1.65 V	282	9.90	45.00
4	9848.00	45.4 AV	54.00	-8.60	1.65 V	282	0.40	45.00

REMARKS:

- 1.Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
- 2.Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
- 3.The other emission levels were very low against the limit.
- 4.Margin value = Emission level – Limit value.
- 5.“ * “ : Fundamental frequency



4.3 6dB BANDWIDTH MEASUREMENT

4.4.15 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.4.16 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	August 12, 2004


NOTE:

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.4.17 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 kHz RBW and 100 kHz VBW. The 6 dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6 dB.

4.4.18 TEST SETUP



For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.

4.4.19 EUT OPERATING CONDITIONS


The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.4.20 TEST RESULTS (FOR CCK)


EUT	HighSpeed 2.4GHz Wireless USB Adapter	MODEL	GL2454MU-0I
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	24 deg. C, 63%RH, 991 hPa
TESTED BY: Steven Lu			

CHANNEL	CHANNEL FREQUENCY (MHz)	6 dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	11.12	0.5	PASS
6	2437	11.12	0.5	PASS
11	2462	11.12	0.5	PASS


CH1

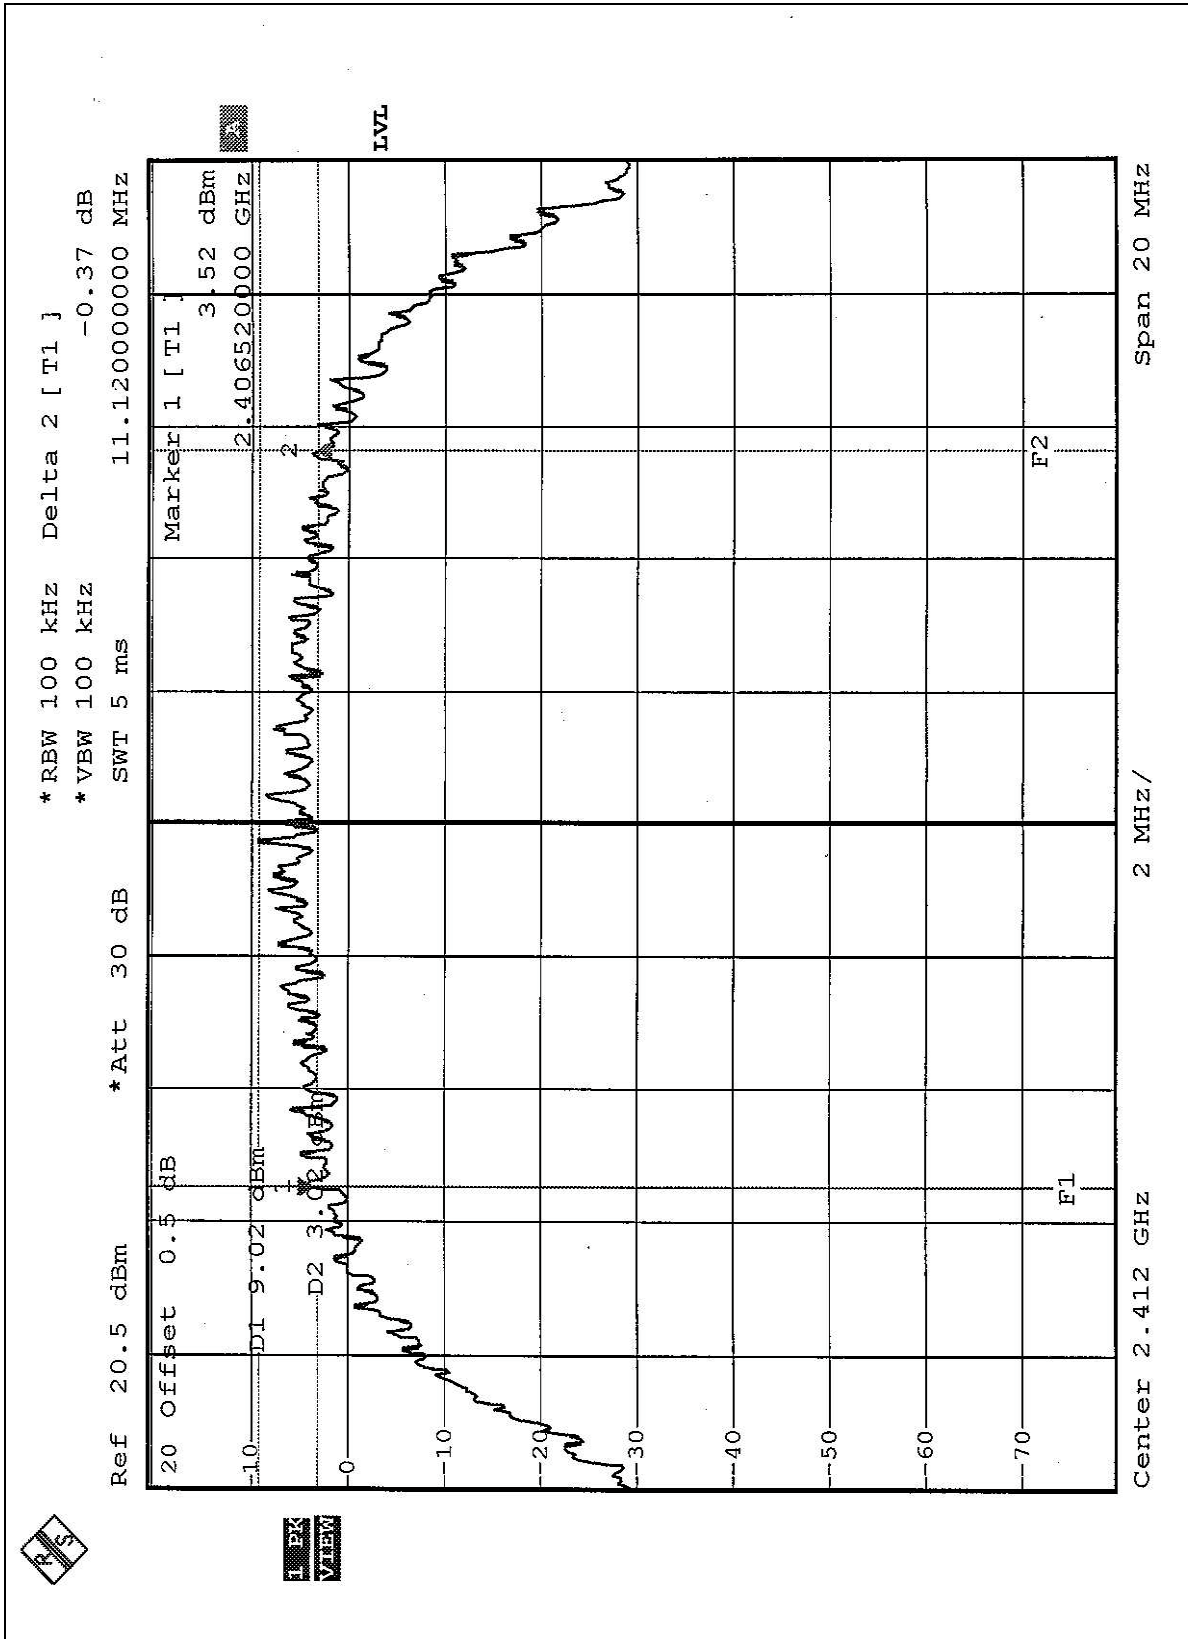

CH6

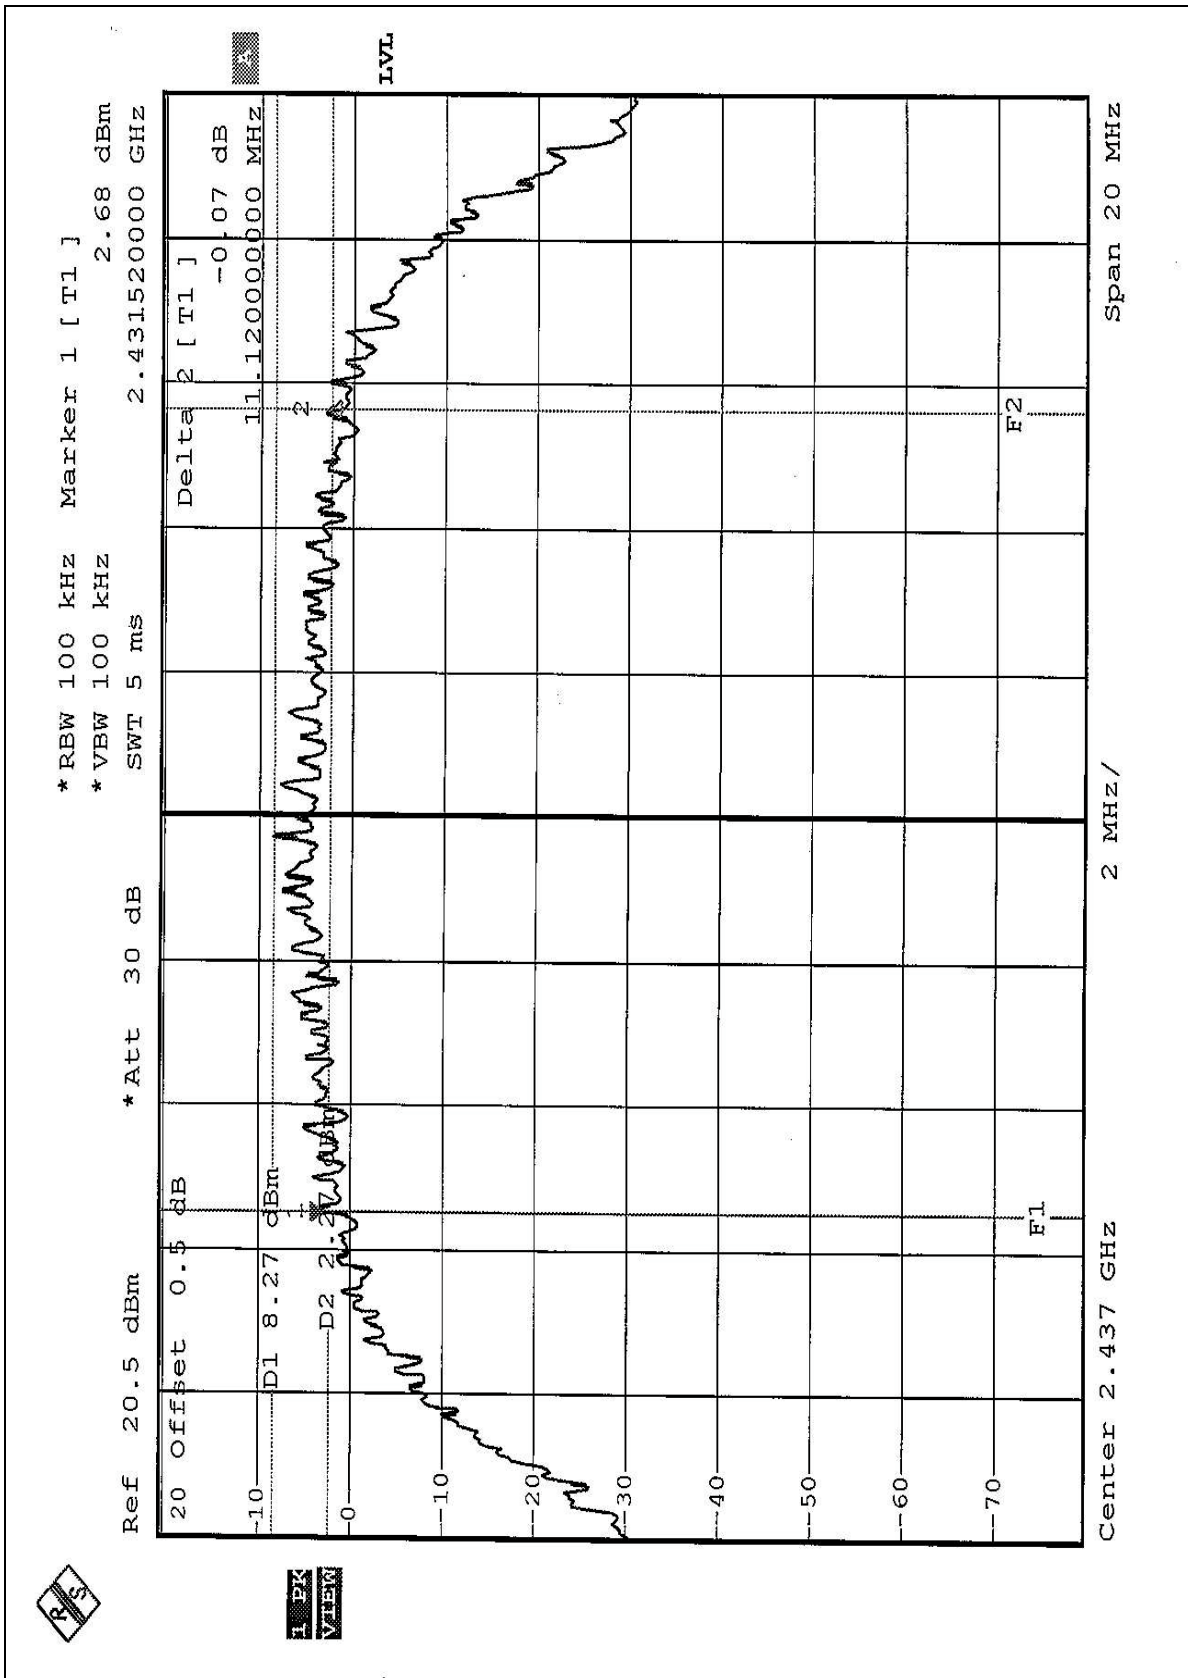

CH11

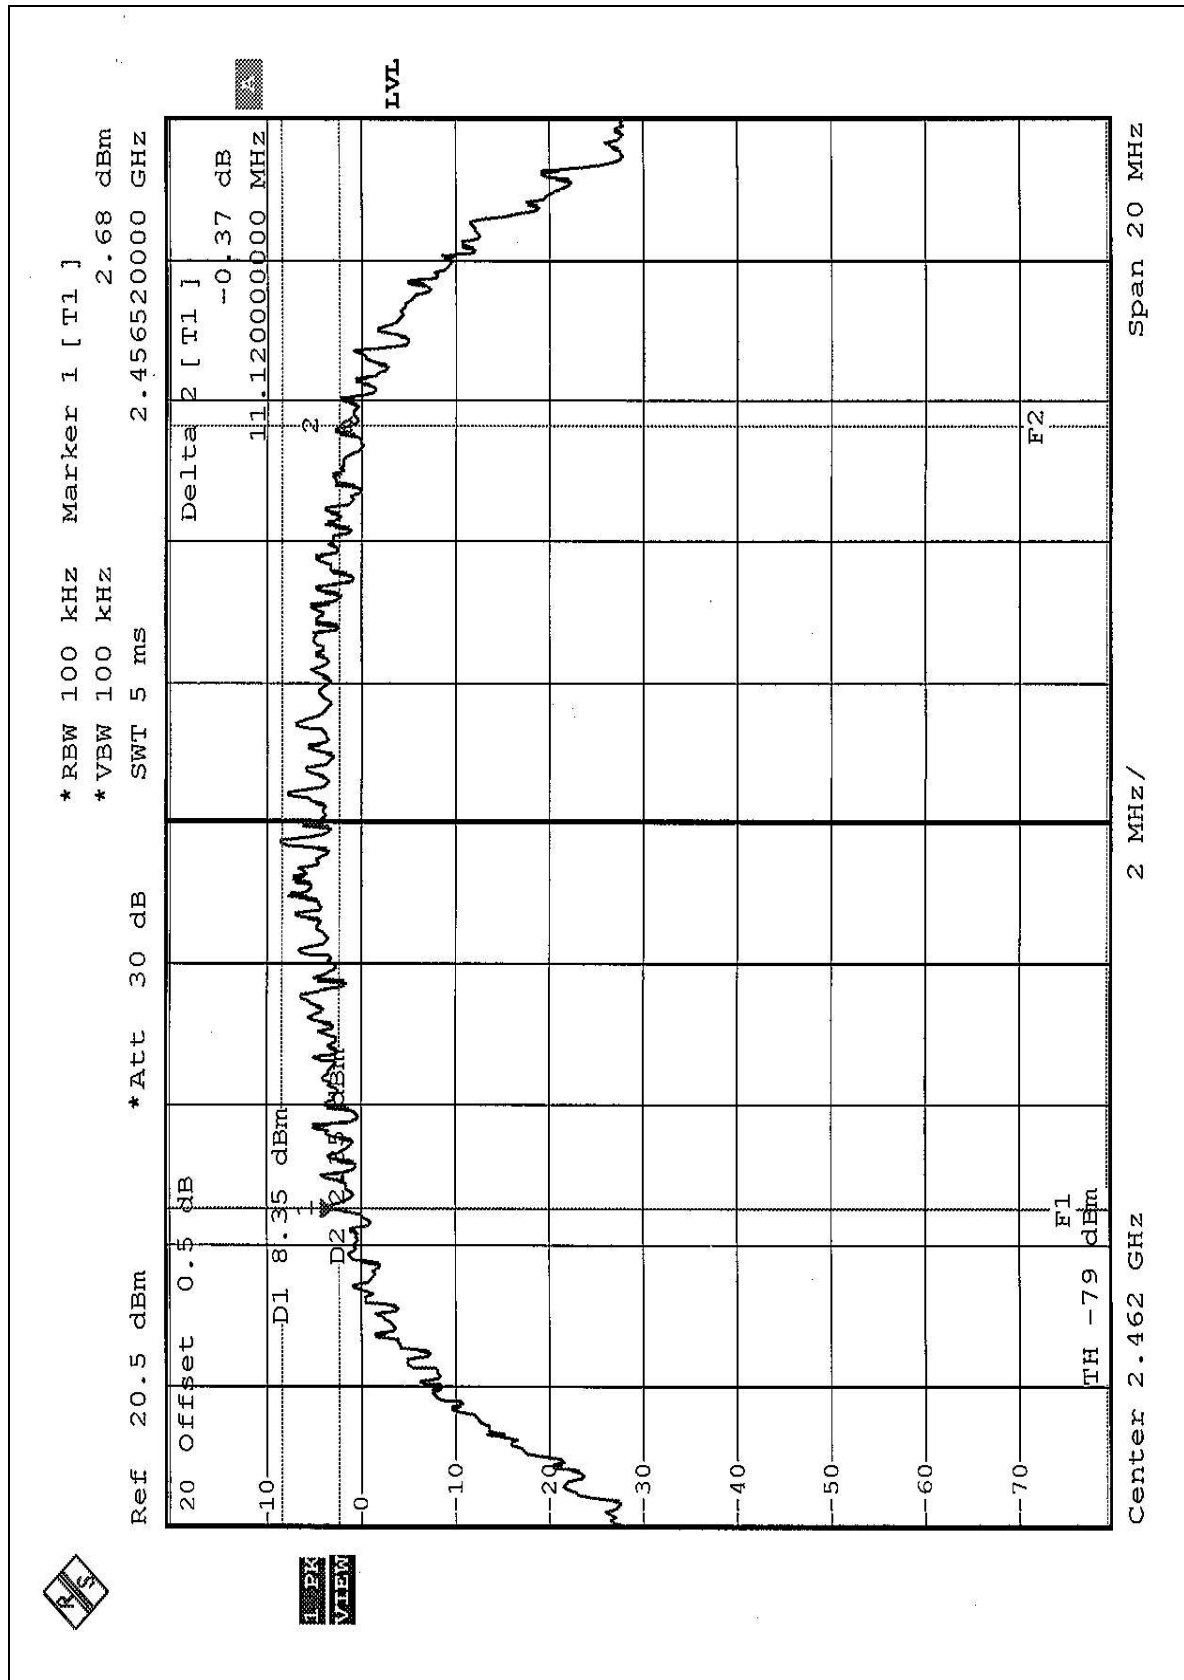


4.4.21 TEST RESULTS (FOR OFDM)


EUT	HighSpeed 2.4GHz Wireless USB Adapter	MODEL	GL2454MU-01
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	24 deg. C, 63%RH, 991 hPa
TESTED BY: Steven Lu			

CHANNEL	CHANNEL FREQUENCY (MHz)	6 dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	16.44	0.5	PASS
6	2437	16.36	0.5	PASS
11	2462	16.44	0.5	PASS


CH1

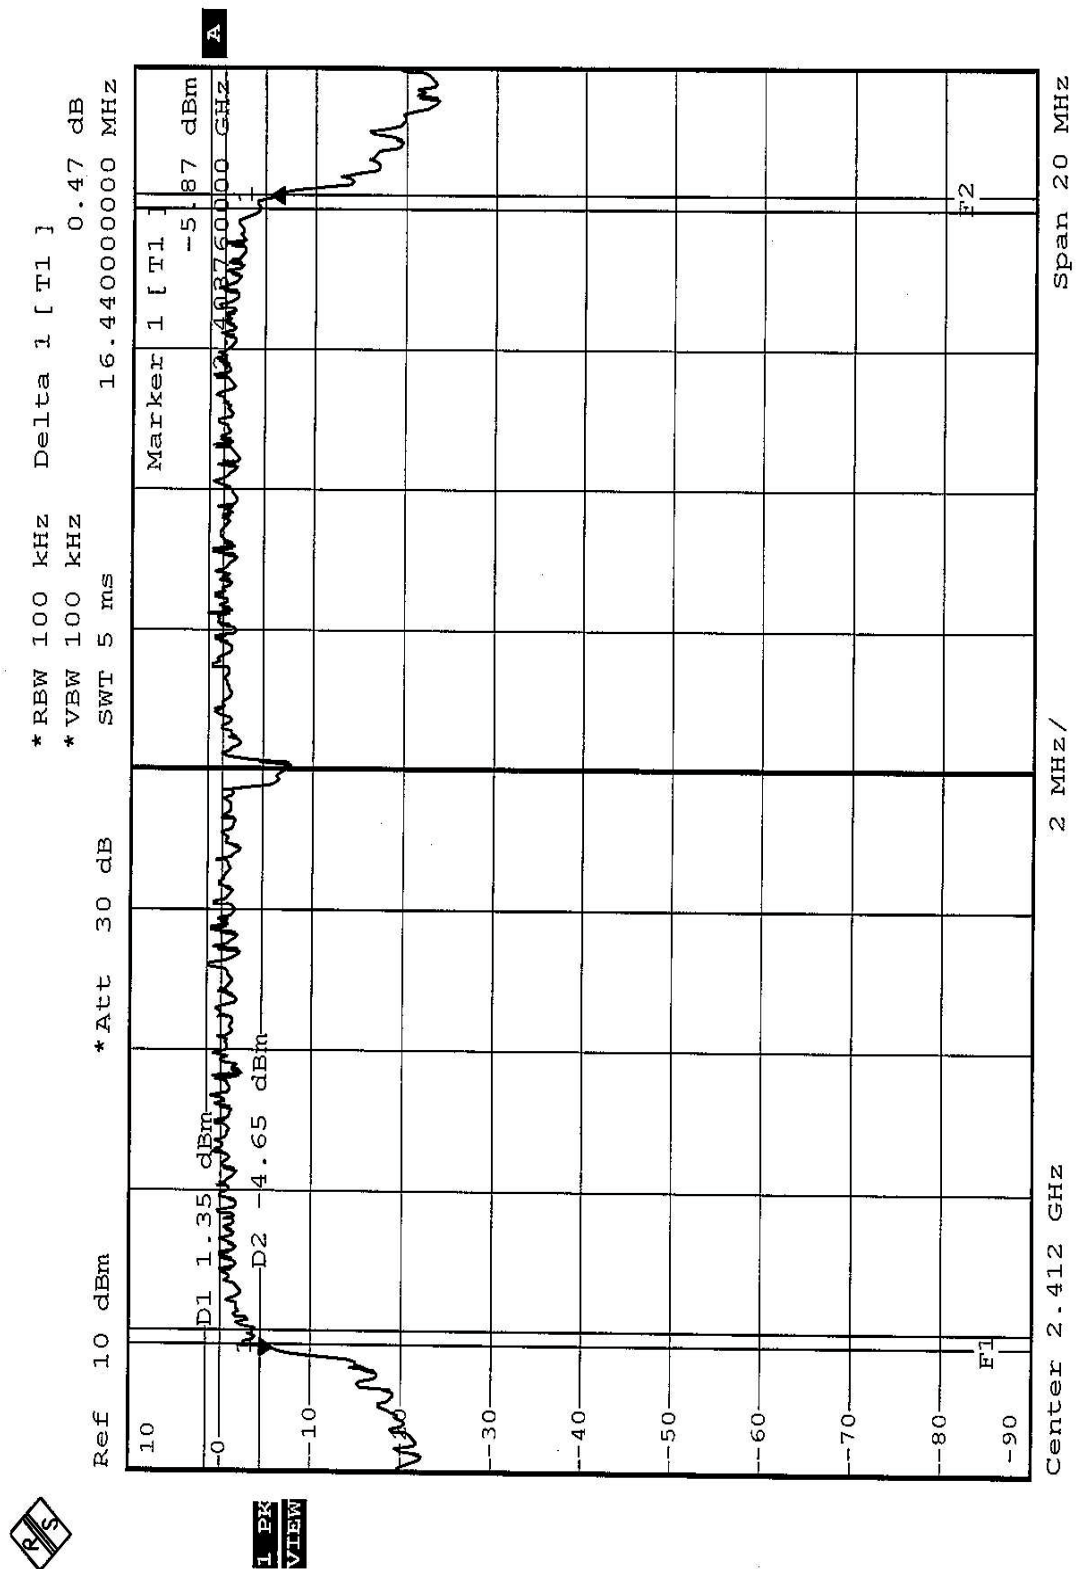

CH6

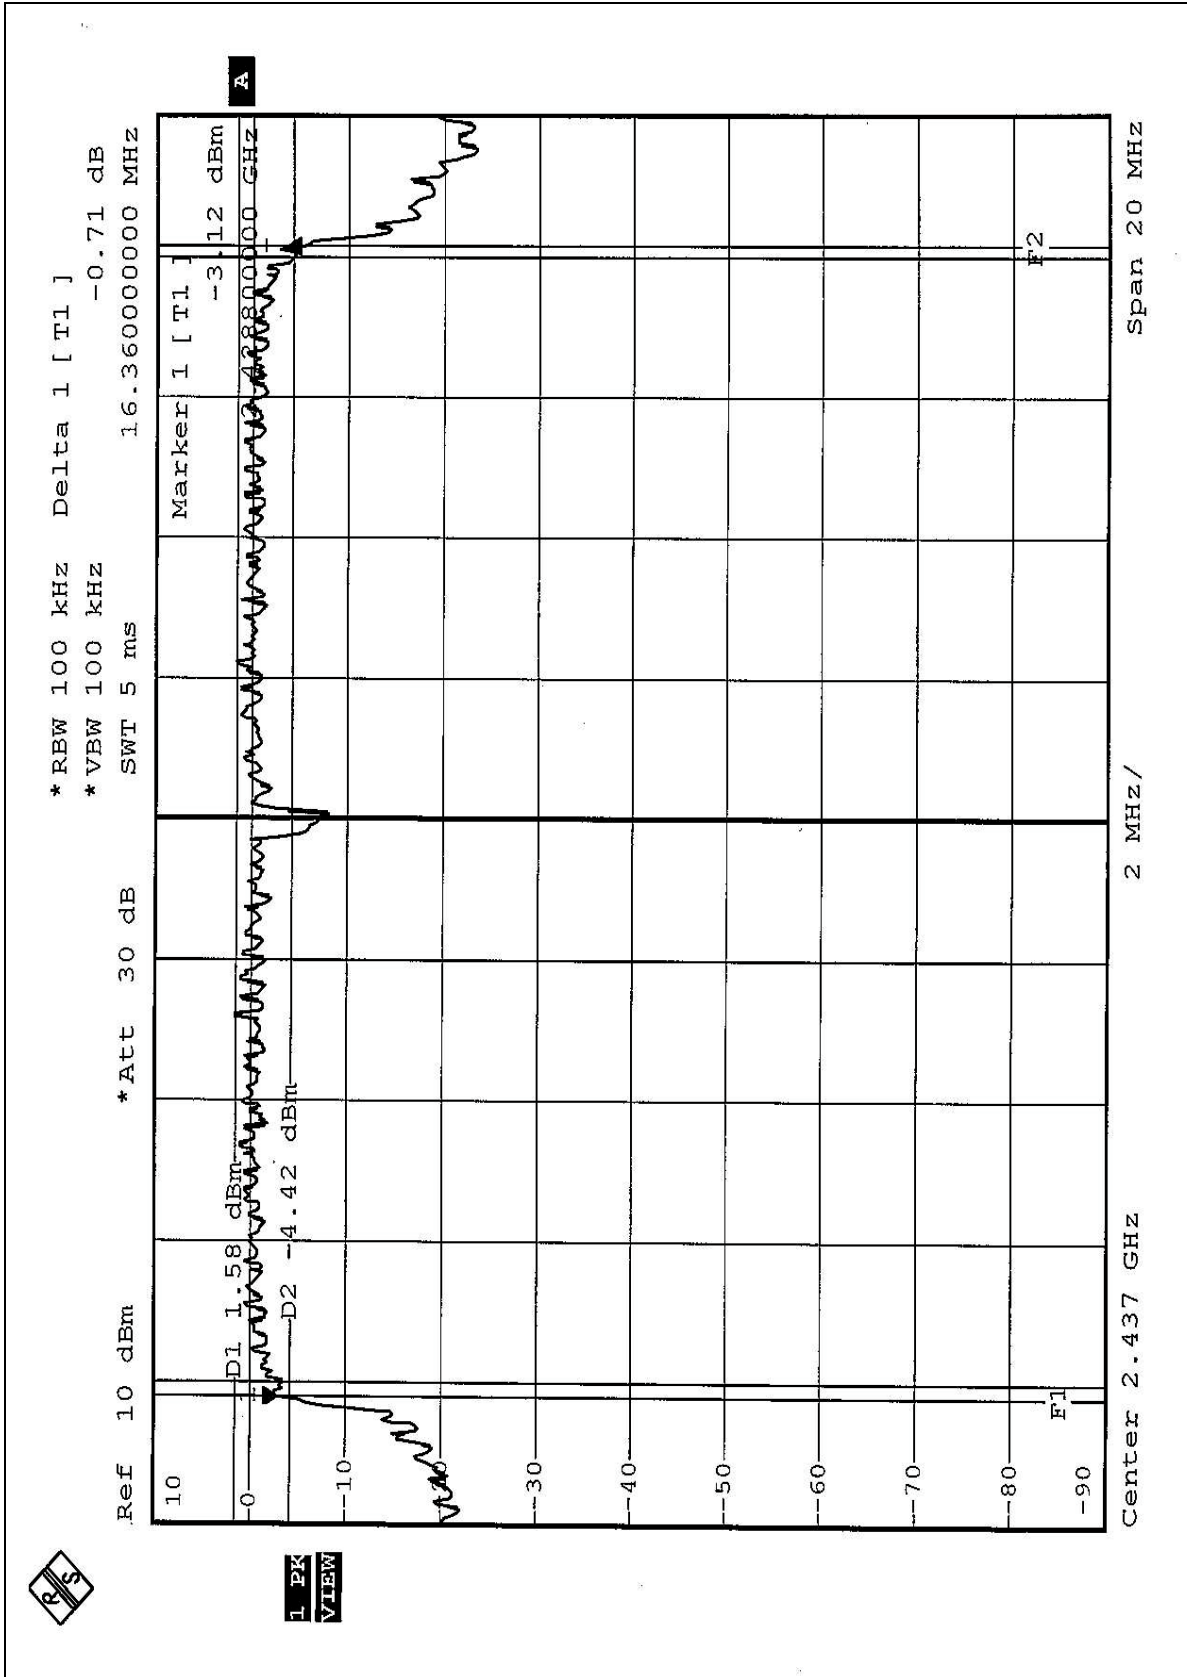

CH11

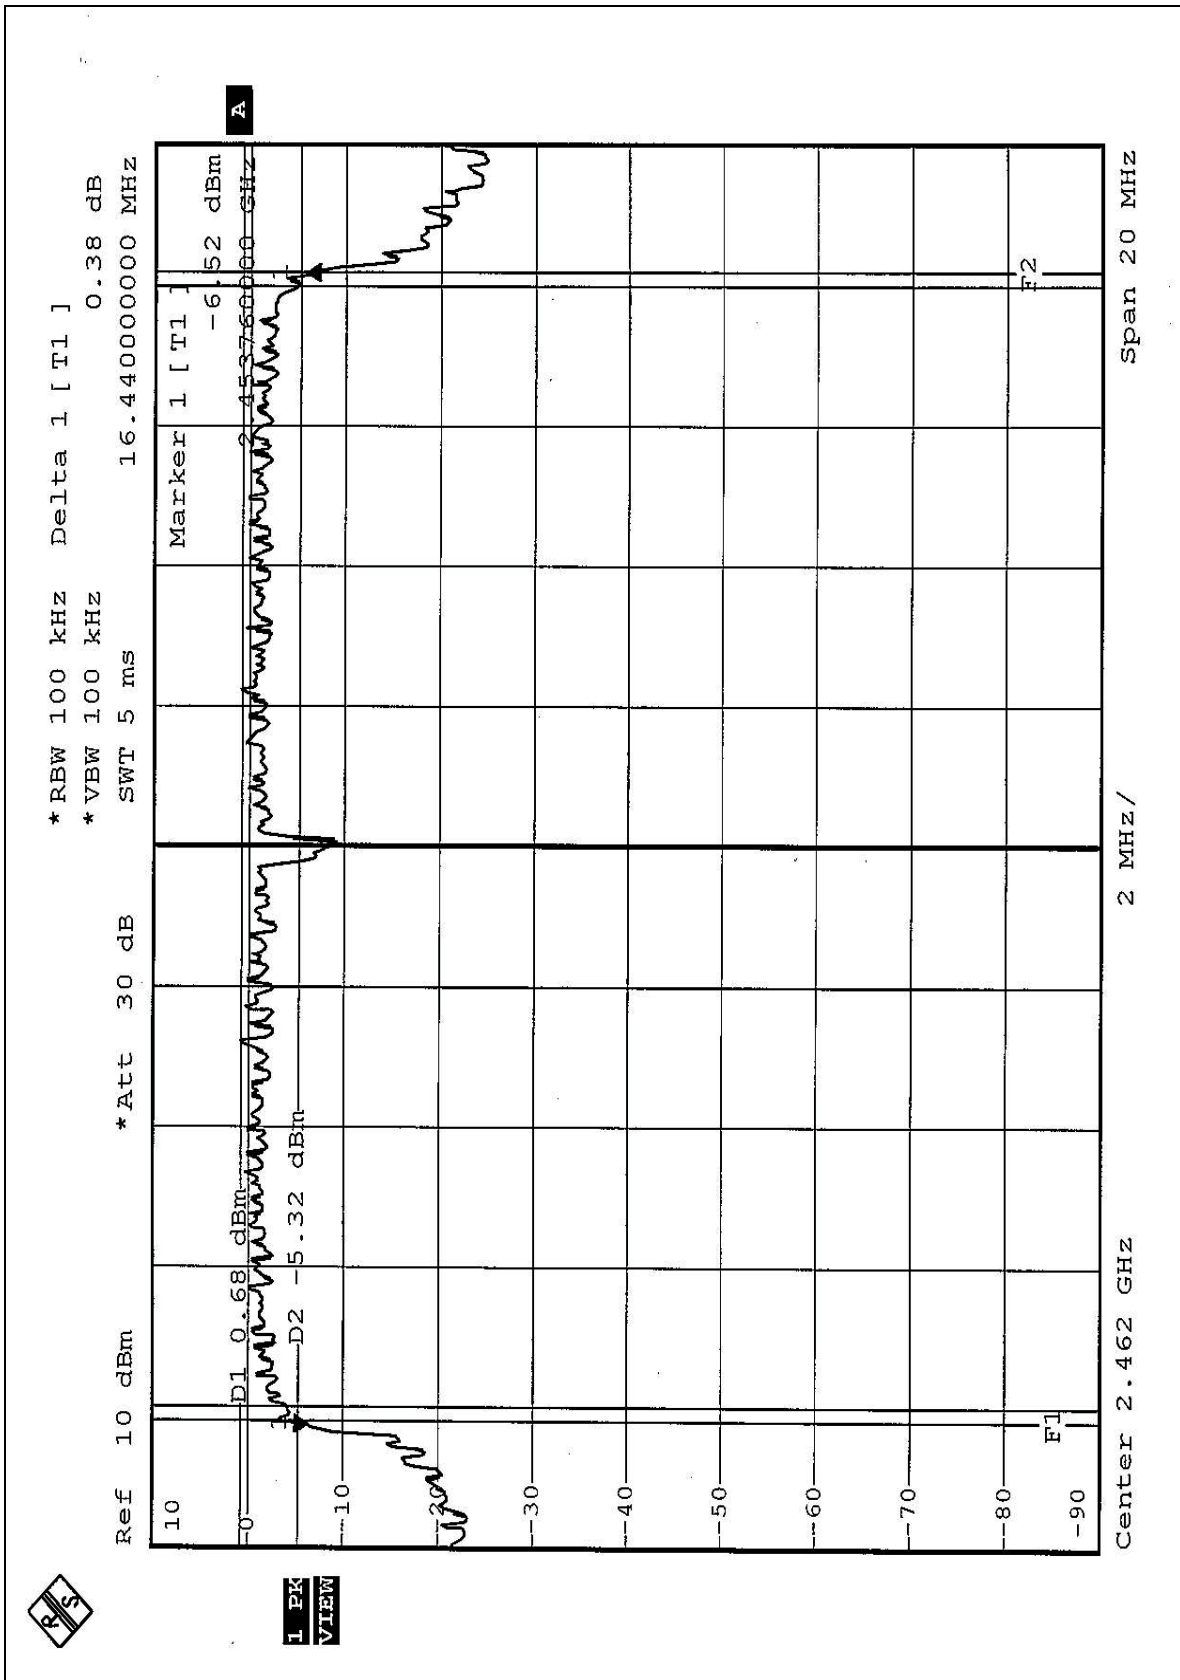

4.4 MAXIMUM PEAK OUTPUT POWER

4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

4.4.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2004
R&S SIGNAL GENERATOR	SMP04	100011	May 28, 2004
TEKTRONIX OSCILLOSCOPE	TDS 220	B048470	Mar. 05, 2004
NARDA DETECTOR	4503A	FSCM99899	NA

NOTE:

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.4.3 TEST PROCEDURES

1. A detector was used on the output port of the EUT. An oscilloscope was used to read the response of the detector.
2. Replaced the EUT by the signal generator. The center frequency of the S.G was adjusted to the center frequency of the measured channel.
3. Adjusted the power to have the same reading on oscilloscope. Record the power level.

4.4.4 DEVIATION FROM TEST STANDARD

No deviation

4.4.5 TEST SETUP



4.4.6 EUT OPERATING CONDITIONS

Same as Item 4.3.6

4.4.7 TEST RESULTS (FOR CCK)

EUT	HighSpeed 2.4GHz Wireless USB Adapter	MODEL	GL2454MU-0I
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25 deg. C, 67%RH, 991 hPa
TESTED BY: Steven Lu			

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	19.07	30	PASS
6	2437	19.11	30	PASS
11	2462	19.07	30	PASS

4.4.8 TEST RESULTS (FOR OFDM)

EUT	HighSpeed 2.4GHz Wireless USB Adapter	MODEL	GL2454MU-0I
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25 deg. C, 67%RH, 991 hPa
TESTED BY: Steven Lu			

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	19.72	30	PASS
6	2437	19.84	30	PASS
11	2462	19.87	30	PASS



4.5 POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	August 12, 2004


NOTE:

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.5.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3 kHz RBW and 30 kHz VBW, set sweep time=span/3kHz. The power spectral density was measured and recorded. The sweep time is allowed to be longer than span/3KHz for a full response of the mixer in the spectrum analyzer.

4.5.4 TEST SETUP



4.5.5 EUT OPERATING CONDITIONS


Same as 4.3.5

4.5.6 TEST RESULTS (FOR CCK)


EUT	HighSpeed 2.4GHz Wireless USB Adapter	MODEL	GL2454MU-0I
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	24 deg. C, 63%RH, 991 hPa
TESTED BY: Steven Lu			

CHANNEL NUMBER	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 KHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-6.95	8	PASS
6	2437	-7.28	8	PASS
11	2462	-7.37	8	PASS


CH1

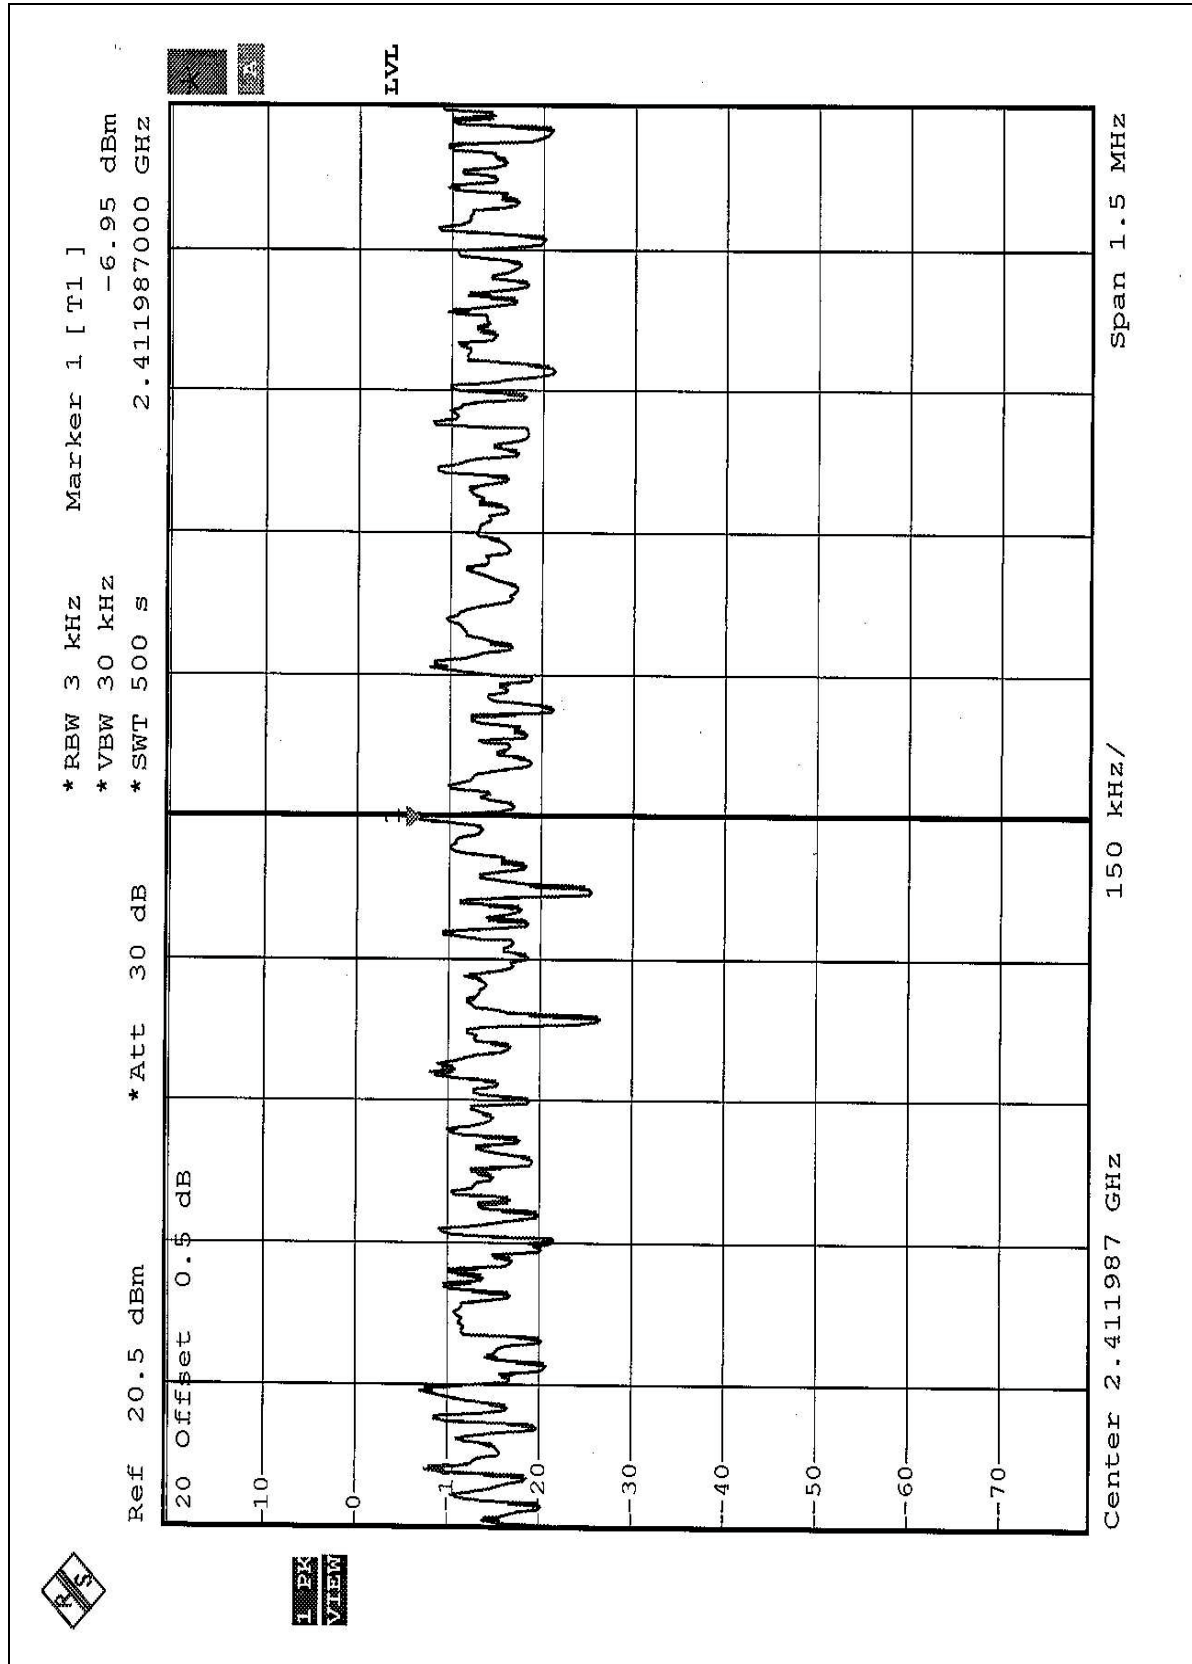

CH6

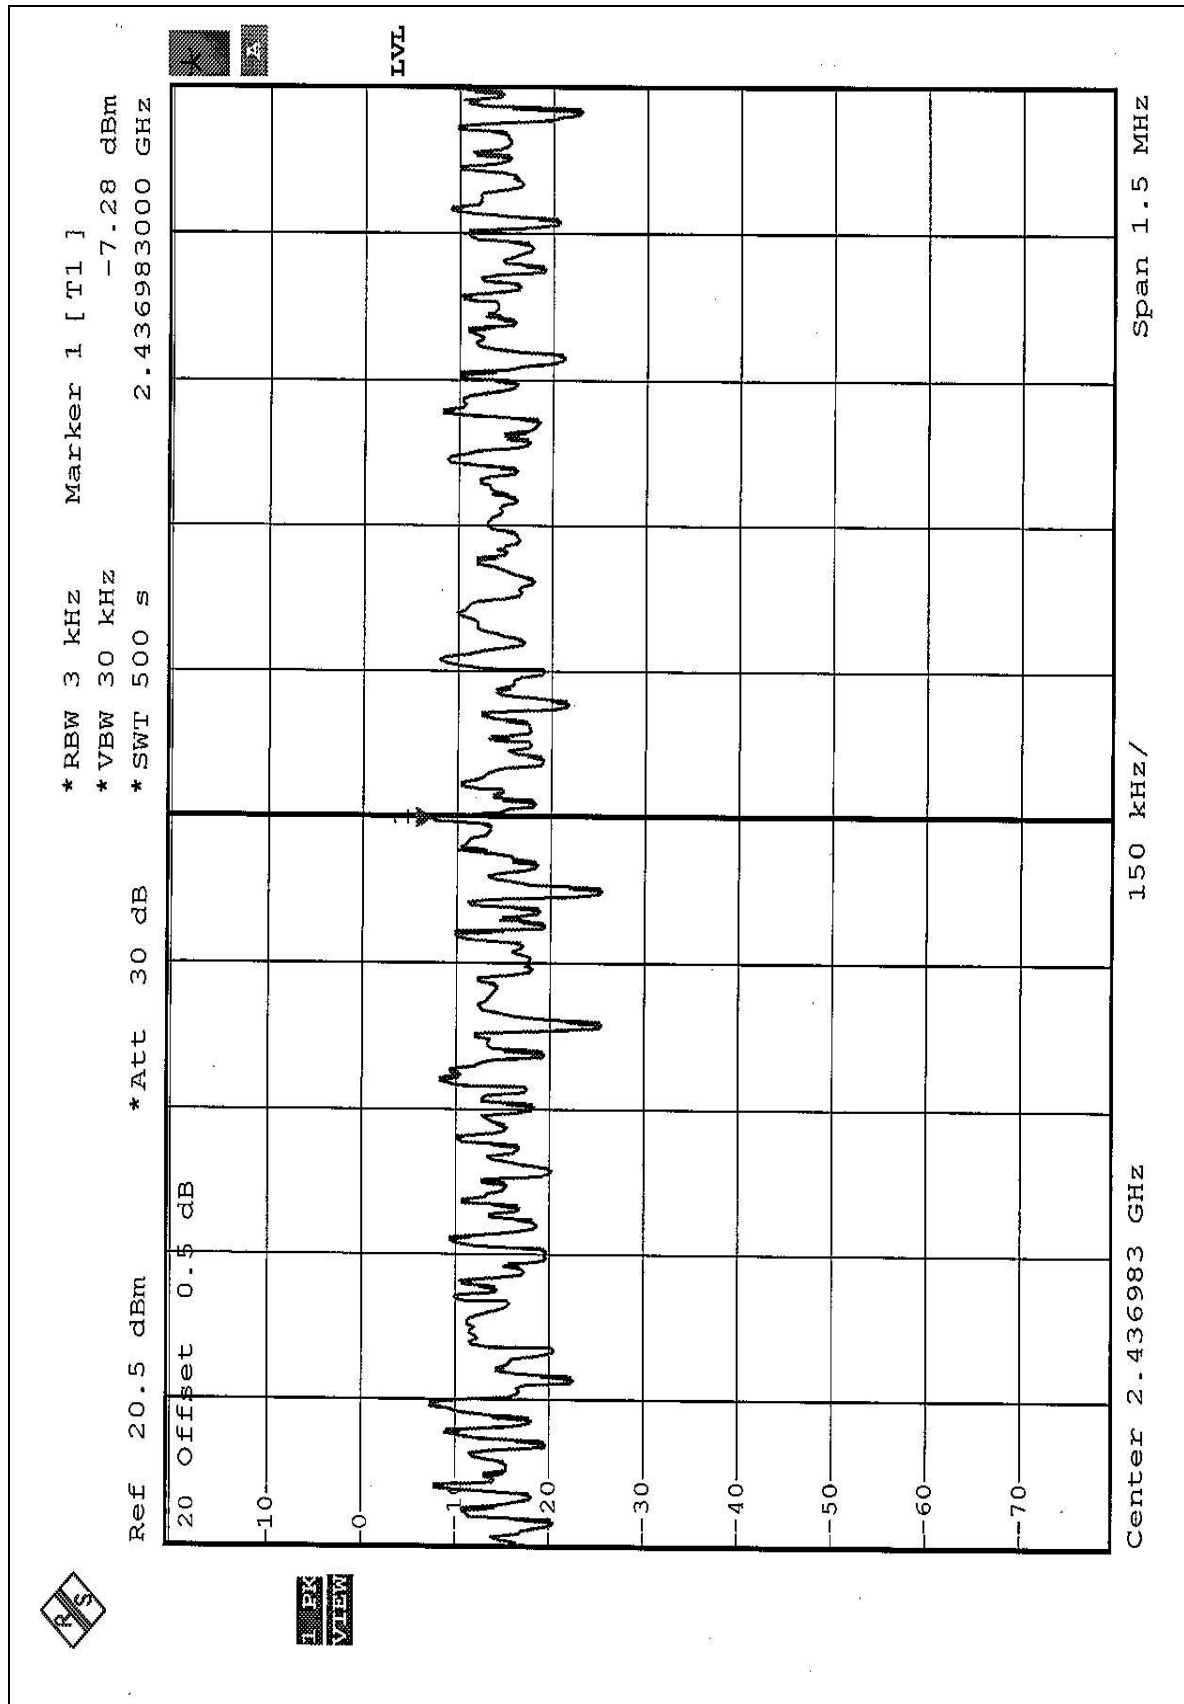

CH11

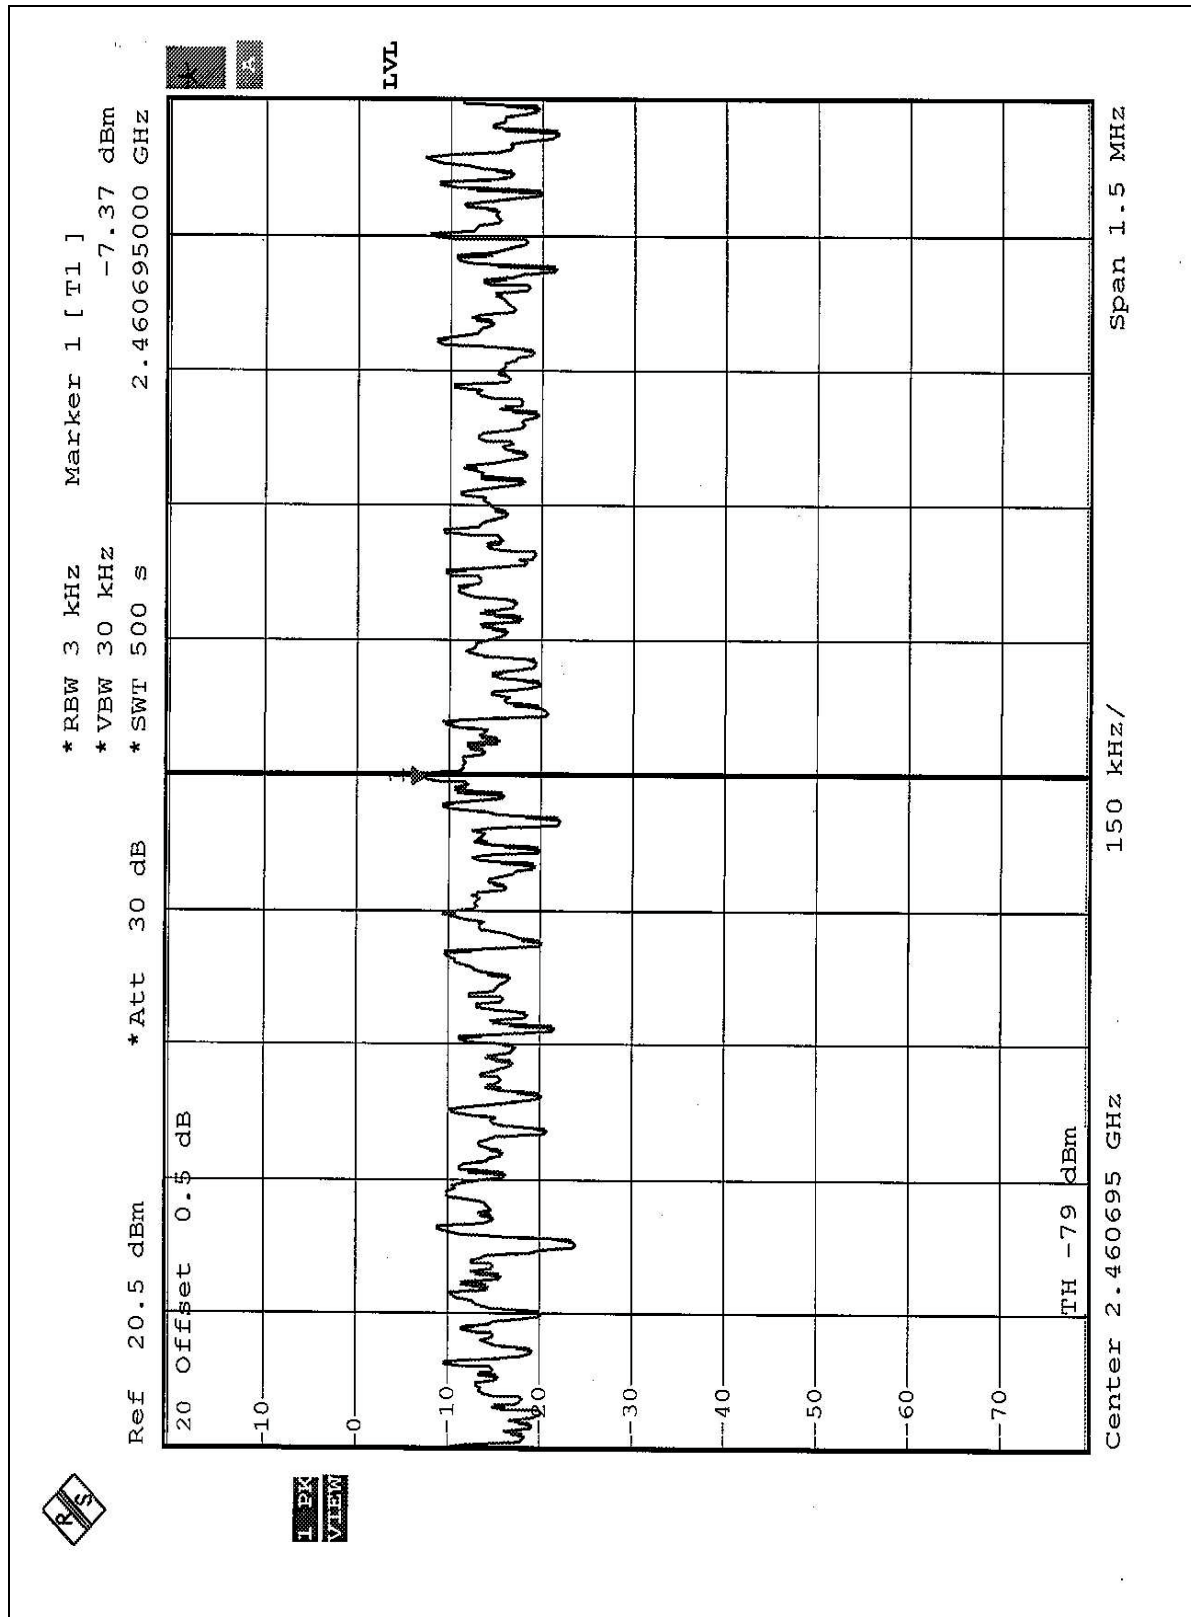


4.5.7 TEST RESULTS (FOR OFDM)


EUT	HighSpeed 2.4GHz Wireless USB Adapter	MODEL	GL2454MU-0I
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	26 deg. C, 65%RH, 991 hPa
TESTED BY: Steven Lu			

CHANNEL NUMBER	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 KHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-12.78	8	PASS
6	2437	-12.85	8	PASS
11	2462	-13.67	8	PASS


CH1

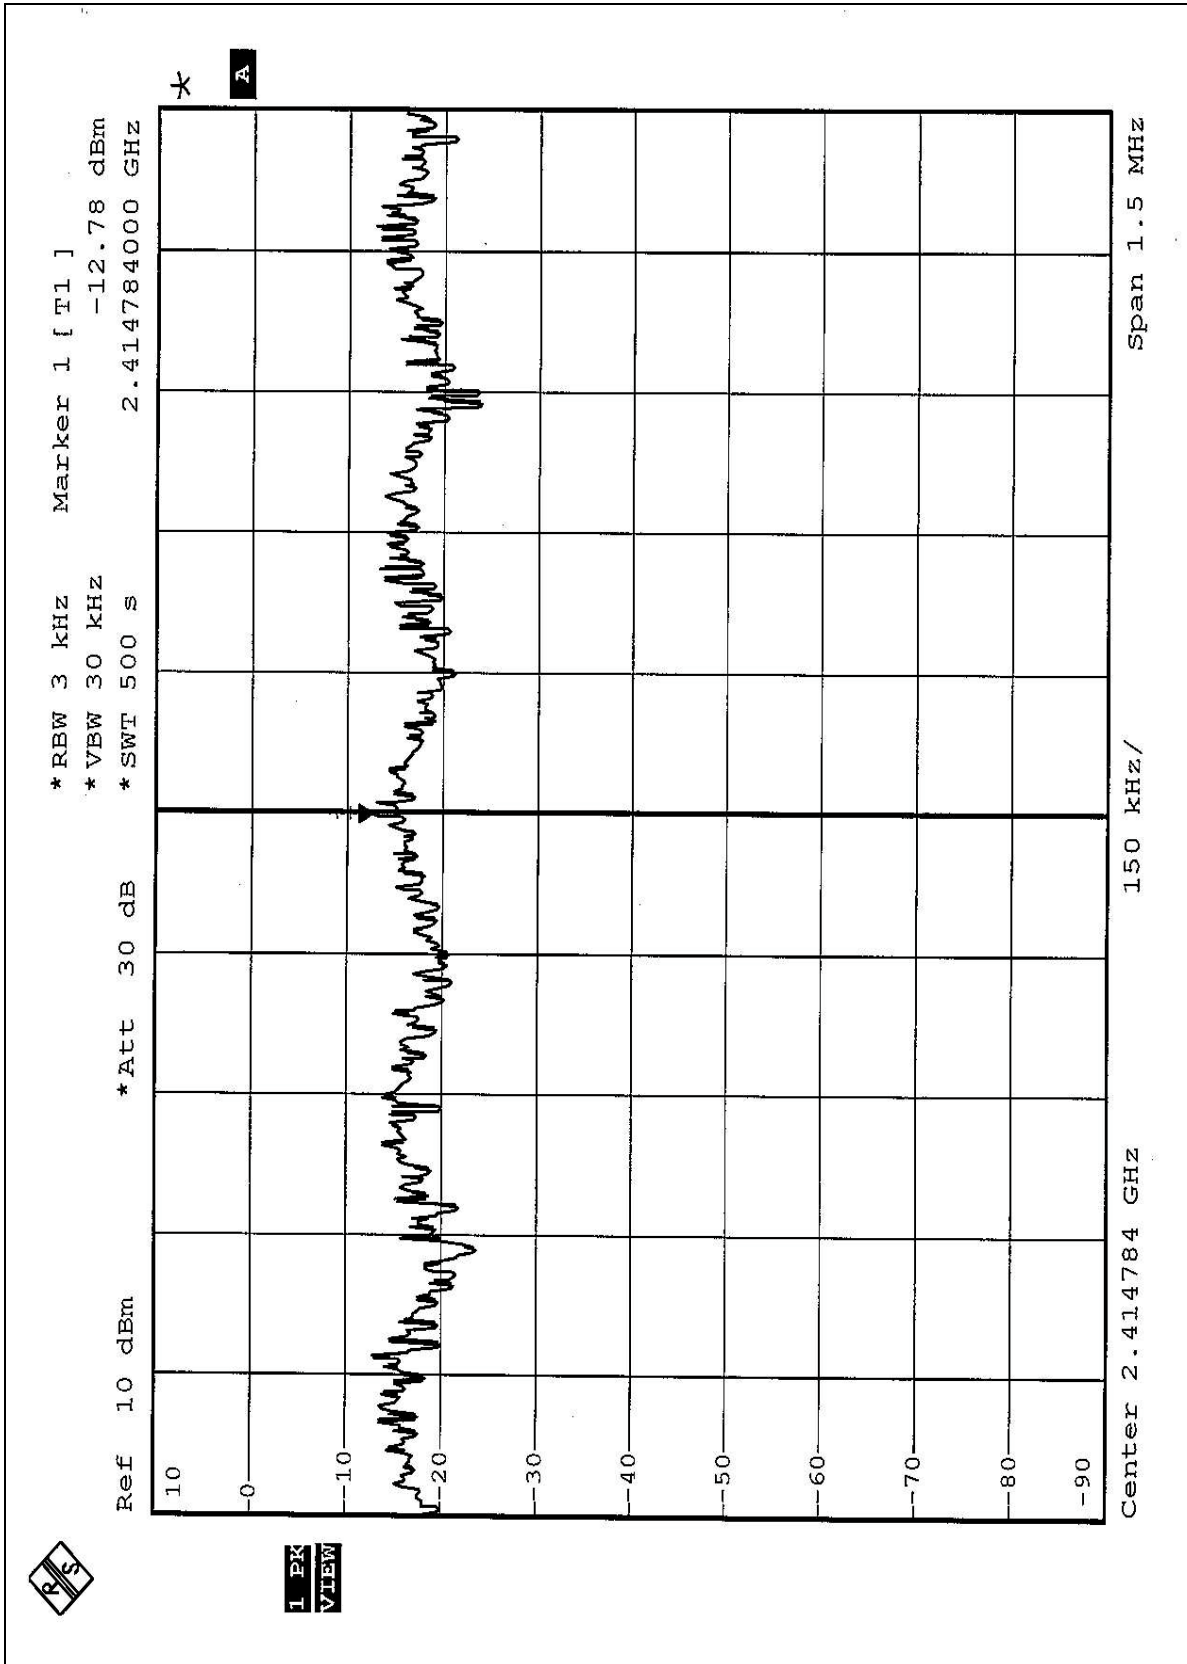

CH6

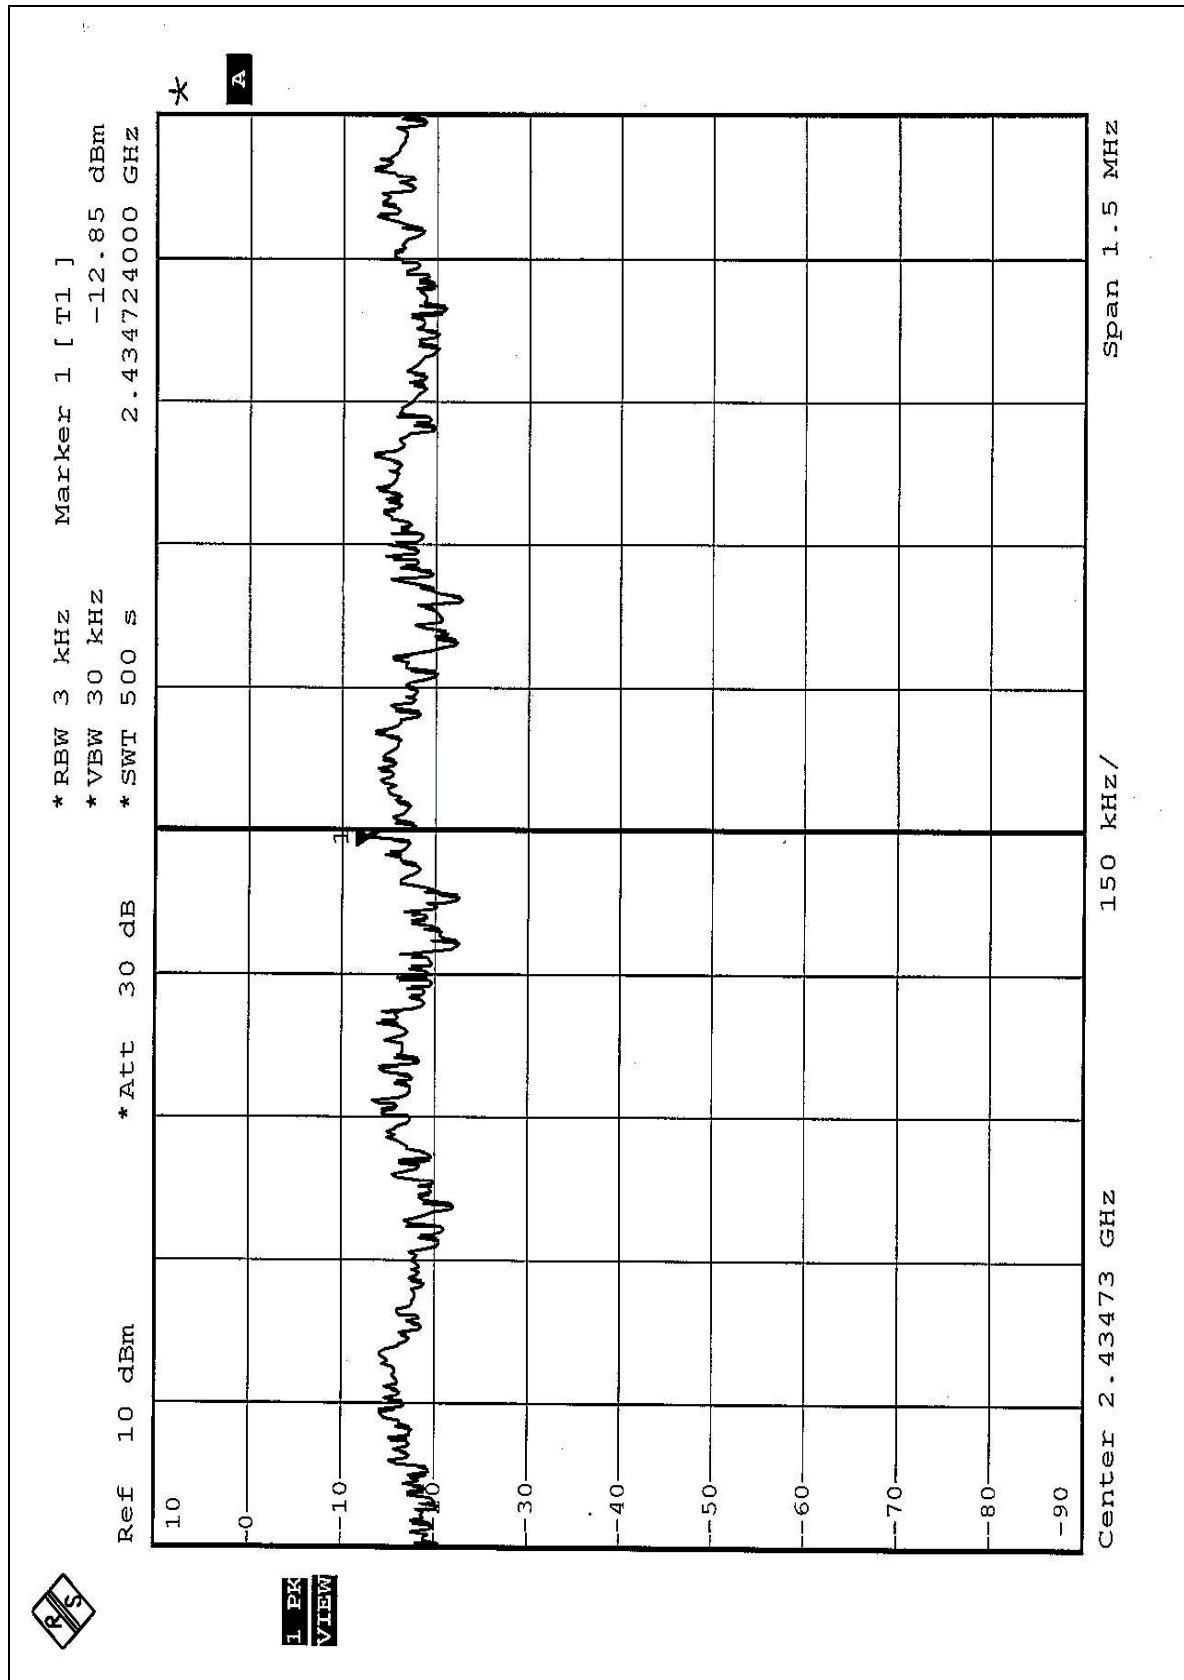

CH11

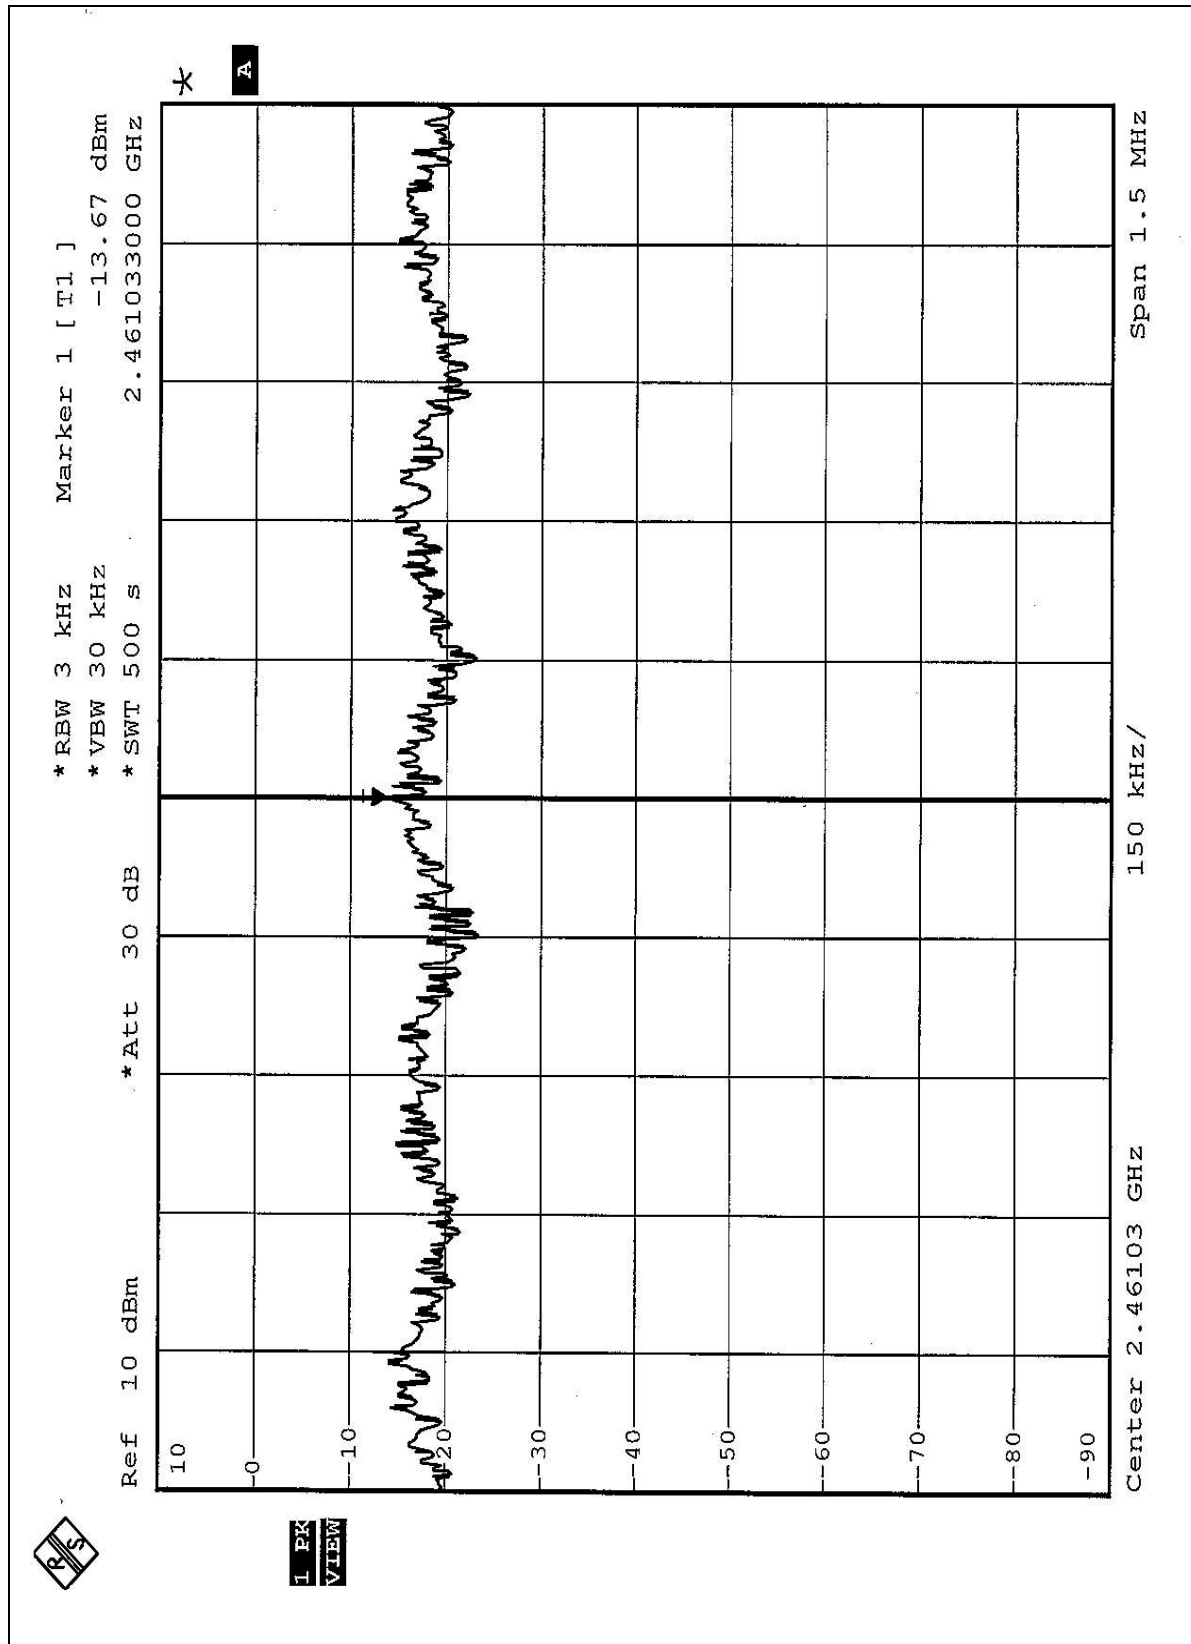

4.6 BAND EDGES MEASUREMENT

4.6.1 LIMITS OF BAND EDGES MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100KHz Resolution Bandwidth).

4.6.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	August 12, 2004

NOTE:

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.6.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low loss cable. Set both RBW and VBW of spectrum analyzer to 100 kHz with suitable frequency span including 100 MHz bandwidth from band edge. The band edges was measured and recorded.

4.6.4 EUT OPERATING CONDITION


Same as Item 4.3.5




4.6.5 TEST RESULTS (FOR CCK)

The spectrum plots are attached on the following 2 pages. D2 line indicates the highest level, D1 line indicates the 20dB offset below D2. It shows compliance with the requirement in part 15.247(C).

NOTE: The band edge emission plot on the following 2 pages shows 54.48dB / 52.04dB delta between carrier maximum power and local maximum emission in restrict band (2.3900GHz / 2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.6 (Page 26) is 105.2dBuV/m, so the maximum field strength in restrict band is $105.2 - 52.04 = 53.16$ dBuV/m which is under 54 dBuV/m limit.

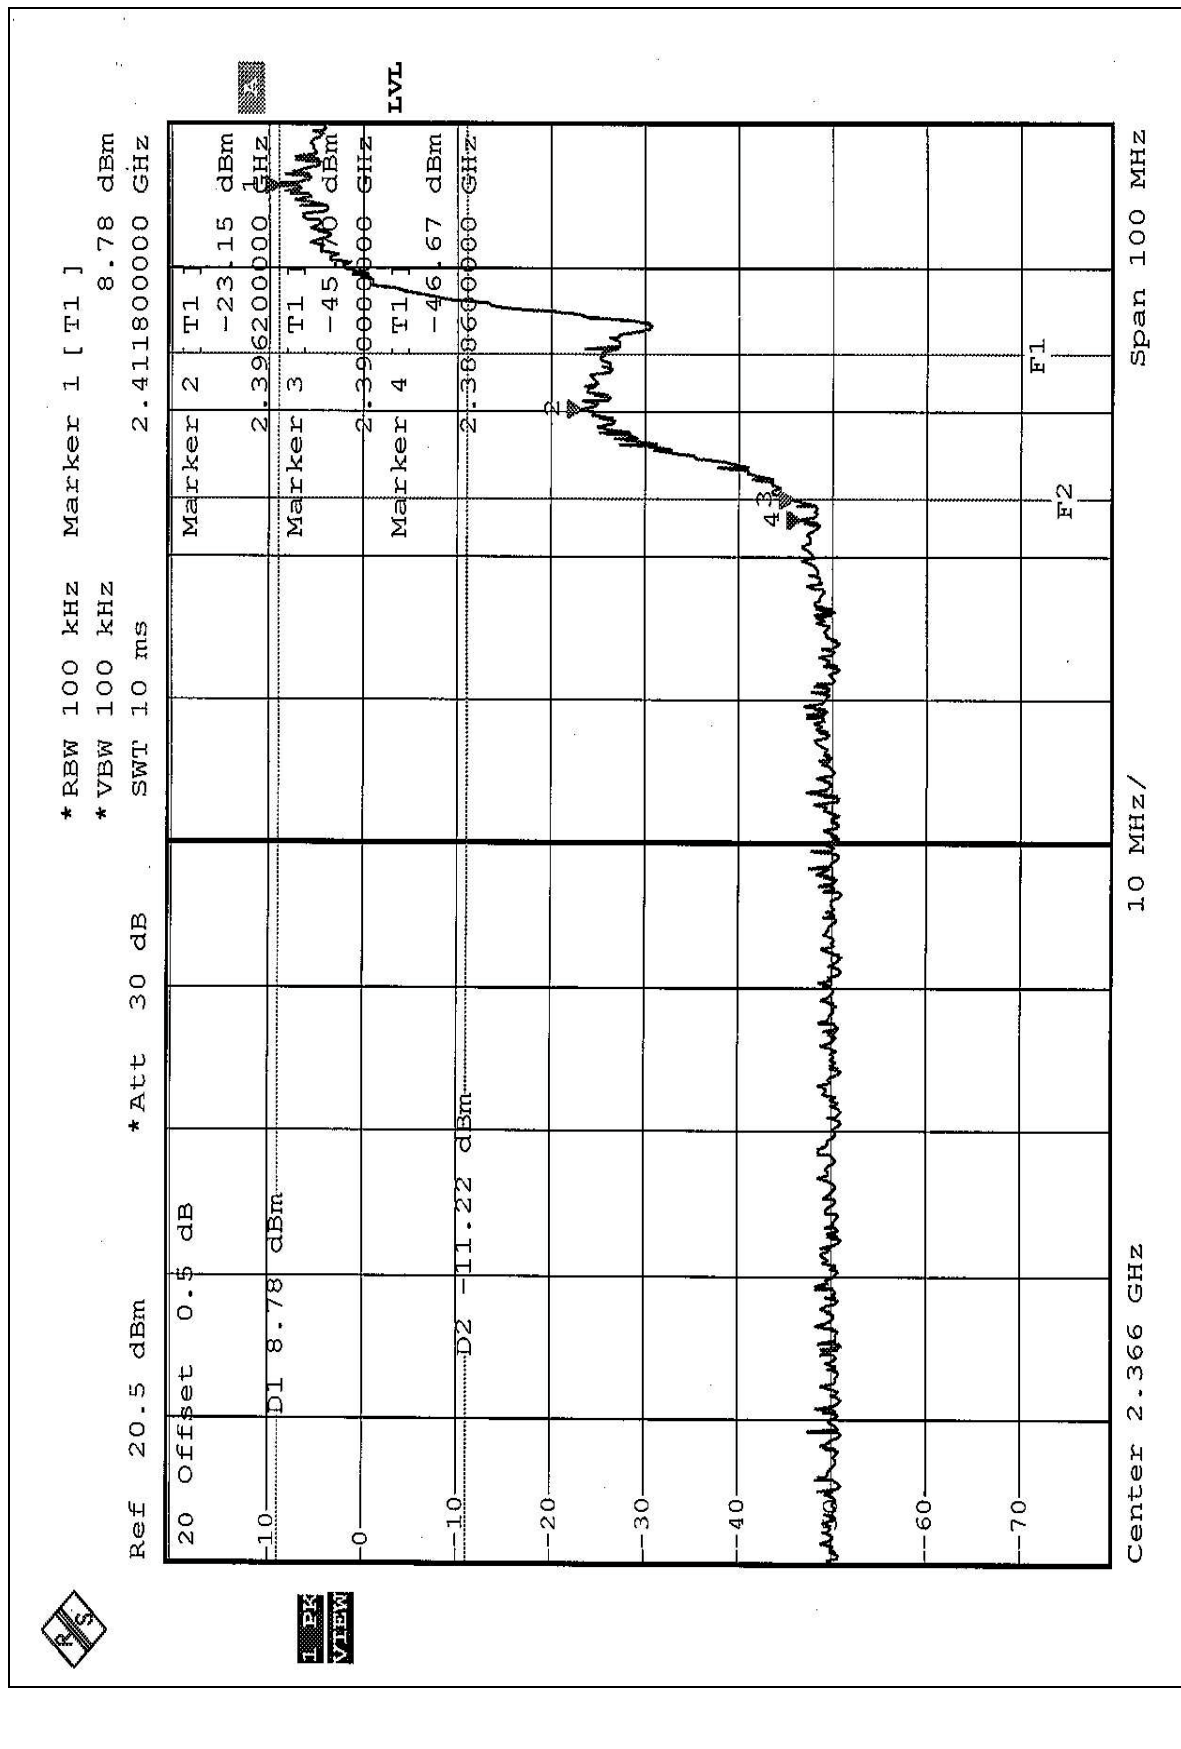

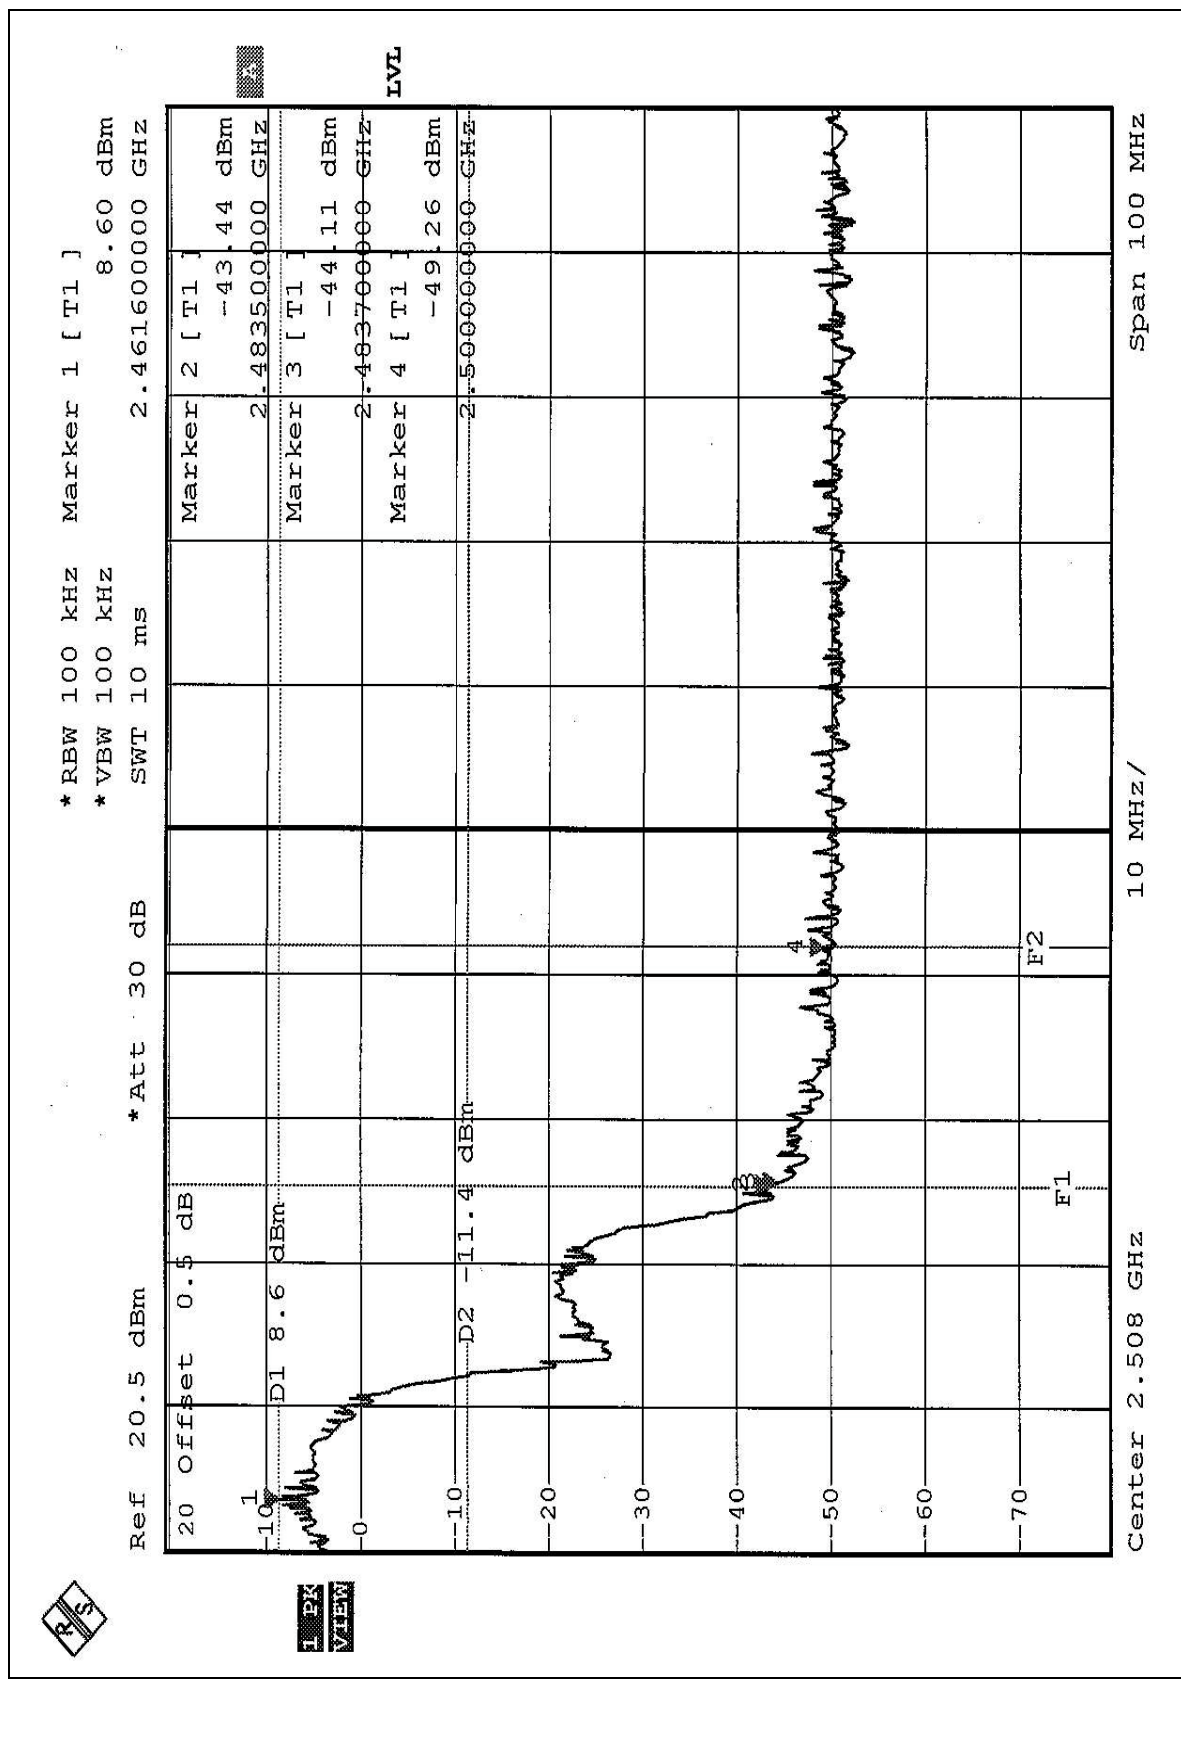




4.6.6 TEST RESULTS (FOR OFDM)

The spectrum plots are attached on the following 2 pages. D2 line indicates the highest level, D1 line indicates the 20dB offset below D2. It shows compliance with the requirement in part 15.247(C).

NOTE: The band edge emission plot on the following 2 pages shows 44.21dB / 45.70dB delta between carrier maximum power and local maximum emission in restrict band (2.3900GHz / 2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.6 (Page 29) is 98.3dBuV/m, so the maximum field strength in restrict band is $98.3 - 45.7 = 52.60$ dBuV/m which is under 54 dBuV/m limit.

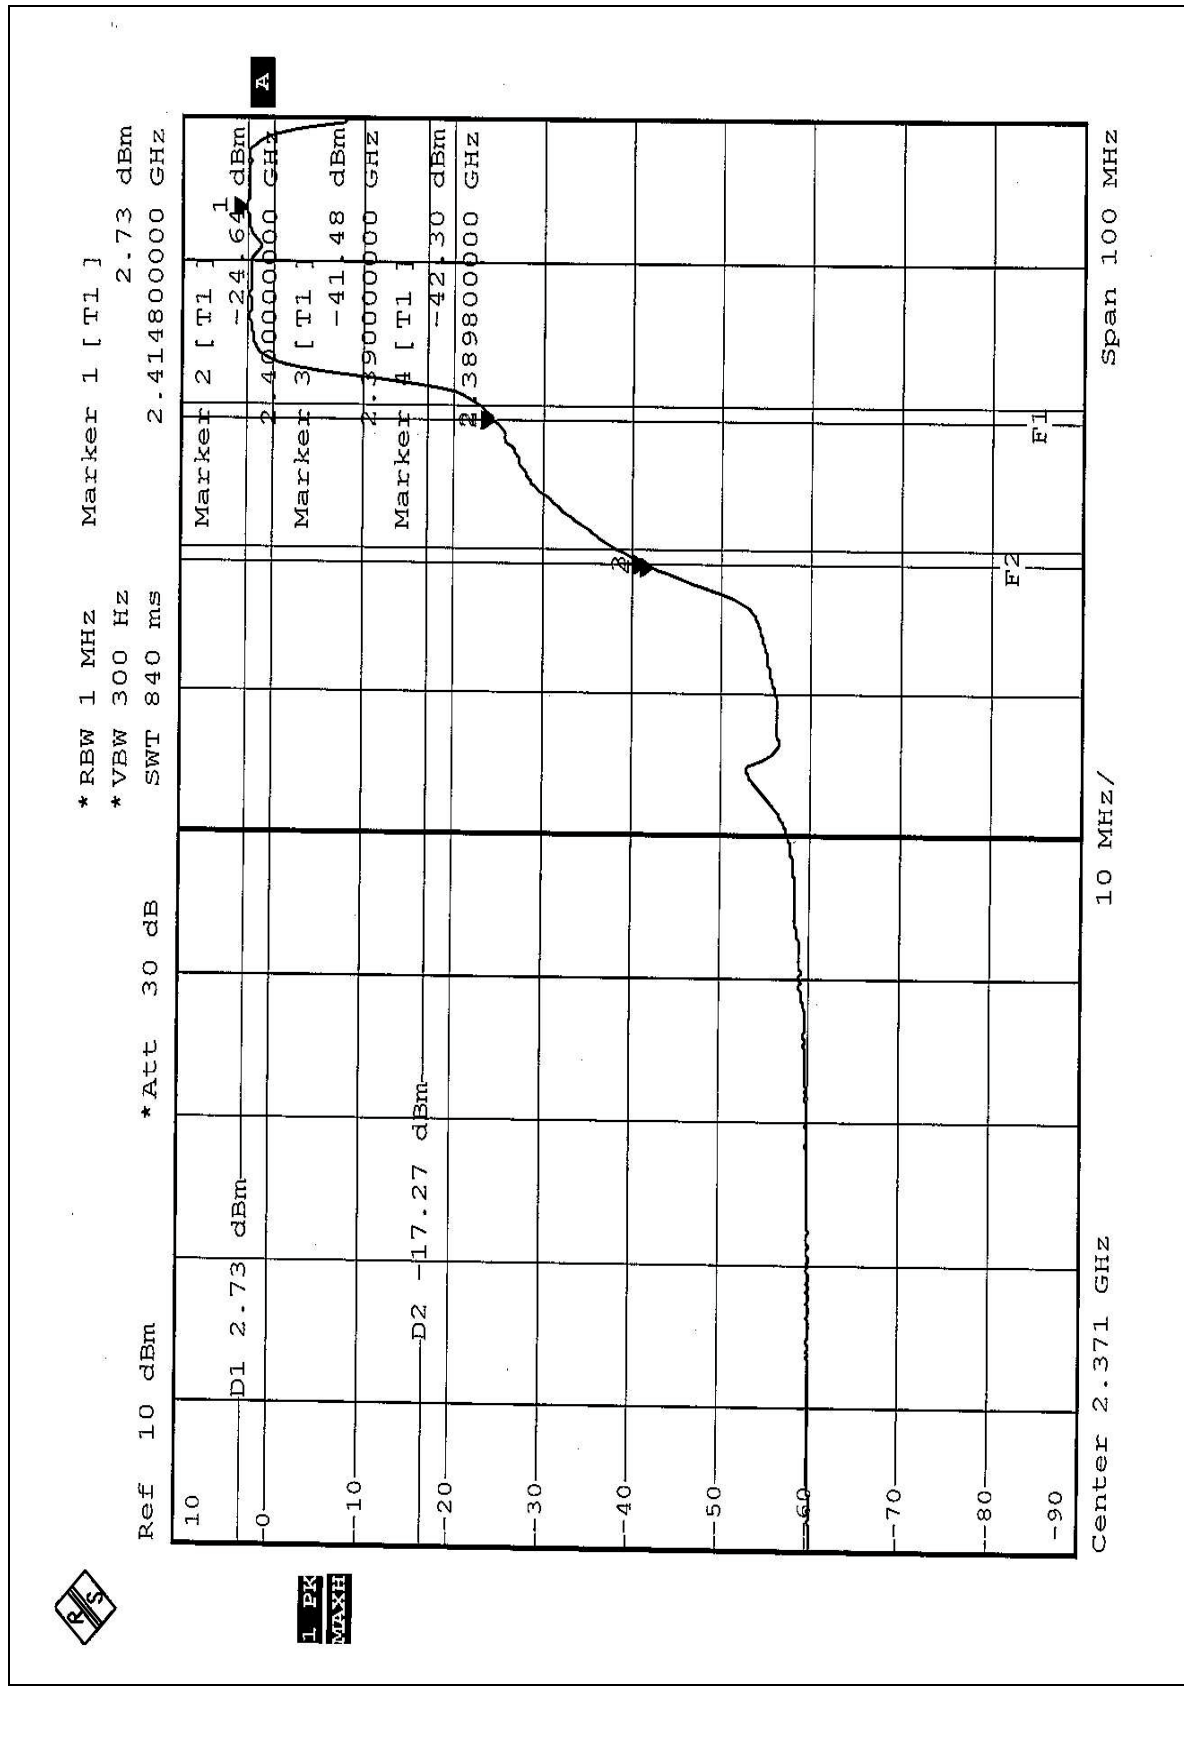





4.7 ANTENNA REQUIREMENT

4.7.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.7.2 ANTENNA CONNECTED CONSTRUCTION

The antenna used in this product is Dipole Antenna without antenna connector. And the maximum Gain of this antenna is only 1.5dBi.

5 PHOTOGRAPHS OF THE TEST CONFIGURATION

CONDUCTED EMISSION TEST



RADIATED EMISSION TEST





6 INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025, Guide 25 or EN 45001:

USA	FCC, NVLAP
Germany	TUV Rheinland
Japan	VCCI
New Zealand	MoC
Norway	NEMKO
R.O.C.	BSMI, DGT, CNLA

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site:
www.adt.com.tw/index.5/phtml.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC Lab:

Tel: 886-2-26052180

Fax: 886-2-26052943

Hsin Chu EMC Lab:

Tel: 886-35-935343

Fax: 886-35-935342

Lin Kou Safety Lab:

Tel: 886-2-26093195

Fax: 886-2-26093184

Lin Kou RF&Telecom Lab

Tel: 886-3-3270910

Fax: 886-3-3270892

Email: service@mail.adt.com.tw

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.