




FCC EMI TEST REPORT

FCC ID : GKRRMMG1
Equipment : 5G Module
Brand Name : COMPAL
Model Name : RMM-G1
Applicant : Compal Electronics, Inc.
No.581 & 581-1, Ruiguang Rd., Neihu District,
Taipei, (114) Taiwan
Manufacturer : Compal Electronics, Inc.
No.581 & 581-1, Ruiguang Rd., Neihu District,
Taipei, (114) Taiwan
Standard : FCC 47 CFR FCC Part 15 Subpart B Class B

The product was received on Apr. 02, 2024 and testing was performed from Apr. 20, 2024 to Apr. 22, 2024. We, Sporton International Inc. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI C63.4-2014 and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.



Approved by: Louis Wu

Sporton International Inc. EMC & Wireless Communications Laboratory
No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1. General Description	5
1.1. Product Feature of Equipment Under Test	5
1.2. Modification of EUT	5
1.3. Test Location	5
1.4. Applicable Standards	5
2. Test Configuration of Equipment Under Test	6
2.1. Test Mode	6
2.2. Connection Diagram of Test System	7
2.3. Support Unit used in test configuration and system	7
2.4. EUT Operation Test Setup	7
3. Test Result	8
3.1. Test of AC Conducted Emission Measurement	8
3.2. Test of Radiated Emission Measurement	10
4. List of Measuring Equipment.....	12
5. Measurement Uncertainty	13
Appendix A. AC Conducted Emission Test Result	
Appendix B. Radiated Emission Test Result	
Appendix C. Setup Photographs	



History of this test report

Report No.	Version	Description	Issue Date
FC432920-02	01	Initial issue of report	Jul. 05, 2024



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.107	AC Conducted Emission	Pass	18.19 dB under the limit at 0.43 MHz
3.2	15.109	Radiated Emission	Pass	12.88 dB under the limit at 936.30 MHz

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Keven Cheng

Report Producer: Mila Chen

1. General Description

1.1. Product Feature of Equipment Under Test

Product Feature
General Specs WCDMA/LTE/5G NR, and GNSS.
Antenna Type WWAN: PIFA Antenna / Monopole Antenna GPS / Glonass / BDS / Galileo: PIFA Antenna

Remark: The EUT's information above is declared by manufacturer. Please refer to Disclaimer in report summary.

1.2. Modification of EUT

No modifications made to the EUT during the testing.

1.3. Test Location

Test Site	Sporton International Inc. EMC & Wireless Communications Laboratory
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978
Test Site No.	Sporton Site No. CO05-HY, 03CH06-HY

FCC designation No.: TW1093

1.4. Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC 47 CFR FCC Part 15 Subpart B Class B
- ♦ ANSI C63.4-2014
- ♦ ANSI C63.4a-2017

Remark: All test items were verified and recorded according to the standards and without any deviation during the test.


2. Test Configuration of Equipment Under Test

2.1. Test Mode

The EUT is tested along with the peripherals, operating under possible configurations in compliant with normal operation. The maximum emissions can be identified by a pre-scan carried out in different orientations of placement pursuant to ANSI C63.4-2014. Frequency range covered: Conduction Emission (150 kHz to 30 MHz), Radiation Emission (30 MHz to the 5th harmonics of the highest fundamental frequency or to 40 GHz, whichever is lower).

Test Items	Functions Enabled
AC Conducted Emission	Mode 1: Monopole 3 Antenna + 5G NR n5 Idle + GPS Rx + USB Cable (Charging from Adapter) Mode 2: Monopole 3 Antenna + LTE Band 26 Idle + GPS Rx + USB Cable (Charging from Adapter) Mode 3: PIFA 3 Antenna + LTE Band 12 Idle + GPS Rx + USB Cable (Charging from Adapter) Mode 4: Monopole 3 Antenna + LTE Band 13 Idle + GPS Rx + USB Cable (Charging from Adapter) Mode 5: Monopole 2 Antenna + LTE Band 14 Idle + GPS Rx + USB Cable (Charging from Adapter) Mode 6: PIFA 3 Antenna + 5G NR n71 Idle + GPS Rx + USB Cable (Charging from Adapter)
Radiated Emissions	Mode 1: Monopole 3 Antenna + 5G NR n5 Idle + GPS Rx + USB Cable (Charging from Adapter) Mode 2: Monopole 3 Antenna + LTE Band 26 Idle + GPS Rx + USB Cable (Charging from Adapter) Mode 3: PIFA 3 Antenna + LTE Band 12 Idle + GPS Rx + USB Cable (Charging from Adapter) Mode 4: Monopole 3 Antenna + LTE Band 13 Idle + GPS Rx + USB Cable (Charging from Adapter) Mode 5: Monopole 2 Antenna + LTE Band 14 Idle + GPS Rx + USB Cable (Charging from Adapter) Mode 6: PIFA 3 Antenna + 5G NR n71 Idle + GPS Rx + USB Cable (Charging from Adapter)
Remark: 1. The worst case of AC is mode 3; only the test data of this mode was reported. 2. The worst case of RE is mode 2; only the test data of this mode was reported. 3. For Radiation Emission after pre-scanned the cellular band between 30MHz ~ 960MHz (LTE Band 12/13/14/26/5G NR n5); only the worst case for cellular band test data of this mode was reported.	

2.2. Connection Diagram of Test System

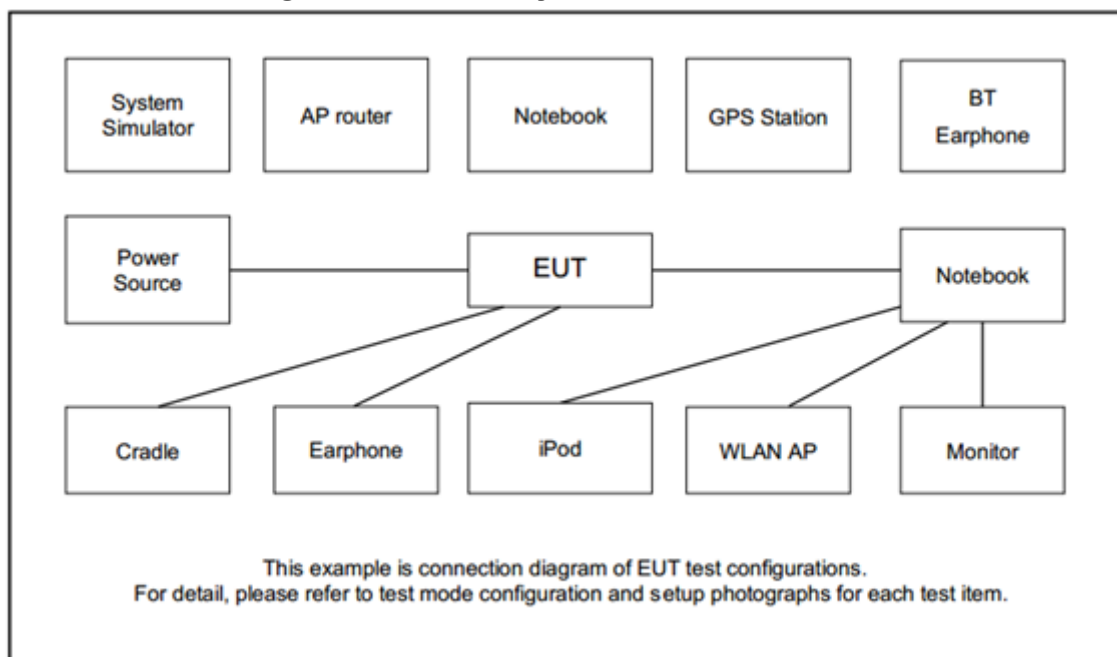

2.3. Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	5G Wireless Test Platform	Anritsu	MT8000A	N/A	N/A	Unshielded,1.8m
2.	System Simulator	Anritsu	MT8820C	N/A	N/A	Unshielded,1.8m
3.	System Simulator	Anritsu	MT8821C	N/A	N/A	Unshielded,1.8m
4.	GPS Station	Pendulum	GSG-54	N/A	N/A	Unshielded,1.8m
5.	Adapter	FRECOM	F24L3-120200SPAU	N/A	N/A	N/A
6.	Fixture	COMPAL	ZM16	N/A	N/A	N/A

2.4. EUT Operation Test Setup

The EUT is in LTE or 5G NR idle mode during the test. The EUT is synchronized with the BCCH, and has been continuous receiving mode by setting paging reorganization of the system simulator.

And the following programs installed in the EUT are programmed during the test:

1. Execute "GPS" to make the EUT receive continuous signals from GPS station.

3. Test Result

3.1. Test of AC Conducted Emission Measurement

3.1.1. Limits of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

<Class B>

Frequency of emission (MHz)	Conducted limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.1.2. Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.1.3. Test Procedure

1. The EUT is placed 0.4 meter away from the conducting wall of the shielding room, and is kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN shall be used.
6. Both Line and Neutral shall be tested in order to find out the maximum conducted emission.
7. The frequency range from 150 kHz to 30 MHz is scanned.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (If Bandwidth = 9 kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.1.4. Test Setup

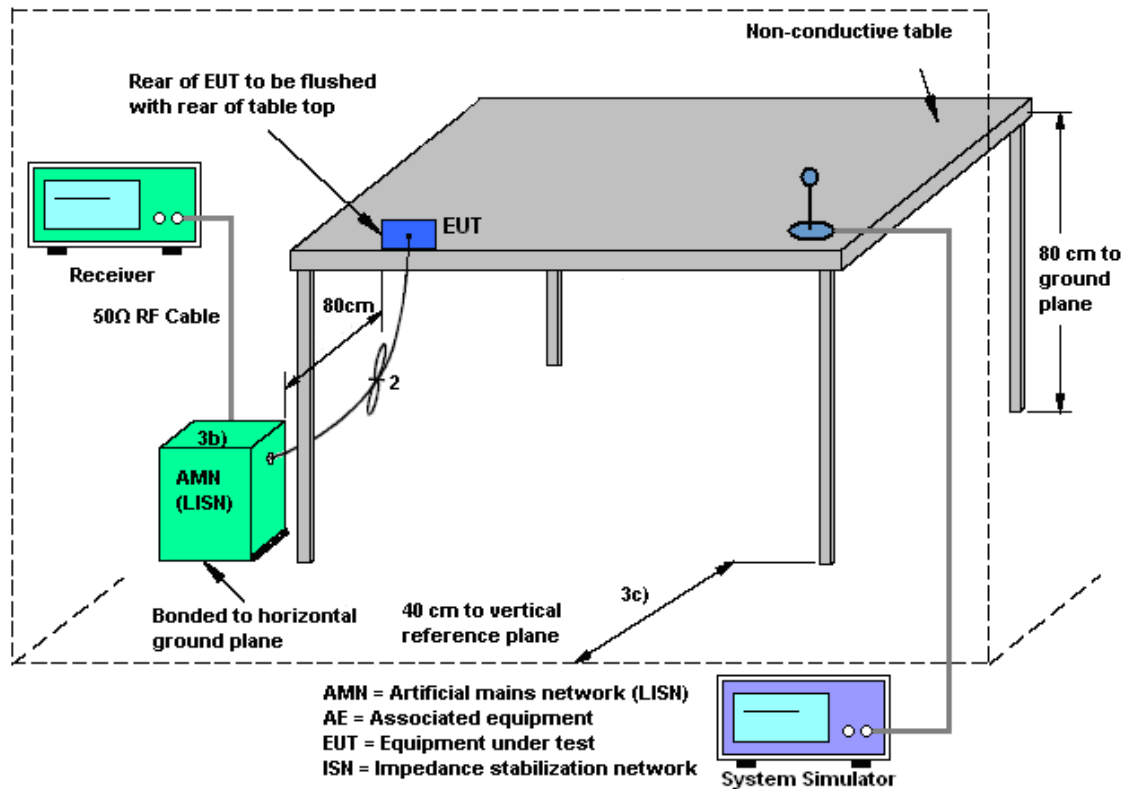

3.1.5. Test Result of AC Conducted Emission

Please refer to Appendix A.

3.2. Test of Radiated Emission Measurement

3.2.1. Limit of Radiated Emission

The emissions from an unintentional radiator shall not exceed the field strength levels specified in the following table:

<Class B>

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.2.2. Measuring Instruments


Please refer to the measuring equipment list in this test report.

3.2.3. Test Procedures


1. The EUT is placed on a turntable with 0.8 meter above ground.
2. The EUT is set 3 meters from the interference receiving antenna, which is mounted on the top of a variable height antenna tower.
3. The table is rotated 360 degrees to determine the position of the highest radiation.
4. The antenna is a Bi-Log antenna and its height is adjusted between one to four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT is arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode (RBW=120 kHz/VBW=300 kHz for frequency below 1 GHz; RBW=1 MHz VBW=3 MHz (Peak), RBW=1 MHz/VBW=10 Hz (Average) for frequency above 1 GHz).
7. If the emission level of the EUT in peak mode is 3 dB lower than the limit specified, peak values of EUT will be reported. Otherwise, the emission will be repeated by using the quasi-peak method and reported.

3.2.4. Test Setup of Radiated Emission

For Radiated Emissions from 30 MHz to 1 GHz

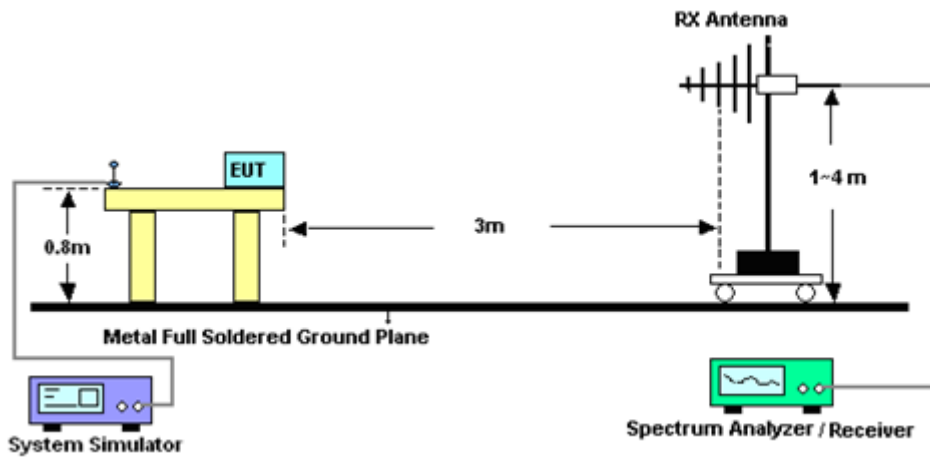

For Radiated Emissions above 1GHz

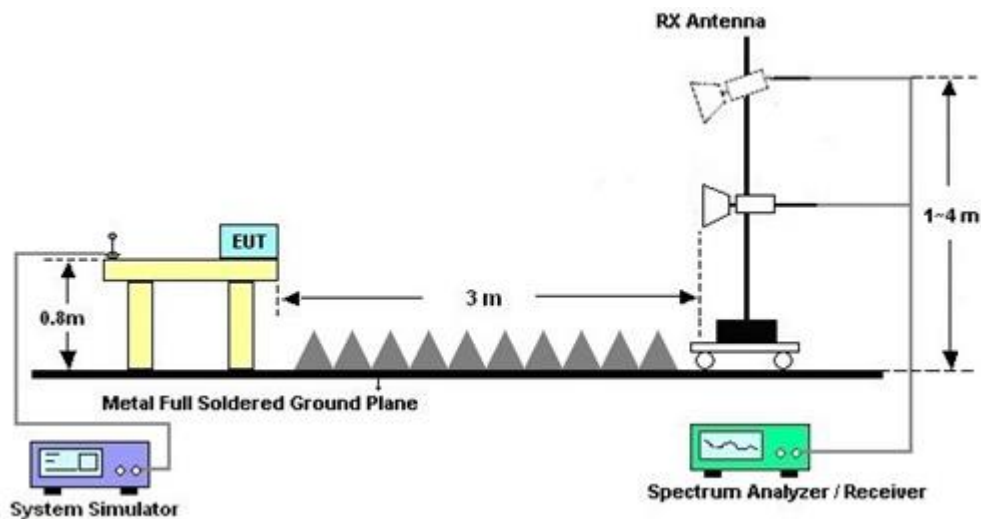

3.2.5. Test Result of Radiated Emission

Please refer to Appendix B.



4. List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	Apr. 20, 2024	N/A	Conduction (CO05-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102388	9kHz~3.6GHz	Dec. 06, 2023	Apr. 20, 2024	Dec. 05, 2024	Conduction (CO05-HY)
Hygrometer	Testo	608-H1	34913912	N/A	Oct. 26, 2023	Apr. 20, 2024	Oct. 25, 2024	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100081	9kHz~30MHz	Nov. 22, 2023	Apr. 20, 2024	Nov. 21, 2024	Conduction (CO05-HY)
Software	Rohde & Schwarz	EMC32	N/A	N/A	N/A	Apr. 20, 2024	N/A	Conduction (CO05-HY)
Pulse Limiter	SCHWARZBECK	VTSD 9561-F N	00691	N/A	Jul. 28, 2023	Apr. 20, 2024	Jul. 27, 2024	Conduction (CO05-HY)
LISN Cable	MVE	RG-400	260260	N/A	Dec. 28, 2023	Apr. 20, 2024	Dec. 27, 2024	Conduction (CO05-HY)
Amplifier	SONOMA	310N	186713	9kHz~1GHz	Apr. 16, 2024	Apr. 21, 2024~ Apr. 22, 2024	Apr. 15, 2025	Radiation (03CH06-HY)
Bilog Antenna	Schaffner	CBL 6111C & N-6-06	2725 & AT-N0601	30MHz~1GHz	Nov. 03, 2023	Apr. 21, 2024~ Apr. 22, 2024	Nov. 02, 2024	Radiation (03CH06-HY)
EMI Test Receiver	Rohde & Schwarz	ESU26	100472	20Hz~26.5GHz	Feb. 01, 2024	Apr. 21, 2024~ Apr. 22, 2024	Jan. 31, 2025	Radiation (03CH06-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-02037	1GHz~18GHz	Dec. 28, 2023	Apr. 21, 2024~ Apr. 22, 2024	Dec. 27, 2024	Radiation (03CH06-HY)
Preamplifier	Jet-Power	JPA00101800-30-10P	1601180001	1GHz~18GHz	Jul. 16, 2023	Apr. 21, 2024~ Apr. 22, 2024	Jul. 15, 2024	Radiation (03CH06-HY)
RF Cable	HUBER + SUHNER	SF102_2000mm SF102_3000mm SF102_7000mm	532421/2 532422/2 532299/2	30MHz to 40GHz	Jul. 03, 2023	Apr. 21, 2024~ Apr. 22, 2024	Jul. 02, 2024	Radiation (03CH06-HY)
RF Cable	HUBER + SUHNER	104 SF102_2000mm SF102_3000mm SF102_7000mm	802433/4 532421/2 532422/2 532299/2	30Mhz to 18Ghz	Jul. 03, 2023	Apr. 21, 2024~ Apr. 22, 2024	Jul. 02, 2024	Radiation (03CH06-HY)
Hygrometer	TECPEL	DTM-303B	TP210018	N/A	Oct. 24, 2023	Apr. 21, 2024~ Apr. 22, 2024	Oct. 23, 2024	Radiation (03CH06-HY)
Controller	INN-CO	EM1000	060782	Control Turn table & Ant Mast	N/A	Apr. 21, 2024~ Apr. 22, 2024	N/A	Radiation (03CH06-HY)
Antenna Mast	MF	MF-7802	MF780208212	1m~4m	N/A	Apr. 21, 2024~ Apr. 22, 2024	N/A	Radiation (03CH06-HY)
Turn Table	INN-CO	DS2000	420/650/00	0-360 degree	N/A	Apr. 21, 2024~ Apr. 22, 2024	N/A	Radiation (03CH06-HY)
Software	Audix	E3 6.2009-8-24(k5)	N/A	N/A	N/A	Apr. 21, 2024~ Apr. 22, 2024	N/A	Radiation (03CH06-HY)

5. Measurement Uncertainty

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.5 dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	6.3 dB
---	--------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 6000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.7 dB
---	--------

Uncertainty of Radiated Emission Measurement (6000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.6 dB
---	--------




Appendix A. AC Conducted Emission Test Results

Test Engineer :	Calvin Wang	Temperature :	23~26℃
		Relative Humidity :	45~55%

EUT Information

Report NO : 432920-02
Test Mode : Mode 3
Test Voltage : 120Vac/60Hz
Phase : Line

Full Spectrum

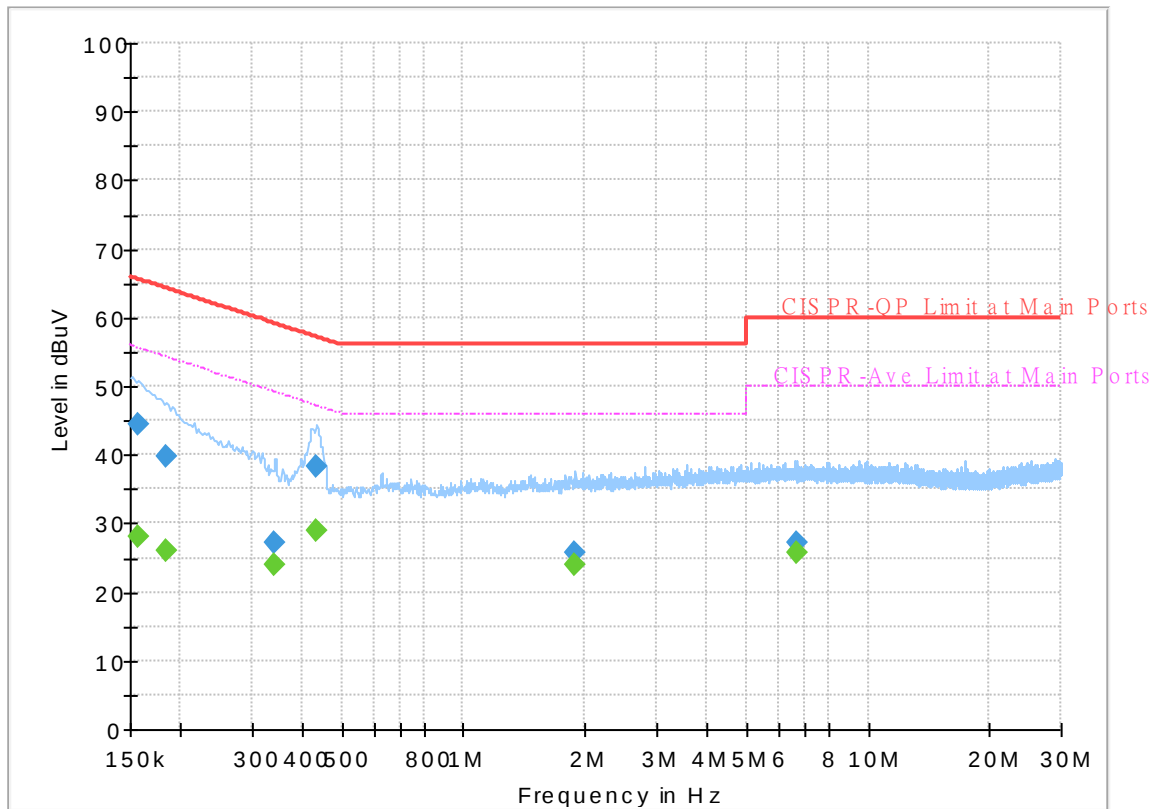


Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.156750	---	28.04	55.63	27.59	L1	OFF	19.8
0.156750	44.49	---	65.63	21.14	L1	OFF	19.8
0.183750	---	26.06	54.31	28.25	L1	OFF	19.8
0.183750	39.75	---	64.31	24.56	L1	OFF	19.8
0.341250	---	24.10	49.17	25.07	L1	OFF	19.8
0.341250	27.31	---	59.17	31.86	L1	OFF	19.8
0.433500	---	28.82	47.19	18.37	L1	OFF	19.8
0.433500	38.27	---	57.19	18.92	L1	OFF	19.8
1.889250	---	23.97	46.00	22.03	L1	OFF	19.9
1.889250	25.87	---	56.00	30.13	L1	OFF	19.9
6.672750	---	25.64	50.00	24.36	L1	OFF	20.0
6.672750	27.08	---	60.00	32.92	L1	OFF	20.0

EUT Information

Report NO : 432920-02
Test Mode : Mode 3
Test Voltage : 120Vac/60Hz
Phase : Neutral

Full Spectrum

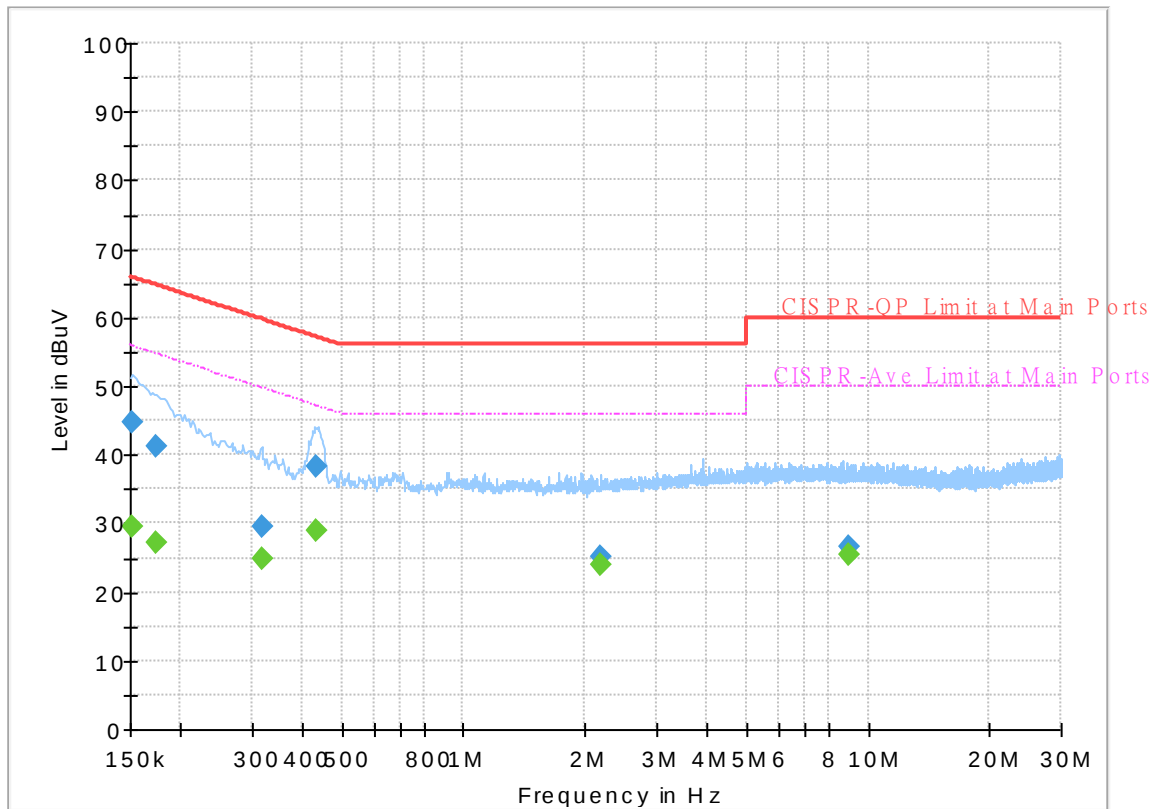


Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.152250	---	29.55	55.88	26.33	N	OFF	19.8
0.152250	44.79	---	65.88	21.09	N	OFF	19.8
0.174750	---	27.11	54.73	27.62	N	OFF	19.8
0.174750	41.35	---	64.73	23.38	N	OFF	19.8
0.316500	---	24.78	49.80	25.02	N	OFF	19.8
0.316500	29.55	---	59.80	30.25	N	OFF	19.8
0.433500	---	29.00	47.19	18.19	N	OFF	19.8
0.433500	38.41	---	57.19	18.78	N	OFF	19.8
2.181750	---	23.87	46.00	22.13	N	OFF	19.9
2.181750	25.26	---	56.00	30.74	N	OFF	19.9
8.961000	---	25.42	50.00	24.58	N	OFF	20.1
8.961000	26.69	---	60.00	33.31	N	OFF	20.1




Appendix B. Radiated Emission Test Result

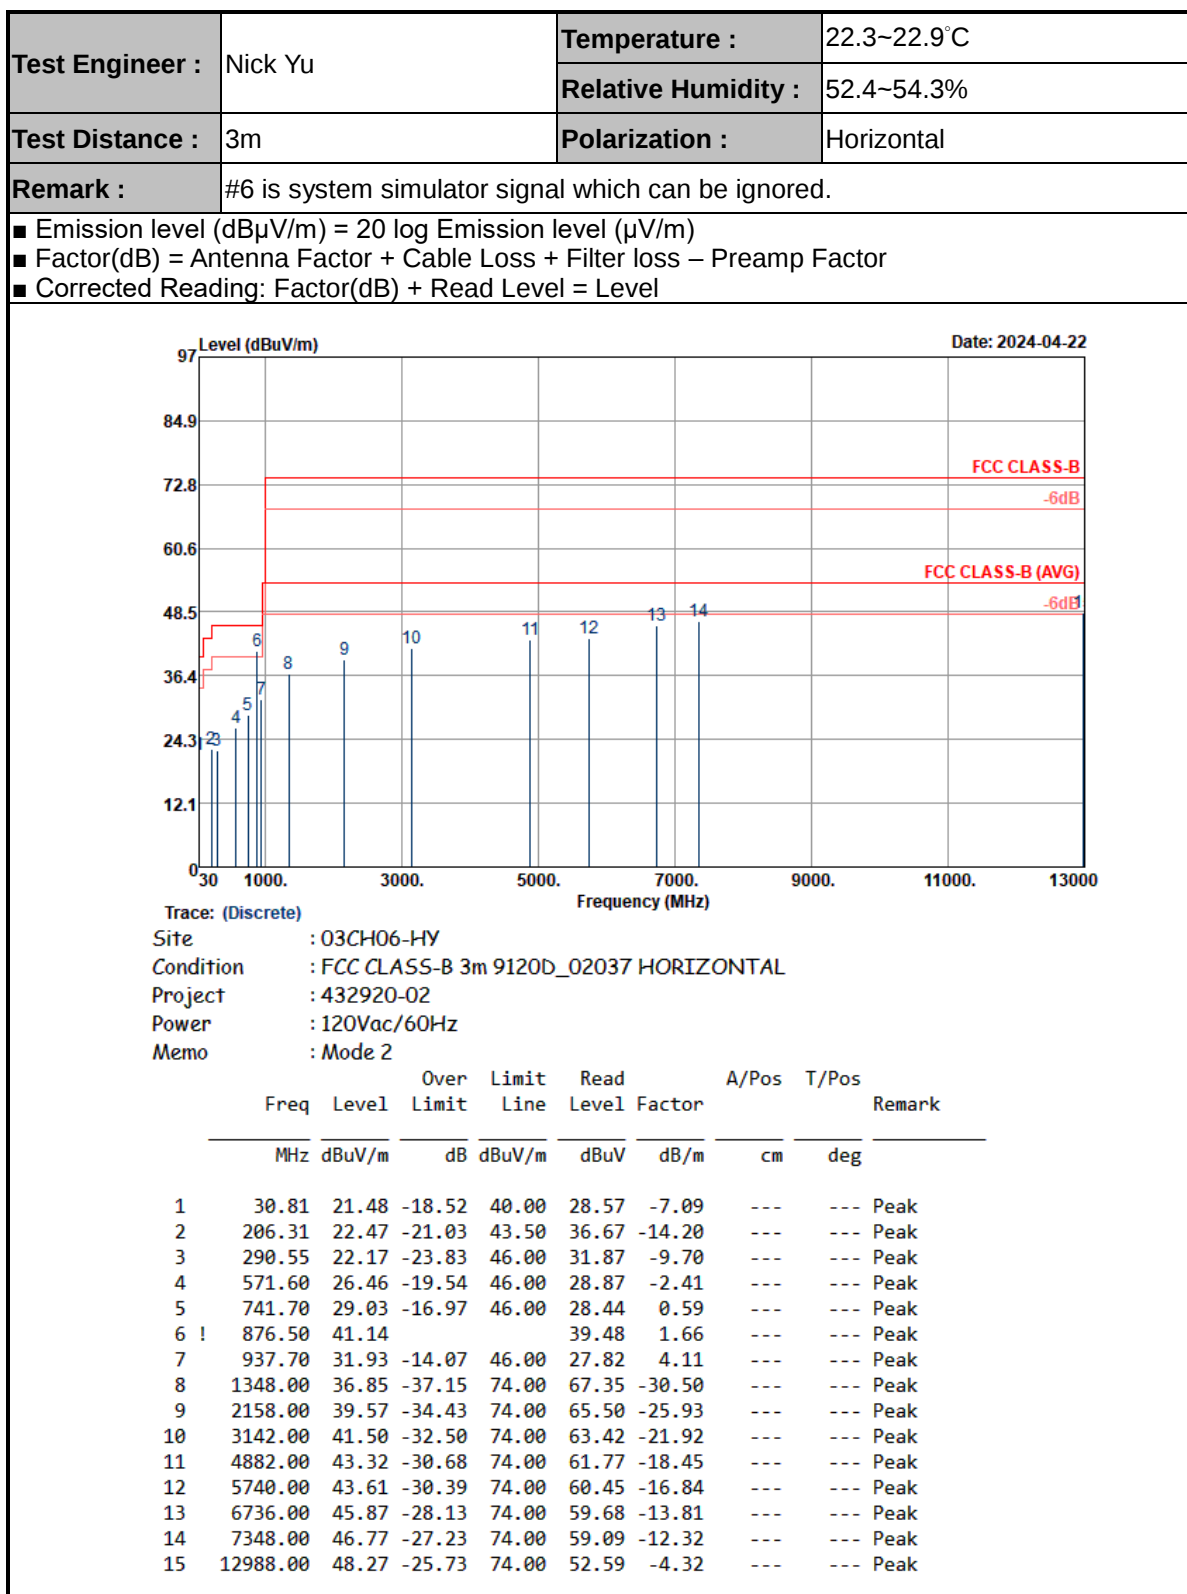



Test Engineer :	Nick Yu	Temperature :	22.3~22.9°C
		Relative Humidity :	52.4~54.3%
Test Distance :	3m	Polarization :	Vertical
Remark :	#6 is system simulator signal which can be ignored.		

- Emission level (dBμV/m) = 20 log Emission level (μV/m)
- Factor(dB) = Antenna Factor + Cable Loss + Filter loss – Preamp Factor
- Corrected Reading: Factor(dB) + Read Level = Level

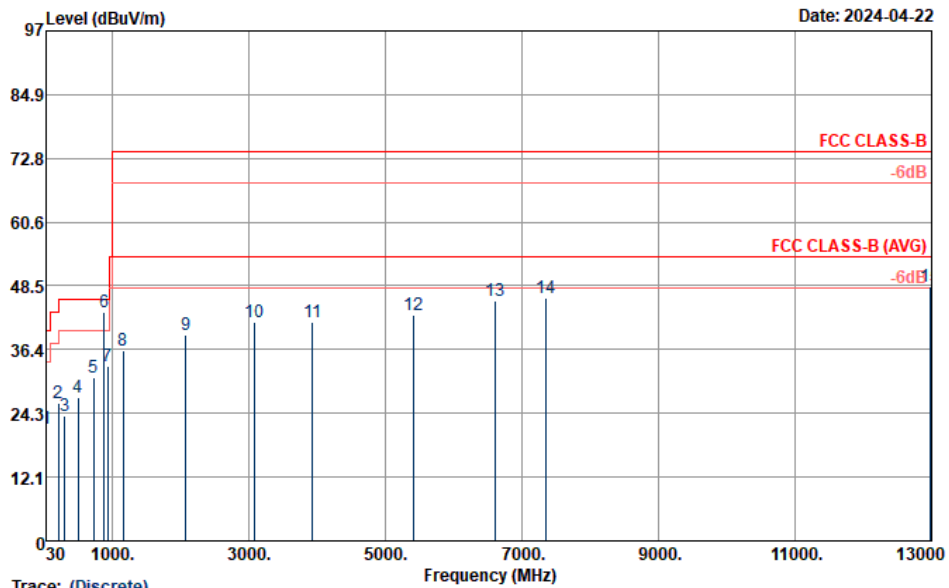

Trace: (Discrete)

Site : 03CH06-HY
Condition : FCC CLASS-B 3m 9120D_02037 VERTICAL
Project : 432920-02
Power : 120Vac/60Hz
Memo : Mode 2

	Freq	Level	Over	Limit	Read		A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	cm	deg	
1	30.54	21.26	-18.74	40.00	28.25	-6.99	---	---	Peak
2	206.31	26.30	-17.20	43.50	40.50	-14.20	---	---	Peak
3	300.00	23.68	-22.32	46.00	33.26	-9.58	---	---	Peak
4	496.00	27.40	-18.60	46.00	31.90	-4.50	---	---	Peak
5	729.10	31.20	-14.80	46.00	31.34	-0.14	---	---	Peak
6 !	876.50	43.61			41.95	1.66	---	---	Peak
7	936.30	33.12	-12.88	46.00	28.93	4.19	---	---	Peak
8	1162.00	36.33	-37.67	74.00	67.27	-30.94	---	---	Peak
9	2074.00	39.19	-34.81	74.00	65.30	-26.11	---	---	Peak
10	3076.00	41.57	-32.43	74.00	63.66	-22.09	---	---	Peak
11	3928.00	41.51	-32.49	74.00	62.07	-20.56	---	---	Peak
12	5404.00	42.96	-31.04	74.00	60.88	-17.92	---	---	Peak
13	6616.00	45.61	-28.39	74.00	59.73	-14.12	---	---	Peak
14	7348.00	46.09	-27.91	74.00	58.41	-12.32	---	---	Peak
15	12988.00	48.37	-25.63	74.00	52.69	-4.32	---	---	Peak