



FCC SAR Test Report

FCC ID: 2BH7FTBE6500U

Project No. : 2502G010
Equipment : 1) BE6500 Tri-Band Wi-Fi 7 Wireless USB Adapter
2) BE3600 Dual-Band Wi-Fi 7 Wireless USB Adapter
Brand Name : tp-link
Test Model : 1) Archer TBE6500U
Series Model : 2) Archer TBE3600U
Date of Receipt : Feb. 24, 2025
Date of Test : Feb. 27, 2025 ~ Apr. 07, 2025
Issued Date : May 06, 2025
Report Version : R04
Test Sample : Engineering Sample No.: DG20250224181
Standard(s) : Please refer to page 2.
Applicant : TP-Link Systems Inc.
Address : 10 Mauchly, Irvine, CA 92618
Manufacturer : TP-Link Systems Inc.
Address : 10 Mauchly, Irvine, CA 92618

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc. (Dongguan)

Prepared by : Justin Huang
Justin Huang

Approved by : Herbert Liu
Herbert Liu

No.3, Jinshagang 1st Road, Dalang, Dongguan, Guangdong People's Republic of China.
Tel: +86-769-8318-3000 Web: www.newbtl.com Service mail: btl_qa@newbtl.com

Standard(s)	<p>: IEEE Std 1528™-2013 IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques</p> <p>IEC TR 63170-2018 Measurement procedure for the evaluation of power density related to human exposure to radio frequency fields from wireless communication devices operating between 6 GHz and 100 GHz</p> <p>IEC/IEEE 63195-1-2022 Assessment of power density of human exposure to radio frequency fields from wireless devices in close proximity to the head and body (frequency range of 6 GHz to 300 GHz) – Part 1: Measurement procedure</p> <p>KDB447498 D04 Interim General RF Exposure Guidance v01</p> <p>KDB865664 D01 SAR measurement 100 MHz to 6 GHz v01r04</p>
Test Method	<p>: KDB447498 D02 SAR Procedures for Dongle Xmtr v02</p> <p>KDB865664 D02 SAR Reporting v01r02</p> <p>KDB248227 D01 802.11 Wi-Fi SAR v02r02</p>

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** assumes no responsibility for the data provided by the customer, any statements, inferences or generalizations drawn by the customer or others from the reports issued by **BTL**.

The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the U.S. Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

BTL's laboratory quality assurance procedures are in compliance with the ISO/IEC 17025: 2017 requirements, and accredited by the conformity assessment authorities listed in this test report.

BTL is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

Table of Contents	Page
REPORT ISSUED HISTORY	6
1 . GENERAL INFORMATION	7
1.1 STATEMENT OF COMPLIANCE	7
1.2 LABORATORY ENVIRONMENT	7
1.3 GENERAL DESCRIPTION OF EUT	8
1.4 MAIN TEST INSTRUMENTS	10
2 . RF EMISSIONS MEASUREMENT	11
2.1 TEST FACILITY	11
2.2 MEASUREMENT UNCERTAINTY	11
3 . SAR MEASUREMENTS SYSTEM CONFIGURATION	15
3.1 SAR MEASUREMENT SET-UP	15
3.1.1 TEST SETUP LAYOUT	15
3.2 DASY5 E-FIELD PROBE SYSTEM	16
3.2.1 PROBE SPECIFICATION	16
3.2.2 E-FIELD PROBE CALIBRATION	17
3.2.3 OTHER TEST EQUIPMENT	18
3.2.4 SCANNING PROCEDURE	19
3.2.5 SPATIAL PEAK SAR EVALUATION	20
3.2.6 DATA STORAGE AND EVALUATION	21
3.2.7 DATA EVALUATION BY SEMCAD	22
4 . SYSTEM VERIFICATION PROCEDURE	24
4.1 TISSUE VERIFICATION	24
4.2 SYSTEM CHECK	25
4.2.1 POWER DENSITY SYSTEM CHECK	26
4.3 SYSTEM CHECK PROCEDURE	27
5 . SAR MEASUREMENT VARIABILITY AND UNCERTAINTY	28
5.1 SAR MEASUREMENT VARIABILITY	28
6 . OPERATIONAL CONDITIONS DURING TEST	29
6.1 SAR TEST CONFIGURATION	29
6.1.1 WIFI TEST CONFIGURATION	29
6.2 TEST POSITION	32
7 . TEST RESULT	33
7.1 CONDUCTED POWER RESULTS	33
7.1.1 CONDUCTED POWER MEASUREMENTS OF WIFI	33
7.2 SAR TEST RESULTS	47
7.2.1 SAR MEASUREMENT RESULT	48



Table of Contents

Page

8 MULTIPLE TRANSMITTER EVALUATION	52
APPENDIX	53
1. TEST LAYOUT	53
Appendix A. SAR Plots of System Verification	
Appendix B. SAR Plots of SAR Measurement	
Appendix C. Calibration Certificate	
Appendix D. Photographs of the Test Set-Up	

REPORT ISSUED HISTORY

Report No.	Version	Description	Issued Date	Note
BTL-FCC SAR-1-2502G010	R00	Original Report.	Apr. 16, 2025	Invalid
BTL-FCC SAR-1-2502G010	R01	Modified the comments of TCB.	Apr. 18, 2025	Invalid
BTL-FCC SAR-1-2502G010	R02	Modified the comments of TCB.	Apr. 18, 2025	Invalid
BTL-FCC SAR-1-2502G010	R03	Modified the comments of TCB.	Apr. 29, 2025	Invalid
BTL-FCC SAR-1-2502G010	R04	Modified the comments of TCB.	May 06, 2025	Valid

1. GENERAL INFORMATION

1.1 STATEMENT OF COMPLIANCE

Mode	Highest Reported Body-worn SAR-1g(W/kg)
2.4G WLAN MIMO	1.288
5.2G WLAN MIMO	1.523
5.3G WLAN MIMO	1.336
5.6G WLAN MIMO	1.395
5.8G WLAN MIMO	1.434
WIFI 6E MIMO	0.824

Frequency Band	Highest Averaged Power Density (mW/cm ²)
WIFI 6E MIMO	0.587

Highest Simultaneous SAR: N/A

Remark: This product only supports transmission on a single frequency band of 2.4G/5G/6G and does not support simultaneous transmission.

Note:

- 1) The device is in compliance with Specific Absorption Rate (SAR) for general population uncontrolled exposure limits according to the FCC rule §2.1093, the ANSI/IEEE C95.1, the NCRP Report Number 86 for uncontrolled environment, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528.
- 2) According to standard 47 CFR part 2.1093, the MPE limits specified in part 1.1310 apply to portable devices that transmit at frequencies above 6 GHz. The localized power density limit for general population exposure is 1.0 mW/cm² (equal to 10 W/m²) for frequency up to 100 GHz.

1.2 LABORATORY ENVIRONMENT

Temperature	Min. = 20°C, Max. = 24°C
Relative humidity	Min. = 30%, Max. = 70%
Ground system resistance	< 0.5Ω
Ambient noise is checked and found very low and in compliance with requirement of standards.	
Reflection of surrounding objects is minimized and in compliance with requirement of standards.	

1.3 GENERAL DESCRIPTION OF EUT

Equipment	1) BE6500 Tri-Band Wi-Fi 7 Wireless USB Adapter 2) BE3600 Dual-Band Wi-Fi 7 Wireless USB Adapter							
Brand Name	tp-link							
Test Model	1) Archer TBE6500U							
Series Model	2) Archer TBE3600U							
Model Difference(s)	Archer TBE3600U has the same hardware as Archer TBE6500U, only 6G is turned off in software.							
Hardware Version	1.0							
Software Version	5002.24.117.4							
Modulation	WiFi(DSSS/OFDM/OFDMA)							
Operation Frequency Range(s)	Band		TX (MHz)			RX (MHz)		
	WIFI	2.4G	2400~2483.5					
		5G_UNII 1	5150~5250					
		5G_UNII 2a	5250~5350					
		5G_UNII 2c	5470~5725					
		5G_UNII 3	5725~5850					
		6E_UNII 5	5925~6425					
		6E_UNII 6	6425~6525					
		6E_UNII 7	6525~6875					
6E_UNII 8	6875~7125							
Test Channels (low-mid-high)	1-6-11 (2.4G WiFi 802.11b/g/n HT20/ax HE20/be EHT20)							
	3-6-9 (2.4G WiFi 802.11n HT40/ax HE40/be EHT40))							
	Band	WiFi 5.2G&5.3G	WiFi 5.6G	WiFi 5.8G	WiFi 6.2G	WiFi 6.5G	WiFi 6.7G	WiFi 7.0G
	802.11a 802.11n HT20 802.11ac VHT20 802.11ax HE20 802.11be EHT20	36-40-44 -48-52-56 -60-64	100-104-108 -112-116-132 -136-140-144	149-153 -157-161 -165	1-49 -93	97-105 -115	117-149 -181	185-209 -233
	802.11n HT40 802.11ac VHT40 802.11ax HE40 802.11be EHT40	38-46-54 -62	102-110-118- 126-134-142	151-159	3-43 -91	99-107	115-147 -179	187-227
	802.11ac VHT80 802.11ax HE80 802.11be EHT80	42-58	106-122-138	155	7-39 -87	103 -119	135-151 -167	183-199 -215
	802.11ac VHT160 802.11ax HE160 802.11be EHT160	50	/	114	15-47 -79	111	143-175	207

Antenna Information	Ant.	Brand	P/N	Type	Frequency Range (MHz)	Gain (dBi)
	ANT 1	tp-link	2052500895	Monopole	2400-2500	1.00
					5150-5350	3.00
					5470-5725	3.00
					5725-5850	3.00
					5925-6425	2.85
					6425-6525	2.85
					6525-6875	2.85
					6875-7125	2.85
	ANT 2	tp-link	2052500895	Monopole	2400-2500	0.88
					5150-5350	2.97
					5470-5725	2.97
					5725-5850	2.97
					5925-6425	3.00
					6425-6525	3.00
					6525-6875	3.00
					6875-7125	3.00

Note: The antenna gain is provided by the manufacturer.

1.4 MAIN TEST INSTRUMENTS

Item	Equipment	Manufacturer	Model	Serial No.	Cal. Date	Cal. Interval
1	Data Acquisition Electronics	Speag	DAE4	1390	Nov. 14, 2024	1 Year
2	Data Acquisition Electronics	Speag	DAE4	1717	Apr. 18, 2024	1 Year
3	E-field Probe	Speag	EX3DV4	7544	Apr. 03, 2024	1 Year
4	E-field Probe	Speag	EX3DV4	7693	Nov. 20, 2024	1 Year
5	E-field Probe	Speag	EUmmWV4	9503	Nov. 11, 2024	1 Year
6	System Validation Dipole	Speag	D2450V2	919	Apr. 22, 2024	3 Years
7	System Validation Dipole	Speag	D5GHzV2	1160	Apr. 25, 2024	3 Years
8	System Validation Dipole	Speag	D6.5GHzV2	1052	Nov. 13, 2024	3 Years
9	System Validation Source	Speag	5G Verification Source 10GHz	1041	May. 22, 2024	1 Years
10	ELI Phantom	Speag	ELI Phantom V5.0	1128	N/A	N/A
11	Twin Sam Phantom	Speag	SAM-Twim V8.0	2081	N/A	N/A
12	Power Amplifier	Talent Microwave	TLPA1G18G-40-3 3-HS	220330003	Jan. 20, 2024	1 Year
13	DC Source metter	Iteck	IT6154	0061041267682 01001	Jun. 29, 2024	1 Year
14	Vector Network Analyzer	Agilent	E5071C	MY46102965	Jan. 11, 2025	1 Year
15	Signal Generator	Keysight	N5173B	MY59101420	Jan. 11, 2025	1 Year
16	Smart Power Sensor	R&S	NRP18S	101333	Jun. 01, 2024	1 Year
17	Smart Power Sensor	R&S	NRP-Z21	102209	Jan. 12, 2025	1 Year
18	3.5mm Economy Calibration Kit	Agilent	85052D	MY43252246	Nov. 04, 2024	1 Year
19	Dielectric Assessment Kit	Speag	DAK-3.5	1226	Jan. 20, 2025	3 Years
20	Directional Coupler	Talent Microwave	TC-05180-20S	210628013	Jan. 11, 2025	1 Year
21	Liquid Thermometer	Nscing Es	YZ6021S	/	Nov. 24, 2024	1 Year

Note:

1. "N/A" denotes no model name, serial No. or calibration specified.

2.

1) Per KDB865664 D01 requirements for dipole calibration, the test laboratory has adopted three-year extended calibration interval. Each measured dipole is expected to evaluate with the following criteria at least on annual interval in Appendix C.

a) There is no physical damage on the dipole;

b) System check with specific dipole is within 10% of calibrated value;

c) The most recent return-loss result, measured at least annually, deviates by no more than 20% from the previous measurement;

d) The most recent measurement of the real or imaginary parts of the impedance, measured at least annually is within 5Ω from the previous measurement.

2) Network analyzer probe calibration against air, distilled water and a short block performed before measuring liquid parameters.

2. RF EMISSIONS MEASUREMENT

2.1 TEST FACILITY

The test facilities used to collect the test data in this report is SAR room at the location of Room 108-116, 309-310, Building 2, No.1, Yile Road, Songshan Lake Zone, Dongguan, Guangdong, People's Republic of China.

BTL's Registration Number for FCC: 747969

BTL's Designation Number for FCC: CN1377.

2.2 MEASUREMENT UNCERTAINTY

Uncertainty Budget for Frequency range of 300 MHz to 3 GHz

Symbol	Input quantity X_i (source of uncertainty)	Unc. Value	Prob. Dist.	Div.	ci (1g)	ci (10g)	Std.Unc. (1g) (±%)	Std.Unc. (10g) (±%)
Measurement system errors								
CF	Probe calibration(±%)	11.0	N	2	1	1	5.5	5.5
CF_{drift}	Probe calibration drift(±%)	1.7	R	$\sqrt{3}$	1	1	1.0	1.0
LIN	Probe linearity and detection limit(±%)	4.7	R	$\sqrt{3}$	1	1	2.7	2.7
BBS	Broadband signal(±%)	3.0	R	$\sqrt{3}$	1	1	1.7	1.7
ISO	Probe isotropy(±%)	7.6	R	$\sqrt{3}$	1	1	4.4	4.4
DAE	Other probe and data acquisition errors(±%)	0.7	N	1	1	1	0.7	0.7
AMB	RF ambient and noise(±%)	1.8	N	1	1	1	1.8	1.8
Δ_{xyz}	Probe positioning errors(±mm)	0.006	N	1	0.14	0.14	0.08	0.08
DAT	Data processing errors(±%)	1.2	N	1	1	1	1.2	1.2
Phantom and device (DUT or validation antenna) errors								
LIQ(σ)	Conductivity (meas.)(±%)	0.8	N	1	0.78	0.71	0.7	0.6
LIQ(T_c)	Conductivity (temp.)(±%)	4.16	R	$\sqrt{3}$	0.78	0.71	1.9	1.7
EPS	Phantom Permittivity(±%)	14	R	$\sqrt{3}$	0	0	0.0	0.0
DIS	Distance DUT - TSL(±%)	2	N	1	2	2	4.0	4.0
D_{xyz}	Device Positioning(±%)	1.3	N	1	1	1	1.3	1.3
H	Device Holder(±%)	2	N	1	1	1	2.0	2.0
MOD	DUT Modulationm(±%)	2.4	R	$\sqrt{3}$	1	1	1.4	1.4
TAS	Time-average SAR(±%)	1.7	R	$\sqrt{3}$	1	1	1.0	1.0
RF_{drift}	DUT drift(±%)	1.8	N	1	1	1	1.8	1.8
VAL	Val Antenna Unc.(±%)	0	N	1	1	1	0.0	0.0
P_{in}	Unc. Input Power(±%)	0	N	1	1	1	0.0	0.0
Corrections to the SAR result								
C(ϵ',σ)	Deviation to Target(±%)	1.9	N	1	1	0.84	1.9	1.6
C(R)	SAR scaling(±%)	0	R	$\sqrt{3}$	1	1	0.0	0.0
u(ΔSAR)	Combined uncertainty						10.1	10.0
	Coverage Factor for 95%						k=2	k=2
U	Expanded uncertainty					U =	20.1	20.0
a Other probability distributions and divisors may be used if they better represent available knowledge of the quantities concerned.								

Uncertainty Budget for Frequency range of 3 GHz to 6 GHz

Symbol	Input quantity X_i (source of uncertainty)	Unc. Value	Prob. Dist.	Div.	ci (1g)	ci (10g)	Std.Unc. (1g) (±%)	Std.Unc. (10g) (±%)
Measurement system errors								
CF	Probe calibration(±%)	13.1	N	2	1	1	6.6	6.6
CF_{drift}	Probe calibration drift(±%)	1.7	R	$\sqrt{3}$	1	1	1.0	1.0
LIN	Probe linearity and detection limit(±%)	4.7	R	$\sqrt{3}$	1	1	2.7	2.7
BBS	Broadband signal(±%)	2.6	R	$\sqrt{3}$	1	1	1.5	1.5
ISO	Probe isotropy(±%)	7.6	R	$\sqrt{3}$	1	1	4.4	4.4
DAE	Other probe and data acquisition errors(±%)	1.2	N	1	1	1	1.2	1.2
AMB	RF ambient and noise(±%)	1.8	N	1	1	1	1.8	1.8
Δ_{xyz}	Probe positioning errors(±mm)	0.005	N	1	0.29	0.29	0.15	0.15
DAT	Data processing errors(±%)	2.3	N	1	1	1	2.3	2.3
Phantom and device (DUT or validation antenna) errors								
LIQ(σ)	Conductivity (meas.)(±%)	0.7	N	1	0.78	0.71	0.6	0.5
LIQ(T_c)	Conductivity (temp.)(±%)	2.45	R	$\sqrt{3}$	0.78	0.71	1.1	1.0
EPS	Phantom Permittivity(±%)	14	R	$\sqrt{3}$	0.25	0.25	2.0	2.0
DIS	Distance DUT - TSL(±%)	2	N	1	2	2	4.0	4.0
D_{xyz}	Device Positioning(±%)	0.2	N	1	1	1	0.2	0.2
H	Device Holder(±%)	1.8	N	1	1	1	1.8	1.8
MOD	DUT Modulationm(±%)	2.4	R	$\sqrt{3}$	1	1	1.4	1.4
TAS	Time-average SAR(±%)	1.7	R	$\sqrt{3}$	1	1	1.0	1.0
RF_{drift}	DUT drift(±%)	1.5	N	1	1	1	1.5	1.5
VAL	Val Antenna Unc.(±%)	0	N	1	1	1	0.0	0.0
P_{in}	Unc. Input Power(±%)	0	N	1	1	1	0.0	0.0
Corrections to the SAR result								
C(ϵ', σ)	Deviation to Target(±%)	1.9	N	1	1	0.84	1.9	1.6
C(R)	SAR scaling(±%)	0	R	$\sqrt{3}$	1	1	0.0	0.0
u(ΔSAR)	Combined uncertainty						10.8	10.7
	Coverage Factor for 95%						k=2	k=2
U	Expanded uncertainty					U =	21.6	21.5
a Other probability distributions and divisors may be used if they better represent available knowledge of the quantities concerned.								

Uncertainty Budget for Frequency range of above 6 GHz

Symbol	Input quantity X_i (source of uncertainty)	Unc. Value	Prob. Dist.	Div.	ci (1g)	ci (10g)	Std.Unc. (1g) (±%)	Std.Unc. (10g) (±%)
Measurement system errors								
CF	Probe calibration(±%)	18.6	N	2	1	1	9.3	9.3
CF_{drift}	Probe calibration drift(±%)	1.7	N	1	1	1	1.0	1.0
LIN	Probe linearity and detection limit(±%)	4.7	R	1.732	1	1	2.7	2.7
BBS	Broadband signal(±%)	2.8	N	1	1	1	1.6	1.6
ISO	Probe isotropy(±%)	7.6	R	2	1	1	4.4	4.4
DAE	Other probe and data acquisition errors(±%)	2.4	N	1.732	1	1	1.4	1.4
AMB	RF ambient and noise(±%)	1.8	N	1	1	1	1.8	1.8
Δ_{xyz}	Probe positioning errors(±mm)	0.01	N	1	0.33	0.33	0.00	0.00
DAT	Data processing errors(±%)	3.5	N	1	1	1	3.5	3.5
Phantom and device (DUT or validation antenna) errors								
LIQ(σ)	Conductivity (meas.) DAK (±%)	2.0	N	1	0.78	0.71	1.6	1.4
LIQ(T_c)	Conductivity (temp.)(±%)	2.43	R	1.732	0.78	0.71	1.1	1.0
EPS	Phantom Permittivity(±%)	14	R	1.732	0.5	0.5	4.0	4.0
DIS	Distance DUT - TSL(±%)	2	N	1	2	2	4.0	4.0
D_{xyz}	Device Positioning(±%)	1.5	N	1	1	1	1.5	1.5
H	Device Holder(±%)	2	N	1	1	1	2.0	2.0
MOD	DUT Modulationm(±%)	2.4	R	1.732	1	1	1.4	1.4
TAS	Time-average SAR(±%)	1.7	R	1.732	1	1	1.0	1.0
RF_{drift}	DUT drift(±%)	2	N	1	1	1	2.0	2.0
VAL	Val Antenna Unc.(±%)	0	N	1	1	1	0.0	0.0
P_{in}	Unc. Input Power(±%)	0	N	1	1	1	0.0	0.0
Corrections to the SAR result								
C(ϵ', σ)	Deviation to Target(±%)	1.9	N	1	1	0.84	1.9	1.6
C(R)	SAR scaling(±%)	0	R	$\sqrt{3}$	1	1	0.0	0.0
u(ΔSAR)	Combined uncertainty						13.7	13.6
	Coverage Factor for 95%						k=2	k=2
U	Expanded uncertainty					U =	27.3	27.2
a Other probability distributions and divisors may be used if they better represent available knowledge of the quantities concerned.								

Uncertainty Budget for PD

Error Description	Uncertainty Value (±dB)	Probability	Divisor	(Ci)	(Ci) 10g	Standard Uncertainty (±dB)	Standard Uncertainty (10g) (±%)
Uncertainty terms dependent on the measurement system							
Probe Calibration	0.98	N	1	1	1	0.98	1.0
Probe correction	0.00	R	1.732	1	0.7	0.00	0.0
Frequency response (BW ≤ 1 GHz)	0.20	R	1.732	1	0.7	0.12	0.1
Sensor cross coupling	0.00	R	1.732	1	1	0.00	0.0
Isotropy	0.50	R	1.732	1	1	0.29	0.3
Linearity	0.20	R	1.732	1	1	0.12	0.1
Probe scattering	0.00	R	1.732	1	1	0.00	0.0
Probe positioning offset	0.30	R	1.732	1	1	0.17	0.2
Probe positioning repeatability	0.04	R	1.732	1	1	0.02	0.0
Sensor mechanical offset	0.00	R	1.732	1	1	0.00	0.0
Probe spatial resolution	0.00	R	1.732	1	1	0.00	0.0
Field impedance dependence	0.00	R	1.732	1	1	0.00	0.0
Amplitude and phase drift	0.00	R	1.732	1	1	0.00	0.0
Amplitude and phase noise	0.04	R	1.732	1	1	0.02	0.0
Measurement area truncation	0.00	R	1.732	1	1	0.00	0.0
Data acquisition	0.03	N	1	1	1	0.03	0.0
Sampling	0.00	R	1.732	1	1	0.00	0.0
Field reconstruction	2.00	R	1.732	1	1	1.15	1.2
Forward transformation	0.00	R	1.732	1	1	0.00	0.0
Power density scaling	0.00	R	1.732	1	1	0.00	0.0
Spatial averaging	0.10	R	1.732	1	1	0.06	0.1
System detection limit	0.04	R	1.732	1	1	0.02	0.0
Uncertainty terms dependent on the DUT and environmental factors							
Probe coupling with DUT	0.00	R	1.732	1	1	0.0	0.0
Modulation response	0.40	R	1.732	1	0.84	0.2	0.2
Integration time	0.00	R	1.732	1	0.71	0.0	0.0
Response time	0.00	R	1.732	1	0.71	0.0	0.0
Device holder influence	0.10	R	1.732	1	0.71	0.1	0.0
DUT alignment	0.00	R	1.732	1	0.71	0.0	0.0
RF ambient conditions	0.04	R	1.732	1	0.26	0.0	0.0
Ambient reflections	0.04	R	1.732	1	0.26	0.0	0.0
Immunity / secondary reception	0.00	R	1.732	1	0.26	0.0	0.0
Drift of the DUT	0.00	R	1.732	1	0.26	0.0	0.0
Combined Std. Uncertainty						1.59	1.6%
Coverage Factor for 95 %						k=2	k=2
Expanded STD Uncertainty (95%)						3.18	3.1%


3. SAR MEASUREMENTS SYSTEM CONFIGURATION

3.1 SAR MEASUREMENT SET-UP

The DASY5 system for performing compliance tests consists of the following items:

1. A standard high precision 6-axis robot (Stäubli RX family) with controller and software. An arm extension for accommodating the data acquisition electronics (DAE).
2. A dosimetric probe, i.e. an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
3. A data acquisition electronic (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
4. A unit to operate the optical surface detector which is connected to the EOC.
5. The Electro-Optical Coupler (EOC) performs the conversion from the optical into a digital electric signal of the DAE. The EOC is connected to the DASY5 measurement server.
6. The DASY5 measurement server, which performs all real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operation. A computer operating Windows.
7. DASY5 software and SEMCAD data evaluation software.
8. Remote control with teach panel and additional circuitry for robot safety such as warning lamps, etc.
9. The generic twin phantom enabling the testing of left-hand and right-hand usage.
10. The device holder for handheld mobile phones.
11. Tissue simulating liquid mixed according to the given recipes.
12. System validation dipoles allowing to validate the proper functioning of the system.

3.1.1 TEST SETUP LAYOUT

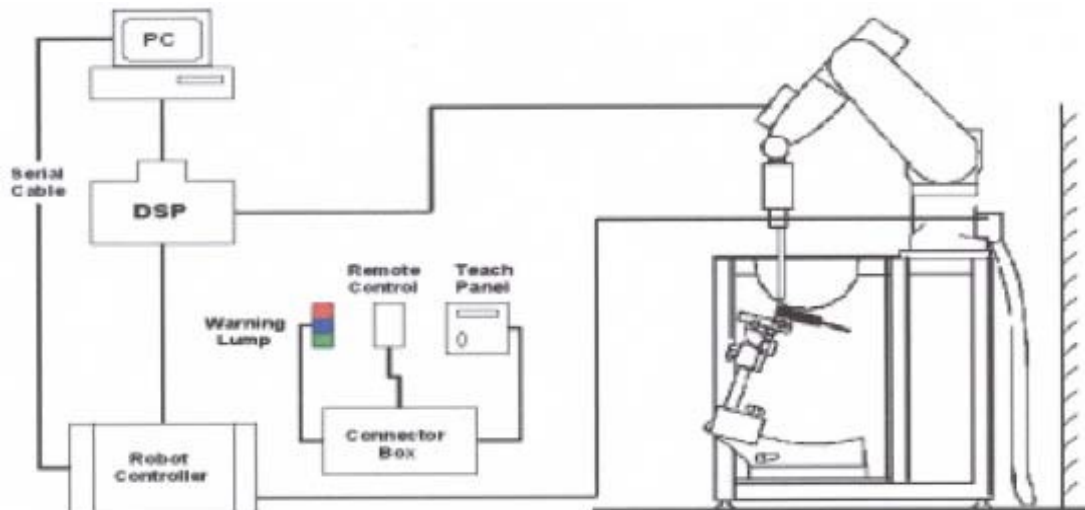

3.2 DASY5 E-FIELD PROBE SYSTEM

The SAR measurements were conducted with the dosimetric probe EX3DV4 (manufactured by SPEAG), designed in the classical triangular configuration and optimized for dosimetric valuation.

3.2.1 PROBE SPECIFICATION

EX3DV4

Construction	Symmetrical design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Calibration	ISO/IEC 17025 calibration service available
Frequency	10 MHz to 6 GHz Linearity: ± 0.2 dB (30 MHz to 6 GHz)
Directivity	± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in tissue material (rotation normal to probe axis)
Dynamic Range	10 μ W/g to > 100 mW/g Linearity: ± 0.2 dB
Dimensions	Overall length: 330 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Distance from probe tip to dipole centers: 1.0 mm



E-field Probe

3.2.2 E-FIELD PROBE CALIBRATION

Each probe is calibrated according to an dosimetric assessment procedure with accuracy better than $\pm 10\%$. The spherical isotropy was evaluated and found to be better than $\pm 0.25\text{dB}$. The sensitivity parameters (NormX, NormY, NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe are tested.

The free space E-field from amplified probe outputs is determined in a test chamber. This is performed in a TEM cell for frequencies below 1 GHz, and in a wave guide above 1 GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity and at the proper orientation with the field. The probe is then rotated 360 degrees.

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated brain tissue. The measured free space E-field in the medium correlates to temperature rise in a dielectric medium. For temperature correlation calibration a RF transparent thermistor-based temperature probe is used in conjunction with the E-field probe.

$$\text{SAR} = C \frac{\Delta T}{\Delta t}$$

Where: Δt = Exposure time (30 seconds),

C = Heat capacity of tissue (brain or muscle),

ΔT = Temperature increase due to RF exposure.

Or
$$\text{SAR} = \frac{|E|^2 \sigma}{\rho}$$

Where: σ = Simulated tissue conductivity,

ρ = Tissue density (kg/m³).


3.2.3 OTHER TEST EQUIPMENT


3.2.3.1 Device Holder for Transmitters

Construction: Simple but effective and easy-to-use extension for Mounting Device that facilitates the testing of larger devices (e.g., laptops, cameras, etc.) It is lightweight and fits easily on the upper part of the Mounting Device in place of the phone positioner. The extension is fully compatible with the Twin SAM, ELI and SAM v6.0 Phantoms.

Material: POM, Acrylic glass, Foam

3.2.3.2 Phantom

Model	Twin SAM	
Construction	The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528 and IEC 62209-1. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by teaching three points with the robot.	
Shell Thickness	2 ± 0.2 mm	
Filling Volume	Approx. 25 liters	
Dimensions	Length: 1000mm; Width: 500mm Height: adjustable feet	
Available	Special	

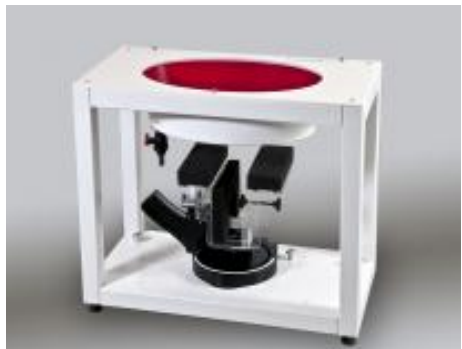Model	ELI Phantom	
Construction	Phantom for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI is fully compatible with the IEC 62209-2 standard and all known tissue simulating liquids. ELI has been optimized regarding its performance and can be integrated into our standard phantom tables. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points. The phantom is compatible with all SPEAG dosimetric probes and dipoles.	
Shell Thickness	2 ± 0.1 mm	
Filling Volume	Approx. 30 liters	
Dimensions	Length: 600 mm; Width: 190mm Height: adjustable feet	
Available	Special	

3.2.4 SCANNING PROCEDURE

The DASY5 installation includes predefined files with recommended procedures for measurements and validation. They are read-only document files and destined as fully defined but unmeasured masks. All test positions (head or body-worn) are tested with the same configuration of test steps differing only in the grid definition for the different test positions.

The “reference” and “drift” measurements are located at the beginning and end of the batch process. They measure the field drift at one single point in the liquid over the complete procedure. The indicated drift is mainly the variation of the DUT’s output power and should vary max. $\pm 5\%$.

The “surface check” measurement tests the optical surface detection system of the DASY5 system by repeatedly detecting the surface with the optical and mechanical surface detector and comparing the results. The output gives the detecting heights of both systems, the difference between the two systems and the standard deviation of the detection repeatability. Air bubbles or refraction in the liquid due to separation of the sugar-water mixture gives poor repeatability (above $\pm 0.1\text{mm}$). To prevent wrong results tests are only executed when the liquid is free of air bubbles. The difference between the optical surface detection and the actual surface depends on the probe and is specified with each probe. (It does not depend on the surface reflectivity or the probe angle to the surface within $\pm 30^\circ$.)

- Area Scan

The “area scan” measures the SAR above the DUT or verification dipole on a parallel plane to the surface. It is used to locate the approximate location of the peak SAR with 2D spline interpolation. The robot performs a stepped movement along one grid axis while the local electrical field strength is measured by the probe. The probe is touching the surface of the SAM during acquisition of measurement values. The standard scan uses large grid spacing for faster measurement. Standard grid spacing for head measurements is 15 mm in x- and y- dimension ($\leq 2\text{GHz}$), 12 mm in x- and y- dimension (2-4 GHz) and 10mm in x- and y- dimension (4-6GHz). If a finer resolution is needed, the grid spacing can be reduced. Grid spacing and orientation have no influence on the SAR result. For special applications where the standard scan method does not find the peak SAR within the grid, e.g. mobile phones with flip cover, the grid can be adapted in orientation.

- Zoom Scan

A “zoom scan” measures the field in a volume around the 2D peak SAR value acquired in the previous “coarse” scan. This is a fine grid with maximum scan spatial resolution: $\Delta x_{\text{zoom}}, \Delta y_{\text{zoom}} \leq 2\text{GHz} \rightarrow \leq 8\text{mm}$, 2-4GHz $\rightarrow \leq 5\text{ mm}$ and 4-6 GHz $\rightarrow \leq 4\text{mm}$; $\Delta z_{\text{zoom}} \leq 3\text{GHz} \rightarrow \leq 5\text{ mm}$, 3-4 GHz $\rightarrow \leq 4\text{mm}$ and 4-6GHz $\rightarrow \leq 2\text{mm}$ where the robot additionally moves the probe along the z-axis away from the bottom of the Phantom. DASY is also able to perform repeated zoom scans if more than 1 peak is found during area scan. In this document, the evaluated peak 1g and 10g averaged SAR values are shown in the 2D-graphics in Appendix B. Test results relevant for the specified standard (see chapter 1.4.) are shown in table form in chapter 7.2.

A Z-axis scan measures the total SAR value at the x-and y-position of the maximum SAR value found during the cube scan. The probe is moved away in z-direction from the bottom of the SAM phantom in 2 mm steps. This measurement shows the continuity of the liquid and can - depending in the field strength – also show the liquid depth.

The following table summarizes the area scan and zoom scan resolutions per FCC KDB 865664D01:

Frequency	Maximun Area Scan resolution ($\Delta x_{\text{area}}, \Delta y_{\text{area}}$)	Maximun Zoom Scan spatial resolution ($\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$)	Maximun Zoom Scan spatial resolution			Minimum zoom scan volume (x,y,z)
			Uniform Grid	Graded Grad		
			$\Delta z_{\text{Zoom}}(n)$	$\Delta z_{\text{Zoom}}(1)^*$	$\Delta z_{\text{Zoom}}(n>1)^*$	
$\leq 2\text{GHz}$	$\leq 15\text{mm}$	$\leq 8\text{mm}$	$\leq 5\text{mm}$	$\leq 4\text{mm}$	$\leq 1.5^* \Delta z_{\text{Zoom}}(n-1)$	$\geq 30\text{mm}$
2-3GHz	$\leq 12\text{mm}$	$\leq 5\text{mm}$	$\leq 5\text{mm}$	$\leq 4\text{mm}$	$\leq 1.5^* \Delta z_{\text{Zoom}}(n-1)$	$\geq 30\text{mm}$
3-4GHz	$\leq 12\text{mm}$	$\leq 5\text{mm}$	$\leq 4\text{mm}$	$\leq 3\text{mm}$	$\leq 1.5^* \Delta z_{\text{Zoom}}(n-1)$	$\geq 28\text{mm}$
4-5GHz	$\leq 10\text{mm}$	$\leq 4\text{mm}$	$\leq 3\text{mm}$	$\leq 2.5\text{mm}$	$\leq 1.5^* \Delta z_{\text{Zoom}}(n-1)$	$\geq 25\text{mm}$
5-6GHz	$\leq 10\text{mm}$	$\leq 4\text{mm}$	$\leq 2\text{mm}$	$\leq 2\text{mm}$	$\leq 1.5^* \Delta z_{\text{Zoom}}(n-1)$	$\geq 22\text{mm}$

3.2.5 SPATIAL PEAK SAR EVALUATION

The spatial peak SAR - value for 1 and 10 g is evaluated after the Cube measurements have been done. The basis of the evaluation are the SAR values measured at the points of the fine cube grid consisting of 5 x 5 x 7 points (with 8mm horizontal resolution) or 7 x 7 x 7 points (with 5mm horizontal resolution) or 8 x 8 x 7 points (with 4mm horizontal resolution). The algorithm that finds the maximal averaged volume is separated into three different stages.

- The data between the dipole center of the probe and the surface of the phantom are extrapolated. This data cannot be measured since the center of the dipole is 2.7 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is about 1 mm (see probe calibration sheet). The extrapolated data from a cube measurement can be visualized by selecting "Graph Evaluated".
- The maximum interpolated value is searched with a straight-forward algorithm. Around this maximum the SAR - values averaged over the spatial volumes (1g or 10 g) are computed using the 3d-spline interpolation algorithm. If the volume cannot be evaluated (i.e., if a part of the grid was cut off by the boundary of the measurement area) the evaluation will be started on the corners of the bottom plane of the cube.
- All neighboring volumes are evaluated until no neighboring volume with a higher average value is found.

Extrapolation

The extrapolation is based on a least square algorithm [W. Gander, Computer mathematic, p.168-180]. Through the points in the first 3 cm along the z-axis, polynomials of order four are calculated. These polynomials are then used to evaluate the points between the surface and the probe tip. The points, calculated from the surface, have a distance of 1 mm from each other.

Interpolation

The interpolation of the points is done with a 3d-Spline. The 3d-Spline is composed of three one-dimensional splines with the "Not a knot"-condition [W. Gander, Computer mathematic, p.141-150] (x, y and z -direction) [Numerical Recipes in C, Second Edition, p.123ff].

Volume Averaging

At First the size of the cube is calculated. Then the volume is integrated with the trapezoidal algorithm. 8000 points (20x20x20) are interpolated to calculate the average.

Advanced Extrapolation

DASY5 uses the advanced extrapolation option which is able to compensate boundary effects on E-field probes.

3.2.6 DATA STORAGE AND EVALUATION

3.2.6.1 Data Storage

The DASY5 software stores the acquired data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files with the extension "DAE". The software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of incorrect parameter settings. For example, if a measurement has been performed with a wrong crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be re-evaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type ([V/m], [A/m], [°C], [mW/g], [mW/cm²], [dBrel], etc.). Some of these units are not available in certain situations or show meaningless results, e.g., a SAR output in a lossless media will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

3.2.7 DATA EVALUATION BY SEMCAD

The SEMCAD software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters:	Sensitivity	Normi, ai0, ai1,ai2
	Conversion factor	ConvFi
	Diode compression point	Dcpj
Device parameters:	Frequency	f
	Crest factor	cf
Media parameters:	Conductivity	
	Density	

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY5 components. In the direct measuring mode of the multimeter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics.

If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot cf / dcp_i$$

With	V_i = compensated signal of channel i	(i = x,y,z)
	U_i = input signal of channel i	(i = x, y,z)
	cf=crest factor of exciting field	(DASY parameter)
	dcpj=diode compression point	(DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

$$\text{E-field probes: } E_i = (V_i / \text{Norm}_i \cdot \text{ConvF})^{1/2}$$

$$\text{H-field probes: } H_i = (V_i)^{1/2} \cdot (a_{i0} + a_{i1}f + a_{i2}f^2) / f$$

With V_i = compensated signal of channel i (i = x, y, z)

Norm_i = sensor sensitivity of channel i (i = x, y, z)
[mV/(V/m)²] for E-field Probes

ConvF = sensitivity enhancement in solution

a_{ij} = sensor sensitivity factors for H-field probes

f = carrier frequency [GHz]

E_i = electric field strength of channel i in V/m

H_i = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{\text{tot}} = (E_x^2 + E_y^2 + E_z^2)^{1/2}$$

The primary field data are used to calculate the derived field units.

$$\text{SAR} = (E_{\text{tot}})^2 \cdot \sigma / (\rho \cdot 1000)$$

With SAR = local specific absorption rate in mW/g

E_{tot} = total field strength in V/m
= conductivity in [mho/m] or [Siemens/m]
= equivalent tissue density in g/cm³

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid. The power flow density is calculated assuming the excitation field to be a free space field.

$$P_{\text{pwe}} = E_{\text{tot}}^2 / 3770 \text{ or } P_{\text{pwe}} = H_{\text{tot}}^2 \cdot 37.7$$

With P_{pwe} = equivalent power density of a plane wave in mW/cm²

E_{tot} = total field strength in V/m

H_{tot} = total magnetic field strength in A/m

4. SYSTEM VERIFICATION PROCEDURE

4.1 TISSUE VERIFICATION

The simulating liquids should be checked at the beginning of a series of SAR measurements to determine if the dielectric parameters are within the tolerances of the specified target values. The measured conductivity and relative permittivity should be within $\pm 5\%$ of the target values.

The following materials are used for producing the tissue-equivalent materials.

Tissue Type	Bactericide	DGBE	HEC	NaCl	Sucrose	Triton X-100	Water	Diethylene Glycol Mono-hexylether
Head 2450	-	45.0	-	0.1	-	-	54.9	-
Head 5G	-	-	-	-	-	17.2	65.5	17.3

Salt: 99+% Pure Sodium Chloride; Sugar: 98+% Pure Sucrose; Water: De-ionized, 16M + resistivity

HEC: Hydroxyethyl Cellulose; DGBE: 99+% Di(ethylene glycol) butyl ether, [2-(2-butoxyethoxy)ethanol]

Triton X-100 (ultra pure): Polyethylene glycol mono [4-(1,1,3,3-tetramethylbutyl)phenyl]ether

Tissue Verification									
Tissue Type	Frequency (MHz)	Liquid Temp. (°C)	Conductivity (σ)	Permittivity (ϵ_r)	Targeted Conductivity (σ)	Targeted Permittivity (ϵ_r)	Deviation Conductivity (σ) (%)	Deviation Permittivity (ϵ_r) (%)	Date
Head	2450	22.1	1.848	39.751	1.80	39.2	2.67	1.41	Mar. 29, 2025
Head	5250	22.3	4.589	35.392	4.71	36.0	-2.57	-1.55	Mar. 31, 2025
Head	5600	22.3	5.051	34.576	5.07	35.5	-0.37	-2.60	Mar. 31, 2025
Head	5750	22.3	5.168	34.173	5.22	35.4	-1.00	-3.33	Mar. 31, 2025
Head	6500	22.6	5.870	33.600	6.07	34.5	-3.29	-2.61	Apr. 02, 2025

Note:

- 1) The dielectric parameters of the tissue-equivalent liquid should be measured under similar ambient conditions and within 2 °C of the conditions expected during the SAR evaluation to satisfy protocol requirements.
- 2) KDB 865664 was ensured to be applied for probe calibration frequencies greater than or equal to 50MHz of the EUT frequencies.
- 3) The above measured tissue parameters were used in the DASY software to perform interpolation via the DASY software to determine actual dielectric parameters at the test frequencies. The SAR test plots may slightly differ from the table above since the DASY rounds to three significant digits.

4.2 SYSTEM CHECK

The system check is performed for verifying the accuracy of the complete measurement system and performance of the software. The system check is performed with tissue equivalent material according to IEEE 1528 (described above). The following table shows system check results for all frequency bands and tissue liquids used during the tests.

System Check	Date	Frequency (MHz)	Targeted SAR 1g (W/kg)	Measured SAR 1g (W/kg)	normalized SAR 1g (W/kg)	Deviation (%)	Dipole S/N
Head	Mar. 29, 2025	2450	52.10	13.00	52.00	-0.19	919
Head	Mar. 31, 2025	5250	78.00	7.67	76.70	-1.67	1160
Head	Mar. 31, 2025	5600	80.60	7.94	79.40	-1.49	1160
Head	Mar. 31, 2025	5750	76.50	7.58	75.80	-0.92	1160
Head	Apr. 02, 2025	6500	290.00	29.50	295.00	1.72	1052

4.2.1 POWER DENSITY SYSTEM CHECK

System check provides a fast and reliable method to routinely verify that the measurement system is operational with no system component failures, including probe defects, drifts or deviation from target performance requirements. A system check also verifies the repeatability of the measurement system before compliance testing.

The measurement of a verification source is started from 5G probe installed and the phantom taught. The verification source is placed on the 5G phantom. Due to the internal distance from the horn to the outer surface of the verification source, the measurement distance set in the software should be offset by -4.45 mm; e.g, for measurement of the verification source at 10 mm, the measurement distance set in the software should be 5.55mm (10mm -4.45 mm).

The system check is a complete measurement using simple well-defined reference sources. According to the description of "Relative system check" in Section A.3 of Annex A to the IEC IEEE 63195-1 test standard, the uncertainty tolerance range of the system performance check can be converted to a percentage by referring to the uncertainty K=1 of the source calibration certificate. Here are some examples of A.5 and A.6 formulas! The uncertainty tolerance range of this calibration certificate is $\pm 15.88\%$. According to the measured $psPD_{4cm^2}$ result, within the tolerance of the calibration certificate standard uncertainty, the system verification is successful. The instruments and procedures used for system inspection shall ensure that the system is ready to perform compliance tests.

Before starting DUT PD testing in any configuration, the acceptance criteria shall be met. The relative system check is successful if a) or b) is met:

- a) All absolute differences between the measured values, $psPD_{meas}$ and target values $psPD_{tgt}$, with $psPD$ values averaged over 1 cm^2 and/or 4 cm^2 , shall be within the combined uncertainty u_c of the measurement system and the source antenna, according to Formula (A.4) if the uncertainty is expressed in decibel, or according to Formula (A.5) if the uncertainty is expressed in percent, along with Formula (A.6).

$$\Delta psPD_{tgt} = \left| 10 \times \lg \left(\frac{psPD_{meas}}{psPD_{tgt}} \right) \right| < \min(2 \times |u_c|, 2\text{ dB}) \quad (\text{A.4})$$

or

$$\Delta psPD_{tgt} = \left| \frac{psPD_{meas} - psPD_{tgt}}{psPD_{tgt}} \right| < \min(2 \times |u_c|, 58\%) \quad (\text{A.5})$$

$$u_c = \sqrt{u_{\text{antenna_cal}}^2 + u_{\text{power}}^2 + u_{\text{meas}}^2} \quad (\text{A.6})$$

where


- $psPD_{tgt}$ is the target value, derived from repeated measurement of source antenna, normalized to 0 dBm TRP;
- $u_{\text{antenna_cal}}$ is the standard uncertainty ($k = 1$) of the $psPD$ of the antenna model;
- u_{power} is the standard uncertainty ($k = 1$) of the measured TRP (see Clause A.2);
- u_{meas} is the standard uncertainty ($k = 1$) of the $psPD$ measurement (probe calibration, electronics, and positioning).

System Check	Date	Frequency (GHz)	Distance (mm)	Targeted 4cm^2 (W/m ²)	Measured 4cm^2 (W/m ²)	Deviation For 4cm^2 (%)	Dipole S/N
Power Density	Apr. 07, 2025	10	10	56.9	54.7	-3.87	1041

4.3 SYSTEM CHECK PROCEDURE

The system check is performed by using a system check dipole which is positioned parallel to the planar part of the SAM phantom at the reference point. The distance of the dipole to the SAM phantom is determined by a plexiglass spacer. The dipole is connected to the signal source consisting of signal generator and amplifier via a directional coupler, N-connector cable and adaption to SMA. It is fed with a power of 250mW (below 3GHz) or 100mW (3-6GHz). To adjust this power a power meter is used.

The power sensor is connected to the cable before the system check to measure the power at this point and do adjustments at the signal generator. At the outputs of the directional coupler both return loss as well as forward power are controlled during the system check to make sure that emitted power at the dipole is kept constant. This can also be checked by the power drift measurement after the test. System check results have to be equal or near the values determined during dipole calibration (target SAR in table above) with the relevant liquids and test system ($\pm 10\%$).

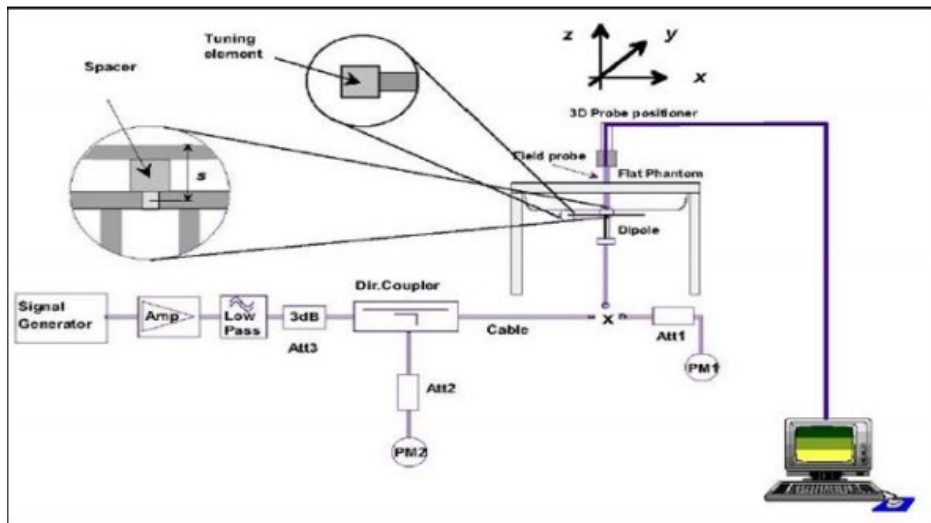

5. SAR MEASUREMENT VARIABILITY AND UNCERTAINTY

5.1 SAR MEASUREMENT VARIABILITY

Per KDB865664 D01 SAR measurement 100 MHz to 6 GHz, SAR measurement variability must be assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. The additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg ($\sim 10\%$ from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

The same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.

The detailed repeated measurement results are shown in Section 7.2.


6. OPERATIONAL CONDITIONS DURING TEST

6.1 SAR TEST CONFIGURATION

6.1.1 WIFI TEST CONFIGURATION

For WLAN SAR testing, WLAN engineering testing software installed on the DUT can provide continuous transmitting RF signal.

For WiFi SAR testing, a communication link is set up with the test mode software for WiFi mode test. During the test, at the each test frequency channel, the EUT is operated at the RF continuous emission mode. The test procedures in KDB 248227 D01 are applied.

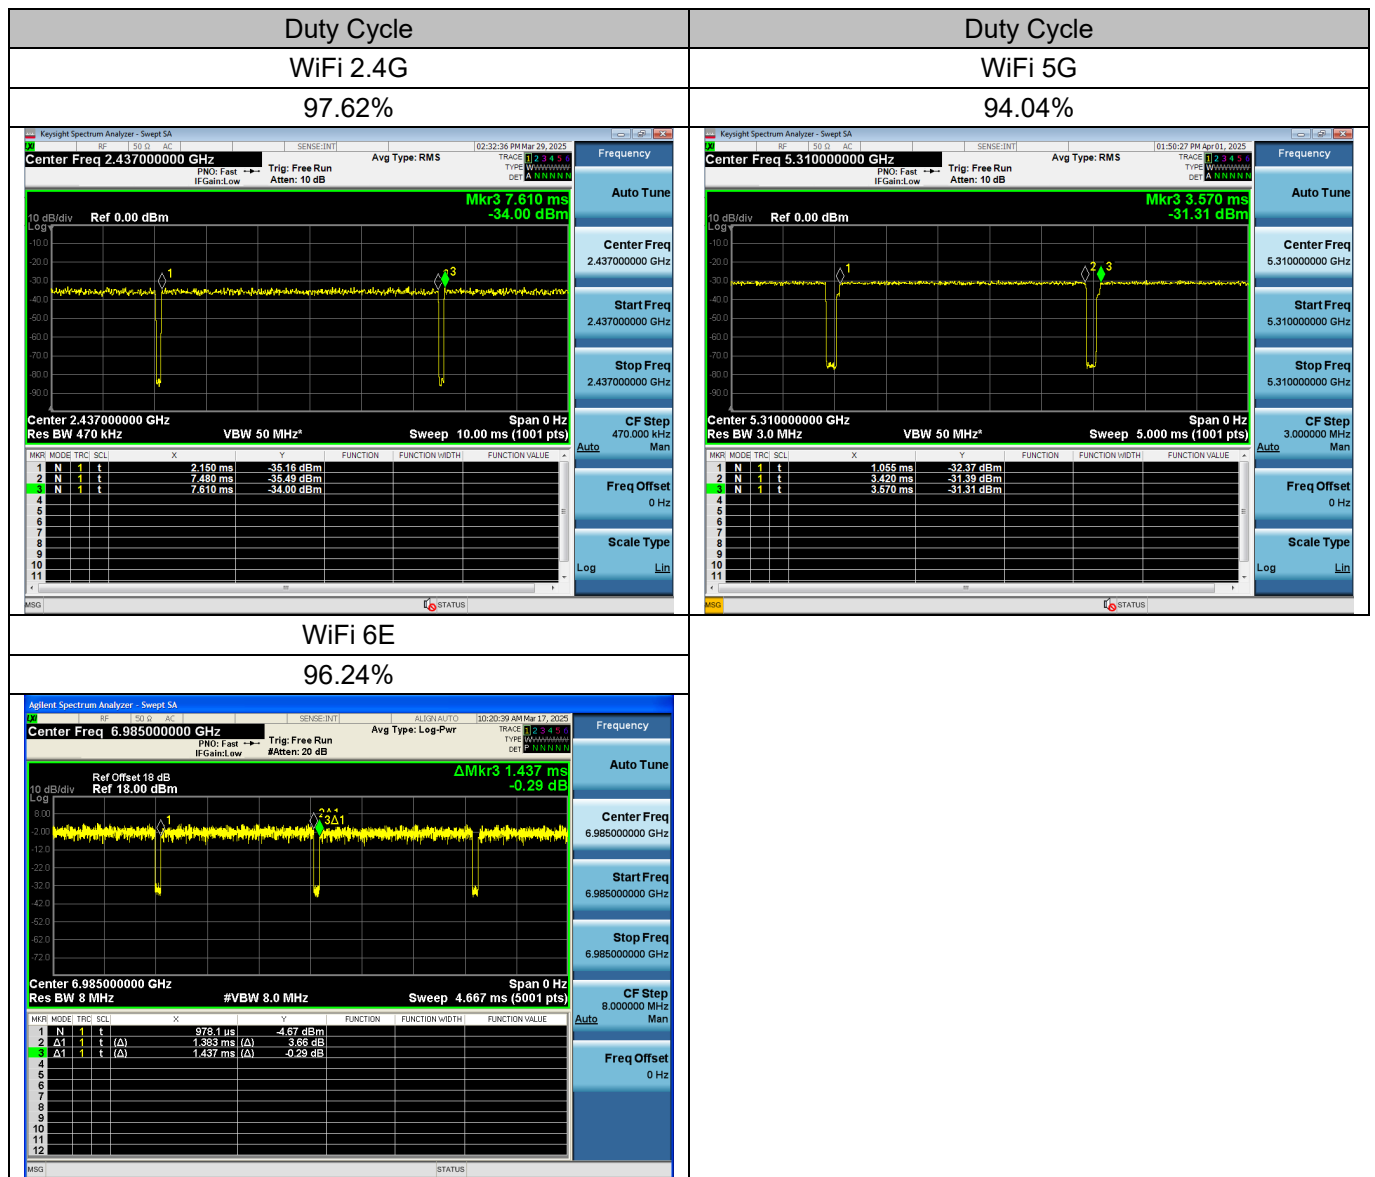

6.1.1.1 2.4G SAR Test Requirements

802.11b DSSS SAR Test Requirements

SAR is measured for 2.4 GHz 802.11b DSSS using either a fixed test position or, when applicable, the initial test position procedure. SAR test reduction is determined according to the following:

- 1) When the reported SAR of the highest measured maximum output power channel for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- 2) When the reported SAR is > 0.8 W/kg, SAR is required for that exposure configuration using the next highest measured output power channel. When any reported SAR is > 1.2 W/kg, SAR is required for the third channel; i.e., all channels require testing.

2.4 GHz 802.11g/n OFDM SAR Test Exclusion Requirements

When SAR measurement is required for 2.4 GHz 802.11g/n OFDM configurations, the measurement and test reduction procedures for OFDM are applied. SAR is not required for the following 2.4 GHz OFDM conditions.

- 1) When KDB Publication 447498 SAR test exclusion applies to the OFDM configuration.
- 2) When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

SAR Test Requirements for OFDM configurations

When SAR measurement is required for 2.4 GHz 802.11g/n OFDM configurations, each stand alone. And frequency aggregated band is considered separately for SAR test reduction. In applying the initial test configuration and subsequent test configuration procedures, the 802.11 transmission configuration with the highest specified maximum output power and the channel within a test configuration with the highest measured maximum output power should be clearly distinguished to apply the procedures.

6.1.1.2 5G SAR Test Requirements

✧ U-NII-1 and U-NII-2A Band

For devices that operate in both U-NII-1 and U-NII-2A bands, when the same maximum output power is specified for both bands, begin SAR measurement in U-NII-2A band by applying the OFDM SAR requirements. If the highest reported SAR for a test configuration is ≤ 1.2 W/kg, SAR is not required for U-NII-1 band for that configuration (802.11 mode and exposure condition); otherwise, both bands are tested independently for SAR. When different maximum output power is specified for the bands, begin SAR measurement in the band with higher specified maximum output power. The highest reported SAR for the tested configuration is adjusted by the ratio of lower to higher specified maximum output power for the two bands. When the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for the band with lower maximum output power in that test configuration; otherwise, both bands are tested independently for SAR.

✧ U-NII-2C, U-NII-3 Bands

The frequency range covered by these bands is 380 MHz (5.47 – 5.85 GHz), which requires a minimum of at least two SAR probe calibration frequency points to support SAR measurements. When Terminal Doppler Weather Radar (TDWR) restriction applies, the channels at 5.60 – 5.65 GHz in U-NII-2C band must be disabled with acceptable mechanisms and documented in the equipment certification.

Unless band gap channels are permanently disabled, they must be considered for SAR testing. To maintain SAR measurement accuracy and to facilitate test reduction, the channels in U-NII-2C band above 5.65 GHz may be grouped with the 5.8 GHz channels in U-NII-3 or §15.247 band to enable two SAR probe calibration frequency points to cover the bands, including the band gap channels.¹¹ When band gap channels are supported and the bands are not aggregated for SAR testing, band gap channels must be considered independently in each band according to the normally required OFDM SAR measurement and probe calibration frequency points requirements.

6.1.1.3 OFDM transmission mode and SAR test channel selection

For the 2.4GHz and 5GHz bands, when the same maximum output power was specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration with the largest channel bandwidth, lowest order modulation and lowest data rate. When the maximum output power of a channel is the same for equivalent OFDM configurations (for example 802.11a, 802.11n and 802.11ac, or 802.11g and 802.11n, with the same channel bandwidth, modulation, and data rate, etc.), the lower order 802.11 mode (i.e. 802.11a then 802.11n and 802.11ac, or 802.11g then 802.11n) is used for SAR measurement. When the maximum output power are the same for multiple test channels, either according to the default or additional power measurement requirements, SAR is measured using the channel closest to the middle of the frequency band or aggregated band. When there are multiple channels with the same maximum output power, SAR is measured using the higher number channel.

6.1.1.4 Initial test configuration procedure

For OFDM, in both 2.4G and 5GHz bands, an initial test configuration is determined for each frequency band and aggregated band, according to the transmission mode with the highest maximum output power specified for SAR measurements. When the same maximum output power is specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration(s) with the largest channel bandwidth, lowest order modulation, and lowest data rate. If the average RF output powers of the highest identical transmission modes are within 0.25 dB of each other, mid channel of the transmission mode with highest average RF output powers is the initial test channel. Otherwise, the channel of the transmission mode with the highest average RF output power will be the initial test configuration.

When the reported SAR is ≤ 0.8 W/kg, no additional measurements on other test channels are required. Otherwise, SAR is evaluated using the subsequent highest average RF output channel until the reported SAR result is ≤ 1.2 W/kg or all channels are measured. When there are multiple untested channels having the same subsequent highest average RF output power, the channel with higher frequency from the lowest 802.11 mode is considered for SAR measurement.

6.2 TEST POSITION

Test all USB orientations [see figure below: (A) Horizontal-Up, (B) Horizontal-Down, (C) Vertical-Front, and (D) Vertical-Back and Tip] with a device-to-phantom separation distance of 5 mm.

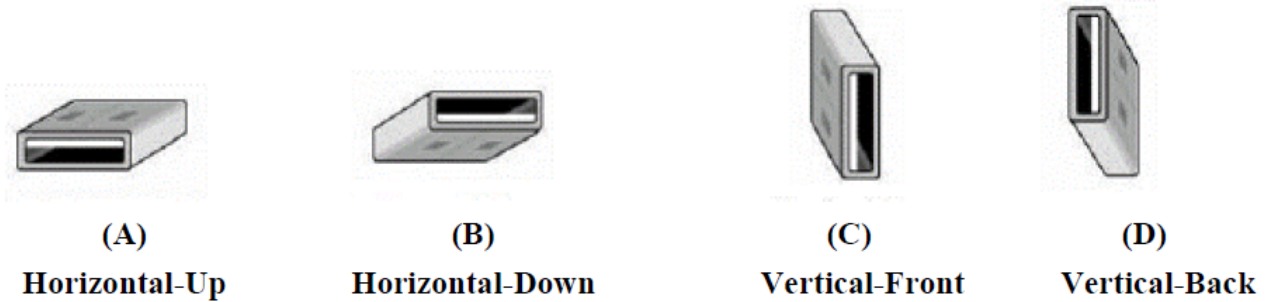


Fig: USB Connector Orientations Implemented on Laptop Computers

The location of the antennas inside the EUT is shown as below:



7. TEST RESULT

7.1 CONDUCTED POWER RESULTS

7.1.1 CONDUCTED POWER MEASUREMENTS OF WIFI

1. Conducted power measurements of WiFi 2.4G

Band	Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	ANT 1 Average Power (dBm)	ANT 2 Average Power (dBm)	Max. Tune up	Total Average Power (dBm)
2.4G WIFI _2TX _ ANT 1+2	802.11b	1	2412	1	16.84	16.03	20.00	19.46
		6	2437		15.62	15.23	19.00	18.44
		11	2462		15.80	15.03	19.00	18.44
	802.11g	1	2412	6	16.77	16.61	20.00	19.70
		6	2437		16.60	16.71	20.00	19.67
		11	2462		15.96	15.40	19.00	18.70
	802.11n HT20	1	2412	HT8	16.15	15.93	20.00	19.05
		6	2437		16.34	16.29	20.00	19.33
		11	2462		14.92	14.86	19.00	17.90
	802.11n HT40	3	2422	HT8	12.92	12.59	17.00	15.77
		6	2437		16.10	16.14	20.00	19.13
		9	2452		13.32	13.09	17.00	16.22
	802.11be EHT20	1	2412	HE8	15.25	15.14	20.00	18.21
		6	2437		16.12	16.38	20.00	19.26
		11	2462		14.76	14.56	19.00	17.67
	802.11be EHT40	3	2422	EHT8	12.97	12.70	17.00	15.85
		6	2437		16.24	16.41	20.00	19.34
		9	2452		12.23	12.07	17.00	15.16

Note:

1) The Average conducted power of WiFi 2.4G is measured with RMS detector.

2) Per KDB248227 D01, for WiFi 2.4G, the highest measured maximum output power Channel for DSSS modes (802.11b) was selected for SAR measurement. SAR for OFDM modes (2.4GHz 802.11g/n/ac/ax) was not required When the highest reported SAR for DSSS is adjusted by the ratio of OFDM modes (802.11g/n/ac/ax) to DSSS modes (802.11b) specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

3) The tested channel results are marks in bold.

2. Conducted power measurements of WiFi 5.2G

Band	Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	ANT 1 Average Power (dBm)	ANT 2 Average Power (dBm)	Max. Tune-up	Total Average Power (dBm)
5.2G WIFI _2TX_ ANT 1+2	802.11a	36	5180	6	16.56	15.88	20.00	19.24
		40	5200		16.60	16.03	20.00	19.33
		44	5220		16.08	15.62	20.00	18.87
		48	5240		16.06	15.58	20.00	18.84
	802.11ac VHT20	36	5180	MCS8	16.57	15.97	20.00	19.29
		40	5200		16.66	15.96	20.00	19.33
		44	5220		16.64	16.06	20.00	19.37
		48	5240		16.51	15.94	20.00	19.24
	802.11ac VHT40	38	5190	MCS8	14.44	14.89	19.00	17.68
		46	5230		16.36	15.72	20.00	19.06
	802.11ac VHT80	42	5210	MCS8	13.33	13.75	18.00	16.56
	802.11ac VHT160	50	5250	MCS8	12.42	12.63	17.00	15.54
	802.11be EHT20	36	5180	MCS8	16.47	15.79	20.00	19.15
		40	5200		16.38	15.75	20.00	19.09
		44	5220		15.87	15.43	20.00	18.67
		48	5240		15.99	15.31	20.00	18.67
	802.11be EHT40	38	5190	MCS8	14.72	15.43	19.00	18.10
		46	5230		16.68	16.09	20.00	19.41
	802.11be EHT80	42	5210	MCS8	14.63	15.29	18.00	17.98
	802.11be EHT160	50	5250	MCS8	13.31	13.33	17.00	16.33

Note:

- 1) The Average conducted power of WiFi 5.2G is measured with RMS detector.
- 2) The tested channel results are marks in bold.

3. Conducted power measurements of WiFi 5.3G

Band	Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	ANT 1 Average Power (dBm)	ANT 2 Average Power (dBm)	Max. Tune-up	Total Average Power (dBm)
5.3G WIFI _2TX_ ANT 1+2	802.11a	52	5260	6	16.08	15.89	20.00	19.00
		56	5280		16.17	15.76	20.00	18.98
		60	5300		16.73	16.01	20.00	19.40
		64	5320		16.63	16.03	20.00	19.35
	802.11ac VHT20	52	5260	MCS8	16.66	16.19	20.00	19.44
		56	5280		16.69	16.16	20.00	19.44
		60	5300		16.79	16.11	20.00	19.47
		64	5320		16.67	15.97	20.00	19.34
	802.11ac VHT40	54	5270	MCS8	16.46	15.96	20.00	19.23
		62	5310		14.32	14.93	19.00	17.65
	802.11ac VHT80	58	5290	MCS8	13.81	14.32	18.00	17.08
	802.11be EHT20	52	5260	MCS8	15.91	15.48	20.00	18.71
		56	5280		16.07	15.57	20.00	18.84
		60	5300		16.52	15.81	20.00	19.19
		64	5320		16.46	15.85	20.00	19.18
	802.11be EHT40	54	5270	MCS8	16.72	16.25	20.00	19.50
		62	5310		14.27	14.95	19.00	17.63
	802.11be EHT80	58	5290	MCS8	14.58	15.26	18.00	17.94

Note:

- 1) The Average conducted power of WiFi 5.3G is measured with RMS detector.
- 2) The tested channel results are marks in bold.

4. Conducted power measurements of WiFi 5.6G

Band	Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	ANT 1 Average Power (dBm)	ANT 2 Average Power (dBm)	Max. Tune-up	Total Average Power (dBm)
5.6G WIFI _2TX_ ANT 1+2	802.11a	100	5500	6	16.92	16.41	20.00	19.68
		104	5520		16.93	16.38	20.00	19.67
		108	5540		16.78	16.22	20.00	19.52
		112	5560		16.77	16.13	20.00	19.47
		116	5580		16.51	16.13	20.00	19.33
		132	5660		16.43	15.92	20.00	19.19
		136	5680		16.45	15.98	20.00	19.23
		140	5700		16.49	16.03	20.00	19.28
		144	5720		16.23	16.10	20.00	19.18
	802.11ac VHT20	100	5500	MCS8	16.89	16.39	20.00	19.66
		104	5520		16.98	16.32	20.00	19.67
		108	5540		16.86	16.14	20.00	19.53
		112	5560		16.79	16.09	20.00	19.46
		116	5580		16.54	16.09	20.00	19.33
		132	5660		17.05	16.39	20.00	19.74
		136	5680		16.93	16.52	20.00	19.74
		140	5700		16.91	16.57	20.00	19.75
		144	5720		16.54	16.49	20.00	19.53
	802.11ac VHT40	102	5510	MCS8	15.53	15.87	20.00	18.71
		110	5550		15.83	16.45	20.00	19.16
		118	5590		16.62	16.45	20.00	19.55
		126	5630		16.15	16.66	20.00	19.42
		134	5670		17.08	16.61	20.00	19.86
		142	5710		16.86	16.27	20.00	19.59
	802.11ac VHT80	106	5530	MCS8	12.95	13.30	17.00	16.14
		122	5610		16.45	15.83	20.00	19.16
		138	5690		16.19	16.02	20.00	19.12
	802.11ac VHT160	114	5570	MCS8	12.28	12.81	17.00	15.56

Band	Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	ANT 1 Average Power (dBm)	ANT 2 Average Power (dBm)	Max. Tune-up	Total Average Power (dBm)
5.6G WIFI _2TX_ ANT 1+2	802.11be EHT20	100	5500	MCS8	16.72	16.21	20.00	19.48
		104	5520		17.18	16.68	20.00	19.95
		108	5540		17.25	16.53	20.00	19.92
		112	5560		17.23	16.60	20.00	19.94
		116	5580		16.89	16.37	20.00	19.65
		132	5660		16.73	16.28	20.00	19.52
		136	5680		16.65	16.23	20.00	19.46
		140	5700		16.80	16.47	20.00	19.65
		144	5720		16.73	16.28	20.00	19.52
	802.11be EHT40	102	5510	MCS8	15.97	16.45	20.00	19.23
		110	5550		16.93	16.48	20.00	19.72
		118	5590		16.39	16.19	20.00	19.30
		126	5630		16.61	16.27	20.00	19.45
		134	5670		17.08	16.82	20.00	19.96
		142	5710		16.05	16.48	20.00	19.28
	802.11be EHT80	106	5530	MCS8	12.77	12.99	17.00	15.89
		122	5610		16.89	16.49	20.00	19.70
		138	5690		16.59	16.26	20.00	19.44
	802.11be EHT160	114	5570	MCS8	13.40	13.71	17.00	16.57

Note:

- 1) The Average conducted power of WiFi 5.6G is measured with RMS detector.
- 2) The tested channel results are marks in bold.

5. Conducted power measurements of WiFi 5.8G

Band	Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	ANT 1 Average Power (dBm)	ANT 2 Average Power (dBm)	Max. Tune-up	Total Average Power (dBm)
5.8G WIFI _2TX_ ANT 1+2	802.11a	149	5745	6	15.18	14.93	19.00	18.07
		153	5765		15.33	14.94	19.00	18.15
		157	5785		15.18	14.79	19.00	18.00
		161	5805		15.29	14.75	19.00	18.04
		165	5825		15.18	14.93	19.00	18.07
	802.11ac VHT20	149	5745	MCS8	15.24	14.49	19.00	17.89
		153	5765		15.26	14.89	19.00	18.09
		157	5785		15.28	14.80	19.00	18.06
		161	5805		15.29	14.89	19.00	18.10
		165	5825		15.18	14.89	19.00	18.05
	802.11ac VHT40	151	5755	MCS8	15.35	15.08	19.00	18.23
		159	5795		15.42	15.10	19.00	18.27
	802.11ac VHT80	155	5775	MCS8	15.37	15.03	19.00	18.21
	802.11be EHT20	149	5745	MCS8	15.56	15.24	19.00	18.41
		153	5765		15.55	15.21	19.00	18.39
		157	5785		15.58	15.21	19.00	18.41
		161	5805		15.53	15.19	19.00	18.37
		165	5825		15.59	15.23	19.00	18.42
	802.11be EHT40	151	5755	MCS8	15.45	15.17	19.00	18.32
		159	5795		15.48	14.98	19.00	18.25
	802.11be EHT80	155	5775	MCS8	15.44	14.99	19.00	18.23

Note:

- 1) The Average conducted power of WiFi 5.8G is measured with RMS detector.
- 2) The tested channel results are marks in bold.

6. Conducted power measurements of WiFi 6.2G

NSS1

Band	Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	ANT 1 Average Power (dBm)	ANT 2 Average Power (dBm)	Max. Tune-up	Total Average Power (dBm)
6.2G WIFI _2TX_ ANT 1+2	802.11ax HE20	1	5955	MCS8	0.87	0.74	5.00	3.82
		49	6195		1.47	1.18	5.00	4.34
		93	6415		1.46	1.62	5.00	4.55
	802.11ax HE40	3	5965	MCS8	2.26	1.79	8.00	5.04
		43	6165		4.49	4.25	8.00	7.38
		91	6405		4.09	4.22	8.00	7.17
	802.11ax HE80	7	5985	MCS8	5.66	5.08	11.00	8.39
		39	6145		6.67	6.59	11.00	9.64
		87	6385		7.05	7.14	11.00	10.11
	802.11ax HE160	15	6025	MCS8	8.73	8.76	13.00	11.76
		47	6185		9.64	9.01	13.00	12.35
		79	6345		9.43	9.24	13.00	12.35
	802.11be EHT20	1	5955	MCS8	-4.38	-4.79	5.00	-1.57
		49	6195		1.36	1.48	5.00	4.43
		93	6415		1.22	1.49	5.00	4.37
	802.11be EHT40	3	5965	MCS8	3.43	2.63	8.00	6.06
		43	6165		4.08	3.65	8.00	6.88
		91	6405		3.74	3.93	8.00	6.85
	802.11be EHT80	7	5985	MCS8	6.41	5.78	11.00	9.12
		39	6145		7.56	7.38	11.00	10.48
		87	6385		6.62	6.79	11.00	9.72
	802.11be EHT160	15	6025	MCS8	8.73	8.86	13.00	11.81
		47	6185		9.20	8.81	13.00	12.02
		79	6345		9.23	9.46	13.00	12.36

NSS2

Band	Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	ANT 1 Average Power (dBm)	ANT 2 Average Power (dBm)	Max. Tune-up	Total Average Power (dBm)
6.2G WIFI _2TX_ ANT 1+2	802.11ax HE20	1	5955	MCS8	3.06	3.63	9.00	6.36
		49	6195		4.26	4.33	9.00	7.31
		93	6415		4.23	4.56	9.00	7.41
	802.11ax HE40	3	5965	MCS8	6.74	6.03	12.00	9.41
		43	6165		7.57	7.34	12.00	10.47
		91	6405		7.23	7.61	12.00	10.43
	802.11ax HE80	7	5985	MCS8	8.96	8.48	14.00	11.74
		39	6145		9.88	9.79	14.00	12.85
		87	6385		10.24	11.05	14.00	13.67
	802.11ax HE160	15	6025	MCS8	11.69	11.76	16.00	14.74
		47	6185		11.60	11.42	16.00	14.52
		79	6345		13.03	12.70	16.00	15.88
	802.11be EHT20	1	5955	MCS8	2.73	3.62	9.00	6.21
		49	6195		3.67	3.78	9.00	6.74
		93	6415		4.13	4.69	9.00	7.43
	802.11be EHT40	3	5965	MCS8	5.62	5.15	12.00	8.40
		43	6165		6.42	5.93	12.00	9.19
		91	6405		7.24	7.76	12.00	10.52
	802.11be EHT80	7	5985	MCS8	8.76	8.50	14.00	11.64
		39	6145		9.24	9.29	14.00	12.28
		87	6385		9.87	10.43	14.00	13.17
	802.11be EHT160	15	6025	MCS8	11.41	11.53	16.00	14.48
		47	6185		11.74	11.32	16.00	14.55
		79	6345		12.80	12.68	16.00	15.75

Note:

- 1) The Average conducted power of WiFi 6.2G is measured with RMS detector.
- 2) The tested channel results are marks in bold.

7. Conducted power measurements of WiFi 6.5G

NSS1

Band	Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	ANT 1 Average Power (dBm)	ANT 2 Average Power (dBm)	Max. Tune-up	Total Average Power (dBm)
6.5G WIFI _2TX_ ANT 1+2	802.11ax HE20	97	6435	MCS8	1.64	1.48	5.00	4.57
		105	6475		1.86	1.96	5.00	4.92
		113	6515		1.23	1.18	5.00	4.22
	802.11ax HE40	99	6445	MCS8	4.54	4.89	8.00	7.73
		107	6485		4.28	4.16	8.00	7.23
	802.11ax HE80	103	6465	MCS8	6.80	6.62	11.00	9.72
		119	6545		6.79	6.85	11.00	9.83
	802.11ax HE160	111	6505	MCS8	9.40	9.35	13.00	12.39
	802.11be EHT20	97	6435	MCS8	1.36	1.28	5.00	4.33
		105	6475		1.74	1.34	5.00	4.55
		113	6515		0.84	1.22	5.00	4.04
	802.11be EHT40	99	6445	MCS8	4.35	4.08	8.00	7.23
		107	6485		4.08	3.75	8.00	6.93
	802.11be EHT80	103	6465	MCS8	7.06	6.69	11.00	9.89
		119	6545		6.28	6.31	11.00	9.31
	802.11be EHT160	111	6505	MCS8	9.31	9.73	13.00	12.54

NSS2

Band	Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	ANT 1 Average Power (dBm)	ANT 2 Average Power (dBm)	Max. Tune-up	Total Average Power (dBm)
6.5G WIFI _2TX_ ANT 1+2	802.11ax HE20	97	6435	MCS8	4.33	4.65	9.00	7.50
		105	6475		4.86	4.59	9.00	7.74
		113	6515		3.33	3.67	9.00	6.51
	802.11ax HE40	99	6445	MCS8	8.84	8.16	12.00	11.52
		107	6485		8.02	7.89	12.00	10.97
	802.11ax HE80	103	6465	MCS8	10.19	10.46	14.00	13.34
		119	6545		9.84	9.96	14.00	12.91
	802.11ax HE160	111	6505	MCS8	13.05	12.78	16.00	15.93
	802.11be EHT20	97	6435	MCS8	4.63	4.71	9.00	7.68
		105	6475		5.34	4.99	9.00	8.18
		113	6515		4.26	4.46	9.00	7.37
	802.11be EHT40	99	6445	MCS8	7.75	7.20	12.00	10.49
		107	6485		7.12	6.94	12.00	10.04
	802.11be EHT80	103	6465	MCS8	10.15	10.02	14.00	13.10
		119	6545		9.82	9.97	14.00	12.91
	802.11be EHT160	111	6505	MCS8	13.03	12.84	16.00	15.95

Note:

- 1) The Average conducted power of WiFi 6.5G is measured with RMS detector.
- 2) The tested channel results are marks in bold.

8. Conducted power measurements of WiFi 6.7G

NSS1

Band	Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	ANT 1 Average Power (dBm)	ANT 2 Average Power (dBm)	Max. Tune-up	Total Average Power (dBm)
6.7G WIFI _2TX_ ANT 1+2	802.11ax HE20	117	6535	MCS8	0.79	0.62	5.00	3.72
		149	6695		0.34	0.48	5.00	3.42
		181	6855		0.34	0.52	5.00	3.44
	802.11ax HE40	115	6525	MCS8	4.48	4.33	8.00	7.42
		147	6685		3.89	3.58	8.00	6.75
		179	6845		3.43	3.78	8.00	6.62
	802.11ax HE80	135	6625	MCS8	6.79	6.85	11.00	9.83
		151	6705		5.72	5.60	11.00	8.67
		167	6785		5.79	5.94	11.00	8.88
	802.11ax HE160	143	6665	MCS8	8.41	8.56	13.00	11.50
		175	6825		8.86	8.58	13.00	11.73
	802.11be EHT20	117	6535	MCS8	0.66	0.41	5.00	3.55
		149	6695		-0.84	-1.06	5.00	2.06
		181	6855		0.05	0.22	5.00	3.15
	802.11be EHT40	115	6525	MCS8	4.25	4.28	8.00	7.28
		147	6685		2.98	3.34	8.00	6.17
		179	6845		2.93	2.75	8.00	5.85
	802.11be EHT80	135	6625	MCS8	6.28	6.31	11.00	9.31
		151	6705		5.69	5.46	11.00	8.59
		167	6785		5.74	5.82	11.00	8.79
	802.11be EHT160	143	6665	MCS8	9.20	8.91	13.00	12.07
		175	6825		8.66	8.50	13.00	11.59

NSS2

Band	Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	ANT 1 Average Power (dBm)	ANT 2 Average Power (dBm)	Max. Tune-up	Total Average Power (dBm)
6.7G WIFI _2TX_ ANT 1+2	802.11ax HE20	117	6535	MCS8	4.11	3.99	9.00	7.06
		149	6695		2.94	3.15	9.00	6.06
		181	6855		3.53	3.72	9.00	6.64
	802.11ax HE40	115	6525	MCS8	7.35	7.46	12.00	10.42
		147	6685		6.06	6.14	12.00	9.11
		179	6845		6.45	6.53	12.00	9.50
	802.11ax HE80	135	6625	MCS8	9.84	9.96	14.00	12.91
		151	6705		8.86	8.62	14.00	11.75
		167	6785		8.73	9.10	14.00	11.93
	802.11ax HE160	143	6665	MCS8	12.22	12.11	16.00	15.18
		175	6825		12.23	12.03	16.00	15.14
	802.11be EHT20	117	6535	MCS8	4.63	4.24	9.00	7.45
		149	6695		3.18	3.06	9.00	6.13
		181	6855		3.25	3.13	9.00	6.20
	802.11be EHT40	115	6525	MCS8	7.21	7.32	12.00	10.28
		147	6685		5.95	6.40	12.00	9.19
		179	6845		5.72	5.66	12.00	8.70
	802.11be EHT80	135	6625	MCS8	9.82	9.97	14.00	12.91
		151	6705		8.63	8.46	14.00	11.56
		167	6785		8.28	8.34	14.00	11.32
	802.11be EHT160	143	6665	MCS8	11.96	11.70	16.00	14.84
		175	6825		12.40	12.02	16.00	15.22

Note:

1) The Average conducted power of WiFi 6.7G is measured with RMS detector.

2) The tested channel results are marks in bold.

9. Conducted power measurements of WiFi 7.0G

NSS1

Band	Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	ANT 1 Average Power (dBm)	ANT 2 Average Power (dBm)	Max. Tune-up	Total Average Power (dBm)
7.0G WIFI _2TX_ ANT 1+2	802.11ax HE20	185	6875	MCS8	-0.11	0.41	5.00	3.17
		209	6995		1.64	1.99	5.00	4.83
		233	7115		1.16	1.31	5.00	4.25
	802.11ax HE40	187	6885	MCS8	3.31	4.23	8.00	6.80
		227	7085		3.49	4.06	8.00	6.79
	802.11ax HE80	183	6865	MCS8	5.79	5.94	11.00	8.88
		199	6945		6.80	6.24	11.00	9.54
		215	7025		6.95	7.13	11.00	10.05
	802.11ax HE160	207	6985	MCS8	10.03	10.32	13.50	13.19
	802.11be EHT20	185	6875	MCS8	-0.06	-0.33	5.00	2.82
		209	6995		0.63	1.38	5.00	4.03
		233	7115		1.49	1.69	5.00	4.60
	802.11be EHT40	187	6885	MCS8	3.45	4.08	8.00	6.79
		227	7085		4.15	4.44	8.00	7.31
	802.11be EHT80	183	6865	MCS8	5.74	5.82	11.00	8.79
		199	6945		6.30	6.23	11.00	9.28
		215	7025		6.56	6.34	11.00	9.46
	802.11be EHT160	207	6985	MCS8	9.86	10.20	13.50	13.04

NSS2

Band	Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	ANT 1 Average Power (dBm)	ANT 2 Average Power (dBm)	Max. Tune-up	Total Average Power (dBm)
7.0G WIFI _2TX_ ANT 1+2	802.11ax HE20	185	6875	MCS8	3.78	4.86	9.00	7.36
		209	6995		5.09	5.36	9.00	8.24
		233	7115		4.13	4.08	9.00	7.12
	802.11ax HE40	187	6885	MCS8	6.87	7.44	12.00	10.17
		227	7085		6.49	6.76	12.00	9.64
	802.11ax HE80	183	6865	MCS8	8.73	9.10	14.00	11.93
		199	6945		9.42	9.17	14.00	12.31
		215	7025		10.42	10.25	14.00	13.35
	802.11ax HE160	207	6985	MCS8	12.71	13.02	16.00	15.88
	802.11be EHT20	185	6875	MCS8	4.08	3.52	9.00	6.82
		209	6995		4.46	4.95	9.00	7.72
		233	7115		3.52	3.64	9.00	6.59
	802.11be EHT40	187	6885	MCS8	6.21	7.11	12.00	9.69
		227	7085		6.44	6.78	12.00	9.62
	802.11be EHT80	183	6865	MCS8	8.28	8.34	14.00	11.32
		199	6945		9.32	9.14	14.00	12.24
		215	7025		9.49	9.30	14.00	12.41
	802.11be EHT160	207	6985	MCS8	12.81	13.03	16.00	15.93

Note:

- 1) The Average conducted power of WiFi 7.0G is measured with RMS detector.
- 2) The tested channel results are marks in bold.

7.2 SAR TEST RESULTS

General Notes:

- 1) Per KDB447498 D04, all measurement SAR results are scaled to the maximum tune-up tolerance limit to demonstrate compliant.
- 2) Per KDB447498 D04, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is: ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz. When the maximum output power variation across the required test channels is $> \frac{1}{2}$ dB, instead of the middle channel, the highest output power channel must be used.
- 3) Per KDB865664 D01, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/kg; if the deviation among the repeated measurement is $\leq 20\%$, and the measured SAR < 1.45 W/kg, only one repeated measurement is required.
- 4) Per KDB941225 D06, the DUT Dimension is bigger than 9 cm x 5 cm, so 10mm is chosen as the test separation distance for Hotspot mode. When the antenna-to-edge distance is greater than 2.5cm, such position does not need to be tested.
- 5) Per KDB648474 D04, SAR is evaluated without a headset connected to the device. When the standalone reported body-worn SAR is ≤ 1.2 W/kg, no additional SAR evaluations using a headset are required.
- 6) Per KDB865664 D02, SAR plot is only required for the highest measured SAR in each exposure configuration, wireless mode and frequency band combination; Plots are also required when the measured SAR is > 1.5 W/kg, or > 7.0 W/kg for occupational exposure. The published RF exposure KDB procedures may require additional plots; for example, to support SAR to peak location separation ratio test exclusion and/or volume scan post-processing.

WLAN Notes:

1. For exposure conditions with multiple test positions, such as handset operating next to the ear, devices with hotspot mode, procedures for initial test position can be applied. Using the transmission mode determined by the DSSS procedure or initial test configuration, area scans are measured for all positions in an exposure condition. The test position with the highest extrapolated (peak) SAR is used as the initial test position. When the reported SAR of the initial test position is ≤ 0.4 W/kg, further SAR measurement is not required for the other (remaining) test positions. Otherwise, SAR is evaluated at the subsequent highest peak SAR position until the reported SAR result is ≤ 0.8 W/kg or all test positions are measured.
2. Justification for test configurations for WLAN per KDB Publication 248227 for 2.4GHZ WIFI single transmission chain operations, the highest measured maximum output power Channel for DSSS was selected for SAR measurement. SAR for OFDM modes (2.4GHz 802.11g/n) was not required due to the maximum allowed powers and the highest reported DSSS SAR. See Section 7.1 for more information.
3. Justification for test configurations for WLAN per KDB Publication 248227 for 5GHZ WIFI single transmission chain operations, the initial test configuration was selected according to the transmission mode with the highest maximum allowed power. Other transmission modes were not investigated since the highest reported SAR for initial test configuration adjusted by the ratio of maximum output powers is less than 1.2W/kg. See Section 7.1 for more information.

7.2.1 SAR MEASUREMENT RESULT

Separation Distance: 5 mm

1. SAR test results of WiFi 2.4G

Test No.	Mode	Channel	Test Position	Ant	Data Rate	Duty Cycle (%)	Duty Cycle Scaling Factor	Maximum Tune-up (dBm)	Conducted Power (dBm)	Power Drift (dB)	SAR 1g (W/kg)	SAR 10g (W/kg)	Tune-Up Scaling Factor	Reported 1g SAR (W/kg)
W01	802.11b	1	Horizontal Up	ANT1+2	1M	97.62	1.024	20	19.46	-0.01	0.947	0.494	1.132	1.099
W02	802.11b	1	Horizontal Down	ANT1+2	1M	97.62	1.024	20	19.46	-0.17	1.11	0.565	1.132	1.288
W03	802.11b	1	Vertical Front	ANT1+2	1M	97.62	1.024	20	19.46	0.12	0.39	0.26	1.132	0.452
W04	802.11b	1	Vertical Back	ANT1+2	1M	97.62	1.024	20	19.46	0.04	0.514	0.321	1.132	0.596
W05	802.11b	1	Tip Side	ANT1+2	1M	97.62	1.024	20	19.46	-0.07	0.261	0.161	1.132	0.303
W06	802.11b	6	Horizontal Down	ANT1+2	1M	97.62	1.024	19	18.44	-0.13	0.91	0.506	1.138	1.060
W07	802.11b	11	Horizontal Down	ANT1+2	1M	97.62	1.024	19	18.44	-0.11	1.03	0.664	1.138	1.200
W09	802.11g	6	Horizontal Up	ANT1+2	6M	97.62	1.024	20	19.67	0.01	1.03	0.608	1.079	1.138
W10	802.11g	6	Horizontal Down	ANT1+2	6M	97.62	1.024	20	19.67	0.01	1.16	0.603	1.079	1.282
W11	802.11g	6	Vertical Front	ANT1+2	6M	97.62	1.024	20	19.67	-0.02	0.481	0.254	1.079	0.532
W12	802.11g	6	Vertical Back	ANT1+2	6M	97.62	1.024	20	19.67	0.16	0.507	0.268	1.079	0.560
W13	802.11g	6	Tip Side	ANT1+2	6M	97.62	1.024	20	19.67	-0.02	0.245	0.13	1.079	0.271
W14	802.11g	1	Horizontal Down	ANT1+2	6M	97.62	1.024	20	19.7	-0.01	1.05	0.641	1.072	1.153
W15	802.11g	11	Horizontal Down	ANT1+2	6M	97.62	1.024	19	18.7	0.1	1.03	0.578	1.072	1.131

Note: The value with boldface is the maximum SAR Value of each test band.

2. SAR test results of WiFi 5G

Test No.	Mode	Channel	Test Position	Ant	Data Rate	Duty Cycle (%)	Duty Cycle Scaling Factor	Maximum Tune-up (dBm)	Conducted Power (dBm)	Power Drift (dB)	SAR 1g (W/kg)	SAR 10g (W/kg)	Tune-Up Scaling Factor	Reported 1g SAR (W/kg)
W17	802.11be EHT40	46	Horizontal Up	ANT1+2	MCS8	94.04	1.063	20	19.41	0.16	0.973	0.349	1.146	1.185
W18	802.11be EHT40	46	Horizontal Down	ANT1+2	MCS8	94.04	1.063	20	19.41	0.01	1.050	0.399	1.146	1.279
W19	802.11be EHT40	46	Vertical Front	ANT1+2	MCS8	94.04	1.063	20	19.41	0.18	0.959	0.322	1.146	1.168
W20	802.11be EHT40	46	Vertical Back	ANT1+2	MCS8	94.04	1.063	20	19.41	-0.08	1.250	0.446	1.146	1.523
W21	802.11be EHT40	46	Tip Side	ANT1+2	MCS8	94.04	1.063	20	19.41	-0.05	0.205	0.078	1.146	0.250
W22	802.11be EHT40	38	Vertical Back	ANT1+2	MCS8	94.04	1.063	19	18.1	0.11	0.578	0.172	1.230	0.756
W24	802.11be EHT40	54	Horizontal Up	ANT1+2	MCS8	94.04	1.063	20	19.5	0.15	0.820	0.346	1.122	0.978
W25	802.11be EHT40	54	Horizontal Down	ANT1+2	MCS8	94.04	1.063	20	19.5	0.07	0.956	0.371	1.122	1.141
W26	802.11be EHT40	54	Vertical Front	ANT1+2	MCS8	94.04	1.063	20	19.5	-0.02	1.040	0.371	1.122	1.241
W27	802.11be EHT40	54	Vertical Back	ANT1+2	MCS8	94.04	1.063	20	19.5	-0.05	1.120	0.400	1.122	1.336
W28	802.11be EHT40	54	Tip Side	ANT1+2	MCS8	94.04	1.063	20	19.5	0.04	0.184	0.078	1.122	0.220
W29	802.11be EHT40	62	Vertical Back	ANT1+2	MCS8	94.04	1.063	19	17.63	-0.04	0.562	0.204	1.371	0.819
W31	802.11be EHT40	134	Horizontal Up	ANT1+2	MCS8	94.04	1.063	20	19.96	-0.1	0.757	0.301	1.009	0.812
W32	802.11be EHT40	134	Horizontal Down	ANT1+2	MCS8	94.04	1.063	20	19.96	0.04	1.020	0.368	1.009	1.095
W33	802.11be EHT40	134	Vertical Front	ANT1+2	MCS8	94.04	1.063	20	19.96	0.14	1.020	0.383	1.009	1.095
W34	802.11be EHT40	134	Vertical Back	ANT1+2	MCS8	94.04	1.063	20	19.96	-0.03	1.230	0.416	1.009	1.320
W35	802.11be EHT40	134	Tip Side	ANT1+2	MCS8	94.04	1.063	20	19.96	-0.09	0.155	0.071	1.009	0.166
W36	802.11be EHT40	110	Vertical Back	ANT1+2	MCS8	94.04	1.063	20	19.72	-0.01	1.230	0.424	1.067	1.395
W37	802.11be EHT40	126	Vertical Back	ANT1+2	MCS8	94.04	1.063	20	19.45	-0.03	1.150	0.394	1.135	1.388
W39	802.11be EHT20	165	Horizontal Up	ANT1+2	MCS8	94.04	1.063	19	18.42	-0.02	0.831	0.295	1.143	1.010
W40	802.11be EHT20	165	Horizontal Down	ANT1+2	MCS8	94.04	1.063	19	18.42	-0.17	0.945	0.365	1.143	1.148
W41	802.11be EHT20	165	Vertical Front	ANT1+2	MCS8	94.04	1.063	19	18.42	-0.07	1.180	0.397	1.143	1.434
W42	802.11be EHT20	165	Vertical Back	ANT1+2	MCS8	94.04	1.063	19	18.42	-0.01	1.030	0.355	1.143	1.252
W43	802.11be EHT20	165	Tip Side	ANT1+2	MCS8	94.04	1.063	19	18.42	0.18	0.177	0.069	1.143	0.215
W44	802.11be EHT20	157	Vertical Front	ANT1+2	MCS8	94.04	1.063	19	18.41	0.09	1.160	0.397	1.146	1.413
W45	802.11be EHT20	149	Vertical Front	ANT1+2	MCS8	94.04	1.063	19	18.41	0.1	1.090	0.376	1.146	1.328

Note: The value with boldface is the maximum SAR Value of each test band.

3. SAR test results of WiFi 6E

Test No.	Mode	Channel	Test Position	Ant	Data Rate	Duty Cycle (%)	Duty Cycle Scaling Factor	Maximum Tune-up (dBm)	Conducted Power (dBm)	Power Drift (dB)	SAR 1g (W/kg)	SAR 10g (W/kg)	Tune-Up Scaling Factor	Reported 1g SAR (W/kg)
W47	802.11ax 160	79	Horizontal Up	ANT1+2	MCS8	96.24	1.039	16	15.88	0	0.409	0.138	1.028	0.437
W48	802.11ax 160	79	Horizontal Down	ANT1+2	MCS8	96.24	1.039	16	15.88	0	0.528	0.174	1.028	0.564
W49	802.11ax 160	79	Vertical Front	ANT1+2	MCS8	96.24	1.039	16	15.88	-0.02	0.605	0.206	1.028	0.646
W50	802.11ax 160	79	Vertical Back	ANT1+2	MCS8	96.24	1.039	16	15.88	0.01	0.554	0.187	1.028	0.592
W51	802.11ax 160	79	Tip Side	ANT1+2	MCS8	96.24	1.039	16	15.88	0.08	0.094	0.039	1.028	0.100
W52	802.11ax 160	15	Vertical Front	ANT1+2	MCS8	96.24	1.039	16	14.74	0.04	0.352	0.12	1.337	0.489
W53	802.11ax 160	47	Vertical Front	ANT1+2	MCS8	96.24	1.039	16	14.52	0.01	0.421	0.14	1.406	0.615
W55	802.11be 160	111	Horizontal Up	ANT1+2	MCS8	96.24	1.039	16	15.95	0.03	0.437	0.147	1.012	0.459
W56	802.11be 160	111	Horizontal Down	ANT1+2	MCS8	96.24	1.039	16	15.95	-0.07	0.548	0.179	1.012	0.576
W57	802.11be 160	111	Vertical Front	ANT1+2	MCS8	96.24	1.039	16	15.95	0.04	0.638	0.217	1.012	0.671
W58	802.11be 160	111	Vertical Back	ANT1+2	MCS8	96.24	1.039	16	15.95	0.06	0.634	0.215	1.012	0.666
W59	802.11be 160	111	Tip Side	ANT1+2	MCS8	96.24	1.039	16	15.95	0.06	0.105	0.044	1.012	0.110
W61	802.11be 160	175	Horizontal Up	ANT1+2	MCS8	96.24	1.039	16	15.22	0.03	0.431	0.144	1.197	0.536
W62	802.11be 160	175	Horizontal Down	ANT1+2	MCS8	96.24	1.039	16	15.22	-0.02	0.602	0.185	1.197	0.749
W63	802.11be 160	175	Vertical Front	ANT1+2	MCS8	96.24	1.039	16	15.22	-0.01	0.663	0.216	1.197	0.824
W64	802.11be 160	175	Vertical Back	ANT1+2	MCS8	96.24	1.039	16	15.22	-0.05	0.577	0.186	1.197	0.717
W65	802.11be 160	175	Tip Side	ANT1+2	MCS8	96.24	1.039	16	15.22	0.06	0.115	0.046	1.197	0.143
W66	802.11be 160	143	Vertical Front	ANT1+2	MCS8	96.24	1.039	16	14.84	-0.01	0.431	0.136	1.306	0.585
W68	802.11be 160	207	Horizontal Up	ANT1+2	MCS8	96.24	1.039	16	15.93	0.03	0.427	0.142	1.016	0.451
W69	802.11be 160	207	Horizontal Down	ANT1+2	MCS8	96.24	1.039	16	15.93	-0.06	0.614	0.196	1.016	0.648
W70	802.11be 160	207	Vertical Front	ANT1+2	MCS8	96.24	1.039	16	15.93	-0.05	0.688	0.223	1.016	0.726
W71	802.11be 160	207	Vertical Back	ANT1+2	MCS8	96.24	1.039	16	15.93	-0.03	0.522	0.165	1.016	0.551
W72	802.11be 160	207	Tip Side	ANT1+2	MCS8	96.24	1.039	16	15.93	0.03	0.151	0.061	1.016	0.159

Note: The value with boldface is the maximum SAR Value of each test band.

4. SAR test results of Power Density

System&Posistion					DUT & Accessory	SAR											Power Density							
Test No.	Band	Mode	Channel	Test Position	Ant	Data Rate	Duty Cycle (%)	Duty Cycle Scaling Factor	Maximum Tune up (dBm)	Conducted Power (dBm)	Power Drift (dB)	SAR 1g (W/kg)	SAR 10g (W/kg)	Tune Up Scaling Factor	Reported 1g SAR	APD W/m ² (4cm ²)	Grid Step [λ]	Scaling Factor for Measurement Uncertainty	Averaging Area [cm ²]	Power Drift [dB]	Normal PsPD [W/m ²]	Scaling Normal PsPD [W/m ²]	Total PsPD [W/m ²]	Scaling Total PsPD [W/m ²]
W49	UNII-5	802.11ax HE160	79	Vertical Front	ANT 1+2	MCS8	96.24	1.039	16	15.88	-0.02	0.605	0.206	1.028	0.646	4.67	0.125	1.55	4	-0.02	1.06	1.76	2.32	3.85
W57	UNII-6	802.11be EHT160	111	Vertical Front	ANT 1+2	MCS8	96.24	1.039	16	15.95	0.04	0.638	0.217	1.012	0.671	4.93	0.125	1.55	4	0	0.849	1.39	2.54	4.15
W63	UNII-7	802.11be EHT160	175	Vertical Front	ANT 1+2	MCS8	96.24	1.039	16	15.22	-0.01	0.663	0.216	1.197	0.824	4.93	0.125	1.55	4	0.02	2.66	5.14	3.04	5.87
W70	UNII-8	802.11be EHT160	207	Vertical Front	ANT 1+2	MCS8	96.24	1.039	16	15.93	-0.05	0.688	0.223	1.016	0.726	5.08	0.125	1.55	4	-0.05	2.45	4.02	2.86	4.69

Note:

- 1) Chose the worst case of WiFi 6E to test power density.
- 2) This device is in compliance with power density for general population or uncontrolled exposure limits, and has been tested in accordance with the measurement methods and procedures specified in TCBC workshop notes and IEC TR 63170.

8 MULTIPLE TRANSMITTER EVALUATION

The following tables list information which is relevant for the decision if a simultaneous transmit evaluation is necessary according to FCC KDB 447498 D04 Interim General RF Exposure Guidance v01.

The location of the antennas inside the EUT is shown as below:





Note: This product only supports transmission on a single frequency band of 2.4G/5G/6G and does not support simultaneous transmission.


APPENDIX**1. TEST LAYOUT****Specific Absorption Rate Test Layout**

Liquid depth in the flat Phantom ($\geq 15\text{cm}$ depth)

HSL_2300MHz-2700MHz_Body_15.1cm HSL_4500MHz-6000MHz_Body_15.5cm

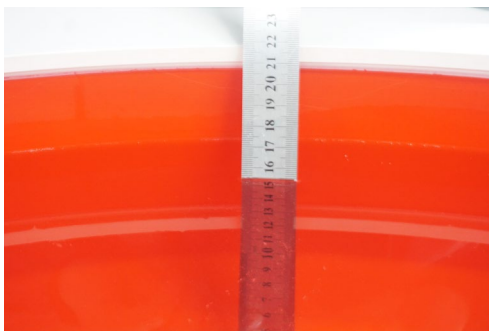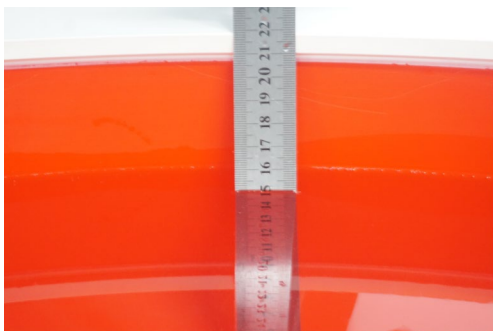

HSL_600MHz-10000MHz_Body_18.2cm

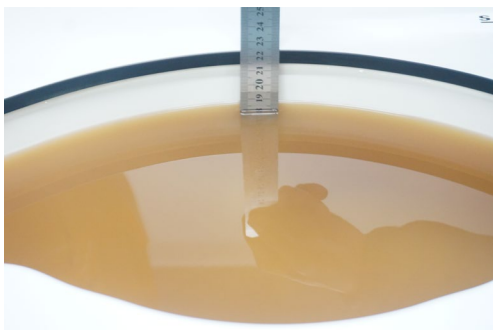

Appendix A. SAR Plots of System Verification

(Pls See BTL-FCC SAR-1-2502G010_Appendix A.)

Appendix B. SAR Plots of SAR Measurement

(Pls See BTL-FCC SAR-1-2502G010_Appendix B.)

Appendix C. Calibration Certificate

(Pls See BTL-FCC SAR-1-2502G010_Appendix C.)

Appendix D. Photographs of the Test Set-Up

(Pls See BTL-FCC SAR-1-2502G010_Appendix D.)

End of Test Report