

TEST REPORT

CERTIFICATE OF CONFORMITY

Standard: 47 CFR FCC Part 15, Subpart C (Section 15.247)
Report No.: RFBFBE-WTW-P22031259
FCC ID: I88EX5512-T0
Model No.: EX5512-T0
Received Date: 2022/6/1
Test Date: 2022/6/2 ~ 2022/7/20
Issued Date: 2022/8/24
Applicant: Zyxel Communications Corporation
Address: No.2 Industry East RD. IX, Hsinchu Science Park, Hsinchu 30075, Taiwan
Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Hsin Chu Laboratory
Lab Address: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300, Taiwan
Test Location: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300, Taiwan
FCC Registration / 723255 / TW2022
Designation Number:

Approved by: _____, **Date:** 2022/8/24
May Chen / Manager

This test report consists of 84 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The test results in the report only apply to the tested sample. The test results in this report are traceable to the national or international standards.

Prepared by : Vivian Huang / Specialist



This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

Table of Contents

Release Control Record	4
1 Certificate.....	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty	6
2.2 Supplementary Information	6
3 General Information	7
3.1 General Description.....	7
3.2 Antenna Description of EUT	8
3.3 Channel List.....	11
3.4 Power Setting	12
3.5 Test Mode Applicability and Tested Channel Detail.....	13
3.6 Duty Cycle of Test Signal.....	14
3.7 Test Program Used and Operation Descriptions	15
3.8 Connection Diagram of EUT and Peripheral Devices	15
3.9 Configuration of Peripheral Devices and Cable Connections	16
4 Test Instruments	17
4.1 RF Output Power.....	17
4.2 Power Spectral Density	17
4.3 6 dB Bandwidth	17
4.4 Conducted Out of Band Emissions	17
4.5 AC Power Conducted Emissions	18
4.6 Unwanted Emissions below 1 GHz	18
4.7 Unwanted Emissions above 1 GHz.....	19
5 Limits of Test Items.....	20
5.1 RF Output Power.....	20
5.2 Power Spectral Density	20
5.3 6 dB Bandwidth	20
5.4 Conducted Out of Band Emissions	20
5.5 AC Power Conducted Emissions	20
5.6 Unwanted Emissions below 1 GHz	20
5.7 Unwanted Emissions above 1 GHz.....	21
6 Test Arrangements.....	22
6.1 RF Output Power.....	22
6.1.1 Test Setup	22
6.1.2 Test Procedure.....	22
6.2 Power Spectral Density	22
6.2.1 Test Setup	22
6.2.2 Test Procedure.....	22
6.3 6 dB Bandwidth	23
6.3.1 Test Setup	23
6.3.2 Test Procedure.....	23
6.4 Conducted Out of Band Emissions	23
6.4.1 Test Setup	23
6.4.2 Test Procedure.....	23
6.5 AC Power Conducted Emissions	24
6.5.1 Test Setup	24
6.5.2 Test Procedure.....	24
6.6 Unwanted Emissions below 1 GHz	25
6.6.1 Test Setup	25
6.6.2 Test Procedure.....	26
6.7 Unwanted Emissions above 1 GHz.....	27
6.7.1 Test Setup	27
6.7.2 Test Procedure.....	27

7	Test Results of Test Item	28
7.1	RF Output Power.....	28
7.2	Power Spectral Density	31
7.3	6 dB Bandwidth	33
7.4	Conducted Out of Band Emissions	35
7.5	AC Power Conducted Emissions	51
7.6	Unwanted Emissions below 1 GHz	53
7.7	Unwanted Emissions above 1 GHz.....	55
8	Pictures of Test Arrangements	83
9	Information of the Testing Laboratories	84

Release Control Record

Issue No.	Description	Date Issued
RFBFBE-WTW-P22031259	Original release.	2022/8/24

1 Certificate

Product: AX6000 WiFi 6 Multi-Gigabit Ethernet Gateway

Brand: ZYXEL

Test Model: EX5512-T0

Sample Status: Engineering sample

Applicant: Zyxel Communications Corporation

Test Date: 2022/6/2 ~ 2022/7/20

Standard: 47 CFR FCC Part 15, Subpart C (Section 15.247)

Measurement ANSI C63.10-2013

procedure: KDB 558074 D01 15.247 Meas Guidance v05r02

KDB 662911 D01 Multiple Transmitter Output v02r01

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (Section 15.247)			
Standard / Clause	Test Item	Result	Remark
15.247(b)	RF Output Power	Pass	Meet the requirement of limit.
15.247(e)	Power Spectral Density	Pass	Meet the requirement of limit.
15.247(a)(2)	6 dB Bandwidth	Pass	Meet the requirement of limit.
15.247(d)	Conducted Out of Band Emissions	Pass	Meet the requirement of limit.
15.207	AC Power Conducted Emissions	Pass	Minimum passing margin is -9.98 dB at 0.36484 MHz
15.205 / 15.209 / 15.247(d)	Unwanted Emissions below 1 GHz	Pass	Minimum passing margin is -3.1 dB at 42.95 MHz
15.205 / 15.209 / 15.247(d)	Unwanted Emissions above 1 GHz	Pass	Minimum passing margin is -0.6 dB at 2390.00, 2483.50, 2486.26 MHz
15.203	Antenna Requirement	Pass	Antenna connector is ipex(MHF) not a standard connector.

Note: Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Specification	Expanded Uncertainty (k=2) (±)
Conducted Out of Band Emissions	9 kHz ~ 40 GHz	2.5 dB
AC Power Conducted Emissions	150 kHz ~ 30 MHz	1.9 dB
Unwanted Emissions below 1 GHz	9 kHz ~ 30 MHz	3.1 dB
	30 MHz ~ 1 GHz	5.4 dB
Unwanted Emissions above 1 GHz	1 GHz ~ 18 GHz	5.0 dB
	18 GHz ~ 40 GHz	5.3 dB

The other instruments specified are routine verified to remain within the calibrated levels, no measurement uncertainty is required to be calculated.

2.2 Supplementary Information

There is not any deviation from the test standards for the test method, and no modifications required for compliance.

3 General Information

3.1 General Description

Product	AX6000 WiFi 6 Multi-Gigabit Ethernet Gateway
Brand	ZYXEL
Test Model	EX5512-T0
CPU Model No.	MT7986A
RF Chip Model No.	2.4G Chip Model: MT7976G 5G Chip Model: MT7976A
FW Version	V5.70(ACEG.0)b3
Status of EUT	Engineering sample
Power Supply Rating	12Vdc from Adapter
Modulation Type	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM 256QAM for OFDM in VHT mode 1024QAM for OFDMA in 11ax mode
Modulation Technology	DSSS, OFDM, OFDMA
Transfer Rate	802.11b: up to 11 Mbps 802.11g: up to 54 Mbps 802.11n: up to 600 Mbps VHT: up to 800 Mbps 802.11ax: up to 1147.1 Mbps
Operating Frequency	2412 ~ 2462 MHz
Number of Channel	802.11b, 802.11g, 802.11n (HT20), VHT20, 802.11ax (HE20): 11 802.11n (HT40), VHT40, 802.11ax (HE40): 7
Output Power	CDD Mode: 989.716 mW (29.96 dBm) Beamforming Mode: 899.967 mW (29.54 dBm)
Accessory Device	- AC Adapter x1, Brand:MNC, Model:MAUS-1202503000 - Ethernet Cable x1 (1m, Non-shielded)

Note:

1. The EUT power needs to be supplied from a power adapter, the information is as below table:

Brand	Model	Specification
MNC	MAUS-1202503000	AC Input : 100-240V 50/60Hz, 0.8A DC Output : 12V/2.5A DC Cable : 1.5m, Non-shielded

2. Simultaneously transmission condition.

Condition	Technology	
1	WLAN 2.4GHz	WLAN 5GHz

Note: The emission of the simultaneous operation has been evaluated and no non-compliance was found.

3. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.


3.2 Antenna Description of EUT

1. The antenna information is listed as below.

Antenna No.	RF Chain No.	Brand	Model	Antenna Net Gain(dBi)	Frequency range (GHz)	Antenna Type	Connector Type
2G_ANT1	2G_Chain2	M.gear	56-001-000240Z	2.6	2.4~2.4835	Dipole	ipex(MHF)
2G_ANT2	2G_Chain0	M.gear	56-001-000241Z	3.3	2.4~2.4835	Dipole	ipex(MHF)
2G_ANT3	2G_Chain1	M.gear	56-001-000247Z	3.1	2.4~2.4835	Dipole	ipex(MHF)
2G_ANT4	2G_Chain3	M.gear	56-001-000242Z	3.2	2.4~2.4835	Dipole	ipex(MHF)
5G_ANT5	5G_Chain0	M.gear	56-001-000243Z	3.2	5.15~5.25	Dipole	ipex(MHF)
				3.4	5.25~5.35		
				4.0	5.47~5.725		
				3.3	5.725~5.85		
				3.6	5.850~5.895		
5G_ANT6	5G_Chain1	M.gear	56-001-000244Z	2.5	5.15~5.25	Dipole	ipex(MHF)
				2.2	5.25~5.35		
				3.2	5.47~5.725		
				2.4	5.725~5.85		
				2.7	5.850~5.895		
5G_ANT7	5G_Chain2	M.gear	56-001-000245Z	3.6	5.15~5.25	Dipole	ipex(MHF)
				3.8	5.25~5.35		
				3.9	5.47~5.725		
				3.8	5.725~5.85		
				4.2	5.850~5.895		
5G_ANT8	5G_Chain3	M.gear	56-001-000246Z	2.4	5.15~5.25	Dipole	ipex(MHF)
				3.4	5.25~5.35		
				3.4	5.47~5.725		
				3.2	5.725~5.85		
				3.2	5.850~5.895		

* Detail antenna specification please refer to antenna datasheet and/or antenna measurement report.

* Antenna port location

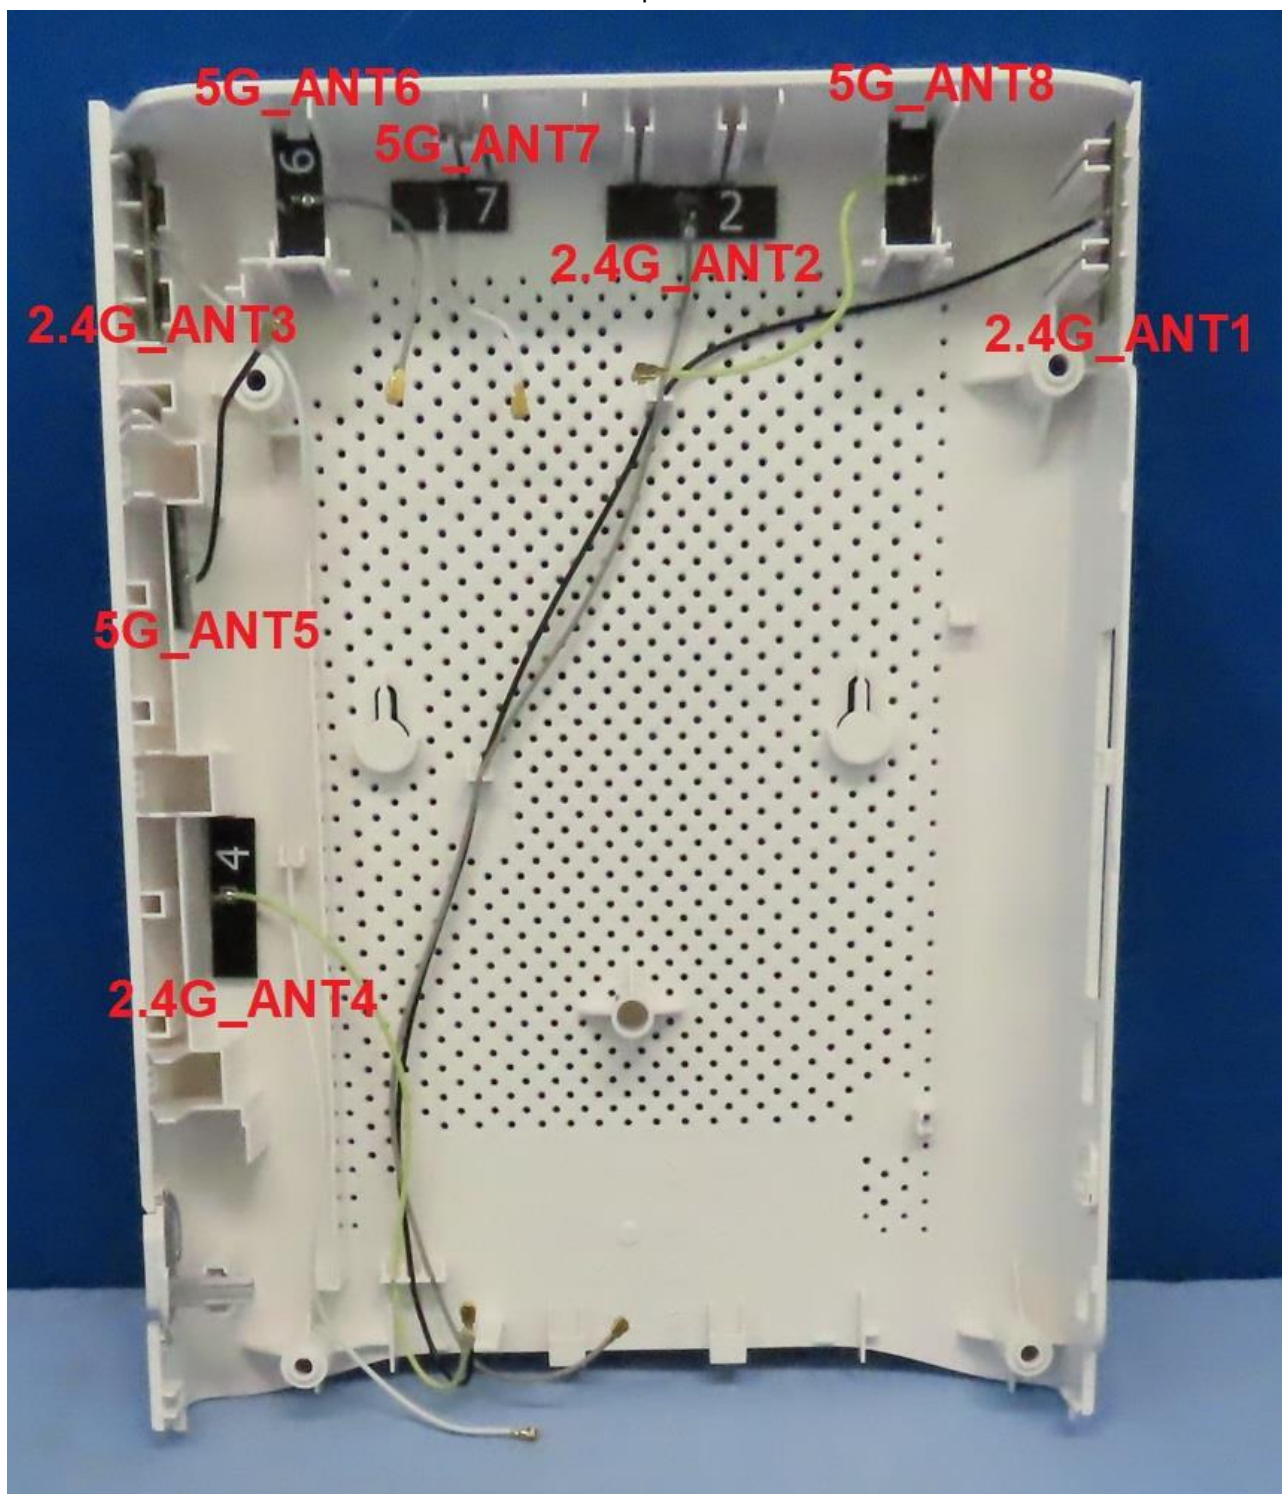

2. The directional antenna gain, please refer to the following table:

Frequency Range (GHz)	Directional Antenna Gain (dBi)	Antenna Type	Antenna Connector
2.4~2.4835	5.12	Dipole	ipex(MHF)

Note: Directional gain is the measured value according to KDB 662911 D03 Method of MIMO Antenna Gain Measurement. More detailed information, please refer to antenna specification.

3. The EUT incorporates a MIMO function:

2.4 GHz Band		
Modulation Mode	TX & RX Configuration	
802.11b	4TX	4RX
802.11g	4TX	4RX
802.11n (HT20)	4TX	4RX
802.11n (HT40)	4TX	4RX
VHT20	4TX	4RX
VHT40	4TX	4RX
802.11ax (HE20)	4TX	4RX
802.11ax (HE40)	4TX	4RX

Note:

1. All of modulation mode support beamforming function except 802.11b/g modulation mode.
2. The EUT support Beamforming and CDD mode, therefore both mode were investigated and the worst case scenario was identified. The worst case data were presented in test report.
3. The modulation and bandwidth are similar for 802.11n mode for 20MHz (40MHz), VHT mode for 20MHz (40MHz) and 802.11ax mode for 20MHz (40MHz), therefore the manufacturer will control the power for 802.11n / VHT mode is the same as the 802.11ax mode or more lower than it and investigated worst case to representative mode in test report.

3.3 Channel List

11 channels are provided for 802.11b, 802.11g, 802.11n (HT20), VHT20 and 802.11ax (HE20):

Channel	Frequency	Channel	Frequency
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

7 channels are provided for 802.11n (HT40), VHT40 and 802.11ax (HE40):

Channel	Frequency	Channel	Frequency
3	2422 MHz	7	2442 MHz
4	2427 MHz	8	2447 MHz
5	2432 MHz	9	2452 MHz
6	2437 MHz		

3.4 Power Setting

Power Setting							
Channel	802.11b CDD	802.11g CDD	VHT20 CDD	Channel	VHT40 CDD	Channel	802.11ax (HE20) CDD
1	23.5	17.5	17	3	14.5	1	17
6	25.5	25.5	23	6	18.5	6	23
11	24	19	18.5	9	15.5	11	18.5

Power Setting									
Channel	802.11ax (HE40) CDD	Channel	VHT20 Beamforming	Channel	VHT40 Beamforming	Channel	802.11ax (HE20) Beamforming	Channel	802.11ax (HE40) Beamforming
3	14.5	1	17	3	14.5	1	17	3	14.5
6	18.5	6	23	6	18.5	6	23	6	18.5
9	15.5	11	18.5	9	15.5	11	18.5	9	15.5

3.5 Test Mode Applicability and Tested Channel Detail

Worst Case:	1. Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
-------------	--

Note: Partial RU (resource unit) configurations not supported.

Following channel(s) was (were) selected for the final test as listed below:

Test Item	Mode	Signal Mode	Tested Channel	Modulation	Data Rate Parameter
RF Output Power	802.11b	CDD	1, 6, 11	DBPSK	1Mb/s
	802.11g	CDD	1, 6, 11	BPSK	6Mb/s
	VHT20	CDD & Beamforming	1, 6, 11	BPSK	MCS0
	VHT40	CDD & Beamforming	3, 6, 9	BPSK	MCS0
	802.11ax (HE20)	CDD & Beamforming	1, 6, 11	BPSK	MCS0
	802.11ax (HE40)	CDD & Beamforming	3, 6, 9	BPSK	MCS0
Power Spectral Density	802.11b	CDD	1, 6, 11	DBPSK	1Mb/s
	802.11g	CDD	1, 6, 11	BPSK	6Mb/s
	802.11ax (HE20)	CDD	1, 6, 11	BPSK	MCS0
	802.11ax (HE40)	CDD	3, 6, 9	BPSK	MCS0
6 dB Bandwidth / Conducted Out of Band Emissions	802.11b	CDD	1, 6, 11	DBPSK	1Mb/s
	802.11g	CDD	1, 6, 11	BPSK	6Mb/s
	802.11ax (HE20)	CDD	1, 6, 11	BPSK	MCS0
	802.11ax (HE40)	CDD	3, 6, 9	BPSK	MCS0
AC Power Conducted Emissions	802.11ax (HE20)	CDD	6	BPSK	MCS0
Unwanted Emissions below 1 GHz	802.11ax (HE20)	CDD	6	BPSK	MCS0
Unwanted Emissions above 1 GHz	802.11b	CDD	1, 6, 11	DBPSK	1Mb/s
	802.11g	CDD	1, 6, 11	BPSK	6Mb/s
	802.11ax (HE20)	CDD	1, 6, 11	BPSK	MCS0
	802.11ax (HE40)	CDD	3, 6, 9	BPSK	MCS0

3.6 Duty Cycle of Test Signal


Duty cycle of test signal is $\geq 98\%$, duty factor is not required.
Duty cycle of test signal is $< 98\%$, duty factor shall be considered.

802.11b: Duty cycle = $8.413 \text{ ms} / 8.473 \text{ ms} \times 100\% = 99.3\%$

802.11g: Duty cycle = $2.99 \text{ ms} / 3.03 \text{ ms} \times 100\% = 98.7\%$

802.11ax (HE20): Duty cycle = $3.165 \text{ ms} / 3.225 \text{ ms} \times 100\% = 98.1\%$


802.11ax (HE40): Duty cycle = $4.715 \text{ ms} / 4.78 \text{ ms} \times 100\% = 98.6\%$

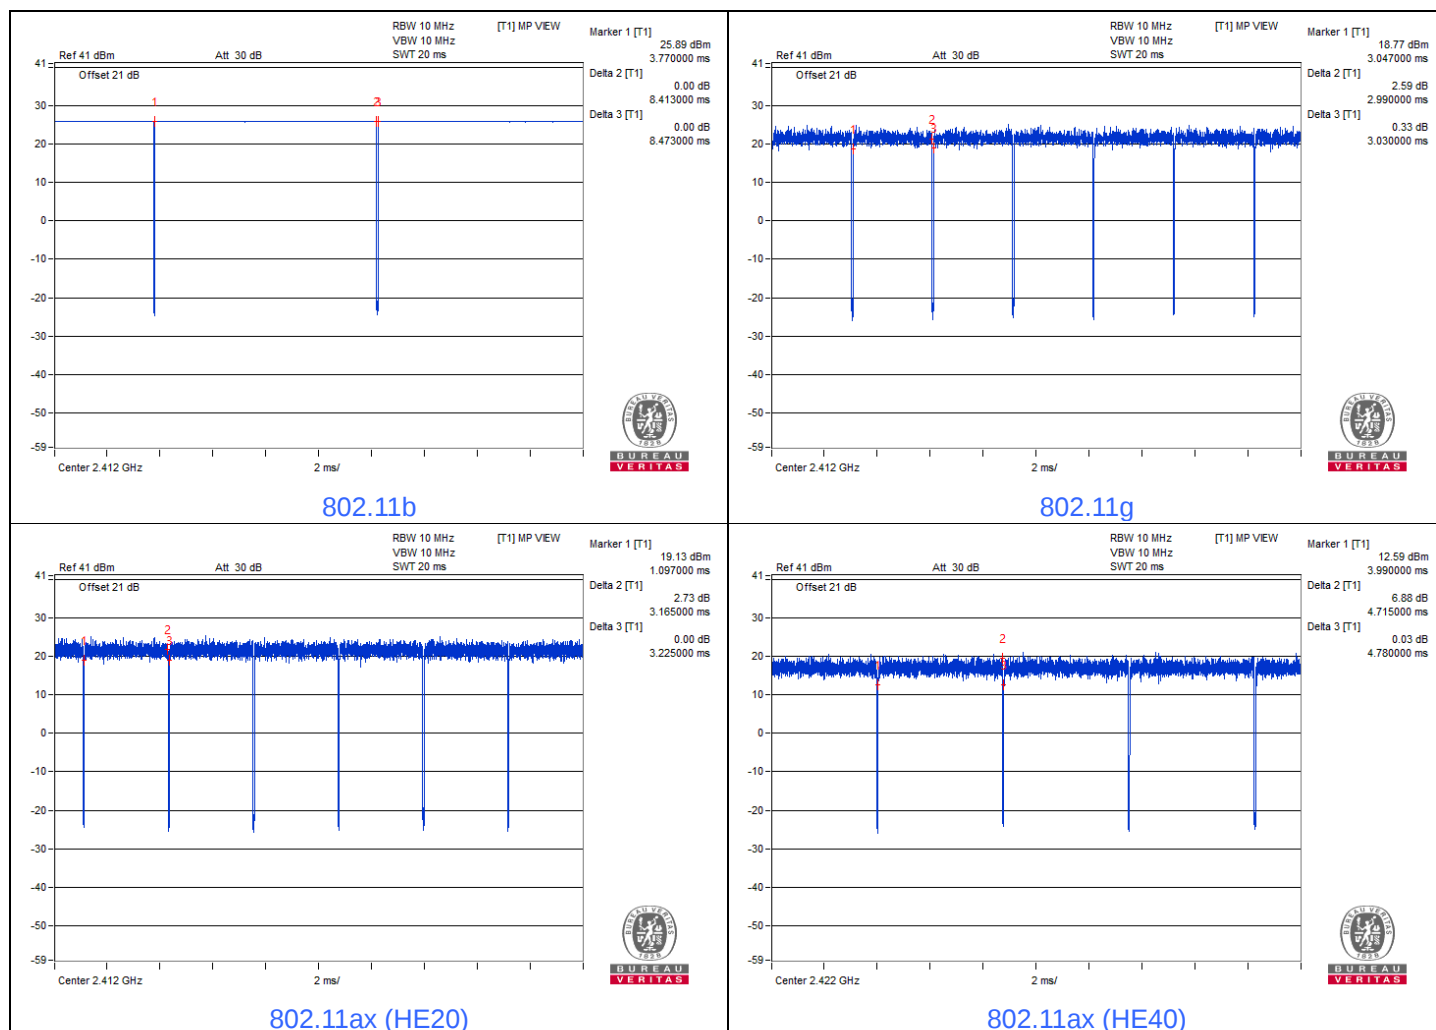

3.7 Test Program Used and Operation Descriptions

Controlling software (QATool_Ulv2.88_DLLv6.93_ap_2022.01.04(V14)c) has been activated to set the EUT under transmission condition continuously at specific channel frequency.

3.8 Connection Diagram of EUT and Peripheral Devices

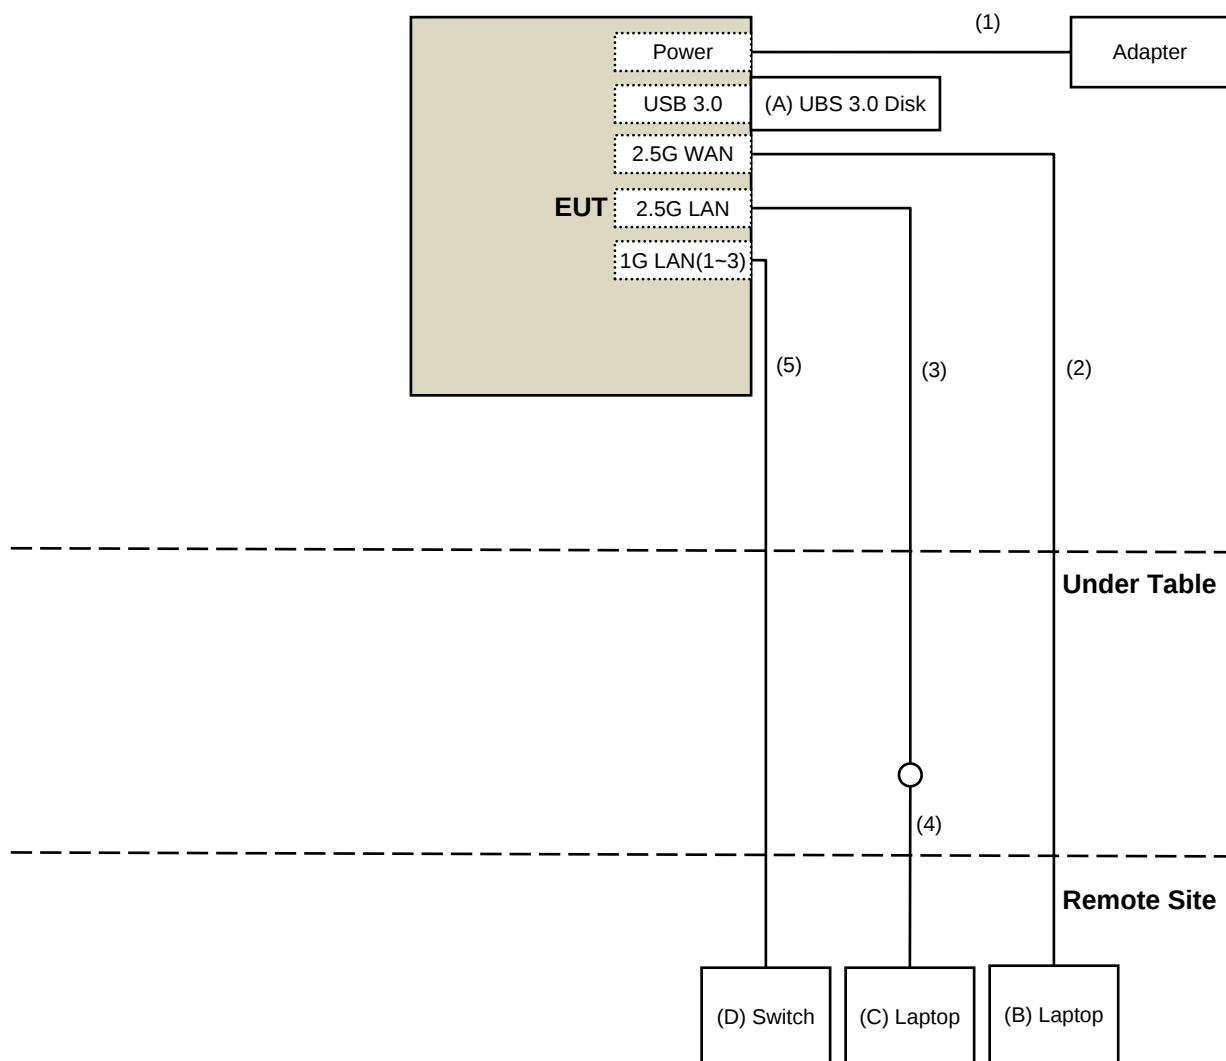

3.9 Configuration of Peripheral Devices and Cable Connections

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A	UBS 3.0 Disk	SanDisk	BM181225896Z	N/A	N/A	Provided by Lab
B	Laptop	Lenovo	20U5S01X00 L14	PF-28LKK7	N/A	Provided by Lab
C	Laptop	DELL	PP36S	25733582128	N/A	Provided by Lab
D	Switch	D-Link	DGS-1005D	DR8WC92000523	N/A	Provided by Lab

ID	Cable Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1	DC Cable	1	1.5	No	0	Supplied by applicant
2	RJ-45 Cable	1	10	No	0	Provided by Lab
3	Ethernet Cable	1	1	No	0	Supplied by applicant
4	RJ-45 Cable	1	10	No	0	Provided by Lab
5	RJ-45 Cable	3	10	No	0	Provided by Lab

4 Test Instruments

The calibration interval of the all test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.1 RF Output Power

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Attenuator WOKEN	MDCS18N-10	MDCS18N-10-01	2022/4/5	2023/4/4
Power Meter Anritsu	ML2495A	1529002	2022/6/22	2023/6/21
Pulse Power Sensor Anritsu	MA2411B	1726434	2022/6/22	2023/6/21
Software	ADT_RF Test Software V6.6.5.4	N/A	N/A	N/A

Notes:

1. The test was performed in Oven room 2.
2. Tested Date: 2022/7/7

4.2 Power Spectral Density

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Attenuator WOKEN	MDCS18N-10	MDCS18N-10-01	2022/4/5	2023/4/4
Software	ADT_RF Test Software V6.6.5.4	N/A	N/A	N/A
Spectrum Analyzer R&S	FSV40	101516	2022/3/7	2023/3/6

Notes:

1. The test was performed in Oven room 2.
2. Tested Date: 2022/7/7

4.3 6 dB Bandwidth

Refer to section 4.2 to get information of the instruments.

4.4 Conducted Out of Band Emissions

Refer to section 4.2 to get information of the instruments.

4.5 AC Power Conducted Emissions

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
50 ohms Terminator	50	3	2021/10/27	2022/10/26
Fixed attenuator STI	STI02-2200-10	005	2021/8/27	2022/8/26
LISN R&S	ESH3-Z5	848773/004	2021/10/29	2022/10/28
RF Coaxial Cable JYEBO	5D-FB	COCCAB-001	2021/9/25	2022/9/24
Software BVADT	BVADT_Cond_V7.3.7.4	N/A	N/A	N/A
TEST RECEIVER R&S	ESCS 30	847124/029	2021/10/13	2022/10/12

Notes:

1. The test was performed in Conduction 1
2. Tested Date: 2022/6/10

4.6 Unwanted Emissions below 1 GHz

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Antenna Tower & Turn Table Max-Full	MF-7802	MF780208406	N/A	N/A
Fixed attenuator Mini-Circuits	UNAT-5+	PAD-3m-3-01	2021/9/23	2022/9/22
LOOP ANTENNA Electro-Metrics	EM-6879	264	2022/3/18	2023/3/17
Pre_Amplifier Agilent	8447D	2944A10636	2022/3/19	2023/3/18
Pre_Amplifier Mini-Circuits	ZFL-1000VH2	QA0838008	2021/10/19	2022/10/18
RF Coaxial Cable JYEBO	5D-FB	LOOPCAB-001	2022/1/6	2023/1/5
		LOOPCAB-002	2022/1/6	2023/1/5
RF Coaxial Cable COMMATE/PEWC	8D	966-4-1	2022/3/8	2023/3/7
		966-3-2	2022/2/26	2023/2/25
		966-3-3	2022/2/26	2023/2/25
Software	ADT_Radiated_V8.7.08	N/A	N/A	N/A
Spectrum Analyzer KEYSIGHT	N9030B	MY57142938	2022/4/26	2023/4/25
Test Receiver KEYSIGHT	N9038A	MY59050100	2022/6/20	2023/6/19
Trilog Broadband Antenna Schwarzbeck	VULB 9168	9168-361	2021/10/26	2022/10/25

Notes:

1. The test was performed in 966 Chamber No. 3.
2. Tested Date: 2022/7/20

4.7 Unwanted Emissions above 1 GHz

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Antenna Tower & Turn Table Max-Full	MF-7802	MF780208406	N/A	N/A
Fix tool for Boresight antenna tower BV	FBA-01	FBA_SIP01	N/A	N/A
Horn Antenna Schwarzbeck	BBHA9120-D	9120D-406	2021/11/14	2022/11/13
	BBHA 9170	9170-739	2021/11/14	2022/11/13
MXE EMI Receiver(20 Hz to 44 GHz) Keysight	N9038A	MY54450088	2021/7/6 2022/07/11	2022/7/5 2023/07/10
Pre_Amplifier EMCI	EMC12630SE	980384	2022/1/10	2023/1/9
	EMC184045SE	980387	2022/1/10	2023/1/9
RF Cable EMCI	EMC104-SM-SM-6000	210201	2022/5/10	2023/5/9
RF Cable-Frequency range: 1- 40GHz EMCI	EMC102-KM-KM-1200	160924	2022/1/10	2023/1/9
RF Coaxial Cable EMCI	EMC104-SM-SM-1500	180504	2022/4/25	2023/4/24
	EMC-KM-KM-4000	200214	2022/3/8	2023/3/7
	EMC104-SM-SM-2000	180601	2021/6/8 2022/6/6	2022/6/7 2023/6/5
Software	ADT_Radiated_V8.7.08	N/A	N/A	N/A
Spectrum Analyzer KEYSIGHT	N9030B	MY57142938	2022/4/26	2023/4/25
Test Receiver KEYSIGHT	N9038A	MY59050100	2021/7/6 2022/6/20	2022/7/5 2023/6/19

Notes:

1. The test was performed in 966 Chamber No. 3.
2. Tested Date: 2022/6/2 ~ 2022/7/13

5 Limits of Test Items

5.1 RF Output Power

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30 dBm)

Per KDB 662911 D01 Multiple Transmitter Output Method of conducted output power measurement on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$;

Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any N_{ANT} ;

Array Gain = $5 \log(N_{ANT}/N_{SS})$ dB or 3 dB, whichever is less, for 20-MHz channel widths with $N_{ANT} \geq 5$.

For power measurements on all other devices: Array Gain = $10 \log(N_{ANT}/N_{SS})$ dB.

5.2 Power Spectral Density

The Maximum of Power Spectral Density Measurement is 8 dBm in any 3 kHz.

5.3 6 dB Bandwidth

The minimum of 6 dB Bandwidth Measurement is 0.5 MHz.

5.4 Conducted Out of Band Emissions

Below 30 dB of the highest emission level of operating band (in 100 kHz Resolution Bandwidth).

5.5 AC Power Conducted Emissions

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Notes:

1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

5.6 Unwanted Emissions below 1 GHz

Radiated emissions up to 1 GHz which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 30 dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	$2400/F(\text{kHz})$	300
0.490 ~ 1.705	$24000/F(\text{kHz})$	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

Notes:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = $20 \log$ Emission level (uV/m).

5.7 Unwanted Emissions above 1 GHz

Radiated emissions above 1 GHz which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 30 dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
Above 960	500	3


Notes:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20 dB under any condition of modulation.

6 Test Arrangements

6.1 RF Output Power

6.1.1 Test Setup




6.1.2 Test Procedure

Average power sensor was used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

6.2 Power Spectral Density

6.2.1 Test Setup




6.2.2 Test Procedure

- Measure the duty cycle (x).
- Set instrument center frequency to DTS channel center frequency.
- Set span to at least 1.5 times the OBW.
- Set RBW to: 3 kHz.
- Set VBW $\geq 3 \times$ RBW.
- Detector = power averaging (RMS) or sample detector (when RMS not available).
- Ensure that the number of measurement points in the sweep $\geq 2 \times$ span/RBW.
- Sweep time = auto couple.
- Do not use sweep triggering. Allow sweep to "free run".
- Employ trace averaging (RMS) mode over a minimum of 100 traces.
- Use the peak marker function to determine the maximum amplitude level.

Note: If Duty cycle < 98%, Add $10 \log (1/x)$, where x is the duty cycle measured in step (a), to the measured PSD to compute the average PSD during the actual transmission time.

6.3 6 dB Bandwidth

6.3.1 Test Setup




6.3.2 Test Procedure

- Set resolution bandwidth (RBW) = 100 kHz.
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

6.4 Conducted Out of Band Emissions

6.4.1 Test Setup



6.4.2 Test Procedure

MEASUREMENT PROCEDURE REF


- Set the RBW = 100 kHz.
- Set the VBW ≥ 300 kHz.
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

MEASUREMENT PROCEDURE OOBE

- Set RBW = 100 kHz.
- Set VBW ≥ 300 kHz.
- Detector = peak.
- Sweep = auto couple.
- Trace Mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level.

6.5 AC Power Conducted Emissions

6.5.1 Test Setup

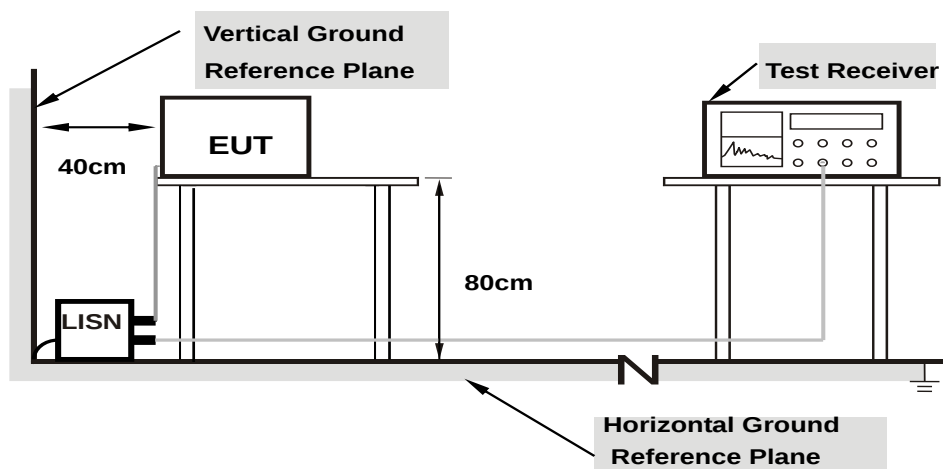

Note: 1. Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

6.5.2 Test Procedure


- The EUT was placed on a 0.8 meter to the top of table and placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50 uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150 kHz to 30 MHz was searched. Emission levels under (Limit – 20 dB) was not recorded.

Note: The resolution bandwidth and video bandwidth of test receiver is 9 kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15 MHz-30 MHz.


6.6 Unwanted Emissions below 1 GHz

6.6.1 Test Setup

For Radiated emission below 30 MHz

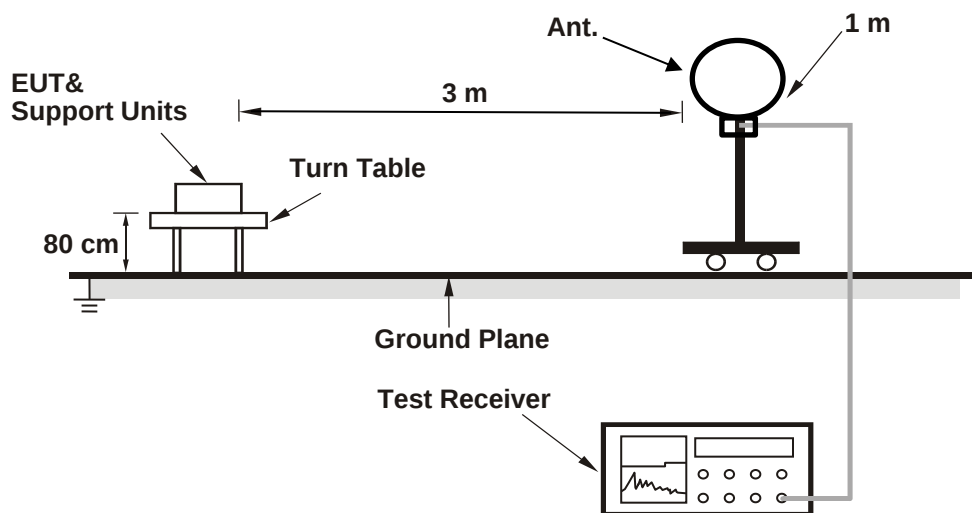

For Radiated emission above 30 MHz

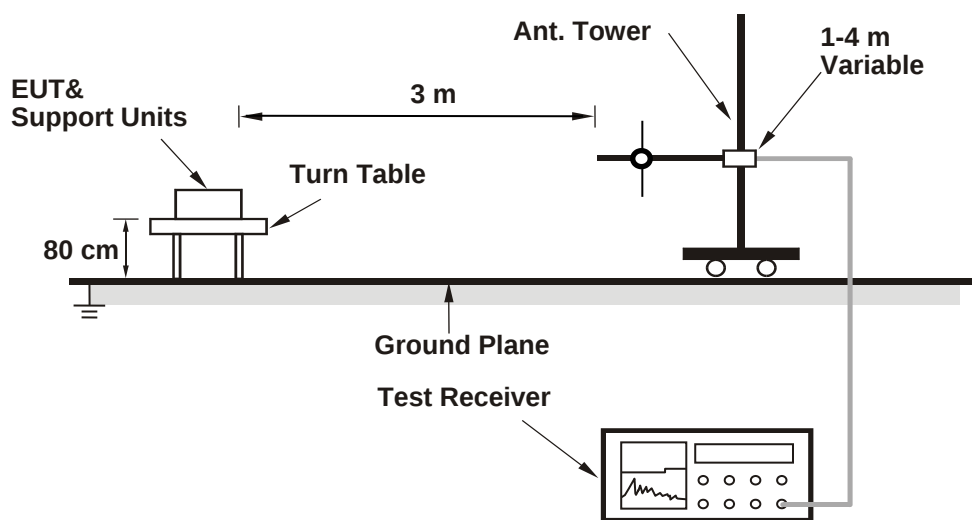

For the actual test configuration, please refer to the attached file (Test Setup Photo).

6.6.2 Test Procedure

For Radiated emission below 30 MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode, except for the frequency band (9 kHz to 90 kHz and 110 kHz to 490 kHz) set to average detect function and peak detect function.

Notes:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 200 Hz at frequency below 150 kHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9 kHz or 10 kHz at frequency (150 kHz to 30 MHz).
3. All modes of operation were investigated and the worst-case emissions are reported.

For Radiated emission above 30 MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.


Notes:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection (QP) at frequency below 1 GHz.
2. All modes of operation were investigated and the worst-case emissions are reported.

6.7 Unwanted Emissions above 1 GHz

6.7.1 Test Setup

For Radiated emission above 1 GHz

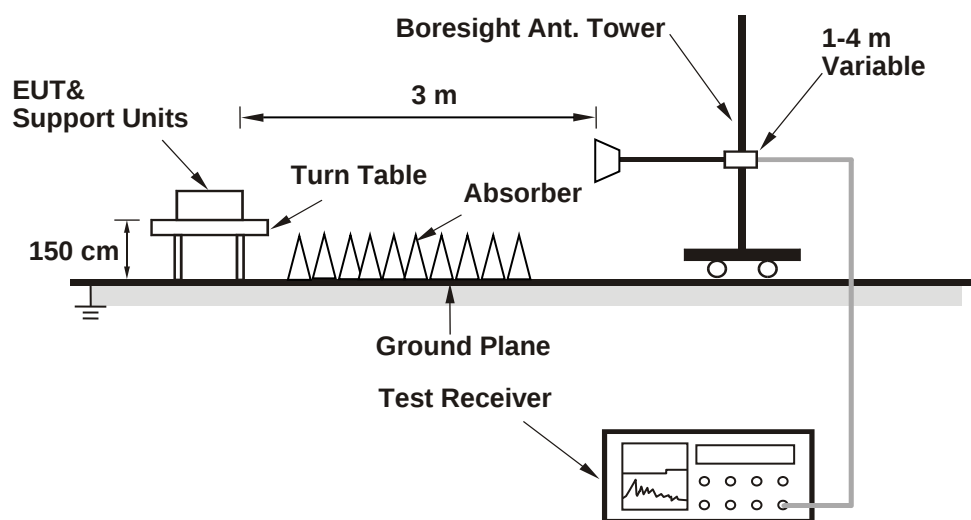

For the actual test configuration, please refer to the attached file (Test Setup Photo).

6.7.2 Test Procedure

- The EUT was placed on the top of a rotating table 1.5 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to peak and average detects function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Notes:

- The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) and Average detection (AV) at frequency above 1 GHz.
- For fundamental and harmonic signal measurement, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or 10 Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1 GHz.
- All modes of operation were investigated and the worst-case emissions are reported.

7 Test Results of Test Item

7.1 RF Output Power

Input Power:	120 Vac, 60 Hz	Environmental Conditions:	25°C, 60% RH	Tested By:	Chilin Lee
--------------	----------------	---------------------------	--------------	------------	------------

802.11b CDD

Chan.	Chan. Freq. (MHz)	Average Power (dBm)				Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1	Chain 2	Chain 3				
1	2412	23.77	24.41	23.34	23.29	943.369	29.75	30	Pass
6	2437	23.72	24.43	24.48	22.93	989.716	29.96	30	Pass
11	2462	23.33	23.99	24.13	23.52	949.616	29.78	30	Pass

Notes:

1. Directional gain is the maximum gain of antennas.
2. The maximum gain is 3.3 dBi < 6 dBi, so the output power limit shall not be reduced.

802.11g CDD

Chan.	Chan. Freq. (MHz)	Average Power (dBm)				Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1	Chain 2	Chain 3				
1	2412	19.21	20.17	20.18	19.23	375.345	25.74	30	Pass
6	2437	24.24	24.07	24.17	22.99	981.014	29.92	30	Pass
11	2462	20.04	19.98	20.23	19.23	389.657	25.91	30	Pass

Notes:

1. Directional gain is the maximum gain of antennas.
2. The maximum gain is 3.3 dBi < 6 dBi, so the output power limit shall not be reduced.

VHT20 CDD

Chan.	Chan. Freq. (MHz)	Average Power (dBm)				Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1	Chain 2	Chain 3				
1	2412	18.26	18.29	18.01	17.74	257.112	24.10	30	Pass
6	2437	23.39	23.34	23.29	23.07	850.12	29.29	30	Pass
11	2462	18.62	18.59	18.67	18.33	286.753	24.58	30	Pass

Notes:

1. Directional gain is the maximum gain of antennas.
2. The maximum gain is 3.3 dBi < 6 dBi, so the output power limit shall not be reduced.

VHT40 CDD

Chan.	Chan. Freq. (MHz)	Average Power (dBm)				Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1	Chain 2	Chain 3				
3	2422	15.96	15.99	16.04	15.52	154.989	21.90	30	Pass
6	2437	19.62	19.50	19.54	19.12	352.355	25.47	30	Pass
9	2452	16.11	16.09	16.34	15.83	162.811	22.12	30	Pass

Notes:

1. Directional gain is the maximum gain of antennas.
2. The maximum gain is 3.3 dBi < 6 dBi, so the output power limit shall not be reduced.

802.11ax (HE20) CDD

Chan.	Chan. Freq. (MHz)	Average Power (dBm)				Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1	Chain 2	Chain 3				
1	2412	18.50	18.51	18.24	17.97	271.094	24.33	30	Pass
6	2437	23.64	23.58	23.54	23.32	899.967	29.54	30	Pass
11	2462	18.87	18.85	18.91	18.57	303.575	24.82	30	Pass

Notes:

1. Directional gain is the maximum gain of antennas.
2. The maximum gain is 3.3 dBi < 6 dBi, so the output power limit shall not be reduced.

802.11ax (HE40) CDD

Chan.	Chan. Freq. (MHz)	Average Power (dBm)				Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1	Chain 2	Chain 3				
3	2422	16.20	16.23	16.28	15.76	163.795	22.14	30	Pass
6	2437	19.85	19.74	19.79	19.36	372.372	25.71	30	Pass
9	2452	16.37	16.34	16.57	16.07	172.255	22.36	30	Pass

Notes:

1. Directional gain is the maximum gain of antennas.
2. The maximum gain is 3.3 dBi < 6 dBi, so the output power limit shall not be reduced.

VHT20 Beamforming

Chan.	Chan. Freq. (MHz)	Average Power (dBm)				Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1	Chain 2	Chain 3				
1	2412	18.26	18.29	18.01	17.74	257.112	24.10	30	Pass
6	2437	23.39	23.34	23.29	23.07	850.12	29.29	30	Pass
11	2462	18.62	18.59	18.67	18.33	286.753	24.58	30	Pass

Notes:

1. Directional gain is the measured value according to KDB 662911 D03 Method of MIMO Antenna Gain Measurement.
2. The directional gain is 5.12 dBi < 6 dBi, so the output power limit shall not be reduced.

VHT40 Beamforming

Chan.	Chan. Freq. (MHz)	Average Power (dBm)				Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1	Chain 2	Chain 3				
3	2422	15.96	15.99	16.04	15.52	154.989	21.90	30	Pass
6	2437	19.62	19.50	19.54	19.12	352.355	25.47	30	Pass
9	2452	16.11	16.09	16.34	15.83	162.811	22.12	30	Pass

Notes:

1. Directional gain is the measured value according to KDB 662911 D03 Method of MIMO Antenna Gain Measurement.
2. The directional gain is 5.12 dBi < 6 dBi, so the output power limit shall not be reduced.

802.11ax (HE20) Beamforming

Chan.	Chan. Freq. (MHz)	Average Power (dBm)				Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1	Chain 2	Chain 3				
1	2412	18.50	18.51	18.24	17.97	271.094	24.33	30	Pass
6	2437	23.64	23.58	23.54	23.32	899.967	29.54	30	Pass
11	2462	18.87	18.85	18.91	18.57	303.575	24.82	30	Pass

Notes:

1. Directional gain is the measured value according to KDB 662911 D03 Method of MIMO Antenna Gain Measurement.
2. The directional gain is 5.12 dBi < 6 dBi, so the output power limit shall not be reduced.

802.11ax (HE40) Beamforming

Chan.	Chan. Freq. (MHz)	Average Power (dBm)				Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1	Chain 2	Chain 3				
3	2422	16.20	16.23	16.28	15.76	163.795	22.14	30	Pass
6	2437	19.85	19.74	19.79	19.36	372.372	25.71	30	Pass
9	2452	16.37	16.34	16.57	16.07	172.255	22.36	30	Pass

Notes:

1. Directional gain is the measured value according to KDB 662911 D03 Method of MIMO Antenna Gain Measurement.
2. The directional gain is 5.12 dBi < 6 dBi, so the output power limit shall not be reduced.

7.2 Power Spectral Density

Input Power:	120 Vac, 60 Hz	Environmental Conditions:	25°C, 60% RH	Tested By:	Chilin Lee
--------------	----------------	---------------------------	--------------	------------	------------

802.11b

Chan.	Chan. Freq. (MHz)	PSD (dBm/3kHz)				Total PSD (dBm/3kHz)	PSD Limit (dBm/3kHz)	Test Result
		Chain 0	Chain 1	Chain 2	Chain 3			
1	2412	-9.08	-8.93	-9.54	-9.76	-3.29	8.00	Pass
6	2437	-6.85	-7.24	-8.33	-8.36	-1.62	8.00	Pass
11	2462	-9.51	-9.23	-9.75	-10.03	-3.60	8.00	Pass

Notes:

1. Method E) 2) b) Measure and sum spectral maxima across the outputs of KDB 662911 is using for calculating total power density.
2. Directional gain is the measured value according to KDB 662911 D03 Method of MIMO Antenna Gain Measurement.
3. The directional gain is 5.12 dBi < 6 dBi, so the power density limit shall not be reduced.

802.11g

Chan.	Chan. Freq. (MHz)	PSD (dBm/3kHz)				Total PSD (dBm/3kHz)	PSD Limit (dBm/3kHz)	Test Result
		Chain 0	Chain 1	Chain 2	Chain 3			
1	2412	-15.85	-15.31	-16.87	-16.79	-10.13	8.00	Pass
6	2437	-9.74	-9.42	-9.50	-10.10	-3.66	8.00	Pass
11	2462	-16.03	-15.78	-15.89	-16.18	-9.95	8.00	Pass

Notes:

1. Method E) 2) b) Measure and sum spectral maxima across the outputs of KDB 662911 is using for calculating total power density.
2. Directional gain is the measured value according to KDB 662911 D03 Method of MIMO Antenna Gain Measurement.
3. The directional gain is 5.12 dBi < 6 dBi, so the power density limit shall not be reduced.

802.11ax (HE20)

Chan.	Chan. Freq. (MHz)	PSD (dBm/3kHz)				Total PSD (dBm/3kHz)	PSD Limit (dBm/3kHz)	Test Result
		Chain 0	Chain 1	Chain 2	Chain 3			
1	2412	-17.51	-16.99	-18.33	-18.31	-11.73	8.00	Pass
6	2437	-10.09	-12.04	-12.81	-10.52	-5.21	8.00	Pass
11	2462	-16.78	-16.66	-17.57	-13.60	-9.84	8.00	Pass

Notes:

1. Method E) 2) b) Measure and sum spectral maxima across the outputs of KDB 662911 is using for calculating total power density.
2. Directional gain is the measured value according to KDB 662911 D03 Method of MIMO Antenna Gain Measurement.
3. The directional gain is 5.12 dBi < 6 dBi, so the power density limit shall not be reduced.


802.11ax (HE40)

Chan.	Chan. Freq. (MHz)	PSD (dBm/3kHz)				Total PSD (dBm/3kHz)	PSD Limit (dBm/3kHz)	Test Result
		Chain 0	Chain 1	Chain 2	Chain 3			
3	2422	-22.64	-21.94	-22.27	-22.24	-16.24	8.00	Pass
6	2437	-18.60	-18.53	-19.44	-19.16	-12.90	8.00	Pass
9	2452	-22.48	-22.25	-21.60	-22.28	-16.12	8.00	Pass

Notes:

- Method E) 2) b) Measure and sum spectral maxima across the outputs of KDB 662911 is using for calculating total power density.
- Directional gain is the measured value according to KDB 662911 D03 Method of MIMO Antenna Gain Measurement.
- The directional gain is 5.12 dBi < 6 dBi, so the power density limit shall not be reduced.

Spectrum Plot of Maximum Value

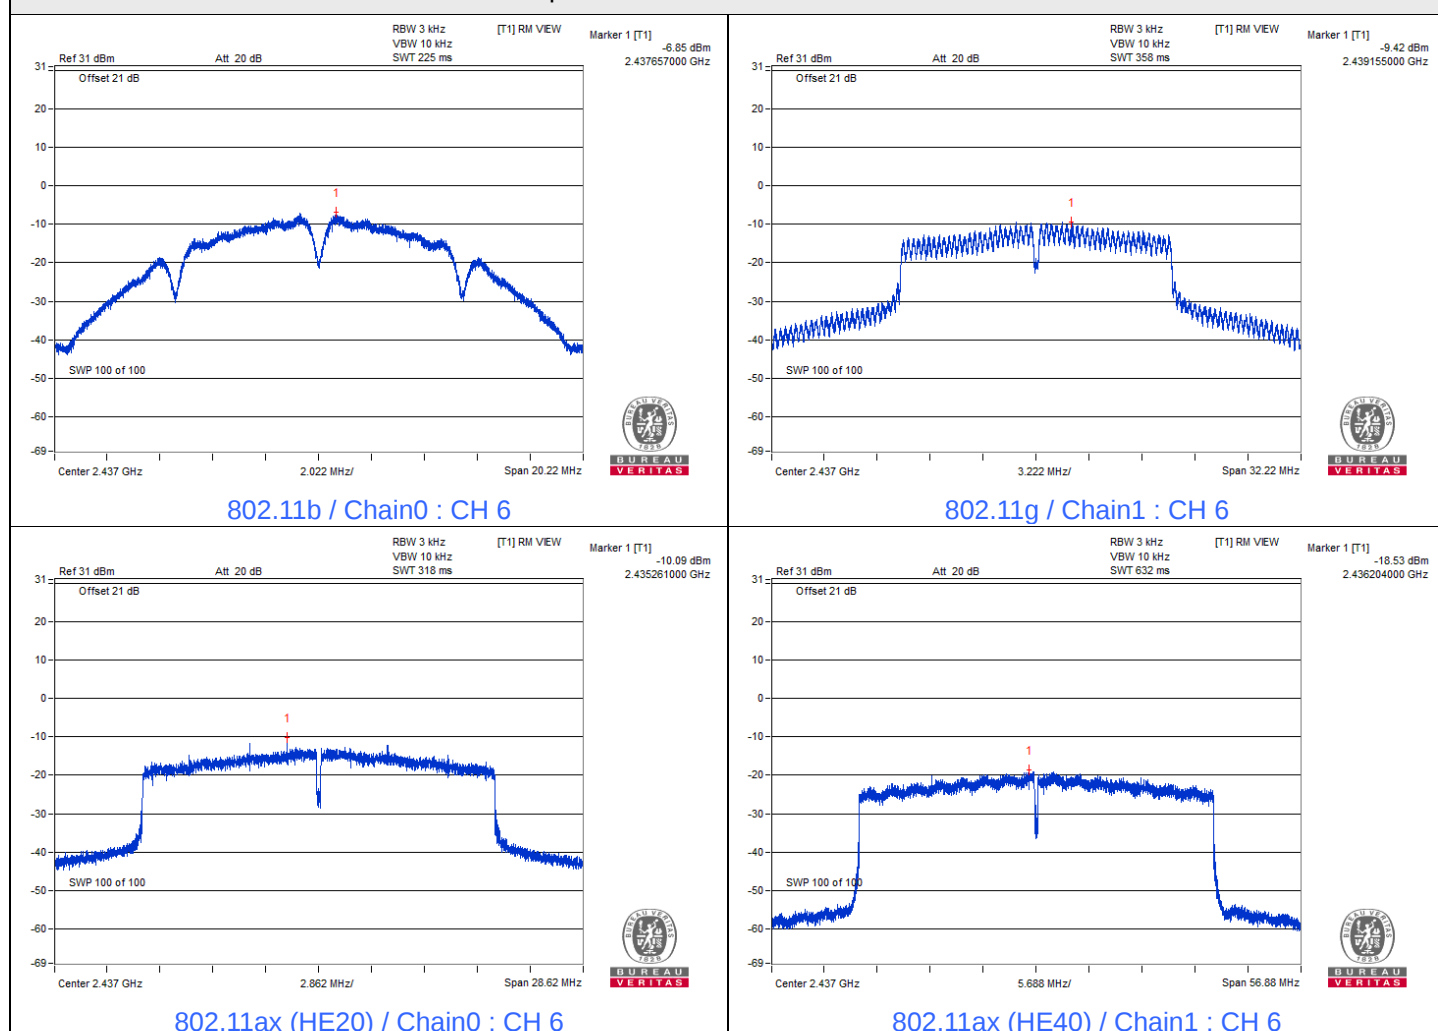

7.3 6 dB Bandwidth

Input Power:	120 Vac, 60 Hz	Environmental Conditions:	25°C, 60% RH	Tested By:	Chilin Lee
--------------	----------------	---------------------------	--------------	------------	------------

802.11b

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)				Minimum Limit (MHz)	Test Result
		Chain 0	Chain 1	Chain 2	Chain 3		
1	2412	8.08	7.63	8.07	8.07	0.5	Pass
6	2437	8.61	8.57	8.08	8.10	0.5	Pass
11	2462	8.08	8.07	8.07	7.59	0.5	Pass

802.11g

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)				Minimum Limit (MHz)	Test Result
		Chain 0	Chain 1	Chain 2	Chain 3		
1	2412	15.87	15.16	15.20	16.32	0.5	Pass
6	2437	15.67	15.19	15.48	15.40	0.5	Pass
11	2462	15.41	15.09	15.19	15.20	0.5	Pass





802.11ax (HE20)

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)				Minimum Limit (MHz)	Test Result
		Chain 0	Chain 1	Chain 2	Chain 3		
1	2412	18.48	18.40	18.10	15.22	0.5	Pass
6	2437	16.89	16.44	17.60	16.31	0.5	Pass
11	2462	17.41	15.91	17.14	16.33	0.5	Pass

802.11ax (HE40)

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)				Minimum Limit (MHz)	Test Result
		Chain 0	Chain 1	Chain 2	Chain 3		
3	2422	37.82	37.71	36.90	37.66	0.5	Pass
6	2437	37.43	33.92	37.08	36.45	0.5	Pass
9	2452	36.70	36.12	36.51	37.10	0.5	Pass







Spectrum Plot of Minimum Value



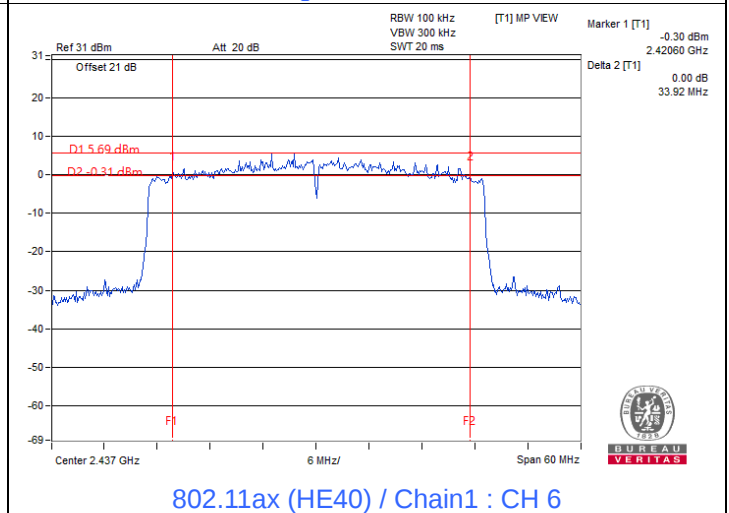
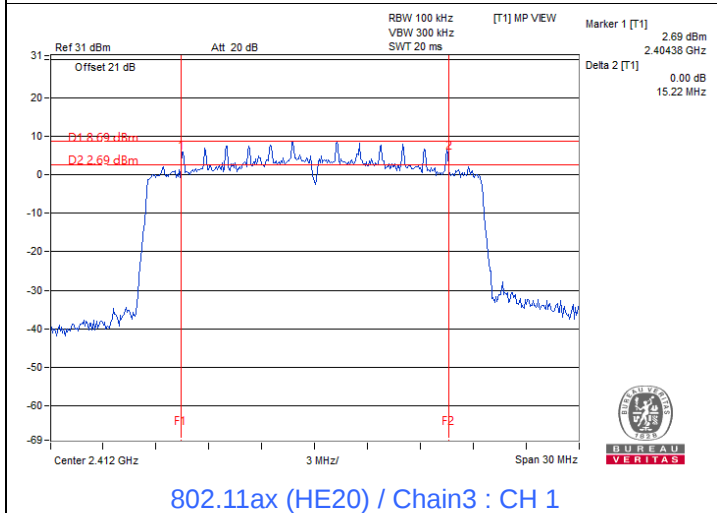
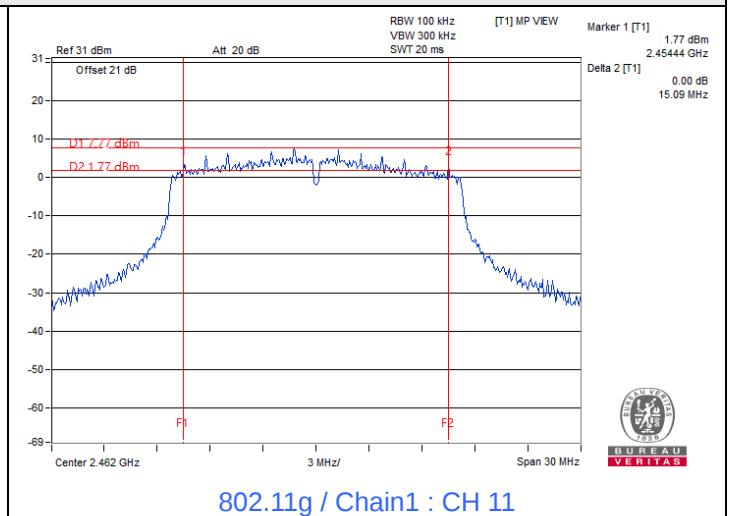
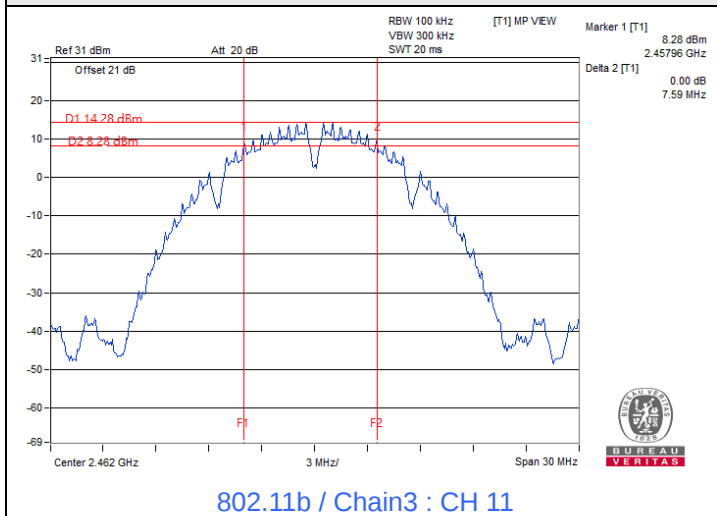








7.4 Conducted Out of Band Emissions







Input Power:	120 Vac, 60 Hz	Environmental Conditions:	25°C, 60% RH	Tested By:	Chilin Lee
--------------	----------------	---------------------------	--------------	------------	------------

802.11b

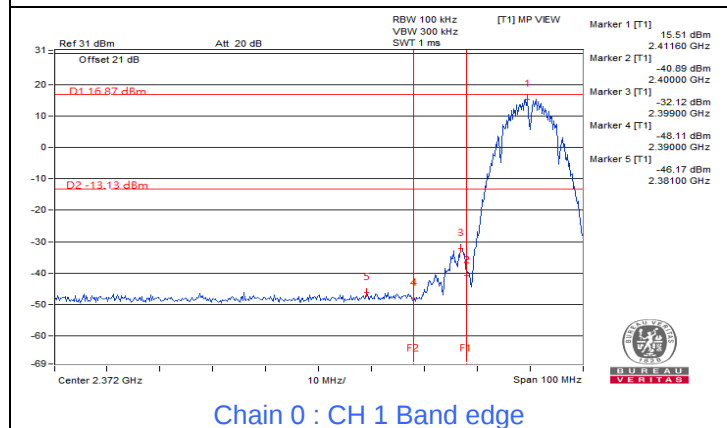

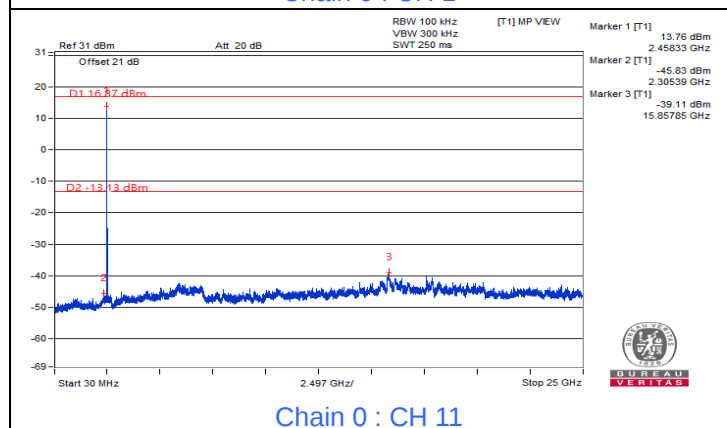
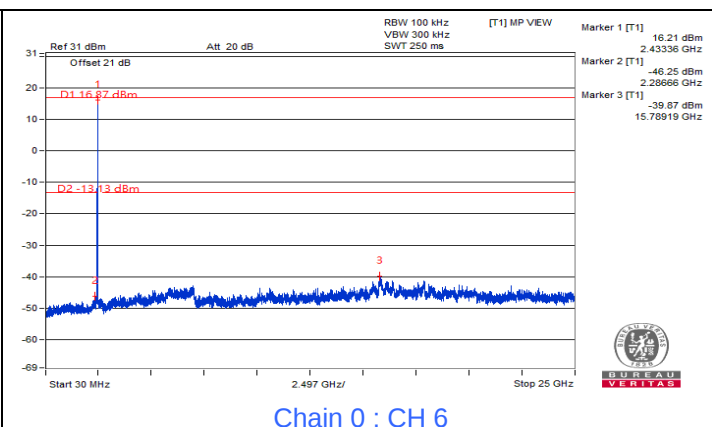
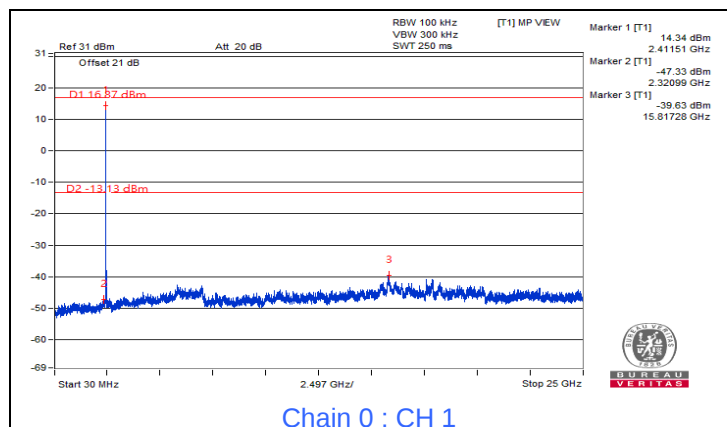
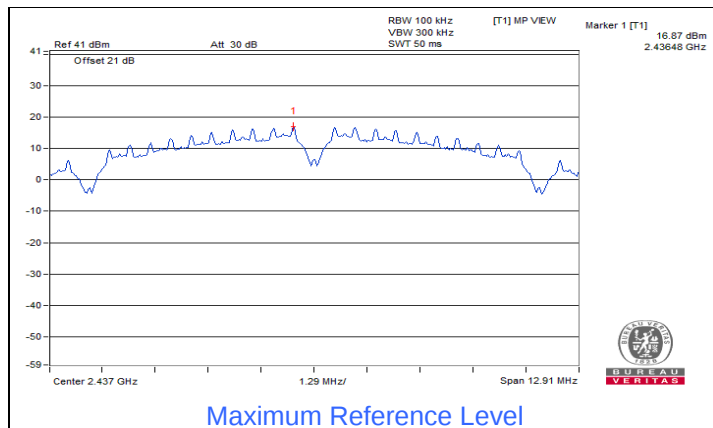


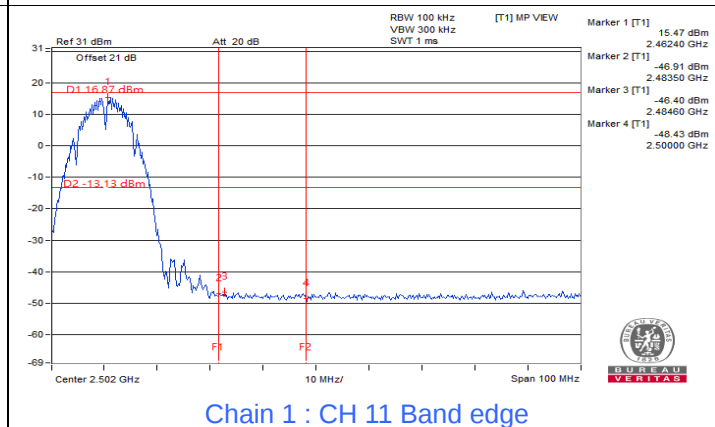
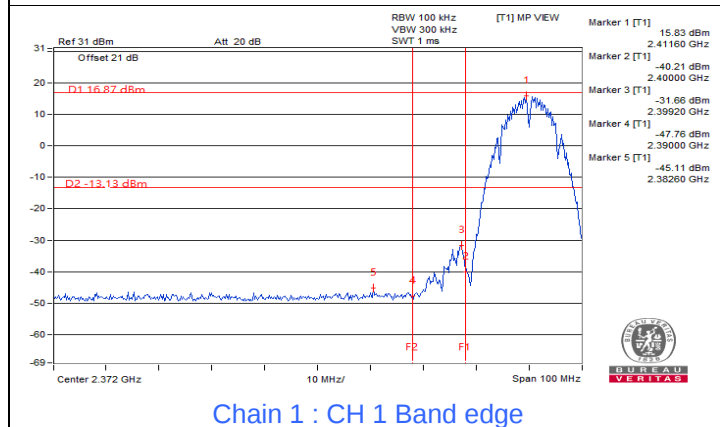

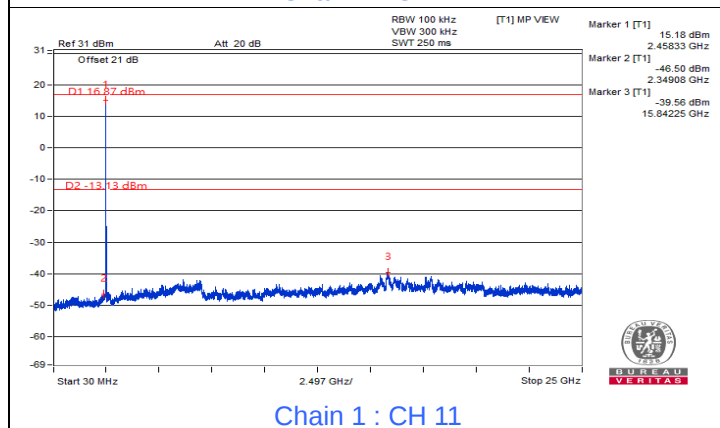
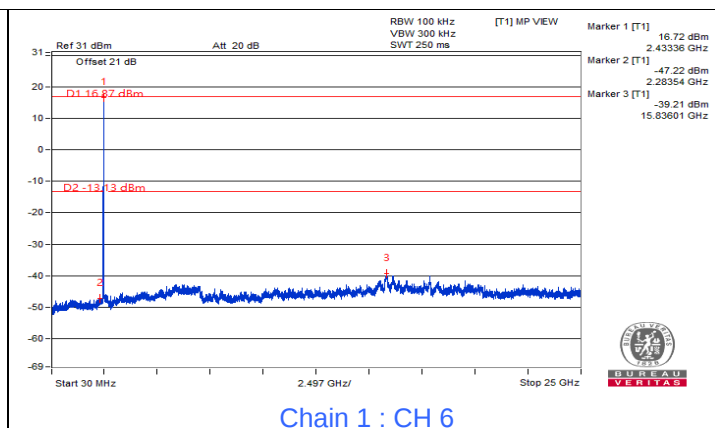
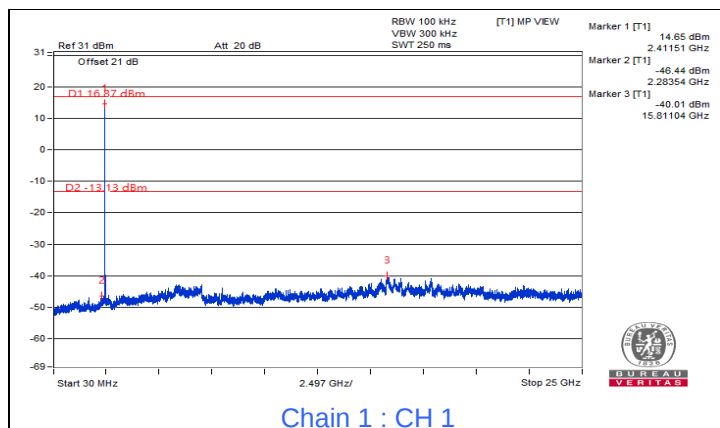


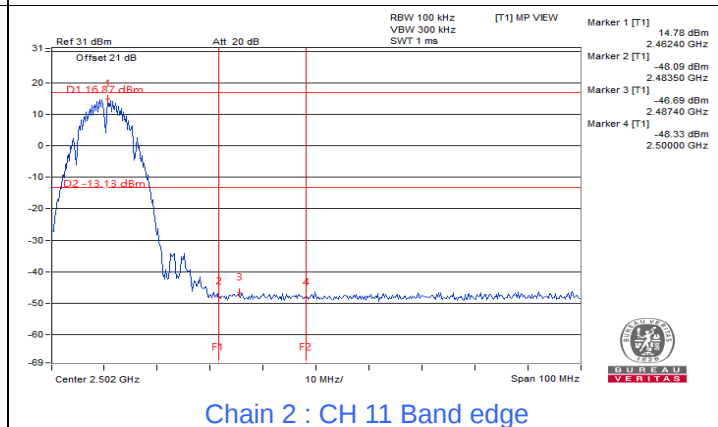
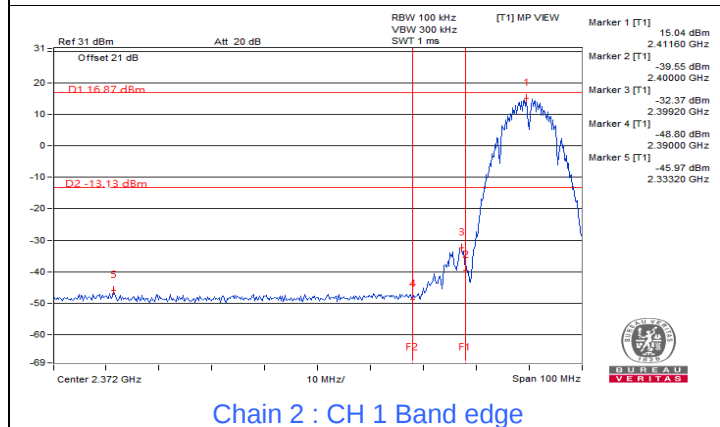

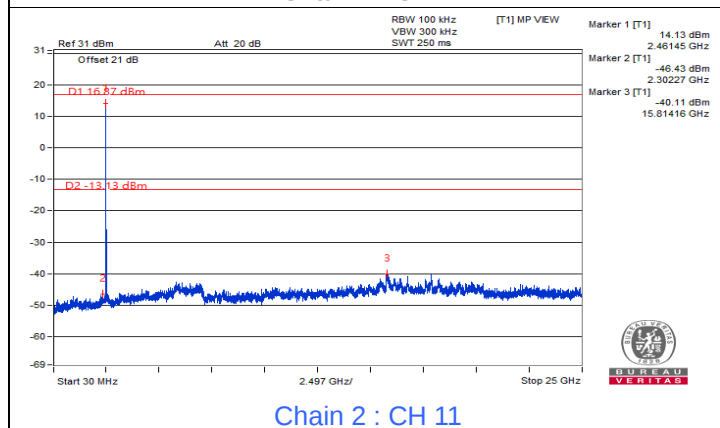
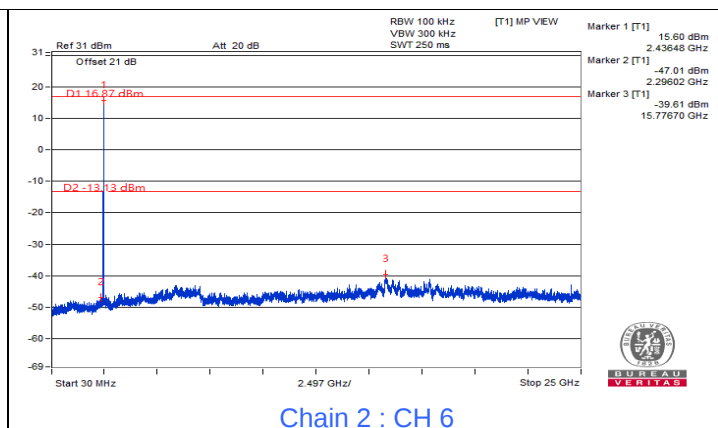
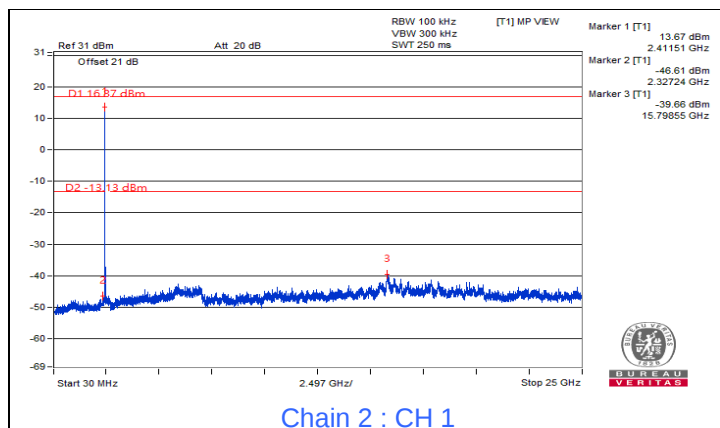


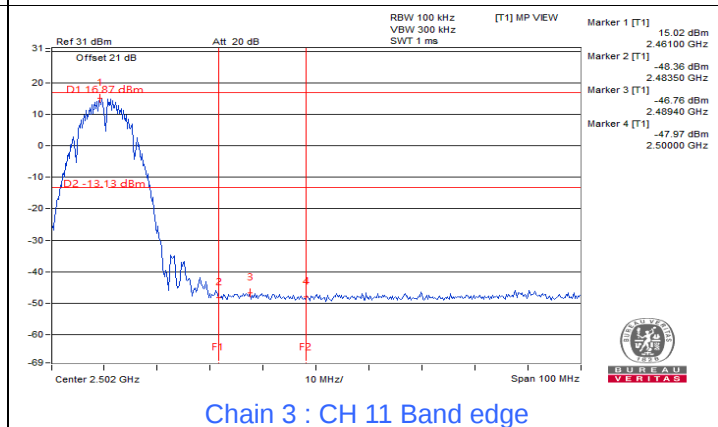
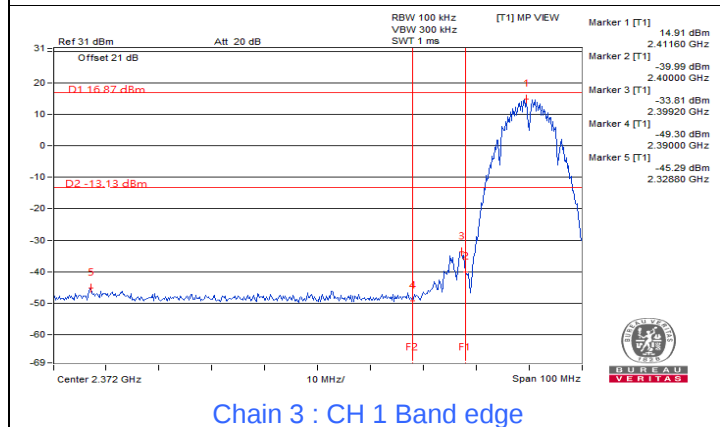

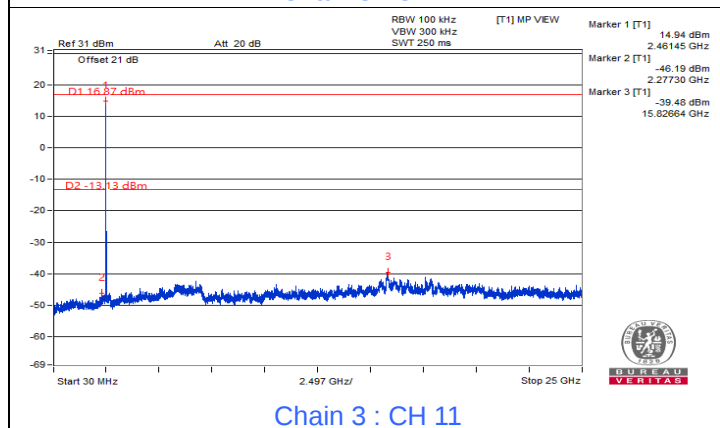
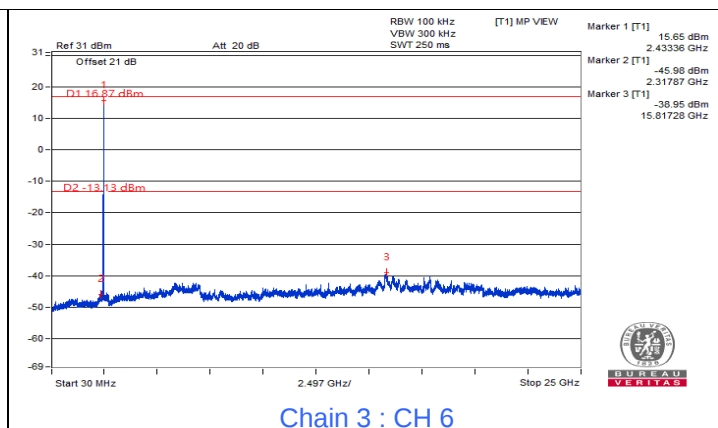
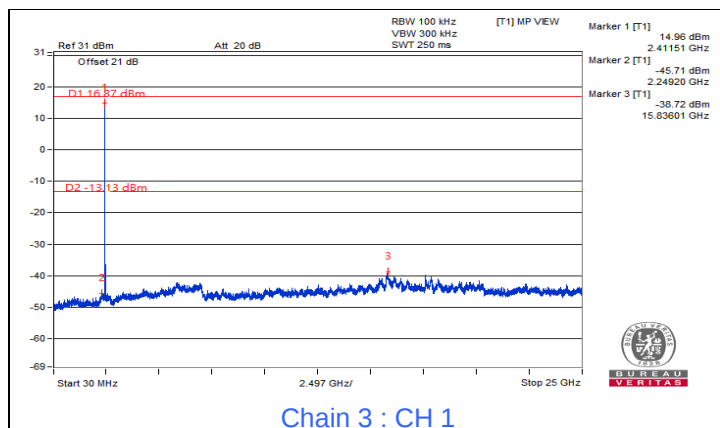


802.11g


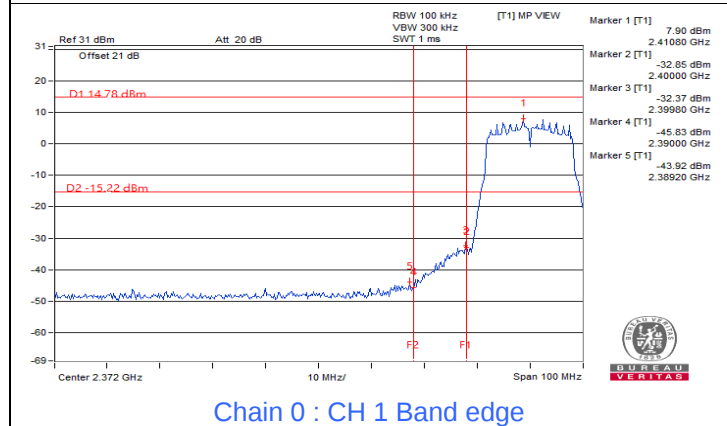

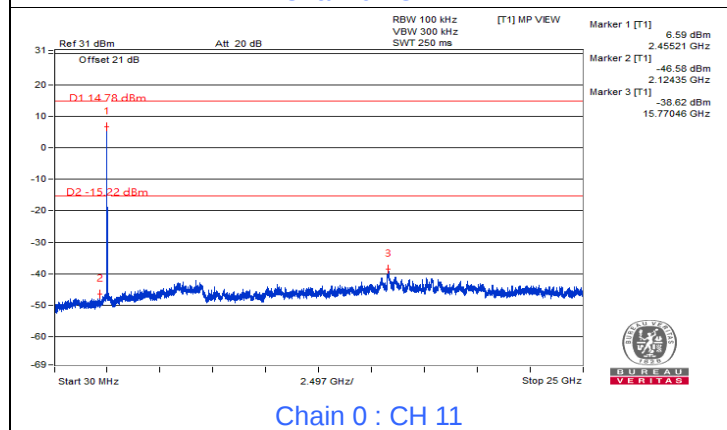
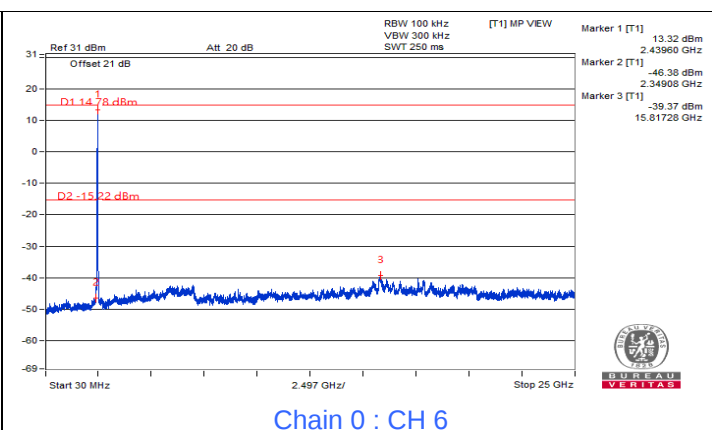
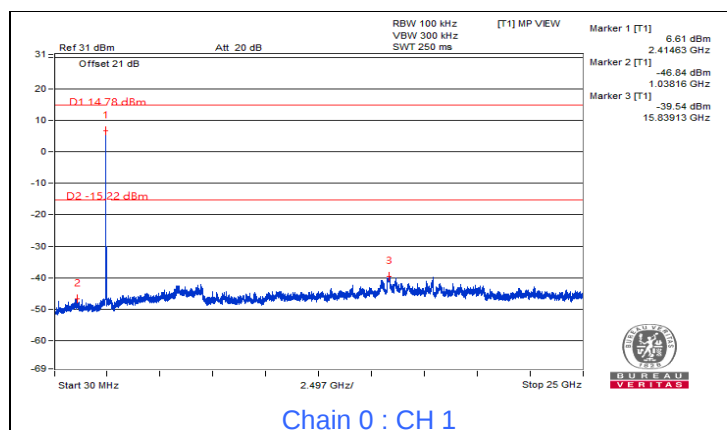
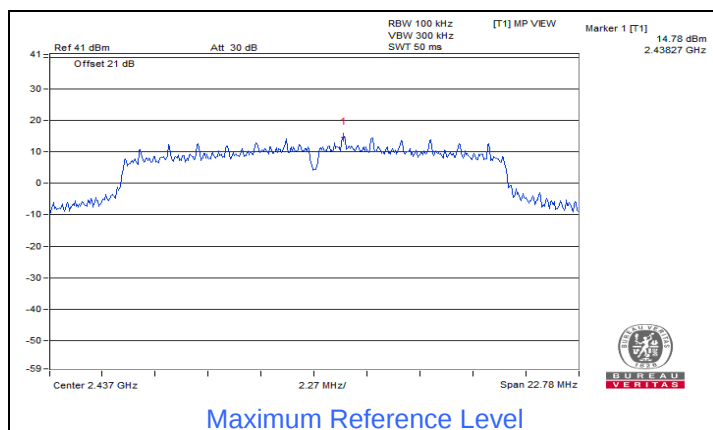


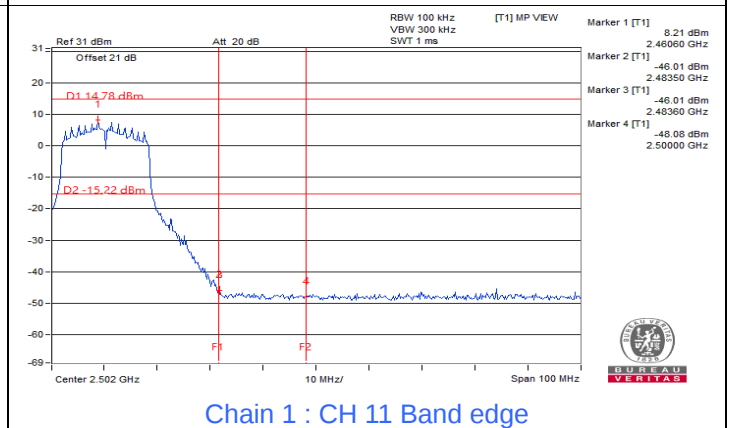
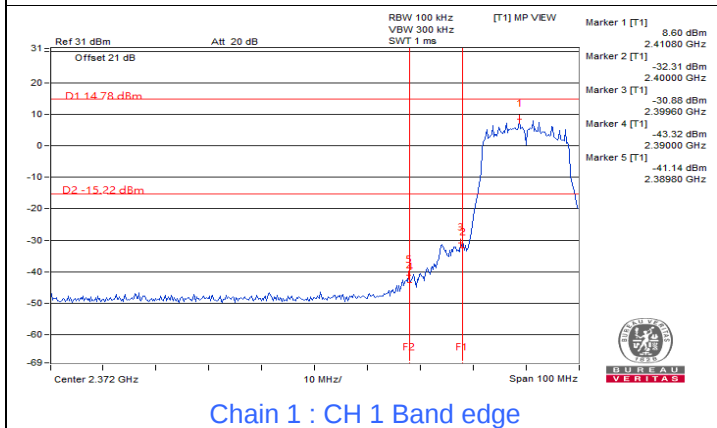

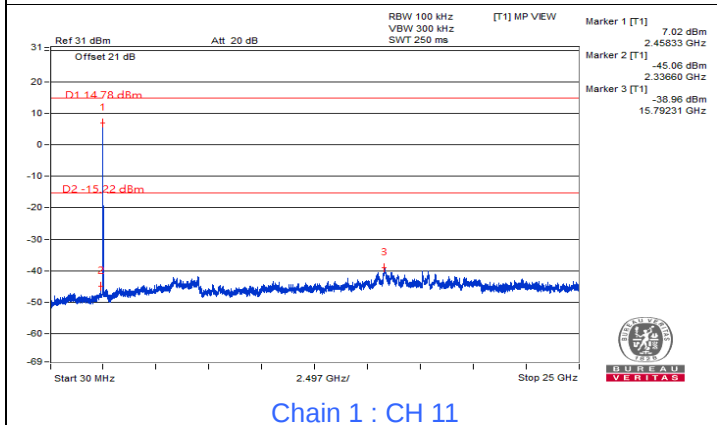
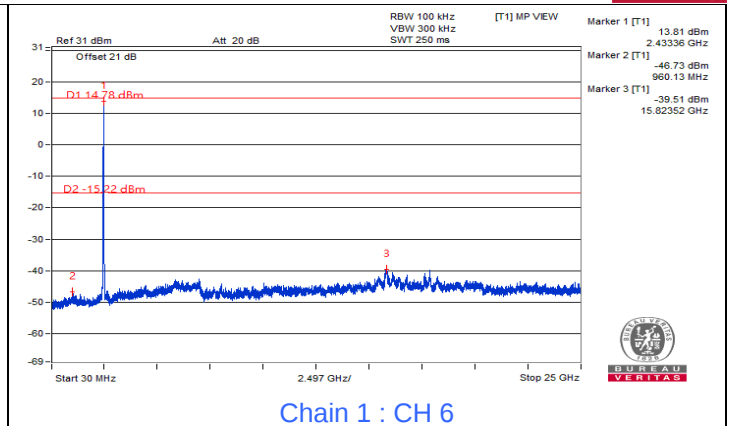
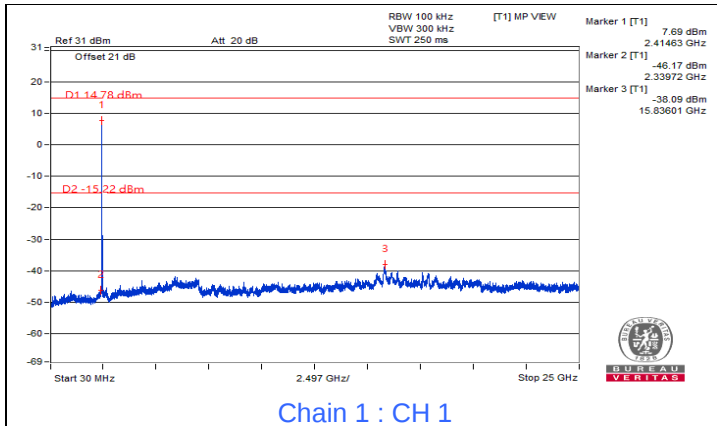


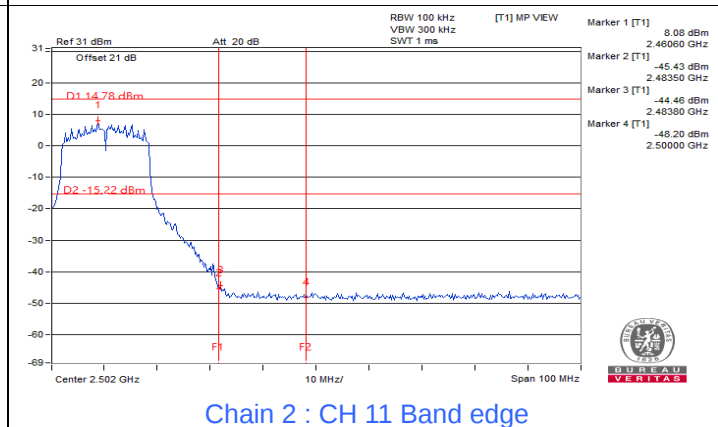
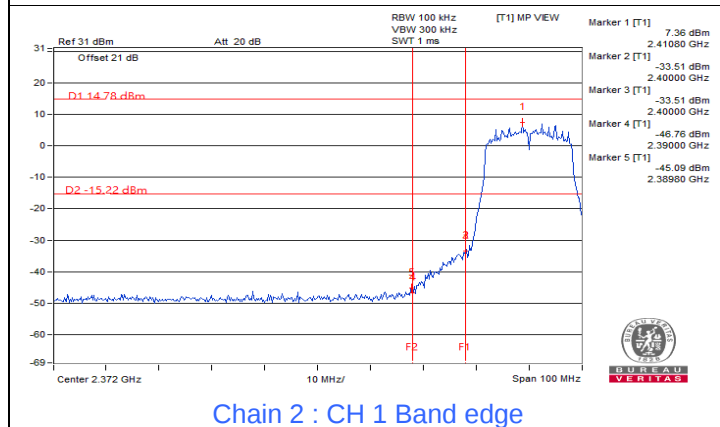

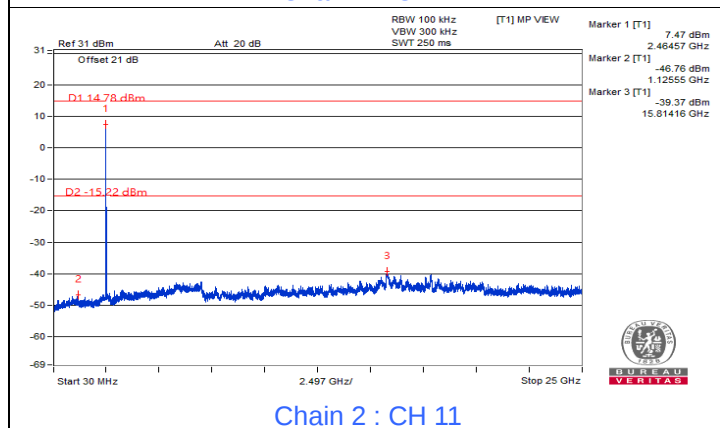
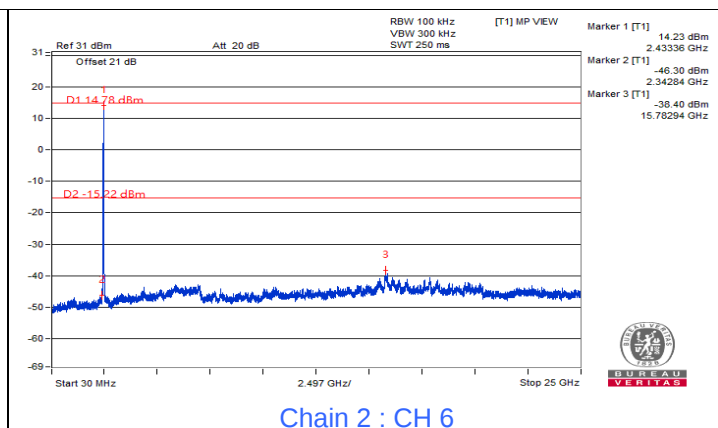
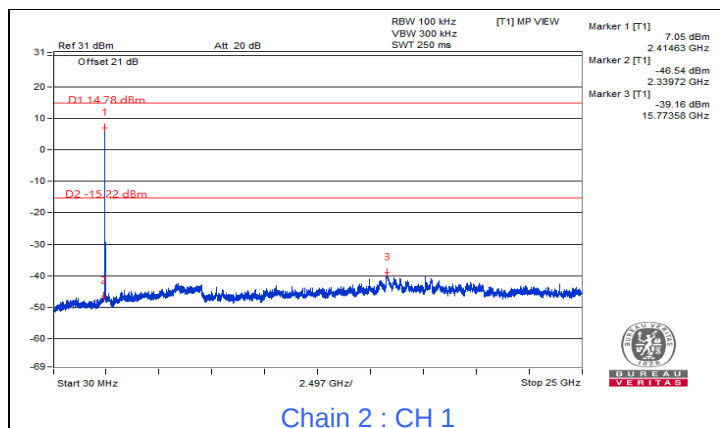


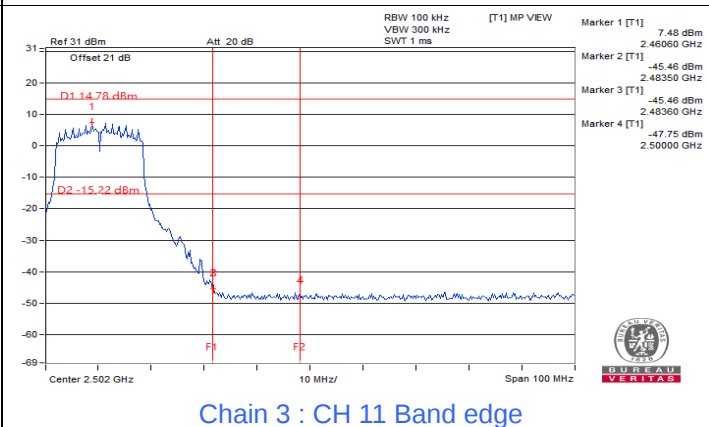
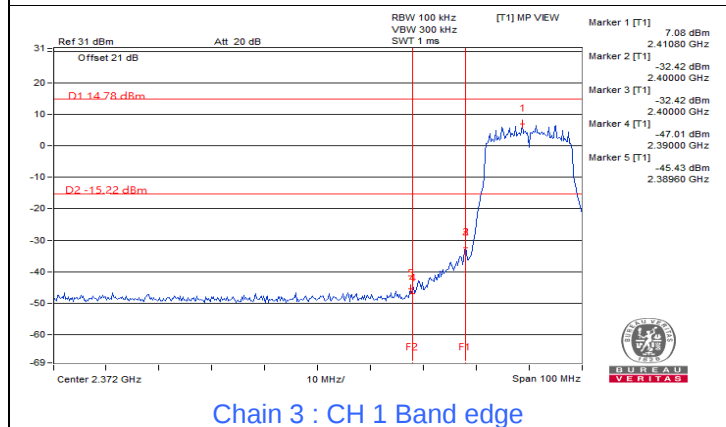

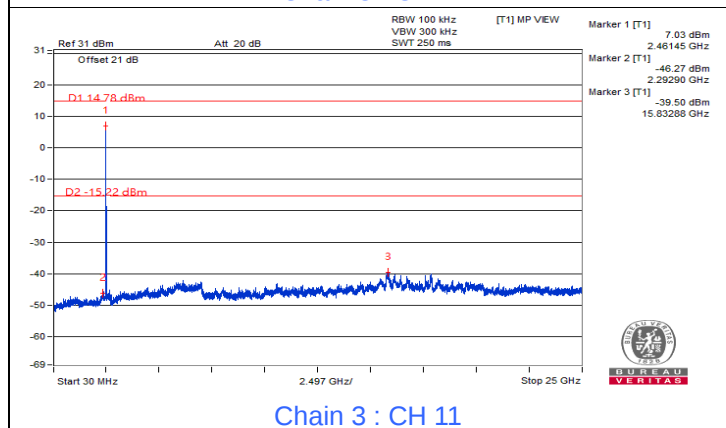
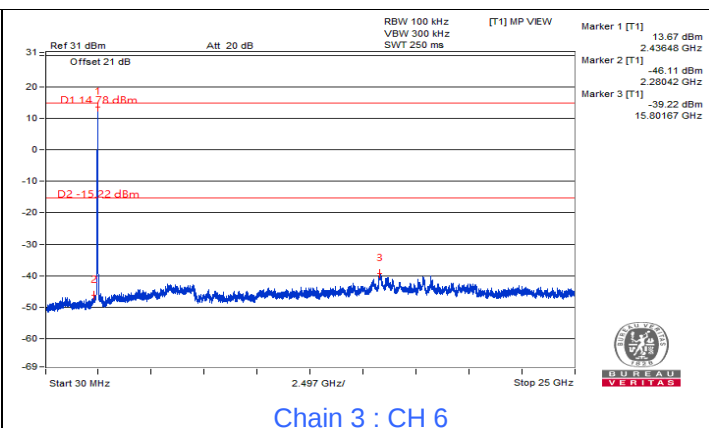
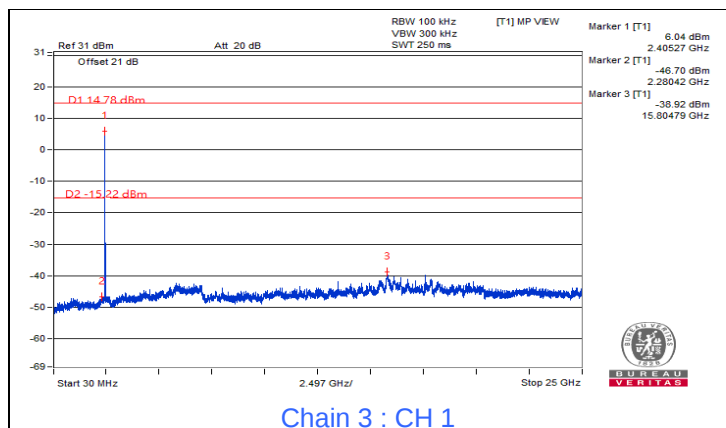


802.11ax (HE20)

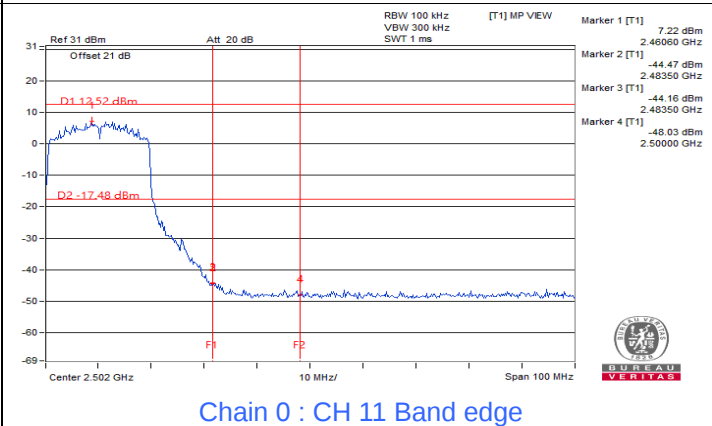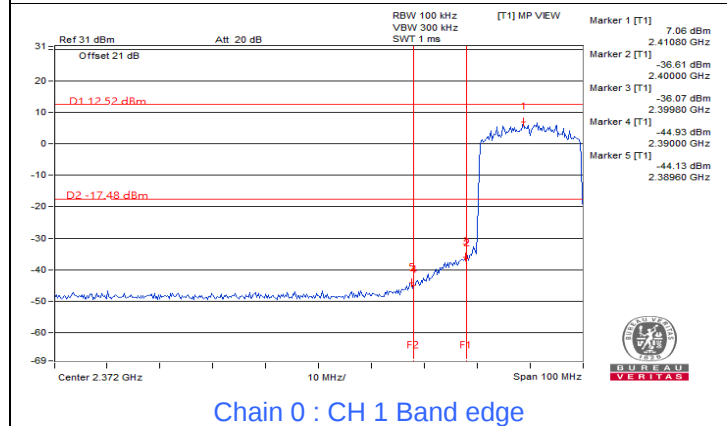

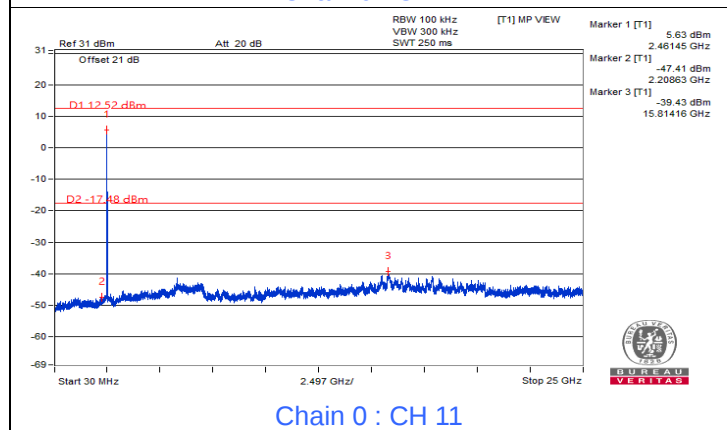
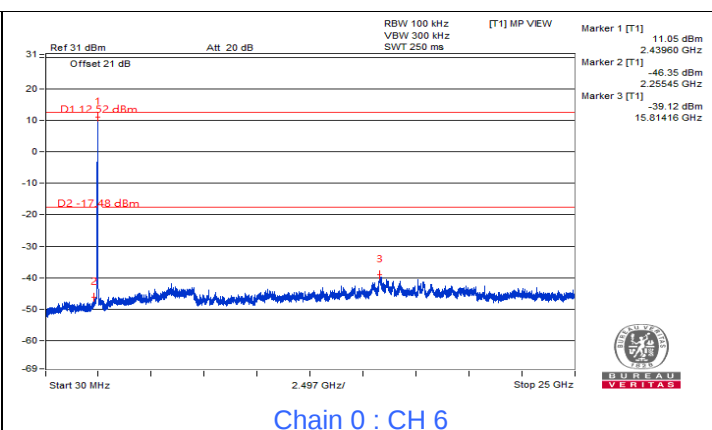
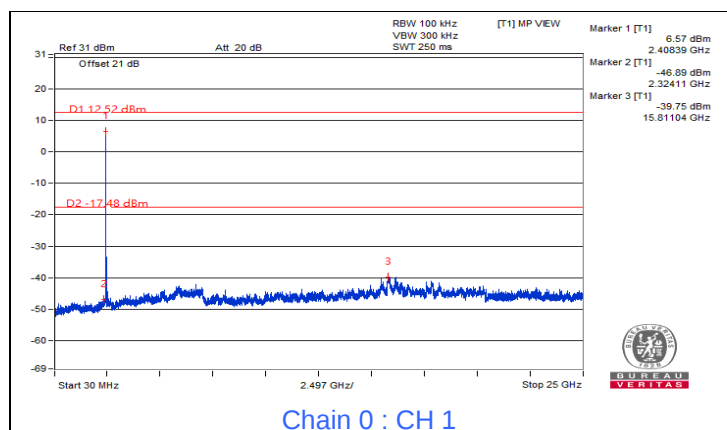
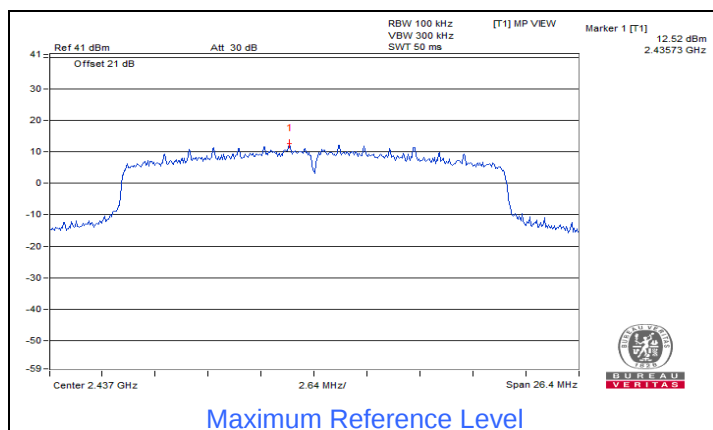


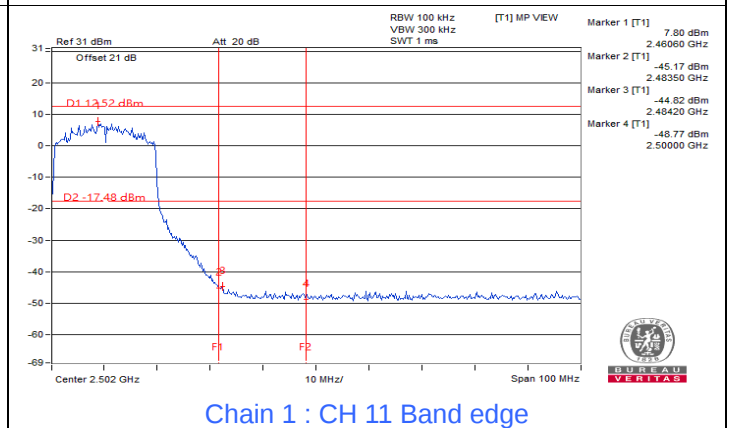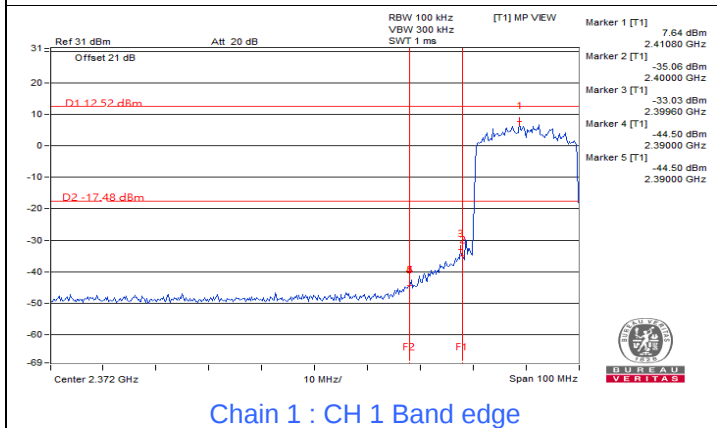

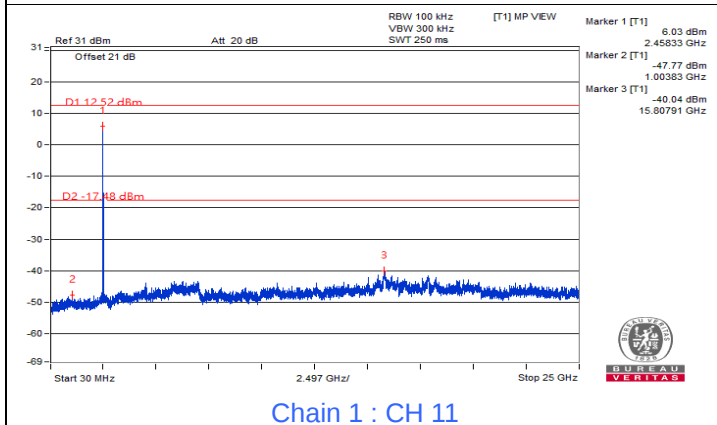
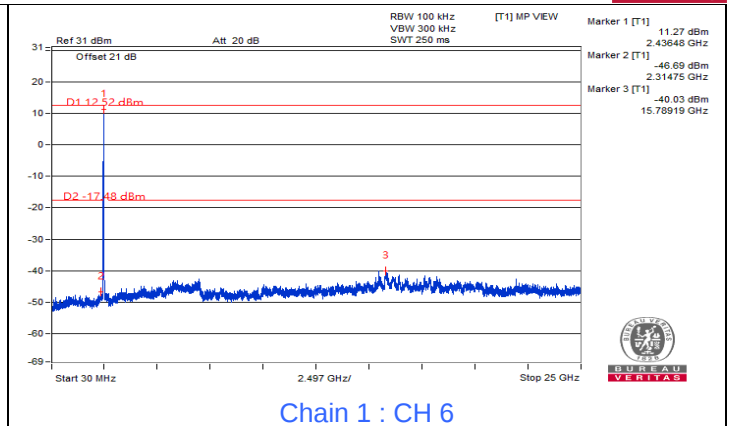
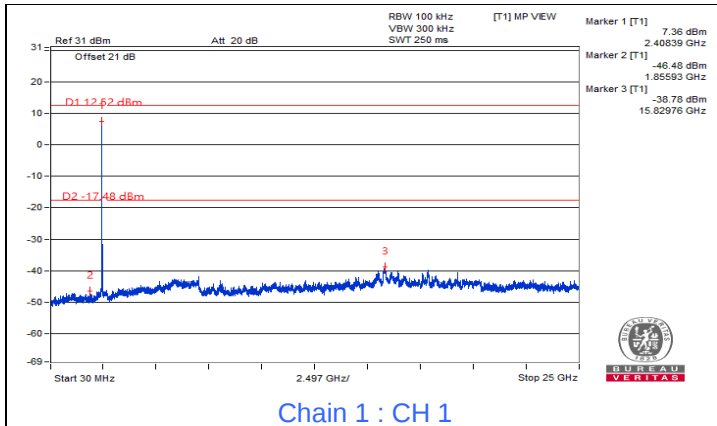


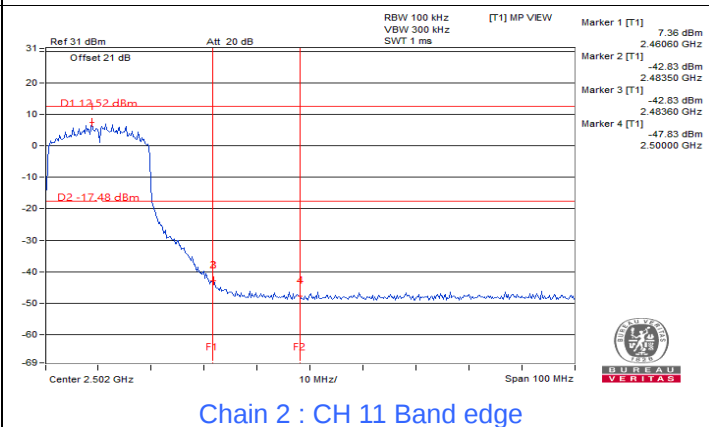
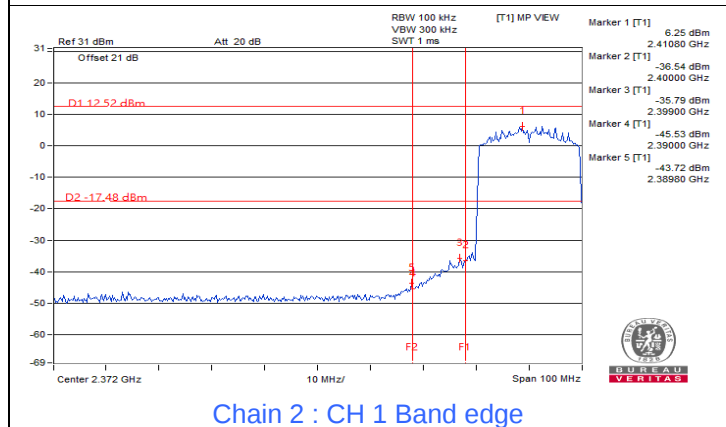

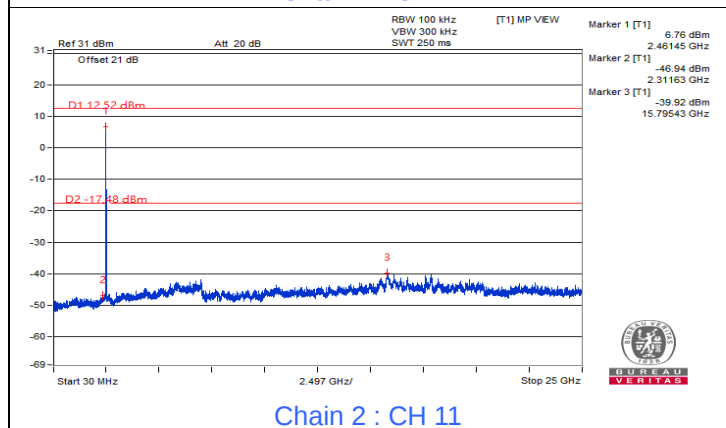
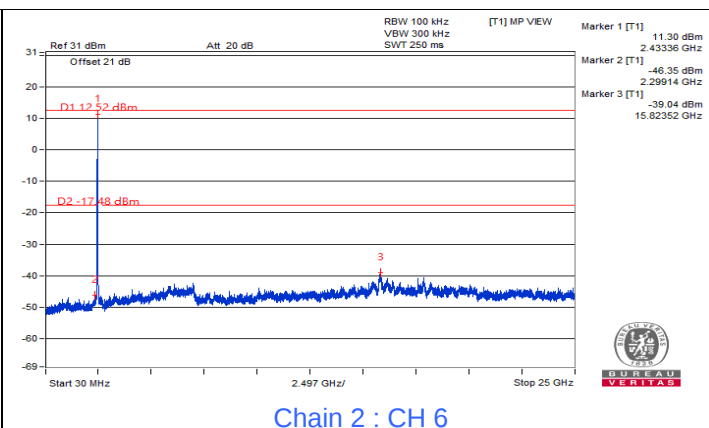
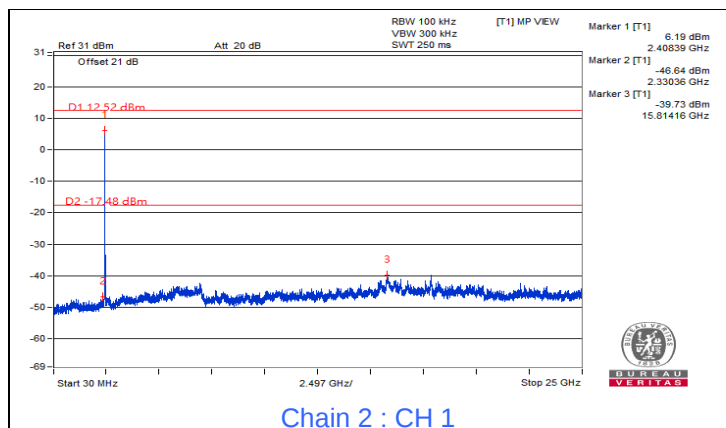


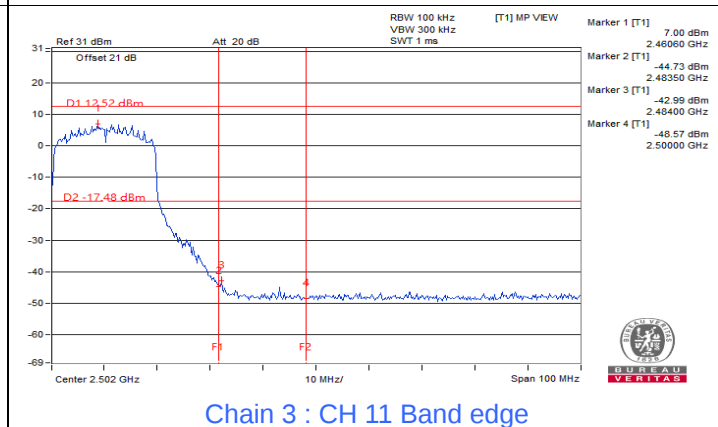
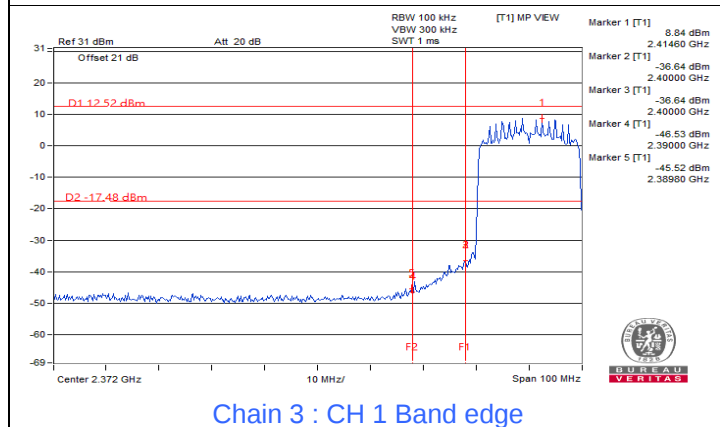

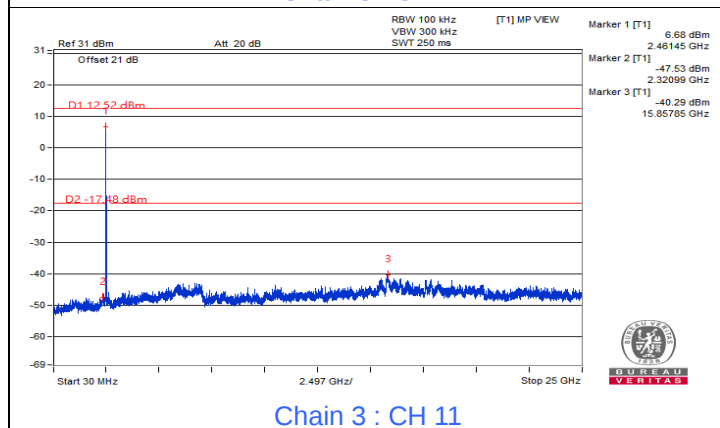
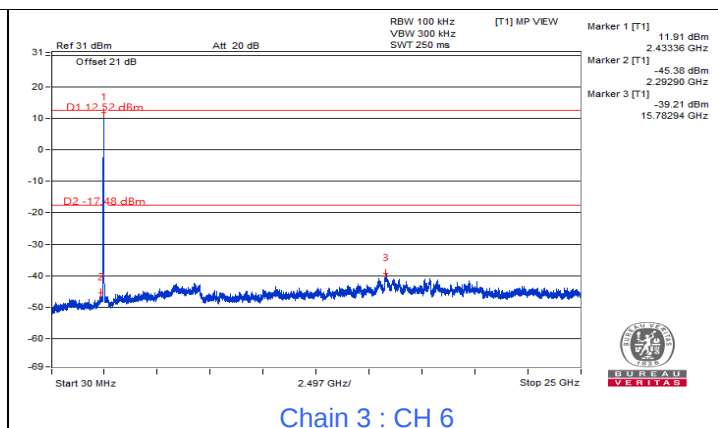
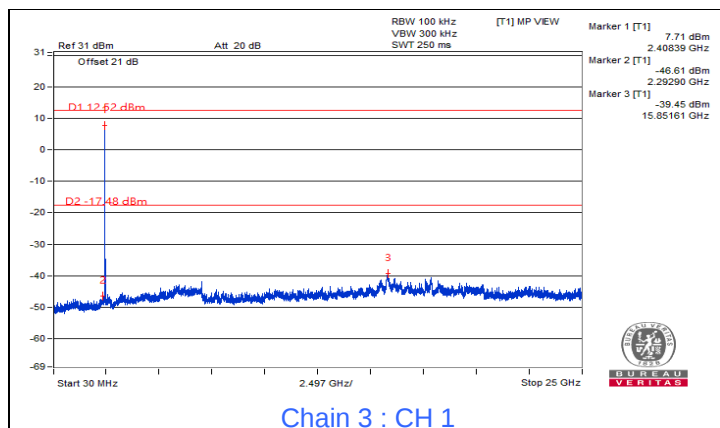


802.11ax (HE40)

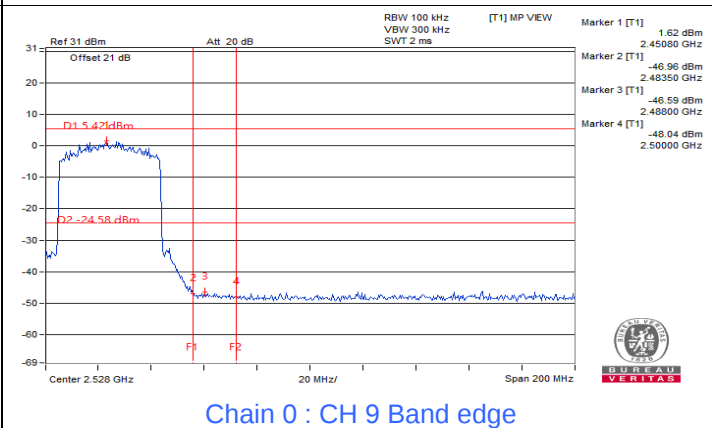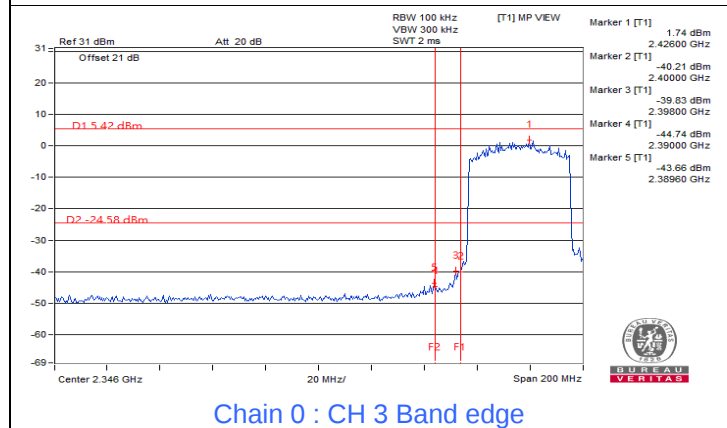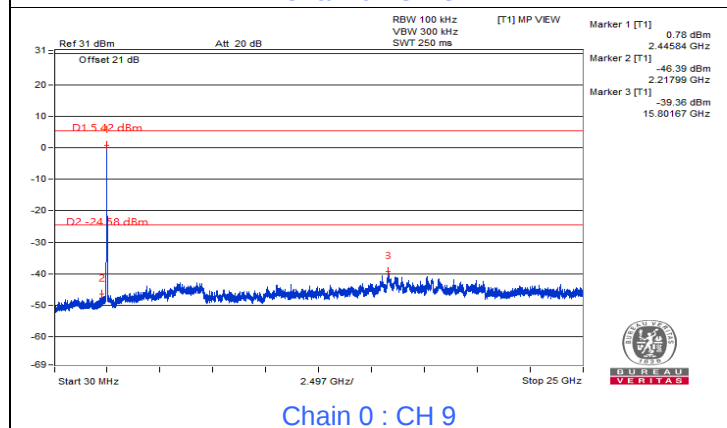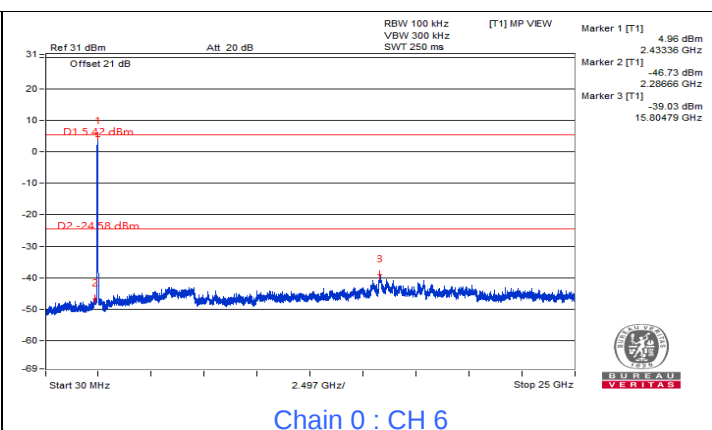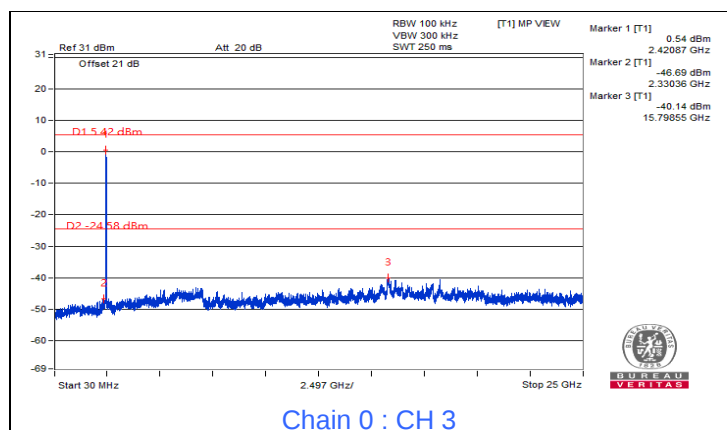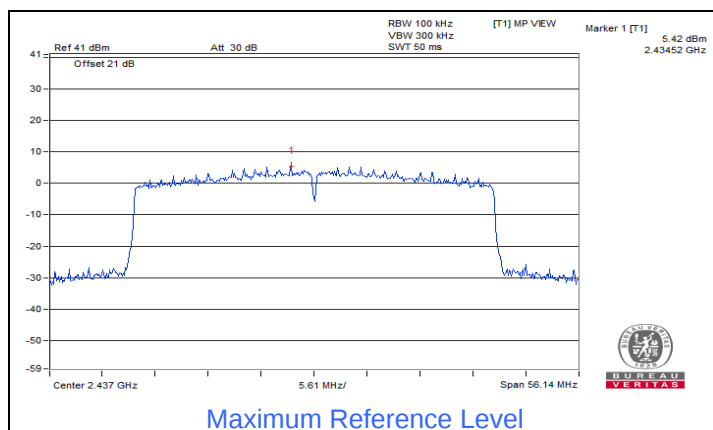

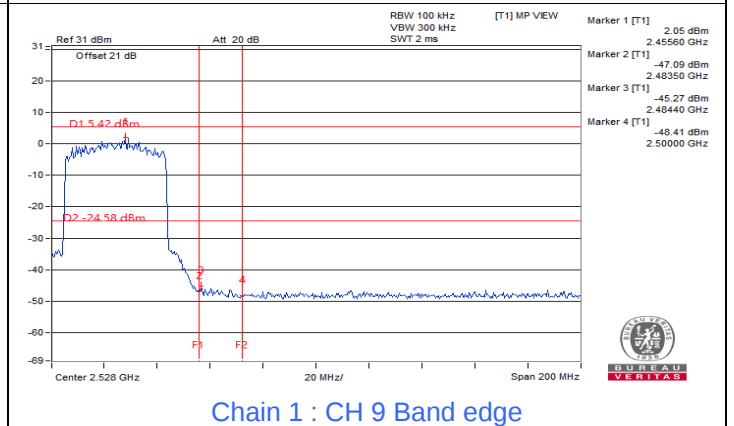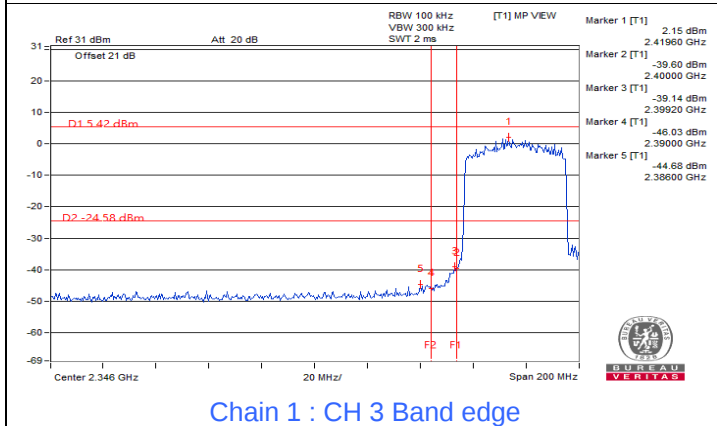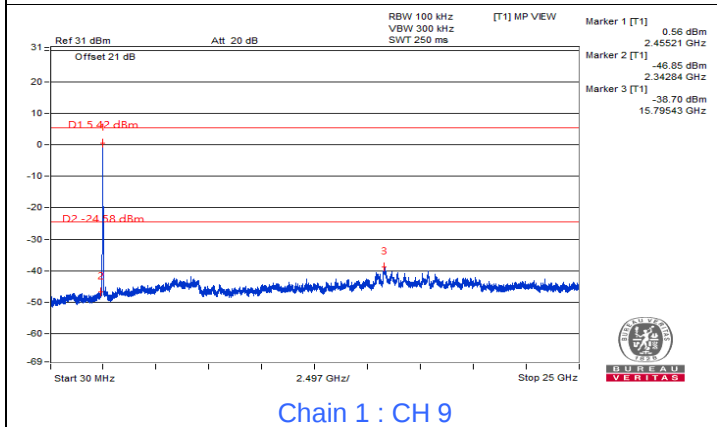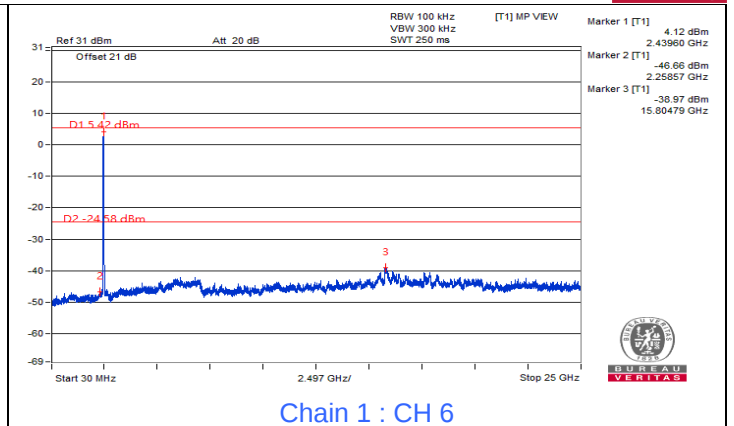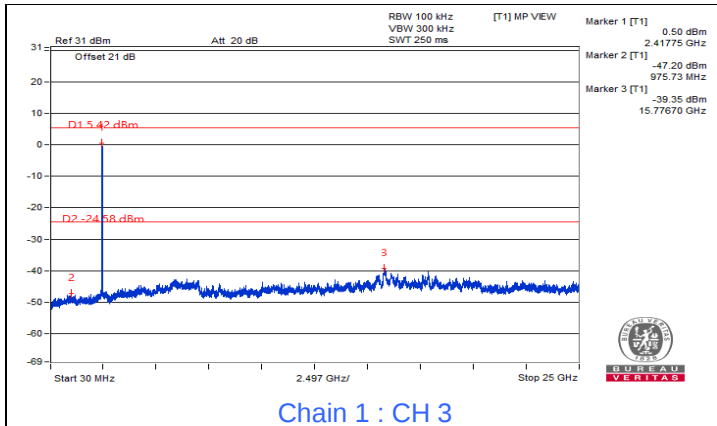

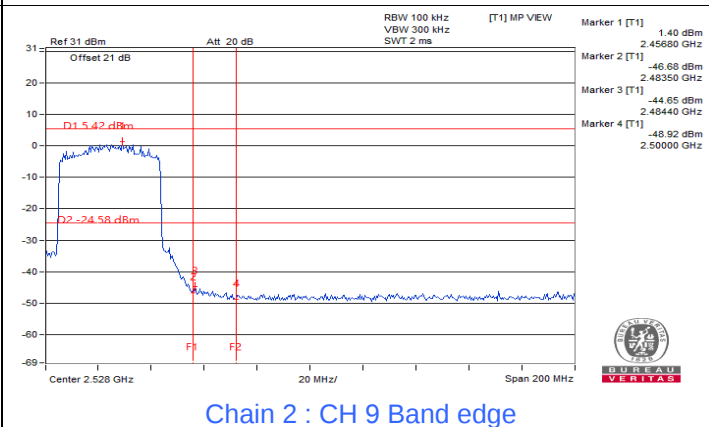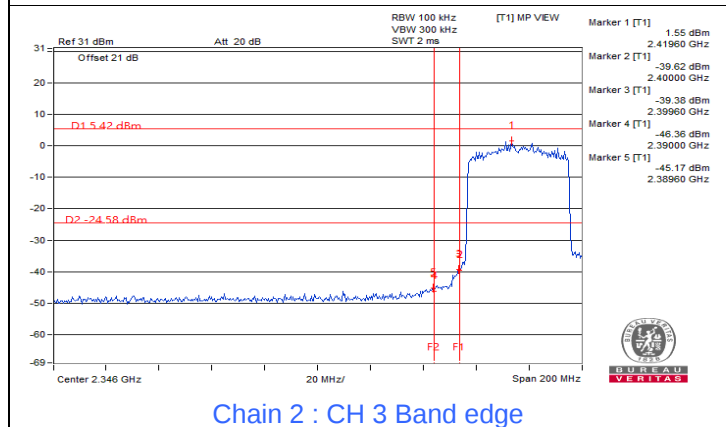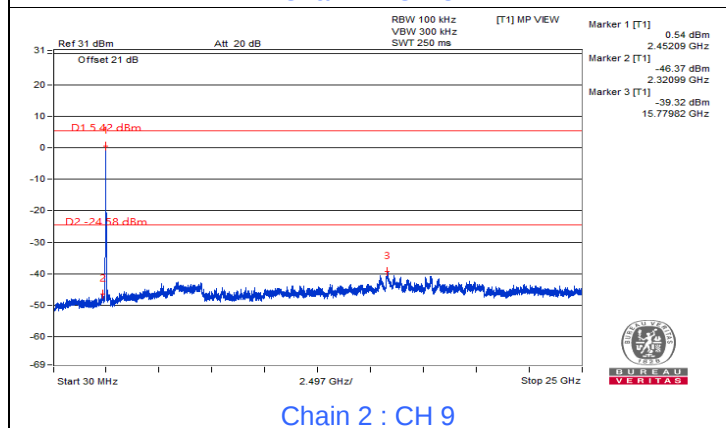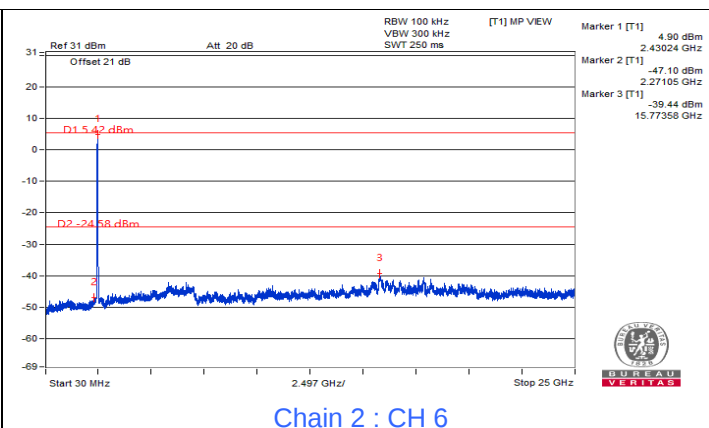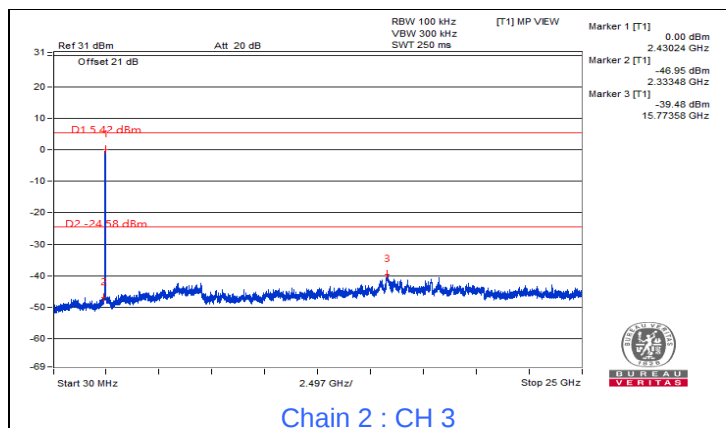

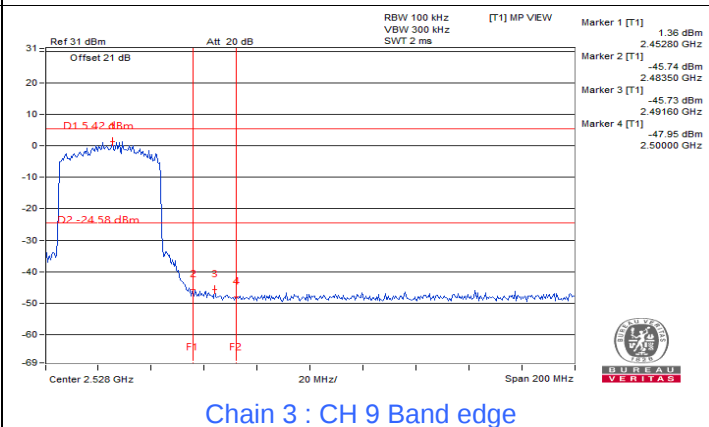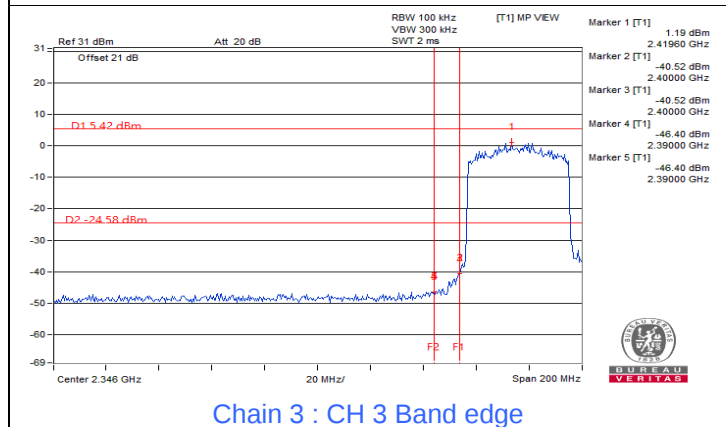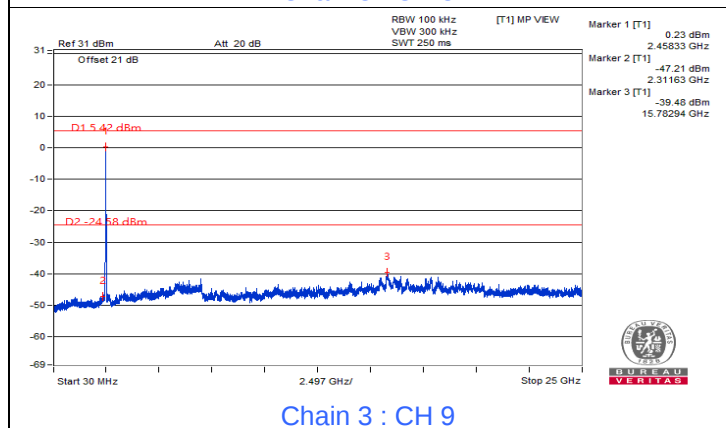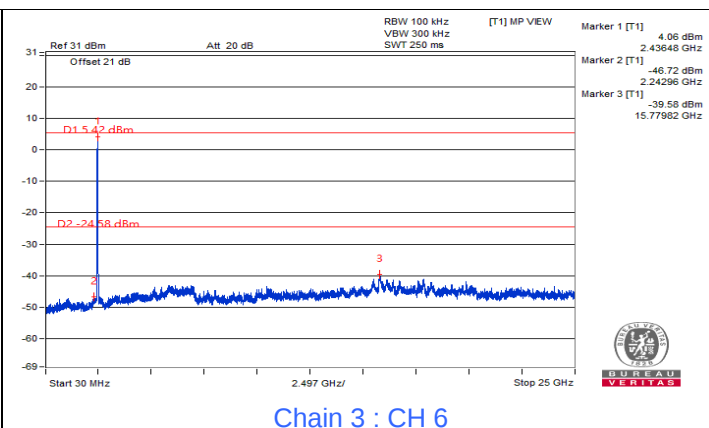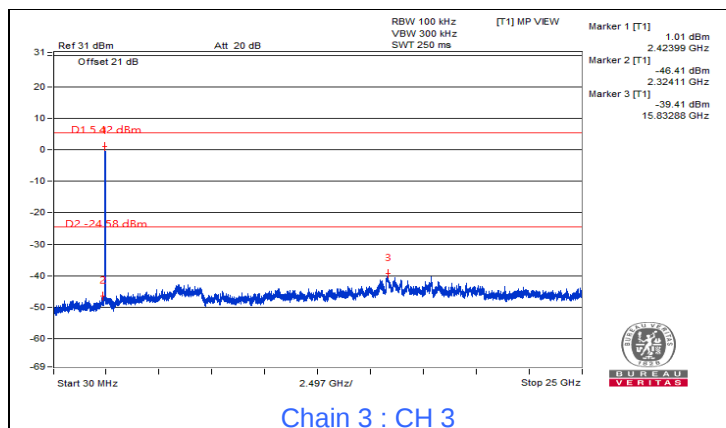


7.5 AC Power Conducted Emissions

RF Mode	TX 802.11ax (HE20)	Channel	CH 6 : 2437 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	25°C, 75% RH
Tested By	Ryan Du		

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	10.07	45.62	31.76	55.69	41.83	66.00	56.00	-10.31	-14.17
2	0.16172	10.07	39.90	24.78	49.97	34.85	65.38	55.38	-15.41	-20.53
3	0.18906	10.08	37.50	25.86	47.58	35.94	64.08	54.08	-16.50	-18.14
4	0.22422	10.08	32.94	23.88	43.02	33.96	62.66	52.66	-19.64	-18.70
5	0.36484	10.10	33.64	28.54	43.74	38.64	58.62	48.62	-14.88	-9.98
6	9.03516	10.71	19.74	11.84	30.45	22.55	60.00	50.00	-29.55	-27.45

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

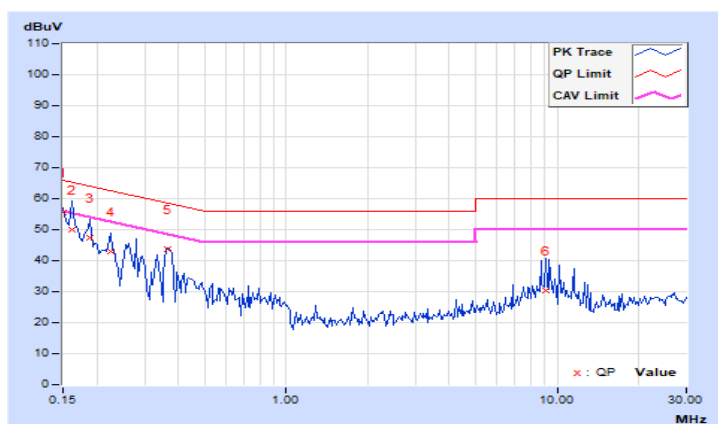


RF Mode	TX 802.11ax (HE20)	Channel	CH 6 : 2437 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	25°C, 75% RH
Tested By	Ryan Du		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBUV)		Emission Level (dBUV)		Limit (dBUV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	10.05	43.50	28.90	53.55	38.95	66.00	56.00	-12.45	-17.05
2	0.16172	10.06	37.82	21.28	47.88	31.34	65.38	55.38	-17.50	-24.04
3	0.18906	10.07	34.62	20.94	44.69	31.01	64.08	54.08	-19.39	-23.07
4	0.22812	10.08	28.52	14.98	38.60	25.06	62.52	52.52	-23.92	-27.46
5	0.25547	10.09	28.78	18.08	38.87	28.17	61.58	51.58	-22.71	-23.41
6	9.78516	10.67	23.58	16.04	34.25	26.71	60.00	50.00	-25.75	-23.29

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

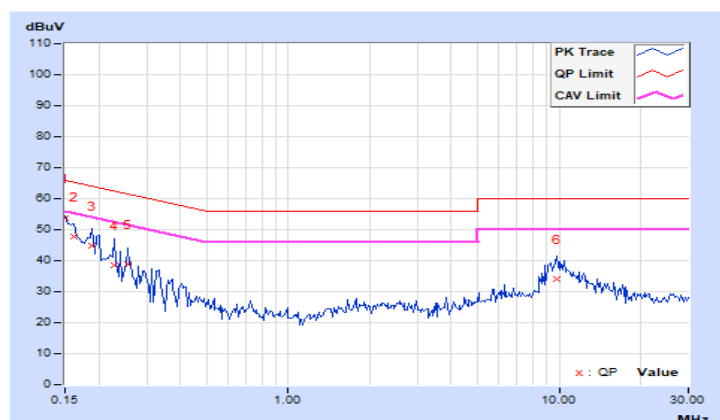


7.6 Unwanted Emissions below 1 GHz

RF Mode	TX 802.11ax (HE20)	Channel	CH 6 : 2437 MHz
Frequency Range	9 kHz ~ 1 GHz	Detector Function & Bandwidth	(QP) RB = 120kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Ryan Du		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	37.40	36.5 QP	40.0	-3.5	2.00 H	358	45.3	-8.8
2	60.46	30.7 QP	40.0	-9.3	1.50 H	360	39.7	-9.0
3	73.67	29.5 QP	40.0	-10.5	1.50 H	360	40.8	-11.3
4	96.37	31.0 QP	43.5	-12.5	1.50 H	272	44.4	-13.4
5	143.15	26.9 QP	43.5	-16.6	2.00 H	252	35.1	-8.2
6	250.02	26.3 QP	46.0	-19.7	2.00 H	64	35.9	-9.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The emission levels were very low against the limit of frequency range 9 kHz ~ 30 MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

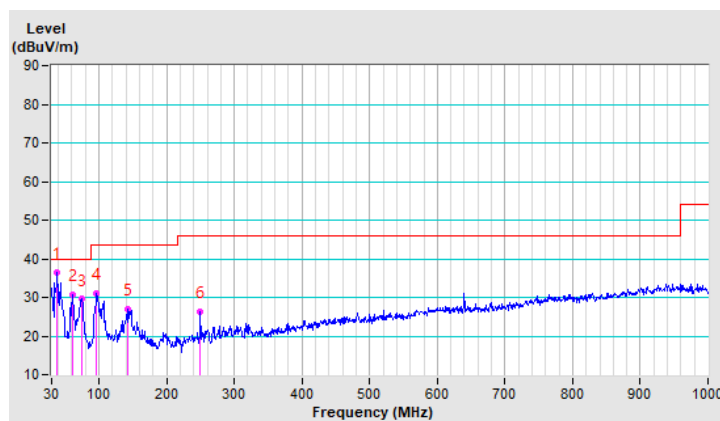


RF Mode	TX 802.11ax (HE20)	Channel	CH 6 : 2437 MHz
Frequency Range	9 kHz ~ 1 GHz	Detector Function & Bandwidth	(QP) RB = 120kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Ryan Du		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	42.95	36.9 QP	40.0	-3.1	2.00 V	72	45.2	-8.3
2	73.14	32.2 QP	40.0	-7.8	1.00 V	331	43.3	-11.1
3	106.68	32.1 QP	43.5	-11.4	2.00 V	360	43.5	-11.4
4	141.23	26.5 QP	43.5	-17.0	2.00 V	360	34.9	-8.4
5	250.00	22.2 QP	46.0	-23.8	1.50 V	0	31.8	-9.6
6	639.98	30.2 QP	46.0	-15.8	2.00 V	181	30.1	0.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The emission levels were very low against the limit of frequency range 9 kHz ~ 30 MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

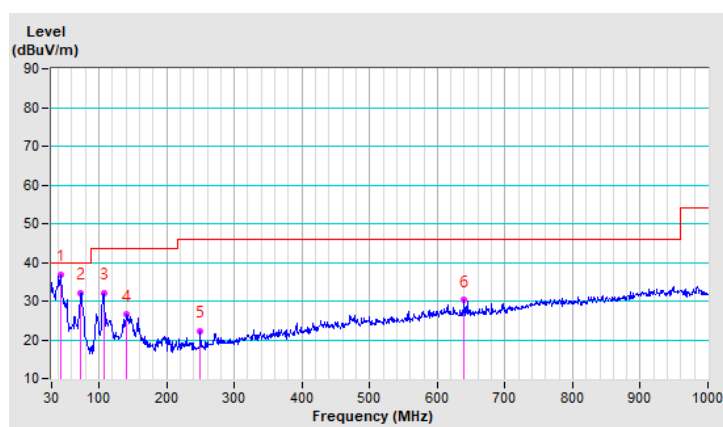


7.7 Unwanted Emissions above 1 GHz

RF Mode	TX 802.11b	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Ryan Du		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2389.15	58.4 PK	74.0	-15.6	1.51 H	45	59.2	-0.8
2	2389.15	46.1 AV	54.0	-7.9	1.51 H	45	46.9	-0.8
3	*2412.00	115.5 PK			1.51 H	45	116.3	-0.8
4	*2412.00	113.2 AV			1.51 H	45	114.0	-0.8
5	4824.00	52.4 PK	74.0	-21.6	1.00 H	40	48.5	3.9
6	4824.00	50.3 AV	54.0	-3.7	1.00 H	40	46.4	3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

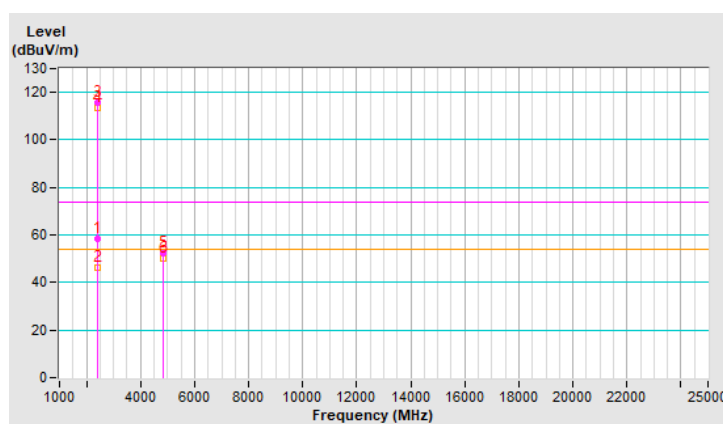


RF Mode	TX 802.11b	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Ryan Du		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2389.21	59.6 PK	74.0	-14.4	1.86 V	119	60.4	-0.8
2	2389.21	50.4 AV	54.0	-3.6	1.86 V	119	51.2	-0.8
3	*2412.00	123.2 PK			1.86 V	119	124.0	-0.8
4	*2412.00	121.2 AV			1.86 V	119	122.0	-0.8
5	4824.00	45.5 PK	74.0	-28.5	4.00 V	117	41.6	3.9
6	4824.00	40.0 AV	54.0	-14.0	4.00 V	117	36.1	3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

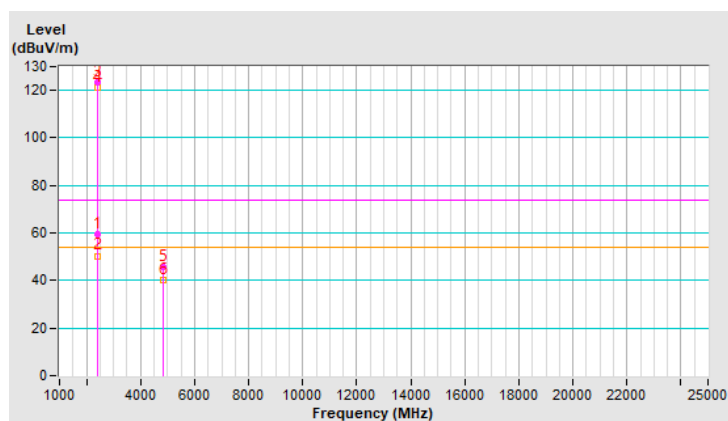


RF Mode	TX 802.11b	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Ryan Du		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2356.26	57.4 PK	74.0	-16.6	1.81 H	61	58.1	-0.7
2	2356.26	45.7 AV	54.0	-8.3	1.81 H	61	46.4	-0.7
3	*2437.00	116.9 PK			1.81 H	61	117.7	-0.8
4	*2437.00	114.6 AV			1.81 H	61	115.4	-0.8
5	2483.50	57.1 PK	74.0	-16.9	1.81 H	61	58.1	-1.0
6	2483.50	44.0 AV	54.0	-10.0	1.81 H	61	45.0	-1.0
7	4874.00	55.0 PK	74.0	-19.0	1.44 H	30	51.0	4.0
8	4874.00	53.2 AV	54.0	-0.8	1.44 H	30	49.2	4.0
9	7311.00	49.3 PK	74.0	-24.7	2.70 H	103	39.2	10.1
10	7311.00	43.3 AV	54.0	-10.7	2.70 H	103	33.2	10.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

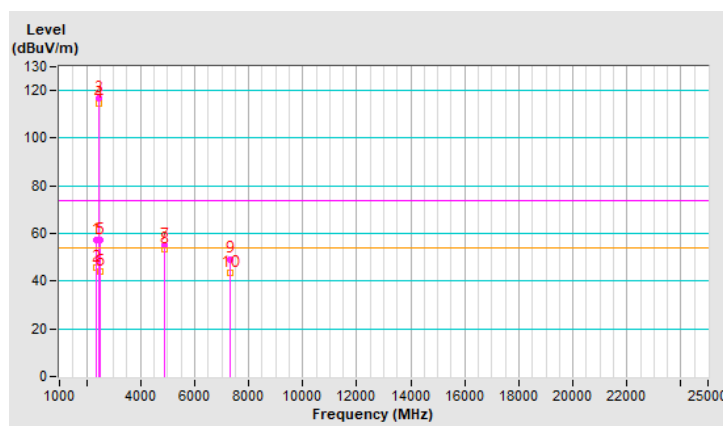


RF Mode	TX 802.11b	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Ryan Du		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2356.26	60.1 PK	74.0	-13.9	2.06 V	128	60.8	-0.7
2	2356.26	51.4 AV	54.0	-2.6	2.06 V	128	52.1	-0.7
3	*2437.00	123.1 PK			2.06 V	128	123.9	-0.8
4	*2437.00	121.1 AV			2.06 V	128	121.9	-0.8
5	2483.50	57.2 PK	74.0	-16.8	2.06 V	128	58.2	-1.0
6	2483.50	47.3 AV	54.0	-6.7	2.06 V	128	48.3	-1.0
7	4874.00	46.1 PK	74.0	-27.9	3.96 V	108	42.1	4.0
8	4874.00	40.7 AV	54.0	-13.3	3.96 V	108	36.7	4.0
9	7311.00	49.5 PK	74.0	-24.5	2.88 V	275	39.4	10.1
10	7311.00	42.8 AV	54.0	-11.2	2.88 V	275	32.7	10.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

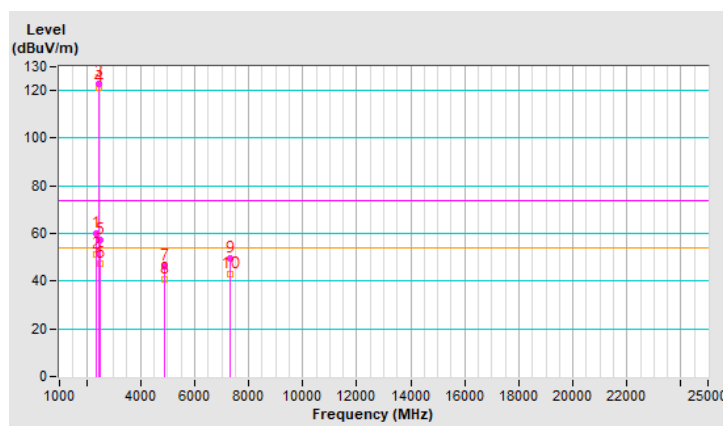


RF Mode	TX 802.11b	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Ryan Du		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	115.7 PK			1.72 H	63	116.6	-0.9
2	*2462.00	113.6 AV			1.72 H	63	114.5	-0.9
3	2486.26	55.8 PK	74.0	-18.2	1.72 H	63	56.8	-1.0
4	2486.26	47.2 AV	54.0	-6.8	1.72 H	63	48.2	-1.0
5	4924.00	53.0 PK	74.0	-21.0	1.84 H	38	49.0	4.0
6	4924.00	51.9 AV	54.0	-2.1	1.84 H	38	47.9	4.0
7	7386.00	49.0 PK	74.0	-25.0	3.43 H	46	38.8	10.2
8	7386.00	43.8 AV	54.0	-10.2	3.43 H	46	33.6	10.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

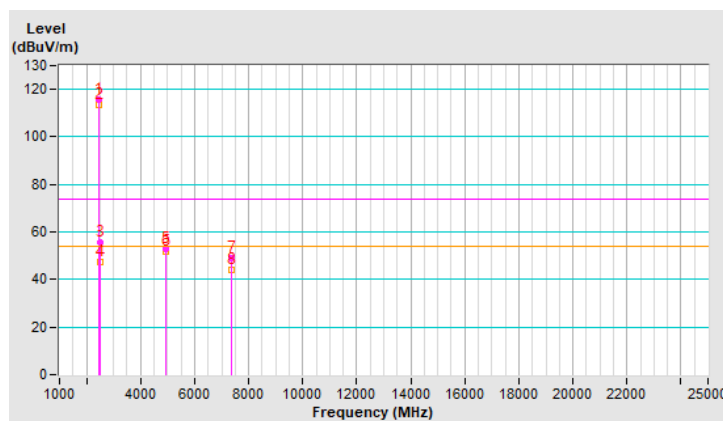


RF Mode	TX 802.11b	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Ryan Du		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	122.4 PK			1.27 V	63	123.3	-0.9
2	*2462.00	120.3 AV			1.27 V	63	121.2	-0.9
3	2486.26	59.6 PK	74.0	-14.4	1.27 V	63	60.6	-1.0
4	2486.26	53.4 AV	54.0	-0.6	1.27 V	63	54.4	-1.0
5	4924.00	45.7 PK	74.0	-28.3	4.00 V	120	41.7	4.0
6	4924.00	40.4 AV	54.0	-13.6	4.00 V	120	36.4	4.0
7	7386.00	49.9 PK	74.0	-24.1	2.89 V	280	39.7	10.2
8	7386.00	43.2 AV	54.0	-10.8	2.89 V	280	33.0	10.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

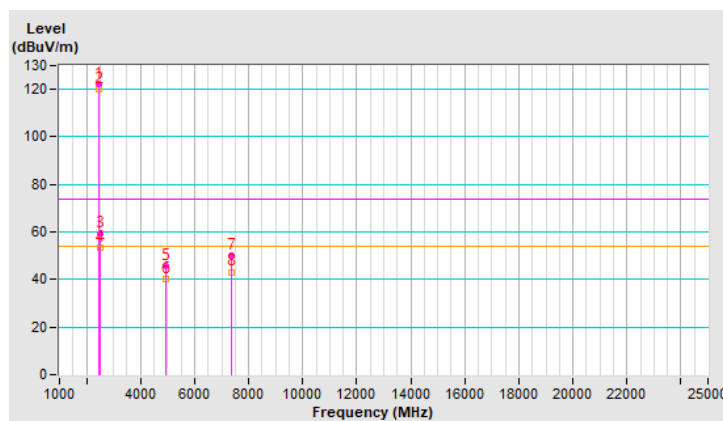


RF Mode	TX 802.11g	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Ryan Du		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	63.6 PK	74.0	-10.4	1.87 H	62	64.4	-0.8
2	2390.00	47.3 AV	54.0	-6.7	1.87 H	62	48.1	-0.8
3	*2412.00	113.8 PK			1.87 H	62	114.6	-0.8
4	*2412.00	103.0 AV			1.87 H	62	103.8	-0.8
5	4824.00	44.4 PK	74.0	-29.6	1.31 H	47	40.5	3.9
6	4824.00	42.7 AV	54.0	-11.3	1.31 H	47	38.8	3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

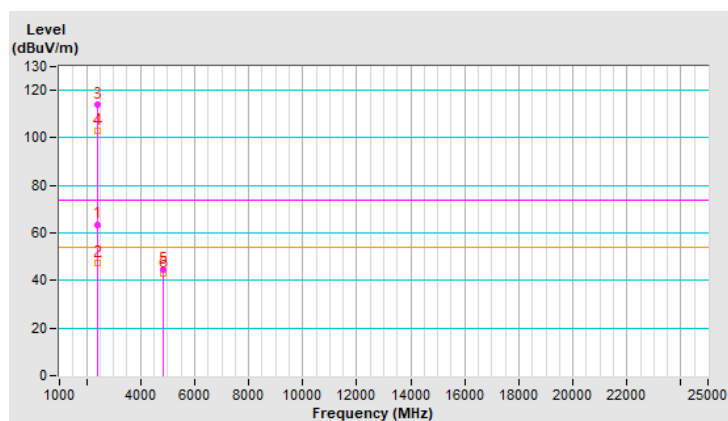


RF Mode	TX 802.11g	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Ryan Du		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	67.9 PK	74.0	-6.1	1.89 V	118	68.7	-0.8
2	2390.00	53.3 AV	54.0	-0.7	1.89 V	118	54.1	-0.8
3	*2412.00	120.1 PK			1.89 V	118	120.9	-0.8
4	*2412.00	112.0 AV			1.89 V	118	112.8	-0.8
5	4824.00	43.8 PK	74.0	-30.2	3.95 V	109	39.9	3.9
6	4824.00	38.5 AV	54.0	-15.5	3.95 V	109	34.6	3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

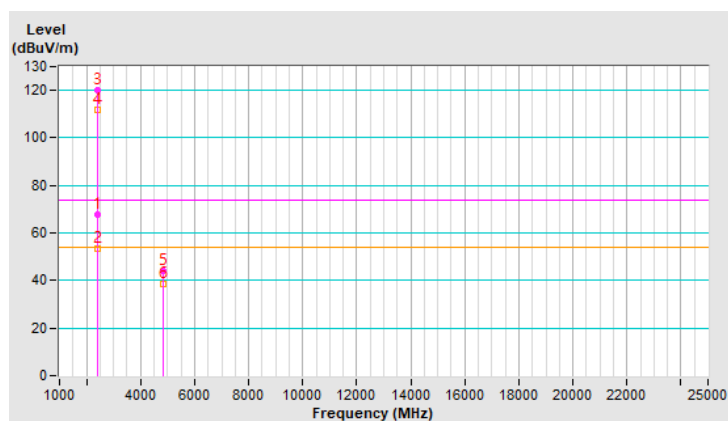


RF Mode	TX 802.11g	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Ryan Du		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	68.2 PK	74.0	-5.8	2.82 H	77	69.0	-0.8
2	2390.00	49.1 AV	54.0	-4.9	2.82 H	77	49.9	-0.8
3	*2437.00	120.4 PK			2.82 H	77	121.2	-0.8
4	*2437.00	110.0 AV			2.82 H	77	110.8	-0.8
5	2483.50	66.4 PK	74.0	-7.6	2.82 H	77	67.4	-1.0
6	2483.50	47.5 AV	54.0	-6.5	2.82 H	77	48.5	-1.0
7	4874.00	51.1 PK	74.0	-22.9	1.38 H	38	47.1	4.0
8	4874.00	49.4 AV	54.0	-4.6	1.38 H	38	45.4	4.0
9	7311.00	46.4 PK	74.0	-27.6	2.64 H	90	36.3	10.1
10	7311.00	40.3 AV	54.0	-13.7	2.64 H	90	30.2	10.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

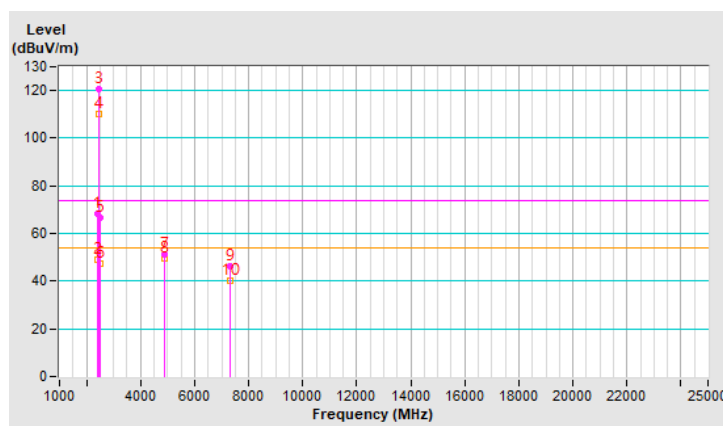


RF Mode	TX 802.11g	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Ryan Du		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	68.9 PK	74.0	-5.1	2.07 V	123	69.7	-0.8
2	2390.00	51.6 AV	54.0	-2.4	2.07 V	123	52.4	-0.8
3	*2437.00	127.1 PK			2.07 V	123	127.9	-0.8
4	*2437.00	118.1 AV			2.07 V	123	118.9	-0.8
5	2483.50	72.8 PK	74.0	-1.2	2.07 V	123	73.8	-1.0
6	2483.50	53.4 AV	54.0	-0.6	2.07 V	123	54.4	-1.0
7	4874.00	43.3 PK	74.0	-30.7	4.00 V	122	39.3	4.0
8	4874.00	38.1 AV	54.0	-15.9	4.00 V	122	34.1	4.0
9	7311.00	46.1 PK	74.0	-27.9	2.86 V	272	36.0	10.1
10	7311.00	40.2 AV	54.0	-13.8	2.86 V	272	30.1	10.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

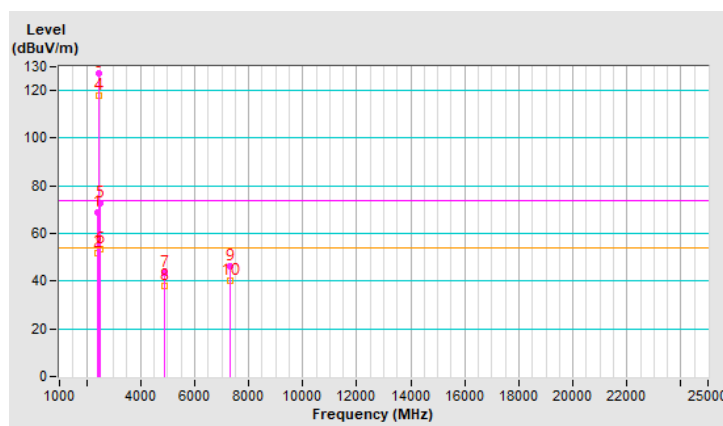


RF Mode	TX 802.11g	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Ryan Du		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	116.2 PK			3.09 H	78	117.1	-0.9
2	*2462.00	105.2 AV			3.09 H	78	106.1	-0.9
3	2483.50	65.1 PK	74.0	-8.9	3.09 H	78	66.1	-1.0
4	2483.50	47.8 AV	54.0	-6.2	3.09 H	78	48.8	-1.0
5	4924.00	44.4 PK	74.0	-29.6	1.36 H	31	40.4	4.0
6	4924.00	42.8 AV	54.0	-11.2	1.36 H	31	38.8	4.0
7	7386.00	46.8 PK	74.0	-27.2	2.69 H	90	36.6	10.2
8	7386.00	40.4 AV	54.0	-13.6	2.69 H	90	30.2	10.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

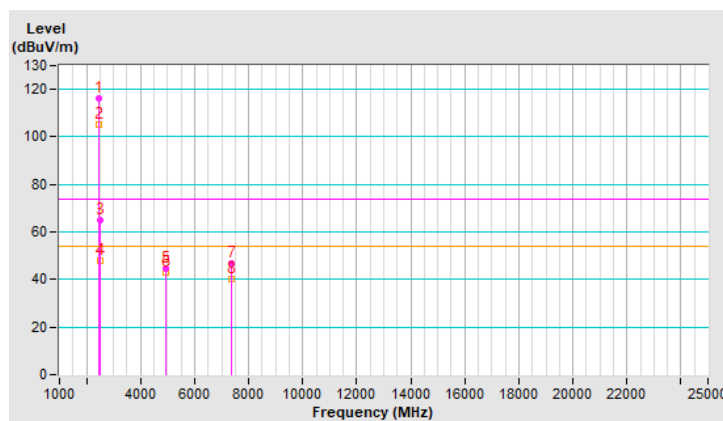


RF Mode	TX 802.11g	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Ryan Du		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	122.0 PK			1.80 V	116	122.9	-0.9
2	*2462.00	112.8 AV			1.80 V	116	113.7	-0.9
3	2483.50	67.5 PK	74.0	-6.5	1.80 V	116	68.5	-1.0
4	2483.50	53.3 AV	54.0	-0.7	1.80 V	116	54.3	-1.0
5	4924.00	43.1 PK	74.0	-30.9	3.96 V	127	39.1	4.0
6	4924.00	38.1 AV	54.0	-15.9	3.96 V	127	34.1	4.0
7	7386.00	46.0 PK	74.0	-28.0	2.82 V	279	35.8	10.2
8	7386.00	39.8 AV	54.0	-14.2	2.82 V	279	29.6	10.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

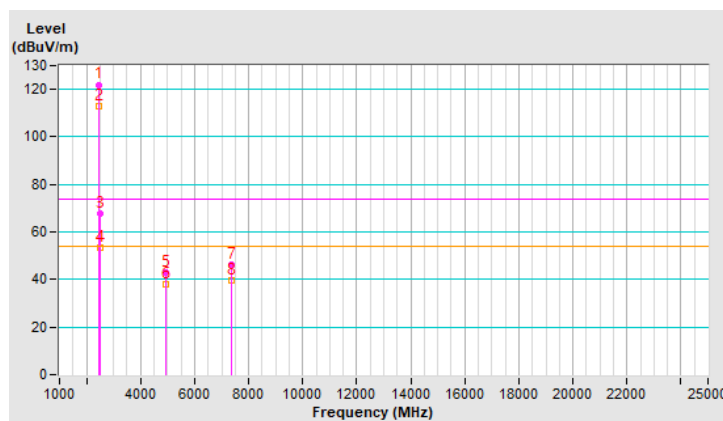


RF Mode	TX 802.11ax (HE20)	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Ryan Du		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2389.34	65.1 PK	74.0	-8.9	2.83 H	78	65.9	-0.8
2	2389.34	48.3 AV	54.0	-5.7	2.83 H	78	49.1	-0.8
3	*2412.00	115.0 PK			2.83 H	78	115.8	-0.8
4	*2412.00	102.9 AV			2.83 H	78	103.7	-0.8
5	4824.00	44.1 PK	74.0	-29.9	1.30 H	43	40.2	3.9
6	4824.00	42.5 AV	54.0	-11.5	1.30 H	43	38.6	3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

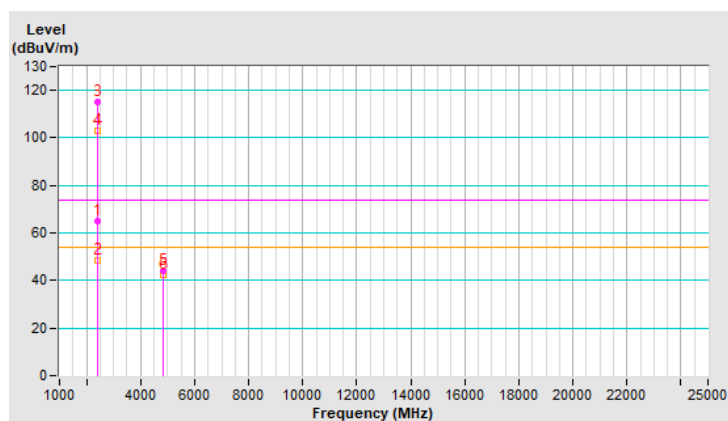


RF Mode	TX 802.11ax (HE20)	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Ryan Du		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	67.8 PK	74.0	-6.2	1.21 V	98	68.6	-0.8
2	2390.00	53.2 AV	54.0	-0.8	1.21 V	98	54.0	-0.8
3	*2412.00	118.9 PK			1.21 V	98	119.7	-0.8
4	*2412.00	109.3 AV			1.21 V	98	110.1	-0.8
5	4824.00	42.5 PK	74.0	-31.5	3.91 V	142	38.6	3.9
6	4824.00	37.6 AV	54.0	-16.4	3.91 V	142	33.7	3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

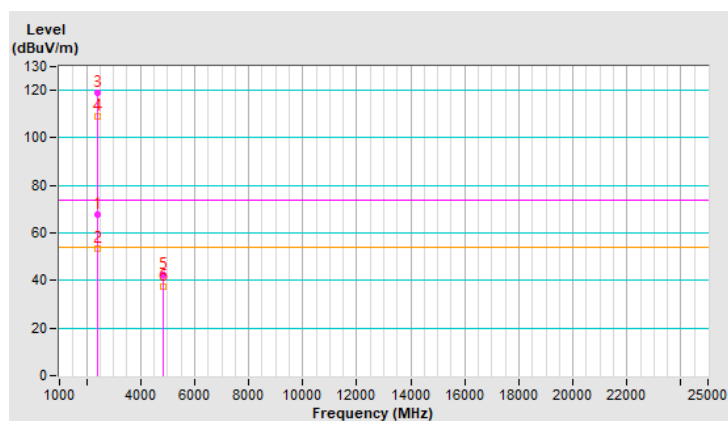


RF Mode	TX 802.11ax (HE20)	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Ryan Du		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	60.3 PK	74.0	-13.7	2.88 H	83	61.1	-0.8
2	2390.00	46.8 AV	54.0	-7.2	2.88 H	83	47.6	-0.8
3	*2437.00	118.4 PK			2.88 H	83	119.2	-0.8
4	*2437.00	105.8 AV			2.88 H	83	106.6	-0.8
5	2483.50	64.9 PK	74.0	-9.1	2.88 H	83	65.9	-1.0
6	2483.50	48.4 AV	54.0	-5.6	2.88 H	83	49.4	-1.0
7	4874.00	44.9 PK	74.0	-29.1	1.31 H	29	40.9	4.0
8	4874.00	43.3 AV	54.0	-10.7	1.31 H	29	39.3	4.0
9	7311.00	46.4 PK	74.0	-27.6	2.63 H	91	36.3	10.1
10	7311.00	40.0 AV	54.0	-14.0	2.63 H	91	29.9	10.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

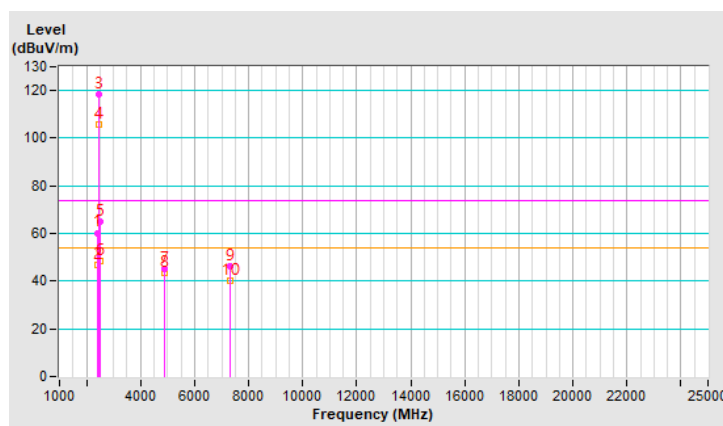


RF Mode	TX 802.11ax (HE20)	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Ryan Du		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	67.4 PK	74.0	-6.6	1.47 V	60	68.2	-0.8
2	2390.00	53.4 AV	54.0	-0.6	1.47 V	60	54.2	-0.8
3	*2437.00	124.2 PK			1.47 V	60	125.0	-0.8
4	*2437.00	114.6 AV			1.47 V	60	115.4	-0.8
5	2483.50	66.8 PK	74.0	-7.2	1.47 V	60	67.8	-1.0
6	2483.50	51.5 AV	54.0	-2.5	1.47 V	60	52.5	-1.0
7	4874.00	42.4 PK	74.0	-31.6	4.00 V	120	38.4	4.0
8	4874.00	37.6 AV	54.0	-16.4	4.00 V	120	33.6	4.0
9	7311.00	46.3 PK	74.0	-27.7	2.86 V	266	36.2	10.1
10	7311.00	39.9 AV	54.0	-14.1	2.86 V	266	29.8	10.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

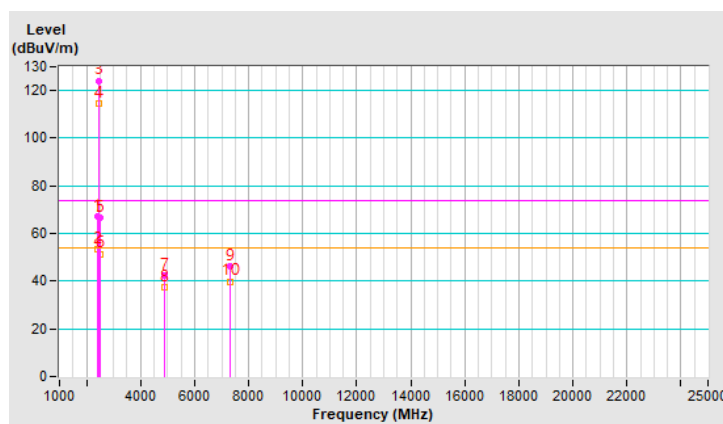


RF Mode	TX 802.11ax (HE20)	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Ryan Du		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	118.2 PK			3.04 H	72	119.1	-0.9
2	*2462.00	105.2 AV			3.04 H	72	106.1	-0.9
3	2485.42	68.8 PK	74.0	-5.2	3.04 H	72	69.8	-1.0
4	2485.42	50.4 AV	54.0	-3.6	3.04 H	72	51.4	-1.0
5	4924.00	43.8 PK	74.0	-30.2	1.35 H	26	39.8	4.0
6	4924.00	42.4 AV	54.0	-11.6	1.35 H	26	38.4	4.0
7	7386.00	47.1 PK	74.0	-26.9	2.65 H	81	36.9	10.2
8	7386.00	40.8 AV	54.0	-13.2	2.65 H	81	30.6	10.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

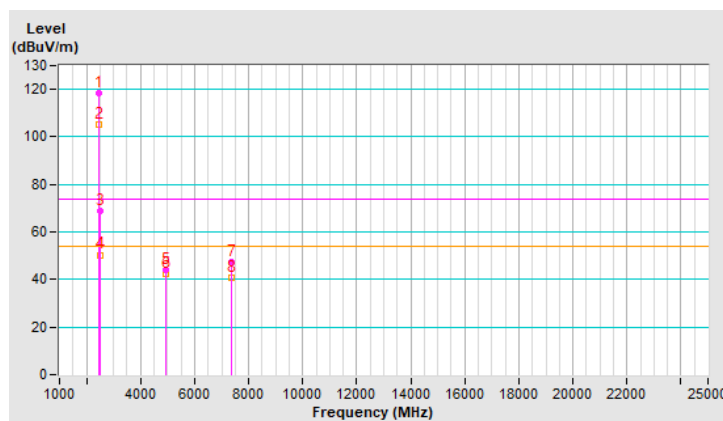


RF Mode	TX 802.11ax (HE20)	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Ryan Du		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	121.2 PK			2.20 V	105	122.1	-0.9
2	*2462.00	111.6 AV			2.20 V	105	112.5	-0.9
3	2485.42	66.1 PK	74.0	-7.9	2.20 V	105	67.1	-1.0
4	2485.42	53.3 AV	54.0	-0.7	2.20 V	105	54.3	-1.0
5	4924.00	42.6 PK	74.0	-31.4	3.90 V	131	38.6	4.0
6	4924.00	37.9 AV	54.0	-16.1	3.90 V	131	33.9	4.0
7	7386.00	46.5 PK	74.0	-27.5	2.83 V	276	36.3	10.2
8	7386.00	40.1 AV	54.0	-13.9	2.83 V	276	29.9	10.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

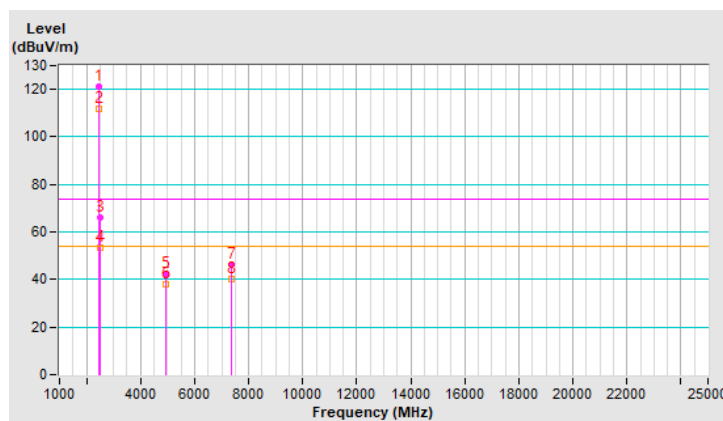


RF Mode	TX 802.11ax (HE40)	Channel	CH 3 : 2422 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Ryan Du		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2389.17	60.7 PK	74.0	-13.3	3.15 H	70	61.5	-0.8
2	2389.17	48.6 AV	54.0	-5.4	3.15 H	70	49.4	-0.8
3	*2422.00	111.0 PK			3.15 H	70	111.8	-0.8
4	*2422.00	99.6 AV			3.15 H	70	100.4	-0.8
5	4844.00	44.7 PK	74.0	-29.3	1.42 H	22	40.8	3.9
6	4844.00	42.9 AV	54.0	-11.1	1.42 H	22	39.0	3.9
7	7266.00	47.4 PK	74.0	-26.6	2.64 H	93	37.4	10.0
8	7266.00	40.8 AV	54.0	-13.2	2.64 H	93	30.8	10.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

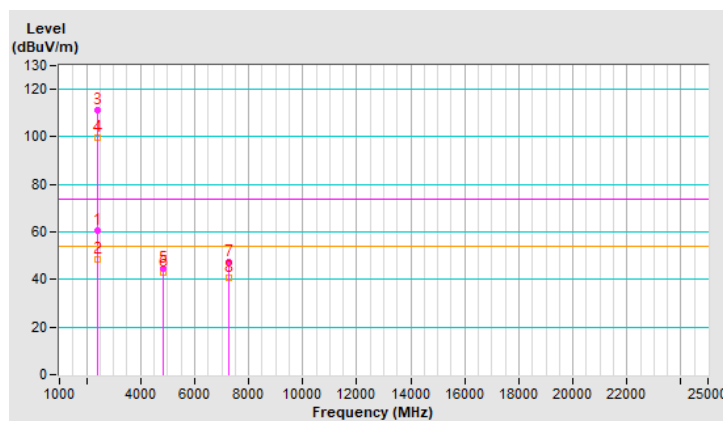


RF Mode	TX 802.11ax (HE40)	Channel	CH 3 : 2422 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Ryan Du		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2386.51	64.0 PK	74.0	-10.0	1.49 V	71	64.8	-0.8
2	2386.51	53.3 AV	54.0	-0.7	1.49 V	71	54.1	-0.8
3	*2422.00	114.1 PK			1.49 V	71	114.9	-0.8
4	*2422.00	104.5 AV			1.49 V	71	105.3	-0.8
5	4844.00	42.6 PK	74.0	-31.4	3.97 V	140	38.7	3.9
6	4844.00	37.7 AV	54.0	-16.3	3.97 V	140	33.8	3.9
7	7266.00	46.1 PK	74.0	-27.9	2.85 V	272	36.1	10.0
8	7266.00	39.8 AV	54.0	-14.2	2.85 V	272	29.8	10.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

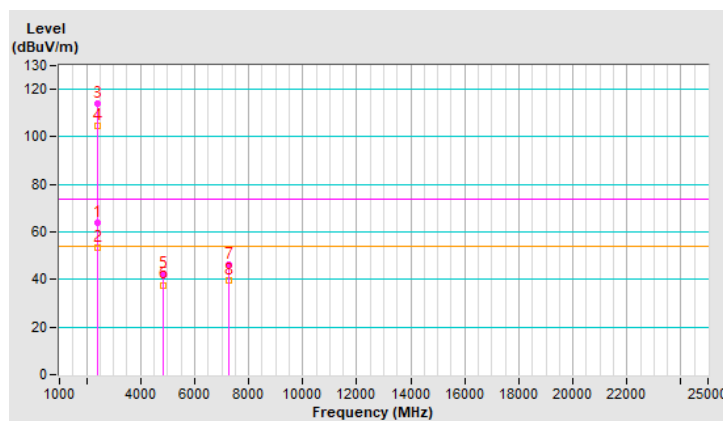


RF Mode	TX 802.11ax (HE40)	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Ryan Du		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	60.3 PK	74.0	-13.7	3.09 H	72	61.1	-0.8
2	2390.00	46.8 AV	54.0	-7.2	3.09 H	72	47.6	-0.8
3	*2437.00	114.5 PK			3.09 H	72	115.3	-0.8
4	*2437.00	103.1 AV			3.09 H	72	103.9	-0.8
5	2483.50	64.9 PK	74.0	-9.1	3.09 H	72	65.9	-1.0
6	2483.50	48.4 AV	54.0	-5.6	3.09 H	72	49.4	-1.0
7	4874.00	44.3 PK	74.0	-29.7	1.35 H	40	40.3	4.0
8	4874.00	42.9 AV	54.0	-11.1	1.35 H	40	38.9	4.0
9	7311.00	47.1 PK	74.0	-26.9	2.71 H	98	37.0	10.1
10	7311.00	40.6 AV	54.0	-13.4	2.71 H	98	30.5	10.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

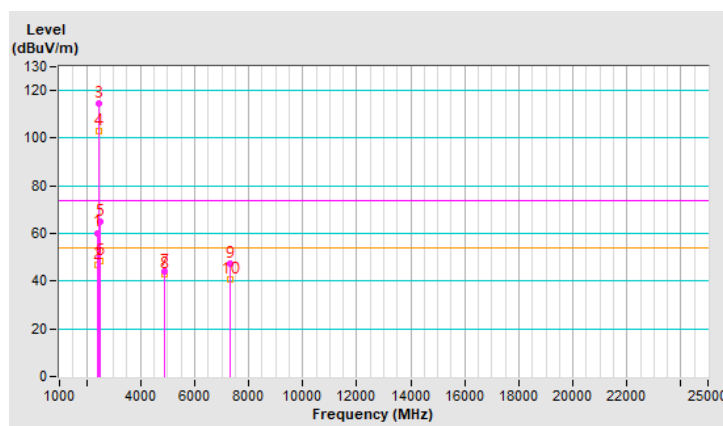


RF Mode	TX 802.11ax (HE40)	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Ryan Du		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	67.6 PK	74.0	-6.4	1.49 V	60	68.4	-0.8
2	2390.00	53.4 AV	54.0	-0.6	1.49 V	60	54.2	-0.8
3	*2437.00	117.2 PK			1.49 V	60	118.0	-0.8
4	*2437.00	107.8 AV			1.49 V	60	108.6	-0.8
5	2483.50	66.6 PK	74.0	-7.4	1.49 V	60	67.6	-1.0
6	2483.50	51.5 AV	54.0	-2.5	1.49 V	60	52.5	-1.0
7	4874.00	42.9 PK	74.0	-31.1	4.00 V	138	38.9	4.0
8	4874.00	37.9 AV	54.0	-16.1	4.00 V	138	33.9	4.0
9	7311.00	45.4 PK	74.0	-28.6	2.88 V	282	35.3	10.1
10	7311.00	39.5 AV	54.0	-14.5	2.88 V	282	29.4	10.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

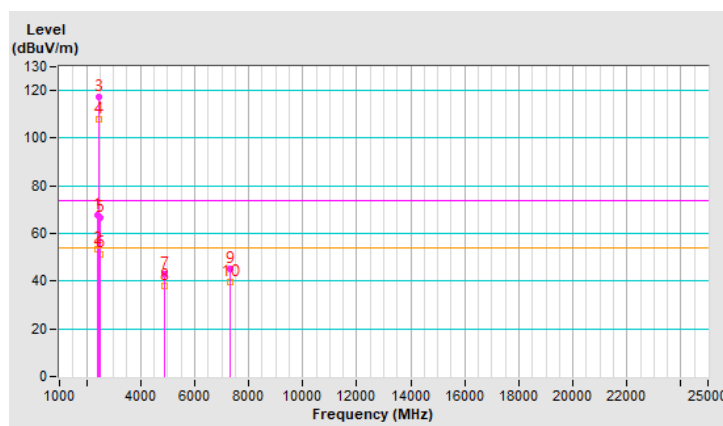


RF Mode	TX 802.11ax (HE40)	Channel	CH 9 : 2452 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Ryan Du		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2452.00	111.3 PK			3.08 H	75	112.2	-0.9
2	*2452.00	100.3 AV			3.08 H	75	101.2	-0.9
3	2485.17	62.0 PK	74.0	-12.0	3.08 H	75	63.0	-1.0
4	2485.17	48.5 AV	54.0	-5.5	3.08 H	75	49.5	-1.0
5	4904.00	44.8 PK	74.0	-29.2	1.39 H	22	40.9	3.9
6	4904.00	43.0 AV	54.0	-11.0	1.39 H	22	39.1	3.9
7	7356.00	47.1 PK	74.0	-26.9	2.74 H	77	37.0	10.1
8	7356.00	40.4 AV	54.0	-13.6	2.74 H	77	30.3	10.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

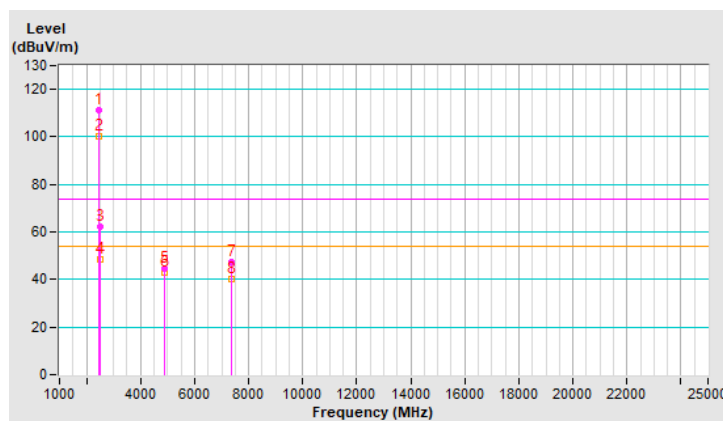


RF Mode	TX 802.11ax (HE40)	Channel	CH 9 : 2452 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Ryan Du		


Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2452.00	116.2 PK			2.00 V	108	117.1	-0.9
2	*2452.00	106.4 AV			2.00 V	108	107.3	-0.9
3	2485.17	63.5 PK	74.0	-10.5	2.00 V	108	64.5	-1.0
4	2485.17	53.3 AV	54.0	-0.7	2.00 V	108	54.3	-1.0
5	4904.00	42.7 PK	74.0	-31.3	3.91 V	135	38.8	3.9
6	4904.00	37.9 AV	54.0	-16.1	3.91 V	135	34.0	3.9
7	7356.00	46.2 PK	74.0	-27.8	2.83 V	277	36.1	10.1
8	7356.00	40.1 AV	54.0	-13.9	2.83 V	277	30.0	10.1


Remarks:


1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

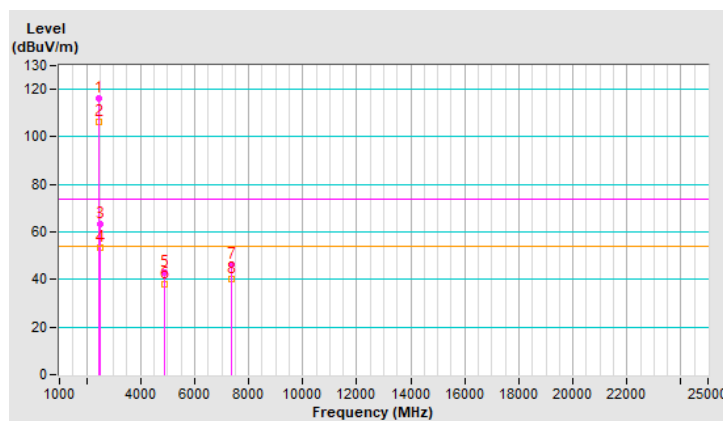


Plot of Band Edge

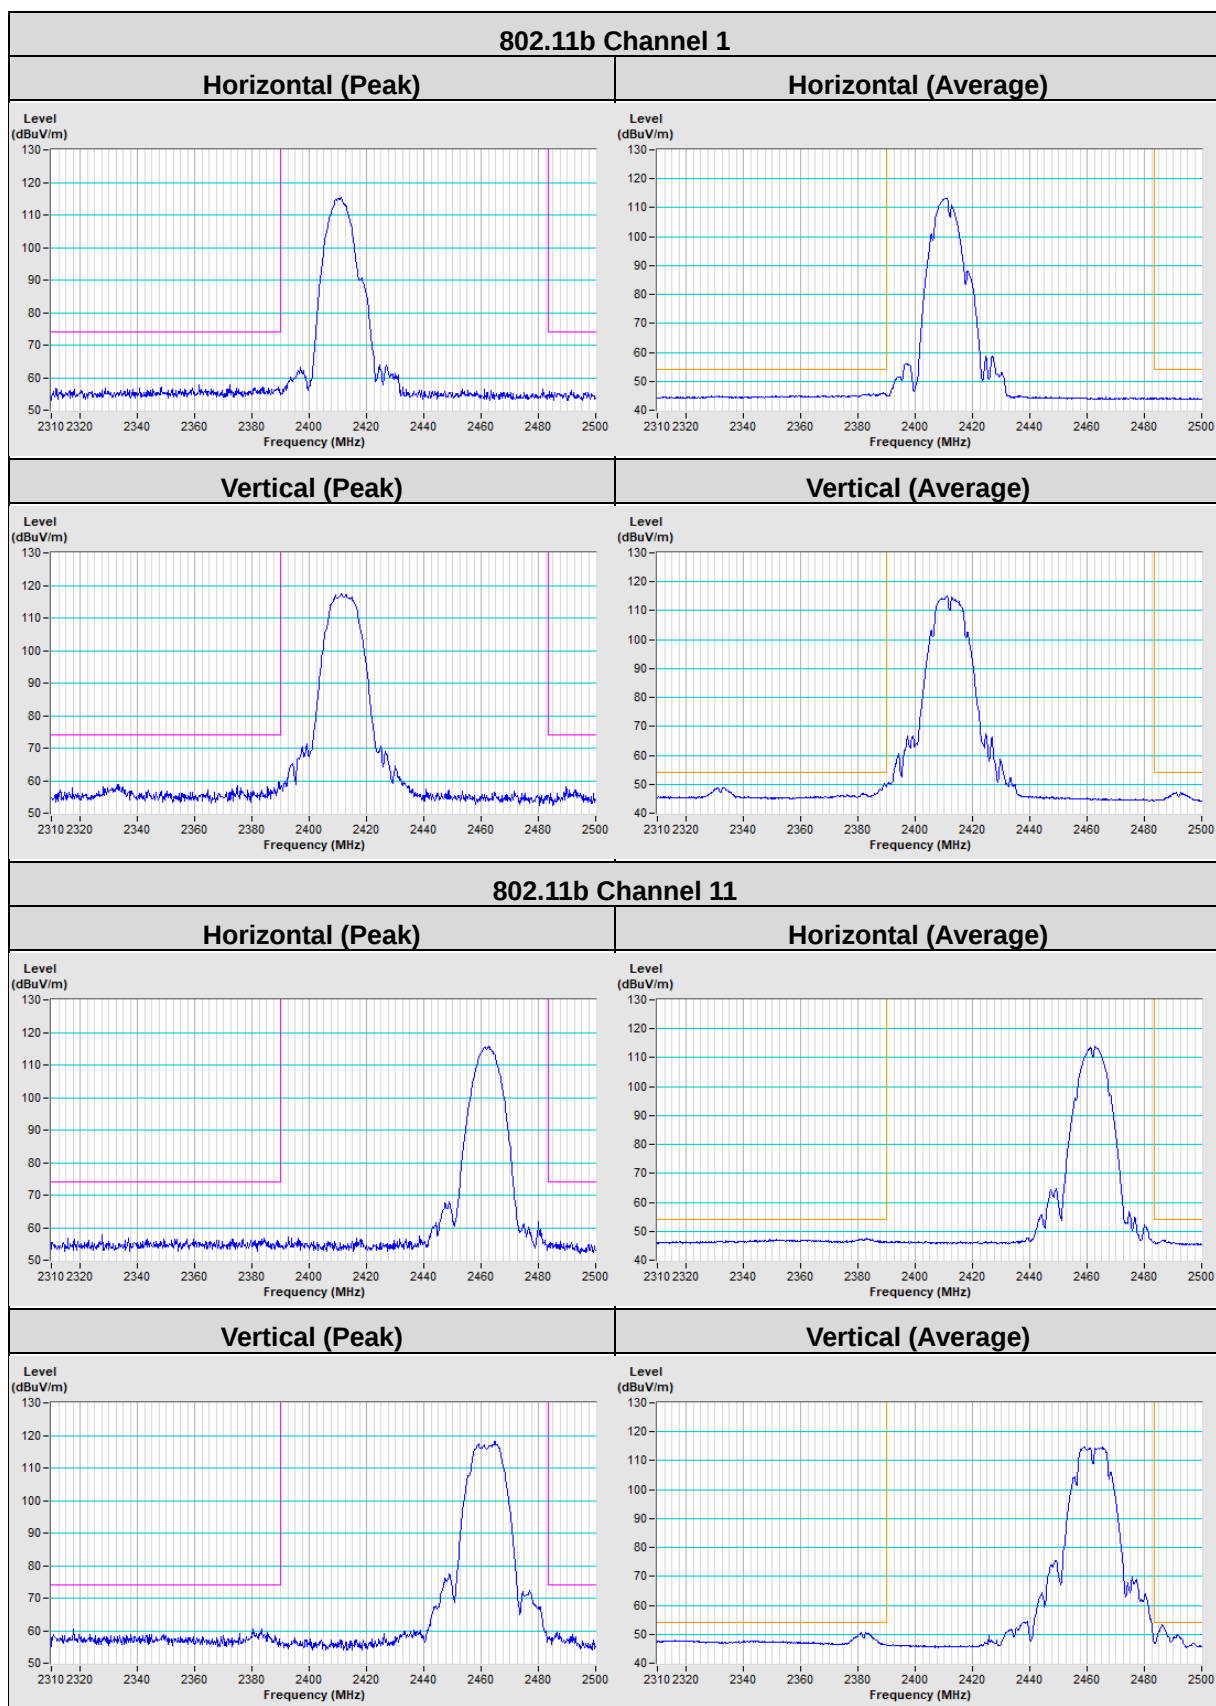

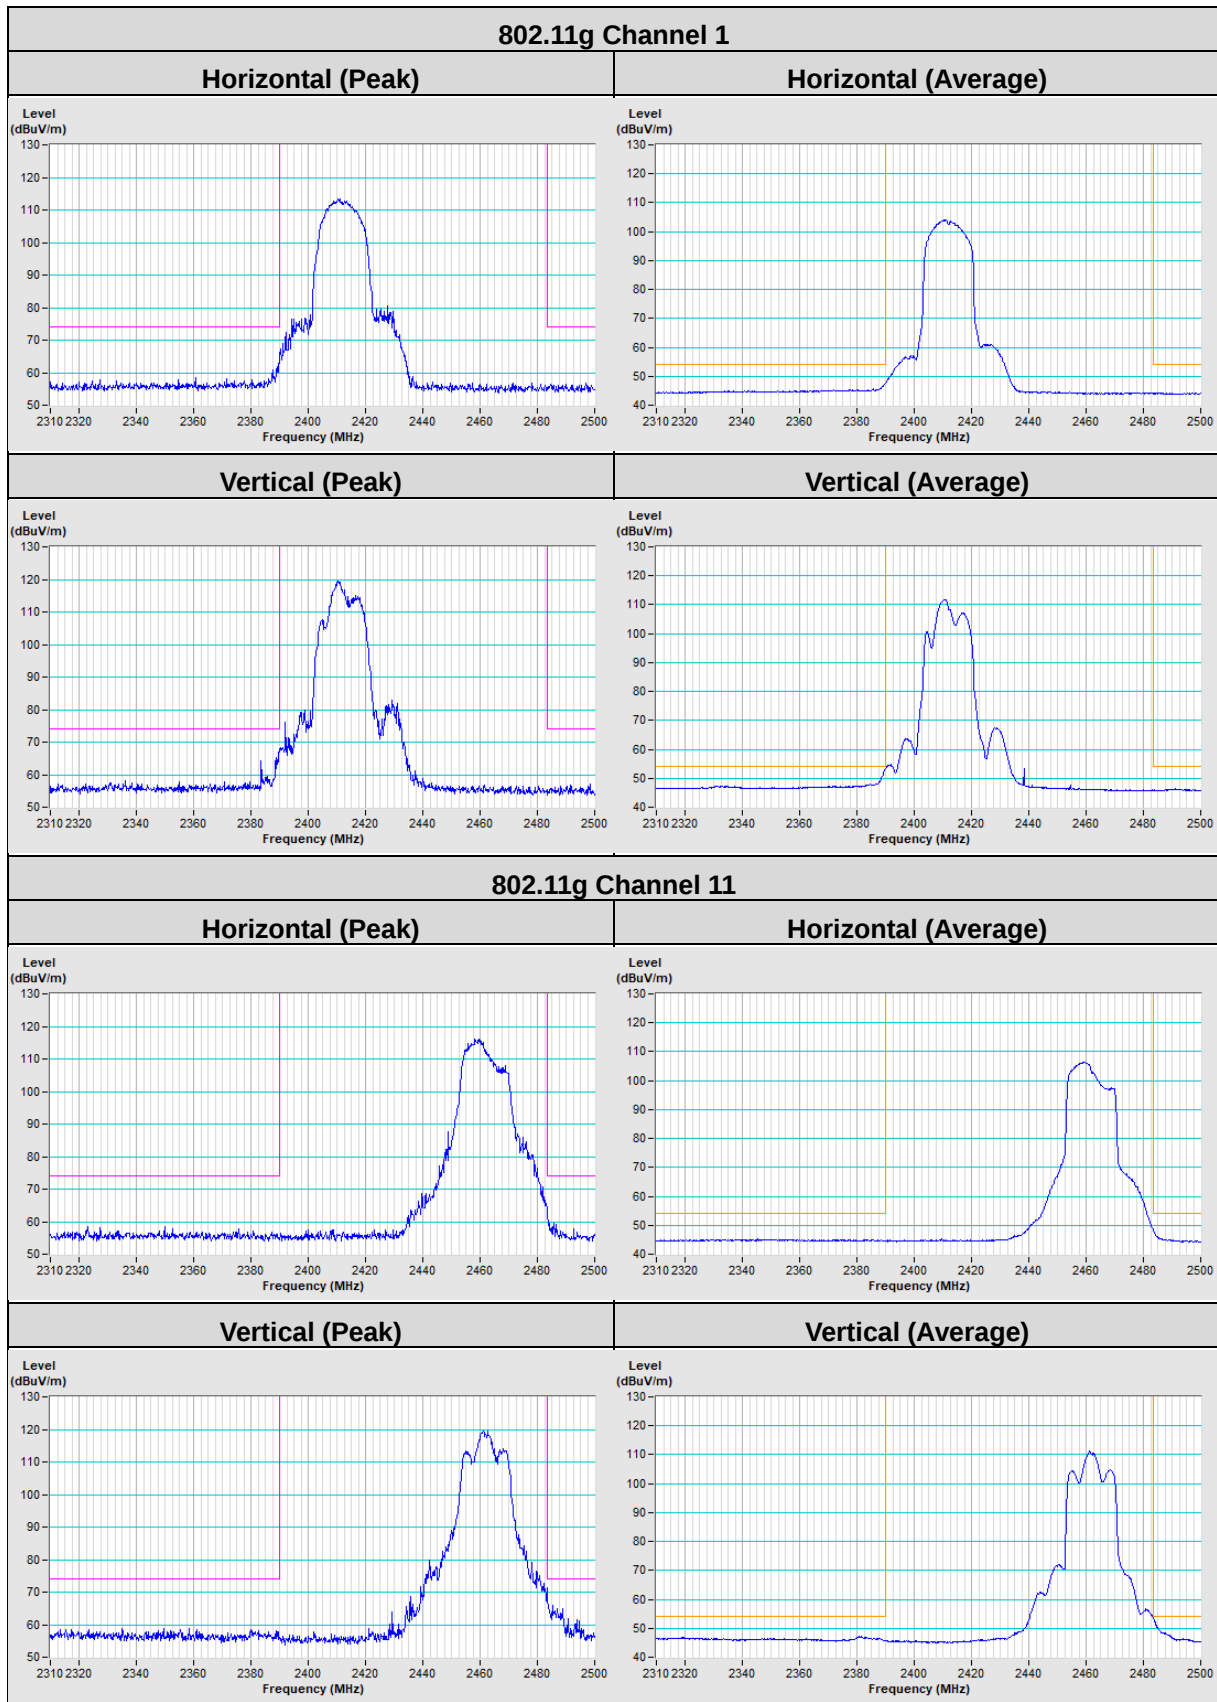

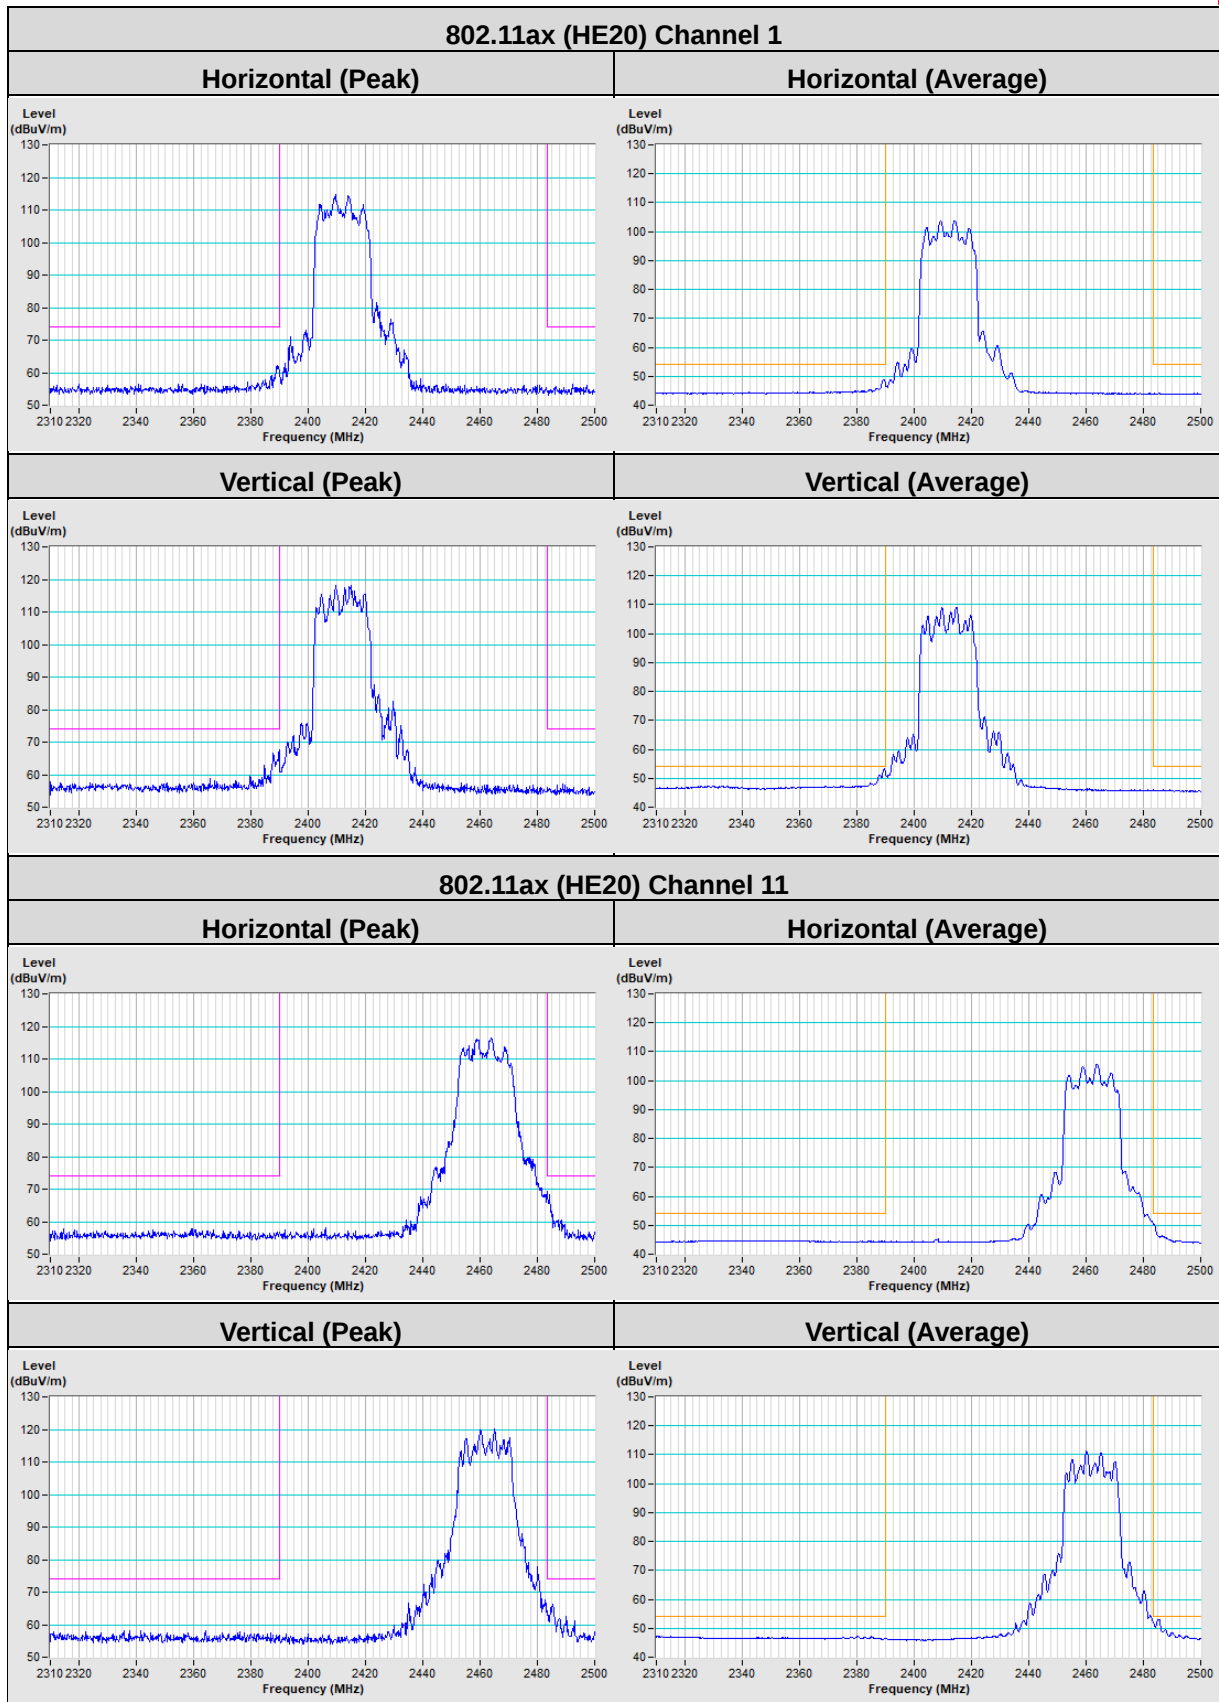

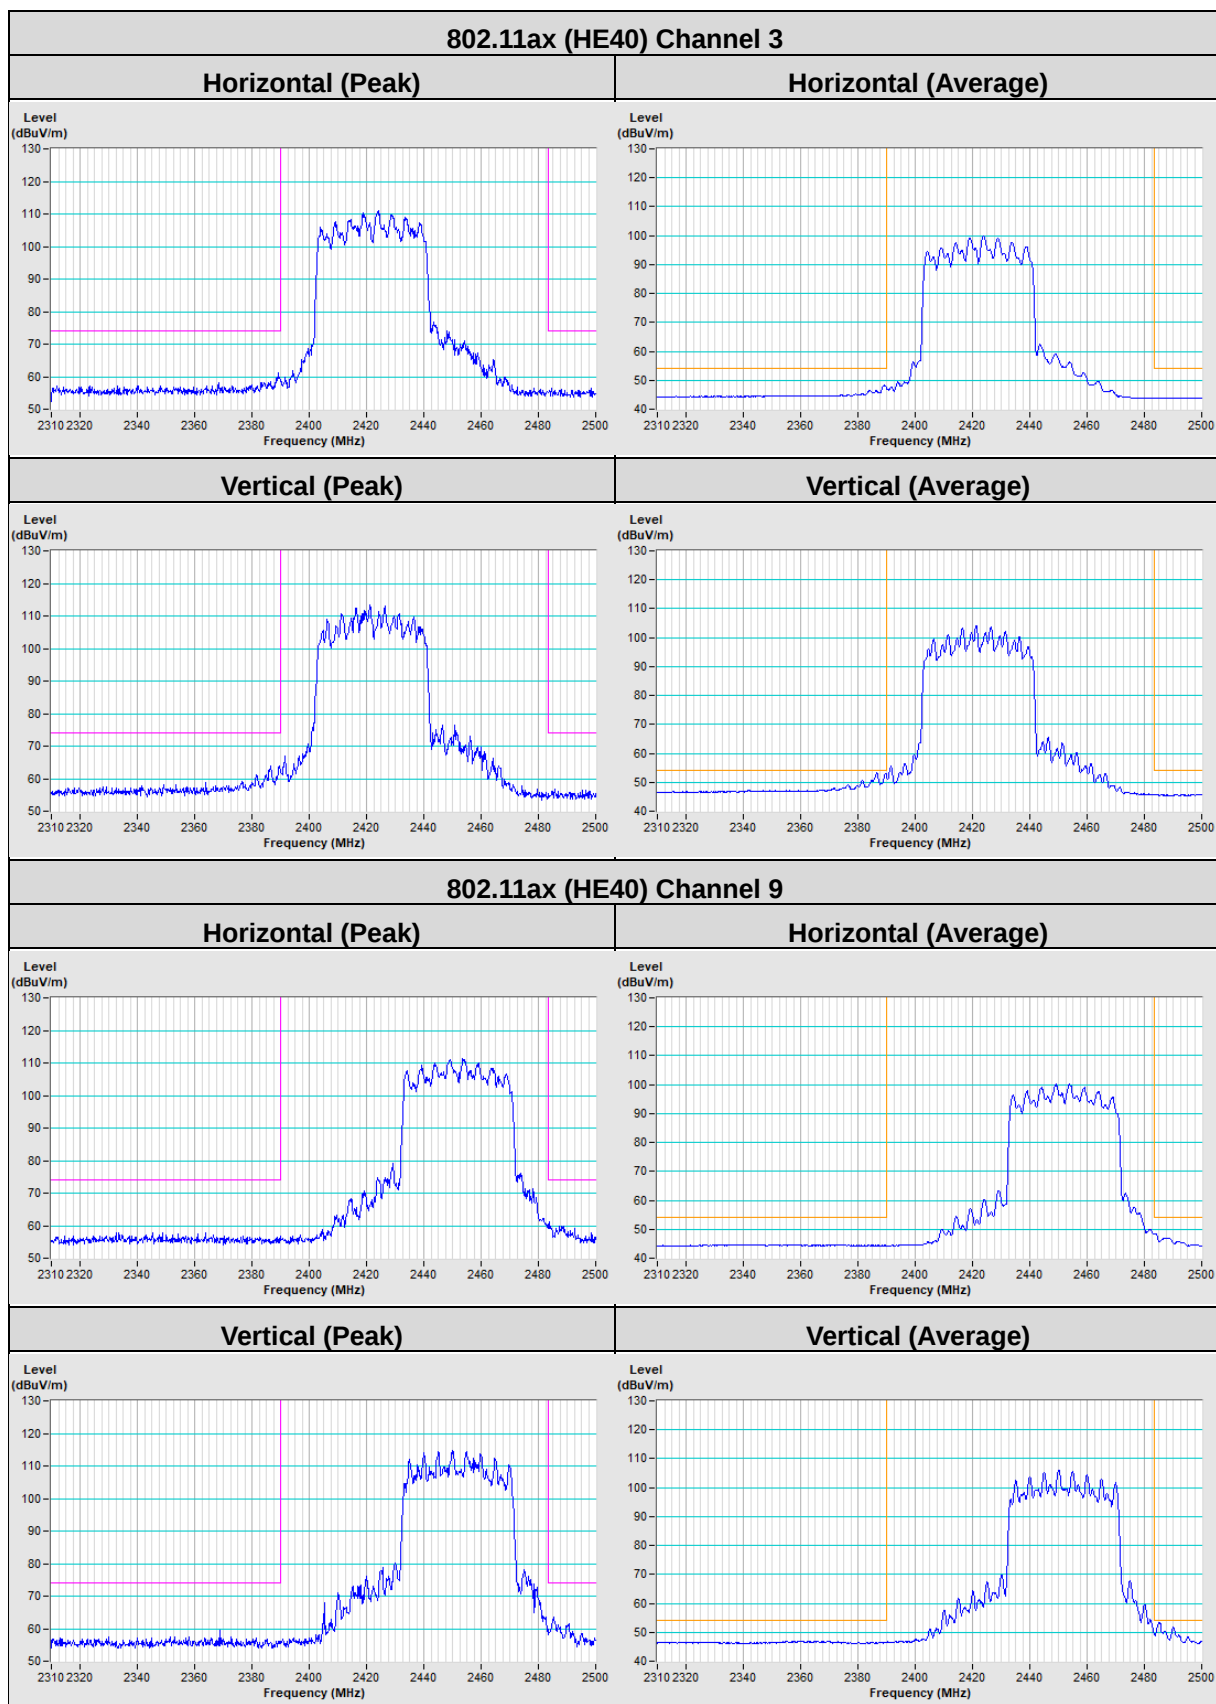

8 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo)

9 Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@bureauveritas.com

Web Site: <http://ee.bureauveritas.com.tw>

The address and road map of all our labs can be found in our web site also.

--- END ---