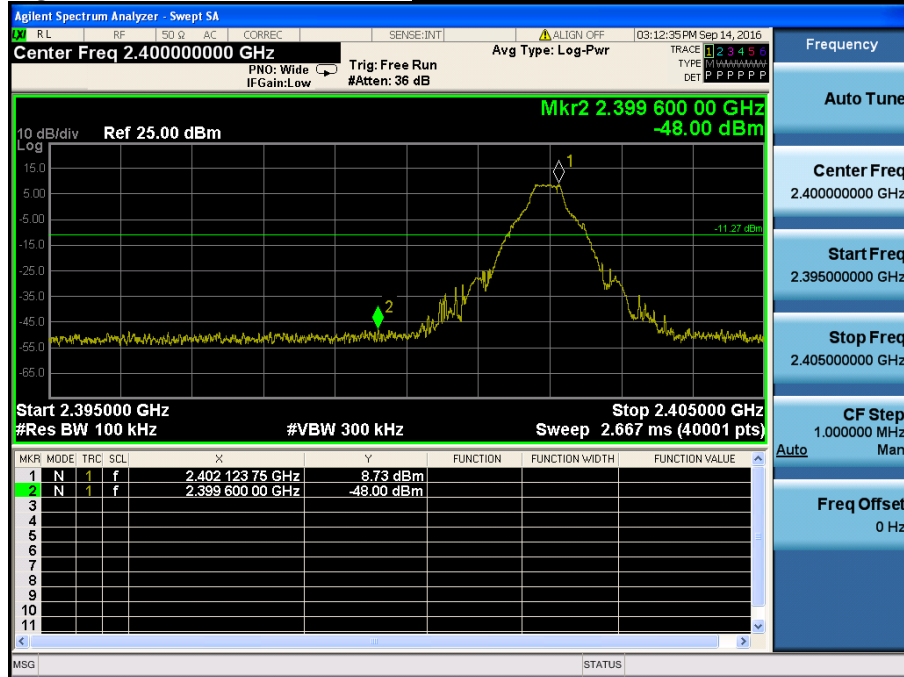


7.4.3. Conducted Spurious Emissions

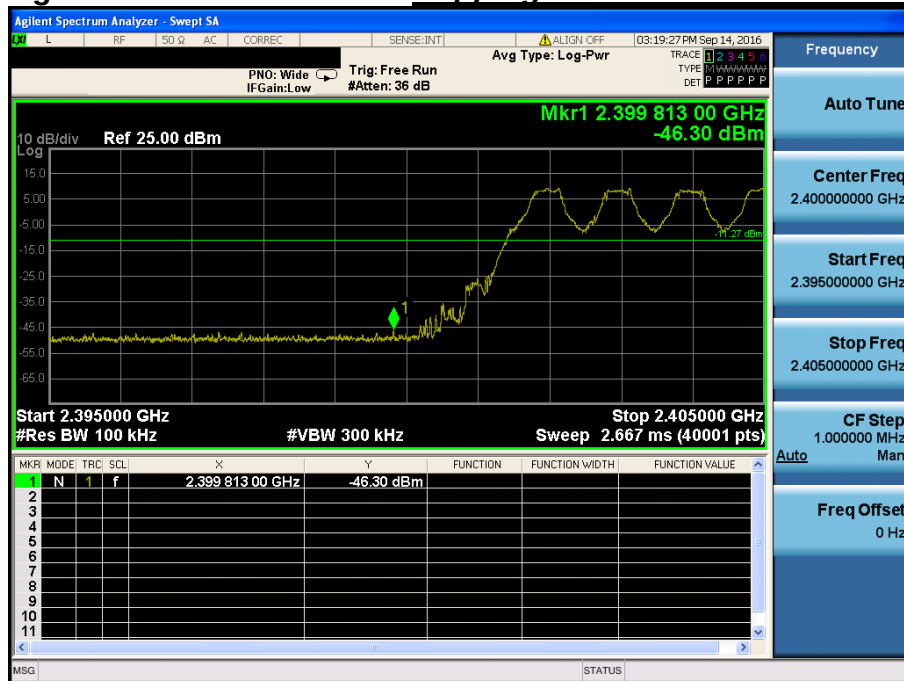
Low Band-edge

Lowest Channel & Modulation : GFSK

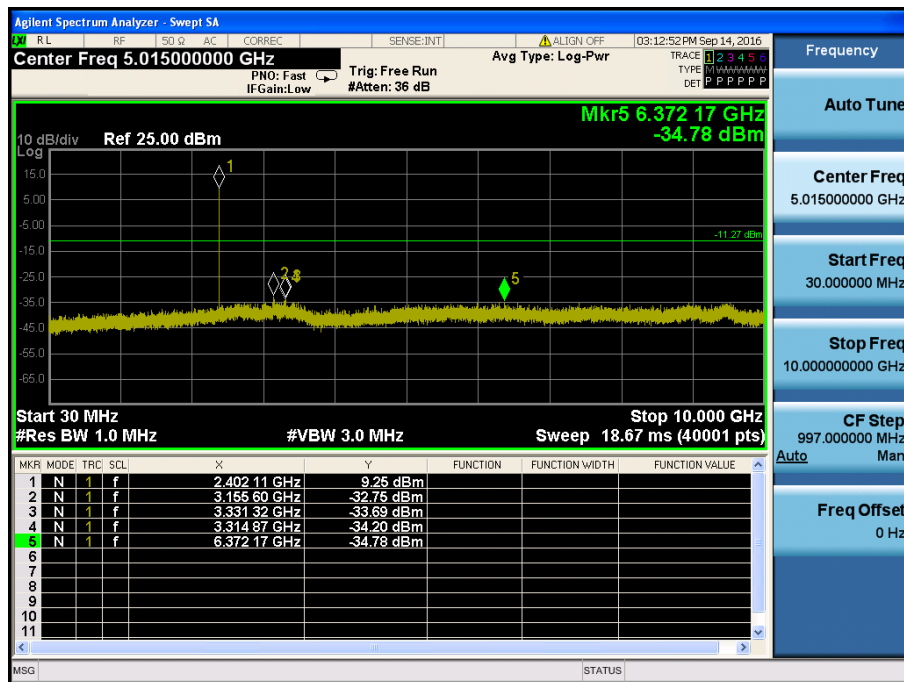
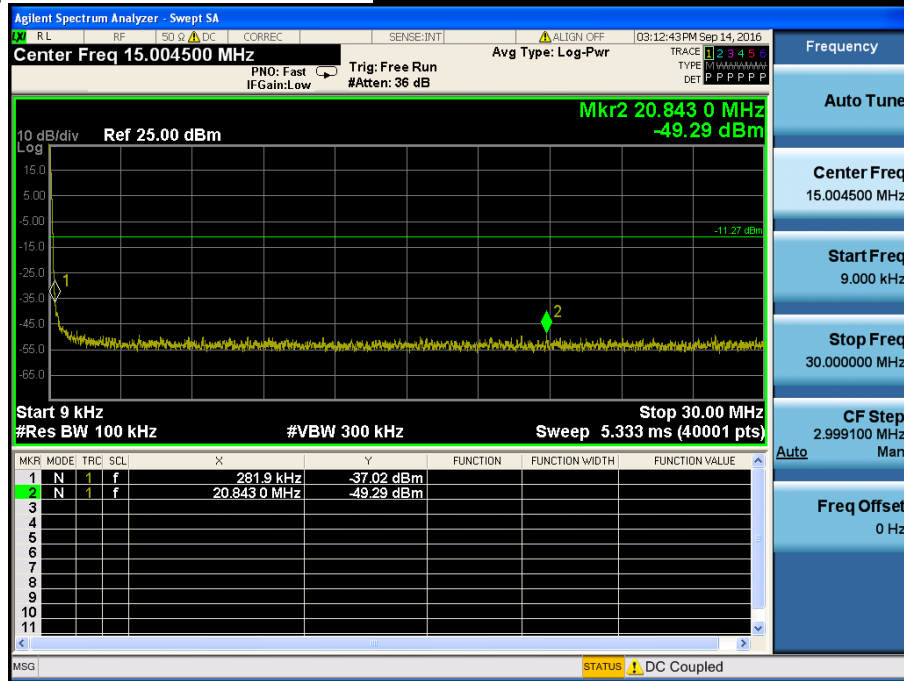


Low Band-edge

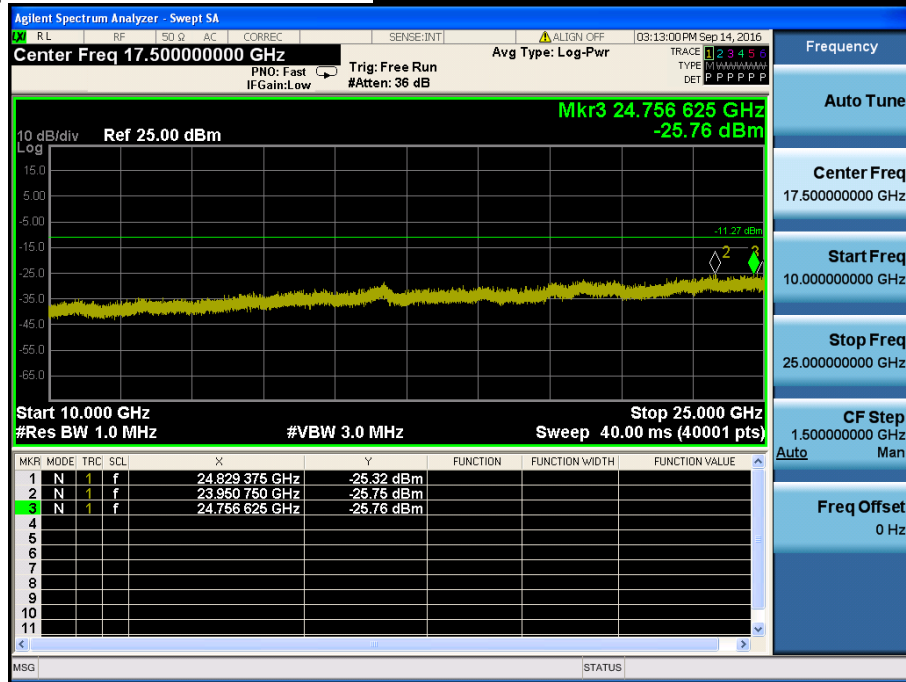
Hopping mode & Modulation : GFSK



Conducted Spurious Emissions

Lowest Channel & Modulation : GFSK

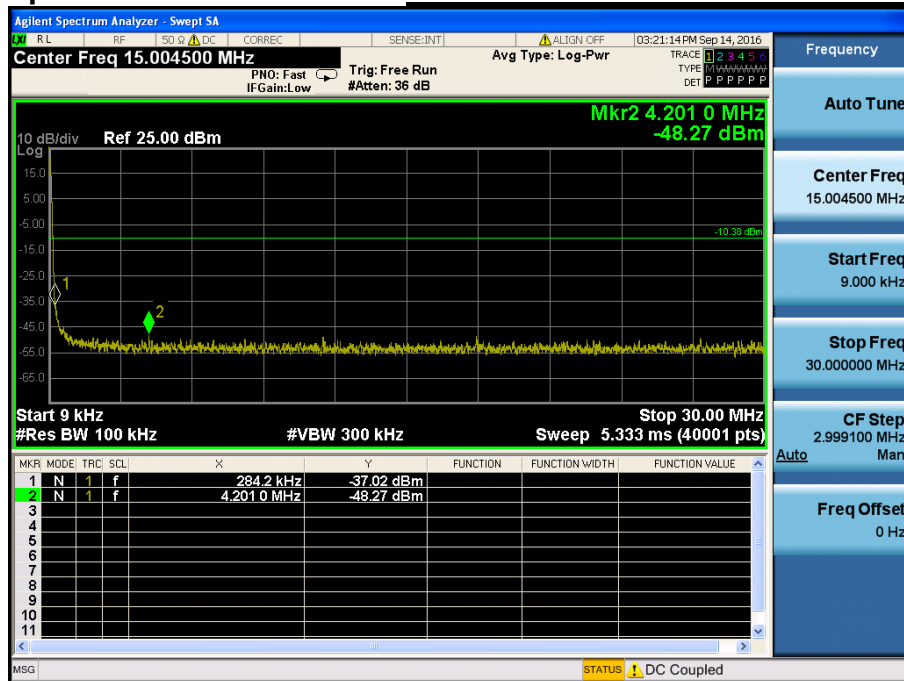
Conducted Spurious Emissions *Lowest Channel & Modulation : GFSK*



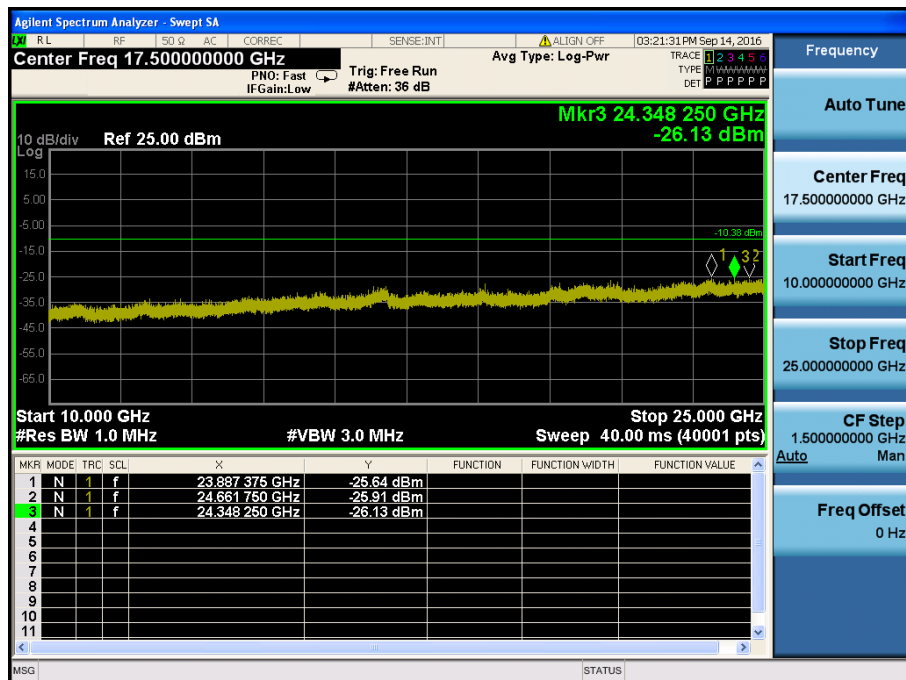
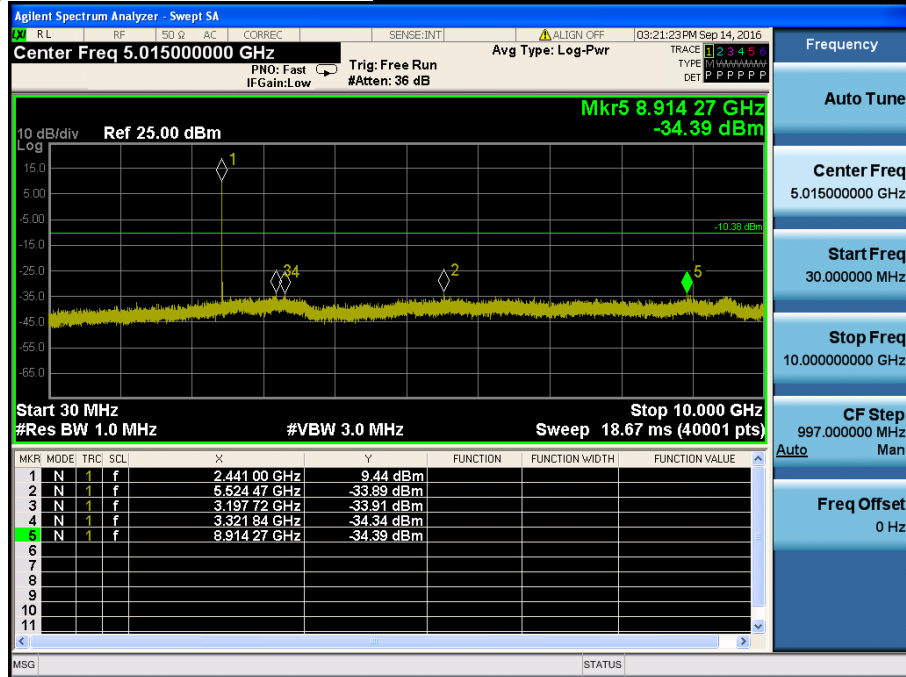
Reference for limit

Middle Channel & Modulation : GFSK

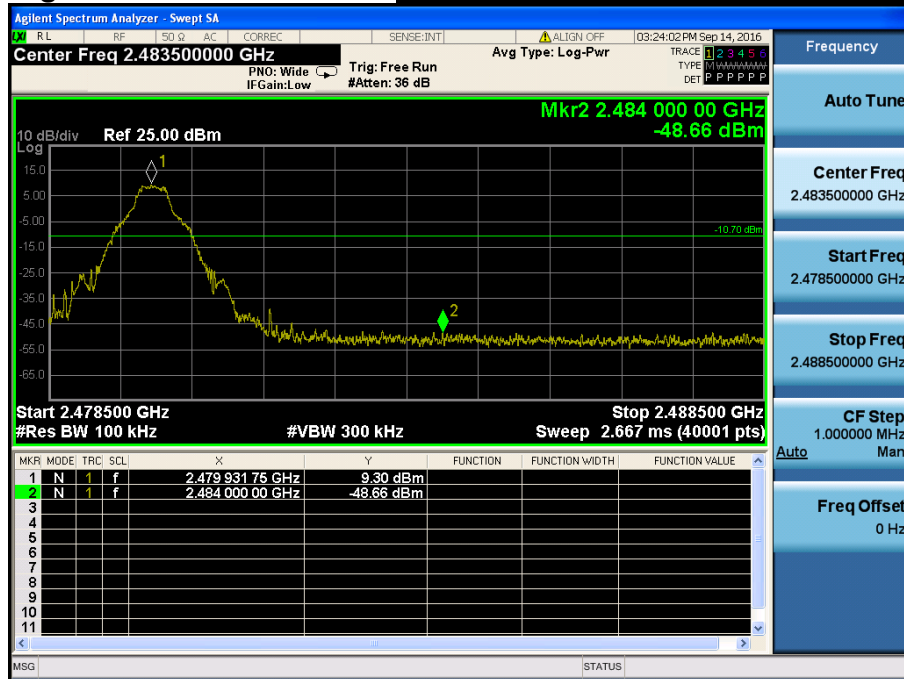
Conducted Spurious Emissions

Middle Channel & Modulation : GFSK

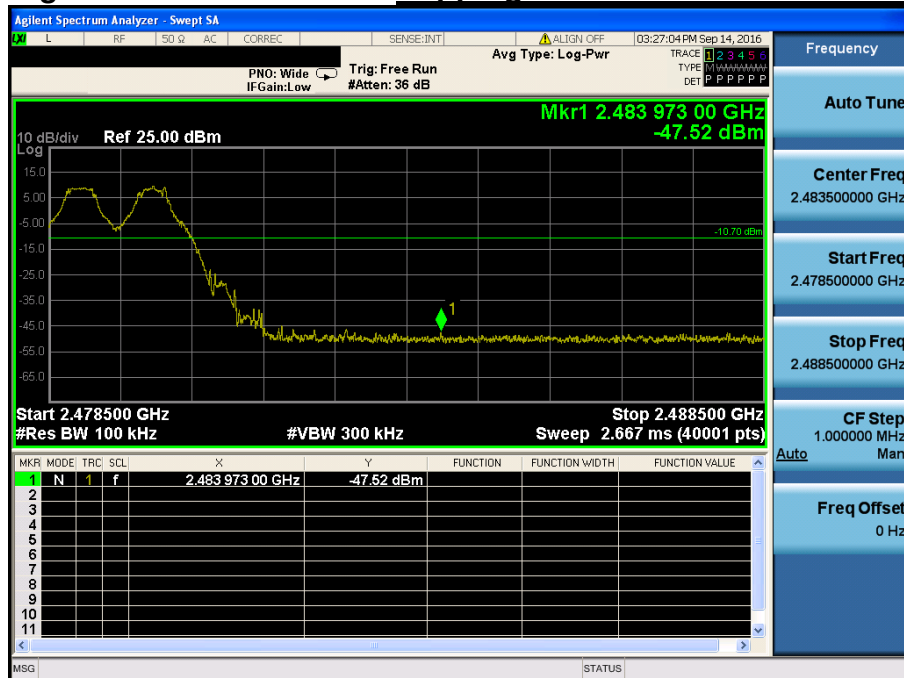
Conducted Spurious Emissions

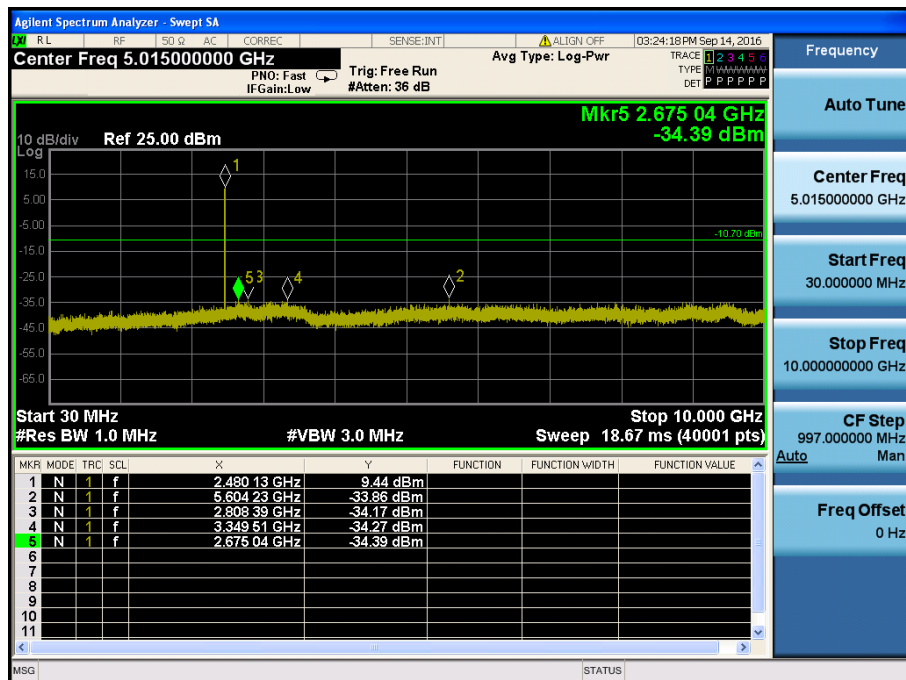
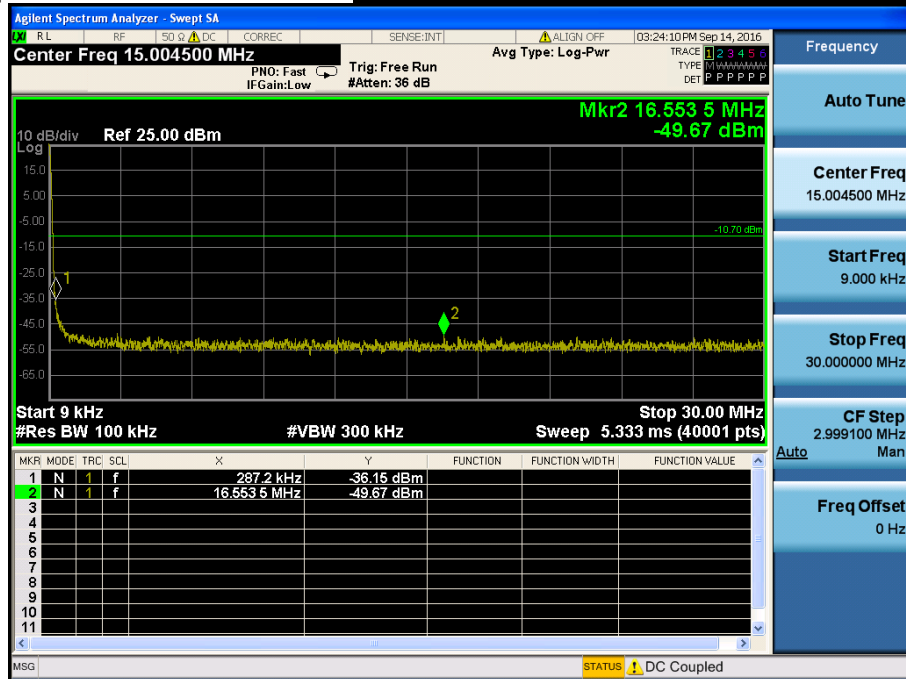
Middle Channel & Modulation : GFSK

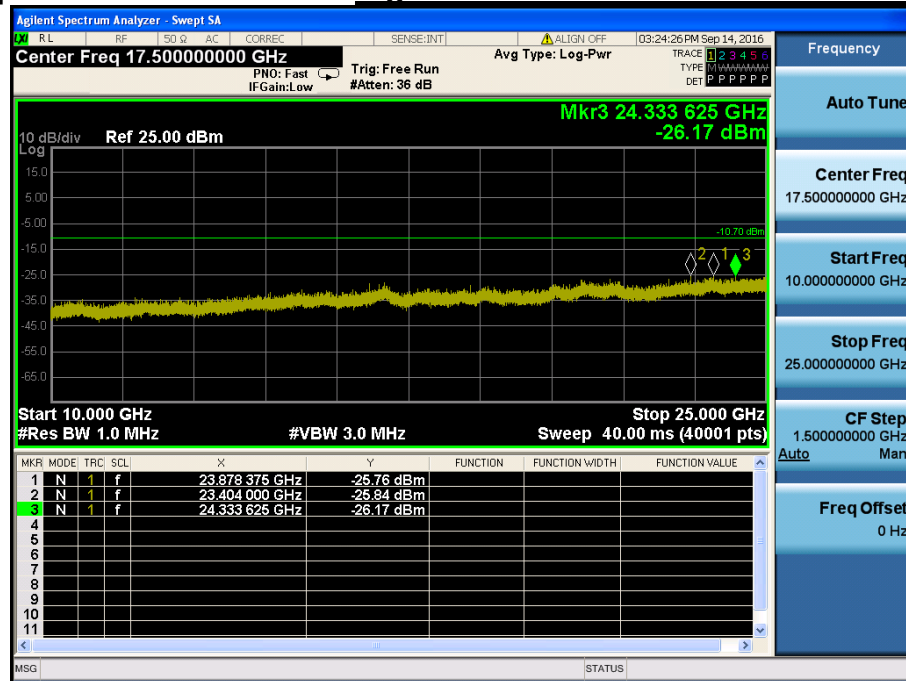
High Band-edge

Highest Channel & Modulation : GFSK

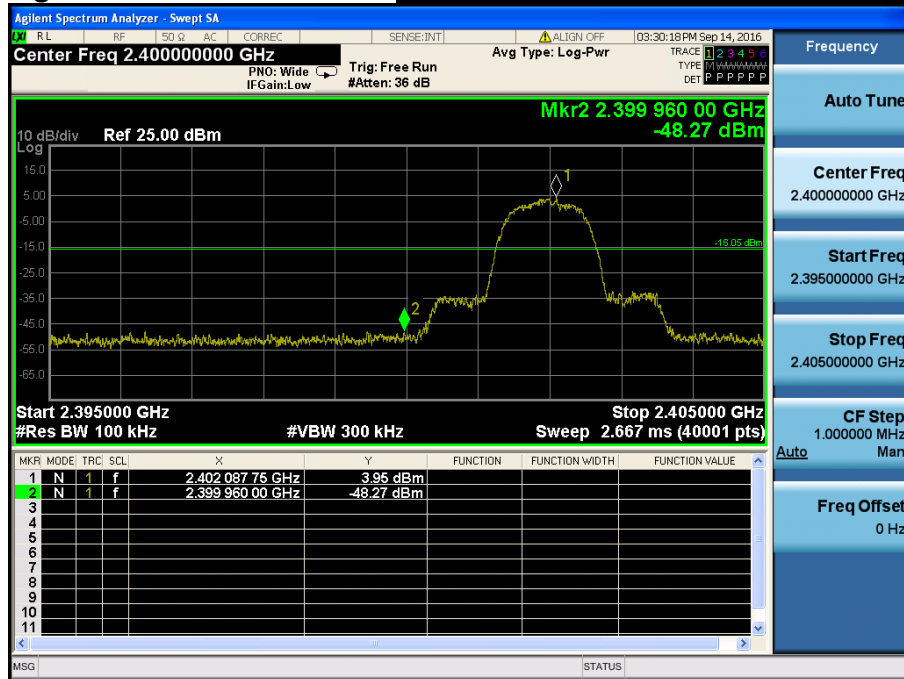
High Band-edge

Hopping mode & Modulation : GFSK

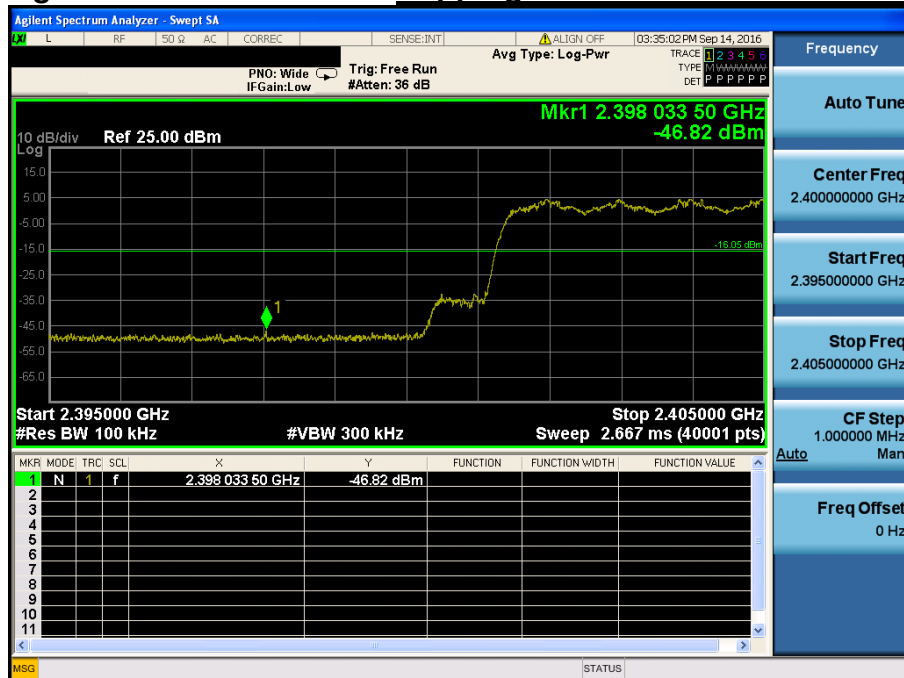
Conducted Spurious Emissions **Highest Channel & Modulation : GFSK**

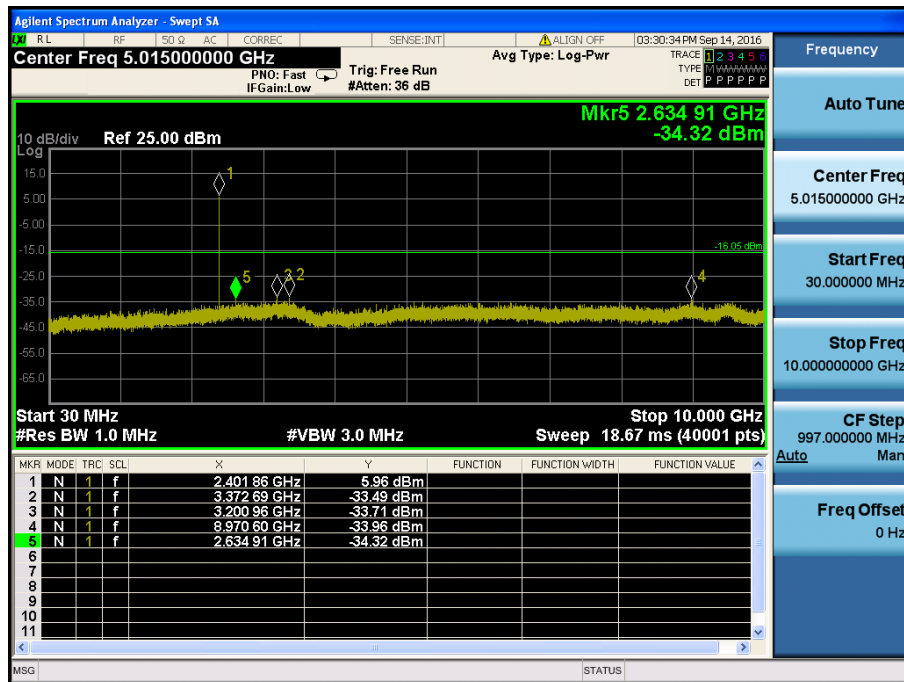
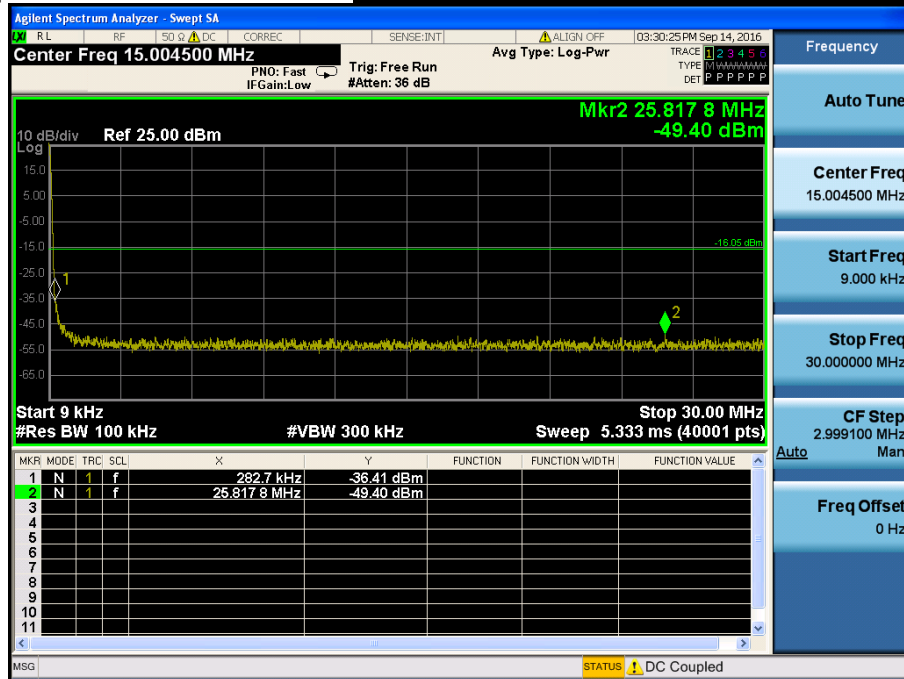
Conducted Spurious Emissions **Highest Channel & Modulation : GFSK**

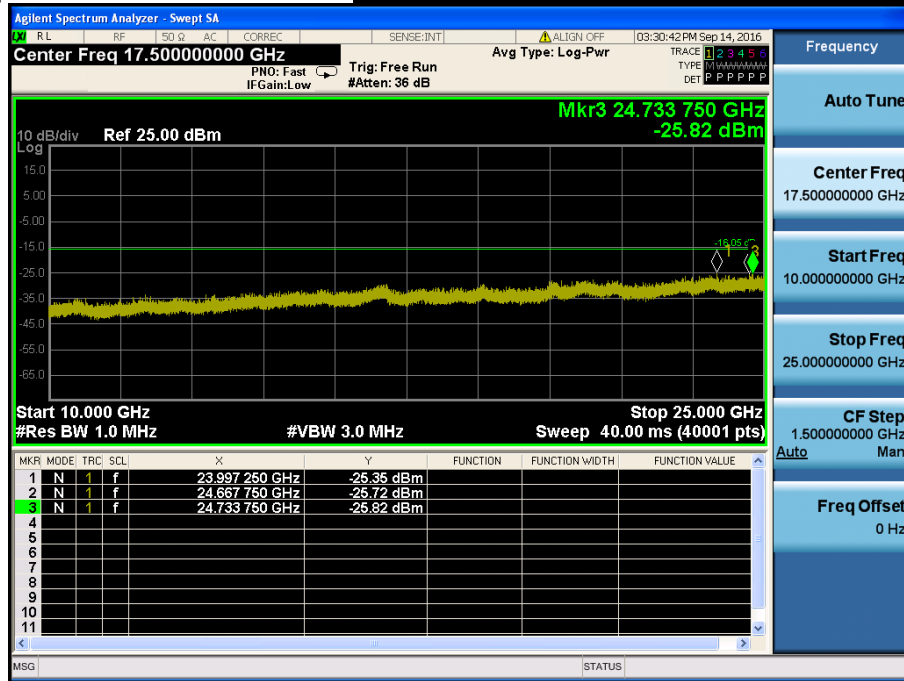
Low Band-edge

Lowest Channel & Modulation : $\pi/4$ DQPSK

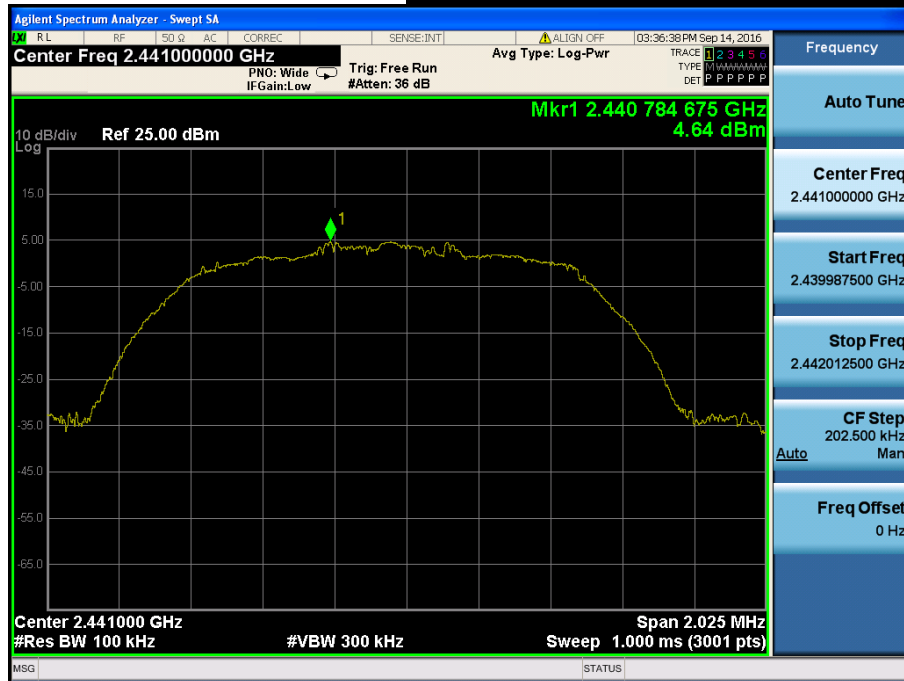
Low Band-edge

Hopping mode & Modulation : $\pi/4$ DQPSK

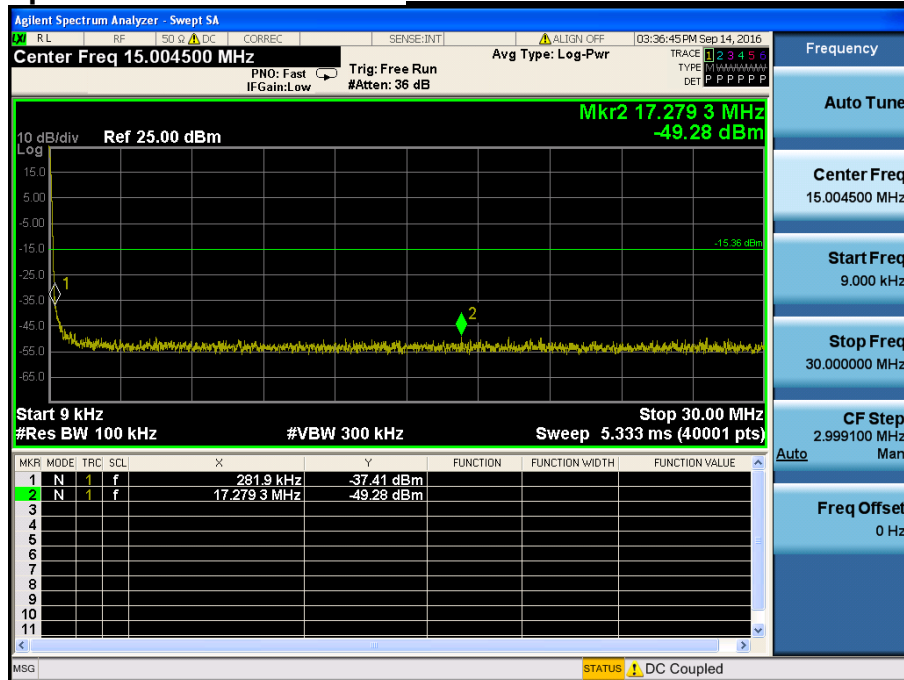
Conducted Spurious Emissions ***Lowest Channel & Modulation : $\pi/4$ DQPSK***

Conducted Spurious Emissions ***Lowest Channel & Modulation : $\pi/4$ DQPSK***

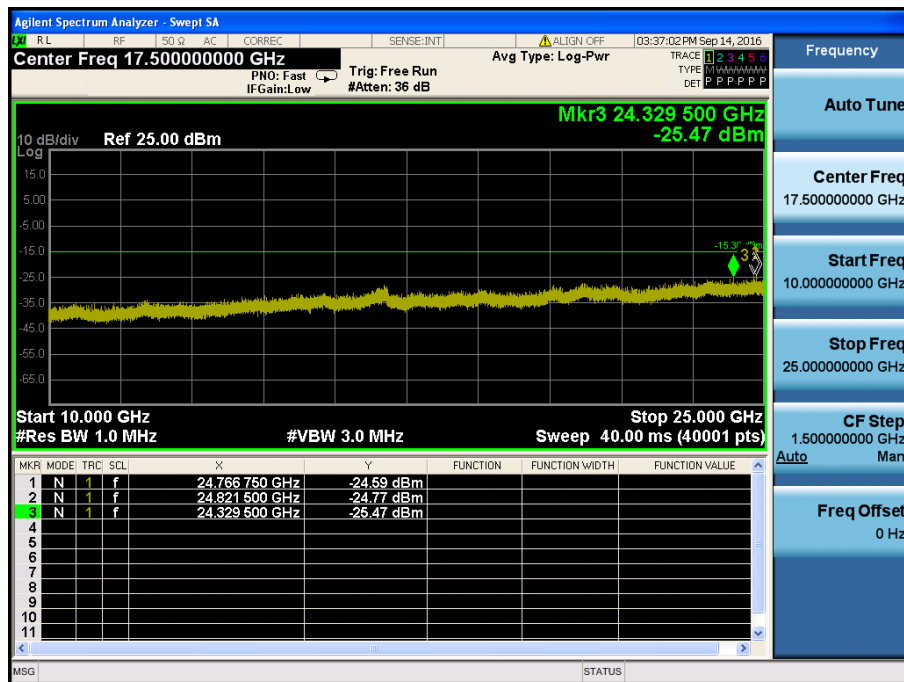
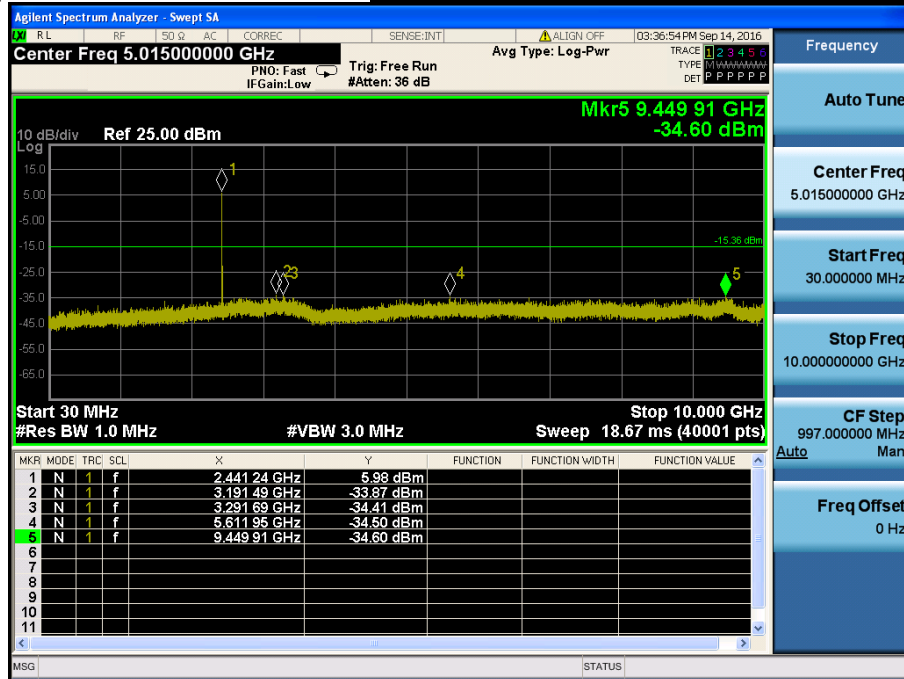
Reference for limit

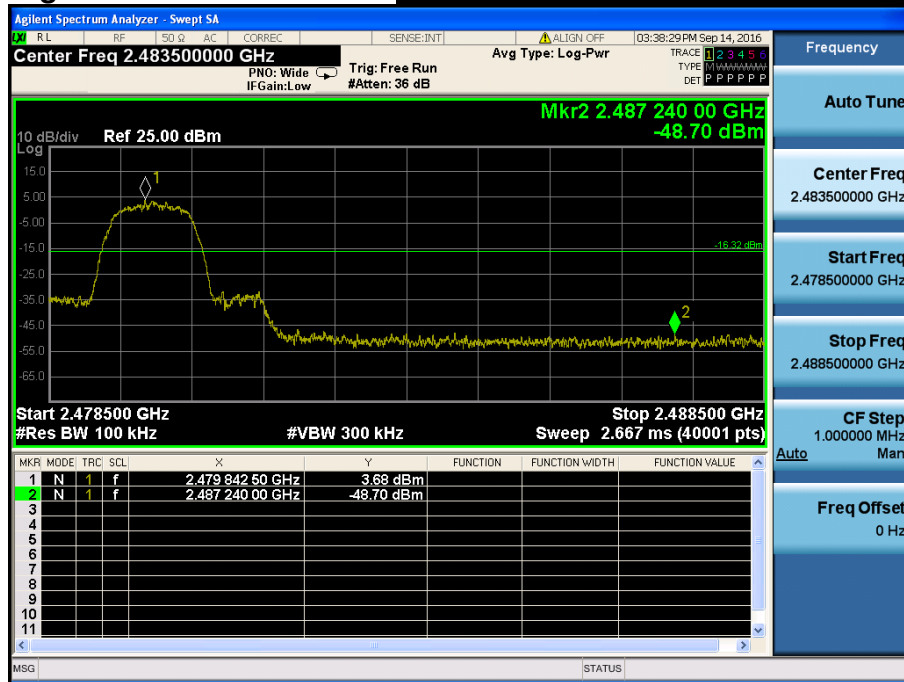
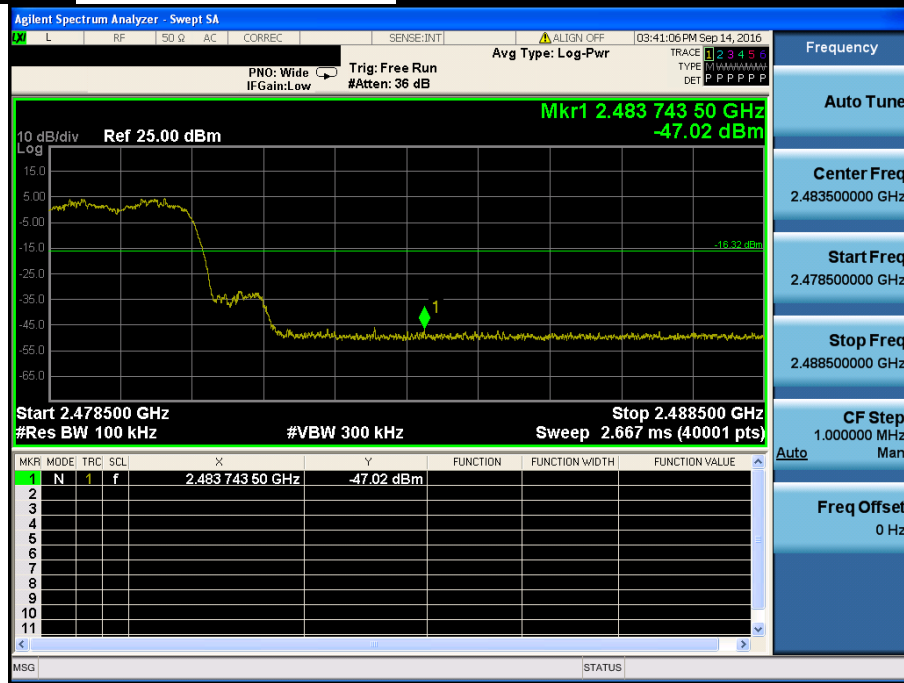
Middle Channel & Modulation : $\pi/4$ DQPSK

Conducted Spurious Emissions

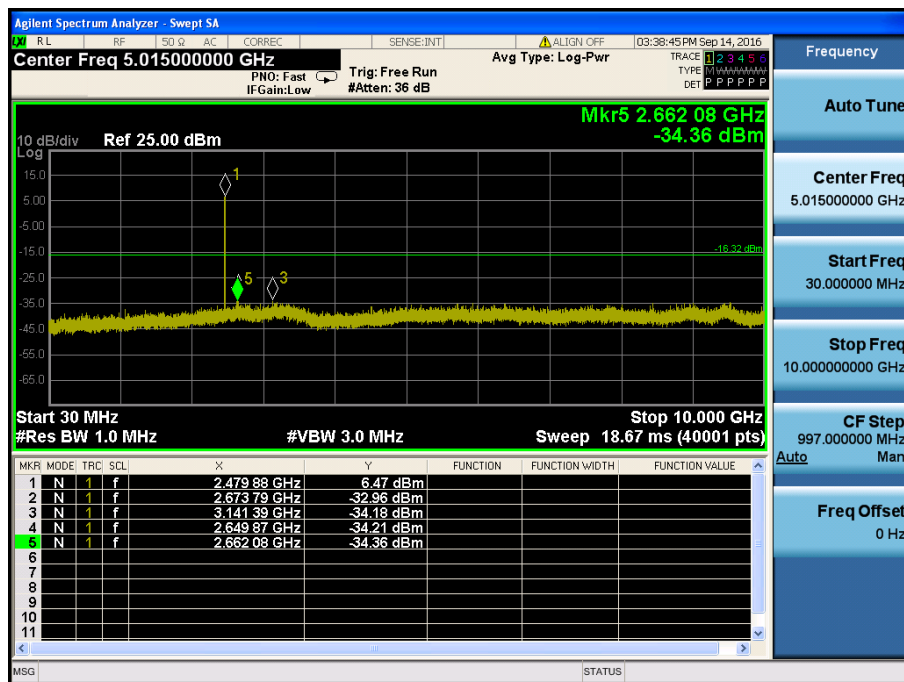
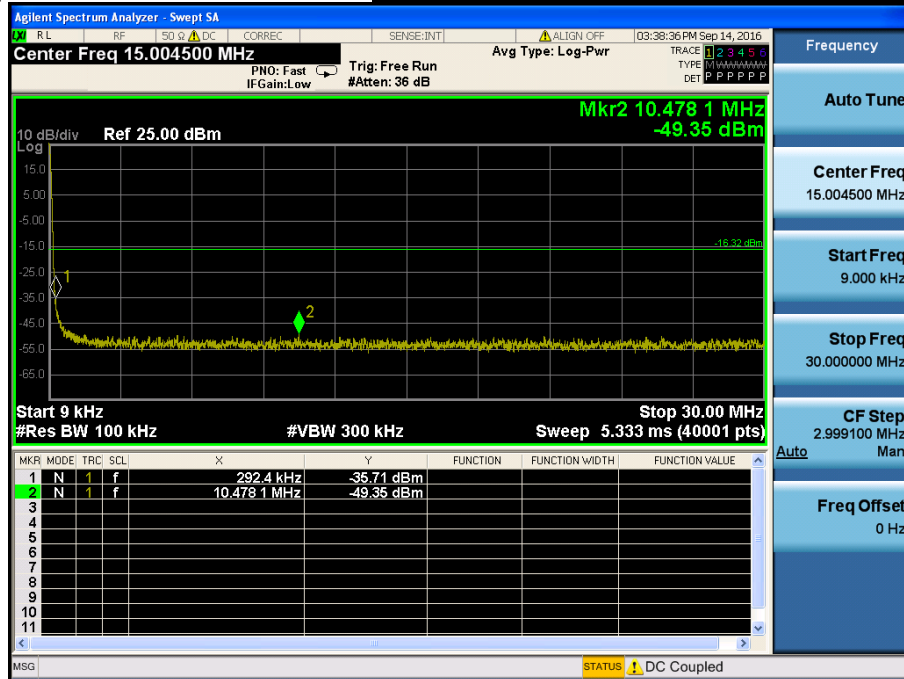
Middle Channel & Modulation : $\pi/4$ DQPSK

Conducted Spurious Emissions

Middle Channel & Modulation : $\pi/4$ DQPSK

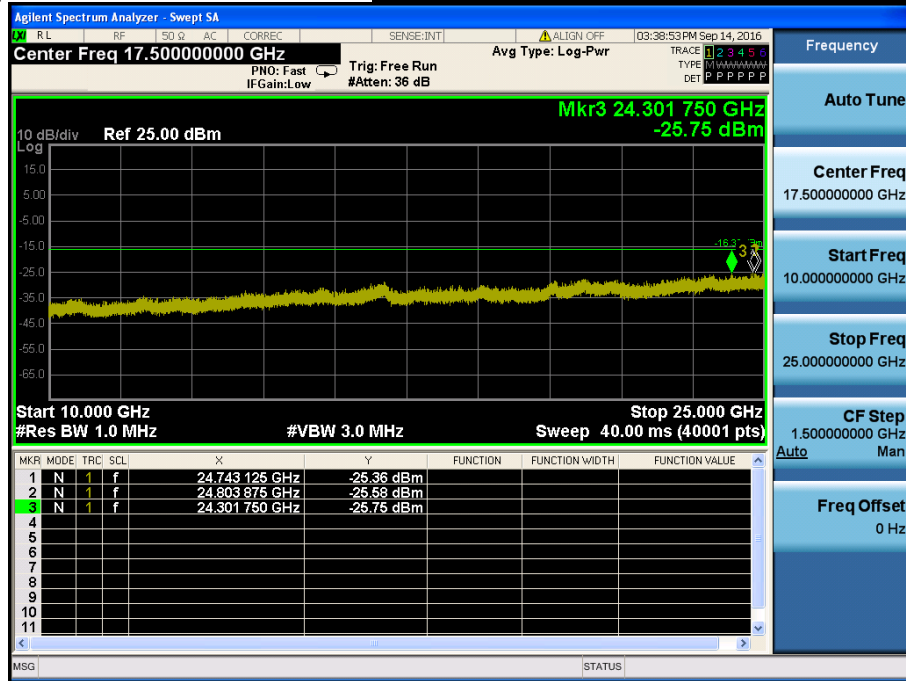
High Band-edge***Highest Channel & Modulation : $\pi/4$ DQPSK*****High Band-edge*****Hopping mode & Modulation : $\pi/4$ DQPSK***

Conducted Spurious Emissions

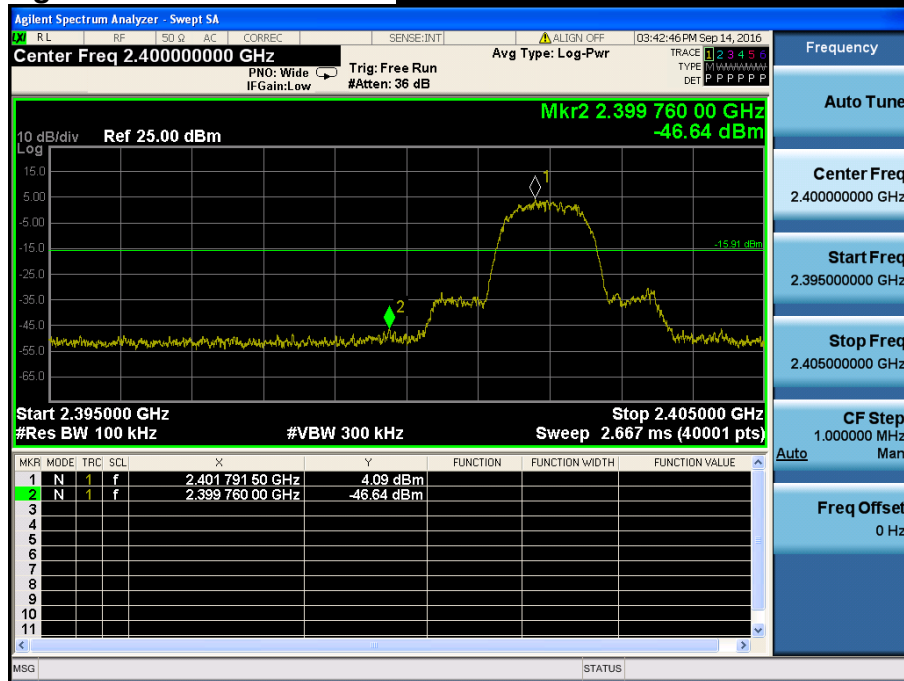
Highest Channel & Modulation : $\pi/4$ DQPSK

Conducted Spurious Emissions

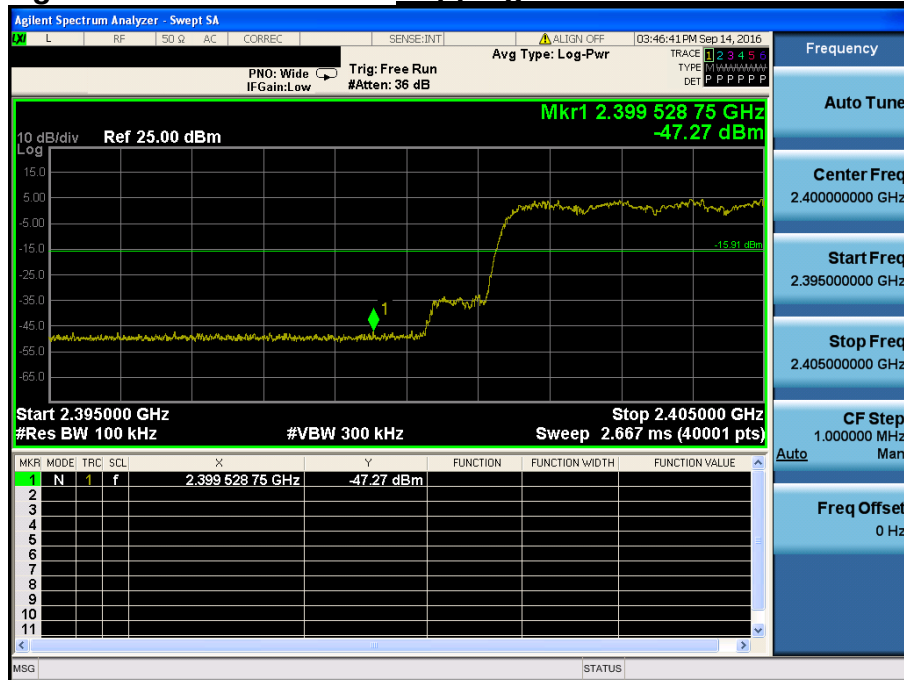
Highest Channel & Modulation : $\pi/4$ DQPSK



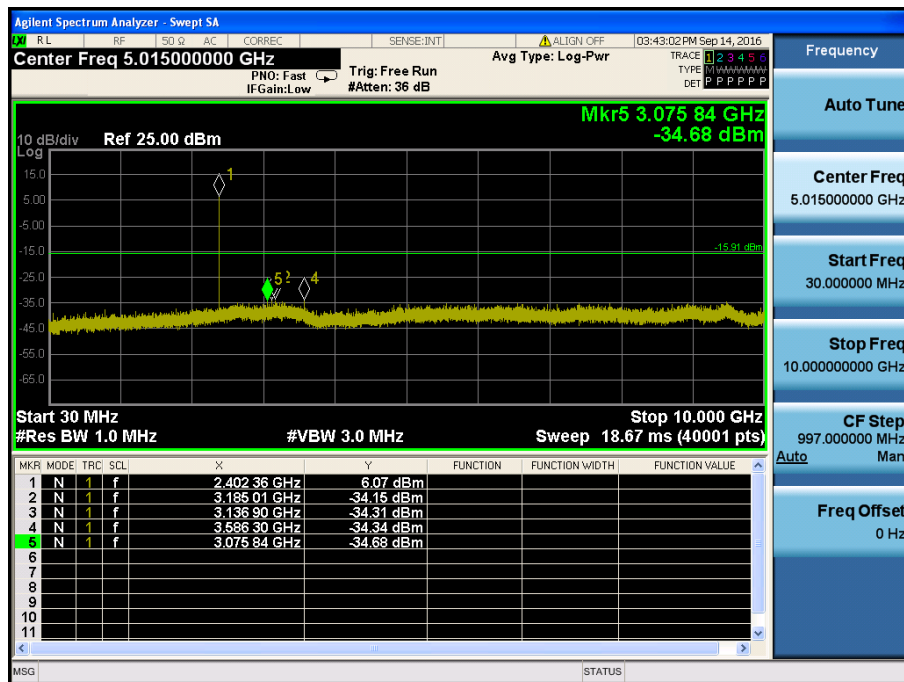
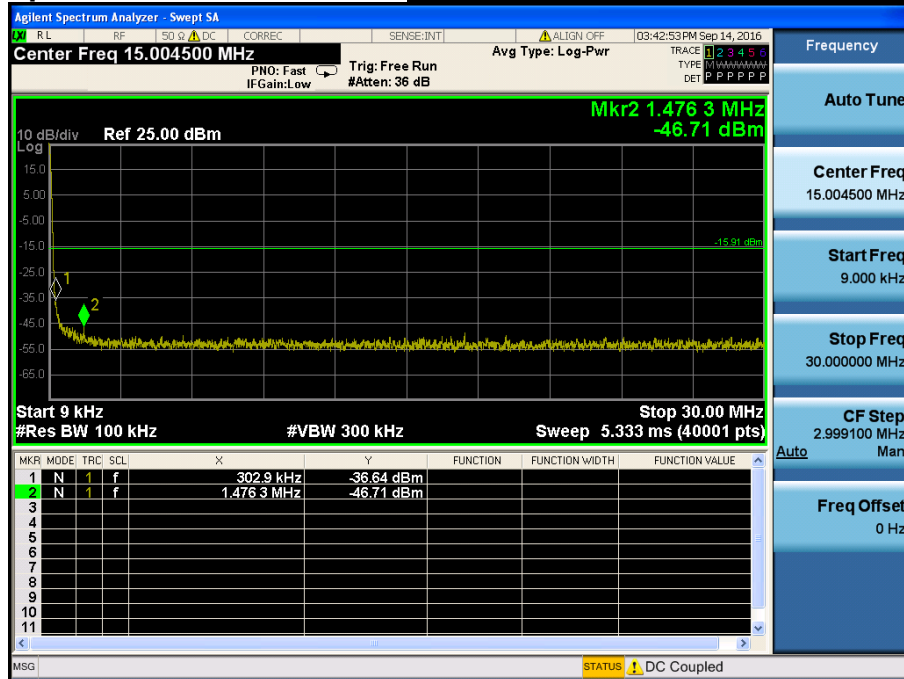
Low Band-edge

Lowest Channel & Modulation : 8DPSK

Low Band-edge

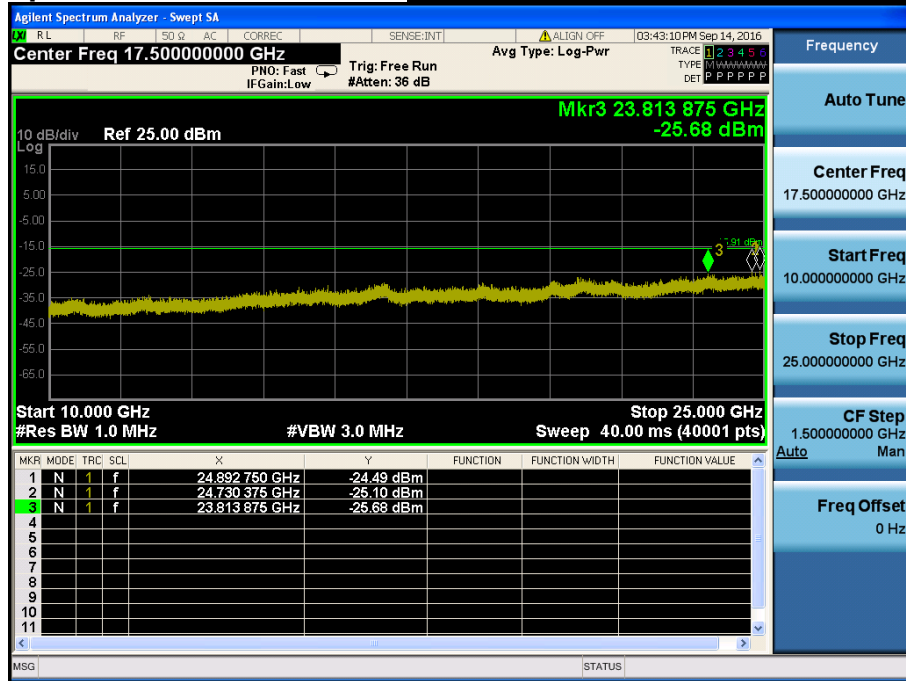
Hopping mode & Modulation : 8DPSK

Conducted Spurious Emissions

Lowest Channel & Modulation : 8DPSK

Conducted Spurious Emissions

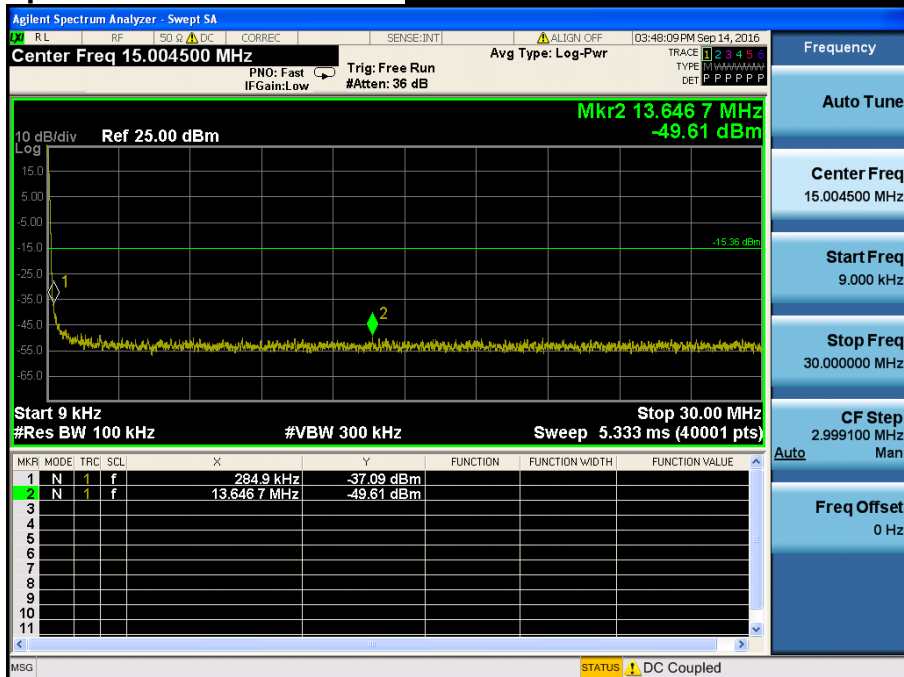
Lowest Channel & Modulation : 8DPSK



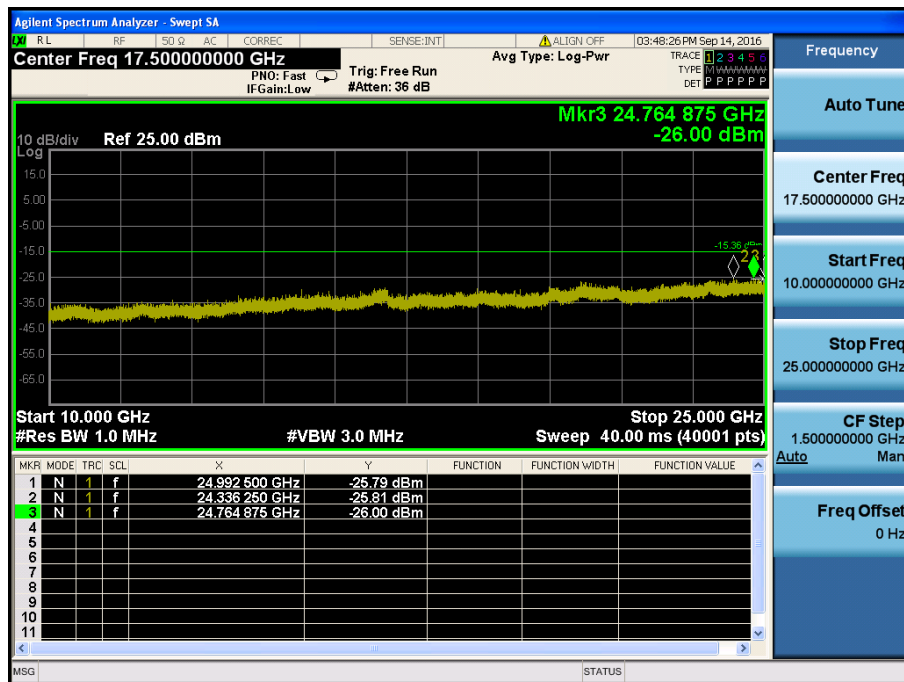
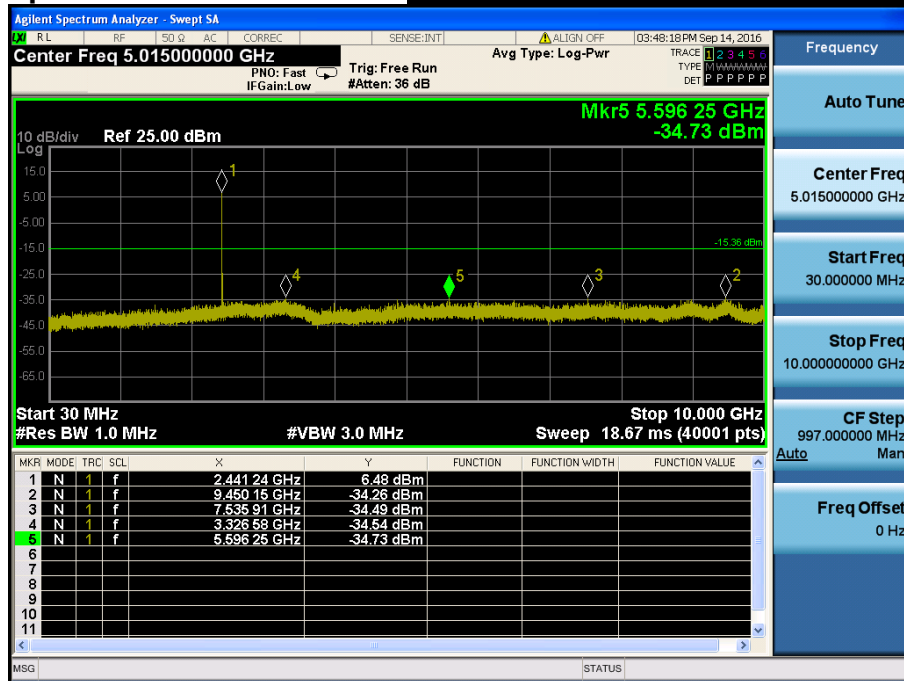
Reference for limit

Middle Channel & Modulation : 8DPSK

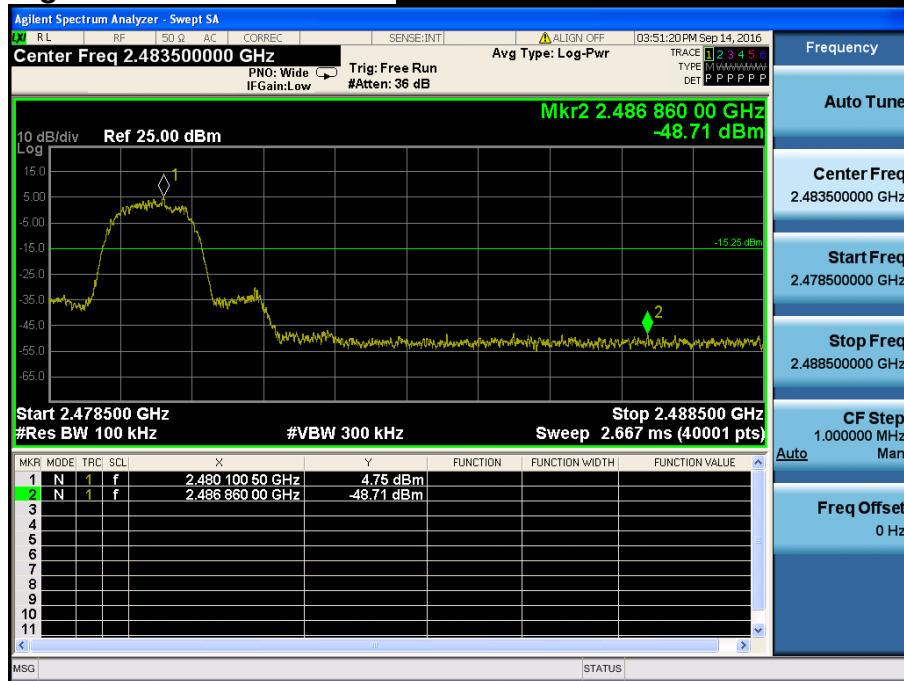
Conducted Spurious Emissions

Middle Channel & Modulation : 8DPSK

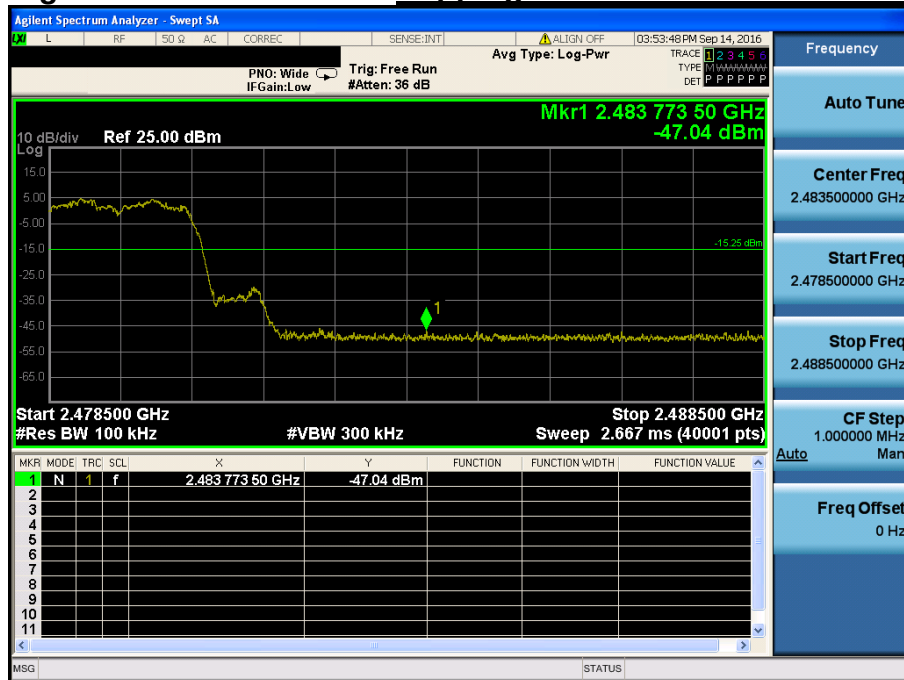
Conducted Spurious Emissions

Middle Channel & Modulation : 8DPSK

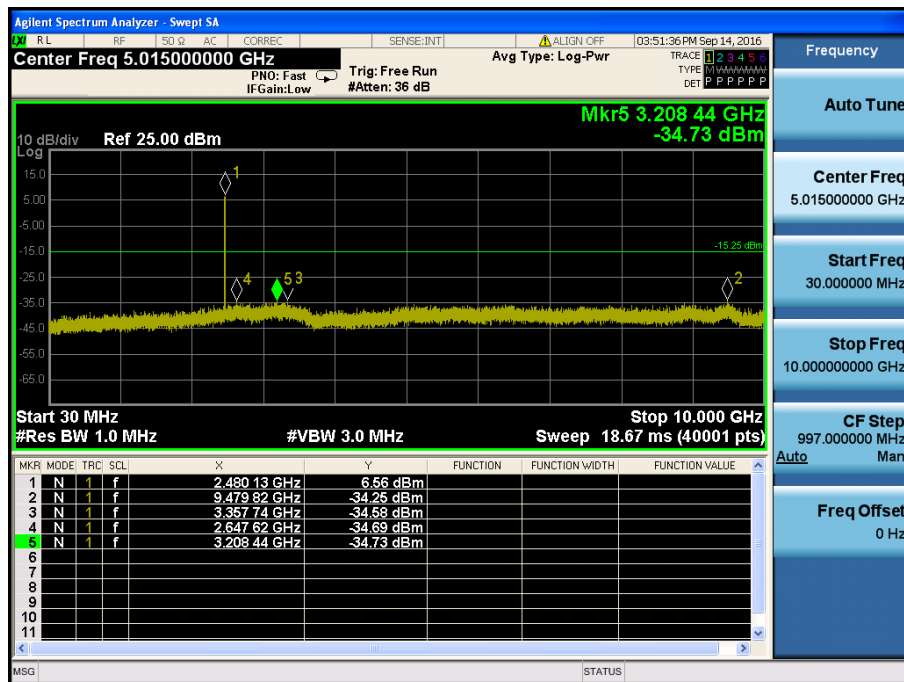
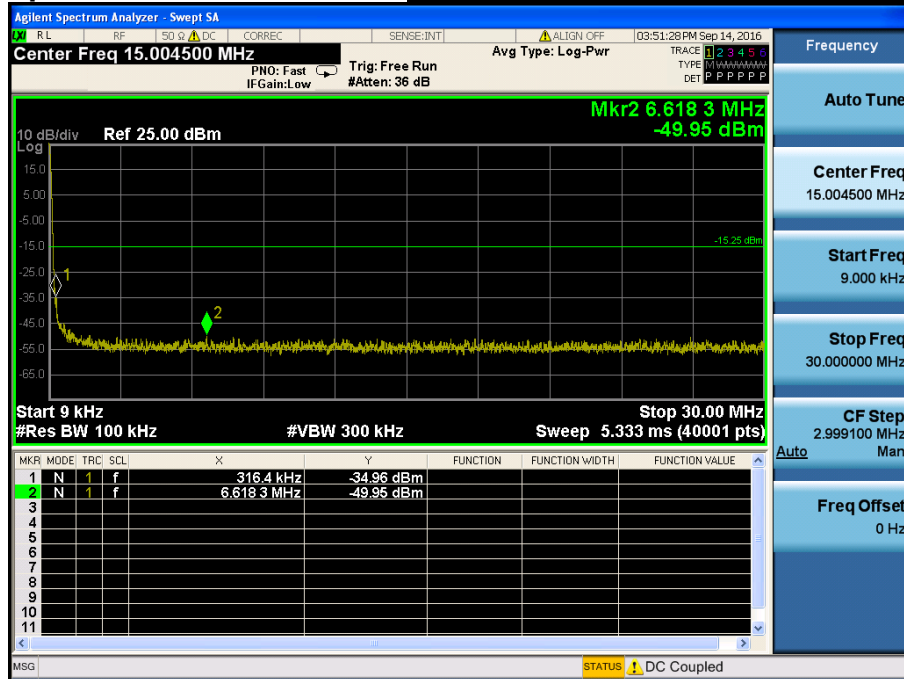
High Band-edge

Highest Channel & Modulation : 8DPSK

High Band-edge

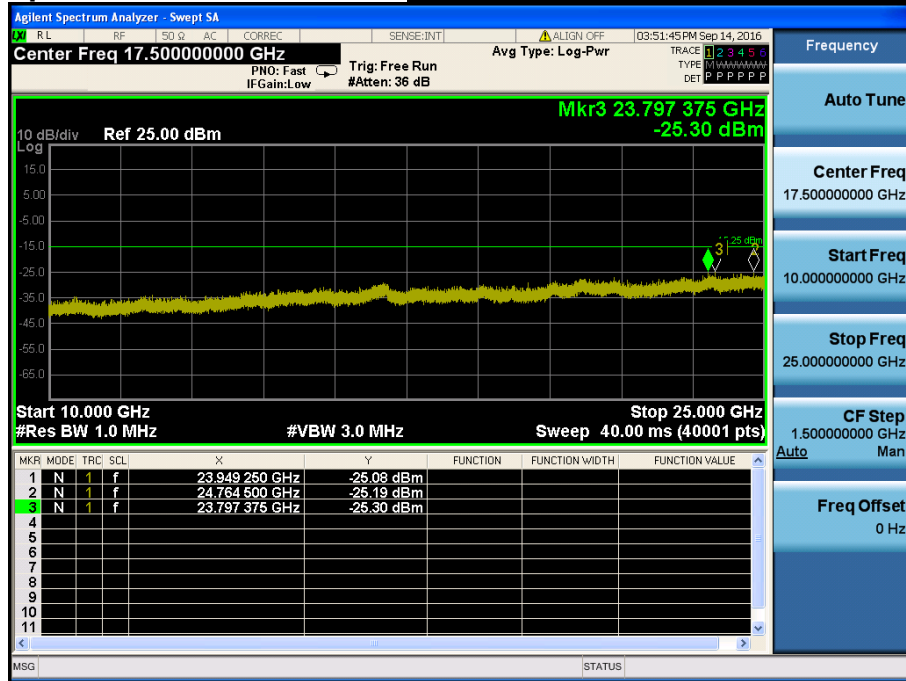
Hopping mode & Modulation : 8DPSK

Conducted Spurious Emissions

Highest Channel & Modulation : 8DPSK

Conducted Spurious Emissions

Highest Channel & Modulation : 8DPSK



8. Transmitter AC Power Line Conducted Emission

8.1 Test Setup

Not Applicable

8.2 Limit

According to §15.207(a) for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohm line impedance stabilization network (LISN).

Compliance with the provision of this paragraph shall on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower applies at the boundary between the frequency ranges.

Frequency Range (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15 ~ 0.5	66 to 56 *	56 to 46 *
0.5 ~ 5	56	46
5 ~ 30	60	50

* Decreases with the logarithm of the frequency

8.3 Test Procedures

Conducted emissions from the EUT were measured according to the ANSI C63.10.

1. The test procedure is performed in a 6.5 m $\times$ 3.5 m $\times$ 3.5 m (L $\times$ W $\times$ H) shielded room. The EUT along with its peripherals were placed on a 1.0 m (W) $\times$ 1.5 m (L) and 0.8 m in height wooden table and the EUT was adjusted to maintain a 0.4 meter space from a vertical reference plane.
2. The EUT was connected to power mains through a line impedance stabilization network (LISN) which provides 50 ohm coupling impedance for measuring instrument and the chassis ground was bounded to the horizontal ground plane of shielded room.
3. All peripherals were connected to the second LISN and the chassis ground also bounded to the horizontal ground plane of shielded room.
4. The excess power cable between the EUT and the LISN was bundled. The power cables of peripherals were unbundled. All connecting cables of EUT and peripherals were moved to find the maximum emission.

8.4 Test Results

AC Line Conducted Emissions (Graph) = Modulation : GFSK

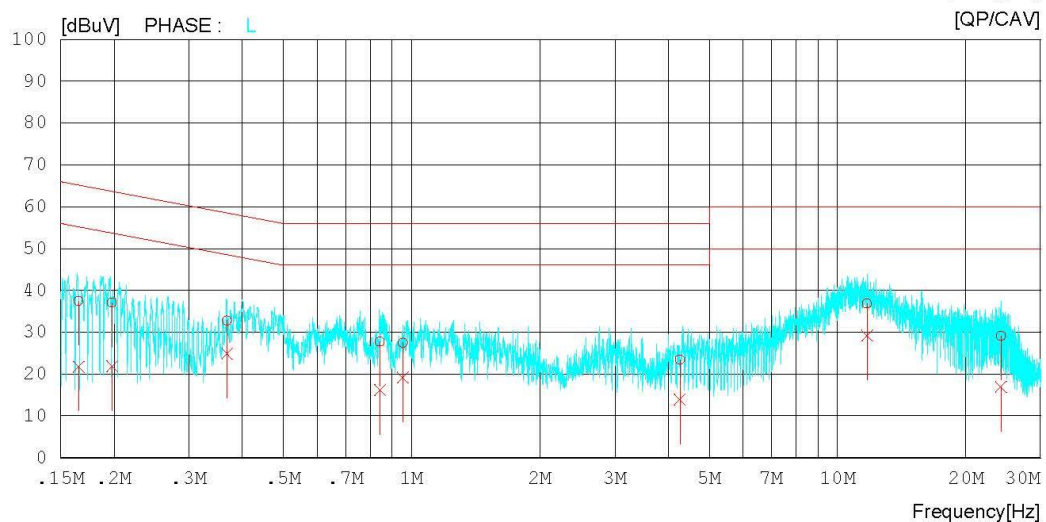
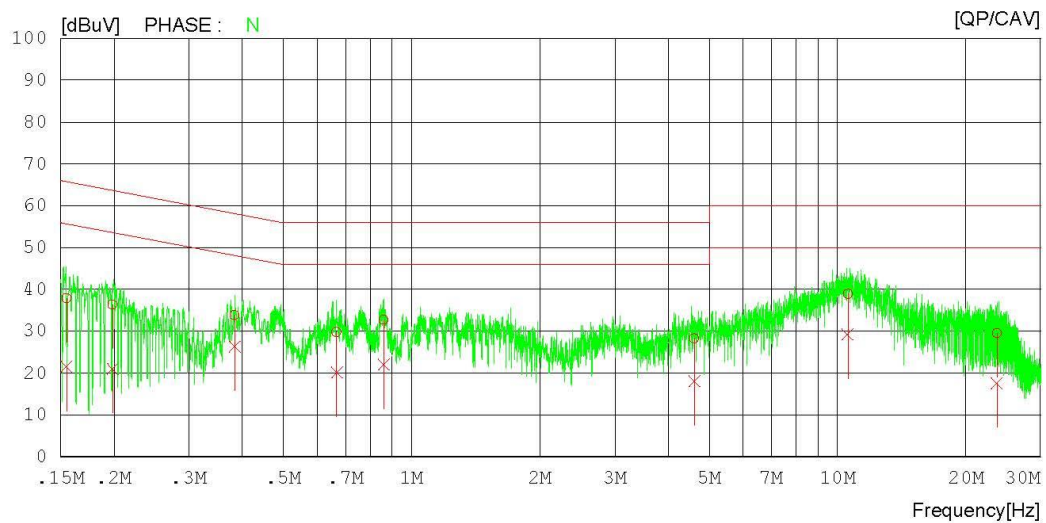
Results of Conducted Emission

DT&C
Date : 2016-09-27

Order No. : DTNC1608-05285
Serial No. : Identical prototype
Model No. : AP6212
Test Condition : Bluetooth_1Mbps

Power Supply : 120V 60Hz
Temp/Humi/Atm : 23 'C 44 % R.H.
Operator : J.W.Kim

LIMIT : CISPR32_B QP
CISPR32_B AV



AC Line Conducted Emissions (List) = Modulation : GFSK

Results of Conducted Emission

DT&C
Date : 2016-09-27

Order No.	: DTNC1608-05285	Power Supply	: 120V 60Hz
Serial No.	: Identical prototype	Temp/Humi/Atm	: 23 'C 44 % R.H.
Model No.	: AP6212	Operator	: J.W.Kim
Test Condition	: Bluetooth_1Mbps		

LIMIT : CISPR32_B QP
CISPR32_B AV

NO	FREQ [MHz]	READING		C.FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP	CAV		QP	CAV	QP	CAV	QP	CAV	
		[dBuV]	[dBuV]		[dBuV]	[dBuV]	[dBuV]	[dBuV]	[dBuV]	[dBuV]	
1	0.15458	34.76	18.29	3.20	37.96	21.49	65.75	55.75	27.79	34.26	N
2	0.19843	34.33	18.95	2.08	36.41	21.03	63.68	53.68	27.27	32.65	N
3	0.38407	32.93	25.44	0.92	33.85	26.36	58.19	48.19	24.34	21.83	N
4	0.66657	29.23	19.58	0.53	29.76	20.11	56.00	46.00	26.24	25.89	N
5	0.85975	32.28	21.56	0.44	32.72	22.00	56.00	46.00	23.28	24.00	N
6	4.60920	27.95	17.79	0.33	28.28	18.12	56.00	46.00	27.72	27.88	N
7	10.56640	38.53	28.86	0.41	38.94	29.27	60.00	50.00	21.06	20.73	N
8	23.64520	29.03	17.05	0.54	29.57	17.59	60.00	50.00	30.43	32.41	N
9	0.16539	34.58	18.87	2.86	37.44	21.73	65.19	55.19	27.75	33.46	L
10	0.19797	34.90	19.77	2.12	37.02	21.89	63.70	53.70	26.68	31.81	L
11	0.36893	31.75	23.84	0.99	32.74	24.83	58.52	48.52	25.78	23.69	L
12	0.84239	27.21	15.69	0.47	27.68	16.16	56.00	46.00	28.32	29.84	L
13	0.95360	27.08	18.76	0.44	27.52	19.20	56.00	46.00	28.48	26.80	L
14	4.26220	23.02	13.53	0.37	23.39	13.90	56.00	46.00	32.61	32.10	L
15	11.73440	36.39	28.68	0.45	36.84	29.13	60.00	50.00	23.16	20.87	L
16	24.20160	28.49	16.23	0.67	29.16	16.90	60.00	50.00	30.84	33.10	L

9. Antenna Requirement

Describe how the EUT complies with the requirement that either its antenna is permanently attached, or that it employs a unique antenna connector, for every antenna proposed for use with the EUT.

Conclusion: **Comply**

The internal antenna employs a unique antenna connector.

- Minimum Standard :

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions.

10. Occupied Bandwidth (99 %)

10.1 Test Setup

Refer to the APPENDIX I.

10.2 Limit

Limit : Not Applicable

10.3 Test Procedure

The 99 % power bandwidth was measured with a calibrated spectrum analyzer.

The resolution bandwidth (RBW) shall be in the range of 1 % to 5 % of the occupied bandwidth (OBW) and video bandwidth (VBW) shall be approximately $3 \times \text{RBW}$.

Spectrum analyzer plots are included on the following pages.

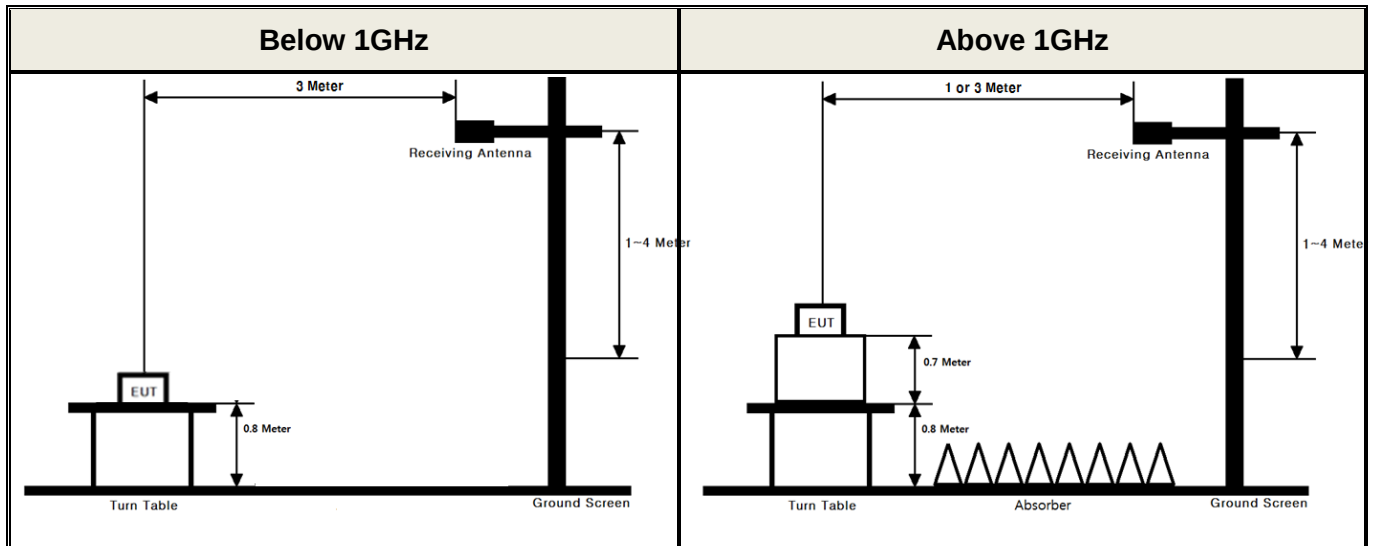
10.4 Test Results

Not Applicable

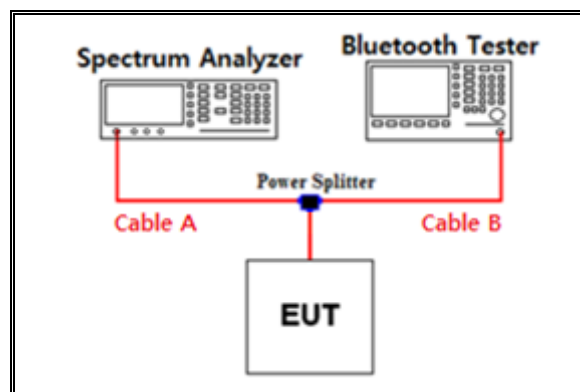
APPENDIX I

Test set up diagrams

▪ Radiated Measurement



▪ Conducted Measurement



Path loss information

Frequency (GHz)	Path Loss (dB)	Frequency (GHz)	Path Loss (dB)
0.03	6.47	15	11.10
1	7.17	20	12.50
2402 & 2440 & 2480	7.54	25	13.21
5	8.07	-	-
10	9.87	-	-

Note 1 : The path loss from EUT to Spectrum analyzer were measured and used for test.

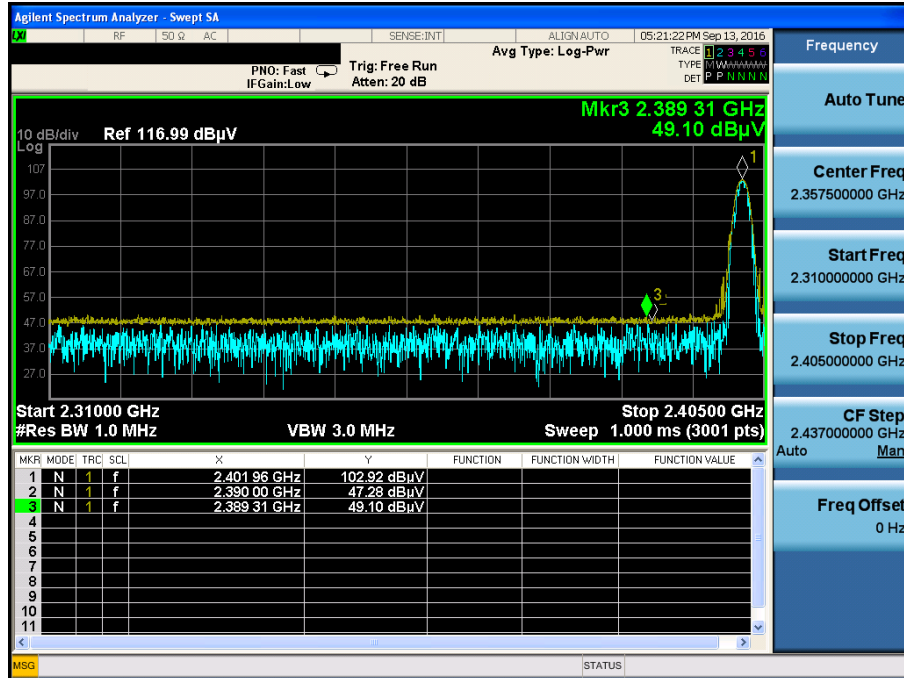
Path loss (S/A's Correction factor) = Cable A + Power splitter

APPENDIX II

Unwanted Emissions (Radiated) Test Plot

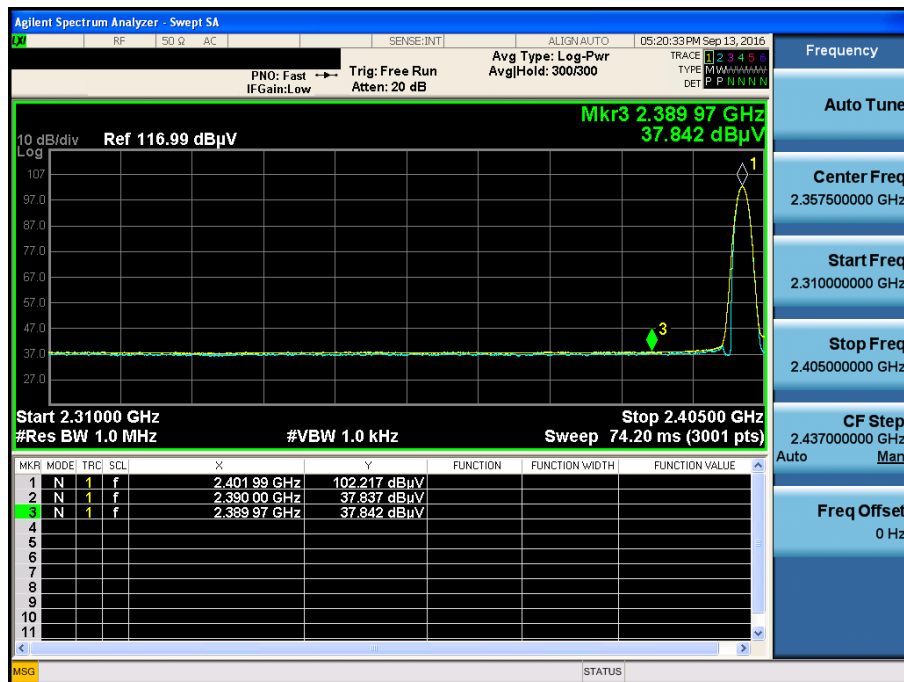
GFSK & Lowest & X & Hor

Detector Mode : PK



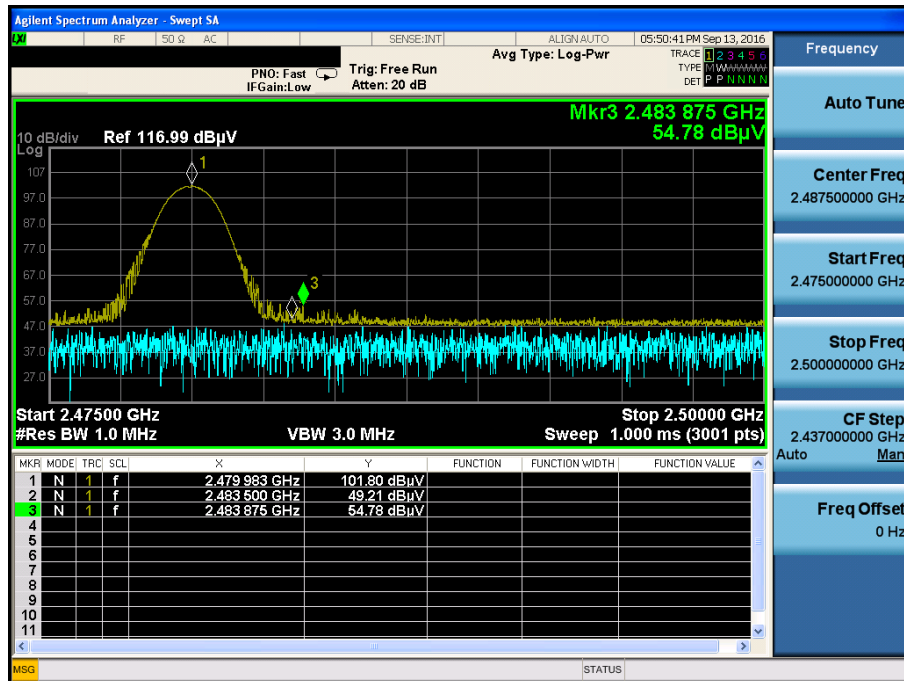
GFSK & Lowest & X & Hor

Detector Mode : AV



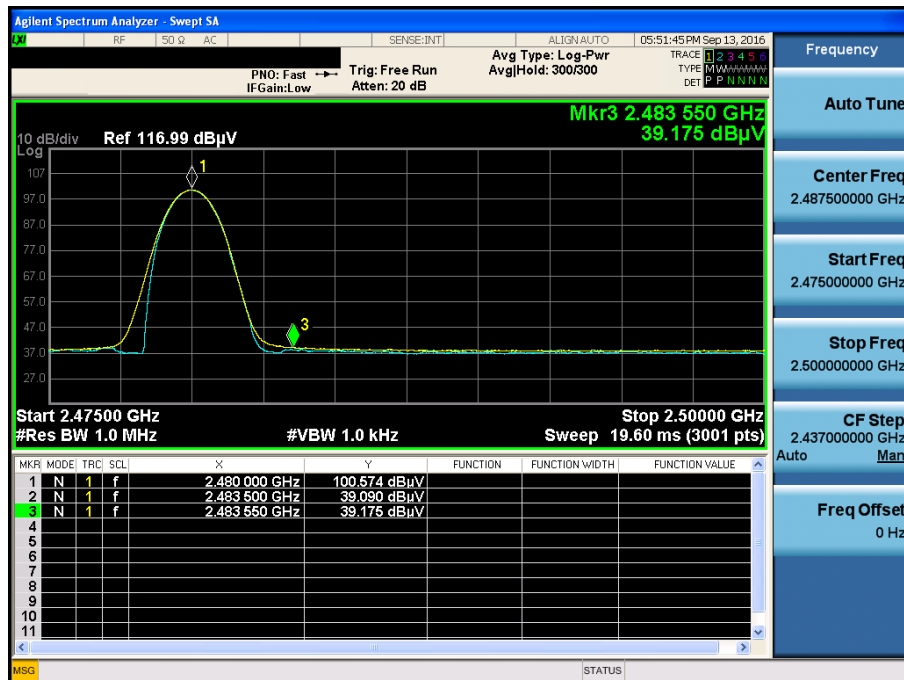
GFSK & Highest & X & Hor

Detector Mode : PK



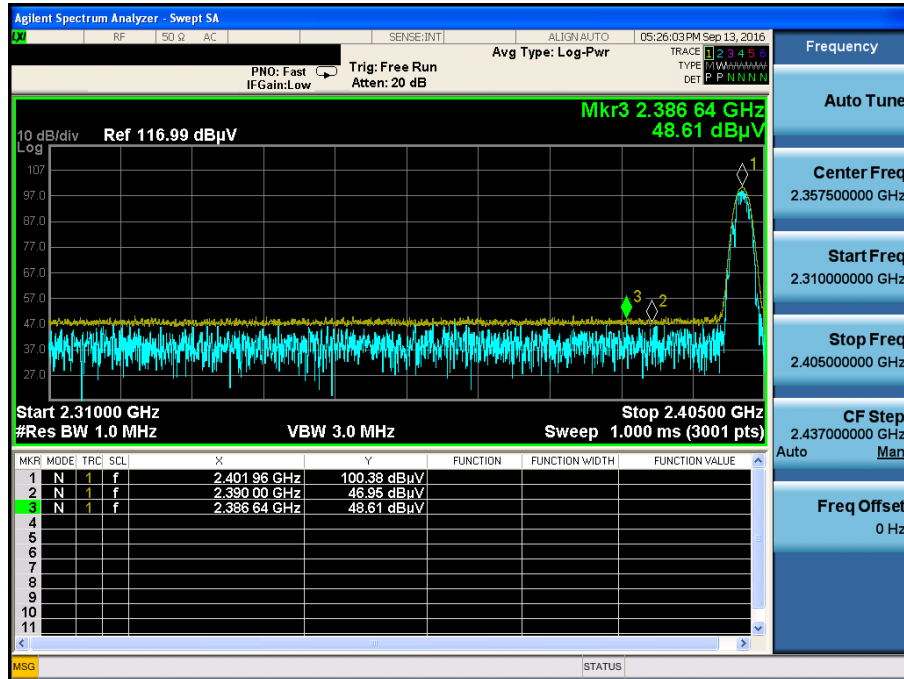
GFSK & Highest & X & Hor

Detector Mode : AV

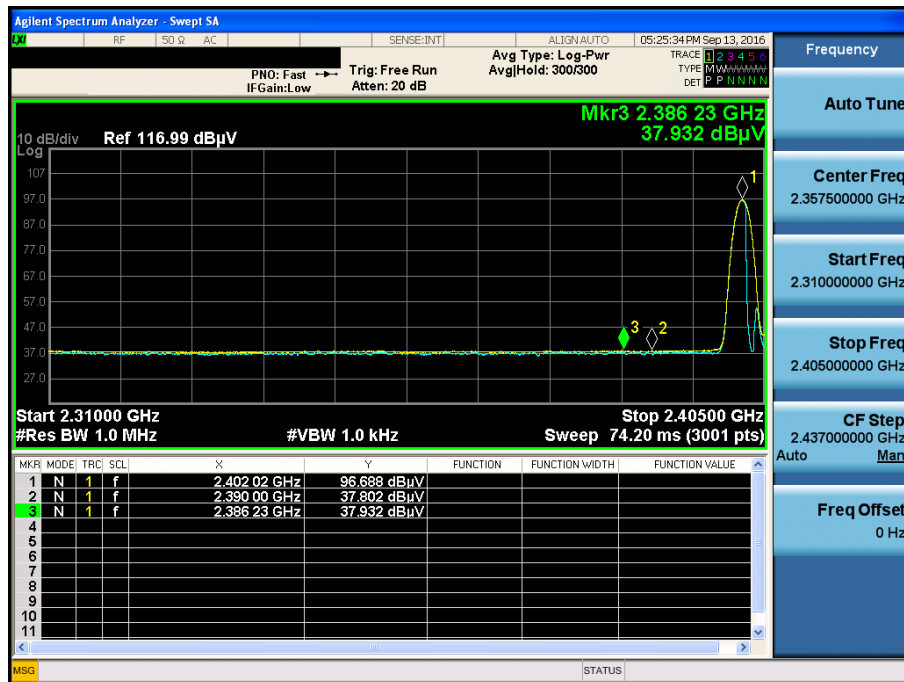


π /4DQPSK & Lowest & X & Hor

Detector Mode : PK

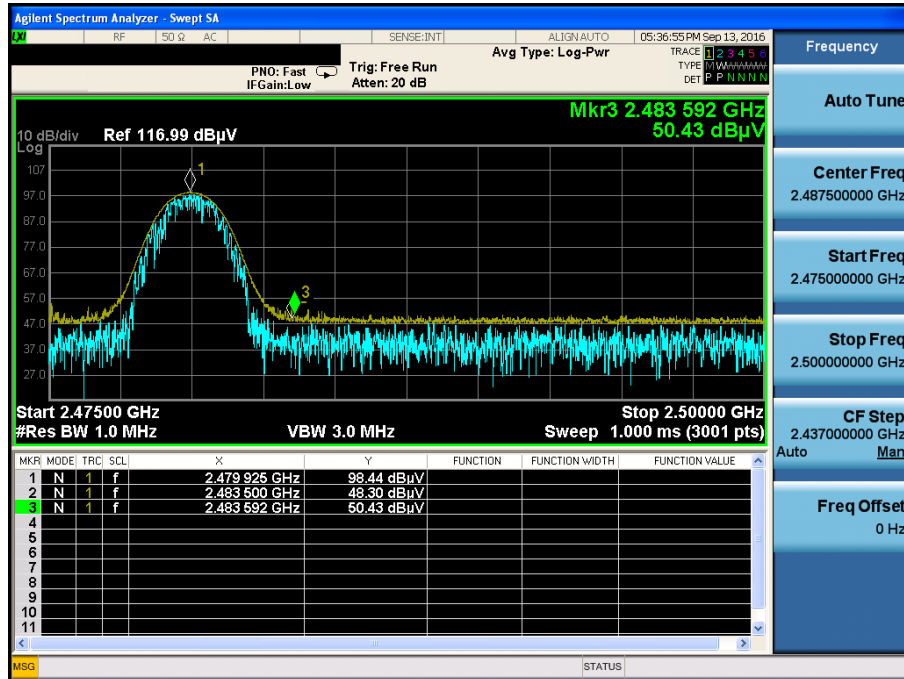
 π /4DQPSK & Lowest & X & Hor

Detector Mode : AV

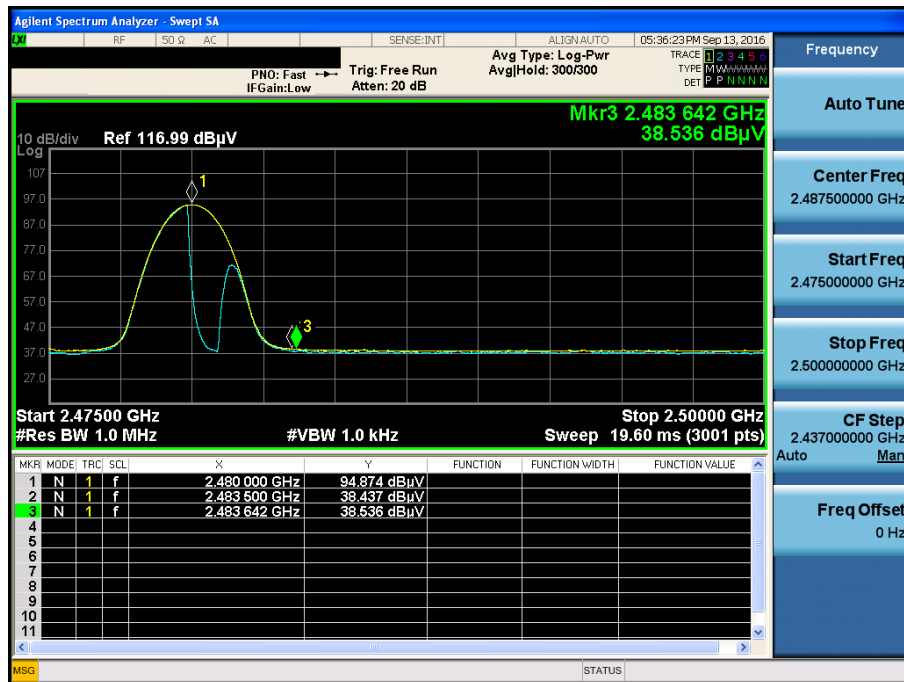


π /4DQPSK & Highest & X & Hor

Detector Mode : PK

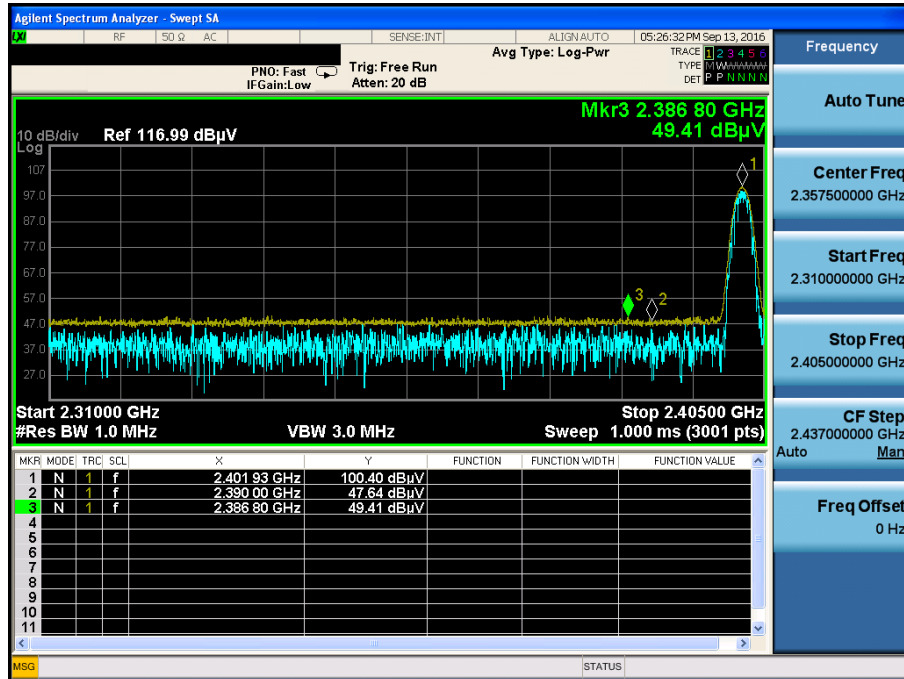
 π /4DQPSK & Highest & X & Hor

Detector Mode : AV



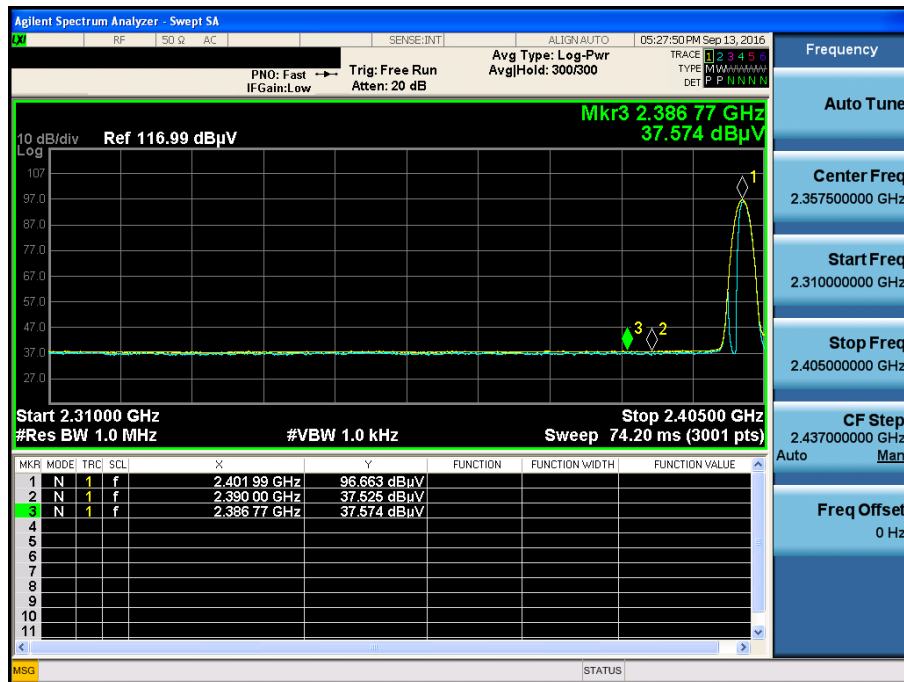
8DPSK & Lowest & X & Hor

Detector Mode : PK



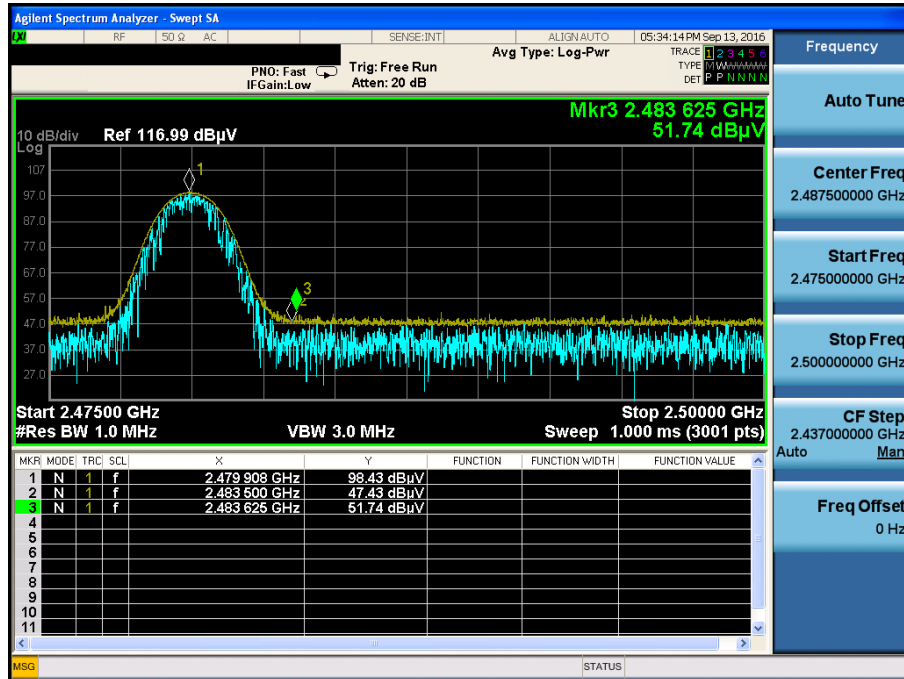
8DPSK & Lowest & X & Hor

Detector Mode : AV



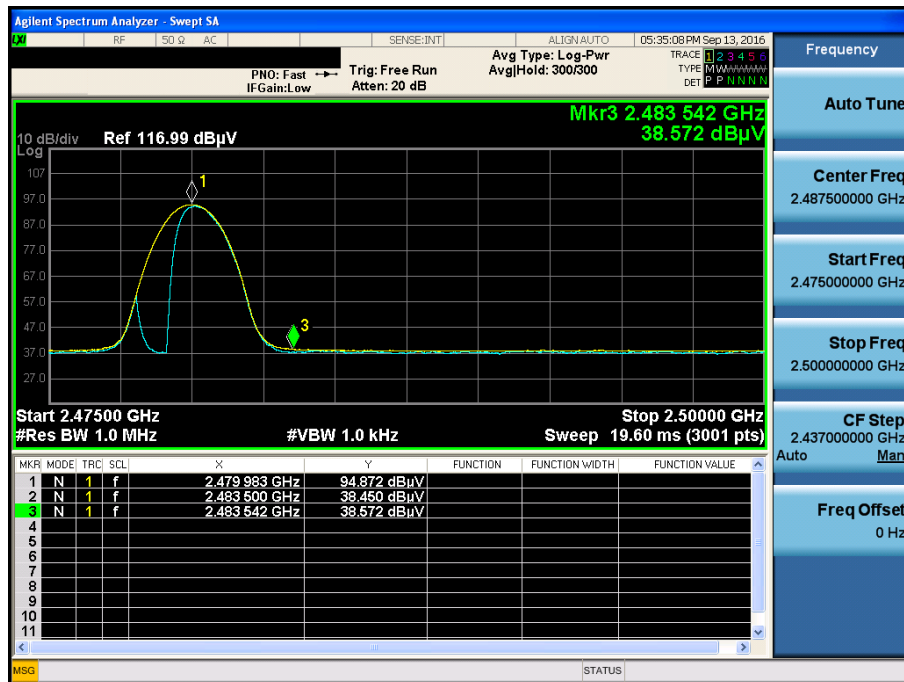
8DPSK & Highest & X & Hor

Detector Mode : PK



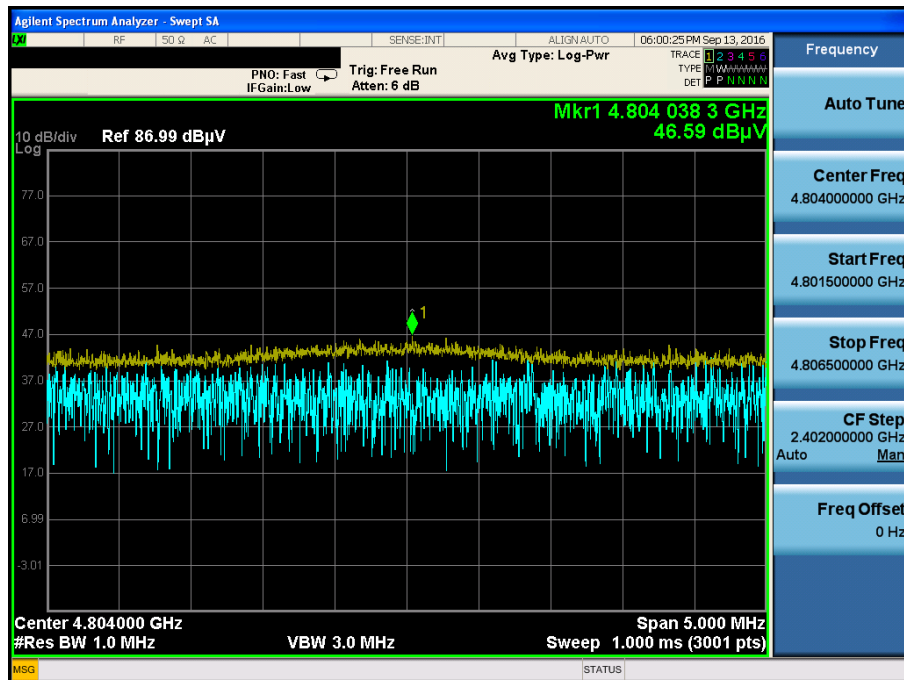
8DPSK & Highest & X & Hor

Detector Mode : AV

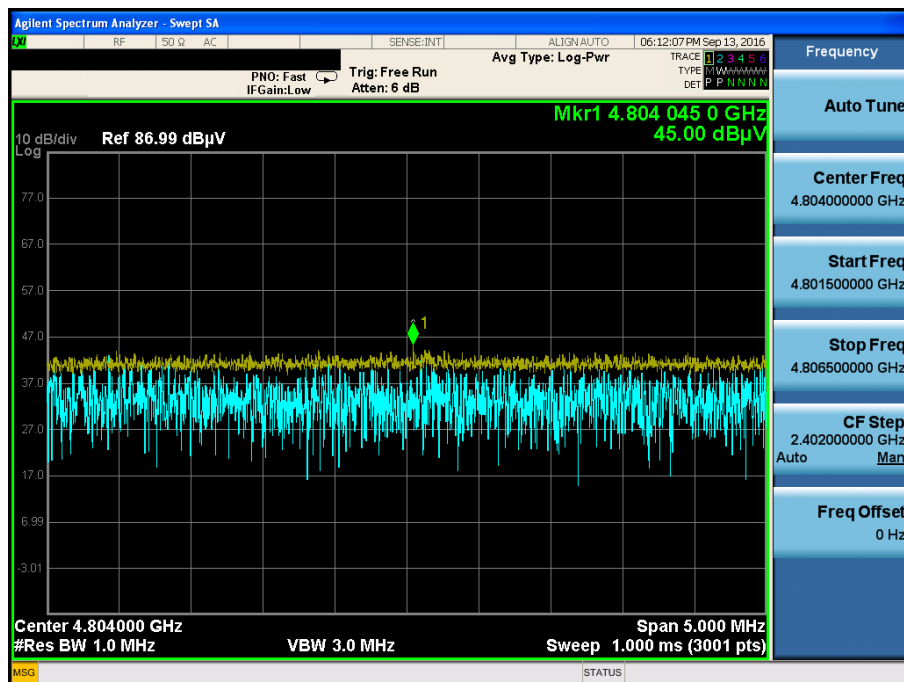


GFSK & Lowest & X & Hor

Detector Mode : PK

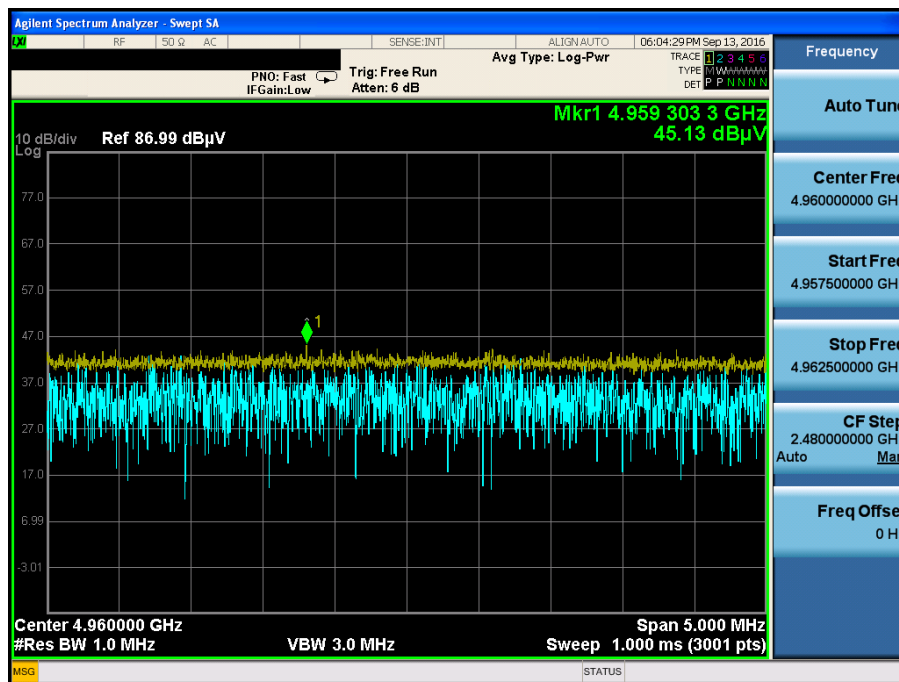
 $\pi/4$ DQPSK & Lowest & X & Hor

Detector Mode : PK



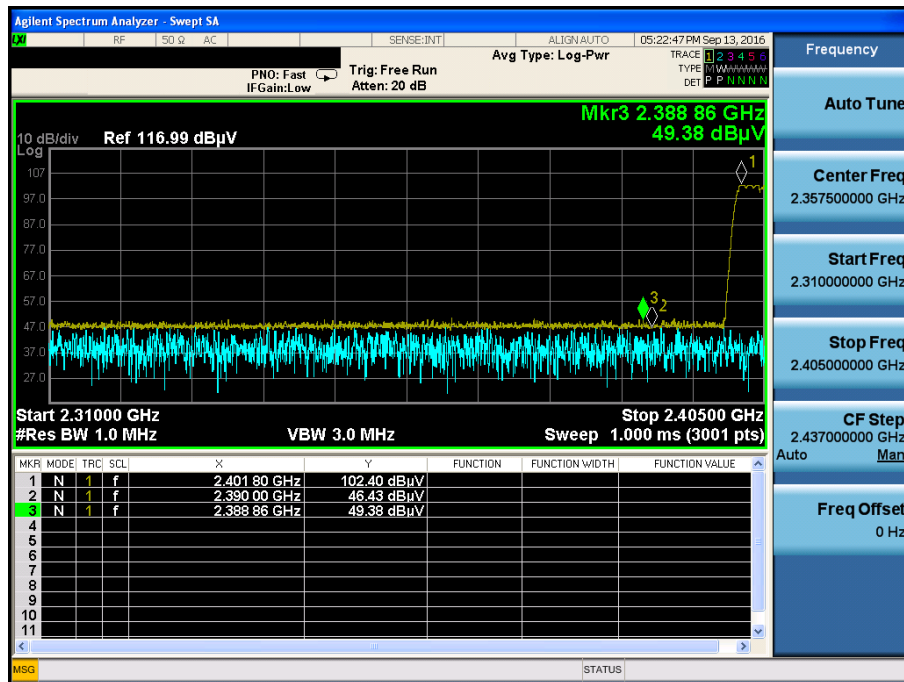
8DPSK & Highest & X & Hor

Detector Mode : PK



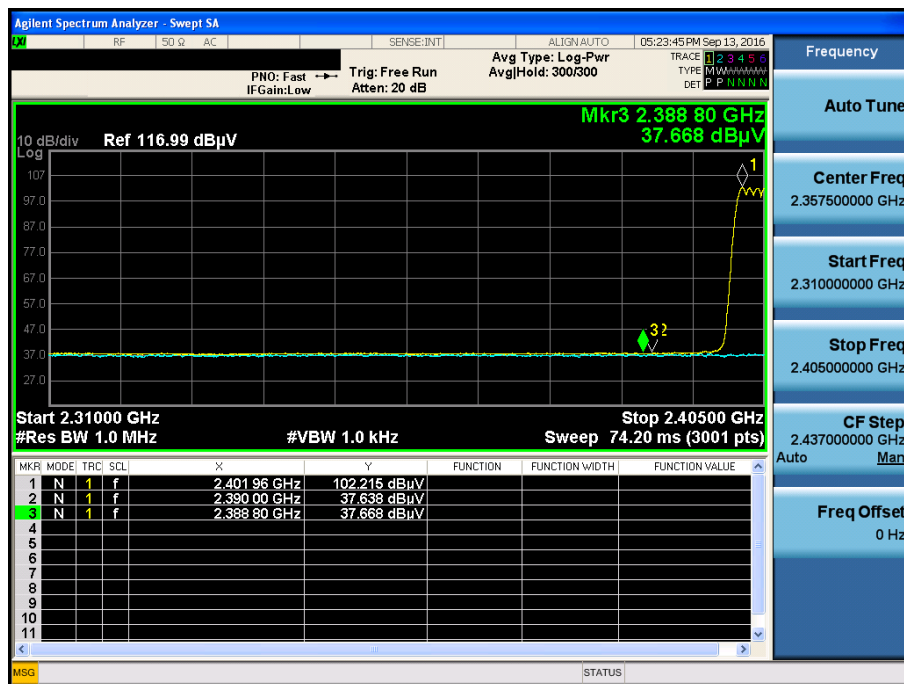
GFSK & Hopping mode & X & Hor

Detector Mode : PK



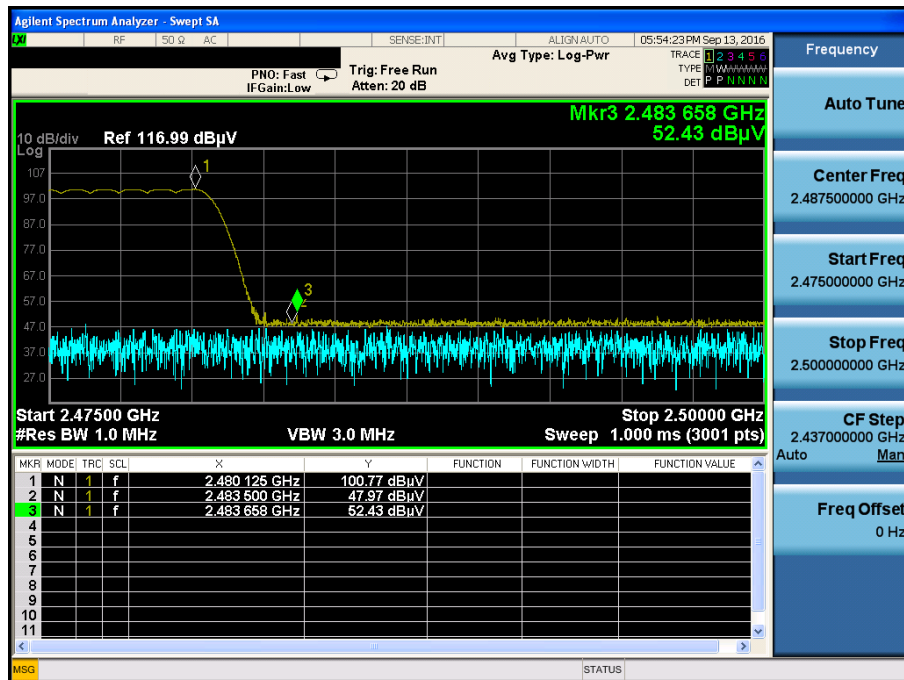
GFSK & Hopping mode & X & Hor

Detector Mode : AV



GFSK & Hopping mode & X & Hor

Detector Mode : PK



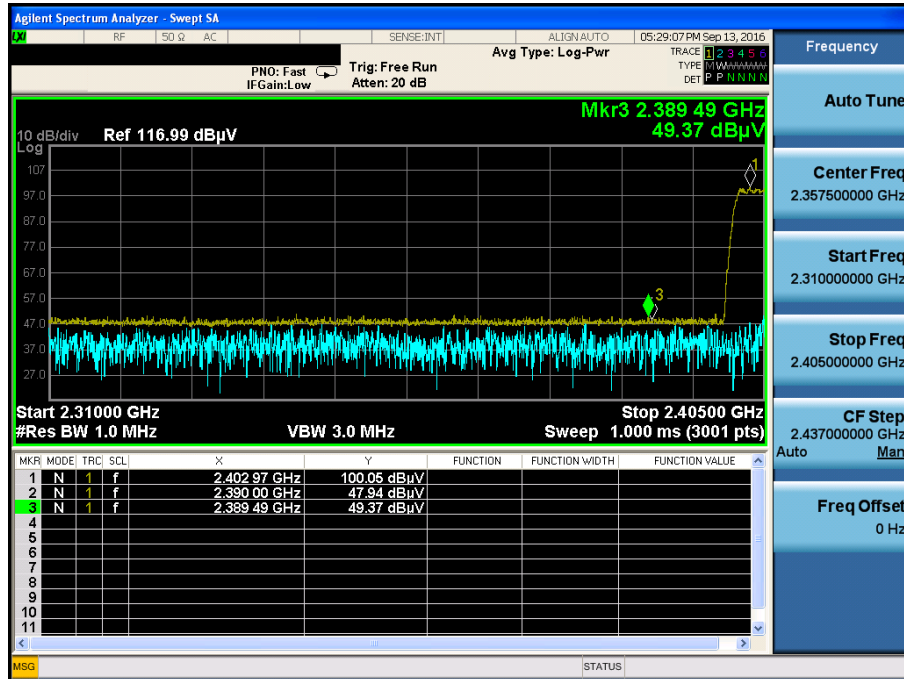
GFSK & Hopping mode & X & Hor

Detector Mode : AV

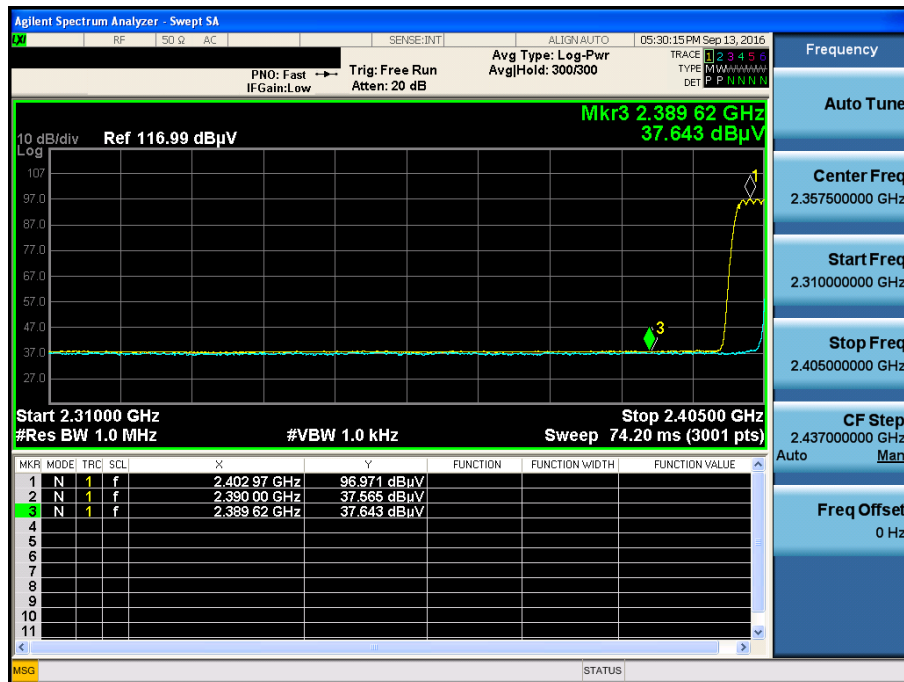


π /4DQPSK & Hopping mode & X & Hor

Detector Mode : PK

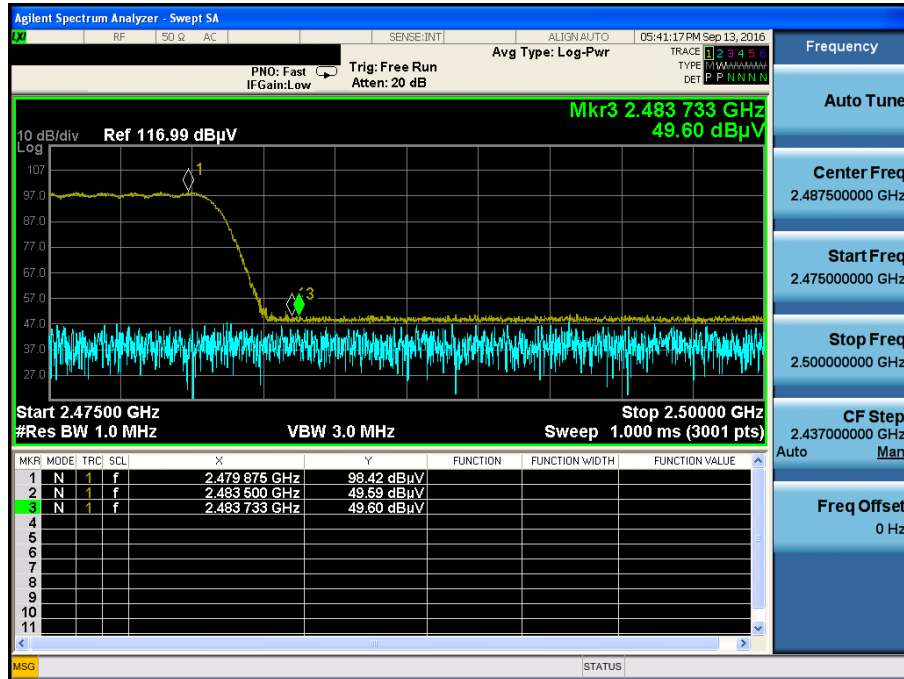
 π /4DQPSK & Hopping mode & X & Hor

Detector Mode : AV



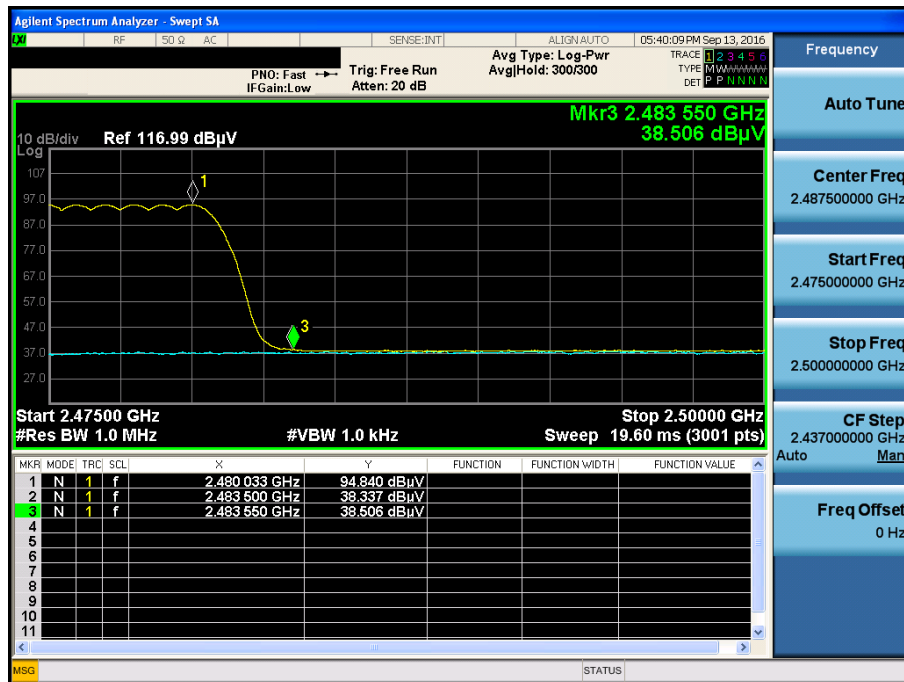
π /4DQPSK & Hopping mode & X & Hor

Detector Mode : PK



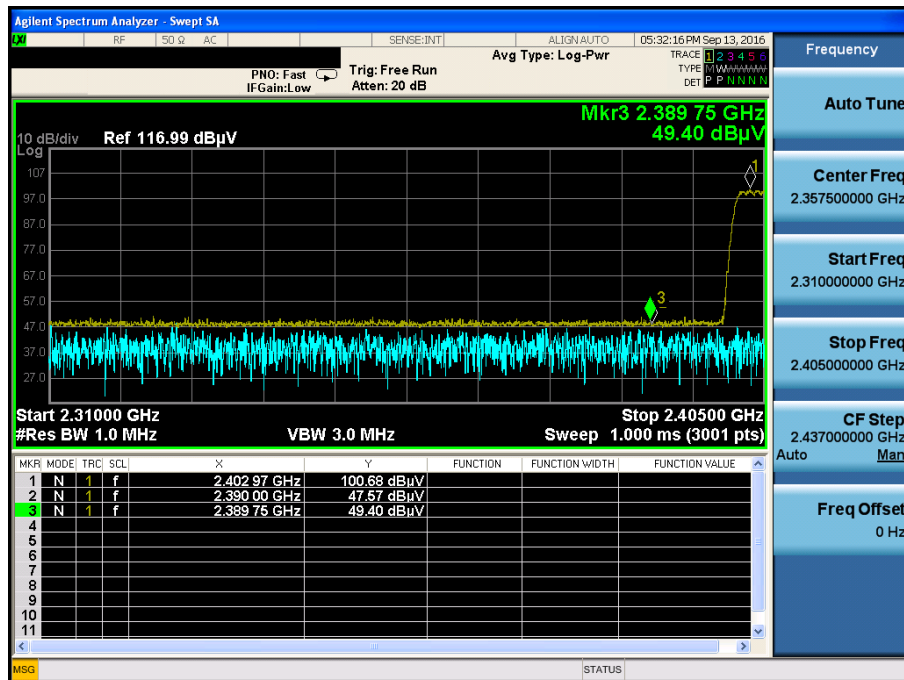
π /4DQPSK & Hopping mode & X & Hor

Detector Mode : AV



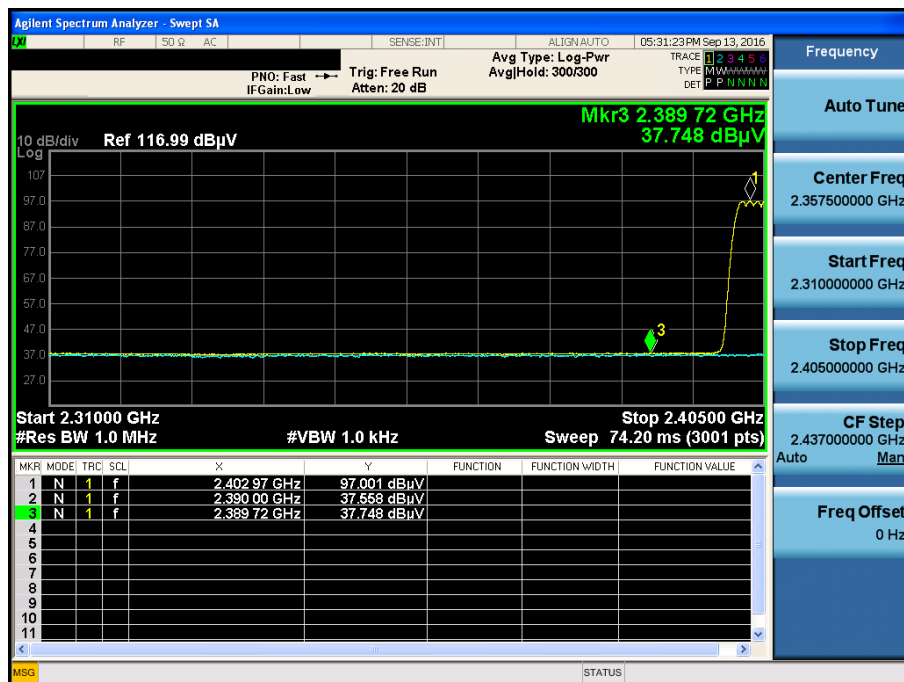
8DPSK & Hopping mode & X & Hor

Detector Mode : PK



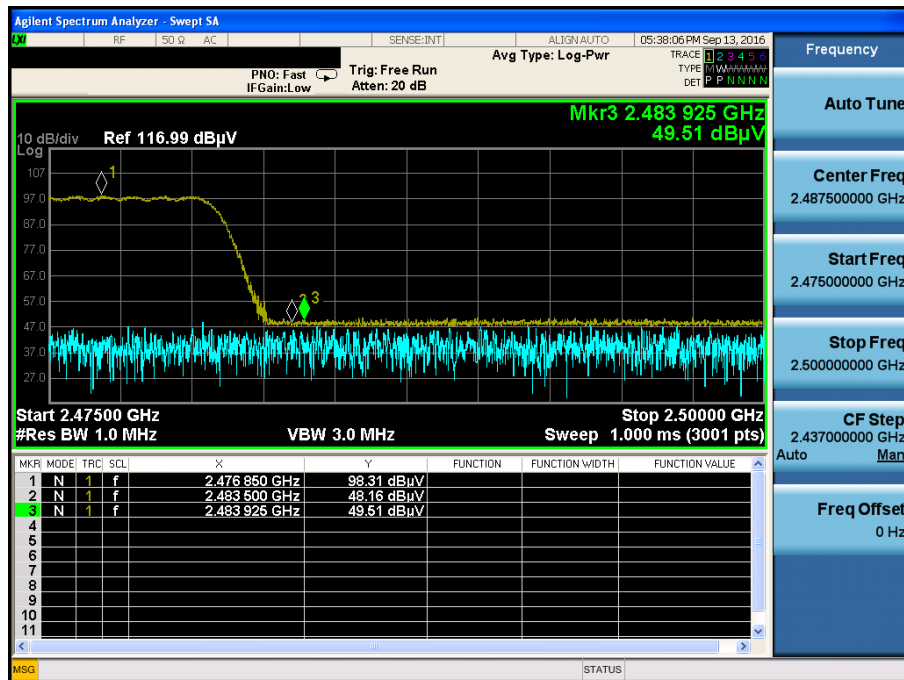
8DPSK & Hopping mode & X & Hor

Detector Mode : AV



8DPSK & Hopping mode & X & Hor

Detector Mode : PK



8DPSK & Hopping mode & X & Hor

Detector Mode : AV

