

BDR_1M

Frequency: 2402 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C

Medium parameters used (interpolated): $f = 2402$ MHz; $\sigma = 1.83$ S/m; $\epsilon_r = 39.852$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1486; Calibrated: 2022/5/31
- Probe: EX3DV4 - SN7369; ConvF(7.61, 7.61, 7.61) @ 2402 MHz; Calibrated: 2022/5/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240

Tablet/Aux Ant/Edge 2/ Ch:0/Area Scan (6x8x1):

Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.125 W/kg

Tablet/Aux Ant/Edge 2/ Ch:0/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.8980 V/m; Power Drift = 0.08 dB


Peak SAR (extrapolated) = 0.165 W/kg

SAR(1 g) = 0.079 W/kg; SAR(10 g) = 0.037 W/kg

Smallest distance from peaks to all points 3 dB below = 10 mm

Ratio of SAR at M2 to SAR at M1 = 48.9%

Maximum value of SAR (measured) = 0.130 W/kg

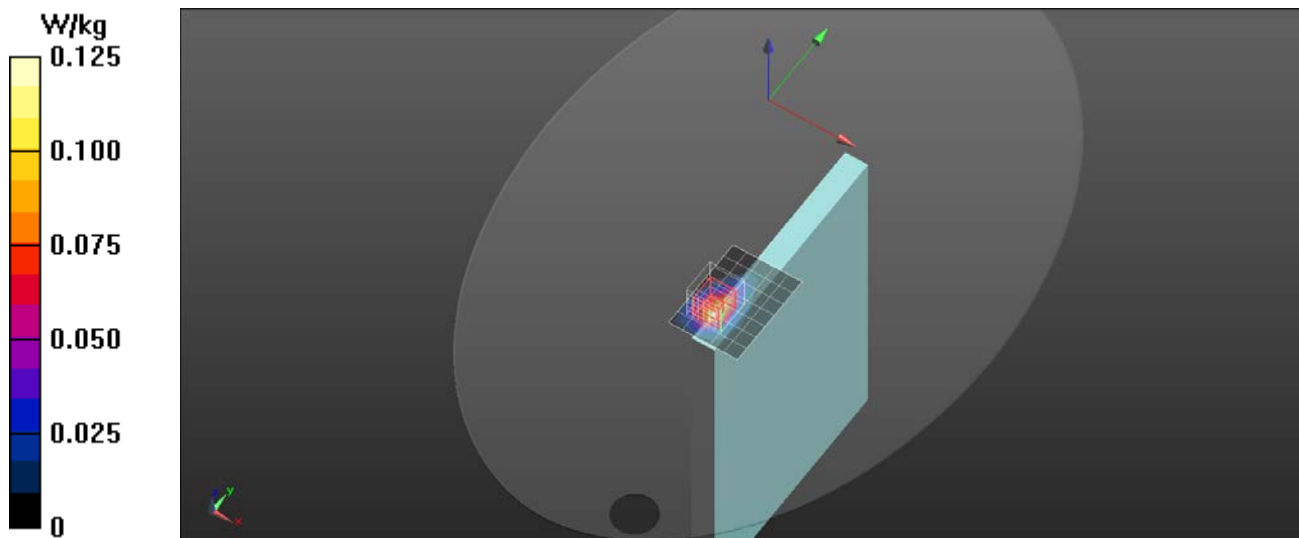

WiFi-2.4GHz

Frequency: 2462 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C

Medium parameters used (interpolated): $f = 2462$ MHz; $\sigma = 1.872$ S/m; $\epsilon_r = 39.777$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1486; Calibrated: 2022/5/31
- Probe: EX3DV4 - SN7369; ConvF(7.61, 7.61, 7.61) @ 2462 MHz; Calibrated: 2022/5/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240

Tablet/Main Ant/Edge 1/802.11n40_Ch11/Area Scan (6x8x1):

Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 1.35 W/kg

Tablet/Main Ant/Edge 1/802.11n40_Ch11/Zoom Scan (7x7x7)/Cube 0: Measurement grid:

$dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 5.288 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 2.26 W/kg

SAR(1 g) = 1.05 W/kg; SAR(10 g) = 0.467 W/kg

Smallest distance from peaks to all points 3 dB below = 9.1 mm

Ratio of SAR at M2 to SAR at M1 = 46.8%.

Maximum value of SAR (measured) = 1.76 W/kg

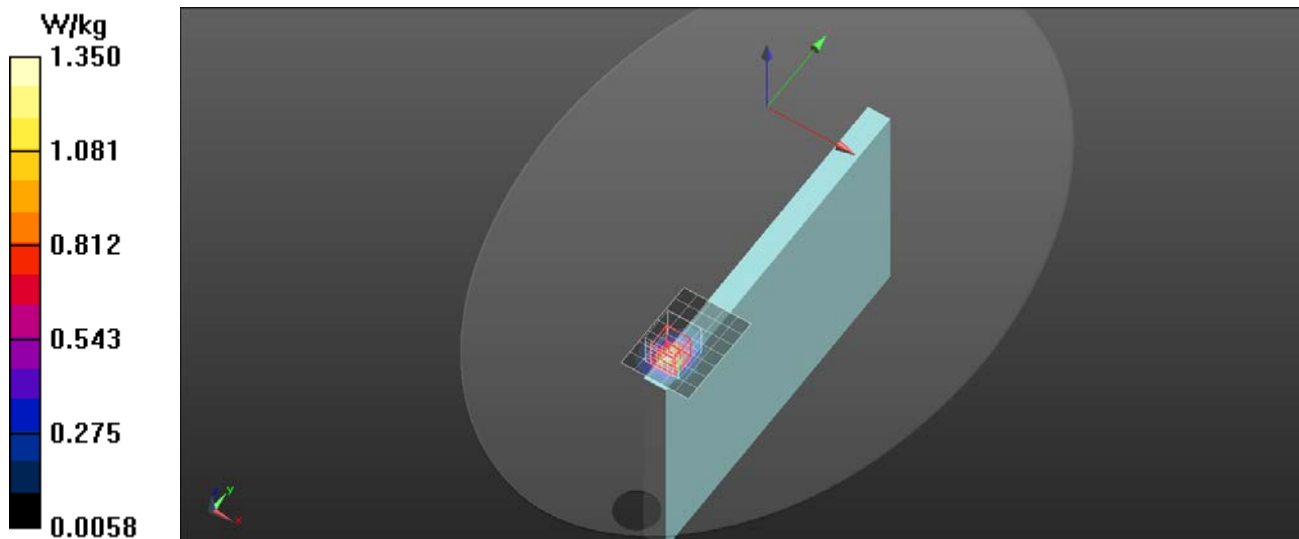

WiFi-2.4GHz

Frequency: 2437 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.855$ S/m; $\epsilon_r = 39.819$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1486; Calibrated: 2022/5/31
- Probe: EX3DV4 - SN7369; ConvF(7.61, 7.61, 7.61) @ 2437 MHz; Calibrated: 2022/5/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240

Tablet/Aux Ant/Edge 2/802.11n40_Ch6/Area Scan (6x8x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.593 W/kg

Tablet/Aux Ant/Edge 2/802.11n40_Ch6/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.334 V/m; Power Drift = -0.15 dB


Peak SAR (extrapolated) = 0.967 W/kg

SAR(1 g) = 0.459 W/kg; SAR(10 g) = 0.209 W/kg

Smallest distance from peaks to all points 3 dB below = 10 mm

Ratio of SAR at M2 to SAR at M1 = 48.6%

Maximum value of SAR (measured) = 0.759 W/kg

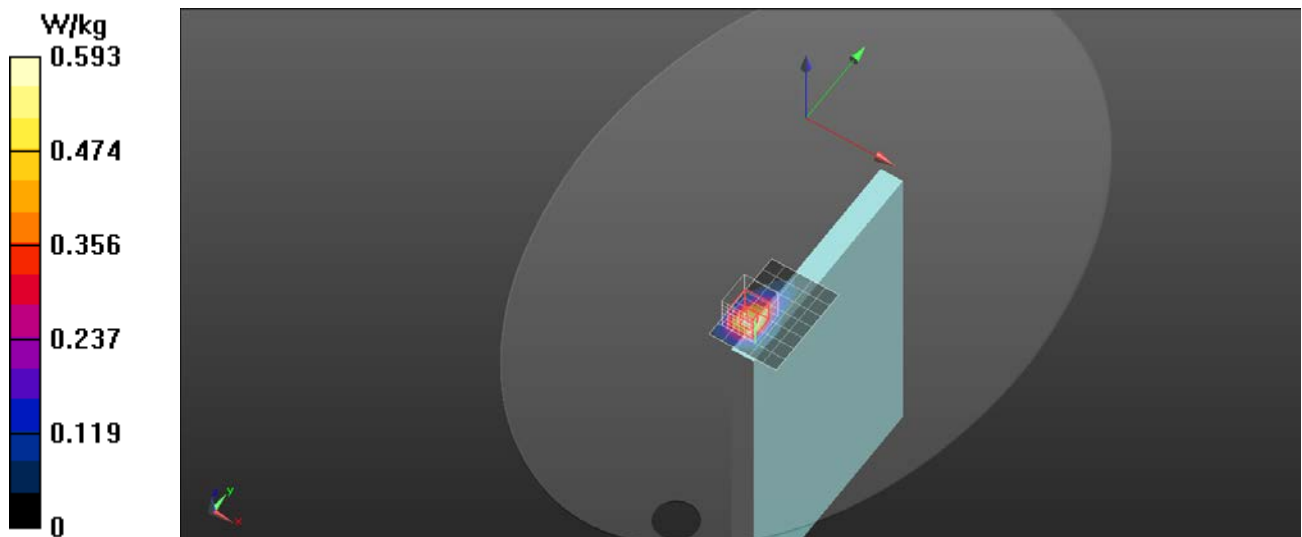

WiFi 5GHz

Frequency: 5290 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C

Medium parameters used (interpolated): $f = 5290$ MHz; $\sigma = 4.574$ S/m; $\epsilon_r = 35.947$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1486; Calibrated: 2022/5/31
- Probe: EX3DV4 - SN7369; ConvF(5.04, 5.04, 5.04) @ 5290 MHz; Calibrated: 2022/5/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240

Tablet/Main Ant/Edge 1/802.11ac80_Ch58/Area Scan (6x8x1):

Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.791 W/kg

Tablet/Main Ant/Edge 1/802.11ac80_Ch58/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.915 V/m; Power Drift = -0.04 dB


Peak SAR (extrapolated) = 1.78 W/kg

SAR(1 g) = 0.451 W/kg; SAR(10 g) = 0.155 W/kg

Smallest distance from peaks to all points 3 dB below = 9 mm

Ratio of SAR at M2 to SAR at M1 = 20.2%

Maximum value of SAR (measured) = 1.09 W/kg

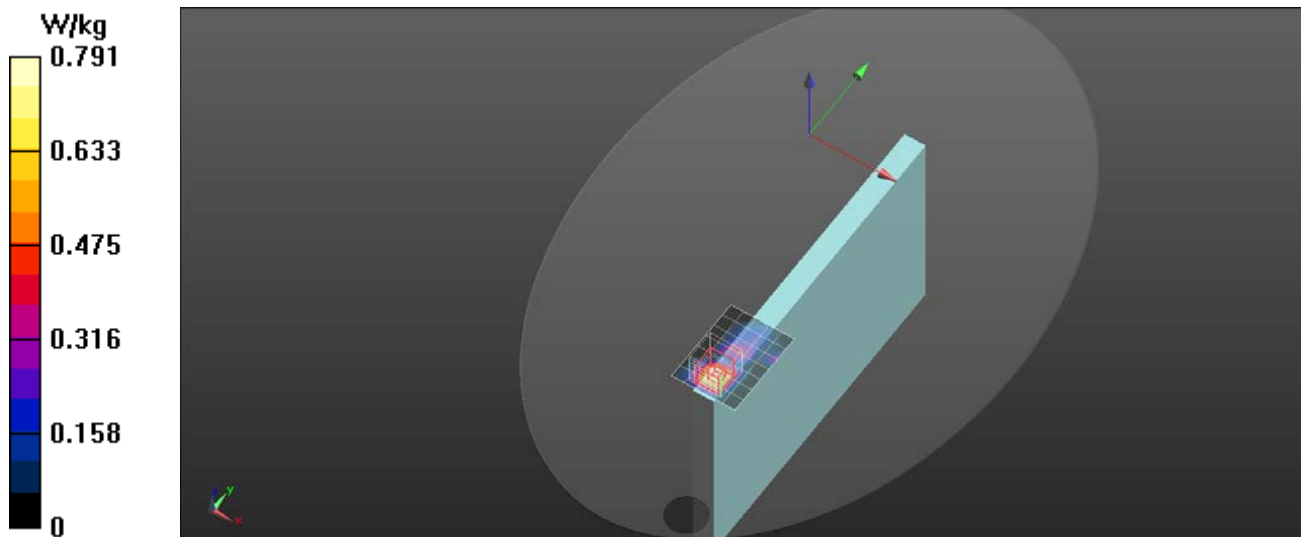

WiFi 5GHz

Frequency: 5290 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C

Medium parameters used (interpolated): $f = 5290$ MHz; $\sigma = 4.574$ S/m; $\epsilon_r = 35.947$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1486; Calibrated: 2022/5/31
- Probe: EX3DV4 - SN7369; ConvF(5.04, 5.04, 5.04) @ 5290 MHz; Calibrated: 2022/5/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240

Tablet/Aux Ant/Rear/802.11ac80_Ch58/Area Scan (6x9x1):

Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.06 W/kg

Tablet/Aux Ant/Rear/802.11ac80_Ch58/Zoom Scan (7x7x12)/Cube 0:

Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0.8010 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 2.01 W/kg

SAR(1 g) = 0.490 W/kg; SAR(10 g) = 0.161 W/kg

Smallest distance from peaks to all points 3 dB below = 6.1 mm

Ratio of SAR at M2 to SAR at M1 = 54.5%

Maximum value of SAR (measured) = 1.19 W/kg

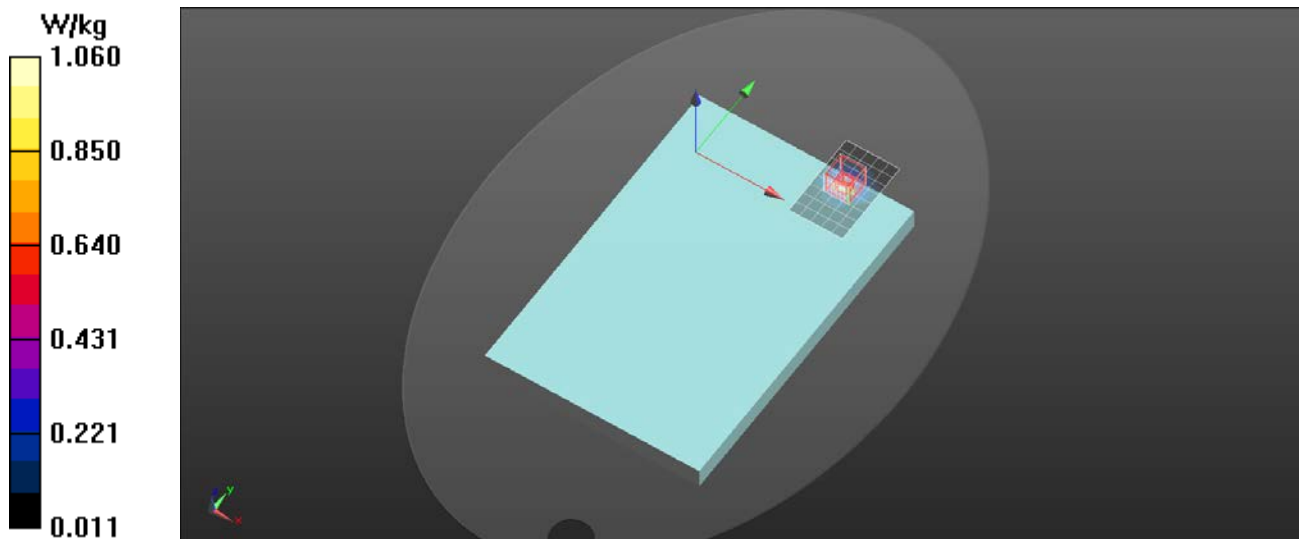

WiFi-5GHz

Frequency: 5690 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C

Medium parameters used (interpolated): $f = 5690$ MHz; $\sigma = 5.016$ S/m; $\epsilon_r = 35.202$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1486; Calibrated: 2022/5/31
- Probe: EX3DV4 - SN7369; ConvF(4.66, 4.66, 4.66) @ 5690 MHz; Calibrated: 2022/5/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240

Tablet/Main Ant/Edge 1/802.11ac80_Ch138/Area Scan (7x9x1):

Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 2.41 W/kg

Tablet/Main Ant/Edge 1/802.11ac80_Ch138/Zoom Scan (7x7x12)/Cube 0:

Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.373 V/m; Power Drift = 0.09 dB


Peak SAR (extrapolated) = 4.88 W/kg

SAR(1 g) = 1.03 W/kg; SAR(10 g) = 0.329 W/kg

Smallest distance from peaks to all points 3 dB below = 7.5 mm

Ratio of SAR at M2 to SAR at M1 = 48.4%

Maximum value of SAR (measured) = 2.68 W/kg

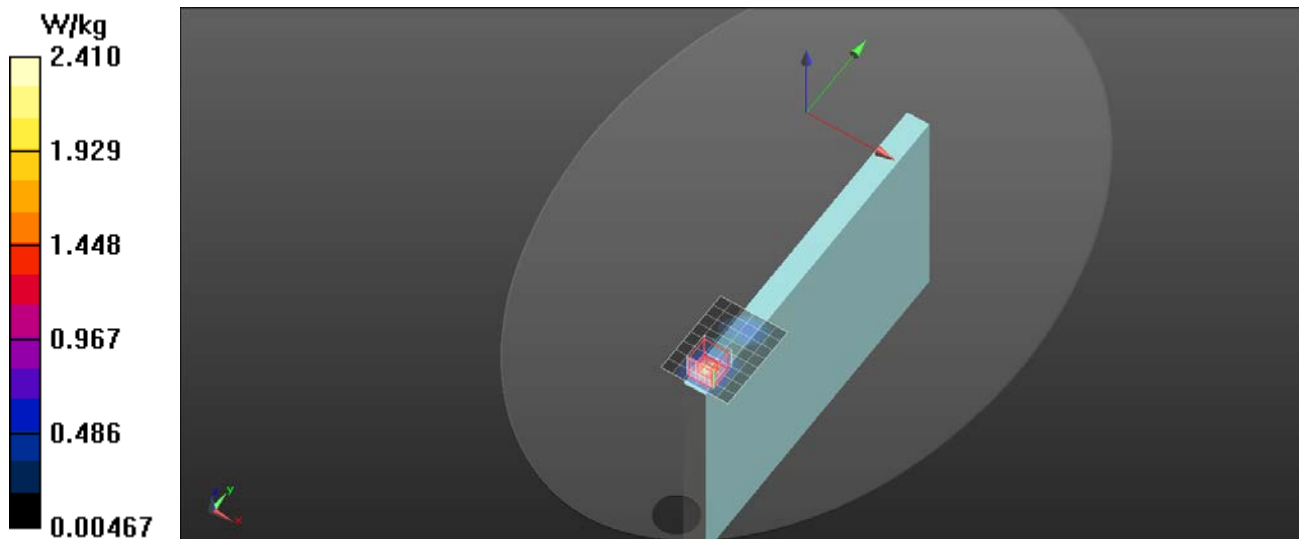

WiFi 5GHz

Frequency: 5530 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C

Medium parameters used (interpolated): $f = 5530$ MHz; $\sigma = 4.828$ S/m; $\epsilon_r = 35.494$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1486; Calibrated: 2022/5/31
- Probe: EX3DV4 - SN7369; ConvF(4.66, 4.66, 4.66) @ 5530 MHz; Calibrated: 2022/5/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240

Tablet/Aux Ant/Rear/802.11ac80_Ch106/Area Scan (6x9x1):

Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.15 W/kg

Tablet/Aux Ant/Rear/802.11ac80_Ch106/Zoom Scan (7x7x12)/Cube 0:

Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0 V/m; Power Drift = 0.10 dB


Peak SAR (extrapolated) = 2.55 W/kg

SAR(1 g) = 0.585 W/kg; SAR(10 g) = 0.185 W/kg

Smallest distance from peaks to all points 3 dB below = 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 50.5%

Maximum value of SAR (measured) = 1.48 W/kg

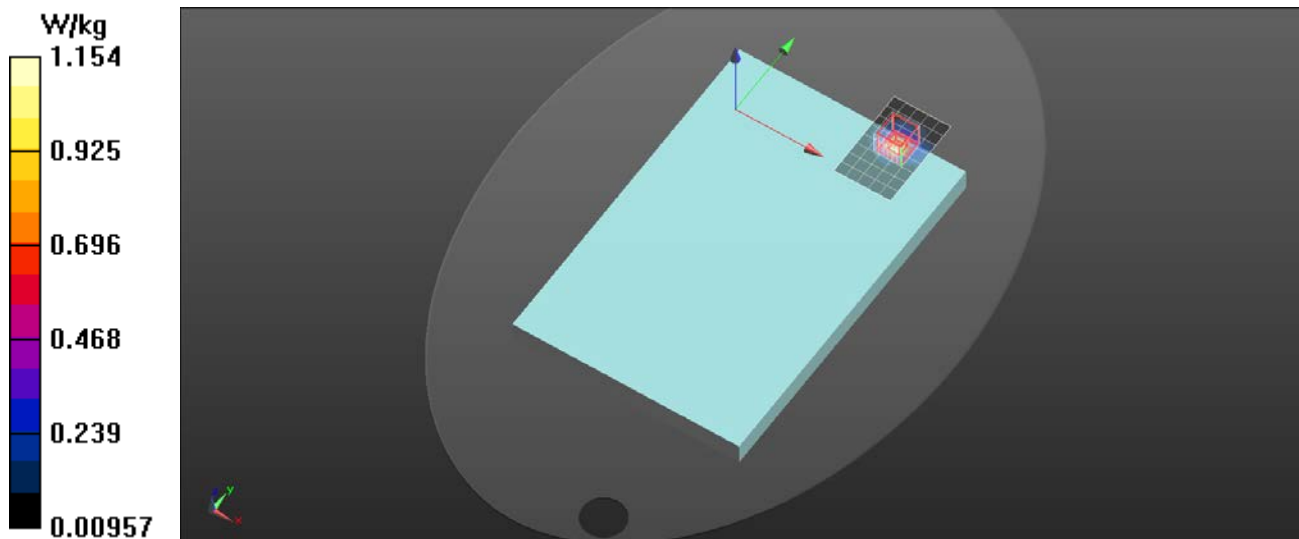

WiFi-5GHz

Frequency: 5755 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C

Medium parameters used (interpolated): $f = 5755$ MHz; $\sigma = 5.089$ S/m; $\epsilon_r = 35.12$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1486; Calibrated: 2022/5/31
- Probe: EX3DV4 - SN7369; ConvF(4.65, 4.65, 4.65) @ 5755 MHz; Calibrated: 2022/5/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240

Tablet/Main Ant/Edge 1/802.11n40_Ch151/Area Scan (7x9x1):

Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 2.37 W/kg

Tablet/Main Ant/Edge 1/802.11n40_Ch151 /Zoom Scan (7x7x12)/Cube 0:

Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.339 V/m; Power Drift = 0.09 dB


Peak SAR (extrapolated) = 6.17 W/kg

SAR(1 g) = 1.08 W/kg; SAR(10 g) = 0.305 W/kg

Smallest distance from peaks to all points 3 dB below = 4.1 mm

Ratio of SAR at M2 to SAR at M1 = 41.8%

Maximum value of SAR (measured) = 2.86 W/kg

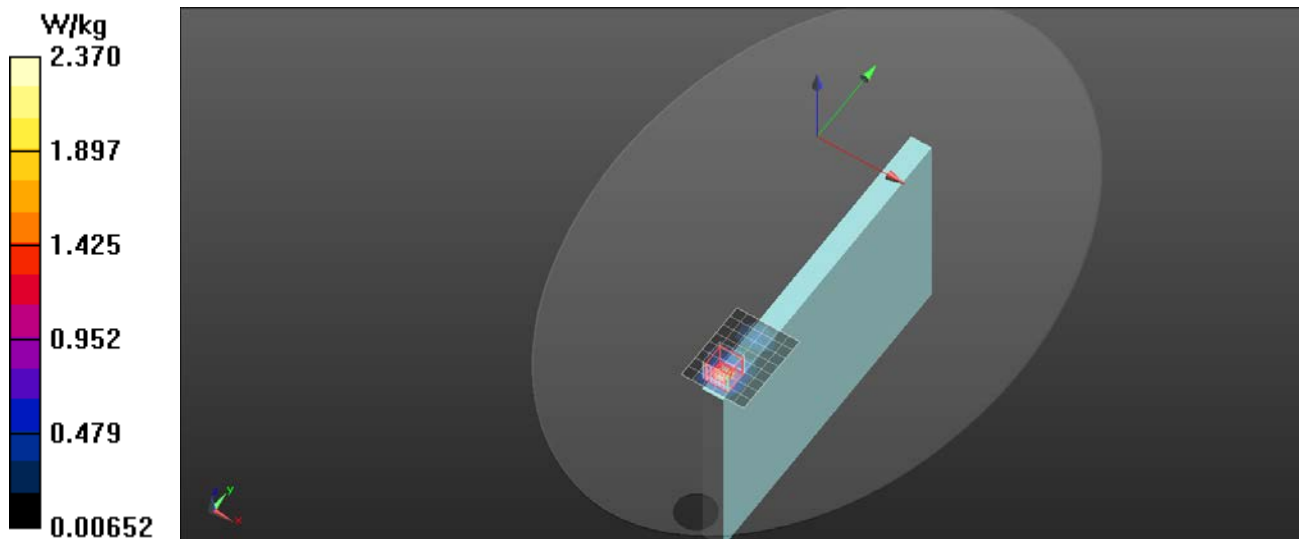

WiFi 5GHz

Frequency: 5775 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C

Medium parameters used (interpolated): $f = 5775$ MHz; $\sigma = 5.113$ S/m; $\epsilon_r = 35.066$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1486; Calibrated: 2022/5/31
- Probe: EX3DV4 - SN7369; ConvF(4.65, 4.65, 4.65) @ 5775 MHz; Calibrated: 2022/5/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240

Tablet/Aux Ant/Rear/802.11ac80_Ch155/Area Scan (6x9x1):

Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.08 W/kg

Tablet/Aux Ant/Rear/802.11ac80_Ch155/Zoom Scan (7x7x12)/Cube 0: Measurement grid:

dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.260 V/m; Power Drift = 0.06 dB


Peak SAR (extrapolated) = 2.46 W/kg

SAR(1 g) = 0.508 W/kg; SAR(10 g) = 0.164 W/kg

Smallest distance from peaks to all points 3 dB below = 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 48.4%

Maximum value of SAR (measured) = 1.34 W/kg

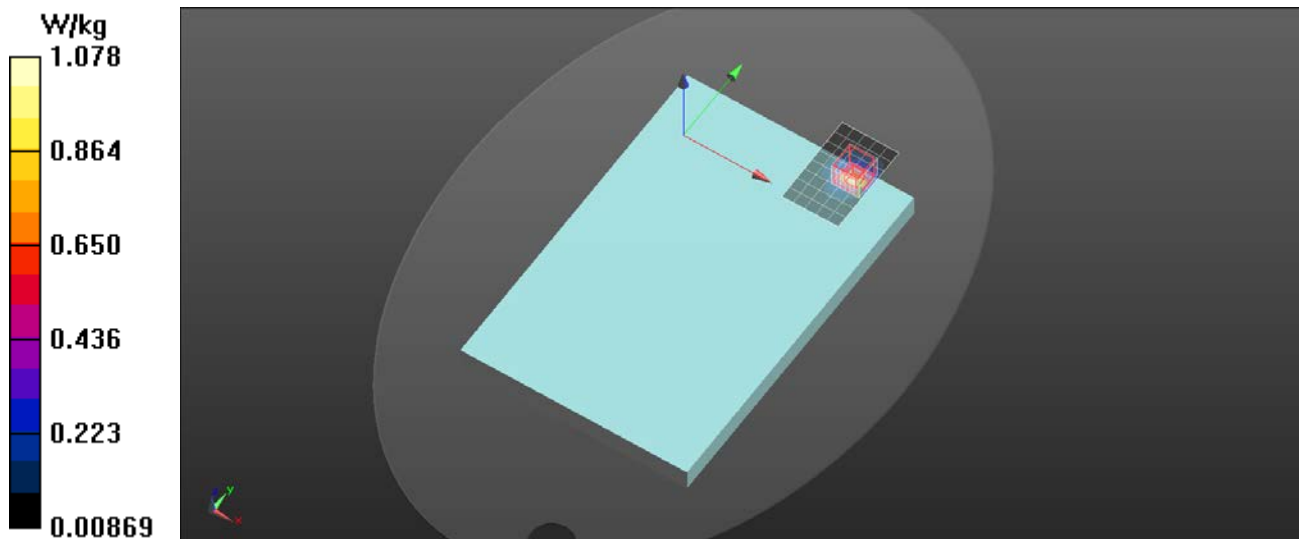

Device Under Test Properties

Model, Manufacturer			Dimensions [mm]			IMEI	DUT Type
Device,			200.0 x 300.0 x 20.0			Tablet	
Exposure Conditions							
Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	EDGE 1, 0.00	U-NII-5	WLAN, 10743-AAC	6185.0, 47	5.4	5.61	34.3

Hardware Setup


Phantom	TSL, Measured Date		Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 (20deg probe tilt) – 1240	6E Charge: xxxx, 2022–Aug–05		EX3DV4 – SN7369, 2022–05–28	DAE4 Sn1486, 2022–05–31

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	68.0 x 85.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.4
MAIA	Y	N/A
Surface Detection	All points	All points
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2022–08–05,	2022–08–05,
psSAR1g [W/Kg]	0.972	1.08
psSAR10g [W/Kg]	0.300	0.301
Power Drift [dB]	0.11	0.04
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	Positive	Positive
M2/M1 [%]		53.7
Dist 3dB Peak [mm]		4.1

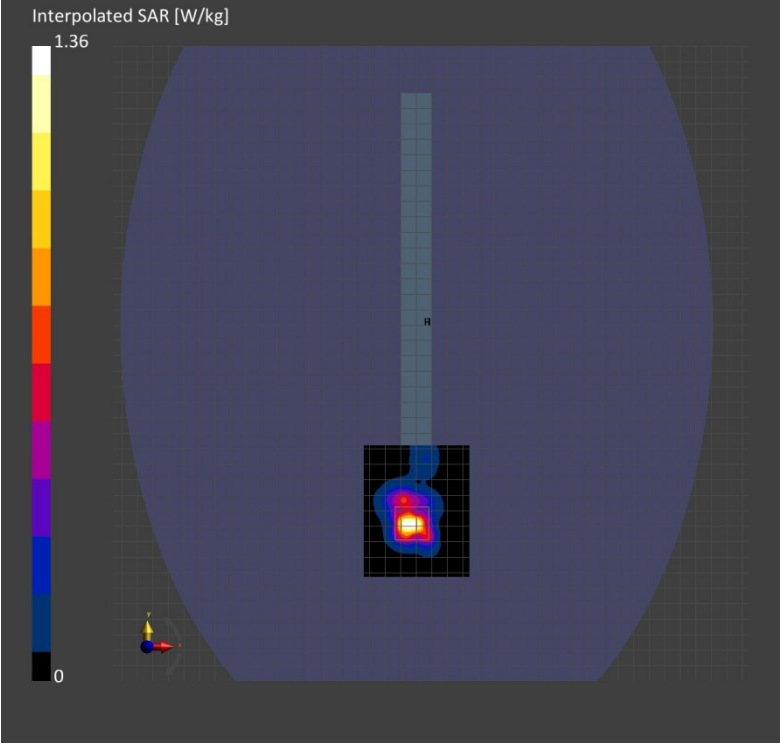

Device Under Test Properties

Model, Manufacturer			Dimensions [mm]		IMEI	DUT Type	
Device,			20.0 x 300.0 x 200.0			Tablet	
Exposure Conditions							
Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	Rear, 0.00	U–NII–5	WLAN, 10743–AAC	6025.0, 15	5.4	5.39	34.6

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 (20deg probe tilt) – 1240	6E Charge: xxxx, 2022–Aug–05	EX3DV4 – SN7369, 2022–05–28	DAE4 Sn1486, 2022–05–31

Scans Setup


	Area Scan	Zoom Scan
Grid Extents [mm]	68.0 x 68.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.4
MAIA	Y	Y
Surface Detection	All points	All points
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2022–08–05,	2022–08–05,
psSAR1g [W/Kg]	0.422	0.472
psSAR10g [W/Kg]	0.134	0.132
Power Drift [dB]	0.13	0.03
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	Positive	Positive
M2/M1 [%]		55.2
Dist 3dB Peak [mm]		5.8

Interpolated SAR [W/kg]

0.59

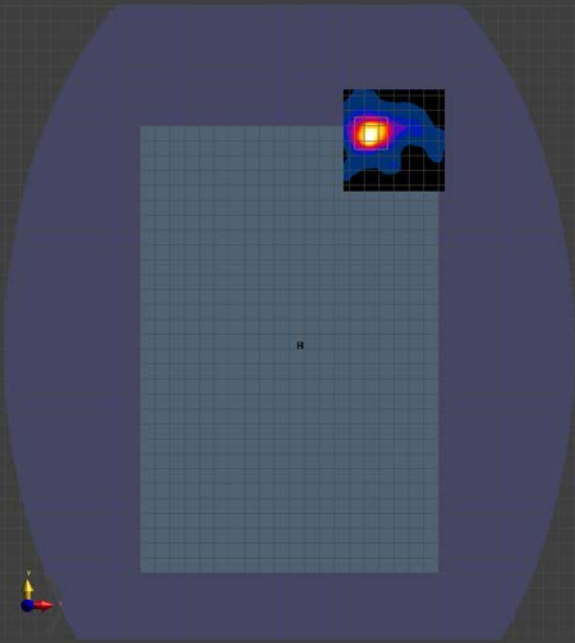

R

Device Under Test Properties

Model, Manufacturer			Dimensions [mm]			IMEI	DUT Type	
Device,			200.0 x 300.0 x 20.0			Tablet		
Exposure Conditions								
Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	
Flat, HSL	EDGE 1, 0.00	U–NII–6	WLAN, 10743–AAC	6505.0, 111	5.4	5.95	33.8	

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 (20deg probe tilt) – 1240	6E Charge: xxxx, 2022–Aug–05	EX3DV4 – SN7369, 2022–05–28	DAE4 Sn1486, 2022–05–31

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	68.0 x 85.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.2
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.2
MAIA	Y	N/A
Surface Detection	All points	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2022–08–05,	2022–08–05,
psSAR1g [W/Kg]	0.714	0.908
psSAR10g [W/Kg]	0.257	0.257
Power Drift [dB]	–0.04	–0.11
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	Positive	Positive
M2/M1 [%]		59.3
Dist 3dB Peak [mm]		4.6

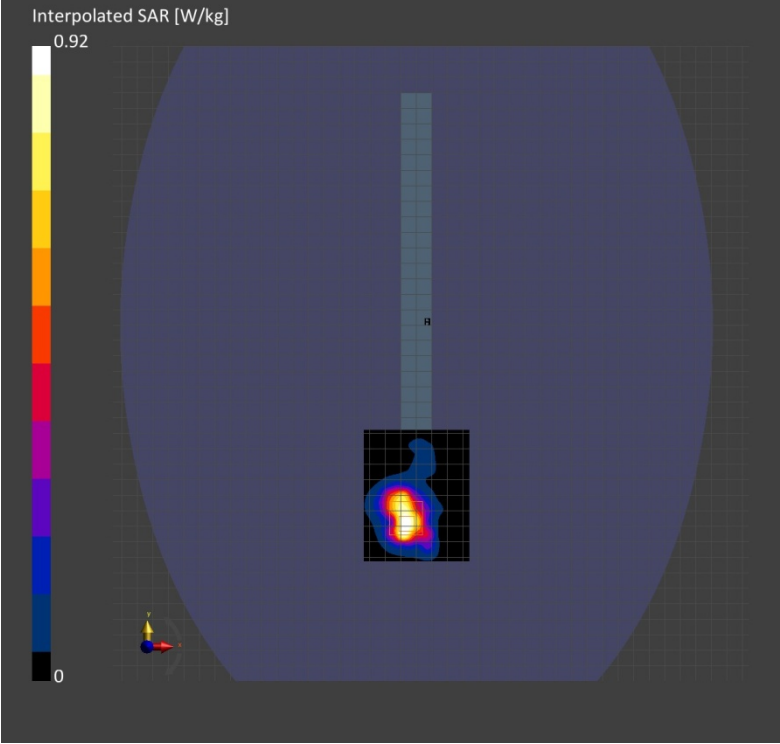

Device Under Test Properties

Model, Manufacturer			Dimensions [mm]			IMEI	DUT Type
Device,			20.0 x 300.0 x 200.0			Tablet	
Exposure Conditions							
Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	Rear, 0.00	U–NII–6	WLAN, 10743–AAC	6505.0, 111	5.4	5.95	33.8

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 (20deg probe tilt) – 1240	6E Charge: xxxx, 2022–Aug–05	EX3DV4 – SN7369, 2022–05–28	DAE4 Sn1486, 2022–05–31

Scans Setup


	Area Scan	Zoom Scan
Grid Extents [mm]	68.0 x 68.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.4
MAIA	Y	Y
Surface Detection	All points	All points
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2022–08–05,	2022–08–05,
psSAR1g [W/Kg]	0.421	0.453
psSAR10g [W/Kg]	0.135	0.127
Power Drift [dB]	0.05	0.02
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	Positive	Positive
M2/M1 [%]		51.4
Dist 3dB Peak [mm]		6.1

Interpolated SAR [W/kg]

0.562

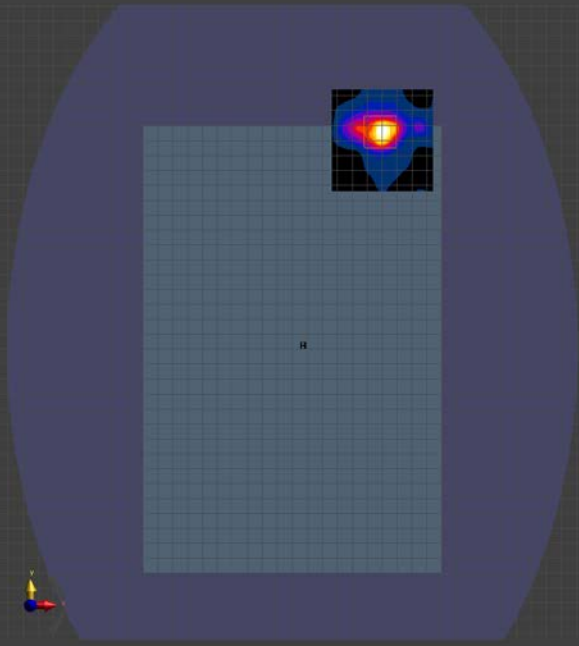

R

Device Under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
Device,	200.0 x 300.0 x 20.0		Tablet

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	EDGE 1, 0.00	U-NII-7	WLAN, 10743-AAC	6665.0, 143	5.4	6.15	33.5

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 (20deg probe tilt) – 1240	6E Charge: xxxx, 2022–Aug–05	EX3DV4 – SN7369, 2022–05–28	DAE4 Sn1486, 2022–05–31

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	68.0 x 85.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.4
MAIA	Y	N/A
Surface Detection	All points	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2022–08–05,	2022–08–05,
psSAR1g [W/Kg]	0.689	0.784
psSAR10g [W/Kg]	0.245	0.209
Power Drift [dB]	–0.04	–0.03
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	Positive	Positive
M2/M1 [%]		53.0
Dist 3dB Peak [mm]		4.4

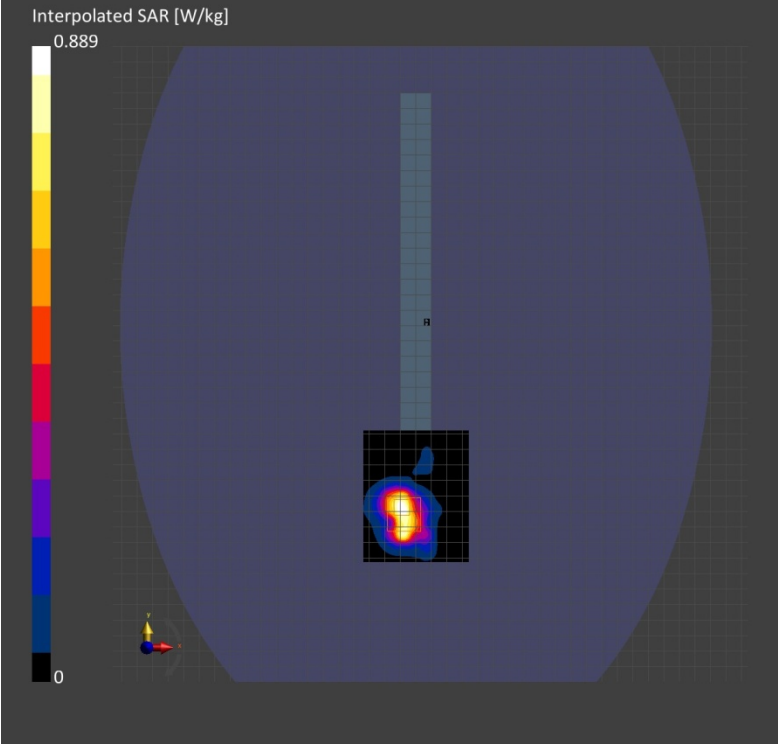

Device Under Test Properties

Model, Manufacturer			Dimensions [mm]			IMEI	DUT Type
Device,			20.0 x 300.0 x 200.0			Tablet	
Exposure Conditions							
Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	Rear, 0.00	U–NII–7	WLAN, 10743–AAC	6665.0, 143	5.4	6.15	33.5

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 (20deg probe tilt) – 1240	6E Charge: xxxx, 2022–Aug–05	EX3DV4 – SN7369, 2022–05–28	DAE4 Sn1486, 2022–05–31

Scans Setup


	Area Scan	Zoom Scan
Grid Extents [mm]	68.0 x 68.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.4
MAIA	Y	Y
Surface Detection	All points	All points
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2022–08–05,	2022–08–05,
psSAR1g [W/Kg]	0.501	0.528
psSAR10g [W/Kg]	0.167	0.151
Power Drift [dB]	–0.12	0.09
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	Positive	Positive
M2/M1 [%]		49.9
Dist 3dB Peak [mm]		6.3

Interpolated SAR [W/kg]

0.652

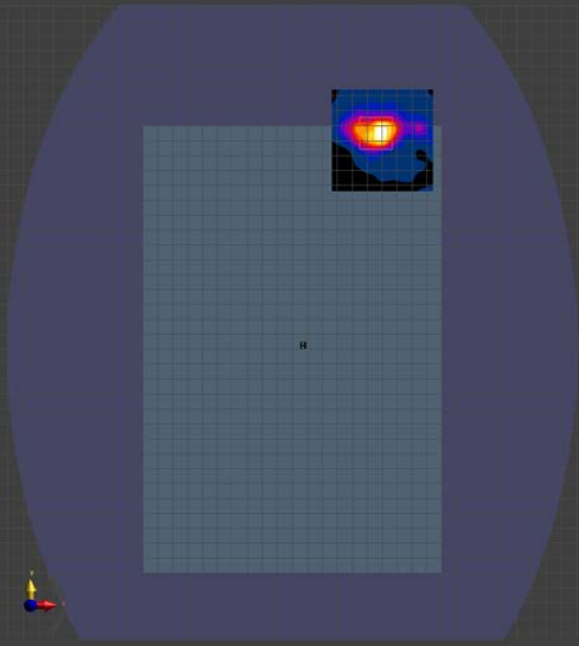

R



Device Under Test Properties

Model, Manufacturer			Dimensions [mm]		IMEI	DUT Type	
Device,			200.0 x 300.0 x 20.0			Tablet	
Exposure Conditions							
Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	EDGE 1, 0.00	U–NII–8	WLAN, 10743–AAC	6985.0, 207	5.4	6.50	33.0

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 (20deg probe tilt) – 1240	6E Charge: xxxx, 2022–Aug–05	EX3DV4 – SN7369, 2022–05–28	DAE4 Sn1486, 2022–05–31

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	68.0 x 85.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.4
MAIA	Y	N/A
Surface Detection	All points	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2022–08–05,	2022–08–05,
psSAR1g [W/Kg]	0.805	0.729
psSAR10g [W/Kg]	0.265	0.207
Power Drift [dB]	–0.12	–0.05
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	Positive	Positive
M2/M1 [%]		50.5
Dist 3dB Peak [mm]		4.3

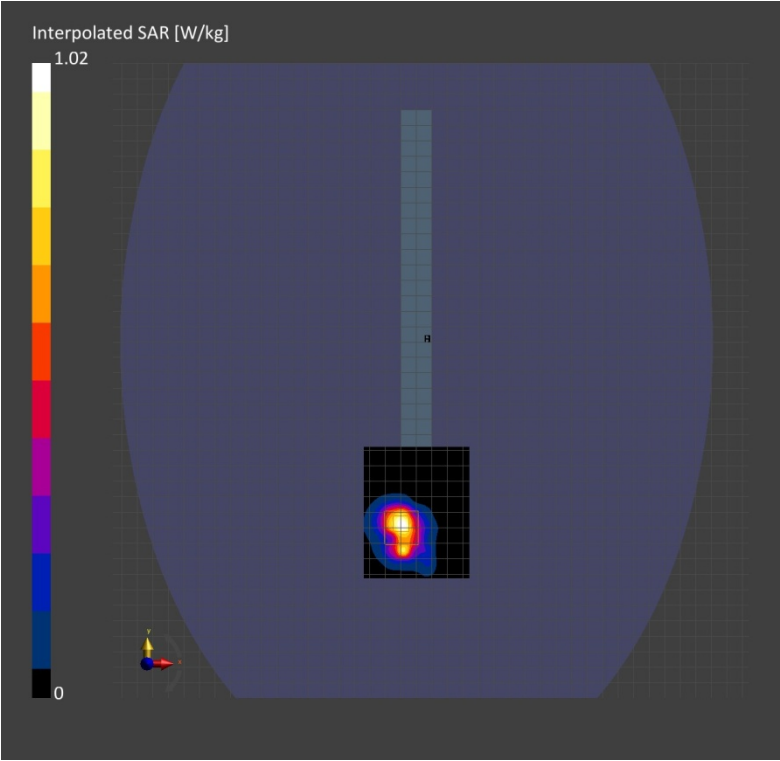

Device Under Test Properties

Model, Manufacturer			Dimensions [mm]			IMEI	DUT Type
Device,			20.0 x 300.0 x 200.0			Tablet	
Exposure Conditions							
Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	Rear, 0.00	U–NII–8	WLAN, 10743–AAC	6985.0, 207	5.4	6.50	33.0

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 (20deg probe tilt) – 1240	6E Charge: xxxx, 2022–Aug–05	EX3DV4 – SN7369, 2022–05–28	DAE4 Sn1486, 2022–05–31

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	68.0 x 68.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.4
MAIA	Y	N/A
Surface Detection	All points	All points
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2022–08–05,	2022–08–05,
psSAR1g [W/Kg]	0.656	0.743
psSAR10g [W/Kg]	0.210	0.215
Power Drift [dB]	0.02	0.04
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	Positive	Positive
M2/M1 [%]		47.8
Dist 3dB Peak [mm]		6.1

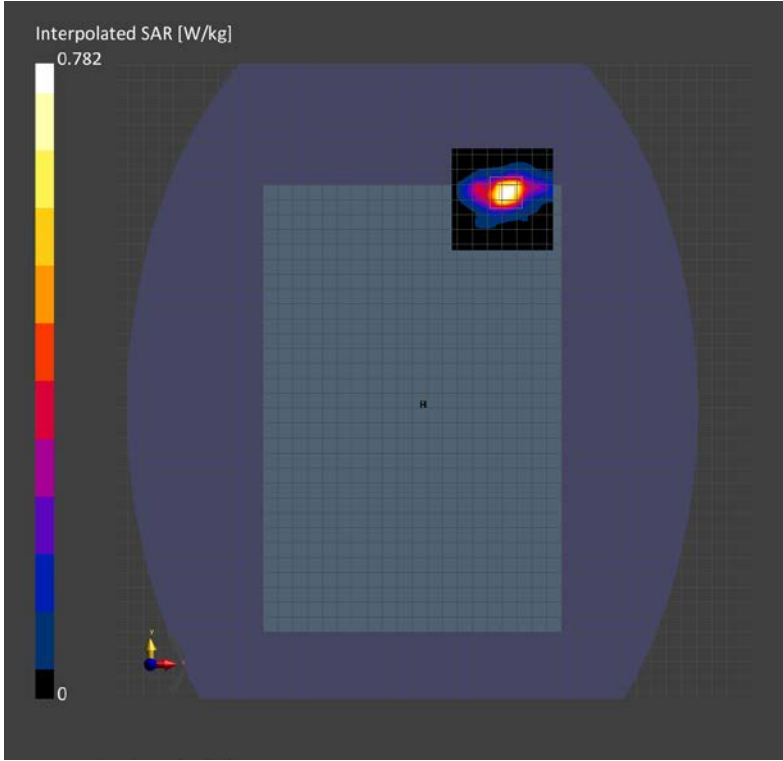

Device Under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
Device,	200.0 x 300.0 x 20.0		Tablet

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor
5G	EDGE 1, 2.00	U-NII-5	WLAN, 10743-AAC	6185.0, 47	1.0

Hardware Setup


Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave – 1085	Air –	EUmmWV4 – SN9583_F1–55GHz, 2021–09–03	DAE4 Sn1486, 2022–05–31

Scans Setup

Scan Type	5G Scan
Grid Extents [mm]	100.0 x 100.0
Grid Steps [lambda]	0.25 x 0.25
Sensor Surface [mm]	2.0
MAIA	N/A

Measurement Results

Scan Type	5G Scan
Date	2022–08–09
Avg. Area [cm ²]	4.00
psPDn+ [W/m ²]	3.77
psPDtot+ [W/m ²]	4.85
psPDmod+ [W/m ²]	5.20
E _{max} [V/m]	56.9
Power Drift [dB]	0.01

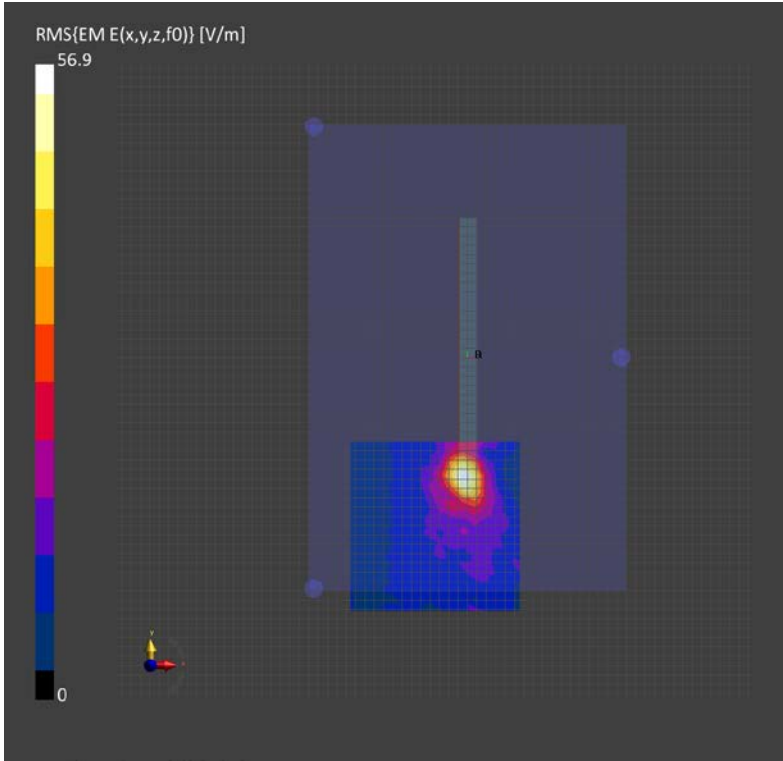

Device Under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
Device,	200.0 x 300.0 x 20.0		Tablet

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor
5G	EDGE 1 , 2.00	U-NII-5	WLAN, 10743-AAC	6345.0, 79	1.0

Hardware Setup


Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave – 1085	Air –	EUmmWV4 – SN9583_F1-55GHz, 2021-09-03	DAE4 Sn1486, 2022-05-31

Scans Setup

Scan Type	5G Scan
Grid Extents [mm]	100.0 x 100.0
Grid Steps [lambda]	0.25 x 0.25
Sensor Surface [mm]	2.0
MAIA	N/A

Measurement Results

Scan Type	5G Scan
Date	2022-08-09
Avg. Area [cm ²]	4.00
psPDn+ [W/m ²]	2.77
psPDtot+ [W/m ²]	3.40
psPDmod+ [W/m ²]	3.71
E _{max} [V/m]	49.6
Power Drift [dB]	0.18

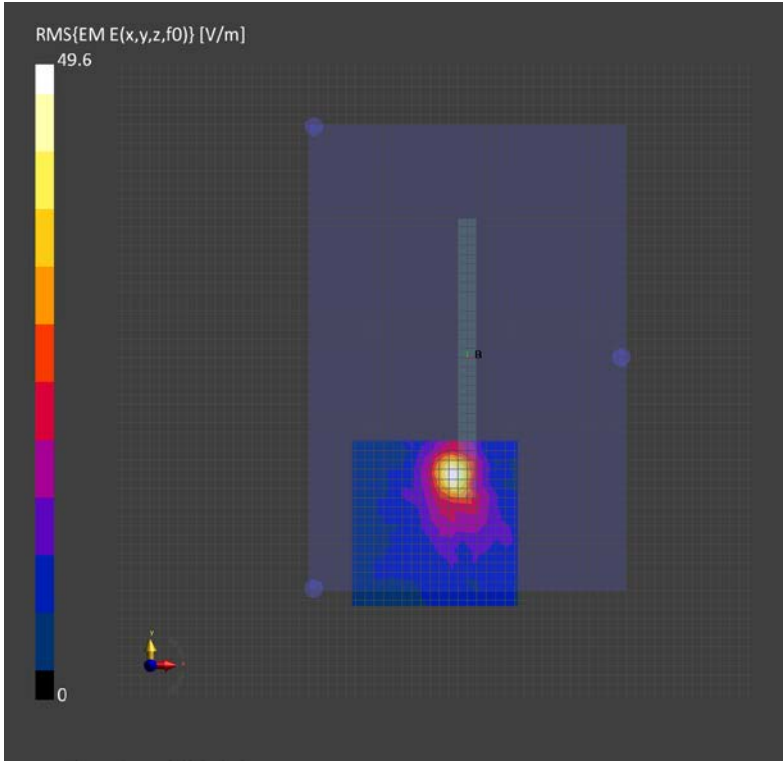

Device Under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
Device,	200.0 x 300.0 x 20.0		Tablet

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor
5G	EDGE 1, 2.00	U-NII-6	WLAN, 10743-AAC	6505.0, 111	1.0

Hardware Setup


Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave – 1085	Air –	EUmmWV4 – SN9583_F1-55GHz, 2021-09-03	DAE4 Sn1486, 2022-05-31

Scans Setup

Scan Type	5G Scan
Grid Extents [mm]	100.0 x 100.0
Grid Steps [lambda]	0.25 x 0.25
Sensor Surface [mm]	2.0
MAIA	N/A

Measurement Results

Scan Type	5G Scan
Date	2022-08-09
Avg. Area [cm ²]	4.00
psPDn+ [W/m ²]	3.82
psPDtot+ [W/m ²]	4.83
psPDmod+ [W/m ²]	5.90
E _{max} [V/m]	66.8
Power Drift [dB]	-0.02

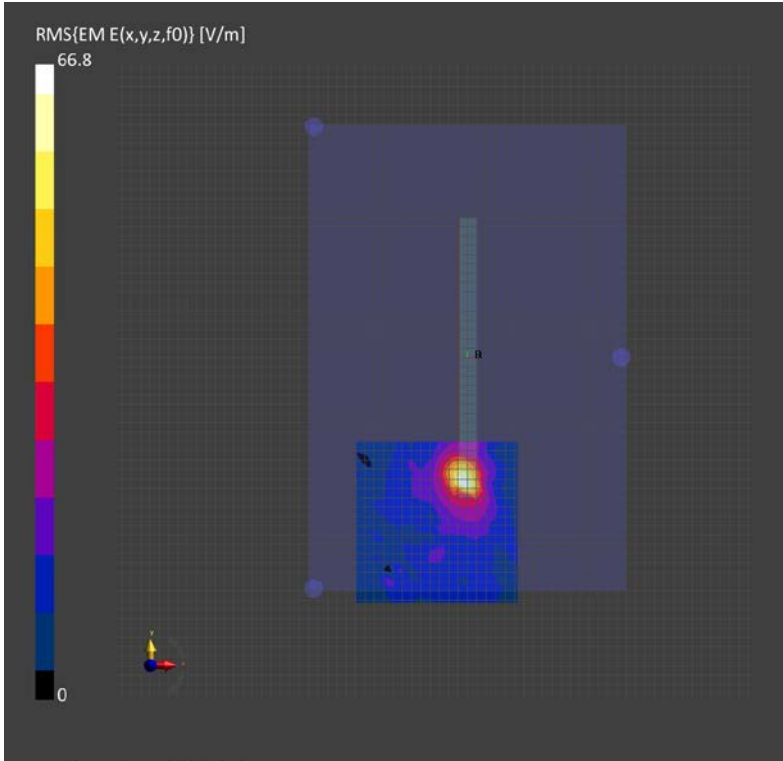

Device Under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
Device,	200.0 x 300.0 x 20.0		Tablet

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor
5G	EDGE 1, 2.00	U-NII-7	WLAN, 10743-AAC	6665.0, 143	1.0

Hardware Setup


Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave – 1085	Air –	EUmmWV4 – SN9583_F1–55GHz, 2021–09–03	DAE4 Sn1486, 2022–05–31

Scans Setup

Scan Type	5G Scan
Grid Extents [mm]	100.0 x 100.0
Grid Steps [lambda]	0.25 x 0.25
Sensor Surface [mm]	2.0
MAIA	N/A

Measurement Results

Scan Type	5G Scan
Date	2022-08-09
Avg. Area [cm ²]	4.00
psPDn+ [W/m ²]	3.03
psPDtot+ [W/m ²]	4.23
psPDmod+ [W/m ²]	5.04
E _{max} [V/m]	60.8
Power Drift [dB]	0.03

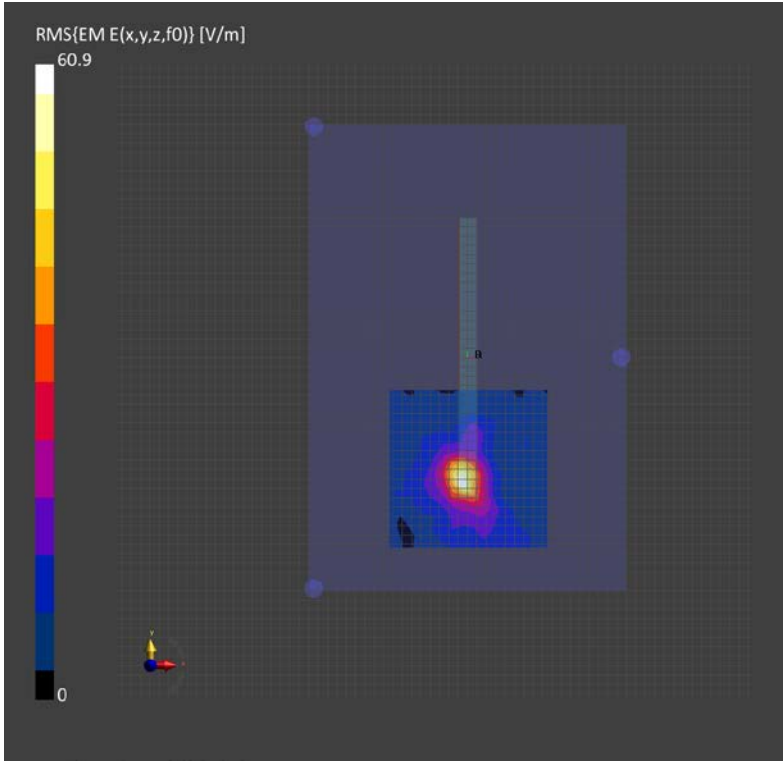

Device Under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
Device,	200.0 x 300.0 x 20.0		Tablet

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor
5G	EDGE 1, 2.00	U-NII-8	WLAN, 10743-AAC	6985.0, 207	1.0

Hardware Setup

Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave – 1085	Air –	EUmmWV4 – SN9583_F1–55GHz, 2021–09–03	DAE4 Sn1486, 2022–05–31

Scans Setup

Scan Type	5G Scan
Grid Extents [mm]	100.0 x 100.0
Grid Steps [lambda]	0.25 x 0.25
Sensor Surface [mm]	2.0
MAIA	N/A

Measurement Results

Scan Type	5G Scan
Date	2022–08–09
Avg. Area [cm ²]	4.00
psPDn+ [W/m ²]	3.90
psPDtot+ [W/m ²]	4.38
psPDmod+ [W/m ²]	5.51
E _{max} [V/m]	82.5
Power Drift [dB]	0.12

