


RF TEST REPORT



Report No.: 16070911-FCC-R1

Supersede Report No.: N/A

Applicant	Verykool USA Inc	
Product Name	Mobile phone	
Model No.	SL5200	
Serial No.	N/A	
Test Standard	FCC Part 22(H):2015 ;FCC Part 24(E):2015; FCC Part 27:2015; ANSI/TIA-603-D: 2010	
Test Date	August 1 to August 29,2016	
Issue Date	August 31, 2016	
Test Result	☒ Pass ☐ Fail	
Equipment complied with the specification	☒	
Equipment did not comply with the specification	☐	
		
Loren Luo Test Engineer	David Huang Checked By	
This test report may be reproduced in full only Test result presented in this test report is applicable to the tested sample only		

Issued by:

SIEMIC (SHENZHEN-CHINA) LABORATORIES

Zone A, Floor 1, Building 2 Wan Ye Long Technology Park

South Side of Zhoushi Road, Bao' an District, Shenzhen, Guangdong China 518108

Phone: +86 0755 2601 4629801 Email: China@siemic.com.cn

Laboratories Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to testing and certification, SIEMIC provides initial design reviews and compliance management throughout a project. Our extensive experience with China, Asia Pacific, North America, European, and International compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the global markets.

Accreditations for Conformity Assessment

Country/Region	Scope
USA	EMC, RF/Wireless, SAR, Telecom
Canada	EMC, RF/Wireless, SAR, Telecom
Taiwan	EMC, RF, Telecom, SAR, Safety
Hong Kong	RF/Wireless, SAR, Telecom
Australia	EMC, RF, Telecom, SAR, Safety
Korea	EMI, EMS, RF, SAR, Telecom, Safety
Japan	EMI, RF/Wireless, SAR, Telecom
Singapore	EMC, RF, SAR, Telecom
Europe	EMC, RF, SAR, Telecom, Safety

Test Report	16070911-FCC-R1
Page	3 of 98

This page has been left blank intentionally.

CONTENTS

SUPERSEDE REPORT NO.: N/A	1
ISSUED BY:	1
LABORATORIES INTRODUCTION	2
ACCREDITATIONS FOR CONFORMITY ASSESSMENT	2
THIS PAGE HAS BEEN LEFT BLANK INTENTIONALLY	3
CONTENTS.....	4
1. REPORT REVISION HISTORY	6
2. CUSTOMER INFORMATION	6
3. TEST SITE INFORMATION.....	6
4. EQUIPMENT UNDER TEST (EUT) INFORMATION	7
5. TEST SUMMARY	11
MEASUREMENT UNCERTAINTY	11
6. MEASUREMENTS, EXAMINATION AND DERIVED RESULTS	12
6.1 RF EXPOSURE (SAR).....	12
TEST RESULT: PASS.....	12
6.2 RF OUTPUT POWER	13
6.3 PEAK-AVERAGE RATIO.....	26
6.4 OCCUPIED BANDWIDTH.....	31
6.5 SPURIOUS EMISSIONS AT ANTENNA TERMINALS	46
6.6 SPURIOUS RADIATED EMISSIONS.....	62
6.7 BAND EDGE.....	69
6.8 FREQUENCY STABILITY	82

Test Report	16070911-FCC-R1
Page	5 of 98

ANNEX A. TEST INSTRUMENT.....	87
ANNEX B. EUT AND TEST SETUP PHOTOGRAPHS.....	89
ANNEX C. TEST SETUP AND SUPPORTING EQUIPMENT.....	95
ANNEX C.II. EUT OPERATING CONKITIONS.....	97
N/A.....	97
ANNEX D. USER MANUAL / BLOCK DIAGRAM / SCHEMATICS / PARTLIST	98

1. Report Revision History

Report No.	Report Version	Description	Issue Date
16070911-FCC-R1	NONE	Original	August 31, 2016

2. Customer information

Applicant Name	Verykool USA Inc
Applicant Add	3636 Nobel Drive, Suite 325, San Diego, California 92122 United States
Manufacturer	Kozen Mobile Co.,Ltd
Manufacturer Add	Floor 3rd, Building 29, No.368 Zhangjiang Road, Pudong District, Shanghai, China 201203

3. Test site information

Lab performing tests	SIEMIC (Shenzhen-China) LABORATORIES
Lab Address	Zone A, Floor 1, Building 2 Wan Ye Long Technology Park South Side of Zhoushi Road, Bao' an District, Shenzhen, Guangdong China 518108
FCC Test Site No.	718246
IC Test Site No.	4842E-1
Test Software	Radiated Emission Program-To Shenzhen v2.0

4. Equipment under Test (EUT) Information

Description of EUT: Mobile phone

Main Model: SL5200

Serial Model: N/A

Date EUT received: July 26, 2016

Test Date(s): August 1 to August 29, 2016

Equipment Category : PCE

Antenna Gain:

GSM850: -3.2dBi
 PCS1900: -2.21dBi
 UMTS-FDD Band V: -3.62dBi
 UMTS-FDD Band IV: -2.42dBi
 UMTS-FDD Band II: -2.42dBi
 LTE Band 2: -2.5dBi
 LTE Band 4: -3.0dBi
 LTE Band 5: -3.20dBi
 LTE Band 7: -3.0dBi
 LTE Band 12: -4.2dBi
 LTE Band 17: -4.2dBi
 Bluetooth/BLE/WIFI: 0dBi
 GPS: 0dBi

Antenna Type: PIFA antenna

Type of Modulation:

GSM / GPRS: GMSK
 EGPRS: GMSK, 8PSK
 UMTS-FDD: QPSK
 LTE Band: QPSK, 16QAM
 802.11b/g/n: DSSS, OFDM
 Bluetooth: GFSK, $\pi/4$ DQPSK, 8DPSK
 BLE: GFSK
 GPS: BPSK

RF Operating Frequency (ies):	GSM850 TX: 824.2 ~ 848.8 MHz; RX: 869.2 ~ 893.8 MHz
	PCS1900 TX: 1850.2 ~ 1909.8 MHz; RX: 1930.2 ~ 1989.8 MHz
	UMTS-FDD Band V TX: 826.4 ~ 846.6 MHz; RX: 871.4 ~ 891.6 MHz
	UMTS-FDD Band IV TX:1712.4 ~ 1752.6 MHz; RX : 2112.4 ~ 2152.6 MHz
	UMTS-FDD Band II TX:1852.4 ~ 1907.6 MHz; RX: 1932.4 ~ 1987.6 MHz
	LTE Band 2 TX: 1852.5 ~ 1907.5 MHz; RX : 1932.5 ~ 1987.5 MHz
	LTE Band 4 TX: 1712.5 ~ 1752.5 MHz; RX : 2112.5 ~ 2152.5 MHz
	LTE Band 5 TX: 826.5 ~ 846.5 MHz; RX : 871.5 ~ 891.5 MHz
	LTE Band 7 TX: 2502.5 ~ 2567.5 MHz; RX : 2622.5 ~ 2687.5 MHz
	LTE Band 12 TX:699.7 ~ 715.3 MHz; RX : 729.7~ 745.3MHz
	LTE Band 17 TX: 706.5 ~ 713.5 MHz; RX : 736.5 ~ 743.5 MHz
	WIFI: 802.11b/g/n(20M): 2412-2462 MHz
	WIFI: 802.11n(40M): 2422-2452 MHz
	Bluetooth& BLE: 2402-2480 MHz
	GPS: 1575.42 MHz
Number of Channels:	GSM 850: 124CH
	PCS1900: 299CH
	UMTS-FDD Band V: 102CH
	UMTS-FDD Band IV: 202CH
	UMTS-FDD Band II: 277CH
	WIFI :802.11b/g/n(20M): 11CH
	WIFI :802.11n(40M): 7CH
	Bluetooth: 79CH
	BLE: 40CH
	GPS:1CH
Port:	Earphone Port, USB Port
Input Power:	Adapter:
	Model: TPA-46B050100UU
	Input: 100-240V~50/60Hz,0.2A
	Output:5.0V,1000mA
	Battery:
	Model: MLP415879
	Spec: 3.8V,2960mAh(11.248Wh)
	Charge limited voltage: 4.35V

Maximum Conducted
AV Power to Antenna:

GSM Voice: GSM850: 32.43 dBm
PCS1900: 30.48 dBm
GPRS: GSM850: 32.61 dBm
PCS1900: 30.45 dBm
MCS1: GSM850: 33.12 dBm
PCS1900: 30.23 dBm
MCS5: GSM850: 27.78 dBm
PCS1900: 26.51 dBm
RMC: UMTS-FDD Band V: 21.97 dBm
UMTS-FDD Band IV: 21.47 dBm
UMTS-FDD Band II: 21.96 dBm
HSDPA: UMTS-FDD Band V: 20.96 dBm
UMTS-FDD Band IV: 21.95 dBm
UMTS-FDD Band II: 20.98 dBm
HSUPA: UMTS-FDD Band V: 20.95 dBm
UMTS-FDD Band IV: 21.63 dBm
UMTS-FDD Band II: 20.98 dBm

ERP/EIRP:

GSM Voice: GSM850: 27.51 dBm / ERP
PCS1900: 28.59 dBm / EIRP
GPRS: GSM850: 28.76 dBm / ERP
PCS1900: 28.57 dBm / EIRP
MCS1: GSM850: 28.05 dBm / ERP
PCS1900: 28.05 dBm / EIRP
RMC: UMTS-FDD Band V: 16.28 dBm / ERP
UMTS-FDD Band IV: 19.07 dBm / EIRP
UMTS-FDD Band II: 19.15 dBm / ERP
HSDPA: UMTS-FDD Band V: 15.98 dBm / ERP
UMTS-FDD Band IV: 19.59 dBm / EIRP
UMTS-FDD Band II: 18.08 dBm / ERP
HSUPA: UMTS-FDD Band V: 15.6 dBm / ERP
UMTS-FDD Band IV: 19.29 dBm / EIRP
UMTS-FDD Band II: 18.48 dBm / ERP

Test Report	16070911-FCC-R1
Page	10 of 98

Trade Name : verykool

GPRS/EGPRS Multi-slot class 8/10/12

FCC ID: WA6SL5200

5. Test Summary

The product was tested in accordance with the following specifications.

All testing has been performed according to below product classification:

FCC Rules	Description of Test	Result
§ 1.1307; § 2.1093	RF Exposure (SAR)	Compliance
§2.1046; § 22.913(a); § 24.232(c); § 27.50(c.10) ; § 27.50(d.4)	RF Output Power	Compliance
§ 24.232 (d) ; § 27.50(d)	Peak-Average Ratio	Compliance
§ 2.1049; § 22.905; § 22.917; § 24.238; § 27.53(a.5)	99% & -26 dB Occupied Bandwidth	Compliance
§ 2.1051; § 22.917(a); § 24.238(a); § 27.53(h)	Spurious Emissions at Antenna Terminal	Compliance
§ 2.1053; § 22.917(a); § 24.238(a); § 27.53(h)	Field Strength of Spurious Radiation	Compliance
§ 22.917(a); § 24.238(a); § 27.53(h)	Out of band emission, Band Edge	Compliance
§ 2.1055; § 22.355; § 24.235; § 27.5(h); § 27.54	Frequency stability vs. temperature Frequency stability vs. voltage	Compliance

Note: Testing was performed by configuring EUT to maximum output power status, the declared output power class for different

Measurement Uncertainty

Emissions		
Test Item	Description	Uncertainty
Band Edge and Radiated Spurious Emissions	Confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2 (for EUTs < 0.5m X 0.5m X 0.5m)	+5.6dB/-4.5dB
-	-	-

6. MEASUREMENTS, EXAMINATION AND DERIVED RESULTS

6.1 RF Exposure (SAR)

Test Result: Pass


The EUT is a portable device, thus requires SAR evaluation;
Please refer to RF Exposure Evaluation Report: 16070911-FCC-H.

6.2 RF Output Power

Temperature	25°C
Relative Humidity	57%
Atmospheric Pressure	1024mbar
Test date :	August 24, 2016
Tested By :	Loren Luo

Requirement(s):

Spec	Item	Requirement	Applicable
§22.913 (a)	a)	ERP:38.45dBm	☒
§24.232 (c)	b)	EIRP:33dBm	☒
§27.50 (c)	c)	EIRP: 30dBm	☒

Test Setup	
------------	--

Test Procedure	For Conducted Power: - The transmitter output port was connected to base station. - Set EUT at maximum power through base station. - Select lowest, middle, and highest channels for each band and different test mode. For ERP/EIRP: According with KDB 971168 v02r02 - The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load which was also placed on the turntable. - The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis. - The frequency range up to tenth harmonic of the fundamental
----------------	---

Test Report	16070911-FCC-R1
Page	14 of 98

	frequency was investigated. - Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution. - Spurious emissions in dB = $10 \log (\text{TX power in Watts}/0.001)$ – the absolute level - Spurious attenuation limit in dB = $43 + 10 \text{ Log}_{10} (\text{power out in Watts})$.
Remark	
Result	☒ Pass ☐ Fail

Test Data ☒ Yes ☐ N/A
 Test Plot ☐ Yes (See below) ☒ N/A

Conducted Power

GSM Mode:

Burst Average Power (dBm);								
Band	GSM850				PCS1900			
Channel	128	190	251	Tune up Power tolerant	512	661	810	Tune up Power tolerant
Frequency (MHz)	824.2	836.6	848.8	/	1850.2	1880	1909.8	/
GSM Voice (1 uplink),GMSK	32.43	32.14	32.02	32±1	30.48	30.21	30.16	30±1
GPRS Multi-Slot Class 8 (1 uplink),GMSK	32.42	32.07	32.61	32±1	30.45	30.19	30.18	30±1
GPRS Multi-Slot Class 10 (2 uplink) GMSK	30.64	30.54	30.17	30±1	28.26	28.23	28.05	28±1
GPRS Multi-Slot Class 12 (4 uplink) GMSK	26.75	26.87	26.78	26±1	24.93	24.72	24.57	24±1
EGPRS Multi-Slot Class 8 (1 uplink) GMSK MCS1	33.12	33.07	33.03	33±1	30.23	30.17	30.03	30±1
EGPRS Multi-Slot Class 10 (2 uplink) GMSK MCS1	31.86	31.42	31.24	31±1	28.37	28.21	28.12	28.5±1
EGPRS Multi-Slot Class 12 (4 uplink) GMSK MCS1	28.52	28.13	28.02	28±1	25.12	25.06	25.04	25±1
EGPRS Multi-Slot Class 8 (1 uplink) MCS 5 8PSK	27.78	27.56	27.37	27±1	26.51	26.47	26.38	26±1
EGPRS Multi-Slot Class 10 (2 uplink) MCS 5 8PSK	26.63	26.39	26.24	26±1	26.29	26.17	26.05	26±1
EGPRS Multi-Slot Class 12 (4 uplink) MCS 5 8PSK	23.45	23.37	23.23	23±1	22.97	22.75	22.55	22±1

Test Report	16070911-FCC-R1
Page	16 of 98

Remark :

GPRS, CS1 coding scheme.

EGPRS, MCS1 coding scheme.

Multi-Slot Class 8 , Support Max 4 downlink, 1 uplink , 5 working link

Multi-Slot Class 10 , Support Max 4 downlink, 2 uplink , 5 working link

Multi-Slot Class 12 , Support Max 4 downlink, 4 uplink , 5 working link

UMTS Mode:

UMTS-FDD Band V

Band/ Time Slot configuration	Channel	Frequency	Average power (dBm)	Tune up Power tolerant
RMC 12.2kbps	4132	826.4	21.97	21±1
	4175	835	21.69	21±1
	4233	846.6	21.16	21±1
HSDPA Subtest1	4132	826.4	20.65	20.5±1
	4175	835	20.87	20.5±1
	4233	846.6	20.96	20.5±1
HSDPA Subtest2	4132	826.4	20.74	20.5±1
	4175	835	20.84	20.5±1
	4233	846.6	20.49	20.5±1
HSDPA Subtest3	4132	826.4	20.84	20.5±1
	4175	835	20.95	20.5±1
	4233	846.6	20.46	20.5±1
HSDPA Subtest4	4132	826.4	20.56	20.5±1
	4175	835	20.79	20.5±1
	4233	846.6	20.72	20.5±1
HSUPA Subtest1	4132	826.4	20.92	20.5±1
	4175	835	20.69	20.5±1
	4233	846.6	20.71	20.5±1
HSUPA Subtest2	4132	826.4	20.49	20.5±1
	4175	835	20.58	20.5±1
	4233	846.6	20.54	20.5±1
HSUPA Subtest3	4132	826.4	20.87	20.5±1
	4175	835	20.69	20.5±1
	4233	846.6	20.93	20.5±1
HSUPA Subtest4	4132	826.4	20.84	20.5±1
	4175	835	20.95	20.5±1
	4233	846.6	20.56	20.5±1
HSUPA Subtest5	4132	826.4	20.89	20.5±1
	4175	835	20.49	20.5±1
	4233	846.6	20.74	20.5±1

UMTS-FDD Band IV

Band/ Time Slot configuration	Channel	Frequency	Average power (dBm)	Tune up Power tolerant
RMC 12.2kbps	4132	826.4	20.86	21±1
	4175	835	21.47	21±1
	4233	846.6	20.62	21±1
HSDPA Subtest1	4132	826.4	20.54	21.3±1
	4175	835	21.95	21.3±1
	4233	846.6	21.46	21.3±1
HSDPA Subtest2	4132	826.4	21.16	21.3±1
	4175	835	21.25	21.3±1
	4233	846.6	21.56	21.3±1
HSDPA Subtest3	4132	826.4	21.78	21.3±1
	4175	835	21.28	21.3±1
	4233	846.6	21.29	21.3±1
HSDPA Subtest4	4132	826.4	21.17	21.3±1
	4175	835	21.19	21.3±1
	4233	846.6	21.18	21.3±1
HSUPA Subtest1	4132	826.4	21.26	21.3±1
	4175	835	21.35	21.3±1
	4233	846.6	21.29	21.3±1
HSUPA Subtest2	4132	826.4	21.25	21.3±1
	4175	835	21.53	21.3±1
	4233	846.6	21.35	21.3±1
HSUPA Subtest3	4132	826.4	21.52	21.3±1
	4175	835	21.58	21.3±1
	4233	846.6	21.25	21.3±1
HSUPA Subtest4	4132	826.4	21.61	21.3±1
	4175	835	21.18	21.3±1
	4233	846.6	21.35	21.3±1
HSUPA Subtest5	4132	826.4	21.43	21.3±1
	4175	835	21.63	21.3±1
	4233	846.6	21.59	21.3±1

UMTS-FDD Band II

Band/ Time Slot configuration	Channel	Frequency	Average power (dBm)	Tune up Power tolerant
RMC 12.2kbps	9262	1852.4	21.49	21±1
	9400	1880	21.96	22±1
	9538	1907.6	21.34	21±1
HSDPA Subtest1	9262	1852.4	20.65	20.5±1
	9400	1880	20.53	20.5±1
	9538	1907.6	20.64	20.5±1
HSDPA Subtest2	9262	1852.4	20.45	20.5±1
	9400	1880	20.87	20.5±1
	9538	1907.6	20.54	20.5±1
HSDPA Subtest3	9262	1852.4	20.63	20.5±1
	9400	1880	20.47	20.5±1
	9538	1907.6	20.98	20.5±1
HSDPA Subtest4	9262	1852.4	20.54	20.5±1
	9400	1880	20.96	20.5±1
	9538	1907.6	20.58	20.5±1
HSUPA Subtest1	9262	1852.4	20.53	20.5±1
	9400	1880	20.87	20.5±1
	9538	1907.6	20.79	20.5±1
HSUPA Subtest2	9262	1852.4	20.84	20.5±1
	9400	1880	20.54	20.5±1
	9538	1907.6	20.98	20.5±1
HSUPA Subtest3	9262	1852.4	20.78	20.5±1
	9400	1880	20.97	20.5±1
	9538	1907.6	20.95	20.5±1
HSUPA Subtest4	9262	1852.4	20.78	20.5±1
	9400	1880	20.63	20.5±1
	9538	1907.6	20.91	20.5±1
HSUPA Subtest5	9262	1852.4	20.86	20.5±1
	9400	1880	20.67	20.5±1
	9538	1907.6	20.88	20.5±1

ERP & EIRP

GSM Voice

ERP for Cellular Band (Part 22H)

Frequency (MHz)	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
824.2	21.24	V	6.8	0.53	27.51	38.45
824.2	19.35	H	6.8	0.53	25.62	38.45
836.6	20.98	V	6.8	0.53	27.25	38.45
836.6	19.173	H	6.8	0.53	25.443	38.45
848.8	21.11	V	6.9	0.53	27.48	38.45
848.8	19.19	H	6.9	0.53	25.56	38.45

EIRP for PCS Band (Part 24E)

Frequency (MHz)	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
1850.2	21.56	V	7.88	0.85	28.59	33
1850.2	19.89	H	7.88	0.85	26.92	33
1880	21.48	V	7.88	0.85	28.51	33
1880	19.76	H	7.88	0.85	26.79	33
1909.8	21.51	V	7.86	0.85	28.52	33
1909.8	19.84	H	7.86	0.85	26.85	33

GPRS:

ERP for Cellular Band (Part 22H)

Frequency (MHz)	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
824.2	21.16	V	6.8	0.53	27.43	38.45
824.2	19.87	H	6.8	0.53	26.14	38.45
836.6	21.08	V	6.8	0.53	27.35	38.45
836.6	19.63	H	6.8	0.53	25.9	38.45
848.8	21.39	V	6.9	0.53	27.76	38.45
848.8	19.65	H	6.9	0.53	26.02	38.45

EIRP for PCS Band (Part 24E)

Frequency (MHz)	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
1850.2	21.54	V	7.88	0.85	28.57	33
1850.2	20.21	H	7.88	0.85	27.24	33
1880	21.18	V	7.88	0.85	28.21	33
1880	19.82	H	7.88	0.85	26.85	33
1909.8	21.22	V	7.86	0.85	28.23	33
1909.8	19.94	H	7.86	0.85	26.95	33

EGPRS (MCS5):

ERP for Cellular Band (Part 22H)

Frequency (MHz)	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
824.2	21.78	V	6.8	0.53	28.05	38.45
824.2	19.97	H	6.8	0.53	26.24	38.45
836.6	21.35	V	6.8	0.53	27.62	38.45
836.6	19.46	H	6.8	0.53	25.73	38.45
848.8	21.44	V	6.9	0.53	27.81	38.45
848.8	19.61	H	6.9	0.53	25.98	38.45

EIRP for PCS Band (Part 24E)

Frequency (MHz)	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
1850.2	21.02	V	7.88	0.85	28.05	33
1850.2	19.75	H	7.88	0.85	26.78	33
1880	20.58	V	7.88	0.85	27.61	33
1880	19.24	H	7.88	0.85	26.27	33
1909.8	20.69	V	7.86	0.85	27.7	33
1909.8	19.32	H	7.86	0.85	26.33	33

RMC

ERP for UMTS-FDD Band V (Part 22H)

Frequency (MHz)	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
826.4	10.01	V	6.8	0.53	16.28	38.45
826.4	8.28	H	6.8	0.53	14.55	38.45
835	9.56	V	6.8	0.53	15.83	38.45
835	7.84	H	6.8	0.53	14.11	38.45
846.6	9.86	V	6.9	0.53	16.23	38.45
846.6	8.01	H	6.9	0.53	14.38	38.45

EIRP for UMTS-FDD Band IV (Part 27E)

Frequency (MHz)	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
1712.4	11.56	V	7.76	0.82	18.5	30
1712.4	9.88	H	7.76	0.82	16.82	30
1740	12.13	V	7.76	0.82	19.07	30
1740	10.21	H	7.76	0.82	17.15	30
1752.6	11.49	V	7.74	0.82	18.41	30
1752.6	9.76	H	7.74	0.82	16.68	30

EIRP for UMTS-FDD Band II (Part 24E)

Frequency (MHz)	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
1852.4	12.03	V	7.88	0.85	19.06	33
1852.4	10.32	H	7.88	0.85	17.35	33
1880	12.12	V	7.88	0.85	19.15	33
1880	10.56	H	7.88	0.85	17.59	33
1907.6	11.86	V	7.86	0.85	18.87	33
1907.6	10.32	H	7.86	0.85	17.33	33

HSDPA

ERP for UMTS-FDD Band V (Part 22H)

Frequency (MHz)	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
826.4	9.65	V	6.8	0.53	15.92	38.45
826.4	8.09	H	6.8	0.53	14.36	38.45
835	9.48	V	6.8	0.53	15.75	38.45
835	8.17	H	6.8	0.53	14.44	38.45
846.6	9.61	V	6.9	0.53	15.98	38.45
846.6	8.01	H	6.9	0.53	14.38	38.45

EIRP for UMTS-FDD Band IV (Part 27E)

Frequency (MHz)	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
1712.4	12.12	V	7.76	0.82	19.06	30
1712.4	11.24	H	7.76	0.82	18.18	30
1740	12.34	V	7.76	0.82	19.28	30
1740	11.45	H	7.76	0.82	18.39	30
1752.6	12.67	V	7.74	0.82	19.59	30
1752.6	11.59	H	7.74	0.82	18.51	30

EIRP for UMTS-FDD Band II (Part 24E)

Frequency (MHz)	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
1852.4	11.01	V	7.88	0.85	18.04	33
1852.4	9.57	H	7.88	0.85	16.6	33
1880	11.05	V	7.88	0.85	18.08	33
1880	9.28	H	7.88	0.85	16.31	33
1907.6	10.97	V	7.86	0.85	17.98	33
1907.6	9.31	H	7.86	0.85	16.32	33

HSUPA

ERP for UMTS-FDD Band V (Part 22H)

Frequency (MHz)	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
826.4	9.01	V	6.8	0.53	15.28	38.45
826.4	7.86	H	6.8	0.53	14.13	38.45
835	9.33	V	6.8	0.53	15.6	38.45
835	8.01	H	6.8	0.53	14.28	38.45
846.6	9.05	V	6.9	0.53	15.42	38.45
846.6	7.92	H	6.9	0.53	14.29	38.45

EIRP for UMTS-FDD Band IV (Part 27E)

Frequency (MHz)	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
1712.4	12.09	V	7.76	0.82	19.03	30
1712.4	10.87	H	7.76	0.82	17.81	30
1740	12.14	V	7.76	0.82	19.08	30
1740	10.96	H	7.76	0.82	17.9	30
1752.6	12.37	V	7.74	0.82	19.29	30
1752.6	11.05	H	7.74	0.82	17.97	30


EIRP for UMTS-FDD Band II (Part 24E)

Frequency (MHz)	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
1852.4	11.28	V	7.88	0.85	18.31	33
1852.4	10.34	H	7.88	0.85	17.37	33
1880	11.45	V	7.88	0.85	18.48	33
1880	10.59	H	7.88	0.85	17.62	33
1907.6	11.31	V	7.86	0.85	18.32	33
1907.6	10.38	H	7.86	0.85	17.39	33

6.3 Peak-Average Ratio

Temperature	25°C
Relative Humidity	57%
Atmospheric Pressure	1024mbar
Test date :	August 24, 2016
Tested By :	Loren Luo

Requirement(s):

Spec	Item	Requirement	Applicable
§24.232(d) § 27.50(d)	a)	The peak-to-average ratio (PAR) of the transmission may not exceed 13dB.	☒
Test Setup			
Test Procedure	According with KDB 971168 v02r02 5.7.2 Alternate procedure for PAPR 5.1.2 Peak power measurements with a peak power meter The total peak output power may be measured using a broadband peak RF power meter. The power meter must have a video bandwidth that is greater than or equal to the emission bandwidth and utilize a fast-responding diode detector. 5.2.3 Average power measurement with average power meter As an alternative to the use of a spectrum/signal analyzer or EMI receiver to perform a measurement of the total in-band average output power, a wideband RF average power meter with a thermocouple detector or equivalent can be used under certain conditions If the EUT can be configured to transmit continuously (i.e., the burst duty cycle $\geq 98\%$) and at all times the EUT is transmitting at its maximum output		

Test Report	16070911-FCC-R1
Page	27 of 98

	power level, then a conventional wide-band RF power meter can be used. If the EUT cannot be configured to transmit continuously (i.e., the burst duty cycle < 98%), then there are two options for the use of an average power meter. First, a gated average power meter can be used to perform the measurement if the gating parameters can be adjusted such that the power is measured only over active transmission bursts at maximum output power levels. A conventional average power meter can also be used if the measured burst duty cycle is constant (i.e., duty cycle variations are less than ± 2 percent) by performing the measurement over the on/off burst cycles and then correcting (increasing) the measured level by a factor equal to $10\log(1/\text{duty cycle})$
Remark	
Result	☒ Pass ☐ Fail

Test Data ☒ Yes ☐ N/A
 Test Plot ☐ Yes (See below) ☒ N/A

GSM : GSM 1900 PK-AV POWER (PART 24E)

Frequency (MHz)	Conducted power(dBm)		Peak-Average Ratio(PAR)
	Peak	Average	
1850.2	32.52	30.48	2.04
1880	32.45	30.21	2.24
1909.8	32.34	30.16	2.18

GPRS 1900 PK-AV POWER (PART 24E)

Frequency (MHz)	Conducted power(dBm)		Peak-Average Ratio(PAR)
	Peak	Average	
1850.2	32.41	30.45	1.96
1880	32.13	30.19	1.94
1909.8	32.21	30.18	2.03

EGPRS (MSC 1) 1900 PK-AV POWER (PART 24E)

Frequency (MHz)	Conducted power(dBm)		Peak-Average Ratio(PAR)
	Peak	Average	
1850.2	28.17	26.51	1.66
1880	28.24	26.47	1.77
1909.8	28.13	26.38	1.75

RMC : UMTS-FDD Band 2 PK-AV POWER (PART 24E)

Frequency (MHz)	Conducted power(dBm)		Peak-Average Ratio(PAR)
	Peak	Average	
1852.4	23.78	21.49	2.29
1880	23.79	21.96	1.83
1907.6	23.82	21.34	2.48

UMTS-FDD Band 4 PK-AV POWER (PART 27)

Frequency (MHz)	Conducted power(dBm)		Peak-Average Ratio(PAR)
	Peak	Average	
1712.6	22.89	20.86	2.03
1732.6	22.68	21.47	1.21
1752.4	22.79	20.62	2.17

HSUPA : UMTS-FDD Band 2 PK-AV POWER (PART 24E)

Frequency (MHz)	Conducted power(dBm)		Peak-Average Ratio(PAR)
	Peak	Average	
1852.4	23.16	20.53	2.63
1880	23.24	20.87	2.37
1907.6	23.12	20.79	2.33

UMTS-FDD Band 4 PK-AV POWER (PART 27)

Frequency (MHz)	Conducted power(dBm)		Peak-Average Ratio(PAR)
	Peak	Average	
1712.6	22.68	21.26	1.42
1732.6	22.49	21.35	1.14
1752.4	22.38	21.29	1.09

HSDPA : UMTS-FDD Band 2 PK-AV POWER (PART 24E)

Frequency (MHz)	Conducted power(dBm)		Peak-Average Ratio(PAR)
	Peak	Average	
1852.4	23.61	20.65	2.96
1880	23.42	20.53	2.89
1907.6	23.15	20.64	2.51


UMTS-FDD Band 4 PK-AV POWER (PART 27)

Frequency (MHz)	Conducted power(dBm)		Peak-Average Ratio(PAR)
	Peak	Average	
1712.6	22.87	20.54	2.33
1732.6	23.59	21.95	1.64
1752.4	22.76	21.46	1.3

6.4 Occupied Bandwidth

Temperature	23°C
Relative Humidity	51%
Atmospheric Pressure	1018mbar
Test date :	August 18, 2016
Tested By :	Loren Luo

Requirement(s):

Spec	Item	Requirement	Applicable
§2.1049, §22.917, §22.905 §24.238 §27.53(a)	a)	99% Occupied Bandwidth(kHz)	☒
	b)	26 dB Bandwidth(kHz)	☒
Test Setup			
Test Procedure	- The EUT was connected to Spectrum Analyzer and Base Station via power divider. - The 99% and 26 dB occupied bandwidth (BW) of the middle channel for the highest RF powers.		
Remark			
Result	☒ Pass ☐ Fail		

Test Data ☒ Yes ☐ N/A

Test Plot ☒ Yes (See below) ☐ N/A

GSM Voice:

Cellular Band (Part 22H) result

Channel	Frequency (MHz)	99% Occupied Bandwidth (kHz)	26 dB Bandwidth (kHz)
128	824.2	247.5934	323.067
190	836.6	245.3953	322.116
251	848.8	244.5578	323.281

PCS Band (Part 24E) result

Channel	Frequency (MHz)	99% Occupied Bandwidth (kHz)	26 dB Bandwidth (kHz)
512	1850.2	248.1345	319.470
661	1880.0	246.0536	321.038
810	1909.8	245.6545	329.667

GPRS:

Cellular Band (Part 22H) result

Channel	Frequency (MHz)	99% Occupied Bandwidth (kHz)	26 dB Bandwidth (kHz)
128	824.2	245.3305	320.889
190	836.6	245.5740	321.974
251	848.8	244.6702	321.767

PCS Band (Part 24E) result

Channel	Frequency (MHz)	99% Occupied Bandwidth (kHz)	26 dB Bandwidth (kHz)
512	1850.2	246.6785	320.766
661	1880.0	246.5636	322.032
810	1909.8	246.9826	323.713

EGPRS (MCS 5):

Cellular Band (Part 22H) result

Channel	Frequency (MHz)	99% Occupied Bandwidth (kHz)	26 dB Bandwidth (kHz)
128	824.2	247.0473	316.247
190	836.6	248.7066	317.057
251	848.8	244.9292	318.512

PCS Band (Part 24E) result

Channel	Frequency (MHz)	99% Occupied Bandwidth (kHz)	26 dB Bandwidth (kHz)
512	1850.2	243.2294	317.071
661	1880.0	246.1900	322.758
810	1909.8	246.6229	320.722

RMC:

UMTS-FDD Band V (Part 22H)

Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26 dB Bandwidth (MHz)
4132	826.4	4.2016	4.905
4175	835.0	4.2112	4.875
4233	846.6	4.2071	4.878

UMTS-FDD Band IV (Part 27E)

Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26 dB Bandwidth (MHz)
1313	1712.6	4.2137	4.865
1413	1732.6	4.2206	4.913
1512	1752.4	4.2108	4.907

UMTS-FDD Band II (Part 24E)

Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26 dB Bandwidth (MHz)
9262	1852.4	4.2197	4.897
9400	1880.0	4.2117	4.892
9538	1907.6	4.2081	4.894

HSDPA:

UMTS-FDD Band V (Part 22H)

Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26 dB Bandwidth (MHz)
4132	826.4	4.2053	4.886
4175	835.0	4.2172	4.913
4233	846.6	4.2090	4.892

UMTS-FDD Band IV (Part 27E)

Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26 dB Bandwidth (MHz)
1313	1712.6	4.2181	4.895
1413	1732.6	4.2180	4.920
1512	1752.4	4.2047	4.894

UMTS-FDD Band II (Part 24E)

Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26 dB Bandwidth (MHz)
9262	1852.4	4.2056	4.901
9400	1880.0	4.2102	4.908
9538	1907.6	4.2085	4.903

HSUPA:

UMTS-FDD Band V (Part 22H)

Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26 dB Bandwidth (MHz)
4132	826.4	4.2076	4.902
4175	835.0	4.1993	4.901
4233	846.6	4.1943	4.876

UMTS-FDD Band IV (Part 27E)


Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26 dB Bandwidth (MHz)
1313	1712.6	4.1956	4.919
1413	1732.6	4.2082	4.894
1512	1752.4	4.2102	4.873

UMTS-FDD Band II (Part 24E)


Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26 dB Bandwidth (MHz)
9262	1852.4	4.2066	4.886
9400	1880.0	4.2155	4.918
9538	1907.6	4.2010	4.883

Test Plots


GMS Voice:

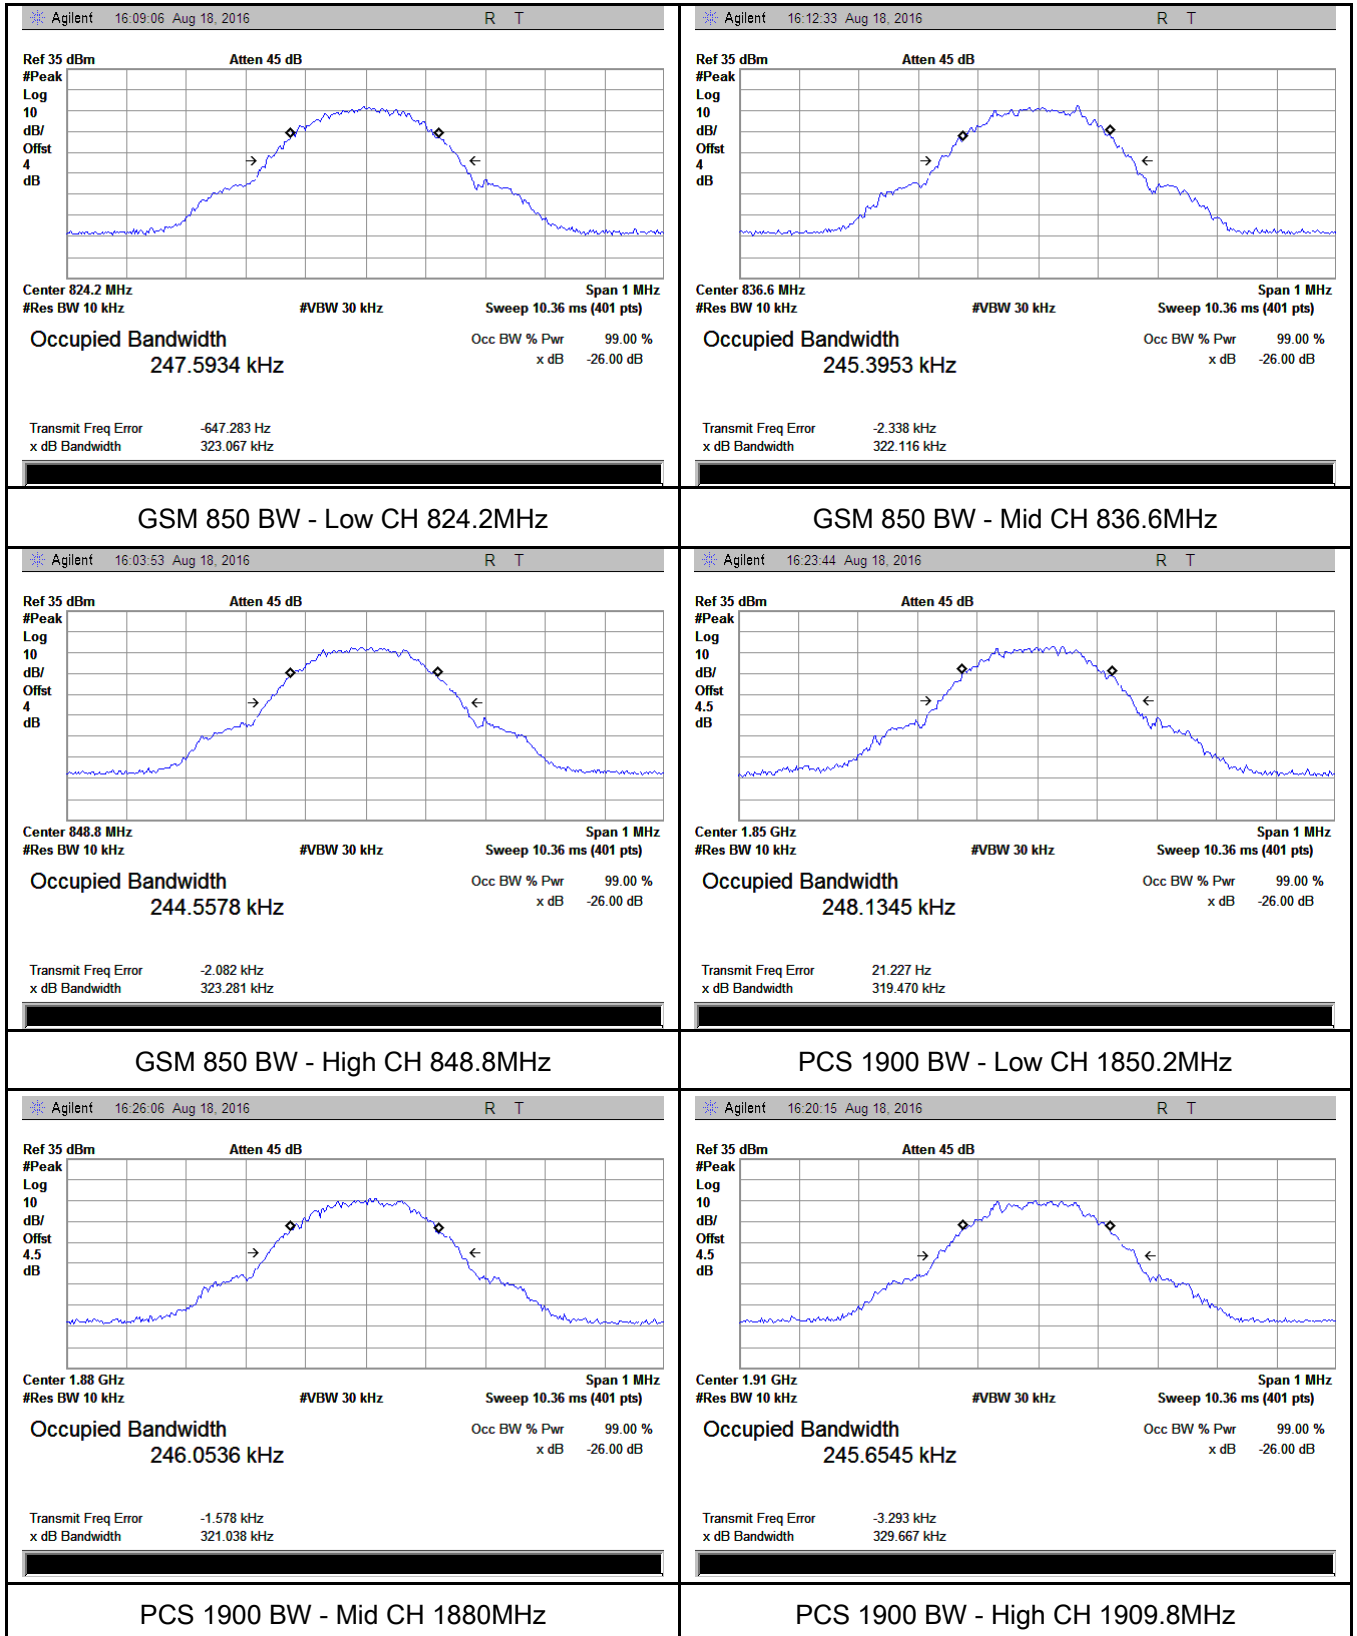


GPRS:

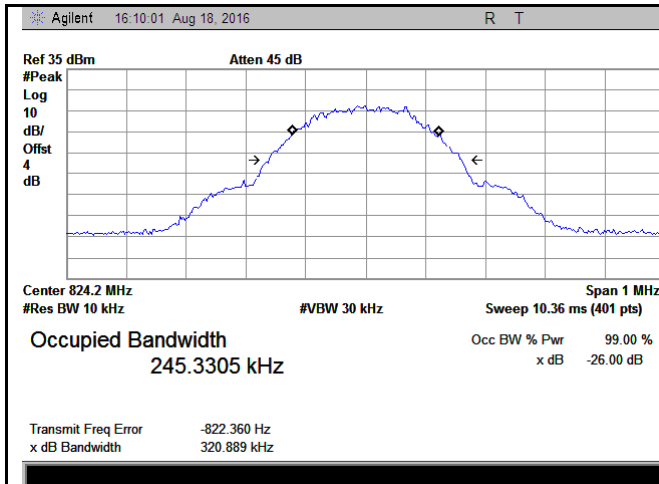


GSM 850 BW - Low CH 824.2MHz

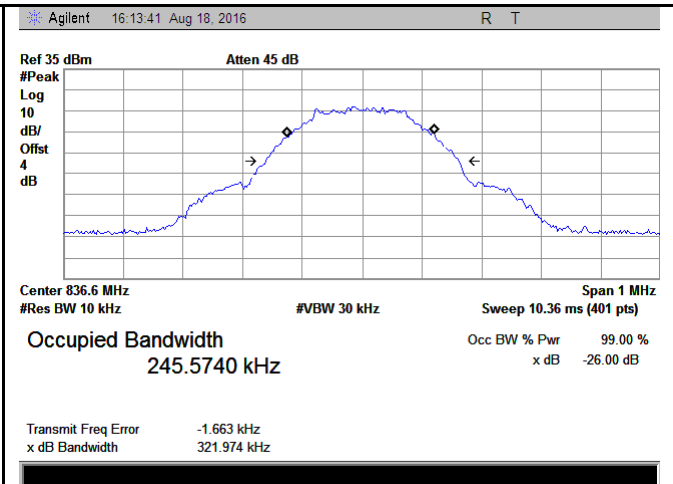


GSM 850 BW - Mid CH 836.6MHz

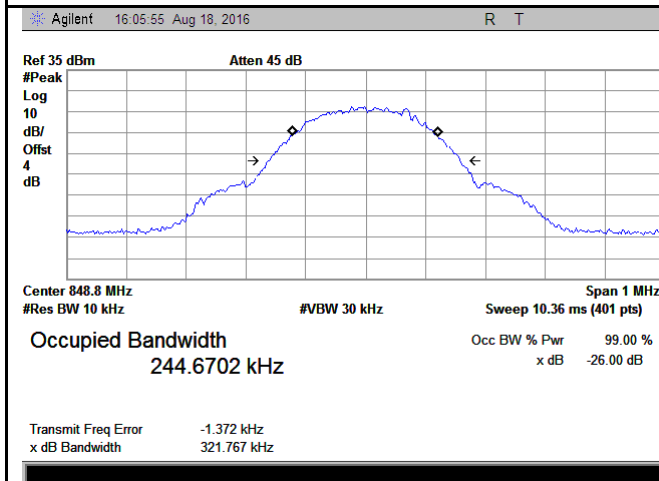


GSM 850 BW - High CH 848.8MHz

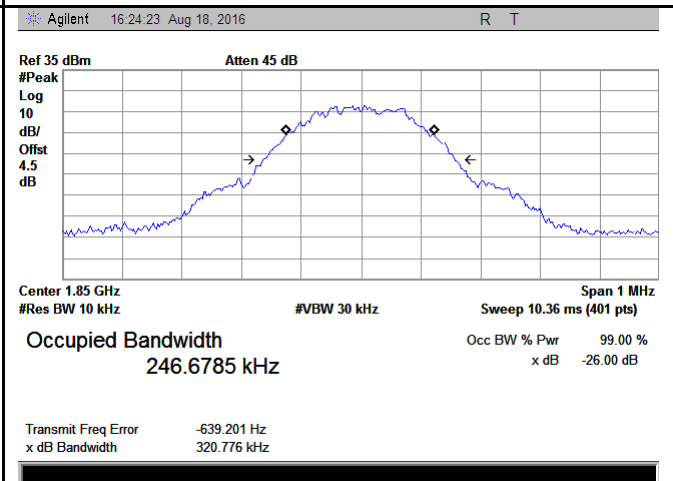

PCS 1900 BW - Low CH 1850.2MHz

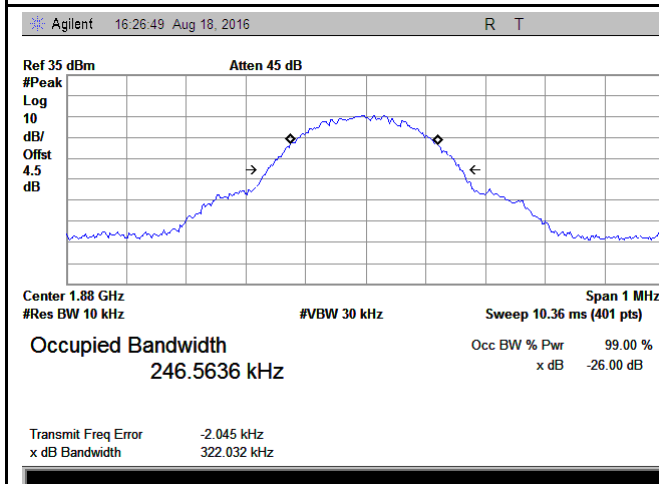


PCS 1900 BW - Mid CH 1880MHz

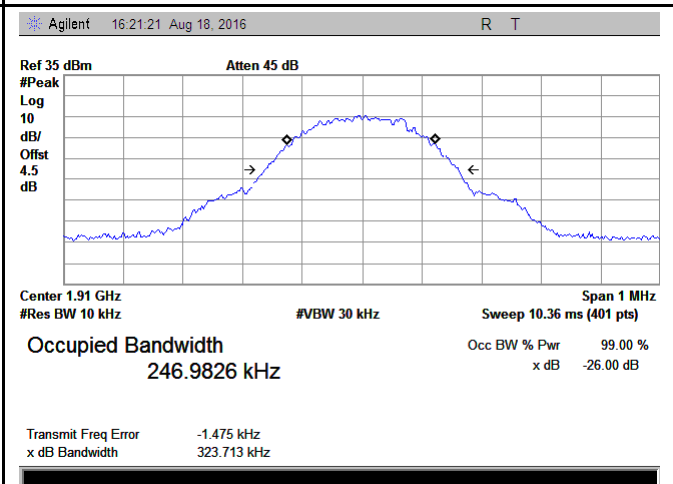


PCS 1900 BW - High CH 1909.8MHz


EGPRS (MCS 5):

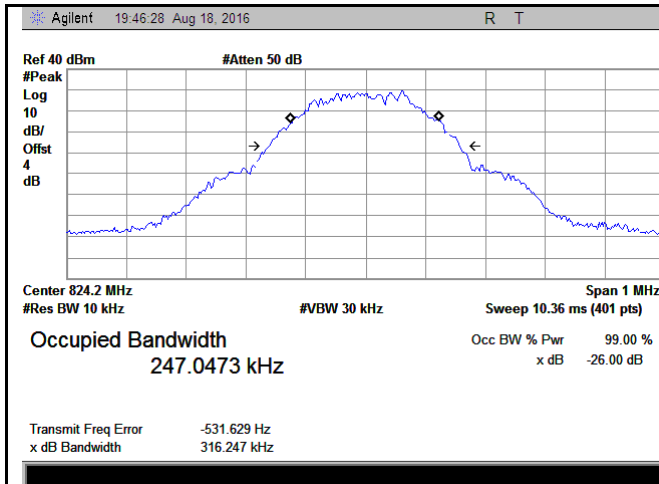


GSM 850 BW - Low CH 824.2MHz

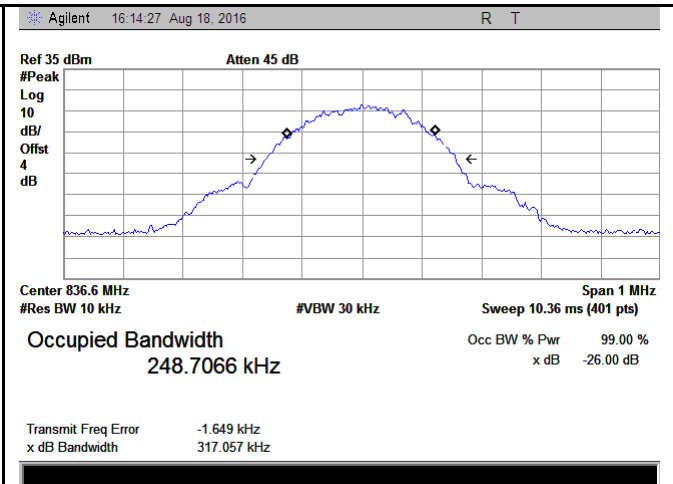


GSM 850 BW - Mid CH 836.6MHz

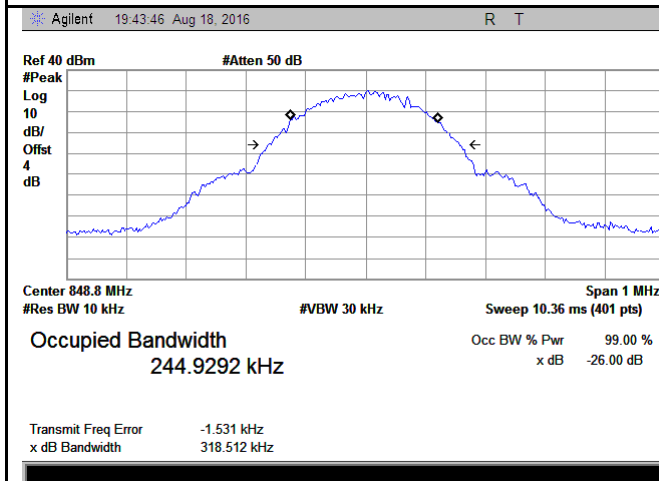


GSM 850 BW - High CH 848.8MHz

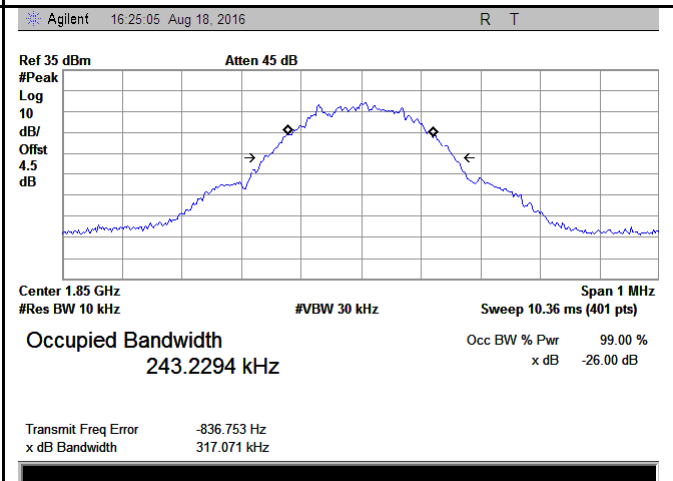

PCS 1900 BW - Low CH 1850.2MHz

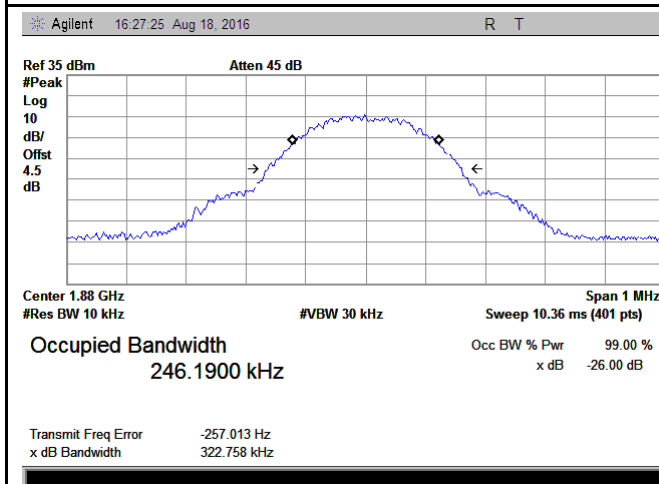



PCS 1900 BW - Mid CH 1880MHz

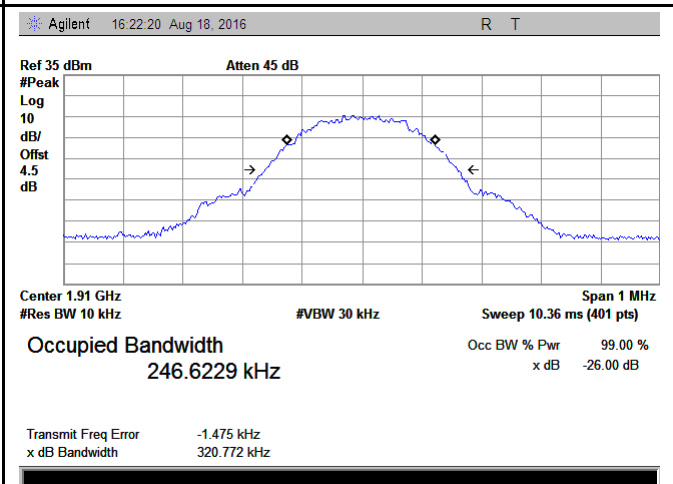


PCS 1900 BW - High CH 1909.8MHz

RMC:

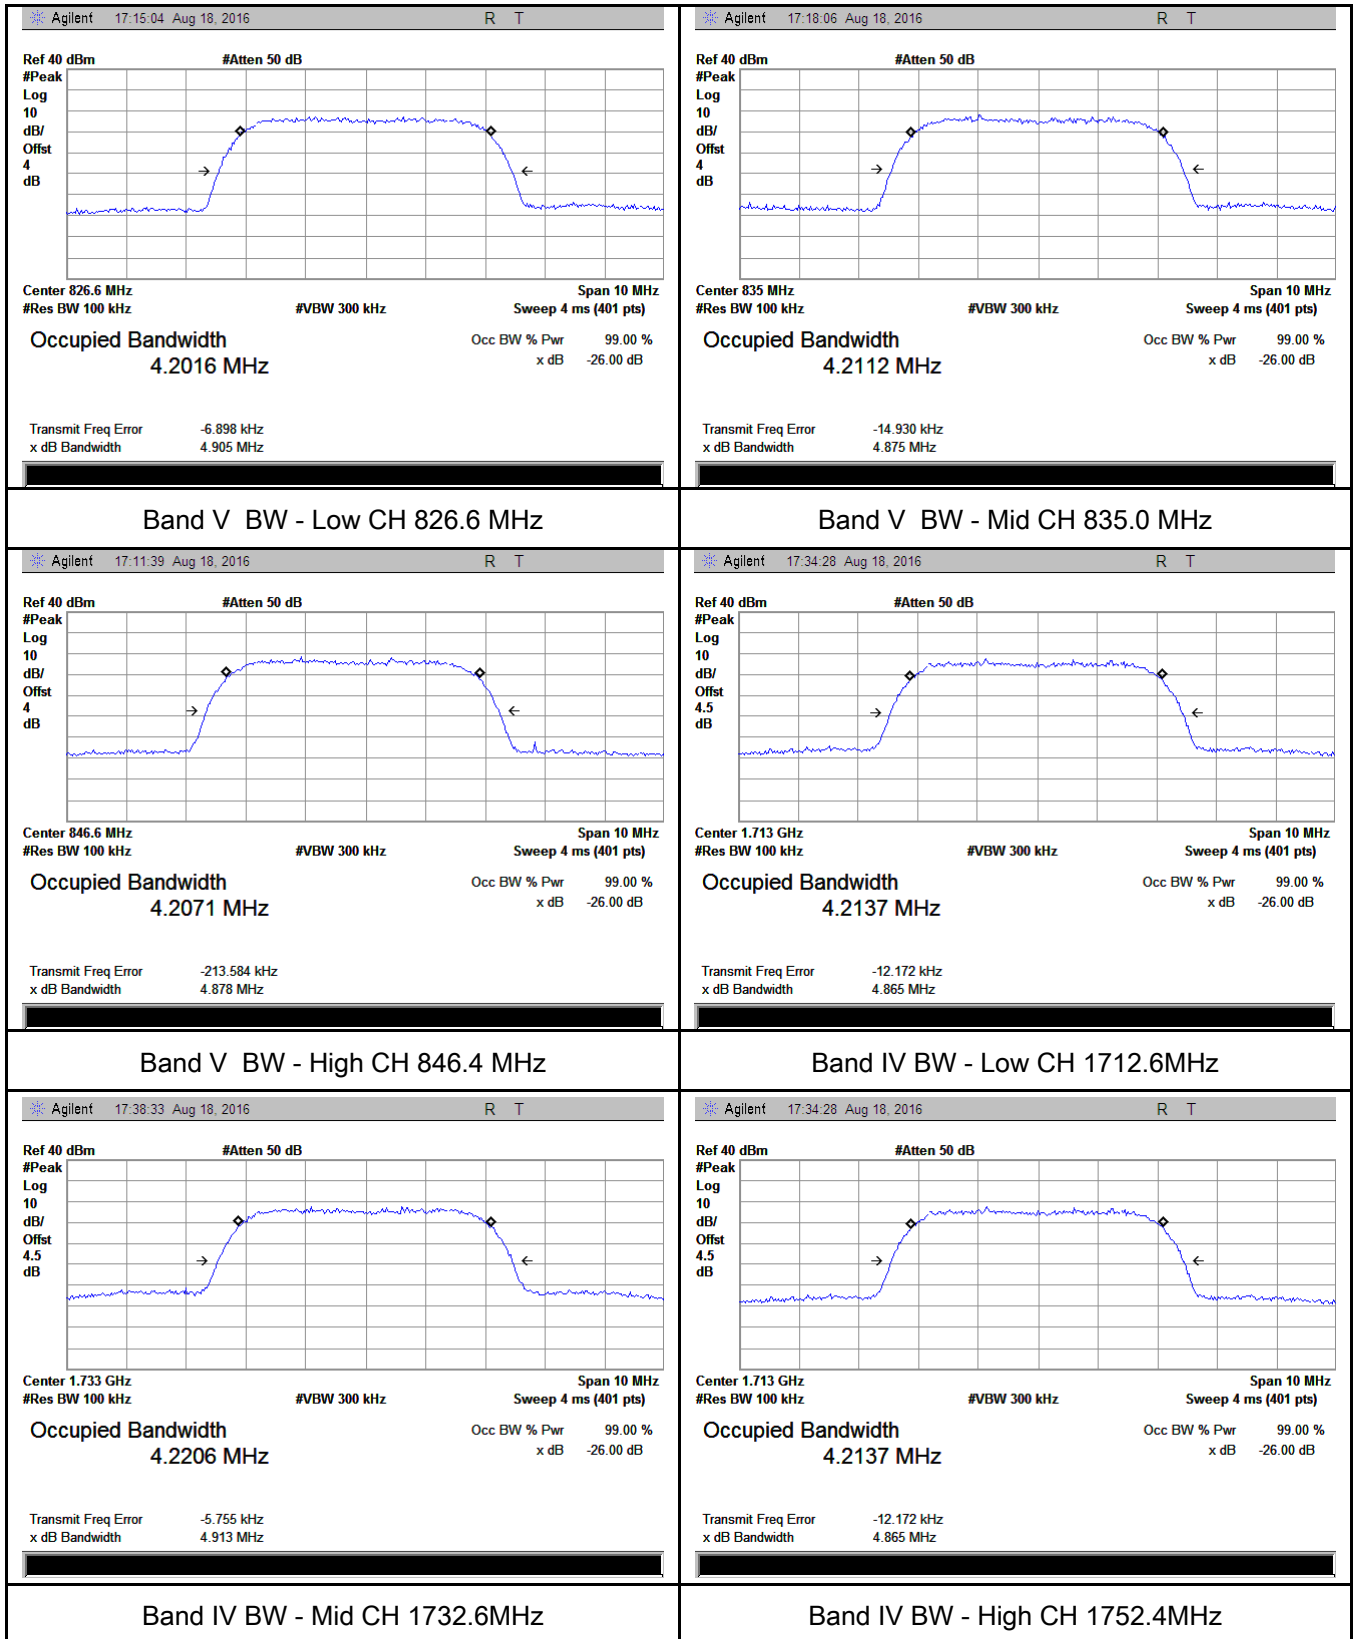


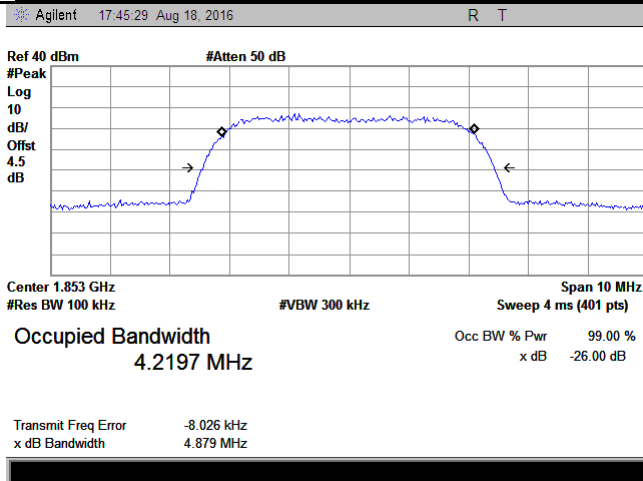

Band II BW - Low CH 1852.4MHz

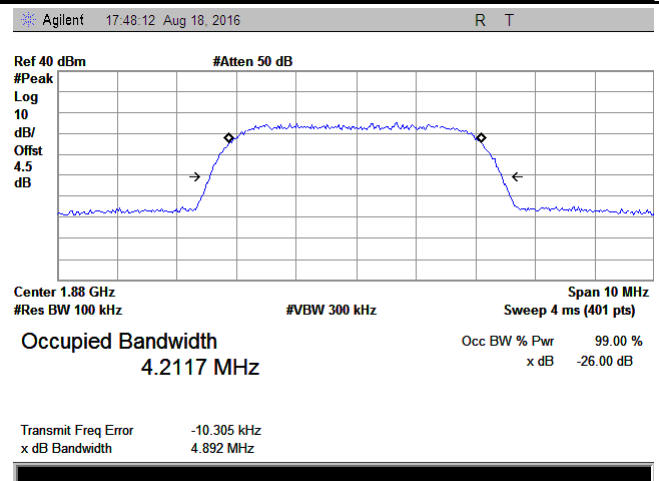


Band II BW - Mid CH 1880MHz

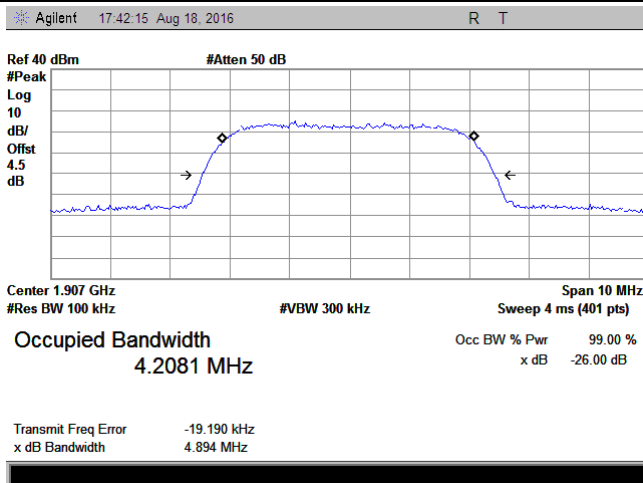


Band II BW - High CH 1907.6MHz

HSDPA:

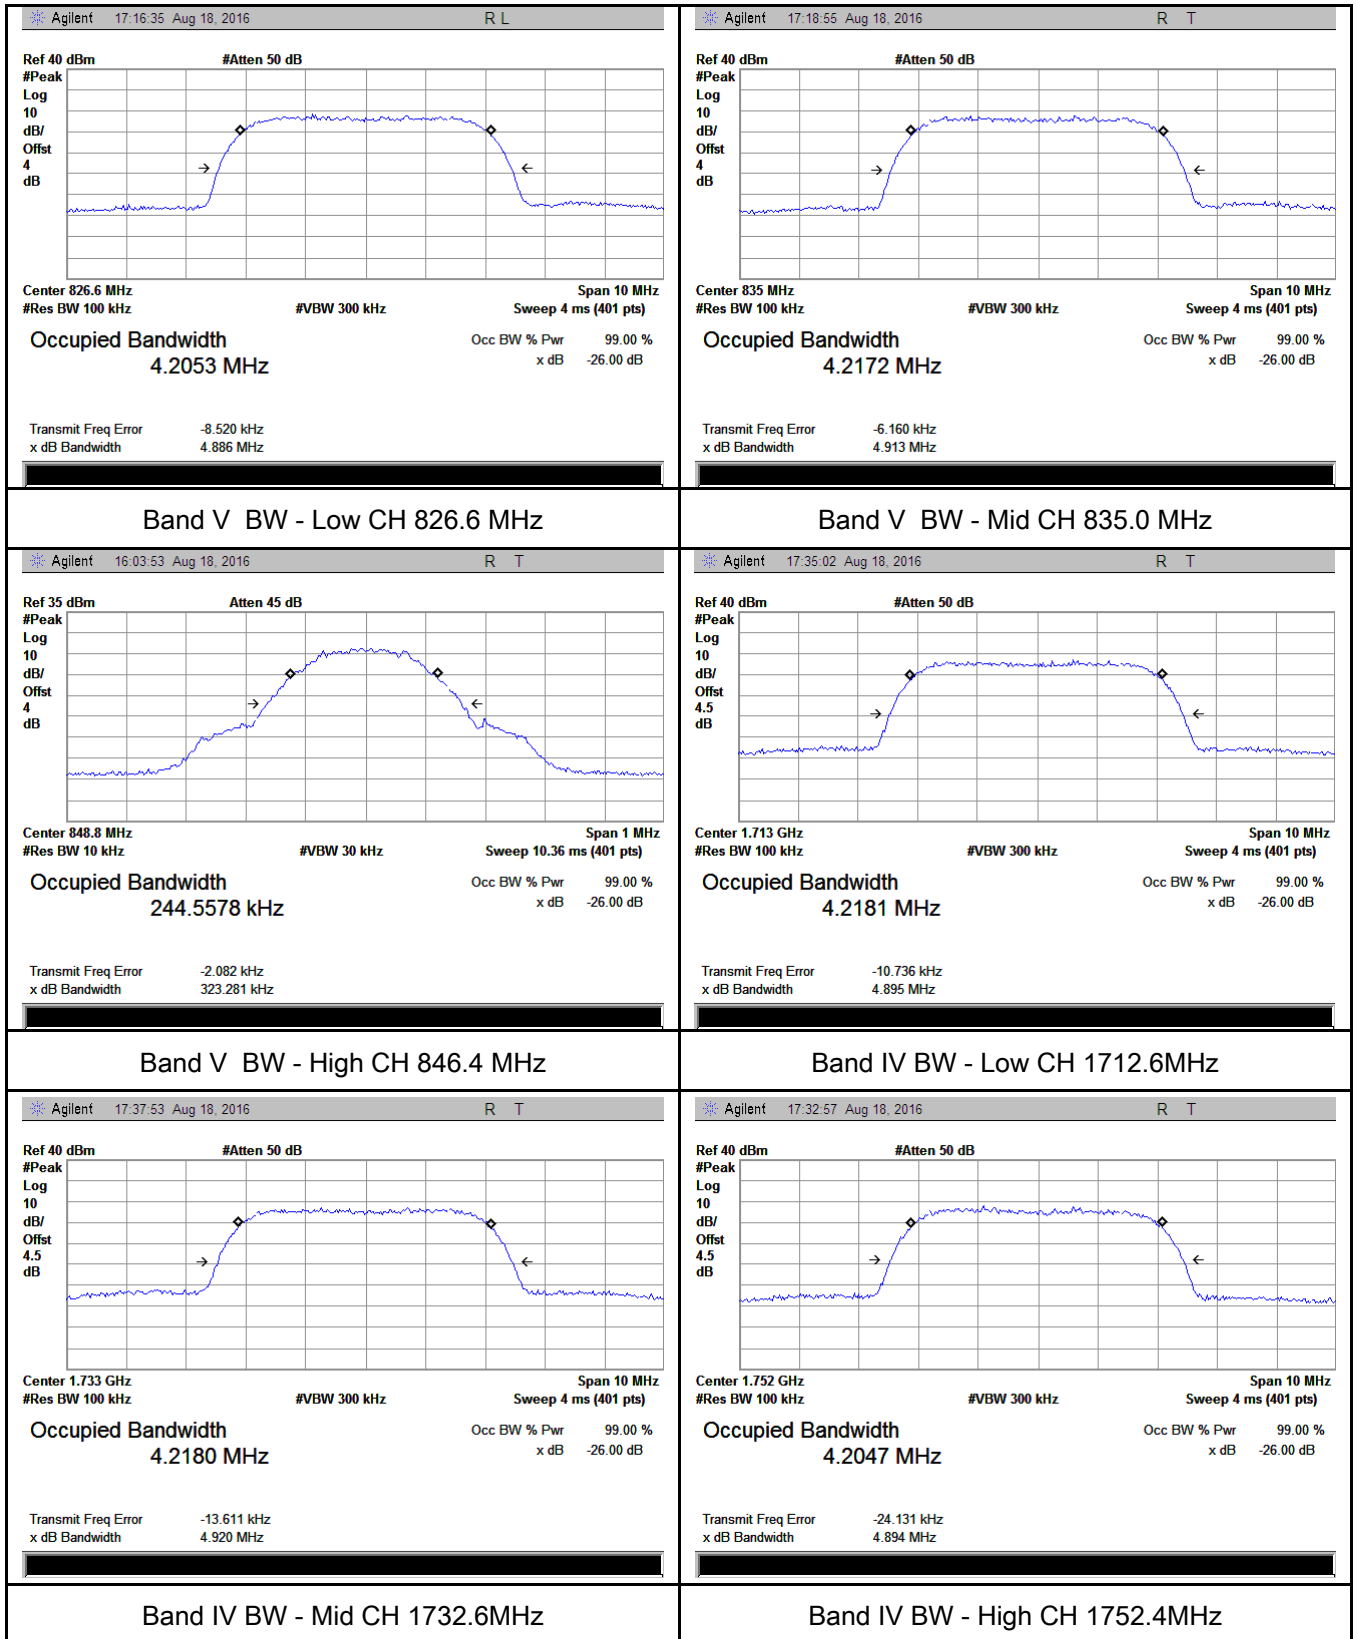

Agilent 17:46:39 Aug 18, 2016

R T

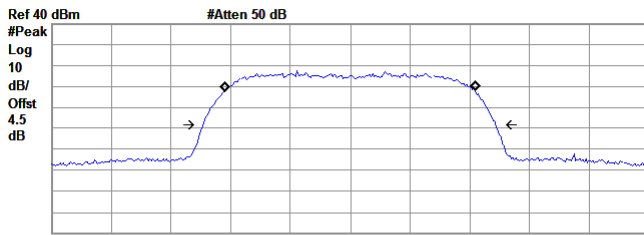


Center 1.853 GHz
#Res BW 100 kHz
#VBW 300 kHz
Span 10 MHz
Sweep 4 ms (401 pts)
Occupied Bandwidth
4.2056 MHz
Occ BW % Pwr 99.00 %
x dB -26.00 dB

Transmit Freq Error -8.933 kHz
x dB Bandwidth 4.901 MHz

Agilent 17:48:59 Aug 18, 2016

R T

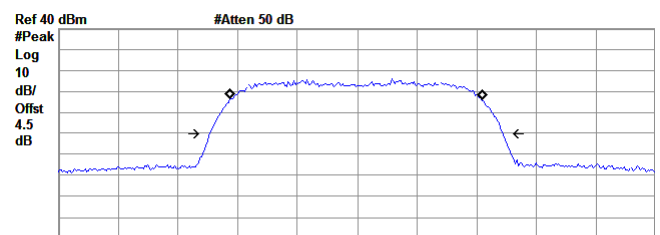

Center 1.88 GHz
#Res BW 100 kHz
#VBW 300 kHz
Span 10 MHz
Sweep 4 ms (401 pts)
Occupied Bandwidth
4.2102 MHz
Occ BW % Pwr 99.00 %
x dB -26.00 dB


Transmit Freq Error -10.915 kHz
x dB Bandwidth 4.908 MHz

Band II BW - Low CH 1852.4MHz

Band II BW - Mid CH 1880MHz

Agilent 17:43:28 Aug 18, 2016

R T

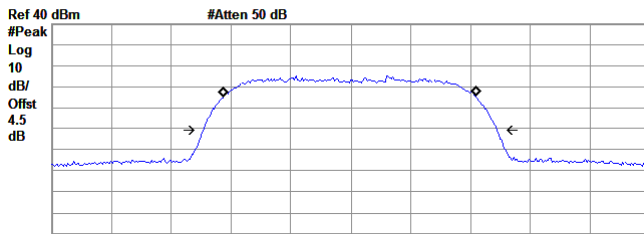


Center 1.907 GHz
#Res BW 100 kHz
#VBW 300 kHz
Span 10 MHz
Sweep 4 ms (401 pts)
Occupied Bandwidth
4.2085 MHz
Occ BW % Pwr 99.00 %
x dB -26.00 dB

Transmit Freq Error -16.228 kHz
x dB Bandwidth 4.903 MHz


Band II BW - High CH 1907.6MHz

HSUPA:

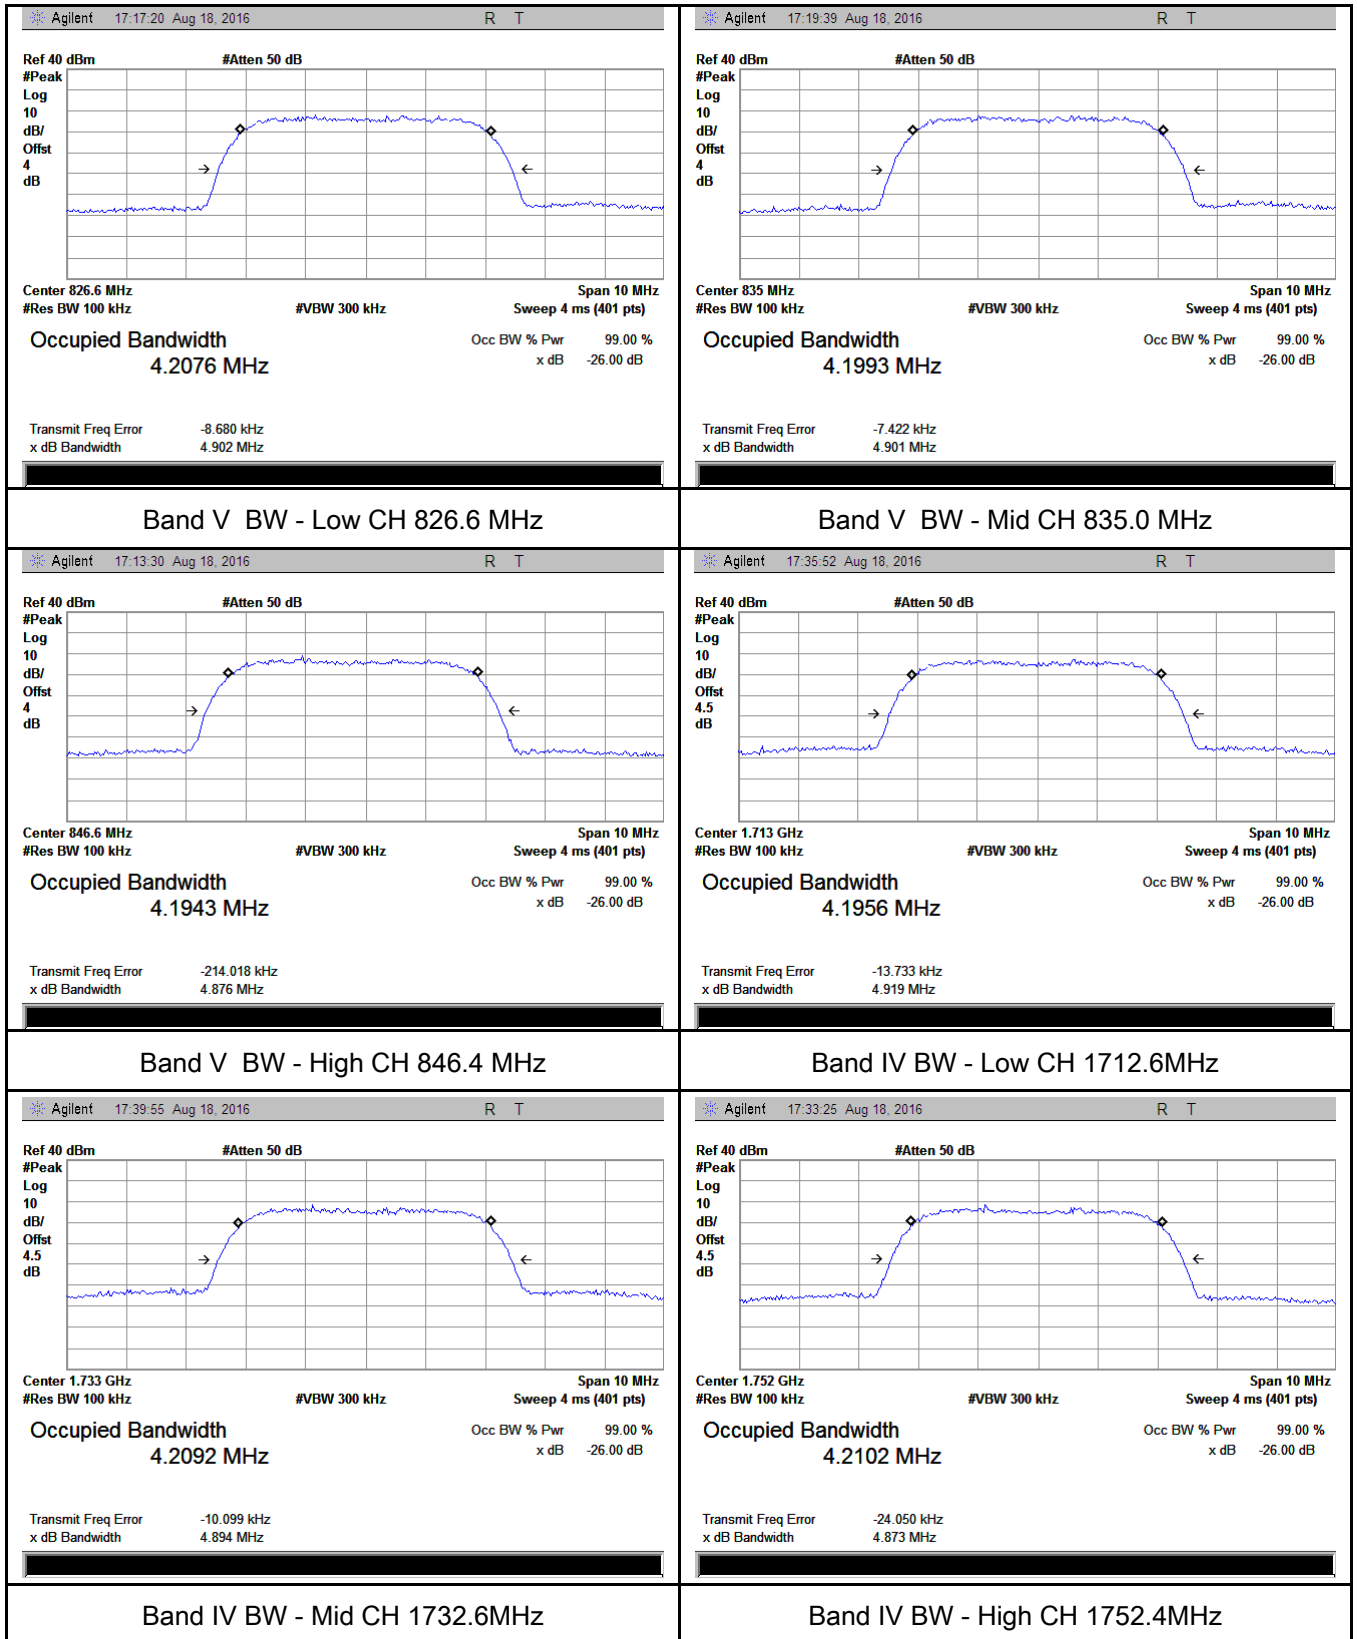

Agilent 17:47:34 Aug 18, 2016

R T

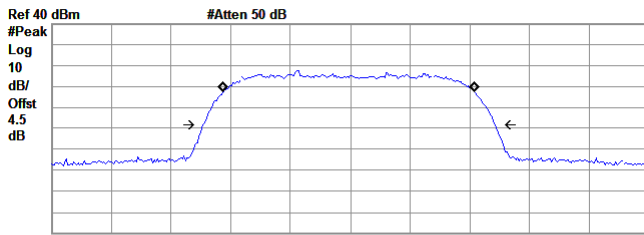


Center 1.853 GHz
#Res BW 100 kHz
#VBW 300 kHz
Span 10 MHz
Sweep 4 ms (401 pts)
Occupied Bandwidth
4.2066 MHz
Occ BW % Pwr 99.00 %
x dB -26.00 dB

Transmit Freq Error -18.567 kHz
x dB Bandwidth 4.886 MHz

Agilent 17:49:23 Aug 18, 2016

R T

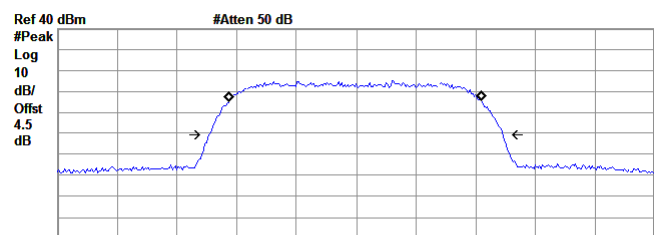

Center 1.88 GHz
#Res BW 100 kHz
#VBW 300 kHz
Span 10 MHz
Sweep 4 ms (401 pts)
Occupied Bandwidth
4.2155 MHz
Occ BW % Pwr 99.00 %
x dB -26.00 dB


Transmit Freq Error -11.504 kHz
x dB Bandwidth 4.918 MHz

Band II BW - Low CH 1852.4MHz

Band II BW - Mid CH 1880MHz

Agilent 17:44:24 Aug 18, 2016

R T

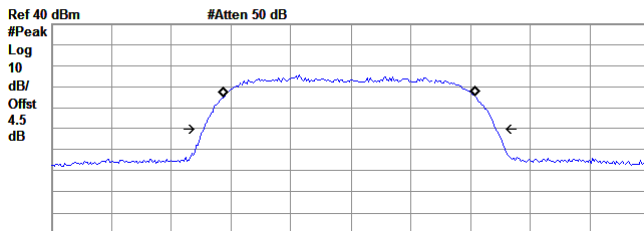

Center 1.907 GHz
#Res BW 100 kHz
#VBW 300 kHz
Span 10 MHz
Sweep 4 ms (401 pts)
Occupied Bandwidth
4.2010 MHz
Occ BW % Pwr 99.00 %
x dB -26.00 dB


Transmit Freq Error -17.094 kHz
x dB Bandwidth 4.883 MHz

Band II BW - High CH 1907.6MHz

6.5 Spurious Emissions at Antenna Terminals

Temperature	23°C
Relative Humidity	59%
Atmospheric Pressure	1026mbar
Test date :	August 26, 2016
Tested By :	Loren Luo

Requirement(s):


Spec	Item	Requirement	Applicable
§2.1051, §22.917(a)& §24.238(a) § 27.53(h)	a)	The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB	☒
Test Setup			
Test Procedure	- The EUT was connected to Spectrum Analyzer and Base Station via power divider. - The Band Edges of low and high channels for the highest RF powers were measured. - Setting RBW as roughly BW/100.		
Remark			
Result	☒ Pass ☐ Fail		

Test Data ☒ Yes ☐ N/A
 Test Plot ☒ Yes (See below) ☐ N/A


Test Plots

GSM Voice:

Cellular Band (Part 22H) result

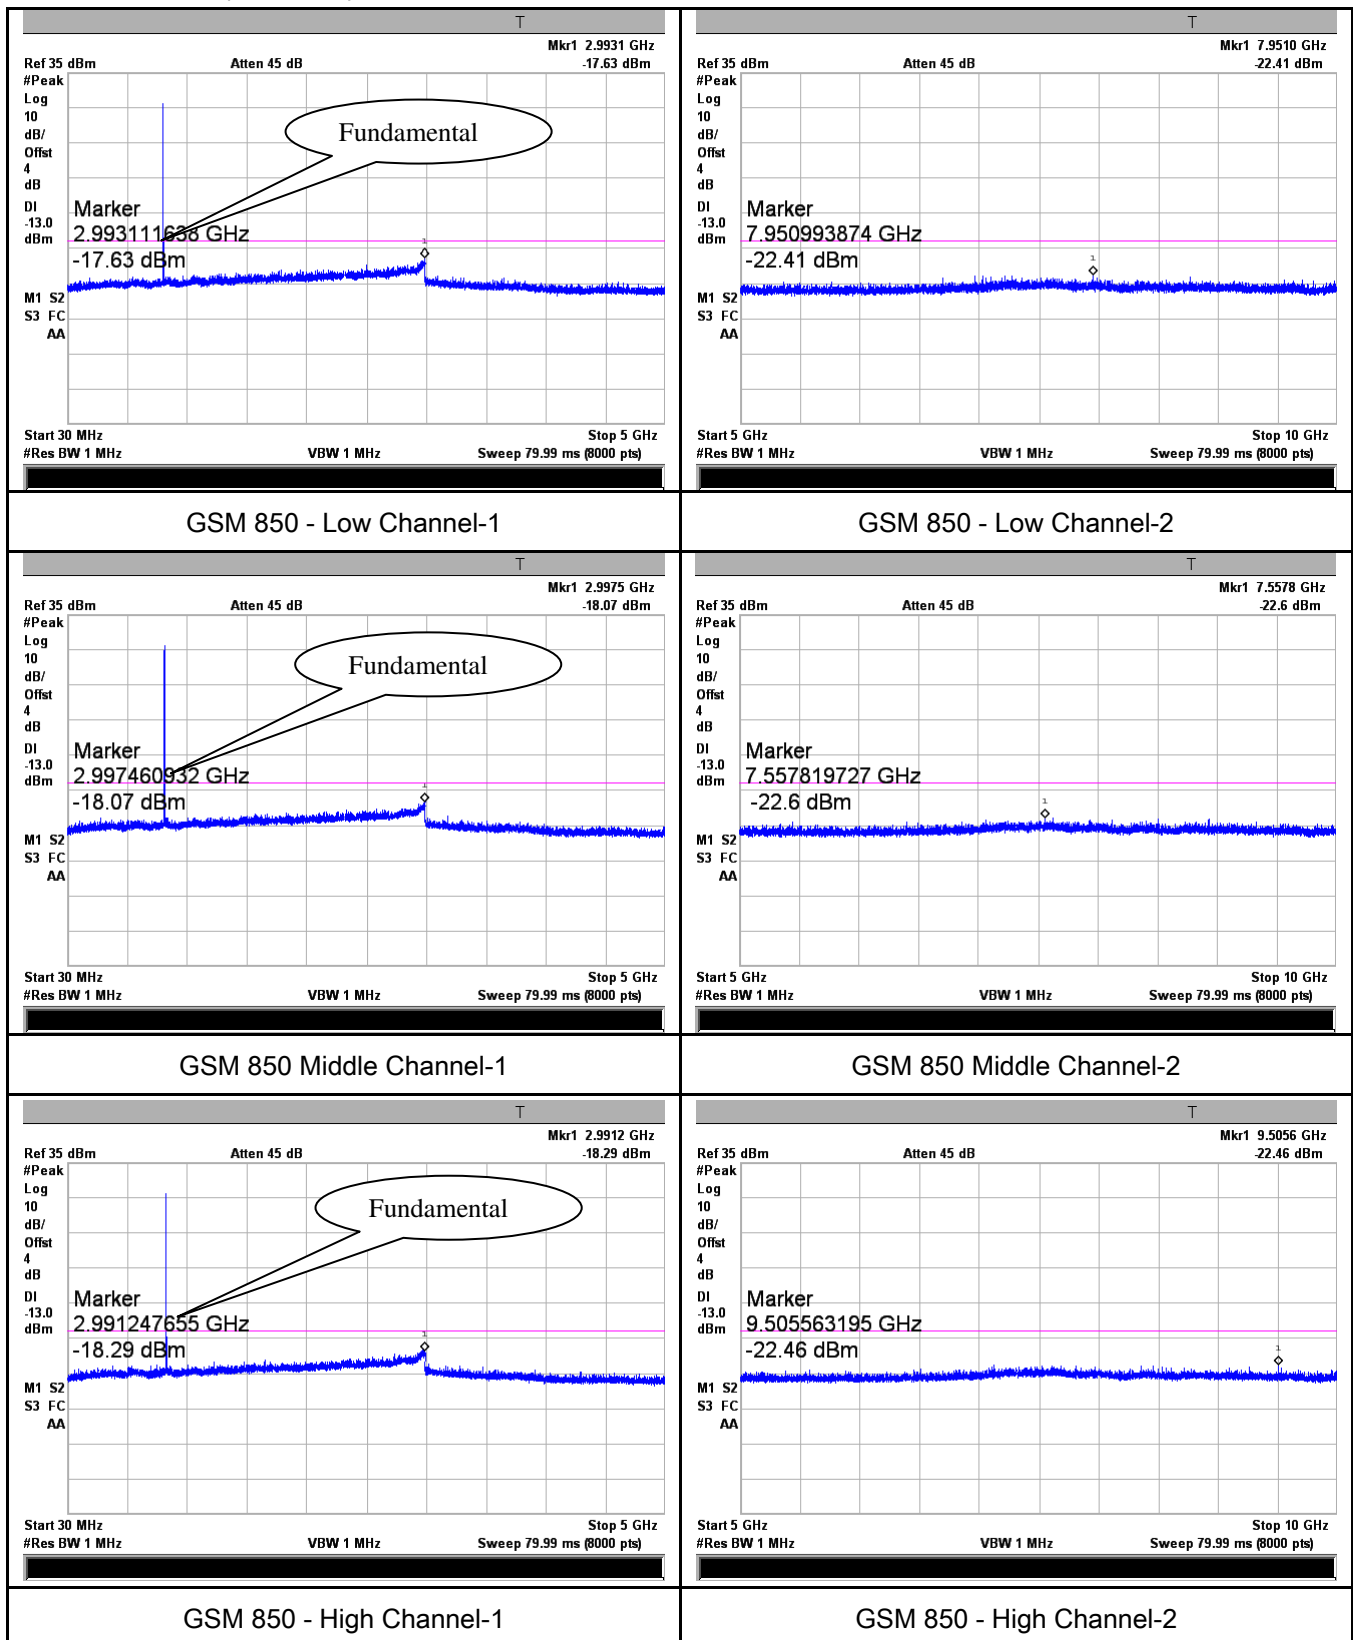


PCS Band (Part24E) result

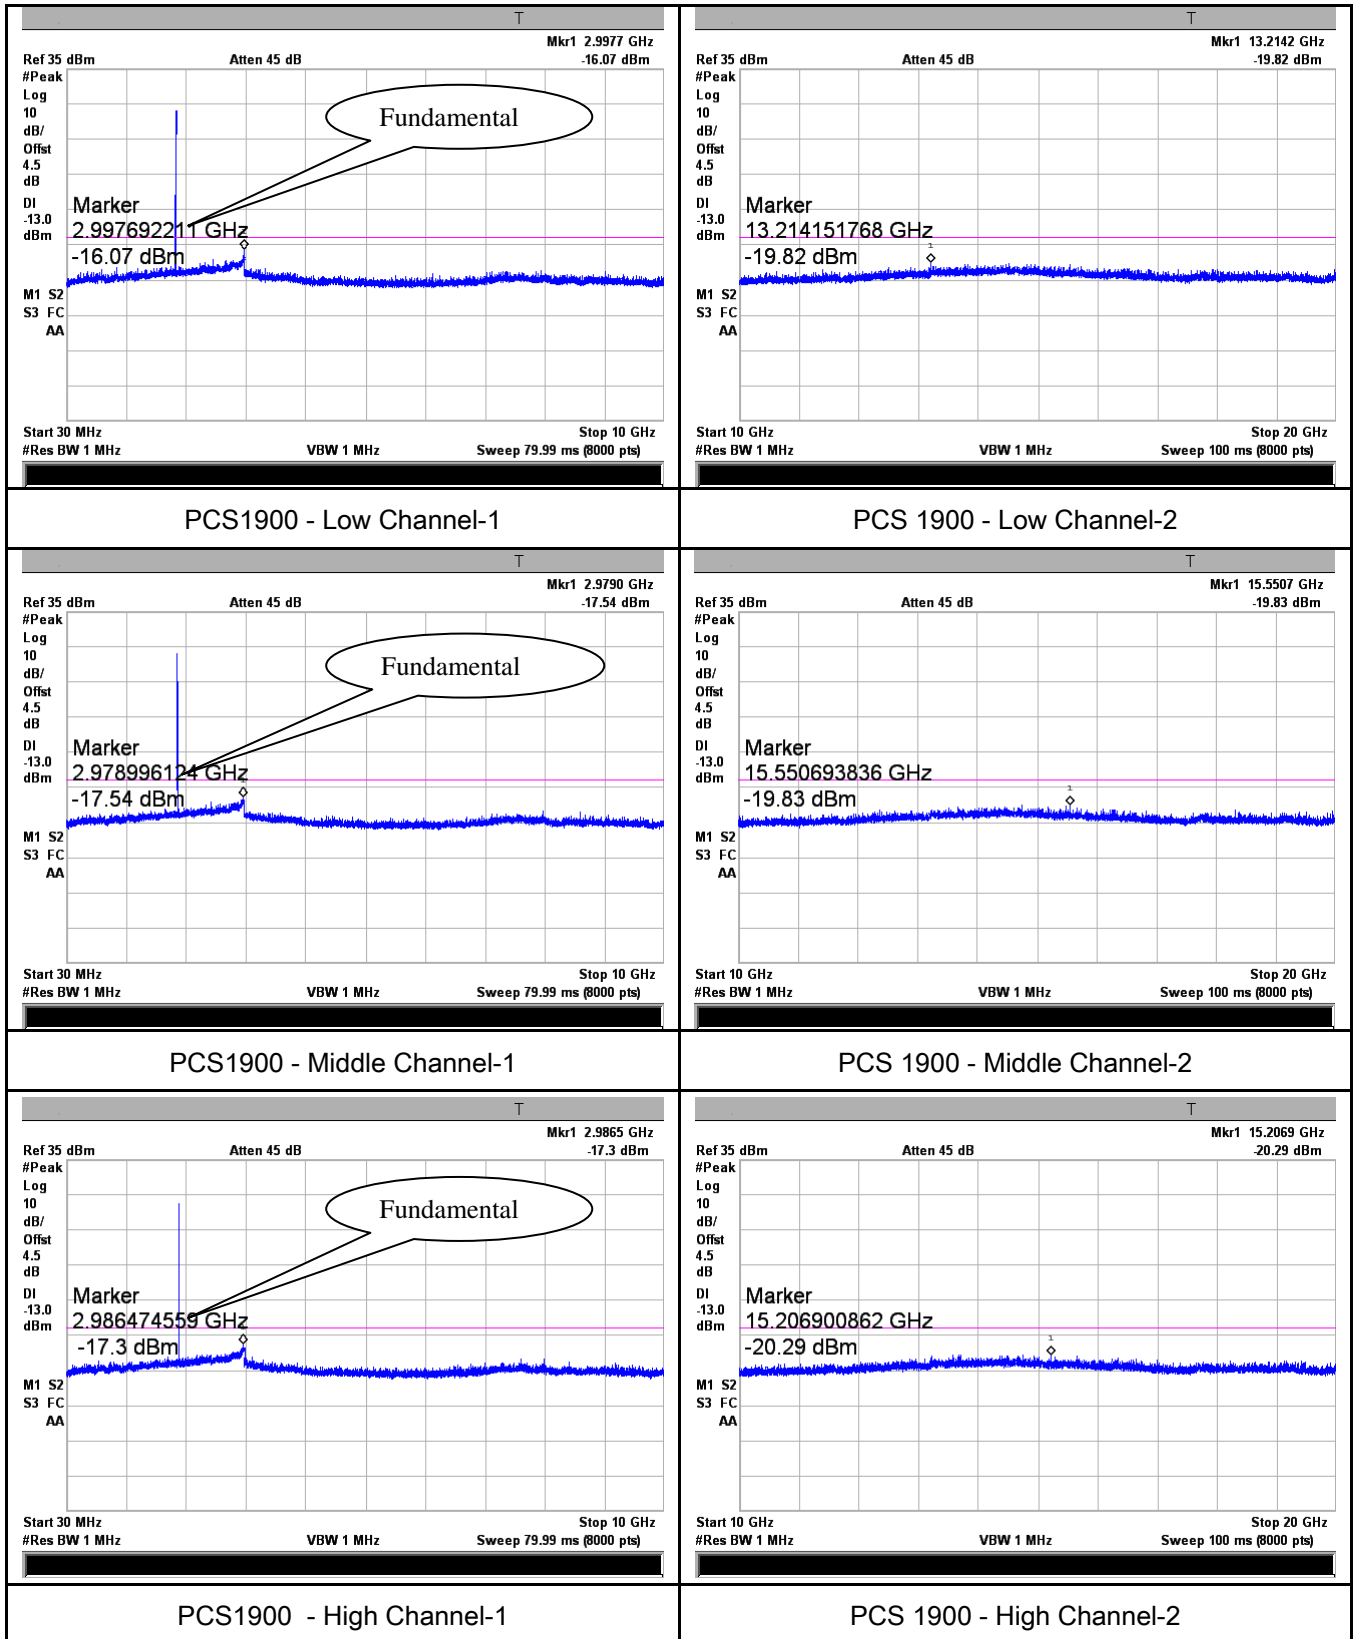


GPRS:

Cellular Band (Part 22H) result

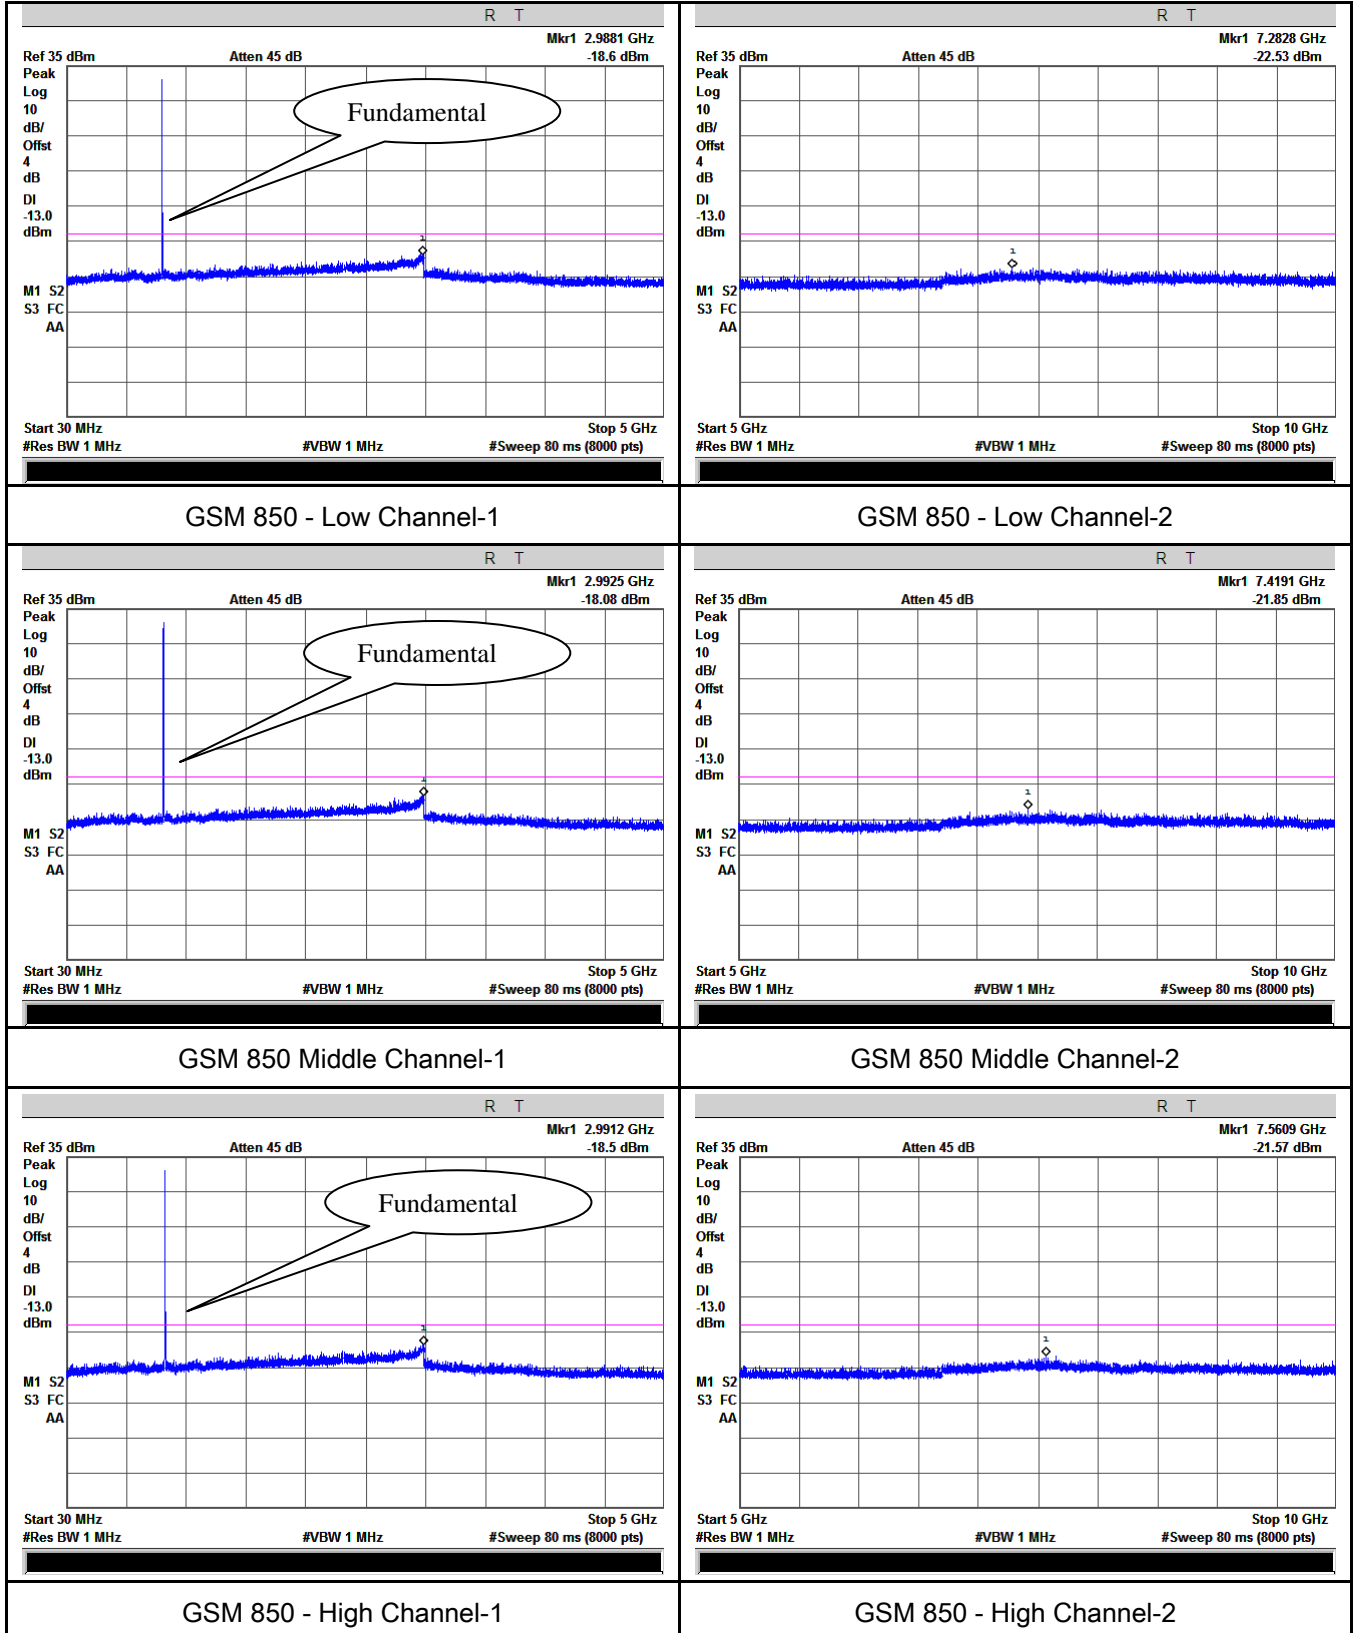


PCS Band (Part24E) result

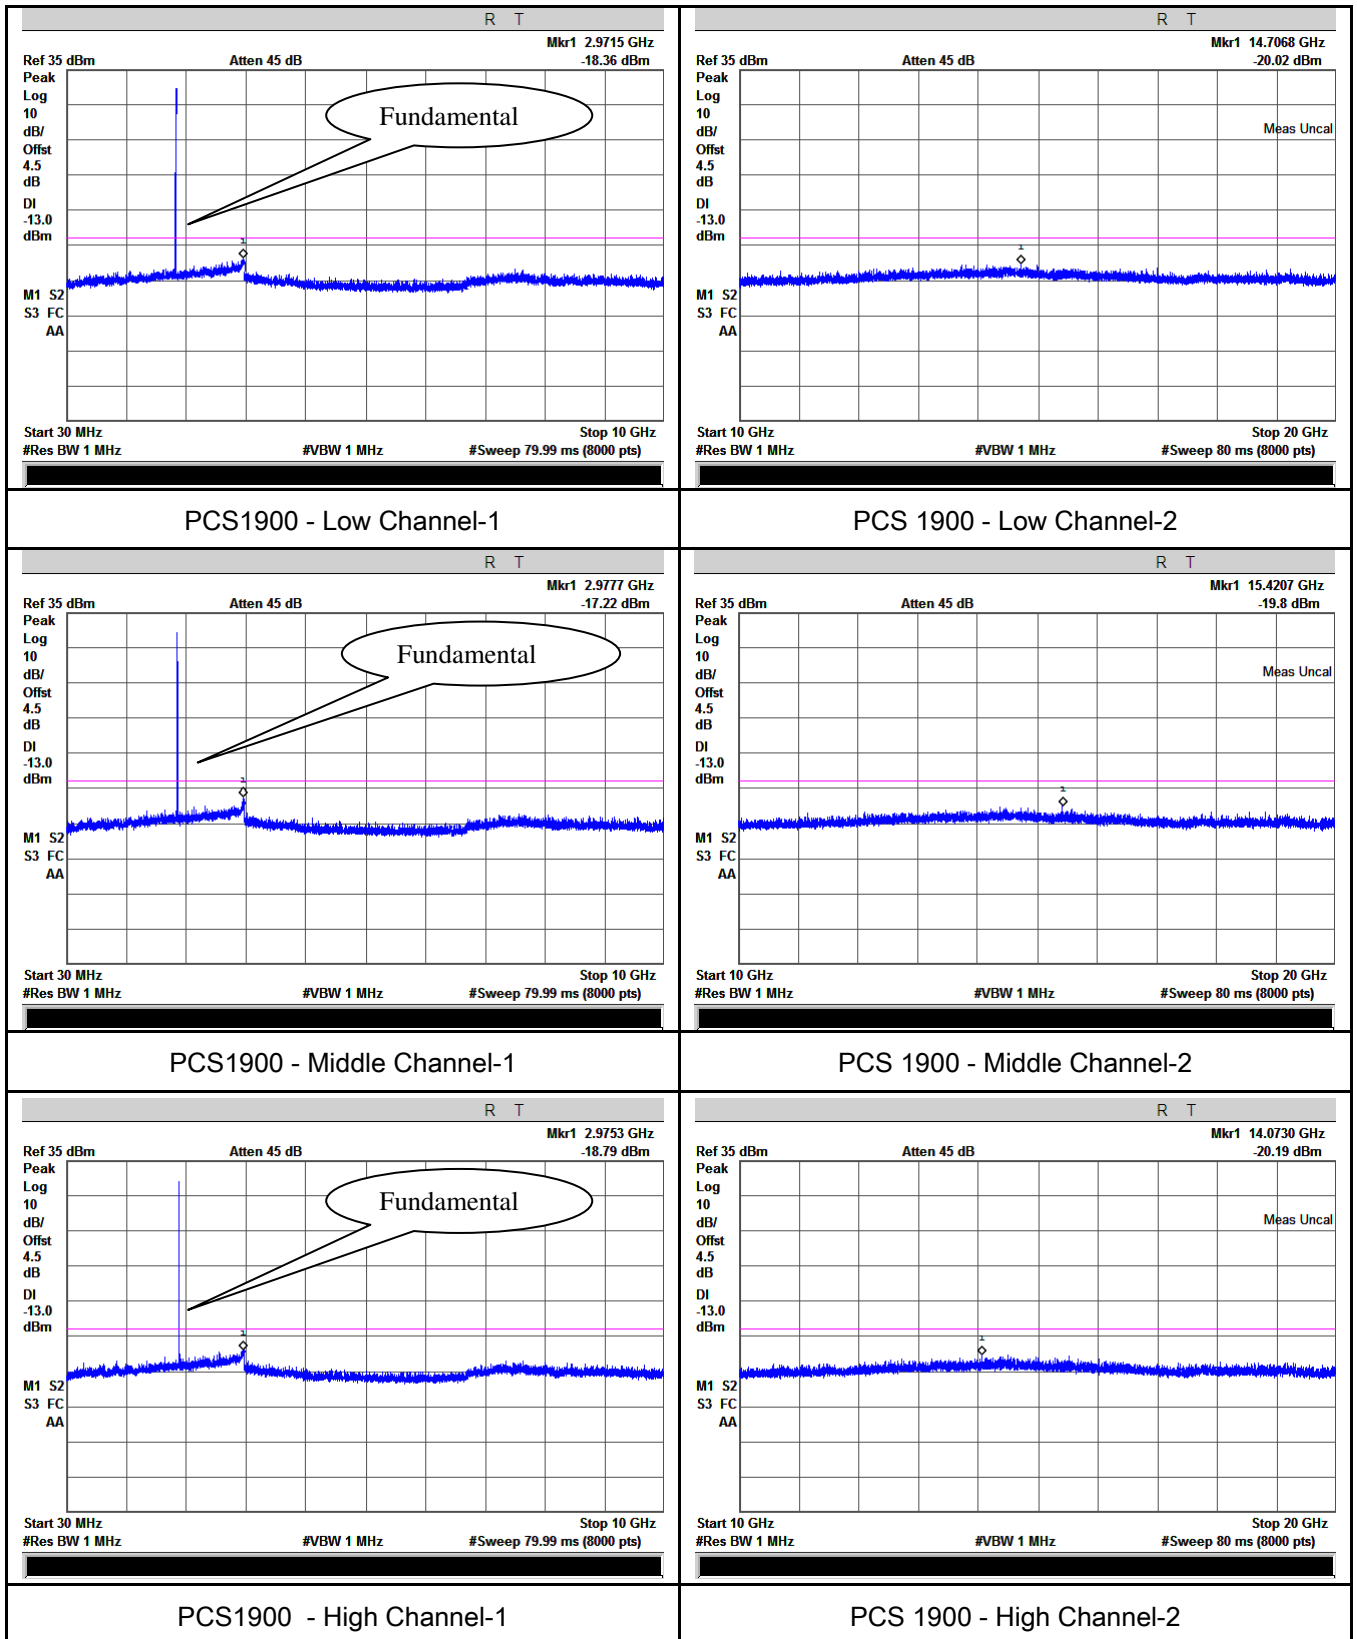


EGPRS (MCS 5):

Cellular Band (Part 22H) result

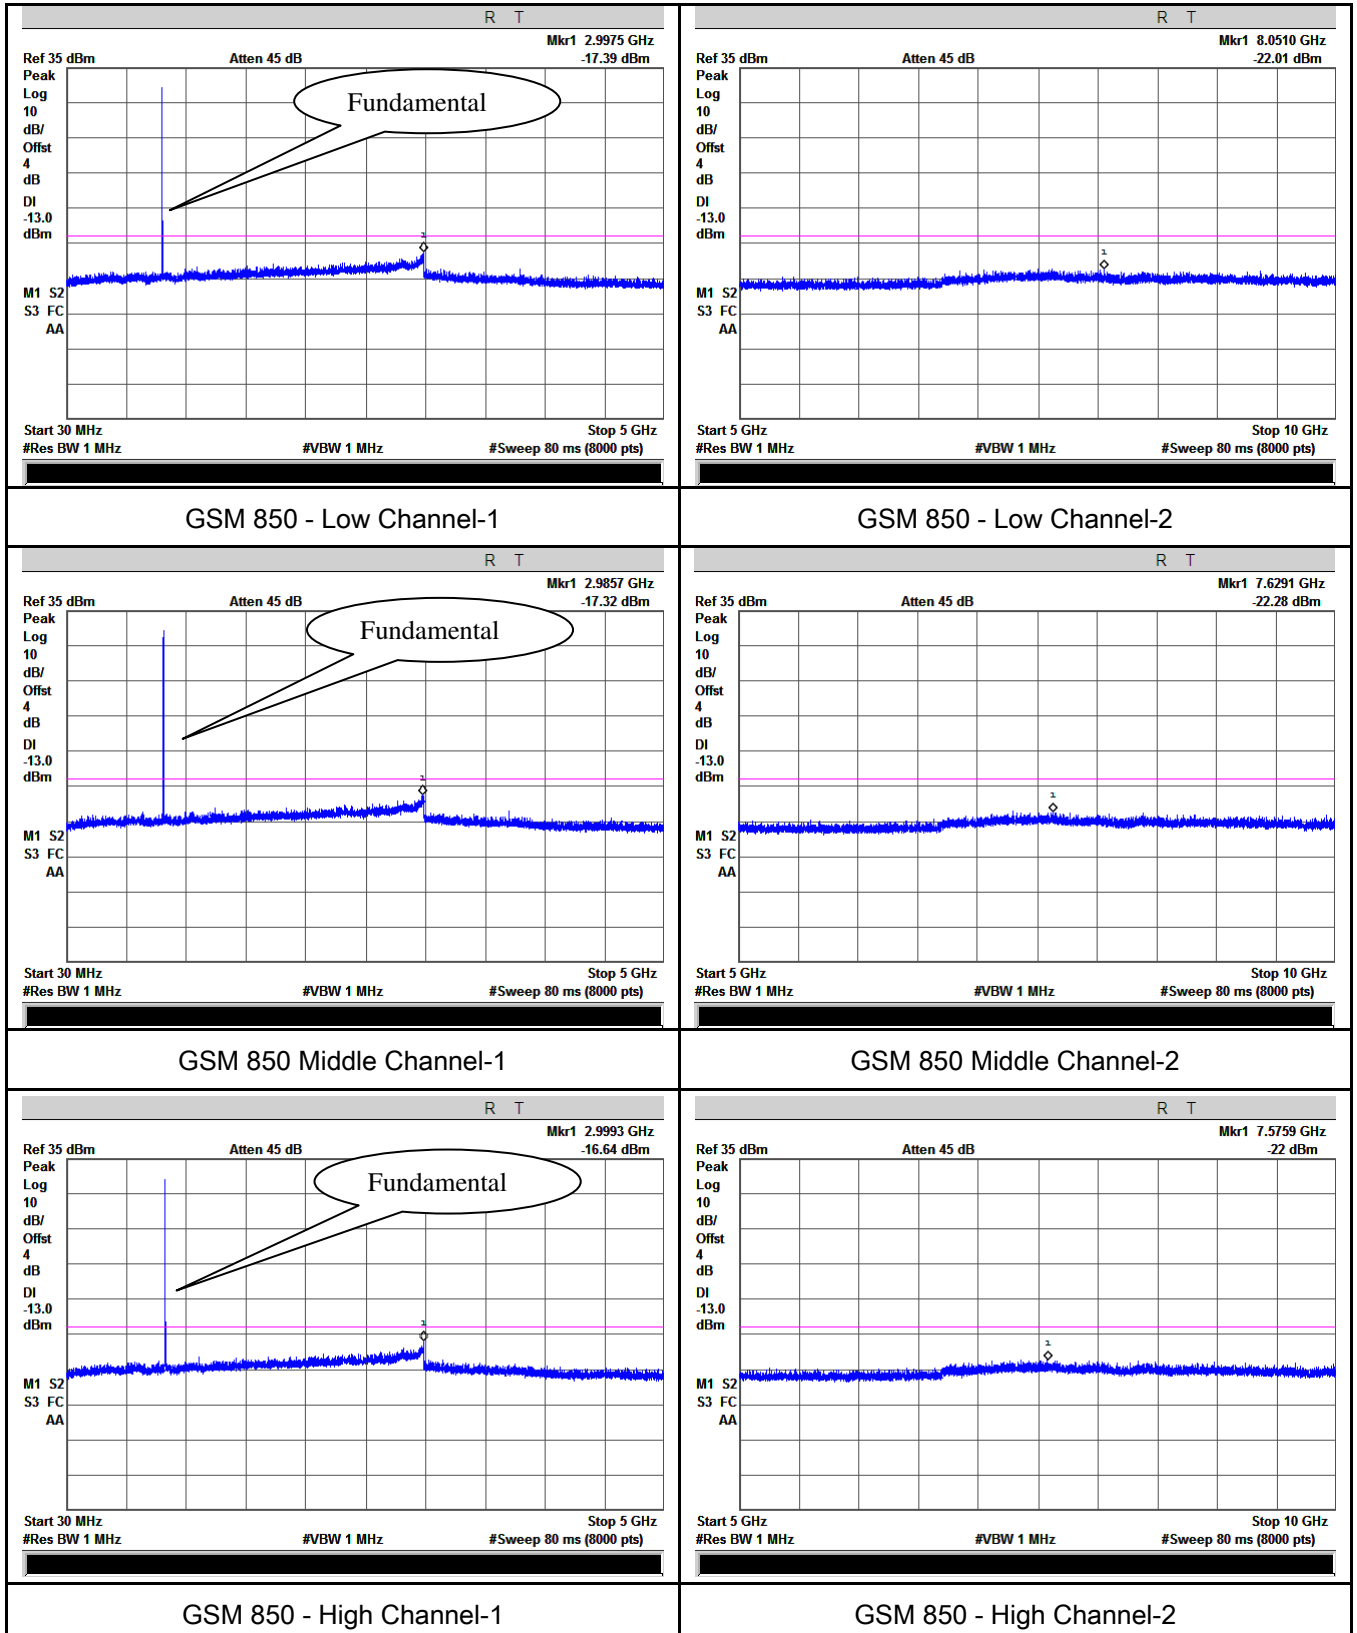


PCS Band (Part24E) result

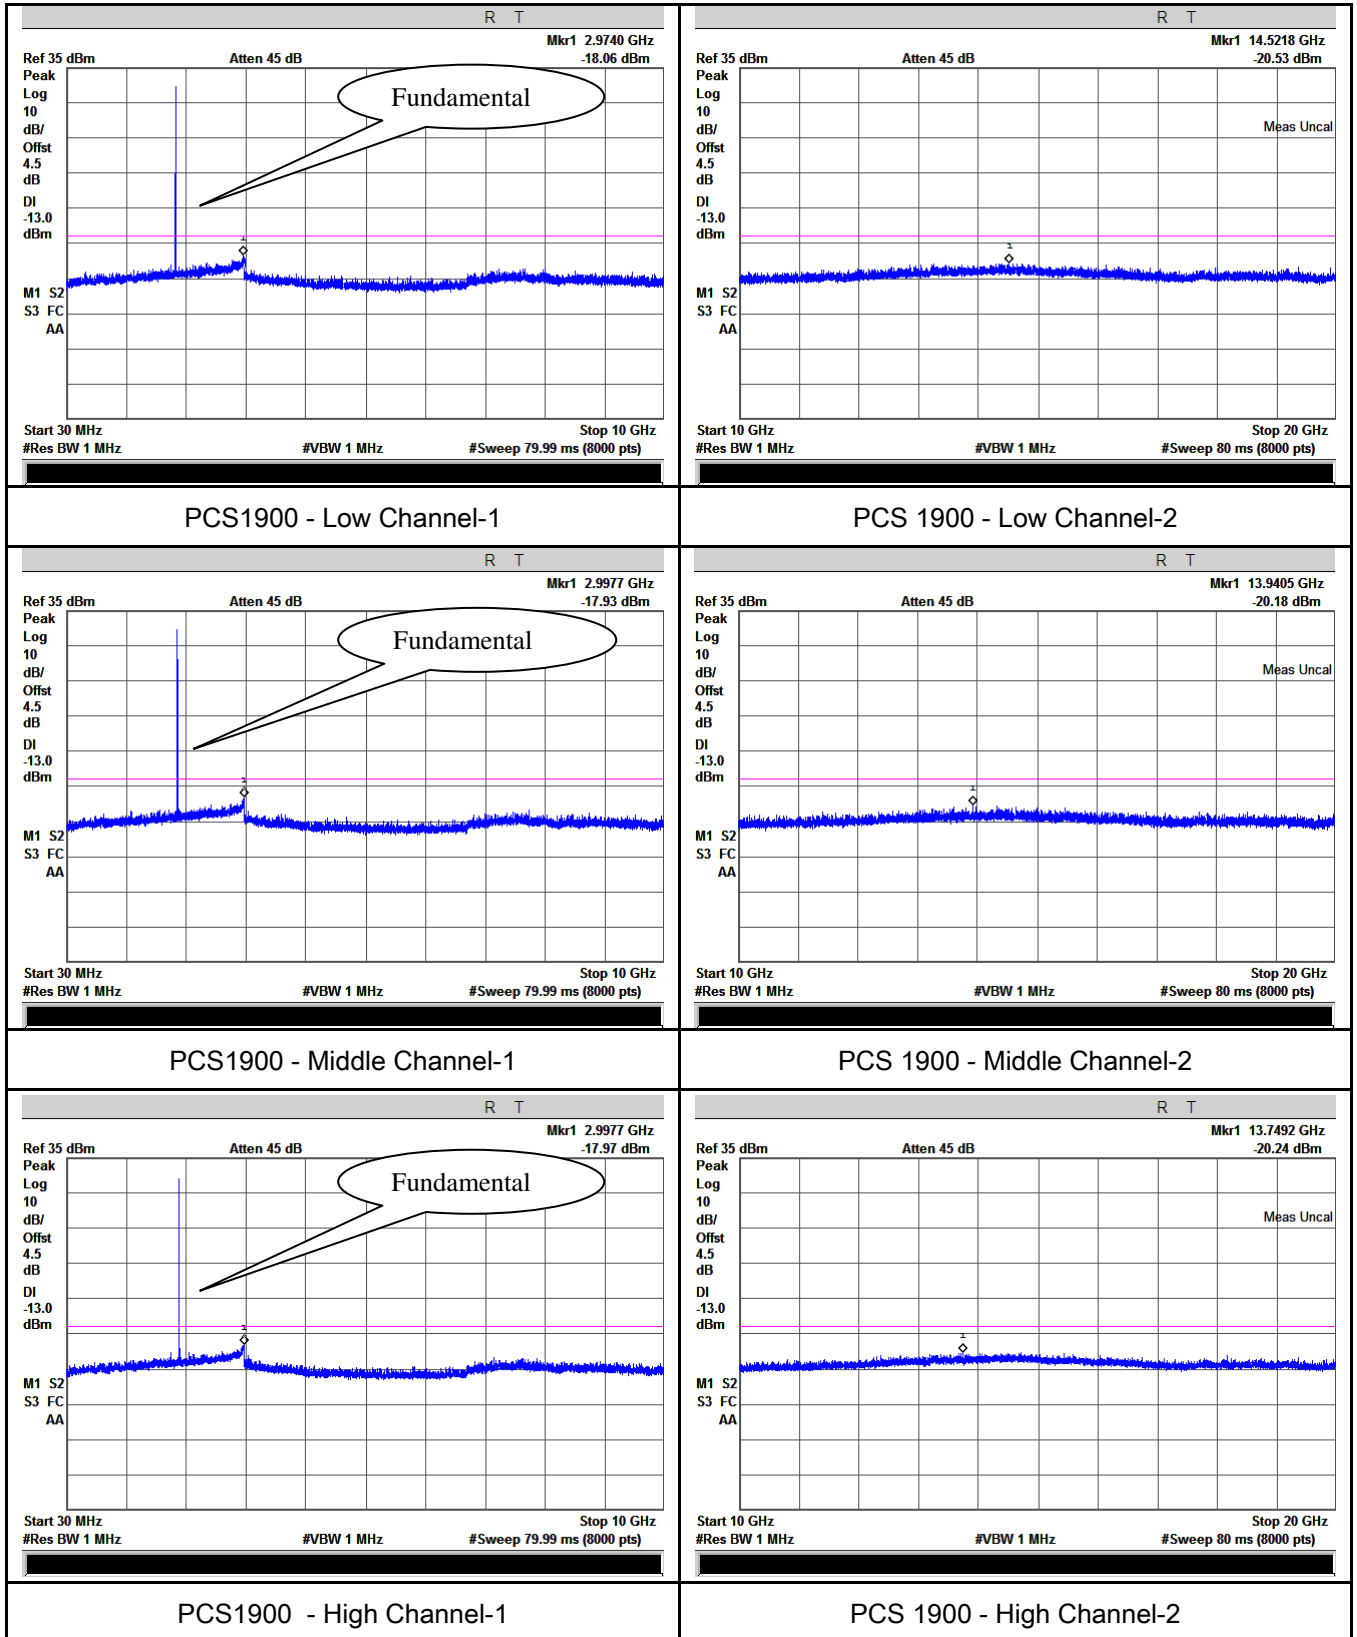


RMC


UMTS-FDD Band V (Part 22H)

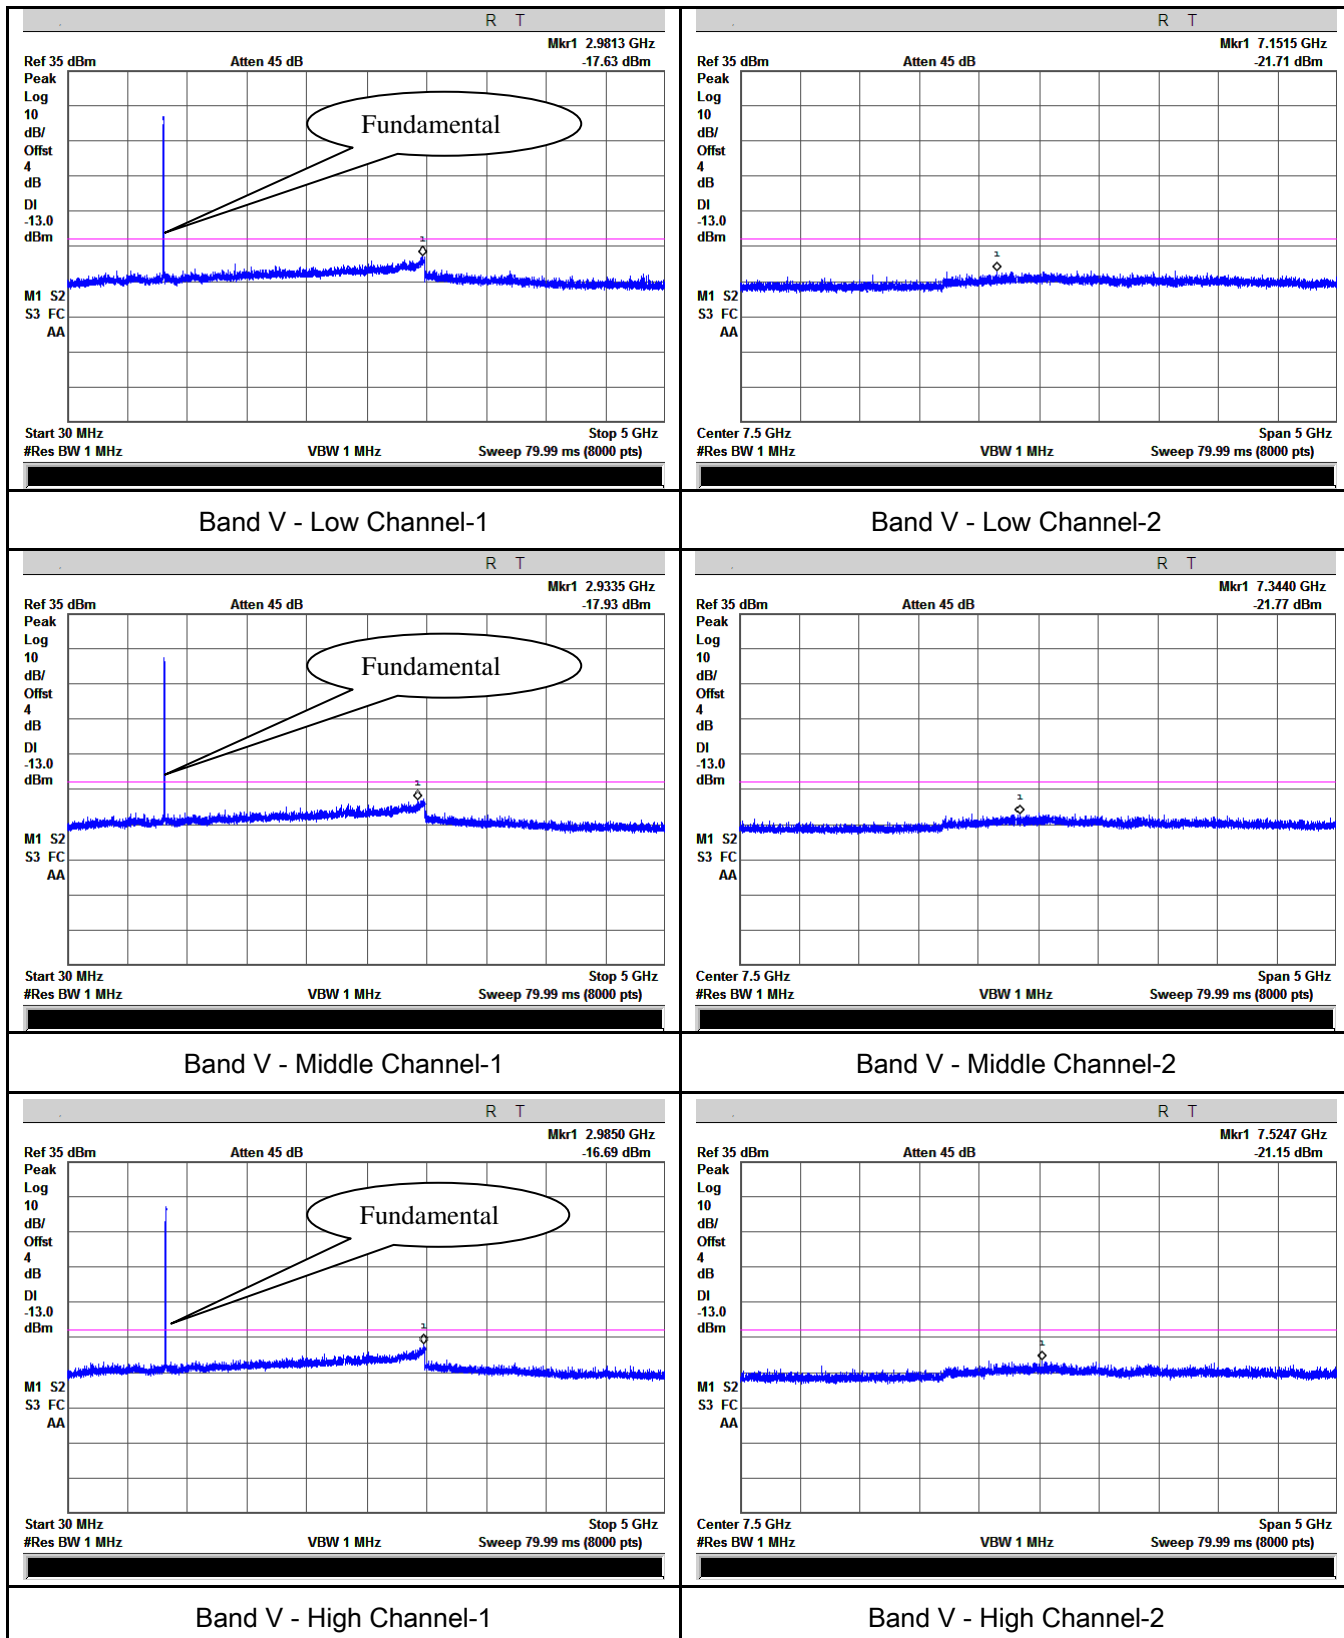


UMTS-FDD Band IV (Part 27)

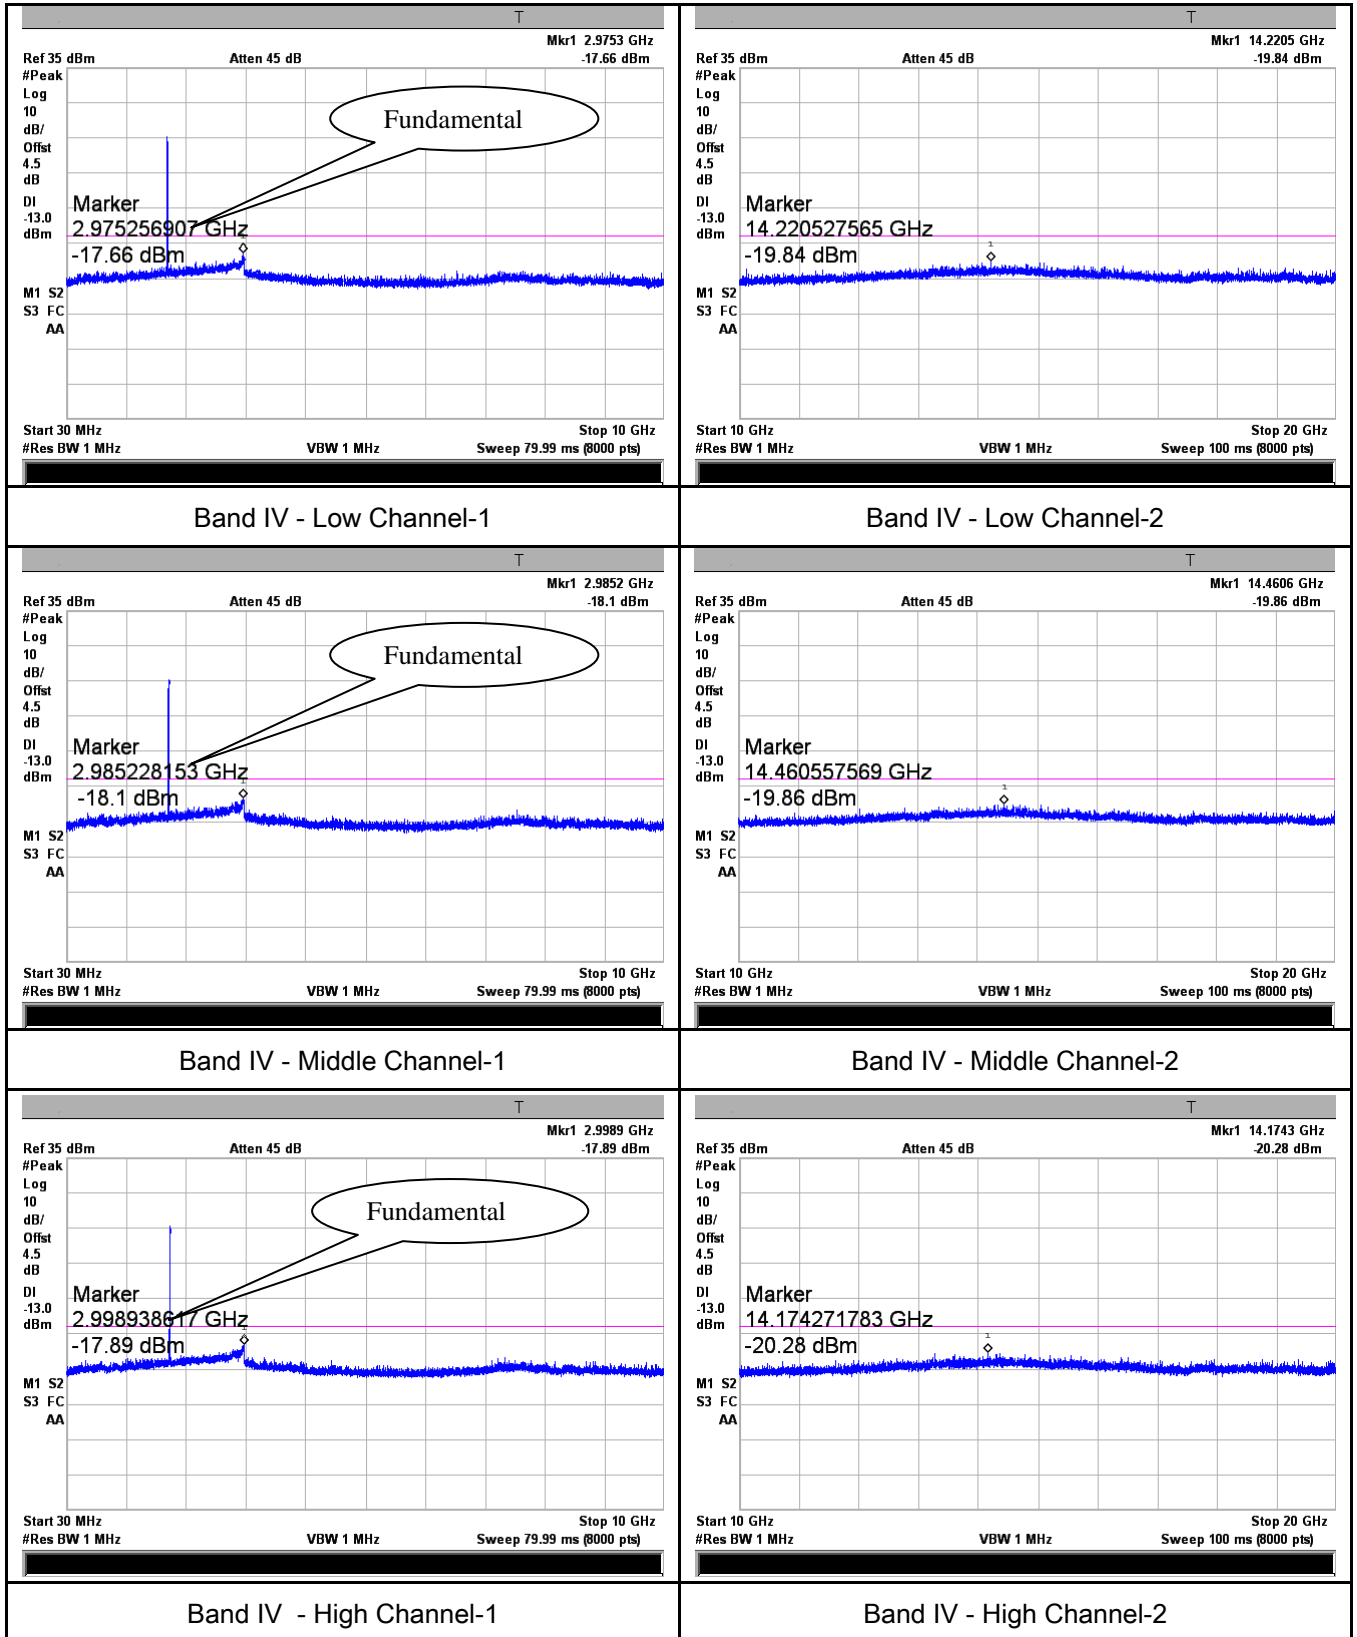


UMTS-FDD Band II (Part 24E)

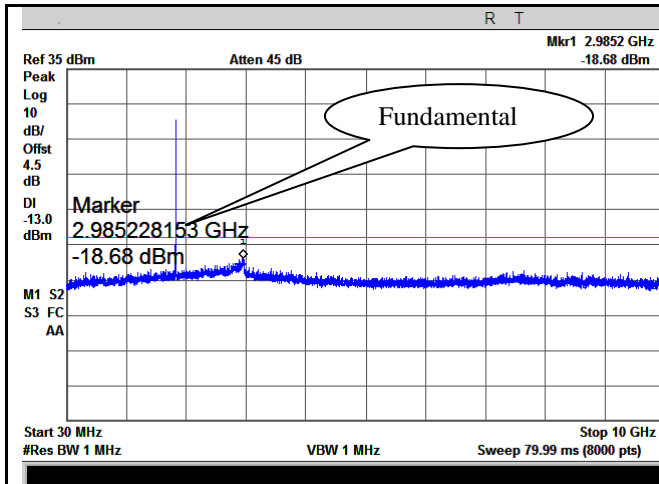


Band II - Low Channel-1

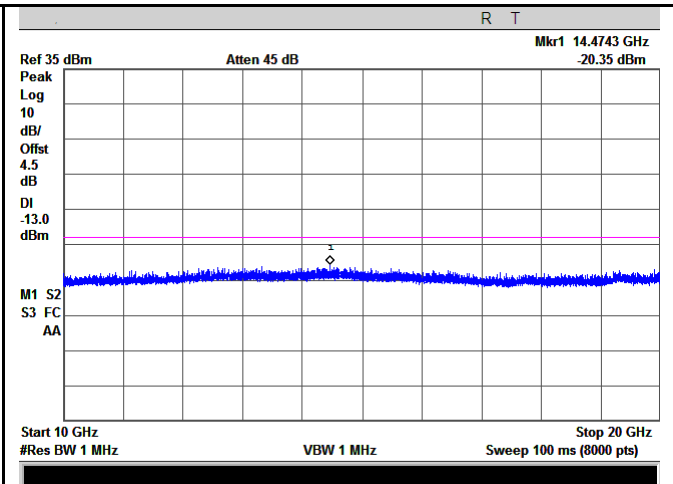


Band II - Low Channel-2

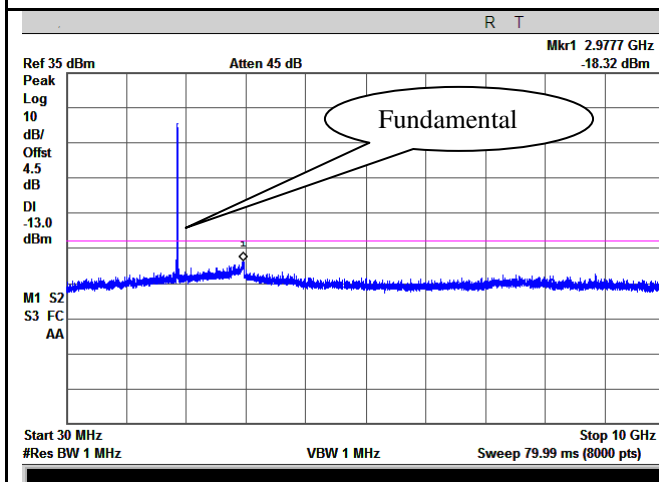


Band II - Middle Channel-1

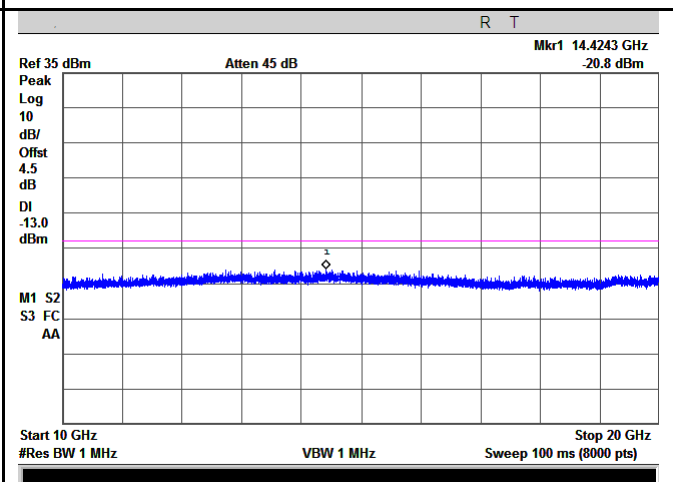

Band II - Middle Channel-2

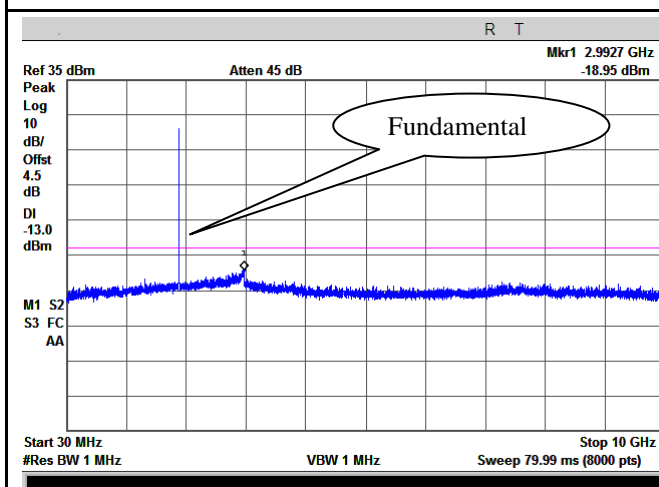


Band II - High Channel-1

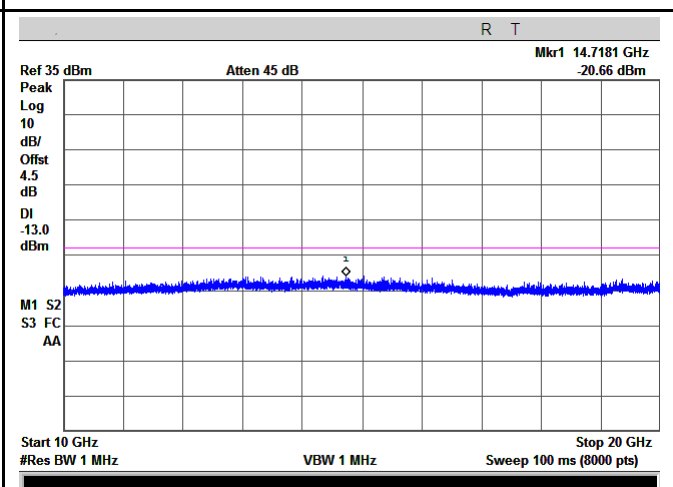


Band II - High Channel-2

HSDPA:


UMTS-FDD Band V (Part 22H)

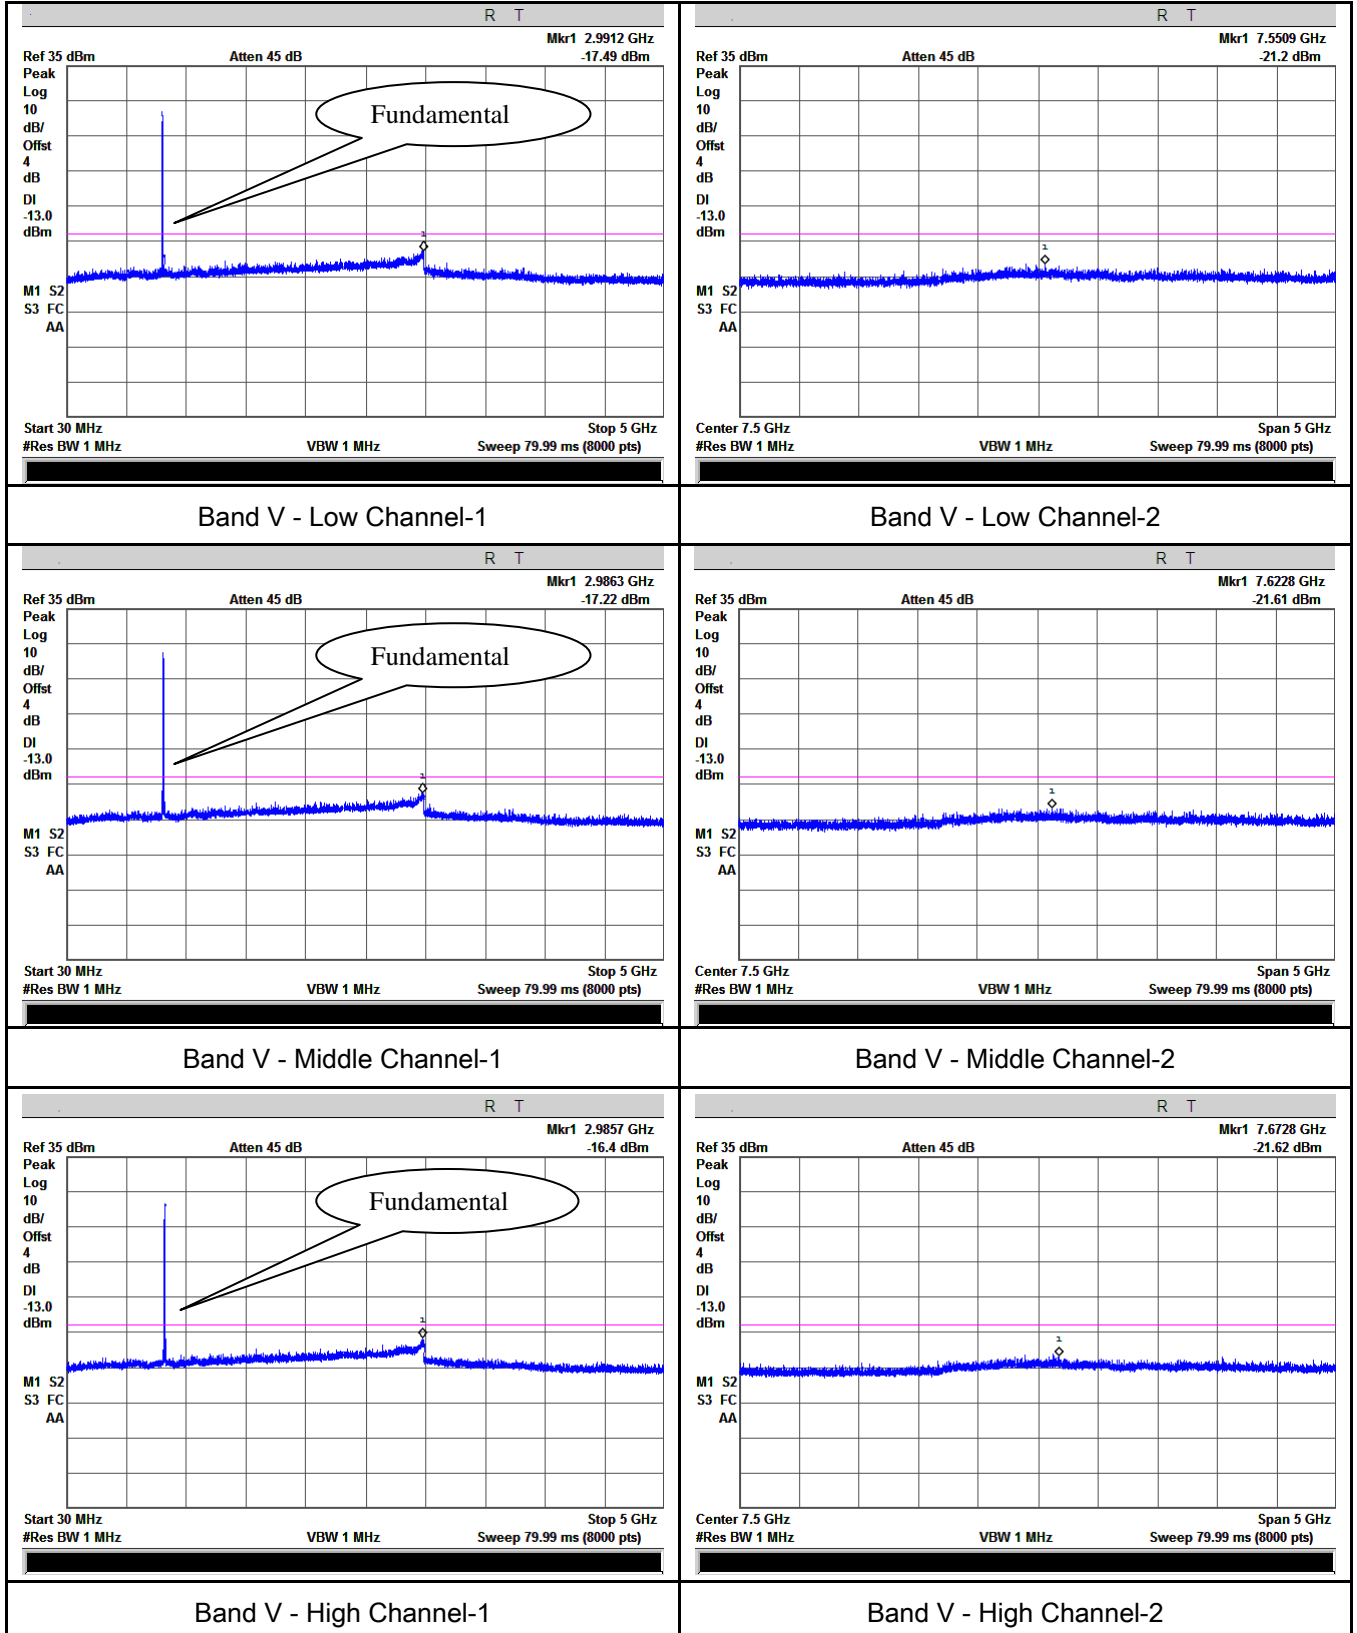


UMTS-FDD Band IV (Part 27)

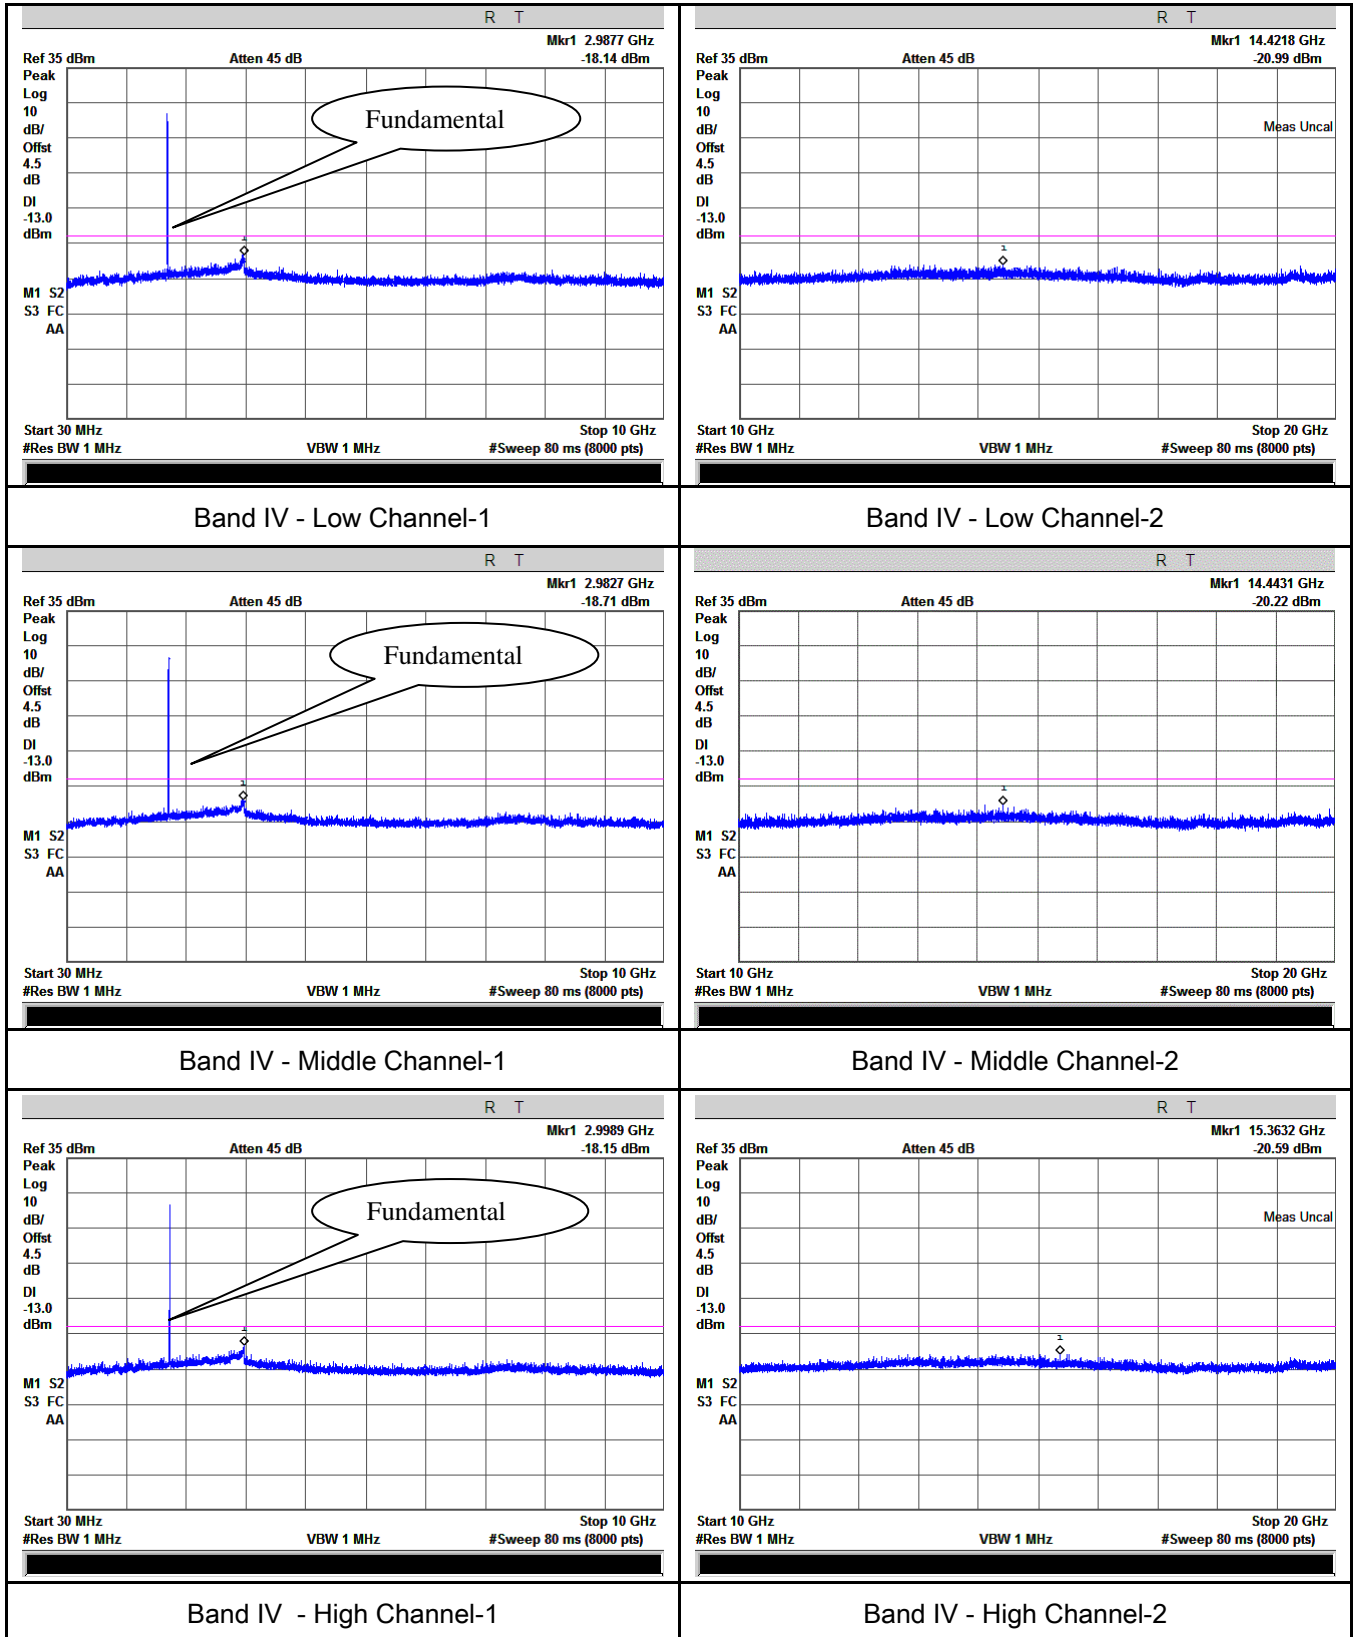


UMTS-FDD Band II (Part 24E)

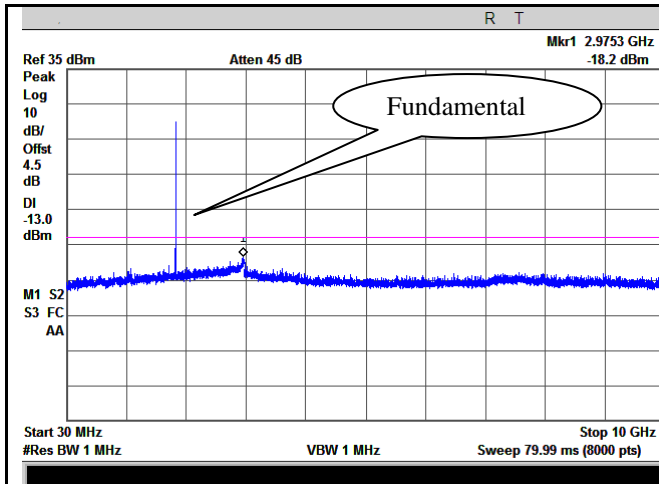


Band II - Low Channel-1

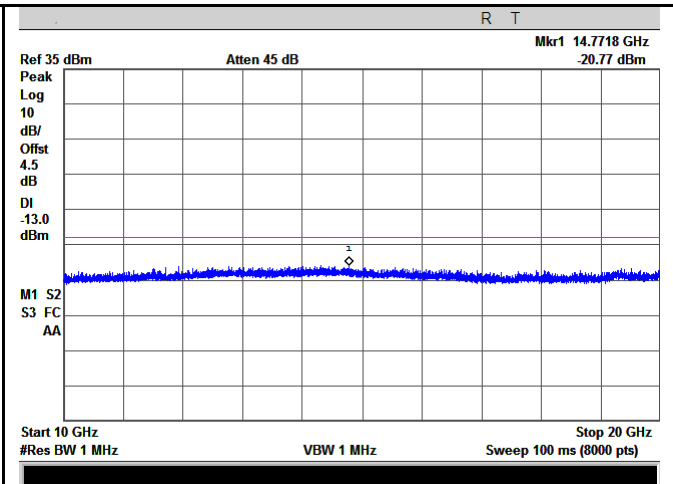


Band II - Low Channel-2

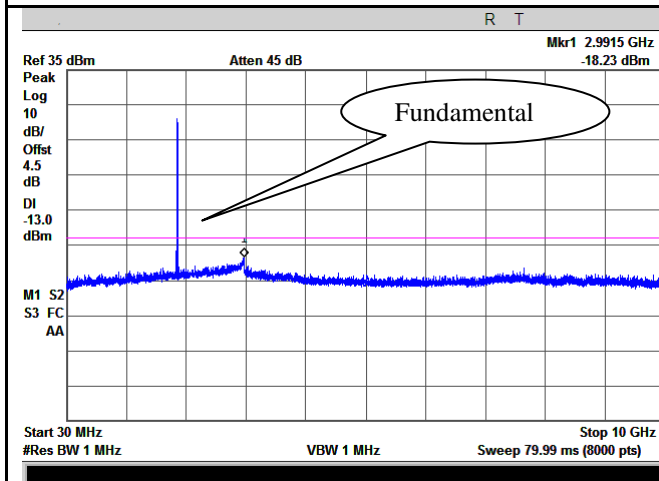


Band II - Middle Channel-1

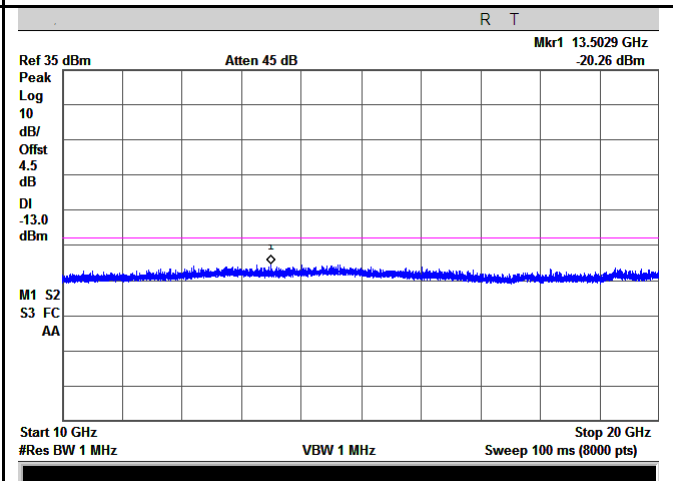

Band II - Middle Channel-2

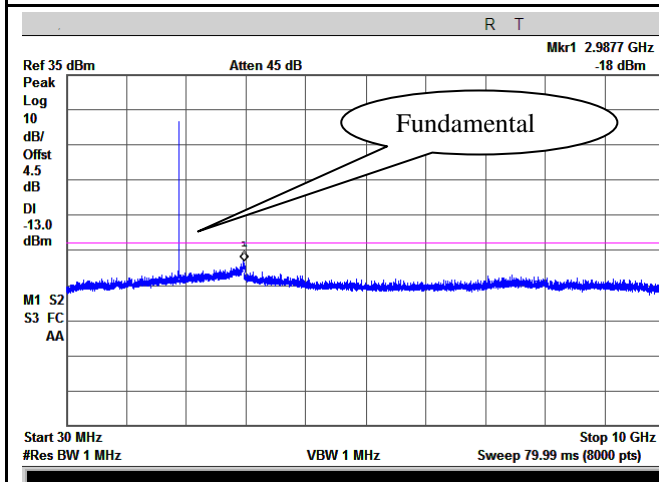


Band II - High Channel-1

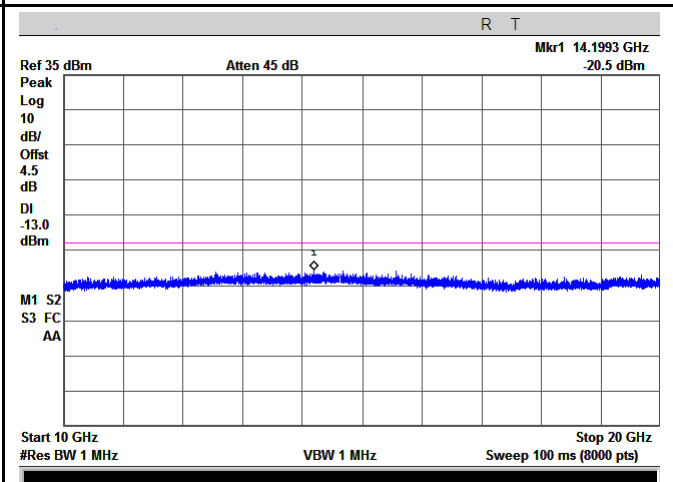


Band II - High Channel-2

HSUPA:


UMTS-FDD Band V (Part 22H)

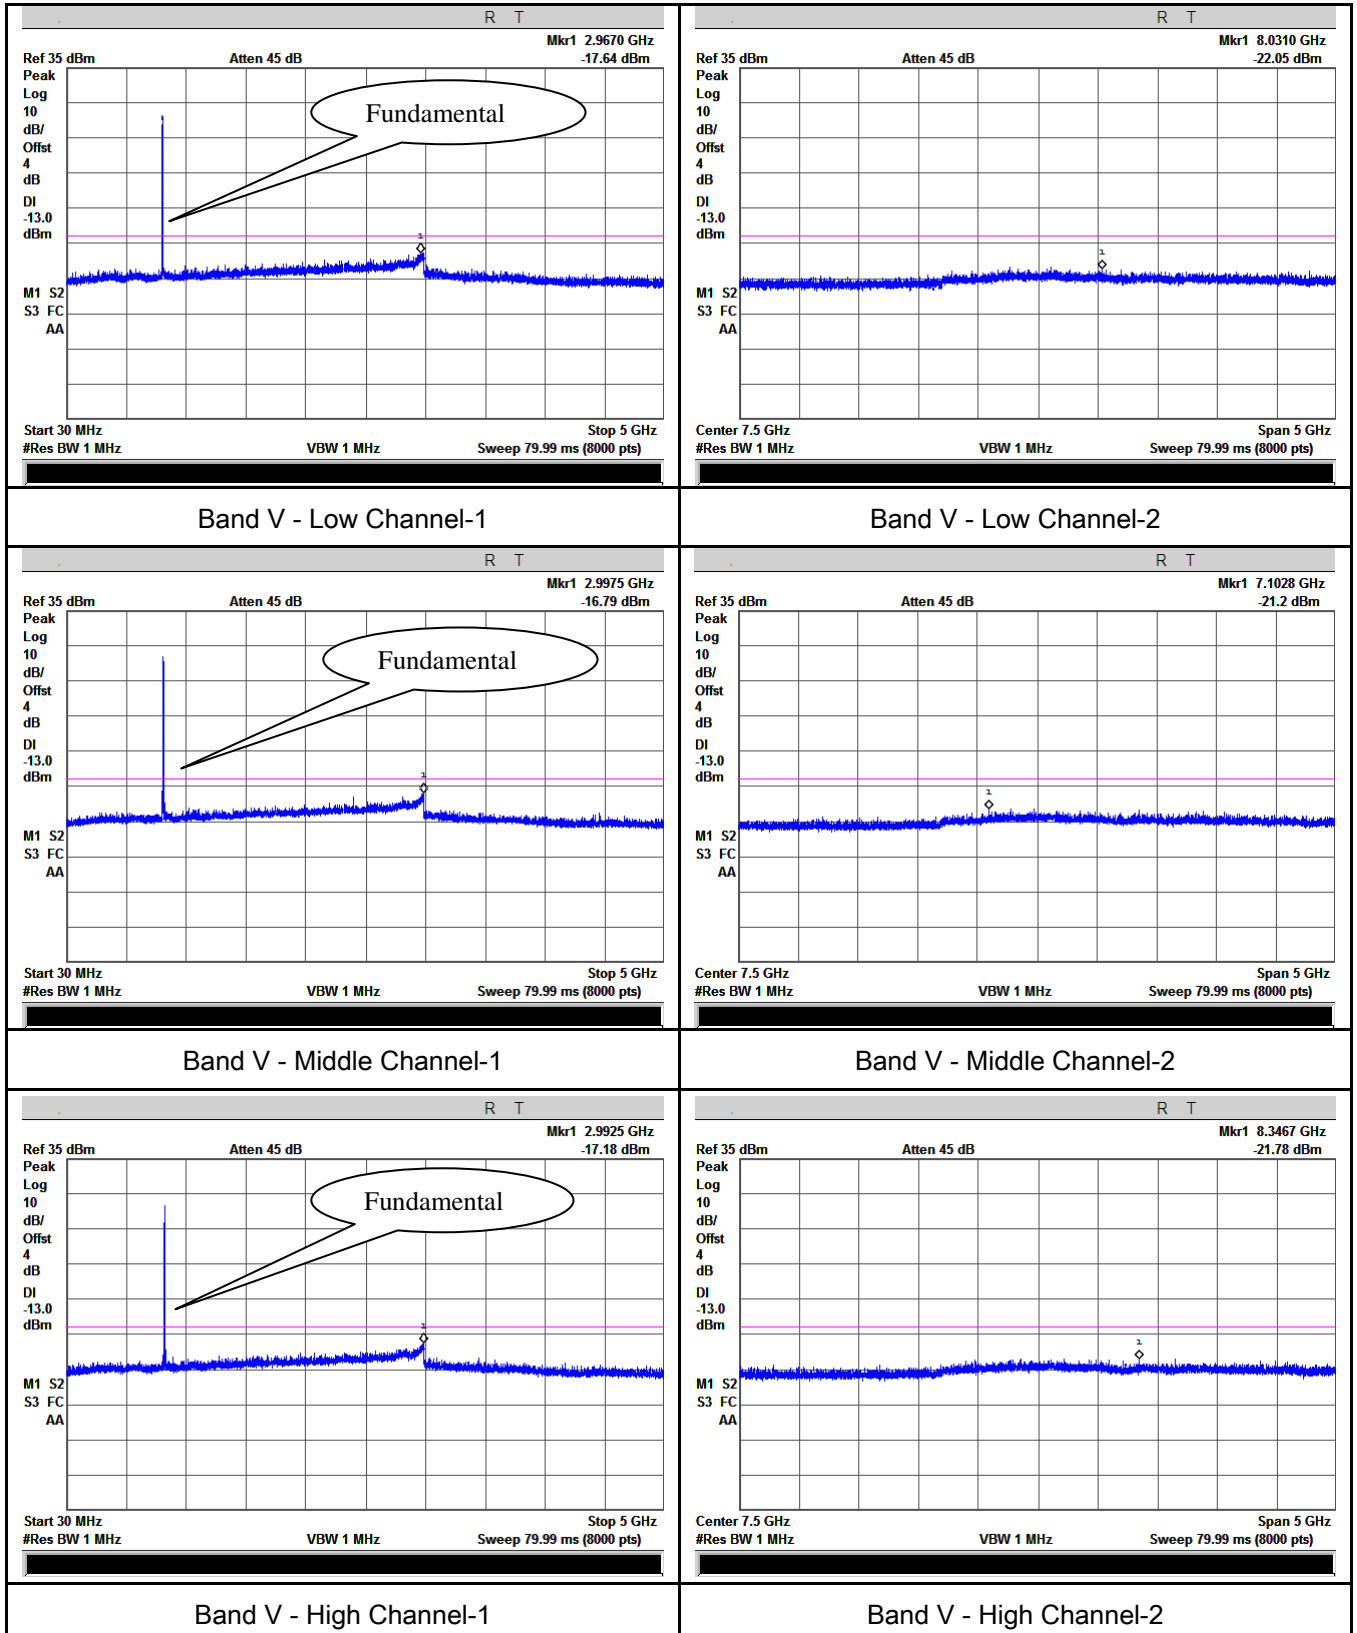


UMTS-FDD Band IV (Part 27)

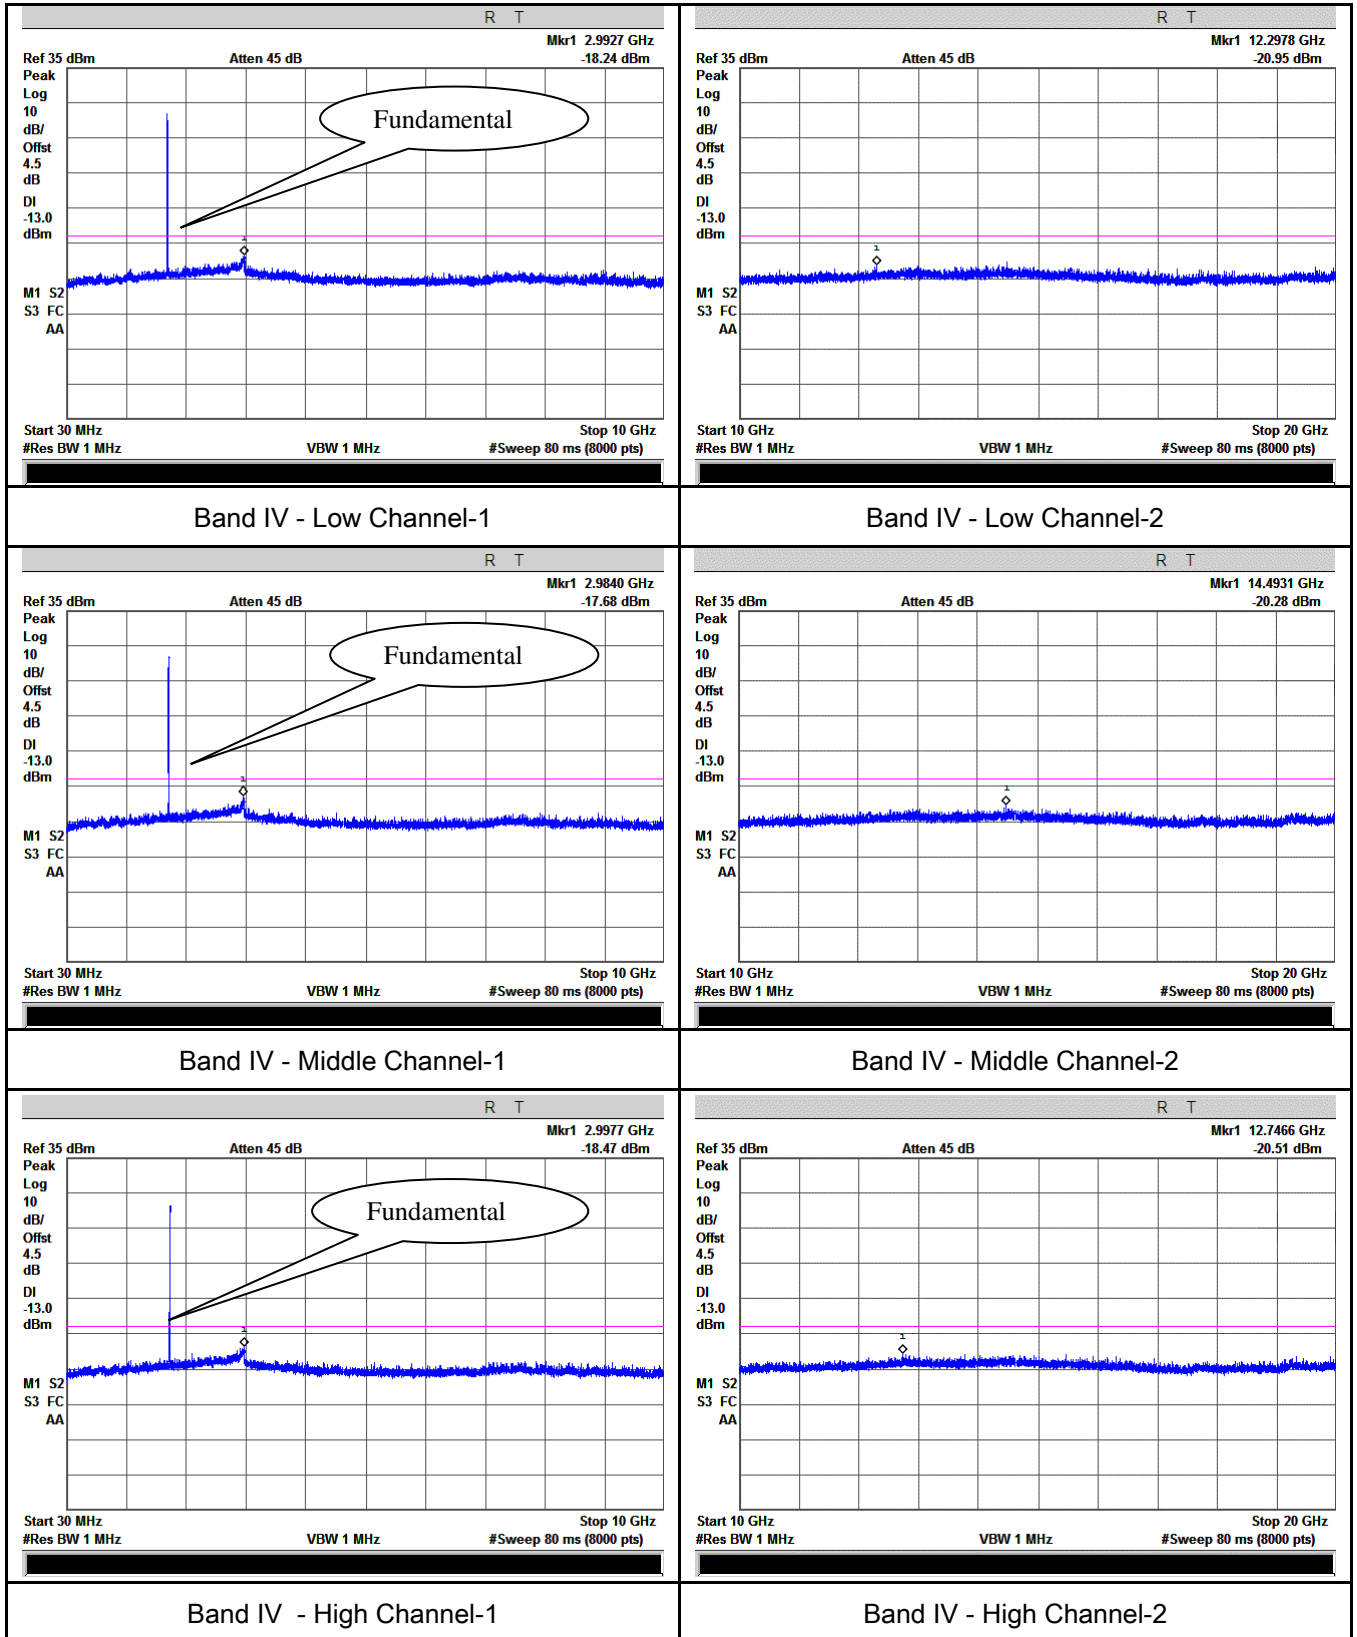


UMTS-FDD Band II (Part 24E)

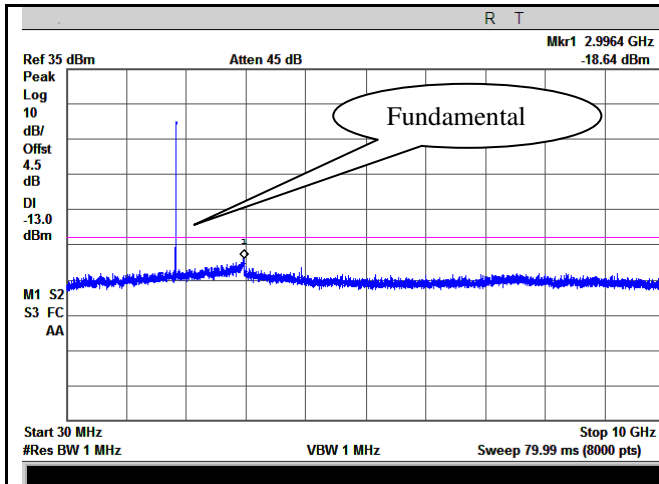


Band II - Low Channel-1

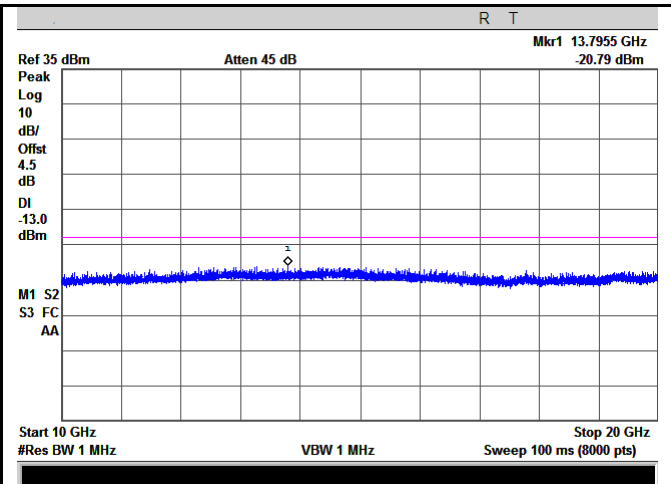


Band II - Low Channel-2

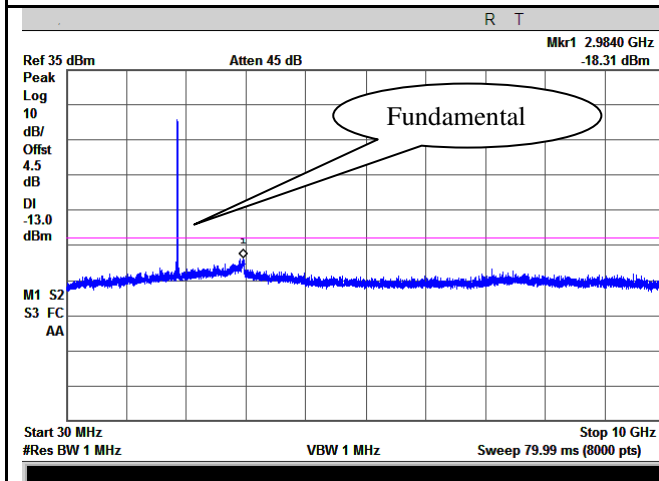


Band II - Middle Channel-1

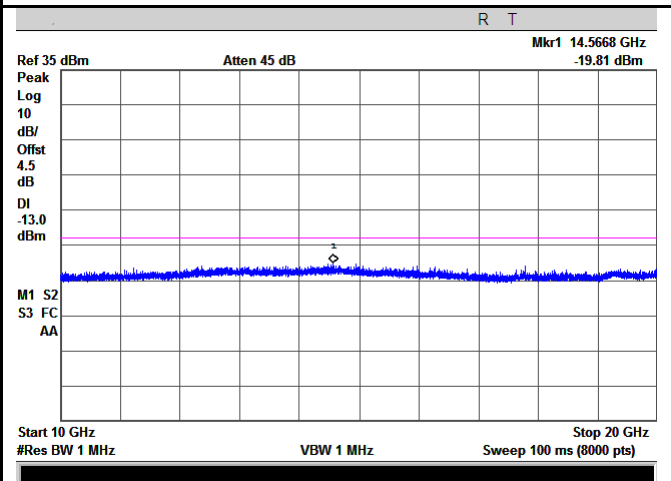

Band II - Middle Channel-2

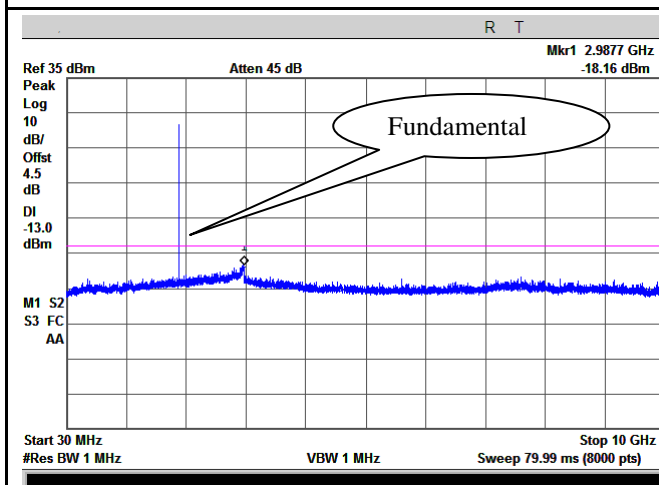

Band II - High Channel-1

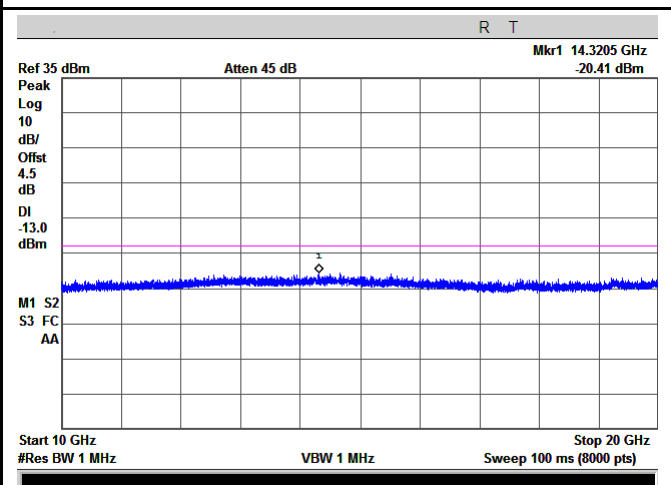


Band II - High Channel-2

6.6 Spurious Radiated Emissions

Temperature	22°C
Relative Humidity	53%
Atmospheric Pressure	1029mbar
Test date :	August 29, 2016
Tested By :	Loren Luo

Requirement(s):

Spec	Item	Requirement	Applicable
§2.1053, §22.917 & §24.238 § 27.53(h)	a)	The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.	☒

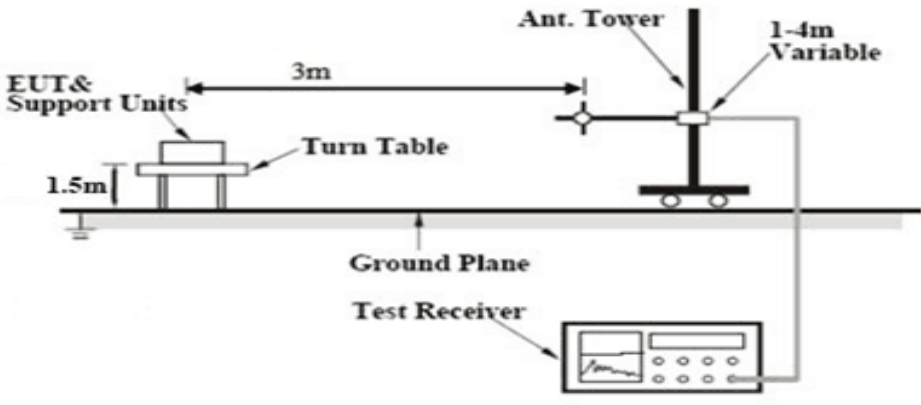Test setup	
------------	--

Test Procedure	- The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load which was also placed on the turntable. - The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis. - Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution. Sample Calculation: EUT Field Strength = Raw Amplitude (dBμV/m) – Amplifier Gain (dB) + Antenna Factor (dB) + Cable Loss (dB) + Filter Attenuation (dB, if used)
----------------	---

Test Report	16070911-FCC-R1
Page	63 of 98

Remark	
Result	☒ Pass ☐ Fail

Test Data ☒ Yes ☐ N/A

Test Plot ☐ Yes (See below) ☒ N/A

Cellular Band (Part 22H) result

Low channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
1648.4	-44.65	V	7.95	0.78	-37.48	-13	-24.48
1648.4	-43.45	H	7.95	0.78	-36.28	-13	-23.28
331.9	-52.68	V	6.4	0.26	-46.54	-13	-33.54
605.4	-51.49	H	6.8	0.37	-45.06	-13	-32.06

Middle channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
1673.2	-44.87	V	7.95	0.78	-37.7	-13	-24.7
1673.2	-43.49	H	7.95	0.78	-36.32	-13	-23.32
330.5	-52.74	V	6.4	0.26	-46.6	-13	-33.6
604.8	-51.56	H	6.8	0.37	-45.13	-13	-32.13

High channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
1697.6	-44.56	V	7.95	0.78	-37.39	-13	-24.39
1697.6	-43.78	H	7.95	0.78	-36.61	-13	-23.61
330.9	-52.16	V	6.4	0.26	-46.02	-13	-33.02
605.1	-51.47	H	6.8	0.37	-45.04	-13	-32.04

Note:

1, The testing has been conformed to $10 \times 848.8 \text{ MHz} = 8,488 \text{ MHz}$

2, All other emissions more than 30 dB below the limit

3, GSM voice, GPRS and EGPRS mode were investigated. The results above show only the worse cases

4, X-Axis, Y-Axis and Z-Axis were investigated. The results above show only the worst case.

PCS Band (Part24E) result

Low channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
3700.4	-49.72	V	10.25	2.73	-42.2	-13	-29.2
3700.4	-48.56	H	10.25	2.73	-41.04	-13	-28.04
331.4	-53.64	V	6.4	0.26	-47.5	-13	-34.5
605.2	-52.38	H	6.8	0.37	-45.95	-13	-32.95

Middle channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
3760	-49.64	V	10.25	2.73	-42.12	-13	-29.12
3760	-48.32	H	10.25	2.73	-40.8	-13	-27.8
329.3	-53.77	V	6.4	0.26	-47.63	-13	-34.63
604.7	-52.45	H	6.8	0.37	-46.02	-13	-33.02

High channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
3819.6	-49.33	V	10.36	2.73	-41.7	-13	-28.7
3819.6	-48.26	H	10.36	2.73	-40.63	-13	-27.63
329.8	-53.22	V	6.4	0.26	-47.08	-13	-34.08
605.2	-51.34	H	6.8	0.37	-44.91	-13	-31.91

Note:

- 1, The testing has been conformed to $10 \times 1909.8 \text{ MHz} = 19,098 \text{ MHz}$
- 2, All other emissions more than 30 dB below the limit
- 3, GSM voice, GPRS and EGPRS mode were investigated. The results above show only the worse cases
- 4, X-Axis, Y-Axis and Z-Axis were investigated. The results above show only the worst case.

UMTS-FDD Band V (Part 22H)

Low channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
1652.8	-47.65	V	7.95	0.78	-40.48	-13	-27.48
1652.8	-46.21	H	7.95	0.78	-39.04	-13	-26.04
330.1	-53.27	V	6.4	0.26	-47.13	-13	-34.13
604.9	-52.16	H	6.8	0.37	-45.73	-13	-32.73

Middle channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
1670	-47.17	V	7.95	0.78	-40	-13	-27
1670	-46.22	H	7.95	0.78	-39.05	-13	-26.05
330.5	-53.15	V	6.4	0.26	-47.01	-13	-34.01
605.1	-52.43	H	6.8	0.37	-46	-13	-33

High channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
1693.2	-47.13	V	7.95	0.78	-39.96	-13	-26.96
1693.2	-46.21	H	7.95	0.78	-39.04	-13	-26.04
328.9	-53.61	V	6.4	0.26	-47.47	-13	-34.47
604.3	-52.25	H	6.8	0.37	-45.82	-13	-32.82

Note:

1, The testing has been conformed to $10 \times 846.6 \text{ MHz} = 8,466 \text{ MHz}$

2, All other emissions more than 30 dB below the limit

3, RMC, HSUPA and HSDPA mode were investigated. The results above show only the worse cases

4, X-Axis, Y-Axis and Z-Axis were investigated. The results above show only the worst case.

UMTS-FDD Band IV (Part 27E)

Low channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
3424.8	-46.59	V	10.07	2.52	-39.04	-13	-26.04
3424.8	-45.16	H	10.07	2.52	-37.61	-13	-24.61
324.5	-55.85	V	6.4	0.26	-49.71	-13	-36.71
736.4	-53.16	H	7.1	0.42	-46.48	-13	-33.48

Middle channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
3480	-46.47	V	10.09	2.52	-38.9	-13	-25.9
3480	-45.22	H	10.09	2.52	-37.65	-13	-24.65
325.1	-56.81	V	6.4	0.26	-50.67	-13	-37.67
737.5	-53.24	H	7.1	0.42	-46.56	-13	-33.56

High channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
3505.2	-46.52	V	10.09	2.52	-38.95	-13	-25.95
3505.2	-45.19	H	10.09	2.52	-37.62	-13	-24.62
324.8	-56.51	V	6.4	0.26	-50.37	-13	-37.37
736.9	-53.11	H	7.1	0.42	-46.43	-13	-33.43

Note:

1, The testing has been conformed to $10 \times 1712.4 \text{ MHz} = 17,124 \text{ MHz}$

2, All other emissions more than 30 dB below the limit

3, RMC, HSUPA and HSDPA mode were investigated. The results above show only the worse cases

4, X-Axis, Y-Axis and Z-Axis were investigated. The results above show only the worst case

UMTS-FDD Band II (Part 24E)

Low channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
3704.8	-49.65	V	10.25	2.73	-42.13	-13	-29.13
3704.8	-48.74	H	10.25	2.73	-41.22	-13	-28.22
331.2	-53.48	V	6.4	0.26	-47.34	-13	-34.34
605.2	-52.76	H	6.8	0.37	-46.33	-13	-33.33

Middle channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
3760	-49.68	V	10.25	2.73	-42.16	-13	-29.16
3760	-48.53	H	10.25	2.73	-41.01	-13	-28.01
330.8	-53.16	V	6.4	0.26	-47.02	-13	-34.02
604.7	-52.34	H	6.8	0.37	-45.91	-13	-32.91

High channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
3815.2	-49.35	V	10.36	2.73	-41.72	-13	-28.72
3815.2	-48.52	H	10.36	2.73	-40.89	-13	-27.89
331.3	-53.36	V	6.4	0.26	-47.22	-13	-34.22
605.1	-52.73	H	6.8	0.37	-46.3	-13	-33.3

Note:

1, The testing has been conformed to $10 \times 1907.6 \text{ MHz} = 19,076 \text{ MHz}$

2, All other emissions more than 30 dB below the limit


3, RMC, HSUPA and HSDPA mode were investigated. The results above show only the worse cases

4, X-Axis, Y-Axis and Z-Axis were investigated. The results above show only the worst case

6.7 Band Edge

Temperature	24°C
Relative Humidity	52%
Atmospheric Pressure	1019mbar
Test date :	August 19, 2016
Tested By :	Loren Luo

Requirement(s):

Spec	Item	Requirement	Applicable
§22.917(a) §24.238(a) § 27.53(h)	a)	The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.	☒
Test setup			
Procedure	- The EUT was connected to Spectrum Analyzer and Base Station via power divider. - The Band Edges of low and high channels for the highest RF powers were measured. Setting RBW as roughly BW/100.		
Remark			
Result	☒ Pass ☐ Fail		

Test Data ☒ Yes ☐ N/A

Test Plot ☒ Yes (See below) ☐ N/A

GSM Voice:

Cellular Band (Part 22H) result

Frequency (MHz)	Emission (dBm)	Limit (dBm)
823.9925	-14.23	-13
849.0175	-14.10	-13

PCS Band (Part24E) result

Frequency (MHz)	Emission (dBm)	Limit (dBm)
1849.9975	-14.99	-13
1910.0225	-17.20	-13

GPRS:

Cellular Band (Part 22H) result

Frequency (MHz)	Emission (dBm)	Limit (dBm)
823.9875	-14.41	-13
849.0175	-13.86	-13

PCS Band (Part24E) result

Frequency (MHz)	Emission (dBm)	Limit (dBm)
1849.9800	-16.28	-13
1910.0250	-16.27	-13

EGPRS (MCS5):

Cellular Band (Part 22H) result

Frequency (MHz)	Emission (dBm)	Limit (dBm)
823.9950	-13.94	-13
849.0175	-13.40	-13

PCS Band (Part24E) result

Frequency (MHz)	Emission (dBm)	Limit (dBm)
1849.9725	-16.64	-13
1910.0275	-17.23	-13

RMC:

UMTS-FDD Band V (Part 22H)

Frequency (MHz)	Emission (dBm)	Limit (dBm)
824.000	-27.34	-13
849.825	-30.39	-13

UMTS-FDD Band IV (Part 27)

Frequency (MHz)	Emission (dBm)	Limit (dBm)
1709.975	-19.68	-13
1755.000	-26.76	-13

UMTS-FDD Band II (Part 24E)

Frequency (MHz)	Emission (dBm)	Limit (dBm)
1850.000	-17.00	-13
1910.025	-20.82	-13

HSDPA:

UMTS-FDD Band V (Part 22H)

Frequency (MHz)	Emission (dBm)	Limit (dBm)
824.000	-28.15	-13
850.835	-30.61	-13

UMTS-FDD Band IV (Part 27)

Frequency (MHz)	Emission (dBm)	Limit (dBm)
1710.000	-18.13	-13
1755.025	-21.77	-13

UMTS-FDD Band II (Part 24E)

Frequency (MHz)	Emission (dBm)	Limit (dBm)
1850.000	-18.37	-13
1910.025	-21.77	-13

HSUPA:

UMTS-FDD Band V (Part 22H)

Frequency (MHz)	Emission (dBm)	Limit (dBm)
824.000	-28.49	-13
849.050	-29.59	-13

UMTS-FDD Band IV (Part 27)


Frequency (MHz)	Emission (dBm)	Limit (dBm)
1710.000	-18.69	-13
1755.025	-21.52	-13

UMTS-FDD Band II (Part 24E)

Frequency (MHz)	Emission (dBm)	Limit (dBm)
1850.000	-18.32	-13
1909.975	-18.09	-13


GSM Voice:

Test Plots

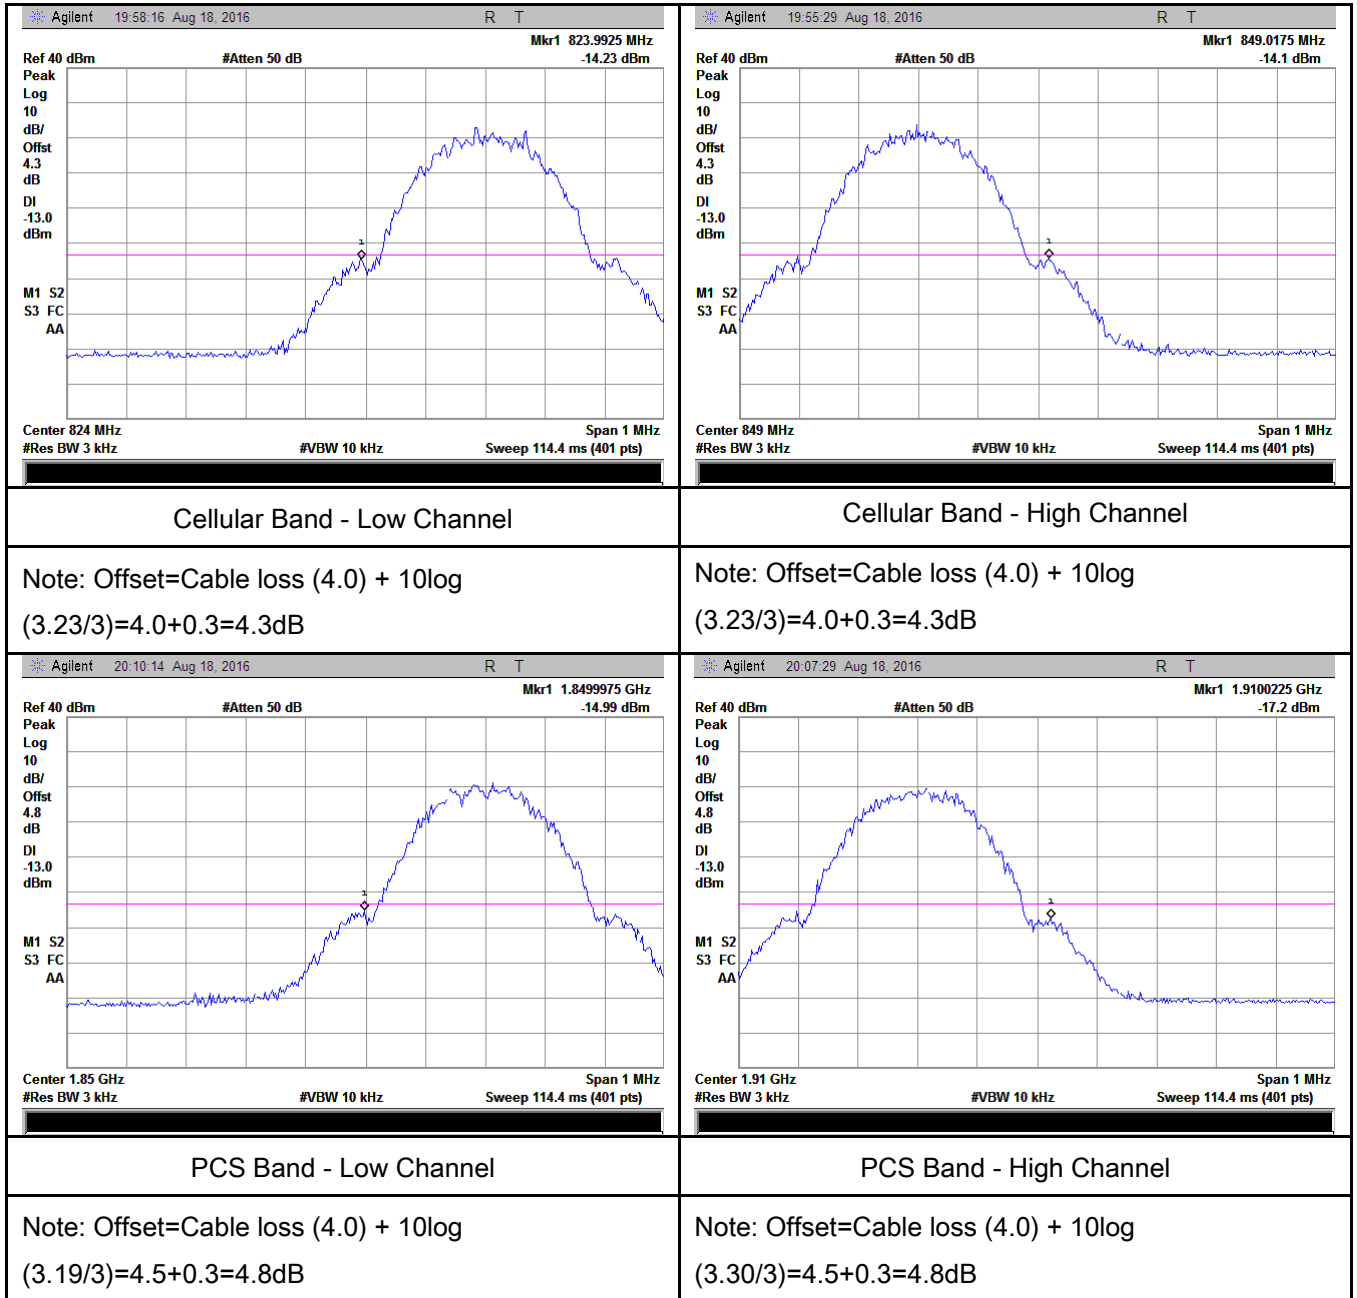


GPRS:

Test Plots

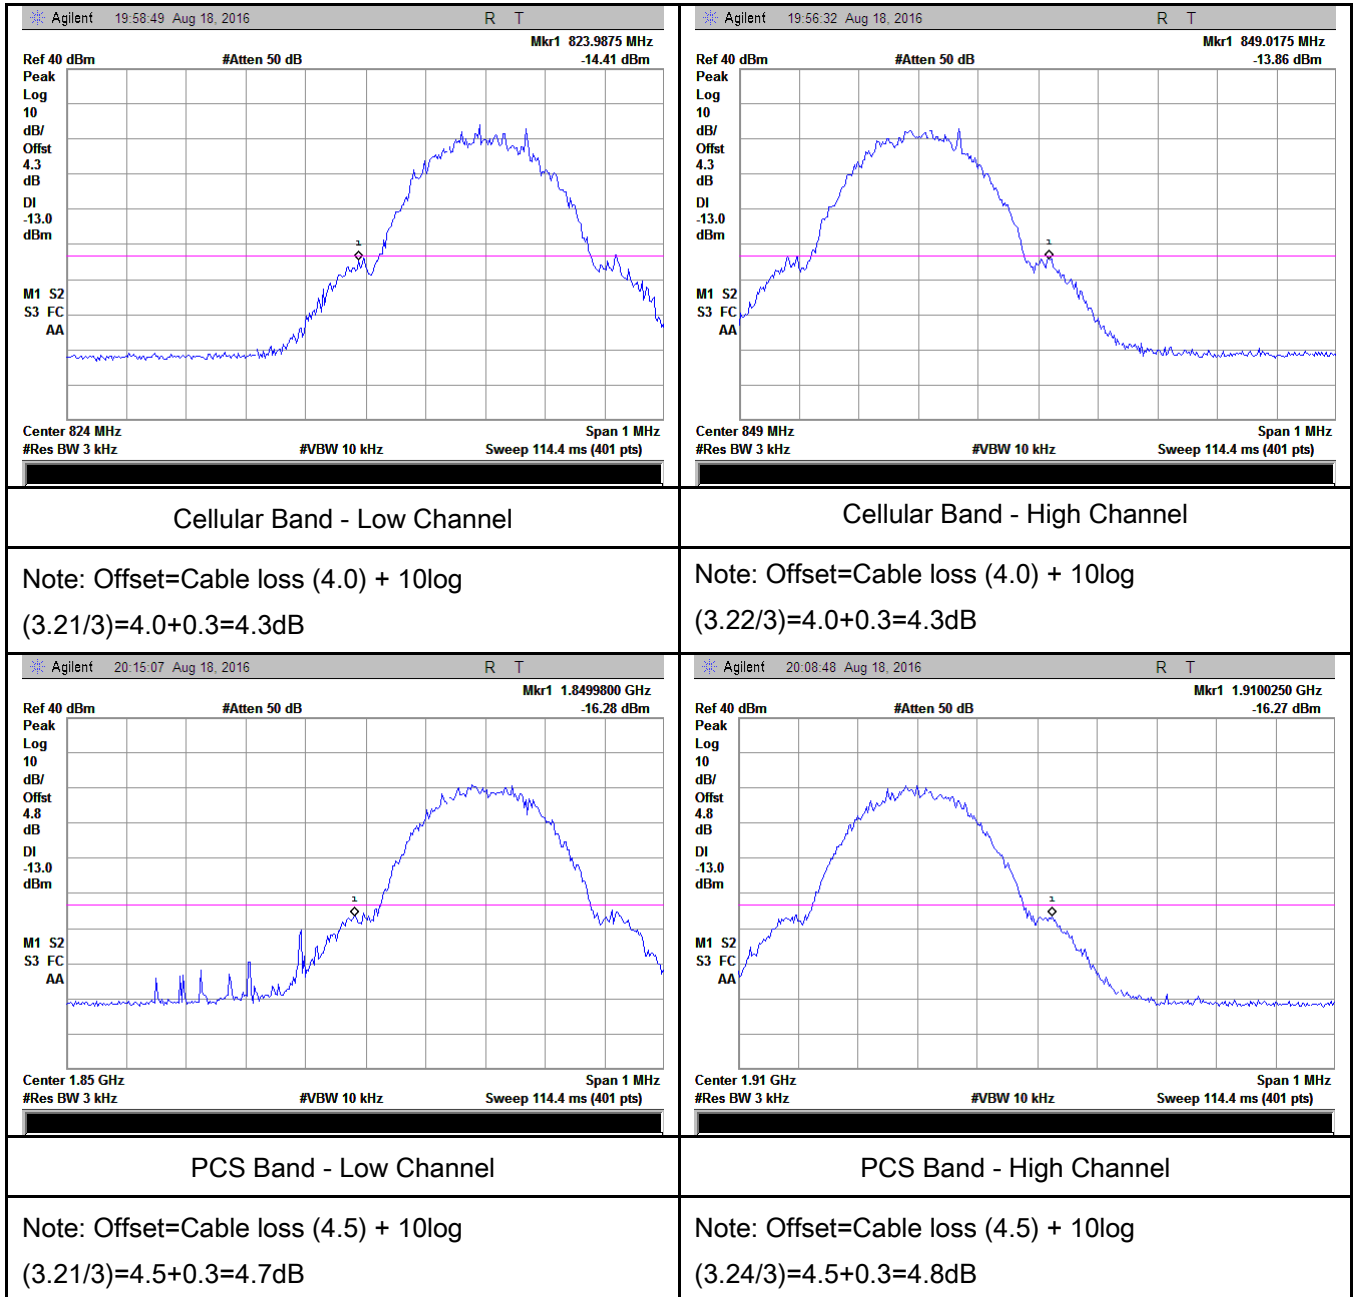


EGPRS (MCS5):

Test Plots

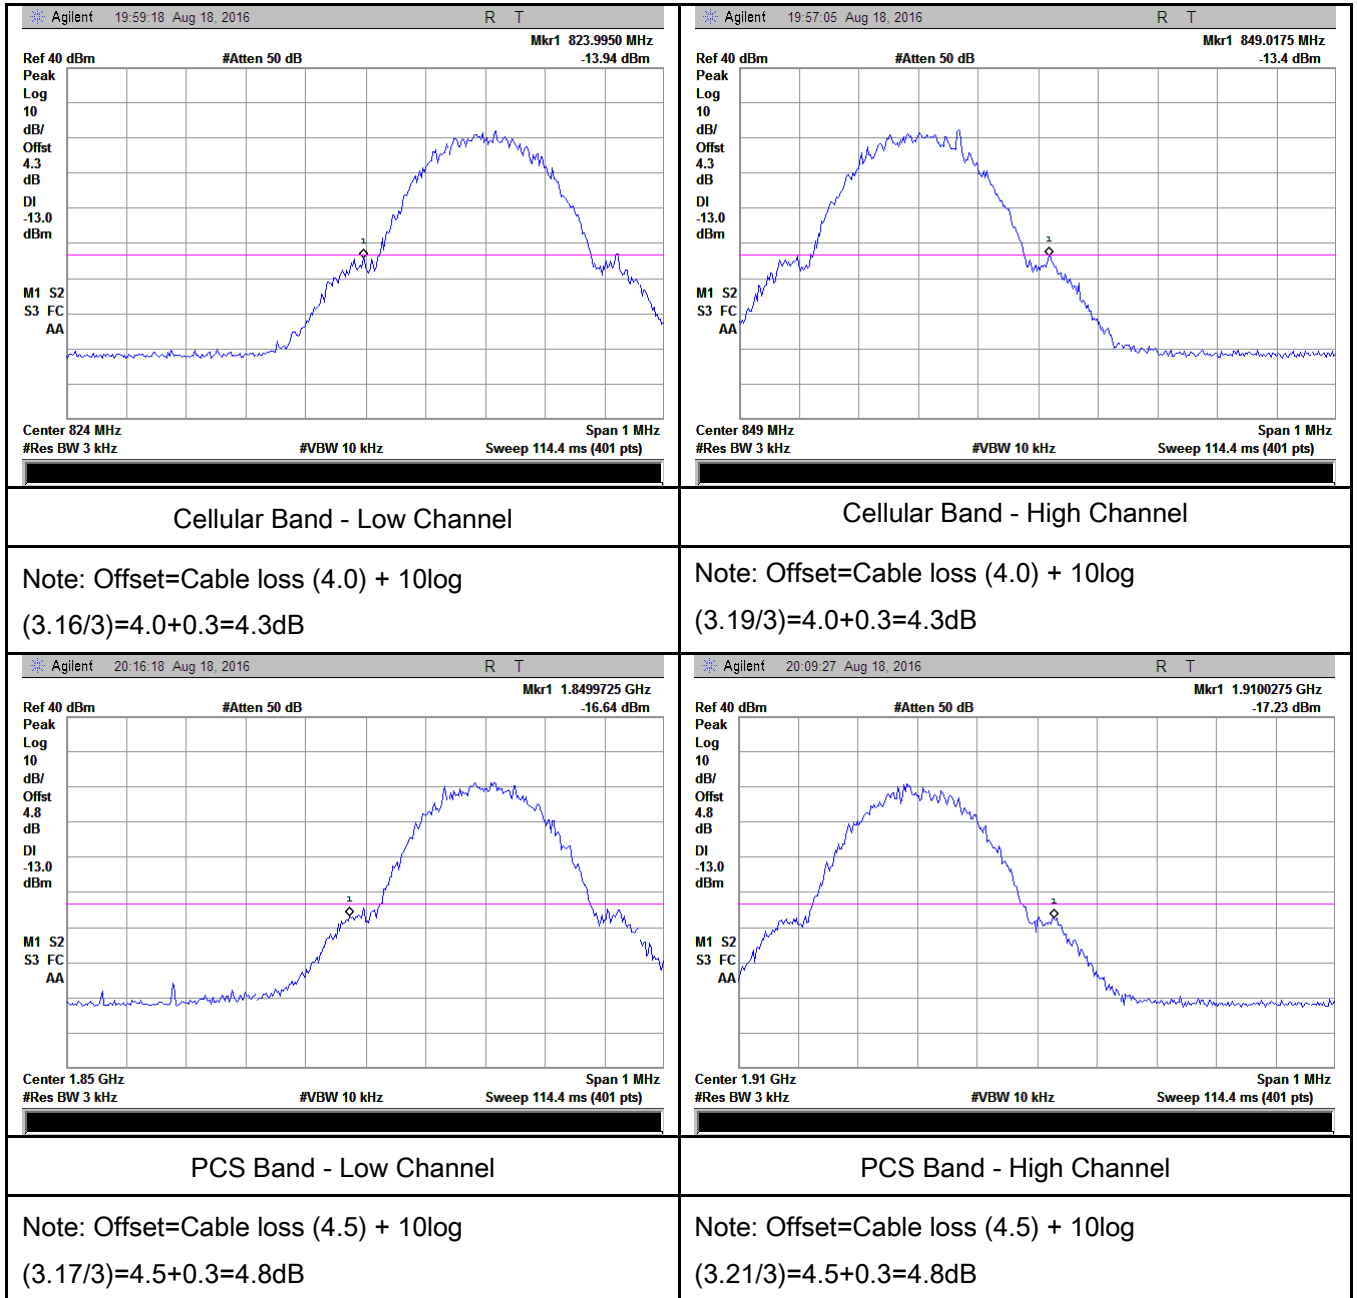


RMC:

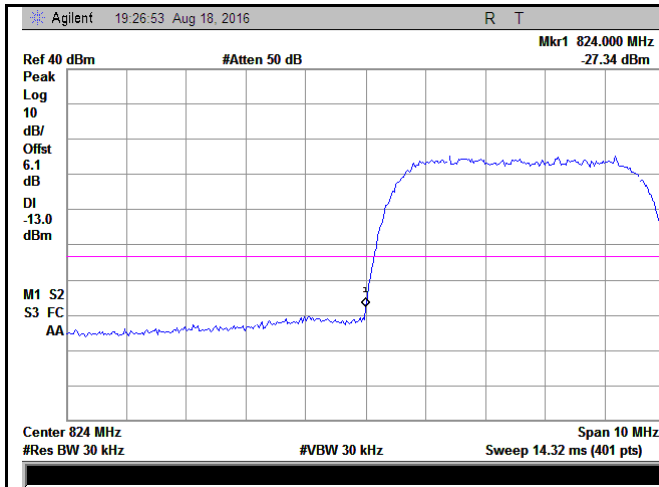


UMTS-FDD Band V - Low Channel

Note: Offset=Cable loss (4.0) + 10log
(49.05/30)=4.0+2.1=6.1dB

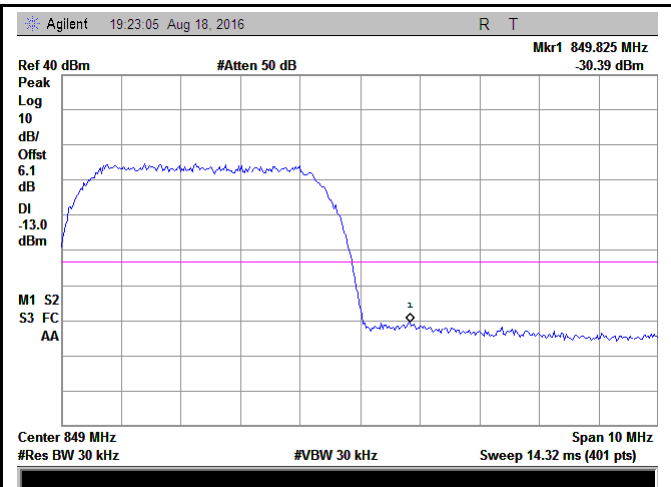


UMTS-FDD Band V - High Channel

Note: Offset=Cable loss (4.0) + 10log
(48.78/30)=4.0+2.1=6.1dB

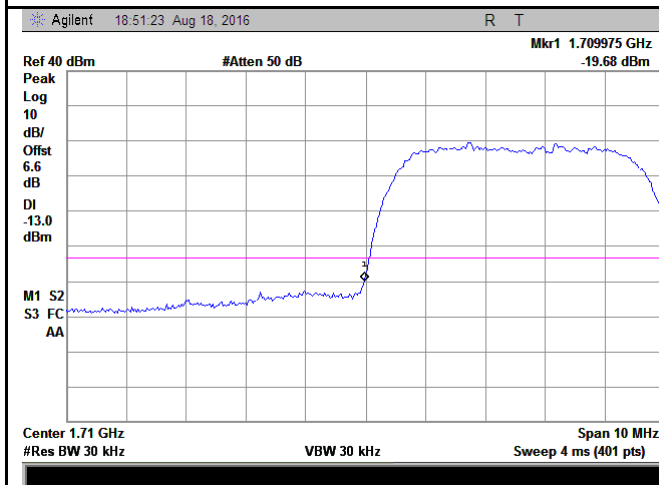

UMTS-FDD Band IV - Low Channel


Note: Offset=Cable loss (4.5) + 10log
(48.65/30)=4.5+2.1=6.6dB

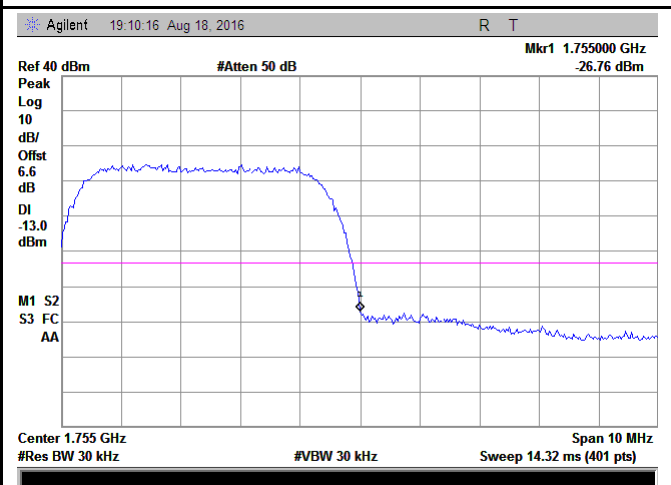

UMTS-FDD Band IV - High Channel


Note: Offset=Cable loss (4.5) + 10log
(49.07/30)=4.5+2.1=6.6dB

Test Report	16070911-FCC-R1
Page	77 of 98

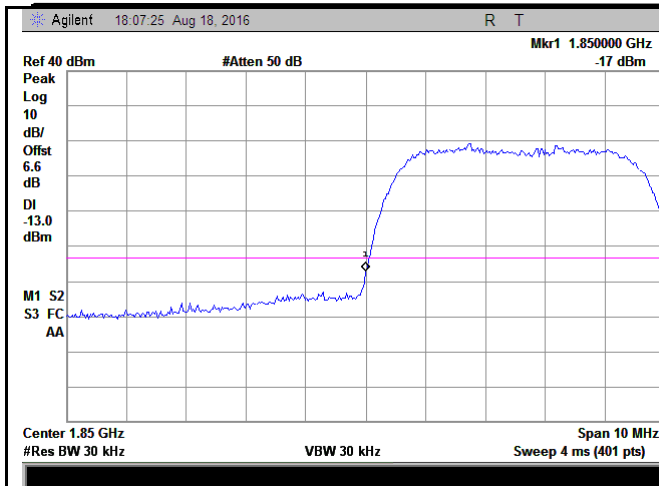

UMTS-FDD Band II - Low Channel


Note: Offset=Cable loss (4.5) + 10log
(48.97/30)4.5+2.1=6.6dB

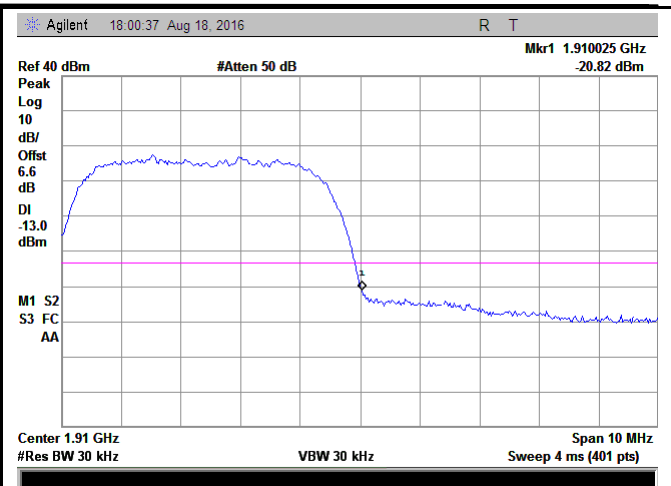

UMTS-FDD Band II - High Channel


Note: Offset=Cable loss (4.5) + 10log
(48.94/30)=4.5+2.1=6.6dB

HSDPA:

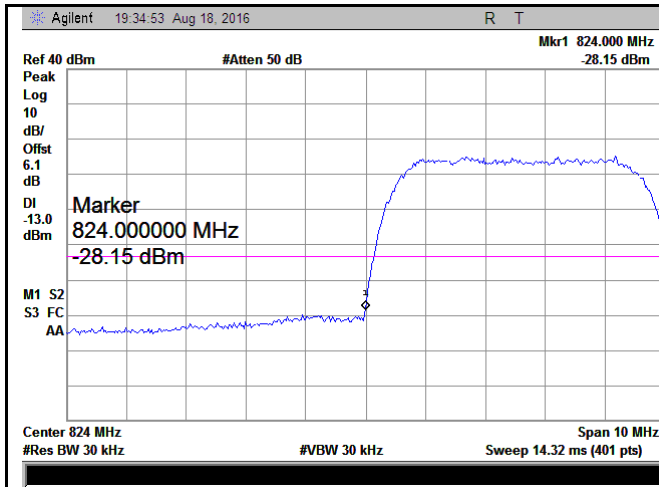


UMTS-FDD Band V - Low Channel

Note: Offset=Cable loss (4.0) + 10log
(48.86/30)=4.0+2.1=6.1dB

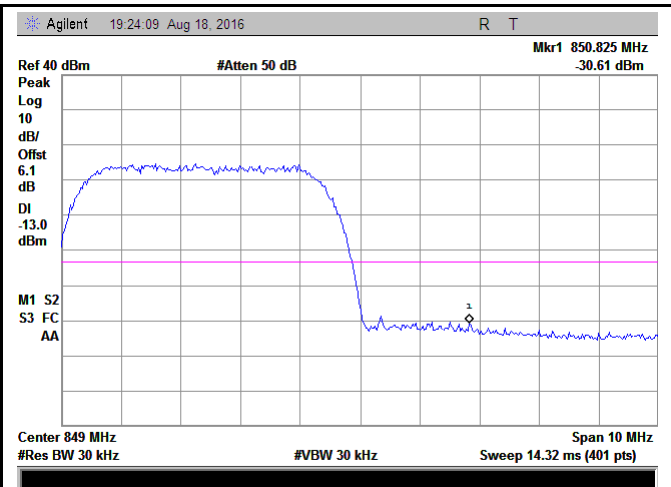


UMTS-FDD Band V - High Channel

Note: Offset=Cable loss (4.0) + 10log
(48.62/30)=4.0+2.1=6.1dB

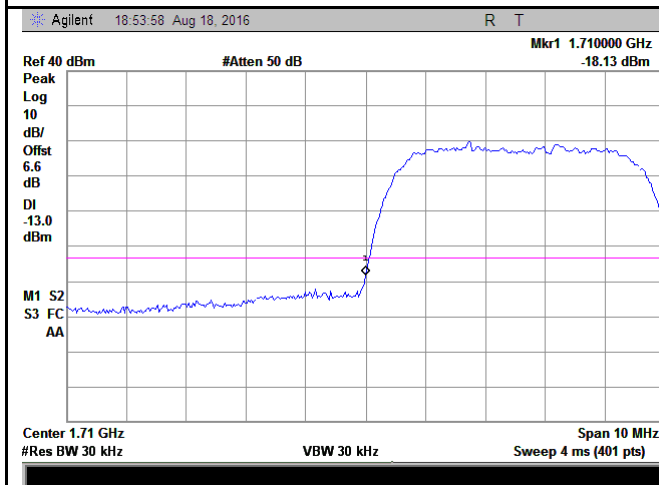

UMTS-FDD Band IV - Low Channel


Note: Offset=Cable loss (4.5) + 10log
(48.95/30)=4.5+2.1=6.6dB

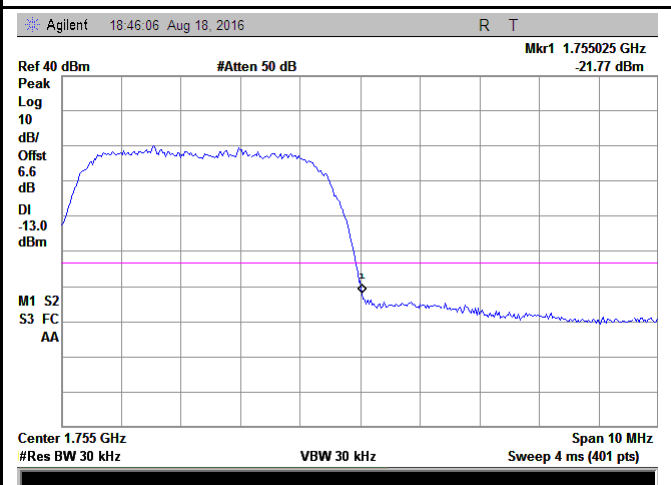

UMTS-FDD Band IV - High Channel


Note: Offset=Cable loss (4.5) + 10log
(48.94/30)=4.5+2.1=6.6dB

Test Report	16070911-FCC-R1
Page	79 of 98

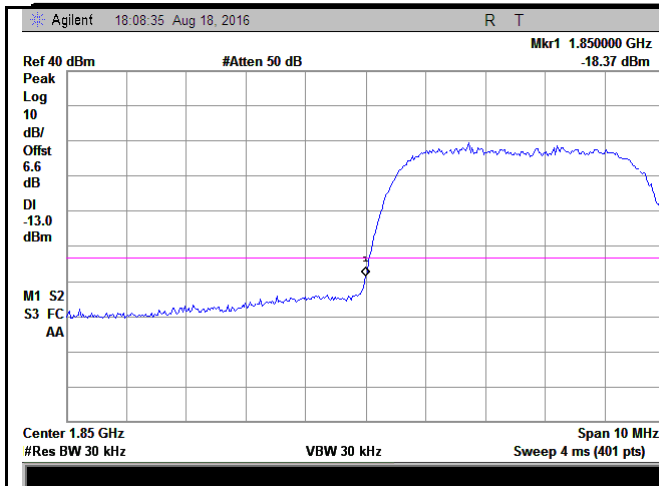

UMTS-FDD Band II - Low Channel


Note: Offset=Cable loss (4.5) + 10log
(49.01/30)=4.5+2.1=6.6dB

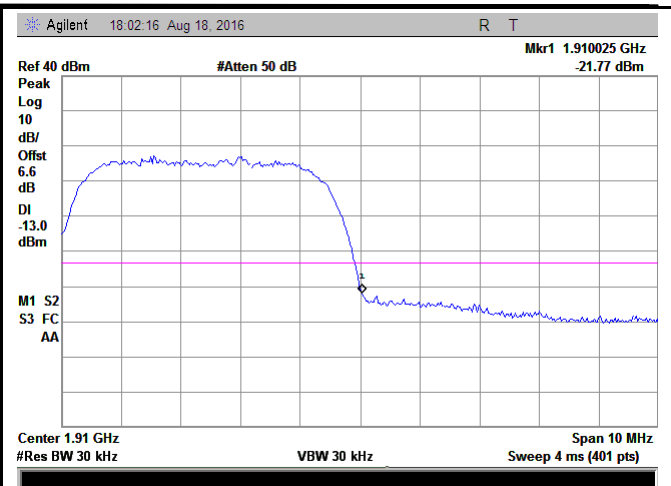


UMTS-FDD Band II - High Channel

Note: Offset=Cable loss (4.5) + 10log
(49.03/30)=4.5+2.1=6.6dB

HSUPA:

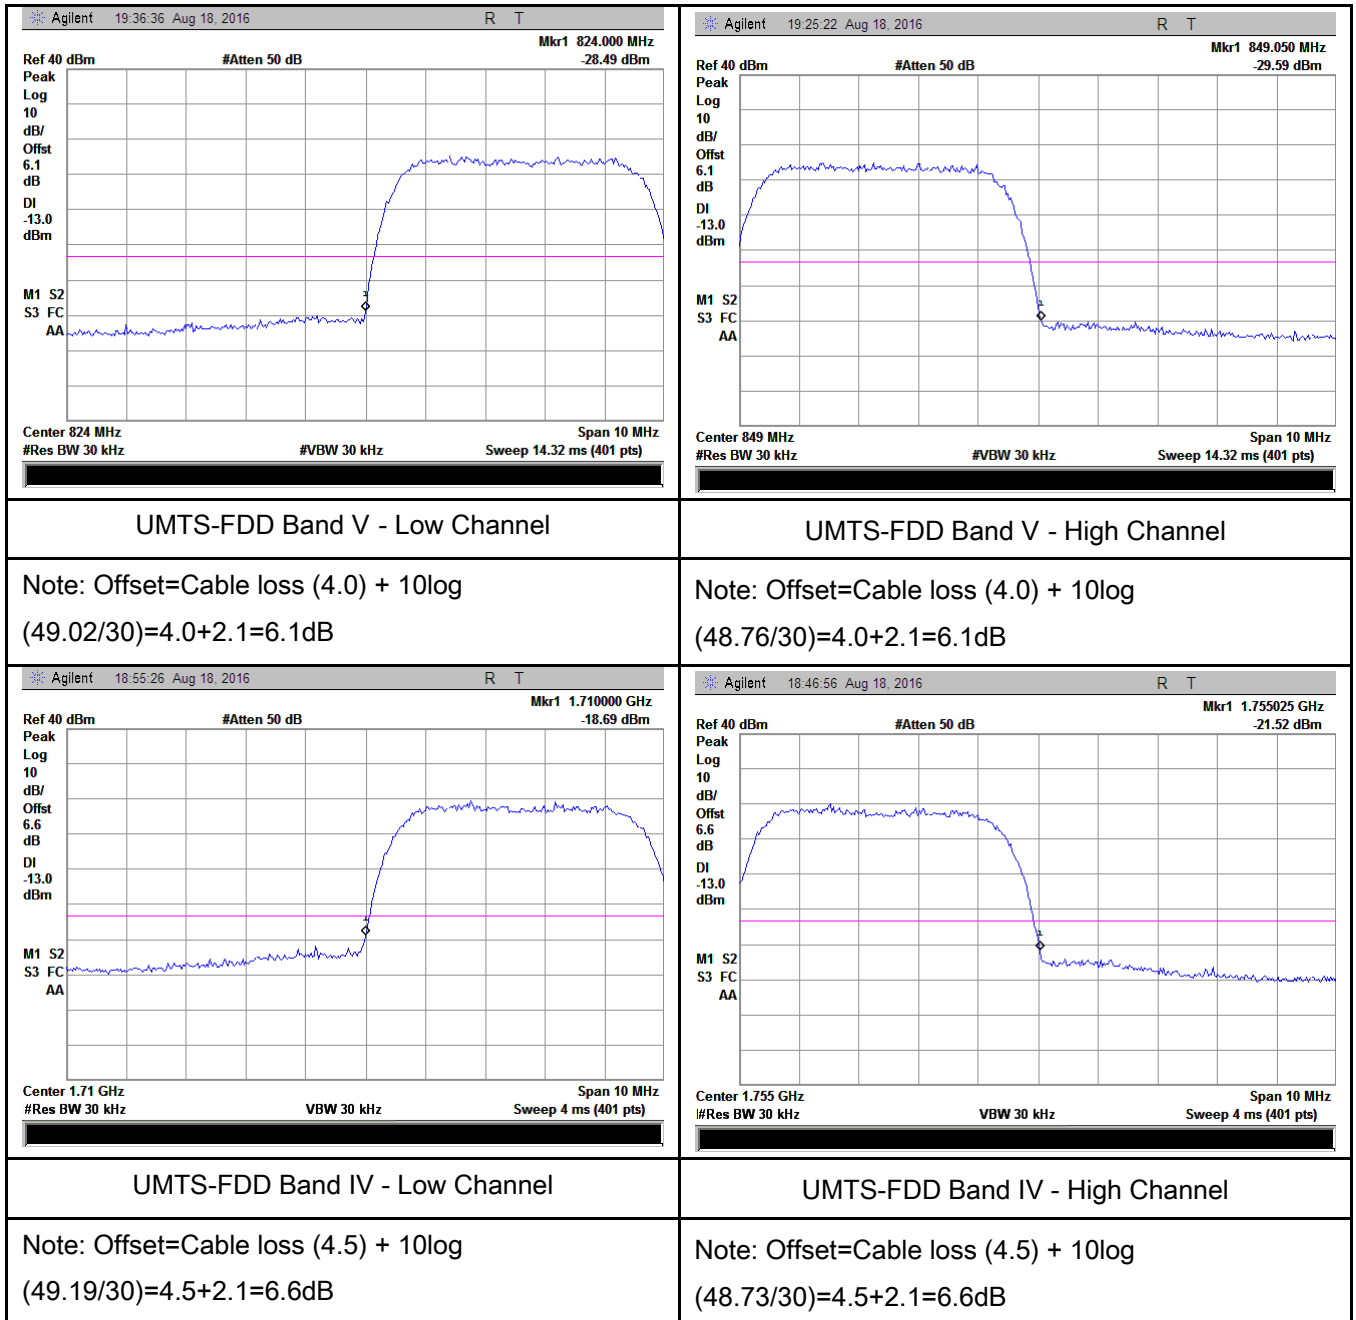


Test Report	16070911-FCC-R1
Page	81 of 98

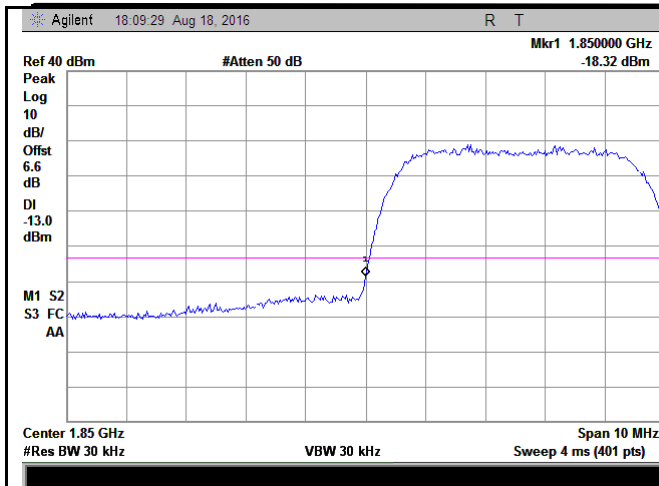

UMTS-FDD Band II - Low Channel

Note: Offset=Cable loss (4.5) + 10log
(48.86/30)=4.5+2.1=6.6dB

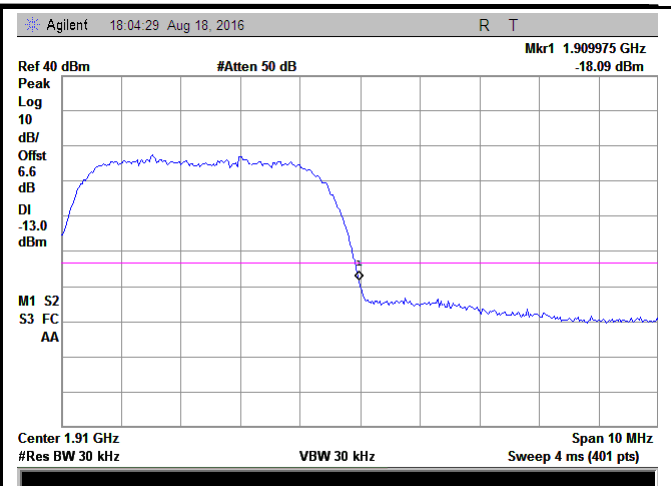


UMTS-FDD Band II - High Channel

Note: Offset=Cable loss (4.5) + 10log
(48.83/30)=4.5+2.1=6.6dB

6.8 Frequency Stability

Temperature	25°C
Relative Humidity	57%
Atmospheric Pressure	1024mbar
Test date :	August 24, 2016
Tested By :	Loren Luo

Requirement(s):

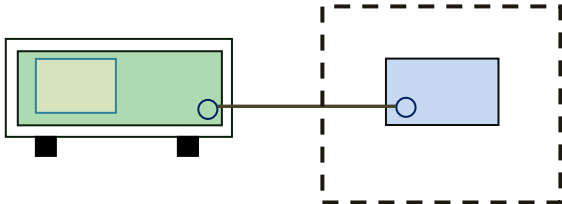Spec	Item	Requirement	Applicable																																
§2.1055, §22.355 & §24.235 § 27.5(h); § 27.54	a)	According to §22.355, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table below: Frequency Tolerance for Transmitters in the Public Mobile Services <table border="1"> <thead> <tr> <th>Frequency Range (MHz)</th><th>Base, fixed (ppm)</th><th>Mobile ≤ 3 watts (ppm)</th><th>Mobile ≤ 3 watts (ppm)</th></tr> </thead> <tbody> <tr> <td>25 to 50</td><td>20.0</td><td>20.0</td><td>50.0</td></tr> <tr> <td>50 to 450</td><td>5.0</td><td>5.0</td><td>50.0</td></tr> <tr> <td>45 to 512</td><td>2.5</td><td>5.0</td><td>.0</td></tr> <tr> <td>821 to 896</td><td>1.5</td><td>2.5</td><td>2.5</td></tr> <tr> <td>928 to 29.</td><td>5.0</td><td>N/A</td><td>N/A</td></tr> <tr> <td>929 to 960.</td><td>1.5</td><td>N/A</td><td>N/A</td></tr> <tr> <td>2110 to 2220</td><td>10.0</td><td>N/A</td><td>N/A</td></tr> </tbody> </table> According to §24.235, the frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized frequency block.	Frequency Range (MHz)	Base, fixed (ppm)	Mobile ≤ 3 watts (ppm)	Mobile ≤ 3 watts (ppm)	25 to 50	20.0	20.0	50.0	50 to 450	5.0	5.0	50.0	45 to 512	2.5	5.0	.0	821 to 896	1.5	2.5	2.5	928 to 29.	5.0	N/A	N/A	929 to 960.	1.5	N/A	N/A	2110 to 2220	10.0	N/A	N/A	☒
Frequency Range (MHz)	Base, fixed (ppm)	Mobile ≤ 3 watts (ppm)	Mobile ≤ 3 watts (ppm)																																
25 to 50	20.0	20.0	50.0																																
50 to 450	5.0	5.0	50.0																																
45 to 512	2.5	5.0	.0																																
821 to 896	1.5	2.5	2.5																																
928 to 29.	5.0	N/A	N/A																																
929 to 960.	1.5	N/A	N/A																																
2110 to 2220	10.0	N/A	N/A																																
Test setup																																			

Test Report	16070911-FCC-R1
Page	83 of 98

Procedure	A communication link was established between EUT and base station. The frequency error was monitored and measured by base station under variation of ambient temperature and variation of primary supply voltage. Limit: The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.
Remark	
Result	☒ Pass ☐ Fail

Test Data ☒ Yes ☐ N/A

Test Plot ☐ Yes (See below) ☒ N/A

GSM Voice:

Cellular Band (Part 22H) result

Middle Channel, $f_0 = 836.6$ MHz				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-10	3.7	19	0.0227	2.5
0		16	0.0191	2.5
10		15	0.0179	2.5
20		16	0.0191	2.5
30		14	0.0167	2.5
40		16	0.0191	2.5
50		21	0.0251	2.5
55		20	0.0239	2.5
25	4.2	21	0.0251	2.5
	3.5	17	0.0203	2.5

PCS Band (Part 24E) result

Middle Channel, $f_0 = 1880$ MHz				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-10	3.7	13	0.0069	2.5
0		12	0.0064	2.5
10		13	0.0069	2.5
20		12	0.0064	2.5
30		16	0.0085	2.5
40		17	0.0090	2.5
50		15	0.0080	2.5
55		19	0.0101	2.5
25	4.2	16	0.0085	2.5
	3.5	21	0.0112	2.5

RMC:

UMTS-FDD Band V (Part 22H)

Middle Channel, $f_0 = 835$ MHz				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-10	3.7	16	0.0192	2.5
0		13	0.0156	2.5
10		15	0.0180	2.5
20		14	0.0168	2.5
30		12	0.0144	2.5
40		11	0.0132	2.5
50		18	0.0216	2.5
55		14	0.0168	2.5
25	4.2	16	0.0192	2.5
	3.5	13	0.0156	2.5

UMTS-FDD Band II (Part 24E)

Middle Channel, $f_0 = 1880$ MHz				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-10	3.7	16	0.0085	2.5
0		12	0.0064	2.5
10		15	0.0080	2.5
20		11	0.0059	2.5
30		12	0.0064	2.5
40		15	0.0080	2.5
50		11	0.0059	2.5
55		13	0.0069	2.5
25	4.2	16	0.0085	2.5
	3.5	14	0.0074	2.5

UMTS-FDD Band IV (Part 27E)

Middle Channel, $f_0 = 1732.6$ MHz				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-10	3.7	16	0.0192	2.5
0		15	0.0180	2.5
10		16	0.0192	2.5
20		18	0.0216	2.5
30		15	0.0180	2.5
40		12	0.0144	2.5
50		15	0.0180	2.5
55		16	0.0192	2.5
25	4.2	12	0.0144	2.5
	3.5	18	0.0216	2.5

Annex A. TEST INSTRUMENT

Instrument	Model	Serial #	Cal Date	Cal Due	In use
RF Conducted Test					
Agilent ESA-E SERIES SPECTRUM ANALYZER	E4407B	MY45108319	09/16/2015	09/15/2016	☒
Power Splitter	1#	1#	09/01/2015	08/31/2016	☒
Universal Radio Communication Tester	CMU200	121393	09/25/2015	09/24/2016	☒
Temperature/Humidity Chamber	UHL-270	001	10/09/2015	10/08/2016	☒
DC Power Supply	E3640A	MY40004013	09/17/2015	09/16/2016	☒
RF Power Sensor	Dare RPR3006C/P/W	AY554013	09/17/2015	09/16/2016	☒
Radiated Emissions					
EMI test receiver	ESL6	100262	09/17/2015	09/16/2016	☒
OPT 010 AMPLIFIER (0.1-1300MHz)	8447E	2727A02430	09/01/2015	08/31/2016	☒
Microwave Preamplifier (1 ~ 26.5GHz)	8449B	3008A02402	03/24/2016	03/23/2017	☒
Bilog Antenna (30MHz~6GHz)	JB6	A110712	09/21/2015	09/20/2016	☒
Bilog Antenna (30MHz~2GHz)	JB1	A112017	09/21/2015	09/20/2016	☒
Double Ridge Horn Antenna (1 ~18GHz)	AH-118	71259	09/24/2015	09/23/2016	☒
Double Ridge Horn Antenna (1 ~18GHz)	AH-118	71283	09/24/2015	09/23/2016	☒
SYNTHESIZED SIGNAL GENERATOR	8665B	3744A01293	09/17/2015	09/16/2016	☒
Power Amplifier	SMC150D	R1553-0313	03/09/2016	03/08/2017	☒
Power Amplifier	S41-25D	R1553-0314	05/27/2016	05/26/2017	☒

Test Report	16070911-FCC-R1
Page	88 of 98

Tunable Notch Filter	3NF-800/1000-S	AA4	09/01/2015	08/31/2016	☒
Tunable Notch Filter	3NF-1000/2000-S	AM 4	09/01/2015	08/31/2016	☒

Annex B. EUT And Test Setup Photographs

Annex B.i. Photograph: EUT External Photo



Whole Package View



Adapter - Front View



EUT - Front View



EUT - Rear View




EUT - Top View



EUT - Bottom View



EUT - Left View

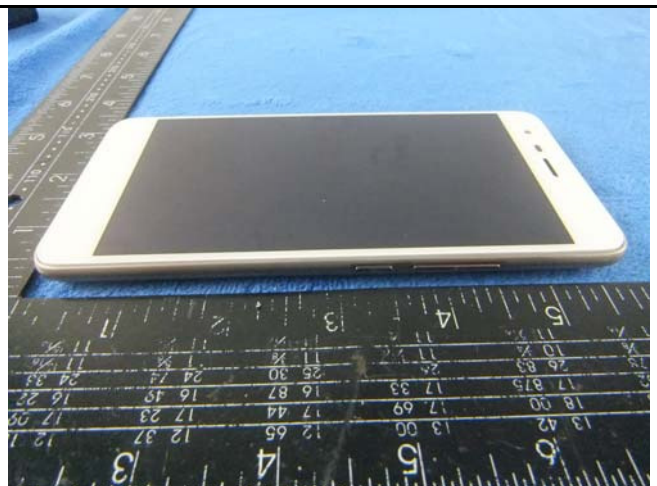

EUT - Right View

Annex B.ii. Photograph: EUT Internal Photo



Cover Off - Top View 1




Cover Off - Top View 2




Battery - Front View



Battery - Rear View

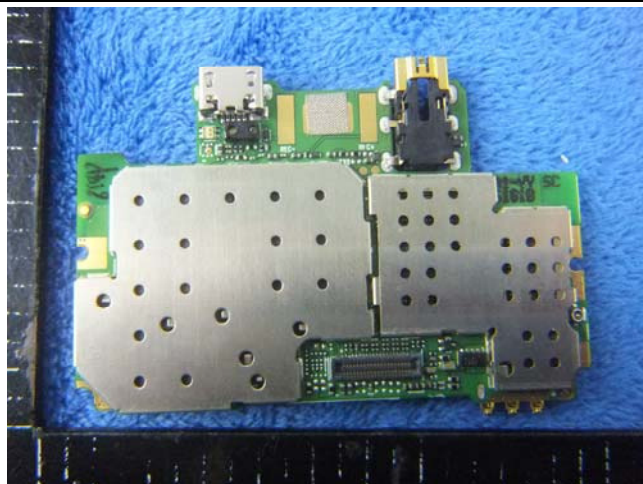

Mainboard with Shielding - Front View

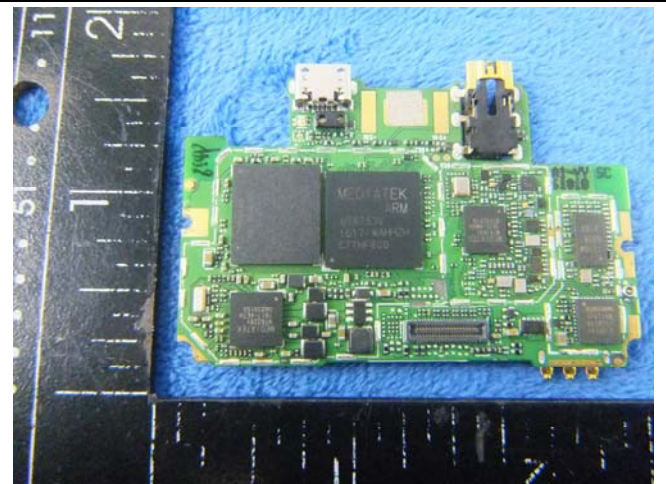


Mainboard without Shielding - Front View




Mainboard with Shielding - Rear View



Mainboard without Shielding - Rear View

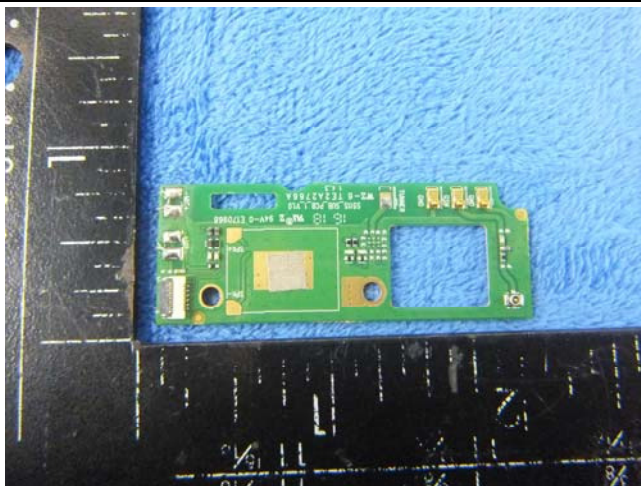

Small Board - Front View

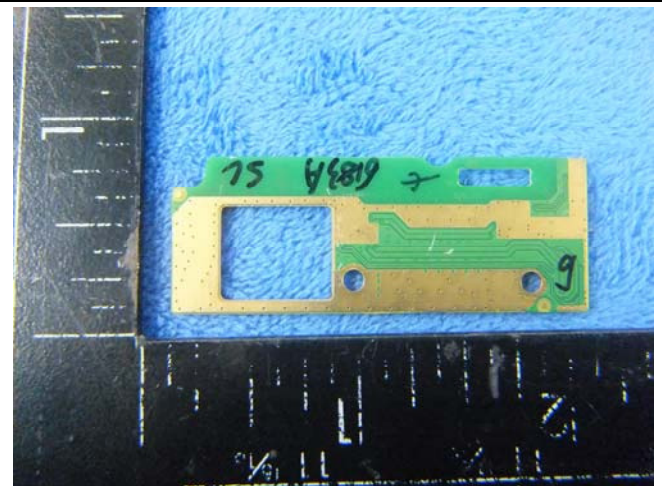

Small Board - Rear View




LCD - Front View



LCD - Rear View



UMTS-FDD/GSM Antenna View

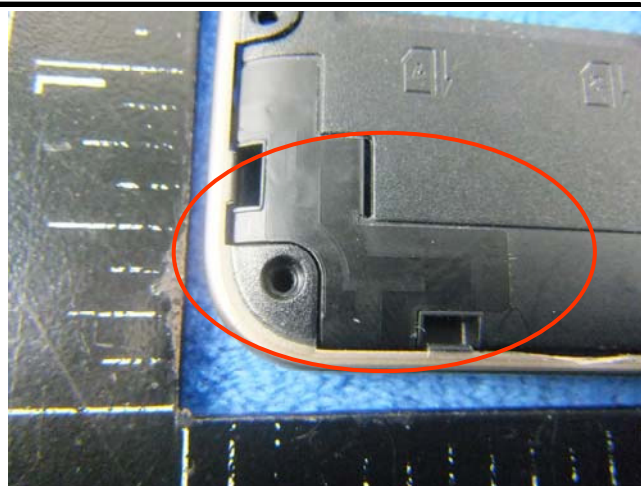

WIFI/BT/BLE/GPS - Antenna View




LTE - Antenna View

Annex B.iii. Photograph: Test Setup Photo



Radiated Spurious Emissions Test Setup Below 1GHz

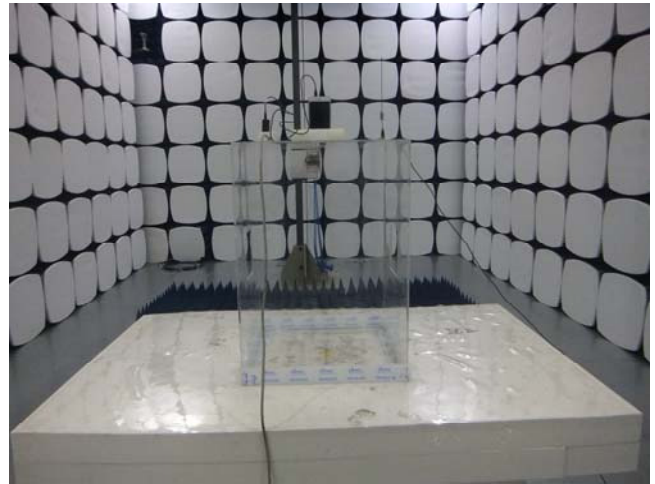


Radiated Spurious Emissions Test Setup Above
1GHz

Annex C. TEST SETUP AND SUPPORTING EQUIPMENT

Annex C.ii. TEST SET UP BLOCK

Block Configuration Diagram for Radiated Emissions

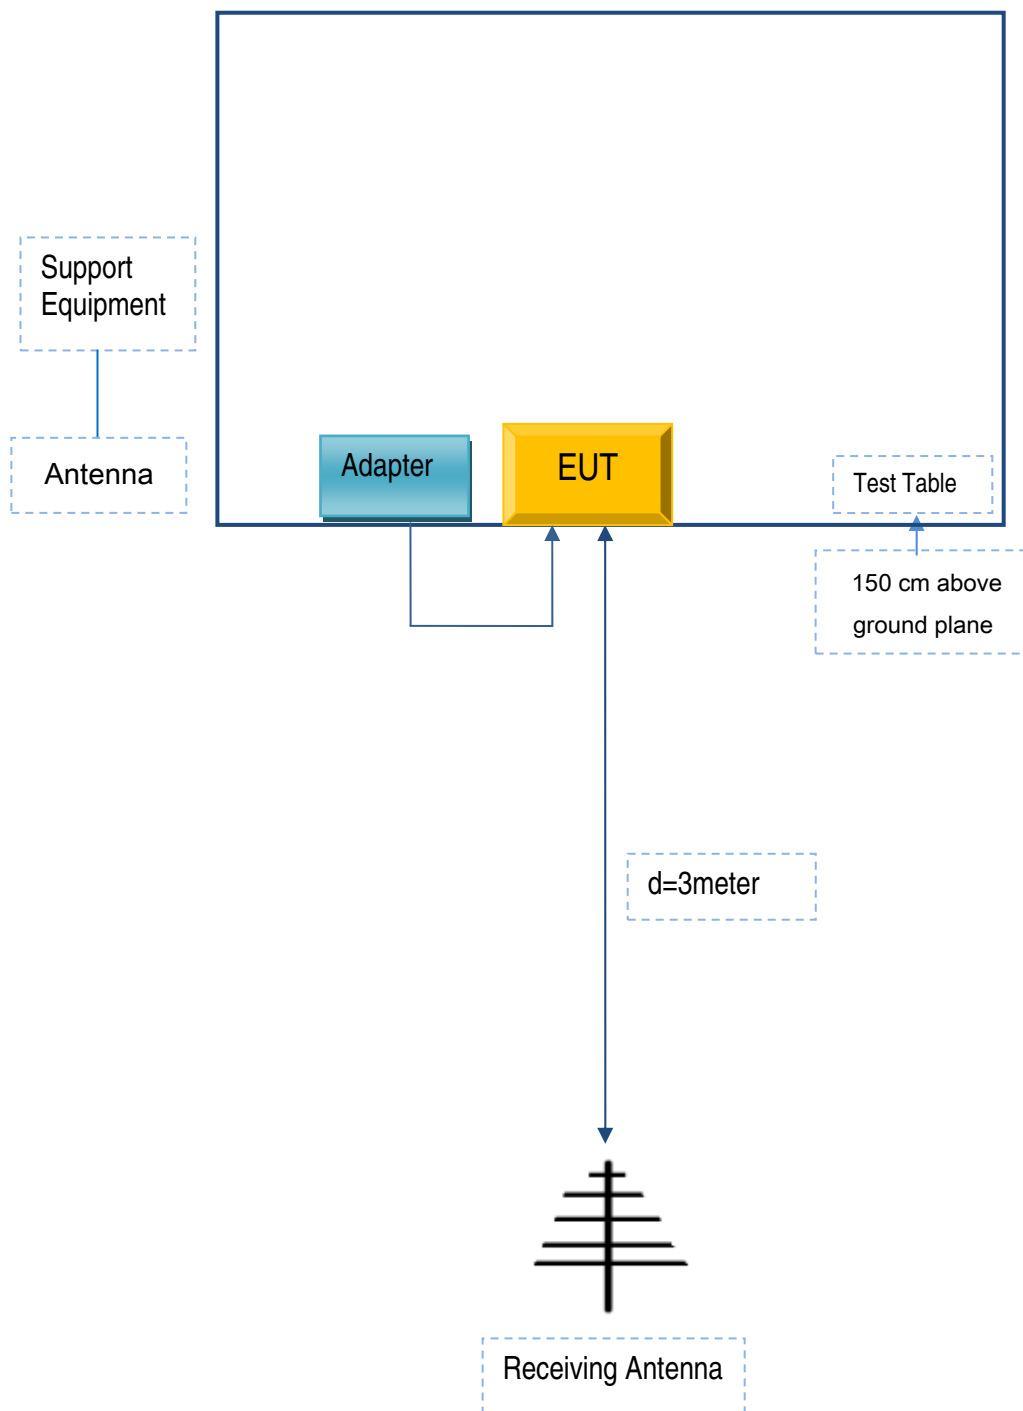

Annex C. ii. SUPPORTING EQUIPMENT DESCRIPTION

The following is a description of supporting equipment and details of cables used with the EUT.

Supporting Equipment:

Manufacturer	Equipment Description	Model	Serial No
Verykool USA Inc	Adapter	TPA-46B050100UU	SL-003

Supporting Cable:

Cable type	Shield Type	Ferrite Core	Length	Serial No
USB Cable	Un-shielding	No	0.8m	SL-003

Test Report	16070911-FCC-R1
Page	97 of 98

Annex C.ii. EUT OPERATING CONKITIONS

N/A

Test Report	16070911-FCC-R1
Page	98 of 98

Annex D. User Manual / Block Diagram / Schematics / Partlist

Please see attachment