


802.11n(HT40)


U-NII 1




U-NII 3

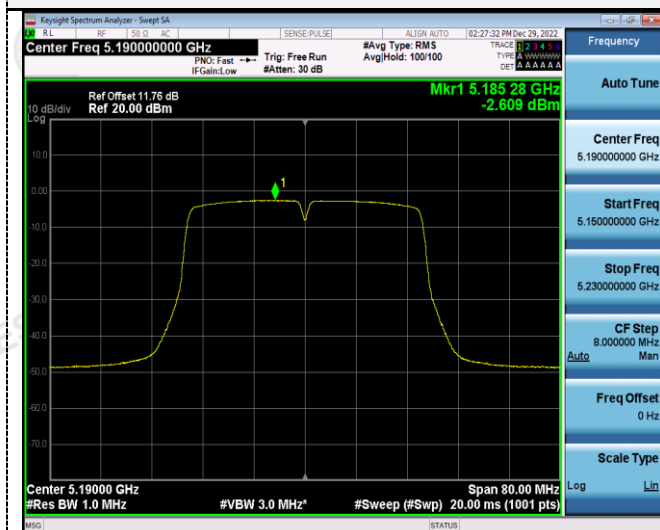

CH38

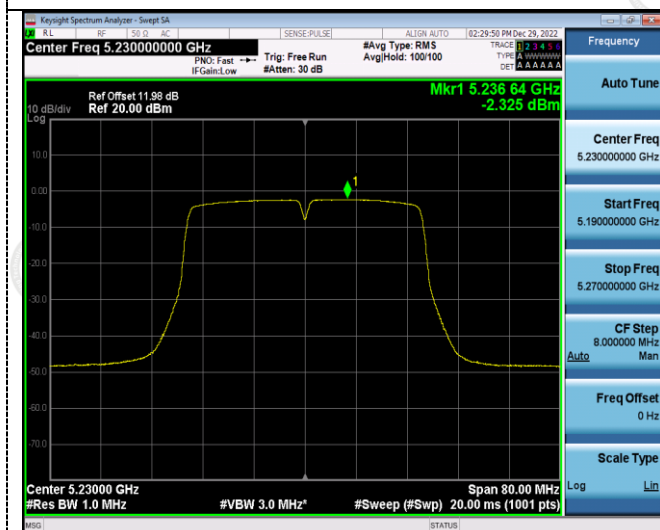

CH151

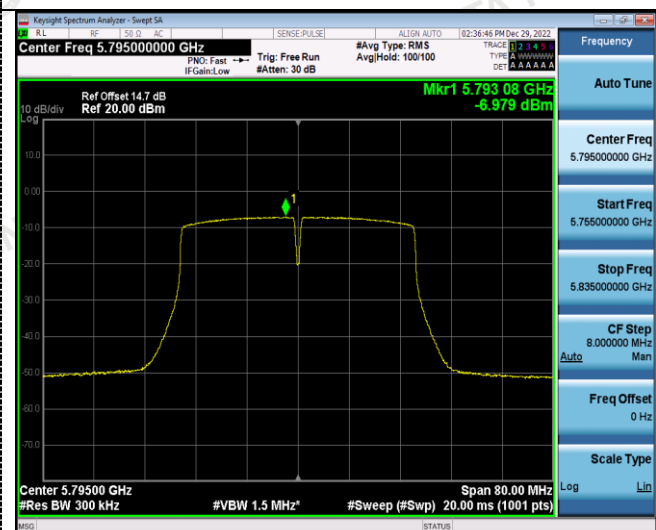


CH46

CH159

802.11ac(HT20)

U-NII 1

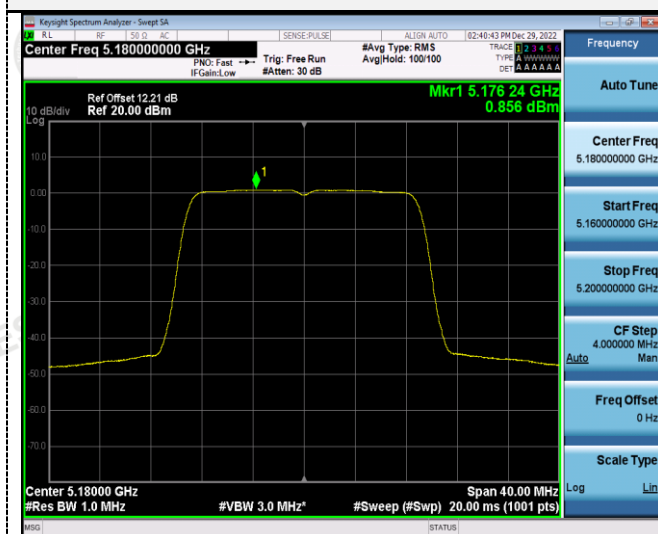

U-NII 3



CH36



CH149




CH44



CH157



CH48




CH165



802.11ac(HT40)


U-NII 1

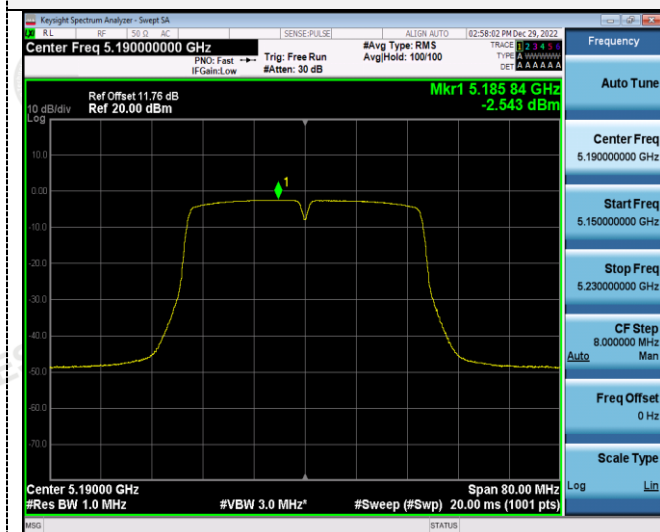

U-NII 3




CH38

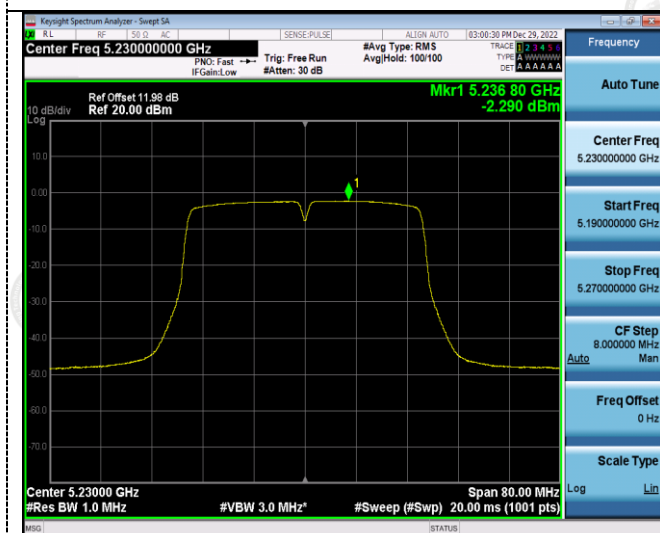


CH151



CH46

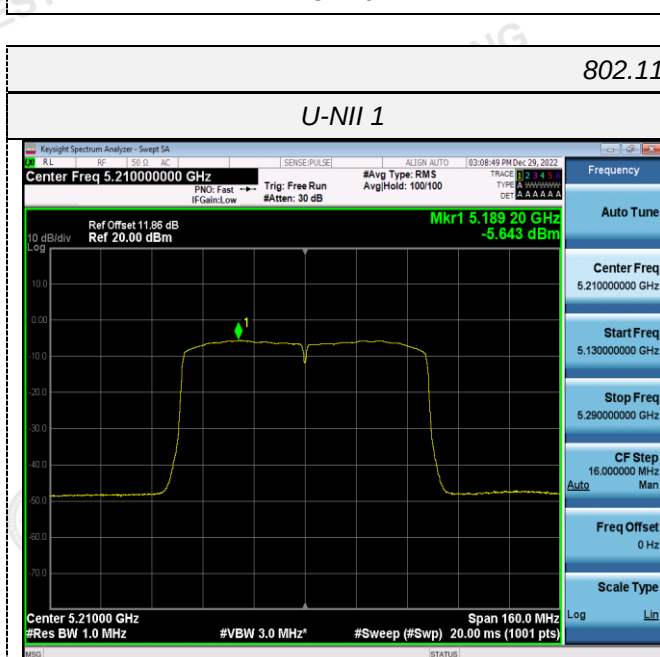

CH159

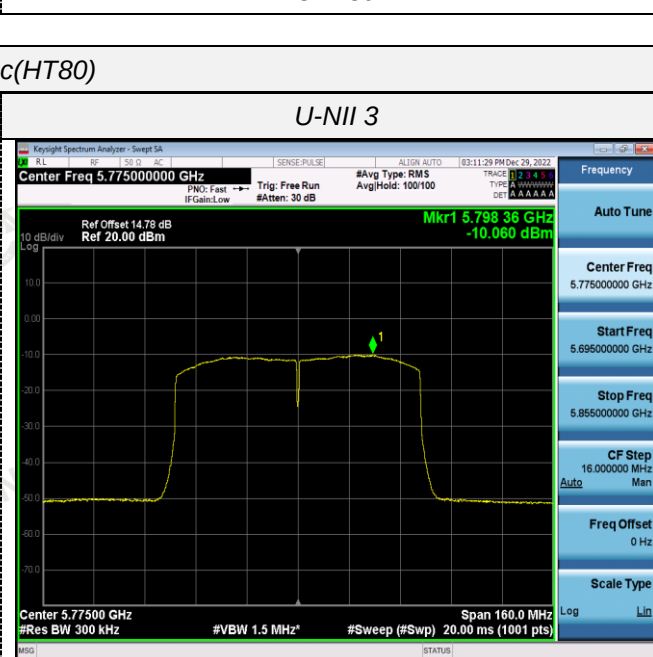


802.11ac(HT80)

U-NII 1



U-NII 3

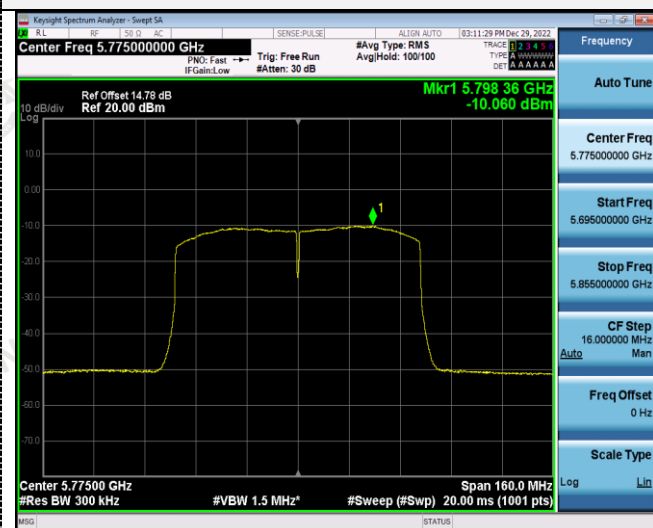

CH42



CH155



4.5 Emission Bandwidth (26dB Bandwidth)

Limit

N/A

Test Procedure

1. Set resolution bandwidth (RBW) = approximately 1 % of the EBW.
2. Set the video bandwidth (VBW) > RBW.
3. Detector = Peak.
4. Trace mode = Max hold.
5. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW / EBW ratio is approximately 1 %.

Test Configuration



Test Results

ANT 1

Type	Bands	Channel	26dB Bandwidth (MHz)	Limit (MHz)	Result
802.11a	U-NII 1	36	18.320	N/A	Pass
		44	18.440		
		48	18.320		
802.11n(HT20)	U-NII 1	36	19.400		
		44	19.360		
		48	19.520		
802.11n(HT40)	U-NII 1	38	41.040		
		46	41.360		
802.11ac(HT20)	U-NII 1	36	19.400		
		44	19.480		
		48	19.400		
802.11ac(HT40)	U-NII 1	38	41.120		
		46	41.120		
802.11ac(HT80)	U-NII 1	42	80.480		


ANT 2

Type	Bands	Channel	26dB Bandwidth (MHz)	Limit (MHz)	Result
802.11a	U-NII 1	36	18.480	N/A	Pass
		44	18.240		
		48	18.400		
802.11n(HT20)	U-NII 1	36	19.480		
		44	19.440		
		48	19.400		
802.11n(HT40)	U-NII 1	38	41.280		
		46	41.280		
802.11ac(HT20)	U-NII 1	36	19.480		
		44	19.400		
		48	19.400		
802.11ac(HT40)	U-NII 1	38	41.040		
		46	41.120		
802.11ac(HT80)	U-NII 1	42	80.800		


Test plot as follows:

ANT 1


802.11a

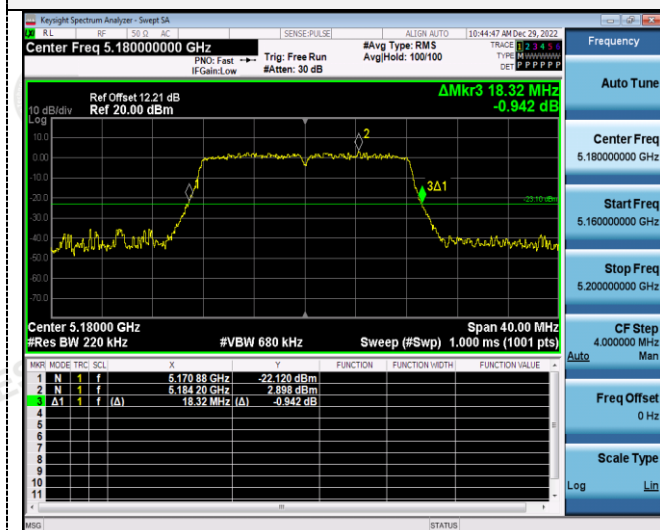


802.11n(HT20)

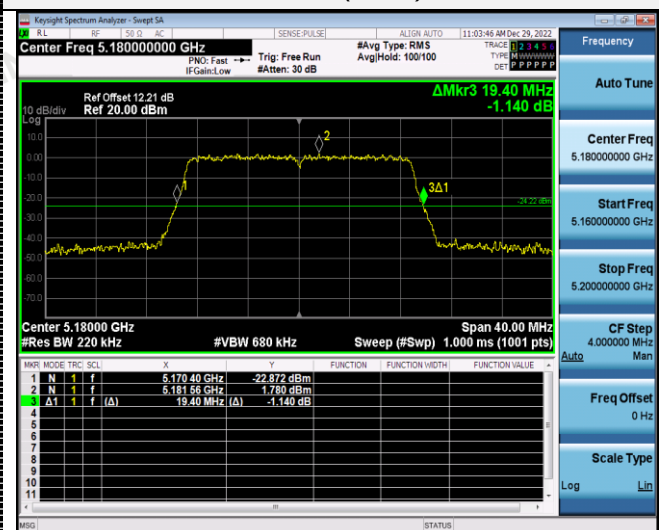


CH36

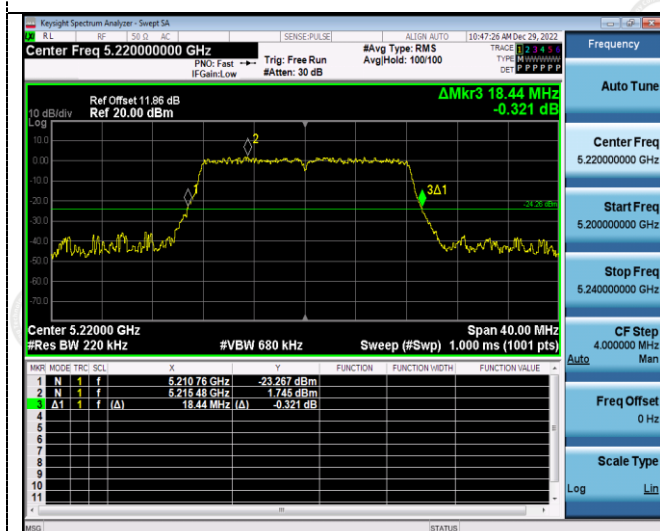

CH36

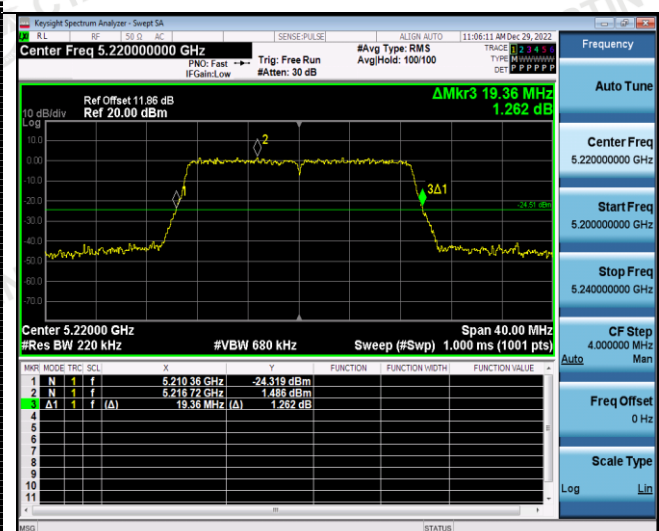

CH44

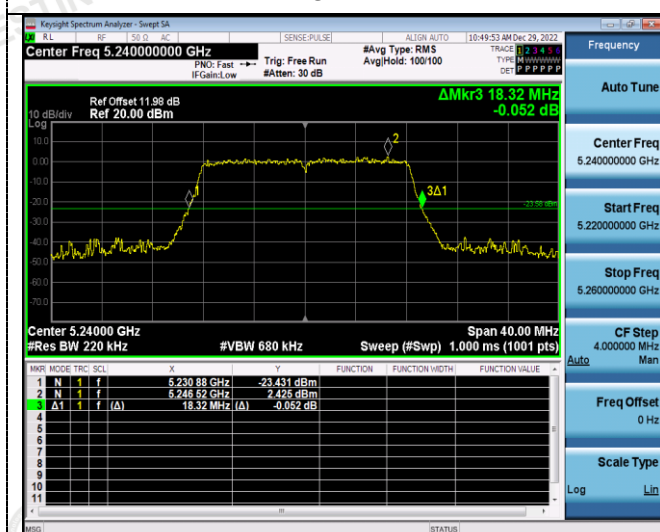

CH44




CH48




CH48




802.11n(HT40)

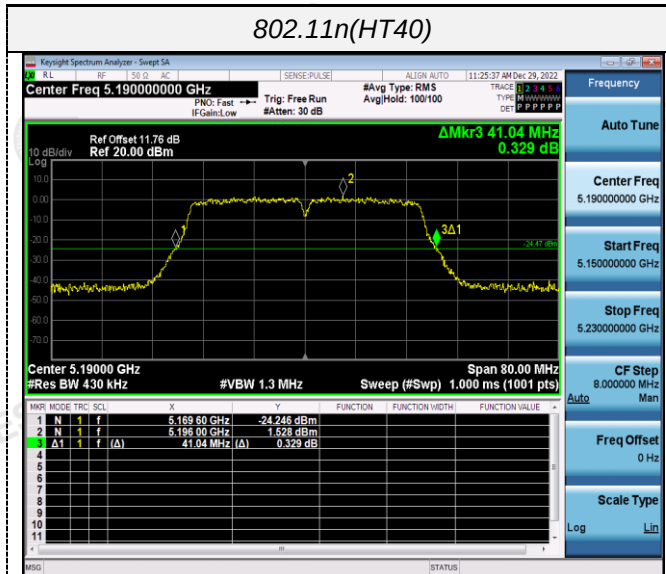


802.11ac(HT20)

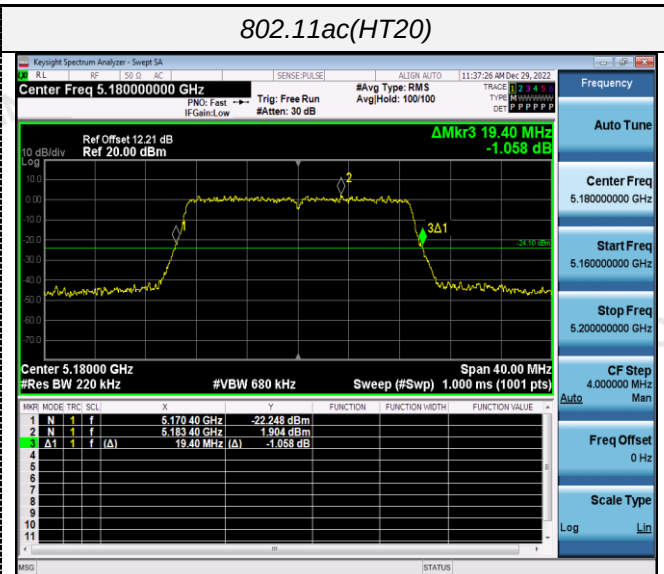

CH38

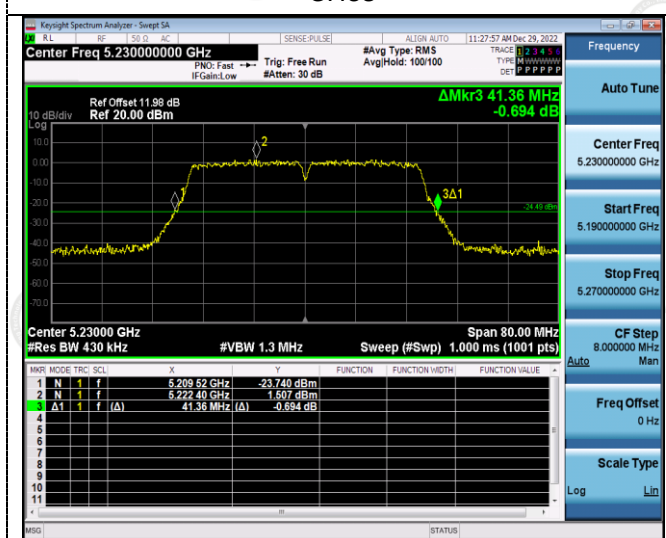


CH36

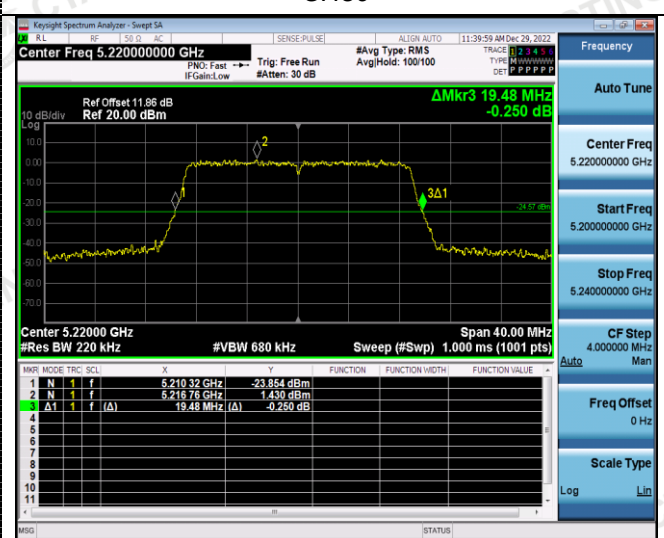

CH46




CH44

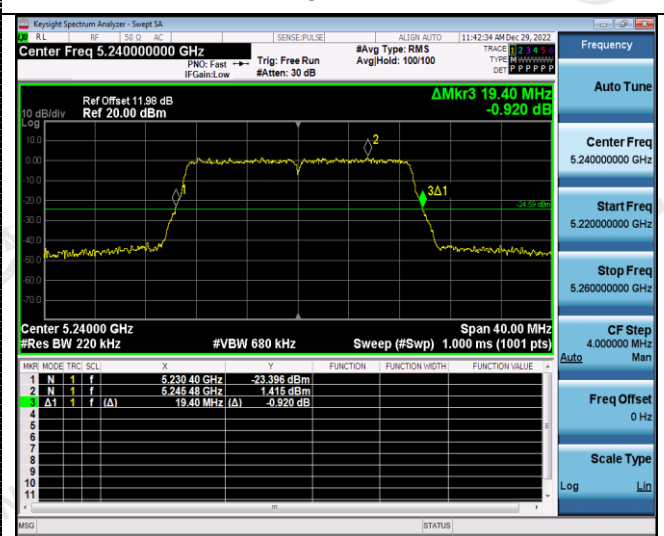


CH48




802.11ac(HT40)

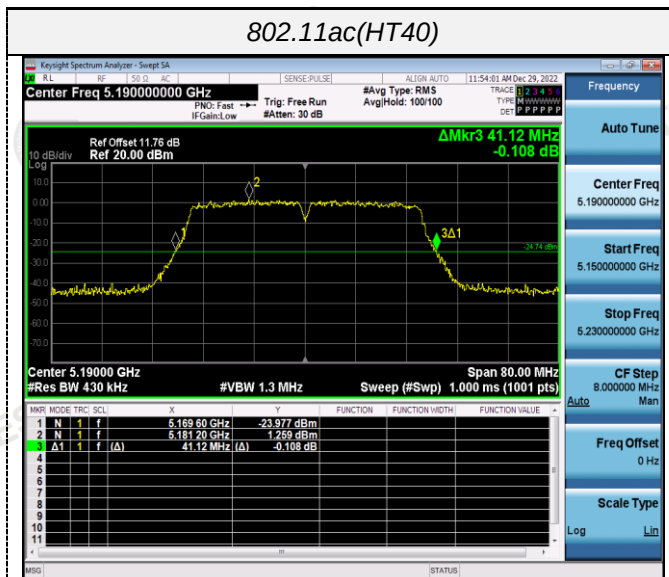


802.11ac(HT80)

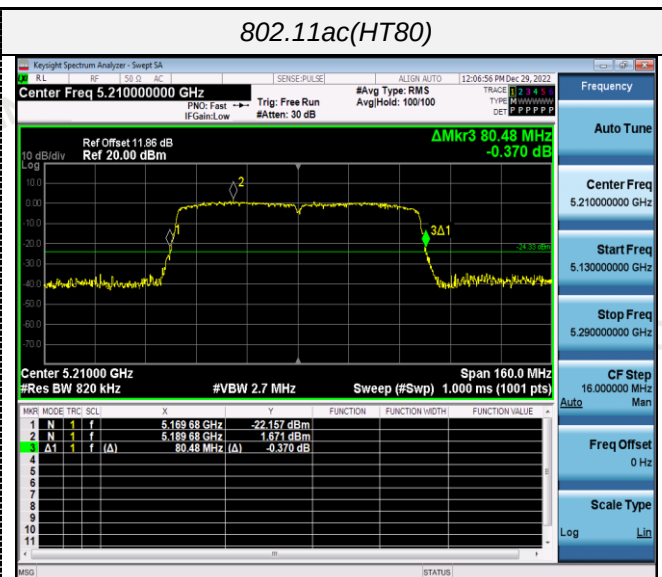


CH38

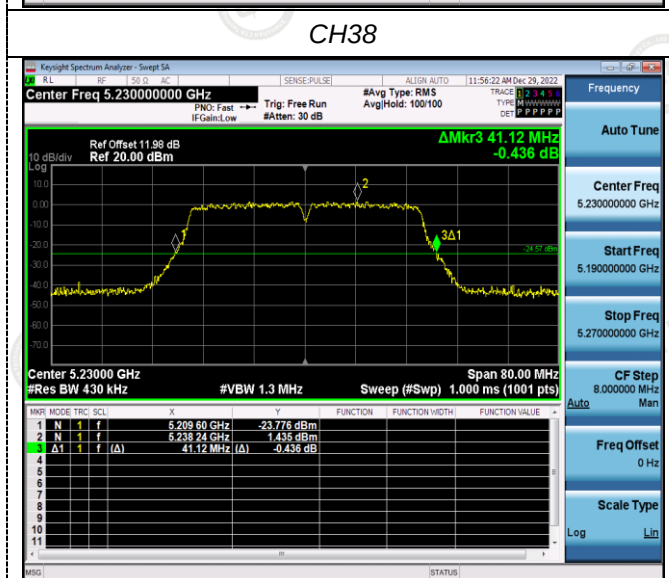

CH42

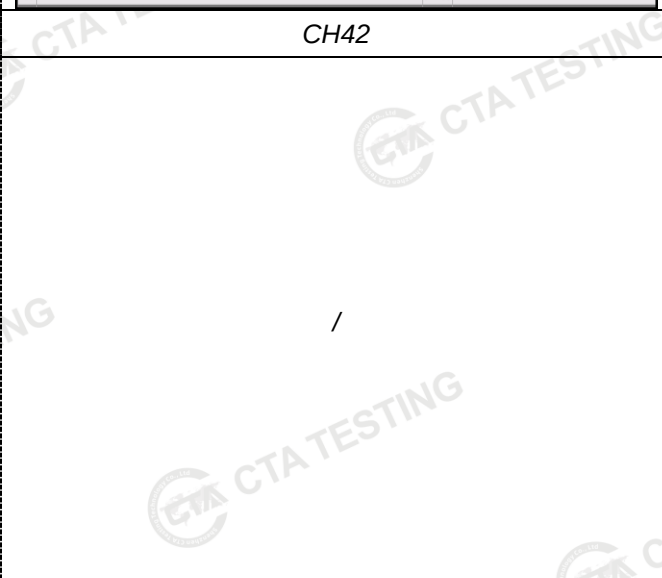


CH46



ANT 2


802.11a

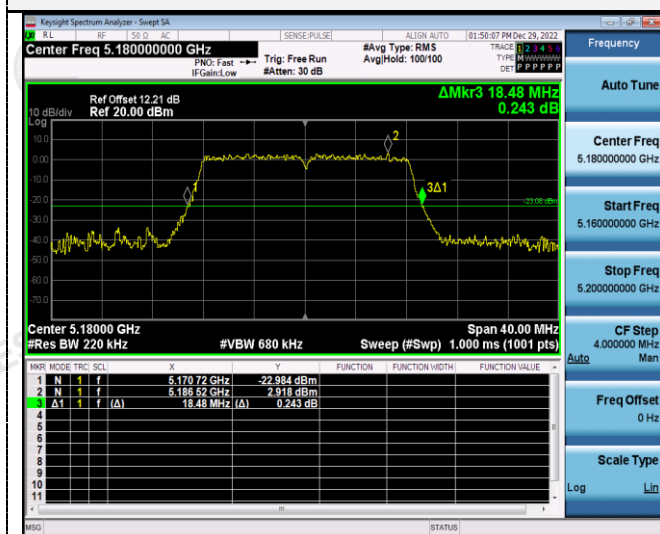

802.11n(HT20)




CH36

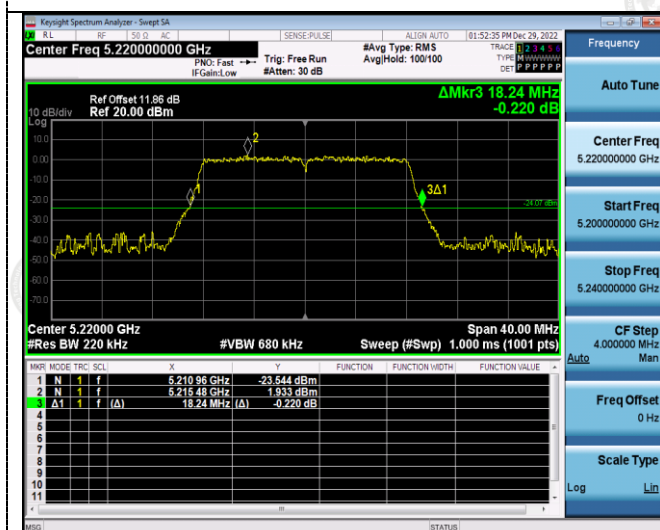


CH36



CH44

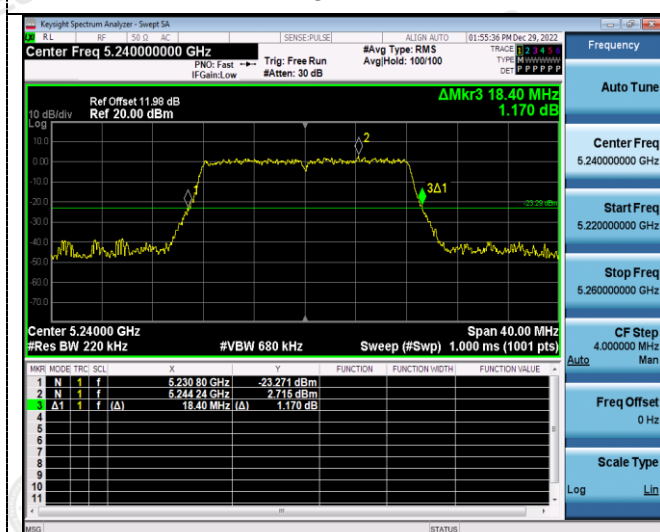


CH44

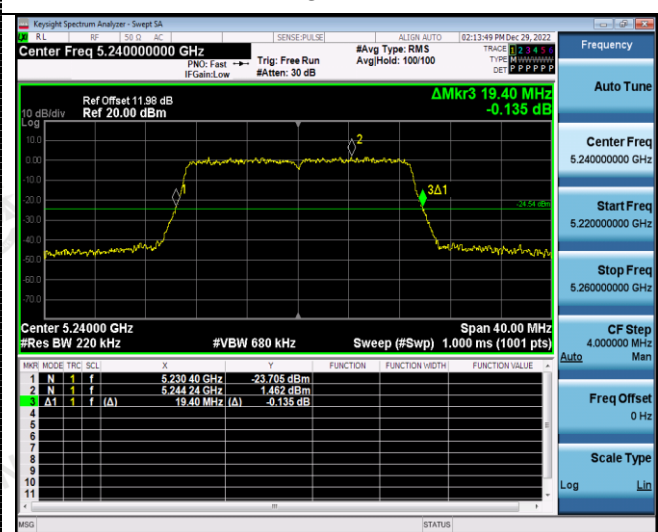


CH48

CH48


802.11n(HT40)

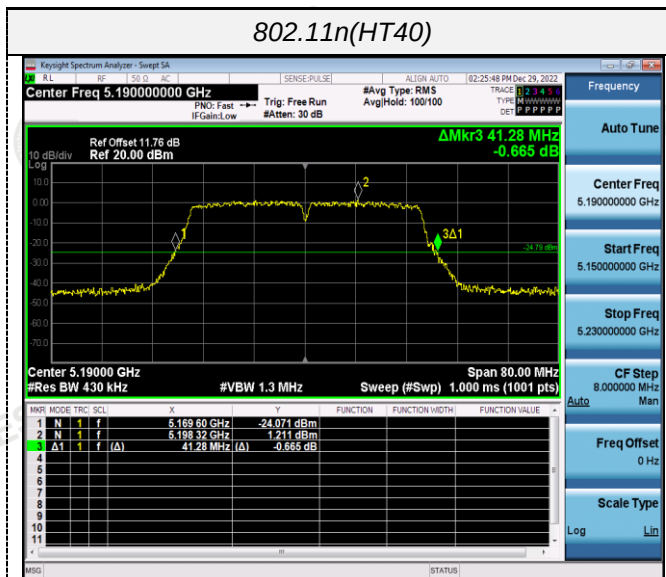


802.11ac(HT20)

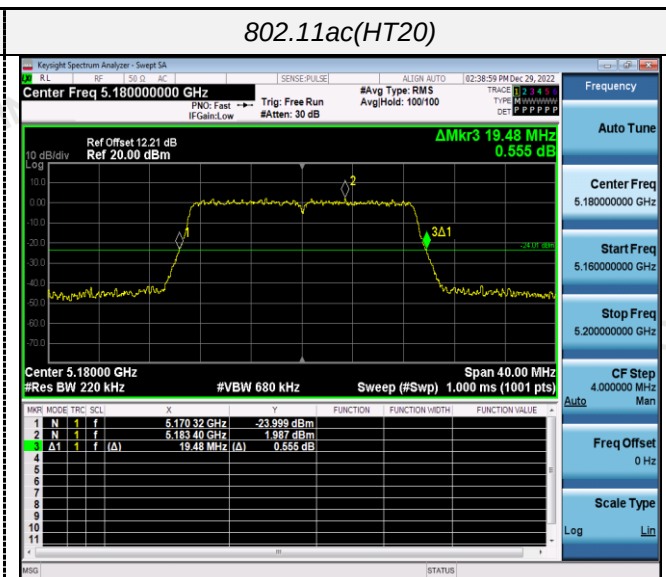

CH38

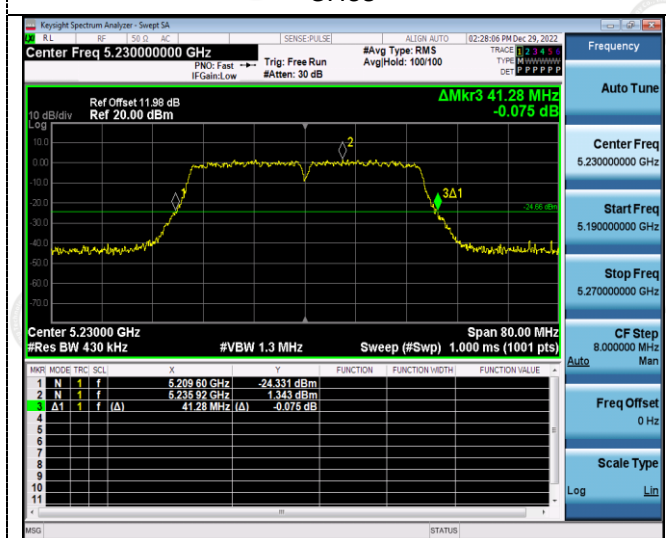


CH36

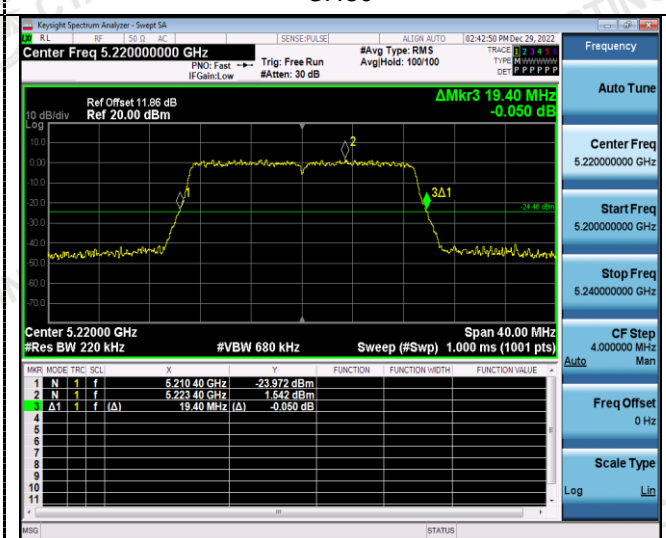

CH46




CH44

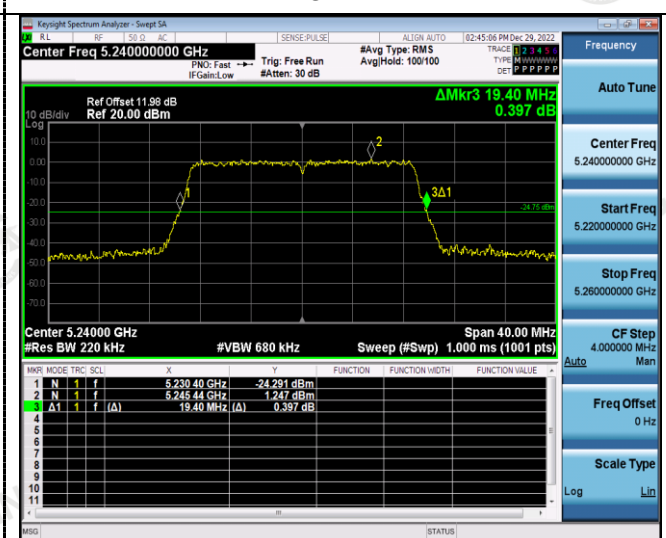


CH48


802.11ac(HT40)

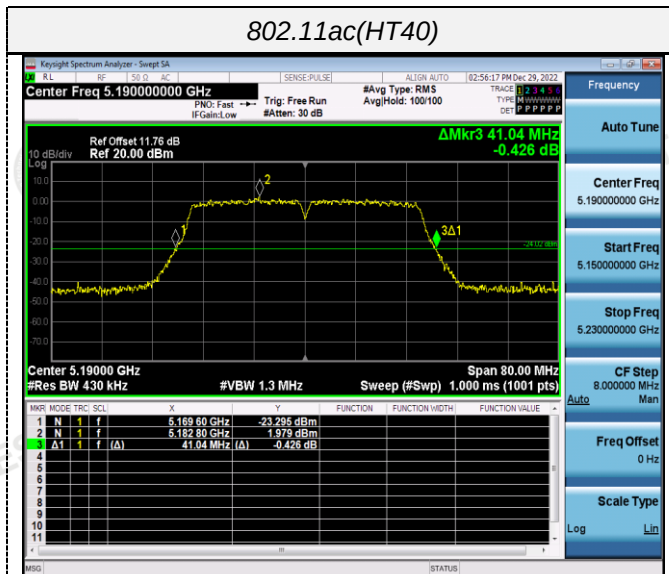

802.11ac(HT80)

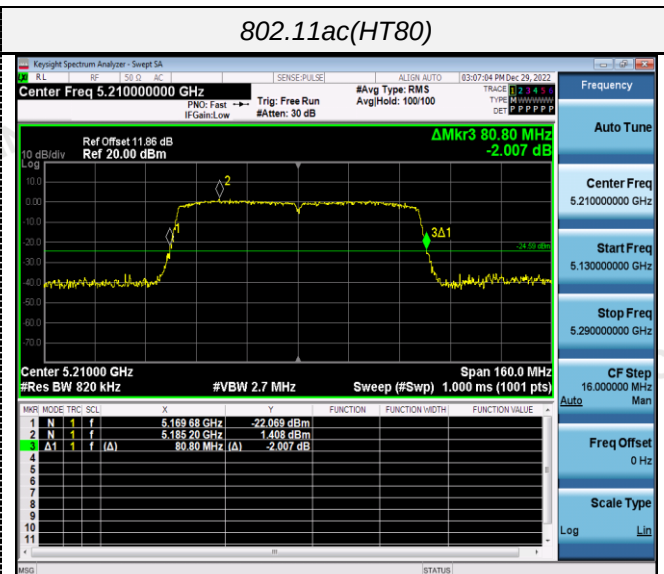

CH38

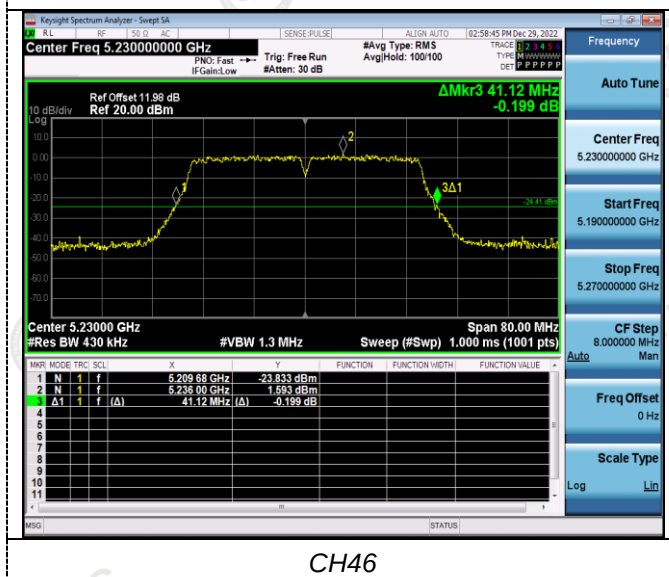

CH46

CH42

/

/

4.6 Minimum Emission Bandwidth (6dB Bandwidth)

Limit

Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

Test Procedure

1. Set resolution bandwidth (RBW) = 100 kHz
2. Set the video bandwidth 3 x RBW.
3. Detector = Peak.
4. Trace mode = Max hold.
5. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Test Configuration



Test Results

ANT 1

Type	Bands	Channel	6dB Bandwidth (MHz)	Limit (KHz)	Result
802.11a	U-NII 3	149	16.480	≥500KHz	Pass
		157	16.520		
		165	16.520		
802.11n(HT20)	U-NII 3	149	17.640		
		157	17.680		
		165	17.680		
802.11n(HT40)	U-NII 3	151	36.400		
		159	36.400		
802.11ac(HT20)	U-NII 3	149	17.720		
		157	17.680		
		165	17.680		
802.11ac(HT40)	U-NII 3	151	36.400		
		159	36.400		
802.11ac(HT80)	U-NII 3	155	76.000		

ANT 2

	Bands	Channel	6dB Bandwidth (MHz)	Limit (KHz)	Result
802.11a	U-NII 3	149	16.480	≥500KHz	Pass
		157	16.480		
		165	16.480		
802.11n(HT20)	U-NII 3	149	17.720		
		157	17.720		
		165	17.680		
802.11n(HT40)	U-NII 3	151	36.400		
		159	36.400		
802.11ac(HT20)	U-NII 3	149	17.720		
		157	17.640		
		165	17.720		
802.11ac(HT40)	U-NII 3	151	36.400		
		159	36.400		
802.11ac(HT80)	U-NII 3	155	76.000		

Test plot as follows: