



FCC RF Test Report

APPLICANT : BLU Products, Inc.
EQUIPMENT : Mobile Phone
BRAND NAME : BLU
MODEL NAME : VIVO XI+
FCC ID : YHLBLUVIVOXIP
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System

The product was received on May 31, 2018 and testing was completed on Jun. 15, 2018. We, Sporton International (Shenzhen) Inc., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Shenzhen) Inc., the test report shall not be reproduced except in full.



Approved by: Eric Shih / Manager

Sporton International (Shenzhen) Inc.

***1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan Shenzhen City
Guangdong Province 518055 China***



TABLE OF CONTENTS

REVISION HISTORY	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer	5
1.3 Product Feature of Equipment Under Test	5
1.4 Product Specification of Equipment Under Test	5
1.5 Modification of EUT	6
1.6 Testing Location	6
1.7 Applicable Standards	7
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	8
2.1 Carrier Frequency and Channel	8
2.2 Test Mode	9
2.3 Connection Diagram of Test System	10
2.4 Support Unit used in test configuration and system	10
2.5 EUT Operation Test Setup	11
2.6 Measurement Results Explanation Example	11
3 TEST RESULT	12
3.1 6dB Bandwidth Measurement	12
3.2 Peak Output Power Measurement	14
3.3 Power Spectral Density Measurement	15
3.4 Conducted Band Edges and Spurious Emission Measurement	17
3.5 Radiated Band Edges and Spurious Emission Measurement	30
3.6 AC Conducted Emission Measurement	34
3.7 Antenna Requirements	36
4 LIST OF MEASURING EQUIPMENT	37
5 UNCERTAINTY OF EVALUATION	38
APPENDIX A. CONDUCTED TEST RESULTS	
APPENDIX B. AC CONDUCTED EMISSION TEST RESULTS	
APPENDIX C. RADIATED SPURIOUS EMISSION	
APPENDIX D. DUTY CYCLE PLOTS	
APPENDIX E. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR853112C	Rev. 01	Initial issue of report	Jun. 26, 2018

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.2	15.247(b)	Power Output Measurement	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass	-
3.4	15.247(d)	Conducted Band Edges	$\leq 20\text{dBc}$	Pass	-
		Conducted Spurious Emission		Pass	-
3.5	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 3.56 dB at 2389.520 MHz
3.6	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 9.30 dB at 0.490 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	N/A	Pass	-



1 General Description

1.1 Applicant

BLU Products, Inc.

10814 NW 33rd St # 100 Doral, FL 33172, USA

1.2 Manufacturer

BLU Products, Inc.

10814 NW 33rd St # 100 Doral, FL 33172, USA

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Phone
Brand Name	BLU
Model Name	VIVO XI+
FCC ID	YHLBLUVIVOXIP
EUT supports Radios application	GSM/GPRS/EGPRS/WCDMA/HSPA/DC-HSDPA/HSPA+/LTE/ WLAN 2.4GHz 802.11b/g/n HT20/HT40 Bluetooth BR/EDR/LE
IMEI Code	Conducted: 354147042328188/35147042378183 Conduction: 354147042328451/354147042378456 Radiation: 354147042328469/354147042378464
HW Version	Vivo XI+ Mainboard_P3
SW Version	Vivo XI+ 2307
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Channel Frequency Range	2412 MHz ~ 2462 MHz
Maximum (Peak) Output Power to antenna	802.11b : 21.10 dBm (0.1288 W) 802.11g : 25.42 dBm (0.3483 W) 802.11n HT20 : 26.15 dBm (0.4121 W) 802.11n HT40 : 25.77 dBm (0.3776 W)
Antenna Type / Gain	Fixed Internal Antenna with gain -0.20 dBi
Type of Modulation	802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)



1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Sporton International (Shenzhen) Inc. is accredited to ISO 17025 by National Voluntary Laboratory Accreditation Program (NVLAP code: 600156-0) and the FCC designation No. are CN5018 and CN5019.

Test Site	Sporton International (Shenzhen) Inc.		
Test Site Location	1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan Shenzhen City Guangdong Province 518055 China TEL: +86-755-8637-9589 FAX: +86-755-8637-9595		
Test Site No.	Sporton Site No.		FCC Test Firm Registration No.
	TH01-SZ	CO01-SZ	251365

Test Site	Sporton International (Shenzhen) Inc.		
Test Site Location	No. 3 Bldg the third floor of south, Shahe River west, Fengzeyuan Warehouse, Nanshan District Shenzhen City Guangdong Province 518055 China TEL: +86-755-3320-2398		
Test Site No.	Sporton Site No.		FCC Test Firm Registration No.
	03CH02-SZ		577730

Note: The test site complies with ANSI C63.4 2014 requirement.



1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v04
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conducted emission (150 kHz to 30 MHz) and radiated emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437		


2.2 Test Mode

Final test mode of conducted test items and radiated spurious emissions are considering the modulation and worse data rates as below table.

Modulation	Data Rate
802.11b	1 Mbps
802.11g	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0

Test Cases	
AC Conducted Emission	Mode 1 :GSM1900 Idle + Bluetooth Link + WLAN Link + USB Cable (Charging from Adapter) + SIM 1
Remark: 1. For Radiated Test Cases, The tests were performed with Adapter, Battery and USB Cable. 2. wireless charging mode verify worse case of adapter mode.	

2.3 Connection Diagram of Test System

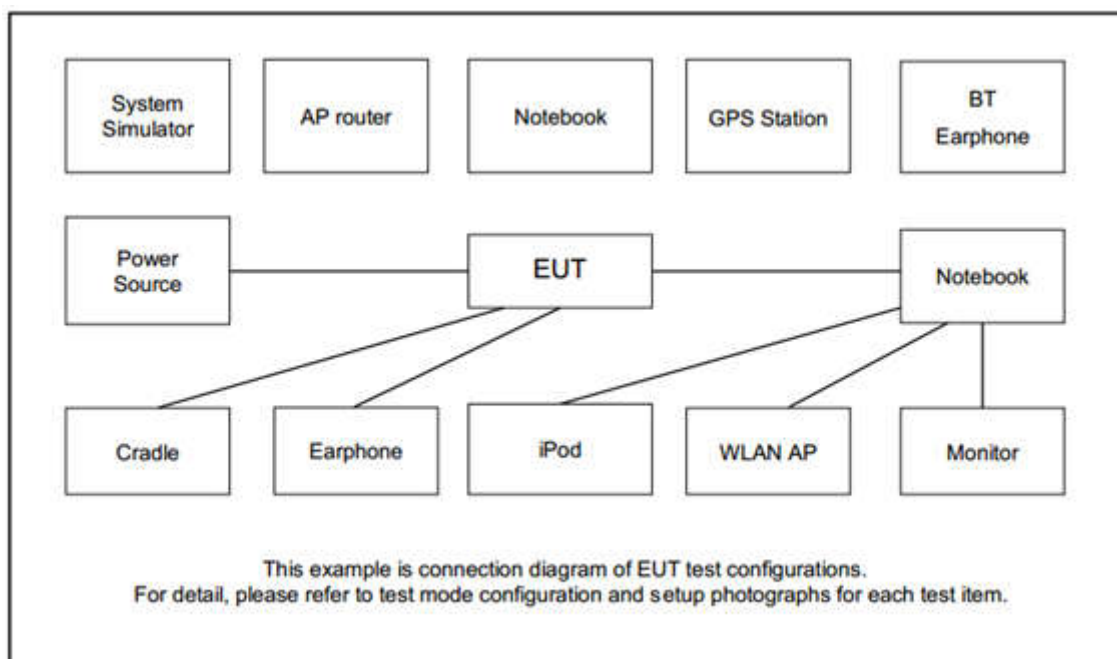

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m
2.	WLAN AP	D-Link	DIR-820L	KA2IR820LA1	N/A	Unshielded, 1.8m
3.	Notebook	Lenovo	E540	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
4.	Bluetooth Earphone	Samsung	EO-MG900	N/A	N/A	N/A
5.	wireless charger	Samsung	EP-NG930	N/A	N/A	N/A



2.5 EUT Operation Test Setup

For WLAN function, the engineering test program was provided and enabled to make EUT continuous transmit/receive.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 5.0 dB and 10dB attenuator.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 5.0 + 10 = 15.0 \text{ (dB)}\end{aligned}$$

3 Test Result

3.1 6dB Bandwidth Measurement

3.1.1 Limit of 6dB Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures


1. The testing follows FCC KDB Publication No. 558074 DTS D01 Meas. Guidance v04.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. Measure and record the results in the test report.

3.1.4 Test Setup

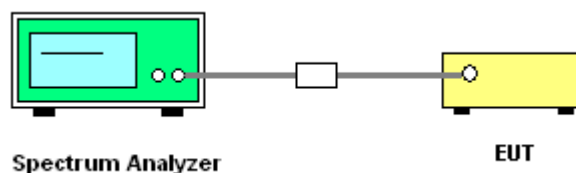

3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A.

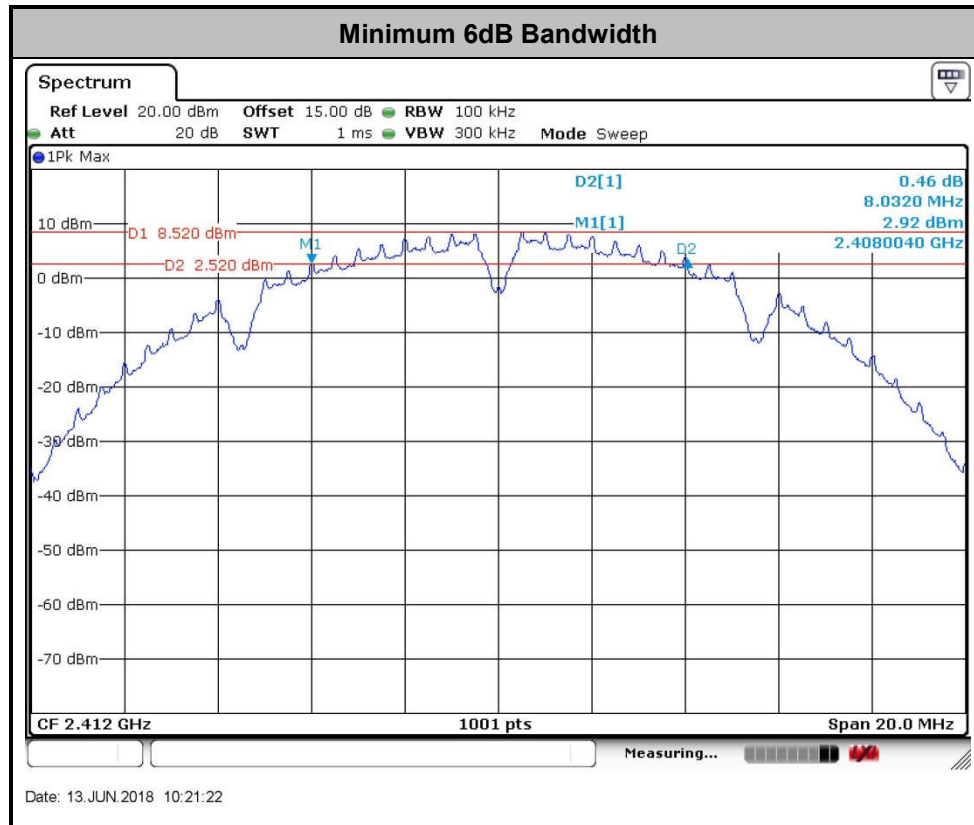

3.2 Peak Output Power Measurement

3.2.1 Limit of Peak Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna with directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of FCC KDB No. 558074 DTS D01 Meas. Guidance v04 section 9.1.2 PKPM1 Peak power meter method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

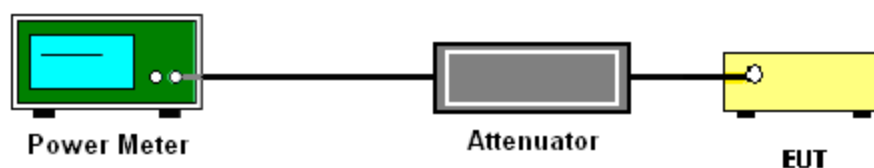

3.2.5 Test Result of Peak Output Power

Please refer to Appendix A.

3.2.6 Test Result of Average output Power (Reporting Only)

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures


1. The testing follows Measurement Procedure 10.2 Method PKPSD of FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v04
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.

3.3.4 Test Setup

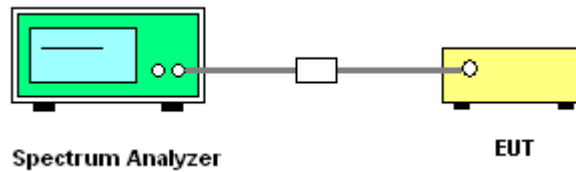

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

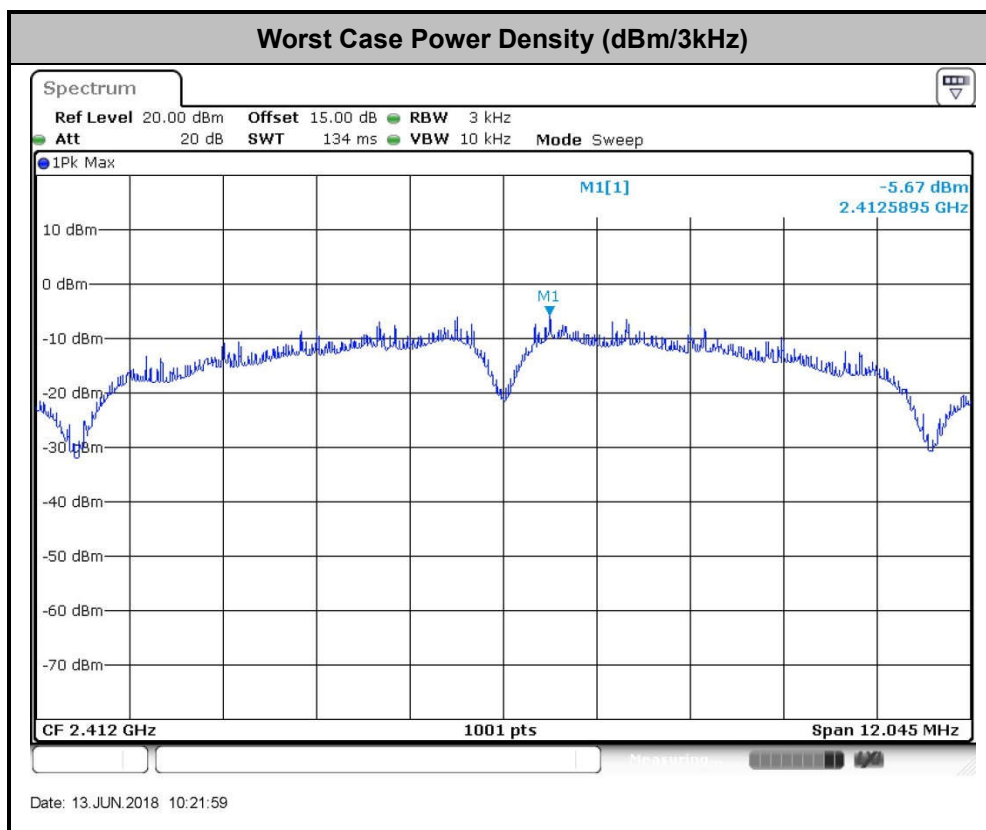

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement.


3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v04.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup

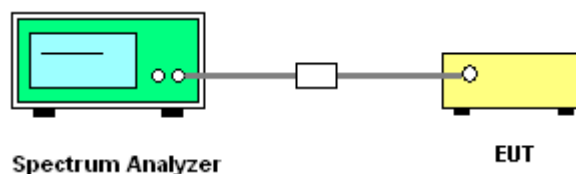




3.4.5 Test Result of Conducted Band Edges and Spurious Emission

Test Engineer :	Wilson Chen	Temperature :	24~26°C
		Relative Humidity :	50~53%


Test Mode :	802.11b	Test Channel :	01
-------------	---------	----------------	----

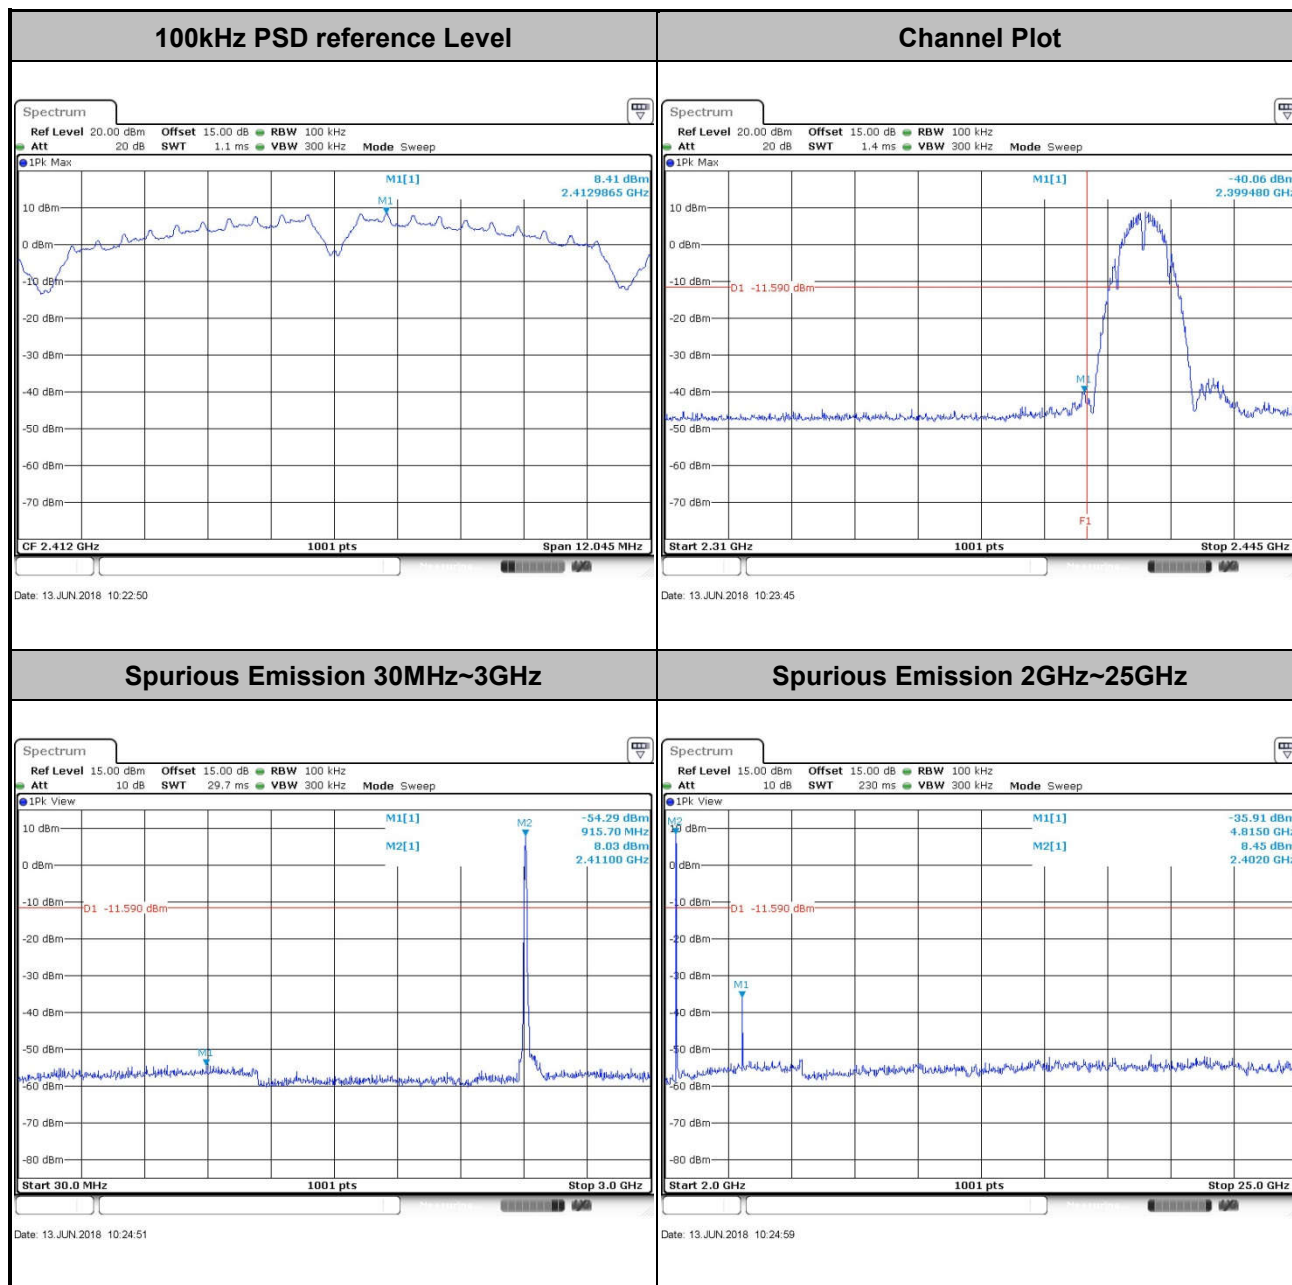




Test Mode :	802.11b	Test Channel :	06
-------------	---------	----------------	----


100kHz PSD reference Level

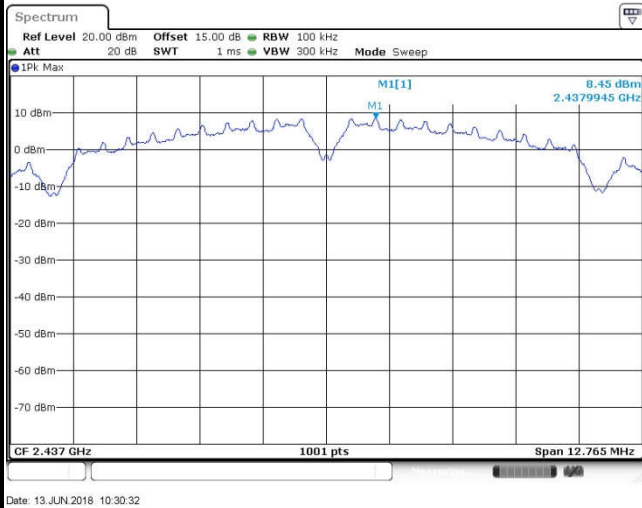

Spurious Emission 30MHz~3GHz

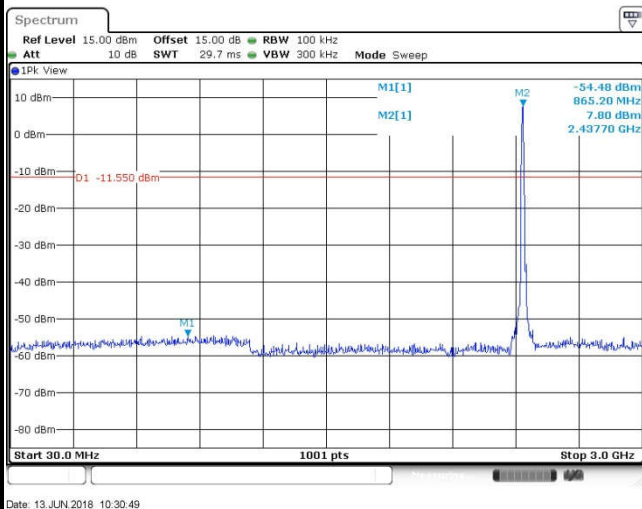


Spurious Emission 2GHz~25GHz

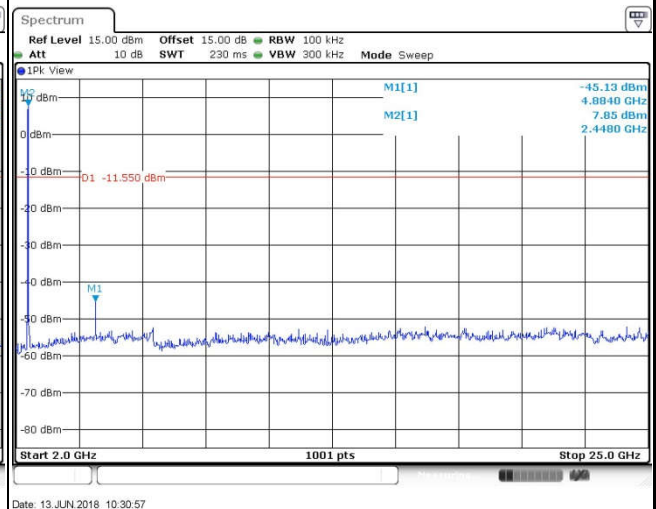




Test Mode :	802.11b	Test Channel :	11
-------------	---------	----------------	----

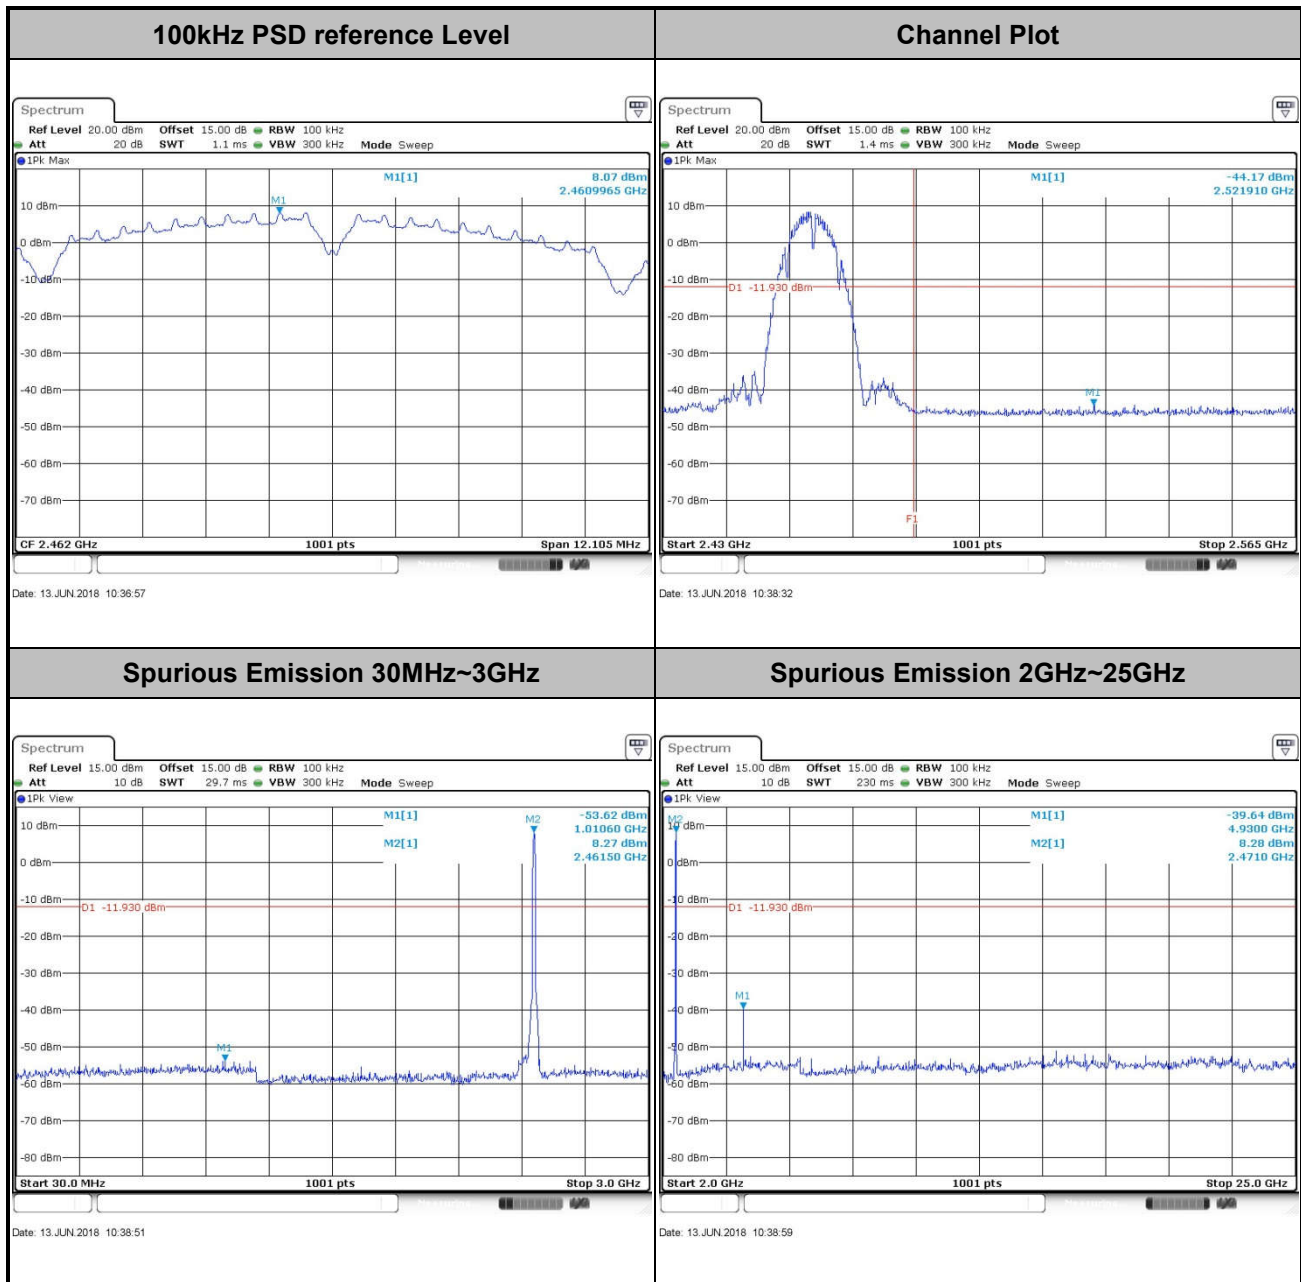




Test Mode :	802.11g	Test Channel :	01
-------------	---------	----------------	----

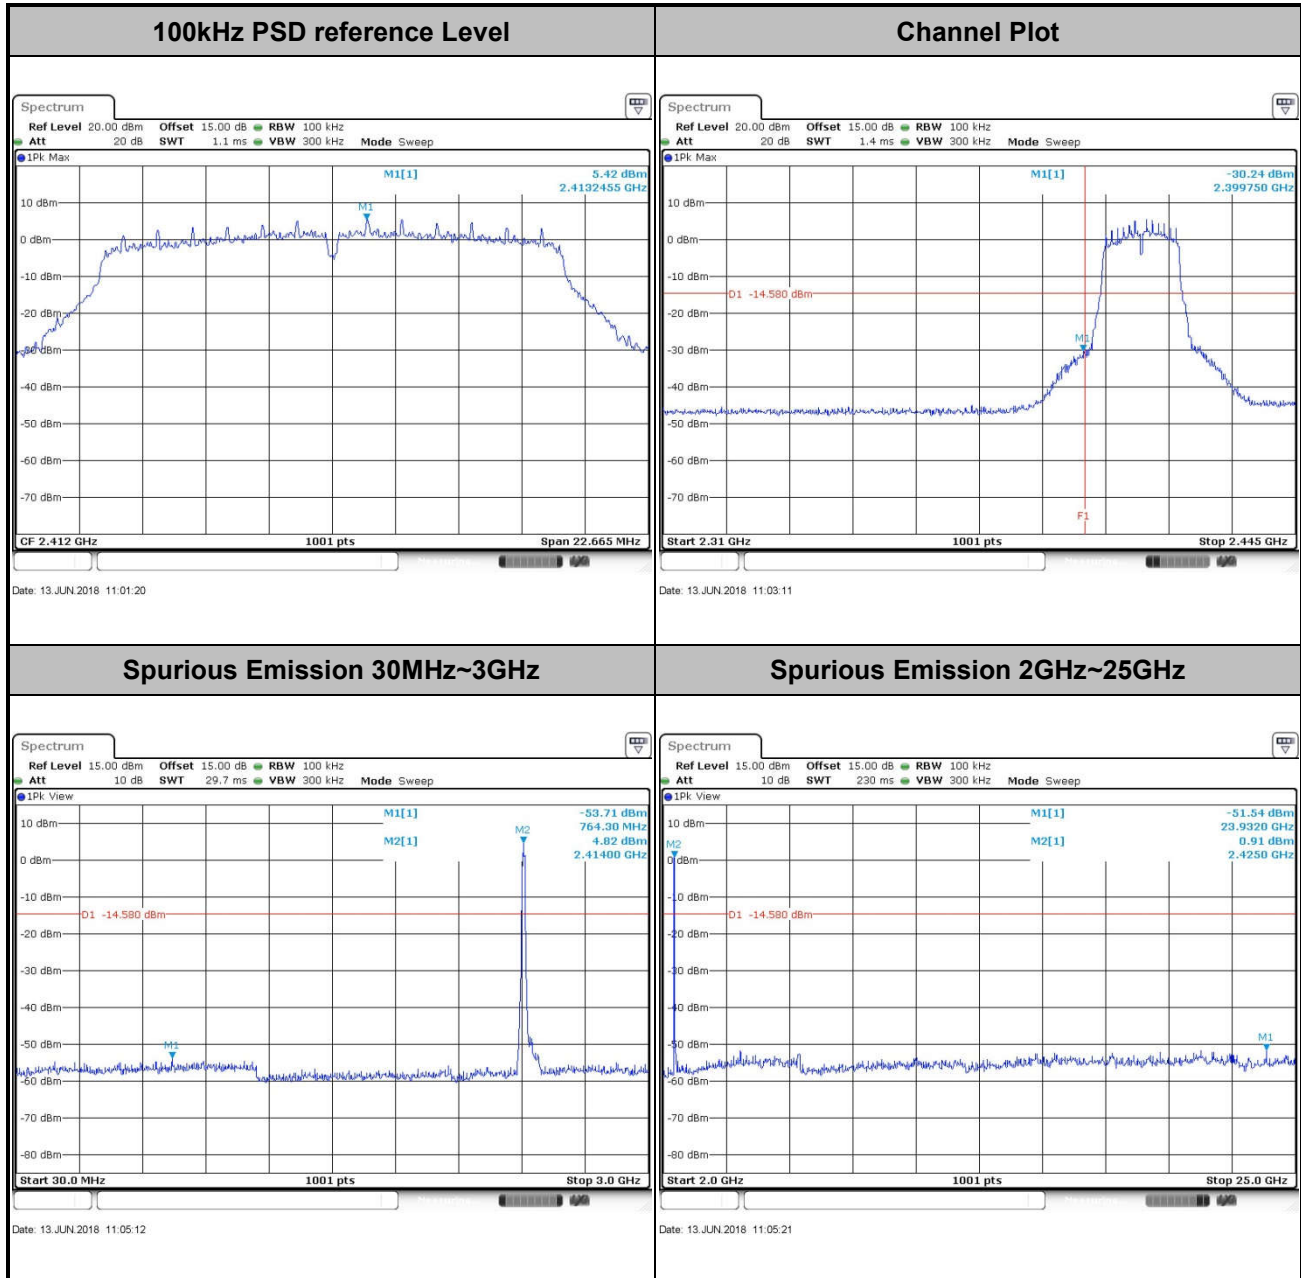




Test Mode :	802.11g	Test Channel :	06
-------------	---------	----------------	----


100kHz PSD reference Level

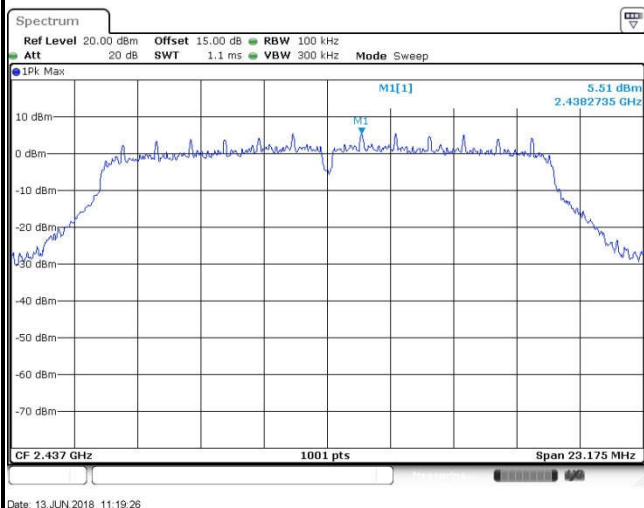

Spurious Emission 30MHz~3GHz

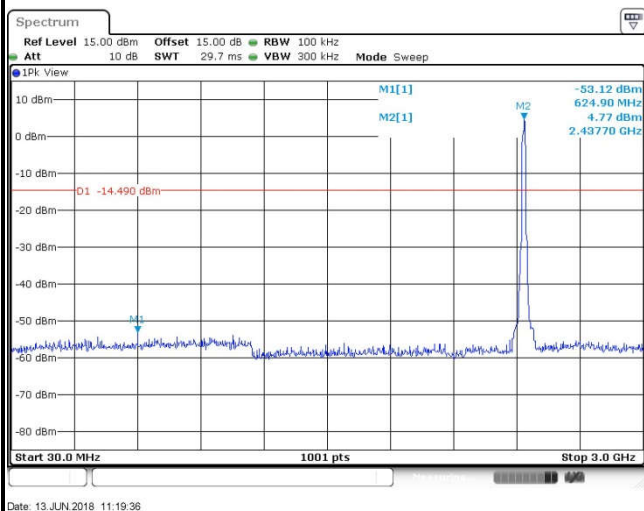


Spurious Emission 2GHz~25GHz

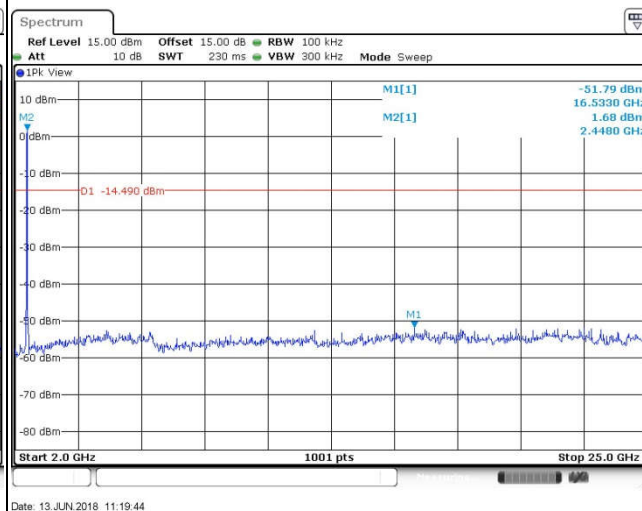



Test Mode :	802.11g	Test Channel :	11
-------------	---------	----------------	----

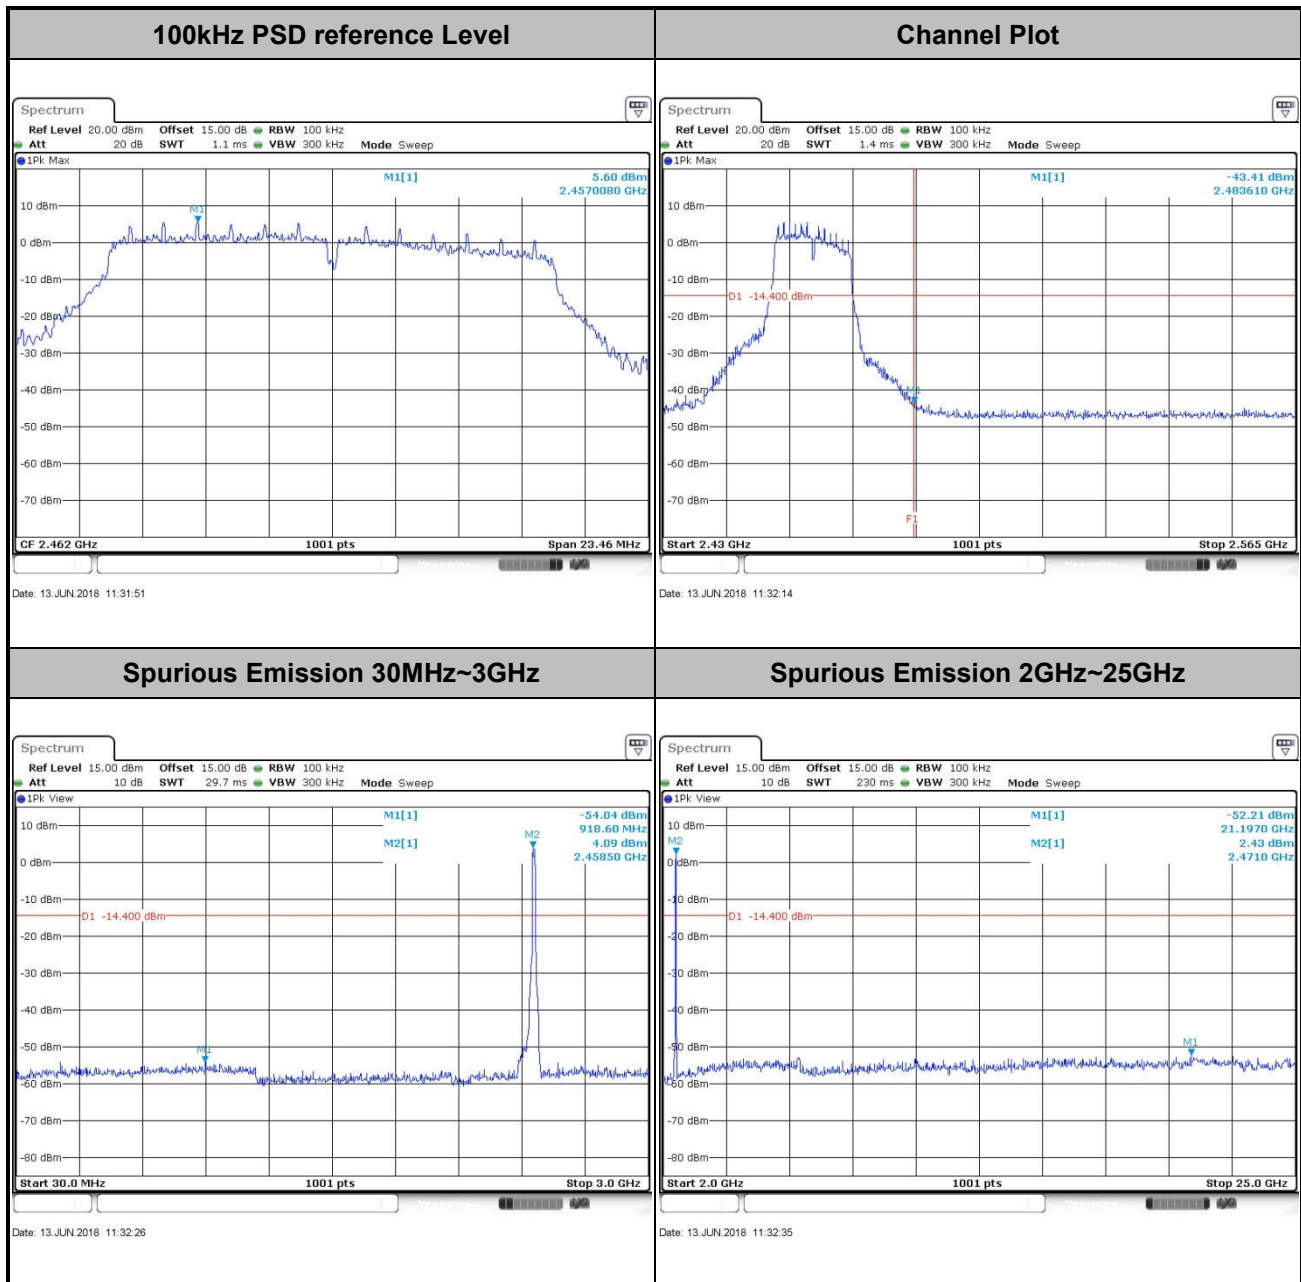




Test Mode : 802.11n HT20


Test Channel : 01

100kHz PSD reference Level

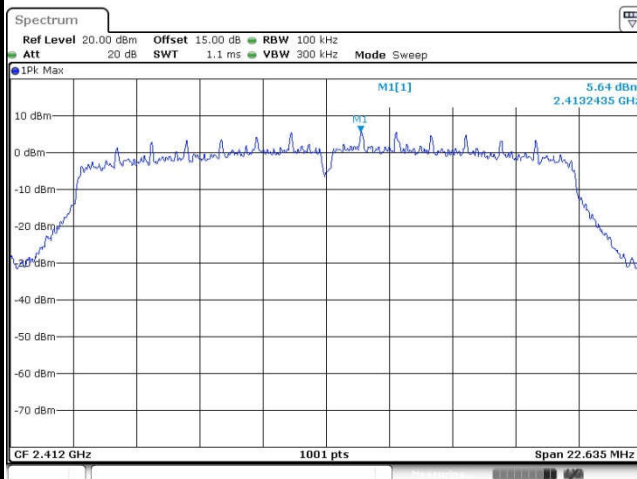


Date: 13 JUN 2018 11:36:07

Channel Plot

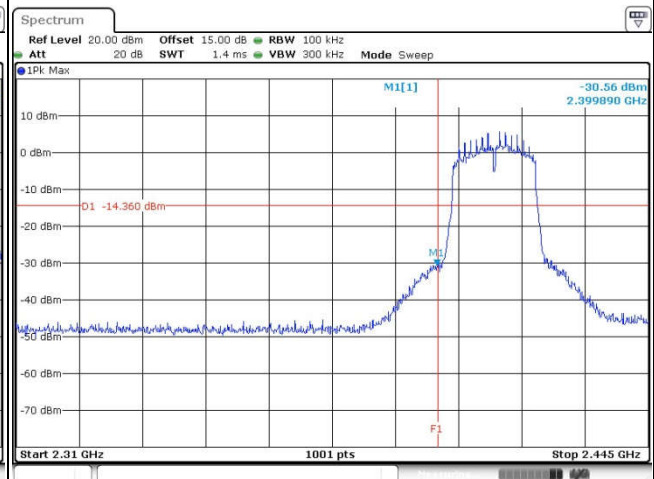


Date: 13 JUN 2018 11:36:58

Spurious Emission 30MHz~3GHz

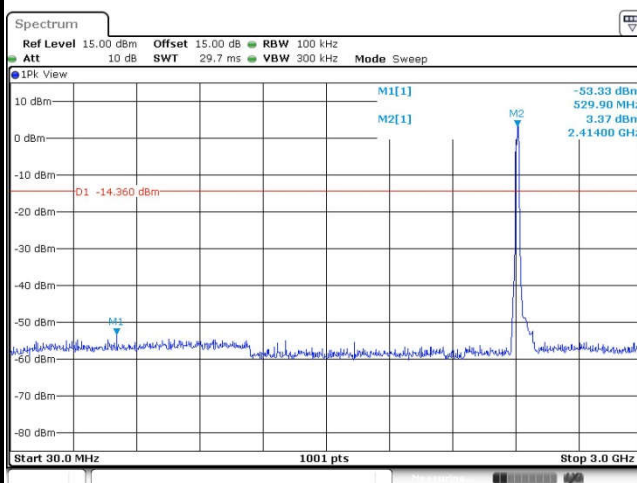

Date: 13 JUN 2018 11:37:10

Spurious Emission 2GHz~25GHz

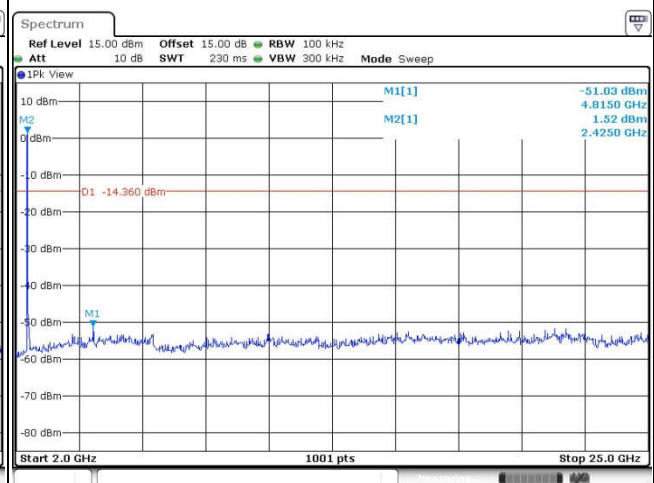


Date: 13 JUN 2018 11:37:18




Test Mode :	802.11n HT20	Test Channel :	06
-------------	--------------	----------------	----


100kHz PSD reference Level

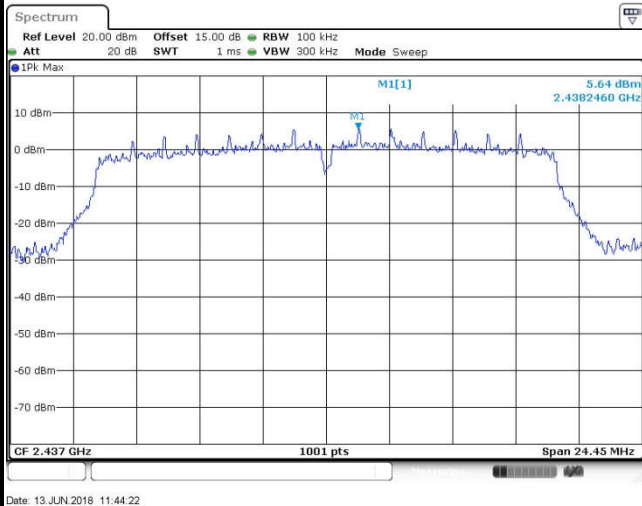

Spurious Emission 30MHz~3GHz

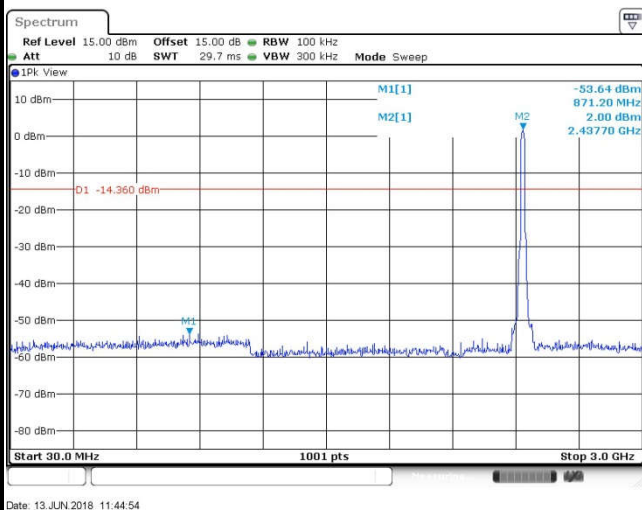

Spurious Emission 2GHz~25GHz

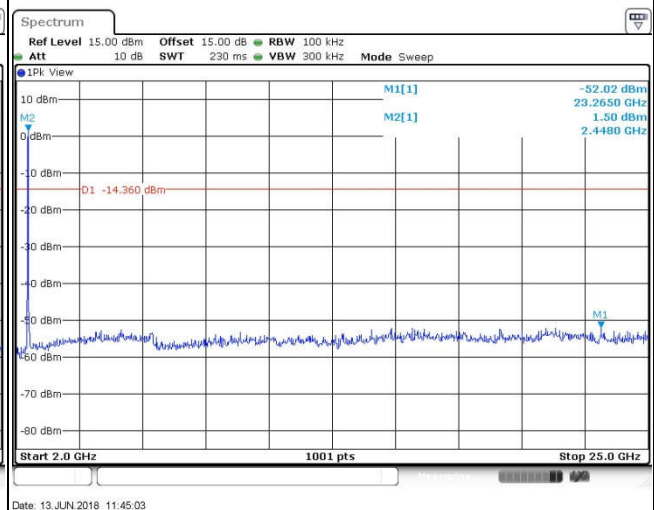




Test Mode : 802.11n HT20


Test Channel : 11

100kHz PSD reference Level

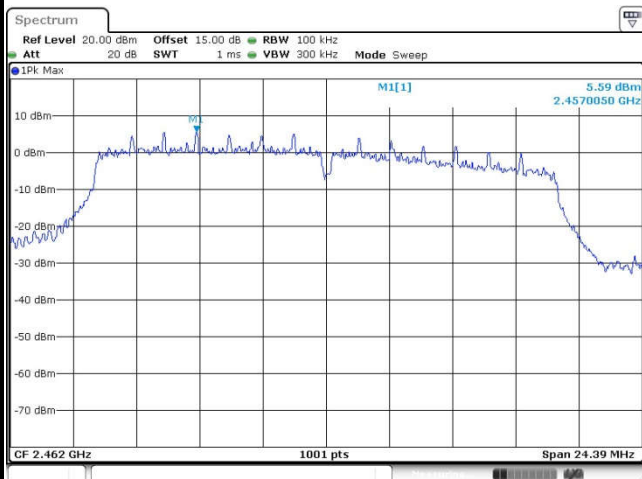


Date: 15 JUN 2018 14:27:21

Channel Plot

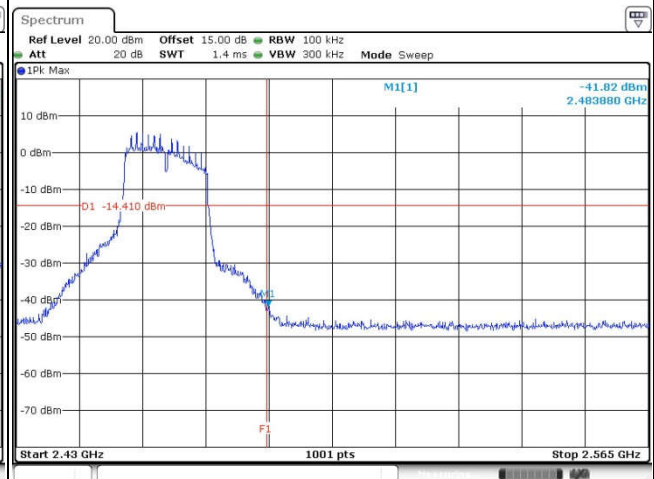


Date: 15 JUN 2018 14:27:42

Spurious Emission 30MHz~3GHz

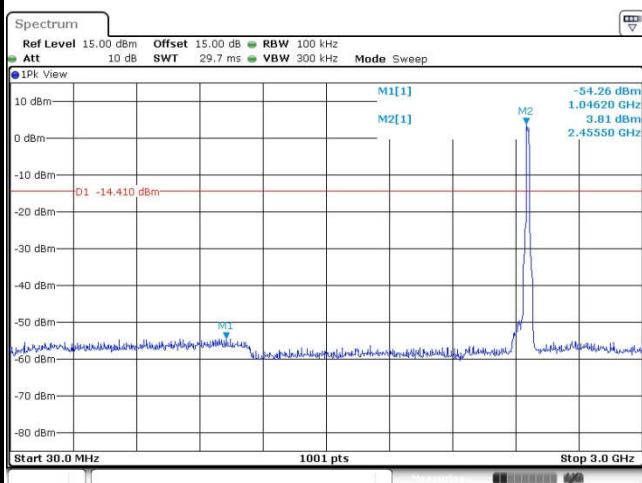


Date: 15 JUN 2018 14:27:55

Spurious Emission 2GHz~25GHz

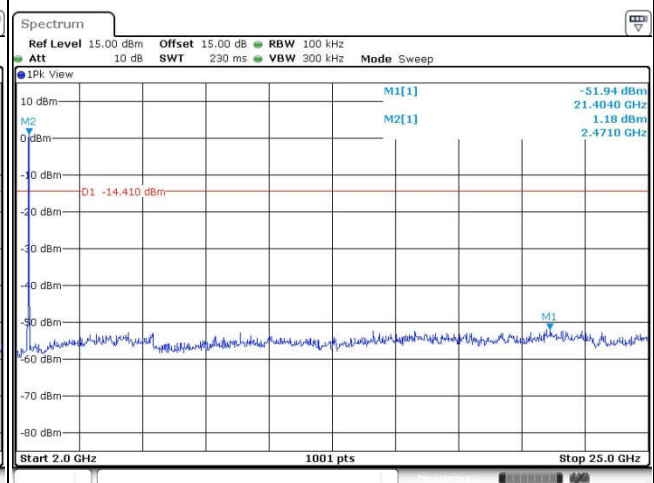


Date: 15 JUN 2018 14:28:03

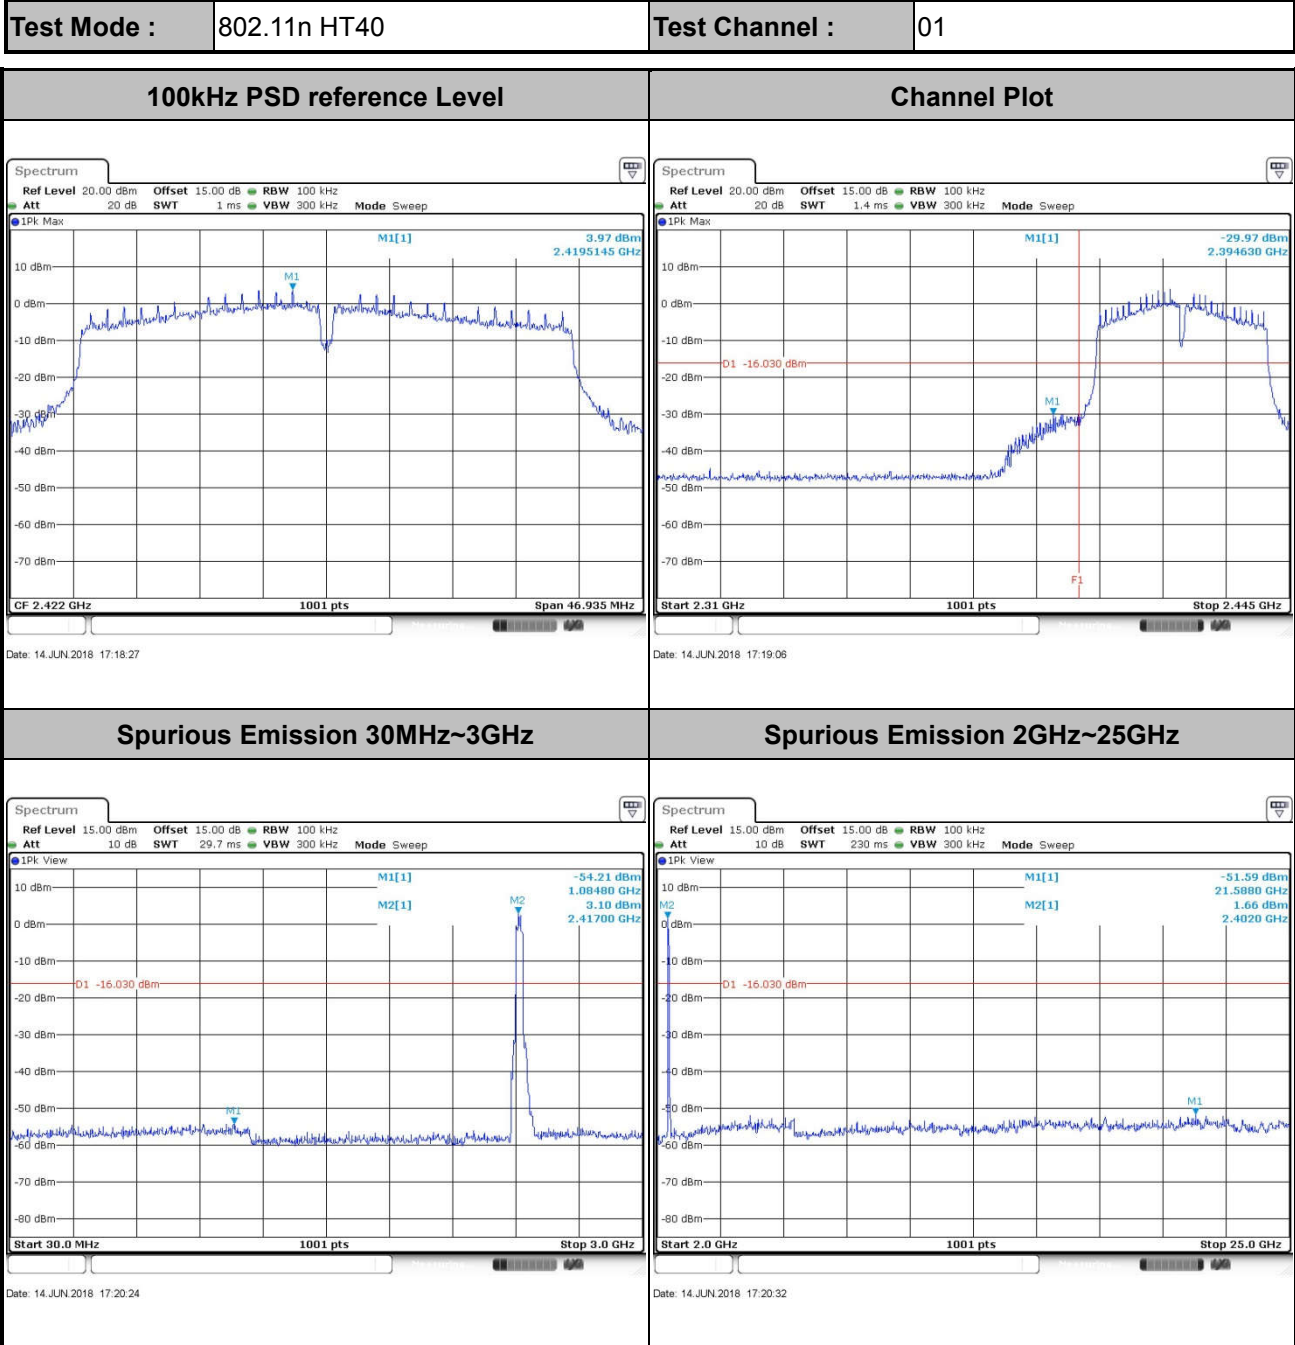




Test Mode :	802.11n HT40	Test Channel :	06
-------------	--------------	----------------	----

100kHz PSD reference Level

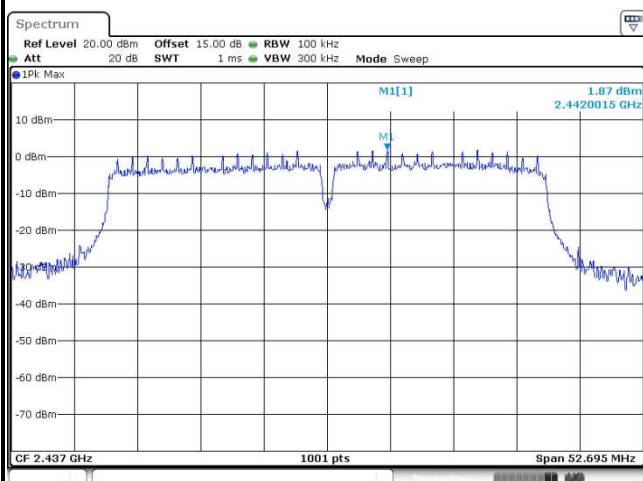


Date: 14 JUN 2018 17:26:35

Spurious Emission 30MHz~3GHz

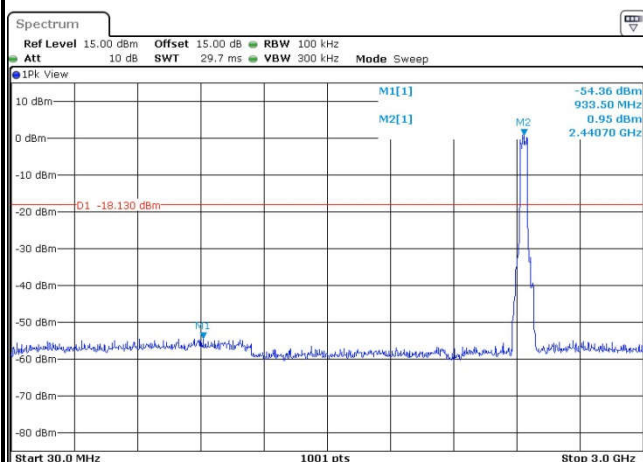

Date: 14 JUN 2018 17:29:58

Spurious Emission 2GHz~25GHz

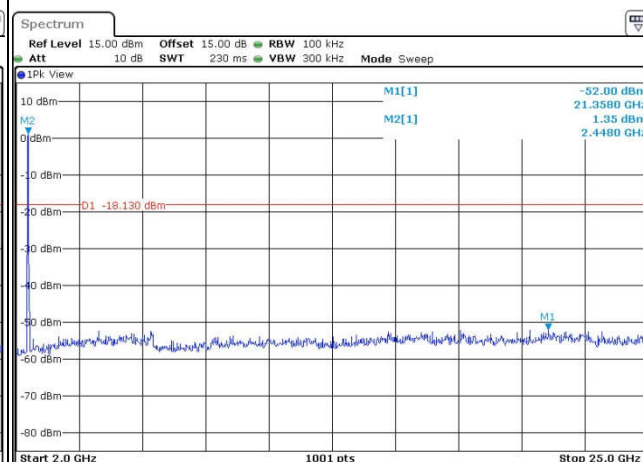


Date: 14 JUN 2018 17:30:06



Test Mode : 802.11n HT40


Test Channel : 11

100kHz PSD reference Level

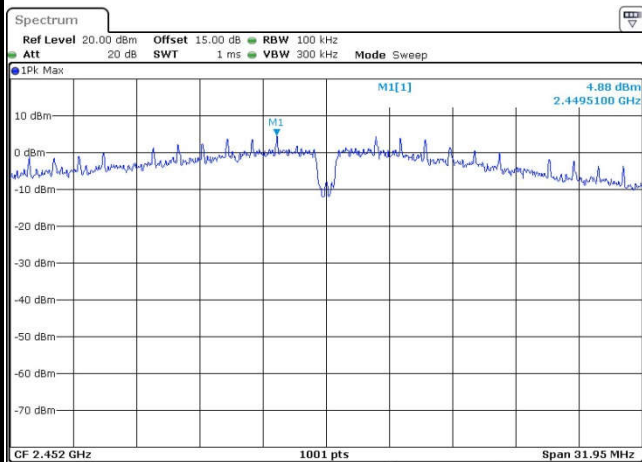


Date: 14 JUN 2018 17:35:51

Channel Plot

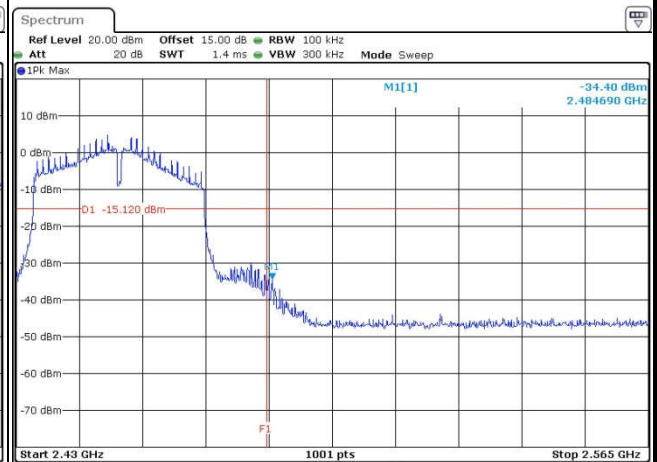


Date: 14 JUN 2018 17:36:24

Spurious Emission 30MHz~3GHz

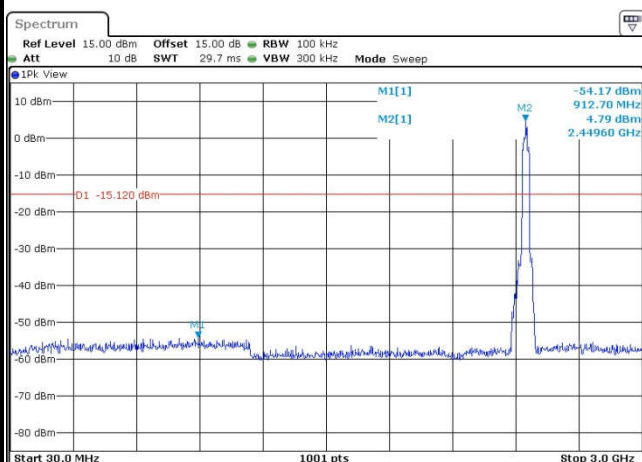

Date: 14 JUN 2018 17:36:35

Spurious Emission 2GHz~25GHz

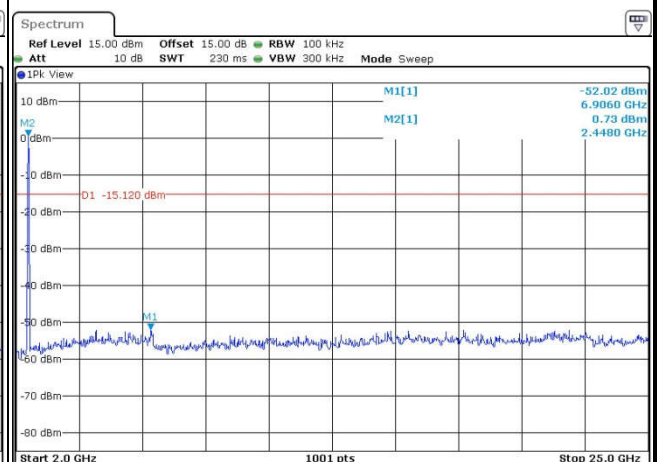

Date: 14 JUN 2018 17:36:44

3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures


1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v04.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.

For average measurement:


 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated emissions below 30MHz

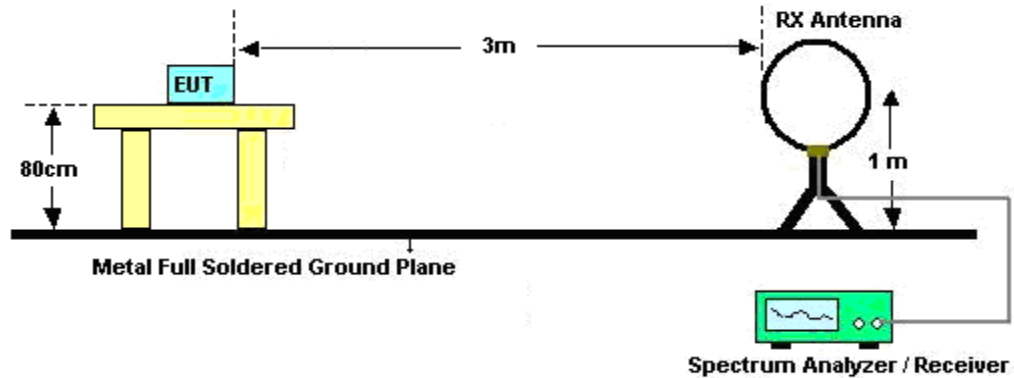

For radiated emissions from 30MHz to 1GHz

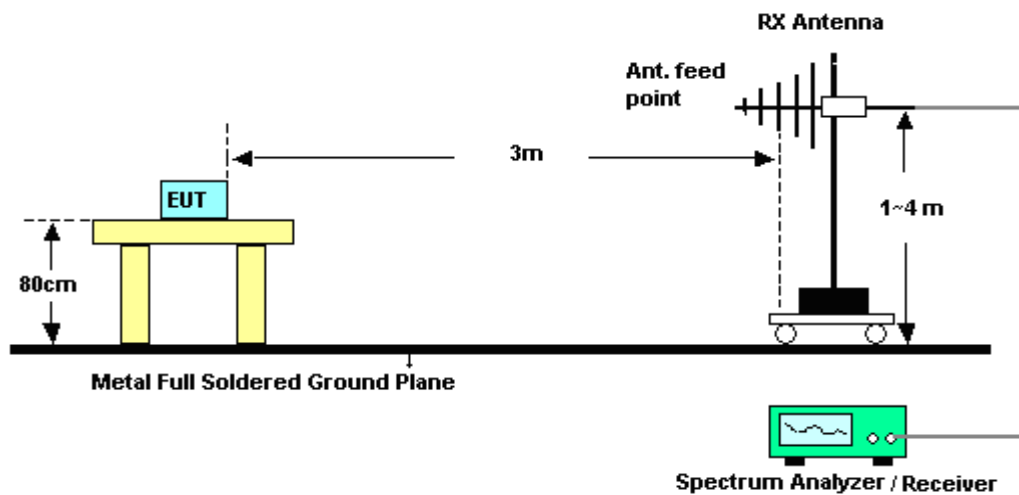

For radiated emissions above 1GHz

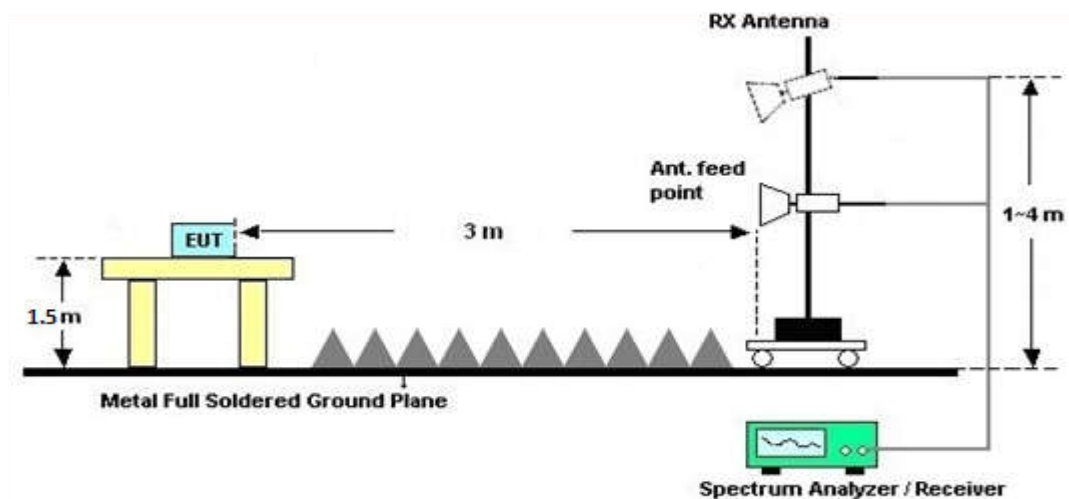



3.5.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.5.7 Duty Cycle

Please refer to Appendix D.

3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix C.

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF bandwidth = 9kHz) with Maximum Hold Mode.

3.6.4 Test Setup

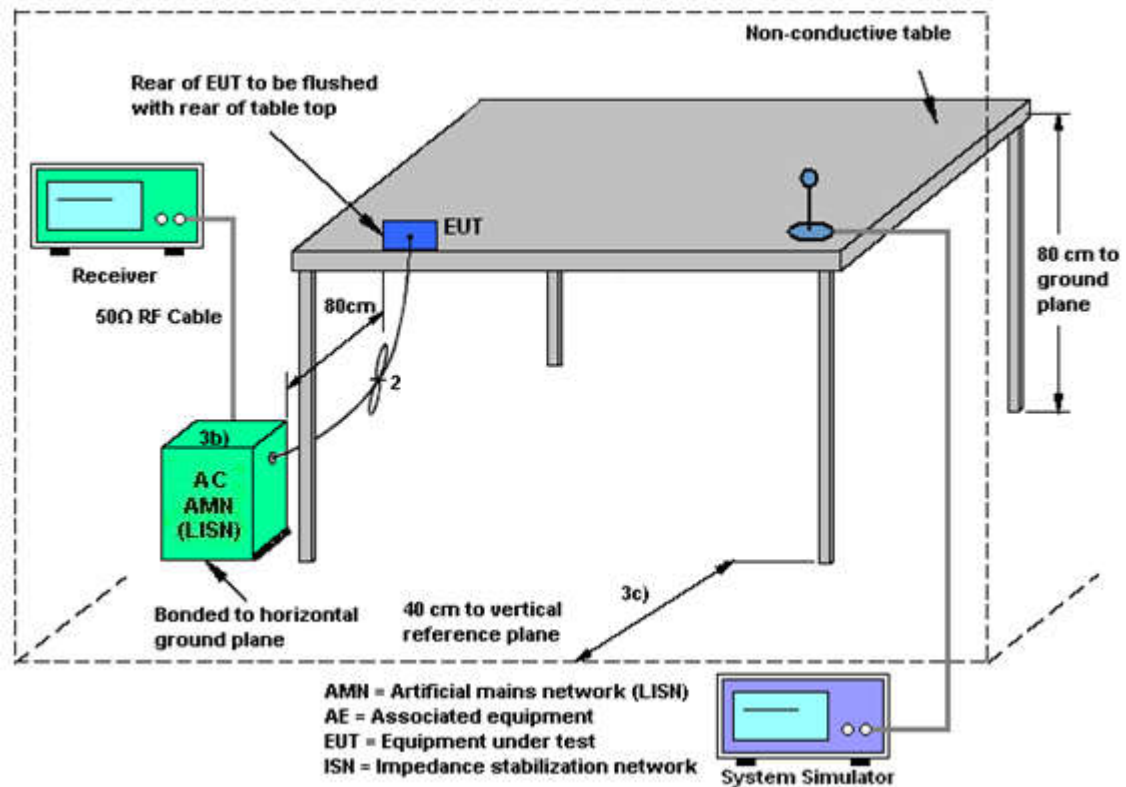

3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting Antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached Antenna or of an Antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101078	9kHz~40GHz	Apr. 19, 2018	Jun. 13, 2018~ Jun. 15, 2018	Apr. 18, 2019	Conducted (TH01-SZ)
Pulse Power Sensor	Anritsu	MA2411B	1207253	30MHz~40GHz	Dec. 26, 2017	Jun. 13, 2018~ Jun. 15, 2018	Dec. 25, 2018	Conducted (TH01-SZ)
Power Meter	Anritsu	ML2495A	1218010	50MHz Bandwidth	Dec. 26, 2017	Jun. 13, 2018~ Jun. 15, 2018	Dec. 25, 2018	Conducted (TH01-SZ)
Spectrum Analyzer	R&S	FSV40	101041	10kHz~40GHz; Max 30dBm	Oct. 19, 2017	Jun. 05, 2018	Oct. 18, 2018	Radiation (03CH02-SZ)
Loop Antenna	R&S	HFH2-Z2	100354	9kHz~30MHz	May 14, 2018	Jun. 05, 2018	May 13, 2019	Radiation (03CH02-SZ)
Bilog Antenna	TeseQ	CBL6112D	35407	30MHz-2GHz	May 10, 2018	Jun. 05, 2018	May 09, 2019	Radiation (03CH02-SZ)
Double Ridge Horn Antenna	SCHWARZBECK	BBHA 9120D	9120D-1285	1GHz~18GHz	Dec. 13, 2017	Jun. 05, 2018	Dec. 12, 2018	Radiation (03CH02-SZ)
HF Amplifier	MITEQ	TTA1840-35-HG	1871923	18GHz~40GHz	Jul. 21, 2017	Jun. 05, 2018	Jul. 20, 2018	Radiation (03CH02-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18GHz-40GHz	Jun. 16, 2017	Jun. 08, 2018	Jun. 15, 2018	Radiation (03CH02-SZ)
LF Amplifier	Burgeon	BPA-530	102211	0.01~3000Mhz	Oct. 19, 2017	Jun. 05, 2018	Oct. 18, 2018	Radiation (03CH02-SZ)
HF Amplifier	MITEQ	AMF-7D-001 01800-30-10 P-R	1707137	1GHz~18GHz	Oct. 19, 2017	Jun. 05, 2018	Oct. 18, 2018	Radiation (03CH02-SZ)
Amplifier	Agilent	8449B	3008A01023	1GHz~26.5GHz	Oct. 19, 2017	Jun. 05, 2018	Oct. 18, 2018	Radiation (03CH02-SZ)
AC Power Source	Chroma	61601	6160100024 70	N/A	NCR	Jun. 05, 2018	NCR	Radiation (03CH02-SZ)
Turn Table	Chaintek	T-200	N/A	0~360 degree	NCR	Jun. 05, 2018	NCR	Radiation (03CH02-SZ)
Antenna Mast	Chaintek	MBS-400	N/A	1 m~4 m	NCR	Jun. 05, 2018	NCR	Radiation (03CH02-SZ)
EMI Receiver	R&S	ESR7	101630	9kHz~7GHz;	Dec. 26, 2017	Jun. 14, 2018	Dec. 25, 2018	Conduction (CO01-SZ)
AC LISN	EMCO	3816/2SH	00103912	9kHz~30MHz	Dec. 26, 2017	Jun. 14, 2018	Dec. 25, 2018	Conduction (CO01-SZ)
AC LISN (for auxiliary equipment)	MessTec	3816/2SH	00103892	9kHz~30MHz	Nov. 01, 2017	Jun. 14, 2018	Oct. 31, 2018	Conduction (CO01-SZ)
AC Power Source	Chroma	61602	6160200008 91	100Vac~250Vac	Jul. 19, 2017	Jun. 14, 2018	Jul. 18, 2018	Conduction (CO01-SZ)

NCR: No Calibration Required

5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	2.6dB
--	-------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	5.1dB
--	-------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	5.0dB
--	-------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	4.4dB
--	-------



Appendix A. Conducted Test Results

A1 - DTS Part

Test Engineer:	Wilson Chen	Temperature:	24~26	°C
Test Date:	2018/6/13~2018/6/15	Relative Humidity:	50~53	%

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

2.4GHz Band								
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
11b	1Mbps	1	1	2412	12.99	8.03	0.50	Pass
11b	1Mbps	1	6	2437	13.24	8.51	0.50	Pass
11b	1Mbps	1	11	2462	13.34	8.07	0.50	Pass
11g	6Mbps	1	1	2412	17.93	15.11	0.50	Pass
11g	6Mbps	1	6	2437	18.23	15.45	0.50	Pass
11g	6Mbps	1	11	2462	18.13	15.64	0.50	Pass
HT20	MCS0	1	1	2412	18.28	15.09	0.50	Pass
HT20	MCS0	1	6	2437	18.58	16.30	0.50	Pass
HT20	MCS0	1	11	2462	18.78	16.26	0.50	Pass
HT40	MCS0	1	3	2422	36.36	31.29	0.50	Pass
HT40	MCS0	1	6	2437	36.96	35.13	0.50	Pass
HT40	MCS0	1	9	2452	35.56	21.30	0.50	Pass

TEST RESULTS DATA
Peak Power Table

2.4GHz Band										
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
11b	1Mbps	1	1	2412	20.84	30.00	-0.20	20.64	36.00	Pass
11b	1Mbps	1	6	2437	21.10	30.00	-0.20	20.90	36.00	Pass
11b	1Mbps	1	11	2462	20.38	30.00	-0.20	20.18	36.00	Pass
11g	6Mbps	1	1	2412	25.24	30.00	-0.20	25.04	36.00	Pass
11g	6Mbps	1	6	2437	25.42	30.00	-0.20	25.22	36.00	Pass
11g	6Mbps	1	11	2462	24.52	30.00	-0.20	24.32	36.00	Pass
HT20	MCS0	1	1	2412	25.97	30.00	-0.20	25.77	36.00	Pass
HT20	MCS0	1	6	2437	26.15	30.00	-0.20	25.95	36.00	Pass
HT20	MCS0	1	11	2462	24.94	30.00	-0.20	24.74	36.00	Pass
HT40	MCS0	1	3	2422	24.11	30.00	-0.20	23.91	36.00	Pass
HT40	MCS0	1	6	2437	25.77	30.00	-0.20	25.57	36.00	Pass
HT40	MCS0	1	9	2452	25.00	30.00	-0.20	24.80	36.00	Pass

TEST RESULTS DATA
Average Power Table
(Reporting Only)


2.4GHz Band						
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)
11b	1Mbps	1	1	2412	0.00	18.40
11b	1Mbps	1	6	2437	0.00	18.85
11b	1Mbps	1	11	2462	0.00	18.32
11g	6Mbps	1	1	2412	0.11	16.28
11g	6Mbps	1	6	2437	0.11	16.49
11g	6Mbps	1	11	2462	0.11	16.12
HT20	MCS0	1	1	2412	0.12	16.15
HT20	MCS0	1	6	2437	0.12	16.56
HT20	MCS0	1	11	2462	0.12	15.92
HT40	MCS0	1	3	2422	0.24	13.42
HT40	MCS0	1	6	2437	0.24	16.42
HT40	MCS0	1	9	2452	0.24	15.02


TEST RESULTS DATA
Peak Power Density

2.4GHz Band								
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
11b	1Mbps	1	1	2412	-5.67	-0.20	8.00	Pass
11b	1Mbps	1	6	2437	-7.14	-0.20	8.00	Pass
11b	1Mbps	1	11	2462	-6.25	-0.20	8.00	Pass
11g	6Mbps	1	1	2412	-9.29	-0.20	8.00	Pass
11g	6Mbps	1	6	2437	-8.87	-0.20	8.00	Pass
11g	6Mbps	1	11	2462	-10.49	-0.20	8.00	Pass
HT20	MCS0	1	1	2412	-8.90	-0.20	8.00	Pass
HT20	MCS0	1	6	2437	-9.15	-0.20	8.00	Pass
HT20	MCS0	1	11	2462	-9.62	-0.20	8.00	Pass
HT40	MCS0	1	3	2422	-11.18	-0.20	8.00	Pass
HT40	MCS0	1	6	2437	-13.14	-0.20	8.00	Pass
HT40	MCS0	1	9	2452	-11.00	-0.20	8.00	Pass



Appendix B. AC Conducted Emission Test Results

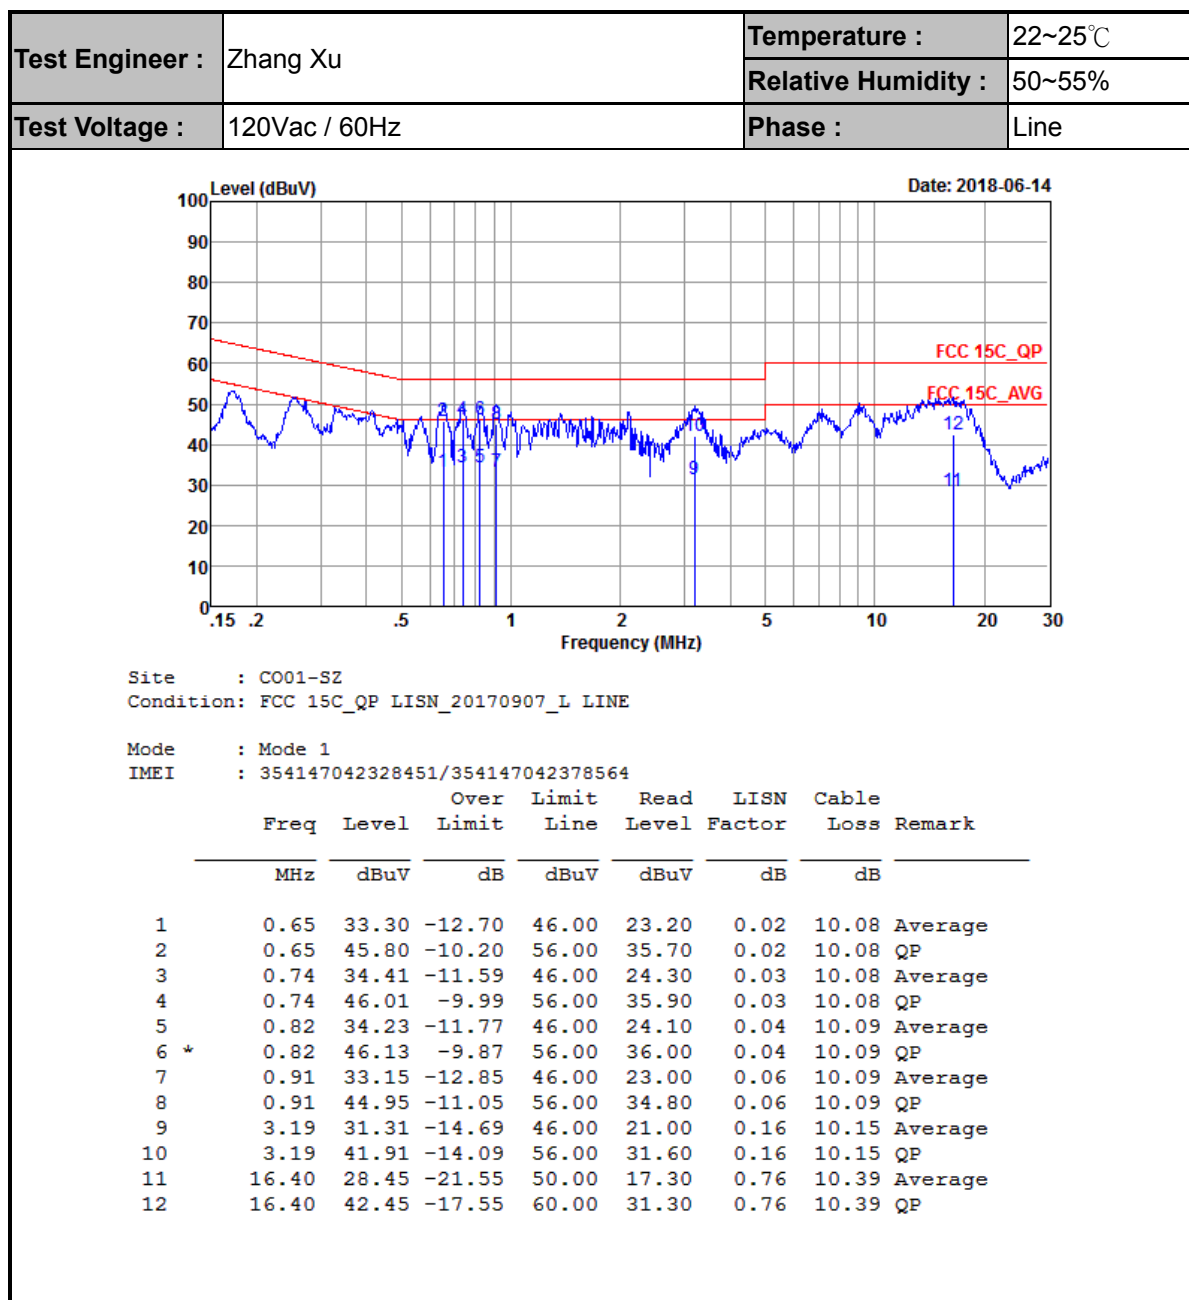

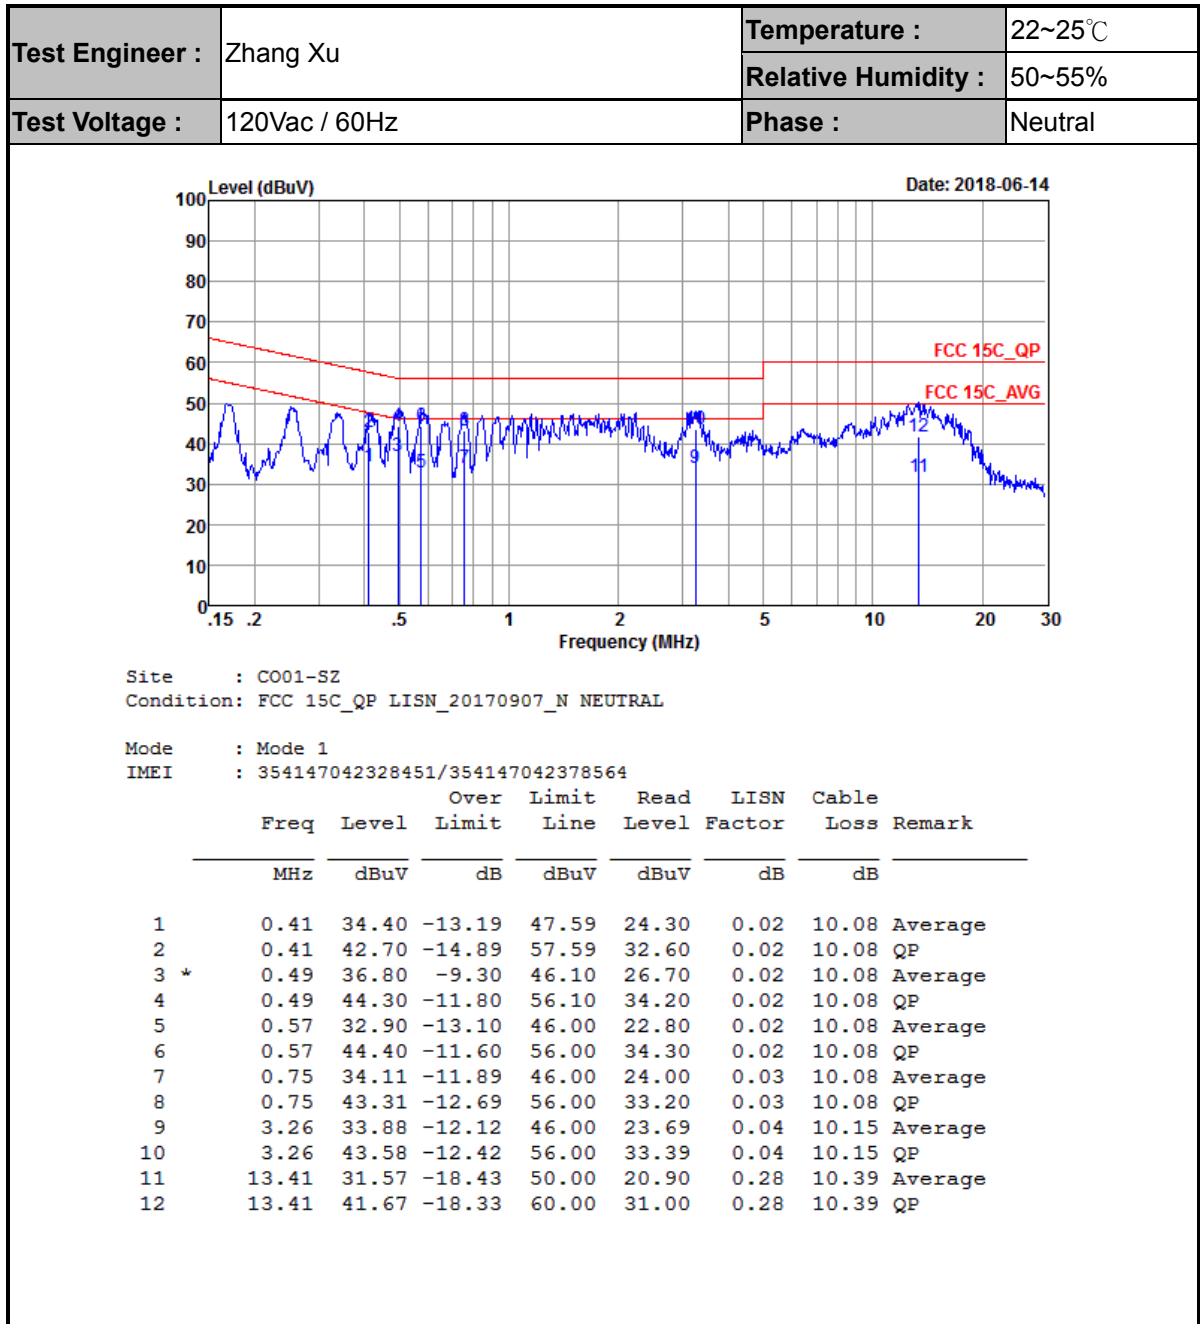



Appendix C. Radiated Spurious Emission

Test Engineer :	Xiaoshi Tan	Temperature :	24~25°C
		Relative Humidity :	48~49%



For adapter mode

2.4GHz 2400~2483.5MHz

WIFI 802.11b (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b CH 01 2412MHz		2386.13	49.6	-24.4	74	47.14	27.09	6.65	31.28	150	327	P	H
		2385.50	41.18	-12.82	54	38.77	27.04	6.65	31.28	150	327	A	H
	*	2412	107.02	-	-	104.48	27.14	6.66	31.26	150	327	P	H
	*	2412	103.91	-	-	101.37	27.14	6.66	31.26	150	327	A	H
		2347.17	46.88	-27.12	74	44.7	26.93	6.58	31.33	150	105	P	V
		2386.55	36.4	-17.6	54	33.94	27.09	6.65	31.28	150	105	A	V
	*	2412	89.91	-	-	87.37	27.14	6.66	31.26	150	105	P	V
	*	2412	86.84	-	-	84.3	27.14	6.66	31.26	150	105	A	V
802.11b CH 06 2437MHz		2384.06	48.95	-25.05	74	46.57	27.04	6.65	31.31	150	327	P	H
		2389.94	38.4	-15.6	54	35.94	27.09	6.65	31.28	150	327	A	H
	*	2437	106.93	-	-	104.32	27.24	6.63	31.26	150	327	P	H
	*	2437	103.72	-	-	101.11	27.24	6.63	31.26	150	327	A	H
		2483.69	48.93	-25.07	74	46.22	27.35	6.58	31.22	150	327	P	H
		2484.04	38.58	-15.42	54	35.87	27.35	6.58	31.22	150	327	A	H
		2373.14	47.26	-26.74	74	44.92	27.04	6.61	31.31	150	105	P	V
		2384.9	36.17	-17.83	54	33.79	27.04	6.65	31.31	150	105	A	V
	*	2437	93.29	-	-	90.68	27.24	6.63	31.26	150	105	P	V
	*	2437	90.19	-	-	87.58	27.24	6.63	31.26	150	105	A	V
		2495.66	46.89	-27.11	74	44.11	27.4	6.58	31.2	150	105	P	V
		2493.28	36.58	-17.42	54	33.8	27.4	6.58	31.2	150	105	A	V



802.11b CH 11 2462MHz	*	2462	106.52	-	-	103.85	27.3	6.61	31.24	150	327	P	H
	*	2462	102.47	-	-	99.8	27.3	6.61	31.24	150	327	A	H
		2487.76	50.36	-23.64	74	47.6	27.4	6.58	31.22	150	327	P	H
		2483.52	39.56	-14.44	54	36.85	27.35	6.58	31.22	150	327	A	H
	*	2462	89.83	-	-	87.16	27.3	6.61	31.24	150	105	P	V
	*	2462	86.6	-	-	83.93	27.3	6.61	31.24	150	105	A	V
		2491.92	47.3	-26.7	74	44.52	27.4	6.58	31.2	150	105	P	V
		2487.48	36.64	-17.36	54	33.93	27.35	6.58	31.22	150	105	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.11b (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11b CH 01 2412MHz		4824	46.37	-27.63	74	63.7	31.42	9.44	58.19	185	255	P	H
		4824	42.06	-31.94	74	59.39	31.42	9.44	58.19	185	255	P	V
802.11b CH 06 2437MHz		4874	46.06	-27.94	74	63.25	31.51	9.4	58.1	165	106	P	H
		7311	47.16	-26.84	74	56.72	36.36	12	57.92	174	100	P	H
		4874	41.34	-32.66	74	58.53	31.51	9.4	58.1	165	106	P	V
		7311	46.81	-27.19	74	56.37	36.36	12	57.92	174	100	P	V
802.11b CH 11 2462MHz		4924	45.12	-28.88	74	62.12	31.59	9.43	58.02	150	285	P	H
		7386	46.45	-27.55	74	55.44	36.65	12.01	57.65	155	274	P	H
		4924	40.8	-33.2	74	57.8	31.59	9.43	58.02	150	285	P	V
		7386	46.48	-27.52	74	55.47	36.65	12.01	57.65	155	274	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz
WIFI 802.11g (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11g CH 01 2412MHz		2389.91	58.77	-15.23	74	56.31	27.09	6.65	31.28	150	325	P	H
		2389.91	46.67	-7.33	54	44.21	27.09	6.65	31.28	150	325	A	H
	*	2412	105.87	-	-	103.33	27.14	6.66	31.26	150	325	P	H
	*	2412	98.57	-	-	96.03	27.14	6.66	31.26	150	325	A	H
		2389.17	47.56	-26.44	74	45.1	27.09	6.65	31.28	150	105	P	V
		2389.59	37.62	-16.38	54	35.16	27.09	6.65	31.28	150	105	A	V
	*	2412	88.92	-	-	86.38	27.14	6.66	31.26	150	105	P	V
	*	2412	81.42	-	-	78.88	27.14	6.66	31.26	150	105	A	V
802.11g CH 06 2437MHz		2389.8	48.78	-25.22	74	46.32	27.09	6.65	31.28	150	325	P	H
		2388.82	39.4	-14.6	54	36.94	27.09	6.65	31.28	150	325	A	H
	*	2437	106.32	-	-	103.71	27.24	6.63	31.26	150	325	P	H
	*	2437	98.67	-	-	96.06	27.24	6.63	31.26	150	325	A	H
		2485.02	49.98	-24.02	74	47.27	27.35	6.58	31.22	150	325	P	H
		2483.83	40.28	-13.72	54	37.57	27.35	6.58	31.22	150	325	A	H
		2378.74	46.71	-27.29	74	44.33	27.04	6.65	31.31	150	105	P	V
		2375.8	36.99	-17.01	54	34.61	27.04	6.65	31.31	150	105	A	V
	*	2437	91.37	-	-	88.76	27.24	6.63	31.26	150	105	P	V
	*	2437	84.85	-	-	82.24	27.24	6.63	31.26	150	105	A	V
		2498.32	47.7	-26.3	74	44.92	27.4	6.58	31.2	150	105	P	V
		2495.24	37.57	-16.43	54	34.79	27.4	6.58	31.2	150	105	A	V



802.11g CH 11 2462MHz	*	2462	105.13	-	-	102.46	27.3	6.61	31.24	150	325	P	H
	*	2462	97.63	-	-	94.96	27.3	6.61	31.24	150	325	A	H
		2483.52	55.85	-18.15	74	53.14	27.35	6.58	31.22	150	325	P	H
		2483.56	45.83	-8.17	54	43.12	27.35	6.58	31.22	150	325	A	H
	*	2462	89.49	-	-	86.82	27.3	6.61	31.24	150	105	P	V
	*	2462	81.95	-	-	79.28	27.3	6.61	31.24	150	105	A	V
		2487.32	47.74	-26.26	74	45.03	27.35	6.58	31.22	150	105	P	V
		2483.8	37.73	-16.27	54	35.02	27.35	6.58	31.22	150	105	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.11g (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11g CH 01 2412MHz		4824	39.73	-34.27	74	57.06	31.42	9.44	58.19	185	255	P	H
		4824	39.42	-34.58	74	56.75	31.42	9.44	58.19	185	255	P	V
802.11g CH 06 2437MHz		4874	40.03	-33.97	74	57.22	31.51	9.4	58.1	165	106	P	H
		7311	46.29	-27.71	74	55.85	36.36	12	57.92	174	100	P	H
		4874	39.73	-34.27	74	56.92	31.51	9.4	58.1	165	106	P	V
		7311	47.07	-26.93	74	56.63	36.36	12	57.92	174	100	P	V
802.11g CH 11 2462MHz		4924	39.99	-34.01	74	56.99	31.59	9.43	58.02	150	285	P	H
		7386	46.24	-27.76	74	55.23	36.65	12.01	57.65	155	274	P	H
		4924	40.03	-33.97	74	57.03	31.59	9.43	58.02	150	285	P	V
		7386	45.96	-28.04	74	54.95	36.65	12.01	57.65	155	274	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 01 2412MHz		2389.59	66.08	-7.92	74	63.62	27.09	6.65	31.28	150	327	P	H
		2389.91	49.26	-4.74	54	46.8	27.09	6.65	31.28	150	327	A	H
	*	2412	106.23	-	-	103.69	27.14	6.66	31.26	150	327	P	H
	*	2412	98.62	-	-	96.08	27.14	6.66	31.26	150	327	A	H
		2386.34	50.33	-23.67	74	47.87	27.09	6.65	31.28	150	107	P	V
		2389.8	38.12	-15.88	54	35.66	27.09	6.65	31.28	150	107	A	V
	*	2412	89.38	-	-	86.84	27.14	6.66	31.26	150	107	P	V
	*	2412	80.45	-	-	77.91	27.14	6.66	31.26	150	107	A	V
802.11n HT20 CH 06 2437MHz		2386.86	48.97	-25.03	74	46.51	27.09	6.65	31.28	150	327	P	H
		2389.1	39.85	-14.15	54	37.39	27.09	6.65	31.28	150	327	A	H
	*	2437	106.18	-	-	103.57	27.24	6.63	31.26	150	327	P	H
	*	2437	98.38	-	-	95.77	27.24	6.63	31.26	150	327	A	H
		2483.62	49.49	-24.51	74	46.78	27.35	6.58	31.22	150	327	P	H
		2483.5	40.04	-13.96	54	37.33	27.35	6.58	31.22	150	327	A	H
		2347.66	46.84	-27.16	74	44.66	26.93	6.58	31.33	150	107	P	V
		2387.28	37.28	-16.72	54	34.82	27.09	6.65	31.28	150	107	A	V
	*	2437	91.95	-	-	89.34	27.24	6.63	31.26	150	107	P	V
	*	2437	84.26	-	-	81.65	27.24	6.63	31.26	150	107	A	V
		2499.51	48.3	-25.7	74	45.52	27.4	6.58	31.2	150	107	P	V
		2487.75	37.49	-16.51	54	34.73	27.4	6.58	31.22	150	107	A	V



802.11n HT20 CH 11 2462MHz	*	2462	105.29	-	-	102.62	27.3	6.61	31.24	150	327	P	H
	*	2462	97.7	-	-	95.03	27.3	6.61	31.24	150	327	A	H
		2484.04	60.25	-13.75	74	57.54	27.35	6.58	31.22	150	327	P	H
		2483.52	47.4	-6.6	54	44.69	27.35	6.58	31.22	150	327	A	H
	*	2462	89.73	-	-	87.06	27.3	6.61	31.24	150	161	P	V
	*	2462	82.13	-	-	79.46	27.3	6.61	31.24	150	161	A	V
		2486.88	48.3	-25.7	74	45.59	27.35	6.58	31.22	150	161	P	V
		2483.56	37.94	-16.06	54	35.23	27.35	6.58	31.22	150	161	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz
WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 01 2412MHz		4824	40.17	-33.83	74	57.5	31.42	9.44	58.19	185	255	P	H
		4824	39.34	-34.66	74	56.67	31.42	9.44	58.19	185	255	P	V
802.11n HT20 CH 06 2437MHz		4874	39.71	-34.29	74	56.9	31.51	9.4	58.1	165	106	P	H
		7311	46.44	-27.56	74	56	36.36	12	57.92	174	100	P	H
		4874	39.73	-34.27	74	56.92	31.51	9.4	58.1	165	106	P	V
		7311	46.25	-27.75	74	55.81	36.36	12	57.92	174	100	P	V
802.11n HT20 CH 11 2462MHz		4924	40.19	-33.81	74	57.19	31.59	9.43	58.02	150	285	P	H
		7386	46.99	-27.01	74	55.98	36.65	12.01	57.65	155	274	P	H
		4924	38.91	-35.09	74	55.91	31.59	9.43	58.02	150	285	P	V
		7386	45.89	-28.11	74	54.88	36.65	12.01	57.65	155	274	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.11n HT40 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 03 2422MHz		2389.52	64.26	-9.74	74	61.8	27.09	6.65	31.28	216	323	P	H
		2389.52	50.44	-3.56	54	47.98	27.09	6.65	31.28	216	323	A	H
	*	2422	101.71	-	-	99.12	27.19	6.66	31.26	216	323	P	H
	*	2422	94.2	-	-	91.61	27.19	6.66	31.26	216	323	A	H
		2483.69	49.77	-24.23	74	47.06	27.35	6.58	31.22	216	323	P	H
		2483.55	40.43	-13.57	54	37.72	27.35	6.58	31.22	216	323	A	H
		2389.52	58.17	-15.83	74	55.71	27.09	6.65	31.28	271	291	P	V
		2389.52	44.37	-9.63	54	41.91	27.09	6.65	31.28	271	291	A	V
	*	2422	95.44	-	-	92.85	27.19	6.66	31.26	271	291	P	V
	*	2422	88.05	-	-	85.46	27.19	6.66	31.26	271	291	A	V
		2483.55	47.57	-26.43	74	44.86	27.35	6.58	31.22	271	291	P	V
		2483.76	38.76	-15.24	54	36.05	27.35	6.58	31.22	271	291	A	V
802.11n HT40 CH 06 2437MHz		2384.48	56.08	-17.92	74	53.7	27.04	6.65	31.31	125	312	P	H
		2389.94	42.03	-11.97	54	39.57	27.09	6.65	31.28	125	312	A	H
	*	2437	104.1	-	-	100.49	27.24	6.63	31.26	125	312	P	H
	*	2437	93.98	-	-	91.37	27.24	6.63	31.26	125	312	A	H
		2483.62	59.36	-14.64	74	56.65	27.35	6.58	31.22	125	312	P	H
		2483.5	44.74	-9.26	54	42.03	27.35	6.58	31.22	125	312	A	H
		2314.2	48.49	-25.51	74	46.5	26.83	6.51	31.35	111	272	P	V
		2388.82	36.87	-17.13	54	34.41	27.09	6.65	31.28	111	272	A	V
	*	2437	94.72	-	-	92.11	27.24	6.63	31.26	111	272	P	V
	*	2437	85.41	-	-	82.8	27.24	6.63	31.26	111	272	A	V
		2484.11	51.03	-22.97	74	48.32	27.35	6.58	31.22	111	272	P	V
		2483.55	37.93	-16.07	54	35.22	27.35	6.58	31.22	111	272	A	V



802.11n HT40 CH 09 2452MHz		2389.8	55.34	-18.66	74	52.88	27.09	6.65	31.28	236	322	P	H
		2388.96	41.96	-12.04	54	39.5	27.09	6.65	31.28	236	322	A	H
	*	2452	103.43	-	-	100.82	27.24	6.61	31.24	236	322	P	H
	*	2452	97.66	-	-	95.05	27.24	6.61	31.24	236	322	A	H
		2483.5	65.58	-8.42	74	62.87	27.35	6.58	31.22	236	322	P	H
		2483.55	49.54	-4.46	54	46.83	27.35	6.58	31.22	236	322	A	H
		2389.52	49.42	-24.58	74	46.96	27.09	6.65	31.28	259	289	P	V
		2388.4	38.63	-15.37	54	36.17	27.09	6.65	31.28	259	289	A	V
	*	2452	98.76	-	-	96.15	27.24	6.61	31.24	259	289	P	V
	*	2452	91.3	-	-	88.69	27.24	6.61	31.24	259	289	A	V
		2483.5	60.2	-13.8	74	57.49	27.35	6.58	31.22	259	289	P	V
		2483.69	45.31	-8.69	54	42.6	27.35	6.58	31.22	259	289	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz
WIFI 802.11n HT40 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 03 2422MHz		4844	39.29	-34.71	74	56.57	31.45	9.43	58.16	150	350	P	H
		7266	46.24	-27.76	74	56.07	36.24	11.96	58.03	200	360	P	H
		4844	39.8	-34.2	74	57.08	31.45	9.43	58.16	150	350	P	V
		7266	46.9	-27.1	74	56.73	36.24	11.96	58.03	200	360	P	V
802.11n HT40 CH 06 2437MHz		4874	38.96	-35.04	74	56.15	31.51	9.4	58.1	165	230	P	H
		7311	46.12	-27.88	74	55.68	36.36	12	57.92	186	323	P	H
		4874	40.19	-33.81	74	57.38	31.51	9.4	58.1	165	230	P	V
		7311	46.02	-27.98	74	55.58	36.36	12	57.92	186	323	P	V
802.11n HT40 CH 09 2452MHz		4904	39.82	-34.18	74	56.92	31.56	9.38	58.04	150	360	P	H
		7356	46.74	-27.26	74	55.96	36.53	12.01	57.76	165	335	P	H
		4904	39.82	-34.18	74	56.92	31.56	9.38	58.04	150	360	P	V
		7356	47.13	-26.87	74	56.35	36.53	12.01	57.76	165	335	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

Emission below 1GHz

2.4GHz WIFI 802.11n HT40 (LF)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
2.4GHz 802.11n HT40 LF		40.67	27.28	-12.72	40	36.41	22.18	0.39	31.7	100	28	P	H
		91.11	19.88	-23.62	43.5	32.75	17.86	0.77	31.5	-	-	P	H
		289.96	20.54	-25.46	46	30.73	18.89	2	31.08	-	-	P	H
		412.18	26.84	-19.16	46	31.03	24.48	2.43	31.1	-	-	P	H
		581.93	28.7	-17.3	46	31.92	25.03	2.95	31.2	-	-	P	H
		751.68	32.72	-13.28	46	32.22	28.33	3.47	31.3	-	-	P	H
		39.7	35.05	-4.95	40	43.57	22.8	0.38	31.7	100	35	P	V
		73.65	22.06	-17.94	40	37.75	15.28	0.63	31.6	-	-	P	V
		275.41	20.68	-25.32	46	31.36	18.42	1.95	31.05	-	-	P	V
		475.23	27.19	-18.81	46	31.15	24.5	2.64	31.1	-	-	P	V
		624.61	28.67	-17.33	46	31.44	25.35	3.08	31.2	-	-	P	V
		814.73	31.13	-14.87	46	29.88	28.92	3.63	31.3	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



For wireless charging

2.4GHz 2400~2483.5MHz

WIFI 802.11n HT40 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 03 2422MHz		2388.12	62.35	-11.65	74	59.89	27.09	6.65	31.28	121	114	P	H
		2389.94	49.1	-4.9	54	46.64	27.09	6.65	31.28	121	114	A	H
	*	2422	100.91	-	-	98.32	27.19	6.66	31.26	121	114	P	H
	*	2422	92.51	-	-	89.92	27.19	6.66	31.26	121	114	A	H
		2483.5	49.13	-24.87	74	46.42	27.35	6.58	31.22	121	114	P	H
		2483.5	40.78	-13.22	54	38.07	27.35	6.58	31.22	121	114	A	H
		2389.8	62.3	-11.7	74	59.84	27.09	6.65	31.28	346	90	P	V
		2389.66	48.24	-5.76	54	45.78	27.09	6.65	31.28	346	90	A	V
	*	2422	97.71	-	-	95.12	27.19	6.66	31.26	346	90	P	V
	*	2422	90.3	-	-	87.71	27.19	6.66	31.26	346	90	A	V
		2486.14	47.23	-26.77	74	44.52	27.35	6.58	31.22	346	90	P	V
		2483.9	38.6	-15.4	54	35.89	27.35	6.58	31.22	346	90	A	V



2.4GHz 2400~2483.5MHz
WIFI 802.11n HT40 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n		4844	38.8	-35.2	74	56.08	31.45	9.43	58.16	150	350	P	H
HT40		7266	46.06	-27.94	74	55.89	36.24	11.96	58.03	200	360	P	H
CH 03		4844	38.9	-35.1	74	56.18	31.45	9.43	58.16	150	350	P	V
2422MHz		7266	46.34	-27.66	74	56.17	36.24	11.96	58.03	200	360	P	V



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	Peak or Average
H/V	Horizontal or Vertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Level(dBμV/m) =

Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

2. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)

= 55.45 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 55.45(dBμV/m) – 74(dBμV/m)

= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)

= 43.54 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 43.54(dBμV/m) – 54(dBμV/m)


= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.

Appendix D. Duty Cycle Plots


Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
802.11b	100	-	-	10Hz
802.11g	97.47	1.399	0.715	1kHz
802.11n HT20	97.28	1.297	0.771	1kHz
802.11n HT40	94.68	0.645	1.551	3kHz

802.11b

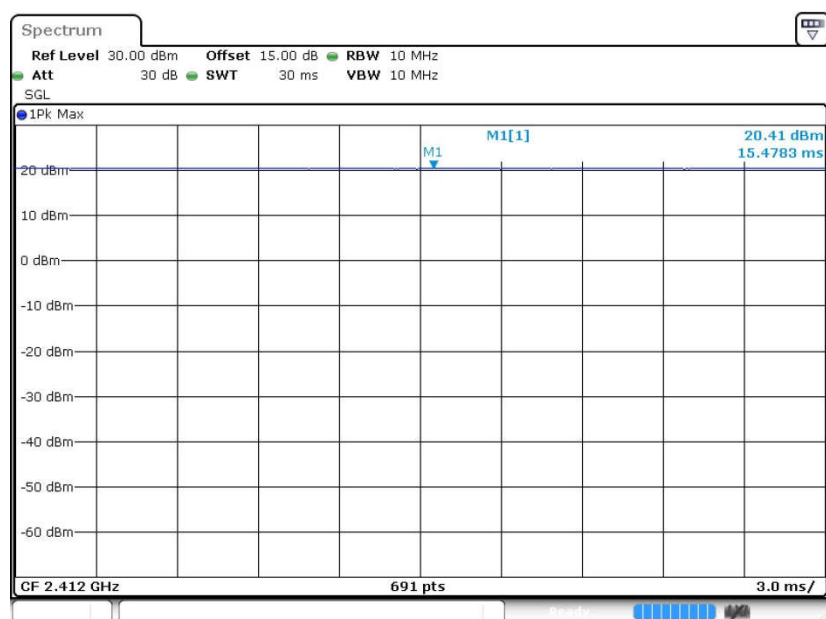




802.11g

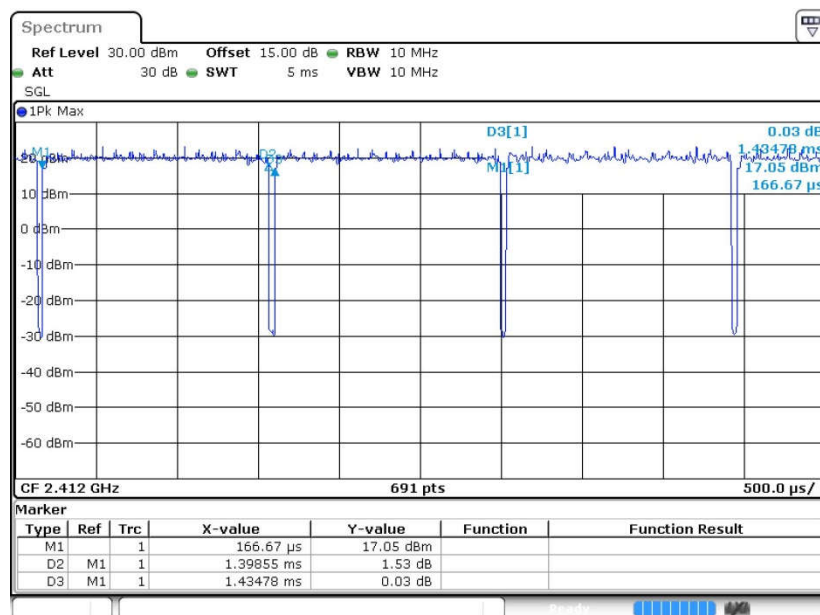

802.11n HT20

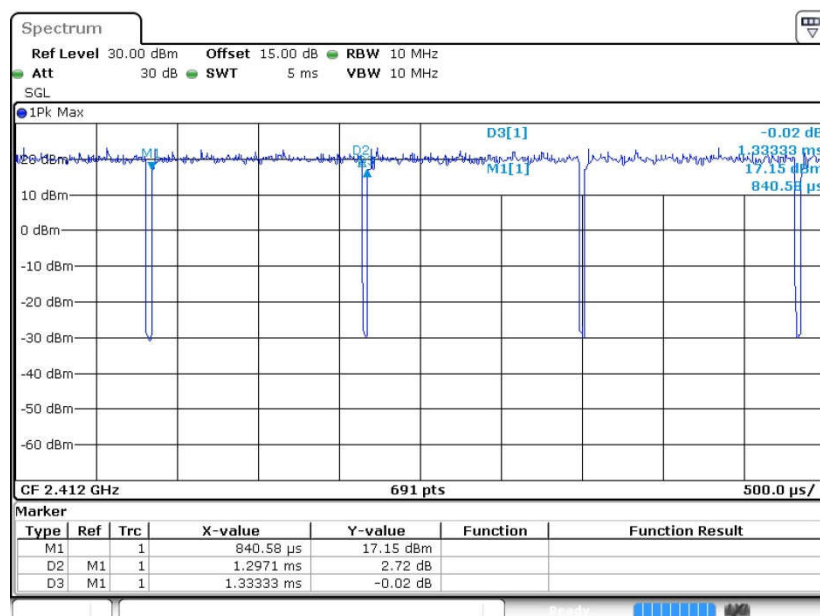



802.11n HT40

