

Test Report No.50148967 001

Appendix D: Radiated Spurious Emission Data

(File: 50148967AppendixD)



Contents

Radiated Emissions, Band Edges, 2.35-2.5G	2
Spurious Emissions, TX Mode, 1-18G.....	18
Spurious Emissions, TX Mode, 18-26.5G.....	42
Spurious Emissions, TX Mode, 9k-30M	66
Spurious Emissions, TX Mode, 30M-1G	68
Spurious Emissions, RX Mode, 1-18G	70
Spurious Emissions, RX Mode, 18-26.5G	72
Spurious Emissions, RX Mode, 30M-1G.....	74
Spurious Emissions, RX Mode, 9k-30M.....	76
Mains Emissions, 150k-30M.....	78


Radiated Emissions, Band Edges, 2.35-2.5G

Radiated Bandedge 11b



Low Channel (Hor)

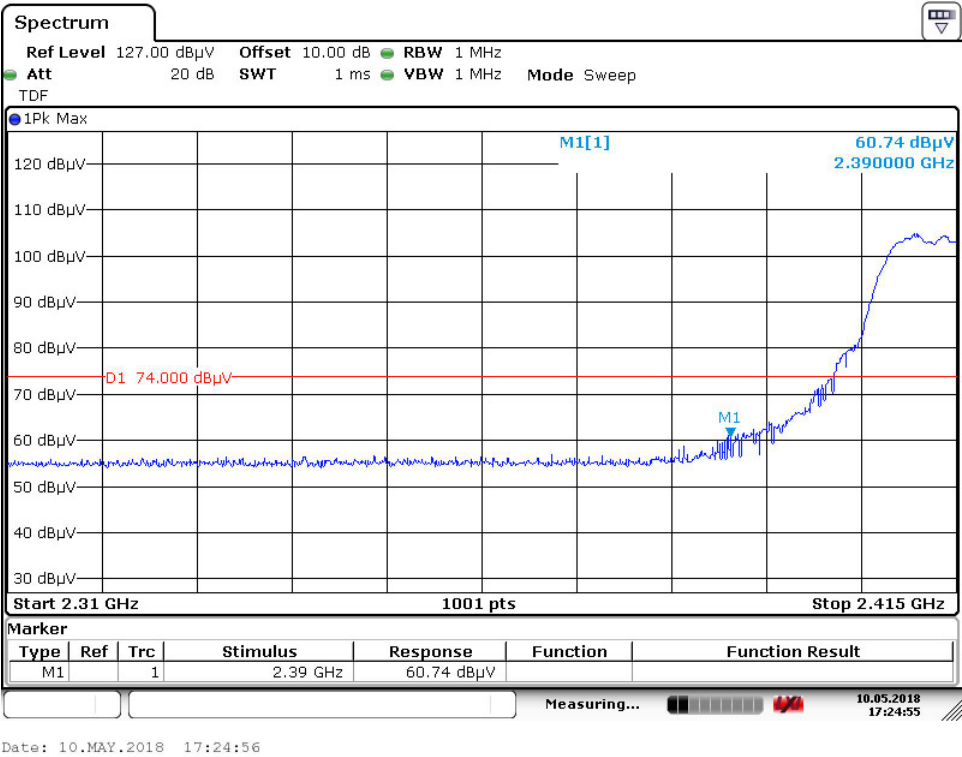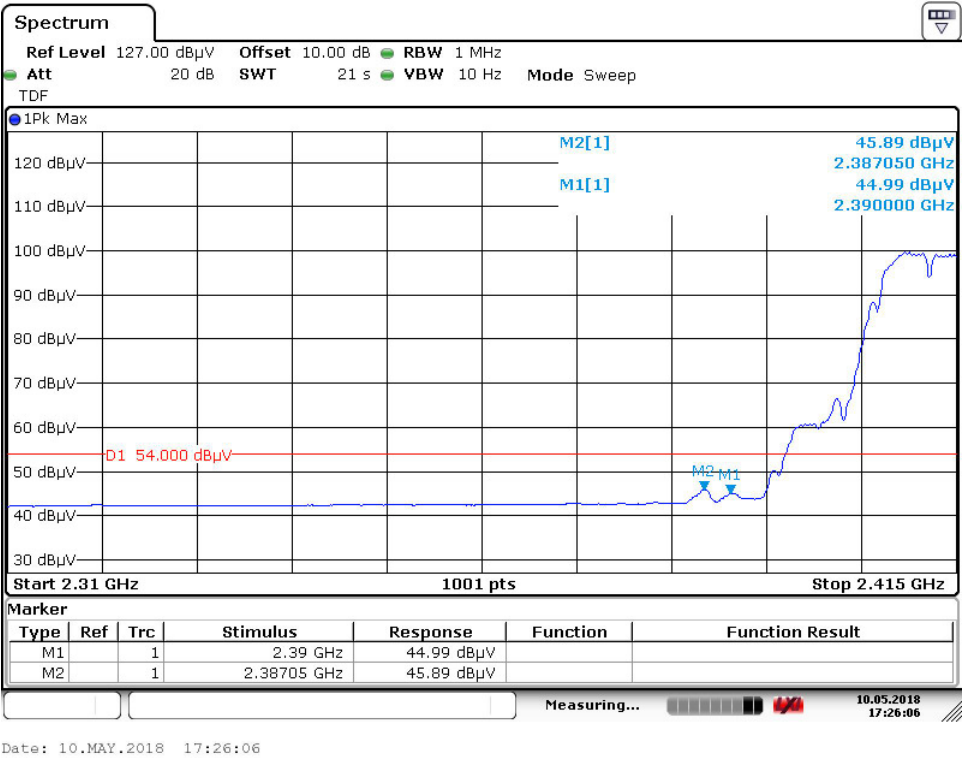



Low Channel (Ver)

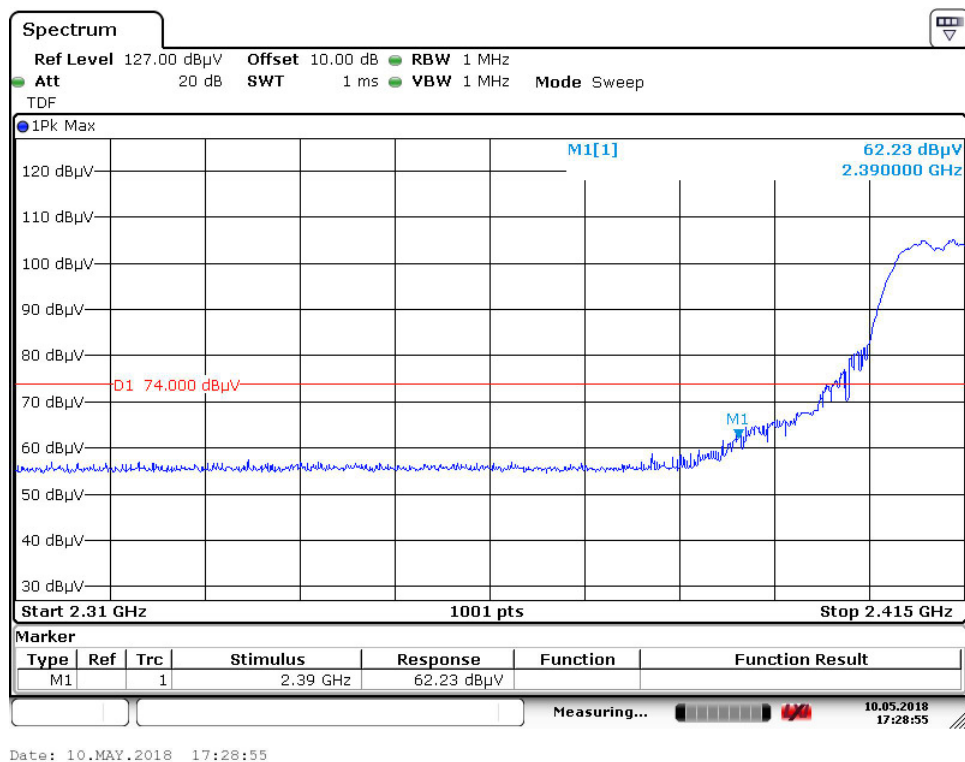



High Channel (Hor)

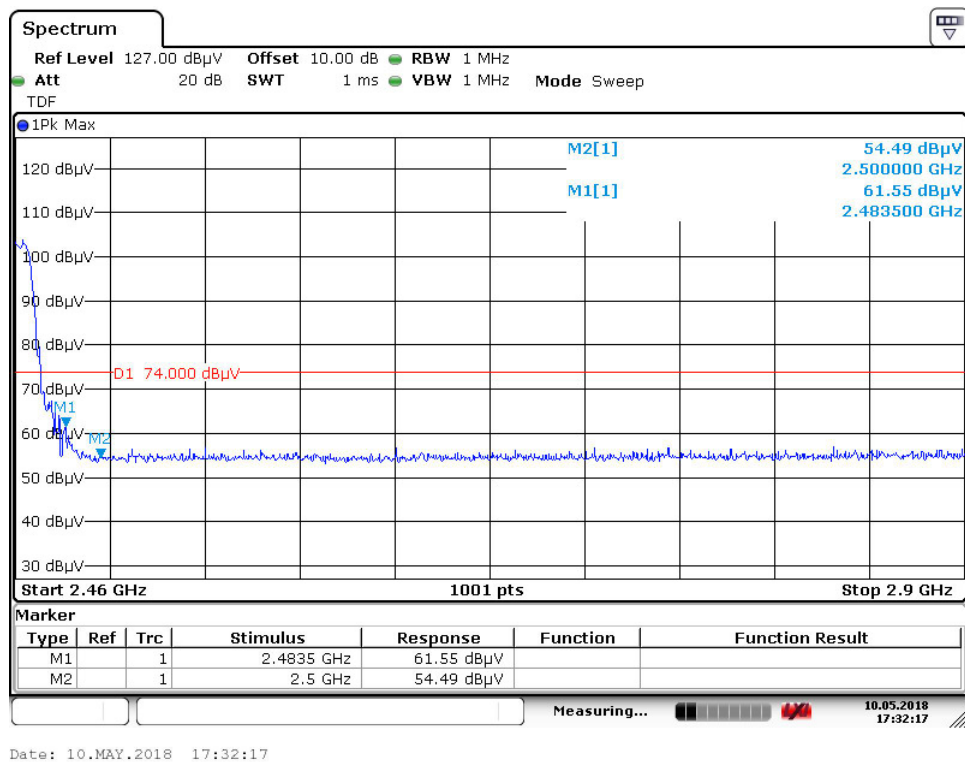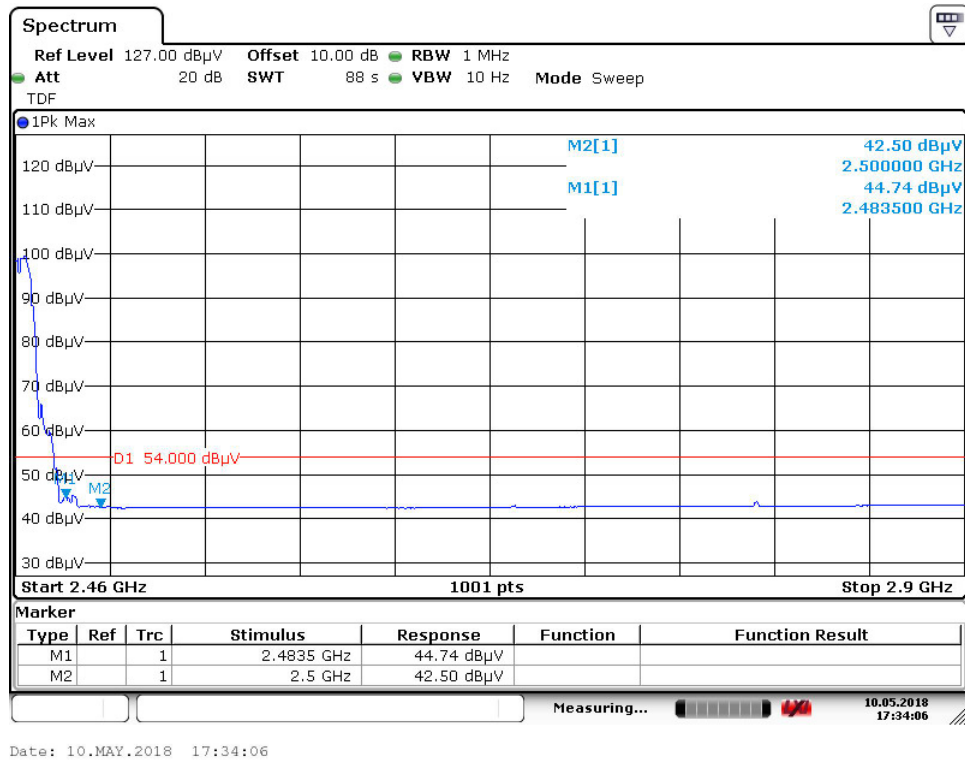



High Channel (Ver)

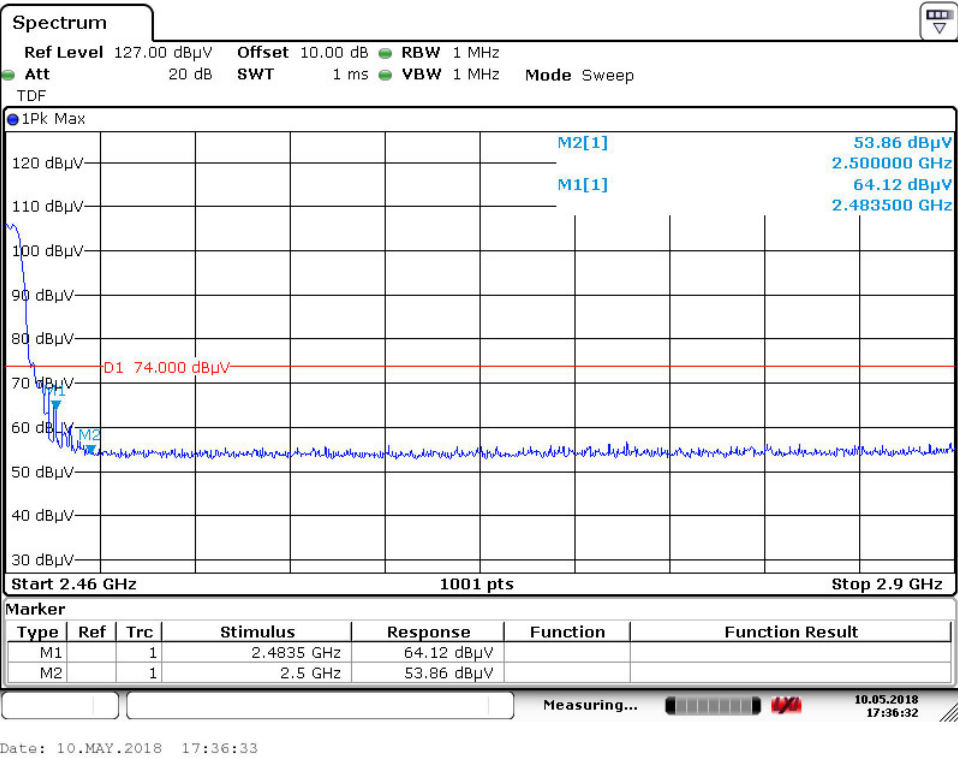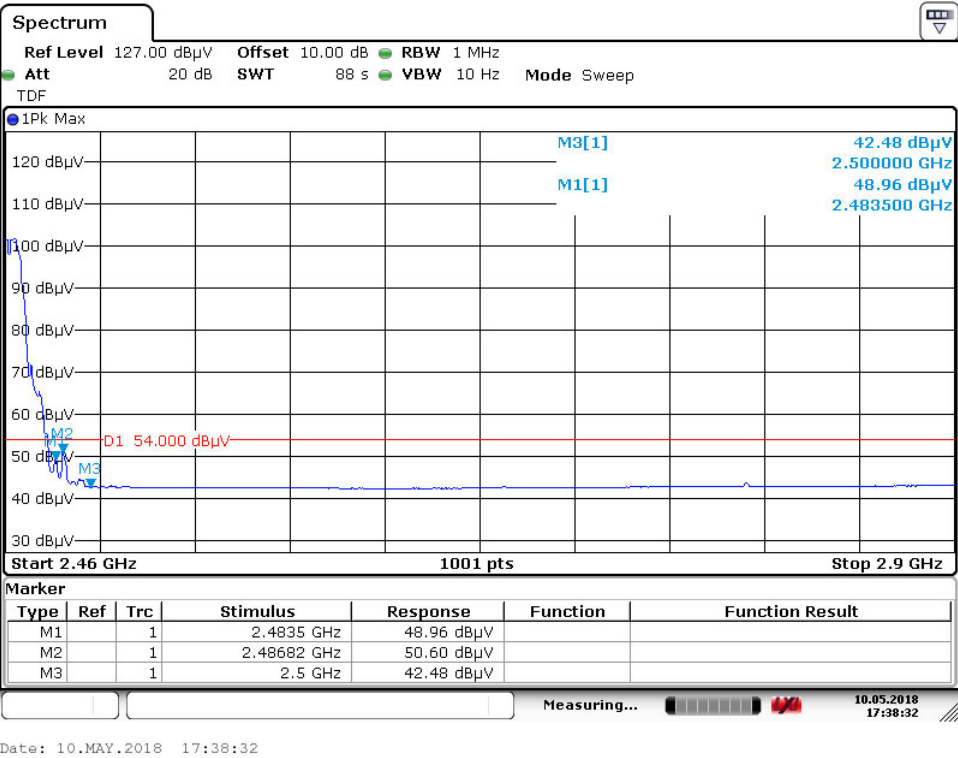



Radiated Bandedge 11g
Low Channel (Hor)

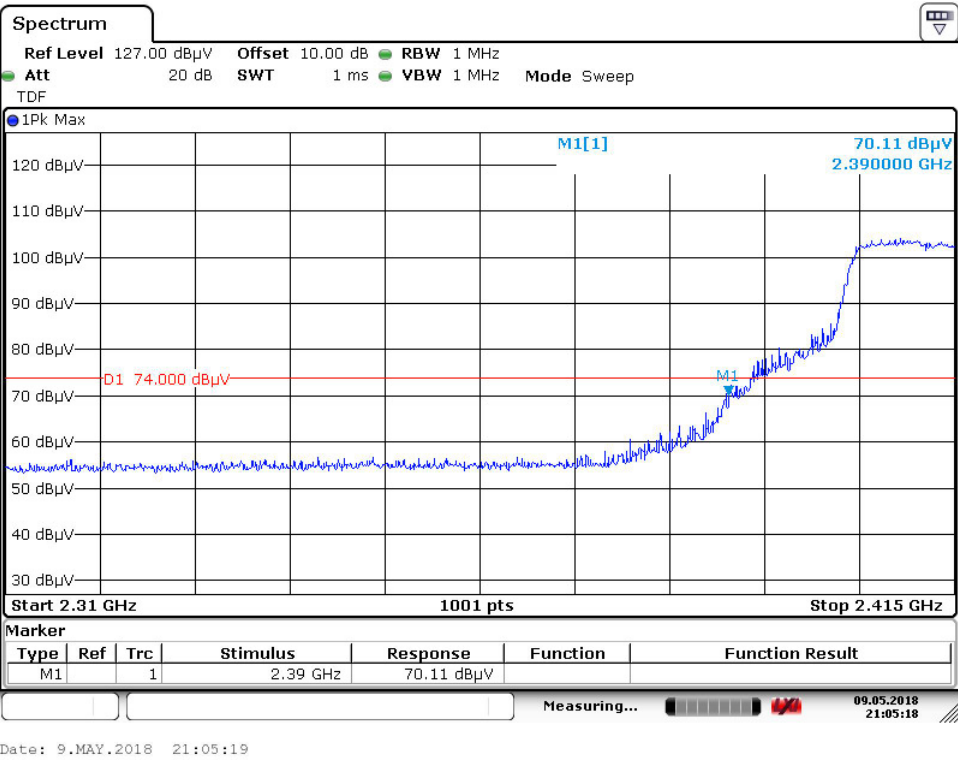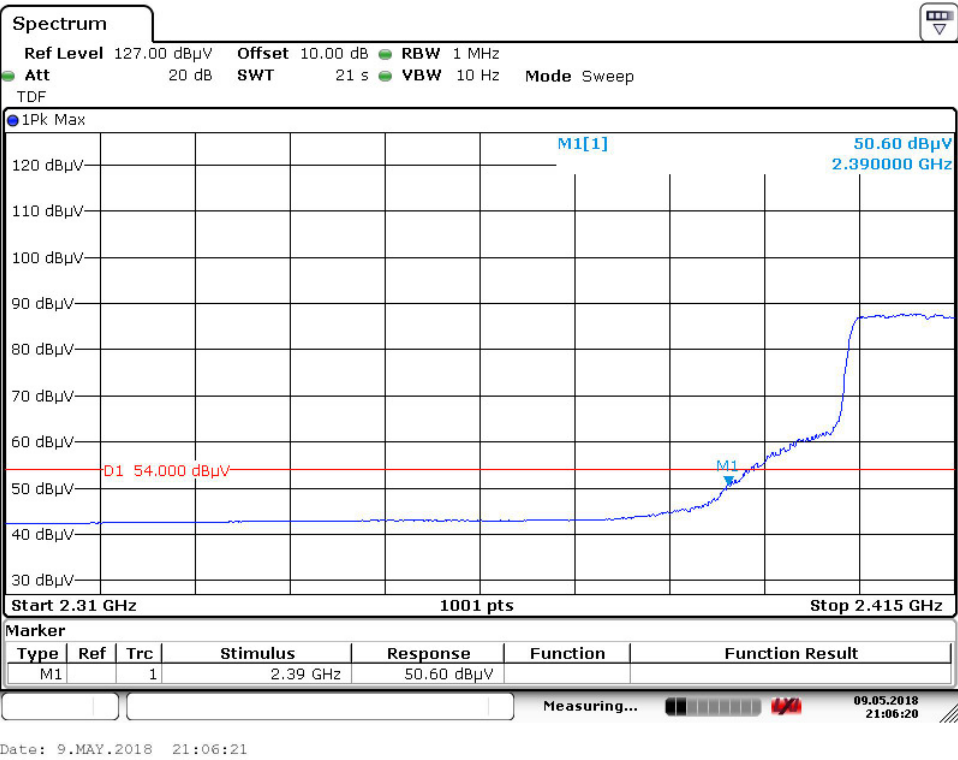



Low Channel (Ver)

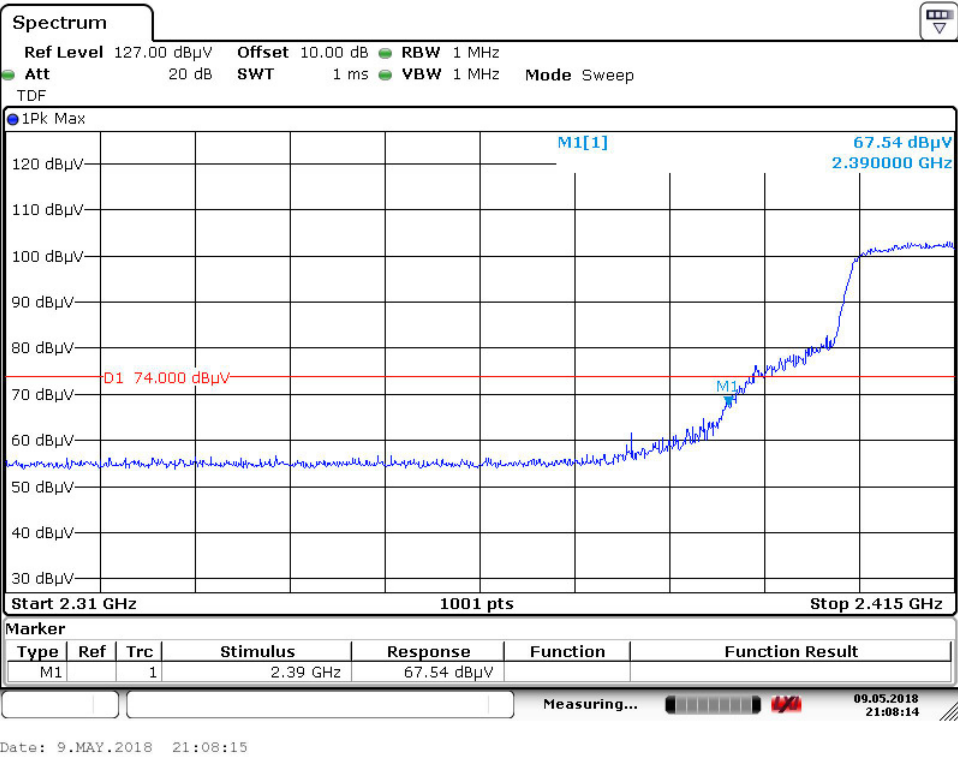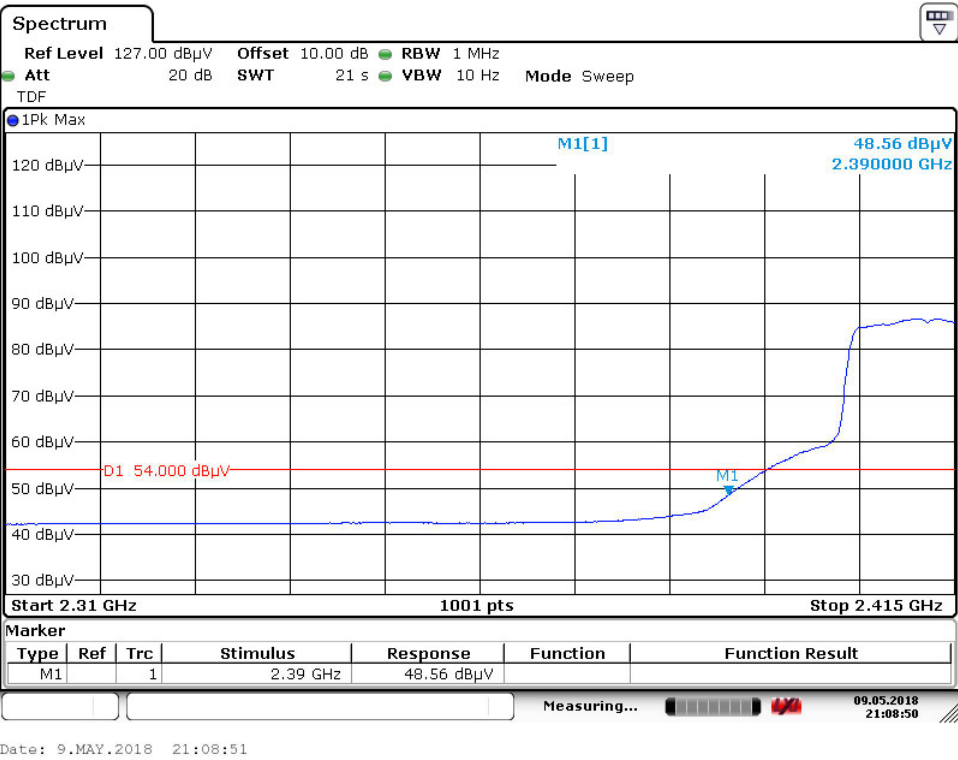

High Channel (Hor)

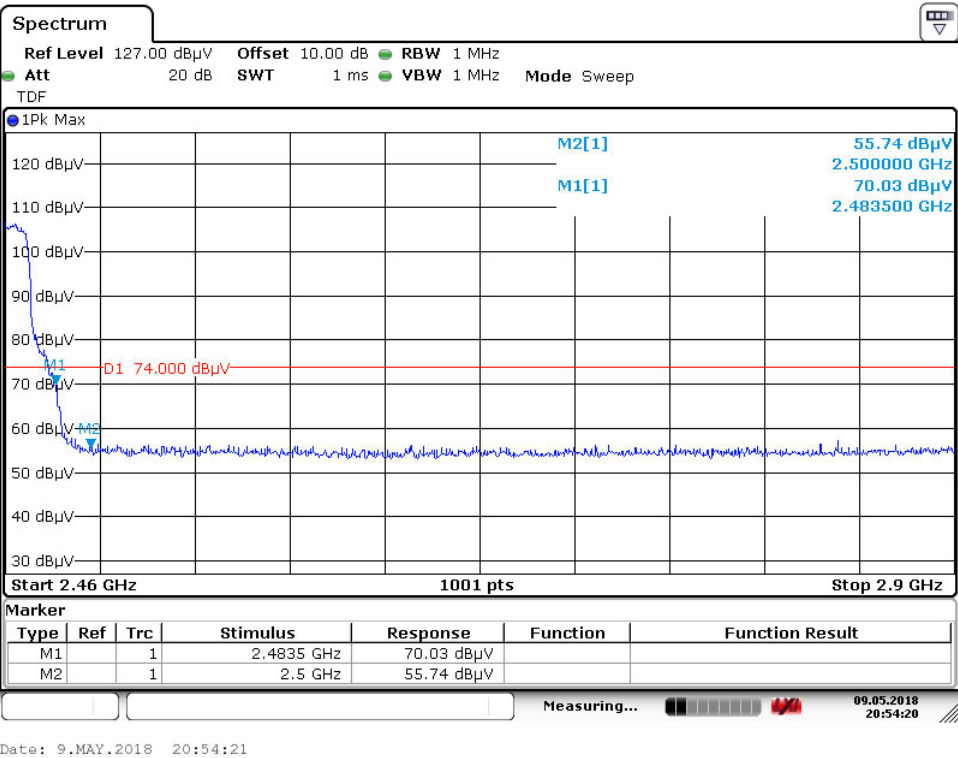
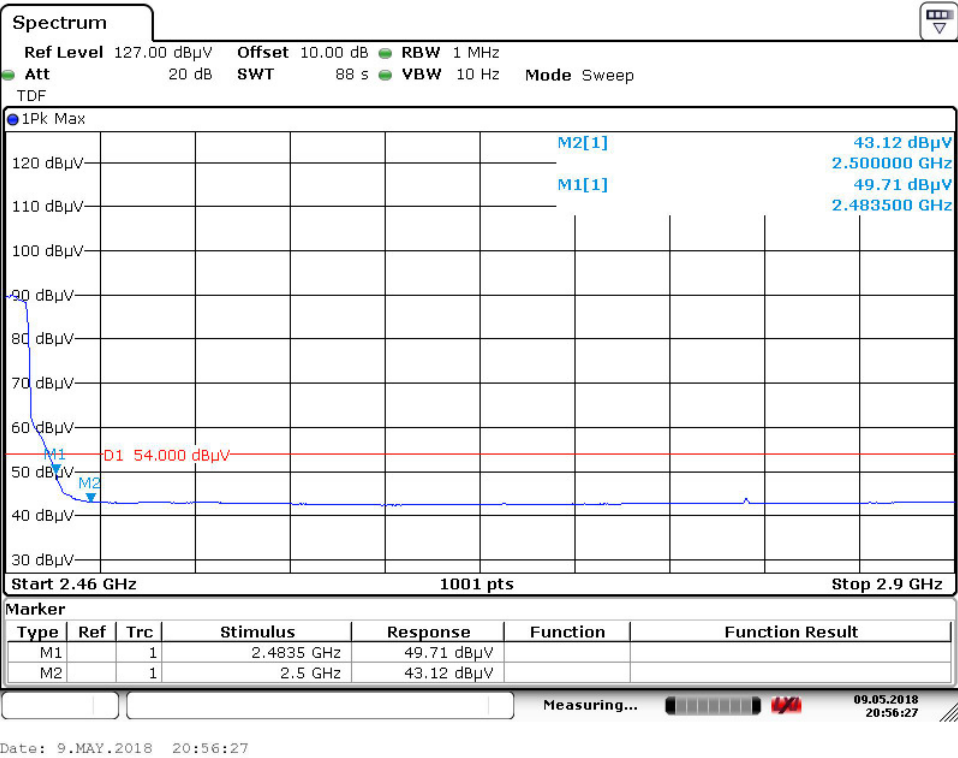


High Channel (Ver)

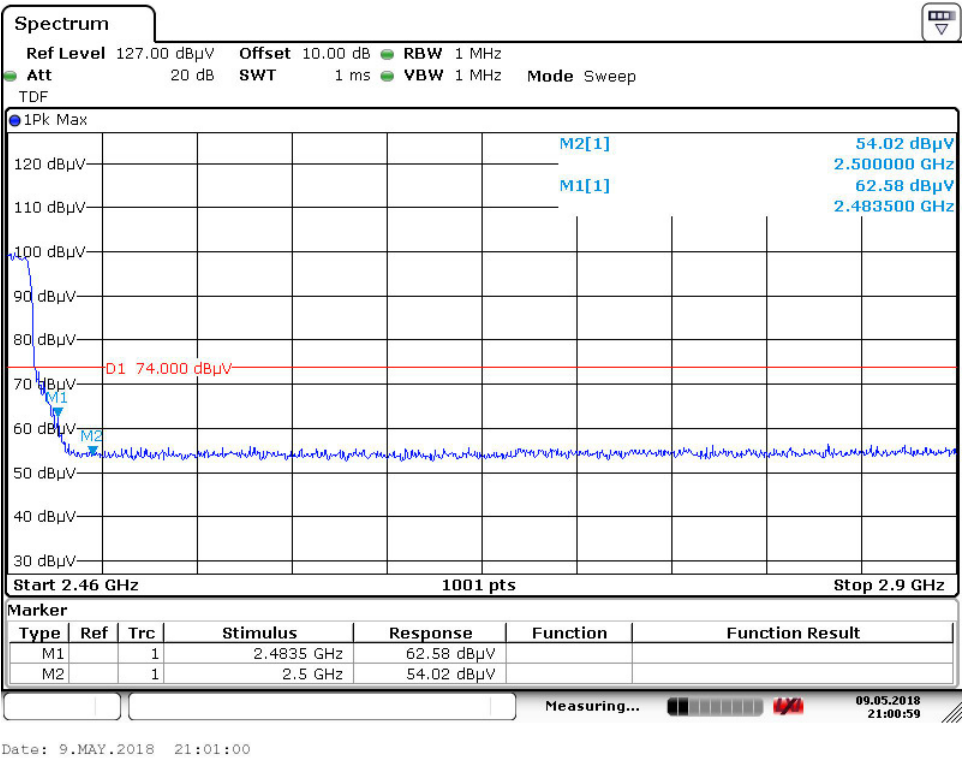
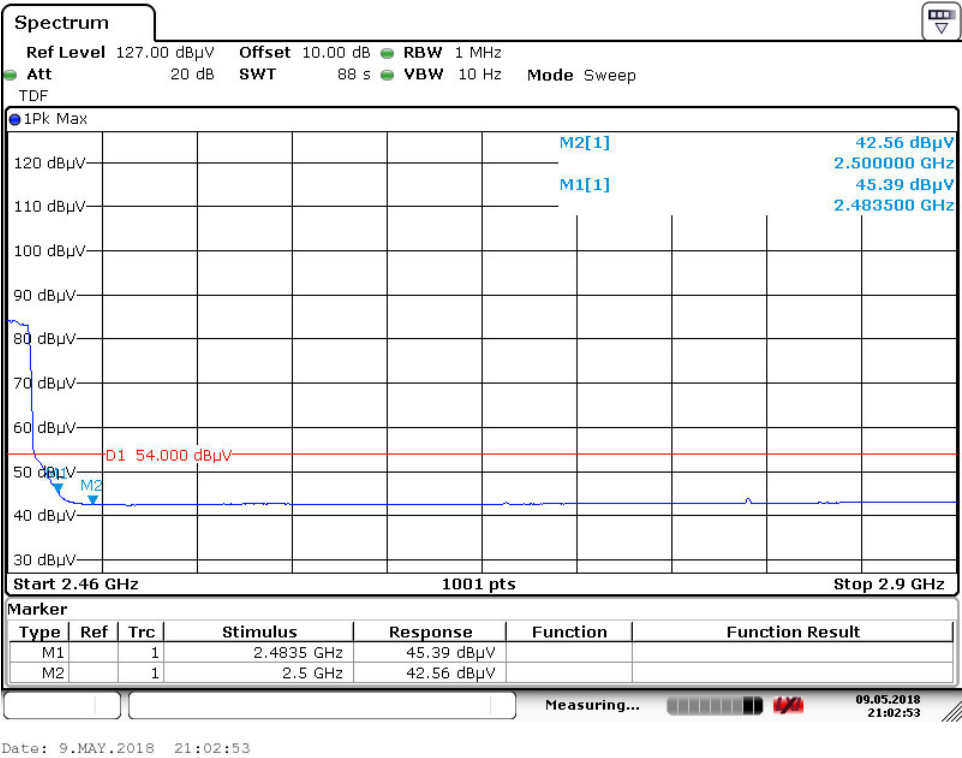


Radiated Bandedge 11n_20M



Low Channel (Hor)

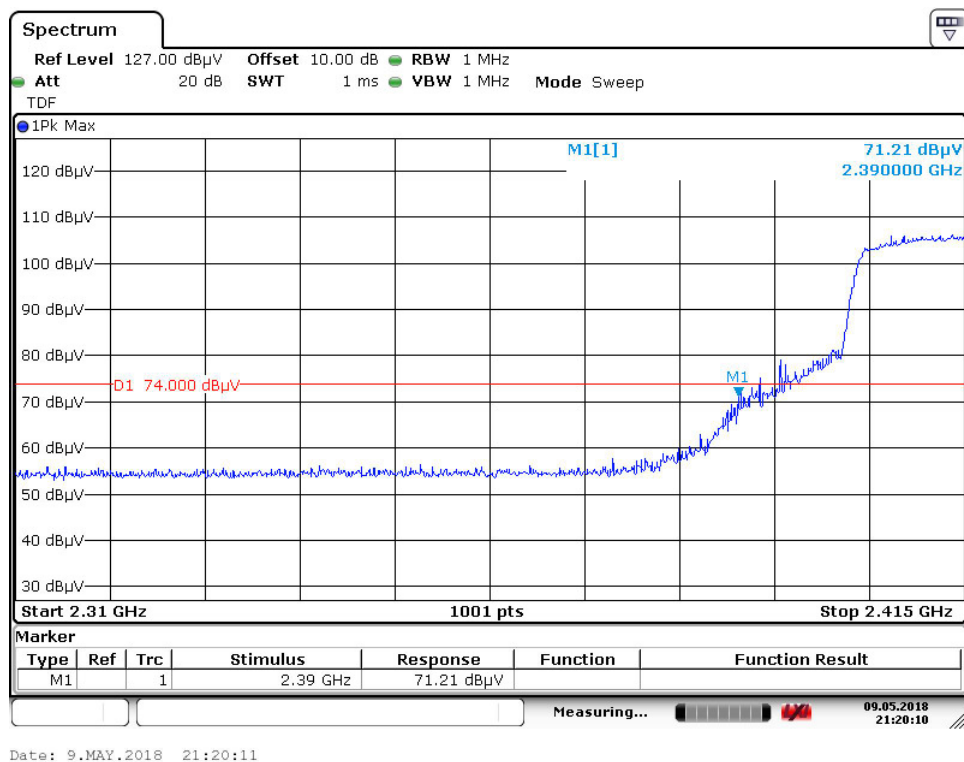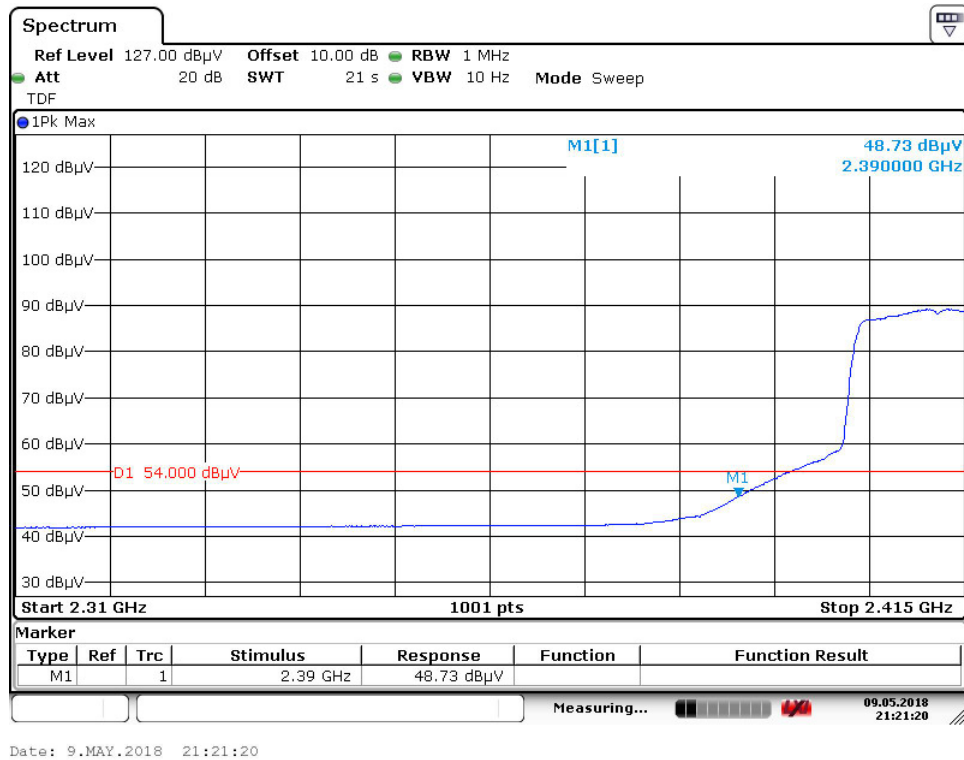



Low Channel (Ver)

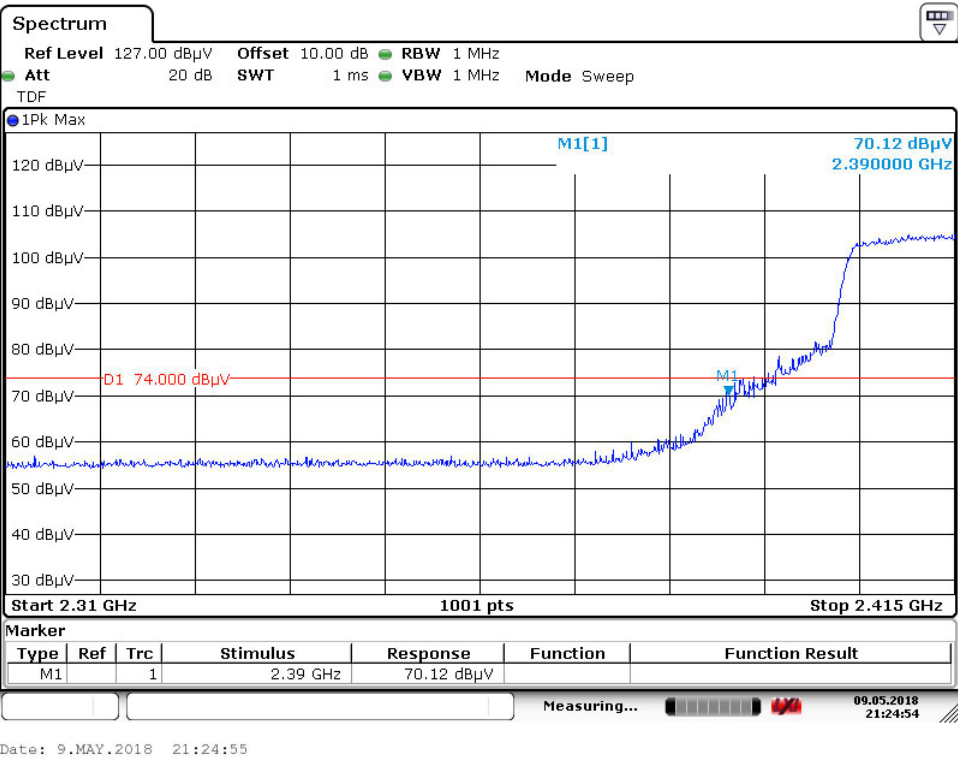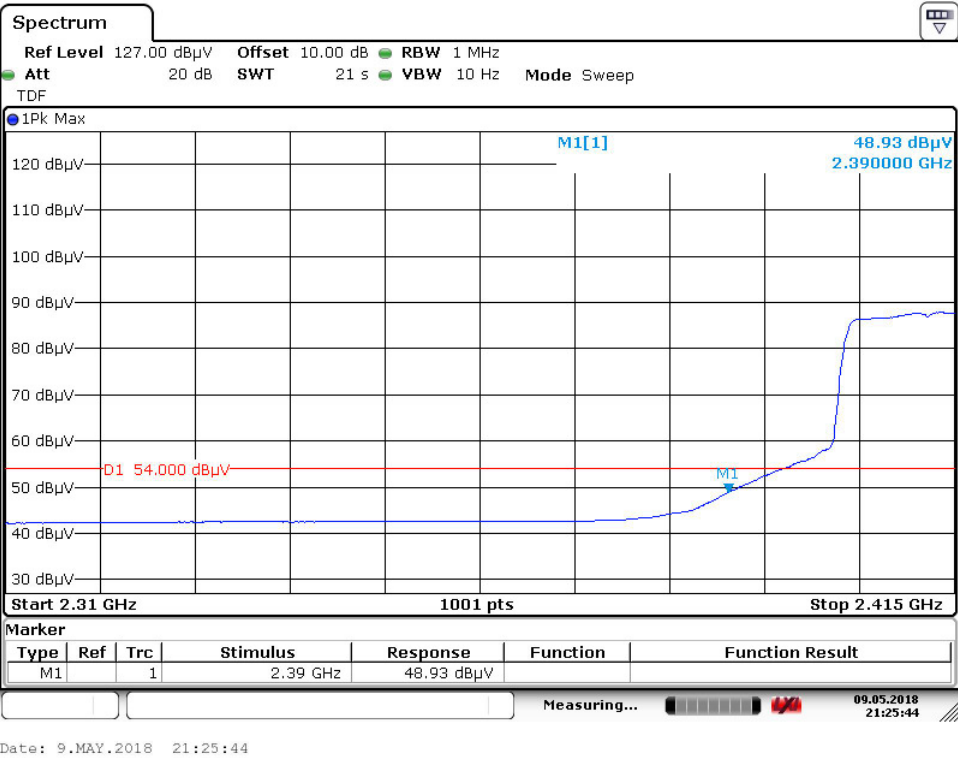

High Channel (Hor)

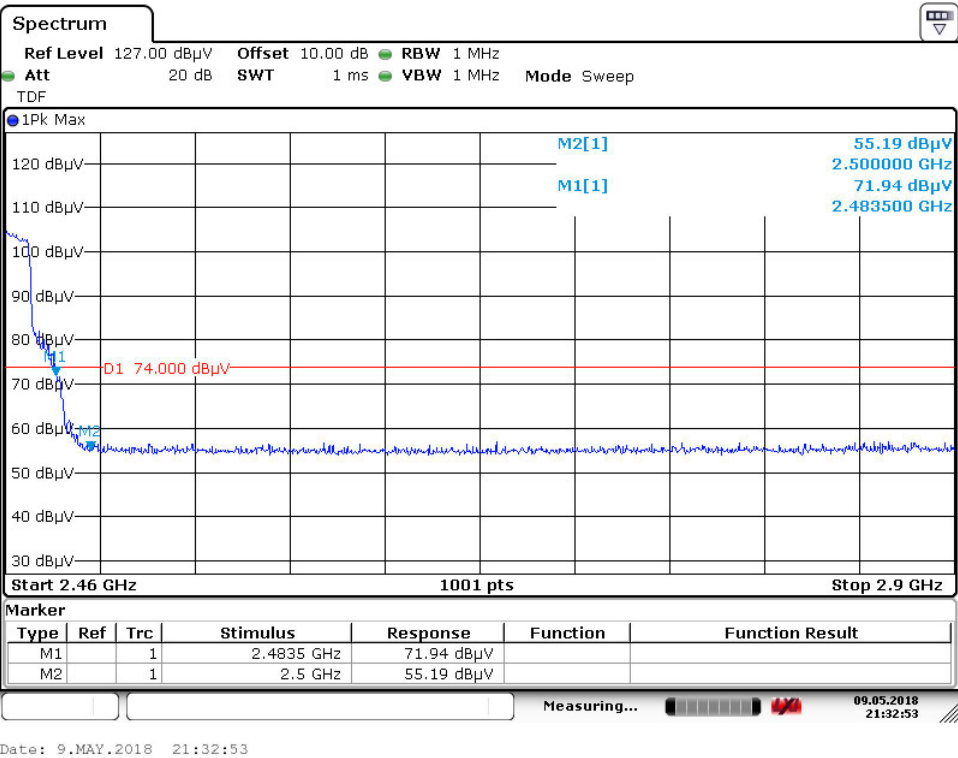
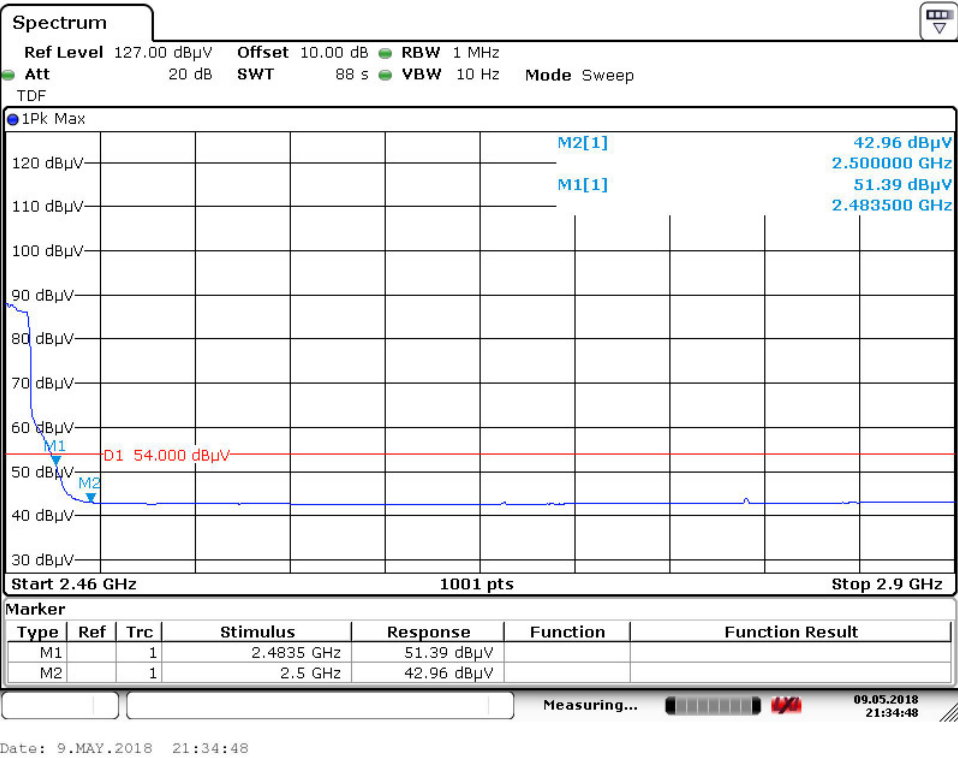


High Channel (Ver)

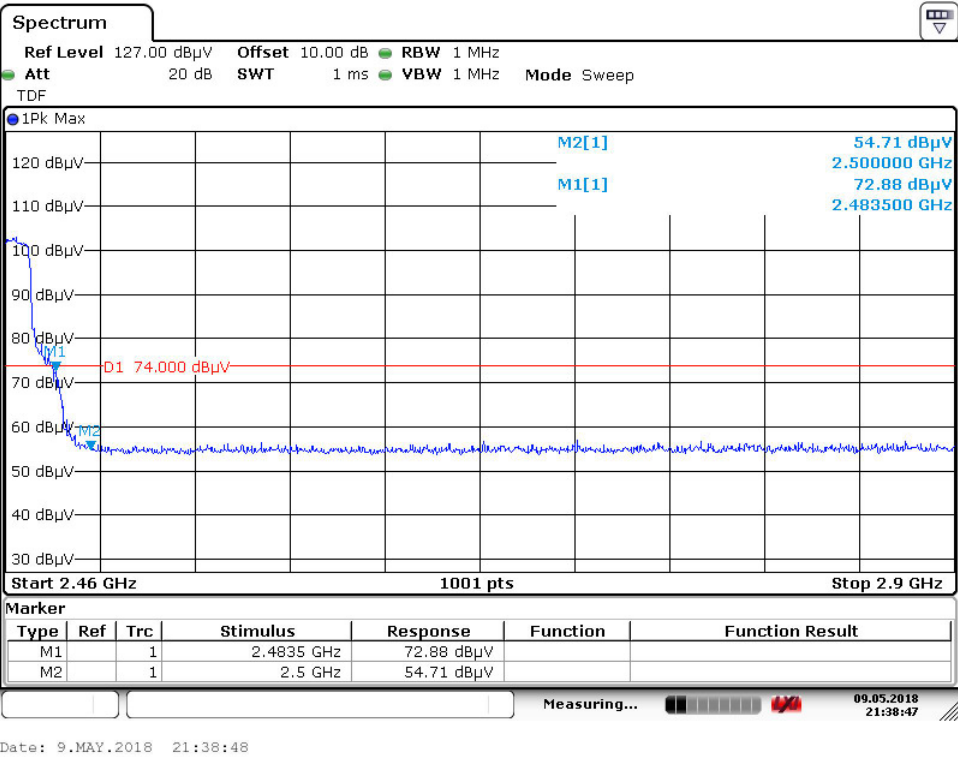
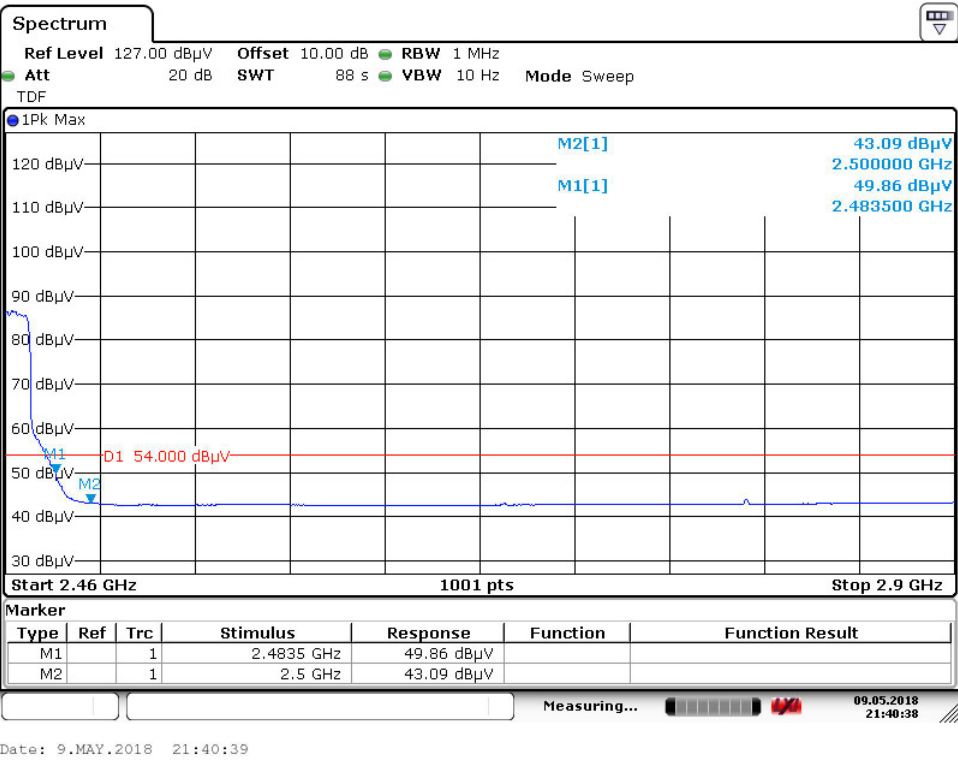


Radiated Bandedge 11n_40M


Low Channel (Hor)

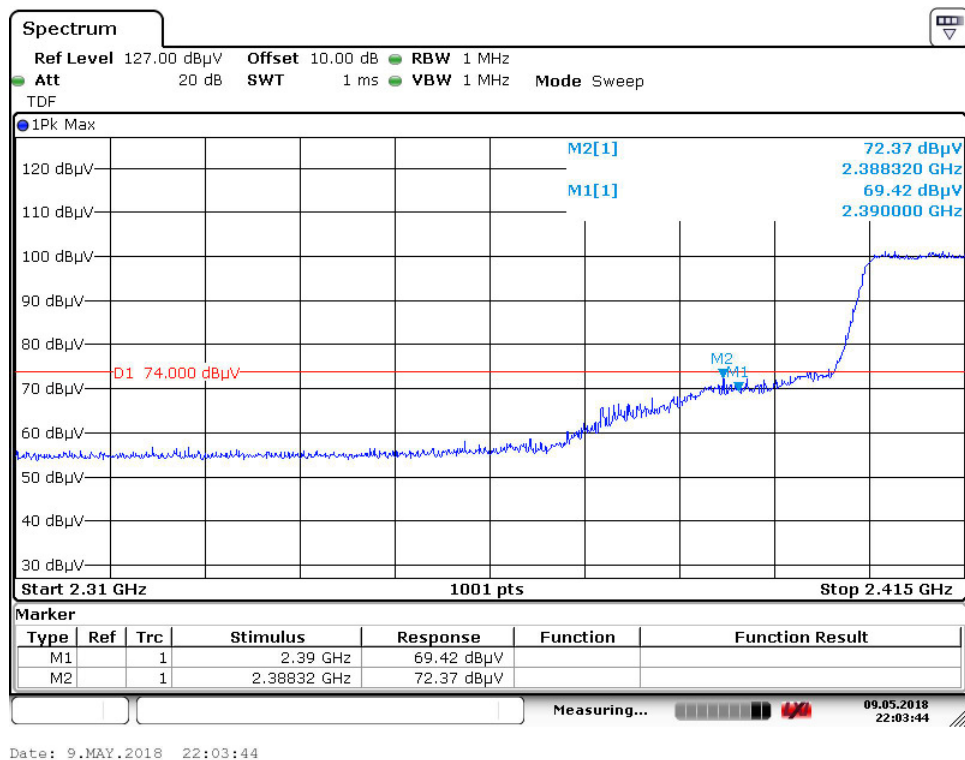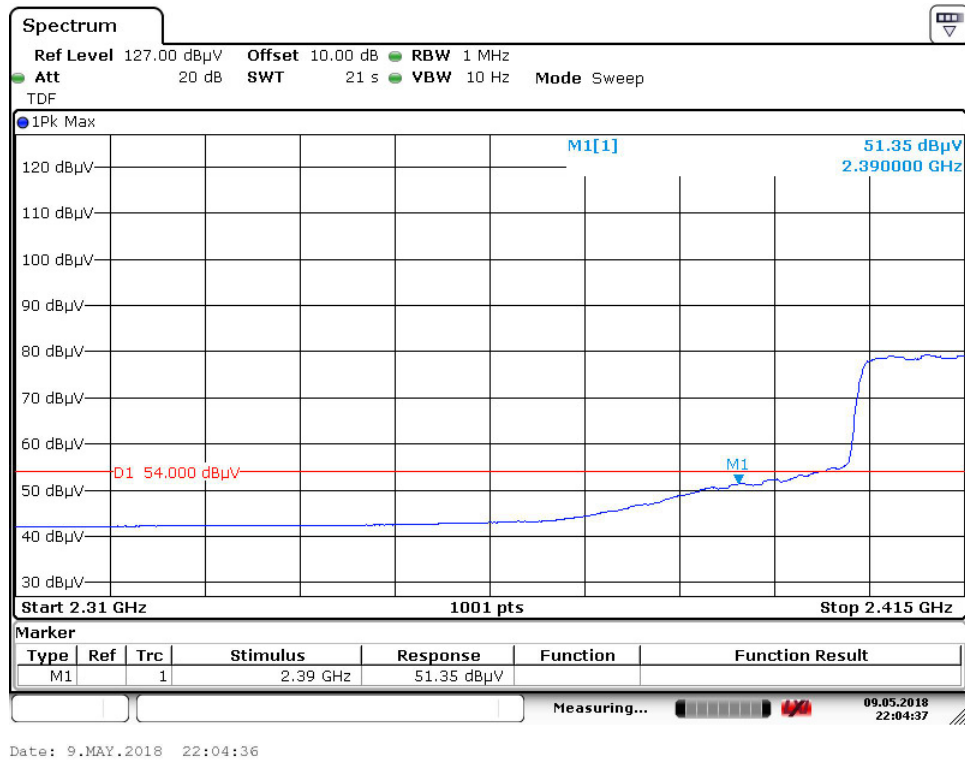


Low Channel (Ver)

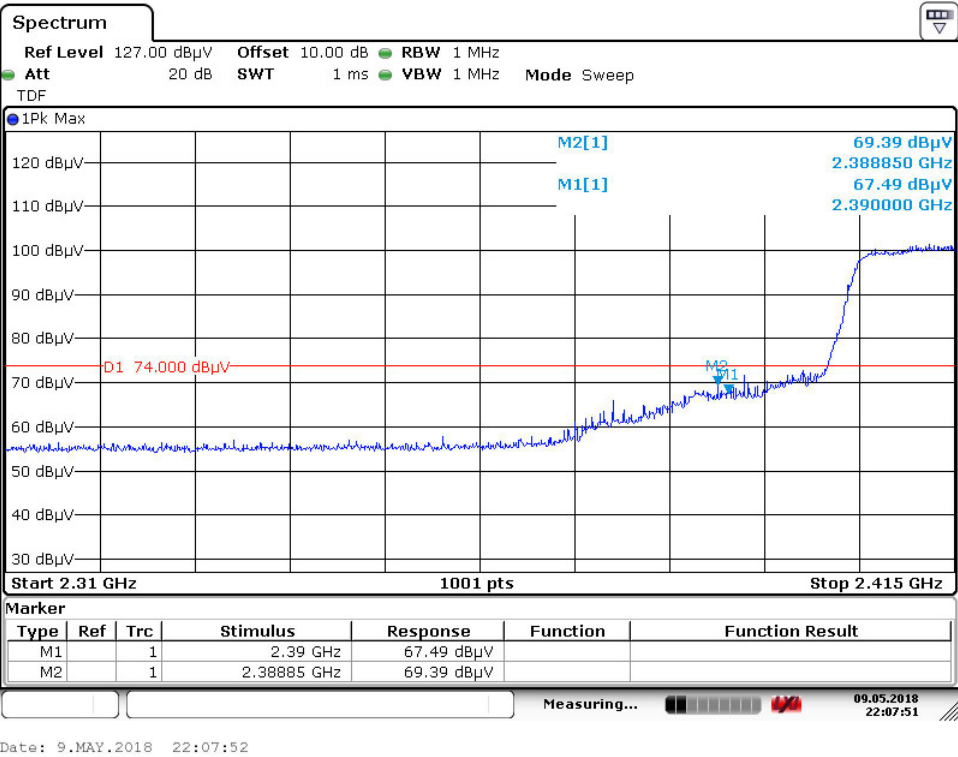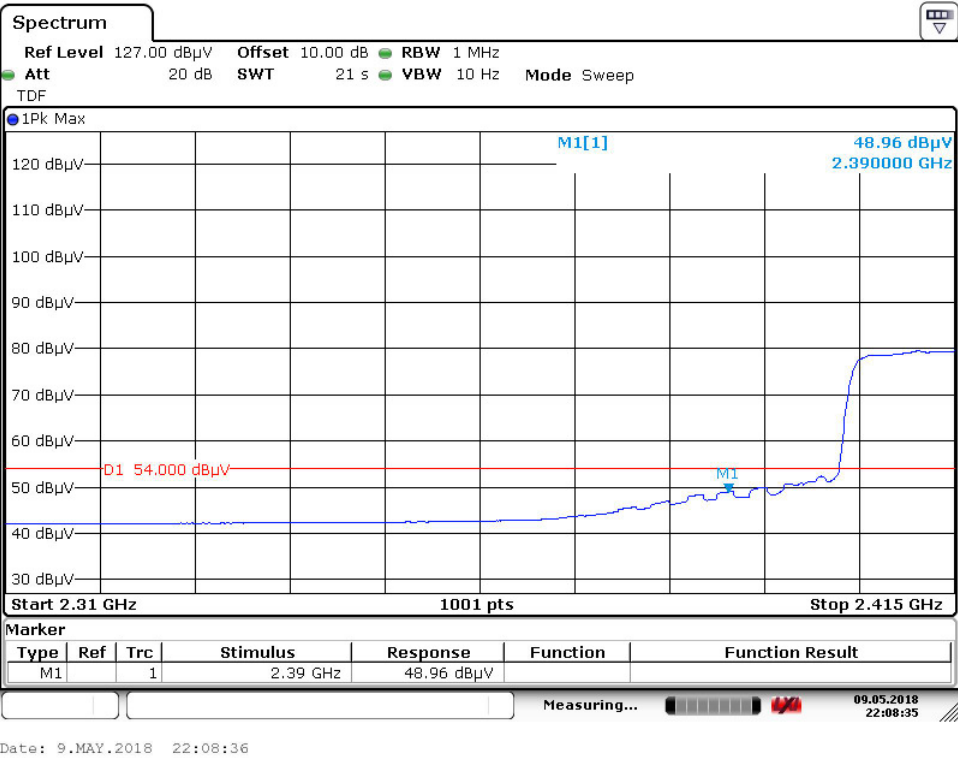

High Channel (Hor)


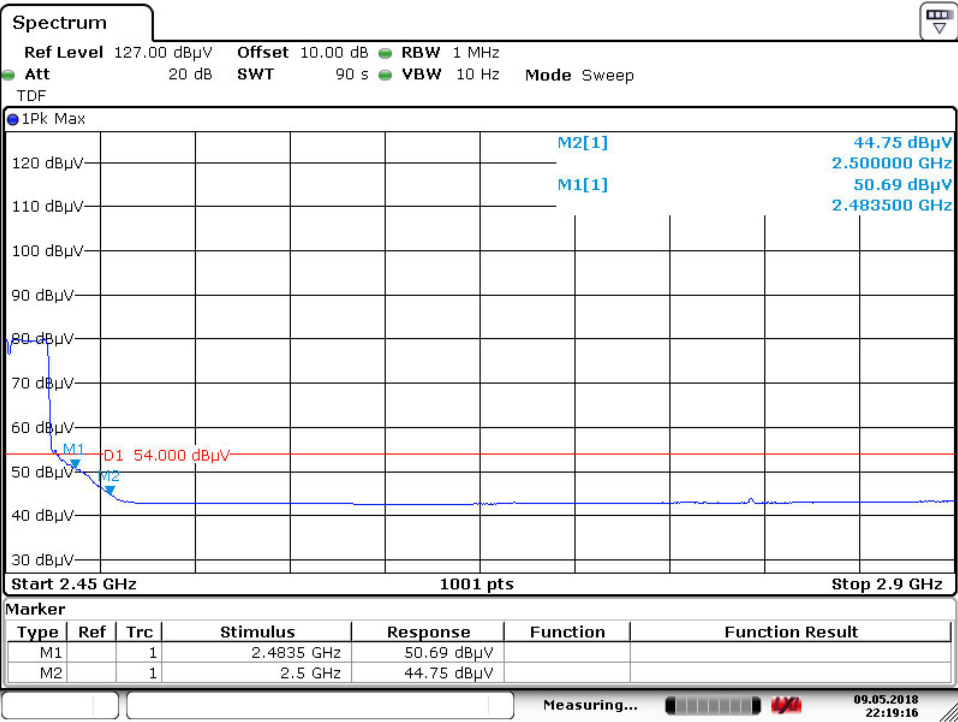


Date: 9.MAY.2018 22:19:17

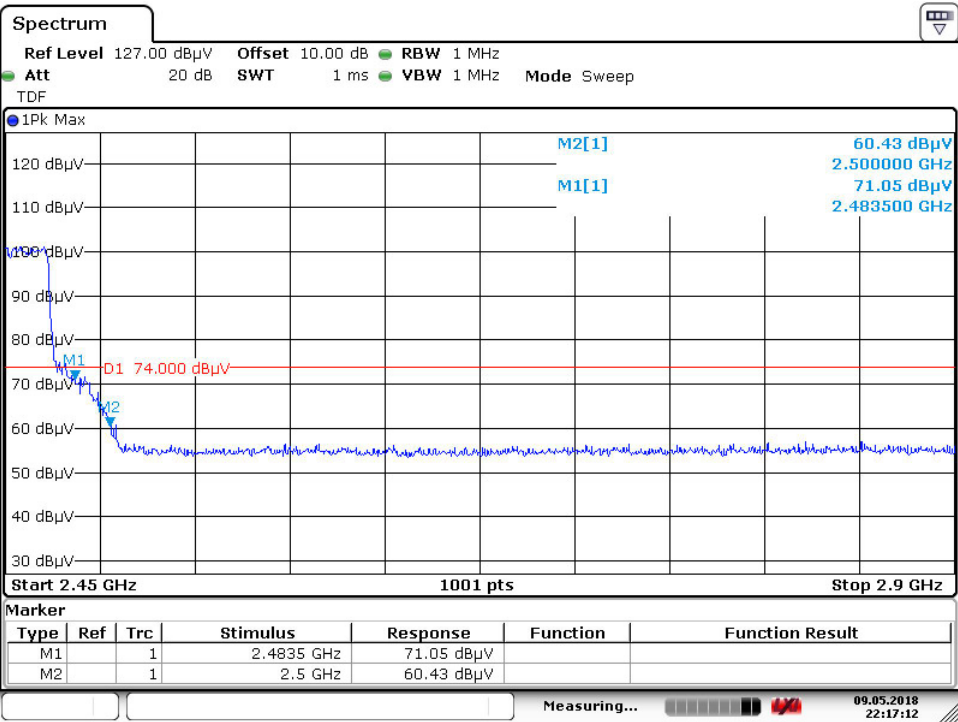

Date: 9.MAY.2018 22:17:11

High Channel (Ver)

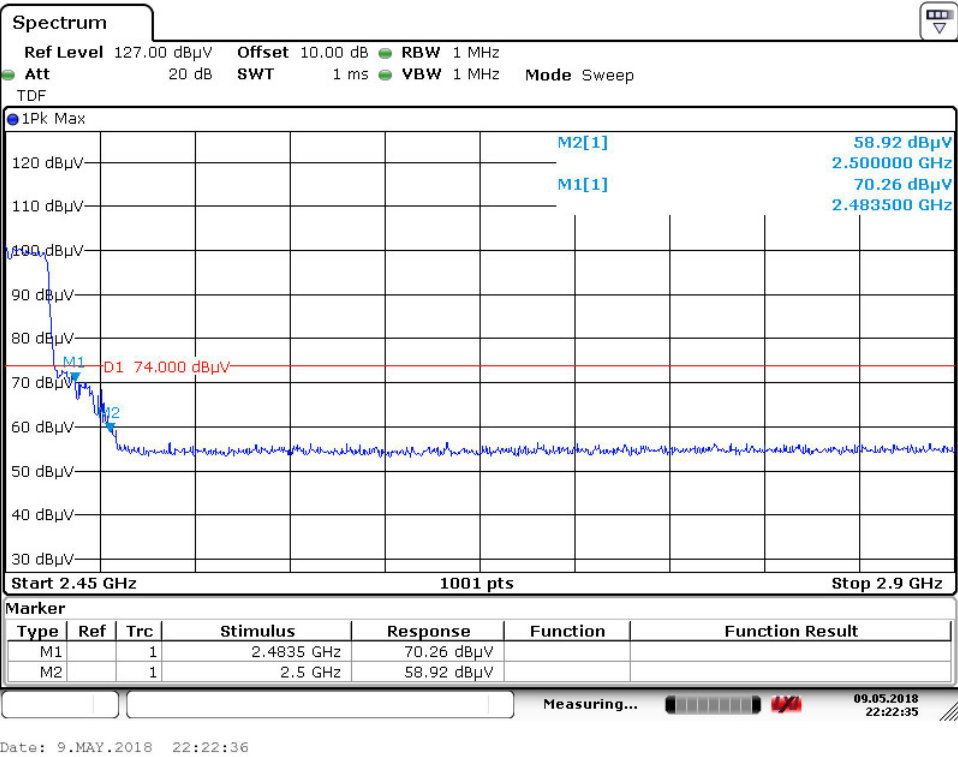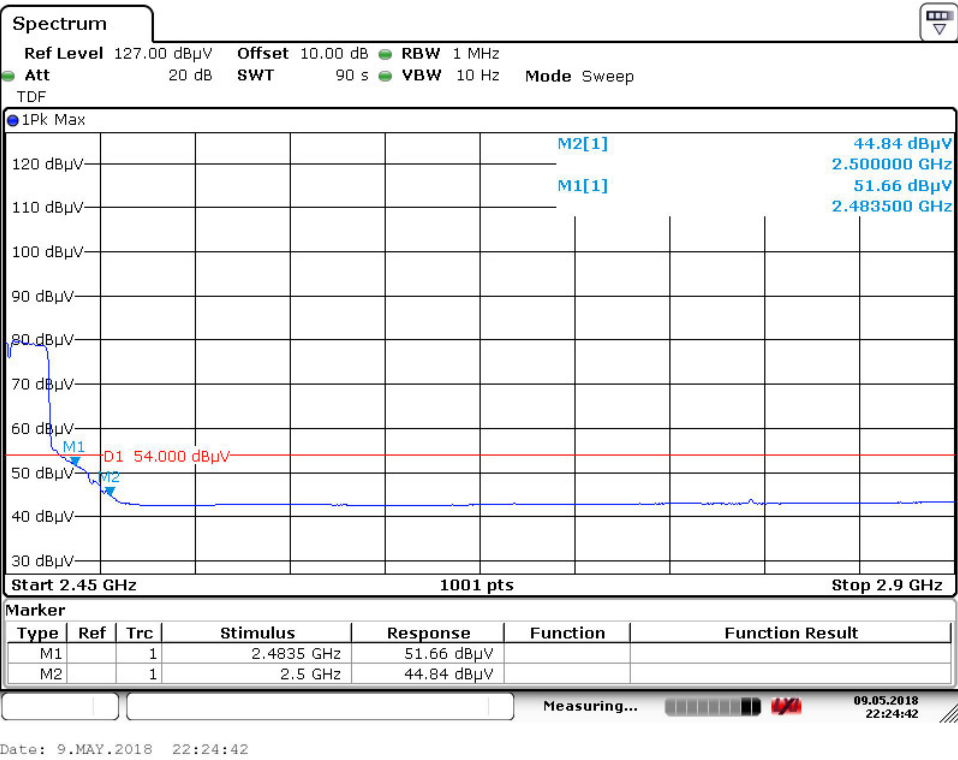


Spurious Emissions, TX Mode, 1-18G



TUV Rheinland Taiwan Ltd.


11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105

Tel:+886-2172-7000 fax:+886-2528-0018

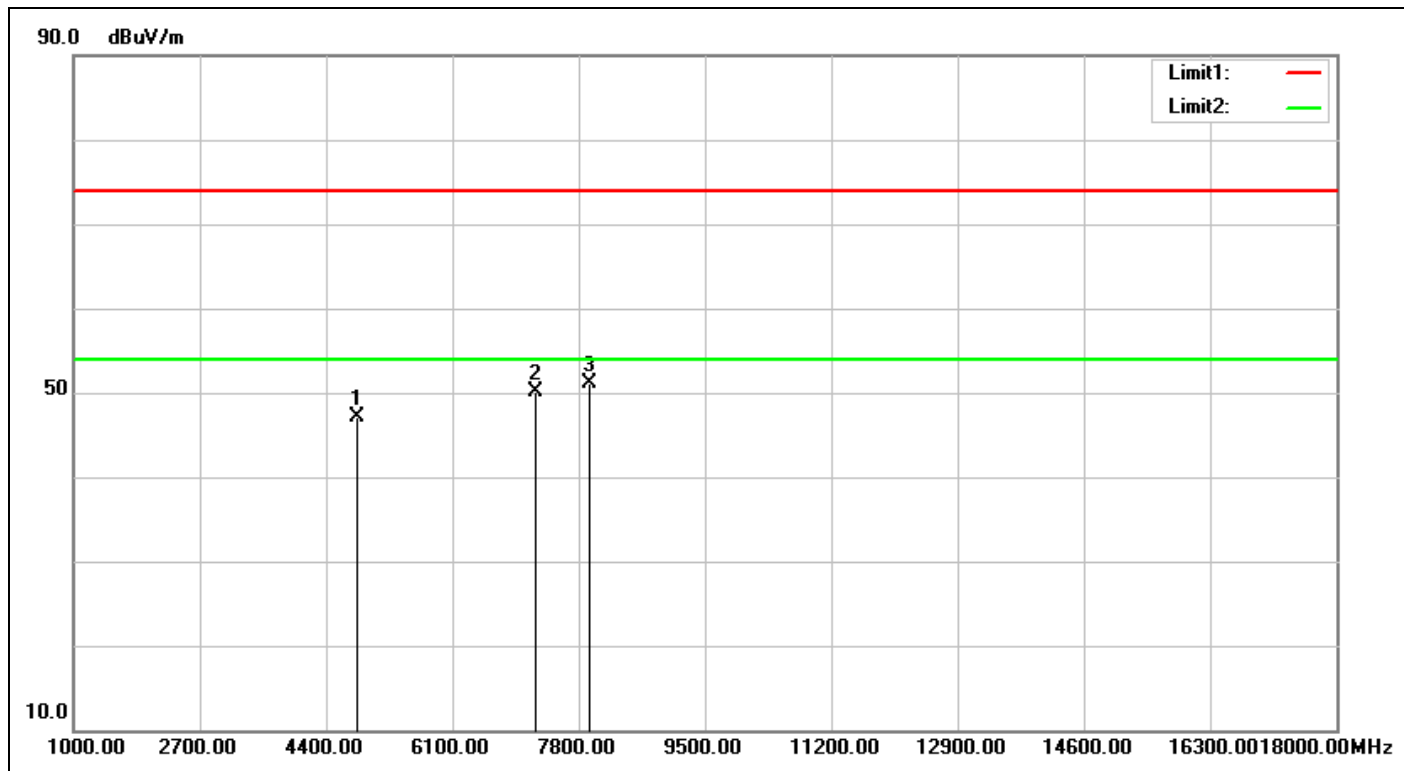


Service No.:	114077170	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2018/5/10 15:50:03
Applicant:	Hon Hai Precision Industry Co., Ltd.	Test Rating:	DC 3.3V
Product:	IEEE 802.11 a/b/g/n/ac 2x2 WiFi Module	Temp.(°C)/Hum.(%)	23(°C)/65%
Model No.:	WFU033-LGA	Test Engineer:	Curry Chen
Test Mode:	B-2412-TX		
Remark:	Power Setting 1F		

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	4824.000	-2.66	49.76	47.10	74.00	-26.90	peak		0	
2	7236.000	5.32	44.79	50.11	74.00	-23.89	peak		0	
3	7936.000	5.84	45.32	51.16	74.00	-22.84	peak		0	

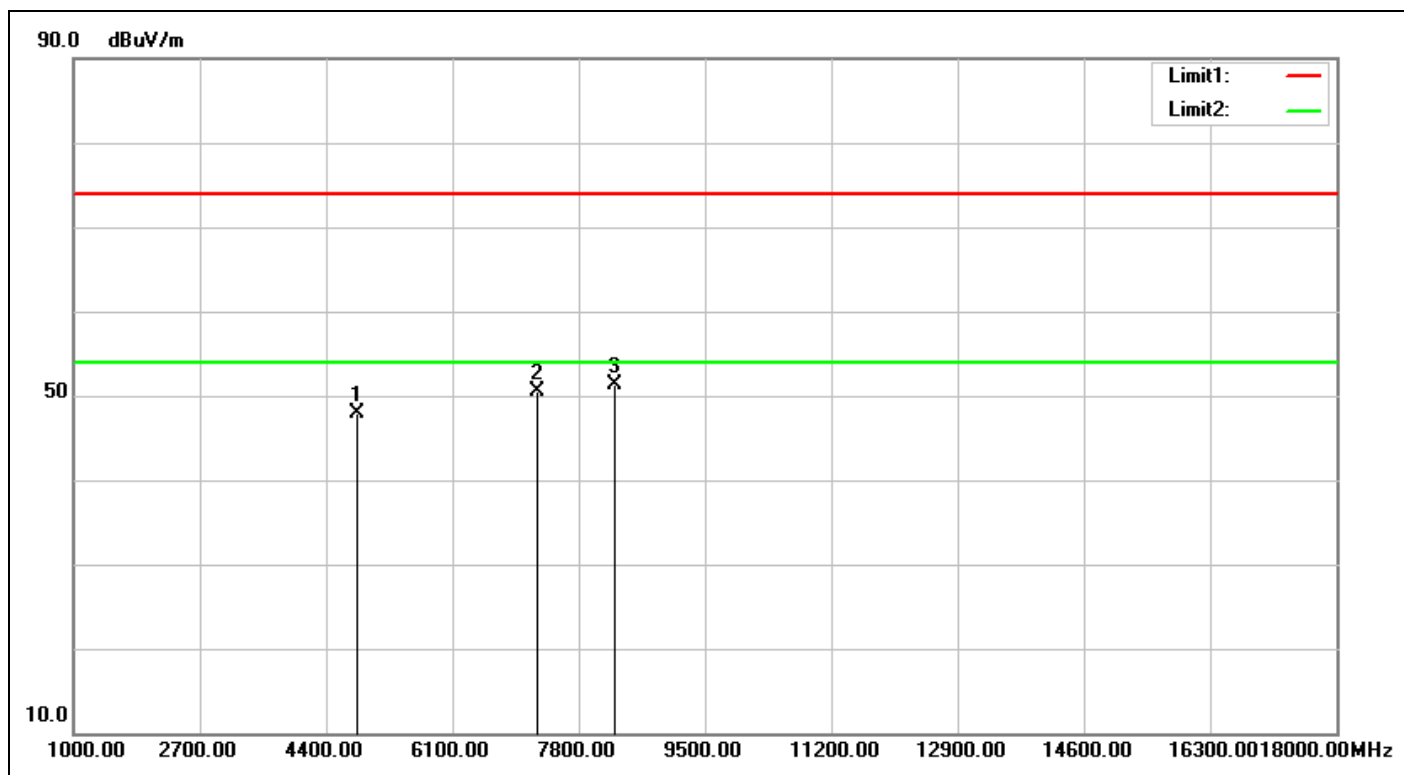


Service No.:	114077170	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2018/5/10 15:50:56
Applicant:	Hon Hai Precision Industry Co., Ltd.	Test Rating:	DC 3.3V
Product:	IEEE 802.11 a/b/g/n/ac 2x2 WiFi Module	Temp.(°C)/Hum.(%)	23(°C)/65%
Model No.:	WFU033-LGA	Test Engineer:	Curry Chen
Test Mode:	B-2412-TX		
Remark:	Power Setting 1F		

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	4824.000	-2.66	50.59	47.93	74.00	-26.07	peak			
2	7236.000	5.32	45.24	50.56	74.00	-23.44	peak			
3	8293.000	6.15	45.18	51.33	74.00	-22.67	peak	100	244	

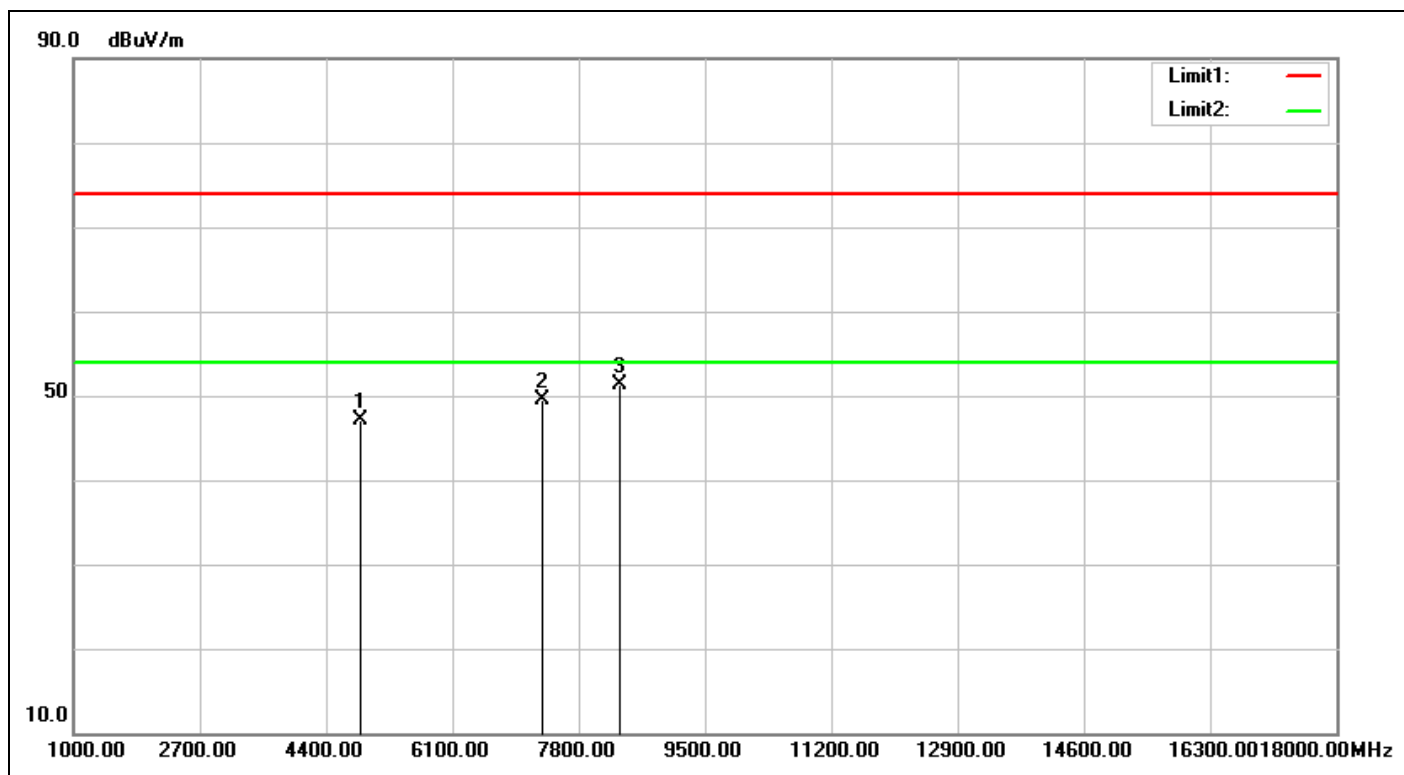


Service No.:	114077170	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2018/5/10 15:53:17
Applicant:	Hon Hai Precision Industry Co., Ltd.	Test Rating:	DC 3.3V
Product:	IEEE 802.11 a/b/g/n/ac 2x2 WiFi Module	Temp.(°C)/Hum.(%)	23(°C)/65%
Model No.:	WFU033-LGA	Test Engineer:	Curry Chen
Test Mode:	B-2437-TX		
Remark:	Power Setting 1F		

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	4874.000	-2.53	49.68	47.15	74.00	-26.85	peak			
2	7311.000	5.52	44.00	49.52	74.00	-24.48	peak			
3	8344.000	6.21	45.13	51.34	74.00	-22.66	peak	100	307	

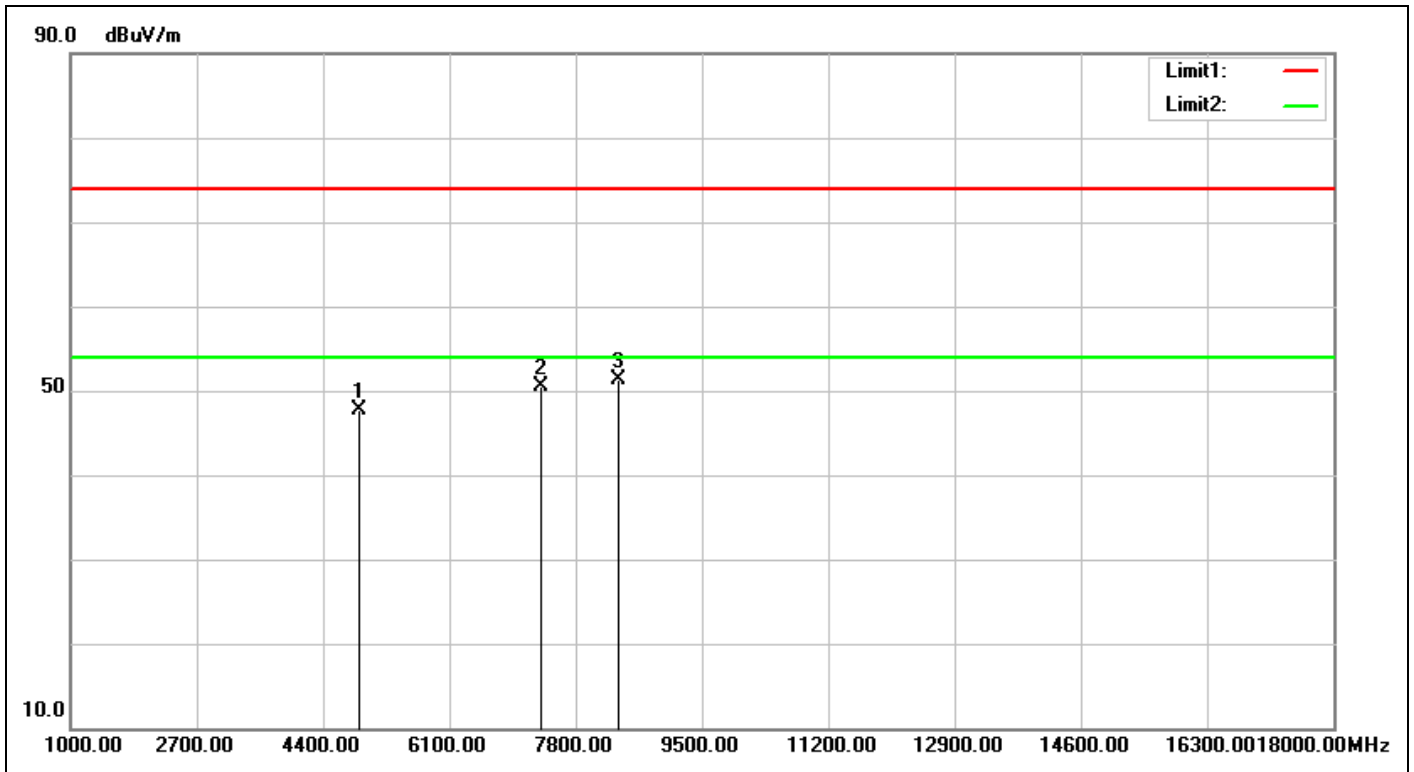


Service No.:	114077170	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2018/5/10 15:54:10
Applicant:	Hon Hai Precision Industry Co., Ltd.	Test Rating:	DC 3.3V
Product:	IEEE 802.11 a/b/g/n/ac 2x2 WiFi Module	Temp.(°C)/Hum.(%):	23(°C)/65%
Model No.:	WFU033-LGA	Test Engineer:	Curry Chen
Test Mode:	B-2437-TX		
Remark:	Power Setting 1F		

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	4874.000	-2.53	50.30	47.77	74.00	-26.23	peak			
2	7311.000	5.52	44.92	50.44	74.00	-23.56	peak			
3	8378.000	6.24	45.12	51.36	74.00	-22.64	peak	100	74	

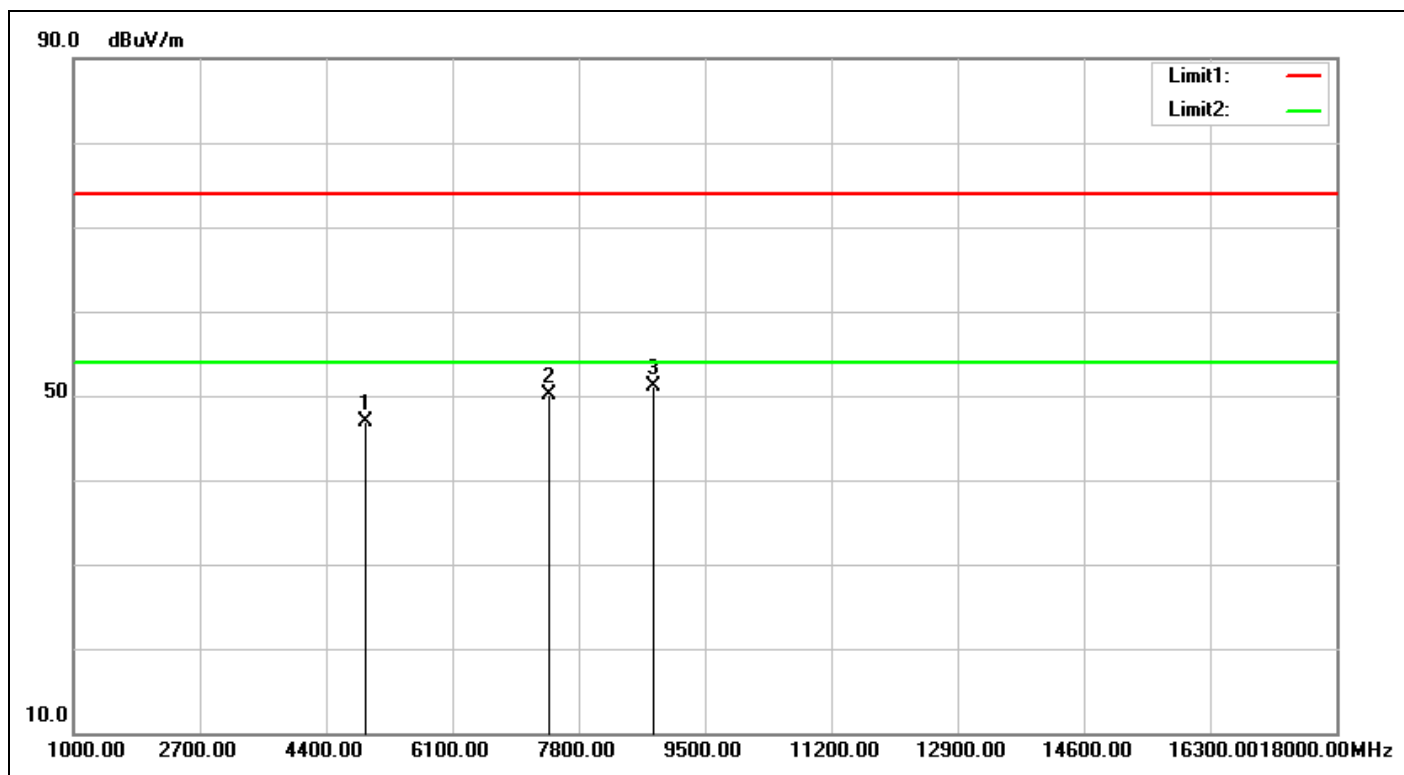


Service No.:	114077170	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2018/5/10 15:56:00
Applicant:	Hon Hai Precision Industry Co., Ltd.	Test Rating:	DC 3.3V
Product:	IEEE 802.11 a/b/g/n/ac 2x2 WiFi Module	Temp.(°C)/Hum.(%)	23(°C)/65%
Model No.:	WFU033-LGA	Test Engineer:	Curry Chen
Test Mode:	B-2462-TX		
Remark:	Power Setting 1F		

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	4924.000	-2.39	49.36	46.97	74.00	-27.03	peak			
2	7386.000	5.70	44.50	50.20	74.00	-23.80	peak			
3	8803.000	6.42	44.72	51.14	74.00	-22.86	peak	100	71	

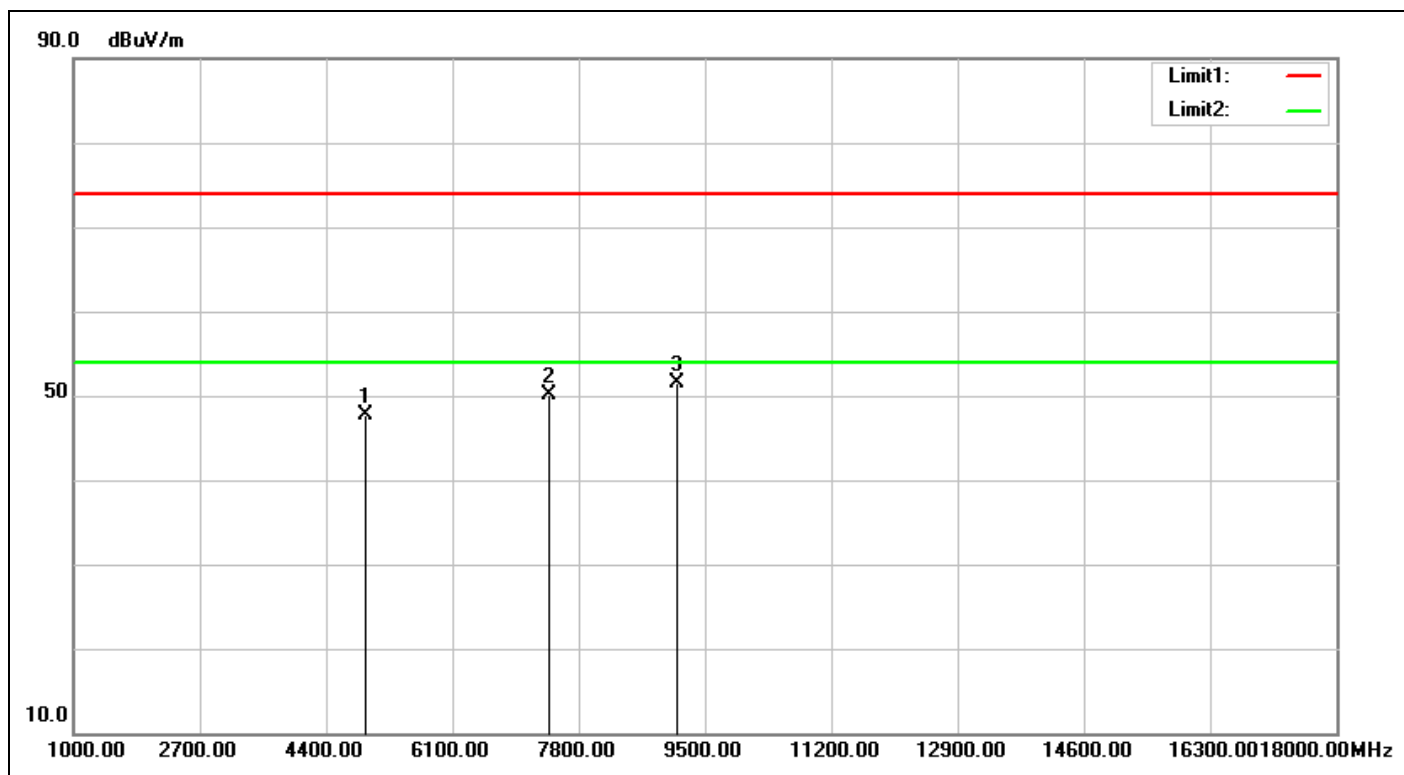


Service No.:	114077170	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2018/5/10 15:56:52
Applicant:	Hon Hai Precision Industry Co., Ltd.	Test Rating:	DC 3.3V
Product:	IEEE 802.11 a/b/g/n/ac 2x2 WiFi Module	Temp.(°C)/Hum.(%)	23(°C)/65%
Model No.:	WFU033-LGA	Test Engineer:	Curry Chen
Test Mode:	B-2462-TX		
Remark:	Power Setting 1F		

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	4924.000	-2.39	50.03	47.64	74.00	-26.36	peak			
2	7386.000	5.70	44.47	50.17	74.00	-23.83	peak			
3	9126.000	6.47	45.12	51.59	74.00	-22.41	peak	100	278	

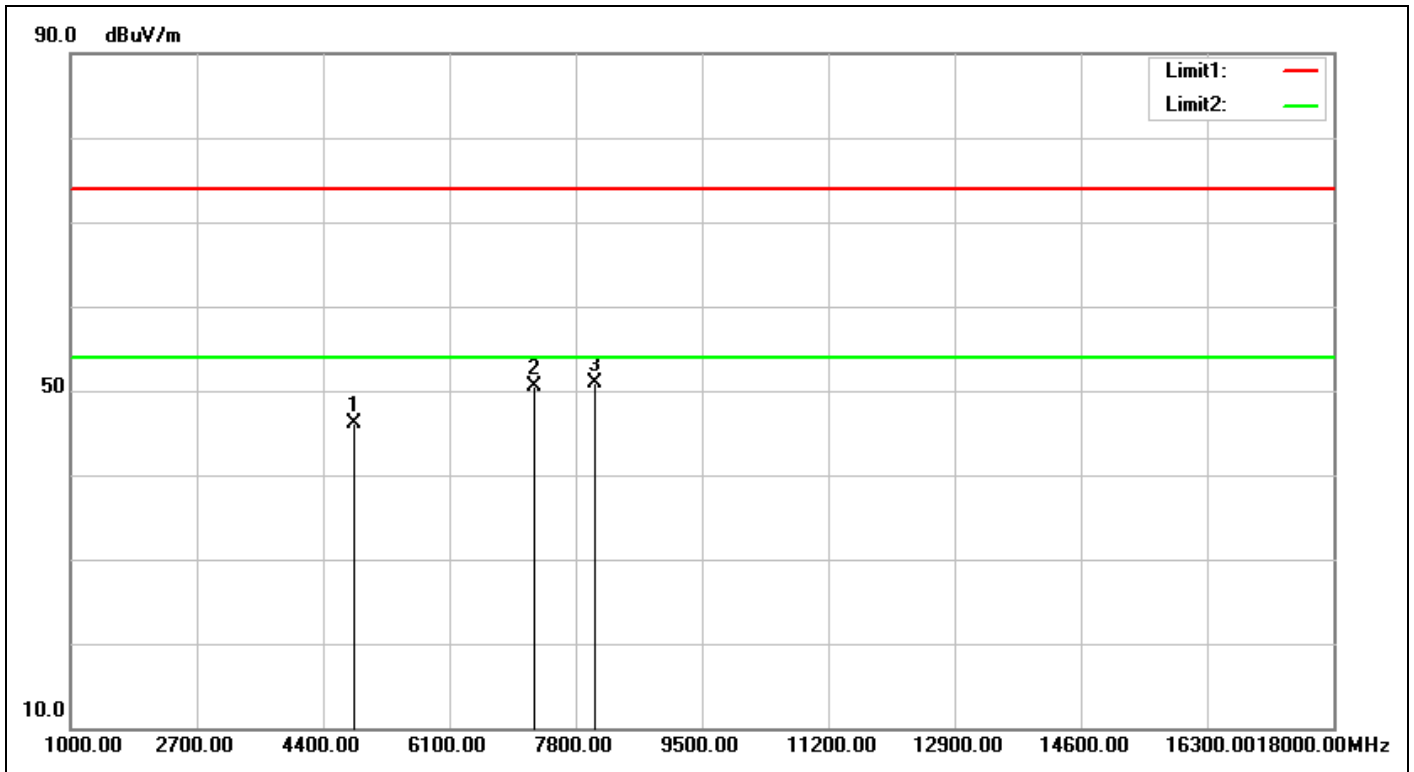


Service No.:	114077170	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2018/5/10 16:01:02
Applicant:	Hon Hai Precision Industry Co., Ltd.	Test Rating:	DC 3.3V
Product:	IEEE 802.11 a/b/g/n/ac 2x2 WiFi Module	Temp.(°C)/Hum.(%):	23(°C)/65%
Model No.:	WFU033-LGA	Test Engineer:	Curry Chen
Test Mode:	G-2412-TX		
Remark:	Power Setting 1C		

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	4824.000	-2.66	48.75	46.09	74.00	-27.91	peak			
2	7236.000	5.32	45.27	50.59	74.00	-23.41	peak			
3	8055.000	5.89	45.06	50.95	74.00	-23.05	peak	100	266	

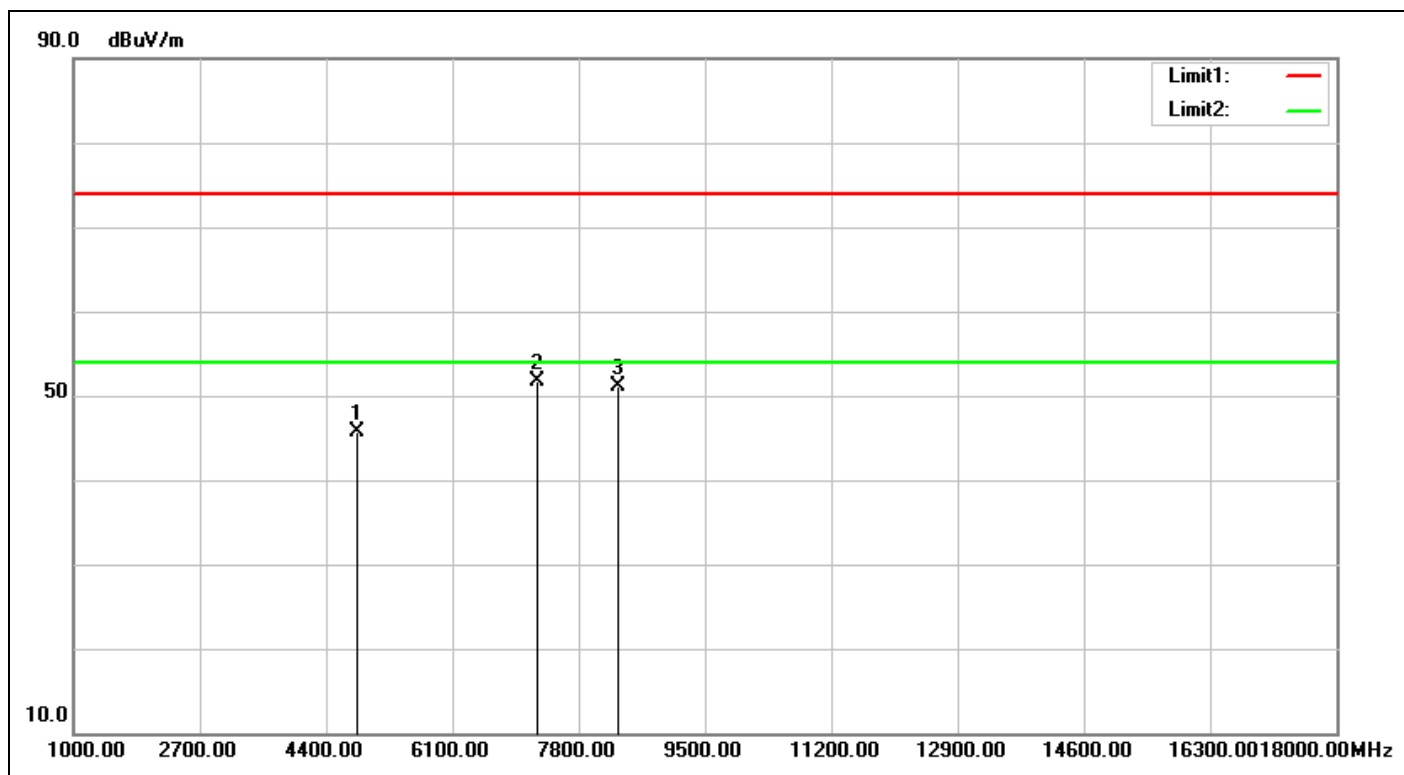


Service No.:	114077170	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2018/5/10 16:01:55
Applicant:	Hon Hai Precision Industry Co., Ltd.	Test Rating:	DC 3.3V
Product:	IEEE 802.11 a/b/g/n/ac 2x2 WiFi Module	Temp.(°C)/Hum.(%)	23(°C)/65%
Model No.:	WFU033-LGA	Test Engineer:	Curry Chen
Test Mode:	G-2412-TX		
Remark:	Power Setting 1C		

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	4824.000	-2.66	48.37	45.71	74.00	-28.29	peak			
2	7236.000	5.32	46.31	51.63	74.00	-22.37	peak			
3	8327.000	6.18	45.01	51.19	74.00	-22.81	peak	100	15	

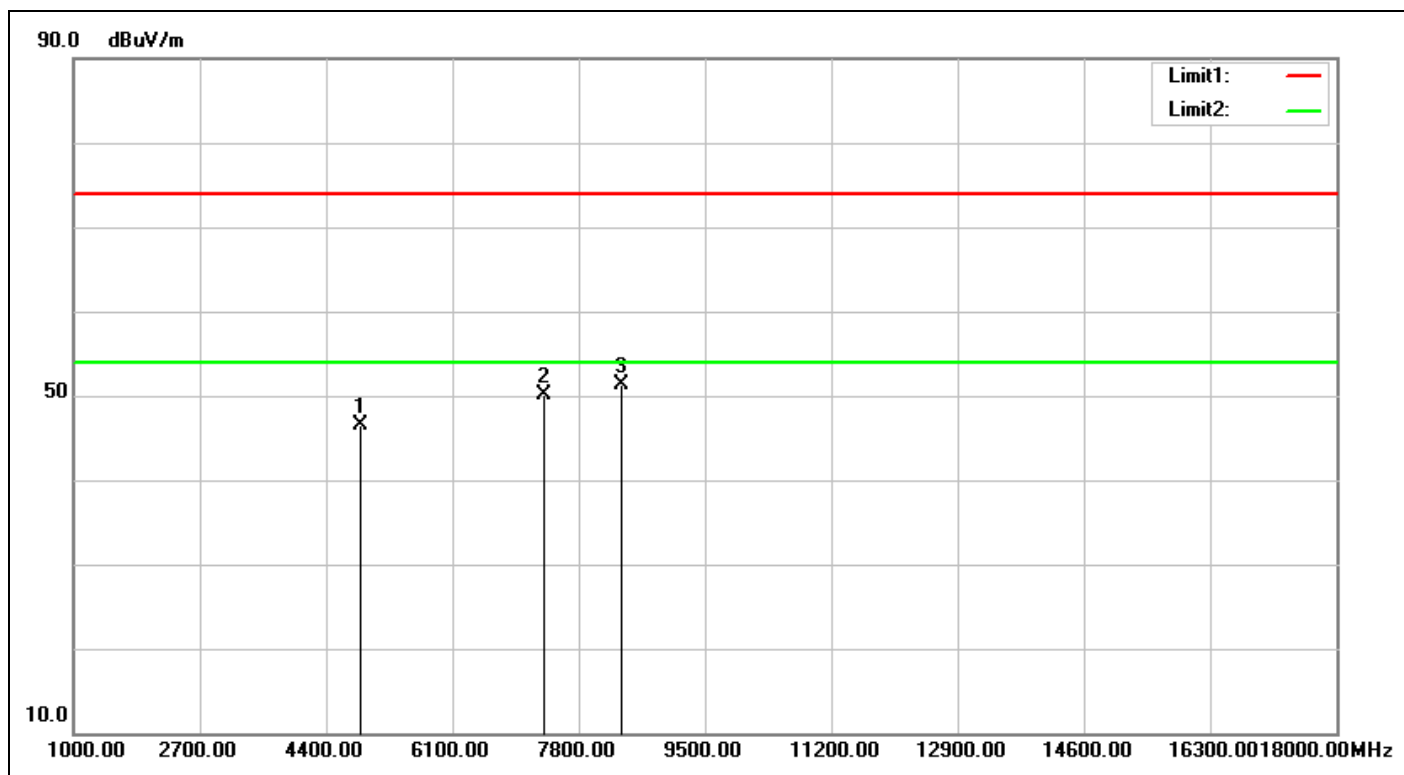


Service No.:	114077170	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2018/5/10 16:03:59
Applicant:	Hon Hai Precision Industry Co., Ltd.	Test Rating:	DC 3.3V
Product:	IEEE 802.11 a/b/g/n/ac 2x2 WiFi Module	Temp.(°C)/Hum.(%)	23(°C)/65%
Model No.:	WFU033-LGA	Test Engineer:	Curry Chen
Test Mode:	G-2437-TX		
Remark:	Power Setting 20		

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	4874.000	-2.53	48.96	46.43	74.00	-27.57	peak			
2	7311.000	5.52	44.68	50.20	74.00	-23.80	peak			
3	8378.000	6.24	45.03	51.27	74.00	-22.73	peak	100	352	

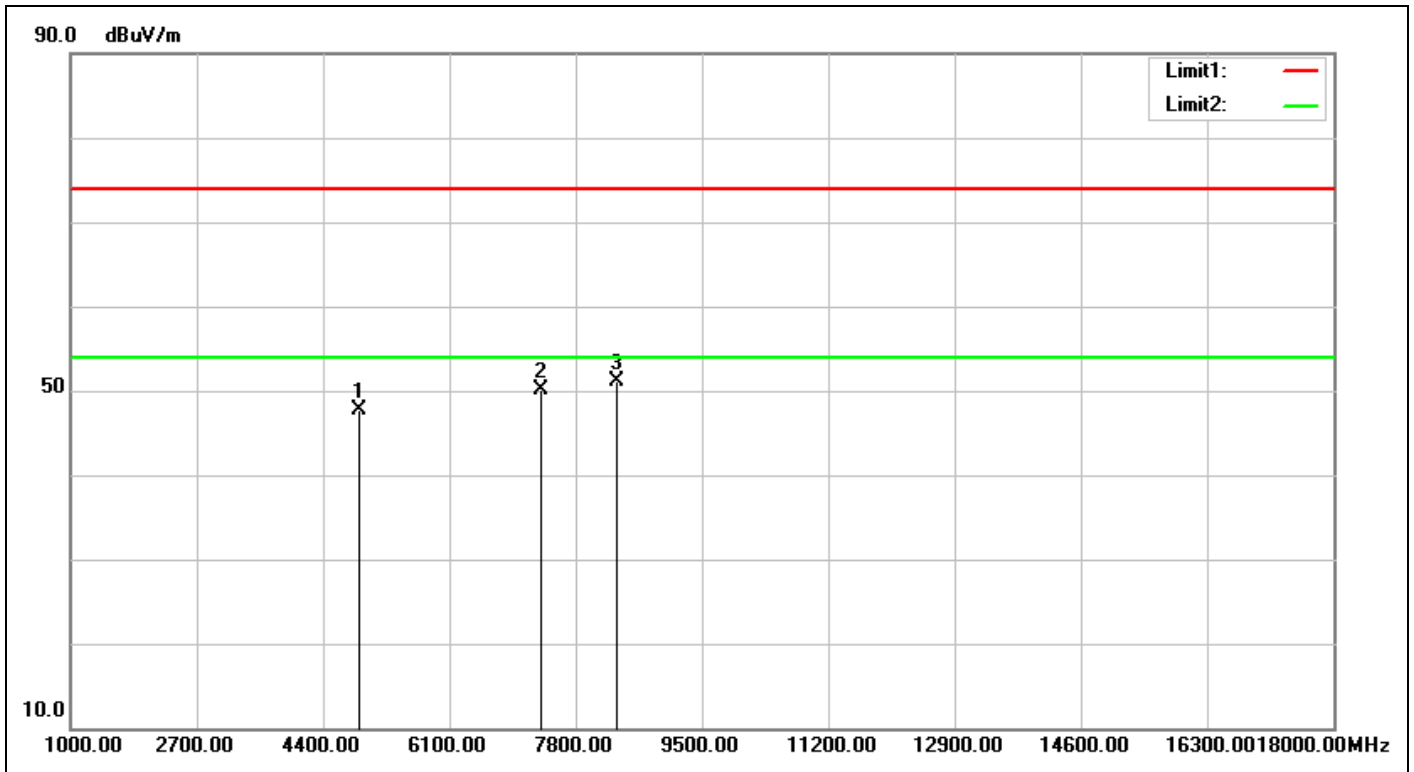


Service No.:	114077170	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2018/5/10 16:04:52
Applicant:	Hon Hai Precision Industry Co., Ltd.	Test Rating:	DC 3.3V
Product:	IEEE 802.11 a/b/g/n/ac 2x2 WiFi Module	Temp.(°C)/Hum.(%):	23(°C)/65%
Model No.:	WFU033-LGA	Test Engineer:	Curry Chen
Test Mode:	G-2437-TX		
Remark:	Power Setting 20		

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	4874.000	-2.53	50.15	47.62	74.00	-26.38	peak			
2	7311.000	5.52	44.65	50.17	74.00	-23.83	peak			
3	8344.000	6.21	44.97	51.18	74.00	-22.82	peak	100	275	

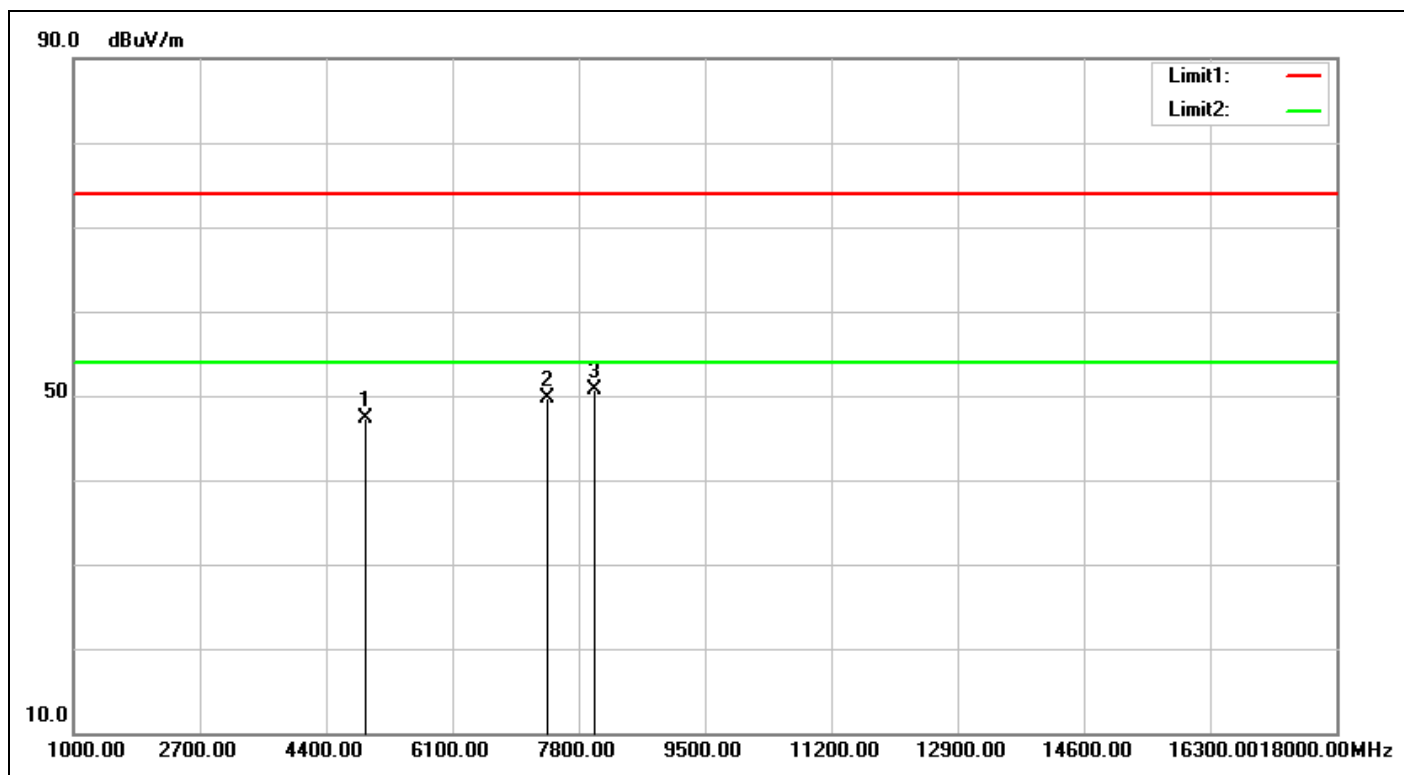


Service No.:	114077170	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2018/5/10 16:07:00
Applicant:	Hon Hai Precision Industry Co., Ltd.	Test Rating:	DC 3.3V
Product:	IEEE 802.11 a/b/g/n/ac 2x2 WiFi Module	Temp.(°C)/Hum.(%)	23(°C)/65%
Model No.:	WFU033-LGA	Test Engineer:	Curry Chen
Test Mode:	G-2462-TX		
Remark:	Power Setting 17		

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	4924.000	-2.39	49.67	47.28	74.00	-26.72	peak			
2	7386.000	5.70	44.06	49.76	74.00	-24.24	peak			
3	8021.000	5.85	44.85	50.70	74.00	-23.30	peak	100	1	

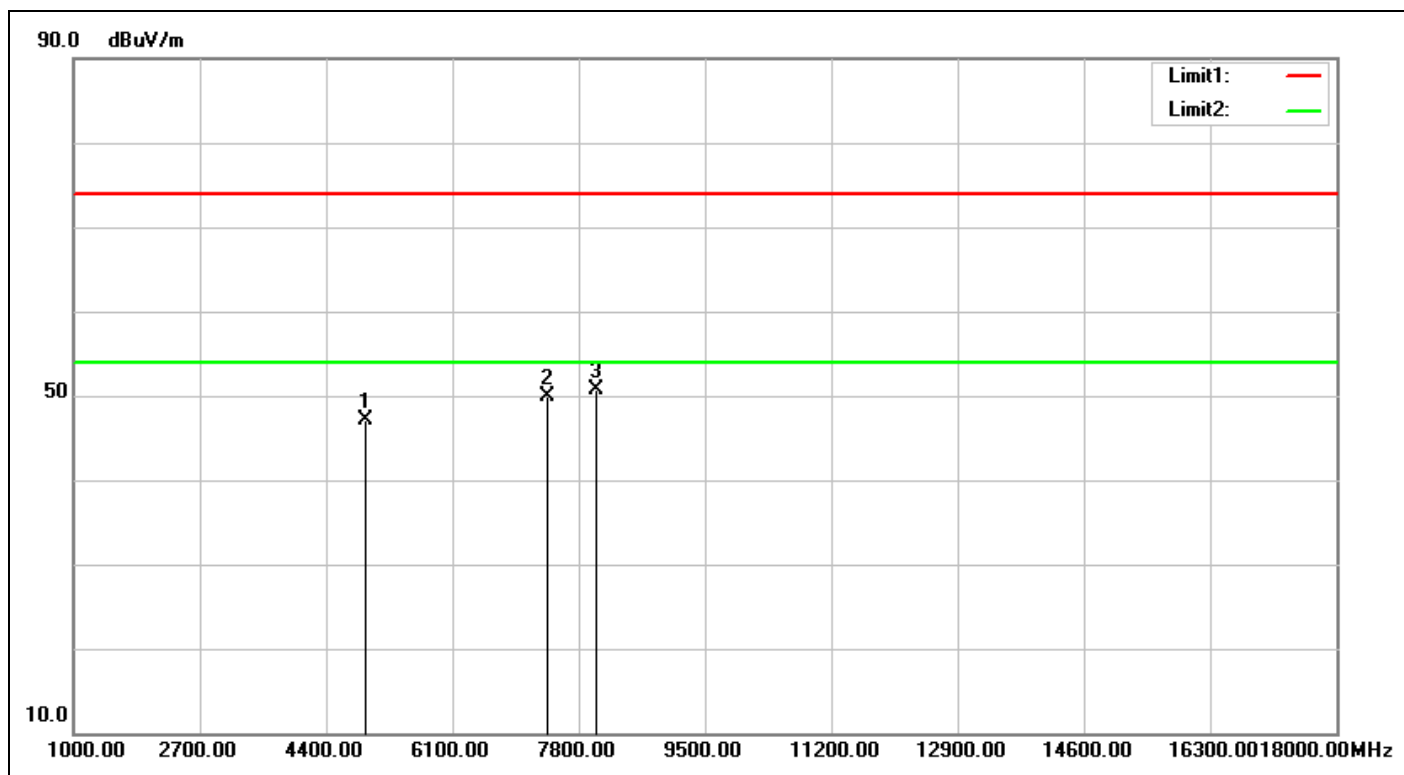


Service No.:	114077170	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2018/5/10 16:07:52
Applicant:	Hon Hai Precision Industry Co., Ltd.	Test Rating:	DC 3.3V
Product:	IEEE 802.11 a/b/g/n/ac 2x2 WiFi Module	Temp.(°C)/Hum.(%):	23(°C)/65%
Model No.:	WFU033-LGA	Test Engineer:	Curry Chen
Test Mode:	G-2462-TX		
Remark:	Power Setting 17		

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	4924.000	-2.39	49.46	47.07	74.00	-26.93	peak			
2	7386.000	5.70	44.11	49.81	74.00	-24.19	peak			
3	8038.000	5.86	44.75	50.61	74.00	-23.39	peak	100	193	

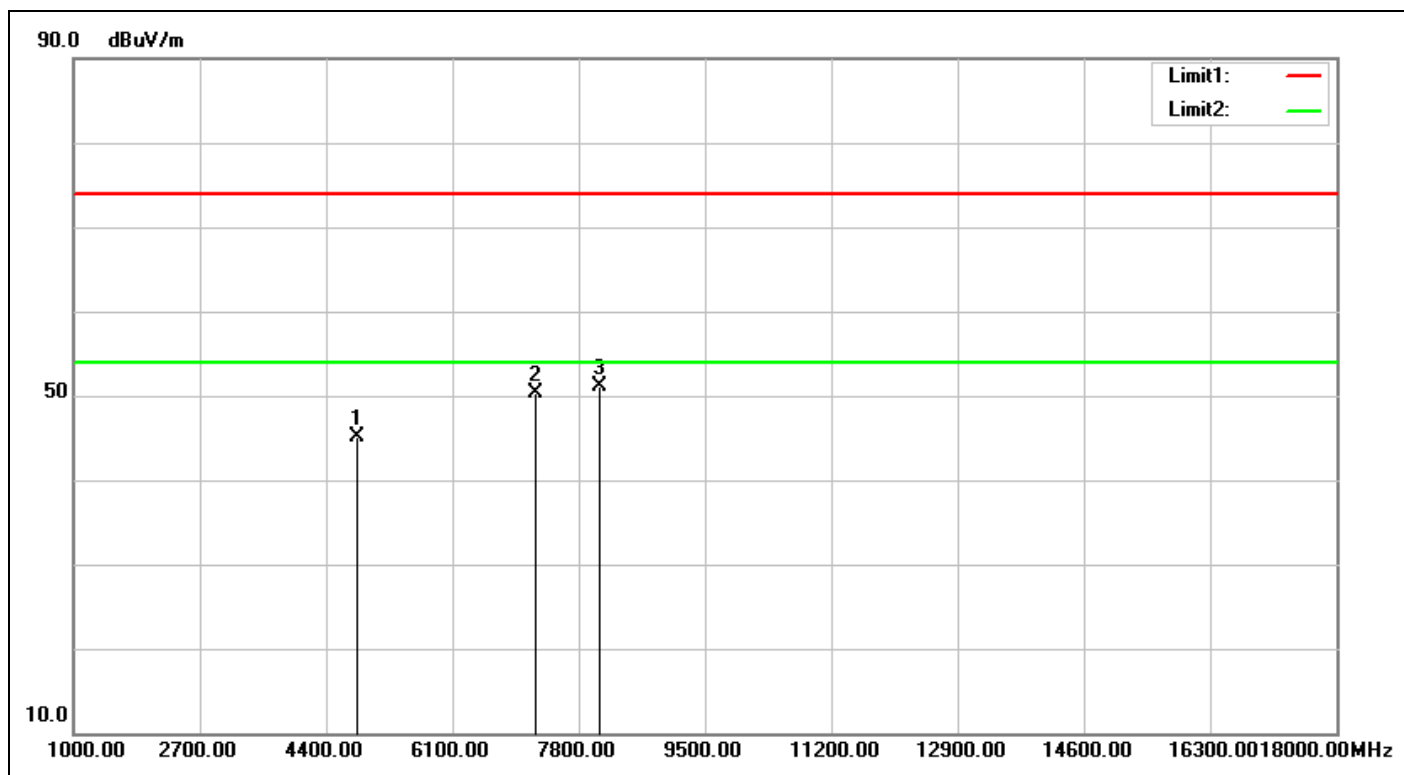


Service No.:	114077170	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2018/5/10 16:10:01
Applicant:	Hon Hai Precision Industry Co., Ltd.	Test Rating:	DC 3.3V
Product:	IEEE 802.11 a/b/g/n/ac 2x2 WiFi Module	Temp.(°C)/Hum.(%)	23(°C)/65%
Model No.:	WFU033-LGA	Test Engineer:	Curry Chen
Test Mode:	N20-2412-TX		
Remark:	Power Setting 16 16		

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	4824.000	-2.66	47.80	45.14	74.00	-28.86	peak			
2	7236.000	5.32	45.03	50.35	74.00	-23.65	peak			
3	8072.000	5.90	45.22	51.12	74.00	-22.88	peak	100	325	

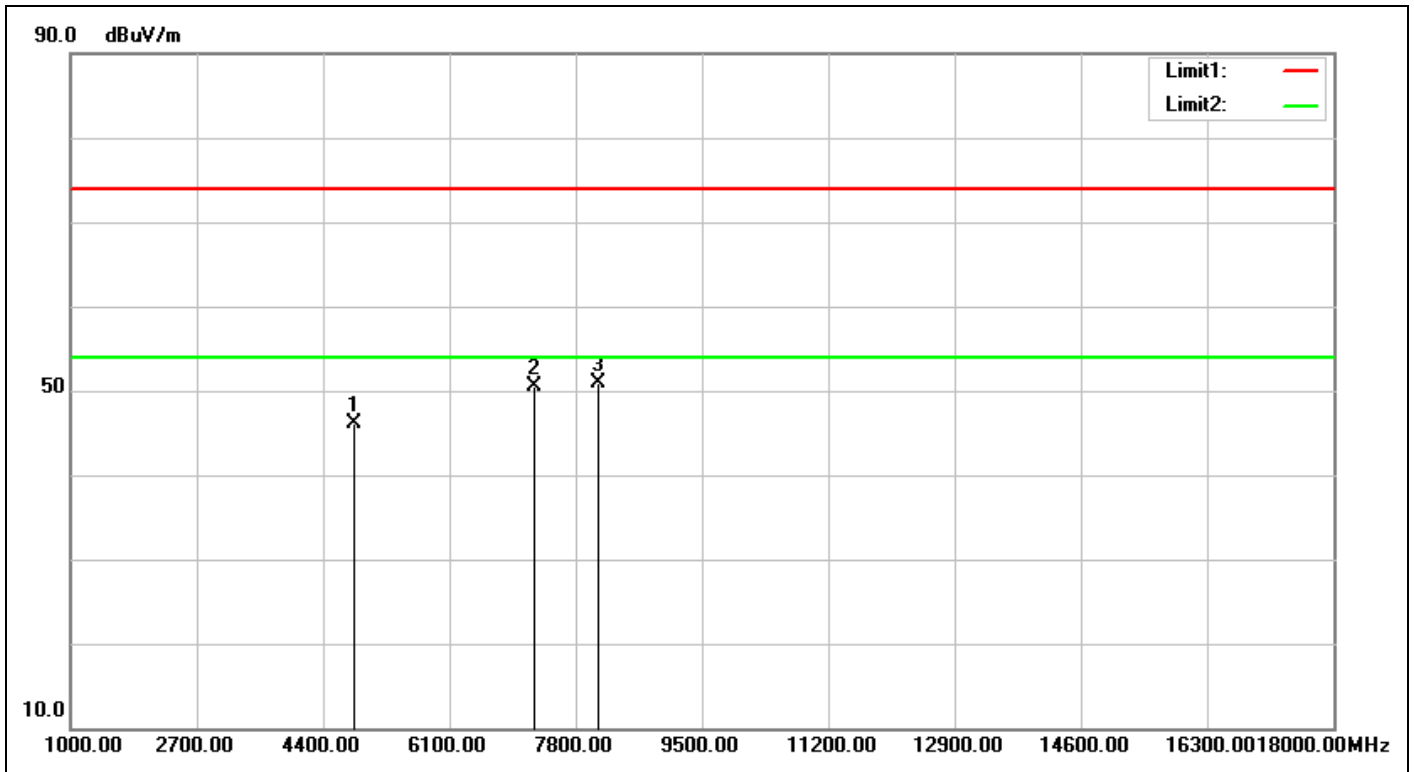


Service No.:	114077170	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2018/5/10 16:10:53
Applicant:	Hon Hai Precision Industry Co., Ltd.	Test Rating:	DC 3.3V
Product:	IEEE 802.11 a/b/g/n/ac 2x2 WiFi Module	Temp.(°C)/Hum.(%):	23(°C)/65%
Model No.:	WFU033-LGA	Test Engineer:	Curry Chen
Test Mode:	N20-2412-TX		
Remark:	Power Setting 16 16		

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	4824.000	-2.66	48.85	46.19	74.00	-27.81	peak			
2	7236.000	5.32	45.22	50.54	74.00	-23.46	peak			
3	8106.000	5.94	45.00	50.94	74.00	-23.06	peak	100	254	

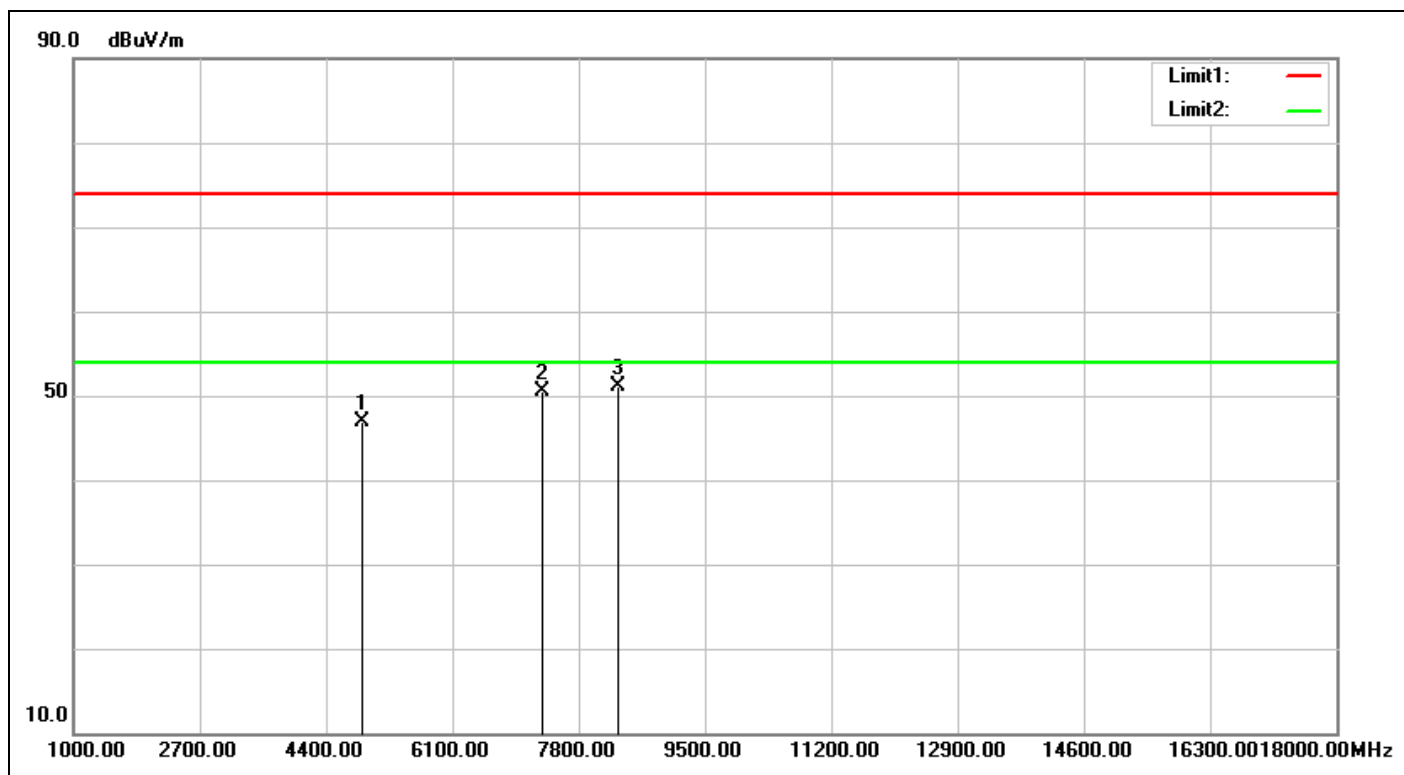


Service No.:	114077170	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2018/5/10 16:13:38
Applicant:	Hon Hai Precision Industry Co., Ltd.	Test Rating:	DC 3.3V
Product:	IEEE 802.11 a/b/g/n/ac 2x2 WiFi Module	Temp.(°C)/Hum.(%)	23(°C)/65%
Model No.:	WFU033-LGA	Test Engineer:	Curry Chen
Test Mode:	N20-2437-TX		
Remark:	Power Setting 17 17		

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	4874.000	-2.53	49.53	47.00	74.00	-27.00	peak			
2	7311.000	5.52	44.98	50.50	74.00	-23.50	peak			
3	8327.000	6.18	45.00	51.18	74.00	-22.82	peak	100	236	

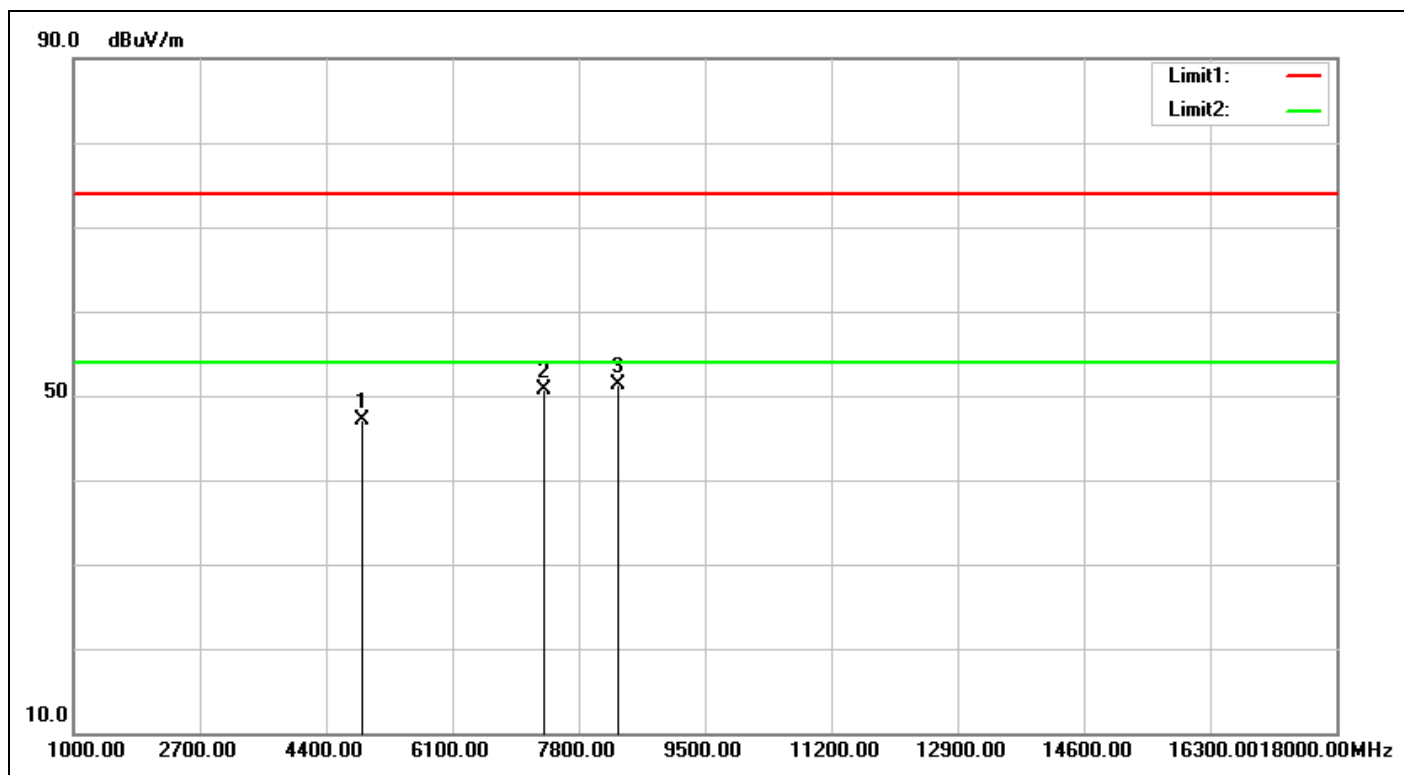


Service No.:	114077170	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2018/5/10 16:14:31
Applicant:	Hon Hai Precision Industry Co., Ltd.	Test Rating:	DC 3.3V
Product:	IEEE 802.11 a/b/g/n/ac 2x2 WiFi Module	Temp.(°C)/Hum.(%):	23(°C)/65%
Model No.:	WFU033-LGA	Test Engineer:	Curry Chen
Test Mode:	N20-2437-TX		
Remark:	Power Setting 17 17		

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	4874.000	-2.53	49.73	47.20	74.00	-26.80	peak			
2	7311.000	5.52	45.26	50.78	74.00	-23.22	peak			
3	8327.000	6.18	45.16	51.34	74.00	-22.66	peak	100	360	

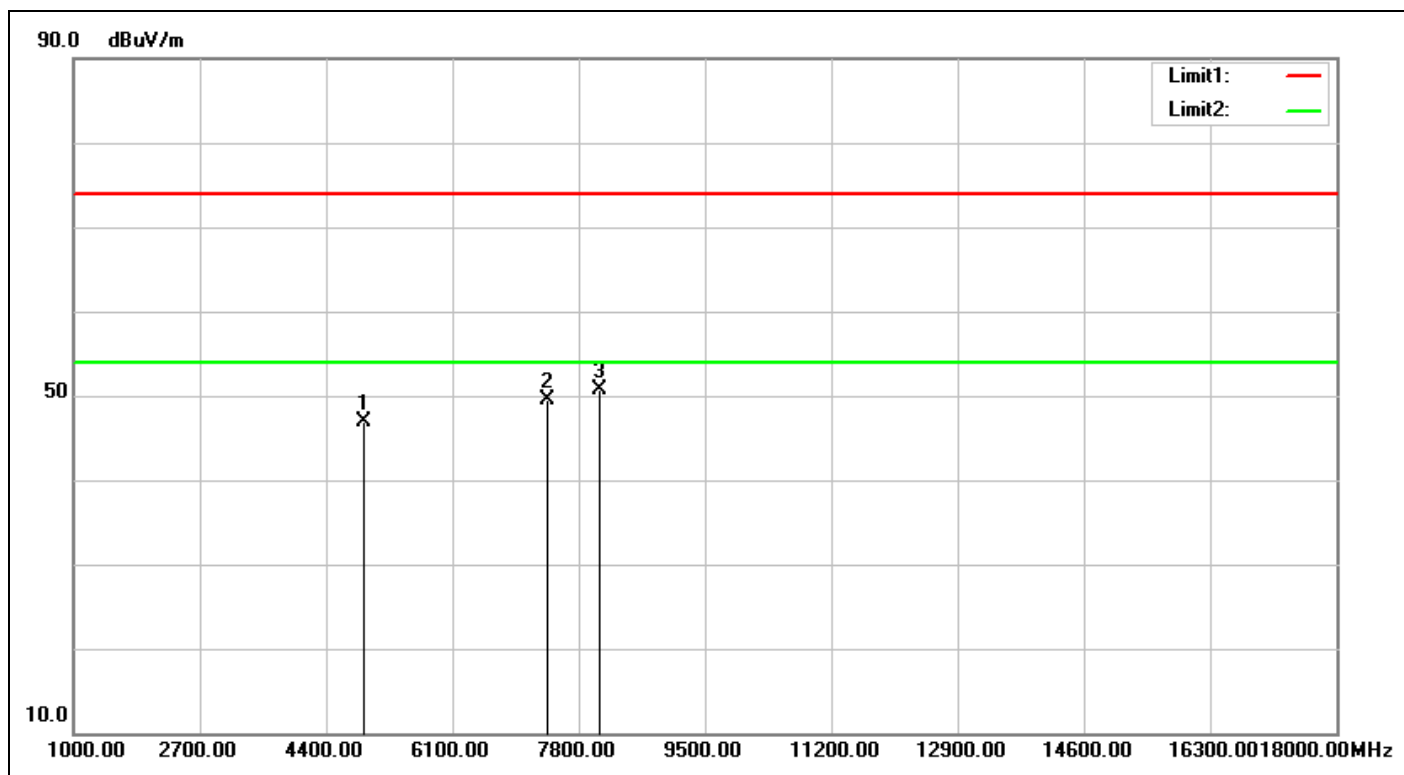


Service No.:	114077170	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2018/5/10 16:20:52
Applicant:	Hon Hai Precision Industry Co., Ltd.	Test Rating:	DC 3.3V
Product:	IEEE 802.11 a/b/g/n/ac 2x2 WiFi Module	Temp.(°C)/Hum.(%)	23(°C)/65%
Model No.:	WFU033-LGA	Test Engineer:	Curry Chen
Test Mode:	N20-2462-TX		
Remark:	Power Setting 16 17		

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	4924.000	-2.39	49.26	46.87	74.00	-27.13	peak			
2	7386.000	5.70	43.80	49.50	74.00	-24.50	peak			
3	8089.000	5.91	44.71	50.62	74.00	-23.38	peak	100	71	

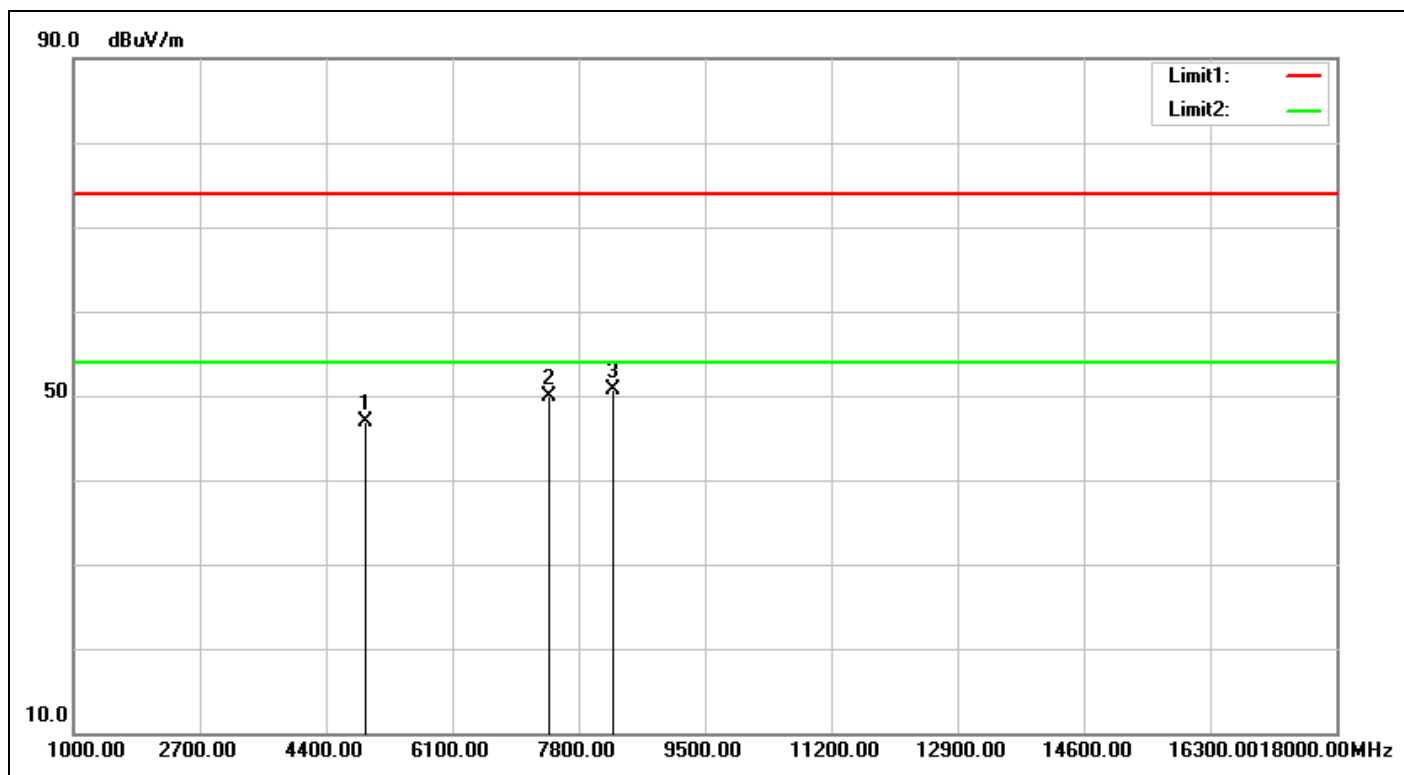


Service No.:	114077170	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2018/5/10 16:21:44
Applicant:	Hon Hai Precision Industry Co., Ltd.	Test Rating:	DC 3.3V
Product:	IEEE 802.11 a/b/g/n/ac 2x2 WiFi Module	Temp.(°C)/Hum.(%)	23(°C)/65%
Model No.:	WFU033-LGA	Test Engineer:	Curry Chen
Test Mode:	N20-2462-TX		
Remark:	Power Setting 16 17		

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	4924.000	-2.39	49.23	46.84	74.00	-27.16	peak			
2	7386.000	5.70	44.26	49.96	74.00	-24.04	peak			
3	8259.000	6.11	44.58	50.69	74.00	-23.31	peak	100	322	

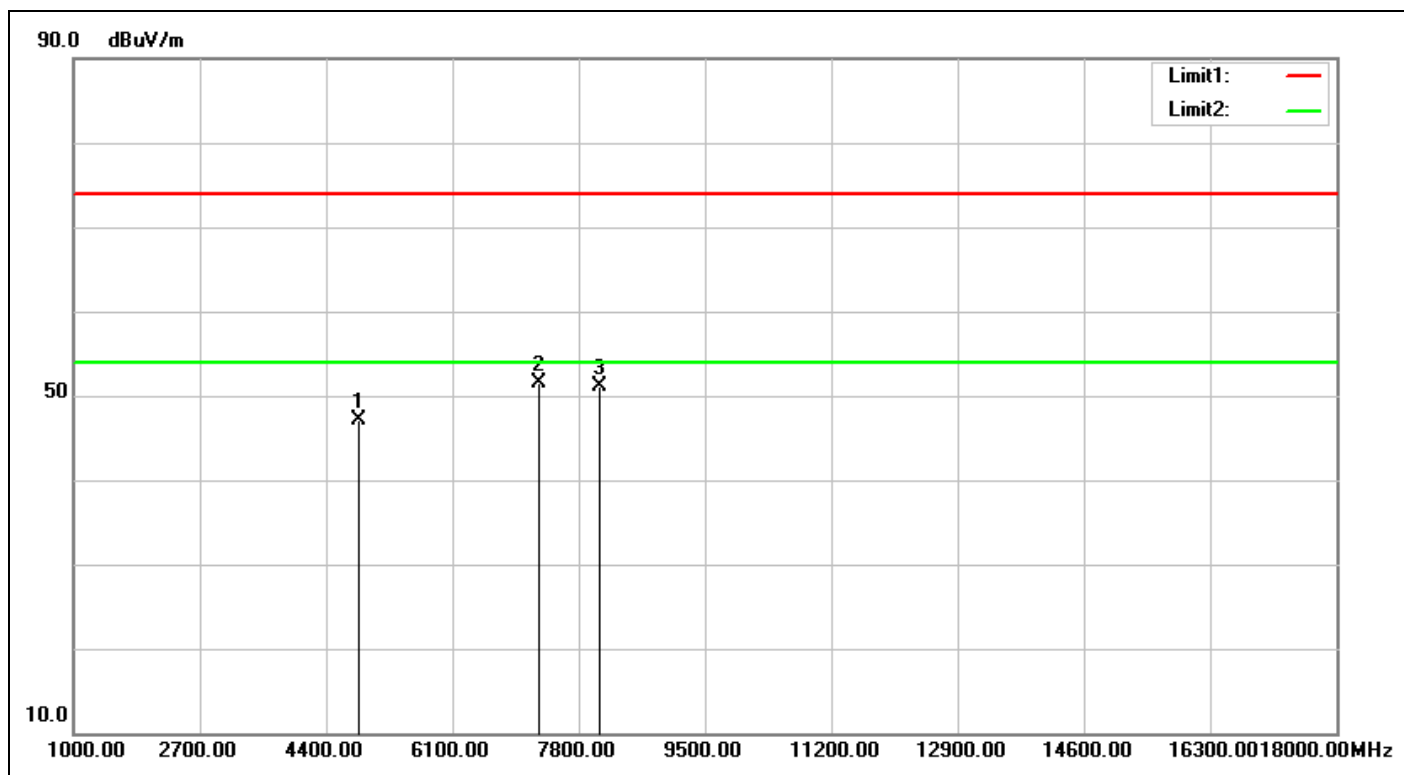


Service No.:	114077170	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2018/5/10 16:24:02
Applicant:	Hon Hai Precision Industry Co., Ltd.	Test Rating:	DC 3.3V
Product:	IEEE 802.11 a/b/g/n/ac 2x2 WiFi Module	Temp.(°C)/Hum.(%):	23(°C)/65%
Model No.:	WFU033-LGA	Test Engineer:	Curry Chen
Test Mode:	N40-2422-TX		
Remark:	Power Setting 12 13		

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	4844.000	-2.61	49.77	47.16	74.00	-26.84	peak			
2	7266.000	5.40	46.05	51.45	74.00	-22.55	peak			
3	8089.000	5.91	45.11	51.02	74.00	-22.98	peak	100	134	

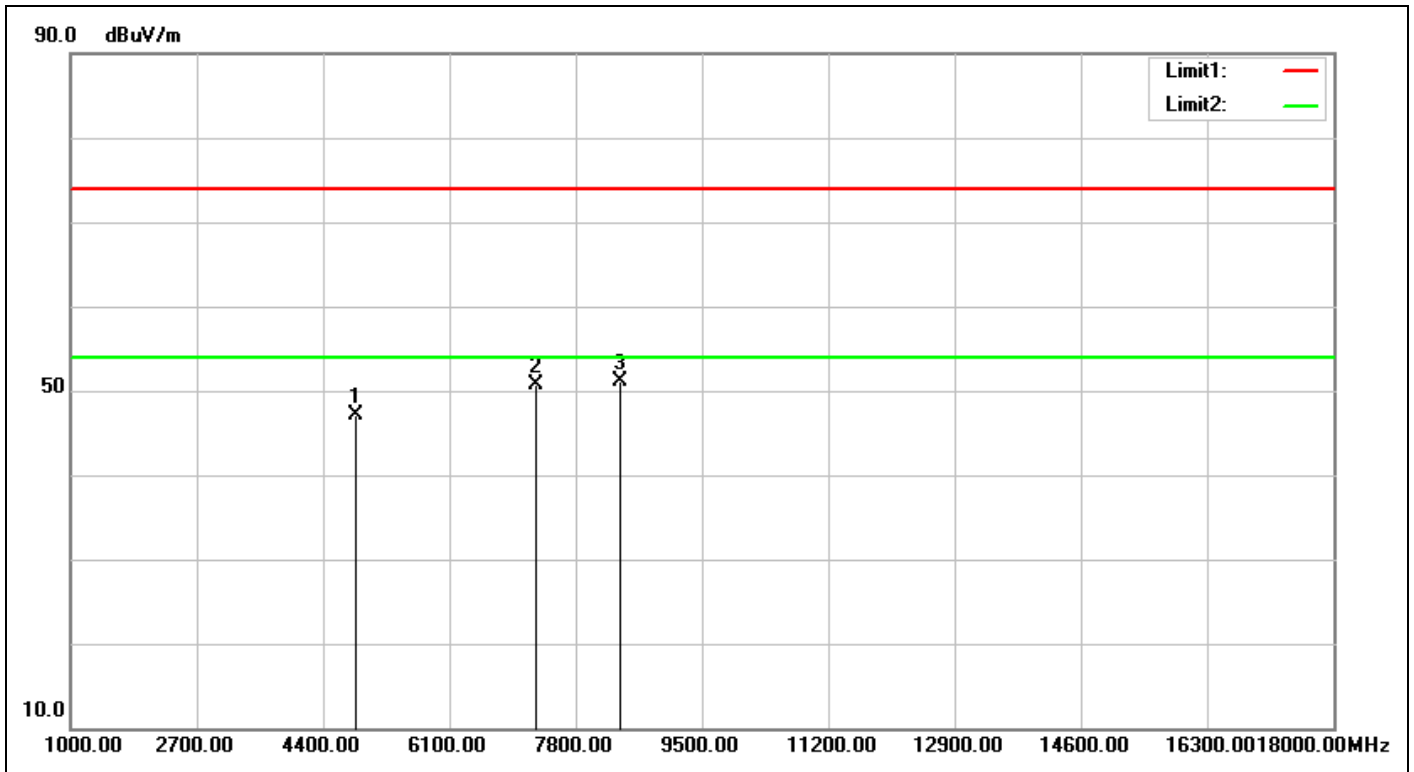


Service No.:	114077170	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2018/5/10 16:24:54
Applicant:	Hon Hai Precision Industry Co., Ltd.	Test Rating:	DC 3.3V
Product:	IEEE 802.11 a/b/g/n/ac 2x2 WiFi Module	Temp.(°C)/Hum.(%)	23(°C)/65%
Model No.:	WFU033-LGA	Test Engineer:	Curry Chen
Test Mode:	N40-2422-TX		
Remark:	Power Setting 12 13		

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	4844.000	-2.61	49.71	47.10	74.00	-26.90	peak			
2	7266.000	5.40	45.39	50.79	74.00	-23.21	peak			
3	8395.000	6.26	44.82	51.08	74.00	-22.92	peak	100	0	

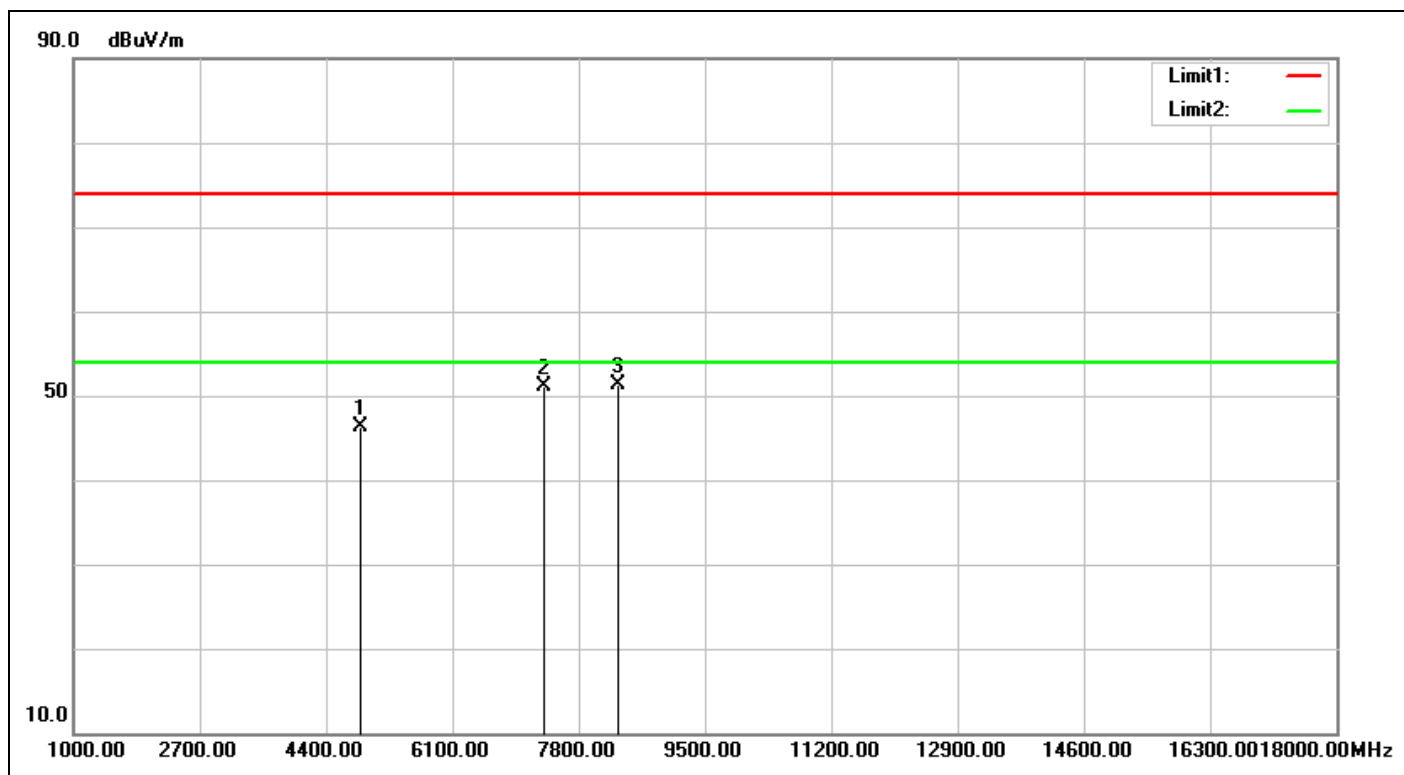


Service No.:	114077170	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2018/5/10 16:27:00
Applicant:	Hon Hai Precision Industry Co., Ltd.	Test Rating:	DC 3.3V
Product:	IEEE 802.11 a/b/g/n/ac 2x2 WiFi Module	Temp.(°C)/Hum.(%)	23(°C)/65%
Model No.:	WFU033-LGA	Test Engineer:	Curry Chen
Test Mode:	N40-2437-TX		
Remark:	Power Setting 16 16		

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	4874.000	-2.53	48.90	46.37	74.00	-27.63	peak			
2	7311.000	5.52	45.57	51.09	74.00	-22.91	peak			
3	8327.000	6.18	45.16	51.34	74.00	-22.66	peak	100	13	

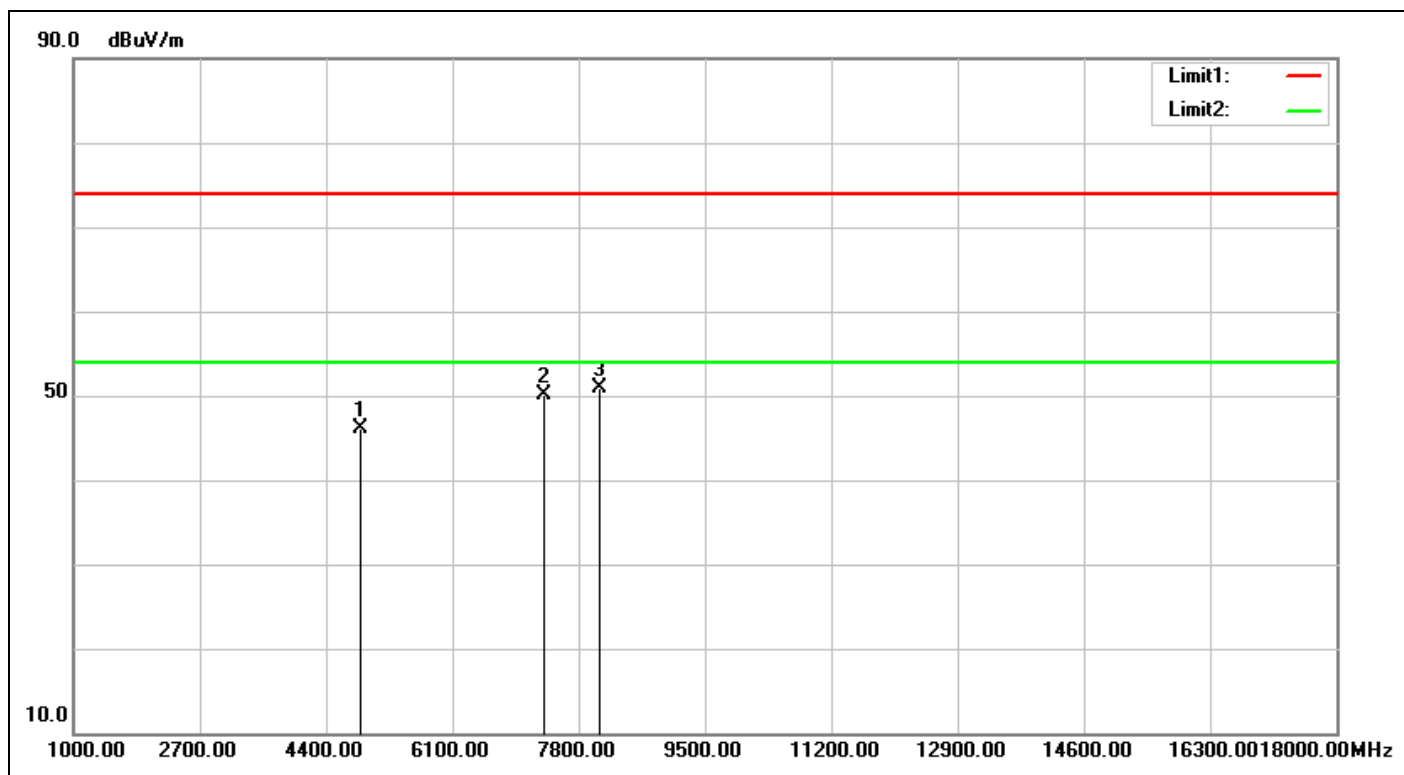


Service No.:	114077170	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2018/5/10 16:27:52
Applicant:	Hon Hai Precision Industry Co., Ltd.	Test Rating:	DC 3.3V
Product:	IEEE 802.11 a/b/g/n/ac 2x2 WiFi Module	Temp.(°C)/Hum.(%)	23(°C)/65%
Model No.:	WFU033-LGA	Test Engineer:	Curry Chen
Test Mode:	N40-2437-TX		
Remark:	Power Setting 16 16		

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	4874.000	-2.53	48.73	46.20	74.00	-27.80	peak			
2	7311.000	5.52	44.54	50.06	74.00	-23.94	peak			
3	8072.000	5.90	44.97	50.87	74.00	-23.13	peak	100	268	

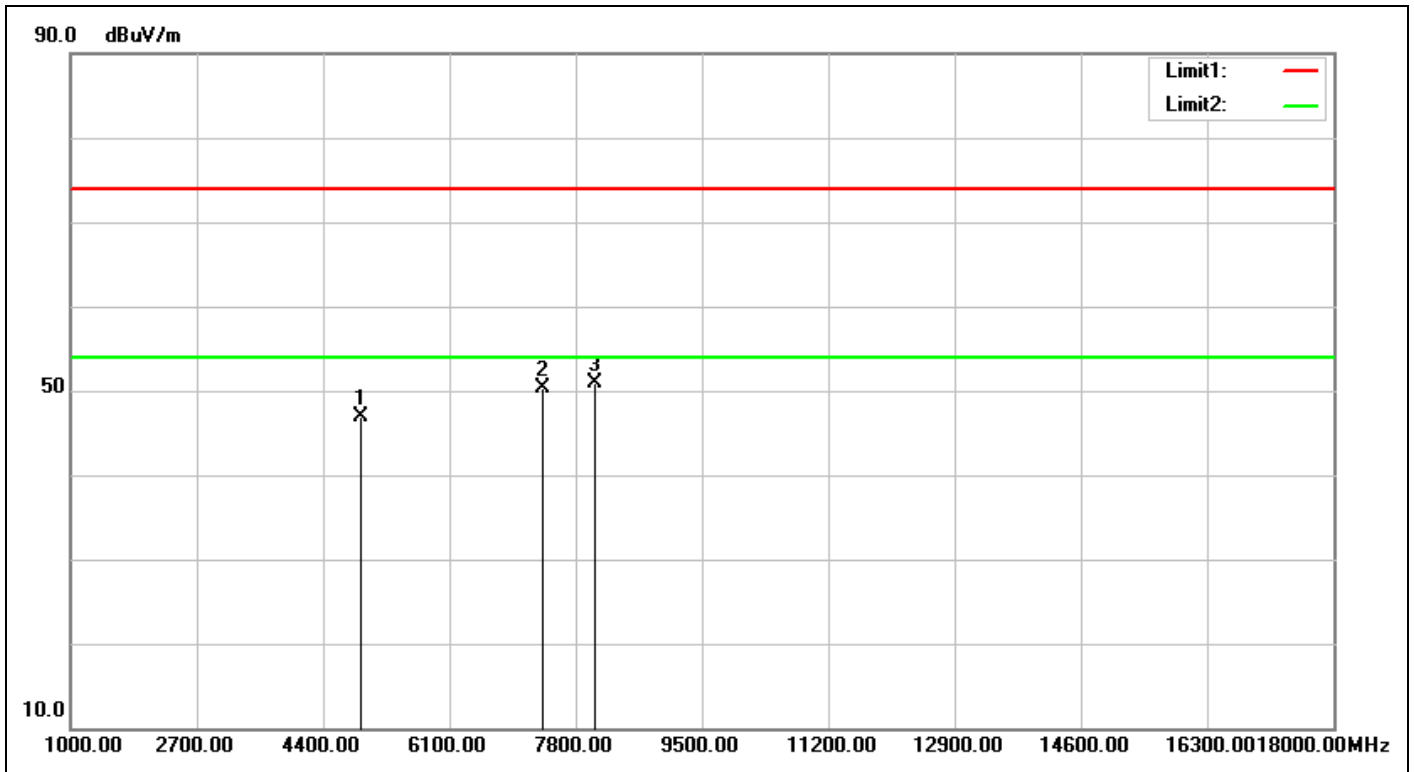

Service No.:	114077170	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2018/5/10 16:29:46
Applicant:	Hon Hai Precision Industry Co., Ltd.	Test Rating:	DC 3.3V
Product:	IEEE 802.11 a/b/g/n/ac 2x2 WiFi Module	Temp.(°C)/Hum.(%):	23(°C)/65%
Model No.:	WFU033-LGA	Test Engineer:	Curry Chen
Test Mode:	N40-2452-TX		
Remark:	Power Setting 13 13		

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	4904.000	-2.44	49.44	47.00	74.00	-27.00	peak			
2	7356.000	5.63	44.76	50.39	74.00	-23.61	peak			
3	8055.000	5.89	44.98	50.87	74.00	-23.13	peak	100	146	

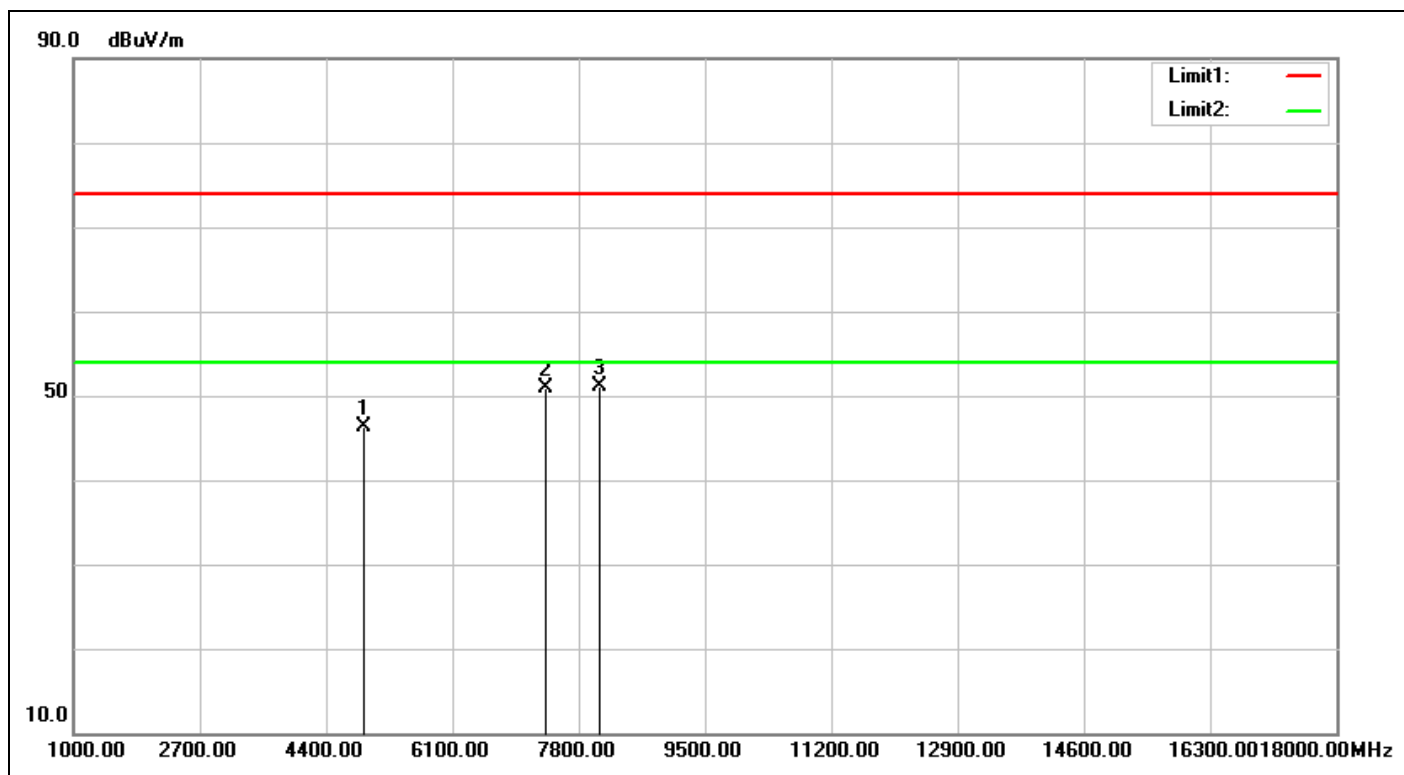

Service No.:	114077170	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2018/5/10 16:30:38
Applicant:	Hon Hai Precision Industry Co., Ltd.	Test Rating:	DC 3.3V
Product:	IEEE 802.11 a/b/g/n/ac 2x2 WiFi Module	Temp.(°C)/Hum.(%)	23(°C)/65%
Model No.:	WFU033-LGA	Test Engineer:	Curry Chen
Test Mode:	N40-2452-TX		
Remark:	Power Setting 13 13		

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	4904.000	-2.44	48.67	46.23	74.00	-27.77	peak			
2	7356.000	5.63	45.32	50.95	74.00	-23.05	peak			
3	8072.000	5.90	45.27	51.17	74.00	-22.83	peak	100	231	


Spurious Emissions, TX Mode, 18-26.5G



TUV Rheinland Taiwan Ltd.


11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105

Tel:+886-2172-7000 fax:+886-2528-0018

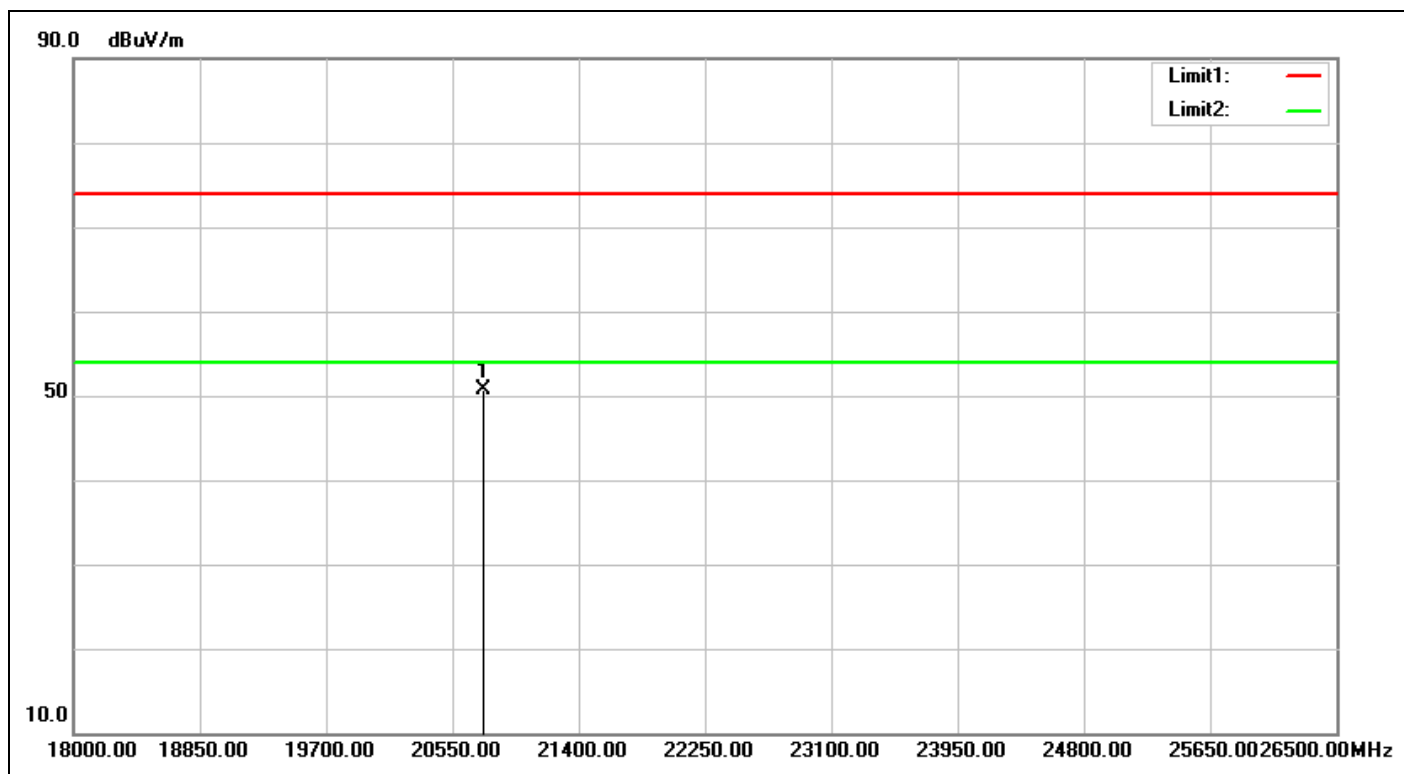


Service No.:	114077170	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2018/5/10 18:48:12
Applicant:	Hon Hai Precision Industry Co., Ltd.	Test Rating:	DC 3.3V
Product:	IEEE 802.11 a/b/g/n/ac 2x2 WiFi Module	Temp.(°C)/Hum.(%)	23(°C)/65%
Model No.:	WFU033-LGA	Test Engineer:	Curry Chen
Test Mode:	B-2412-TX		
Remark:	Power Setting 1F		

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	20762.500	31.95	18.69	50.64	74.00	-23.36	peak		0	

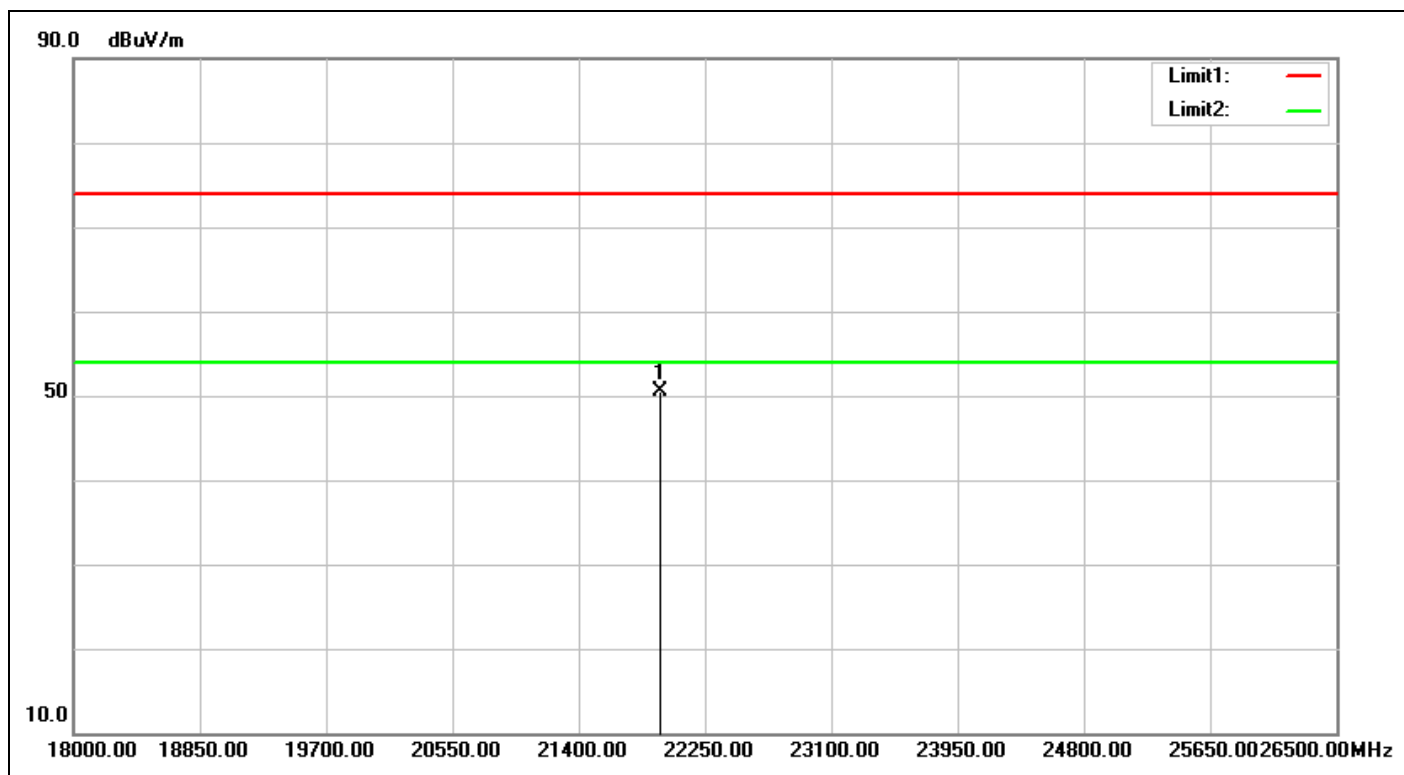


Service No.:	114077170	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2018/5/10 18:48:19
Applicant:	Hon Hai Precision Industry Co., Ltd.	Test Rating:	DC 3.3V
Product:	IEEE 802.11 a/b/g/n/ac 2x2 WiFi Module	Temp.(°C)/Hum.(%)	23(°C)/65%
Model No.:	WFU033-LGA	Test Engineer:	Curry Chen
Test Mode:	B-2412-TX		
Remark:	Power Setting 1F		

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	21952.500	32.62	17.80	50.42	74.00	-23.58	peak			

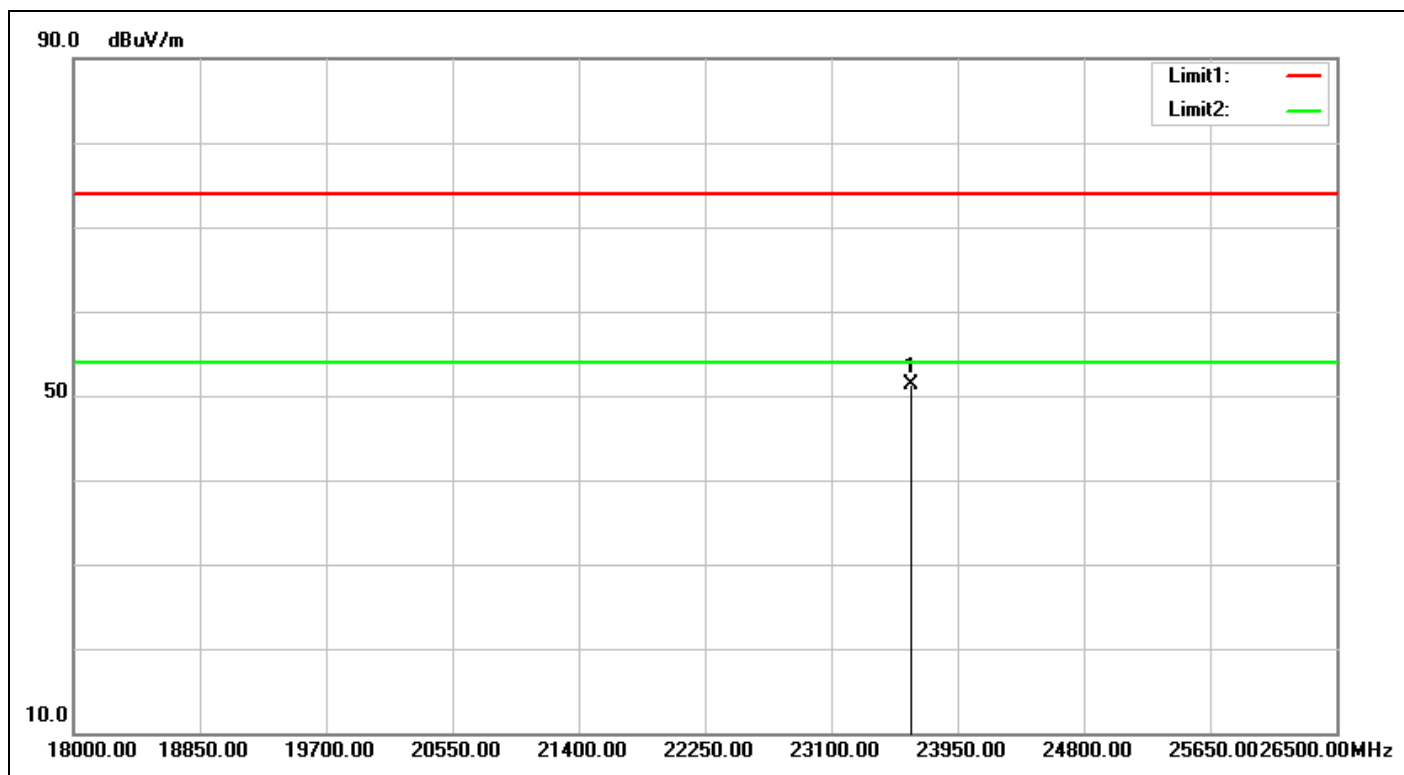


Service No.:	114077170	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2018/5/10 18:49:07
Applicant:	Hon Hai Precision Industry Co., Ltd.	Test Rating:	DC 3.3V
Product:	IEEE 802.11 a/b/g/n/ac 2x2 WiFi Module	Temp.(°C)/Hum.(%):	23(°C)/65%
Model No.:	WFU033-LGA	Test Engineer:	Curry Chen
Test Mode:	B-2437-TX		
Remark:	Power Setting 1F		

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	23635.500	33.19	18.20	51.39	74.00	-22.61	peak			

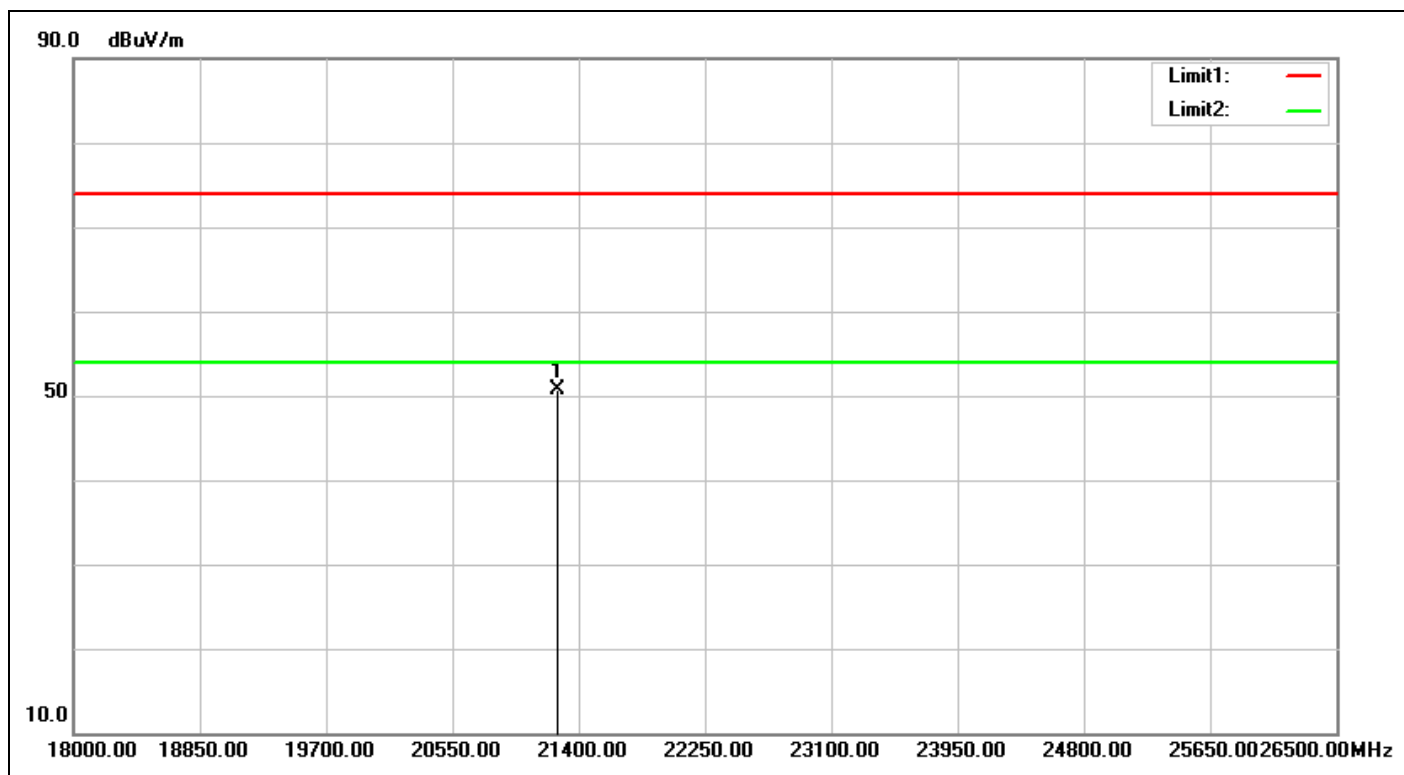


Service No.:	114077170	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2018/5/10 18:49:13
Applicant:	Hon Hai Precision Industry Co., Ltd.	Test Rating:	DC 3.3V
Product:	IEEE 802.11 a/b/g/n/ac 2x2 WiFi Module	Temp.(°C)/Hum.(%):	23(°C)/65%
Model No.:	WFU033-LGA	Test Engineer:	Curry Chen
Test Mode:	B-2437-TX		
Remark:	Power Setting 1F		

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	21255.500	32.67	18.03	50.70	74.00	-23.30	peak			

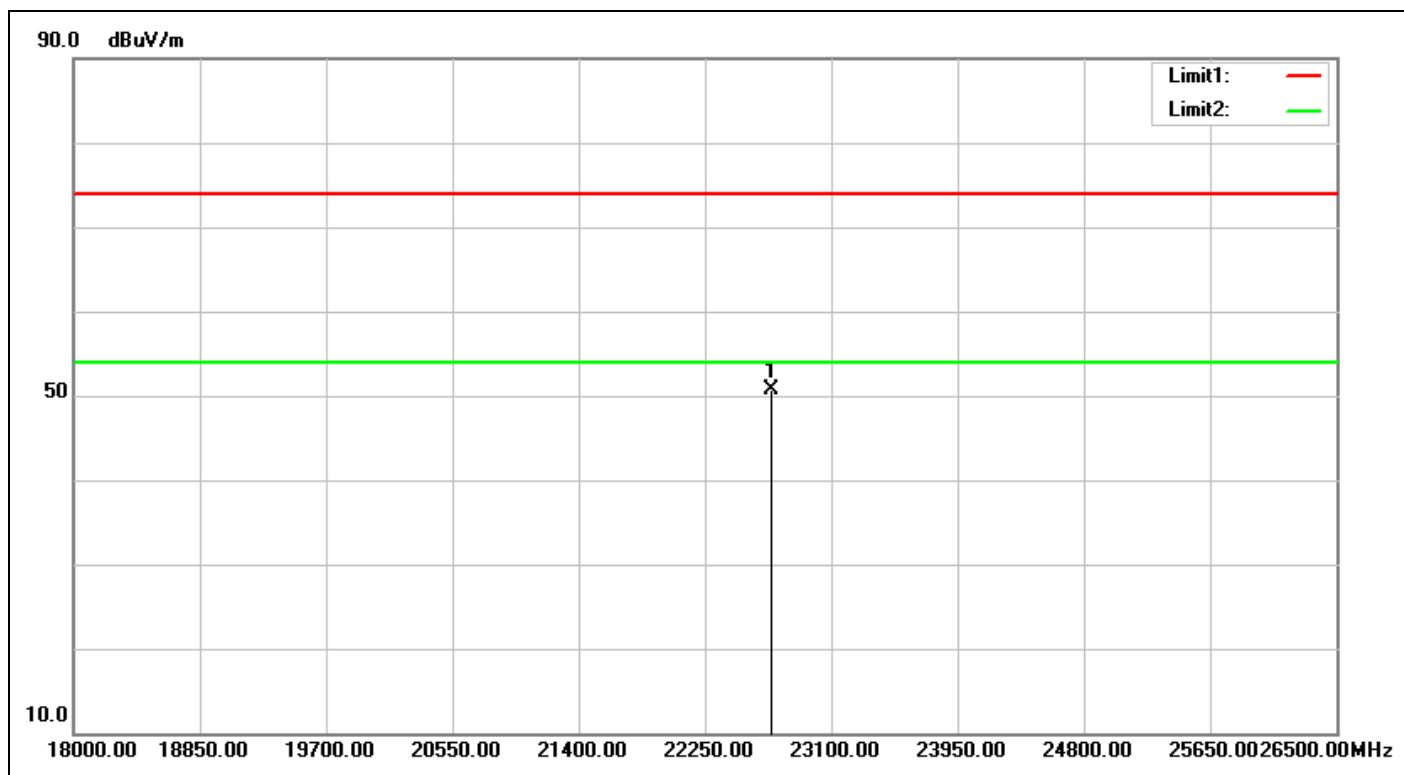


Service No.:	114077170	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2018/5/10 18:49:40
Applicant:	Hon Hai Precision Industry Co., Ltd.	Test Rating:	DC 3.3V
Product:	IEEE 802.11 a/b/g/n/ac 2x2 WiFi Module	Temp.(°C)/Hum.(%)	23(°C)/65%
Model No.:	WFU033-LGA	Test Engineer:	Curry Chen
Test Mode:	B-2462-TX		
Remark:	Power Setting 1F		

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	22700.500	32.71	17.90	50.61	74.00	-23.39	peak			

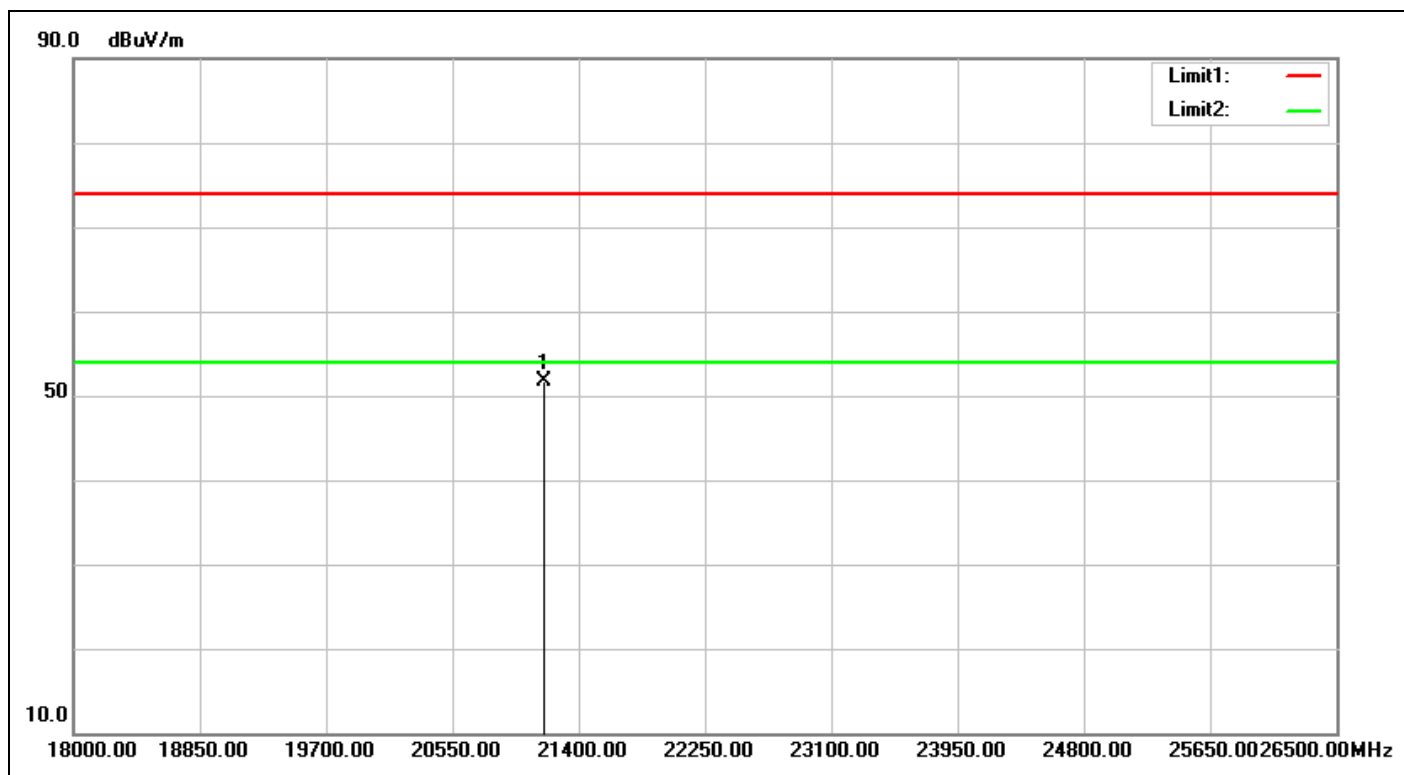


Service No.:	114077170	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2018/5/10 18:49:46
Applicant:	Hon Hai Precision Industry Co., Ltd.	Test Rating:	DC 3.3V
Product:	IEEE 802.11 a/b/g/n/ac 2x2 WiFi Module	Temp.(°C)/Hum.(%):	23(°C)/65%
Model No.:	WFU033-LGA	Test Engineer:	Curry Chen
Test Mode:	B-2462-TX		
Remark:	Power Setting 1F		

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	21170.500	32.60	19.06	51.66	74.00	-22.34	peak			

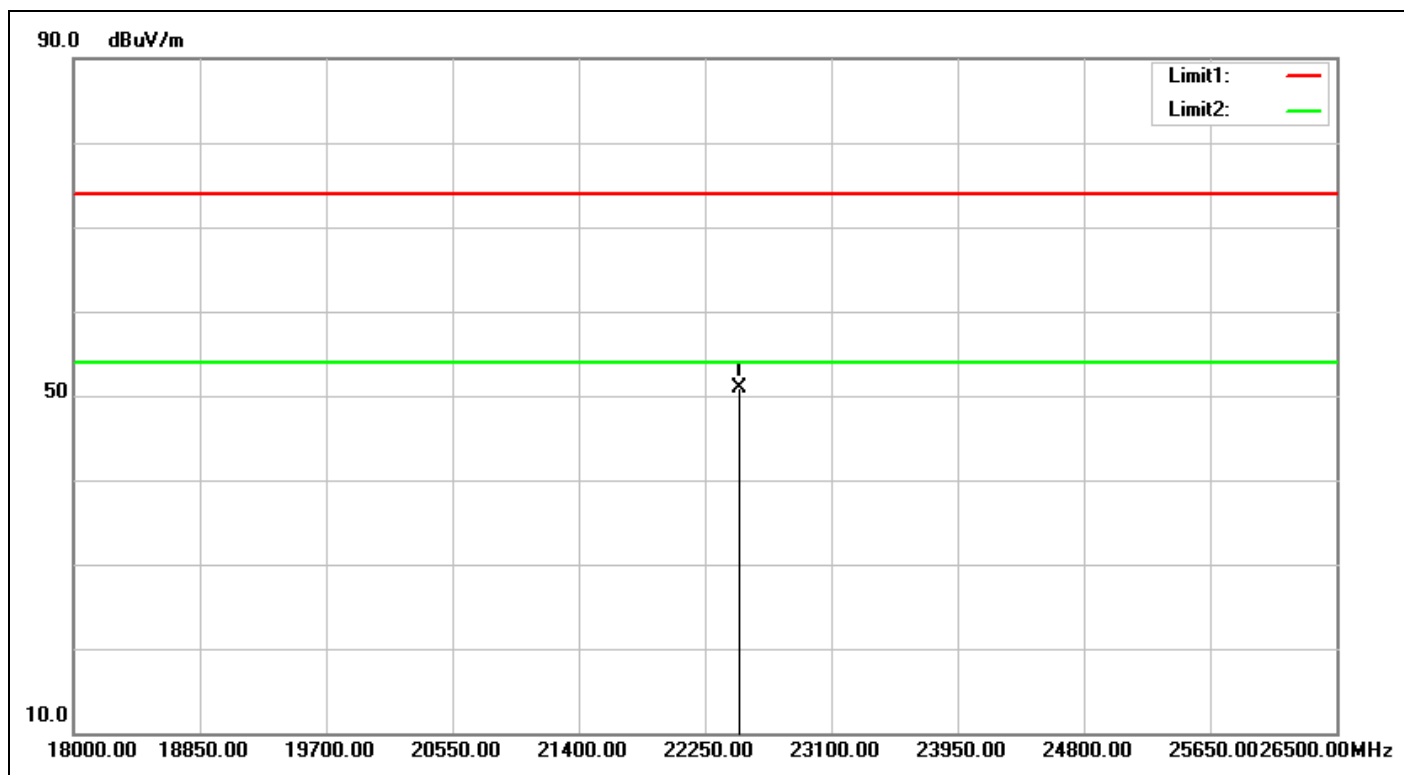


Service No.:	114077170	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2018/5/10 18:50:49
Applicant:	Hon Hai Precision Industry Co., Ltd.	Test Rating:	DC 3.3V
Product:	IEEE 802.11 a/b/g/n/ac 2x2 WiFi Module	Temp.(°C)/Hum.(%):	23(°C)/65%
Model No.:	WFU033-LGA	Test Engineer:	Curry Chen
Test Mode:	G-2412-TX		
Remark:	Power Setting 1C		

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	22479.500	32.63	18.32	50.95	74.00	-23.05	peak			

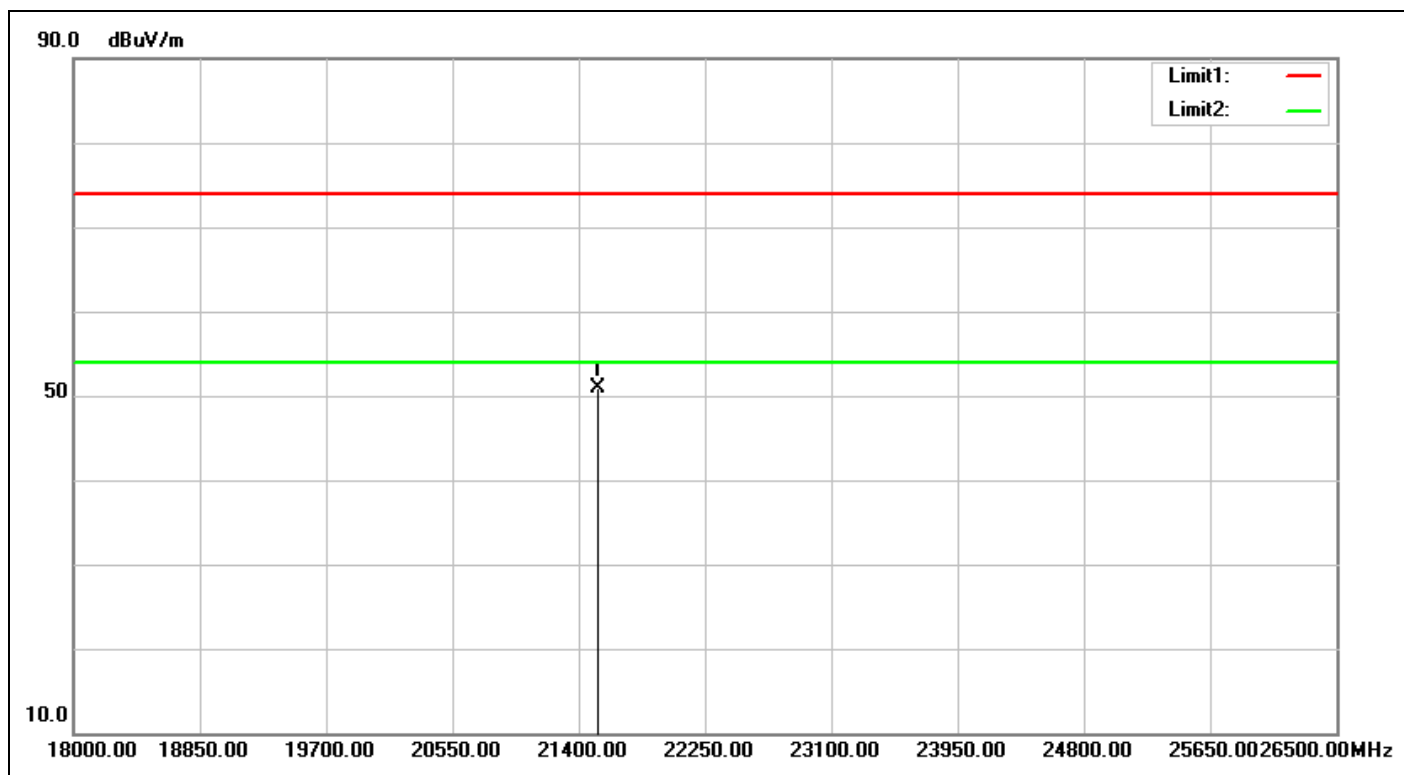


Service No.:	114077170	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2018/5/10 18:50:56
Applicant:	Hon Hai Precision Industry Co., Ltd.	Test Rating:	DC 3.3V
Product:	IEEE 802.11 a/b/g/n/ac 2x2 WiFi Module	Temp.(°C)/Hum.(%)	23(°C)/65%
Model No.:	WFU033-LGA	Test Engineer:	Curry Chen
Test Mode:	G-2412-TX		
Remark:	Power Setting 1C		

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	21527.500	32.88	18.05	50.93	74.00	-23.07	peak			

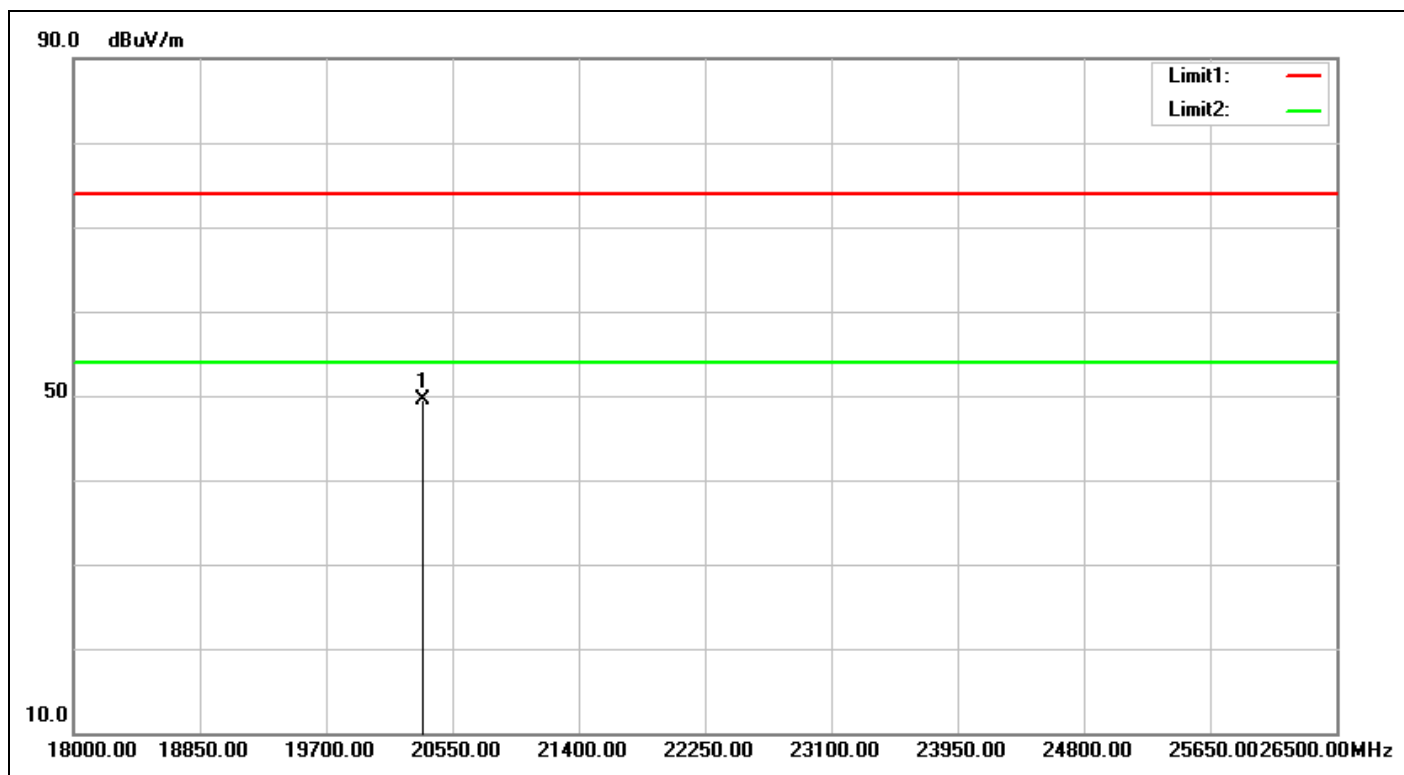


Service No.:	114077170	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2018/5/10 18:51:28
Applicant:	Hon Hai Precision Industry Co., Ltd.	Test Rating:	DC 3.3V
Product:	IEEE 802.11 a/b/g/n/ac 2x2 WiFi Module	Temp.(°C)/Hum.(%)	23(°C)/65%
Model No.:	WFU033-LGA	Test Engineer:	Curry Chen
Test Mode:	G-2437-TX		
Remark:	Power Setting 20		

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	20354.500	31.35	18.11	49.46	74.00	-24.54	peak			

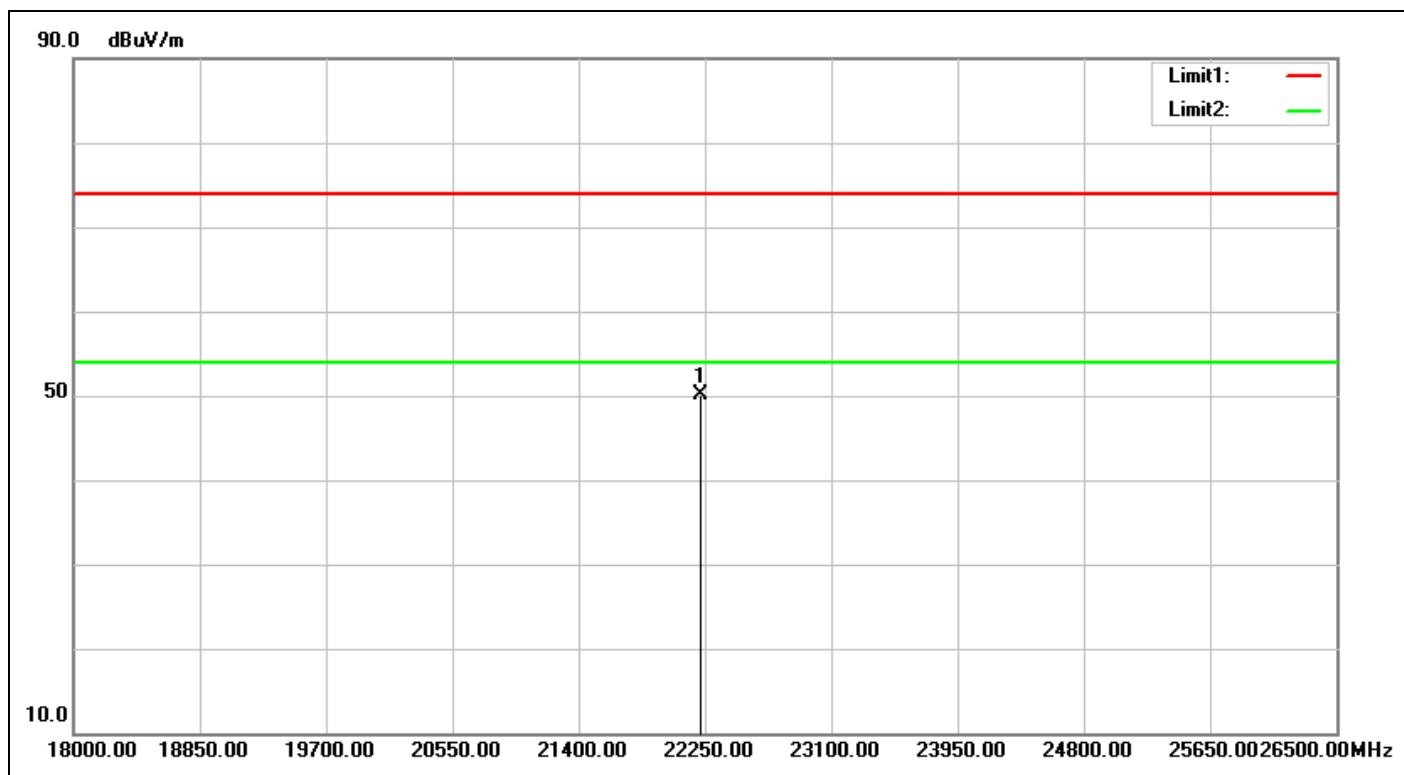


Service No.:	114077170	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2018/5/10 18:51:34
Applicant:	Hon Hai Precision Industry Co., Ltd.	Test Rating:	DC 3.3V
Product:	IEEE 802.11 a/b/g/n/ac 2x2 WiFi Module	Temp.(°C)/Hum.(%):	23(°C)/65%
Model No.:	WFU033-LGA	Test Engineer:	Curry Chen
Test Mode:	G-2437-TX		
Remark:	Power Setting 20		

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	22224.500	32.61	17.58	50.19	74.00	-23.81	peak			

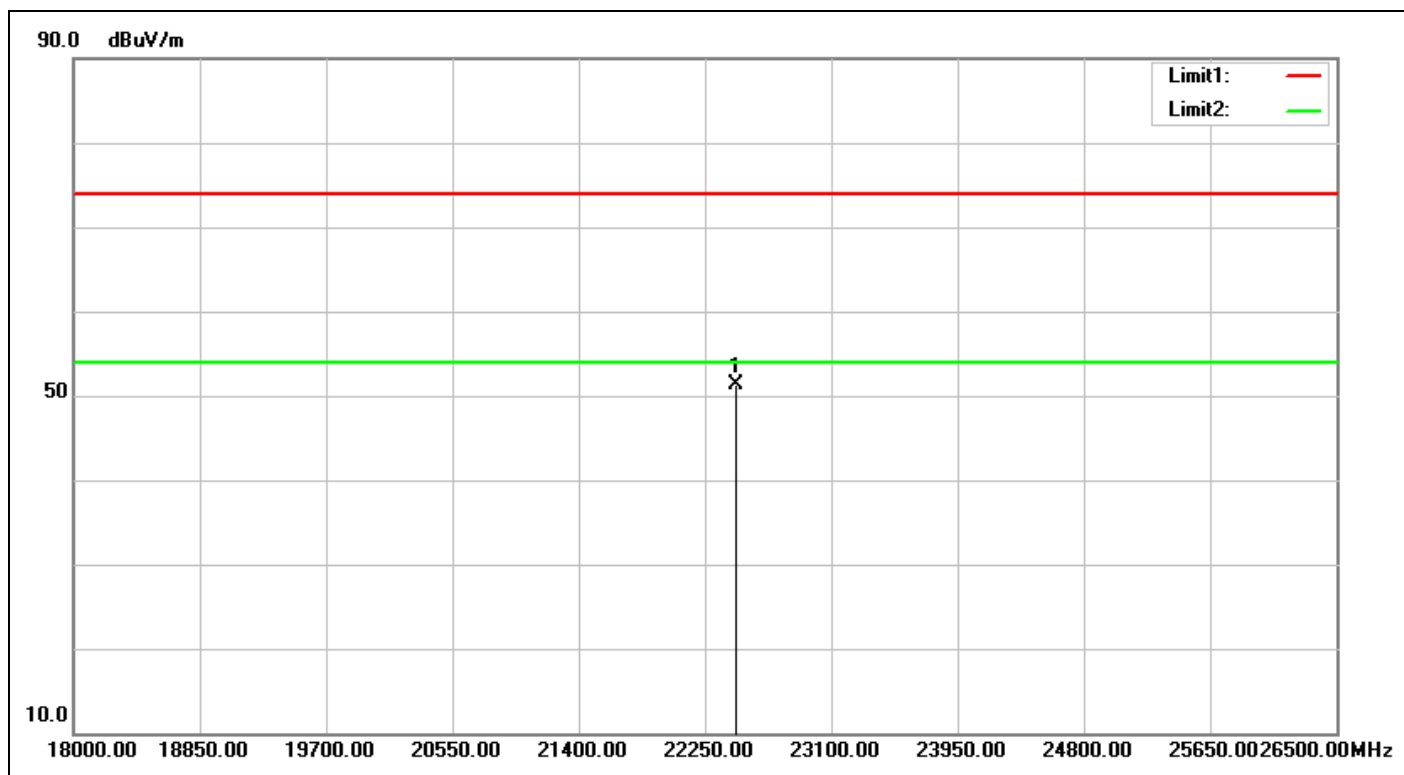


Service No.:	114077170	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2018/5/10 18:52:09
Applicant:	Hon Hai Precision Industry Co., Ltd.	Test Rating:	DC 3.3V
Product:	IEEE 802.11 a/b/g/n/ac 2x2 WiFi Module	Temp.(°C)/Hum.(%)	23(°C)/65%
Model No.:	WFU033-LGA	Test Engineer:	Curry Chen
Test Mode:	G-2462-TX		
Remark:	Power Setting 17		

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	22462.500	32.64	18.66	51.30	74.00	-22.70	peak			

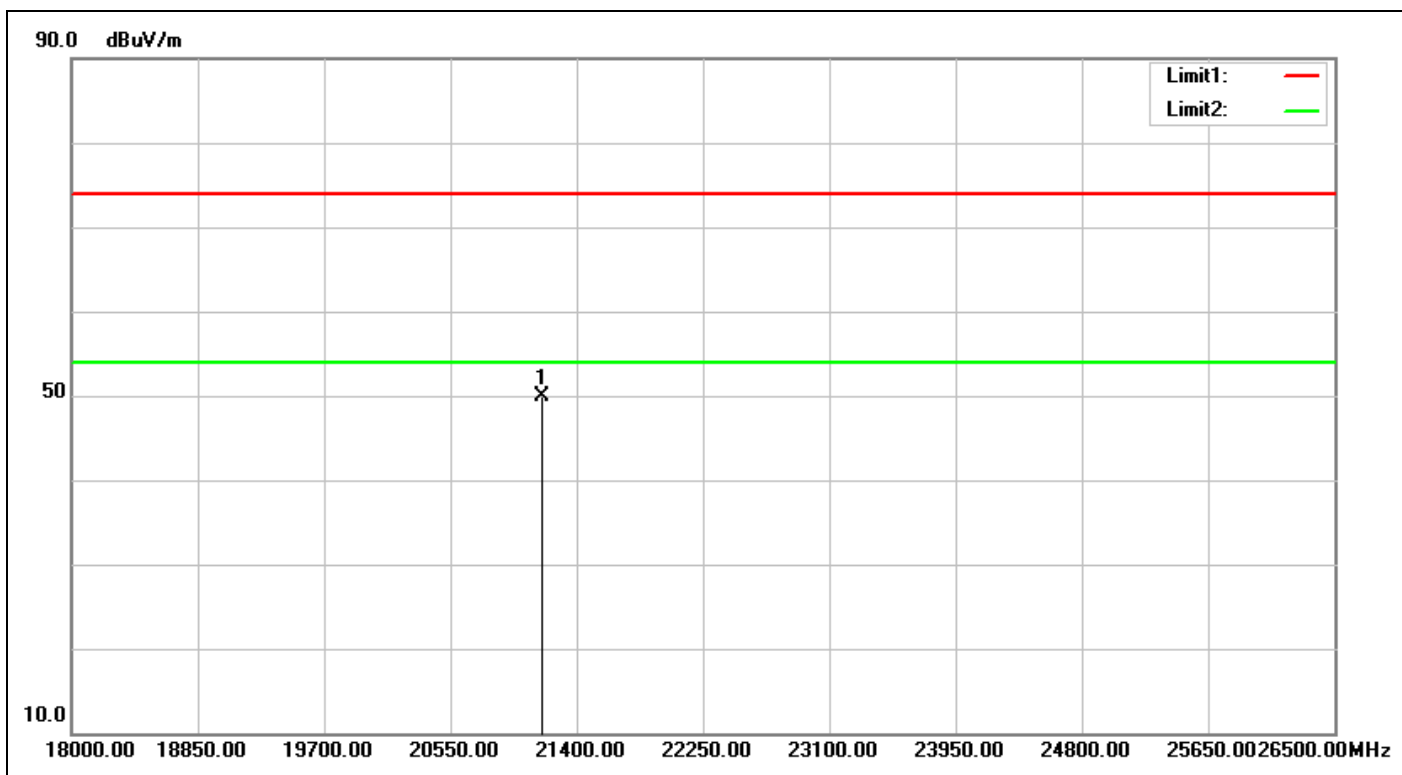


Service No.:	114077170	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2018/5/10 18:52:16
Applicant:	Hon Hai Precision Industry Co., Ltd.	Test Rating:	DC 3.3V
Product:	IEEE 802.11 a/b/g/n/ac 2x2 WiFi Module	Temp.(°C)/Hum.(%)	23(°C)/65%
Model No.:	WFU033-LGA	Test Engineer:	Curry Chen
Test Mode:	G-2462-TX		
Remark:	Power Setting 17		

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	21170.500	32.60	17.35	49.95	74.00	-24.05	peak			

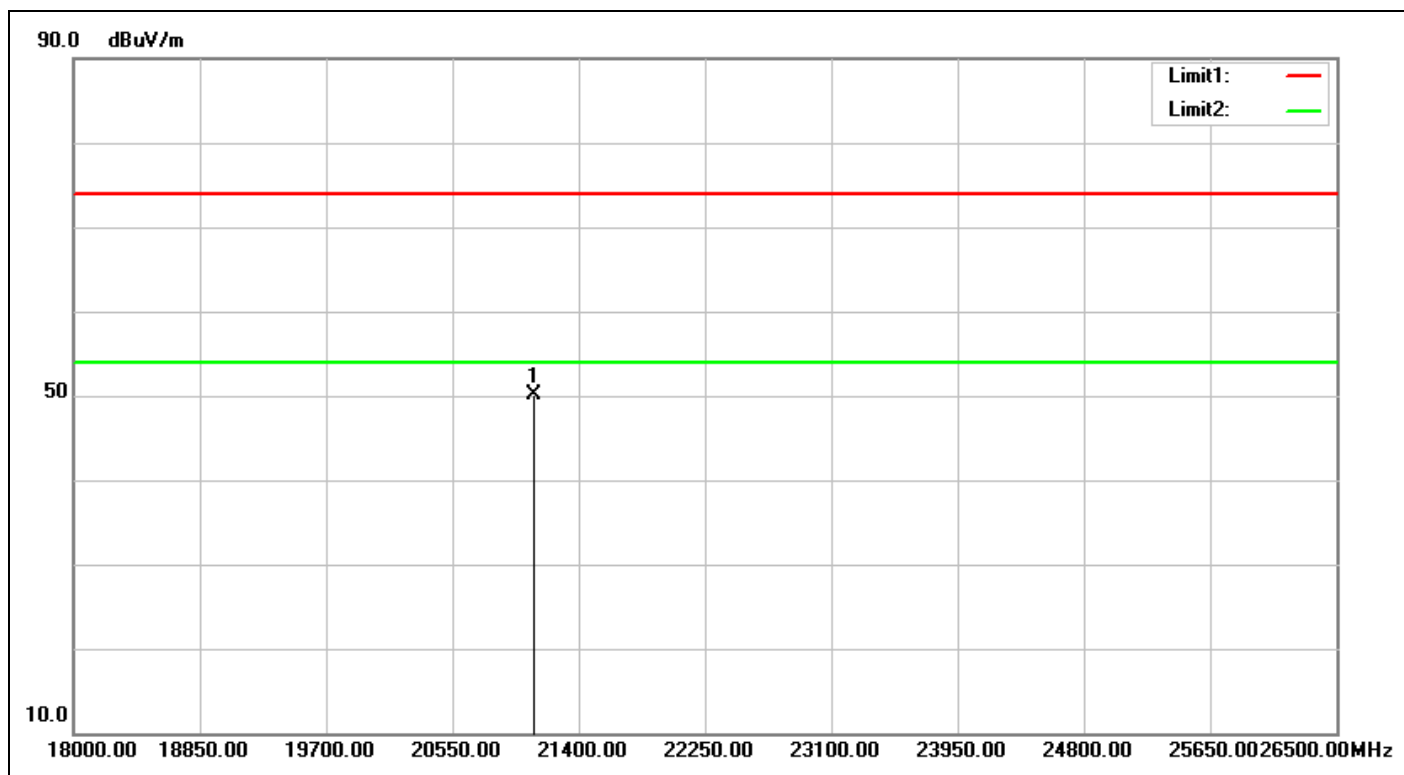


Service No.:	114077170	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2018/5/10 18:53:01
Applicant:	Hon Hai Precision Industry Co., Ltd.	Test Rating:	DC 3.3V
Product:	IEEE 802.11 a/b/g/n/ac 2x2 WiFi Module	Temp.(°C)/Hum.(%)	23(°C)/65%
Model No.:	WFU033-LGA	Test Engineer:	Curry Chen
Test Mode:	N20-2412-TX		
Remark:	Power Setting 16 16		

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	21094.000	32.53	17.58	50.11	74.00	-23.89	peak			

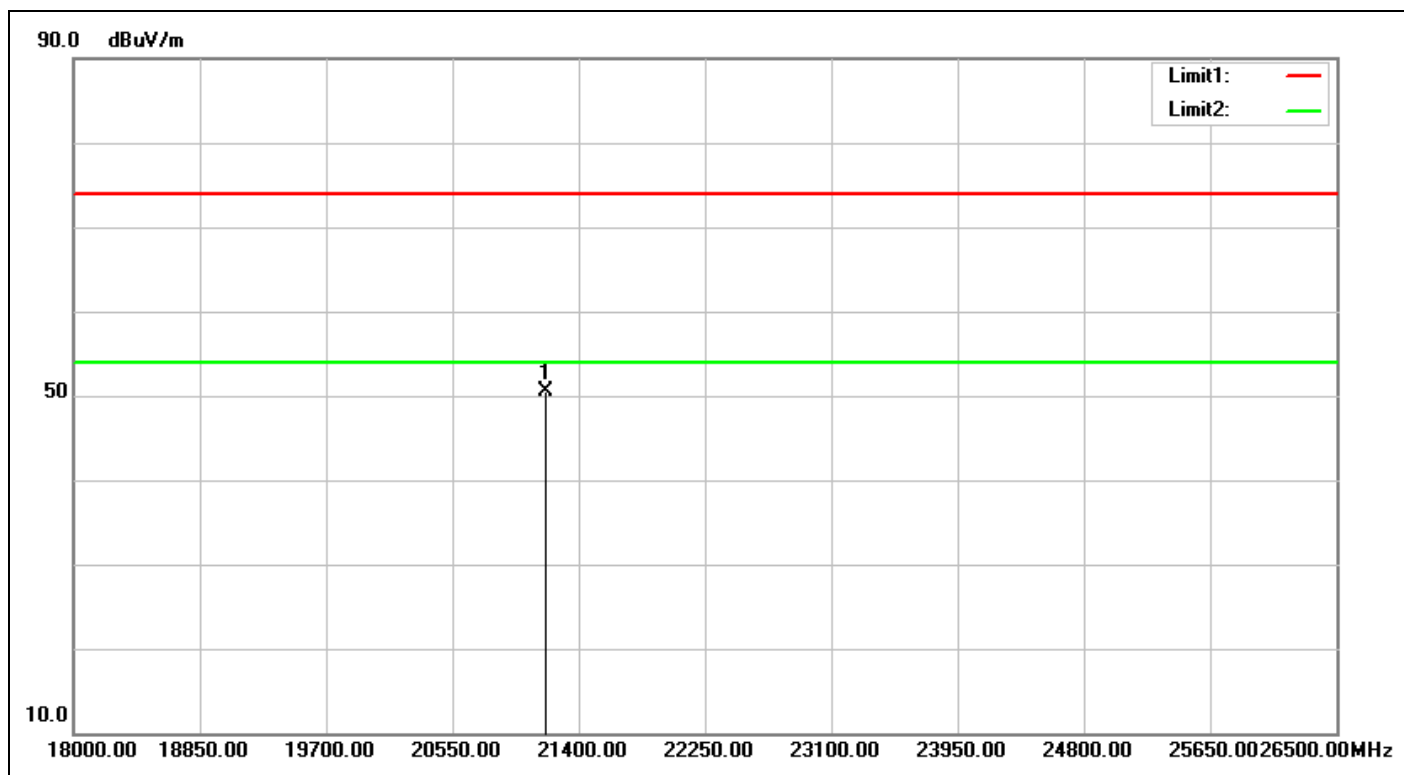


Service No.:	114077170	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2018/5/10 18:53:08
Applicant:	Hon Hai Precision Industry Co., Ltd.	Test Rating:	DC 3.3V
Product:	IEEE 802.11 a/b/g/n/ac 2x2 WiFi Module	Temp.(°C)/Hum.(%)	23(°C)/65%
Model No.:	WFU033-LGA	Test Engineer:	Curry Chen
Test Mode:	N20-2412-TX		
Remark:	Power Setting 16 16		

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	21179.000	32.61	17.81	50.42	74.00	-23.58	peak			

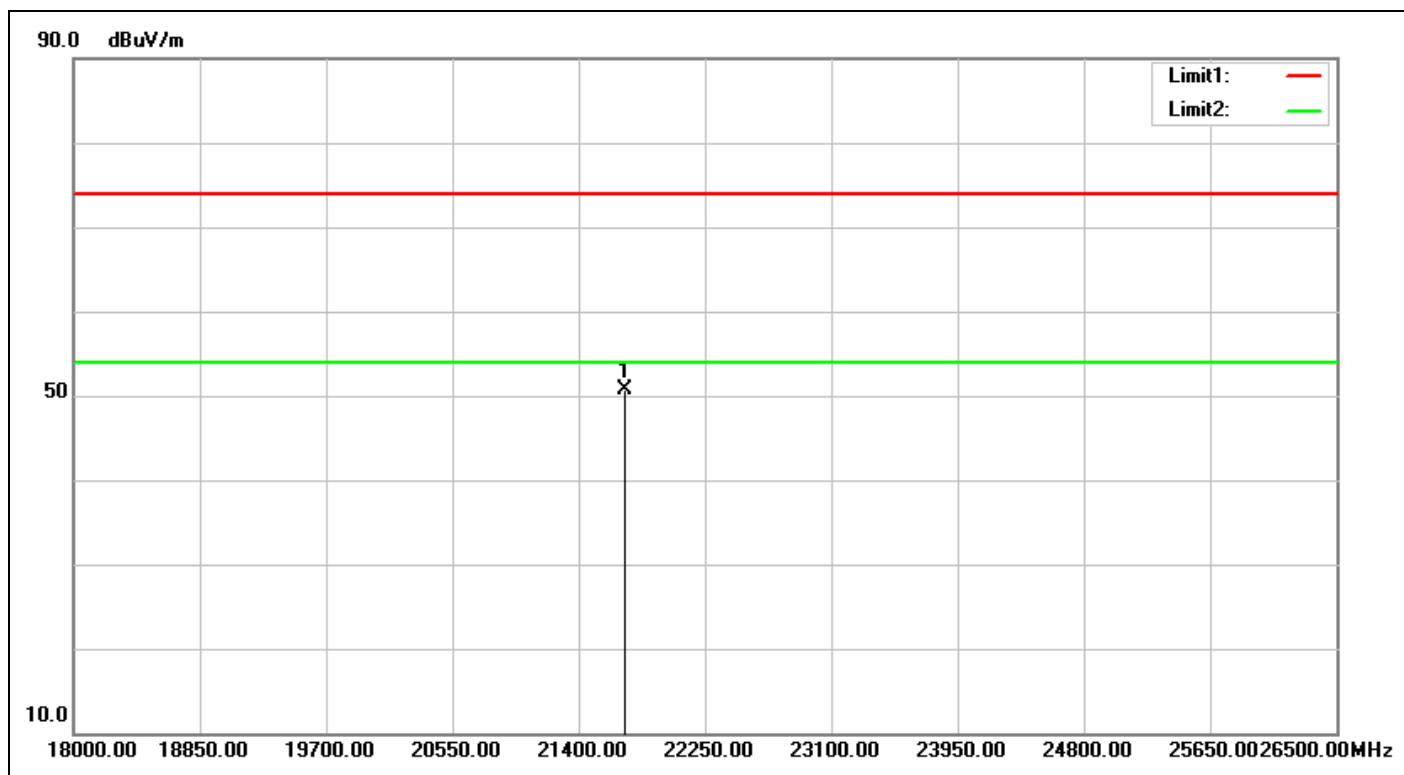


Service No.:	114077170	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2018/5/10 18:53:38
Applicant:	Hon Hai Precision Industry Co., Ltd.	Test Rating:	DC 3.3V
Product:	IEEE 802.11 a/b/g/n/ac 2x2 WiFi Module	Temp.(°C)/Hum.(%)	23(°C)/65%
Model No.:	WFU033-LGA	Test Engineer:	Curry Chen
Test Mode:	N20-2437-TX		
Remark:	Power Setting 17 17		

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	21714.500	32.76	17.85	50.61	74.00	-23.39	peak			

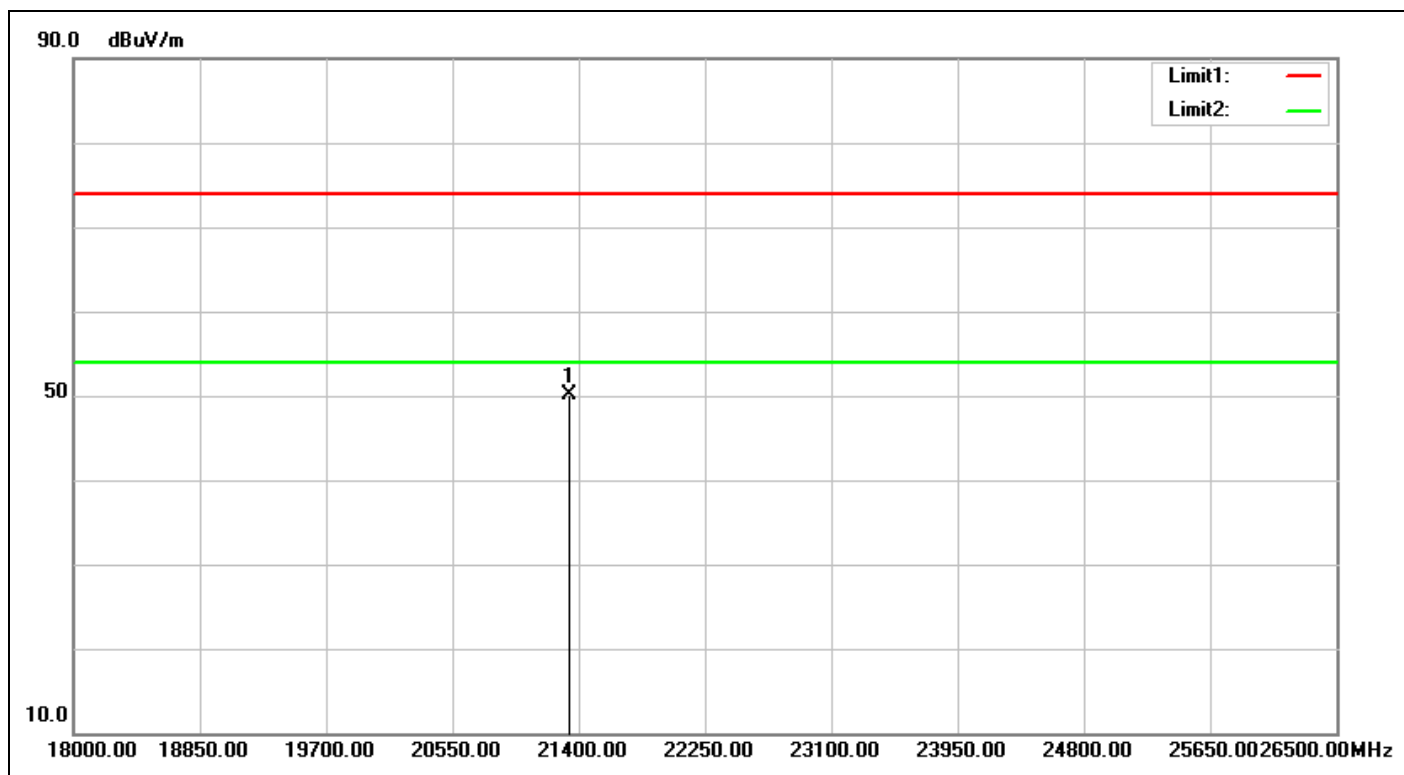


Service No.:	114077170	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2018/5/10 18:53:45
Applicant:	Hon Hai Precision Industry Co., Ltd.	Test Rating:	DC 3.3V
Product:	IEEE 802.11 a/b/g/n/ac 2x2 WiFi Module	Temp.(°C)/Hum.(%):	23(°C)/65%
Model No.:	WFU033-LGA	Test Engineer:	Curry Chen
Test Mode:	N20-2437-TX		
Remark:	Power Setting 17 17		

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	21340.500	32.74	17.27	50.01	74.00	-23.99	peak			

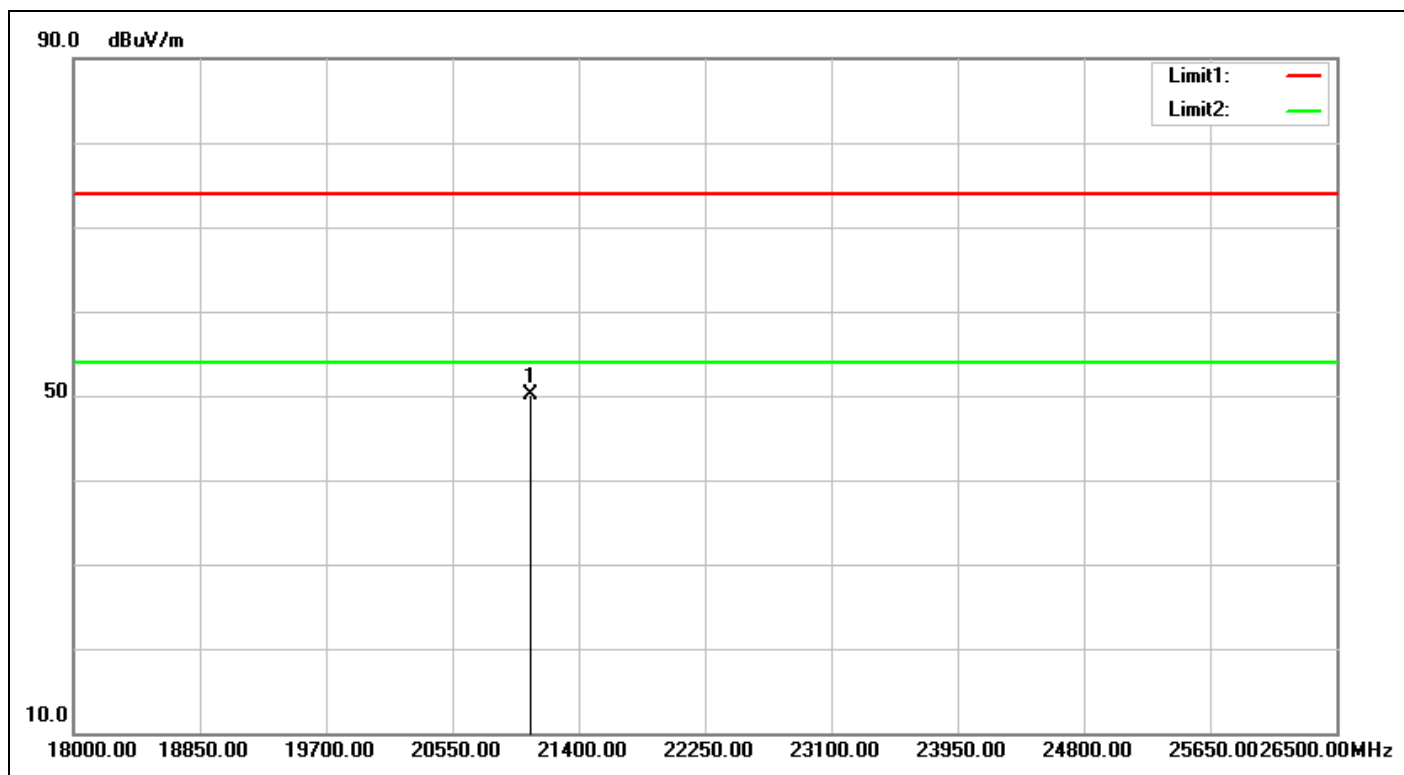


Service No.:	114077170	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2018/5/10 18:54:16
Applicant:	Hon Hai Precision Industry Co., Ltd.	Test Rating:	DC 3.3V
Product:	IEEE 802.11 a/b/g/n/ac 2x2 WiFi Module	Temp.(°C)/Hum.(%)	23(°C)/65%
Model No.:	WFU033-LGA	Test Engineer:	Curry Chen
Test Mode:	N20-2462-TX		
Remark:	Power Setting 16 17		

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	21077.000	32.51	17.69	50.20	74.00	-23.80	peak			

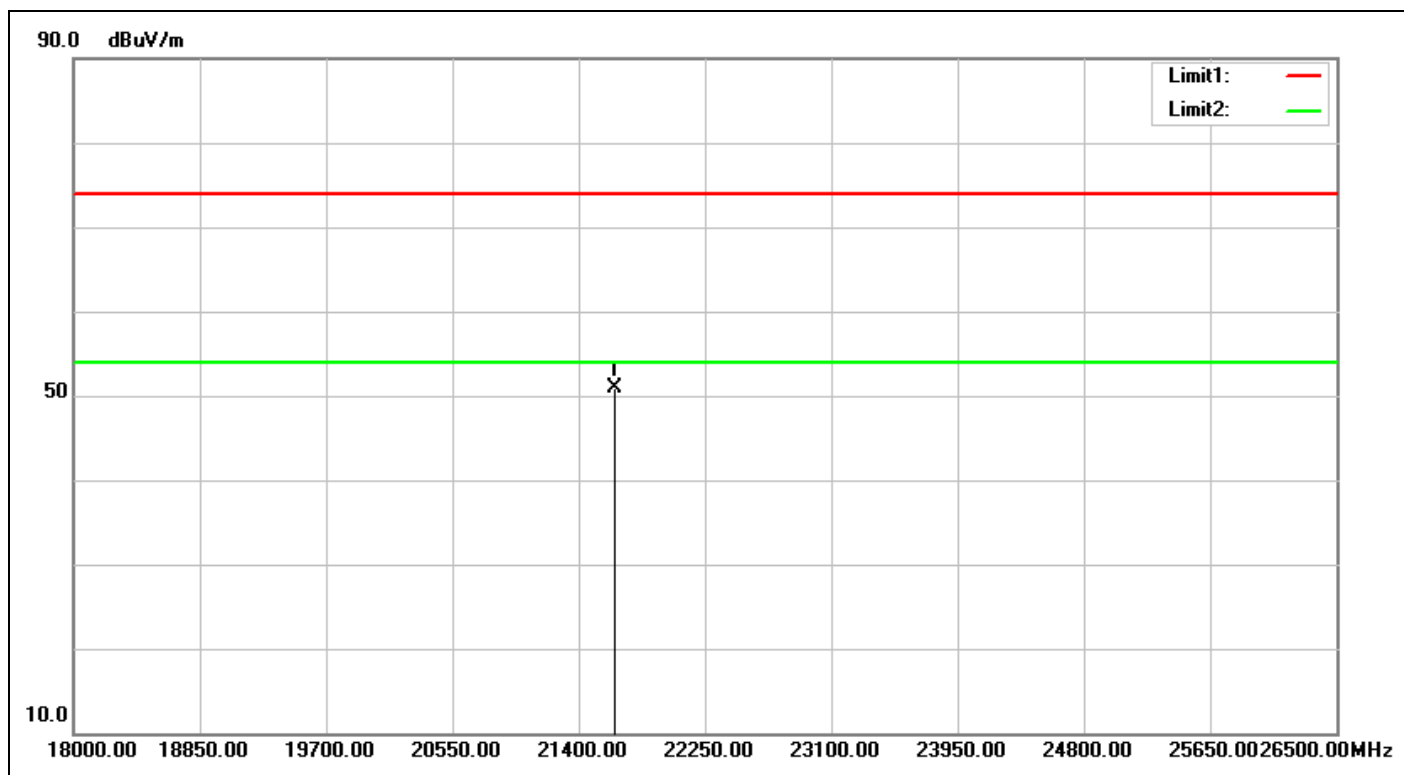


Service No.:	114077170	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2018/5/10 18:54:23
Applicant:	Hon Hai Precision Industry Co., Ltd.	Test Rating:	DC 3.3V
Product:	IEEE 802.11 a/b/g/n/ac 2x2 WiFi Module	Temp.(°C)/Hum.(%) :	23(°C)/65%
Model No.:	WFU033-LGA	Test Engineer:	Curry Chen
Test Mode:	N20-2462-TX		
Remark:	Power Setting 16 17		

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	21646.500	32.80	18.05	50.85	74.00	-23.15	peak			

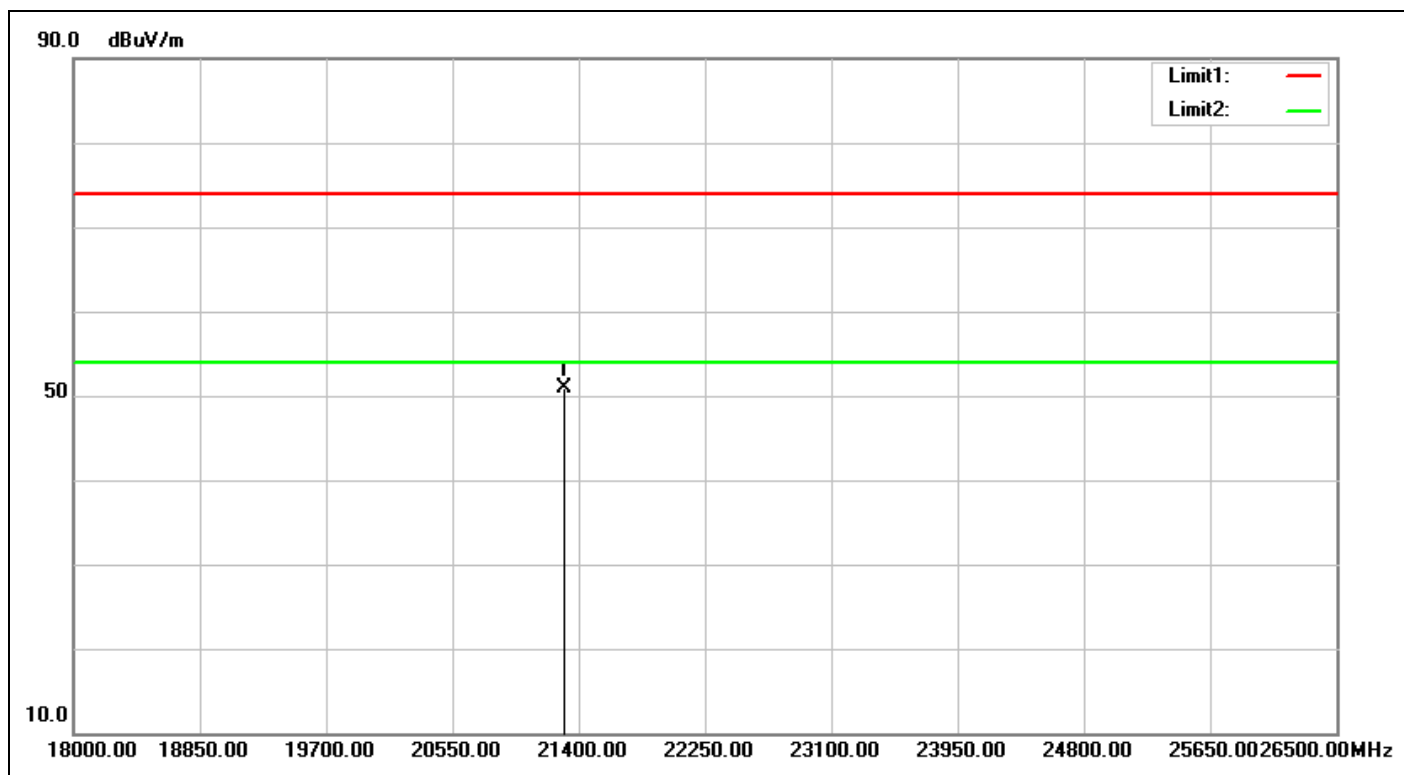


Service No.:	114077170	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2018/5/10 18:54:54
Applicant:	Hon Hai Precision Industry Co., Ltd.	Test Rating:	DC 3.3V
Product:	IEEE 802.11 a/b/g/n/ac 2x2 WiFi Module	Temp.(°C)/Hum.(%)	23(°C)/65%
Model No.:	WFU033-LGA	Test Engineer:	Curry Chen
Test Mode:	N40-2422-TX		
Remark:	Power Setting 12 13		

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	21306.500	32.71	18.12	50.83	74.00	-23.17	peak			

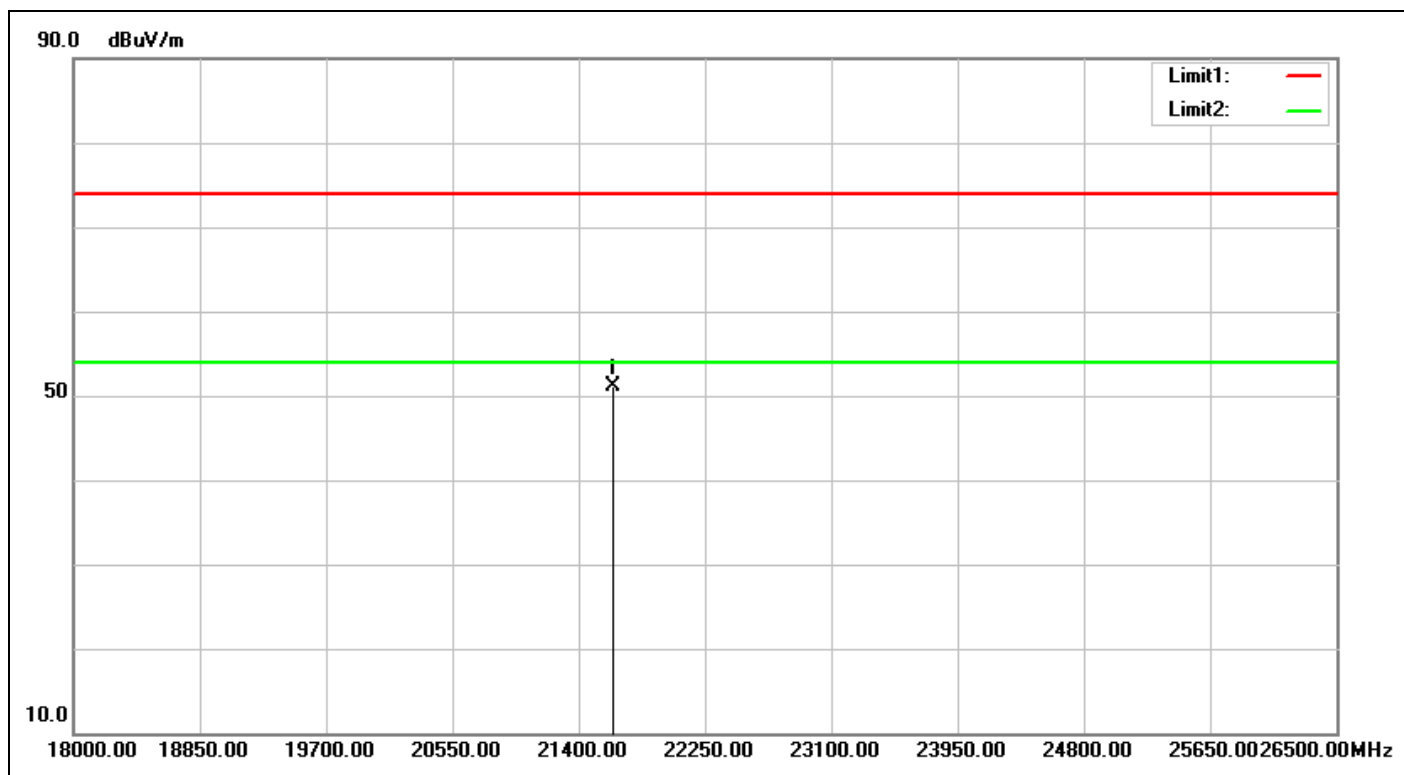


Service No.:	114077170	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2018/5/10 18:55:01
Applicant:	Hon Hai Precision Industry Co., Ltd.	Test Rating:	DC 3.3V
Product:	IEEE 802.11 a/b/g/n/ac 2x2 WiFi Module	Temp.(°C)/Hum.(%)	23(°C)/65%
Model No.:	WFU033-LGA	Test Engineer:	Curry Chen
Test Mode:	N40-2422-TX		
Remark:	Power Setting 12 13		

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	21629.500	32.81	18.32	51.13	74.00	-22.87	peak			

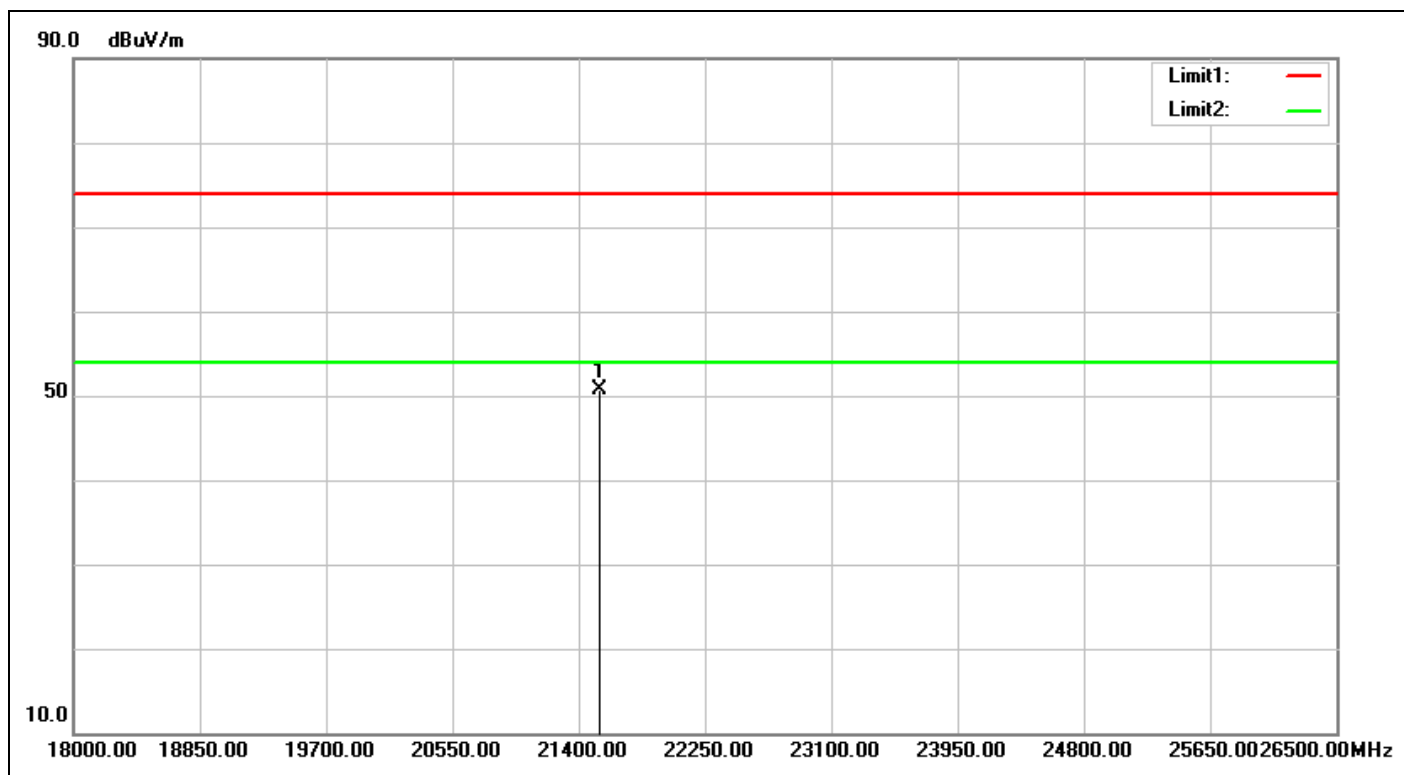


Service No.:	114077170	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2018/5/10 18:55:27
Applicant:	Hon Hai Precision Industry Co., Ltd.	Test Rating:	DC 3.3V
Product:	IEEE 802.11 a/b/g/n/ac 2x2 WiFi Module	Temp.(°C)/Hum.(%)	23(°C)/65%
Model No.:	WFU033-LGA	Test Engineer:	Curry Chen
Test Mode:	N40-2437-TX		
Remark:	Power Setting 16 16		

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	21536.000	32.87	17.80	50.67	74.00	-23.33	peak			

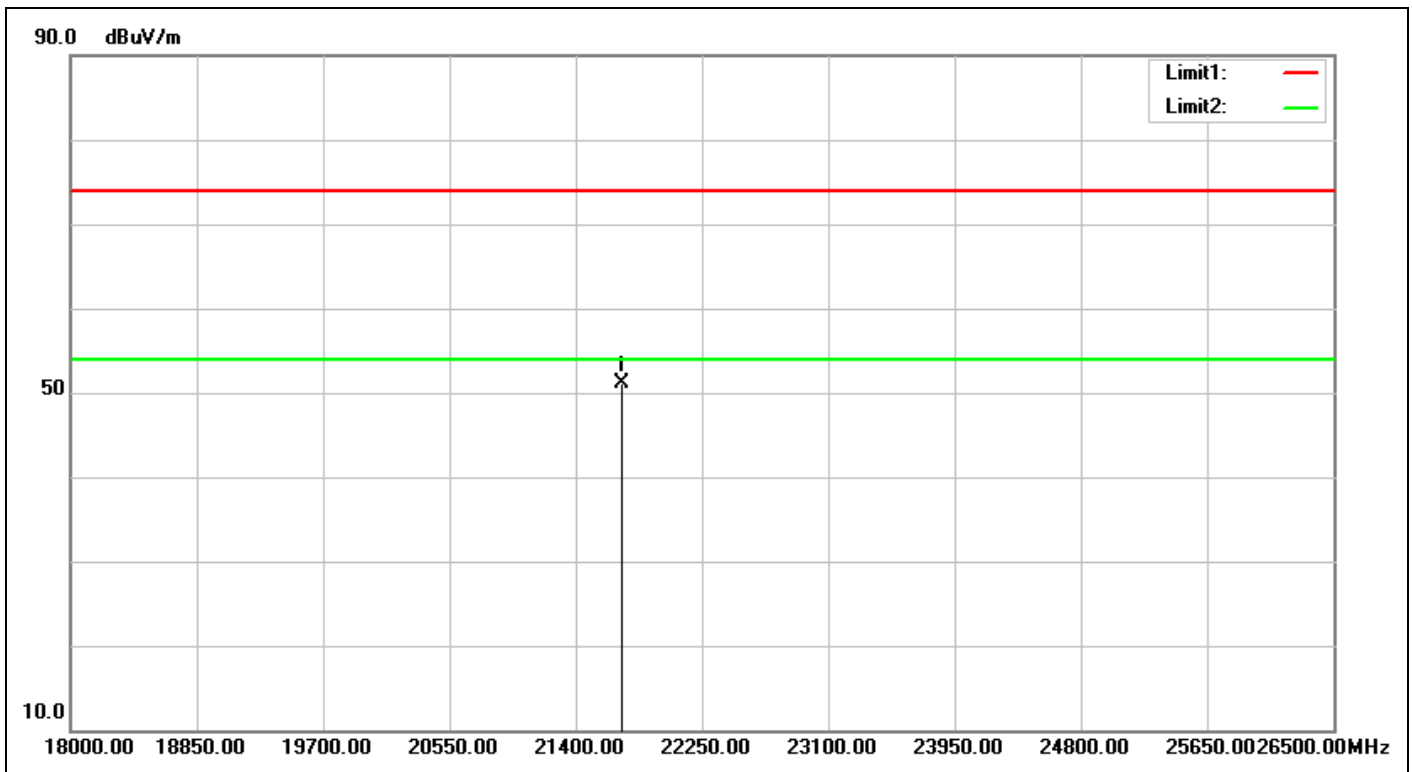


Service No.:	114077170	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2018/5/10 18:55:34
Applicant:	Hon Hai Precision Industry Co., Ltd.	Test Rating:	DC 3.3V
Product:	IEEE 802.11 a/b/g/n/ac 2x2 WiFi Module	Temp.(°C)/Hum.(%):	23(°C)/65%
Model No.:	WFU033-LGA	Test Engineer:	Curry Chen
Test Mode:	N40-2437-TX		
Remark:	Power Setting 16 16		

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	21714.500	32.76	18.28	51.04	74.00	-22.96	peak			

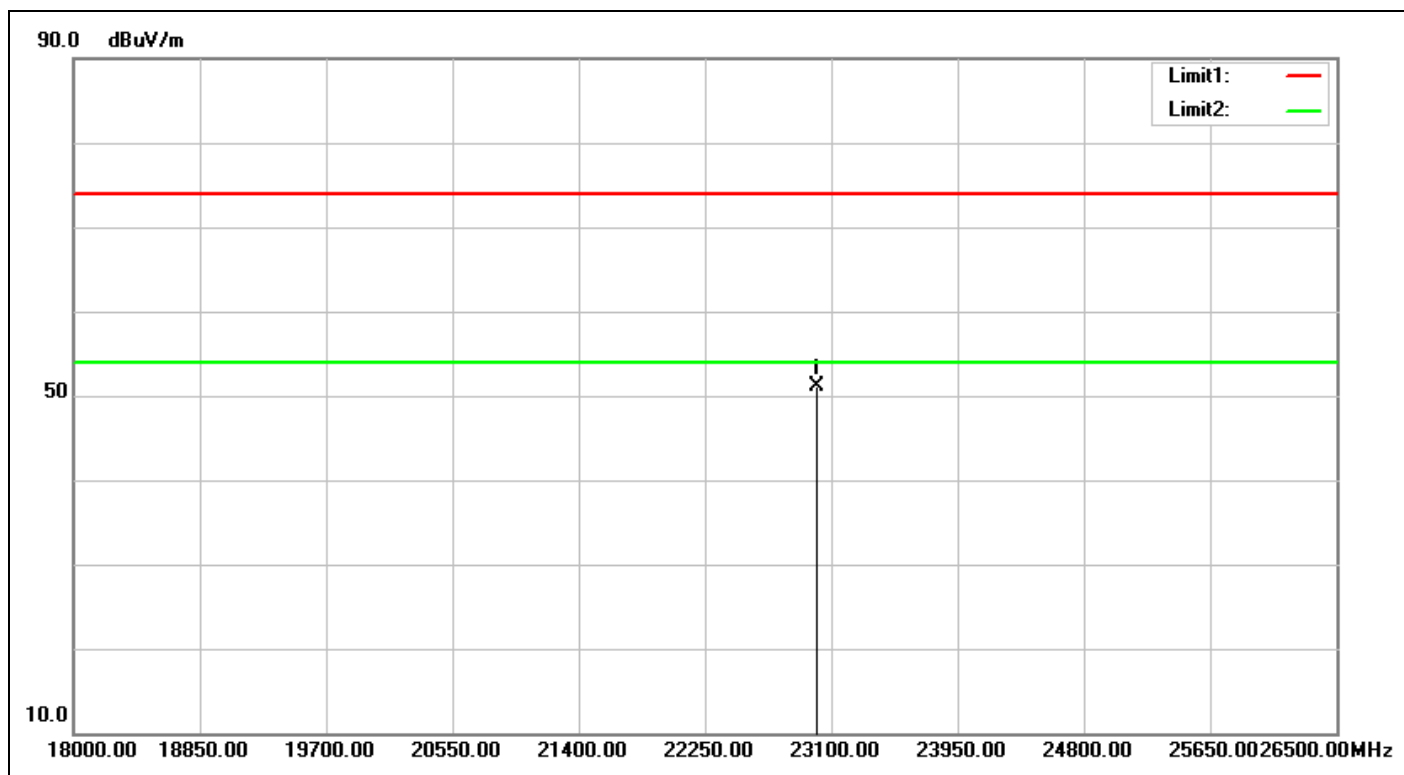

Service No.:	114077170	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2018/5/10 18:56:00
Applicant:	Hon Hai Precision Industry Co., Ltd.	Test Rating:	DC 3.3V
Product:	IEEE 802.11 a/b/g/n/ac 2x2 WiFi Module	Temp.(°C)/Hum.(%)	23(°C)/65%
Model No.:	WFU033-LGA	Test Engineer:	Curry Chen
Test Mode:	N40-2452-TX		
Remark:	Power Setting 13 13		

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	23006.500	32.81	18.29	51.10	74.00	-22.90	peak			

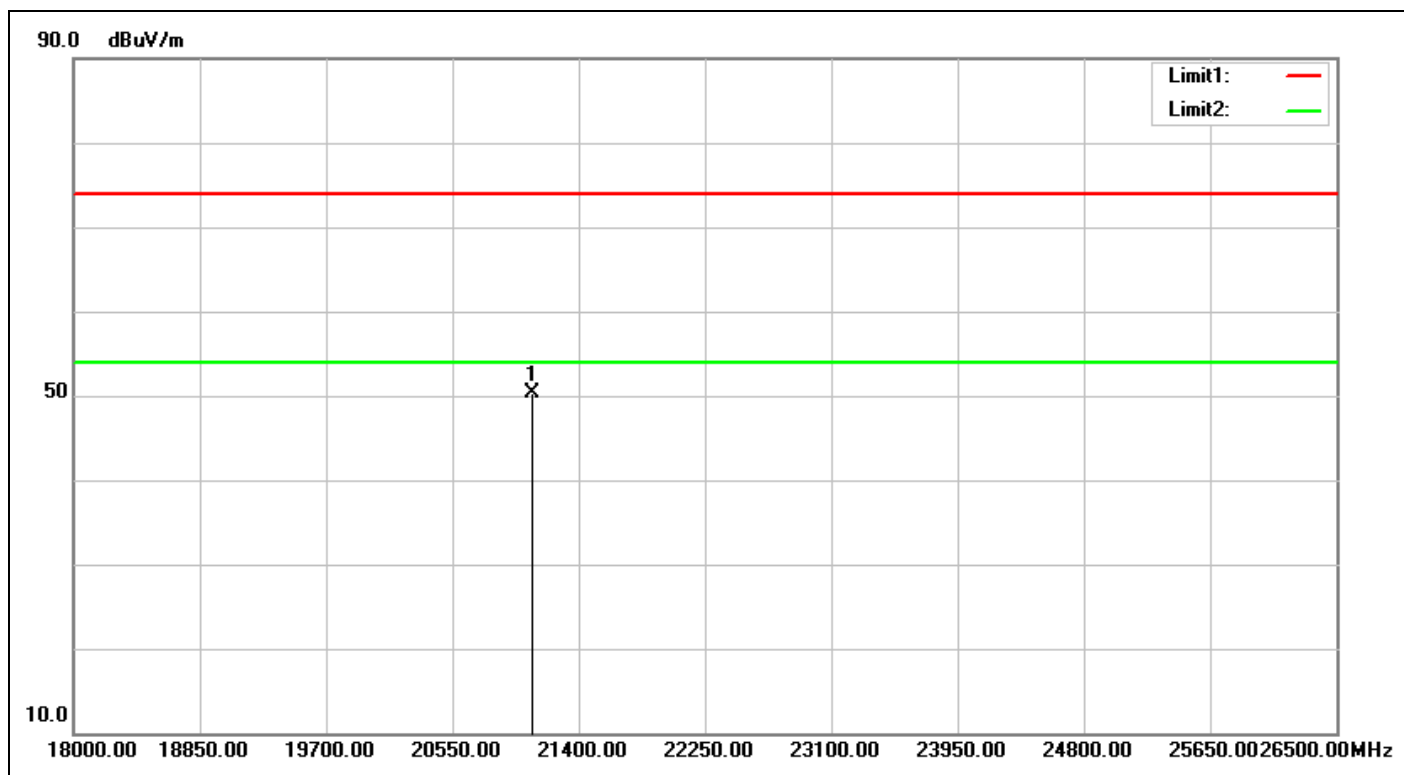

Service No.:	114077170	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2018/5/10 18:56:07
Applicant:	Hon Hai Precision Industry Co., Ltd.	Test Rating:	DC 3.3V
Product:	IEEE 802.11 a/b/g/n/ac 2x2 WiFi Module	Temp.(°C)/Hum.(%)	23(°C)/65%
Model No.:	WFU033-LGA	Test Engineer:	Curry Chen
Test Mode:	N40-2452-TX		
Remark:	Power Setting 13 13		

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	21085.500	32.52	17.78	50.30	74.00	-23.70	peak			


Spurious Emissions, TX Mode, 9k-30M



TUV Rheinland Taiwan Ltd.


11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105

Tel:+886-2172-7000 fax:+886-2528-0018

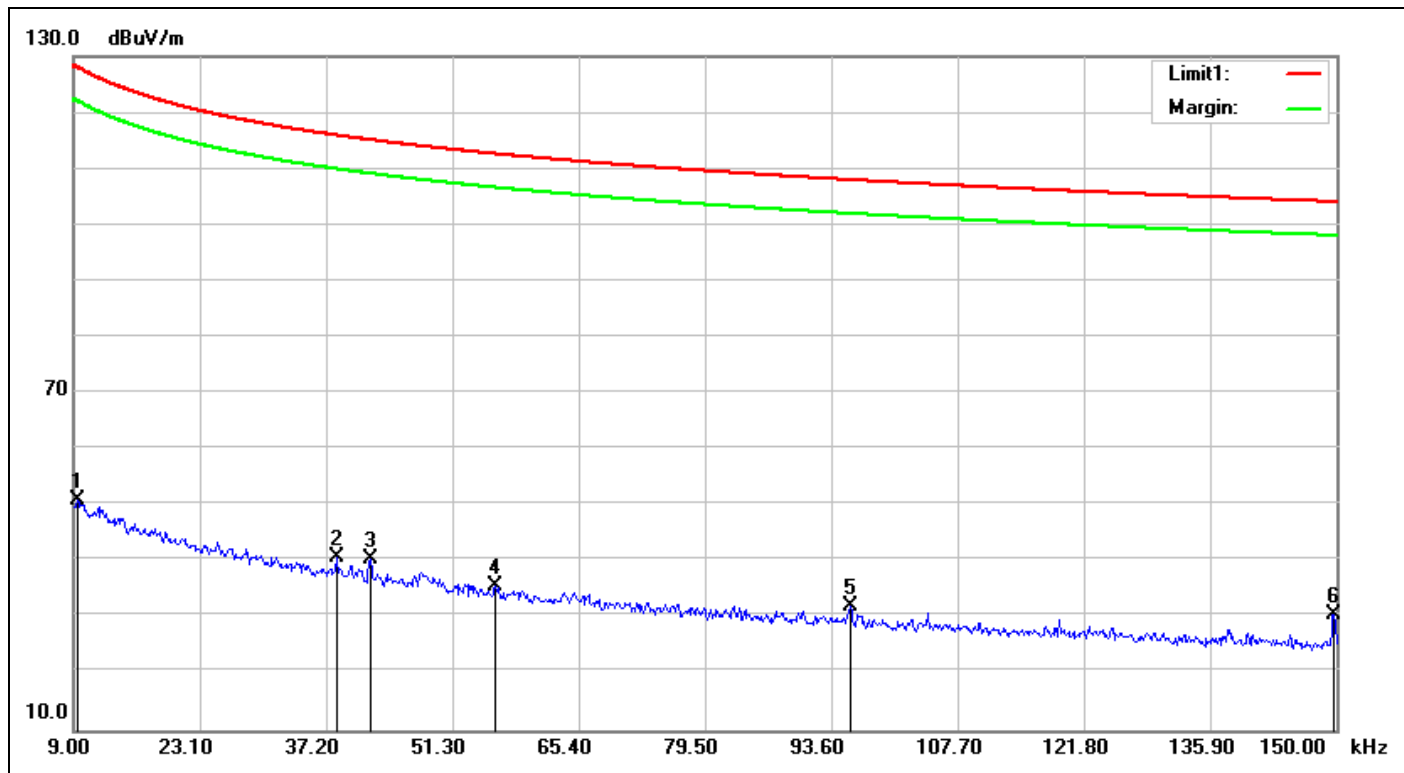

Service No.:	114077170	Test Distance:	3m
Test Standard:	FCC15.209_9k-1G_3m	Ant. Polarization:	
Test item:	Radiation Emission	Test Time:	2018/5/10 19:26:39
Applicant:	Hon Hai Precision Industry Co., Ltd.	Test Rating:	DC 3.3V
Product:	IEEE 802.11 a/b/g/n/ac 2x2 WiFi Module	Temp.(°C)/Hum.(%)	23(°C)/65%
Model No.:	WFU033-LGA	Test Engineer:	Curry Chen
Test Mode:	B-2437-TX		
Remark:	Power Setting 1F		

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	0.0094	19.69	31.23	50.92	128.12	-77.20	QP	100	167	
2	0.0383	19.84	20.79	40.63	115.93	-75.30	QP	100	302	
3	0.0421	19.71	20.79	40.50	115.11	-74.61	QP	100	331	
4	0.0560	19.39	16.18	35.57	112.63	-77.06	QP	100	128	
5	0.0957	19.16	12.79	31.95	107.98	-76.03	QP	100	196	
6	0.1497	19.08	11.47	30.55	104.09	-73.54	QP	100	167	

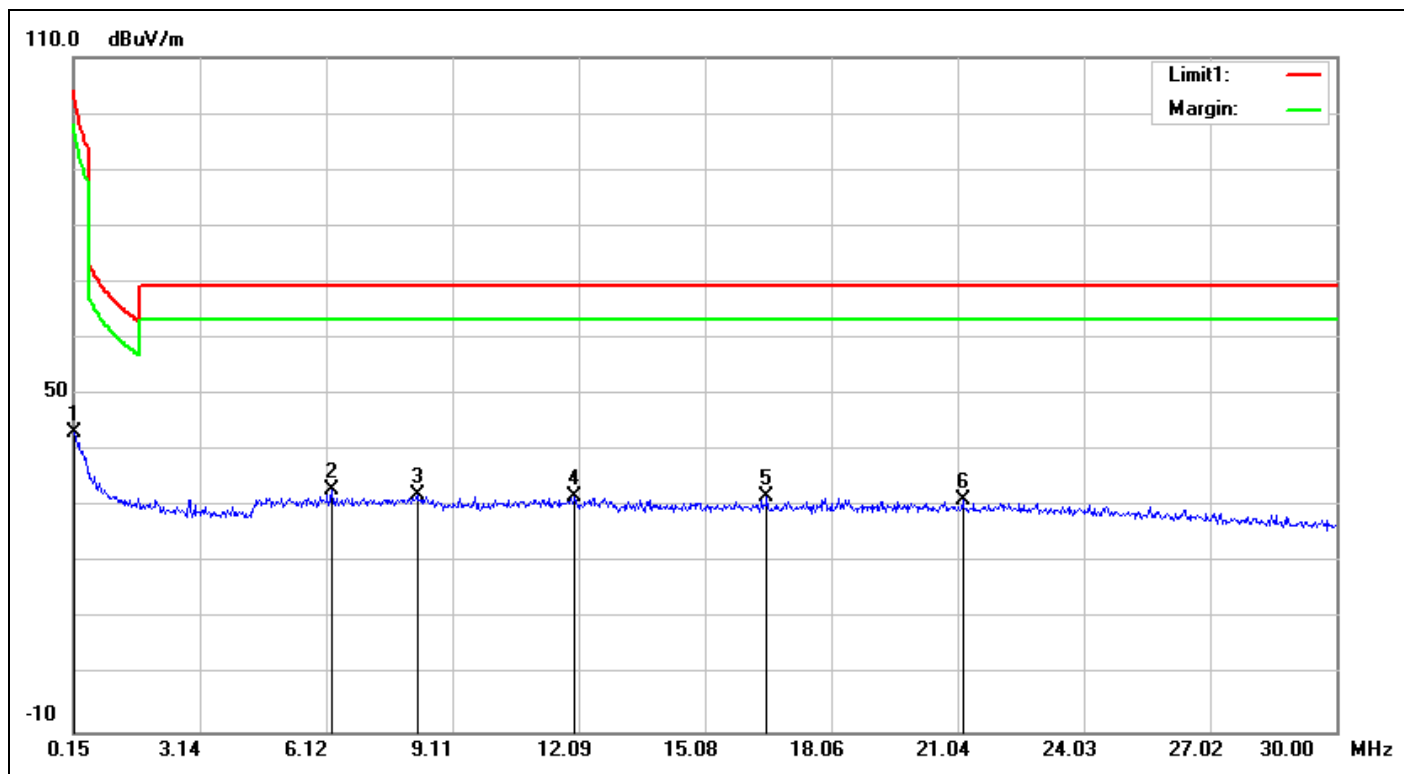

Service No.:	114077170	Test Distance:	3m
Test Standard:	FCC15.209_9k-1G_3m	Ant. Polarization:	
Test item:	Radiation Emission	Test Time:	2018/5/10 19:30:13
Applicant:	Hon Hai Precision Industry Co., Ltd.	Test Rating:	DC 3.3V
Product:	IEEE 802.11 a/b/g/n/ac 2x2 WiFi Module	Temp.(°C)/Hum.(%):	23(°C)/65%
Model No.:	WFU033-LGA	Test Engineer:	Curry Chen
Test Mode:	B-2437-TX		
Remark:	Power Setting 1F		

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	0.1798	19.06	24.30	43.36	102.50	-59.14	QP	100	52	
2	6.2394	19.87	13.23	33.10	69.50	-36.40	QP	100	106	
3	8.2692	20.06	12.04	32.10	69.50	-37.40	QP	100	224	
4	12.0004	20.57	11.16	31.73	69.50	-37.77	QP	100	306	
5	16.5376	21.37	10.39	31.76	69.50	-37.74	QP	100	122	
6	21.1644	22.06	9.29	31.35	69.50	-38.15	QP	100	27	


Spurious Emissions, TX Mode, 30M-1G



TUV Rheinland Taiwan Ltd.


11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105

Tel:+886-2172-7000 fax:+886-2528-0018

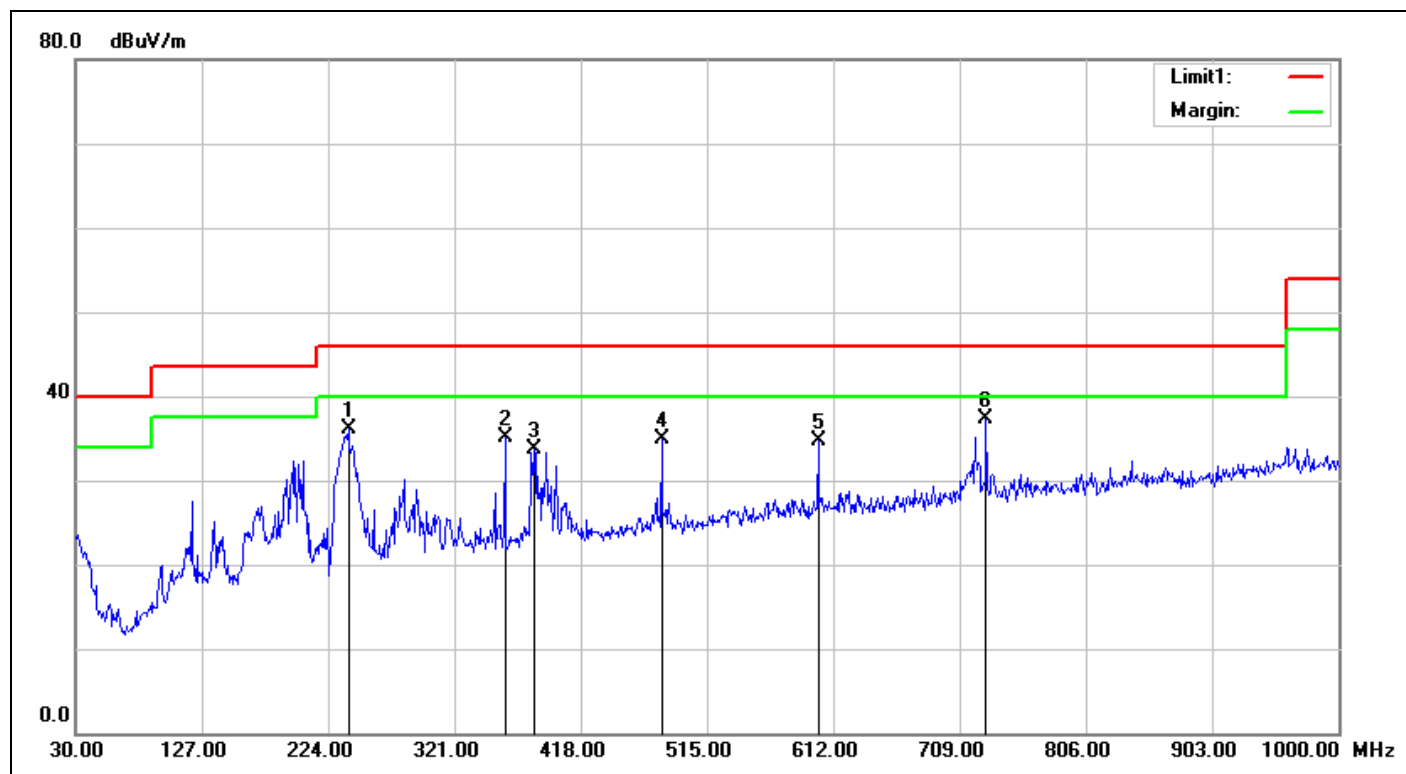

Service No.:	114077170	Test Distance:	3m
Test Standard:	FCC Class B 3M Radiation	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2018/5/10 19:16:33
Applicant:	Hon Hai Precision Industry Co., Ltd.	Test Rating:	DC 3.3V
Product:	IEEE 802.11 a/b/g/n/ac 2x2 WiFi Module	Temp.(°C)/Hum.(%)	23(°C)/65%
Model No.:	WFU033-LGA	Test Engineer:	Curry Chen
Test Mode:	B-2437-TX		
Remark:	Power Setting 1F		

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	239.5200	-6.85	42.86	36.01	46.00	-9.99	QP	100	61	
2	359.8000	-3.16	38.33	35.17	46.00	-10.83	QP	100	143	
3	382.1100	-2.76	36.38	33.62	46.00	-12.38	QP	100	1	
4	480.0800	-1.47	36.38	34.91	46.00	-11.09	QP	100	38	
5	600.3600	0.08	34.72	34.80	46.00	-11.20	QP	100	143	
6	729.3700	1.92	35.30	37.22	46.00	-8.78	QP	100	65	

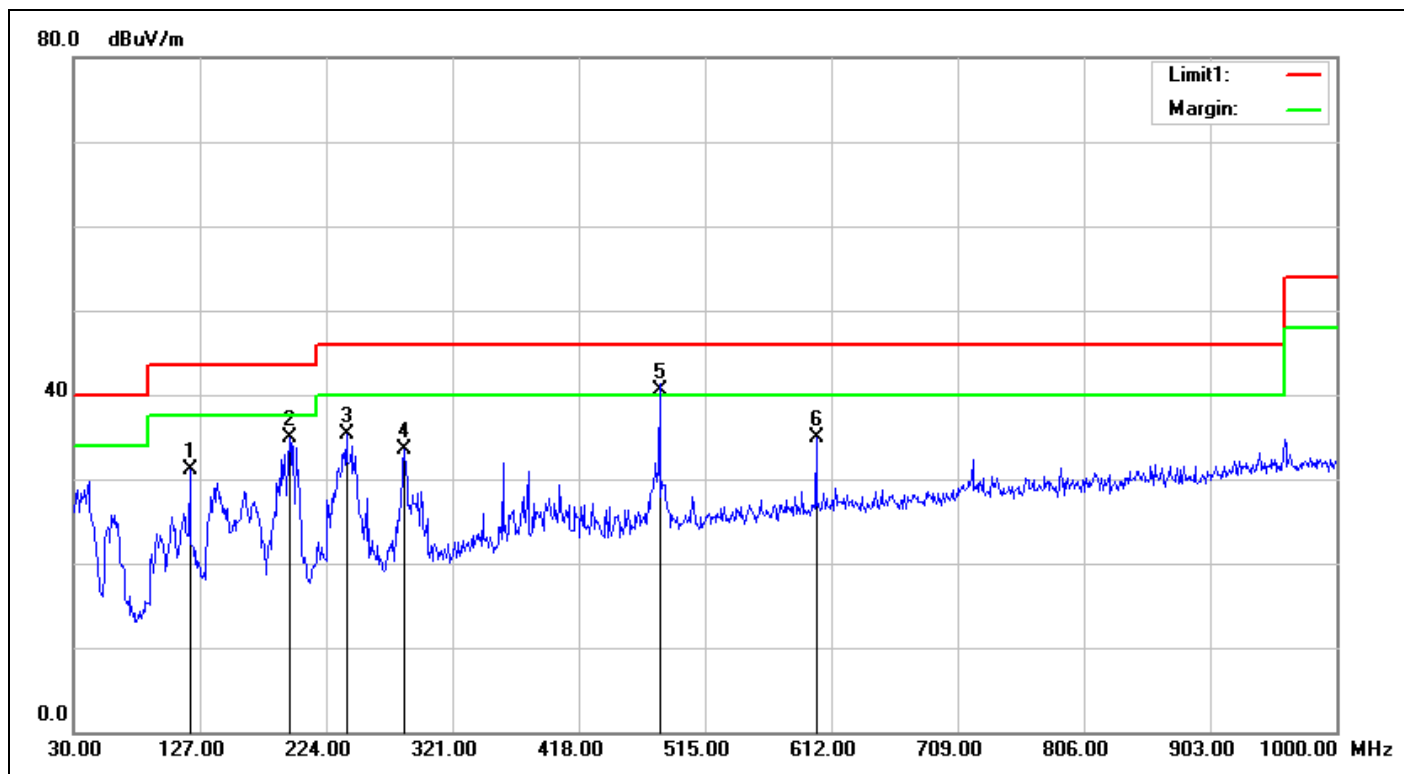

Service No.:	114077170	Test Distance:	3m
Test Standard:	FCC Class B 3M Radiation	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2018/5/10 19:17:26
Applicant:	Hon Hai Precision Industry Co., Ltd.	Test Rating:	DC 3.3V
Product:	IEEE 802.11 a/b/g/n/ac 2x2 WiFi Module	Temp.(°C)/Hum.(%)	23(°C)/65%
Model No.:	WFU033-LGA	Test Engineer:	Curry Chen
Test Mode:	B-2437-TX		
Remark:	Power Setting 1F		

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	119.2400	-7.50	38.53	31.03	43.50	-12.47	QP	100	239	
2	195.8700	-9.17	44.02	34.85	43.50	-8.65	QP	100	192	
3	239.5200	-6.85	42.09	35.24	46.00	-10.76	QP	100	168	
4	284.1400	-5.00	38.47	33.47	46.00	-12.53	QP	100	266	
5	480.0800	-1.47	42.07	40.60	46.00	-5.40	QP	100	185	
6	600.3600	0.08	34.84	34.92	46.00	-11.08	QP	100	259	


Spurious Emissions, RX Mode, 1-18G



TUV Rheinland Taiwan Ltd.


11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105

Tel:+886-2172-7000 fax:+886-2528-0018

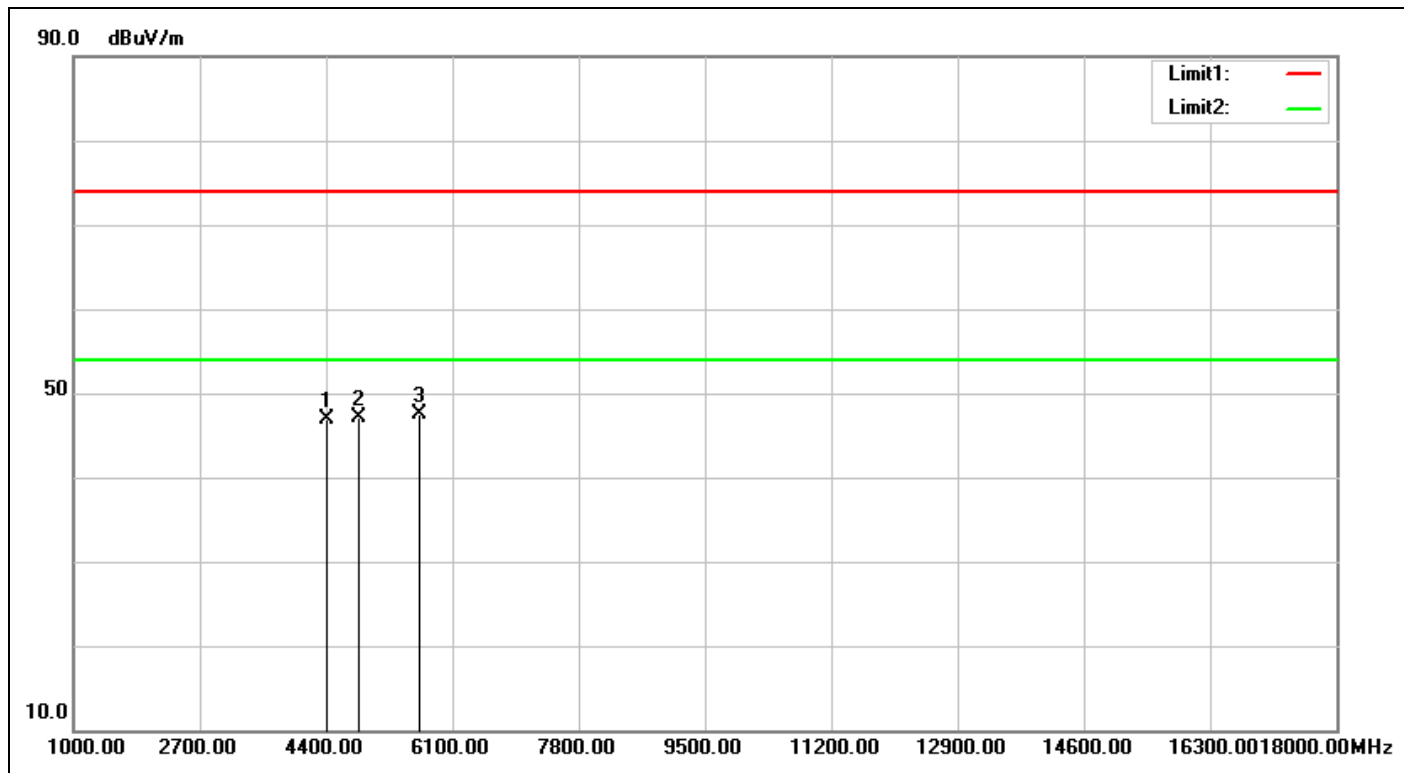

Service No.:	114077170	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2018/5/10 16:37:11
Applicant:	Hon Hai Precision Industry Co., Ltd.	Test Rating:	DC 3.3V
Product:	IEEE 802.11 a/b/g/n/ac 2x2 WiFi Module	Temp.(°C)/Hum.(%)	23(°C)/65%
Model No.:	WFU033-LGA	Test Engineer:	Curry Chen
Test Mode:	B-2437-RX		
Remark:	Power Setting 1F		

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	4400.000	-4.39	51.25	46.86	74.00	-27.14	peak	100	187	
2	4842.000	-3.47	50.52	47.05	74.00	-26.95	peak	100	232	
3	5658.000	0.18	47.33	47.51	74.00	-26.49	peak	100	211	

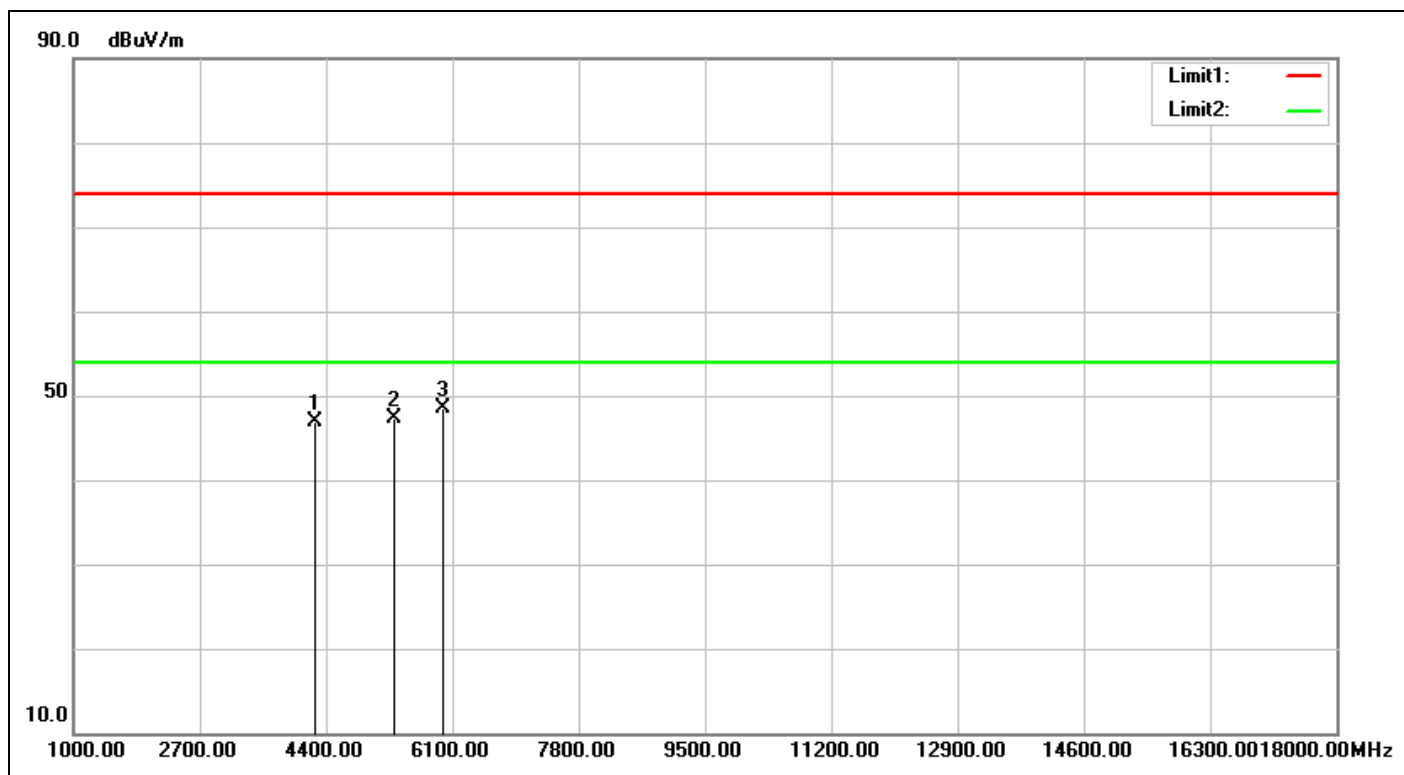

Service No.:	114077170	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2018/5/10 16:38:03
Applicant:	Hon Hai Precision Industry Co., Ltd.	Test Rating:	DC 3.3V
Product:	IEEE 802.11 a/b/g/n/ac 2x2 WiFi Module	Temp.(°C)/Hum.(%)	23(°C)/65%
Model No.:	WFU033-LGA	Test Engineer:	Curry Chen
Test Mode:	B-2437-RX		
Remark:	Power Setting 1F		

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	4247.000	-4.96	51.77	46.81	74.00	-27.19	peak	100	353	
2	5318.000	-1.70	49.09	47.39	74.00	-26.61	peak	100	63	
3	5981.000	2.23	46.18	48.41	74.00	-25.59	peak	100	295	


Spurious Emissions, RX Mode, 18-26.5G



TUV Rheinland Taiwan Ltd.


11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105

Tel:+886-2172-7000 fax:+886-2528-0018

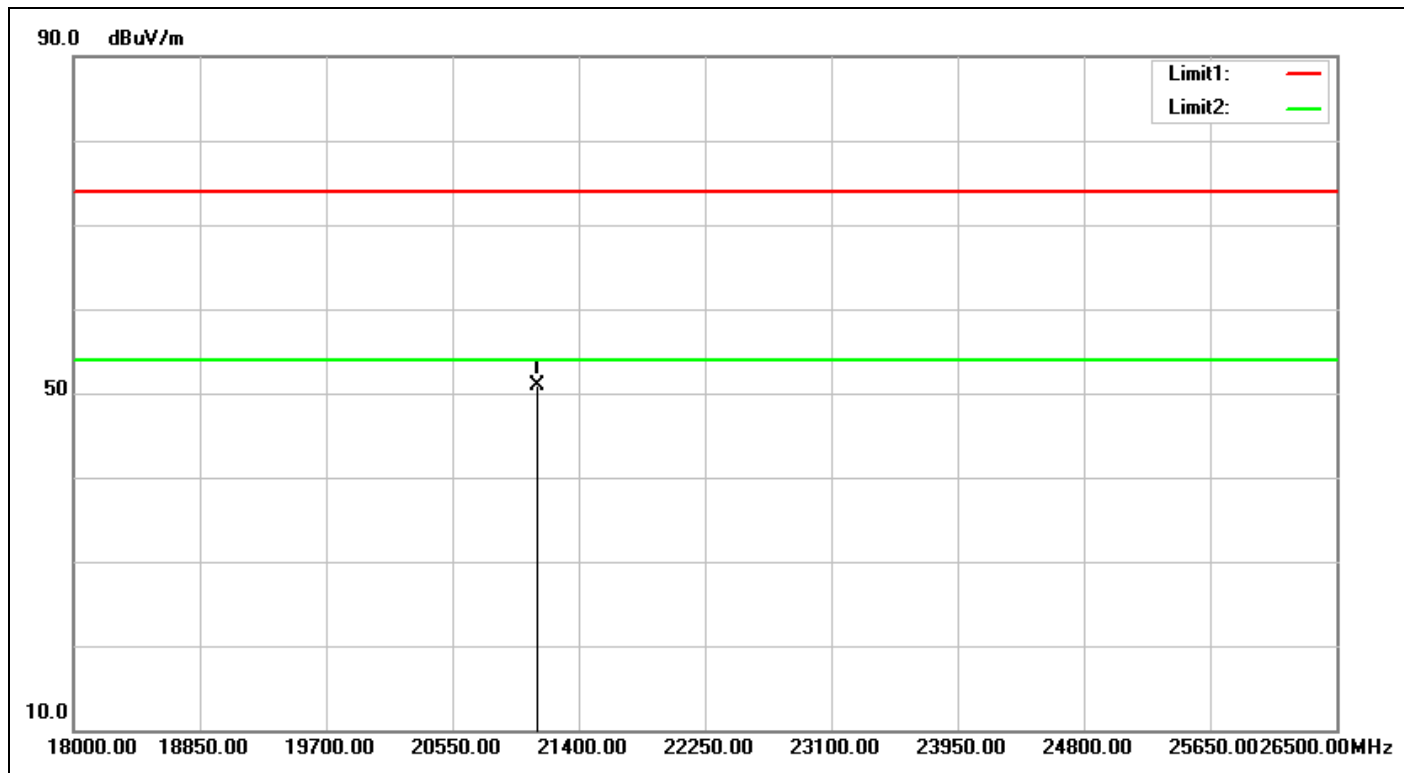

Service No.:	114077170	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2018/5/10 18:56:42
Applicant:	Hon Hai Precision Industry Co., Ltd.	Test Rating:	DC 3.3V
Product:	IEEE 802.11 a/b/g/n/ac 2x2 WiFi Module	Temp.(°C)/Hum.(%):	23(°C)/65%
Model No.:	WFU033-LGA	Test Engineer:	Curry Chen
Test Mode:	B-2437-RX		
Remark:	Power Setting 1F		

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	21119.500	32.55	18.35	50.90	74.00	-23.10	peak			

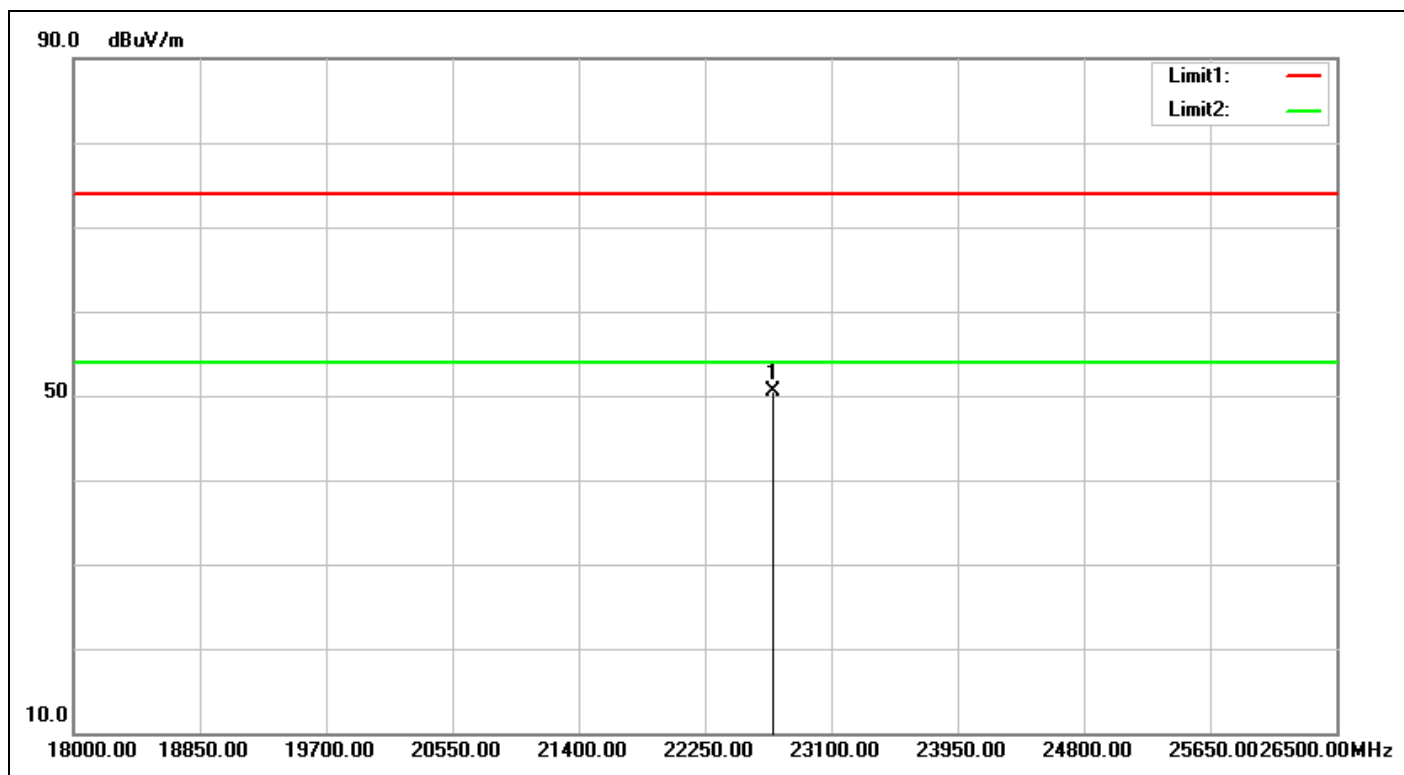

Service No.:	114077170	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2018/5/10 18:56:48
Applicant:	Hon Hai Precision Industry Co., Ltd.	Test Rating:	DC 3.3V
Product:	IEEE 802.11 a/b/g/n/ac 2x2 WiFi Module	Temp.(°C)/Hum.(%)	23(°C)/65%
Model No.:	WFU033-LGA	Test Engineer:	Curry Chen
Test Mode:	B-2437-RX		
Remark:	Power Setting 1F		

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	22709.000	32.71	17.87	50.58	74.00	-23.42	peak			


Spurious Emissions, RX Mode, 30M-1G



TUV Rheinland Taiwan Ltd.


11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105

Tel:+886-2172-7000 fax:+886-2528-0018

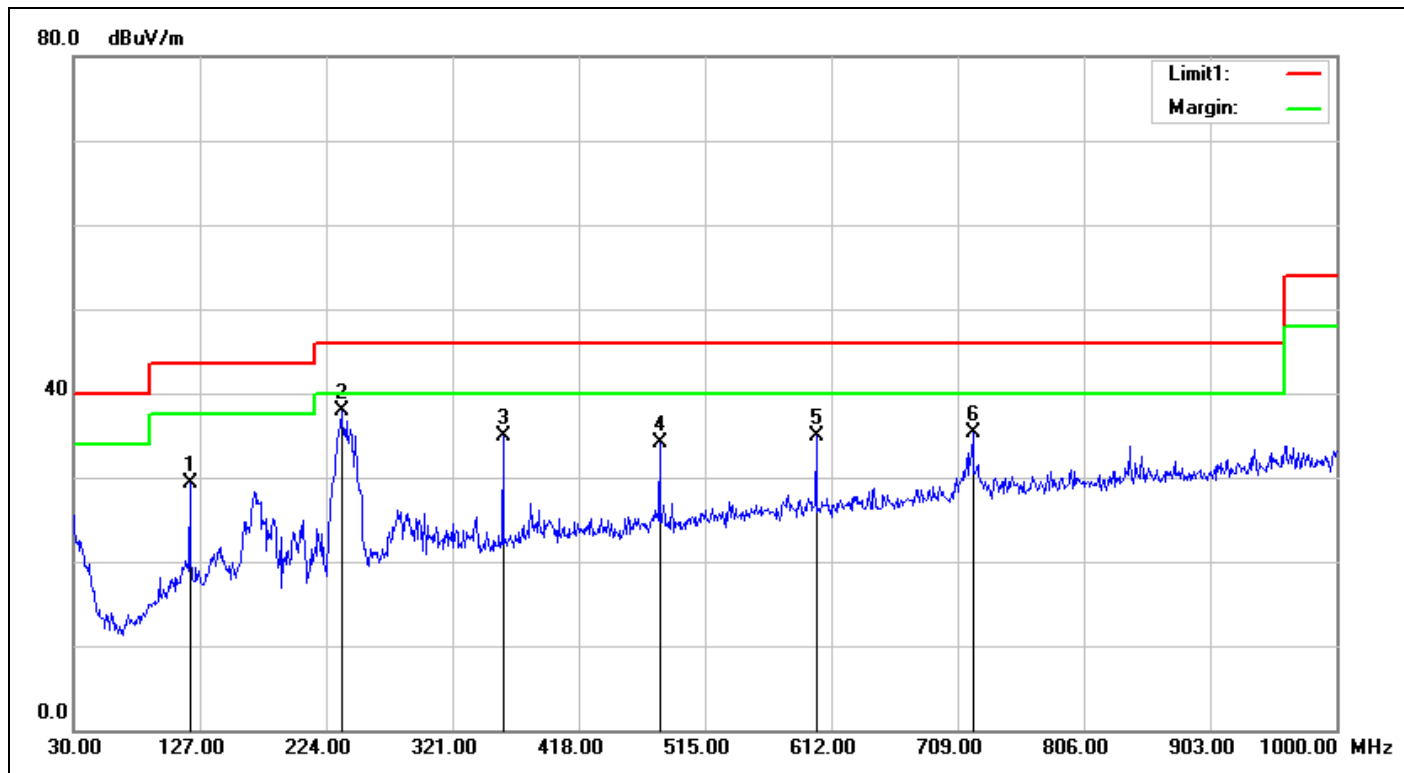

Service No.:	114077170	Test Distance:	3m
Test Standard:	FCC Class B 3M Radiation	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2018/5/10 19:19:59
Applicant:	Hon Hai Precision Industry Co., Ltd.	Test Rating:	DC 3.3V
Product:	IEEE 802.11 a/b/g/n/ac 2x2 WiFi Module	Temp.(°C)/Hum.(%)	23(°C)/65%
Model No.:	WFU033-LGA	Test Engineer:	Curry Chen
Test Mode:	B-2437-RX		
Remark:	Power Setting 1F		

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	119.2400	-7.50	36.73	29.23	43.50	-14.27	QP	100	111	
2	235.6400	-7.15	45.00	37.85	46.00	-8.15	QP	100	91	
3	359.8000	-3.16	38.16	35.00	46.00	-11.00	QP	100	145	
4	480.0800	-1.47	35.65	34.18	46.00	-11.82	QP	100	40	
5	600.3600	0.08	34.76	34.84	46.00	-11.16	QP	100	142	
6	720.6400	1.72	33.66	35.38	46.00	-10.62	QP	100	121	

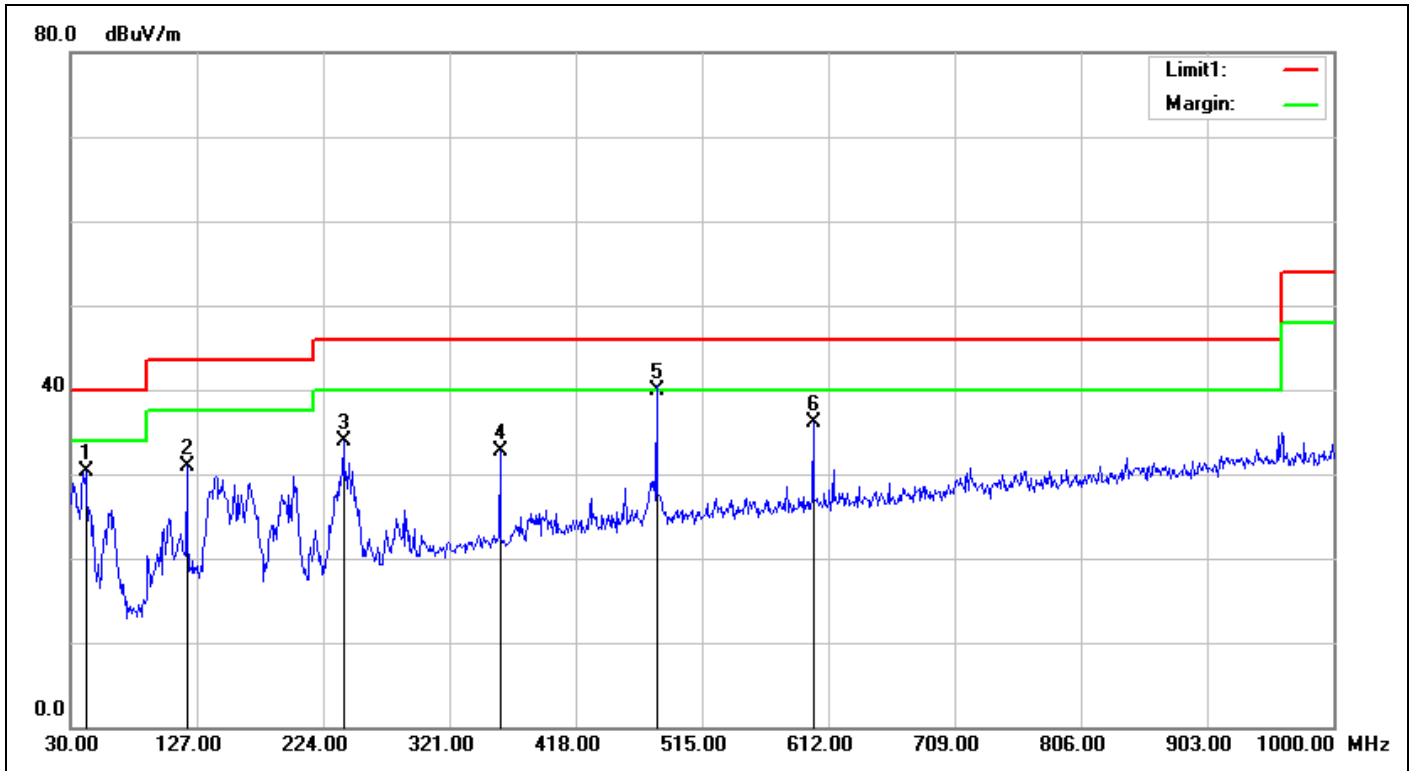

Service No.:	114077170	Test Distance:	3m
Test Standard:	FCC Class B 3M Radiation	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2018/5/10 19:20:52
Applicant:	Hon Hai Precision Industry Co., Ltd.	Test Rating:	DC 3.3V
Product:	IEEE 802.11 a/b/g/n/ac 2x2 WiFi Module	Temp.(°C)/Hum.(%)	23(°C)/65%
Model No.:	WFU033-LGA	Test Engineer:	Curry Chen
Test Mode:	B-2437-RX		
Remark:	Power Setting 1F		

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	41.6400	-6.82	37.07	30.25	40.00	-9.75	QP	100	133	
2	119.2400	-7.50	38.49	30.99	43.50	-12.51	QP	100	286	
3	239.5200	-6.85	40.70	33.85	46.00	-12.15	QP	100	166	
4	359.8000	-3.16	35.82	32.66	46.00	-13.34	QP	100	140	
5	480.0800	-1.47	41.47	40.00	46.00	-6.00	QP	100	163	
6	600.3600	0.08	35.95	36.03	46.00	-9.97	QP	100	266	


Spurious Emissions, RX Mode, 9k-30M



TUV Rheinland Taiwan Ltd.


11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105

Tel:+886-2172-7000 fax:+886-2528-0018

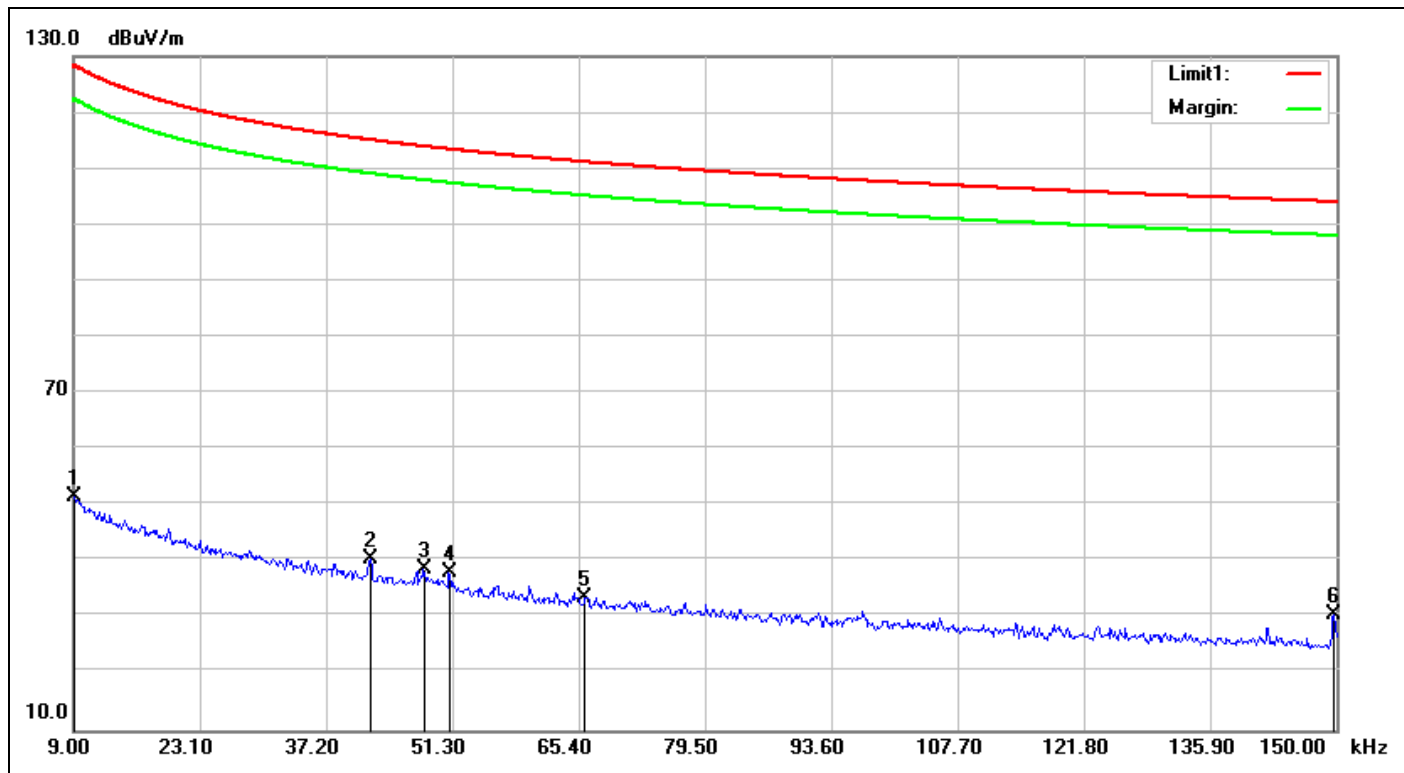

Service No.:	114077170	Test Distance:	3m
Test Standard:	FCC15.209_9k-1G_3m	Ant. Polarization:	
Test item:	Radiation Emission	Test Time:	2018/5/10 19:27:32
Applicant:	Hon Hai Precision Industry Co., Ltd.	Test Rating:	DC 3.3V
Product:	IEEE 802.11 a/b/g/n/ac 2x2 WiFi Module	Temp.(°C)/Hum.(%) :	23(°C)/65%
Model No.:	WFU033-LGA	Test Engineer:	Curry Chen
Test Mode:	B-2437-RX		
Remark:	Power Setting 1F		

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	0.0090	19.53	32.09	51.62	128.50	-76.88	QP	100	347	
2	0.0421	19.71	20.61	40.32	115.11	-74.79	QP	100	252	
3	0.0481	19.50	19.07	38.57	113.95	-75.38	QP	100	209	
4	0.0509	19.42	18.57	37.99	113.46	-75.47	QP	100	104	
5	0.0661	19.33	14.31	33.64	111.19	-77.55	QP	100	179	
6	0.1497	19.08	11.62	30.70	104.09	-73.39	QP	100	64	

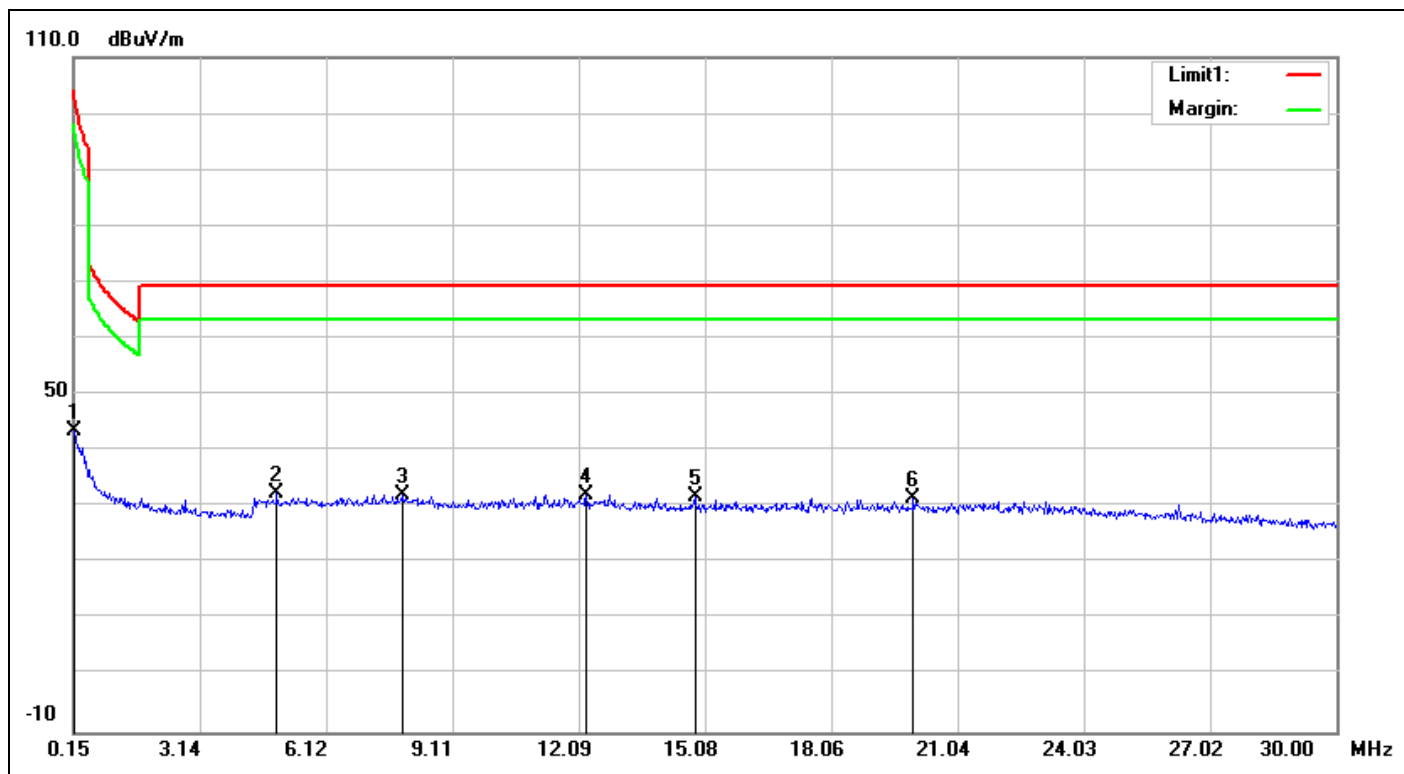

Service No.:	114077170	Test Distance:	3m
Test Standard:	FCC15.209_9k-1G_3m	Ant. Polarization:	
Test item:	Radiation Emission	Test Time:	2018/5/10 19:31:06
Applicant:	Hon Hai Precision Industry Co., Ltd.	Test Rating:	DC 3.3V
Product:	IEEE 802.11 a/b/g/n/ac 2x2 WiFi Module	Temp.(°C)/Hum.(%):	23(°C)/65%
Model No.:	WFU033-LGA	Test Engineer:	Curry Chen
Test Mode:	B-2437-RX		
Remark:	Power Setting 1F		

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	0.1799	19.06	24.63	43.69	102.50	-58.81	QP	100	104	
2	4.9559	19.73	12.83	32.56	69.50	-36.94	QP	100	292	
3	7.9110	20.02	12.26	32.28	69.50	-37.22	QP	100	269	
4	12.2691	20.62	11.55	32.17	69.50	-37.33	QP	100	110	
5	14.8362	21.07	10.92	31.99	69.50	-37.51	QP	100	141	
6	20.0003	21.99	9.45	31.44	69.50	-38.06	QP	100	331	


Mains Emissions, 150k-30M combination1



TUV Rheinland Taiwan Ltd.
11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105
Tel:+886-2172-7000 Fax:+886-2528-0018

File: C:\EMC\Report\2018\Hon Hai\114077170(WFU033-LGA)\114077170(WFU033-LGA)_00007.EMI

Date: 2018-05-17 Time: 19:52:40

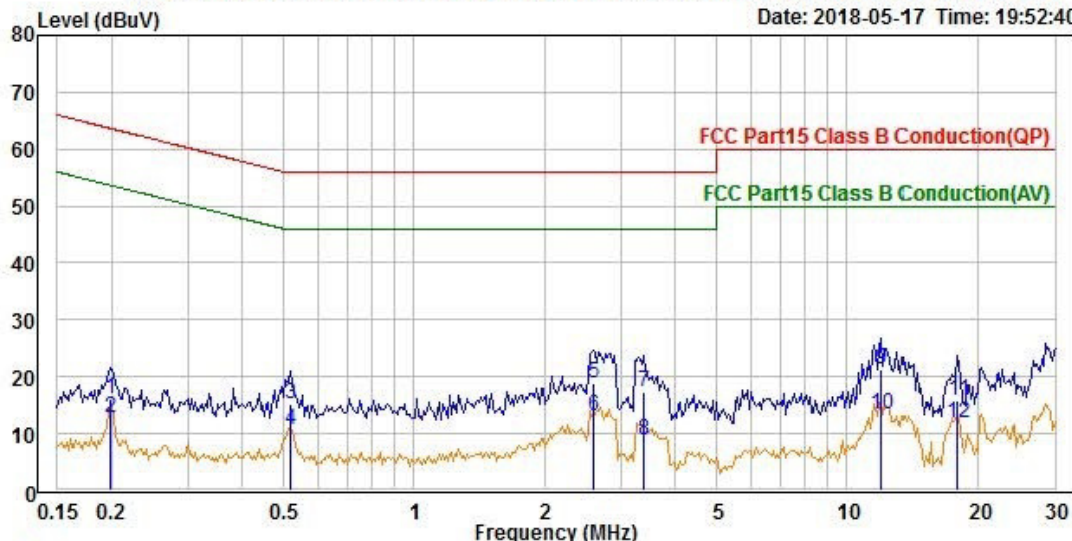


Trace: 1

Site : Conduction room
Condition : FCC Part15 Class B Conduction(QP) line1
Test Engineer: Colin Lu
Applicant : Hon Hai Precision Industry Co., Ltd.
Product : IEEE 802.11 a/b/g/n/ac 2x2 WiFi Module
Model No. : WFU033-LGA
Test Rating : 3.3Vdc
Tmp/Hum : 23 °C / 49 %
Memo : WIFI link + A1/A2 antenna

	Read Freq	Level dBuV	Factor dB	Level dBuV	Limit Line dBuV	Over Limit dB	Remark
	MHz						
1	0.198	6.45	9.65	16.10	63.69	-47.59	QP
2	0.198	3.26	9.65	12.91	53.69	-40.78	Average
3	0.520	5.64	9.66	15.30	56.00	-40.70	QP
4	0.520	1.11	9.66	10.77	46.00	-35.23	Average
5	2.601	9.11	9.69	18.80	56.00	-37.20	QP
6	2.601	3.53	9.69	13.22	46.00	-32.78	Average
7	3.401	7.74	9.71	17.45	56.00	-38.55	QP
8	3.401	-0.82	9.71	8.89	46.00	-37.11	Average
9	12.021	11.47	9.80	21.27	60.00	-38.73	QP
10	12.021	3.60	9.80	13.40	50.00	-36.60	Average
11	17.891	6.12	9.81	15.93	60.00	-44.07	QP
12	17.891	2.15	9.81	11.96	50.00	-38.04	Average

File: C:\EMC\Report\2018\Hon Hai\114077170(WFU033-LGA)\114077170(WFU033-LGA)_00009.EMI

Date: 2018-05-17 Time: 19:57:21

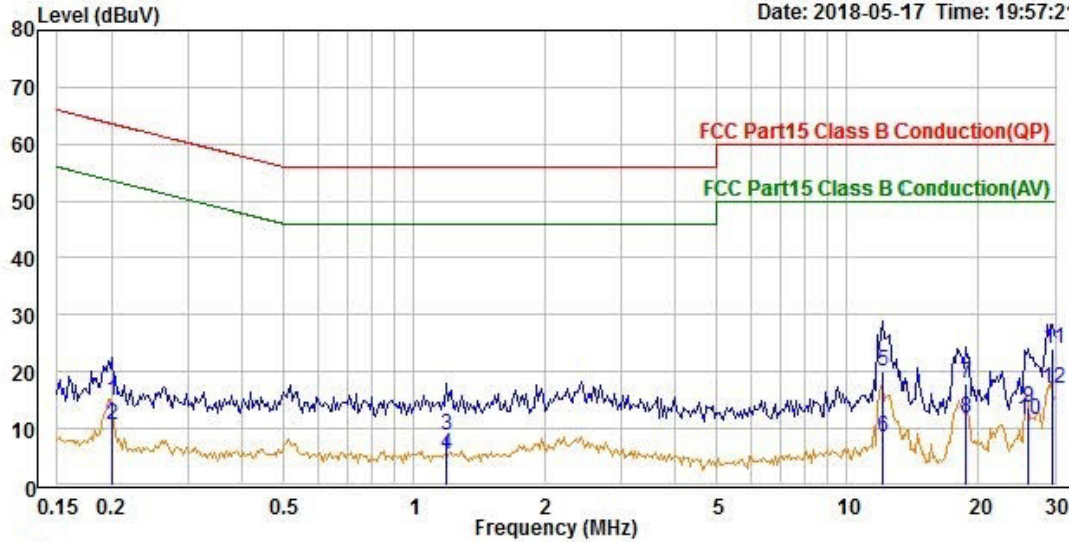

Trace: 1

Site : Conduction room
Condition : FCC Part15 Class B Conduction(QP) neutral
Test Engineer: Colin Lu
Applicant : Hon Hai Precision Industry Co., Ltd.
Product : IEEE 802.11 a/b/g/n/ac 2x2 WiFi Module
Model No. : WFU033-LGA
Test Rating : 3.3Vdc
Tmp/Hum : 23 °C / 49 %
Memo : WIFI link + A1/A2 antenna


	Freq	Read Level	Factor	Level	Limit	Over Limit	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.200	5.12	9.66	14.78	63.61	-48.83	QP
2	0.200	1.13	9.66	10.79	53.61	-42.82	Average
3	1.186	-0.98	9.67	8.69	56.00	-47.31	QP
4	1.186	-4.21	9.67	5.46	46.00	-40.54	Average
5	12.141	10.34	9.83	20.17	60.00	-39.83	QP
6	12.141	-1.25	9.83	8.58	50.00	-41.42	Average
7	18.617	7.98	9.87	17.85	60.00	-42.15	QP
8	18.617	1.90	9.87	11.77	50.00	-38.23	Average
9	26.102	3.90	9.89	13.79	60.00	-46.21	QP
10	26.102	1.73	9.89	11.62	50.00	-38.38	Average
11	29.703	14.21	9.90	24.11	60.00	-35.89	QP
12	29.703	7.12	9.90	17.02	50.00	-32.98	Average



TUV Rheinland Taiwan Ltd.
11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105
Tel:+886-2172-7000 Fax:+886-2528-0018

File: C:\EMC\Report\2018\Hon Hai\114077170(WFU033-LGA)\114077170(WFU033-LGA)_00011.EMI

Date: 2018-05-17 Time: 20:04:42

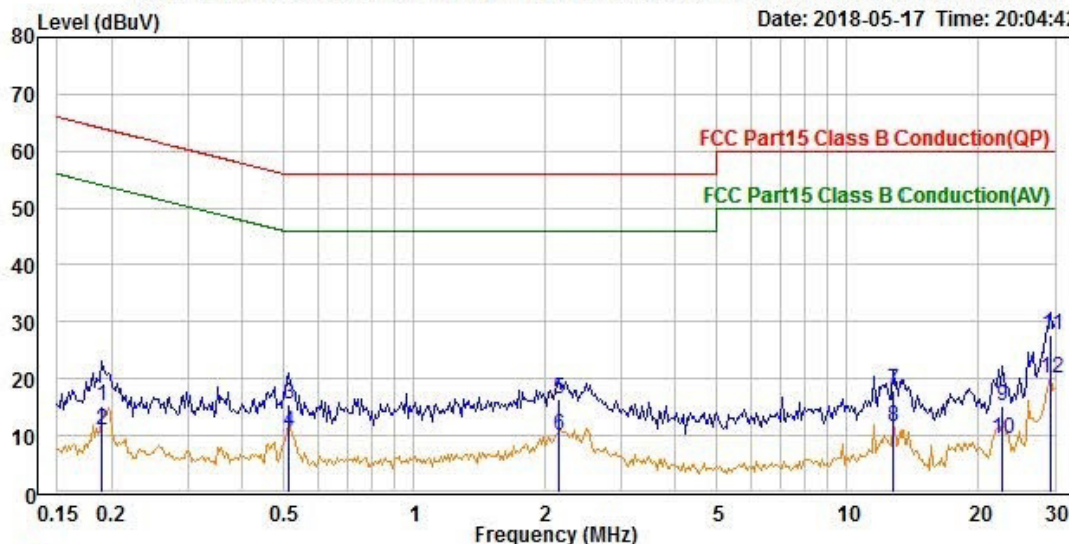


Trace: 1

Site : Conduction room
Condition : FCC Part15 Class B Conduction(QP) line1
Test Engineer: Colin Lu
Applicant : Hon Hai Precision Industry Co., Ltd.
Product : IEEE 802.11 a/b/g/n/ac 2x2 WiFi Module
Model No. : WFU033-LGA
Test Rating : 3.3Vdc
Tmp/Hum : 23 °C / 49 %
Memo : WIFI link + B1/B2 antenna

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.190	5.44	9.65	15.09	64.02	-48.93	QP
2	0.190	1.36	9.65	11.01	54.02	-43.01	Average
3	0.515	5.86	9.66	15.52	56.00	-40.48	QP
4	0.515	1.05	9.66	10.71	46.00	-35.29	Average
5	2.153	6.81	9.69	16.50	56.00	-39.50	QP
6	2.153	0.38	9.69	10.07	46.00	-35.93	Average
7	12.760	8.12	9.80	17.92	60.00	-42.08	QP
8	12.760	1.67	9.80	11.47	50.00	-38.53	Average
9	22.711	5.51	9.81	15.32	60.00	-44.68	QP
10	22.711	-0.32	9.81	9.49	50.00	-40.51	Average
11	29.409	17.88	9.79	27.67	60.00	-32.33	QP
12	29.409	10.16	9.79	19.95	50.00	-30.05	Average

File: C:\EMC\Report\2018\Hon Hai\114077170(WFU033-LGA)\114077170(WFU033-LGA)_00013.EMI

Date: 2018-05-17 Time: 20:07:35

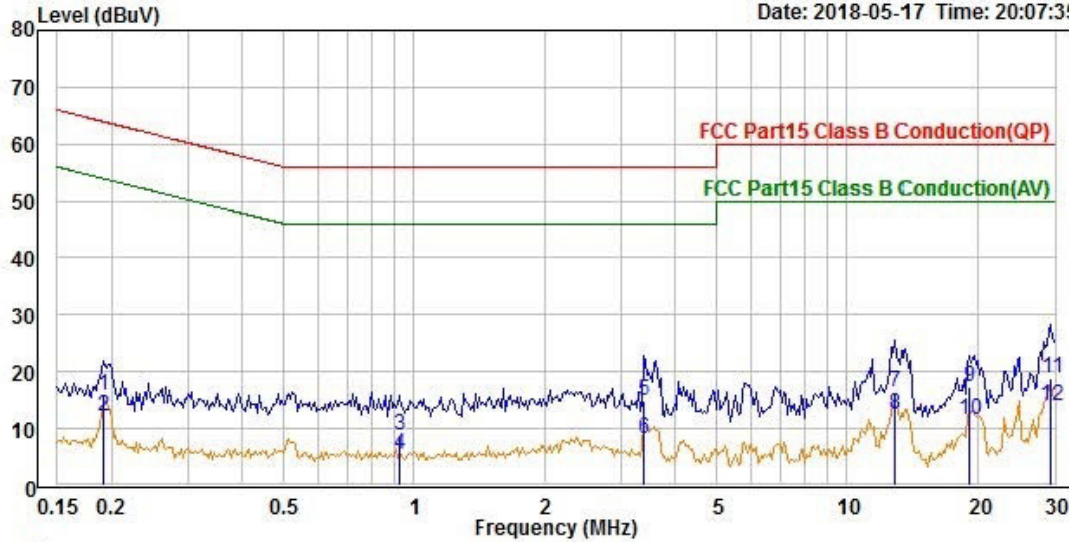

Trace: 1

Site : Conduction room
Condition : FCC Part15 Class B Conduction(QP) neutral
Test Engineer: Colin Lu
Applicant : Hon Hai Precision Industry Co., Ltd.
Product : IEEE 802.11 a/b/g/n/ac 2x2 WiFi Module
Model No. : WFU033-LGA
Test Rating : 3.3Vdc
Tmp/Hum : 23 °C / 49 %
Memo : WIFI link + B1/B2 antenna

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.192	6.23	9.66	15.89	63.94	-48.05	QP
2	0.192	2.55	9.66	12.21	53.94	-41.73	Average
3	0.925	-0.99	9.67	8.68	56.00	-47.32	QP
4	0.925	-4.22	9.67	5.45	46.00	-40.55	Average
5	3.401	5.06	9.72	14.78	56.00	-41.22	QP
6	3.401	-1.61	9.72	8.11	46.00	-37.89	Average
7	12.887	6.51	9.83	16.34	60.00	-43.66	QP
8	12.887	2.55	9.83	12.38	50.00	-37.62	Average
9	18.990	7.30	9.89	17.19	60.00	-42.81	QP
10	18.990	1.55	9.89	11.44	50.00	-38.56	Average
11	29.409	8.98	9.90	18.88	60.00	-41.12	QP
12	29.409	4.13	9.90	14.03	50.00	-35.97	Average