

Series: SMD Helical Antenna

Description: 860-930MHz Embedded Helical Antenna

PART NUMBER: W3136

Features:

- 860-930MHz
- Impedance 50 Ohm
- Plastic support helical antenna
- Length 29.5mm,
- Gain 2dBi
- SMD Mounting on PCB
- RoHS Compliant

Applications:

- 868MHz and 915MHz ISM Band Systems
- IoT systems
- Metering, Automation
- Security, surveillance
- Remote controls, toys



All dimensions are in mm / inches

Issue: 1943

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

For more information:

Pulse Worldwide Headquarters
15255 Innovation Drive #100
San Diego, CA 92128
USA
Tel: 1-858-674-8100

Pulse/Larsen Antennas
18110 SE 34th St Bldg 2 Suite 250
Vancouver, WA 98683
USA
Tel: 1-360-944-7551

Europe Headquarters
Pulse GmbH & Co, KG
Zeppelinstrasse 15
Herrenberg, Germany
Tel: 49 7032 7806 0

Pulse (Suzhou) Wireless Products Co, Inc.
99 Huo Ju Road(#29 Bldg, 4th Phase
Suzhou New District
Jiangsu Province, Suzhou 215009 PR China
Tel: 86 512 6807 9998



ELECTRICAL SPECIFICATIONS

Antenna Type	Helical monopole
Frequency	860-930MHz
Nominal Impedance	50 Ω
VSWR	Max 2.5
Radiation Pattern	Omni
Gain	2 dBi
Efficiency	65%
Polarization	Linear
Power Withstanding	2W

MECHANICAL SPECIFICATIONS

Overall Length	29.5mm
Weight	2.52g
Antenna Color / Material	White
Fix system	SMD+Glue
Recommended Glue	Resinlab EP1320LV Black
Solder Paste Thickness	Min 0.15mm
MSL	3

ENVIRONMENTAL SPECIFICATIONS

Operating Temperature	-40°C~+85°C
Storage Temperature	-40°C~+85°C
RoHS Compliant	Yes


OTHER SPECIFICATIONS

Series: SMD Helical Antenna

Description: 860-930MHz Embedded Helical Antenna

PART NUMBER: W3136

MECHANICAL DRAWING

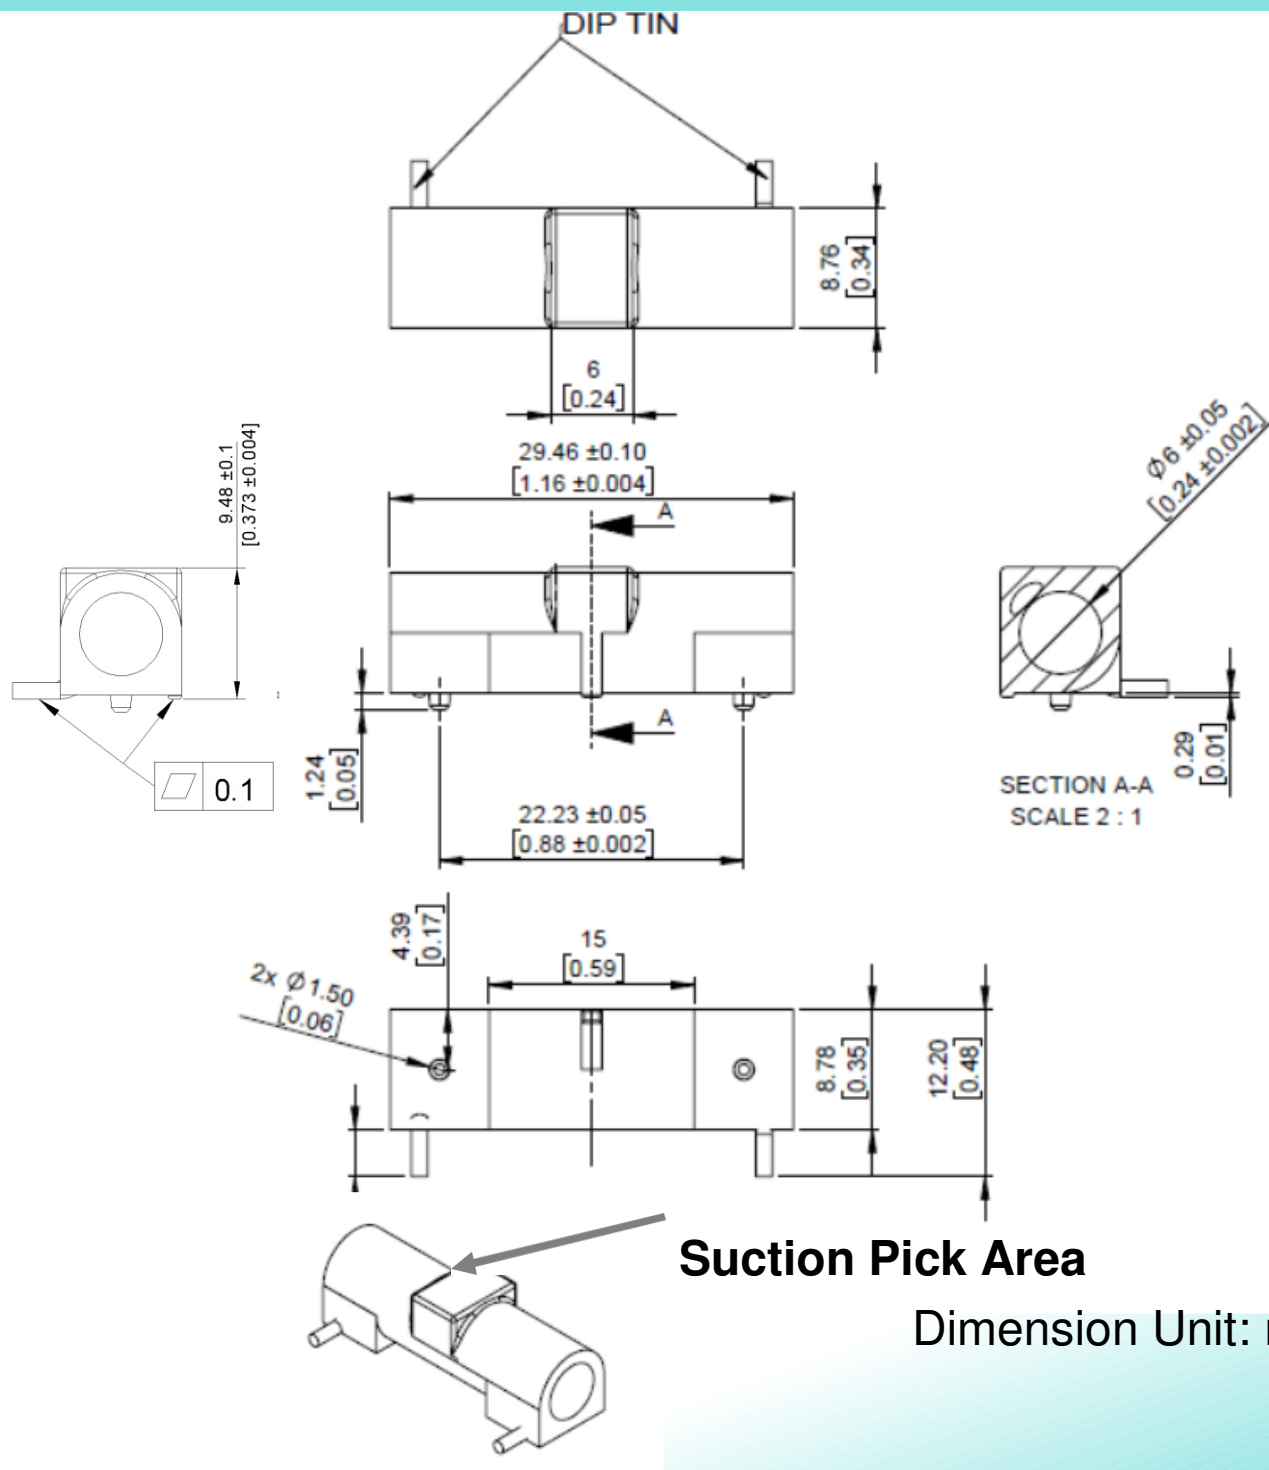

Issue: 1943

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

Series: SMD Helical Antenna

Description: 860-930MHz Embedded Helical Antenna

PART NUMBER: W3136

FIX SYSTEM RECOMMENDATION

Fix system


1. SMD process
2. Solder paste thickness: minimum 0.15mm
3. Glue is required, Recommended Glue: Resinlab EP1320LV Black, usage and position see below recommended area.

Solder
paste

Glue



Recommended
Glue Type

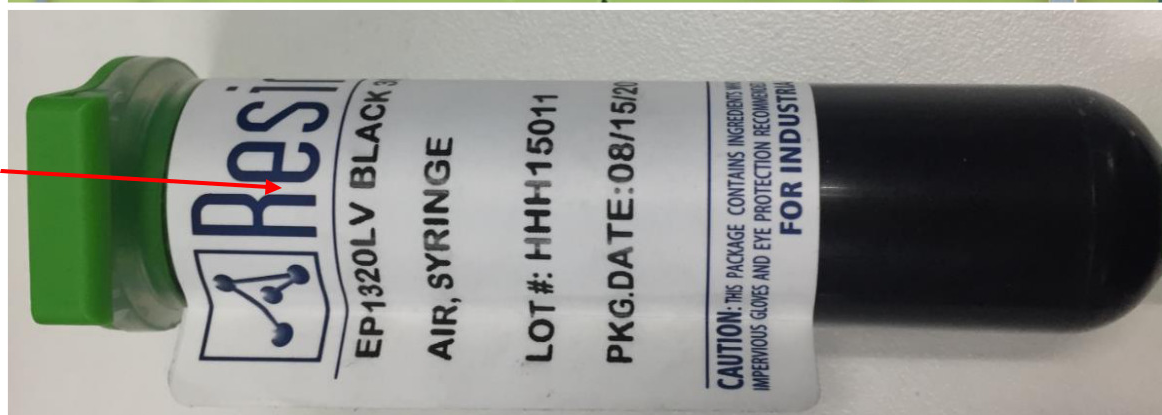

Series: SMD Helical Antenna

Description: 860-930MHz Embedded Helical Antenna


PART NUMBER: W3136

FIX SYSTEM RECOMMENDATION

Fix system

1. Glue position on PCB for recommendation

Glue position on PCB for recommendation

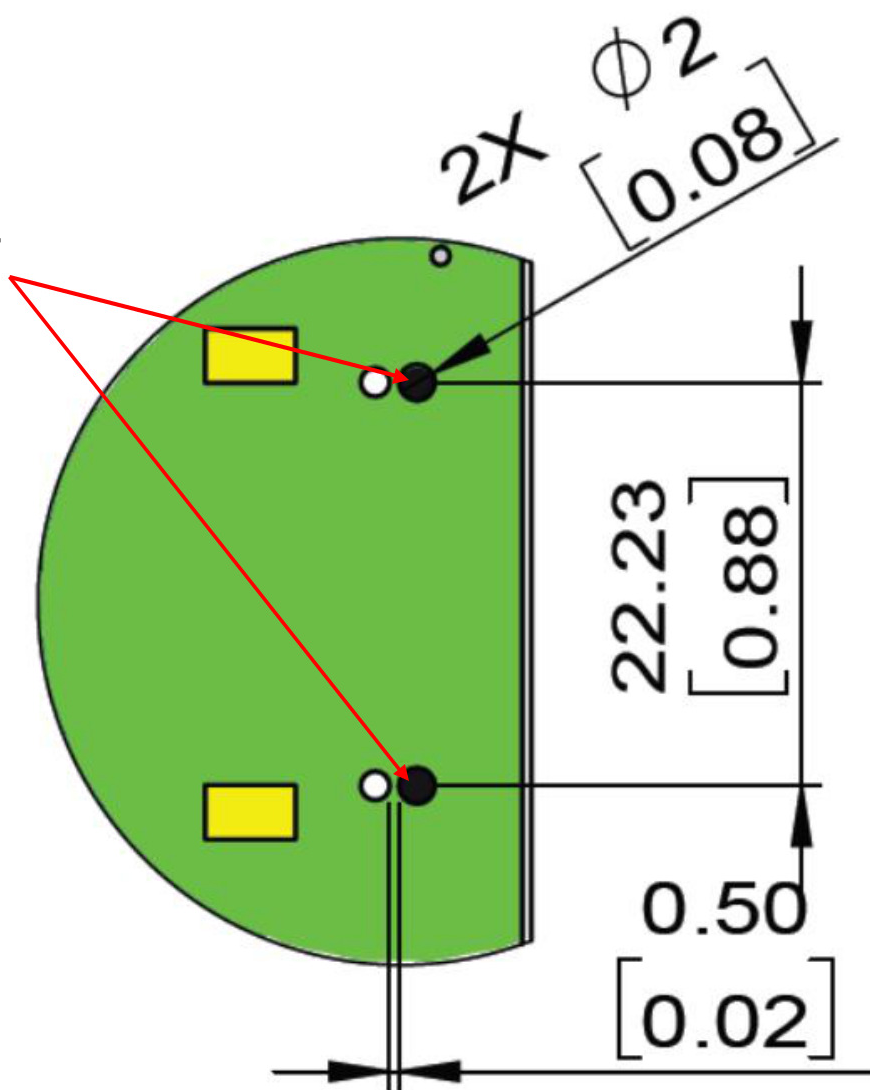


Series: SMD Helical Antenna

Description: 860-930MHz Embedded Helical Antenna

PART NUMBER: W3136

FIX SYSTEM RECOMMENDATION

Solder effect

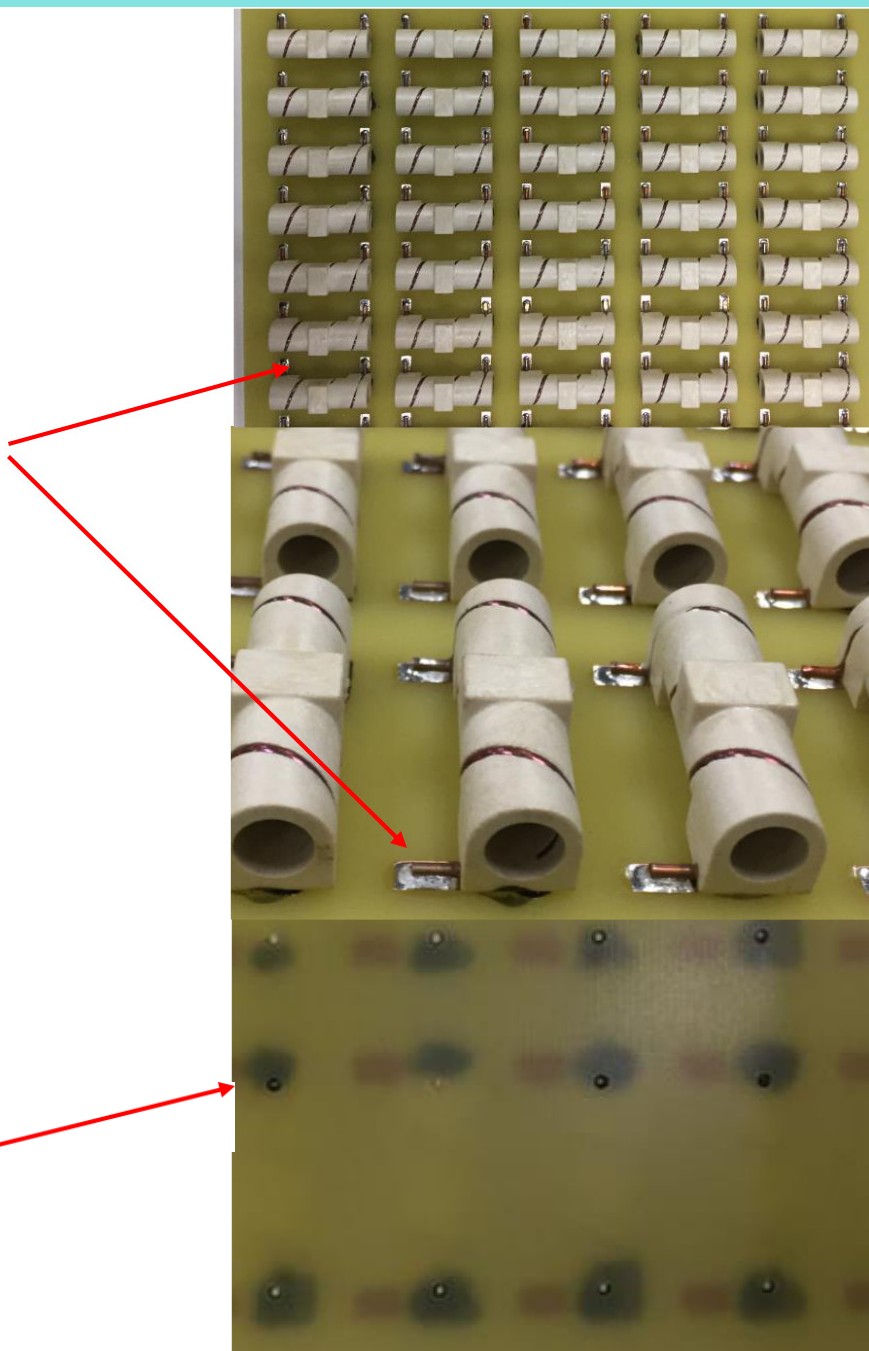

Back view of
glue area



Series: SMD Helical Antenna

Description: 860-930MHz Embedded Helical Antenna

PART NUMBER: W3136

TEST SETUP

PWB Layout for W3136 SMD Helical Antenna

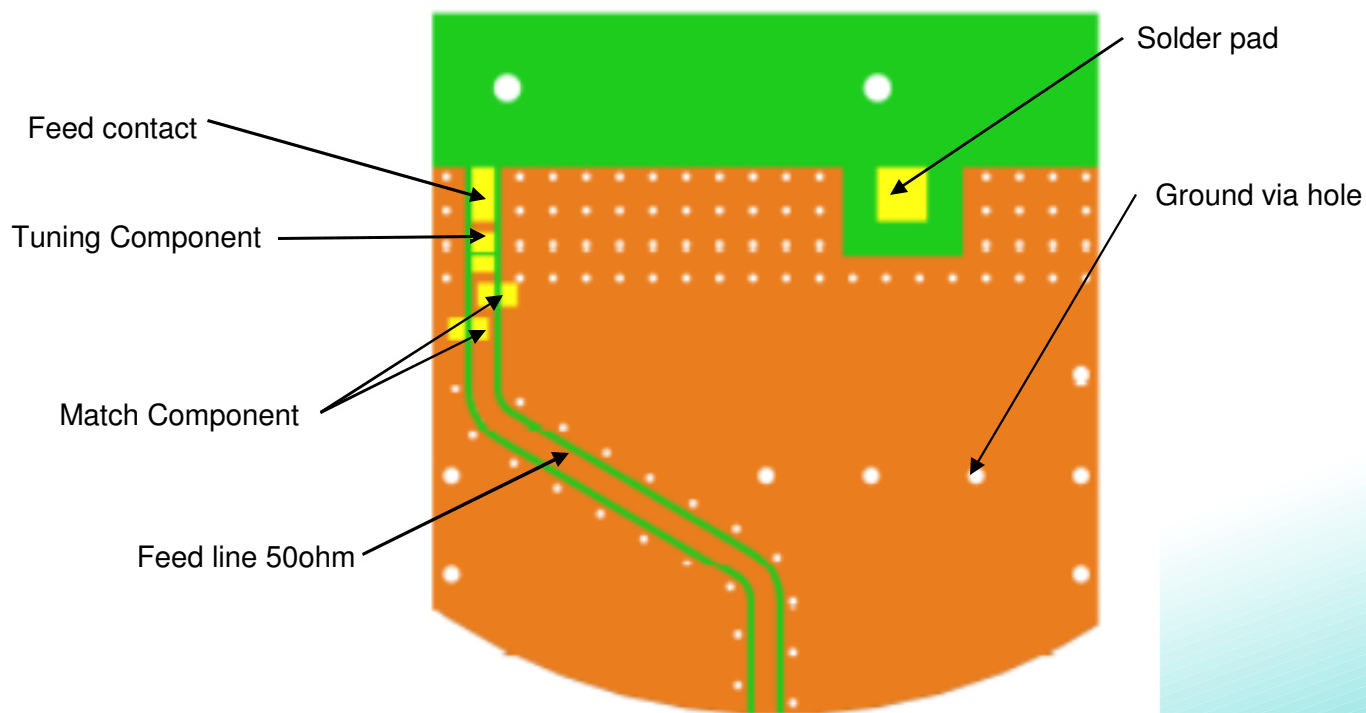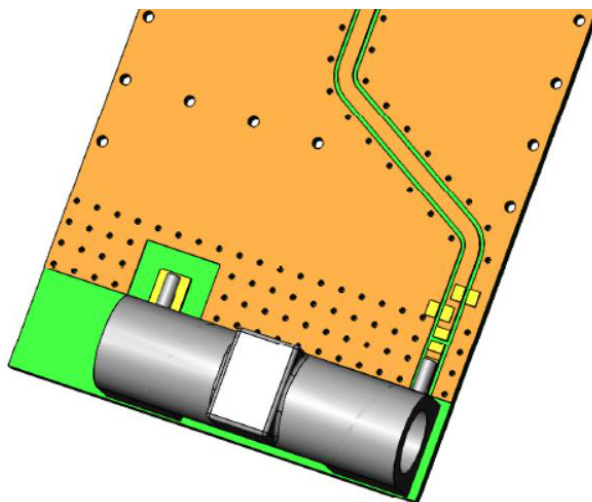

Issue: 1943

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

Series: SMD Helical Antenna


Description: 860-930MHz Embedded Helical Antenna

PART NUMBER: W3136

TEST SETUP

PWB ground clearance area (Top): 40x9.5mm

PWB ground clearance area (Bottom): 40x9.5mm

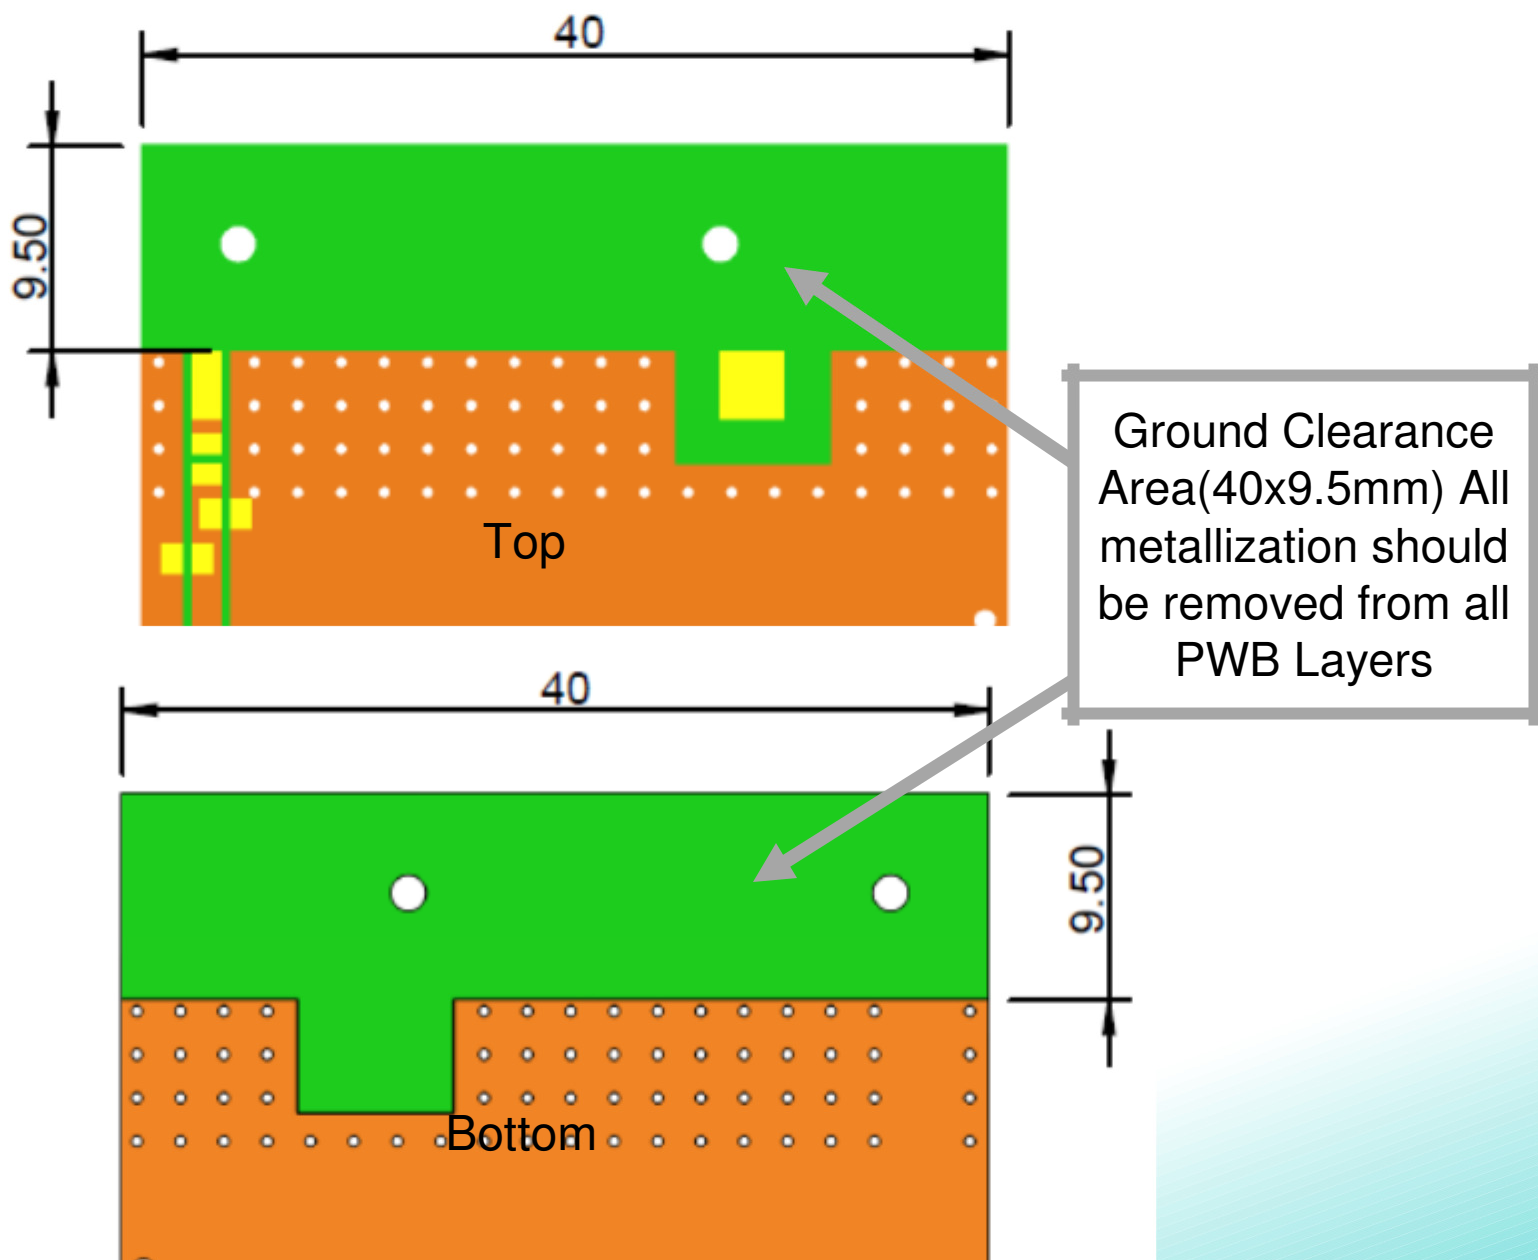

Issue: 1943

In the effort to improve our products, we reserve the right to make changes judged to be necessary.


Series: SMD Helical Antenna

Description: 860-930MHz Embedded Helical Antenna

PART NUMBER: W3136

TEST SETUP

PWB Pad dimension in top copper

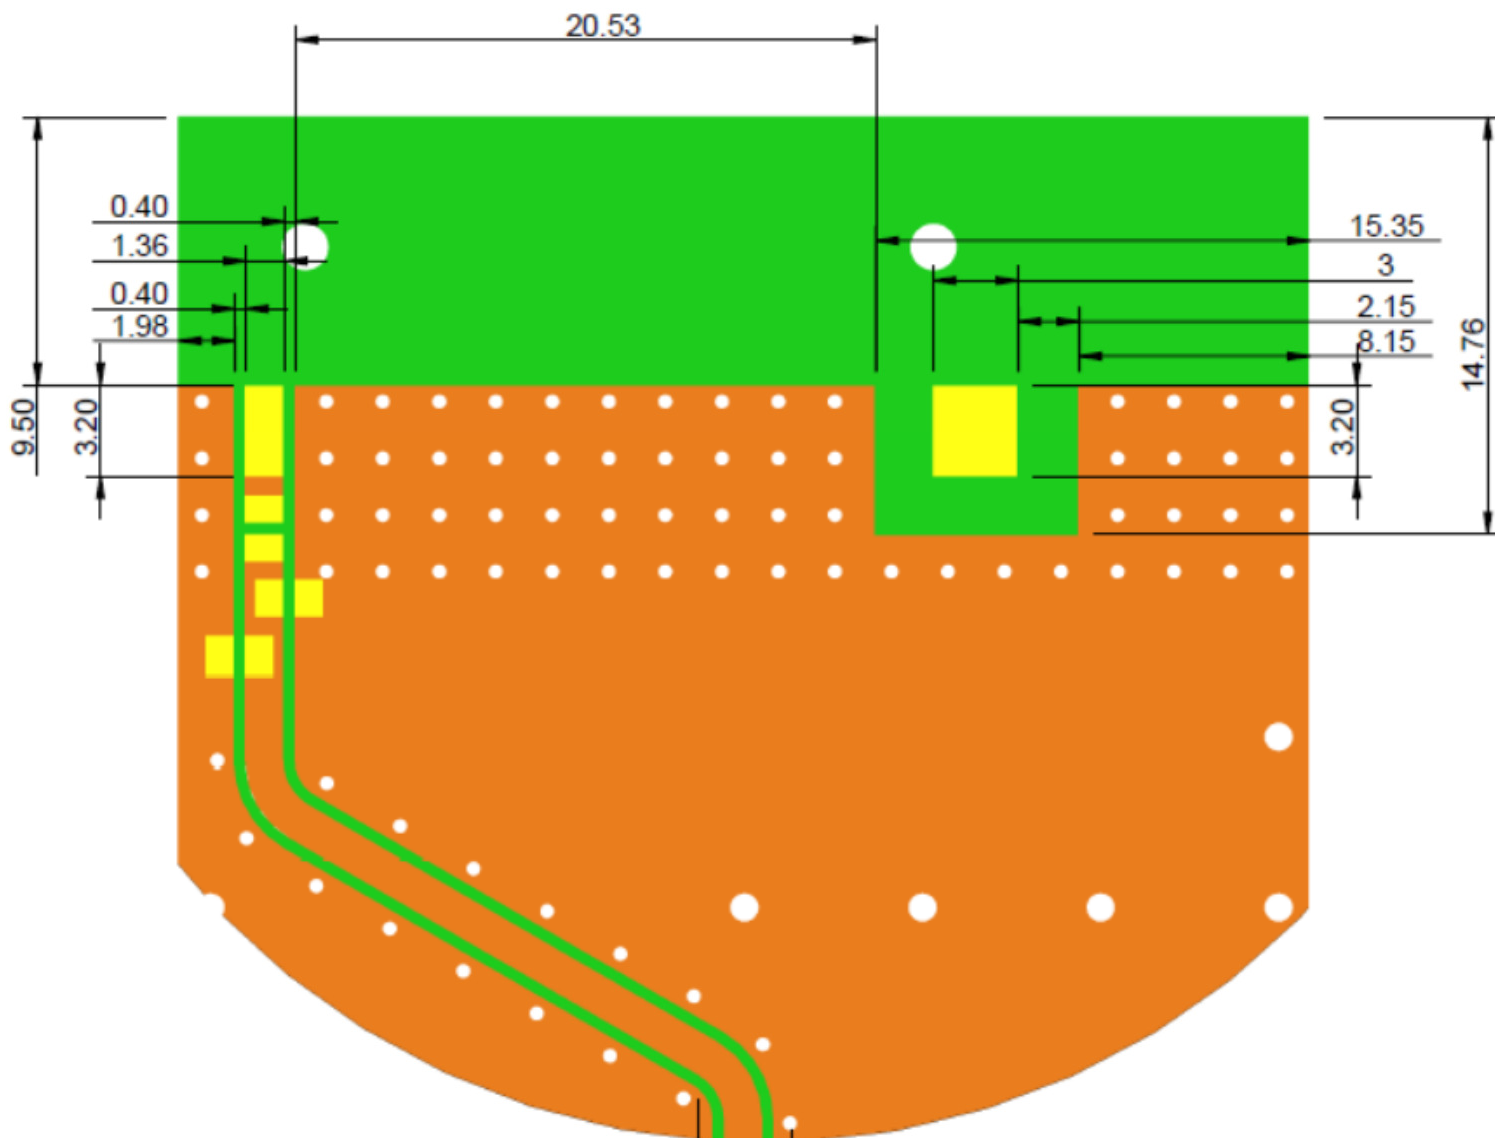


Series: SMD Helical Antenna

Description: 860-930MHz Embedded Helical Antenna

PART NUMBER: W3136

TEST SETUP

PWB Layout, Pulse PWB size: 121x40mm, Thickness 1.0mm, other size boards can be used depending on customer size.

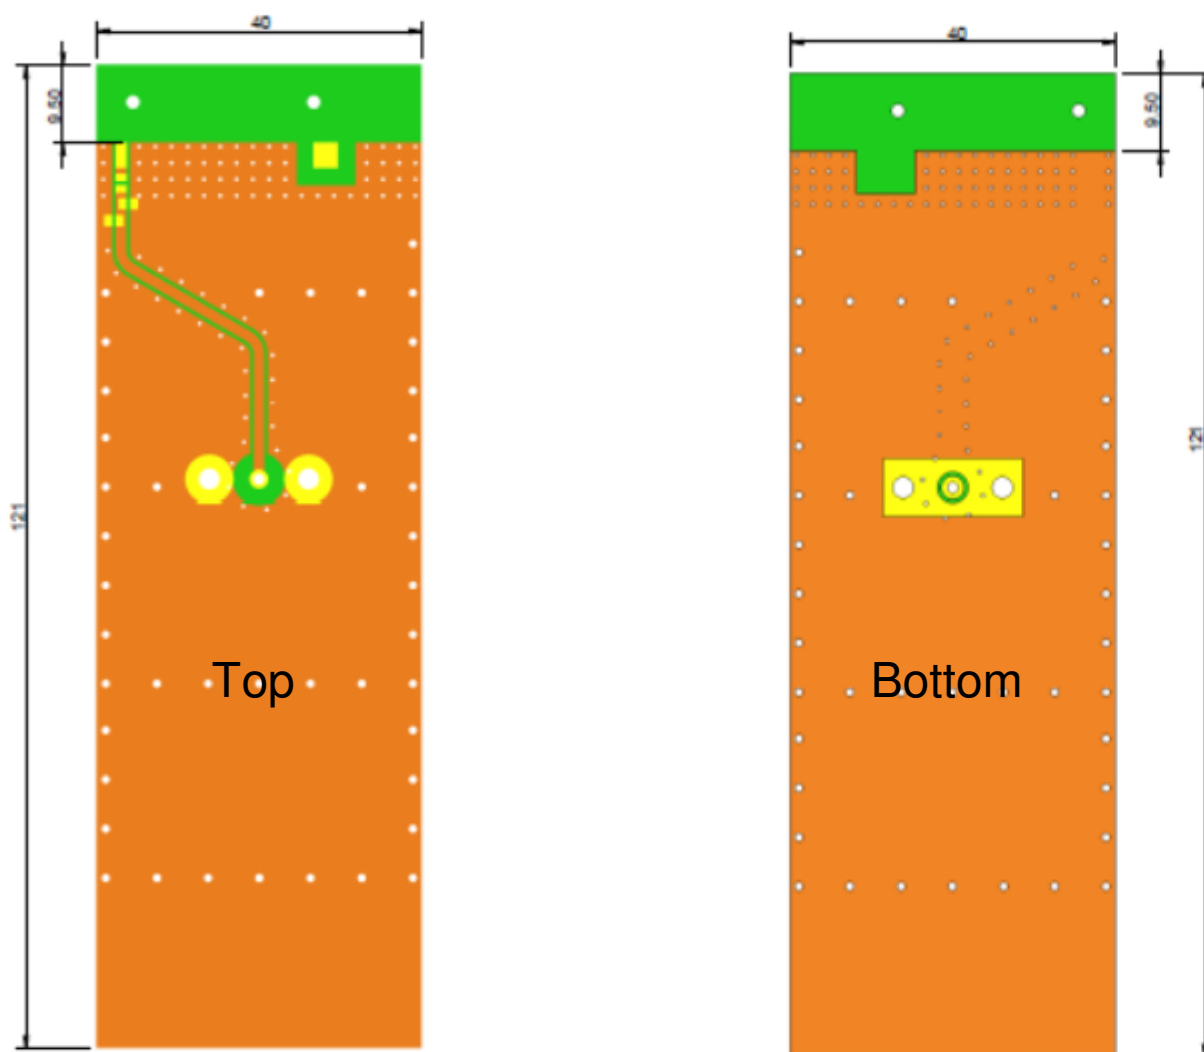

Series: SMD Helical Antenna

Description: 860-930MHz Embedded Helical Antenna

PART NUMBER: W3136


TEST SETUP

PWB Layout, Pulse PWB size:121x40mm, Thickness 1.0mm, other size boards can be used depending on customer size.

Antenna feed point

Capacitance for S11 matching , 3.6pF, series

Inductance for S11 matching , 8.2nH, shunt

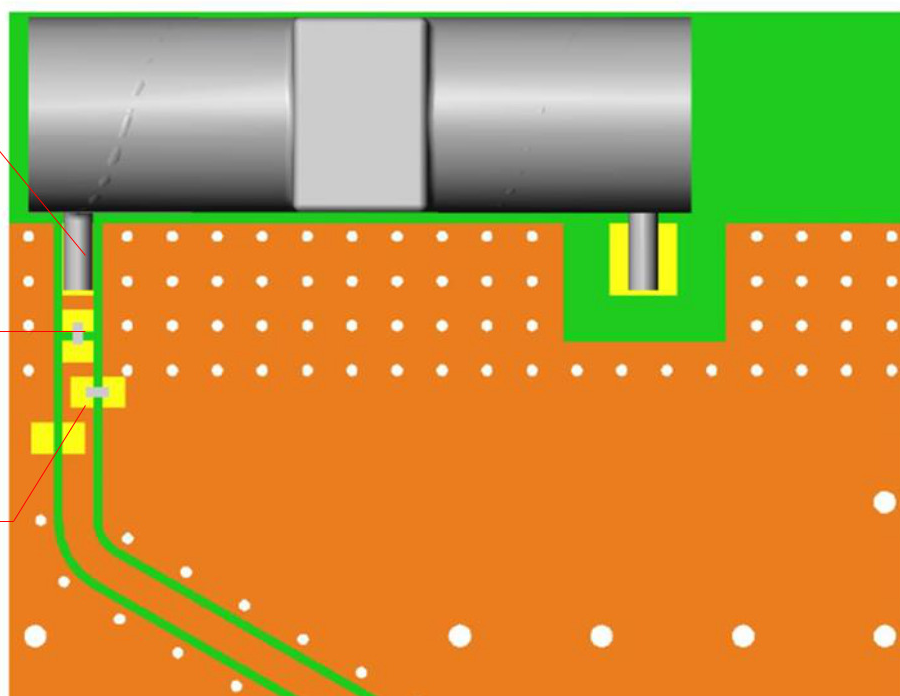

Note : Exact matching and tuning components value depend on application , board size ,cover etc.


Series: SMD Helical Antenna

Description: 860-930MHz Embedded Helical Antenna

PART NUMBER: W3136

CHARTS

Measured on the 121x40mm test board with tuning and matching circuit

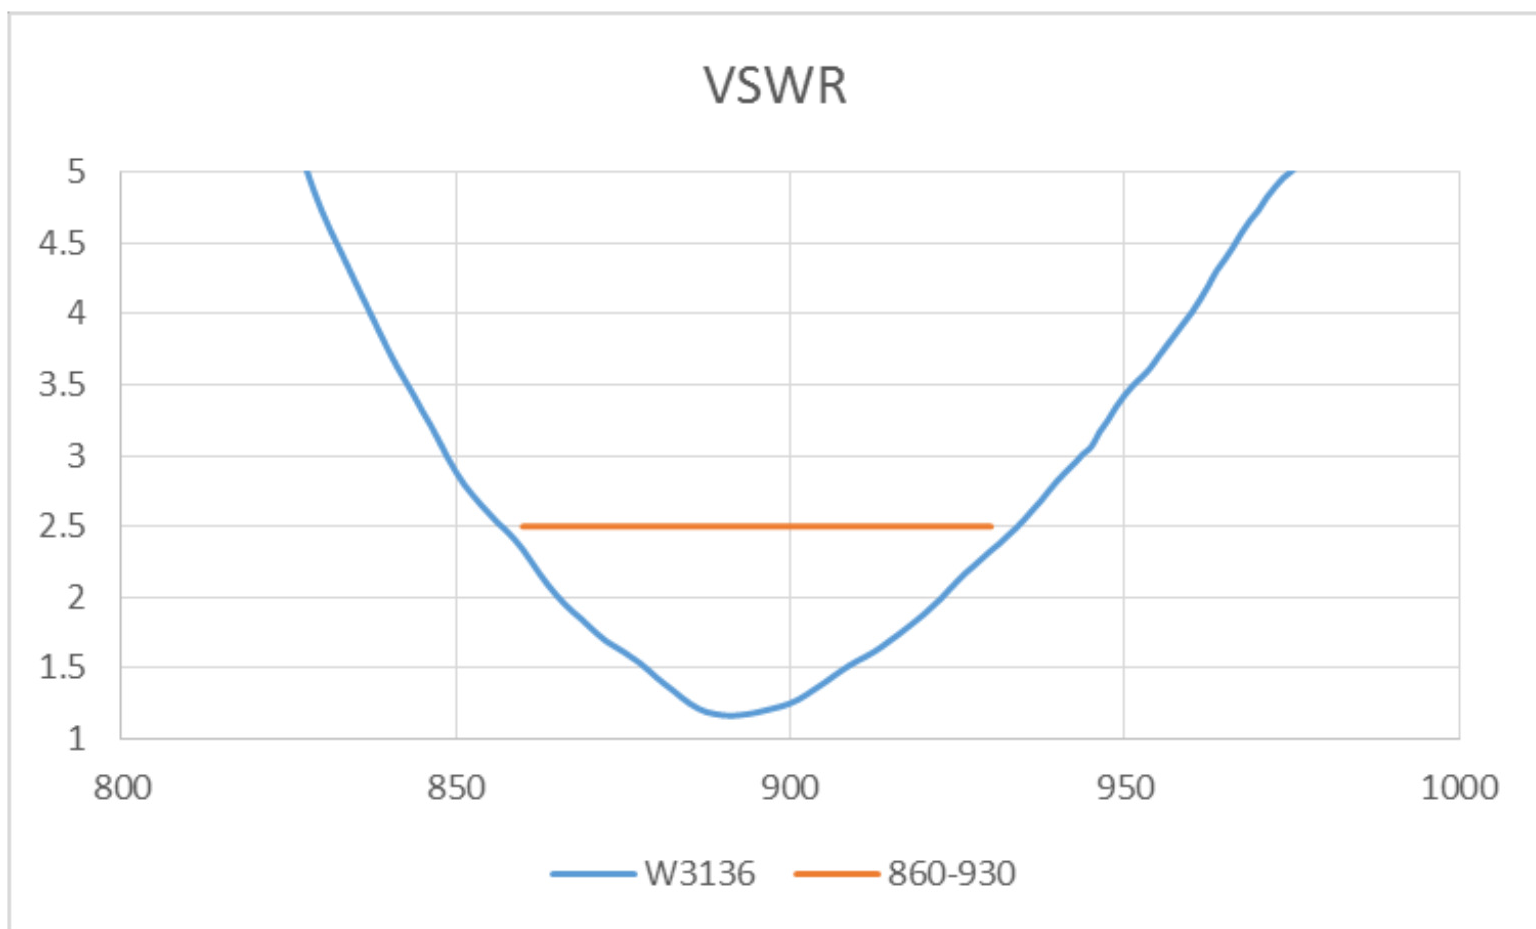

Series: SMD Helical Antenna


Description: 860-930MHz Embedded Helical Antenna

PART NUMBER: W3136

TESTCHARSETSUP

Measured on the 121x40mm test board with tuning and matching circuit.

Test in PSU China Chamber.

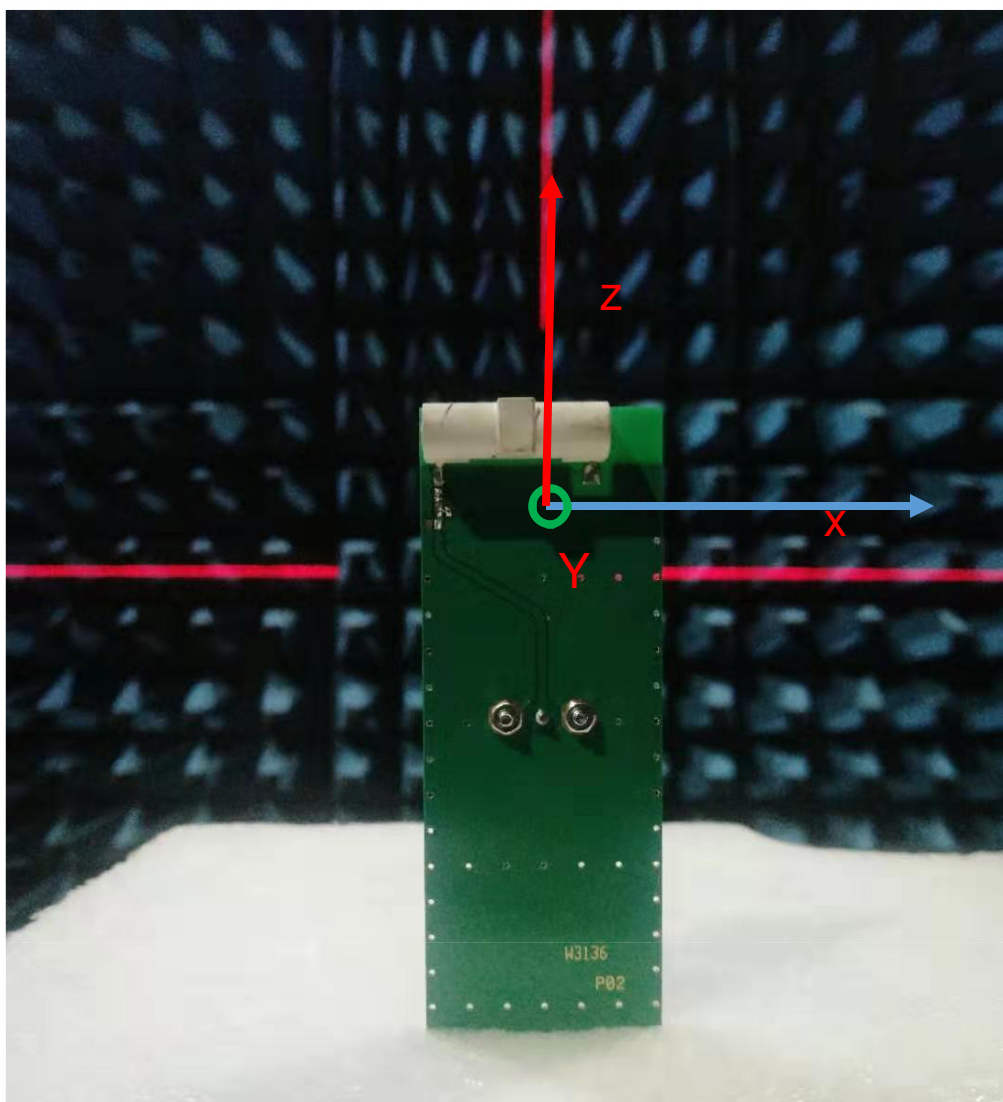


Series: SMD Helical Antenna

Description: 860-930MHz Embedded Helical Antenna

PART NUMBER: W3136

CHARTS

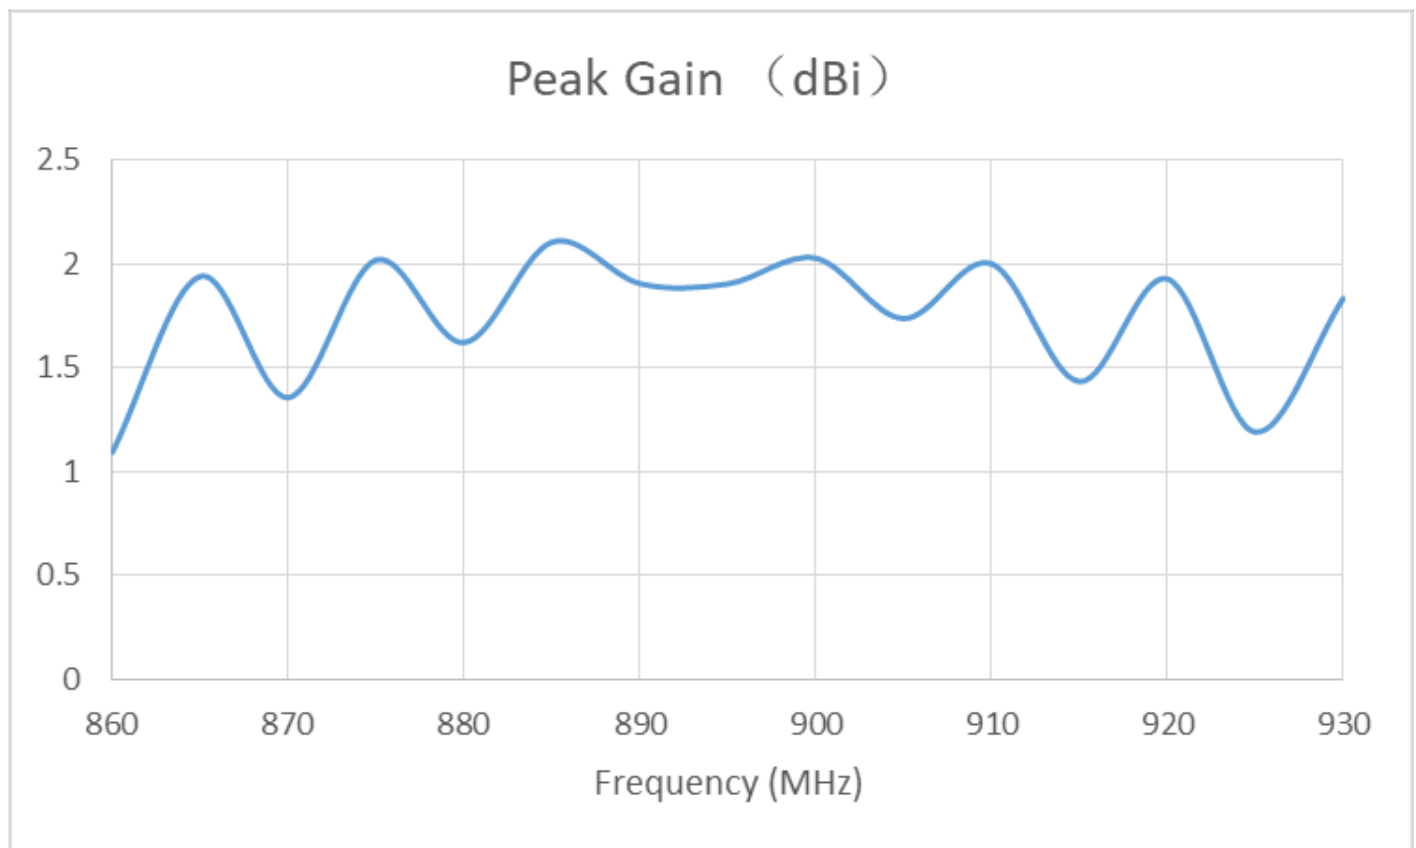


Series: SMD Helical Antenna

Description: 860-930MHz Embedded Helical Antenna

PART NUMBER: W3136

CHARTS

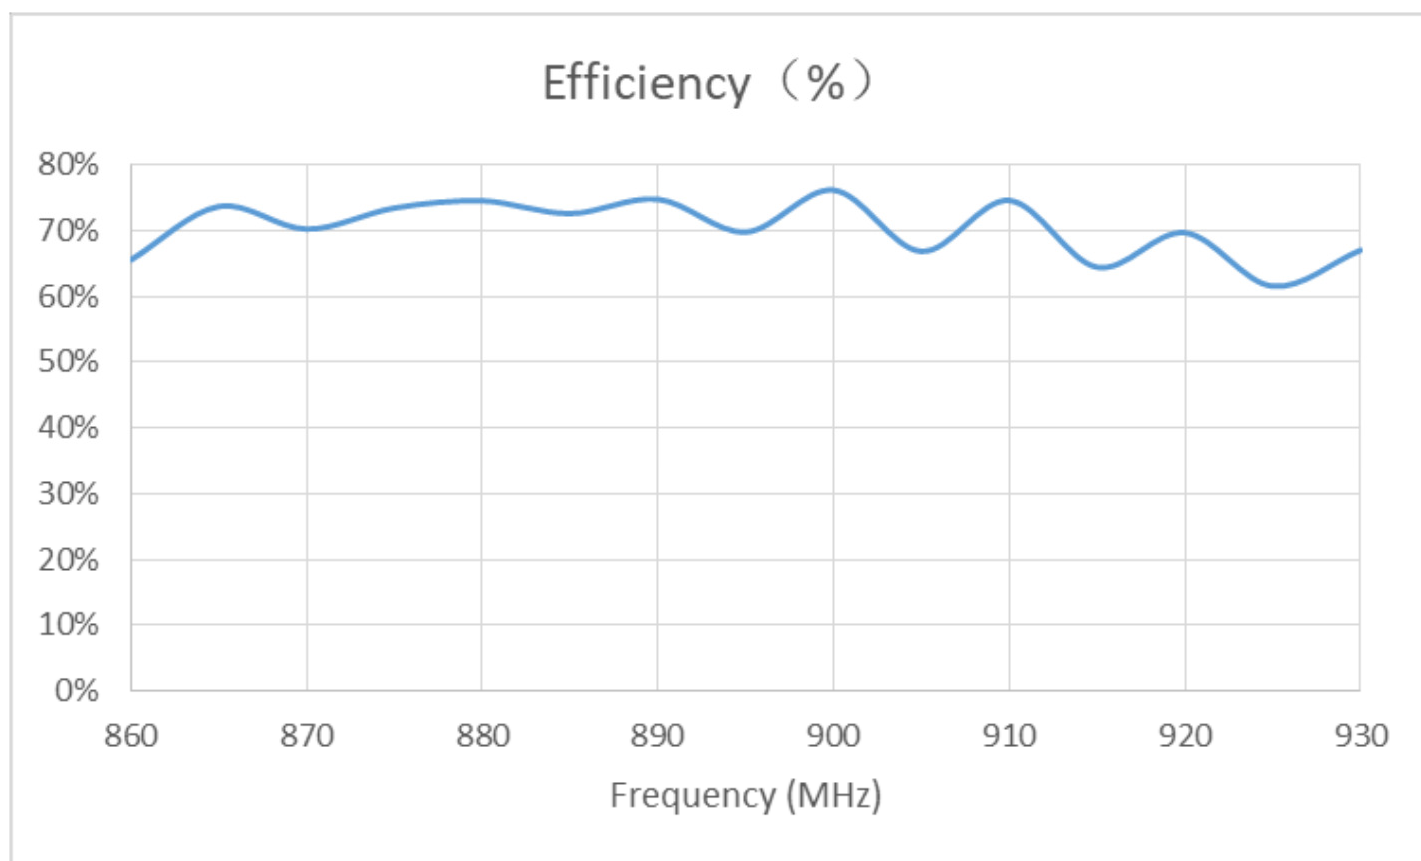


Series: SMD Helical Antenna

Description: 860-930MHz Embedded Helical Antenna

PART NUMBER: W3136

CHARTS

Typical radiation pattern in free space

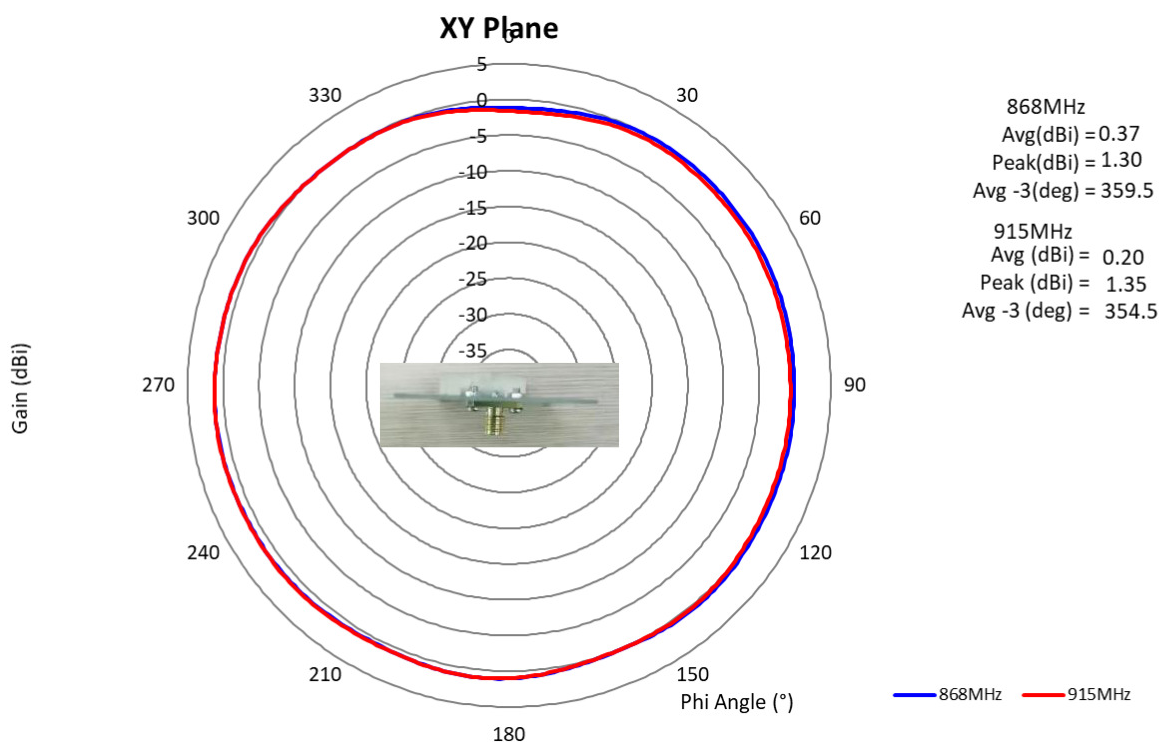


Series: SMD Helical Antenna

Description: 860-930MHz Embedded Helical Antenna

PART NUMBER: W3136

CHARTS

Typical radiation pattern in free space

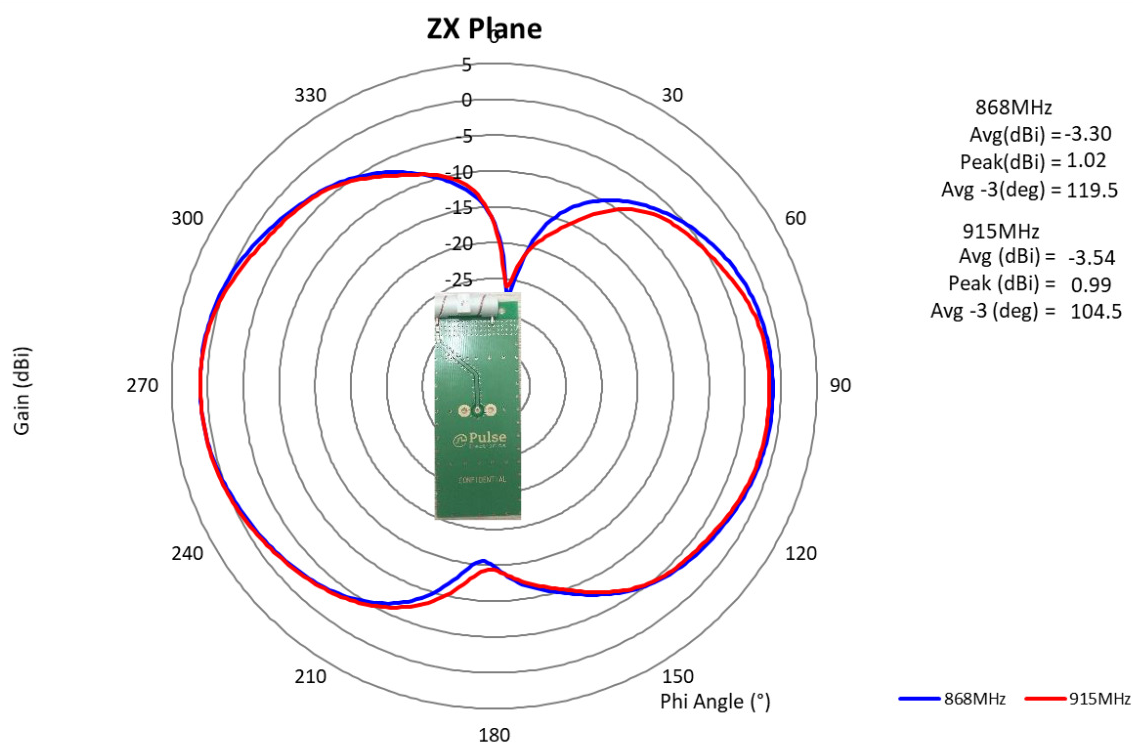


Series: SMD Helical Antenna

Description: 860-930MHz Embedded Helical Antenna

PART NUMBER: W3136

CHARTS

Typical radiation pattern in free space

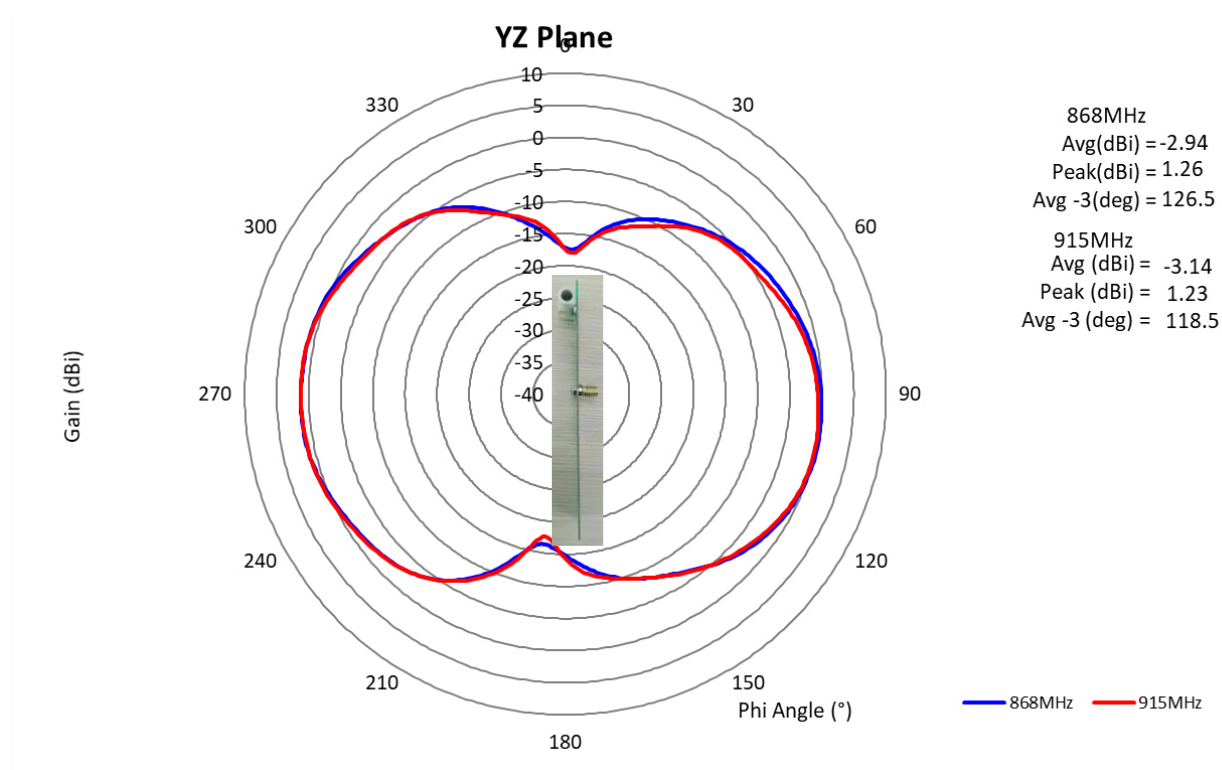

Series: SMD Helical Antenna

Description: 860-930MHz Embedded Helical Antenna

PART NUMBER: W3136

Recommendation for reflow soldering process

Printing stencil thickness 0,15 - 0,25 mm is recommended for the solder paste. The maximum soldering temperature should not exceed 260°C. The temperature profile recommendations for reflow soldering process is presented in the Figures 1 and 2. The reflow profile

presented in figure 1 describes minimum reflow temperatures. The reflow profile presented in figure 2 describes maximum reflow temperatures. located at the center of the coverage area.

	Method of heat transfer	Controlled hot air convection
1	Average temperature gradient in preheating	2.5 °C/s
2	Soak time	2-3 minutes
3	Max temperature gradient in reflow	3 °C/s
4	Time above 217 °C	Max 30 sec
5	Peak temperature in reflow	230 °C for 10 seconds
6	Temperature gradient in cooling	Max -5 °C/s

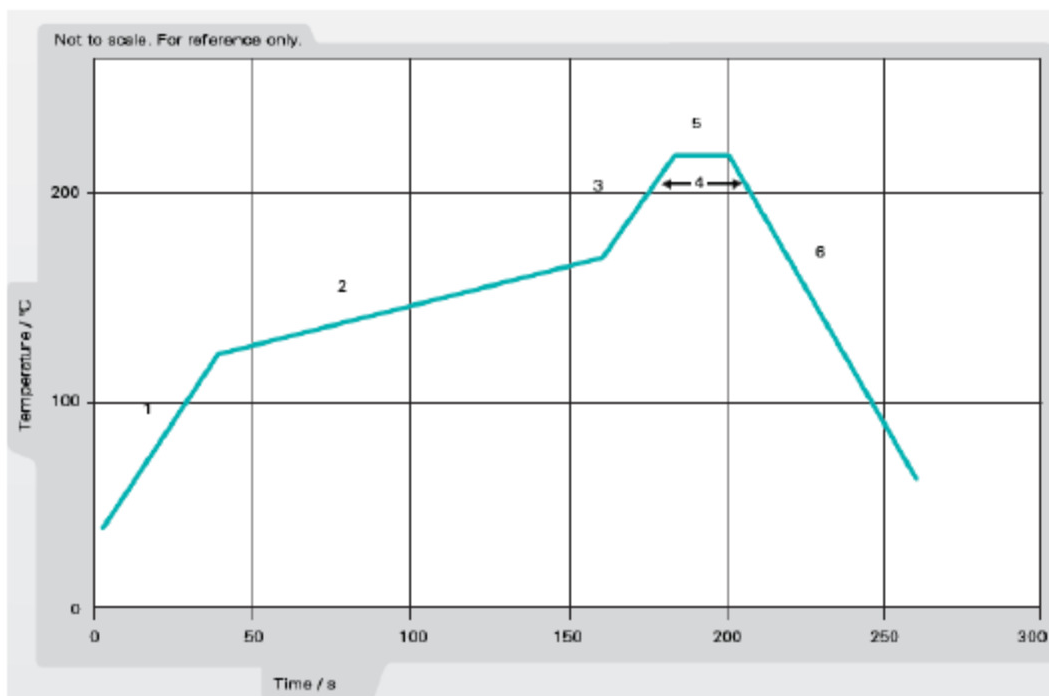


Figure 1. Minimum temperature profile recommendation for reflow soldering process


Series: SMD Helical Antenna

Description: 860-930MHz Embedded Helical Antenna

PART NUMBER: W3136

Recommendation for reflow soldering process

	Method of heat transfer	Controlled hot air convection
1	Average temperature gradient in preheating	2.5 °C/s
2	Soak time	2-3 minutes
3	Max temperature gradient in reflow	3 °C/s
4	Time above 217 °C	Max 60 sec
5	Time above 230 °C	Max 50 sec
6	Time above 250 °C	Max 10 sec
7	Peak temperature in reflow	260 °C for 5 seconds
8	Temperature gradient in cooling	Max -5 °C/s



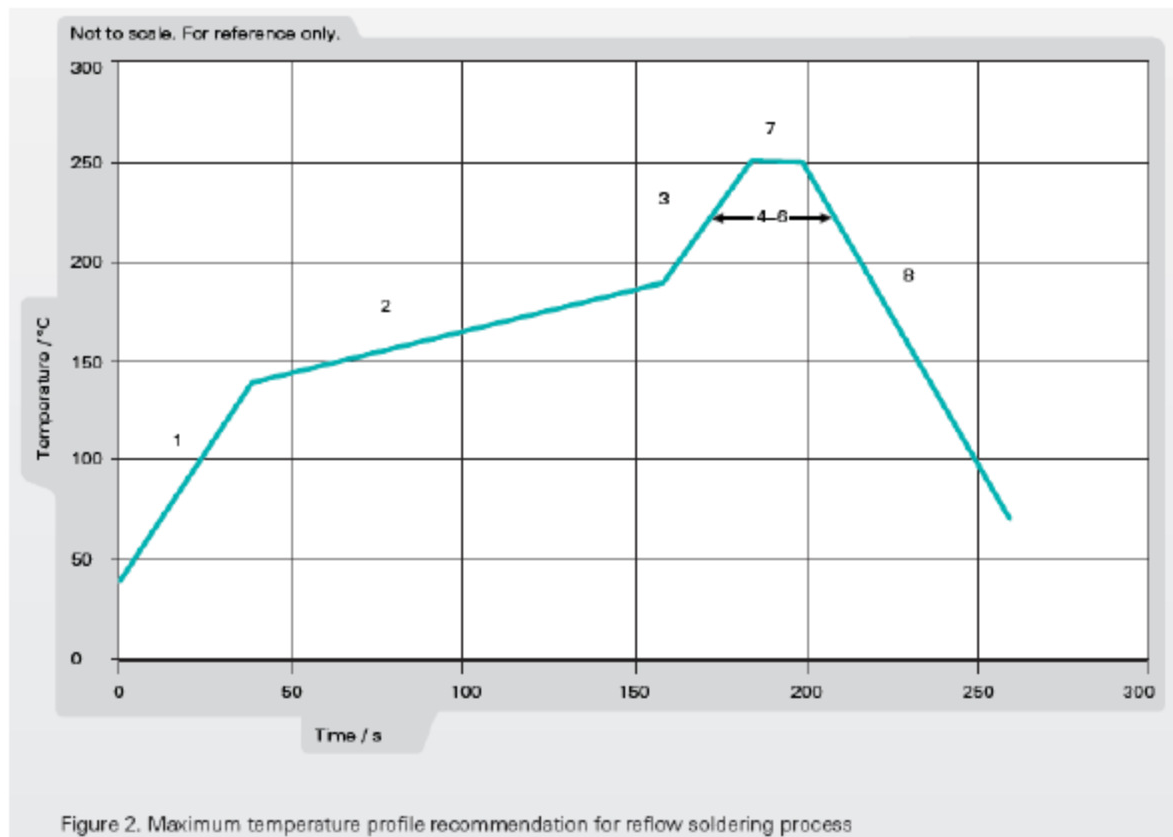


Series: SMD Helical Antenna


Description: 860-930MHz Embedded Helical Antenna

PART NUMBER: W3136

PACKAGING

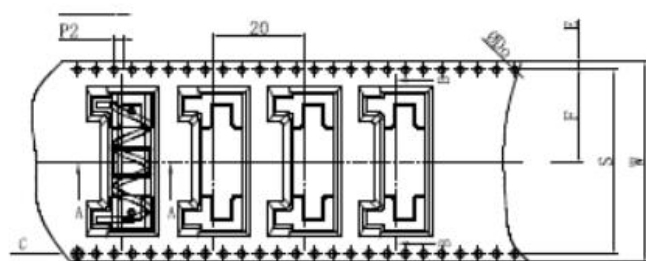

REFERENCE VIEW



6. Loading within 250 mm length maximum curvature is less than 1 mm (see chart).



Notes:

1. 10 side hole of the cumulative tolerance cannot be more than + / - 0.2 mm.
2. Material specifications: PS black antistatic, thickness of 0.50 mm.
3. 13 inches (100) axis reel package length: 4.6 m. (the front air bag length: 0.33 m, parts packing length: 4 m, after a period of empty packet length: 0.33 meters).
4. 13 inches (100) axis reel packaging components to the total number of stars: 230. (the front air bag star count: 15, actual packing parts the number: 200, after a period of empty bag star count: 15).

Manufacture Data	
Total PCS	230PCS
Reel	13"/44
Package Qty	200PCS

Total 200 PCS In Reel

Reel Size: 330MM[13INCH]

Total 2 PCS Reel In Package Box

Package Box Size:350x350x120mm