



Engineering and Testing for EMC and Safety Compliance

CERTIFICATION APPLICATION REPORT  
FCC PART 15.247 CERTIFICATION & INDUSTRY CANADA CERTIFICATION

Test Lab:  Rhein Tech Laboratories, Inc. Phone: 703-689-0368 360 Herndon Parkway Fax: 703-689-2056 Suite 1400 Web Site: <a href="http://www.rheintech.com">www.rheintech.com</a> Herndon, VA 20170 E-Mail: FCCINFO@rheintech.com		Applicant Information:  Vocollect Phone: 412-829-8145 Contact: Doug Zatezalo Fax: 412-829-0972 701 Rodi Road E-Mail: dzatezalo@vocollect.com Pittsburgh, PA 15235	
<b>FCC ID:</b>	MQOTT600-40300	<b>GRANTEE FRN NUMBER:</b>	0007-0735-47
<b>PLAT FORM:</b>	N/A	<b>RTL WORK ORDER NUMBER:</b>	2002102
<b>MODEL(S):</b>	TT-600	<b>RTL QUOTE NUMBER:</b>	QRTL02-455
<b>DATE OF TEST REPORT:</b>	June 10, 2002		
<b>American National Standard Institute:</b>	ANSI/TIA/EIA603 and ANSI/TIA/EIA 603-1		
<b>FCC Classification:</b>	DSS – Part 15 Spread Spectrum Transmitter		
<b>FCC Rule Part(s):</b>	Part 15.247: Operation within the bands 920-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz Direct Sequence System		
<b>Industry Canada Standard:</b>	RSS-210: Low Power License-Exempt Radio Communication Devices (All Frequency Bands)		
<b>Digital Interface Information</b>	Digital Interface was found to be compliant		
<b>Receiver Information</b>	Receiver was found to be compliant		
<b>Frequency Range (MHz)</b>	<b>Output Power (W)</b>	<b>Freq. Tolerance</b>	<b>Emission Designator</b>
2412-2462	0.112	N/A	N/A

We, the undersigned, hereby declare that the equipment tested and referenced in this report conforms to the identified standard(s) as described in this test report. No modifications were made to the equipment during testing in order to achieve compliance with these standards.

Furthermore, there was no deviation from, additions to, or exclusions from the FCC Part 2, FCC Part 15, Industry Canada RSS-210, ANSI C63.4, ANSI/TIA/EIA603, and ANSI/TIA/EIA 603-1.

Signature: Desmond A. Fraser

Date: June 10, 2002

Typed/Printed Name: Desmond A. Fraser

Position: President

## TABLE OF CONTENTS

<b>1</b>	<b>GENERAL INFORMATION .....</b>	<b>5</b>
1.1	SCOPE .....	5
1.2	TEST FACILITY .....	5
1.3	RELATED SUBMITTAL(S)/GRANT(S).....	5
<b>2</b>	<b>TEST INFORMATION.....</b>	<b>6</b>
2.1	TEST JUSTIFICATION .....	6
2.2	EXERCISING THE EUT .....	6
2.3	TEST RESULT SUMMARY .....	6
2.4	TEST SYSTEM DETAILS .....	7
2.5	CONFIGURATION OF TESTED SYSTEM.....	7
<b>3</b>	<b>COMPLIANCE WITH THE RESTRICTED BAND EDGE - §15.205 .....</b>	<b>8</b>
3.1	TEST PROCEDURE.....	8
3.2	BAND EDGE TEST EQUIPMENT .....	8
3.3	COMPLIANCE WITH THE RESTRICTED BAND EDGE TEST DATA .....	9
<b>4</b>	<b>CONDUCTED LIMITS - §15.207 .....</b>	<b>15</b>
4.1	TEST METHODOLOGY FOR CONDUCTED LINE EMISSIONS MEASUREMENTS .....	15
4.2	CONDUCTED LINE EMISSION TEST .....	15
4.3	CONDUCTED LINE TEST EQUIPMENT .....	15
4.4	CONDUCTED LINE EMISSION TEST DATA .....	16
<b>5</b>	<b>RADIATED EMISSION LIMITS RECEIVER/DIGITAL INTERFACE - §15.209 .....</b>	<b>17</b>
5.1	RECEIVER/DIGITAL INTERFACE RADIATED EMISSION LIMITS TEST PROCEDURE.....	17
5.2	RECEIVER/DIGITAL INTERFACE RADIATED EMISSIONS TEST EQUIPMENT .....	17
5.3	RECEIVER/DIGITAL INTERFACE RADIATED EMISSION LIMITS TEST DATA .....	18
<b>6</b>	<b>RADIATED EMISSION LIMITS; SPURIOUS AND HARMONICS - §15.247 .....</b>	<b>19</b>
6.1	RADIATED SPURIOUS EMISSION LIMITS TEST PROCEDURE.....	19
6.2	RADIATED SPURIOUS TEST EQUIPMENT .....	19
6.3	RADIATED EMISSIONS HARMONICS/SPURIOUS TEST DATA .....	20
<b>7</b>	<b>MODULATED BANDWIDTH - §15.247(A)(2) .....</b>	<b>23</b>
7.1	MODULATED BANDWIDTH TEST PROCEDURE – MINIMUM 6 DB BANDWIDTH.....	23
7.2	BANDWIDTH TEST EQUIPMENT .....	23
7.3	BANDWIDTH TEST DATA .....	23
7.4	MODULATED BANDWIDTH PLOTS .....	24
<b>8</b>	<b>PEAK OUTPUT POWER - §15.247(B)(1).....</b>	<b>27</b>
8.1	POWER OUTPUT TEST PROCEDURE .....	27
8.2	POWER OUTPUT TEST EQUIPMENT .....	27
8.3	POWER OUTPUT TEST DATA .....	27
<b>9</b>	<b>ANTENNA CONDUCTED SPURIOUS EMISSIONS - §15.247(C) .....</b>	<b>28</b>
9.1	ANTENNA CONDUCTED SPURIOUS EMISSIONS TEST PROCEDURES .....	28
9.2	ANTENNA CONDUCTED SPURIOUS TEST EQUIPMENT .....	28
9.3	ANTENNA CONDUCTED SPURIOUS EMISSIONS CHANNEL 1.....	28
9.4	ANTENNA CONDUCTED SPURIOUS EMISSIONS CHANNEL 6.....	29
9.5	ANTENNA CONDUCTED SPURIOUS EMISSIONS CHANNEL 11.....	30
<b>10</b>	<b>POWER SPECTRAL DENSITY - §15.247(D).....</b>	<b>31</b>
10.1	POWER SPECTRAL DENSITY TEST PROCEDURE .....	31
10.2	POWER SPECTRAL DENSITY TEST EQUIPMENT .....	31
10.3	POWER SPECTRAL DENSITY TEST DATA .....	31
10.4	POWER SPECTRAL DENSITY PLOTS .....	32
<b>11</b>	<b>CONCLUSION .....</b>	<b>35</b>

## FIGURE INDEX

FIGURE 1: WORST CASE CONFIGURATION OF SYSTEM UNDER TEST .....	7
---	---

## TABLE INDEX

TABLE 2-1: TEST RESULT SUMMARY WITH FCC RULES AND REGULATIONS .....	6
TABLE 2-2: EQUIPMENT UNDER TEST (EUT) .....	7
TABLE 3-1: BAND EDGE TEST EQUIPMENT .....	8
TABLE 4-1: CONDUCTED LINE TEST EQUIPMENT .....	15
TABLE 4-2: CONDUCTED EMISSIONS (NEUTRAL SIDE) .....	16
TABLE 4-3: CONDUCTED EMISSIONS (PHASE SIDE) .....	16
TABLE 5-1: RECEIVER/DIGITAL INTERFACE RADIATED EMISSIONS TEST EQUIPMENT .....	17
TABLE 5-2: RECEIVER/DIGITAL INTERFACE RADIATED EMISSIONS CHANNEL 1 .....	18
TABLE 6-1: RADIATED SPURIOUS EMISSIONS TEST EQUIPMENT .....	19
TABLE 6-2: RADIATED EMISSIONS HARMONICS/SPURIOUS (CHANNEL 1) .....	20
TABLE 6-3: RADIATED EMISSIONS HARMONICS/SPURIOUS (CHANNEL 6) .....	21
TABLE 6-4: RADIATED EMISSIONS HARMONICS/SPURIOUS (CHANNEL 11) .....	22
TABLE 7-1: BANDWIDTH TEST EQUIPMENT .....	23
TABLE 7-2: MINIMUM 6 DB BANDWIDTH TEST DATA .....	23
TABLE 8-1: POWER OUTPUT TEST EQUIPMENT .....	27
TABLE 8-2: POWER OUTPUT TEST DATA .....	27
TABLE 8-3: POWER OUTPUT TEST DATA .....	27
TABLE 9-1: ANTENNA CONDUCTED SPURIOUS TEST EQUIPMENT .....	28
TABLE 9-2: ANTENNA CONDUCTED SPURIOUS EMISSIONS CHANNEL 1 .....	28
TABLE 9-3: ANTENNA CONDUCTED SPURIOUS EMISSIONS CHANNEL 6 .....	29
TABLE 9-4: ANTENNA CONDUCTED SPURIOUS EMISSIONS CHANNEL 11 .....	30
TABLE 10-1: POWER SPECTRAL DENSITY TEST EQUIPMENT .....	31
TABLE 10-2: POWER SPECTRAL DENSITY TEST DATA .....	31

## PLOT INDEX

PLOT 3-1: BAND EDGE: PEAK MEASUREMENT FOR CHANNEL 1 .....	9
PLOT 3-2: BAND EDGE: AVERAGE MEASUREMENT FOR CHANNEL 1 .....	10
PLOT 3-3: BAND EDGE: DELTA MEASUREMENT FOR CHANNEL 1 .....	11
PLOT 3-4: BAND EDGE: PEAK MEASUREMENT FOR CHANNEL 11 .....	12
PLOT 3-5: BAND EDGE: AVERAGE MEASUREMENT FOR CHANNEL 11 .....	13
PLOT 3-6: BAND EDGE: DELTA MEASUREMENT FOR CHANNEL 11 .....	14
PLOT 7-1: MODULATED BANDWIDTH CHANNEL 1 .....	24
PLOT 7-2: MODULATED BANDWIDTH CHANNEL 6 .....	25
PLOT 7-3: MODULATED BANDWIDTH CHANNEL 11 .....	26
PLOT 10-1: POWER SPECTRAL DENSITY: CHANNEL 1 .....	32
PLOT 10-2: POWER SPECTRAL DENSITY: CHANNEL 6 .....	33
PLOT 10-3: POWER SPECTRAL DENSITY: CHANNEL 11 .....	34
PLOT 11-1: 20 DB BANDWIDTH CHANNEL 1 .....	71
PLOT 11-2: 20 DB BANDWIDTH CHANNEL 6 .....	72
PLOT 11-3: 20 DB BANDWIDTH CHANNEL 11 .....	73

## APPENDIX INDEX

APPENDIX A:	SAR .....	36
APPENDIX B:	PROCESSING GAIN REPORT (IF APPLICABLE) .....	37
APPENDIX C:	ANTENNA SPECIFICATIONS .....	38
APPENDIX D:	AGENCY AUTHORIZATION LETTER .....	39
APPENDIX E:	CONFIDENTIALITY REQUEST LETTER (IF APPLICABLE) .....	40
APPENDIX F:	ATTESTATION LETTERS (IF APPLICABLE) .....	41
APPENDIX G:	PRODUCT DESCRIPTION .....	42
APPENDIX H:	LABEL AND LABEL LOCATION .....	43
APPENDIX I:	BILL OF MATERIAL (PARTS LIST) (IF APPLICABLE) .....	44
APPENDIX J:	SCHEMATIC .....	45
APPENDIX K:	BLOCK DIAGRAM (IF APPLICABLE) .....	46
APPENDIX L:	MANUAL .....	47
APPENDIX M:	TEST PHOTOGRAPHS .....	48
APPENDIX N:	EXTERNAL PHOTOGRAPHS .....	52
APPENDIX O:	INTERNAL PHOTOGRAPHS .....	57
APPENDIX P:	ADDITIONAL INFORMATION FOR CANADIAN CERTIFICATION .....	70

## PHOTOGRAPH INDEX

PHOTOGRAPH 1:	LABEL LOCATION .....	43
PHOTOGRAPH 2:	RADIATED EMISSION FRONT VIEW; WORST CASE CONFIGURATION .....	48
PHOTOGRAPH 3:	RADIATED EMISSION REAR VIEW; WORST CASE CONFIGURATION .....	49
PHOTOGRAPH 4:	CONDUCTED EMISSION FRONT VIEW .....	50
PHOTOGRAPH 5:	CONDUCTED EMISSION REAR VIEW .....	51
PHOTOGRAPH 6:	FRONT VIEW WITH BATTERY .....	52
PHOTOGRAPH 7:	FRONT VIEW WITHOUT BATTERY .....	53
PHOTOGRAPH 8:	REAR VIEW SHOWING BELT CLIP .....	54
PHOTOGRAPH 9:	END OF UNIT REAR VIEW .....	55
PHOTOGRAPH 10:	END OF UNIT TOP VIEW .....	56
PHOTOGRAPH 11:	OVERALL INTERNAL VIEW .....	57
PHOTOGRAPH 12:	OVERALL INTERNAL VIEW, REAR VIEW OF PCB .....	58
PHOTOGRAPH 13:	INTERNAL VIEW WITH WLAN CARD .....	59
PHOTOGRAPH 14:	INTERNAL VIEW WITH WLAN CARD .....	60
PHOTOGRAPH 15:	INSIDE FRONT COVER .....	61
PHOTOGRAPH 16:	INSIDE REAR COVER .....	62
PHOTOGRAPH 17:	PCB FRONT .....	63
PHOTOGRAPH 18:	PCB REAR WITH SHIELD .....	64
PHOTOGRAPH 19:	PCB REAR WITHOUT SHIELD .....	65
PHOTOGRAPH 20:	WLAN CARD FRONT WITH ANTENNA .....	66
PHOTOGRAPH 21:	WLAN CARD REAR WITH ANTENNA .....	67
PHOTOGRAPH 22:	ANTENNA FRONT .....	68
PHOTOGRAPH 23:	ANTENNA REAR .....	69

## **1 GENERAL INFORMATION**

### **1.1 SCOPE**

FCC Rules Part 15.247: Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz.

IC RSS-210 Section 6.2.2(o): Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz.

A direct sequence (DS) system is a spread spectrum (SS) system in which the carrier has been modulated by a high speed spreading code and an information data stream. The high-speed code sequence dominates the “modulating function” and is the direct cause of the wide spreading of the transmitted signal.

### **1.2 TEST FACILITY**

The open area test site and conducted measurement facility used to collect the radiated data is located at 360 Herndon Parkway, Suite 1400, Herndon, Virginia 20170. This site has been fully described in a report and approved by the Federal Communications Commission to perform AC line conducted and radiated emissions testing (ANSI C63.4 1992).

### **1.3 RELATED SUBMITTAL(S)/GRANT(S)**

This is an original application for Certification for Talkman2 M/N: TT-600, FCC ID: MQOTT600-40300. The IF, LO and up to the 2<sup>nd</sup> LO were investigated and tested.

## 2 TEST INFORMATION

### 2.1 TEST JUSTIFICATION

The EUT was tested in all three orthogonal planes in order to determine worst-case emissions. Channel 1 at 2412 MHz, Channel 6 at 2437 MHz and channel 11 at 2462 MHz were tested and investigated from 9 kHz to 24 GHz. Data for all three channels are presented in this report.

The EUT contains an internal dipole antenna. The dipole antenna transmits, receives, and is connected to the internal antenna port.

The worst-case data taken in this report represents the highest data rate at 11 Mbps. Data rates of 5.5 Mbps, 2 Mbps and 1 Mbps were investigated and found to be in compliance. The change in envelope did not cause the EUT to be non-compliant in any of the aforementioned modes.

### 2.2 EXERCISING THE EUT

The EUT was provided with software to continuously transmit during testing. The carrier was also checked to verify that information was being transmitted.

### 2.3 TEST RESULT SUMMARY

**TABLE 2-1: TEST RESULT SUMMARY WITH FCC RULES AND REGULATIONS**

STANADARD	TEST	PASS/FAIL OR N/A
FCC 15.205	Compliance with the Restricted Band Edge	Pass
FCC 15.207	Conducted Emissions	Pass
FCC 15.209	Radiated Emissions	Pass
FCC 15.247(a)(2)	Modulated Bandwidth	Pass
FCC 15.247(b)	Power Output	Pass
FCC 15.247(c)	Antenna Conducted Spurious Emissions	Pass
FCC 15.247(d)	Power Spectral Density	Pass


## 2.4 TEST SYSTEM DETAILS

The FCC Identifiers for all equipment, plus descriptions of all cables used in the tested system are:

**TABLE 2-2: EQUIPMENT UNDER TEST (EUT)**

PART	MANUFACTURER	MODEL	SERIAL NUMBER	FCC ID	CABLE DESCRIPTION	RTL BAR CODE
TALKMAN	VOCOLLECT, INC.	T2	61321295	MQOTT600-40300	N/A	014389
BATTERY	VOCOLLECT, INC.	3000MAH	0118 (SQABAT 18)	N/A	N/A	014396
WALL MOUNT CHARGER	VOCOLLECT, INC.	CM-601-1	42172872	N/A	UNSHIELDED	014547
WIRELESS LAN ADAPTER	CISCO SYSTEMS, INC.	AIR-LMC350	SPL050911QL	LDK102040	N/A	N/A

## 2.5 CONFIGURATION OF TESTED SYSTEM



**FIGURE 1: WORST CASE CONFIGURATION OF SYSTEM UNDER TEST**

### 3 COMPLIANCE WITH THE RESTRICTED BAND EDGE - §15.205

#### 3.1 TEST PROCEDURE

Compliance with the band edges was performed using the FCC's "Radiated Measurement at a Band Edge" guidance document. The final data derived below were from radiated measurements only. The data taken in this report represents the worst case at 11 Mbps. Data rates of 5.5 Mbps, 2 Mbps and 1 Mbps were investigated and found to be in compliance.

#### 3.2 BAND EDGE TEST EQUIPMENT

**TABLE 3-1: BAND EDGE TEST EQUIPMENT**

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
900878	Rhein Tech Labs	AM3-1197-0005	3 meter antenna mast, polarizing	Outdoor Range 1	N/A
900913	Hewlett Packard	85462A	EMI Receiver RF Section, 9 KHz - 6.5 GHz	3325A00159	12/5/02
900914	Hewlett Packard	85460A	RF Filter Section, 100 KHz to 6.5 GHz	3330A00107	12/5/02
900814	Electro-Metrics	EM-6961 (RGA-60)	Double Ridged Guide Antenna 1-18 GHz	2310	2/26/03
901242	Rhein Tech Labs	WRT-000-0003	Wood rotating table	N/A	N/A
901231	IW Microwave Products	KPS-1503-2400-KPS	High frequency RF cables	240"	N/A
901235	IW Microwave Products	KPS-1503-360-KPS	High frequency RF cables	36"	N/A



### 3.3 COMPLIANCE WITH THE RESTRICTED BAND EDGE TEST DATA

#### Calculation of Lower Band Edge


The level 98.53 dBuV/m is the average Field Strength measurement, which the delta measurement of 56.82 dB is subtracted (reference plots), which is equivalent to a level of 41.71 dB. This level has a margin of 12.3 dB below the limit of 54 dBuV/m

$$98.53 \text{ dBuV/m} - 56.82 \text{ dB} - 54 \text{ dBuV/m} = -12.3 \text{ dB}$$

Channel Number: 1  
Frequency (MHz): 2412  
Resolution Bandwidth (MHz): 1  
Video Bandwidth (MHz): 1  
Sweep Time (ms): 200

#### PLOT 3-1: BAND EDGE: PEAK MEASUREMENT FOR CHANNEL 1

Peak Field Strength = 107.93 dBuV/m

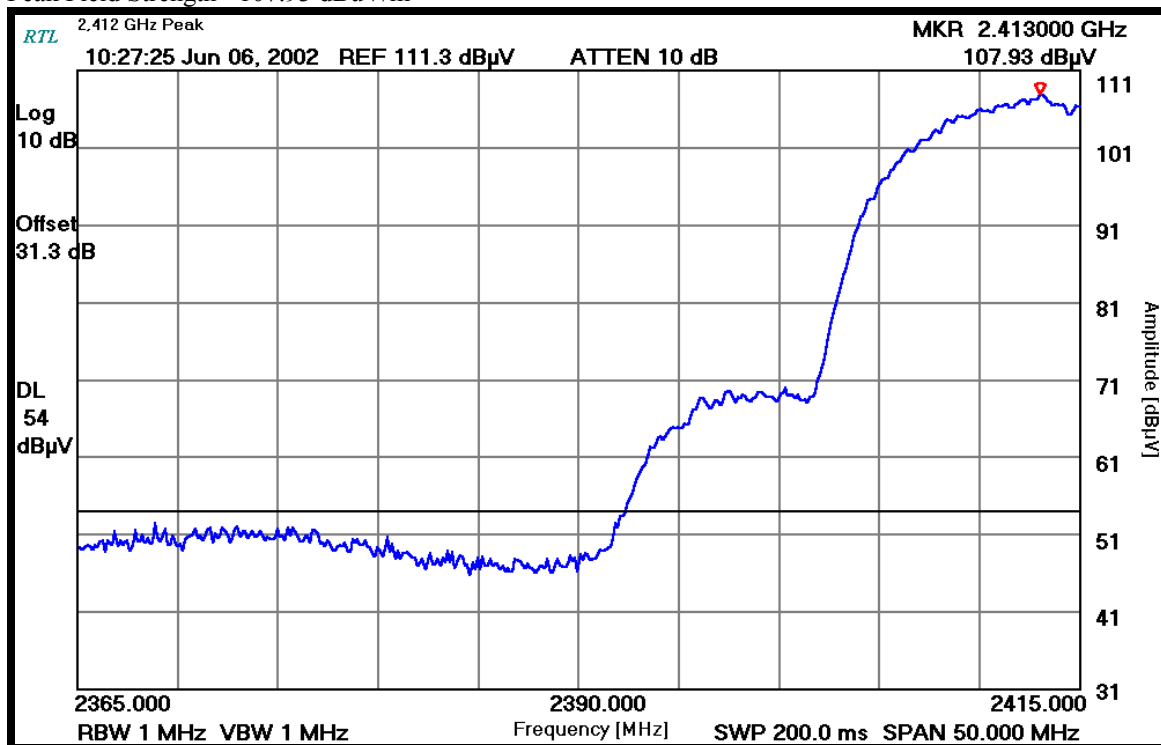

#### TEST PERSONNEL:

Daniel W. Baltzell  
EMC Test Engineer

*Daniel W. Baltzell*


Signature

June 6, 2002  
Date Of Test

Channel Number: 1  
Frequency (MHz): 2412  
Resolution Bandwidth (MHz): 1  
Video Bandwidth (Hz): 10  
Sweep Time (sec.): 15.0

### PLOT 3-2: BAND EDGE: AVERAGE MEASUREMENT FOR CHANNEL 1

Channel 1; 2412 MHz; Average Field Strength =98.53 dBuV/m

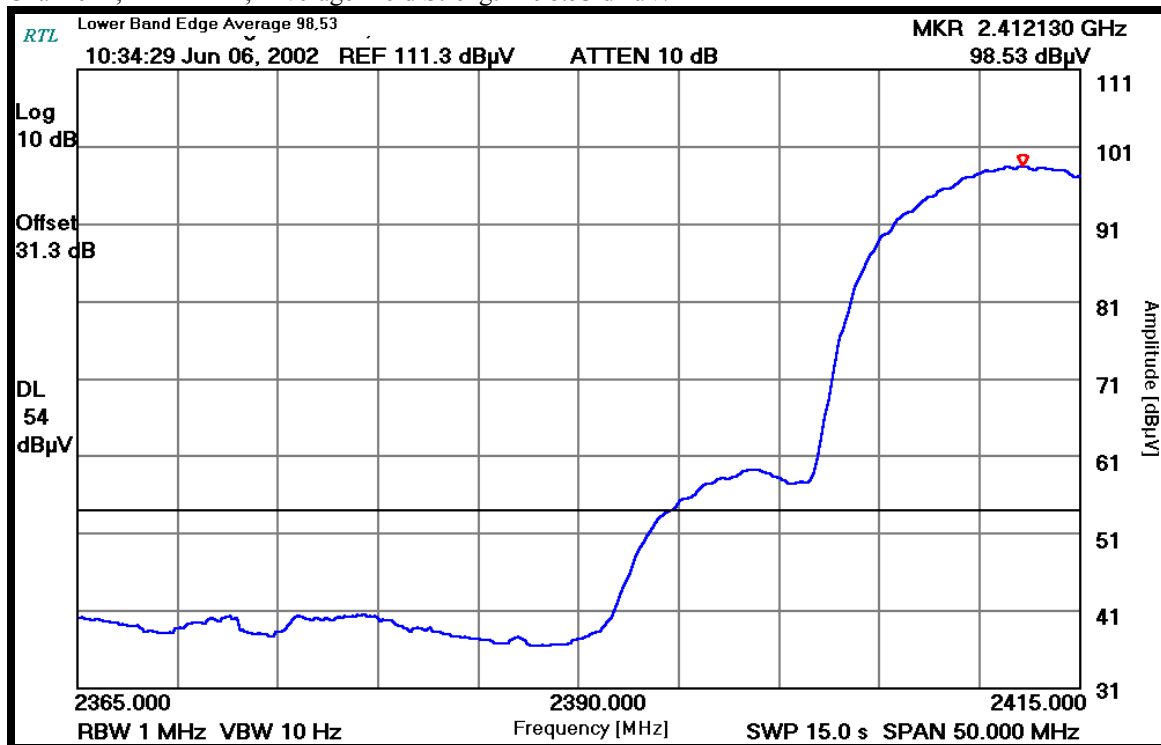

### TEST PERSONNEL:

Daniel W. Baltzell  
EMC Test Engineer


Signature

June 6, 2002  
Date Of Test

Channel Number: 1  
Frequency (MHz): 2412  
Resolution Bandwidth (kHz): 300  
Video Bandwidth (kHz): 300  
Sweep Time (ms): 20.0

### PLOT 3-3: BAND EDGE: DELTA MEASUREMENT FOR CHANNEL 1

Lower Band Edge Delta Measurement = 56.82 dB

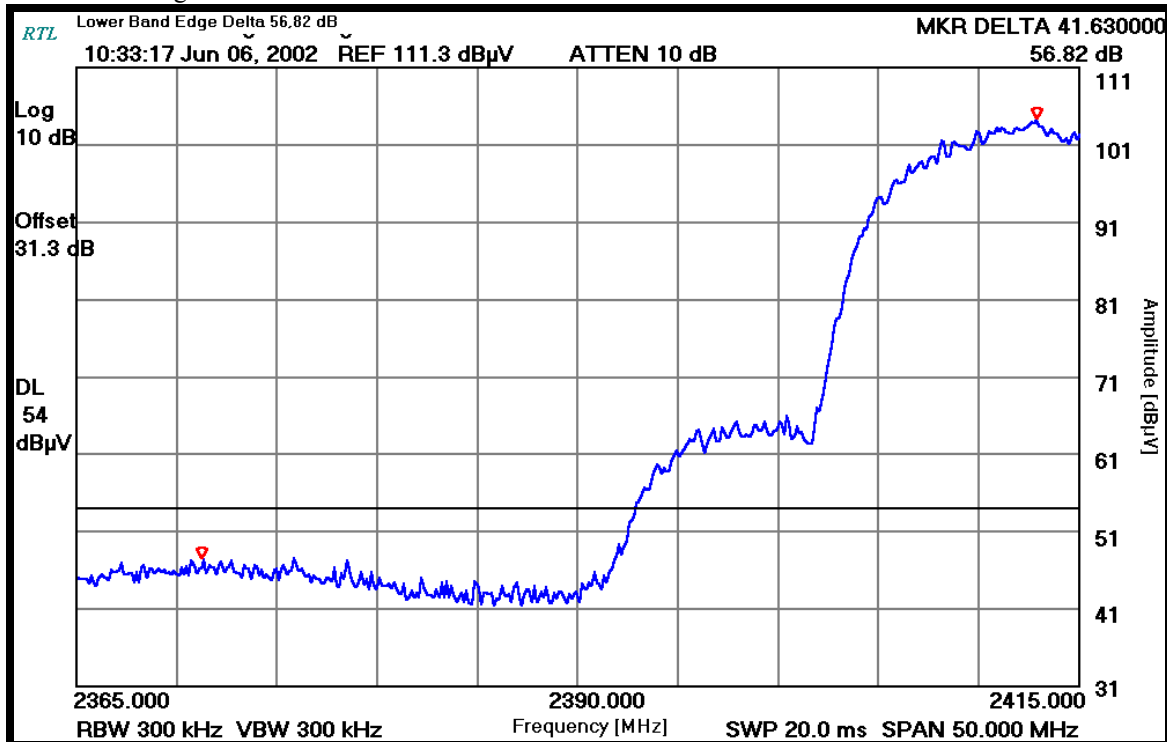

### TEST PERSONNEL:

Daniel W. Baltzell  
EMC Test Engineer

Signature

June 6, 2002  
Date Of Test

### Calculation of Upper Band Edge


The level 100.51 dBuV/m is the average Field Strength measurement, which the delta measurement of 55.92 dB is subtracted (reference plots), which is equivalent to a level of 44.59 dB. This level has a margin of 9.4 dB below the limit of 54 dBuV/m

$$100.51 \text{ dBuV/m} - 55.92 \text{ dB} - 54 \text{ dBuV/m} = -9.4 \text{ dB}$$

Channel Number: 11  
Frequency (MHz): 2462  
Resolution Bandwidth (MHz): 1  
Video Bandwidth (MHz): 1  
Sweep Time (ms): 20.0

### PLOT 3-4: BAND EDGE: PEAK MEASUREMENT FOR CHANNEL 11

Peak Field Strength = 109.41 dBuV/m

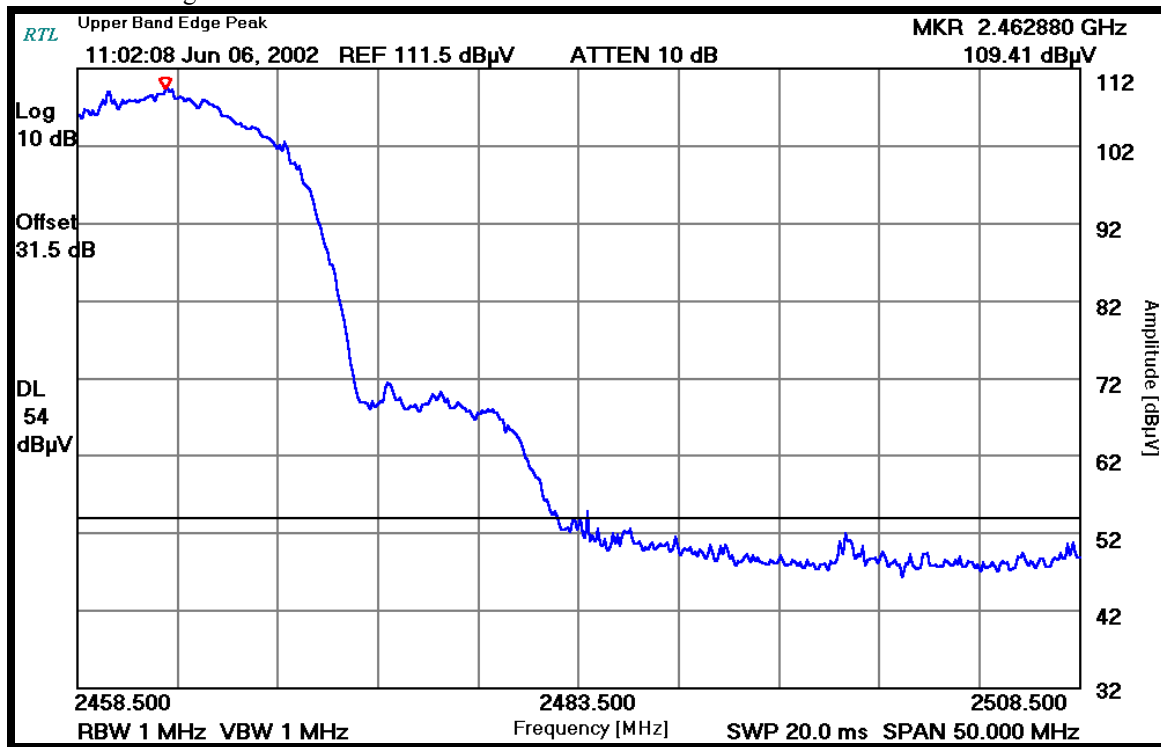

### TEST PERSONNEL:

Daniel W. Baltzell  
EMC Test Engineer

*Daniel W. Baltzell*


Signature

June 6, 2002  
Date Of Test

Channel Number: 11  
Frequency (MHz): 2462  
Resolution Bandwidth (MHz): 1  
Video Bandwidth (Hz): 10  
Sweep Time (sec.): 15.0

### PLOT 3-5: BAND EDGE: AVERAGE MEASUREMENT FOR CHANNEL 11

Channel 11; 2462 MHz; Average Field Strength = 100.51 dBuV/m

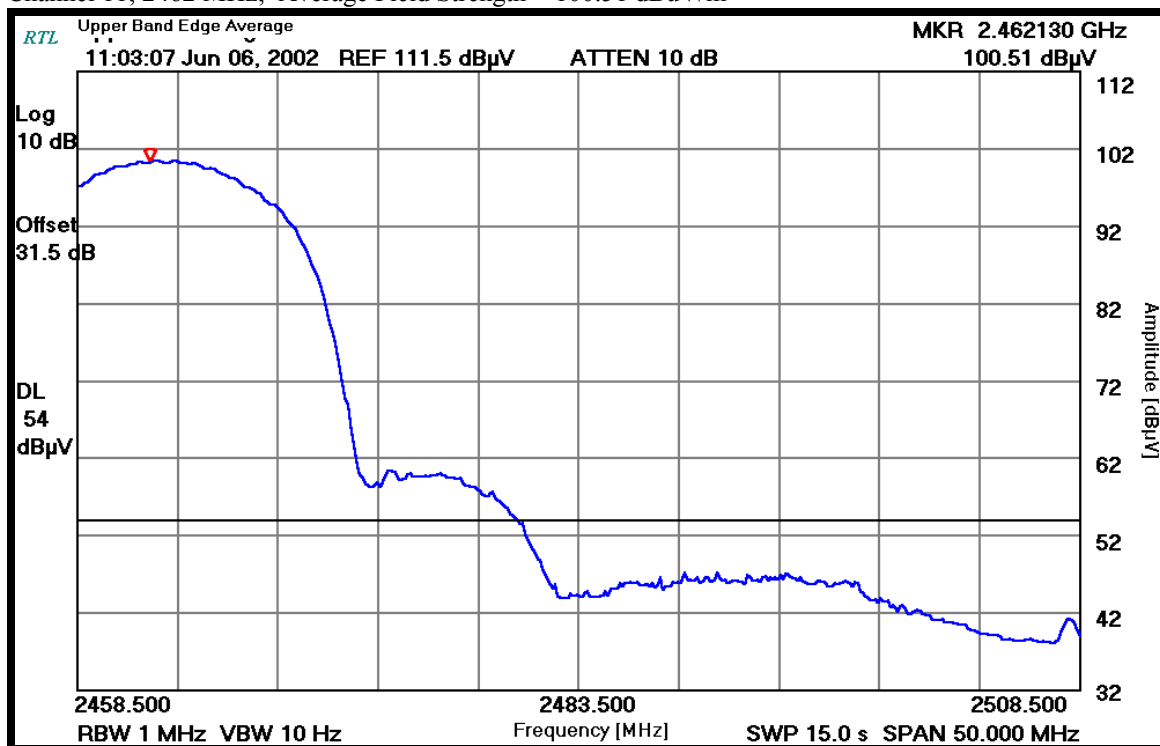

TEST PERSONNEL:

Daniel W. Baltzell  
EMC Test Engineer


Signature

June 6, 2002  
Date Of Test

Channel Number: 11  
Frequency (MHz): 2462  
Resolution Bandwidth (kHz): 300  
Video Bandwidth (kHz): 300  
Sweep Time (ms): 20.0

**PLOT 3-6: BAND EDGE: DELTA MEASUREMENT FOR CHANNEL 11**

Upper Band Edge Delta Measurement = 55.92 dB

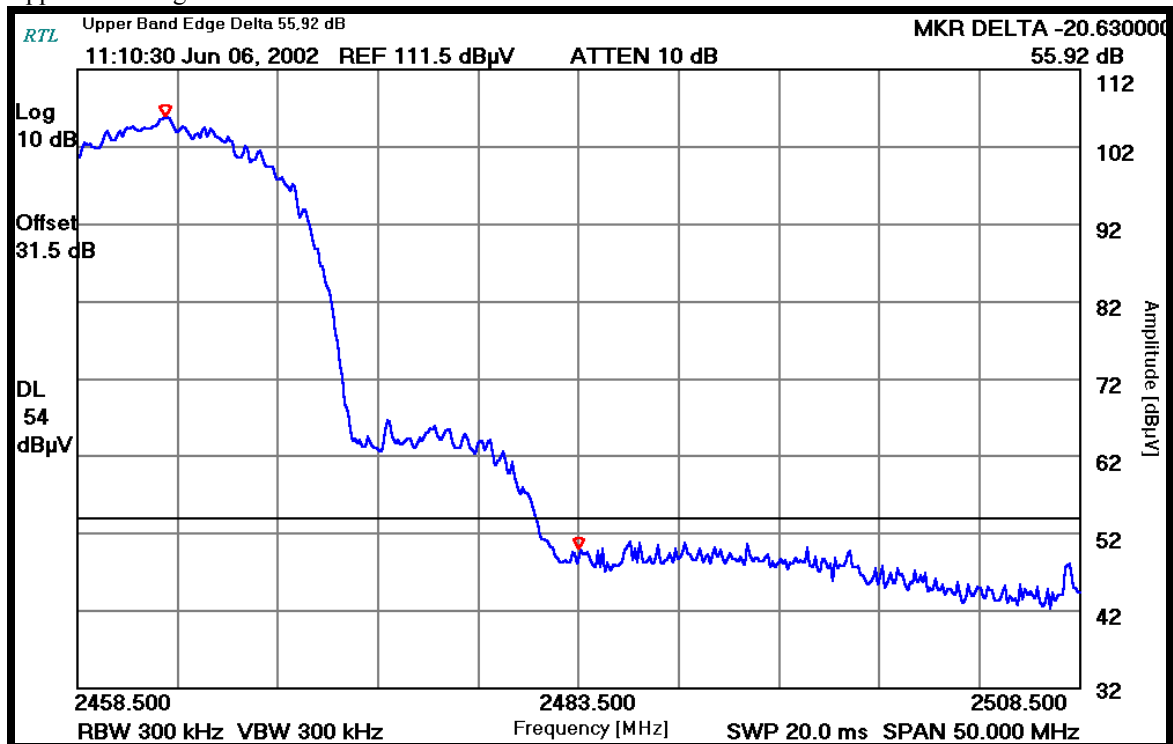

**TEST PERSONNEL:**

Daniel W. Baltzell  
EMC Test Engineer

Signature

June 6, 2002  
Date Of Test

## 4 CONDUCTED LIMITS - §15.207

### 4.1 TEST METHODOLOGY FOR CONDUCTED LINE EMISSIONS MEASUREMENTS

The power line conducted emission measurements were performed in a Series 81 type shielded enclosure manufactured by Rayproof. The EUT was assembled on a wooden table 80 centimeters high. Power was fed to the EUT through a 50 ohm / 50 microhenry Line Impedance Stabilization Network (EUT LISN). The EUT LISN was fed power through an A.C. filter box on the outside of the shielded enclosure. The filter box and EUT LISN housing are bonded to the ground plane of the shielded enclosure. A second LISN, the peripheral LISN, provides isolation for the EUT test peripherals. This peripheral LISN was also fed A.C. power. A metal power outlet box, which is bonded to the ground plane and electrically connected to the peripheral LISN, powers the EUT host peripherals.

The spectrum analyzer was connected to the A.C. line through an isolation transformer. The 50-ohm output of the EUT LISN was connected to the spectrum analyzer input through a Solar 400 kHz high-pass filter. The filter is used to prevent overload of the spectrum analyzer from noise below 400 kHz. Conducted emission levels were measured on each current-carrying line with the spectrum analyzer operating in the CISPR quasi-peak mode (or peak mode if applicable). The analyzer's 6 dB bandwidth was set to 9 kHz. No video filter less than 10 times the resolution bandwidth was used. Average measurements are performed in linear mode using a 10 kHz resolution bandwidth, a 1 Hz video bandwidth, and by increasing the sweep time in order to obtain a calibrated measurement. The emission spectrum was scanned from (150/450) kHz to 30 MHz. The highest emission amplitudes relative to the appropriate limit were measured and have been recorded in this report.

*Note: Rhein Tech Laboratories, Inc. has implemented procedures to minimize errors that occur from test instruments, calibration, procedures, and test setups. Test instrument and calibration errors are documented from the manufacturer or calibration lab. Other errors have been defined and calculated within the Rhein Tech quality manual, section 6.1. Rhein Tech implements the following procedures to minimize errors that may occur: yearly as well as daily calibration methods, technician training, and emphasis to employees on avoiding error.*

### 4.2 CONDUCTED LINE EMISSION TEST

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. If the conducted emissions exceed the limit with the instrument set to the quasi-peak mode, then measurements are made in the average mode. If the quasi-peak measurement is at least 6dB higher than the amplitude in the average mode, the level measured in the quasi-peak mode may be reduced by 13dB before comparing it to the limit.

The conducted test was performed with the EUT exercise program loaded, and the emissions were scanned between 450 kHz to 30 MHz on the NEUTRAL SIDE and PHASE SIDE.

### 4.3 CONDUCTED LINE TEST EQUIPMENT

**TABLE 4-1: CONDUCTED LINE TEST EQUIPMENT**

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
900931	HP	8566B	Spectrum Analyzer (100 Hz - 22 GHz)	3138A07771	5/10/03
901084	AFJ international	LS16	16A LISN	16010020082	9/5/03

#### 4.4 CONDUCTED LINE EMISSION TEST DATA

**TABLE 4-2: CONDUCTED EMISSIONS (NEUTRAL SIDE)**

Emission Frequency (MHz)	Test Detector	Analyzer Reading (dBuV)	Site Correction Factor (dB)	Emission Level (dBuV)	Limit (dBuV)	Margin (dBuV)
0.472	Pk	31.8	0.8	32.6	48.0	-15.4
2.080	Pk	31.8	1.2	33.0	48.0	-15.0
3.050	Pk	32.1	1.3	33.4	48.0	-14.6
3.820	Pk	30.9	1.4	32.3	48.0	-15.7
10.110	Pk	34.1	2.1	36.2	48.0	-11.8
15.110	Pk	24.7	2.8	27.5	48.0	-20.5

**TABLE 4-3: CONDUCTED EMISSIONS (PHASE SIDE)**

Emission Frequency (MHz)	Test Detector	Analyzer Reading (dBuV)	Site Correction Factor (dB)	Emission Level (dBuV)	Limit (dBuV)	Margin (dBuV)
0.470	Pk	32.1	0.8	32.9	48.0	-15.1
1.400	Pk	30.4	0.9	31.3	48.0	-16.7
2.930	Pk	31.9	1.3	33.2	48.0	-14.8
3.700	Pk	29.3	1.4	30.7	48.0	-17.3
5.470	Pk	28.4	1.8	30.2	48.0	-17.8
18.240	Pk	27.6	3.0	30.6	48.0	-17.4

**TEST PERSONNEL:**

Daniel W. Baltzell  
EMC Test Engineer



Signature

June 10, 2002  
Date Of Test



## 5 RADIATED EMISSION LIMITS RECEIVER/DIGITAL INTERFACE - §15.209

### 5.1 RECEIVER/DIGITAL INTERFACE RADIATED EMISSION LIMITS TEST PROCEDURE

Emissions apply to spurious emissions that fall in the restricted and non-restricted bands. The restricted bands are listed in Part 15.205. The maximum permitted average field strength for the restricted band is listed in Part 15.209. The IF, LO and up to the 2<sup>nd</sup> LO were investigated and tested. Channels 1, 6, and 11 were tested and investigated in the transmitting and receiving mode between 10kHz and 1GHz.

### 5.2 RECEIVER/DIGITAL INTERFACE RADIATED EMISSIONS TEST EQUIPMENT

**TABLE 5-1: RECEIVER/DIGITAL INTERFACE RADIATED EMISSIONS TEST EQUIPMENT**

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
900878	Rhein Tech Labs	AM3-1197-0005	3 meter antenna mast, polarizing	Outdoor Range 1	N/A
900889	Hewlett Packard	85685A	RF Preselector for HP 8566B or 8568B (20Hz-2GHz)	3146A01309	11/21/02
900905	RTL	PR-1040	Amplifier	900905	N/A
900931	HP	8566B	Spectrum Analyzer (100 Hz - 22 GHz)	3138A07771	5/10/03
900969	Hewlett Packard	85650A	Quasi-Peak Adapter	2412A00414	5/10/03
901053	Schaffner Chase	CBL6112B	Bi-Log Antenna (20 MHz - 2 GHz)	2648	5/22/03
901242	Rhein Tech Labs	WRT-000-0003	Wood rotating table	N/A	N/A

### 5.3 RECEIVER/DIGITAL INTERFACE RADIATED EMISSION LIMITS TEST DATA

**TABLE 5-2: RECEIVER/DIGITAL INTERFACE RADIATED EMISSIONS CHANNEL 1**

Temperature: 76°F					Humidity: 36%				
Emission Frequency (MHz)	Test Detector	Antenna Polarity (H/V)	Turntable Azimuth (deg)	Antenna Height (m)	Analyzer Reading (dBuV)	Site Correction Factor (dB/m)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
148.808	Qp	H	185	1	43.7	-16.8	26.9	43.5	-16.6
175.999	Qp	H	180	1.4	58.3	-18.2	40.1	43.5	-3.4
219.998	Qp	H	90	1	47.8	-17.3	30.5	46.0	-15.5
307.999	Qp	H	45	1	52.7	-13.2	39.5	46.0	-6.5
309.212	Qp	H	40	1	41.5	-13.2	28.3	46.0	-17.7
483.996	Qp	H	180	1.7	52.0	-8.0	44.0	46.0	-2.0
527.995	Qp	H	180	1.5	50.0	-7.2	42.8	46.0	-3.2
792.000	Qp	H	90	1.6	44.4	-3.5	40.9	46.0	-5.1
2063.490	Av	H	30	1.0	32.9	-1.3	31.6	54.0	-22.4
4126.979									<-25.0
6190.469									<-25.0

QP: RES. =100 KHz, VID= 100 KHz

#### TEST PERSONNEL:

Daniel W. Baltzell  
EMC Test Engineer



Signature

May 16, 2002  
Date Of Test

## 6 RADIATED EMISSION LIMITS; SPURIOUS AND HARMONICS - §15.247

### 6.1 RADIATED SPURIOUS EMISSION LIMITS TEST PROCEDURE

Radiated Spurious Emissions applies to harmonics and spurious emissions that fall in the restricted and non-restricted bands. The restricted bands are listed in Part 15.205. The maximum permitted average field strength for the restricted band is listed in Part 15.209. The EUT was tested in the X-Y, X-Z and Y-Z orthogonal planes.

### 6.2 RADIATED SPURIOUS TEST EQUIPMENT

**TABLE 6-1: RADIATED SPURIOUS EMISSIONS TEST EQUIPMENT**

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
900772	EMCO	3161-02	Horn Antenna	9804-1044	N/A
900321	EMCO	3161-03	Horn Antennas (4-8,2GHz)	9508-1020	N/A
900323	EMCO	3160-7	Horn Antennas (8,2-12.4 GHz)	9605-1054	N/A
900356	EMCO	3160-08	Horn Antennas (12.4 – 18 GHz)	9607-1044	N/A
900325	EMCO	3160-9	Horn Antennas (18 - 26.5 GHz)	9605-1051	N/A
900814	Electro-Metrics	EM-6961 (RGA-60)	Double Ridged Guide Antenna 1-18 GHz	2310	2/26/03
900878	Rhein Tech Labs	AM3-1197-0005	3 meter antenna mast, polarizing	Outdoor Range 1	N/A
900889	Hewlett Packard	85685A	RF Preselector for HP 8566B or 8568B (20Hz-2GHz)	3146A01309	11/21/02
900905	RTL	PR-1040	Amplifier	900905	N/A
900931	Hewlett Packard	8566B	Spectrum Analyzer	3138A07771	5/10/03
900666	Hewlett Packard	8449B	Microwave Preamplifier, 1 to 26.5 GHz	3008A00505	N/A
900969	Hewlett Packard	85650A	Quasi-Peak Adapter	2412A00414	5/10/03
901242	Rhein Tech Labs	WRT-000-0003	Wood rotating table	N/A	N/A

Operating Frequency (MHz): 2412  
Channel: 1  
Measured Conducted Power (dBm): 20.4  
Measured EIRP (dBm): 24.4  
Antenna: Dipole


### 6.3 RADIATED EMISSIONS HARMONICS/SPURIOUS TEST DATA

TABLE 6-2: RADIATED EMISSIONS HARMONICS/SPURIOUS (CHANNEL 1)

Frequency (MHz)	Peak Measurement (dBuV)	Average Measurement (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Corrected Average Measurement (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2412.0	76.6	67.2	30.6	0.7	98.5		
4824.0						54.0	<-20
7236.0						78.5	<-20
9648.0						78.5	<-20
12060.0						54.0	<-20
14472.0						54.0	<-20
16884.0						78.5	<-20
19296.0						54.0	<-20
21708.0						78.5	<-20
24120.0						78.5	<-20

PEAK: RES. =1 MHz, VID= 1MHz; AVERAGE: RES. =1 MHz, VID= 10Hz; <-20dB= 20dB BELOW THE LIMIT

#### TEST PERSONNEL:

Daniel W. Baltzell		June 6, 2002
EMC Test Engineer	Signature	Date Of Test


Operating Frequency (MHz): 2437      Measured EIRP (dBm): 24.5  
Channel: 6      Antenna: Dipole  
Measured Conducted Power (dBm): 20.5

**TABLE 6-3: RADIATED EMISSIONS HARMONICS/SPURIOUS (CHANNEL 6)**

Frequency (MHz)	Peak Measurement (dBuV)	Average Measurement (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Corrected Average Measurement (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2437.0	75.6	66.4	30.7	0.6	97.7		
4874.0						54.0	<-20
7311.0						54.0	<-20
9748.0						77.7	<-20
12185.0						77.7	<-20
14622.0						77.7	<-20
17059.0						77.7	<-20
19496.0						54.0	<-20
21933.0						77.7	<-20
24370.0						77.7	<-20

PEAK: RES. =1 MHz, VID= 1MHz; AVERAGE: RES. =1 MHz, VID= 10Hz; <-20dB= 20dB BELOW THE LIMIT

**TEST PERSONNEL:**

 Daniel W. Baltzell EMC Test Engineer	 Signature	June 6, 2002 Date Of Test
--	---------------	------------------------------

Operating Frequency (MHz): 2462  
Channel: 11  
Measured Conducted Power (dBm): 20.2  
Measured EIRP (dBm): 24.1  
Antenna: Dipole

**TABLE 6-4: RADIATED EMISSIONS HARMONICS/SPURIOUS (CHANNEL 11)**

Frequency (MHz)	Peak Measurement (dBuV)	Average Measurement (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Corrected Average Measurement (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2462.0	78.0	69.1	30.8	0.6	100.5		
4924.0						54.0	<-20
7386.0						54.0	<-20
9848.0						80.5	<-20
12310.0						54.0	<-20
14772.0						80.5	<-20
17234.0						80.5	<-20
19696.0						54.0	<-20
22158.0						54.0	<-20
24620.0						80.5	<-20

AVERAGE: RES. =1 MHz, VID= 10Hz; <-20dB= 20dB BELOW THE LIMIT

**TEST PERSONNEL:**

Daniel W. Baltzell  
EMC Test Engineer



Signature

June 6, 2002  
Date Of Test

## 7 MODULATED BANDWIDTH - §15.247(A)(2)

### 7.1 MODULATED BANDWIDTH TEST PROCEDURE – MINIMUM 6 DB BANDWIDTH

The minimum 6 dB bandwidths per FCC 15.247 (a)(2) were measured using a 50 ohm spectrum analyzer with the resolution bandwidth set at 100 kHz, and the video bandwidth set at 300 kHz. The device was modulated using the maximum 11Mbps data rate. The minimum 6 dB bandwidths are as follows:

### 7.2 BANDWIDTH TEST EQUIPMENT

**TABLE 7-1: BANDWIDTH TEST EQUIPMENT**

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
900931	HP	8566B	Spectrum Analyzer (100Hz – 22 GHz)	3138A07771	5/10/03

### 7.3 BANDWIDTH TEST DATA

**TABLE 7-2: MINIMUM 6 DB BANDWIDTH TEST DATA**

CHANNEL	6 dB BANDWIDTH (MHz)
1	9.96
6	10.32
11	10.32


#### TEST PERSONNEL:

 Kinh Ly EMC Test Engineer	Signature	June 6, 2002 Date Of Test
---	-----------	------------------------------

## 7.4 MODULATED BANDWIDTH PLOTS

Channel Number: 1  
Frequency (MHz): 2412  
Resolution Bandwidth (kHz): 100  
Video Bandwidth (kHz): 300  
Sweep Time (sec.): 10.0

PLOT 7-1: MODULATED BANDWIDTH CHANNEL 1

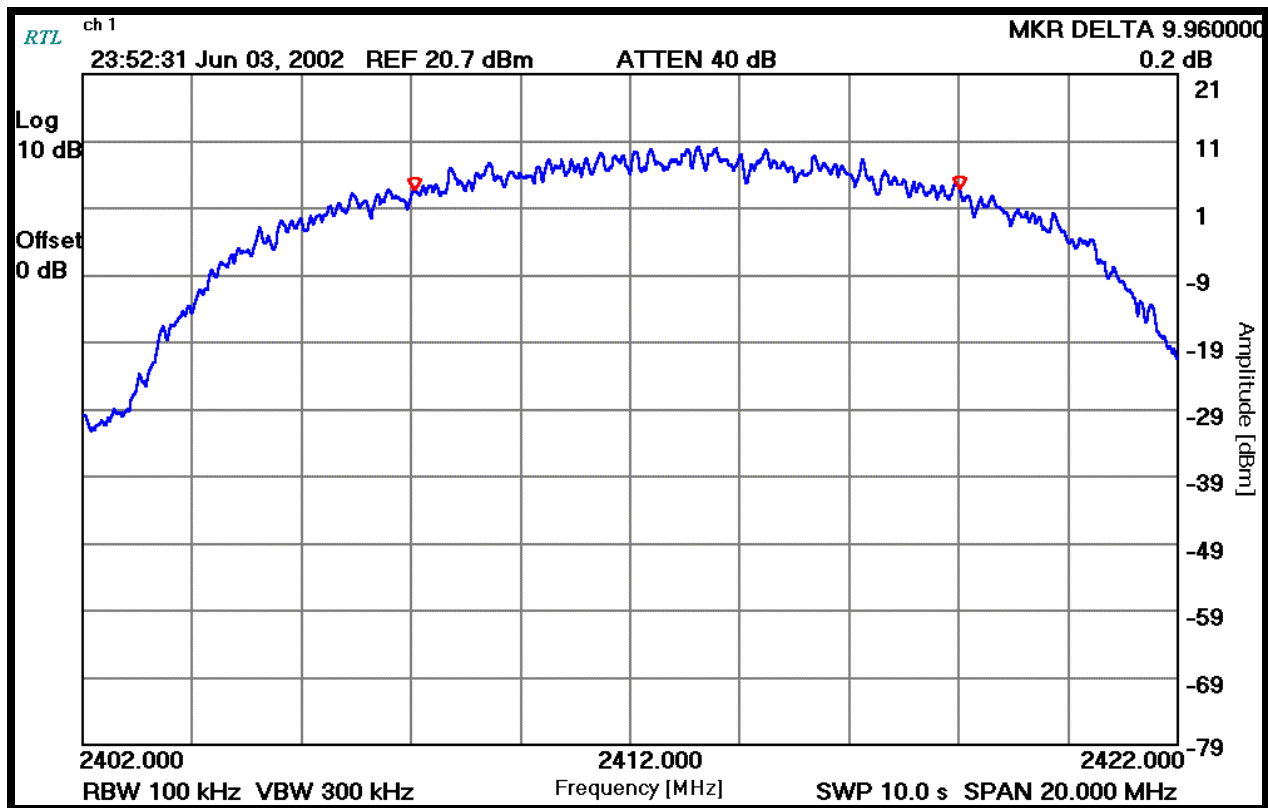

TEST PERSONNEL:

*Kinh Ly*

Kinh Ly  
EMC Test Engineer


Signature

June 3, 2002  
Date Of Test



Channel Number: 6  
Frequency (MHz): 2437  
Resolution Bandwidth (kHz): 100  
Video Bandwidth (kHz): 300  
Sweep Time (sec.): 10.0

**PLOT 7-2: MODULATED BANDWIDTH CHANNEL 6**

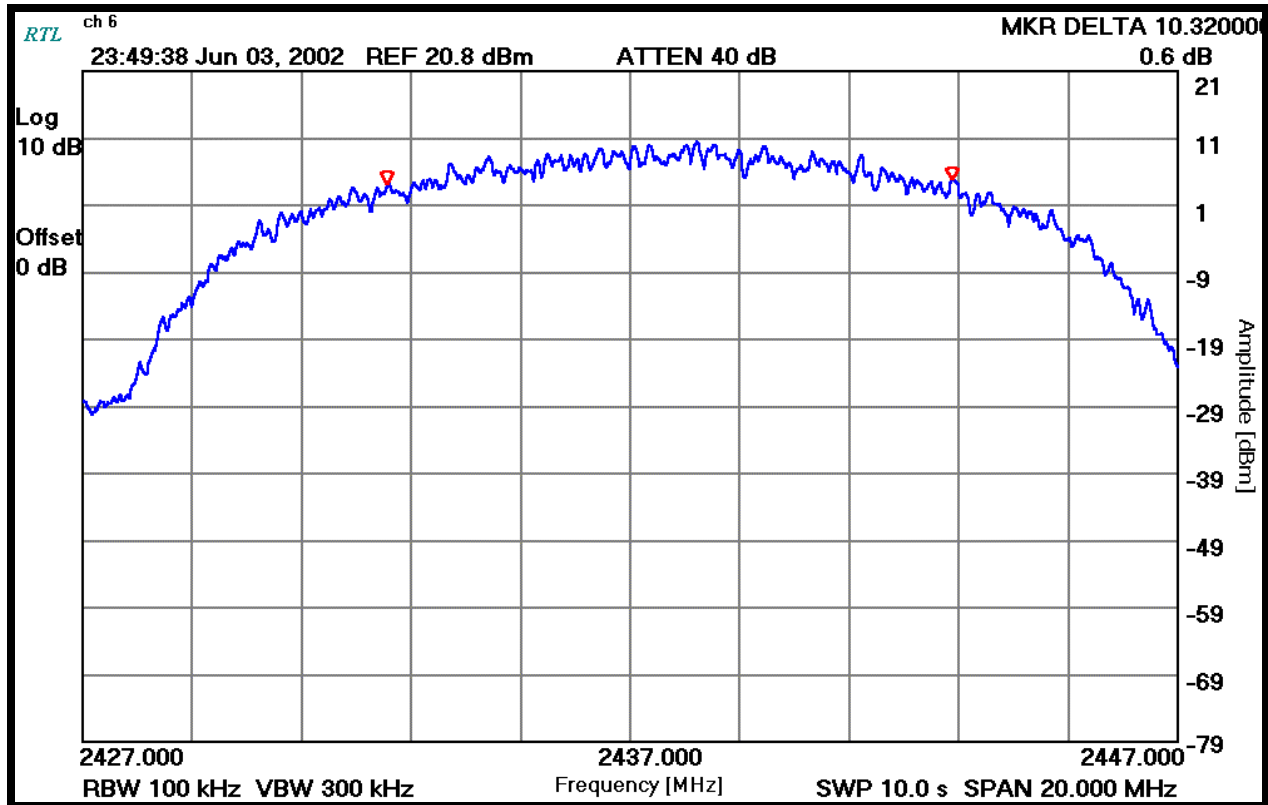

**TEST PERSONNEL:**

*Kinh Ly*


Kinh Ly  
EMC Test Engineer

Signature

June 3, 2002  
Date Of Test

**Channel Number:** 11  
**Frequency (MHz):** 2462  
**Resolution Bandwidth (kHz):** 100  
**Video Bandwidth (kHz):** 300  
**Sweep Time (sec.):** 10.0

**PLOT 7-3: MODULATED BANDWIDTH CHANNEL 11**

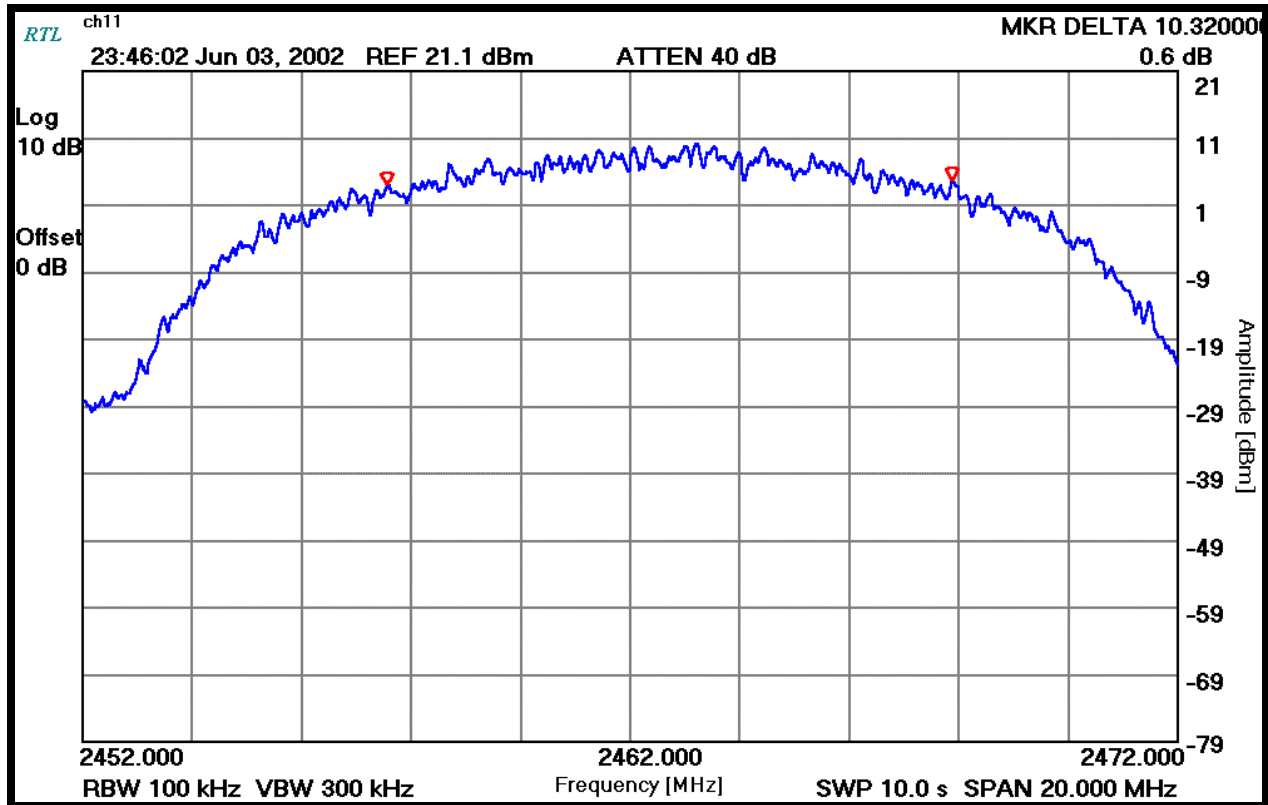

**TEST PERSONNEL:**

*Kinh Ly*

Kinh Ly  
 EMC Test Engineer

Signature

June 3, 2002  
 Date Of Test

## 8 PEAK OUTPUT POWER - §15.247(B)(1)

### 8.1 POWER OUTPUT TEST PROCEDURE

A radiated power measurement of the EUT was measured using an Agilent 4416A EPM-P Series Power Meter with a E9323A Peak and Average Power Sensor substituted at the end of the receive antenna. The EIRP measurement was performed using the substitution method using the previously measured level with this power meter.

### 8.2 POWER OUTPUT TEST EQUIPMENT

**TABLE 8-1: POWER OUTPUT TEST EQUIPMENT**

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
901186	Agilent Technologies	E9323A (50MHz-6GHz)	Peak & Avg. Power Sensor	US40410380	6/25/02
901184	Agilent Technologies	E4416A	EPM-P Power Meter, single channel	GB41050573	7/5/02
900931	HP	8566B	Spectrum Analyzer (100Hz – 22 GHz)	3138A07771	5/10/03
900772	EMCO	3161-02	Horn ANTENNA (2-4 GHz)	900772	N/A
900814	Electro-Metrics	RGA-60	Double Ridged Guide Antenna (1-18 GHz)	2310	N/A

### 8.3 POWER OUTPUT TEST DATA

**TABLE 8-2: POWER OUTPUT TEST DATA**

Operating Frequency (MHz): 2412, 2437, 2462  
Channel: 1, 6 & 11  
Measured Cond. Pwr. (dBm): 20.4, 20.5, 20.2  
Measured EIRP (dBm): 24.4, 24.5, 24.1  
Modulation bandwidth (MHz): 10.3  
Antenna: Dipole

**TABLE 8-3: POWER OUTPUT TEST DATA**

CHANNEL	EIRP (dBm)*	POWER CONDUCTED OUTPUT (dBm)
1	24.4	20.4
6	24.5	20.5
11	24.1	20.2

\*Measurement accuracy is +/- 1.5 dB

#### TEST PERSONNEL:

Daniel W. Baltzell  
EMC Test Engineer



Signature

June 6, 2002  
Date Of Test

## 9 ANTENNA CONDUCTED SPURIOUS EMISSIONS - §15.247(C)

### 9.1 ANTENNA CONDUCTED SPURIOUS EMISSIONS TEST PROCEDURES

Antenna spurious emission per FCC 15.247(c) was measured from the EUT antenna port using a 50 ohm spectrum analyzer with the resolution bandwidth set at 100 kHz, and the video bandwidth set at 300 kHz. The modulated carrier was identified at 2.412GHz for Channel 1, 2.437GHz for Channel 6 and 2.462GHz for Channel 11. No other harmonics or spurs were found within 20 dB of the carrier level from 9kHz to the carrier 10<sup>th</sup> harmonic. See antenna conducted spurious noise table. Channels 1, 6, and 11 were investigated and tested.

### 9.2 ANTENNA CONDUCTED SPURIOUS TEST EQUIPMENT

TABLE 9-1: ANTENNA CONDUCTED SPURIOUS TEST EQUIPMENT

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
900931	HP	8566B	Spectrum Analyzer (100Hz – 22 GHz)	3138A07771	5/10/03
901137	Par Electronics	2.4-2.4850 GHz	Notch Filter	N/A	N/A

### 9.3 ANTENNA CONDUCTED SPURIOUS EMISSIONS CHANNEL 1

Operating Frequency (MHz): 2412

Channel: 1

Measured Cond. Pwr. (dBm): 20.4

Limit (dBc): -20

TABLE 9-2: ANTENNA CONDUCTED SPURIOUS EMISSIONS CHANNEL 1

Frequency (MHz)	Measured Level (dBm)	Notch Filter Insertion Loss (dB)	Corrected Measured Level (dBm)	Limit (-20 dBc) (dBm)	Margin (dB)
4824.0	-46.4	1.3	-45.1	0.4	-45.5
7236.0	-30.6	4.3	-26.2	0.4	-26.7
9648.0	-45.1	7.2	-37.9	0.4	-38.3
12060.0	-44.6	6.2	-38.4	0.4	-38.8
14472.0	-42.6	4.8	-37.7	0.4	-38.2
16884.0	-43.4	4.8	-38.6	0.4	-39.0
19296.0	-44.1	7.7	-36.4	0.4	-36.8
21708.0	-41.9	7.9	-34.0	0.4	-34.5
24120.0	-40.2	8.0	-32.2	0.4	-32.7

#### TEST PERSONNEL:

*Kinh Ly*

Kinh Ly  
EMC Test Engineer

Signature

June 4, 2002  
Date Of Test


#### 9.4 ANTENNA CONDUCTED SPURIOUS EMISSIONS CHANNEL 6

Operating Frequency (MHz): 2437  
Channel: 6  
Measured Cond. Pwr. (dBm): 20.5  
Limit (dBc): -20

**TABLE 9-3: ANTENNA CONDUCTED SPURIOUS EMISSIONS CHANNEL 6**

Frequency (MHz)	Measured Level (dBm)	Notch Filter Insertion Loss (dB)	Corrected Measured Level (dBm)	Limit (-20 dBc) (dBm)	Margin (dB)
4874.0	-43.7	1.5	-42.2	0.5	-42.6
7311.0	-28.8	3.3	-25.5	0.5	-26.0
9748.0	-45.7	7.2	-38.5	0.5	-39.0
12185.0	-46.2	10.2	-36.0	0.5	-36.5
14622.0	-42.8	4.3	-38.5	0.5	-39.0
17059.0	-43.9	3.7	-40.3	0.5	-40.7
19496.0	-43.2	6.7	-36.5	0.5	-37.0
21933.0	-43.9	6.9	-37.1	0.5	-37.5
24370.0	-42.3	7.3	-35.1	0.5	-35.6

#### TEST PERSONNEL:



Kinh Ly  
EMC Test Engineer

Signature

June 4, 2002  
Date Of Test

## 9.5 ANTENNA CONDUCTED SPURIOUS EMISSIONS CHANNEL 11

Operating Frequency (MHz): 2462  
Channel: 11  
Measured Cond. Pwr. (dBm): 20.2  
Limit (dBc): -20

**TABLE 9-4: ANTENNA CONDUCTED SPURIOUS EMISSIONS CHANNEL 11**

Frequency (MHz)	Measured Level (dBm)	Notch Filter Insertion Loss (dB)	Corrected Measured Level (dBm)	Limit (-20 dBc) (dBm)	Margin (dB)
4924.0	-42.2	0.8	-41.3	0.2	-41.5
7386.0	-26.7	1.7	-25.0	0.2	-25.2
9848.0	-46.5	6.7	-39.9	0.2	-40.1
12310.0	-45.5	22.8	-22.7	0.2	-22.9
14772.0	-42.9	5.8	-37.1	0.2	-37.3
17234.0	-43.2	4.0	-39.2	0.2	-39.4
19696.0	-42.9	7.7	-35.3	0.2	-35.5
22158.0	-43.8	8.0	-35.8	0.2	-36.0
24620.0	-39.9	8.3	-31.7	0.2	-31.9

### TEST PERSONNEL:

*Kinh Ly*

Kinh Ly  
EMC Test Engineer

Signature

June 4, 2002  
Date Of Test

## 10 POWER SPECTRAL DENSITY - §15.247(D)

### 10.1 POWER SPECTRAL DENSITY TEST PROCEDURE

The Power spectral density per FCC 15.247(d) was measured using a 50 ohm spectrum analyzer with the resolution bandwidth set at 3 kHz, the video bandwidth set at 300 kHz, and the sweep time set at 1000 seconds. The spectral lines were resolved for the modulated carriers at 2.412GHz, 2.437GHz, and 2.462GHz respectively. These levels are below the +8 dBm limit. See power spectral density table and plots.

### 10.2 POWER SPECTRAL DENSITY TEST EQUIPMENT

**TABLE 10-1: POWER SPECTRAL DENSITY TEST EQUIPMENT**

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
900931	HP	8566B	Spectrum Analyzer (100Hz – 22 GHz)	3138A07771	5/10/03


### 10.3 POWER SPECTRAL DENSITY TEST DATA

Operating Frequency (MHz): 2412, 2437 & 2462  
Channel: 1, 6 & 11  
Measured Cond. Pwr. (dBm): 20.4, 20.5, 20.2  
Modulation Bandwidth (MHz): 10.3  
Limit (dBm): 8

**TABLE 10-2: POWER SPECTRAL DENSITY TEST DATA**

CHANNEL	POWER SPECTRAL DENSITY LIMIT = +8dBm
1	-4.8
6	-4.5
11	-4.8


#### TEST PERSONNEL:

Kinh Ly EMC Test Engineer	 Signature	June 3, 2002 Date Of Test
------------------------------	--	------------------------------

## 10.4 POWER SPECTRAL DENSITY PLOTS

Operating Frequency (MHz): 2412  
Channel: 1  
Measured Cond. Pwr. (dBm): 20.4  
Measured EIRP (dBm): 24.4  
Bandwidth Resolution (kHz): 3  
Bandwidth Video (kHz): 300  
Sweep Time (sec.): 1000.0

PLOT 10-1: POWER SPECTRAL DENSITY: CHANNEL 1

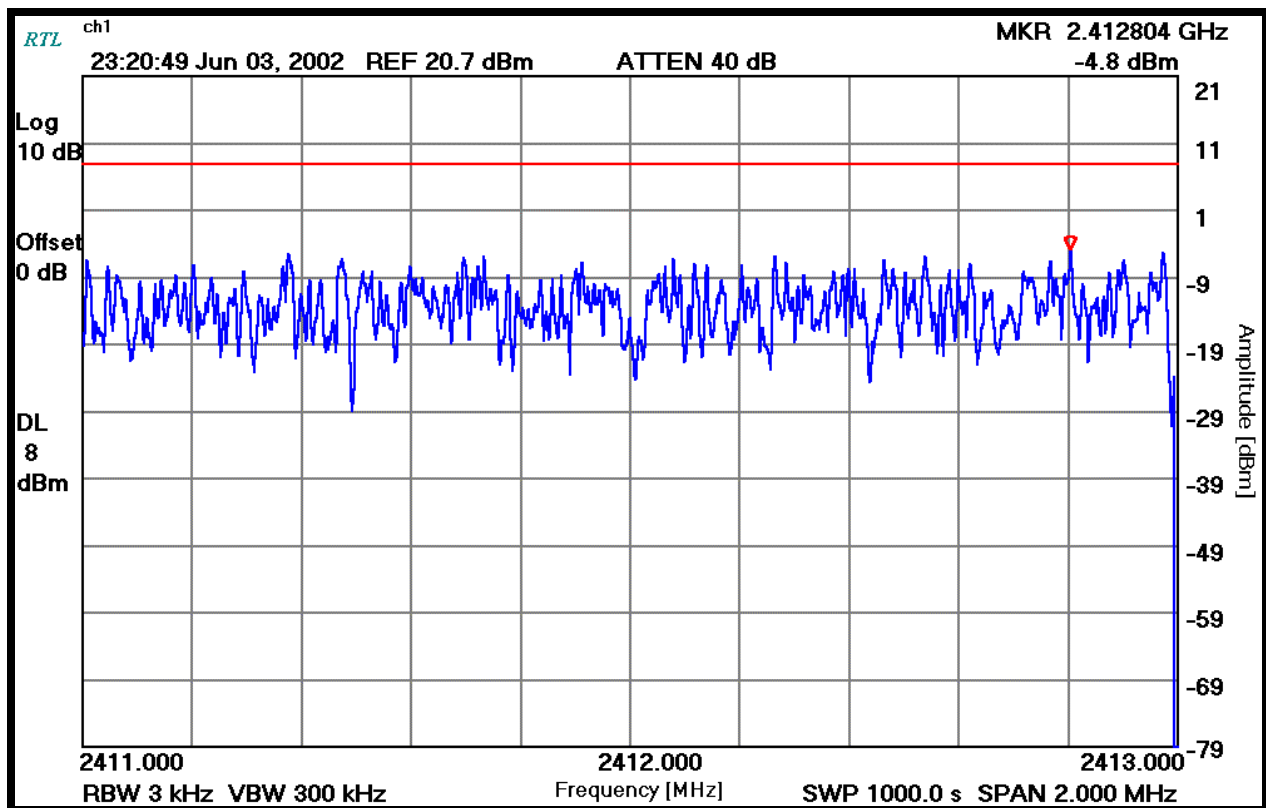

TEST PERSONNEL:

*Kinh Ly*

Kinh Ly  
EMC Test Engineer


Signature

June 3, 2002  
Date Of Test



Operating Frequency (MHz): 2437  
Channel: 6  
Measured Cond. Pwr. (dBm): 20.5  
Measured EIRP (dBm): 24.5  
Bandwidth Resolution (kHz): 3  
Bandwidth Video (kHz): 300  
Sweep Time (sec.): 1000.0

**PLOT 10-2: POWER SPECTRAL DENSITY: CHANNEL 6**

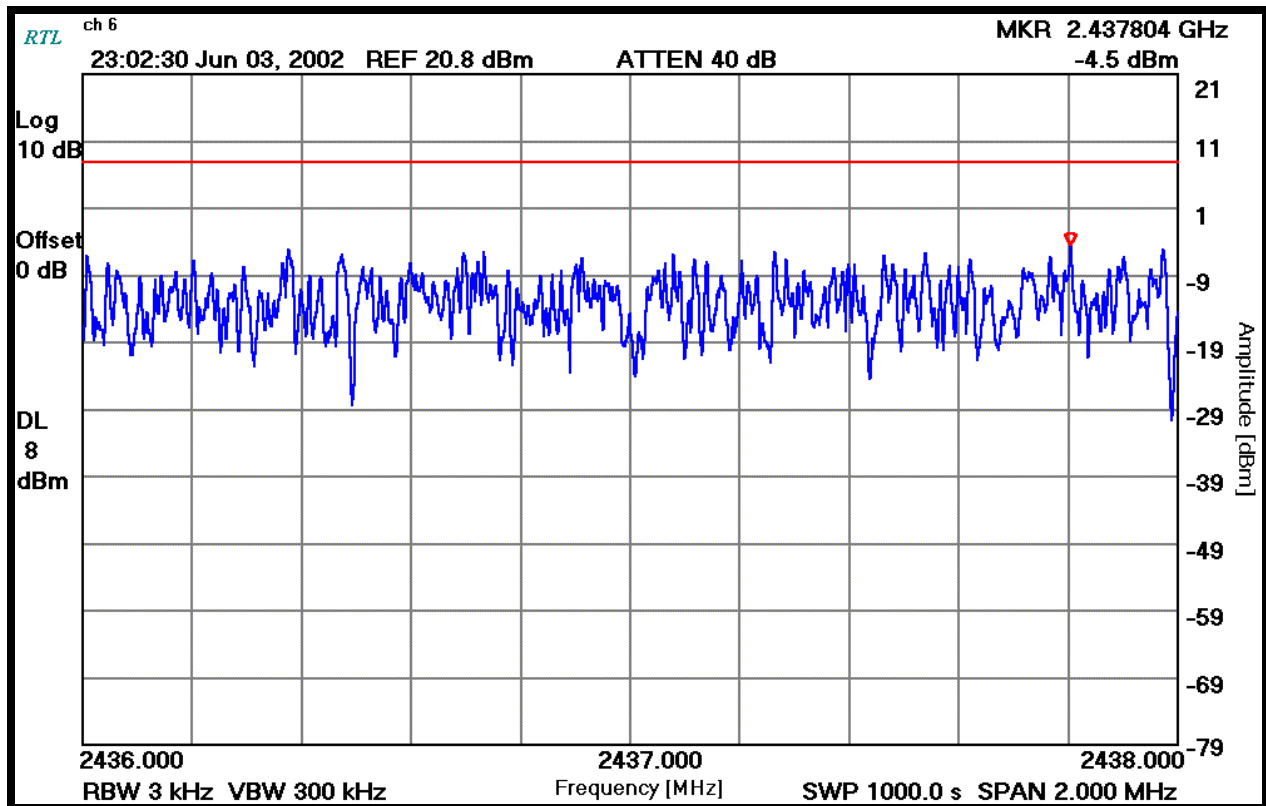

**TEST PERSONNEL:**

*Kinh Ly*


Kinh Ly  
EMC Test Engineer

Signature

June 3, 2002  
Date Of Test

Operating Frequency (MHz): 2462  
Channel: 11  
Measured Cond. Pwr. (dBm): 20.2  
Measured EIRP (dBm): 24.1  
Bandwidth Resolution (kHz): 3  
Bandwidth Video (kHz): 300  
Sweep Time(sec.): 1000.0

**PLOT 10-3: POWER SPECTRAL DENSITY: CHANNEL 11**

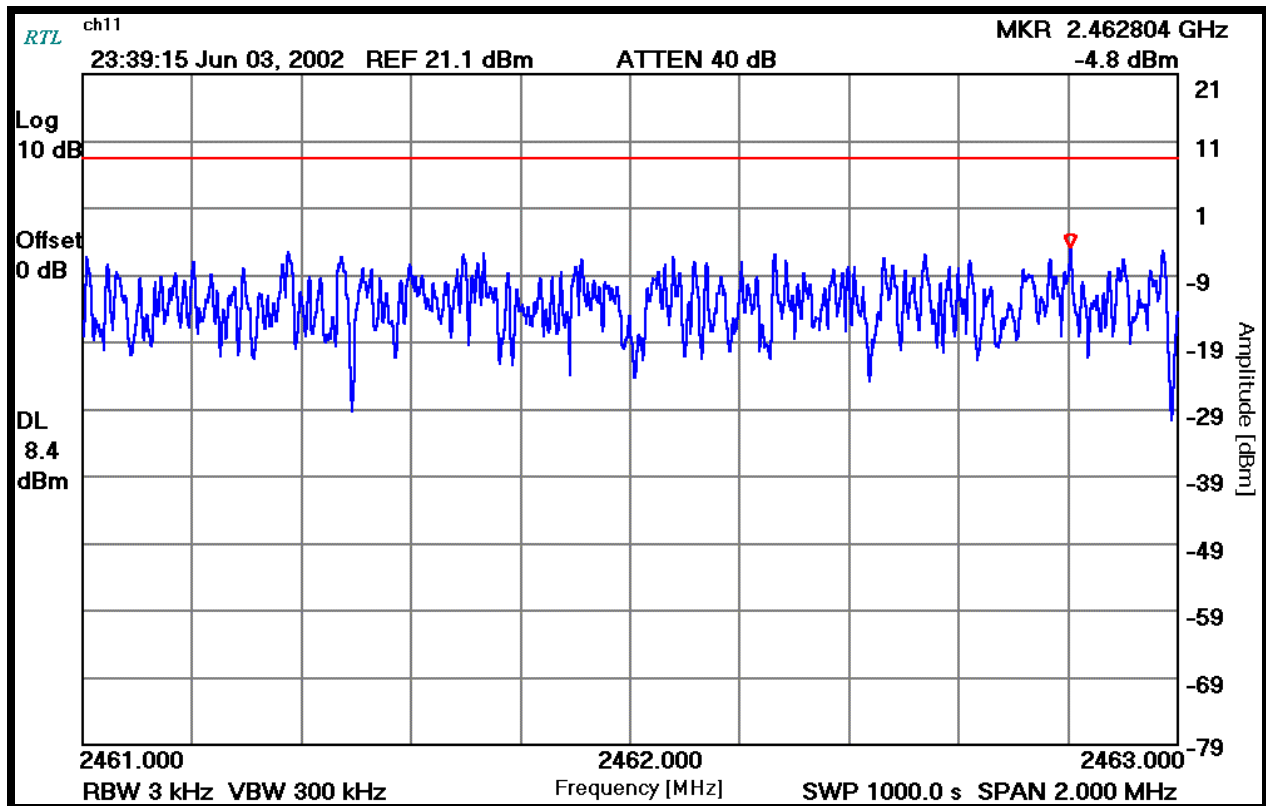

**TEST PERSONNEL:**

*Kinh Ly*

Kinh Ly  
EMC Test Engineer

Signature

June 3, 2002  
Date Of Test

Rhein Tech Laboratories  
360 Herndon Parkway  
Suite 1400  
Herndon, VA 20170  
<http://www.rheintech.com>

Report number: 2002102  
FCC: Part 15.247  
Industry Canada: RSS-210  
FCC ID: MQOTT600-40300  
M/N: TT-600

## 11 CONCLUSION

The data in this measurement report shows that Vocollect, Inc. Talkman2 Model: TT-600, FCC ID: MQOTT600-40300, complies with all the requirements of Parts 2 and 15 of the FCC Rules and Industry Canada RSS-210.