



SAR MEASUREMENT REPORT

FCC ID: HD5-EDA61K1

Applicant: Honeywell International Inc.
Honeywell Safety and Productivity Solutions

Application Type: Certification

Product: Mobile Computer

Model No.: EDA61K-1

Brand Name: Honeywell

FCC Classification: PCS Licensed Transmitter (PCB)
Digital Transmission System (DTS)
Unlicensed National Information Infrastructure (UNII)
Spread Spectrum Transmitter (DSS)

FCC Rule Part(s): FCC 47 CFR Part 2.1093

Test Procedure(s): IEEE 1528:2013, IEEE C95.1- 2005

Test Date: November 05 ~ 28, 2020

Reviewed By:

(Jame Yuan)

Approved By:

(Robin Wu)



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in IEEE1528, KDB 447498 and KDB 865664. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

Revision History

Report No.	Version	Description	Issue Date	Note
2010RSU078-U8	Rev. 01	Initial Report	11-29-2020	Valid

CONTENTS

Description	Page
1. General Information.....	5
1.1. Applicant.....	5
1.2. Manufacturer	5
1.3. Testing Facility.....	5
2. Product Information.....	6
2.1. General Description	6
2.2. Product Specification Subjective to this Report.....	7
2.3. Description of Available Antennas	9
2.4. Ancillary Equipment.....	9
3. Summary of Test Result.....	10
3.1. Test Standards	10
3.2. Environment Condition	10
3.3. RF Exposure Limits	10
3.4. Test Result Summary	11
4. Specific Absorption Rate (SAR).....	12
4.1. Introduction.....	12
4.2. Definition	12
5. DASY6 Measurement System	13
5.1. Introduction.....	13
5.2. DASY6 Measurement System Diagram	13
5.3. System Components Details.....	14
6. The SAR Measurement Procedure	26
6.1. Measurement Process Diagram.....	26
6.2. Test Position Definition	27
6.3. Test Procedure	30
7. System Verificaiton.....	32
7.1. Tissue Check.....	32
7.2. System Check	35
8. Analysis and Results.....	38
8.1. Antenna Location.....	38
8.2. Conducted Power	40
8.3. SAR Exclusion Analysis.....	97

8.4.	SAR Test Results	100
8.5.	Estimated SAR Calculation	121
9.	Simultaneous Transmission Analysis.....	122
10.	Test Equipment Used	123
11.	Measurement Uncertainty	124
Annex A - System Check Result		126
Annex B - Test Data Plots		139
Annex C - SAR Test Setup Photos.....		175
Annex D - EUT External Photos		176
Annex E - Equipment Calibration Report		177

1.1. Applicant

1.2. Manufacturer

1.3. Testing Facility

☒	Test Site – MRT Suzhou Laboratory
	Laboratory Location (Suzhou – Wuzhong) D8 Building, No.2 Tian’edang Rd., Wuzhong Economic Development Zone, Suzhou, China
	Laboratory Location (Suzhou – SIP) 4b Building, Liando U Valley, No.200 Xingpu Rd., Shengpu Town, Suzhou Industrial Park, China
	Laboratory Accreditations
	A2LA: 3628.01CNAS: L10551
	FCC: CN1166ISED: CN0001
	VCCI: R-20025, G-20034, C-20020, T-20020
☐	Test Site – MRT Shenzhen Laboratory
	Laboratory Location (Shenzhen) 1G, Building A, Junxiangda Building, Zhongshanyuan Road West, Nanshan District, Shenzhen, China
	Laboratory Accreditations
	A2LA: 3628.02CNAS: L10551
	FCC: CN1284ISED: CN0105
☐	Test Site – MRT Taiwan Laboratory
	Laboratory Location (Taiwan) No. 38, Fuxing 2 nd Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.)
	Laboratory Accreditations
	TAF: L3261-190725
	FCC: 291082, TW3261ISED: TW3261

2. Product Information

2.1. General Description

Product Name	Mobile Computer
Model No.	EDA61K-1
GSM Operation Band (s)	GPRS/EDGE 850/1900
WCDMA Operation Band (s)	Band 2/4/5
CDMA Operation Band (s)	BC0/BC1
LTE Operation Band (s)	FDD Band 2/4/5/7/12/13/17/25, TDD Band 38/41
Wi-Fi Specification	802.11a/b/g/n/ac
Bluetooth Version	v4.1 dual mode
Satellite	GPS/GLONASS
EUT Type	Portable Device
Exposure Category	General Population/Uncontrolled Exposure

Note: The EUT has two types of scan engine and keyboard, except the scan engine and keyboard, everything else is the same. Full SAR test is performed on Sample 1 and highest reported SAR for each frequency band is repeated on Sample 2, which have different scan engine and keyboard.

2.2. Product Specification Subjective to this Report

3GPP Specification	
IMEI Code	Sample 1: 990013860076798 Sample 2: 990013860185094
Frequency Range	GPRS850: 880 ~ 915 MHz GPRS1900: 1710 ~ 1785 MHz WCDMA Band 2: 1850 ~ 1910 MHz WCDMA Band 4: 1710 ~ 1755 MHz WCDMA Band 5: 824 ~ 849 MHz CDMA BC0: 815 ~ 845 MHz CDMA BC1: 1850 ~ 1910 MHz LTE Band 2: 1850 ~ 1910 MHz LTE Band 4: 1710 ~ 1755 MHz LTE Band 5: 824 ~ 849 MHz LTE Band 7: 2500 ~ 2570 MHz LTE Band 12: 699 ~ 716 MHz LTE Band 13: 777 ~ 787 MHz LTE Band 17: 704 ~ 716 MHz LTE Band 25: 1850 ~ 1915 MHz LTE Band 38: 2570 ~ 2620 MHz LTE Band 41: 2496 ~ 2690 MHz
Multi-slot Class	GPRS/EGPRS Class 33
Type of Modulation	GPRS: GMSK; EDGE: 8PSK WCDMA: BPSK, QPSK CDMA: QPSK, 8PSK LTE: QPSK, 16QAM
Product Category	LTE: Category 6
SIM	Only one SIM card is supported

Wi-Fi Specification	
Frequency Range	<u>For 2.4GHz Wi-Fi</u> 802.11b/g/n-HT20: 2412 ~ 2462 MHz <u>For 5GHz Wi-Fi</u> 802.11a /n-HT20/ac-VHT20: 5180~5240 MHz, 5260~5320 MHz, 5500~5720 MHz, 5745~5825 MHz 802.11n-HT40/ac-VHT40: 5190~5230 MHz, 5270~5310 MHz, 5510~5710 MHz, 5755~5795 MHz 802.11ac-VHT80/ac-VHT80: 5210 MHz, 5290 MHz, 5530 MHz, 5610 MHz, 5690 MHz, 5775 MHz
Channel Number	<u>For 2.4GHz Wi-Fi</u> 802.11b/g/n-HT20: 11 <u>For 5GHz Wi-Fi</u> 802.11a/n-HT20/ac-VHT20: 25 802.11n-HT40/ac-VHT40: 12 802.11ac-VHT80/ac-VHT80: 6
Type of Modulation	802.11b: DSSS 802.11a/g/n/ac: OFDM
Data Rate	802.11b: 1/2/5.5/11Mbps 802.11a/g: 6/9/12/18/24/36/48/54Mbps 802.11n: up to 150Mbps 802.11ac: up to 433.3Mbps
Bluetooth Specification	
Frequency Range	2400MHz~ 2483.5MHz
Channel Number	For Bluetooth: 79 For BT-LE: 40
Channel Spacing	For Bluetooth: 1MHz For BT-LE: 2MHz
Type of Modulation	1Mbps (GFSK), 2Mbps (Pi/4 DQPSK), 3Mbps (8DPSK)

2.3. Description of Available Antennas

Operating Condition	GSM/WCDMA/CDMA/LTE (1Tx, 1Rx) 802.11b/g/n for 2.4GHz Wi-Fi (1Tx, 1Rx) 802.11a/n/ac for 5GHz Wi-Fi (1Tx, 1Rx) Bluetooth BR/EDR/LE (1Tx, 1Rx)
Antenna Type	FPC Antenna
Simultaneously Transmitting Scenarios	WWAN transmit simultaneously with WLAN/BT WLAN and Bluetooth share the same antenna path and cannot transmit simultaneously

2.4. Ancillary Equipment

Ancillary Equipment 1	Adapter
Model No.	ADS-12B-06 05010E
Input	100-240V ~ 50/60Hz, 0.3A
Output	5V $\Rightarrow$ 2.0A
Ancillary Equipment 2	Battery
Brand Name	Honeywell
Model No.	CK65-BTSC
Capacity	7000mAh/25.2Wh
Rated Voltage	DC 3.6V

3. Summary of Test Result

3.1. Test Standards

No.	Identity	Document Title
1	47 CFR Part 2.1093	Radiofrequency radiation exposure evaluation: portable devices
2	IEEE 1528-2013	IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
3	IEEE C95.1-2005	IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz
4	KDB 447498 D01 v06	General RF Exposure Guidance
5	KDB 865664 D01 v01r04	SAR Measurement 100 MHz to 6 GHz
6	KDB 865664 D02 v01r02	RF Exposure Reporting
7	KDB 941225 D01v03r01	3G SAR Measurement Procedures
8	KDB 941225 D05v02r05	SAR Evaluation Considerations for LTE Devices
9	KDB 248227 D01 v02r02	SAR Guidance for IEEE 802.11 (Wi-Fi) Transmitter

3.2. Environment Condition

Ambient Temperature	20.5°C~24.0°C
Temperature of Simulant	20.0°C~23.5°C
Relative Humidity	38%RH ~55%RH

3.3. RF Exposure Limits

Human Exposure	Basic restrictions for electric, magnetic and electromagnetic fields. (Unit in mW/g or W/kg)
Spatial Peak SAR ¹ (Head and Body)	1.60
Spatial Average SAR ² (Whole Body)	0.08
Spatial Peak SAR ³ (Arms and Legs)	4.00

Notes:

1. The Spatial Peak value of the SAR averaged over any 1gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
2. The Spatial Average value of the SAR averaged over the whole body.
3. The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over appropriate averaging time.

3.4. Test Result Summary

Worst SAR List

Highest Reported SAR	Body 1g SAR (W/kg)	Extremity 10g SAR (W/kg)
GPRS 850	0.74	0.81
GPRS 1900	0.40	1.70
WCDMA Band 2	0.70	2.95
WCDMA Band 4	0.89	3.07
WCDMA Band 5	0.73	0.66
CDMA BC0	0.73	0.63
CDMA BC1	0.61	2.48
LTE Band 4	0.77	3.02
LTE Band 5	0.62	0.61
LTE Band 7	1.14	2.73
LTE Band 12	0.50	0.62
LTE Band 13	0.71	0.67
LTE Band 25	0.65	2.81
LTE Band 41	0.41	1.04
DTS Band Wi-Fi	0.11	0.53
U-NII-2A Band Wi-Fi	0.14	0.76
U-NII-2C Band Wi-Fi	0.18	1.16
U-NII-3 Band Wi-Fi	0.17	1.14

Highest Simultaneous SAR

Highest Simultaneous SAR	Body 1g SAR (W/kg)	Extremity 10g SAR (W/kg)
WWAN + WLAN/BT	1.24	3.08

4. Specific Absorption Rate (SAR)

4.1. Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational /controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

4.2. Definition

The SAR in the tissue-equivalent liquid can be determined by the rate of temperature increase or by E-field measurements, according to Formulas (1) or (2):

$$SAR = \frac{\sigma E^2}{\rho} \quad (1)$$

$$SAR = c_h \left. \frac{dT}{dt} \right|_{t=0} \quad (2)$$

where

- SAR is the specific absorption rate in W/kg;
- E is the rms value of the electric field strength in the tissue medium in V/m;
- σ is the electrical conductivity of the tissue medium in S/m;
- ρ is the mass density of the tissue medium in kg/m³;
- c_h is the specific heat capacity of the tissue medium in J/(kg K);

$\left. \frac{dT}{dt} \right|_{t=0}$ is the initial time derivative of temperature in the tissue medium in K/s.


5. DASY6 Measurement System

5.1. Introduction

DASY6 is the latest generation of the Dosimetric Assessment System optimized for specific absorption rate (SAR) measurements, SAR compliance. DASY6 builds on the power of our industry - leading dosimetric and near-field evaluation system, DASY52. Running on a significantly more robust platform and a more powerful measurement server, DASY6 offers much faster scanning with no sacrifice of measurement precision. All hardware and software are fully compatible with DASY52. The new system seamlessly integrates two software solutions, the novel cDASY V6.6 - optimized for SAR compliance testing to significantly reduce SAR assessment costs - and the widely used DASY V5.2 for generalized near-field evaluations with maximized flexibility.

5.2. DASY6 Measurement System Diagram

The DASY6 system in cDASY6/DASY5 V5.2 SAR Configuration is shown below:

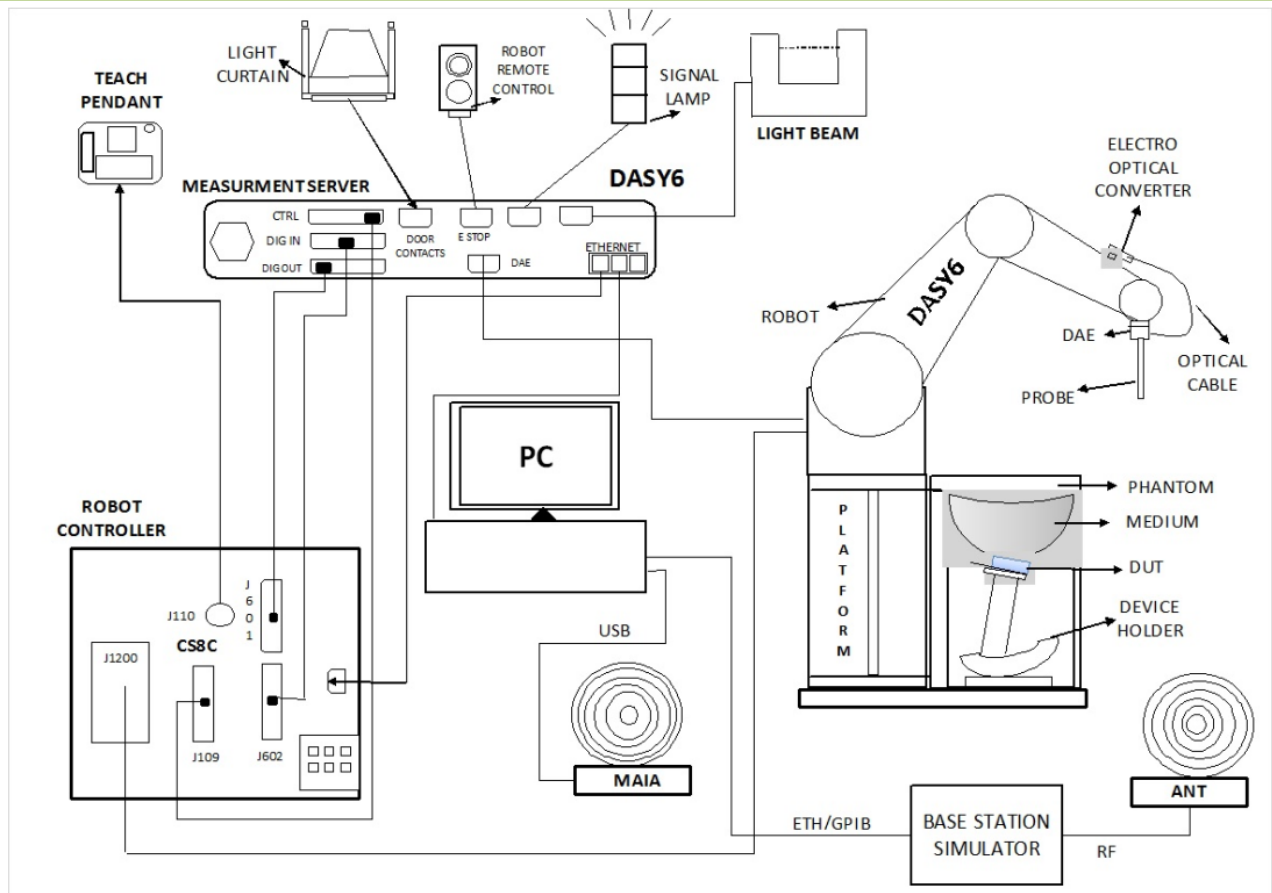

The System consist of the following components:

DASY6 Measurement Server, Data Acquisition Electronics (DAE), Probes, Light-Beam Unit, Phantoms, Media, Device Holder for SAM-Twin Phantom, Laptop Extension Kit to Mounting Device, Robot System Platform & Pedestal, Verification of the Parameters with the Dielectric Assessment Kit (DAK), Modulation and Interference Analyzer (MAIA), Omni-Directional Ultra-Wideband Antenna (ANT), cDASY6 software, DASY5 NEO software and SEMCAD data evaluation software.

5.3. System Components Details

DASY6 Platforms MP6E-TX60L

MP6E-TX60L platform is a compact cost-effective platform based on TX60L. It consists of:

- a stable non-metallic platform for the TX60L robot
- a frame for two standard-size phantoms (1.0×0.5 m)
- a frame for one half-size phantom (0.5×0.5 m)

It includes two easily moveable trolleys for the phone and tablet/computer positioner and two platforms for positioning dipoles and other antennas.



Material The beams consist of a composite of wood and epoxy (permittivity of 3.3 and loss tangent of <0.07)

Size The footprint of the platform is 1590 mm $\times$ 1060 mm.

Robots -TX60L

The MRT DASY6 system uses the high-precision industrial robots TX60L from Staubli SA (France). The TX robot family - the successor of the well-known RX robot family - continues to offer the features important for DASY6 applications:

- High precision (repeatability 0.02mm)
- High reliability (industrial design)
- Low maintenance costs (virtually maintenance-free as all gears are direct drive, no belt drives)
- Jerk-free straight movements (brushless synchron motors, no stepper motors)
- Low extremely low frequency (ELF) interference (motor control fields are shielded by the closed metallic construction)

The robots are controlled by the Staubli CS8c robot controllers. All information regarding the use and maintenance of the robot arm and the robot controller is provided on CDs delivered with the robot. Paper manuals are available directly from Staubli upon request.



DASY6 Measurement Server

The DASY6 measurement server is based on a PC/104 CPU board with a 400MHz intel ULV Celeron, 128MB chip-disk and 128MB RAM. The necessary circuits for communication with the DAE4 electronics box, as well as the 16-bit AD converter system for optical detection and digital I/O interface are contained on the DASY6 I/O board, which is directly connected to the PC/104 bus of the CPU board. The measurement server performs all real-time data evaluations of field measurements and surface detection, controls robot movements, and handles safety operations.



Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE4) consist of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16-bit AD-converter, and a command decoder with a control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information, as well as an optical uplink for commands and the clock.



Probes

E-Field Probe(EX3DV4)

The SAR measurement is conducted with the dosimetric probe manufactured by SPEAG. The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. SPEAG conducts the probe calibration in compliance with international and national standards (e.g. IEEE 1528, EN 62209-1, IEC 62209, etc.) under ISO 17025.

Construction:

Symmetric design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)

Frequency: 4 MHz ~ 10 GHz

Linearity: ± 0.2 dB (30 MHz ~ 10 GHz)

Directivity:

± 0.1 dB in TSL (rotation around probe axis)

± 0.3 dB in TSL (rotation normal to probe axis)

Dynamic Range: 10 μ W/g to 100 mW/g; Linearity: ± 0.2 dB (noise: typically < 1 μ W/g)

Dimensions:

Overall length: 337 mm (Tip: 20 mm)

Tip diameter: 2.5 mm (Body: 12 mm)

Typical distance from probe tip to dipole centers: 1 mm

Applications:

High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields); the only probe that enables compliance testing for frequencies up to 6 GHz with precision of better than 30%.



MSTV1 (Mother Scan Teaching V1) Electronics & TP6V2 (Teaching Probe 6V2) Probe

MSTV1 (Mother Scan Teaching V1) electronics together with the TP6V2 (Teaching Probe 6V2) probe is used for mother scan of DASY6 system. This probe uses a 3D Renishaw LP2 sensor which ensures accurate detection of any shape and a measurement repeatability of 8 μ m.



Light-Beam Unit

The light beam switch allows automatic "tooling" of the probe. During the process, the actual position of the probe tip with respect to the robot arm, as well as the probe length and the horizontal probe offset, are measured. The software then corrects all movements within the measurement jobs, such that the robot coordinates are valid for the probe tip.



The repeatability of this process is better than 0.1 mm. If a position has been taught with an aligned probe, the same position will be reached with another aligned probe within 0.1 mm, even if the other probe has different dimensions. During probe rotations, the probe tip will keep its actual position.

Phantoms

SAM-Twin Phantom

The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528 and IEC 62209-1. It enables the dosimetric evaluation of left and right hand phone usage as well as body-mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by teaching three points with the robot.

SAM-Twin V5.0 and higher has the same shell geometry and is manufactured from the same material as SAM-Twin V4.0, but with the top structure reinforced.

Material Vinyl ester, fiberglass reinforced (VE-GF)

Liquid Compatibility The phantom shell is compatible with SPEAG tissue simulating liquids (sugar and oil based). Use of other liquids may render the phantom warranty void (see note or consult SPEAG support).

Shell Thickness 2 ± 0.2 mm (6 ± 0.2 mm at ear point)

Dimensions Length: 1000 mm
(incl. Wooden Width: 500 mm
Support) Height: adjustable feet

Filling Volume approx. 25 liters

Support DASY6: standard-size platform slot
DASY52 stand-alone: SPEAG standard phantom table




ELI phantom

The ELI phantom is used for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI is fully compatible with the IEC 62209-2 standard and all known tissue simulating liquids. ELI has been optimized regarding its performance and can be integrated into our standard phantom tables. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points. The phantom is compatible with all SPEAG dosimetric probes and dipoles.

ELI V5.0 and higher has the same shell geometry and is manufactured from the same material as ELI V4.0, but has reinforced top structure. ELI V6.0, released in August 2014, has the same shell geometry as ELI V4.0 but offers increased longterm stability.


Material	Vinyl ester, fiberglass reinforced (VE-GF)
Liquid Compatibility	The phantom shell is compatible with SPEAG tissue simulating liquids (sugar and oil based). Use of other liquids may render the phantom warranty void (see note or consult SPEAG support).
Shell Thickness	2.0 ± 0.2 mm (bottom plate)
Dimensions	Major axis: 600 mm Minor axis: 400 mm
Filling Volume	approx. 30 liters
Support	DASY6: standard-size platform slot DASY52 stand-alone: SPEAG standard phantom table

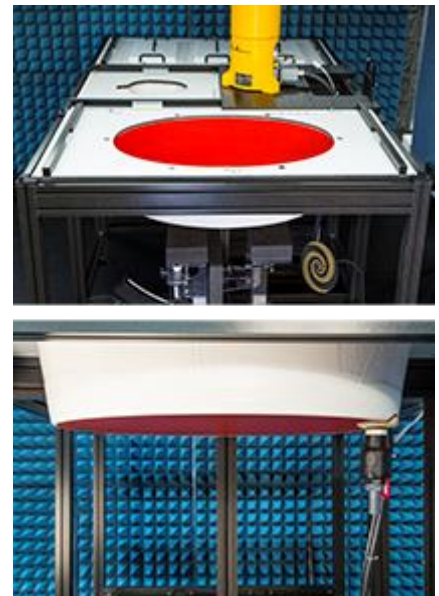

SAM Face Down Phantom

The SAM Face Down Phantom V10 allows assessment of the exposure of the face and in particular the eyes for handheld devices operated in front of the face. e.g., video phones, cameras, organizers, etc. It is manufactured from high precision injection molded polypropylene. The Mounting Device for Transmitters including extensions kit can be used to position the device.

Material	Epoxy based
Liquid Compatibility	The phantom shell is compatible with SPEAG tissue simulating liquids (sugar and oil based). Use of other liquids may render the phantom warranty void (see note or consult SPEAG support).
Shell Thickness	2 ± 0.2 mm (6 mm at ear point)
Head Shape	Standard compatible SAM head.

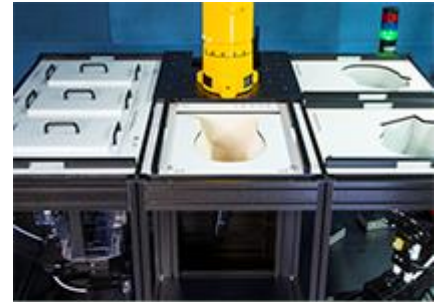

SAM Head Stand Phantom

The SAM Head Stand Phantom V10 allows assessment of the exposure of the top-head or around-the-head wireless accessories, e.g., head-belts, etc. It is manufactured from high precision injection molded polypropylene. The Mounting Device for Transmitters including extensions kit can be used to position the device.

Material	Epoxy based
Liquid Compatibility	The phantom shell is compatible with SPEAG tissue simulating liquids (sugar and oil based). Use of other liquids may render the phantom warranty void (see note or consult SPEAG support).
Shell Thickness	2 ± 0.2 mm (6 mm at ear point)
Head Shape	Standard compatible SAM head.



Wrist Phantom

The Wrist Phantom V10 is shape-compatible with the CTIA approved OTA GFPC-V1 and optimized for SAR evaluation of watches and other wireless hand accessories.

Material	Epoxy based
Liquid Compatibility	The phantom shell is compatible with SPEAG tissue simulating liquids (sugar and oil based). Use of other liquids may render the phantom warranty void (see note or consult SPEAG support).
Shell Thickness	Shell Thickness
Wrist Shape	Design compatible with CTIA forearm.



Device Holder for SAM-Twin Phantom

The SAR in the phantom is approximately inversely proportional to the square of the distance between the source and the liquid surface. For a source at 5mm distance, a positioning uncertainty of $\pm 0.5\text{mm}$ would produce uncertainty in the SAR of $\pm 20\%$. Accurate device positioning is therefore crucial for accurate and repeatable measurements. The positions at which the devices must be measured are defined by the standards.

MD4HHTV5 - Mounting Device for Hand-Held Transmitters

In combination with the Twin SAM V5.0/V5.0c or ELI phantoms, the Mounting Device for Hand-Held Transmitters enables rotation of the mounted transmitter device to specified spherical coordinates. At the heads, the rotation axis is at the ear opening. Transmitter devices can be easily and accurately positioned according to IEC 62209-1, IEEE 1528, FCC, or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat).

Material: Polyoxymethylene (POM)



MDA4WTV5 - Mounting Device Adaptor for Ultra Wide Transmitters

An upgrade kit to Mounting Device to enable easy mounting of wider devices like big smart-phones, e-books, small tablets, etc. It holds devices with width up to 140 mm.

Material: Polyoxymethylene (POM)



MDA4SPV6 - Mounting Device Adaptor for Smart Phones

The solid low-density MDA4SPV6 adaptor assuring no impact on the DUT radiation performance and is conform with any DUT design and shape.

Material: ROHACELL



MD4LAPV5 - Mounting Device for Laptops and other Body-Worn Transmitters

In combination with the Twin SAM V5.0/V5.0c or ELI phantoms, the Mounting Device (Body-Worn) enables testing of transmitter devices according to IEC 62209-2 specifications. The device holder can be locked for positioning at a flat phantom section.

Material: Polyoxymethylene (POM), PET-G, Foam



MDA4LAP - Mounting Device Adaptor for Laptops

A simple but effective and easy-to-use extension for the Mounting Device; facilitates testing of larger devices (e.g., laptops, cameras, etc.) according to IEC 62209-2; lightweight and fits easily on the upper part of the Mounting Device in place of the phone positioner. The extension is fully compatible with the Twin SAM as well as ELI and other Flat Phantoms.

Material: Polyoxymethylene (POM), PET-G, Foam



Modulation and Interference Analyzer(MAIA)

MAIA is a hardware interface used to evaluate the modulation and audio interference characteristics of RF signals in the frequency range 698 - 6000 MHz. DASY6 evaluates the time-domain and frequency domain properties of the uplink signal transmitted by the DUT during SAR measurement with MAIA. MAIA uses USB powered active electronics to identify the modulation of the DUT. It can be operated over the air interface using the built-in ultra-broadband planar log spiral antenna (698 - 6000 MHz) or in conducted mode using the coaxial SMA 50 Ohm connector (300 - 6000 MHz).

To prevent damage in conducted mode due to high peak power, an external RF attenuator may be mounted. The LED on the MAIA hardware also indicates whether it is connected.



DAK-3.5 (200MHz – 20GHz)

This precision dielectric measurement system is designed to cover the 200MHz – 20GHz frequency range with a single open-ended coaxial dielectric probe. The system uses advanced algorithms and novel hardware to measure the dielectric properties of liquids, solids, and semi-solids over a broad range of parameters. The measurement method is fast and non-destructive to the material under test.



Evaluation of reference liquids over a broad frequency range for specific absorption rate (SAR) measurements, in accordance with IEC 62209, IEEE 1528, and several federal regulations.

Evaluating Software: DAK software version 2.0

MRT simulating liquid

Product	Test Frequency (MHz)	Main Ingredients
HSL450	400 – 500	Water, Sucrose, NaCl
MSL450	400 – 500	Water, Sucrose, NaCl

Speag Broad-Band simulating liquid


Product	Test Frequency (MHz)	Main Ingredients
HBBL600-10000V6	600 – 10000	Water, Oil
MBBL600-6000V6	600 – 6000	Water, Oil

6. The SAR Measurement Procedure

6.1. Measurement Process Diagram

General Procedure

For IEEE1528-2013 Head SAR

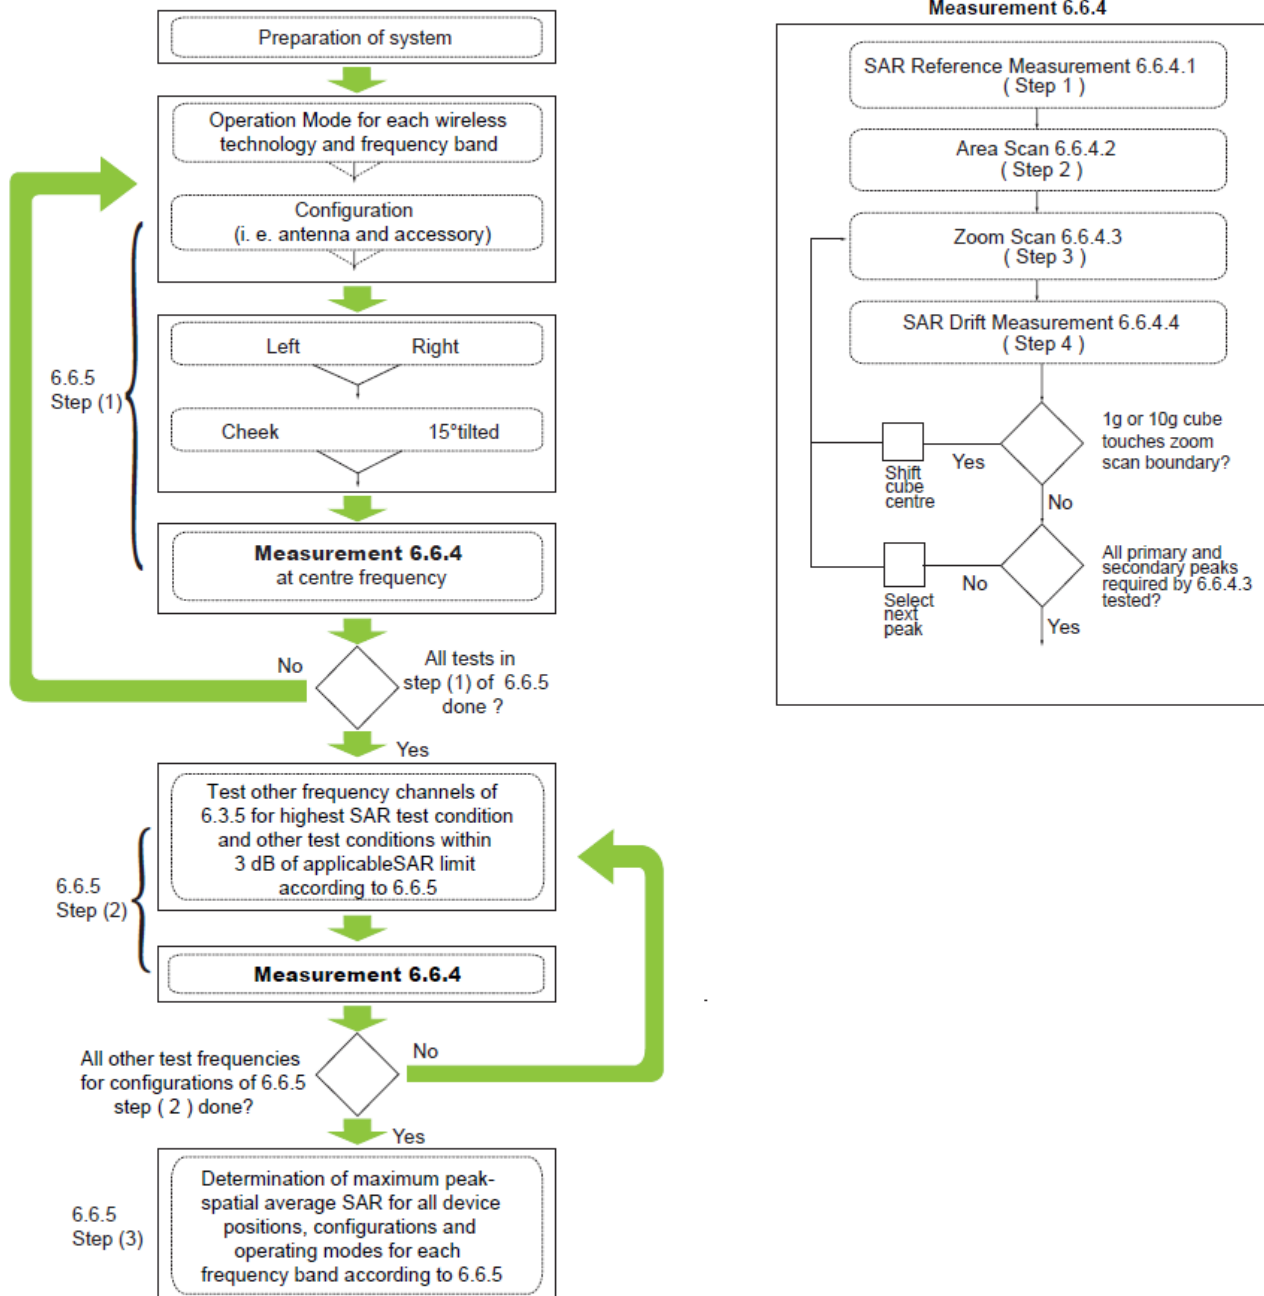



For Body SAR


SAR scan procedures described in section 2.7 of KDB 865664 D01 v01r04 should be applied to body SAR test.

6.2. Test Position Definition

■ Head SAR Test Position


Define two imaginary lines on the handset—the vertical centerline and the horizontal line. The vertical centerline passes through two points on the front side of the handset—the midpoint of the width w_t of the handset at the level of the acoustic output [point A in Fixed case and Clamshell case], and the midpoint of the width w_b at the bottom of the handset (point B). The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output [see Fixed case]. The horizontal line is also tangential to the face of the handset at point A. The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset [see Clamshell case], especially for clamshell handsets, handsets with flip covers, and other irregularly-shaped handsets, the vertical centerline passes through point A but not the tip edge of the phone.

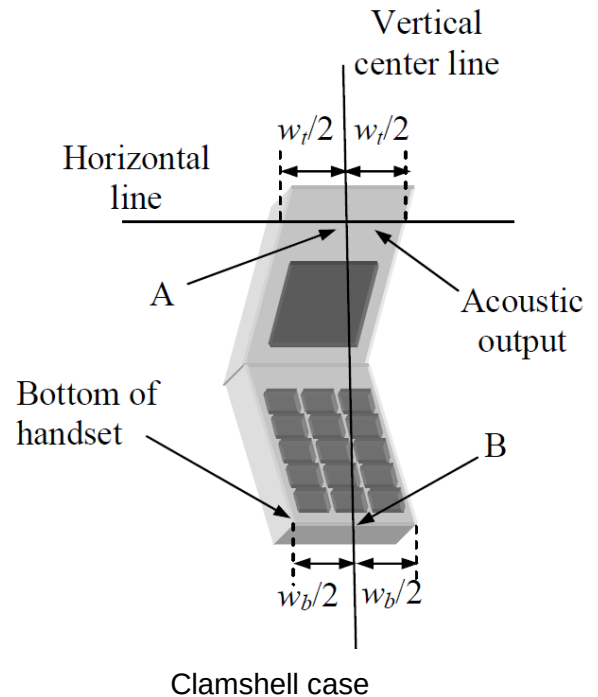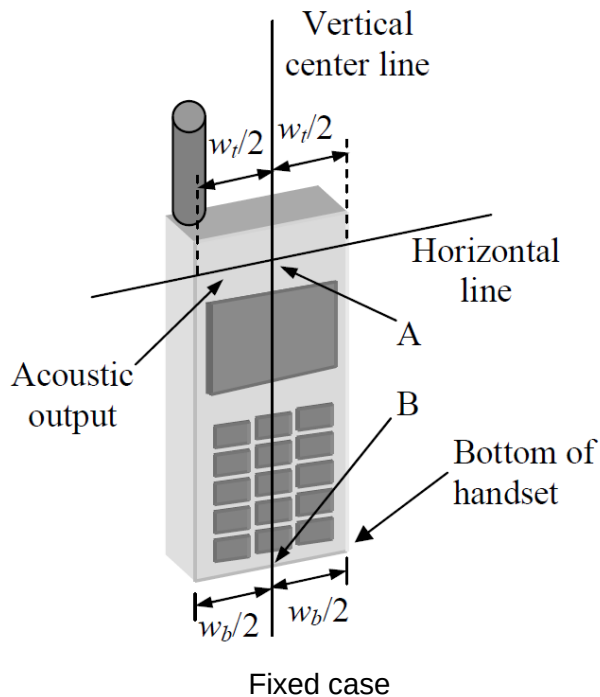

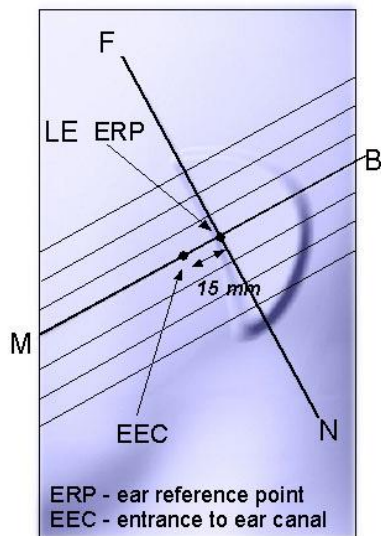

Key

- B Direction of B-M line back endpoint
- F Direction of N-F line front endpoint
- N Direction of N-F line neck endpoint
- M Mouth reference point
- LE Left ear reference point (ERP)

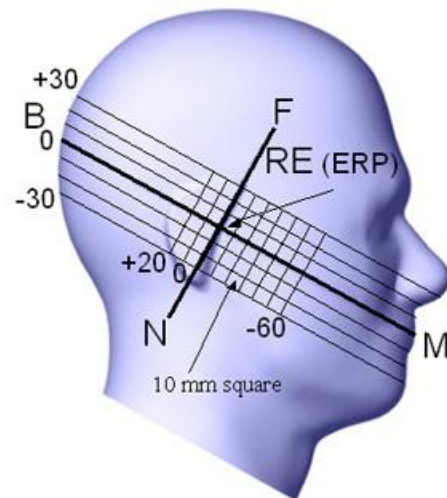


Key

- B Line B-M back endpoint
- M Line B-M front endpoint
- N Line N-F neck endpoint
- F Line N-F front endpoint
- RE Right ear reference point (ERP)

Cheek Position

The cheek position has the following characteristics, based on the geometrical lines described above:

- The N-F line (see above) is in the plane defined by the handset vertical centerline and horizontal line
- Handset touches the pinna
- The handset vertical centerline is aligned with the Reference Plane.

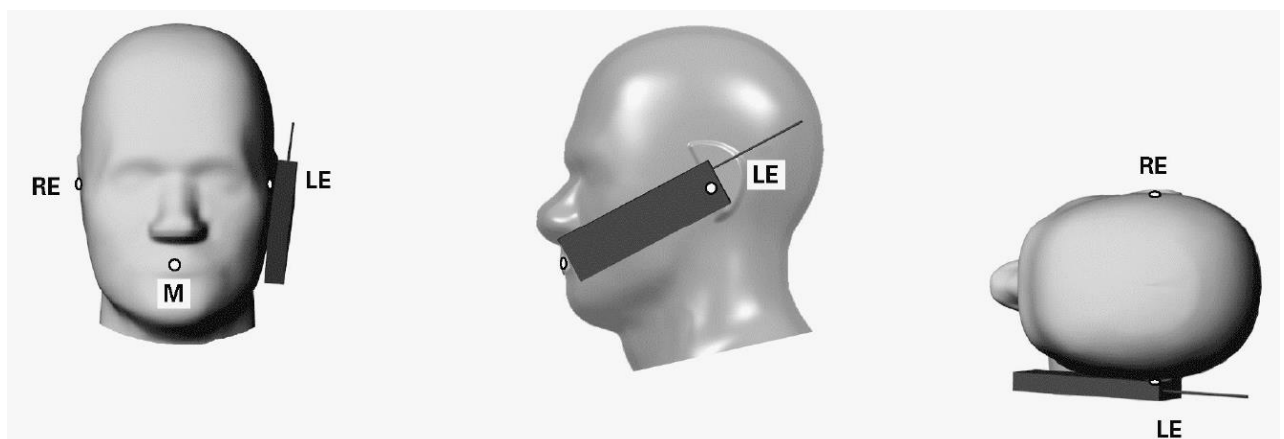




Key

- M Mouth reference point
- LE Left ear reference point
- RE Right ear reference point

Tilt Position

The tilt position is established as follows:

- Repeat the steps to place the device in the cheek position.
- While maintaining the orientation of the handset, move the handset away from the pinna along the line passing through RE and LE far enough to allow a rotation of the handset away from the cheek by 15° .
- Rotate the handset around the horizontal line by 15° .
- While maintaining the orientation of the handset, move the handset towards the phantom on the line passing through RE and LE until any part of the handset touches the ear. The tilt position is obtained when the contact point is on the pinna. If contact occurs at any location other than the pinna, e.g., the antenna at the back of the phantom head, the angle of the handset shall be reduced. In this case, the tilt position is obtained if any point on the handset is in contact with the pinna and a second point on the handset is in contact with the phantom, e.g., the antenna with the back of the head.

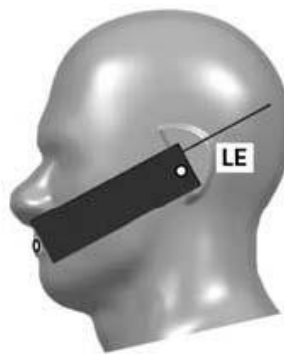

Key

- | | |
|----|---------------------------|
| M | Mouth reference point |
| LE | Left ear reference point |
| RE | Right ear reference point |

■ Body SAR Test Position

For body-worn accessory, hotspot mode and other exposure conditions to human body should be conducted pursuant to the test position requirements of SAR KDBs for certain product.

6.3. Test Procedure

Step 1 Setup a Connection

First, engineer should record the conducted power before the test. Then establish a call in handset at the maximum power level with a base station simulator via air interface, or make the EUT establish transmission by itself in testing band. Place the EUT to certain test position.

Step 2 Power Reference Measurements

To measure the local E-field value at a fixed location which value will be taken as a reference value for calculating a possible power drift.

Step 3 Area Scan

The Area Scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASYS software can find the maximum locations even in relatively coarse grids. When an Area Scan has measured all reachable points, it computes the field maximal found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE Standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan). If only one Zoom Scan follows the Area Scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of Zoom Scans has to be increased accordingly.

Area Scan Parameters extracted from KDB 865664 D01v01r04

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 mm ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2)$ mm ± 0.5 mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	30° ± 1°	20° ± 1°
Maximum area scan spatial resolution: ΔX_{Area} , ΔY_{Area}	≤ 2 GHz: ≤ 15 mm 2 - 3 GHz: ≤ 12 mm	3 - 4 GHz: ≤ 12 mm 4 - 6 GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see IEEE Std 1528-2013 for details.		

Step 4 Zoom Scan

Zoom Scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The Zoom Scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the Zoom Scan evaluates the averaged SAR for 1 g and 10 g and displays these values next to the job's label.

Zoom Scan Parameters extracted from KDB 865664 D01 v01r04

			≤ 3 GHz	> 3 GHz
Maximum zoom scan spatial resolution: Δx_{Zoom} , Δy_{Zoom}			≤ 2 GHz: ≤ 8 mm 2 - 3 GHz: ≤ 5 mm*	3 - 4 GHz: ≤ 5 mm* 4 - 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$		≤ 5 mm	3 - 4 GHz: ≤ 4 mm 4 - 5 GHz: ≤ 3 mm 5 - 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{\text{Zoom}}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 - 4 GHz: ≤ 3 mm 4 - 5 GHz: ≤ 2.5 mm 5 - 6 GHz: ≤ 2 mm
		$\Delta z_{\text{Zoom}}(n>1)$: between subsequent points	≤ 1.5· $\Delta z_{\text{Zoom}}(n-1)$ mm	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3-4 GHz: ≥ 28 mm 4-5 GHz: ≥ 25 mm 5-6 GHz: ≥ 22 mm
Note: * When zoom scan is required and the reported SAR from the area scan based 1-g SAR estimation procedures of KDB Publication 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

Step 5 Power Drift Measurements

Repetition of the E-field measurement at the fixed location mentioned in Step 1 to make sure the two results differ by less than ± 0.2 dB.

Step 6 Test Data


After the test, SAR test data should be exported by SEMCAD.

7. System Verificaiton

7.1. Tissue Check

- Refer to KDB 865664 D01 v01r04, the depth of tissue-equivalent liquid in a phantom must be ≥ 15.0 cm with $\leq \pm 0.5$ cm variation for SAR measurements ≤ 3 GHz and ≥ 10.0 cm with $\leq \pm 0.5$ cm variation for measurements > 3 GHz.

15cm Depth Head Tissue

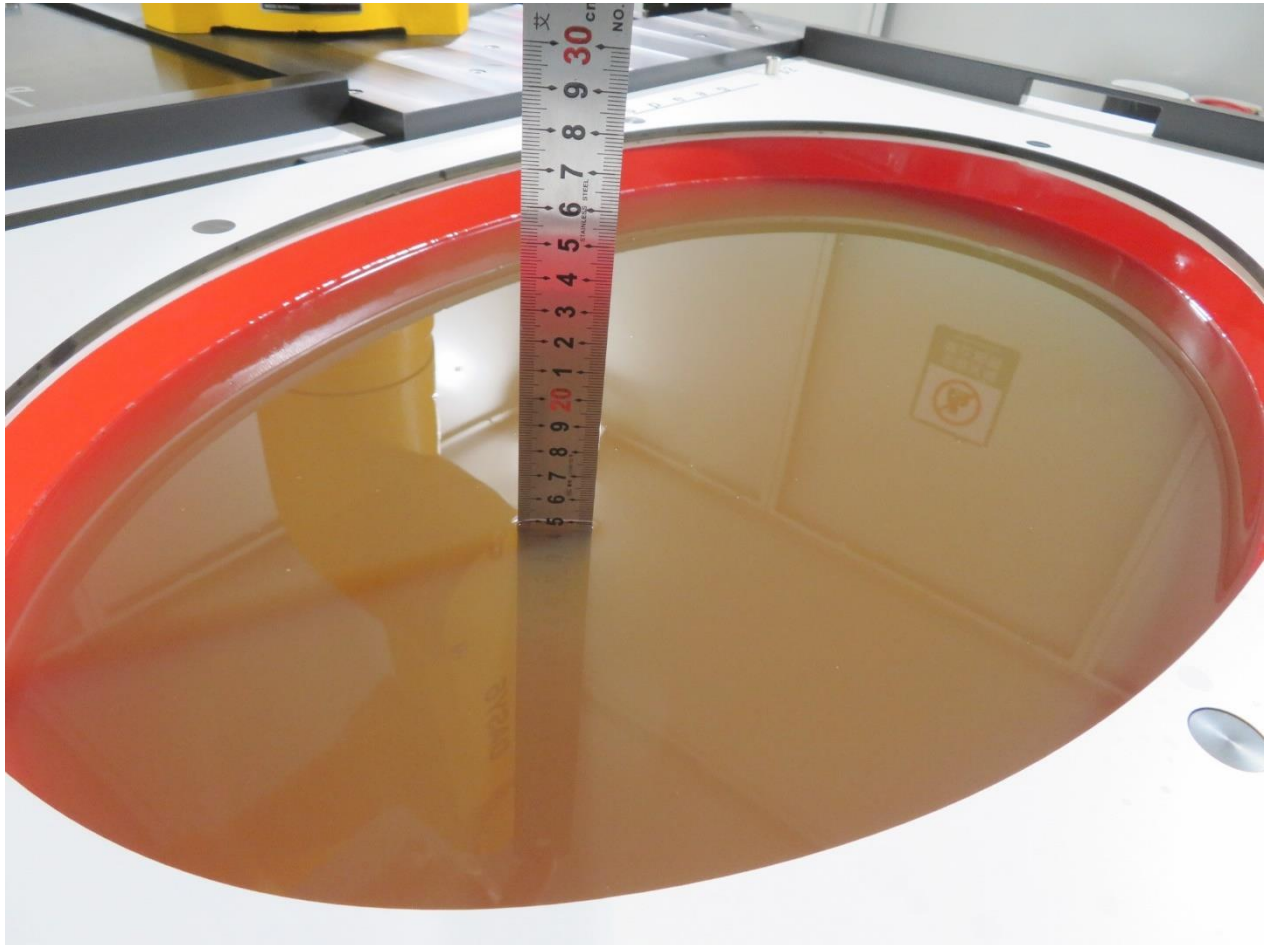

■ Dielectric properties of the head tissue-equivalent liquid

Frequency MHz	Relative Permittivity ϵ_r	Conductivity (σ) S/m
300	45.3	0.87
450	43.5	0.87
750	41.9	0.89
835	41.5	0.90
900	41.5	0.97
<i>1 450</i>	<i>40.5</i>	<i>1.20</i>
<i>1 500</i>	<i>40.4</i>	<i>1.23</i>
<i>1 640</i>	<i>40.2</i>	<i>1.31</i>
<i>1 750</i>	<i>40.1</i>	<i>1.37</i>
1 800	40.0	1.40
1 900	40.0	1.40
2 000	40.0	1.40
<i>2 100</i>	<i>39.8</i>	<i>1.49</i>
<i>2 300</i>	<i>39.5</i>	<i>1.67</i>
2 450	39.2	1.80
<i>2 600</i>	<i>39.0</i>	<i>1.96</i>
3 000	38.5	2.40
<i>3 500</i>	<i>37.9</i>	<i>2.91</i>
<i>4 000</i>	<i>37.4</i>	<i>3.43</i>
<i>4 500</i>	<i>36.8</i>	<i>3.94</i>
<i>5 000</i>	<i>36.2</i>	<i>4.45</i>
<i>5 200</i>	<i>36.0</i>	<i>4.66</i>
<i>5 400</i>	<i>35.8</i>	<i>4.86</i>
<i>5 600</i>	<i>35.5</i>	<i>5.07</i>
<i>5 800</i>	<i>35.3</i>	<i>5.27</i>
<i>6 000</i>	<i>35.1</i>	<i>5.48</i>

Note: For convenience, permittivity and conductivity values at those frequencies which are not part of the original data provided by Drossos et al. [33] or the extension to 5800MHz are provided (i.e. the values shown in italics). These values were linearly interpolated between the values in this table that are immediately above and below these values, except the values at 6000MHz that were linearly extrapolated from the values at 3000MHz and 5800MHz.

■ Tissue Calibration Result

The dielectric parameters of the liquids were verified prior to the SAR evaluation using DASY6 Dielectric Assessment Kit and keysight PNA-L Network Analyzer N5234B.

Tissue parameter for Head								
Freq. (MHz)	Perm.	Cond.	Target Perm.	Target Cond.	Deviation Perm. %	Deviation Cond. %	Tissue Temperature	Test Date
750	43.86	0.87	41.94	0.89	4.58	-2.25	22.5°C	2020.11.14
850	43.38	0.90	41.50	0.92	4.53	-2.17	22.5°C	2020.11.06
850	42.55	0.89	41.50	0.92	2.53	-3.26	22.5°C	2020.11.13
1750	41.70	1.33	40.08	1.37	4.04	-2.92	22.5°C	2020.11.05
1900	41.32	1.42	40.00	1.40	3.30	1.43	22.5°C	2020.11.07
1900	41.01	1.41	40.00	1.40	2.53	0.71	22.5°C	2020.11.09
2450	41.08	1.78	39.20	1.80	4.80	-1.11	22.5°C	2020.11.10
2450	39.35	1.78	39.20	1.80	0.38	-1.11	22.5°C	2020.11.16
2600	40.82	1.90	39.01	1.96	4.64	-3.06	22.5°C	2020.11.10
2600	39.00	1.89	39.01	1.96	-0.03	-3.57	22.5°C	2020.11.11
5250	35.11	4.50	35.93	4.71	-2.28	-4.46	22.5°C	2020.11.16
5600	34.48	4.89	35.53	5.07	-2.96	-3.55	22.5°C	2020.11.17
5750	34.21	5.06	35.36	5.22	-3.25	-3.07	22.5°C	2020.11.17


Note: The $\pm 5\%$ deviation of tissue parameter is recommended.

7.2. System Check

■ Purpose

The purpose of the system check is to verify that the system operates within its specifications at the device test frequencies. System check verifies the measurement repeatability of a SAR system before compliance testing and is not a validation of all system specifications. The latter is not required for testing a device but is mandatory before the system is deployed.

■ System Performance Check Setup Diagram

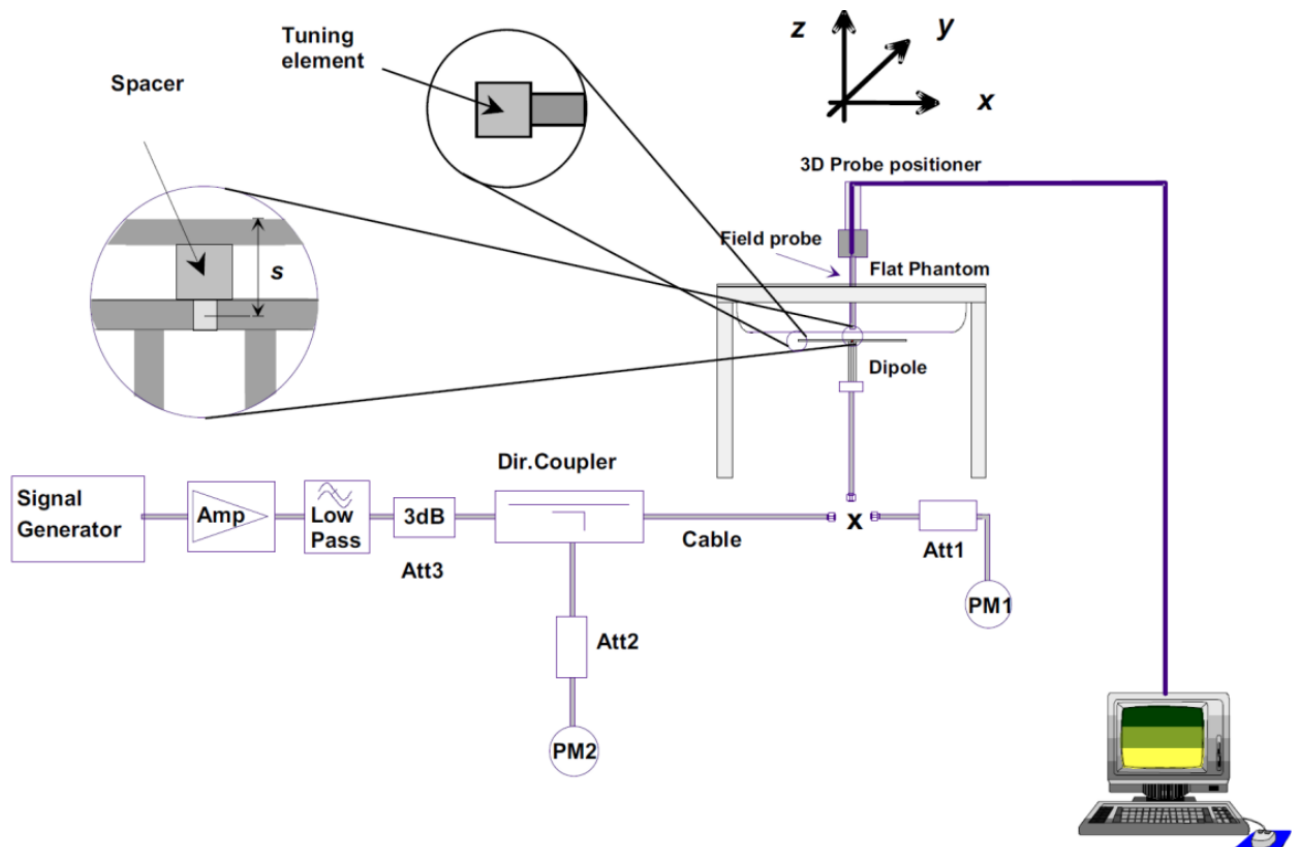

■ System Check Procedure

The system check procedure is a complete 1g and 10g peak spatial-average SAR measurement using a source having a previously determined system check target value. The measured 1g and 10g SAR are normalized to the target input power of the specific source and compared to their respective target values.

A description of the different measurement tasks to be performed is given below, together with the information that can be deduced from their results:

- The Power Reference Measurement and Power Drift Measurement are located at the beginning and end of the batch process. They measure the field drift at one single point in the liquid over the complete procedure. The indicated drift is mainly the variation of the amplifier output power. If it is too high (above ± 0.1 dB), the system check should be repeated; some amplifiers have very high drift during warm-up. A stable amplifier gives drift results in the DASY6 system below ± 0.02 dB.

b. The second step is optional. For probes with integrated optical surface detection sensor this step must be conducted, otherwise the step can be skipped. The Surface Check tests the optical surface detection system of the DASY6 system by repeatedly detecting the surface with the optical and mechanical surface detector and comparing the results. The output gives the detecting heights of both systems, the difference between the two systems and the standard deviation of the detection repeatability. Air bubbles or refraction in the liquid due to separation of the sugar-water mixture gives poor repeatability (above ± 0.1 mm). In that case it is better to abort the system check and stir the liquid.

c. The Area Scan measures the SAR above the dipole on a plane parallel to the surface. It is used to locate the approximate location of the peak SAR. The proposed scan uses large grid spacing for faster measurement; due to the symmetric field, the peak detection is reliable. If a finer graphic is desired, the grid spacing can be reduced. Grid spacing and orientation have no influence on the SAR result.

d. The Zoom Scan measures the field in a volume around the peak SAR value assessed in the previous Area Scan.

If the system check gives reasonable results, the SAR peak, 1 g and 10 g spatial average SAR values normalized to 1 W dipole input power give reference data for comparisons. The next sections analyze the expected uncertainties of these values, as well as additional checks for further information or troubleshooting.

■ Result of System Performance Check


System check for Head								
Freq. (MHz)	1g SAR (W/kg)	10g SAR (W/kg)	Target 1g SAR (W/kg)	Target 10g SAR (W/kg)	Deviation 1g SAR (%)	Deviation 10g SAR (%)	Tissue Temp.	Test Date
750	7.72	5.12	8.20	5.38	-5.85	-4.83	22.5°C	2020.11.14
850	9.24	6.08	9.72	6.26	-4.94	-2.88	22.5°C	2020.11.06
850	8.96	5.88	9.72	6.26	-7.82	-6.07	22.5°C	2020.11.13
1750	35.08	18.88	36.60	19.30	-4.15	-2.18	22.5°C	2020.11.05
1900	39.12	20.56	40.00	21.10	-2.20	-2.56	22.5°C	2020.11.07
1900	39.28	20.64	40.00	21.10	-1.80	-2.18	22.5°C	2020.11.09
2450	48.80	23.12	52.10	24.40	-6.33	-5.25	22.5°C	2020.11.10
2450	52.00	24.48	52.10	24.40	-0.19	0.33	22.5°C	2020.11.16
2600	53.60	24.36	55.90	25.10	-4.11	-2.95	22.5°C	2020.11.10
2600	54.00	24.36	55.90	25.10	-3.40	-2.95	22.5°C	2020.11.11
5250	82.90	23.70	81.70	23.30	1.47	1.72	22.5°C	2020.11.16
5600	85.70	24.20	85.40	24.30	0.35	-0.41	22.5°C	2020.11.17
5750	78.90	22.30	79.10	22.50	-0.25	-0.89	22.5°C	2020.11.17

Note:

1. The $\pm 10\%$ deviation of system check result is required.
2. System check value listed above has been harmonized to 1W.

8. Analysis and Results

8.1. Antenna Location

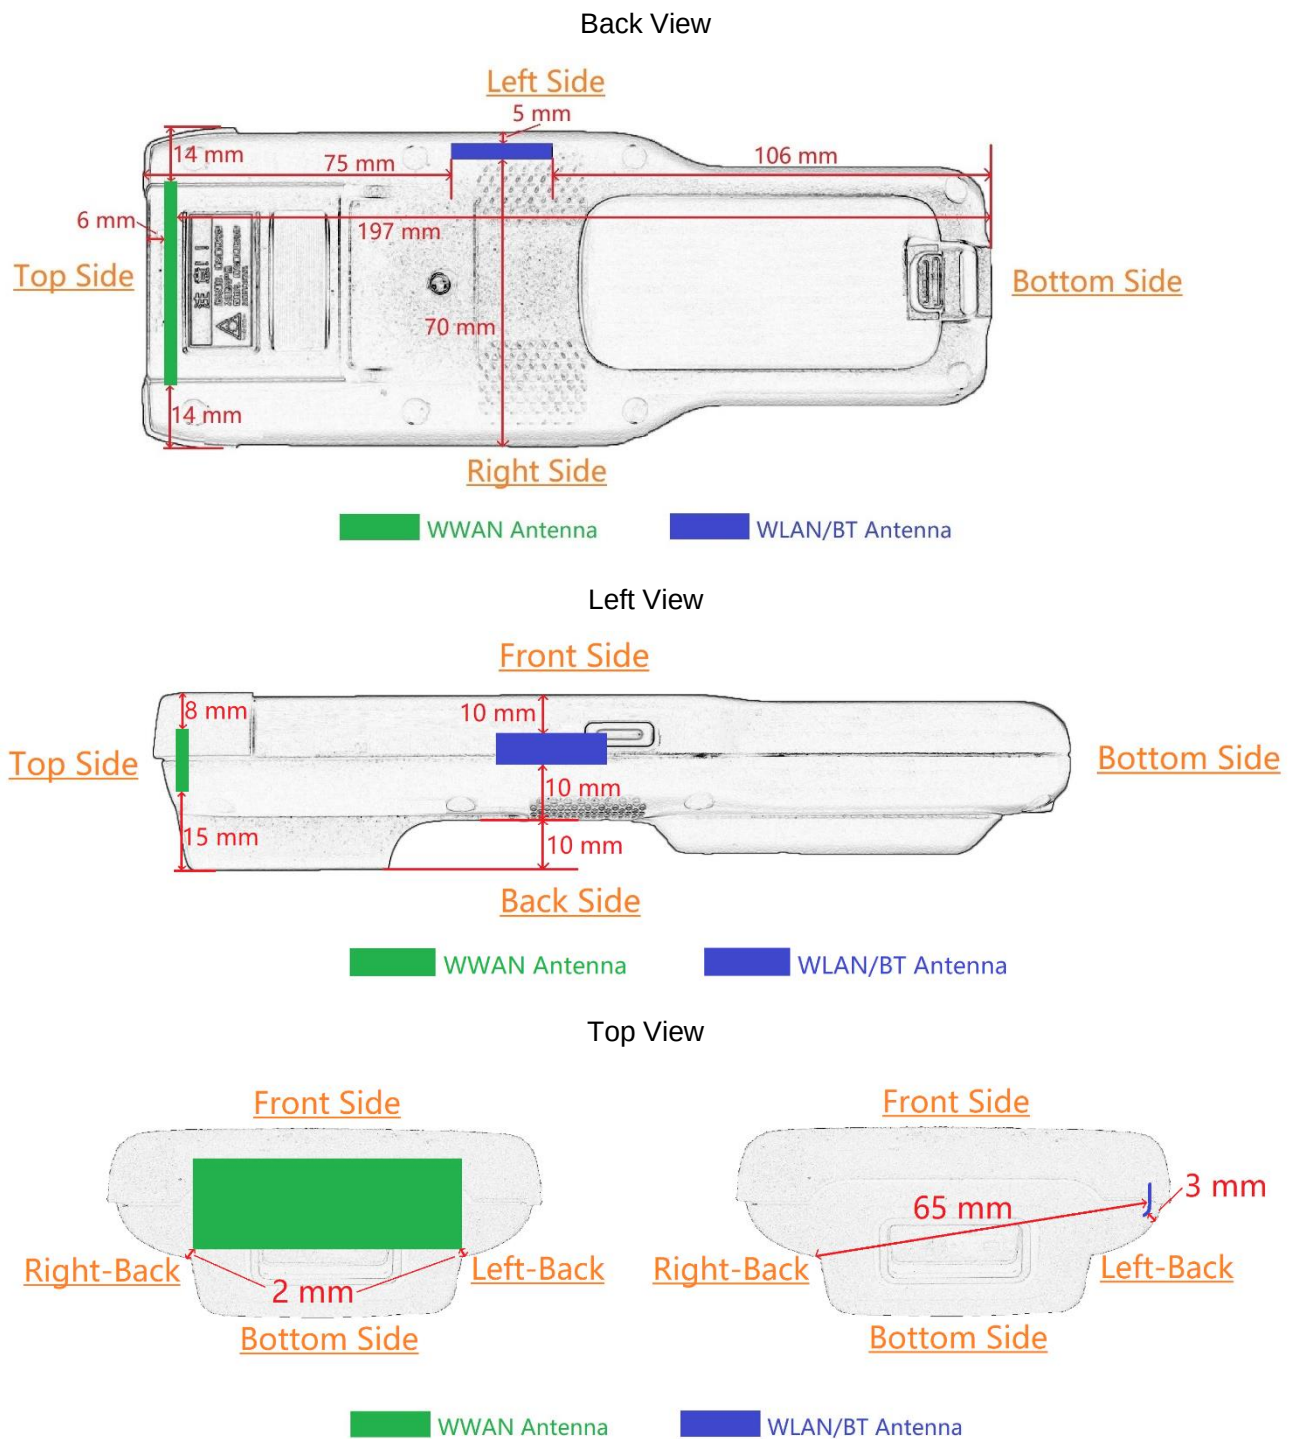

WWAN Antenna Distance to Surfaces/Edges (mm)							
Front side	Back side	Left side	Left-Back side	Right side	Right-Back side	Top side	Bottom side
8	15	14	2	14	2	6	197

WLAN/BT Antenna Distance to Surfaces/Edges (mm)								
Front side	Back side ¹	Back side ²	Left side	Left-Back side	Right side	Right-Back side	Top side	Bottom side
10	20	10	5	3	70	65	75	106

Note:

1. 20 mm for body exposure conditions.
2. 10 mm for extremity exposure conditions.

8.2. Conducted Power

■ GPRS 850

Test Mode		CH.	Freq. (MHz)	Cond. Power (dBm)	Max. Tune- up Power (dBm)	Frame Average Power
GPRS	1 Slot	128	824.2	33.91	34.5	24.88
		189	836.4	34.20	34.5	25.17
		251	848.8	33.85	34.0	24.82
	2 Slot	128	824.2	31.49	32.0	25.47
		189	836.4	31.68	32.0	25.66
		251	848.8	31.48	32.0	25.46
	3 Slot	128	824.2	29.28	29.5	25.02
		189	836.4	29.39	30.0	25.13
		251	848.8	29.24	29.5	24.98
	4 Slot	128	824.2	28.12	28.5	25.11
		189	836.4	28.33	28.5	25.32
		251	848.8	28.07	28.5	25.06
EGPRS(GMSK)	1 Slot	128	824.2	27.64	28.0	18.61
		189	836.4	27.68	28.0	18.65
		251	848.8	27.63	28.0	18.60
	2 Slot	128	824.2	27.56	28.0	21.54
		189	836.4	27.65	28.0	21.63
		251	848.8	27.47	28.0	21.45
	3 Slot	128	824.2	27.55	28.0	23.29
		189	836.4	27.47	28.0	23.21
		251	848.8	27.43	28.0	23.17
	4 Slot	128	824.2	27.38	27.5	24.37
		189	836.4	27.42	28.0	24.41
		251	848.8	27.34	27.5	24.33

<Continue>

EGPRS(8PSK)	1 Slot	128	824.2	27.11	27.5	18.08
		189	836.4	27.13	27.5	18.10
		251	848.8	26.96	27.5	17.93
	2 Slot	128	824.2	25.04	25.5	19.02
		189	836.4	25.03	25.5	19.01
		251	848.8	24.88	25.0	18.86
	3 Slot	128	824.2	22.91	23.5	18.65
		189	836.4	22.97	23.5	18.71
		251	848.8	22.82	23.0	18.56
	4 Slot	128	824.2	21.97	22.5	18.96
		189	836.4	22.16	22.5	19.15
		251	848.8	21.92	22.5	18.91

Note: GPRS850 2Tx slot was selected for testing due to highest source-based time-average power.

■ GPRS 1900

Test Mode		CH.	Freq. (MHz)	Cond. Power (dBm)	Max. Tune- up Power (dBm)	Frame Average Power
GPRS	1 Slot	512	1850.2	29.26	29.5	20.23
		661	1880	29.28	29.5	20.25
		810	1909.8	29.31	29.5	20.28
	2 Slot	512	1850.2	27.46	28.0	21.44
		661	1880	27.43	28.0	21.41
		810	1909.8	27.53	28.0	21.51
	3 Slot	512	1850.2	25.47	26.0	21.21
		661	1880	25.44	26.0	21.18
		810	1909.8	25.41	26.0	21.15
	4 Slot	512	1850.2	24.15	24.5	21.14
		661	1880	24.21	24.5	21.20
		810	1909.8	24.21	24.5	21.20
EGPRS(GMSK)	1 Slot	512	1850.2	25.46	26.0	16.43
		661	1880	25.19	25.5	16.16
		810	1909.8	25.29	25.5	16.26
	2 Slot	512	1850.2	25.49	26.0	19.47
		661	1880	25.47	26.0	19.45
		810	1909.8	25.17	25.5	19.15
	3 Slot	512	1850.2	25.36	25.5	21.10
		661	1880	25.42	26.0	21.16
		810	1909.8	25.42	26.0	21.16
	4 Slot	512	1850.2	24.25	24.5	21.24
		661	1880	24.28	24.5	21.27
		810	1909.8	24.27	24.5	21.26

<Continue>

EGPRS(8PSK)	1 Slot	512	1850.2	25.42	26.0	16.39
		661	1880	25.52	26.0	16.49
		810	1909.8	25.51	26.0	16.48
	2 Slot	512	1850.2	23.28	23.5	17.26
		661	1880	23.31	23.5	17.29
		810	1909.8	23.38	23.5	17.36
	3 Slot	512	1850.2	21.13	21.5	16.87
		661	1880	21.09	21.5	16.83
		810	1909.8	21.19	21.5	16.93
	4 Slot	512	1850.2	20.12	20.5	17.11
		661	1880	20.15	20.5	17.14
		810	1909.8	20.02	20.5	17.01

Note: GPRS1900 2Tx slot was selected for testing due to highest source-based time-average power.

■ WCDMA Band 2

Test Mode		CH.	Freq. (MHz)	Cond. Power (dBm)	Max. Tune-up Power (dBm)
12.2kbps RMC		9262	1852.4	23.58	24.0
		9400	1880	23.54	24.0
		9538	1907.6	23.57	24.0
HSDPA	SUB-TEST 1	9262	1852.4	22.21	22.5
		9400	1880	22.20	22.5
		9538	1907.6	22.26	22.5
	SUB-TEST 2	9262	1852.4	22.13	22.5
		9400	1880	22.17	22.5
		9538	1907.6	22.18	22.5
	SUB-TEST 3	9262	1852.4	22.11	22.5
		9400	1880	22.07	22.5
		9538	1907.6	22.19	22.5
	SUB-TEST 4	9262	1852.4	22.54	23.0
		9400	1880	22.25	22.5
		9538	1907.6	22.29	22.5
HSUPA	SUB-TEST 1	9262	1852.4	21.51	22.0
		9400	1880	21.44	22.0
		9538	1907.6	21.86	22.0
	SUB-TEST 2	9262	1852.4	22.60	23.0
		9400	1880	21.53	22.0
		9538	1907.6	21.95	22.5
	SUB-TEST 3	9262	1852.4	22.59	23.0
		9400	1880	22.65	23.0
		9538	1907.6	22.62	23.0
	SUB-TEST 4	9262	1852.4	22.52	23.0
		9400	1880	21.58	22.0
		9538	1907.6	21.51	22.0
	SUB-TEST 5	9262	1852.4	22.62	23.0
		9400	1880	22.58	23.0
		9538	1907.6	21.52	22.0

■ WCDMA Band 4

Test Mode		CH.	Freq. (MHz)	Cond. Power (dBm)	Max. Tune-up Power (dBm)
12.2kbps RMC		1312	1712.4	23.52	24.0
		1413	1732.6	23.36	23.5
		1513	1752.6	23.59	24.0
HSDPA	SUB-TEST 1	1312	1712.4	22.55	23.0
		1413	1732.6	22.40	23.0
		1513	1752.6	22.54	23.0
	SUB-TEST 2	1312	1712.4	22.37	22.5
		1413	1732.6	22.31	22.5
		1513	1752.6	22.51	23.0
	SUB-TEST 3	1312	1712.4	21.92	22.5
		1413	1732.6	21.88	22.0
		1513	1752.6	22.11	22.5
	SUB-TEST 4	1312	1712.4	22.18	22.5
		1413	1732.6	22.05	22.5
		1513	1752.6	22.27	22.5
HSUPA	SUB-TEST 1	1312	1712.4	20.81	21.0
		1413	1732.6	21.45	22.0
		1513	1752.6	21.65	22.0
	SUB-TEST 2	1312	1712.4	21.53	22.0
		1413	1732.6	21.45	22.0
		1513	1752.6	20.82	21.0
	SUB-TEST 3	1312	1712.4	20.72	21.0
		1413	1732.6	21.46	22.0
		1513	1752.6	21.73	22.0
	SUB-TEST 4	1312	1712.4	21.55	22.0
		1413	1732.6	21.56	22.0
		1513	1752.6	20.87	21.0
	SUB-TEST 5	1312	1712.4	20.67	21.0
		1413	1732.6	21.54	22.0
		1513	1752.6	21.73	22.0

■ WCDMA Band 5

Test Mode		CH.	Freq. (MHz)	Cond. Power (dBm)	Max. Tune-up Power (dBm)
12.2kbps RMC		4132	826.4	23.65	24.0
		4183	836.6	23.71	24.0
		4233	846.6	23.76	24.0
HSDPA	SUB-TEST 1	4132	826.4	22.44	23.0
		4183	836.6	22.42	23.0
		4233	846.6	22.46	23.0
	SUB-TEST 2	4132	826.4	22.28	22.5
		4183	836.6	22.29	22.5
		4233	846.6	22.34	22.5
	SUB-TEST 3	4132	826.4	22.25	22.5
		4183	836.6	22.28	22.5
		4233	846.6	22.31	22.5
	SUB-TEST 4	4132	826.4	22.45	23.0
		4183	836.6	22.41	23.0
		4233	846.6	22.46	23.0
HSUPA	SUB-TEST 1	4132	826.4	22.02	22.5
		4183	836.6	22.08	22.5
		4233	846.6	22.07	22.5
	SUB-TEST 2	4132	826.4	22.06	22.5
		4183	836.6	22.08	22.5
		4233	846.6	22.13	22.5
	SUB-TEST 3	4132	826.4	21.82	22.0
		4183	836.6	21.86	22.0
		4233	846.6	21.17	21.5
	SUB-TEST 4	4132	826.4	21.12	21.5
		4183	836.6	21.84	22.0
		4233	846.6	21.94	22.5
	SUB-TEST 5	4132	826.4	21.82	22.0
		4183	836.6	21.89	22.5
		4233	846.6	21.22	21.5

■ CDMA BC0

Test Mode	CH.	Freq. (MHz)	Cond. Power (dBm)	Max. Tune-up Power (dBm)
SO55/RC3	1013	824.7	23.12	23.5
	384	836.52	23.21	23.5
	777	848.31	23.46	24.0
SO55/RC1	1013	824.7	23.16	23.5
	384	836.52	23.31	23.5
	777	848.31	23.49	24.0
SO32/RC3(FCH only)	1013	824.7	23.12	23.5
	384	836.52	23.22	23.5
	777	848.31	23.51	24.0
SO32/RC3(FCH + SCH _n)	1013	824.7	23.05	23.5
	384	836.52	23.16	23.5
	777	848.31	23.42	24.0

■ CDMA BC1

Test Mode	CH.	Freq. (MHz)	Cond. Power (dBm)	Max. Tune-up Power (dBm)
SO55/RC3	25	1851.25	23.26	23.5
	600	1880	23.28	23.5
	1175	1908.75	23.35	23.5
SO55/RC1	25	1851.25	23.30	23.5
	600	1880	23.28	23.5
	1175	1908.75	23.30	23.5
SO32/RC3(FCH only)	25	1851.25	23.29	23.5
	600	1880	23.21	23.5
	1175	1908.75	23.33	23.5
SO32/RC3(FCH + SCH _n)	25	1851.25	23.22	23.5
	600	1880	23.16	23.5
	1175	1908.75	23.32	23.5

■ LTE Band 2

BW (MHz)	RB Size	RB Offset	CH.	Freq. (MHz)	QPSK		16-QAM	
					Average Power (dBm)	Max. Tune- up Power (dBm)	Average Power (dBm)	Max. Tune- up Power (dBm)
20	1	0	18700	1860	22.53	23.0	21.82	22.0
			18900	1880	22.84	23.0	21.41	22.0
			19100	1900	22.61	23.0	21.54	22.0
		49	18700	1860	22.84	23.0	21.91	22.5
			18900	1880	22.72	23.0	21.71	22.0
			19100	1900	22.78	23.0	21.49	22.0
		99	18700	1860	22.35	22.5	21.76	22.0
			18900	1880	22.55	23.0	21.34	21.5
			19100	1900	22.84	23.0	21.96	22.5
	50	0	18700	1860	21.99	22.5	20.78	21.0
			18900	1880	21.79	22.0	20.63	21.0
			19100	1900	21.78	22.0	20.65	21.0
		24	18700	1860	21.97	22.5	20.89	21.5
			18900	1880	21.80	22.0	20.78	21.0
			19100	1900	21.79	22.0	20.84	21.0
		50	18700	1860	21.81	22.0	20.66	21.0
			18900	1880	21.77	22.0	20.79	21.0
			19100	1900	21.79	22.0	20.93	21.5
	100	0	18700	1860	21.93	22.5	20.86	21.0
			18900	1880	21.74	22.0	20.72	21.0
			19100	1900	21.82	22.0	20.81	21.0

BW (MHz)	RB Size	RB Offset	CH.	Freq. (MHz)	QPSK		16-QAM	
					Average Power (dBm)	Max. Tune- up Power (dBm)	Average Power (dBm)	Max. Tune- up Power (dBm)
15	1	0	18675	1857.5	23.33	23.5	22.01	22.5
			18900	1880	22.76	23.0	21.99	22.5
			19125	1902.5	22.81	23.0	21.85	22.0
		37	18675	1857.5	23.04	23.5	22.38	22.5
			18900	1880	22.72	23.0	21.85	22.0
			19125	1902.5	23.32	23.5	22.47	23.0
		74	18675	1857.5	22.87	23.0	22.10	22.5
			18900	1880	22.72	23.0	21.74	22.0
			19125	1902.5	22.88	23.0	21.36	21.5
	36	0	18675	1857.5	21.98	22.5	20.90	21.5
			18900	1880	21.84	22.0	20.84	21.0
			19125	1902.5	21.89	22.5	21.07	21.5
		19	18675	1857.5	21.92	22.5	20.87	22.0
			18900	1880	21.84	22.0	20.70	21.0
			19125	1902.5	21.83	22.0	20.83	21.0
		39	18675	1857.5	21.96	22.5	21.08	21.5
			18900	1880	21.81	22.0	20.65	21.0
			19125	1902.5	21.88	22.0	20.86	21.0
	75	0	18675	1857.5	21.87	22.0	20.91	21.5
			18900	1880	21.77	22.0	20.78	21.0
			19125	1902.5	21.79	22.0	20.73	21.0

BW (MHz)	RB Size	RB Offset	CH.	Freq. (MHz)	QPSK		16-QAM	
					Average Power (dBm)	Max. Tune- up Power (dBm)	Average Power (dBm)	Max. Tune- up Power (dBm)
10	1	0	18650	1855	20.74	21.0	19.97	20.5
			18900	1880	20.38	20.5	19.35	19.5
			19150	1905	20.73	21.0	19.91	20.5
		24	18650	1855	20.67	21.0	19.71	20.0
			18900	1880	20.53	21.0	19.31	19.5
			19150	1905	20.61	21.0	19.98	20.5
		49	18650	1855	20.73	21.0	19.59	20.0
			18900	1880	20.51	21.0	19.38	19.5
			19150	1905	20.54	21.0	19.58	20.0
	25	0	18650	1855	19.64	20.0	18.70	19.0
			18900	1880	19.47	20.0	18.61	19.0
			19150	1905	19.64	20.0	18.58	19.0
		12	18650	1855	19.60	20.0	18.65	19.0
			18900	1880	19.44	20.0	18.47	19.0
			19150	1905	19.64	20.0	18.58	19.0
		25	18650	1855	19.56	20.0	18.51	19.0
			18900	1880	19.52	20.0	18.49	19.0
			19150	1905	19.51	20.0	18.60	19.0
	50	0	18650	1855	19.68	20.0	18.64	19.0
			18900	1880	19.41	20.0	18.47	19.0
			19150	1905	19.61	20.0	18.58	19.0

BW (MHz)	RB Size	RB Offset	CH.	Freq. (MHz)	QPSK		16-QAM	
					Average Power (dBm)	Max. Tune- up Power (dBm)	Average Power (dBm)	Max. Tune- up Power (dBm)
5	1	0	18625	1852.5	20.38	20.5	19.65	20.0
			18900	1880	20.39	21.0	19.13	19.5
			19175	1907.5	20.39	21.0	19.29	19.5
		12	18625	1852.5	20.60	21.0	19.38	19.5
			18900	1880	20.62	21.0	18.86	19.0
			19175	1907.5	20.82	21.0	19.96	20.5
		24	18625	1852.5	20.41	21.0	19.41	20.0
			18900	1880	20.39	21.0	19.01	19.5
			19175	1907.5	20.08	20.5	19.09	19.5
	12	0	18625	1852.5	19.66	20.0	18.53	19.0
			18900	1880	19.41	20.0	18.62	19.0
			19175	1907.5	19.57	20.0	18.54	19.0
		6	18625	1852.5	19.65	20.0	18.55	19.0
			18900	1880	19.46	20.0	18.47	19.0
			19175	1907.5	19.49	20.0	18.50	19.0
		13	18625	1852.5	19.68	20.0	18.50	19.0
			18900	1880	19.44	20.0	18.49	19.0
			19175	1907.5	19.57	20.0	18.57	19.0
	25	0	18625	1852.5	19.66	20.0	18.71	19.0
			18900	1880	19.44	20.0	18.52	19.0
			19175	1907.5	19.56	20.0	18.67	19.0

BW (MHz)	RB Size	RB Offset	CH.	Freq. (MHz)	QPSK		16-QAM	
					Average Power (dBm)	Max. Tune- up Power (dBm)	Average Power (dBm)	Max. Tune- up Power (dBm)
3	1	0	18615	1851.5	20.58	21.0	19.73	20.0
			18900	1880	20.40	21.0	19.26	19.5
			19185	1908.5	20.63	21.0	20.50	21.0
		7	18615	1851.5	20.70	21.0	19.20	19.5
			18900	1880	20.49	21.0	19.55	20.0
			19185	1908.5	20.54	21.0	19.47	20.0
		14	18615	1851.5	20.46	21.0	19.47	20.0
			18900	1880	20.55	21.0	19.70	20.0
			19185	1908.5	20.60	21.0	19.81	20.0
	8	0	18615	1851.5	19.63	20.0	18.98	19.5
			18900	1880	19.40	20.0	18.37	18.5
			19185	1908.5	19.72	20.0	18.72	19.0
		4	18615	1851.5	19.58	20.0	18.65	19.0
			18900	1880	19.38	19.5	18.46	19.0
			19185	1908.5	19.65	20.0	18.67	19.0
		7	18615	1851.5	19.59	20.0	18.42	19.0
			18900	1880	19.52	20.0	18.30	18.5
			19185	1908.5	19.78	20.0	18.71	19.0
	15	0	18615	1851.5	19.62	20.0	18.54	19.0
			18900	1880	19.49	20.0	18.44	19.0
			19185	1908.5	19.56	20.0	18.53	19.0

BW (MHz)	RB Size	RB Offset	CH.	Freq. (MHz)	QPSK		16-QAM	
					Average Power (dBm)	Max. Tune- up Power (dBm)	Average Power (dBm)	Max. Tune- up Power (dBm)
1.4	1	0	18607	1850.7	20.59	21.0	19.81	20.0
			18900	1880	20.49	21.0	19.76	20.0
			19193	1909.3	20.60	21.0	19.47	20.0
		2	18607	1850.7	20.54	21.0	19.84	20.0
			18900	1880	20.57	21.0	19.93	20.5
			19193	1909.3	20.48	21.0	19.47	20.0
		5	18607	1850.7	20.51	21.0	19.69	20.0
			18900	1880	20.49	21.0	19.77	20.0
			19193	1909.3	20.51	21.0	19.42	20.0
	3	0	18607	1850.7	20.59	21.0	19.96	20.5
			18900	1880	20.41	21.0	19.61	20.0
			19193	1909.3	20.67	21.0	19.50	20.0
		1	18607	1850.7	20.62	21.0	19.92	20.5
			18900	1880	20.61	21.0	19.65	20.0
			19193	1909.3	20.71	21.0	19.53	20.0
		3	18607	1850.7	20.65	21.0	19.83	20.0
			18900	1880	20.47	21.0	19.58	20.0
			19193	1909.3	20.64	21.0	19.61	20.0
	6	0	18607	1850.7	19.67	20.0	18.74	19.0
			18900	1880	19.38	19.5	18.63	19.0
			19193	1909.3	19.50	20.0	18.30	18.5

■ LTE Band 4

BW (MHz)	RB Size	RB Offset	CH.	Freq. (MHz)	QPSK		16-QAM	
					Average Power (dBm)	Max. Tune- up Power (dBm)	Average Power (dBm)	Max. Tune- up Power (dBm)
20	1	0	20050	1720	23.35	23.5	22.35	22.5
			20175	1732.5	23.27	23.5	22.02	22.5
			20300	1745	23.26	23.5	22.15	22.5
		49	20050	1720	23.34	23.5	22.29	22.5
			20175	1732.5	23.30	23.5	22.06	22.5
			20300	1745	23.41	24.0	22.31	22.5
		99	20050	1720	23.23	23.5	22.36	22.5
			20175	1732.5	23.23	23.5	21.80	22.0
			20300	1745	23.46	24.0	22.27	22.5
	50	0	20050	1720	22.37	22.5	21.42	22.0
			20175	1732.5	22.25	22.5	21.23	21.5
			20300	1745	22.38	22.5	21.13	21.5
		24	20050	1720	22.28	22.5	21.24	21.5
			20175	1732.5	22.20	22.5	21.38	21.5
			20300	1745	22.41	23.0	21.37	21.5
		50	20050	1720	22.27	22.5	21.24	21.5
			20175	1732.5	22.28	22.5	21.16	21.5
			20300	1745	22.51	23.0	21.22	21.5
	100	0	20050	1720	22.36	22.5	21.25	21.5
			20175	1732.5	22.25	22.5	21.15	21.5
			20300	1745	22.45	23.0	21.43	22.0

BW (MHz)	RB Size	RB Offset	CH.	Freq. (MHz)	QPSK		16-QAM	
					Average Power (dBm)	Max. Tune- up Power (dBm)	Average Power (dBm)	Max. Tune- up Power (dBm)
15	1	0	20025	1717.5	23.27	23.5	22.37	22.5
			20175	1732.5	23.17	23.5	22.77	23.0
			20325	1747.5	23.52	24.0	22.44	23.0
		37	20025	1717.5	23.47	24.0	22.37	22.5
			20175	1732.5	23.35	22.5	22.80	23.0
			20325	1747.5	23.34	22.5	22.33	22.5
		74	20025	1717.5	23.24	22.5	22.22	22.5
			20175	1732.5	23.19	22.5	22.36	22.5
			20325	1747.5	23.52	24.0	22.45	23.0
	36	0	20025	1717.5	22.42	23.0	21.52	22.0
			20175	1732.5	22.29	22.5	21.21	21.5
			20325	1747.5	22.39	23.0	21.50	22.0
		19	20025	1717.5	22.40	23.0	21.40	22.0
			20175	1732.5	22.24	22.5	21.18	21.5
			20325	1747.5	22.46	23.0	21.37	21.5
		39	20025	1717.5	22.41	23.0	21.31	21.5
			20175	1732.5	22.20	22.5	21.14	21.5
			20325	1747.5	22.55	23.0	21.43	22.0
	75	0	20025	1717.5	22.40	23.0	21.49	22.0
			20175	1732.5	22.23	22.5	21.26	21.5
			20325	1747.5	22.54	23.0	21.44	22.0

BW (MHz)	RB Size	RB Offset	CH.	Freq. (MHz)	QPSK		16-QAM	
					Average Power (dBm)	Max. Tune- up Power (dBm)	Average Power (dBm)	Max. Tune- up Power (dBm)
10	1	0	20000	1715	23.40	24.0	22.38	22.5
			20175	1732.5	23.31	23.5	22.24	22.5
			20350	1750	23.52	24.0	22.45	23.0
		24	20000	1715	23.33	23.5	22.30	22.5
			20175	1732.5	23.37	23.5	22.86	23.0
			20350	1750	23.52	24.0	23.29	23.5
		49	20000	1715	23.33	23.5	22.36	22.5
			20175	1732.5	23.35	23.5	22.12	22.5
			20350	1750	23.35	23.5	22.56	23.0
	25	0	20000	1715	22.44	23.0	21.50	22.0
			20175	1732.5	22.24	22.5	21.23	21.5
			20350	1750	22.56	23.0	21.45	22.0
		12	20000	1715	22.41	23.0	21.49	22.0
			20175	1732.5	22.23	22.5	21.31	21.5
			20350	1750	22.53	23.0	21.56	22.0
		25	20000	1715	22.39	23.0	21.58	22.0
			20175	1732.5	22.21	22.5	21.28	21.5
			20350	1750	22.55	23.0	21.63	22.0
	50	0	20000	1715	22.37	22.5	21.53	22.0
			20175	1732.5	22.26	22.5	21.21	21.5
			20350	1750	22.49	23.0	21.50	22.0

BW (MHz)	RB Size	RB Offset	CH.	Freq. (MHz)	QPSK		16-QAM	
					Average Power (dBm)	Max. Tune- up Power (dBm)	Average Power (dBm)	Max. Tune- up Power (dBm)
5	1	0	19975	1712.5	23.16	23.5	22.21	22.5
			20175	1732.5	23.09	23.5	21.48	22.0
			20375	1752.5	23.45	24.0	22.08	22.5
		12	19975	1712.5	23.33	23.5	22.44	23.0
			20175	1732.5	23.39	24.0	22.23	22.5
			20375	1752.5	23.49	24.0	21.93	22.5
		24	19975	1712.5	23.15	23.5	22.21	22.5
			20175	1732.5	23.13	23.5	22.02	22.5
			20375	1752.5	23.44	24.0	22.10	22.5
	12	0	19975	1712.5	22.46	23.0	21.42	22.0
			20175	1732.5	22.29	22.5	21.31	21.5
			20375	1752.5	22.53	23.0	21.57	22.0
		6	19975	1712.5	22.46	23.0	21.43	22.0
			20175	1732.5	22.29	22.5	21.33	21.5
			20375	1752.5	22.55	23.0	21.56	22.0
		13	19975	1712.5	22.38	22.5	21.27	21.5
			20175	1732.5	22.34	22.5	21.38	21.5
			20375	1752.5	22.54	23.0	21.27	21.5
	25	0	19975	1712.5	22.42	23.0	21.60	22.0
			20175	1732.5	22.31	22.5	21.05	21.5
			20375	1752.5	22.56	23.0	21.63	22.0

BW (MHz)	RB Size	RB Offset	CH.	Freq. (MHz)	QPSK		16-QAM	
					Average Power (dBm)	Max. Tune- up Power (dBm)	Average Power (dBm)	Max. Tune- up Power (dBm)
3	1	0	19965	1711.5	23.36	23.5	22.31	22.5
			20175	1732.5	23.13	23.5	22.11	22.5
			20385	1753.5	23.20	23.5	22.77	23.0
		7	19965	1711.5	23.51	24.0	22.50	23.0
			20175	1732.5	23.32	23.5	22.46	23.0
			20385	1753.5	23.29	23.5	22.45	23.0
		14	19965	1711.5	23.37	23.5	22.35	22.5
			20175	1732.5	23.05	23.5	22.08	22.5
			20385	1753.5	23.18	23.5	22.16	22.5
	8	0	19965	1711.5	22.40	23.0	21.46	22.0
			20175	1732.5	22.30	22.5	21.51	22.0
			20385	1753.5	22.33	22.5	21.74	22.0
		4	19965	1711.5	22.32	22.5	21.52	22.0
			20175	1732.5	22.28	22.5	21.51	22.0
			20385	1753.5	22.41	23.0	21.34	21.5
		7	19965	1711.5	22.35	22.5	21.44	22.0
			20175	1732.5	22.28	22.5	21.22	21.5
			20385	1753.5	22.32	22.5	21.18	21.5
	15	0	19965	1711.5	22.41	23.0	21.46	22.0
			20175	1732.5	22.30	22.5	21.08	21.5
			20385	1753.5	22.26	22.5	21.36	21.5

BW (MHz)	RB Size	RB Offset	CH.	Freq. (MHz)	QPSK		16-QAM	
					Average Power (dBm)	Max. Tune- up Power (dBm)	Average Power (dBm)	Max. Tune- up Power (dBm)
1.4	1	0	19957	1710.7	23.31	23.5	21.79	22.0
			20175	1732.5	23.14	23.5	22.28	22.5
			20393	1754.3	23.42	24.0	22.18	22.5
		2	19957	1710.7	23.48	24.0	22.26	22.5
			20175	1732.5	23.23	23.5	22.53	23.0
			20393	1754.3	23.32	23.5	22.61	23.0
		5	19957	1710.7	23.30	23.5	21.86	22.0
			20175	1732.5	23.15	23.5	22.32	22.5
			20393	1754.3	23.28	23.5	22.48	23.0
	3	0	19957	1710.7	23.34	23.5	22.32	22.5
			20175	1732.5	23.08	23.5	22.55	23.0
			20393	1754.3	23.25	23.5	22.48	23.0
		1	19957	1710.7	23.56	24.0	22.36	22.5
			20175	1732.5	23.22	23.5	22.50	23.0
			20393	1754.3	23.42	24.0	22.64	23.0
		3	19957	1710.7	23.30	23.5	22.32	22.5
			20175	1732.5	23.19	23.5	22.45	23.0
			20393	1754.3	23.41	24.0	22.62	23.0
	6	0	19957	1710.7	22.28	22.5	21.09	21.5
			20175	1732.5	22.24	22.5	21.39	22.0
			20393	1754.3	22.34	22.5	21.56	22.0

■ LTE Band 5

BW (MHz)	RB Size	RB Offset	CH.	Freq. (MHz)	QPSK		16-QAM	
					Average Power (dBm)	Max. Tune- up Power (dBm)	Average Power (dBm)	Max. Tune- up Power (dBm)
10	1	0	20450	829	23.61	24.0	22.65	23.0
			20525	836.5	23.47	24.0	22.38	22.5
			20600	844	23.35	23.5	22.41	23.0
		24	20450	829	23.57	24.0	23.28	22.5
			20525	836.5	23.43	24.0	22.34	22.5
			20600	844	23.54	24.0	22.49	23.0
		49	20450	829	23.64	24.0	22.72	23.0
			20525	836.5	23.45	24.0	22.41	23.0
			20600	844	23.48	24.0	22.42	23.0
	25	0	20450	829	22.46	23.0	21.50	22.0
			20525	836.5	22.49	23.0	21.67	22.0
			20600	844	22.45	23.0	21.48	22.0
		12	20450	829	22.51	23.0	21.47	22.0
			20525	836.5	22.53	23.0	21.41	22.0
			20600	844	22.55	23.0	21.57	22.0
		25	20450	829	22.53	23.0	21.48	22.0
			20525	836.5	22.47	23.0	21.46	22.0
			20600	844	22.60	23.0	21.53	22.0
	50	0	20450	829	22.58	23.0	21.39	22.0
			20525	836.5	22.44	23.0	21.62	22.0
			20600	844	22.52	23.0	21.61	22.0

BW (MHz)	RB Size	RB Offset	CH.	Freq. (MHz)	QPSK		16-QAM	
					Average Power (dBm)	Max. Tune- up Power (dBm)	Average Power (dBm)	Max. Tune- up Power (dBm)
5	1	0	20425	826.5	23.02	23.5	21.97	22.5
			20525	836.5	23.29	23.5	21.98	22.5
			20625	846.5	23.36	23.5	21.62	22.0
		12	20425	826.5	23.36	23.5	22.76	23.0
			20525	836.5	23.31	23.5	22.42	23.0
			20625	846.5	23.63	24.0	22.15	22.5
		24	20425	826.5	23.20	23.5	22.36	22.5
			20525	836.5	23.29	23.5	22.39	23.0
			20625	846.5	23.56	24.0	21.88	22.0
	12	0	20425	826.5	22.48	23.0	21.30	21.5
			20525	836.5	22.48	23.0	21.28	21.5
			20625	846.5	22.54	23.0	21.81	22.0
		6	20425	826.5	22.42	23.0	21.21	21.5
			20525	836.5	22.54	23.0	21.42	22.0
			20625	846.5	22.57	23.0	21.55	22.0
		13	20425	826.5	22.45	23.0	21.38	21.5
			20525	836.5	22.40	23.0	21.34	21.5
			20625	846.5	22.50	23.0	21.55	22.0
	25	0	20425	826.5	22.43	23.0	21.56	22.0
			20525	836.5	22.50	23.0	21.53	22.0
			20625	846.5	22.61	23.0	21.59	22.0

BW (MHz)	RB Size	RB Offset	CH.	Freq. (MHz)	QPSK		16-QAM	
					Average Power (dBm)	Max. Tune- up Power (dBm)	Average Power (dBm)	Max. Tune- up Power (dBm)
3	1	0	20415	825.5	23.52	24.0	22.45	23.0
			20525	836.5	23.46	24.0	22.31	22.5
			20635	847.5	23.49	24.0	22.38	22.5
		7	20415	825.5	23.64	24.0	22.47	23.0
			20525	836.5	23.51	24.0	22.63	23.0
			20635	847.5	23.65	24.0	22.55	23.0
		14	20415	825.5	23.36	23.5	22.53	23.0
			20525	836.5	23.50	24.0	22.38	22.5
			20635	847.5	23.50	24.0	22.67	23.0
	8	0	20415	825.5	22.47	23.0	21.25	21.5
			20525	836.5	22.54	23.0	21.59	22.0
			20635	847.5	22.58	23.0	21.50	22.0
		4	20415	825.5	22.52	23.0	21.47	22.0
			20525	836.5	22.55	23.0	21.62	22.0
			20635	847.5	22.68	23.0	21.71	22.0
		7	20415	825.5	22.39	23.0	21.73	22.0
			20525	836.5	22.47	23.0	21.37	21.5
			20635	847.5	22.54	23.0	21.65	22.0
	15	0	20415	825.5	22.46	23.0	21.45	22.0
			20525	836.5	22.50	23.0	21.57	22.0
			20635	847.5	22.60	23.0	21.61	22.0

BW (MHz)	RB Size	RB Offset	CH.	Freq. (MHz)	QPSK		16-QAM	
					Average Power (dBm)	Max. Tune- up Power (dBm)	Average Power (dBm)	Max. Tune- up Power (dBm)
1.4	1	0	20407	824.7	23.42	24.0	22.62	23.0
			20525	836.5	23.36	23.5	22.41	23.0
			20643	848.3	23.50	24.0	22.42	23.0
		2	20407	824.7	23.57	24.0	22.64	23.0
			20525	836.5	23.30	23.5	22.23	22.5
			20643	848.3	23.57	24.0	22.41	23.0
		5	20407	824.7	23.57	24.0	22.47	23.0
			20525	836.5	23.31	23.5	22.08	22.5
			20643	848.3	23.58	24.0	22.75	23.0
	3	0	20407	824.7	23.40	24.0	22.37	22.5
			20525	836.5	23.51	24.0	22.61	23.0
			20643	848.3	23.58	24.0	22.34	22.5
		1	20407	824.7	23.64	24.0	22.39	23.0
			20525	836.5	23.38	23.5	22.26	22.5
			20643	848.3	23.53	24.0	22.49	23.0
		3	20407	824.7	23.58	24.0	22.32	22.5
			20525	836.5	23.32	23.5	22.18	22.5
			20643	848.3	23.53	24.0	22.38	22.5
	6	0	20407	824.7	22.43	23.0	21.59	22.0
			20525	836.5	22.45	23.0	21.57	22.0
			20643	848.3	22.56	23.0	21.53	22.0

LTE Band 7

BW (MHz)	RB Size	RB Offset	CH.	Freq. (MHz)	QPSK		16-QAM	
					Average Power (dBm)	Max. Tune- up Power (dBm)	Average Power (dBm)	Max. Tune- up Power (dBm)
20	1	0	20850	2510	23.21	23.5	22.43	23.0
			21100	2535	23.34	23.5	21.85	22.0
			21350	2560	22.61	23.0	21.72	22.0
		49	20850	2510	23.06	23.5	22.42	23.0
			21100	2535	23.55	24.0	22.31	22.5
			21350	2560	22.53	23.0	21.38	21.5
		99	20850	2510	22.79	23.0	21.94	22.5
			21100	2535	22.95	23.5	21.59	22.0
			21350	2560	22.30	22.5	21.14	21.5
	50	0	20850	2510	22.47	23.0	21.48	22.0
			21100	2535	22.27	22.5	21.23	21.5
			21350	2560	21.91	22.5	20.77	21.0
		24	20850	2510	22.51	23.0	21.45	22.0
			21100	2535	22.30	22.5	21.21	21.5
			21350	2560	21.86	22.0	20.75	21.0
		50	20850	2510	22.45	23.0	21.51	22.0
			21100	2535	22.12	22.5	21.14	21.5
			21350	2560	21.62	22.0	20.53	21.0
	100	0	20850	2510	22.43	23.0	21.36	21.5
			21100	2535	22.29	22.5	21.27	21.5
			21350	2560	21.83	22.0	20.77	21.0

BW (MHz)	RB Size	RB Offset	CH.	Freq. (MHz)	QPSK		16-QAM	
					Average Power (dBm)	Max. Tune- up Power (dBm)	Average Power (dBm)	Max. Tune- up Power (dBm)
15	1	0	20825	2507.5	23.51	24.0	22.40	23.0
			21100	2535	23.38	23.5	22.78	23.0
			21375	2562.5	22.79	23.0	21.87	22.0
		37	20825	2507.5	23.48	24.0	22.78	23.0
			21100	2535	23.40	24.0	22.71	23.0
			21375	2562.5	22.97	23.5	21.74	22.0
		74	20825	2507.5	23.43	24.0	22.27	22.5
			21100	2535	22.88	23.0	22.18	22.5
			21375	2562.5	22.58	23.0	21.60	22.0
	36	0	20825	2507.5	22.42	23.0	21.40	22.0
			21100	2535	22.24	22.5	21.13	21.5
			21375	2562.5	21.82	22.0	20.79	21.0
		19	20825	2507.5	22.41	23.0	21.32	21.5
			21100	2535	22.17	22.5	21.08	21.5
			21375	2562.5	21.71	22.0	20.72	21.0
		39	20825	2507.5	22.41	23.0	21.39	22.0
			21100	2535	22.12	22.5	21.04	21.5
			21375	2562.5	21.68	22.0	20.63	21.0
	75	0	20825	2507.5	22.36	22.5	21.41	22.0
			21100	2535	22.18	22.5	21.08	21.5
			21375	2562.5	21.67	22.0	20.59	21.0

BW (MHz)	RB Size	RB Offset	CH.	Freq. (MHz)	QPSK		16-QAM	
					Average Power (dBm)	Max. Tune- up Power (dBm)	Average Power (dBm)	Max. Tune- up Power (dBm)
10	1	0	20800	2505	23.43	24.0	22.32	22.5
			21100	2535	23.12	23.5	22.37	22.5
			21400	2565	22.93	23.5	21.70	22.0
		24	20800	2505	23.44	24.0	22.35	22.5
			21100	2535	23.44	24.0	22.47	23.0
			21400	2565	23.01	23.5	22.10	22.5
		49	20800	2505	23.48	24.0	22.39	23.0
			21100	2535	23.06	23.5	22.25	22.5
			21400	2565	22.53	23.0	21.58	22.0
	25	0	20800	2505	22.50	23.0	21.47	22.0
			21100	2535	22.27	22.5	21.34	21.5
			21400	2565	21.74	22.0	20.78	21.0
		12	20800	2505	22.44	23.0	21.39	22.0
			21100	2535	22.23	22.5	21.41	22.0
			21400	2565	21.67	22.0	20.74	21.0
		25	20800	2505	22.39	23.0	21.32	21.5
			21100	2535	22.23	22.5	21.21	21.5
			21400	2565	21.61	22.0	20.77	21.0
	50	0	20800	2505	22.45	23.0	21.17	21.5
			21100	2535	22.30	22.5	21.16	21.5
			21400	2565	21.68	22.0	20.62	21.0

BW (MHz)	RB Size	RB Offset	CH.	Freq. (MHz)	QPSK		16-QAM	
					Average Power (dBm)	Max. Tune- up Power (dBm)	Average Power (dBm)	Max. Tune- up Power (dBm)
5	1	0	20775	2502.5	23.20	23.5	22.32	22.5
			21100	2535	23.25	23.5	21.83	22.0
			21425	2567.5	22.53	23.0	21.34	21.5
		12	20775	2502.5	23.43	24.0	22.36	22.5
			21100	2535	23.57	24.0	22.07	22.5
			21425	2567.5	22.65	23.0	21.22	21.5
		24	20775	2502.5	23.43	24.0	22.22	22.5
			21100	2535	23.22	23.5	21.57	22.0
			21425	2567.5	22.44	23.0	21.11	21.5
	12	0	20775	2502.5	22.48	23.0	21.23	21.5
			21100	2535	22.24	22.5	21.25	21.5
			21425	2567.5	21.59	22.0	20.47	21.0
		6	20775	2502.5	22.43	23.0	21.33	21.5
			21100	2535	22.25	22.5	21.26	21.5
			21425	2567.5	21.59	22.0	20.57	21.0
		13	20775	2502.5	22.25	22.5	21.34	21.5
			21100	2535	22.26	22.5	21.26	21.5
			21425	2567.5	21.54	22.0	20.34	20.5
	25	0	20775	2502.5	22.42	23.0	21.35	21.5
			21100	2535	22.21	22.5	21.33	21.5
			21425	2567.5	21.53	22.0	20.66	21.0

LTE Band 12

BW (MHz)	RB Size	RB Offset	CH.	Freq. (MHz)	QPSK		16-QAM	
					Average Power (dBm)	Max. Tune- up Power (dBm)	Average Power (dBm)	Max. Tune- up Power (dBm)
10	1	0	23060	704	23.79	24.0	22.74	23.0
			23095	707.5	23.66	24.0	22.83	23.0
			23130	711	24.08	24.5	22.97	23.5
		24	23060	704	24.16	24.5	22.88	23.0
			23095	707.5	23.84	24.0	23.20	23.5
			23130	711	24.29	24.5	23.33	23.5
		49	23060	704	24.07	24.5	22.82	23.0
			23095	707.5	23.77	24.0	22.89	23.5
			23130	711	24.08	24.5	23.23	23.5
	25	0	23060	704	22.96	23.5	21.94	22.5
			23095	707.5	22.89	23.5	22.02	22.5
			23130	711	22.97	23.5	21.93	22.5
		12	23060	704	22.94	23.5	22.14	22.5
			23095	707.5	22.87	23.0	21.85	22.0
			23130	711	22.89	23.5	21.93	22.5
		25	23060	704	22.91	23.5	21.92	22.5
			23095	707.5	22.83	23.0	22.01	22.5
			23130	711	22.89	23.5	21.93	22.5
	50	0	23060	704	22.89	23.5	22.06	22.5
			23095	707.5	22.91	23.5	21.80	22.0
			23130	711	22.92	23.5	21.95	22.5

BW (MHz)	RB Size	RB Offset	CH.	Freq. (MHz)	QPSK		16-QAM	
					Average Power (dBm)	Max. Tune- up Power (dBm)	Average Power (dBm)	Max. Tune- up Power (dBm)
5	1	0	23035	701.5	23.56	24.0	22.66	23.0
			23095	707.5	23.85	24.0	22.29	22.5
			23155	713.5	23.77	24.0	22.01	22.5
		12	23035	701.5	24.07	24.5	23.18	23.5
			23095	707.5	23.82	24.0	22.52	23.0
			23155	713.5	23.99	24.5	22.67	23.0
		24	23035	701.5	23.44	24.0	22.99	23.5
			23095	707.5	23.63	24.0	22.69	23.0
			23155	713.5	23.62	24.0	22.33	22.5
	12	0	23035	701.5	22.92	23.5	21.98	22.5
			23095	707.5	22.92	23.5	21.70	22.0
			23155	713.5	22.98	23.5	22.02	22.5
		6	23035	701.5	23.08	23.5	22.11	22.5
			23095	707.5	22.97	23.5	21.87	22.0
			23155	713.5	22.92	23.5	21.99	22.5
		13	23035	701.5	23.02	23.5	22.06	22.5
			23095	707.5	22.84	23.0	21.72	22.0
			23155	713.5	22.94	23.5	21.94	22.5
	25	0	23035	701.5	23.08	23.5	22.22	22.5
			23095	707.5	22.94	23.5	21.82	22.0
			23155	713.5	22.91	23.5	22.02	22.5

BW (MHz)	RB Size	RB Offset	CH.	Freq. (MHz)	QPSK		16-QAM	
					Average Power (dBm)	Max. Tune- up Power (dBm)	Average Power (dBm)	Max. Tune- up Power (dBm)
3	1	0	23025	700.5	23.76	24.0	22.64	23.0
			23095	707.5	23.81	24.0	22.83	23.0
			23165	714.5	23.93	24.5	22.42	23.0
		7	23025	700.5	23.89	24.5	23.34	23.5
			23095	707.5	23.96	24.5	23.04	23.5
			23165	714.5	24.17	24.5	23.13	23.5
		14	23025	700.5	24.00	24.5	22.89	23.5
			23095	707.5	23.59	24.0	22.70	23.0
			23165	714.5	24.13	24.5	22.74	23.0
	8	0	23025	700.5	22.90	23.5	21.99	22.5
			23095	707.5	22.99	23.5	22.23	22.5
			23165	714.5	22.96	23.5	21.98	22.5
		4	23025	700.5	23.07	23.5	22.18	22.5
			23095	707.5	22.88	23.0	22.13	22.5
			23165	714.5	23.03	23.5	21.66	22.0
		7	23025	700.5	23.04	23.5	21.81	22.0
			23095	707.5	22.83	23.0	21.88	22.0
			23165	714.5	22.88	23.0	21.72	22.0
	15	0	23025	700.5	22.95	23.5	21.89	22.5
			23095	707.5	22.92	23.5	21.80	22.0
			23165	714.5	22.90	23.5	21.92	22.5

BW (MHz)	RB Size	RB Offset	CH.	Freq. (MHz)	QPSK		16-QAM	
					Average Power (dBm)	Max. Tune- up Power (dBm)	Average Power (dBm)	Max. Tune- up Power (dBm)
1.4	1	0	23017	699.7	23.70	24.0	22.76	23.0
			23095	707.5	24.07	24.5	22.98	23.5
			23173	715.3	23.99	24.5	22.88	23.0
		2	23017	699.7	24.05	24.5	22.84	23.0
			23095	707.5	24.14	24.5	23.38	23.5
			23173	715.3	23.96	24.5	23.07	23.5
		5	23017	699.7	23.82	24.0	22.72	23.0
			23095	707.5	23.83	24.0	22.93	23.5
			23173	715.3	24.02	24.5	22.84	23.0
	3	0	23017	699.7	23.68	24.0	22.74	23.0
			23095	707.5	23.87	24.0	22.83	23.0
			23173	715.3	24.08	24.5	22.83	23.0
		1	23017	699.7	23.92	24.5	22.84	23.0
			23095	707.5	24.04	24.5	23.53	24.0
			23173	715.3	23.91	24.5	22.92	23.5
		3	23017	699.7	23.87	24.0	22.81	23.0
			23095	707.5	23.92	24.5	22.67	23.0
			23173	715.3	23.86	24.0	22.87	23.0
	6	0	23017	699.7	22.87	23.0	21.85	22.0
			23095	707.5	22.89	23.5	21.91	22.5
			23173	715.3	22.91	23.5	21.97	22.5

■ LTE Band 13

BW (MHz)	RB Size	RB Offset	CH.	Freq. (MHz)	QPSK		16-QAM	
					Average Power (dBm)	Max. Tune- up Power (dBm)	Average Power (dBm)	Max. Tune- up Power (dBm)
10	1	0	23230	782	24.01	24.5	23.24	23.5
		24	23230	782	24.13	24.5	23.09	23.5
		49	23230	782	24.29	24.5	22.94	23.5
	25	0	23230	782	22.73	23.0	21.51	22.0
		12	23230	782	22.68	23.0	21.52	22.0
		25	23230	782	22.80	23.0	21.74	22.0
	50	0	23230	782	22.81	23.0	21.72	22.0
5	1	0	23205	779.5	23.68	24.0	22.73	23.0
			23230	782	23.97	24.5	22.33	22.5
			23255	784.5	23.68	24.0	22.36	22.5
		12	23205	779.5	23.71	24.0	23.00	22.5
			23230	782	24.18	24.5	22.36	22.5
			23255	784.5	24.21	24.5	23.08	23.5
		24	23205	779.5	23.82	24.0	22.91	23.5
			23230	782	24.24	24.5	22.44	23.0
			23255	784.5	23.57	24.0	22.50	23.0
	12	0	23205	779.5	23.04	23.5	21.76	22.0
			23230	782	22.92	23.5	21.62	22.0
			23255	784.5	22.88	23.0	21.83	22.0
		6	23205	779.5	23.00	23.5	21.79	22.0
			23230	782	22.87	23.0	21.60	22.0
			23255	784.5	22.87	23.0	21.75	22.0
		13	23205	779.5	22.90	23.5	21.83	22.0
			23230	782	22.91	23.5	21.79	22.0
			23255	784.5	22.87	23.0	21.86	22.0
	25	0	23205	779.5	23.04	23.5	22.10	22.5
			23230	782	22.83	23.0	21.93	22.5
			23255	784.5	22.95	23.5	21.68	22.0

LTE Band 17

BW (MHz)	RB Size	RB Offset	CH.	Freq. (MHz)	QPSK		16-QAM	
					Average Power (dBm)	Max. Tune- up Power (dBm)	Average Power (dBm)	Max. Tune- up Power (dBm)
10	1	0	23780	709	23.93	24.5	23.14	23.5
			23790	710	24.03	24.5	22.82	23.0
			23800	711	23.98	24.5	22.87	23.0
		24	23780	709	23.88	24.0	23.18	23.5
			23790	710	24.27	24.5	23.42	24.0
			23800	711	24.01	24.5	22.87	23.0
		49	23780	709	23.98	24.5	23.15	23.5
			23790	710	24.27	24.5	22.83	23.0
			23800	711	24.10	24.5	22.92	23.5
	25	0	23780	709	23.02	23.5	22.06	22.5
			23790	710	22.95	23.5	21.87	22.0
			23800	711	22.88	23.0	21.90	22.5
		12	23780	709	22.96	23.5	22.05	22.5
			23790	710	22.98	23.5	21.92	22.5
			23800	711	22.96	23.5	21.99	22.5
		25	23780	709	23.00	23.5	22.10	22.5
			23790	710	23.07	23.5	22.06	22.5
			23800	711	23.08	23.5	21.93	22.5
	50	0	23780	709	23.01	23.5	22.05	22.5
			23790	710	22.99	23.5	21.92	22.5
			23800	711	22.97	23.5	21.90	22.5

BW (MHz)	RB Size	RB Offset	CH.	Freq. (MHz)	QPSK		16-QAM	
					Average Power (dBm)	Max. Tune- up Power (dBm)	Average Power (dBm)	Max. Tune- up Power (dBm)
5	1	0	23755	706.5	23.56	24.0	22.82	23.0
			23790	710	23.83	24.0	22.51	23.0
			23825	713.5	24.20	24.5	22.56	23.0
		12	23755	706.5	23.83	24.0	23.13	23.5
			23790	710	23.89	24.5	22.55	23.0
			23825	713.5	24.21	24.5	22.84	23.0
		24	23755	706.5	23.76	24.0	22.84	23.0
			23790	710	23.83	24.0	22.50	23.0
			23825	713.5	24.24	24.5	22.46	23.0
	12	0	23755	706.5	22.97	23.5	21.92	22.5
			23790	710	22.88	23.0	21.89	22.5
			23825	713.5	23.01	23.5	22.03	22.5
		6	23755	706.5	23.02	23.5	21.81	22.0
			23790	710	22.99	23.5	21.96	22.5
			23825	713.5	23.07	23.5	22.09	22.5
		13	23755	706.5	22.77	23.0	21.64	22.0
			23790	710	22.97	23.5	21.70	22.0
			23825	713.5	23.03	23.5	21.82	22.0
	25	0	23755	706.5	23.00	23.5	21.97	22.5
			23790	710	23.01	23.5	21.91	22.5
			23825	713.5	23.06	23.5	22.19	22.5

LTE Band 25

BW (MHz)	RB Size	RB Offset	CH.	Freq. (MHz)	QPSK		16-QAM	
					Average Power (dBm)	Max. Tune- up Power (dBm)	Average Power (dBm)	Max. Tune- up Power (dBm)
20	1	0	26140	1860	23.13	23.5	22.34	22.5
			26365	1882.5	23.47	24.0	22.01	22.5
			26590	1905	23.15	23.5	22.03	22.5
		49	26140	1860	22.96	23.5	22.44	23.0
			26365	1882.5	23.39	24.0	22.24	22.5
			26590	1905	23.33	23.5	21.98	22.5
		99	26140	1860	23.14	23.5	22.39	23.0
			26365	1882.5	23.11	23.5	22.17	22.5
			26590	1905	22.96	23.5	22.11	22.5
	50	0	26140	1860	22.31	22.5	21.29	21.5
			26365	1882.5	22.32	22.5	21.21	21.5
			26590	1905	22.39	23.0	21.32	21.5
		24	26140	1860	22.32	22.5	21.34	21.5
			26365	1882.5	22.39	23.0	21.37	21.5
			26590	1905	22.27	22.5	21.14	21.5
		50	26140	1860	22.43	23.0	21.28	21.5
			26365	1882.5	22.37	22.5	21.33	21.5
			26590	1905	22.26	22.5	21.19	21.5
	100	0	26140	1860	22.37	22.5	21.29	21.5
			26365	1882.5	22.36	22.5	21.33	21.5
			26590	1905	22.31	22.5	21.19	21.5

BW (MHz)	RB Size	RB Offset	CH.	Freq. (MHz)	QPSK		16-QAM	
					Average Power (dBm)	Max. Tune- up Power (dBm)	Average Power (dBm)	Max. Tune- up Power (dBm)
15	1	0	26115	1857.5	23.40	24.0	22.46	23.0
			26365	1882.5	23.37	23.5	22.86	23.0
			26615	1907.5	22.33	23.5	22.31	22.5
		37	26115	1857.5	23.48	24.0	23.03	23.5
			26365	1882.5	23.30	23.5	23.11	23.5
			26615	1907.5	23.33	23.5	23.11	23.5
		74	26115	1857.5	23.38	23.5	22.37	22.5
			26365	1882.5	23.27	23.5	22.90	23.5
			26615	1907.5	23.25	23.5	22.30	22.5
	36	0	26115	1857.5	22.29	22.5	21.31	21.5
			26365	1882.5	22.33	22.5	21.24	21.5
			26615	1907.5	22.31	22.5	21.44	22.0
		19	26115	1857.5	22.33	22.5	21.35	21.5
			26365	1882.5	22.34	22.5	21.26	21.5
			26615	1907.5	22.30	22.5	21.38	21.5
		39	26115	1857.5	22.37	22.5	21.31	21.5
			26365	1882.5	22.32	22.5	21.22	21.5
			26615	1907.5	22.21	22.5	21.20	21.5
	75	0	26115	1857.5	22.38	22.5	21.29	21.5
			26365	1882.5	22.29	22.5	21.36	21.5
			26615	1907.5	22.30	22.5	21.28	21.5

BW (MHz)	RB Size	RB Offset	CH.	Freq. (MHz)	QPSK		16-QAM	
					Average Power (dBm)	Max. Tune- up Power (dBm)	Average Power (dBm)	Max. Tune- up Power (dBm)
10	1	0	26090	1855	23.47	24.0	22.35	22.5
			26365	1882.5	23.09	23.5	22.27	22.5
			26640	1910	23.46	24.0	22.40	23.0
		24	26090	1855	23.21	23.5	22.12	22.5
			26365	1882.5	23.38	23.5	22.54	23.0
			26640	1910	23.48	24.0	22.64	23.0
		49	26090	1855	23.31	23.5	22.21	22.5
			26365	1882.5	23.21	23.5	22.25	22.5
			26640	1910	23.50	24.0	22.44	23.0
	25	0	26090	1855	22.40	23.0	21.43	22.0
			26365	1882.5	22.39	23.0	21.38	21.5
			26640	1910	22.38	22.5	21.27	21.5
		12	26090	1855	22.25	22.5	21.33	21.5
			26365	1882.5	22.36	22.5	21.34	21.5
			26640	1910	22.22	22.5	21.30	21.5
		25	26090	1855	22.36	22.5	21.24	21.5
			26365	1882.5	22.32	22.5	21.55	22.0
			26640	1910	22.41	23.0	21.47	22.0
	50	0	26090	1855	22.26	22.5	21.32	21.5
			26365	1882.5	22.39	23.0	21.31	21.5
			26640	1910	22.30	22.5	21.28	21.5

BW (MHz)	RB Size	RB Offset	CH.	Freq. (MHz)	QPSK		16-QAM	
					Average Power (dBm)	Max. Tune- up Power (dBm)	Average Power (dBm)	Max. Tune- up Power (dBm)
5	1	0	26065	1852.5	23.11	23.5	22.25	21.5
			26365	1882.5	23.16	23.5	22.14	21.5
			26665	1912.5	23.16	23.5	21.77	22.0
		12	26065	1852.5	23.44	24.0	21.82	22.0
			26365	1882.5	23.17	23.5	21.85	22.0
			26665	1912.5	23.49	24.0	22.07	22.5
		24	26065	1852.5	23.08	23.5	22.19	22.5
			26365	1882.5	23.20	23.5	22.20	22.5
			26665	1912.5	23.36	23.5	22.02	22.5
	12	0	26065	1852.5	22.34	22.5	21.41	22.0
			26365	1882.5	22.41	23.0	21.32	21.5
			26665	1912.5	22.33	22.5	21.10	21.5
		6	26065	1852.5	22.33	22.5	21.45	22.0
			26365	1882.5	22.42	23.0	21.32	21.5
			26665	1912.5	22.49	23.0	21.45	22.0
		13	26065	1852.5	22.17	22.5	21.27	21.5
			26365	1882.5	22.36	22.5	21.30	21.5
			26665	1912.5	22.47	23.0	21.40	22.0
	25	0	26065	1852.5	22.38	22.5	21.36	21.5
			26365	1882.5	22.33	22.5	21.19	21.5
			26665	1912.5	22.43	23.0	21.41	22.0

BW (MHz)	RB Size	RB Offset	CH.	Freq. (MHz)	QPSK		16-QAM	
					Average Power (dBm)	Max. Tune- up Power (dBm)	Average Power (dBm)	Max. Tune- up Power (dBm)
3	1	0	26055	1851.5	23.48	24.0	22.64	23.0
			26365	1882.5	23.17	23.5	22.17	22.5
			26675	1913.5	23.30	23.5	22.50	23.0
		7	26055	1851.5	23.39	24.0	22.53	23.0
			26365	1882.5	23.31	23.5	22.42	23.0
			26675	1913.5	23.43	24.0	22.74	23.0
		14	26055	1851.5	23.37	23.5	22.25	22.5
			26365	1882.5	23.44	24.0	22.41	23.0
			26675	1913.5	23.36	23.5	22.75	23.0
	8	0	26055	1851.5	22.44	23.0	21.35	21.5
			26365	1882.5	22.33	22.5	21.55	22.0
			26675	1913.5	22.42	23.0	21.51	22.0
		4	26055	1851.5	22.48	23.0	21.46	22.0
			26365	1882.5	22.33	22.5	21.57	22.0
			26675	1913.5	22.32	22.5	21.52	22.0
		7	26055	1851.5	22.31	22.5	21.43	22.0
			26365	1882.5	22.33	22.5	21.32	21.5
			26675	1913.5	22.36	22.5	21.52	22.0
	15	0	26055	1851.5	22.45	23.0	21.38	21.5
			26365	1882.5	22.28	22.5	21.10	21.5
			26675	1913.5	22.43	23.0	21.35	21.5

BW (MHz)	RB Size	RB Offset	CH.	Freq. (MHz)	QPSK		16-QAM	
					Average Power (dBm)	Max. Tune- up Power (dBm)	Average Power (dBm)	Max. Tune- up Power (dBm)
1.4	1	0	26047	1850.7	23.33	22.5	22.32	22.5
			26365	1882.5	23.44	24.0	22.28	22.5
			26683	1914.3	23.25	22.5	22.09	22.5
		2	26047	1850.7	23.44	24.0	22.56	23.0
			26365	1882.5	23.49	24.0	22.67	23.0
			26683	1914.3	23.33	22.5	22.68	23.0
		5	26047	1850.7	23.28	22.5	22.11	22.5
			26365	1882.5	23.40	24.0	22.37	22.5
			26683	1914.3	23.39	24.0	22.48	23.0
	3	0	26047	1850.7	23.34	22.5	22.58	23.0
			26365	1882.5	23.33	22.5	22.57	23.0
			26683	1914.3	23.40	24.0	22.44	23.0
		1	26047	1850.7	23.42	24.0	22.39	23.0
			26365	1882.5	23.37	22.5	22.58	23.0
			26683	1914.3	23.43	24.0	22.41	23.0
		3	26047	1850.7	23.49	24.0	22.62	23.0
			26365	1882.5	23.28	22.5	22.54	23.0
			26683	1914.3	23.44	24.0	22.64	23.0
	6	0	26047	1850.7	22.37	22.5	21.37	21.5
			26365	1882.5	22.38	22.5	21.33	21.5
			26683	1914.3	22.30	22.5	21.52	22.0

■ LTE Band 38

BW (MHz)	RB Size	RB Offset	CH.	Freq. (MHz)	QPSK		16-QAM	
					Average Power (dBm)	Max. Tune- up Power (dBm)	Average Power (dBm)	Max. Tune- up Power (dBm)
20	1	0	37850	2580	22.12	22.5	20.96	21.5
			38000	2595	22.70	23.0	20.38	20.5
			38150	2610	22.45	23.0	21.65	22.0
		49	37850	2580	22.31	22.5	21.11	21.5
			38000	2595	22.78	23.0	20.68	21.0
			38150	2610	22.70	23.0	21.92	22.5
		99	37850	2580	22.19	22.5	21.07	21.5
			38000	2595	22.59	23.0	20.31	20.5
			38150	2610	22.34	22.5	21.53	22.0
	50	0	37850	2580	21.46	22.0	20.48	21.0
			38000	2595	21.55	22.0	20.47	21.0
			38150	2610	21.49	22.0	20.43	21.0
		24	37850	2580	21.44	22.0	20.42	21.0
			38000	2595	21.53	22.0	20.54	21.0
			38150	2610	21.45	22.0	20.43	21.0
		50	37850	2580	21.51	22.0	20.49	21.0
			38000	2595	21.46	22.0	20.46	21.0
			38150	2610	21.43	22.0	20.41	21.0
	100	0	37850	2580	21.43	22.0	20.45	21.0
			38000	2595	21.57	22.0	20.38	20.5
			38150	2610	21.50	22.0	20.41	21.0

BW (MHz)	RB Size	RB Offset	CH.	Freq. (MHz)	QPSK		16-QAM	
					Average Power (dBm)	Max. Tune- up Power (dBm)	Average Power (dBm)	Max. Tune- up Power (dBm)
15	1	0	37825	2577.5	22.28	22.5	20.86	21.0
			38000	2595	22.39	23.0	21.36	21.5
			38175	2612.5	22.50	23.0	21.73	22.0
		37	37825	2577.5	22.21	22.5	20.75	21.0
			38000	2595	22.94	23.5	21.50	22.0
			38175	2612.5	22.49	23.0	21.65	22.0
		74	37825	2577.5	22.16	22.5	20.80	21.0
			38000	2595	22.35	22.5	21.40	22.0
			38175	2612.5	22.31	22.5	21.54	22.0
	36	0	37825	2577.5	21.41	22.0	20.37	20.5
			38000	2595	21.67	22.0	20.32	20.5
			38175	2612.5	21.53	22.0	20.40	21.0
		19	37825	2577.5	21.35	22.0	20.42	21.0
			38000	2595	21.45	22.0	20.35	20.5
			38175	2612.5	21.50	22.0	20.39	21.0
		39	37825	2577.5	21.37	21.5	20.45	21.0
			38000	2595	21.50	22.0	20.35	20.5
			38175	2612.5	21.43	22.0	20.40	21.0
	75	0	37825	2577.5	21.43	22.0	20.43	21.0
			38000	2595	21.49	22.0	20.47	21.0
			38175	2612.5	21.48	22.0	20.57	21.0

BW (MHz)	RB Size	RB Offset	CH.	Freq. (MHz)	QPSK		16-QAM	
					Average Power (dBm)	Max. Tune- up Power (dBm)	Average Power (dBm)	Max. Tune- up Power (dBm)
10	1	0	37800	2575	22.30	22.5	20.73	21.0
			38000	2595	22.57	23.0	21.58	22.0
			38200	2615	22.51	23.0	21.70	22.0
		24	37800	2575	22.39	23.0	20.65	21.0
			38000	2595	22.52	23.0	22.01	22.5
			38200	2615	22.42	23.0	21.92	22.5
		49	37800	2575	22.24	22.5	20.58	21.0
			38000	2595	22.48	23.0	22.36	22.5
			38200	2615	22.33	22.5	21.86	22.0
	25	0	37800	2575	21.42	22.0	20.37	20.5
			38000	2595	21.54	22.0	20.45	21.0
			38200	2615	21.49	22.0	20.38	20.5
		12	37800	2575	21.40	22.0	20.29	20.5
			38000	2595	21.56	22.0	20.58	21.0
			38200	2615	21.44	22.0	20.45	21.0
		25	37800	2575	21.48	22.0	20.24	20.5
			38000	2595	21.54	22.0	20.56	21.0
			38200	2615	21.45	22.0	20.35	20.5
	50	0	37800	2575	21.38	21.5	20.41	21.0
			38000	2595	21.46	22.0	20.48	21.0
			38200	2615	21.44	22.0	20.23	20.5

BW (MHz)	RB Size	RB Offset	CH.	Freq. (MHz)	QPSK		16-QAM	
					Average Power (dBm)	Max. Tune- up Power (dBm)	Average Power (dBm)	Max. Tune- up Power (dBm)
5	1	0	37775	2572.5	22.23	22.5	20.72	21.0
			38000	2595	22.26	22.5	21.31	21.5
			38225	2617.5	22.31	22.5	21.14	21.5
		12	37775	2572.5	23.04	23.5	20.79	21.0
			38000	2595	22.59	23.0	21.52	22.0
			38225	2617.5	22.49	23.0	21.11	21.5
		24	37775	2572.5	22.21	22.5	20.73	21.0
			38000	2595	22.34	22.5	21.27	21.5
			38225	2617.5	22.25	22.5	21.10	21.5
	12	0	37775	2572.5	21.43	22.0	20.20	20.5
			38000	2595	21.51	22.0	20.60	21.0
			38225	2617.5	21.42	22.0	20.39	21.0
		6	37775	2572.5	21.48	22.0	20.52	21.0
			38000	2595	21.50	22.0	20.59	21.0
			38225	2617.5	21.37	21.5	20.45	21.0
		13	37775	2572.5	21.43	22.0	20.17	20.5
			38000	2595	21.53	22.0	20.62	21.0
			38225	2617.5	21.33	21.5	20.39	21.0
	25	0	37775	2572.5	21.39	22.0	20.39	21.0
			38000	2595	21.49	22.0	20.51	21.0
			38225	2617.5	21.39	22.0	20.48	21.0

■ LTE Band 41

BW (MHz)	RB Size	RB Offset	CH.	Freq. (MHz)	QPSK		16-QAM	
					Average Power (dBm)	Max. Tune- up Power (dBm)	Average Power (dBm)	Max. Tune- up Power (dBm)
20	1	0	39750	2506	22.95	23.5	22.14	22.5
			40185	2549.5	23.03	23.5	20.97	21.5
			40620	2593	22.68	23.0	22.08	22.5
			41055	2636.5	22.73	23.0	20.69	21.0
			41490	2680	22.62	23.0	22.16	22.5
		49	39750	2506	23.10	23.5	22.05	22.5
			40185	2549.5	23.06	23.5	20.90	21.5
			40620	2593	22.83	23.0	22.08	22.5
			41055	2636.5	22.76	23.0	20.63	21.0
			41490	2680	22.86	23.0	21.81	22.0
		99	39750	2506	23.06	23.5	22.14	22.5
			40185	2549.5	22.74	23.0	20.64	21.0
			40620	2593	22.75	23.0	21.72	22.0
			41055	2636.5	22.49	23.0	20.49	21.0
			41490	2680	22.68	23.0	22.10	22.5
	50	0	39750	2506	22.31	22.5	21.33	21.5
			40185	2549.5	21.87	22.0	20.86	21.0
			40620	2593	21.79	22.0	20.66	21.0
			41055	2636.5	21.59	22.0	20.58	21.0
			41490	2680	21.72	22.0	20.68	21.0
		24	39750	2506	22.28	22.5	21.24	21.5
			40185	2549.5	21.75	22.0	20.84	21.0
			40620	2593	21.54	22.0	20.42	21.0
			41055	2636.5	21.54	22.0	20.56	21.0
			41490	2680	21.61	22.0	20.60	21.0
		50	39750	2506	22.12	22.5	21.06	21.5
			40185	2549.5	21.78	22.0	20.66	21.0
			40620	2593	21.70	22.0	20.66	21.0
			41055	2636.5	21.50	22.0	20.51	21.0
			41490	2680	21.58	22.0	20.60	21.0

<Continue>

20	100	0	39750	2506	22.30	22.5	21.26	21.5
			40185	2549.5	21.81	22.0	20.67	21.0
			40620	2593	21.75	22.0	20.47	21.0
			41055	2636.5	21.55	22.0	20.42	21.0
			41490	2680	21.69	22.0	20.55	21.0

BW (MHz)	RB Size	RB Offset	CH.	Freq. (MHz)	QPSK		16-QAM	
					Average Power (dBm)	Max. Tune- up Power (dBm)	Average Power (dBm)	Max. Tune- up Power (dBm)
15	1	0	39725	2503.5	23.08	23.5	21.68	22.0
			40173	2548.3	22.79	23.0	21.37	21.5
			40620	2593	22.59	23.0	21.81	22.0
			41068	2637.8	22.55	23.0	21.91	22.5
			41515	2682.5	22.51	23.0	21.14	21.5
		37	39725	2503.5	23.24	23.5	21.97	22.5
			40173	2548.3	22.65	23.0	21.49	22.0
			40620	2593	23.12	23.5	21.69	22.0
			41068	2637.8	22.48	23.0	21.82	22.0
			41515	2682.5	22.57	23.0	21.05	21.5
		74	39725	2503.5	22.96	23.5	21.37	21.5
			40173	2548.3	22.54	23.0	21.11	21.5
			40620	2593	22.73	23.0	21.64	22.0
			41068	2637.8	22.33	22.5	21.77	22.0
			41515	2682.5	22.51	23.0	20.97	21.5
	36	0	39725	2503.5	22.15	22.5	21.14	21.5
			40173	2548.3	21.89	22.5	20.94	21.5
			40620	2593	21.60	22.0	20.37	20.5
			41068	2637.8	21.58	22.0	20.33	20.5
			41515	2682.5	21.59	22.0	20.56	21.0
		19	39725	2503.5	22.35	22.5	21.29	21.5
			40173	2548.3	21.81	22.0	20.86	21.0
			40620	2593	21.61	22.0	20.40	21.0
			41068	2637.8	21.56	22.0	20.30	20.5
			41515	2682.5	21.62	22.0	20.61	21.0
		39	39725	2503.5	22.26	22.5	21.22	21.5
			40173	2548.3	21.84	22.0	20.86	21.0
			40620	2593	21.56	22.0	20.38	20.5
			41068	2637.8	21.53	22.0	20.24	20.5
			41515	2682.5	21.68	22.0	20.56	21.0

<Continue>

15	75	0	39725	2503.5	22.26	22.5	21.24	21.5
			40173	2548.3	21.87	22.0	20.85	21.0
			40620	2593	21.58	22.0	20.58	21.0
			41068	2637.8	21.52	22.0	20.42	21.0
			41515	2682.5	21.61	22.0	20.62	21.0

BW (MHz)	RB Size	RB Offset	CH.	Freq. (MHz)	QPSK		16-QAM	
					Average Power (dBm)	Max. Tune- up Power (dBm)	Average Power (dBm)	Max. Tune- up Power (dBm)
10	1	0	39700	2501	23.15	23.5	21.73	22.0
			40160	2547	22.98	23.5	22.35	22.5
			40620	2593	22.52	23.0	21.83	22.0
			41080	2639	22.48	23.0	20.94	21.5
			41540	2685	22.74	23.0	22.48	23.0
		24	39700	2501	23.04	23.5	21.78	22.0
			40160	2547	22.96	23.5	22.68	23.0
			40620	2593	22.45	23.0	22.03	22.5
			41080	2639	22.52	23.0	20.82	21.0
			41540	2685	22.65	23.0	22.51	23.0
		49	39700	2501	23.08	23.5	21.87	22.0
			40160	2547	22.89	23.5	22.75	23.0
			40620	2593	22.71	23.0	22.04	22.5
			41080	2639	22.45	23.0	20.68	21.0
			41540	2685	22.77	23.0	22.57	23.0
	25	0	39700	2501	22.44	23.0	21.26	21.5
			40160	2547	21.95	22.5	20.84	21.0
			40620	2593	21.64	22.0	20.49	21.0
			41080	2639	21.63	22.0	20.52	21.0
			41540	2685	21.69	22.0	20.55	21.0
		12	39700	2501	22.37	22.5	21.29	21.5
			40160	2547	21.97	22.5	20.86	21.0
			40620	2593	21.63	22.0	20.58	21.0
			41080	2639	21.56	22.0	20.47	21.0
			41540	2685	21.70	22.0	20.65	21.0
		25	39700	2501	22.59	23.0	21.43	22.0
			40160	2547	21.98	22.5	20.88	21.0
			40620	2593	21.60	22.0	20.52	21.0
			41080	2639	21.57	22.0	20.40	21.0
			41540	2685	21.73	22.0	20.73	21.0

<Continue>

10	50	0	39700	2501	22.42	23.0	21.35	21.5
			40160	2547	21.77	22.0	20.86	21.0
			40620	2593	21.56	22.0	20.50	21.0
			41080	2639	21.55	22.0	20.49	21.0
			41540	2685	21.76	22.0	20.59	21.0

BW (MHz)	RB Size	RB Offset	CH.	Freq. (MHz)	QPSK		16-QAM	
					Average Power (dBm)	Max. Tune- up Power (dBm)	Average Power (dBm)	Max. Tune- up Power (dBm)
5	1	0	39675	2498.5	23.09	23.5	21.89	22.5
			40148	2545.8	22.87	23.0	21.61	22.0
			40620	2593	22.33	22.5	20.91	21.5
			41093	2640.3	22.36	22.5	20.84	21.0
			41565	2687.5	22.40	23.0	21.42	22.0
		12	39675	2498.5	23.24	23.5	22.36	22.5
			40148	2545.8	22.95	23.5	21.75	22.0
			40620	2593	23.16	23.5	20.98	21.5
			41093	2640.3	23.10	23.5	21.10	21.5
			41565	2687.5	22.82	23.0	22.13	22.5
		24	39675	2498.5	23.22	22.5	21.91	22.5
			40148	2545.8	22.83	23.0	21.57	22.0
			40620	2593	22.24	22.5	21.00	21.5
			41093	2640.3	22.28	22.5	20.77	21.0
			41565	2687.5	22.27	22.5	21.45	22.0
	12	0	39675	2498.5	22.53	23.0	21.16	21.5
			40148	2545.8	21.98	22.5	20.93	21.5
			40620	2593	21.58	22.0	20.56	21.0
			41093	2640.3	21.60	22.0	20.57	21.0
			41565	2687.5	21.87	22.0	20.66	21.0
		6	39675	2498.5	22.63	23.0	21.35	21.5
			40148	2545.8	21.88	22.0	20.95	21.5
			40620	2593	21.63	22.0	20.54	21.0
			41093	2640.3	21.55	22.0	20.52	21.0
			41565	2687.5	21.73	22.0	20.81	21.0
		13	39675	2498.5	22.40	23.0	21.31	21.5
			40148	2545.8	22.01	22.5	20.94	21.5
			40620	2593	21.57	22.0	20.53	21.0
			41093	2640.3	21.41	22.0	20.91	21.5
			41565	2687.5	21.72	22.0	20.66	21.0

<Continue>

5	25	0	39675	2498.5	22.45	23.0	21.28	21.5
			40148	2545.8	21.82	22.0	20.70	21.0
			40620	2593	21.58	22.0	20.50	21.0
			41093	2640.3	21.49	22.0	20.59	21.0
			41565	2687.5	21.95	22.5	20.79	21.0

■ DTS Band Wi-Fi

Mode	CH.	Freq. (MHz)	Average Power (dBm)	Max. Tune-up Power (dBm)	Duty Cycle %
802.11b	1	2412	14.71	15.0	97.50
	6	2437	14.59	15.0	
	11	2462	14.88	15.0	
802.11g	1	2412	12.58	13.0	86.50
	6	2437	12.61	13.0	
	11	2462	12.71	13.0	
802.11n (HT20)	1	2412	11.58	12.0	86.10
	6	2437	11.85	12.0	
	11	2462	11.75	12.0	

■ U-NII-1 Band Wi-Fi

Mode	CH.	Freq. (MHz)	Average Power (dBm)	Max. Tune-up Power (dBm)	Duty Cycle %
a	36	5180	13.76	14.0	82.54
	44	5220	13.63	14.0	
	48	5240	13.70	14.0	
n (HT20)	36	5180	11.80	12.0	82.21
	44	5220	11.66	12.0	
	48	5240	11.81	12.0	
n (HT40)	38	5190	9.67	10.0	70.58
	46	5230	9.64	10.0	
ac (VHT20)	36	5180	11.69	12.0	44.62
	44	5220	11.70	12.0	
	48	5240	11.63	12.0	
ac (VHT40)	38	5190	9.75	10.0	70.69
	46	5230	9.55	10.0	
ac (VHT80)	42	5210	7.85	8.0	54.60

■ U-NII-2A Band Wi-Fi

Mode	CH.	Freq. (MHz)	Average Power (dBm)	Max. Tune-up Power (dBm)	Duty Cycle %
a	52	5260	13.81	14.0	82.54
	60	5300	13.84	14.0	
	64	5320	13.83	14.0	
n (HT20)	52	5260	11.62	12.0	82.21
	60	5300	11.86	12.0	
	64	5320	11.61	12.0	
n (HT40)	54	5270	9.60	10.0	70.58
	62	5310	9.74	10.0	
ac (VHT20)	52	5260	11.74	12.0	44.62
	60	5300	11.73	12.0	
	64	5320	11.58	12.0	
ac (VHT40)	54	5270	9.84	10.0	70.69
	62	5310	9.73	10.0	
ac (VHT80)	58	5290	7.92	8.5	54.60

■ U-NII-2C Band Wi-Fi

Mode	CH.	Freq. (MHz)	Average Power (dBm)	Max. Tune-up Power (dBm)	Duty Cycle %
a	100	5500	13.63	14.0	82.54
	120	5600	13.72	14.0	
	140	5700	13.87	14.0	
	144	5720	13.84	14.0	
n (HT20)	100	5500	11.51	12.0	82.21
	120	5600	11.86	12.0	
	140	5700	11.74	12.0	
	144	5720	11.88	12.0	
n (HT40)	102	5510	9.86	10.0	70.58
	118	5590	9.84	10.0	
	134	5670	9.74	10.0	
	142	5710	9.87	10.0	
ac (VHT20)	100	5500	11.73	12.0	44.62
	120	5600	11.63	12.0	
	140	5700	11.67	12.0	
	144	5720	11.72	12.0	
ac (VHT40)	102	5510	9.78	10.0	70.69
	118	5590	9.51	10.0	
	134	5670	9.65	10.0	
	142	5710	9.77	10.0	
ac (VHT80)	106	5530	7.73	8.0	54.60
	112	5610	7.89	8.5	
	138	5690	7.73	8.0	

■ U-NII-3 Band Wi-Fi

Mode	CH.	Freq. (MHz)	Average Power (dBm)	Max. Tune-up Power (dBm)	Duty Cycle %
a	149	5745	13.67	14.0	82.54
	157	5785	13.83	14.0	
	165	5825	13.67	14.0	
n (HT20)	149	5745	11.60	12.0	82.21
	157	5785	11.57	12.0	
	165	5825	11.85	12.0	
n (HT40)	151	5755	9.67	10.0	70.58
	159	5795	9.73	10.0	
ac (VHT20)	149	5745	11.84	12.0	44.62
	157	5785	11.85	12.0	
	165	5825	11.73	12.0	
ac (VHT40)	151	5755	9.78	10.0	70.69
	159	5795	9.77	10.0	
ac (VHT80)	155	5775	7.69	8.0	54.60

■ Bluetooth

Mode	CH.	Freq. (MHz)	Average Power (dBm)	Max. Tune-up Power (dBm)	Duty Cycle %
DH5	0	2402	-1.17	-1.0	76.33
	39	2441	-1.31	-1.0	
	78	2480	-2.61	-2.0	
2DH5	0	2402	0.46	1.0	76.06
	39	2441	0.44	1.0	
	78	2480	-0.69	0	
3DH5	0	2402	0.47	1.0	76.53
	39	2441	0.52	1.0	
	78	2480	-0.44	0	
BLE	0	2402	2.30	2.5	62.50
	19	2440	2.59	3.0	
	39	2480	1.29	1.5	

8.3. SAR Exclusion Analysis

Per FCC KDB 447498 D01v06, the SAR exclusion threshold for distances < 50 mm is defined by the following equation:

$$\frac{\text{Max Power of Channel (mW)}}{\text{Test Separation Distance (mm)}} \times \sqrt{\text{Frequency (GHz)}} \leq 3.0, \text{ for head and boy SAR;}$$

$$\frac{\text{Max Power of Channel (mW)}}{\text{Test Separation Distance (mm)}} \times \sqrt{\text{Frequency (GHz)}} \leq 7.5, \text{ for Extremity SAR.}$$

For 100 MHz to 6 GHz and test separation distances > 50 mm, the 1-g and 10-g SAR test exclusion thresholds are determined by the following:

- 1) {[Power allowed at numeric threshold for 50 mm in step a)] + [(test separation distance – 50 mm) * (f(MHz)/150)]} mW, for 100 MHz to 1500 MHz
- 2) {[Power allowed at numeric threshold for 50 mm in step a)] + [(test separation distance – 50 mm)*10]} mW, for > 1500 MHz and ≤ 6 GHz

Antenna Distance to User Body (mm)								
Antenna	Front side	Back side	Left side	Left-Back side	Right side	Right-Back side	Top side	Bottom side
WWAN	13	18	N/A	N/A	N/A	N/A	N/A	N/A
WLAN/BT	15	25	N/A	N/A	N/A	N/A	N/A	N/A

Note:

1. Antenna to User distance = Antenna to out-surface of EUT distance + Out-surface of EUT to User distance
2. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion

Antenna Distance to User Extremity (mm)								
Antenna	Front side	Back side	Left side	Left-Back side	Right side	Right-Back side	Top side	Bottom side
WWAN	8	15	14	2	14	2	6	197
WLAN/BT	10	10	5	3	70	65	75	106

Note:

1. Antenna to User distance = Antenna to out-surface of EUT distance + Out-surface of EUT to User distance
2. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion

Body

Required Configurations of SAR Test									
Test Band		Front side	Back side	Left side	Left-Back side	Right side	Right-Back side	Top side	Bottom side
GSM	GPRS850	Yes	Yes	N/A	N/A	N/A	N/A	N/A	N/A
	GPRS1900	Yes	Yes	N/A	N/A	N/A	N/A	N/A	N/A
WCDMA	Band 2	Yes	Yes	N/A	N/A	N/A	N/A	N/A	N/A
	Band 4	Yes	Yes	N/A	N/A	N/A	N/A	N/A	N/A
	Band 5	Yes	Yes	N/A	N/A	N/A	N/A	N/A	N/A
CDMA	BC 0	Yes	Yes	N/A	N/A	N/A	N/A	N/A	N/A
	BC 1	Yes	Yes	N/A	N/A	N/A	N/A	N/A	N/A
LTE	Band 2	Yes	Yes	N/A	N/A	N/A	N/A	N/A	N/A
	Band 4	Yes	Yes	N/A	N/A	N/A	N/A	N/A	N/A
	Band 5	Yes	Yes	N/A	N/A	N/A	N/A	N/A	N/A
	Band 7	Yes	Yes	N/A	N/A	N/A	N/A	N/A	N/A
	Band 12	Yes	Yes	N/A	N/A	N/A	N/A	N/A	N/A
	Band 13	Yes	Yes	N/A	N/A	N/A	N/A	N/A	N/A
	Band 17	Yes	Yes	N/A	N/A	N/A	N/A	N/A	N/A
	Band 25	Yes	Yes	N/A	N/A	N/A	N/A	N/A	N/A
	Band 38	Yes	Yes	N/A	N/A	N/A	N/A	N/A	N/A
	Band 41	Yes	Yes	N/A	N/A	N/A	N/A	N/A	N/A
DTS		Yes	Yes *	N/A	N/A	N/A	N/A	N/A	N/A
U-NII-1		Yes	Yes *	N/A	N/A	N/A	N/A	N/A	N/A
U-NII-2A		Yes	Yes *	N/A	N/A	N/A	N/A	N/A	N/A
U-NII-2C		Yes	Yes *	N/A	N/A	N/A	N/A	N/A	N/A
U-NII-3		Yes	Yes *	N/A	N/A	N/A	N/A	N/A	N/A
U-NII-3		Yes	Yes *	N/A	N/A	N/A	N/A	N/A	N/A
Bluetooth		No	No	N/A	N/A	N/A	N/A	N/A	N/A

Note: " * ", marked configuration SAR test is required, which is to get more conservative SAR values.

Extremity

Required Configurations of SAR Test									
Test Band		Front side	Back side	Left side	Left-Back side	Right side	Right-Back side	Top side	Bottom side
GSM	GPRS850	Yes	Yes	Yes	Yes	Yes	Yes	Yes	No
	GPRS1900	Yes	Yes	Yes	Yes	Yes	Yes	Yes	No
WCDMA	Band 2	Yes	Yes	Yes	Yes	Yes	Yes	Yes	No
	Band 4	Yes	Yes	Yes	Yes	Yes	Yes	Yes	No
	Band 5	Yes	Yes	Yes	Yes	Yes	Yes	Yes	No
CDMA	BC 0	Yes	Yes	Yes	Yes	Yes	Yes	Yes	No
	BC 1	Yes	Yes	Yes	Yes	Yes	Yes	Yes	No
LTE	Band 2	Yes	Yes	Yes	Yes	Yes	Yes	Yes	No
	Band 4	Yes	Yes	Yes	Yes	Yes	Yes	Yes	No
	Band 5	Yes	Yes	Yes	Yes	Yes	Yes	Yes	No
	Band 7	Yes	Yes	Yes	Yes	Yes	Yes	Yes	No
	Band 12	Yes	Yes	Yes	Yes	Yes	Yes	Yes	No
	Band 13	Yes	Yes	Yes	Yes	Yes	Yes	Yes	No
	Band 17	Yes	Yes	Yes	Yes	Yes	Yes	Yes	No
	Band 25	Yes	Yes	Yes	Yes	Yes	Yes	Yes	No
	Band 38	Yes	Yes	Yes	Yes	Yes	Yes	Yes	No
	Band 41	Yes	Yes	Yes	Yes	Yes	Yes	Yes	No
DTS		Yes *	Yes *	Yes	Yes	Yes *	Yes *	Yes *	No
U-NII-1		Yes *	Yes *	Yes	Yes	Yes *	Yes *	Yes *	No
U-NII-2A		Yes *	Yes *	Yes	Yes	Yes *	Yes *	Yes *	No
U-NII-2C		Yes *	Yes *	Yes	Yes	Yes *	Yes *	Yes *	No
U-NII-3		Yes *	Yes *	Yes	Yes	Yes *	Yes *	Yes *	No
U-NII-3		Yes *	Yes *	Yes	Yes	Yes *	Yes *	Yes *	No
Bluetooth		No	No	No	No	No	No	No	No

Note: " * ", marked configuration SAR test is required, which is to get more conservative SAR values.

8.4. SAR Test Results

General note:

1. For CDMA mode, body-worn accessory SAR is measured in RC3 with the handset configured in TDSO/SO32 to transmit at full rate on FCH only with all other code channels disabled. The 3G SAR test reduction procedure is applied to the multiple code channel configuration (FCH+SCHn), with FCH only as the primary mode, per KDB941225 D01 v03r01 section 3.1.3.
2. For WCDMA mode, body-worn accessory configurations is measured using a 12.2 kbps RMC with TPC bits configured to all "1's". The 3G SAR test reduction procedure is applied to other spreading codes and multiple DPDCHn configurations supported by the handset with 12.2 kbps RMC as the primary mode, per KDB941225 D01 v03r01 section 4.1.3).
3. For LTE mode, start with the largest channel bandwidth then measure SAR for QPSK with 1 and 50% RB allocation, using the RB offset and required test channel combination with the highest maximum output power among RB offsets at the upper edge, middle, and lower edge of each required test channel.
4. For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations, and the highest reported SAR for 1 RB and 50% RB allocation in 5.2.1 and 5.2.2 are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
5. For each modulation besides QPSK; e.g., 16-QAM, 64-QAM, SAR is required only when the highest maximum output power for the configuration in the higher order modulation is $> \frac{1}{2}$ dB higher than the same configuration in QPSK or when the reported SAR for the QPSK configuration is > 1.45 W/kg.
6. For the other channel bandwidths used by the device in a frequency band, SAR is required only when the highest maximum output power of a configuration requiring testing in the smaller channel bandwidth is $> \frac{1}{2}$ dB higher than the equivalent channel configurations in the largest channel bandwidth configuration, or the reported SAR of a configuration for the largest channel bandwidth is > 1.45 W/kg.
7. According to April 2015 TCB workshop, SAR test exclusion can be applied for testing overlapping LTE bands if:
 - a) The maximum output power, including tolerance, for the smaller band must be $\leq$ the larger band
 - b) The channel bandwidth and other operating parameters for the smaller band is fully supported by the larger band.
 - LTE Band 2 (1850-1910 MHz) is covered by LTE Band 25 (1850-1915 MHz)
 - LTE Band 17 (704-716 MHz) is covered by LTE Band 12 (699-716 MHz)
 - LTE Band 38 (2570-2620 MHz) is covered by LTE Band 41 (2496-2690 MHz)