



**SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch**

No. 1 Workshop, M-10, Middle section, Science & Technology Park,

Shenzhen, Guangdong, China 518057

Telephone: +86 (0) 755 2601 2053

Fax: +86 (0) 755 2671 0594

Email: ee.shenzhen@sgs.com

Report No.: SZEM160700594502

Page: 1 of 30

FCC REPORT

Application No. : SZEM1607005945CR (SGS SZ No.:T51610230094EM)
Applicant: Spin Master Toys Far East Ltd.
Manufacturer: Spin Master Toys Far East Ltd.
Product Name: Hyper Stunt Drone
Item No.(EUT): 44573TX
Trade Mark: ARH
FCC ID: PQN44573TX2G4
Standards: 47 CFR Part 15, Subpart C (2015)
Date of Receipt: 2016-07-21
Date of Test: 2016-07-22 to 2016-07-26
Date of Issue: 2016-08-03

Test Result:	PASS *
---------------------	---------------

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Jack Zhang
EMC Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.


The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



2 Version

Revision Record				
Version	Chapter	Date	Modifier	Remark
00		2016-08-03		Original

Authorized for issue by:				
Tested By		 <hr/>		2016-07-26
				Date
Checked By		 <hr/>		2016-08-03
				Date
		(Gebin Sun) /Project Engineer		
		(Eric Fu) /Reviewer		



3 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15, Subpart C Section 15.203	ANSI C63.10 (2013)	PASS
Field Strength of the Fundamental Signal	47 CFR Part 15, Subpart C Section 15.249 (a)	ANSI C63.10 (2013)	PASS
Spurious Emissions	47 CFR Part 15, Subpart C Section 15.249 (a)/15.209	ANSI C63.10 (2013)	PASS
Restricted bands around fundamental frequency (Radiated Emission)	47 CFR Part 15, Subpart C Section 15.249(a)/15.205	ANSI C63.10 (2013)	PASS
20dB Occupied Bandwidth	47 CFR Part 15, Subpart C Section 15.215 (c)	ANSI C63.10 (2013)	PASS



4 Contents

	Page
1 COVER PAGE	1
2 VERSION	2
3 TEST SUMMARY	3
4 CONTENTS	4
5 GENERAL INFORMATION	5
5.1 CLIENT INFORMATION	5
5.2 GENERAL DESCRIPTION OF EUT	5
5.3 TEST ENVIRONMENT AND MODE	6
5.4 DESCRIPTION OF SUPPORT UNITS	6
5.5 TEST LOCATION	6
5.6 TEST FACILITY	7
5.7 DEVIATION FROM STANDARDS	7
5.8 ABNORMALITIES FROM STANDARD CONDITIONS	7
5.9 OTHER INFORMATION REQUESTED BY THE CUSTOMER	7
5.10 EQUIPMENT LIST	8
6 TEST RESULTS AND MEASUREMENT DATA	10
6.1 ANTENNA REQUIREMENT	10
6.2 SPURIOUS EMISSIONS	11
6.2.1 <i>Spurious Emissions</i>	11
6.3 RESTRICTED BANDS AROUND FUNDAMENTAL FREQUENCY	18
6.4 20dB BANDWIDTH	26
7 PHOTOGRAPHS	29
7.1 RADIATED EMISSION TEST SETUP	29
7.2 EUT CONSTRUCTIONAL DETAILS	30



5 General Information

5.1 Client Information

Applicant:	Spin Master Toys Far East Ltd.
Address of Applicant:	Room 1113, 11/F., Chinachem Golden Plaza, 77 Mody Road, Tsim Sha Tsui East, Kowloon, Hong Kong
Manufacturer:	Spin Master Toys Far East Ltd.

5.2 General Description of EUT

Product Name:	Hyper Stunt Drone
Item No.:	44573TX
Trade Mark:	ARH
Date Code:	60715AAX
Country of Origin:	Made in China
Country of Destination:	US
Request Age Grading:	8+
Operating Frequency:	2.4GHz
Modulation Type:	GFSK
Number of Channels:	7 (declared by the client)
Sample Type:	Portable production
Antenna Type:	Integral
Antenna Gain:	2dBi
Power Supply	1.5V DC (1.5Vx1 "AAA" Size Batteries) for Remote controller 3.7V DC(1 x 3.7V Rechargeable battery) Battery: Charge by DC 5V for Plane
Cable:	USB Cable:60cm unshielded



Operation Frequency each of channel

Channel	Frequency
1 CH	2402 MHz
2 CH	2413 MHz
3 CH	2422 MHz
4 CH	2433 MHz
5 CH	2448 MHz
6 CH	2460 MHz
7 CH	2475 MHz

Keep EUT working in continuous transmitter mode.and select test channel as below:

Channel	Frequency
The Lowest channel(CH1)	2402MHz
The Middle channel(CH4)	2433MHz
The Highest channel(CH7)	2475MHz

5.3 Test Environment and Mode

Operating Environment:	
Temperature:	24.0 °C
Humidity:	52 % RH
Atmospheric Pressure:	1010mbar
Test mode:	
Transmitting mode:	Keep the EUT in transmitting mode with modulation.

5.4 Description of Support Units

The EUT has been tested independently.

5.5 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch,
No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, Guangdong, China.
518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594

No tests were sub-contracted.



5.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **CNAS (No. CNAS L2929)**

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

- **A2LA (Certificate No. 3816.01)**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation (A2LA). Certificate No. 3816.01.

- **VCCI**

The 10m Semi-anechoic chamber and Shielded Room of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-823, R-4188, T-1153 and C-2383 respectively.

- **FCC – Registration No.: 556682**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 556682.

- **Industry Canada (IC)**

Two 3m Semi-anechoic chambers and the 10m Semi-anechoic chamber of SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab have been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-1, 4620C-2, 4620C-3.

5.7 Deviation from Standards

None.

5.8 Abnormalities from Standard Conditions

None.

5.9 Other Information Requested by the Customer

None.



5.10 Equipment List

RE in Chamber						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date (yyyy-mm-dd)	Cal.Due date (yyyy-mm-dd)
1	3m Semi-Anechoic Chamber	ETS-LINDGREN	N/A	SEM001-01	2016-05-13	2017-05-13
2	EMI Test Receiver	Agilent Technologies	N9038A	SEM004-05	2015-09-16	2016-09-16
3	BiConiLog Antenna (26-3000MHz)	ETS-LINDGREN	3142C	SEM003-01	2014-11-01	2017-11-01
4	Double-ridged horn (1-18GHz)	ETS-LINDGREN	3117	SEM003-11	2015-10-17	2018-10-17
5	Horn Antenna (18-26GHz)	ETS-LINDGREN	3160	SEM003-12	2014-11-24	2017-11-24
6	Pre-amplifier (0.1-1300MHz)	Agilent Technologies	8447D	SEM005-01	2016-04-25	2017-04-25
7	Band filter	Amindeon	Asi 3314	SEM023-01	N/A	N/A
8	DC Power Supply	Zhao Xin	RXN-305D	SEM011-02	2015-10-09	2016-10-09
9	Loop Antenna	Beijing Daze	ZN30401	SEM003-09	2015-05-13	2018-05-13


RE in Chamber						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date (yyyy-mm-dd)	Cal.Due date (yyyy-mm-dd)
1	3m Semi-Anechoic Chamber	AUDIX	N/A	SEM001-02	2016-05-13	2017-05-13
2	EMI Test Receiver	Rohde & Schwarz	ESIB26	SEM004-04	2016-04-25	2017-04-25
3	BiConiLog Antenna (26-3000MHz)	ETS-Lindgren	3142C	SEM003-02	2014-11-15	2017-11-15
4	Amplifier (0.1-1300MHz)	HP	8447D	SEM005-02	2015-10-09	2016-10-09
5	Horn Antenna (1-18GHz)	Rohde & Schwarz	HF907	SEM003-07	2015-06-14	2018-06-14
6	Low Noise Amplifier	Black Diamond Series	BDLNA-0118-352810	SEM005-05	2015-10-09	2016-10-09
7	Band filter	Amindeon	Asi 3314	SEM023-01	N/A	N/A



RF connected test						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date (yyyy-mm-dd)	Cal.Due date (yyyy-mm-dd)
1	DC Power Supply	ZhaoXin	RXN-305D	SEM011-02	2015-10-09	2016-10-09
2	Spectrum Analyzer	Rohde & Schwarz	FSP	SEM004-06	2015-10-17	2016-10-17
3	Signal Generator	Rohde & Schwarz	SML03	SEM006-02	2016-04-25	2017-04-25
4	Power Meter	Rohde & Schwarz	NRVS	SEM014-02	2015-10-09	2016-10-09

6 Test results and Measurement Data

6.1 Antenna Requirement

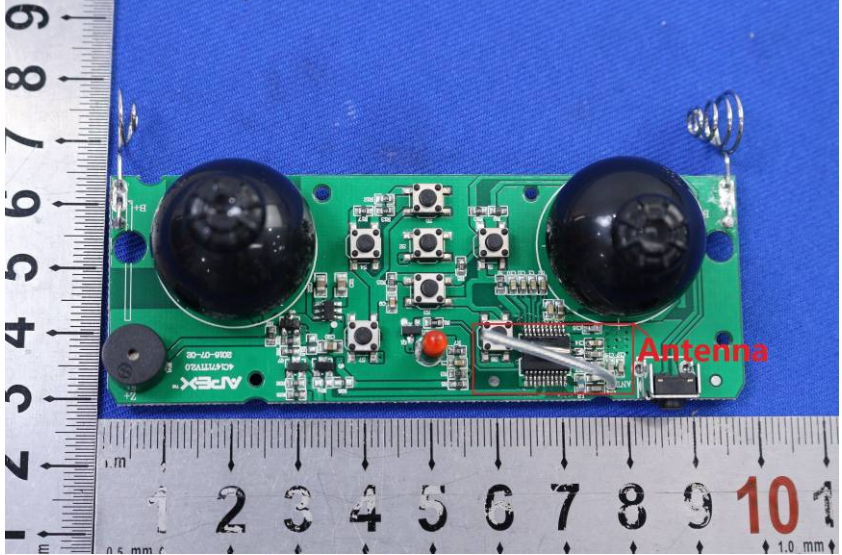Standard requirement:	47 CFR Part 15C Section 15.203
<p>15.203 requirement:</p> <p>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p>	
EUT Antenna:	
<p>The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 2Bi.</p>	



6.2 Spurious Emissions

6.2.1 Spurious Emissions

Test Requirement:	47 CFR Part 15C Section 15.249 and 15.209				
Test Method:	ANSI C63.10: 2013 Clause 6.4,6.5 and 6.6				
Test Site:	Measurement Distance: 3m				
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30KHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30KHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30KHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30KHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30KHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100 kHz	300KHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
Peak		1MHz	10Hz	Average	
Limit: (Spurious Emissions)	Frequency	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz-0.490MHz	2400/F (kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F (kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3
	Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.				
Limit: (Field strength of the fundamental signal)	Frequency	Limit (dBuV/m @3m)		Remark	
	2400MHz-2483.5MHz	94.0		Average Value	
		114.0		Peak Value	
Test Setup:					

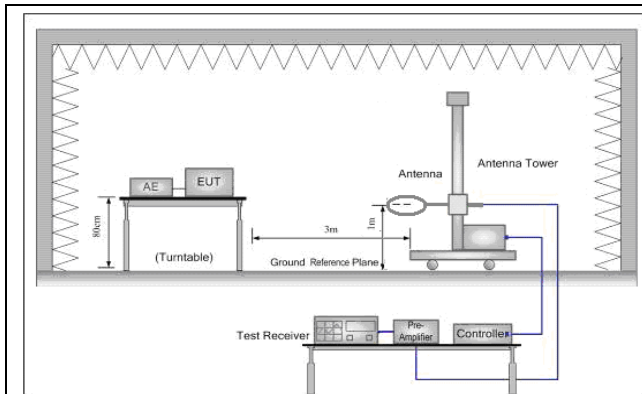


Figure 1. Below 30MHz

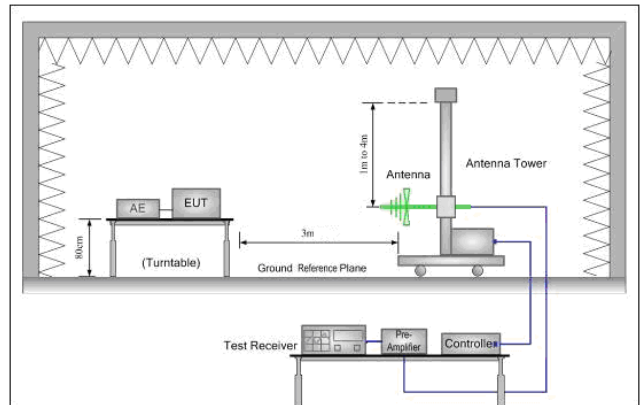


Figure 2. 30MHz to 1GHz

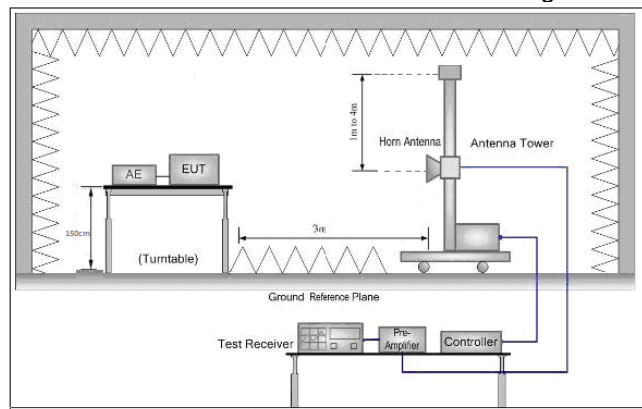


Figure 3. Above 1 GHz

Test Procedure:

- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- Test the EUT in the lowest channel, the middle channel, the Highest channel



	i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, And found the X axis positioning which it is worse case. j. Repeat above procedures until all frequencies measured was complete.
Instruments Used:	Refer to section 5.10 for details
Test Mode:	Transmitting with GFSK modulation. Transmitting mode
Test Results:	Pass

Measurement Data

6.2.1.1 Field Strength Of The Fundamental Signal

Peak value:

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2402.556	28.61	5.35	38.11	74.60	70.45	114.00	-43.55	Vertical
2402.556	28.61	5.35	38.11	72.38	68.23	114.00	-45.77	Horizontal
2433.323	28.76	5.37	38.11	77.80	73.82	114.00	-40.18	Vertical
2433.323	28.76	5.37	38.11	77.15	73.17	114.00	-40.83	Horizontal
2475.274	28.95	5.40	38.12	77.07	73.30	114.00	-40.70	Vertical
2475.274	28.95	5.40	38.12	74.23	70.46	114.00	-43.54	Horizontal


Remark:

The peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak measurements were shown in the report.



6.2.1.2 Spurious Emissions

30MHz~1GHz			
Test mode:	Transmitter mode	Polarization:	Vertical

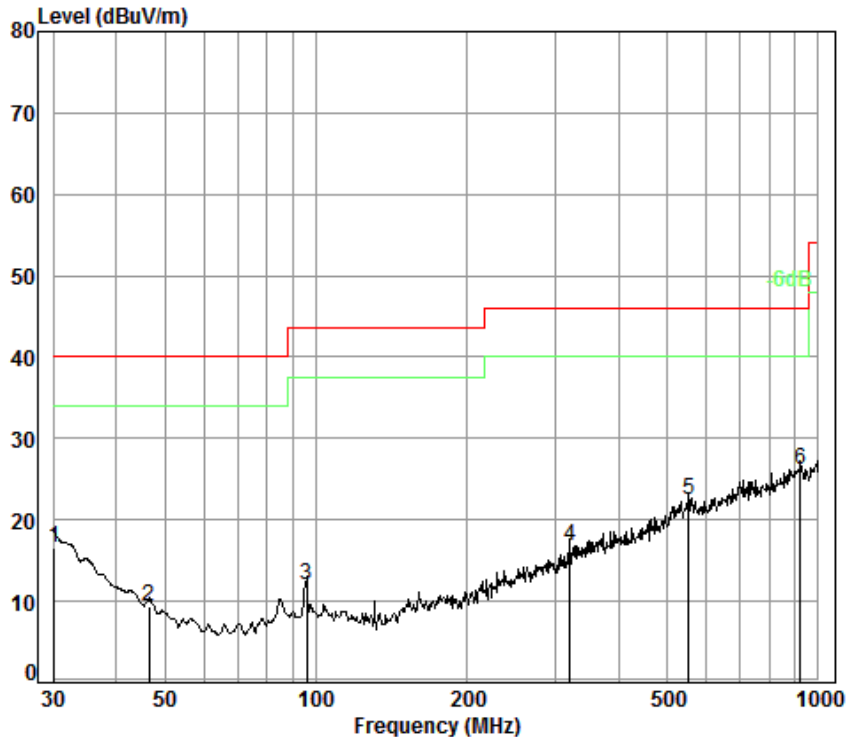

Condition: 3m VERTICAL

Job No. : 5945CR


Test mode: TX

: controller

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit Line	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	30.11	0.60	18.93	27.40	24.49	16.62	40.00	-23.38
2	46.50	0.73	10.30	27.37	25.74	9.40	40.00	-30.60
3	96.10	1.16	8.99	27.30	29.15	12.00	43.50	-31.50
4	319.94	1.97	14.56	26.71	26.90	16.72	46.00	-29.28
5	552.88	2.66	19.00	27.66	28.38	22.38	46.00	-23.62
6 pp	922.52	3.62	23.38	26.83	26.07	26.24	46.00	-19.76



Test mode:	Transmitter mode	Polarization:	Horizontal
------------	------------------	---------------	------------

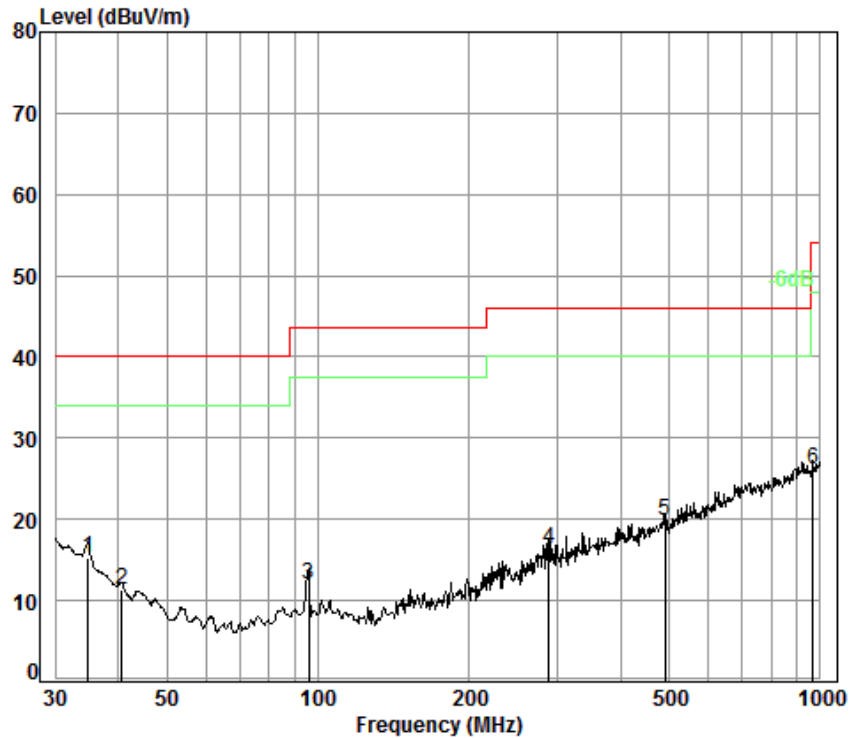

Condition: 3m HORIZONTAL

Job No. : 5945CR

Test mode: TX

: controller

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp	34.88	0.60	15.96	27.39	25.99	15.16	40.00	-24.84
2	40.70	0.62	12.86	27.38	25.20	11.30	40.00	-28.70
3	96.10	1.16	8.99	27.30	29.04	11.89	43.50	-31.61
4	287.99	1.85	13.18	26.63	27.99	16.39	46.00	-29.61
5	490.74	2.57	17.64	27.45	27.01	19.77	46.00	-26.23
6	968.93	3.67	23.58	26.63	25.54	26.16	54.00	-27.84



SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM160700594502

Page: 16 of 30

Above 1GHz								
Test mode:		Transmitting		Test channel:		Lowest		Remark:
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
3652.432	10.18	32.31	38.43	39.45	43.51	74.00	-30.49	Vertical
4804.000	11.63	34.10	38.75	45.22	52.20	74.00	-21.80	Vertical
5982.226	12.97	34.66	38.96	38.57	47.24	74.00	-26.76	Vertical
7206.000	14.57	35.60	37.64	34.85	47.38	74.00	-26.62	Vertical
9608.000	17.40	37.10	36.35	29.06	47.21	74.00	-26.79	Vertical
12458.220	21.30	37.76	37.61	30.76	52.21	74.00	-21.79	Vertical
3631.354	10.16	32.23	38.42	39.86	43.83	74.00	-30.17	Horizontal
4804.000	11.63	34.10	38.75	46.89	53.87	74.00	-20.13	Horizontal
6211.563	13.21	34.80	38.68	38.00	47.33	74.00	-26.67	Horizontal
7206.000	14.57	35.60	37.64	35.23	47.76	74.00	-26.24	Horizontal
9608.000	17.40	37.10	36.35	29.94	48.09	74.00	-25.91	Horizontal
12458.220	21.30	37.76	37.61	30.58	52.03	74.00	-21.97	Horizontal

Test mode:		Transmitting		Test channel:		Middle		Remark:
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
3716.403	10.25	32.57	38.45	39.15	43.52	74.00	-30.48	Vertical
4866.000	11.70	34.18	38.76	43.87	50.99	74.00	-23.01	Vertical
5930.516	12.93	34.53	38.95	37.79	46.30	74.00	-27.70	Vertical
7299.000	14.84	35.54	37.59	33.75	46.54	74.00	-27.46	Vertical
9732.000	17.89	37.10	36.14	31.28	50.13	74.00	-23.87	Vertical
12458.220	21.30	37.76	37.61	30.55	52.00	74.00	-22.00	Vertical
3694.956	10.23	32.49	38.44	39.56	43.84	74.00	-30.16	Horizontal
4866.000	11.70	34.18	38.76	46.03	53.15	74.00	-20.85	Horizontal
5973.576	12.96	34.63	38.96	38.04	46.67	74.00	-27.33	Horizontal
7299.000	14.84	35.54	37.59	35.59	48.38	74.00	-25.62	Horizontal
9732.000	17.89	37.10	36.14	31.78	50.63	74.00	-23.37	Horizontal
12494.320	21.35	37.79	37.65	30.37	51.86	74.00	-22.14	Horizontal

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM160700594502

Page: 17 of 30

Test mode:		Transmitting		Test channel:		Highest		Remark:		Peak	
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization			
3847.726	10.38	32.95	38.50	39.30	44.13	74.00	-29.87	Vertical			
4950.000	11.78	34.26	38.78	43.03	50.29	74.00	-23.71	Vertical			
5982.226	12.97	34.66	38.96	39.45	48.12	74.00	-25.88	Vertical			
7425.000	15.13	35.60	37.54	34.10	47.29	74.00	-26.71	Vertical			
9900.000	18.40	37.22	35.93	33.40	53.09	74.00	-20.91	Vertical			
12603.270	21.43	37.90	37.75	30.94	52.52	74.00	-21.48	Vertical			
3705.664	10.24	32.53	38.45	39.26	43.58	74.00	-30.42	Horizontal			
4950.000	11.78	34.26	38.78	46.14	53.40	74.00	-20.60	Horizontal			
6202.582	13.20	34.80	38.70	36.76	46.06	74.00	-27.94	Horizontal			
7425.000	15.13	35.60	37.54	33.23	46.42	74.00	-27.58	Horizontal			
9900.000	18.40	37.22	35.93	32.26	51.95	74.00	-22.05	Horizontal			
12494.320	21.35	37.79	37.65	30.85	52.34	74.00	-21.66	Horizontal			

Remark:

- 1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor
- 2) Scan from 9kHz to 25GHz, The disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported .
- 3) As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the above measurement data were shown in the report.

6.3 Restricted bands around fundamental frequency

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205	
Test Method:	ANSI C63.10: 2013 Clause 6.10	
Test site:	Measurement Distance: 3m	
Limit(band edge):	Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.	
	Frequency	Limit (dBuV/m @3m)
	30MHz-88MHz	40.0
	88MHz-216MHz	43.5
	216MHz-960MHz	46.0
	960MHz-1GHz	54.0
	Above 1GHz	54.0
		74.0
		Remark
		Quasi-peak Value
		Quasi-peak Value
		Quasi-peak Value
		Quasi-peak Value
		Average Value
		Peak Value
Test Setup:		

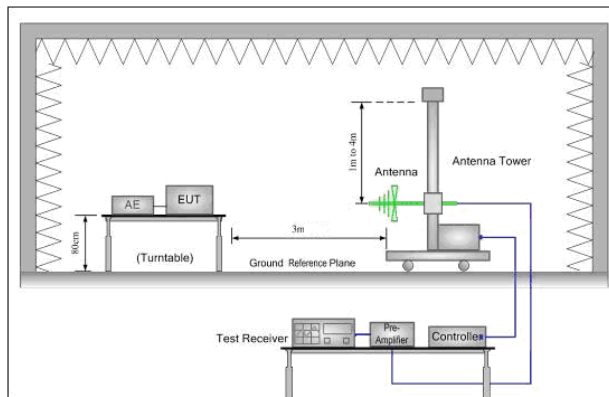


Figure 1. 30MHz to 1GHz

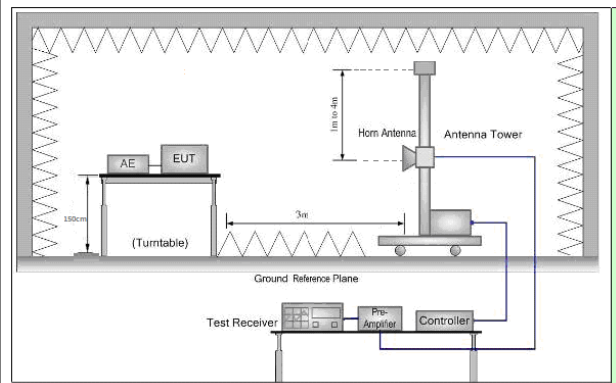



Figure 2. Above 1 GHz



Test Procedure:	<ul style="list-style-type: none">a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.c. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.g. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channelh. Test the EUT in the lowest channel , the Highest channeli. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode,And found the X axis positioning which it is worse case..j. Repeat above procedures until all frequencies measured was complete.
Instruments Used:	Refer to section 5.10 for details
Test Mode:	Transmitting with GFSK modulation. Transmitting mode
Test Results:	Pass



Band edge (Radiated Emission)					
Test mode:	Transmitting	Test channel:	Lowest	Remark:	Vertical

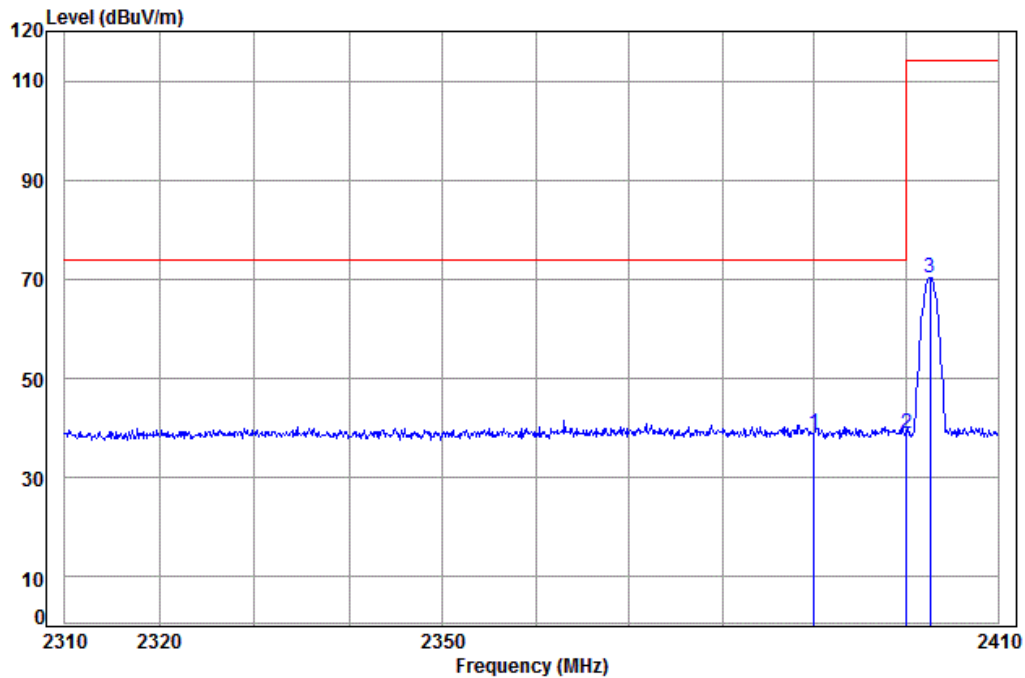

Condition: 3m Vertical


Job No: : 5945CR

Mode: : 2402 Band edge

		Cable	Ant	Preamp	Read		Limit	Over
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	2390.000	5.34	28.57	38.11	42.99	38.79	74.00	-35.21
2 pp	2400.000	5.34	28.60	38.11	43.12	38.95	74.00	-35.05
3	2402.556	5.35	28.61	38.11	74.60	70.45	114.00	-43.55



Test mode:	Transmitting	Test channel:	Lowest	Remark:	Horizontal
------------	--------------	---------------	--------	---------	------------

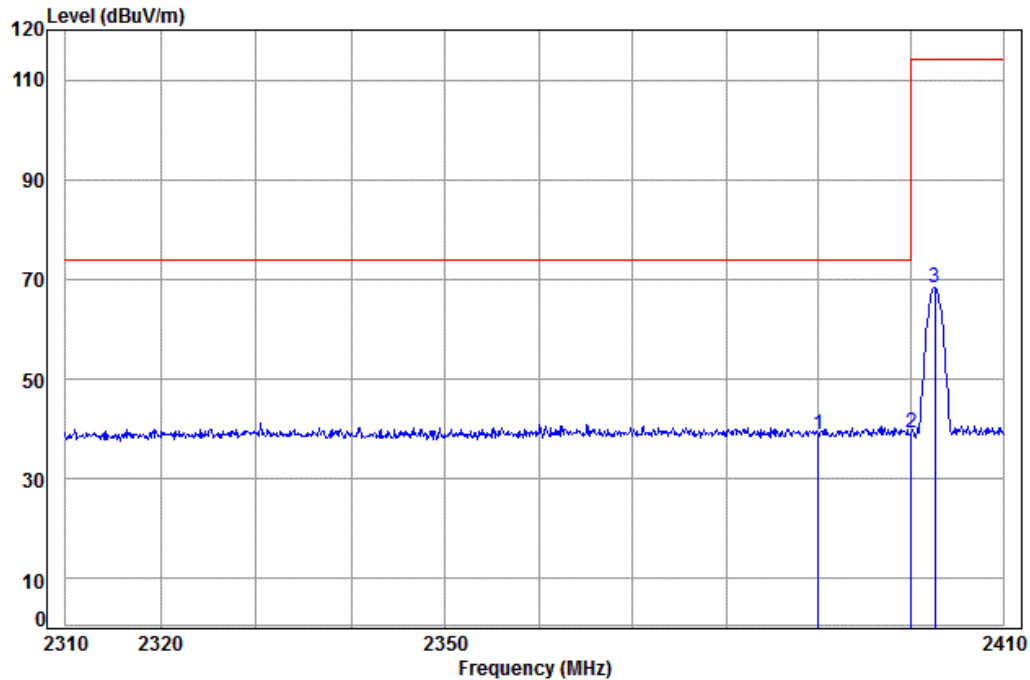

Condition: 3m Horizontal


Job No: : 5945CR

Mode: : 2402 Band edge

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	2390.000	5.34	28.57	38.11	43.21	39.01	74.00	-34.99
2 pp	2400.000	5.34	28.60	38.11	43.56	39.39	74.00	-34.61
3	2402.556	5.35	28.61	38.11	72.38	68.23	114.00	-45.77



Test mode:	Transmitting	Test channel:	Middle	Remark:	Vertical
------------	--------------	---------------	--------	---------	----------

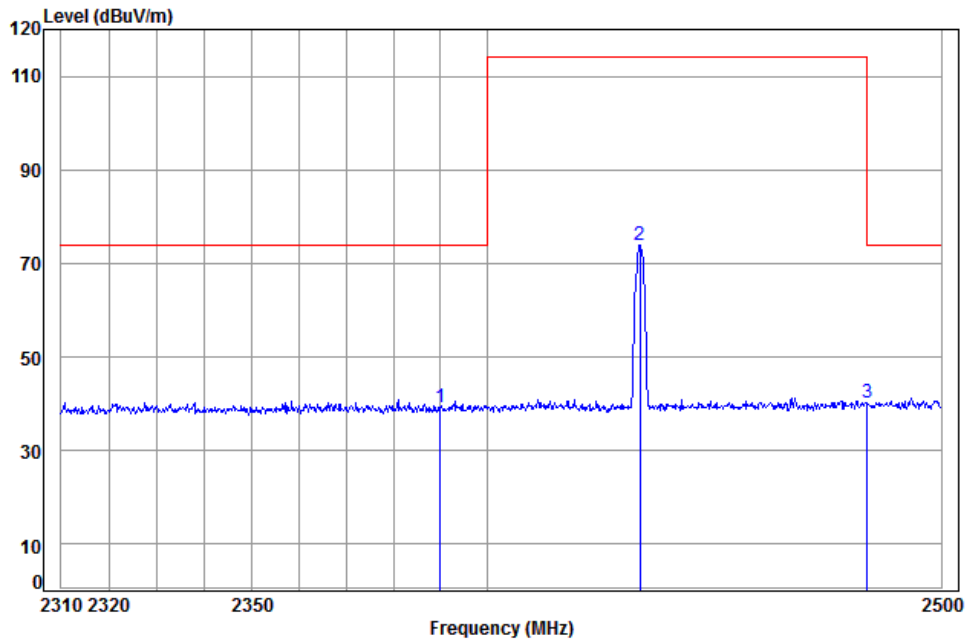

Condition: 3m Vertical


Job No: : 5945CR

Mode: : 2433 Band edge

		Cable	Ant	Preamp	Read		Limit	Over
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	2390.000	5.34	28.57	38.11	43.35	39.15	74.00	-34.85
2	2433.323	5.37	28.76	38.11	77.80	73.82	114.00	-40.18
3 pp	2483.500	5.41	28.98	38.12	44.08	40.35	74.00	-33.65



Test mode:	Transmitting	Test channel:	Middle	Remark:	Horizontal
------------	--------------	---------------	--------	---------	------------

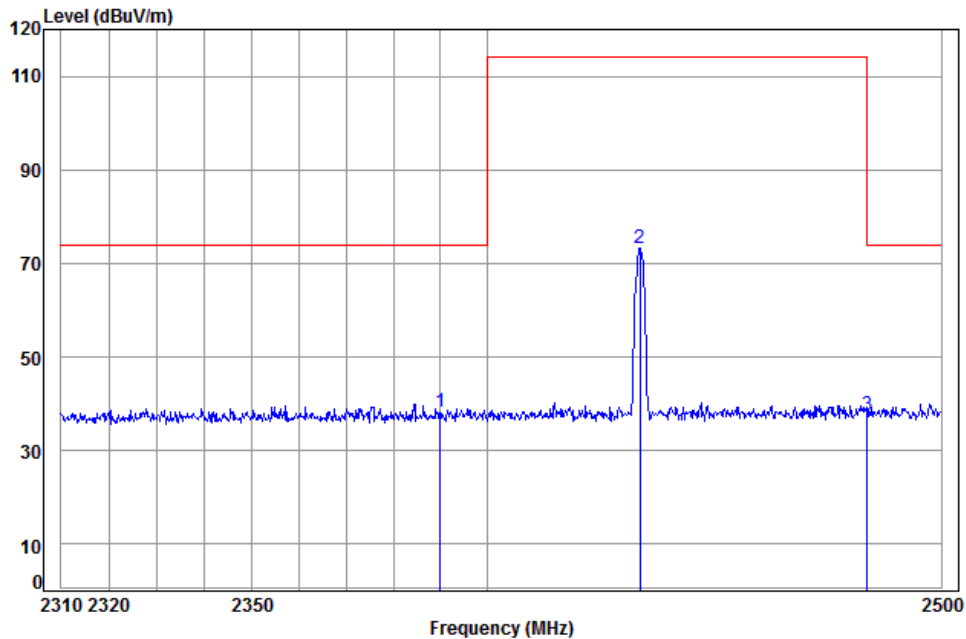

Condition: 3m Horizontal


Job No: : 5945CR

Mode: : 2433 Band edge

		Cable	Ant	Preamp	Read		Limit	Over
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp	2390.000	5.34	28.57	38.11	42.37	38.17	74.00	-35.83
2	2433.323	5.37	28.76	38.11	77.15	73.17	114.00	-40.83
3	2483.500	5.41	28.98	38.12	41.38	37.65	74.00	-36.35



Test mode:	Transmitting	Test channel:	Highest	Remark:	Vertical
------------	--------------	---------------	---------	---------	----------

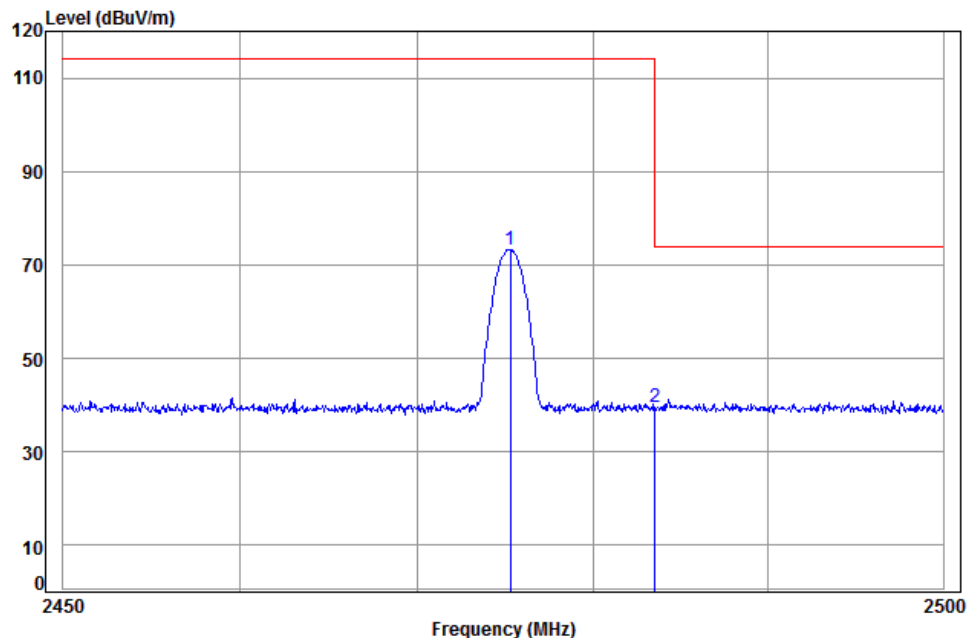

Condition: 3m Vertical


Job No: : 5945CR

Mode: : 2475 Band edge

		Cable	Ant	Preamp	Read		Limit	Over
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	2475.274	5.40	28.95	38.12	77.07	73.30	114.00	-40.70
2 pp	2483.500	5.41	28.98	38.12	43.32	39.59	74.00	-34.41



Test mode:	Transmitting	Test channel:	Highest	Remark:	Horizontal
------------	--------------	---------------	---------	---------	------------

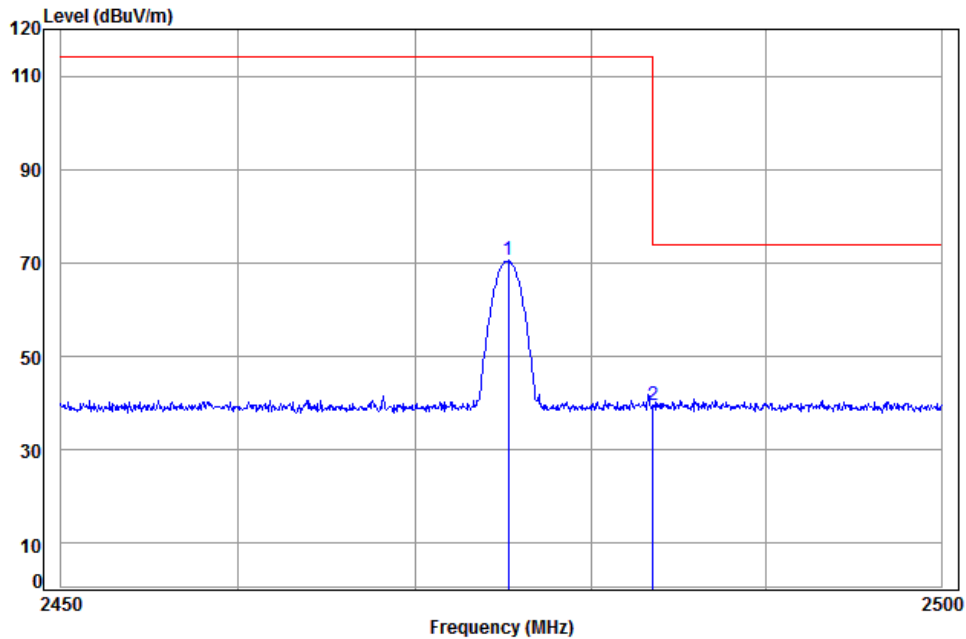

Condition: 3m Horizontal

Job No: : 5945CR

Mode: : 2475 Band edge

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	2475.274	5.40	28.95	38.12	74.23	70.46	114.00	-43.54
2 pp	2483.500	5.41	28.98	38.12	43.18	39.45	74.00	-34.55


Note:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor

The peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak measurements were shown in the report.

6.4 20dB Bandwidth

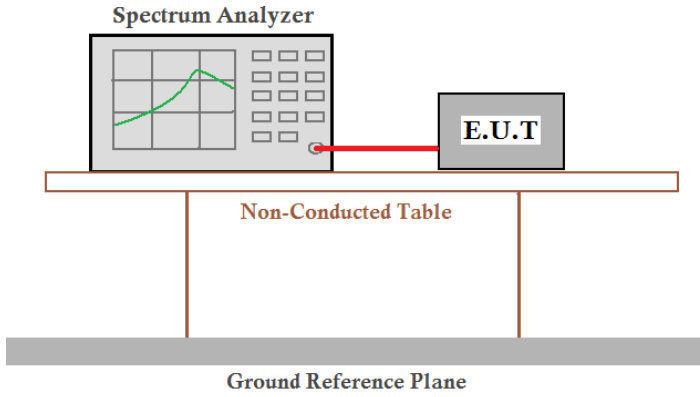Test Requirement:	47 CFR Part 15C Section 15.215
Test Method:	ANSI C63.10:2013 Clause 6.9
Test Setup:	
Instruments Used:	Refer to section 5.10 for details
Test mode:	Transmitting mode
Limit:	Within the band 2400MHz-2483.5MHz
Test Results:	Pass


Measurement Data

Test channel	20dB bandwidth (MHz)	Results
Lowest	0.156	Pass
Middle	0.116	Pass
Highest	0.116	Pass




Test plot as follows:

Test channel:	Lowest
---------------	--------

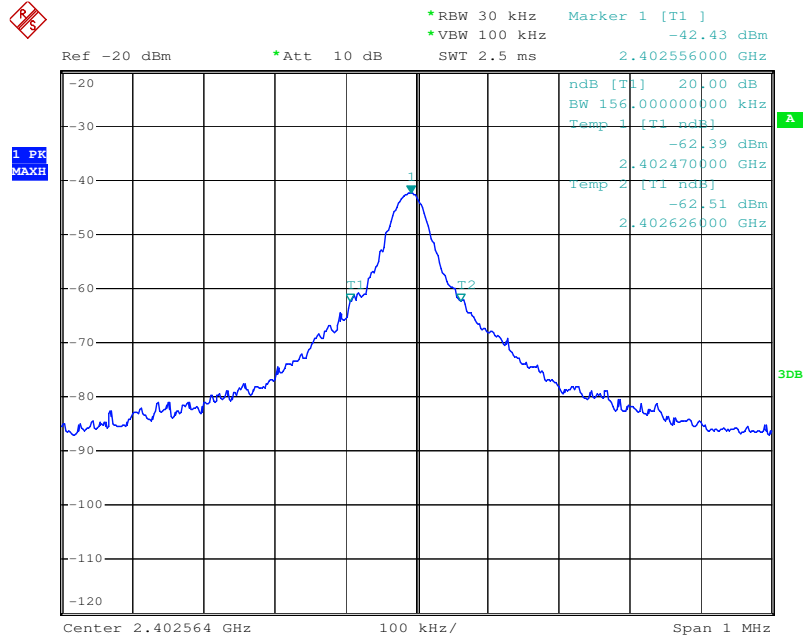


Test channel:	Middle
---------------	--------

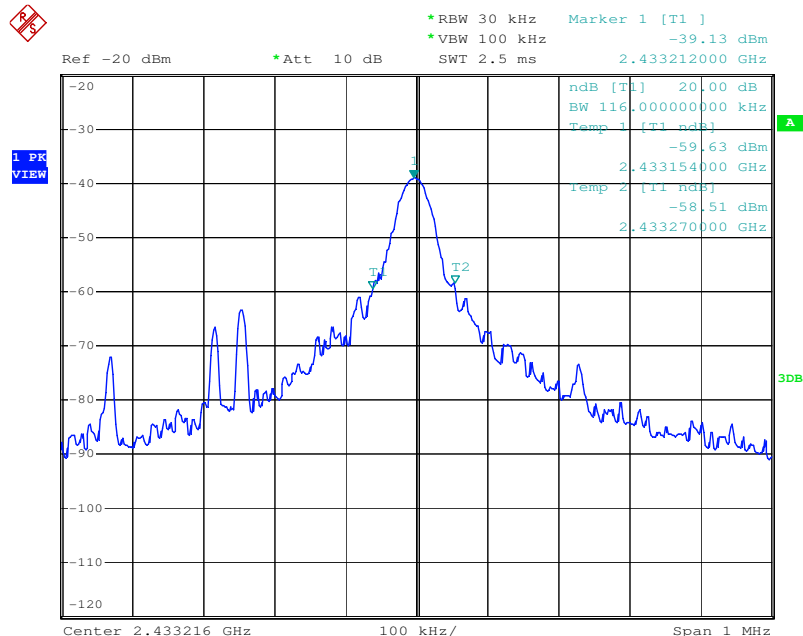





Test channel:	Highest
---------------	---------

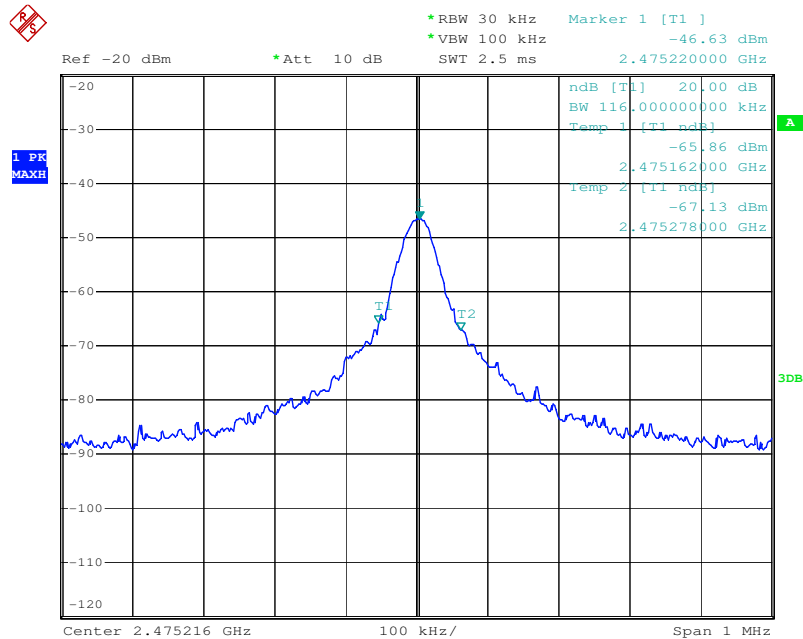

7 Photographs

Test Item No.: 44573TX

7.1 Radiated Emission Test Setup

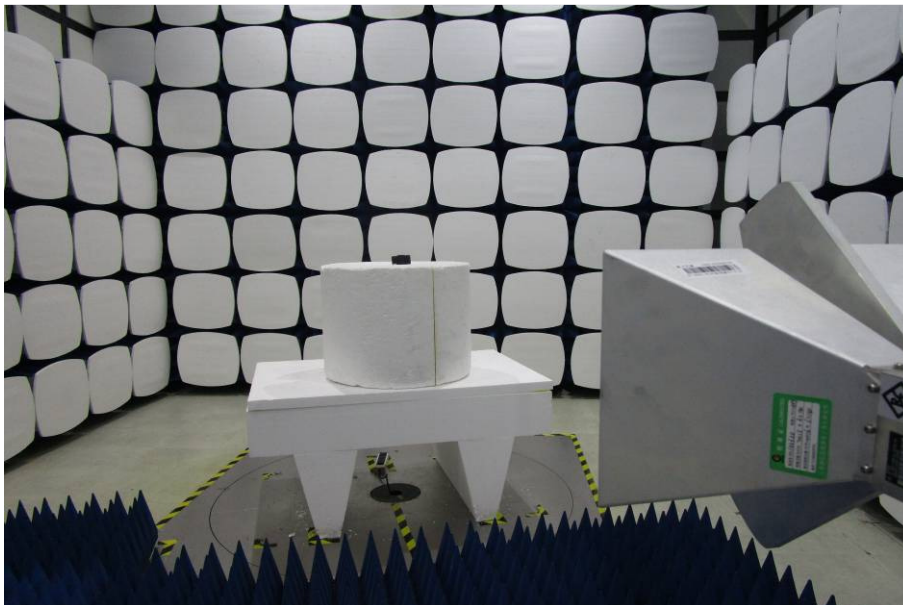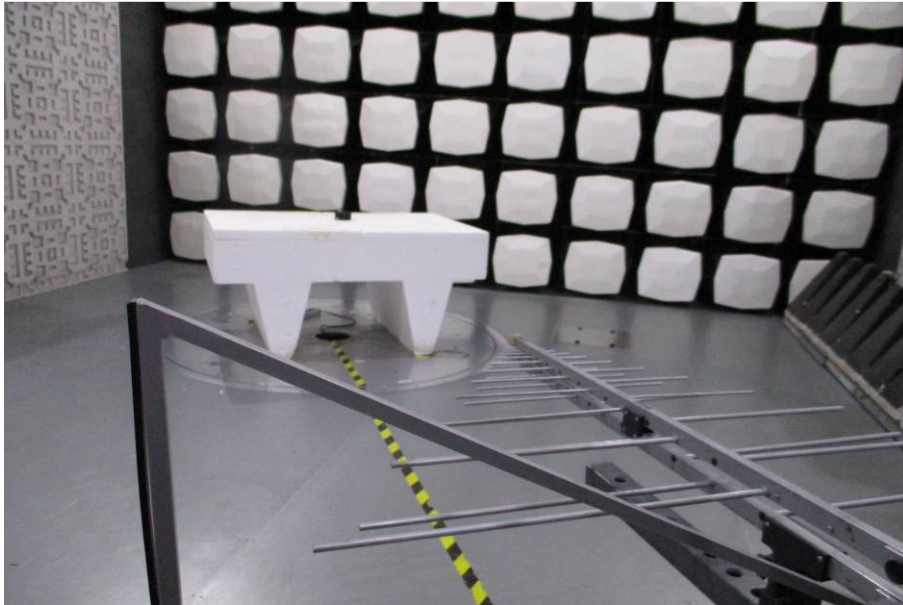



7.2 EUT Constructional Details

Refer to Appendix A - Photographs of EUT Constructional Details for SZEM1607005945CR.