

Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	Port 3 (dBm/RBW)	Port 4 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)	EIRP PD (dBm/RBW)	EIRP PD Limit (dBm/RBW)
802.11a_Nss1,(6Mbps)_4TX	-	-	-	-	-	-	-	-	-	-
5955MHz	Pass	6.96	-8.19	-7.95	-8.82	-8.37	-2.44	Inf	4.52	5.00
6175MHz	Pass	6.96	-8.35	-7.87	-8.22	-7.76	-2.44	Inf	4.52	5.00
6415MHz	Pass	6.96	-8.95	-7.81	-7.79	-7.38	-2.35	Inf	4.61	5.00
6435MHz	Pass	5.32	-7.01	-6.58	-6.15	-5.79	-0.79	Inf	4.53	5.00
6475MHz	Pass	5.32	-7.12	-6.25	-6.12	-5.86	-0.78	Inf	4.54	5.00
6515MHz	Pass	5.32	-6.58	-5.25	-5.99	-5.91	-0.45	Inf	4.87	5.00
6535MHz	Pass	5.38	-6.88	-6.14	-6.33	-6.53	-0.84	Inf	4.54	5.00
6715MHz	Pass	5.38	-7.17	-4.96	-6.89	-6.74	-0.68	Inf	4.70	5.00
6855MHz	Pass	5.38	-7.57	-5.63	-6.74	-6.50	-0.82	Inf	4.56	5.00
6875MHz Straddle 6.525-6.875GHz	Pass	5.38	-6.83	-5.66	-6.32	-6.32	-0.51	Inf	4.87	5.00
6895MHz	Pass	5.00	-7.07	-5.80	-5.80	-5.94	-0.46	Inf	4.54	5.00
7015MHz	Pass	5.00	-6.44	-5.00	-6.04	-6.17	-0.26	Inf	4.74	5.00
7095MHz	Pass	5.00	-6.30	-5.57	-6.36	-6.15	-0.37	Inf	4.63	5.00
7115MHz	Pass	5.00	-6.22	-5.96	-6.20	-5.74	-0.33	Inf	4.67	5.00
802.11be EHT20_Nss1,(MCS0)_4TX-OFDMA	-	-	-	-	-	-	-	-	-	-
5955MHz	Pass	6.96	-8.54	-7.75	-8.17	-8.16	-2.47	Inf	4.49	5.00
6175MHz	Pass	6.96	-8.26	-7.75	-7.58	-7.66	-2.29	Inf	4.67	5.00
6415MHz	Pass	6.96	-9.16	-7.27	-7.64	-7.62	-2.19	Inf	4.77	5.00
6435MHz	Pass	5.32	-6.97	-6.59	-6.20	-6.05	-0.98	Inf	4.34	5.00
6475MHz	Pass	5.32	-7.03	-6.40	-5.76	-6.39	-0.81	Inf	4.51	5.00
6515MHz	Pass	5.32	-6.76	-5.98	-6.41	-6.55	-0.82	Inf	4.50	5.00
6535MHz	Pass	5.38	-7.21	-6.01	-6.77	-6.90	-0.96	Inf	4.42	5.00
6715MHz	Pass	5.38	-7.09	-5.75	-7.06	-6.98	-0.97	Inf	4.41	5.00
6855MHz	Pass	5.38	-7.76	-6.37	-6.41	-6.53	-1.01	Inf	4.37	5.00
6875MHz Straddle 6.525-6.875GHz	Pass	5.38	-7.19	-5.72	-5.82	-6.54	-0.64	Inf	4.74	5.00
6895MHz	Pass	5.00	-6.97	-5.75	-6.08	-6.61	-0.59	Inf	4.41	5.00
7015MHz	Pass	5.00	-6.79	-5.42	-6.31	-5.94	-0.37	Inf	4.63	5.00
7095MHz	Pass	5.00	-6.54	-6.31	-6.10	-6.36	-0.55	Inf	4.45	5.00
7115MHz	Pass	5.00	-6.28	-6.06	-5.47	-5.79	-0.11	Inf	4.89	5.00
802.11be EHT40_Nss1,(MCS0)_4TX-OFDMA	-	-	-	-	-	-	-	-	-	-
5965MHz	Pass	6.96	-8.73	-7.81	-8.31	-8.35	-2.50	Inf	4.46	5.00
6165MHz	Pass	6.96	-7.98	-7.61	-7.62	-7.73	-2.36	Inf	4.60	5.00
6405MHz	Pass	6.96	-8.78	-7.76	-7.37	-7.15	-2.21	Inf	4.75	5.00
6445MHz	Pass	5.32	-6.73	-5.68	-6.19	-6.08	-0.51	Inf	4.81	5.00
6485MHz	Pass	5.32	-6.91	-6.41	-5.85	-5.85	-0.74	Inf	4.58	5.00
6525MHz Straddle 6.525-6.875GHz	Pass	5.38	-6.47	-5.33	-6.01	-6.35	-0.62	Inf	4.76	5.00
6565MHz	Pass	5.38	-6.58	-5.78	-6.25	-6.36	-0.76	Inf	4.62	5.00
6725MHz	Pass	5.38	-6.93	-5.53	-7.02	-6.73	-0.77	Inf	4.61	5.00
6845MHz	Pass	5.38	-7.38	-5.91	-6.34	-6.06	-0.72	Inf	4.66	5.00



Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	Port 3 (dBm/RBW)	Port 4 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)	EIRP PD (dBm/RBW)	EIRP PD Limit (dBm/RBW)
6885MHz Straddle 6.525-6.875GHz	Pass	5.38	-7.50	-6.19	-6.20	-6.79	-0.95	Inf	4.43	5.00
6925MHz	Pass	5.00	-6.14	-5.86	-6.04	-6.03	-0.44	Inf	4.56	5.00
7005MHz	Pass	5.00	-6.99	-5.48	-6.65	-6.30	-0.67	Inf	4.33	5.00
7085MHz	Pass	5.00	-6.30	-5.79	-5.97	-5.78	-0.30	Inf	4.70	5.00
802.11be EHT80_Nss1,(MCS0)_4TX-OFDMA	-	-	-	-	-	-	-	-	-	-
5985MHz	Pass	6.96	-8.40	-6.91	-8.08	-7.87	-2.19	Inf	4.77	5.00
6145MHz	Pass	6.96	-8.31	-8.32	-8.20	-7.96	-2.64	Inf	4.32	5.00
6385MHz	Pass	6.96	-9.01	-7.85	-8.10	-7.76	-2.52	Inf	4.44	5.00
6465MHz	Pass	5.32	-6.96	-5.94	-6.40	-6.27	-0.69	Inf	4.63	5.00
6545MHz Straddle 6.525-6.875GHz	Pass	5.38	-7.23	-6.07	-6.78	-6.70	-0.97	Inf	4.41	5.00
6625MHz	Pass	5.38	-6.84	-5.25	-7.25	-6.69	-0.78	Inf	4.60	5.00
6705MHz	Pass	5.38	-7.00	-5.59	-6.80	-6.18	-0.73	Inf	4.65	5.00
6785MHz	Pass	5.38	-7.38	-5.43	-6.60	-6.58	-0.73	Inf	4.65	5.00
6865MHz Straddle 6.525-6.875GHz	Pass	5.38	-7.43	-5.63	-6.26	-6.25	-0.77	Inf	4.61	5.00
6945MHz	Pass	5.00	-6.57	-6.04	-6.28	-6.49	-0.61	Inf	4.39	5.00
7025MHz	Pass	5.00	-6.71	-5.29	-6.43	-6.05	-0.49	Inf	4.51	5.00
802.11be EHT160_Nss1,(MCS0)_4TX-OFDMA	-	-	-	-	-	-	-	-	-	-
6025MHz	Pass	6.96	-9.13	-7.54	-7.88	-7.62	-2.36	Inf	4.60	5.00
6185MHz	Pass	6.96	-8.07	-7.62	-8.33	-8.01	-2.46	Inf	4.50	5.00
6345MHz	Pass	6.96	-8.34	-7.28	-8.32	-8.57	-2.45	Inf	4.51	5.00
6505MHz Straddle 6.525-6.875GHz	Pass	5.38	-6.68	-6.47	-5.83	-6.11	-0.49	Inf	4.89	5.00
6665MHz	Pass	5.38	-7.43	-5.33	-7.30	-6.69	-0.83	Inf	4.55	5.00
6825MHz Straddle 6.525-6.875GHz	Pass	5.38	-7.75	-5.12	-7.01	-6.56	-0.74	Inf	4.64	5.00
6985MHz	Pass	5.00	-6.50	-5.52	-5.69	-6.03	-0.44	Inf	4.56	5.00
802.11be EHT320_Nss1,(MCS0)_4TX-OFDMA	-	-	-	-	-	-	-	-	-	-
6105MHz	Pass	6.96	-8.93	-7.06	-8.77	-8.63	-2.46	Inf	4.50	5.00
6265MHz	Pass	6.96	-7.05	-7.66	-8.66	-9.07	-2.31	Inf	4.65	5.00
6425MHz	Pass	6.96	-8.70	-7.62	-7.85	-7.70	-2.17	Inf	4.79	5.00
6585MHz Straddle 6.525-6.875GHz	Pass	5.38	-6.82	-5.89	-6.37	-6.59	-0.57	Inf	4.81	5.00
6745MHz Straddle 6.525-6.875GHz	Pass	5.38	-7.14	-5.75	-6.80	-6.47	-0.70	Inf	4.68	5.00
6905MHz Straddle 6.525-6.875GHz	Pass	5.38	-6.94	-5.82	-6.23	-6.43	-0.58	Inf	4.80	5.00

DG = Directional Gain; RBW = 1 MHz


PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;

DG gain is measured. Please refer to antenna test report, report number AP411518.

5.925-6.425GHz_802.11a_Nss1,(6Mbps)_4TX

PSD


5955MHz

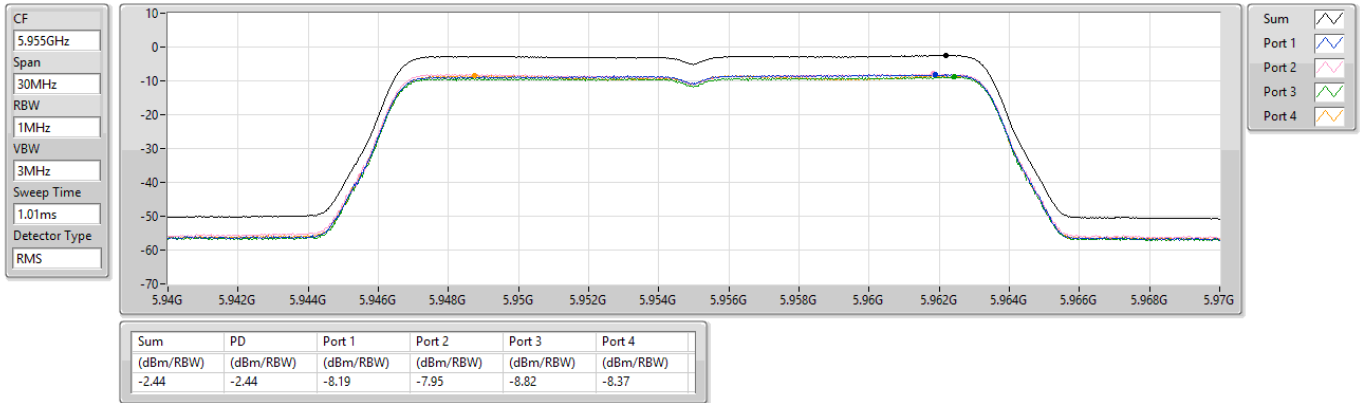

5.925-6.425GHz_802.11a_Nss1,(6Mbps)_4TX

PSD


6175MHz

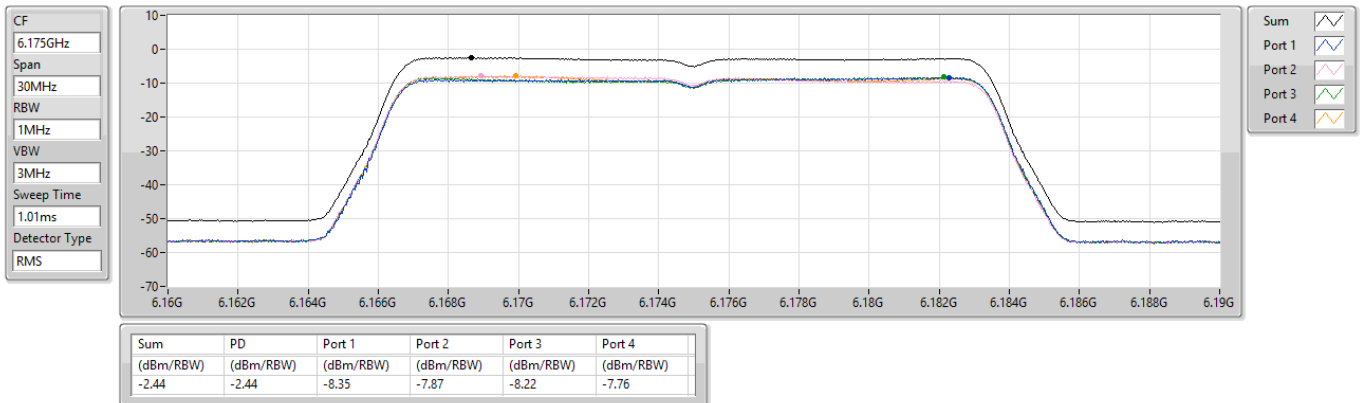

5.925-6.425GHz_802.11a_Nss1,(6Mbps)_4TX

PSD


6415MHz

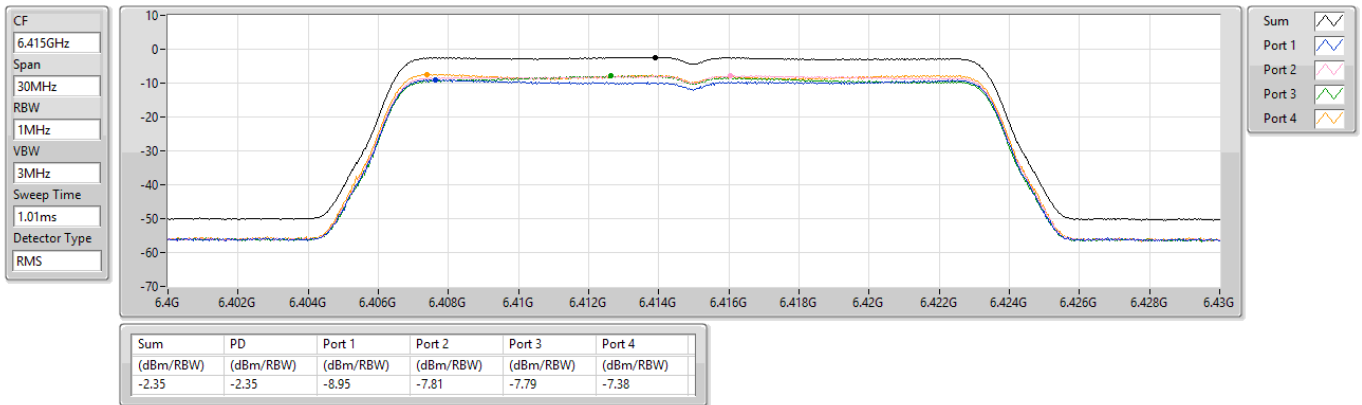

6.425-6.525GHz_802.11a_Nss1,(6Mbps)_4TX

PSD


6435MHz

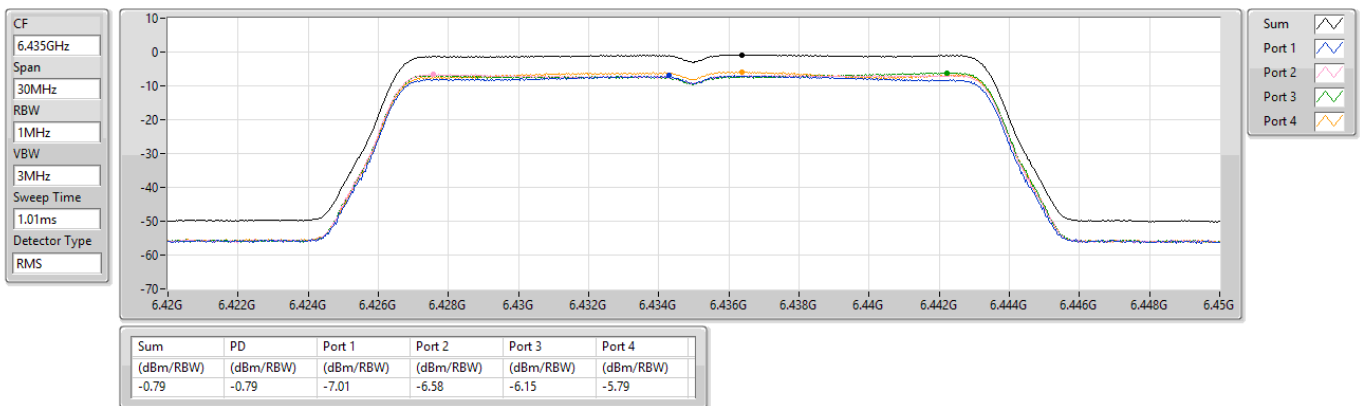

6.425-6.525GHz_802.11a_Nss1,(6Mbps)_4TX

PSD


6475MHz

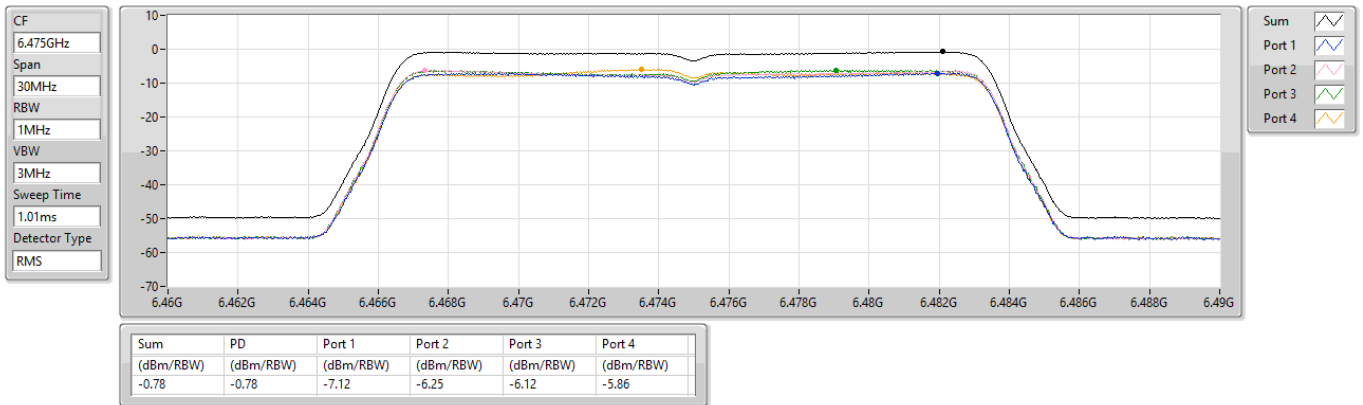

6.425-6.525GHz_802.11a_Nss1,(6Mbps)_4TX

PSD

6515MHz

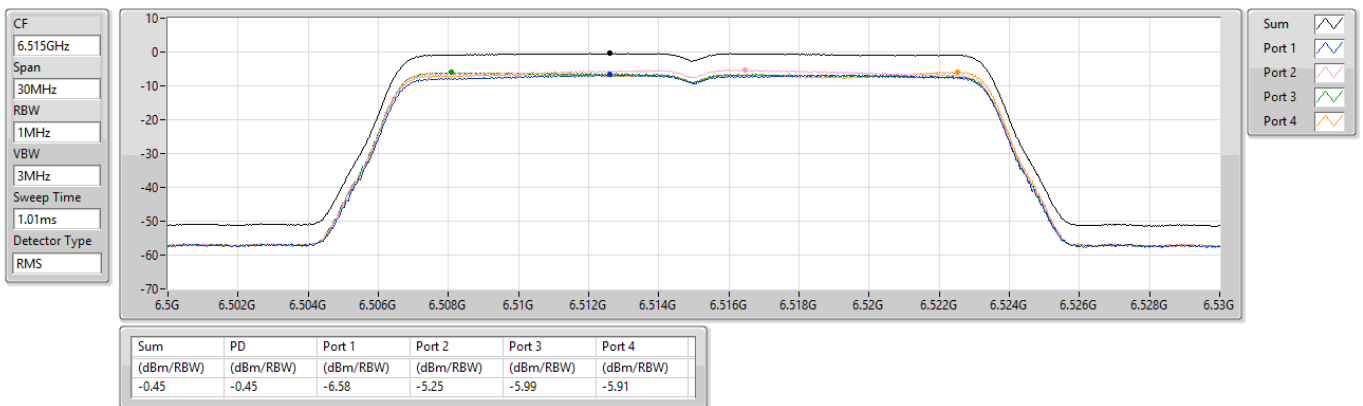


6.525-6.875GHz_802.11a_Nss1,(6Mbps)_4TX

PSD

6535MHz

CF
6.535GHz
Span
30MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS

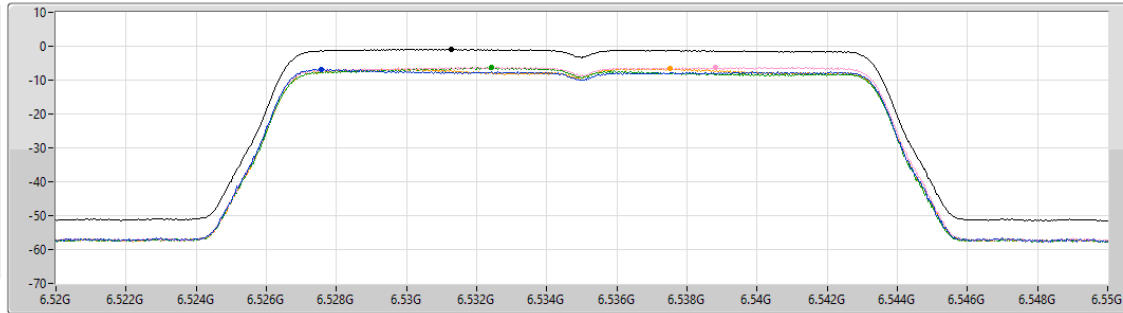


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-0.84	-0.84	-6.88	-6.14	-6.33	-6.53

6.525-6.875GHz_802.11a_Nss1,(6Mbps)_4TX

PSD

6715MHz

CF
6.715GHz
Span
30MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS

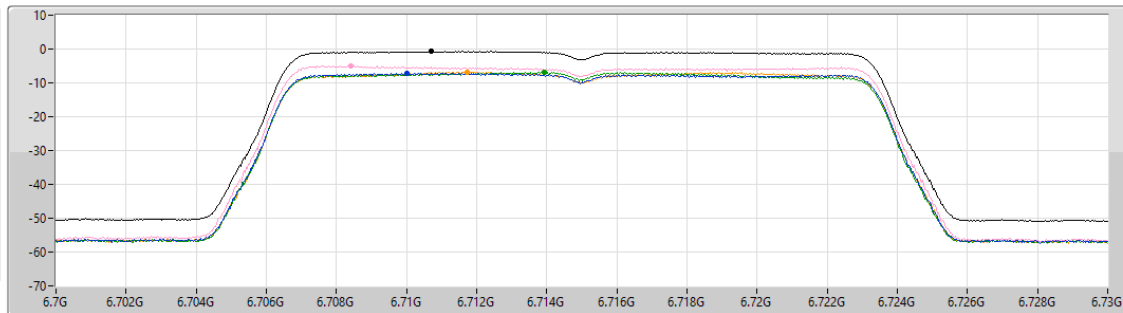


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-0.68	-0.68	-7.17	-4.96	-6.89	-6.74

6.525-6.875GHz_802.11a_Nss1,(6Mbps)_4TX

PSD


6855MHz

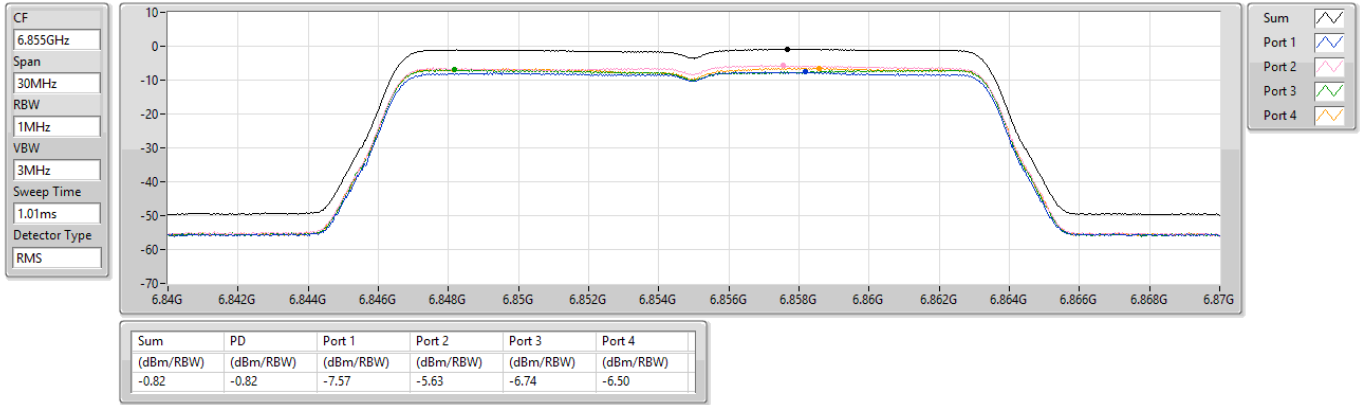

6.525-6.875GHz_802.11a_Nss1,(6Mbps)_4TX

PSD

6875MHz Straddle 6.525-6.875GHz

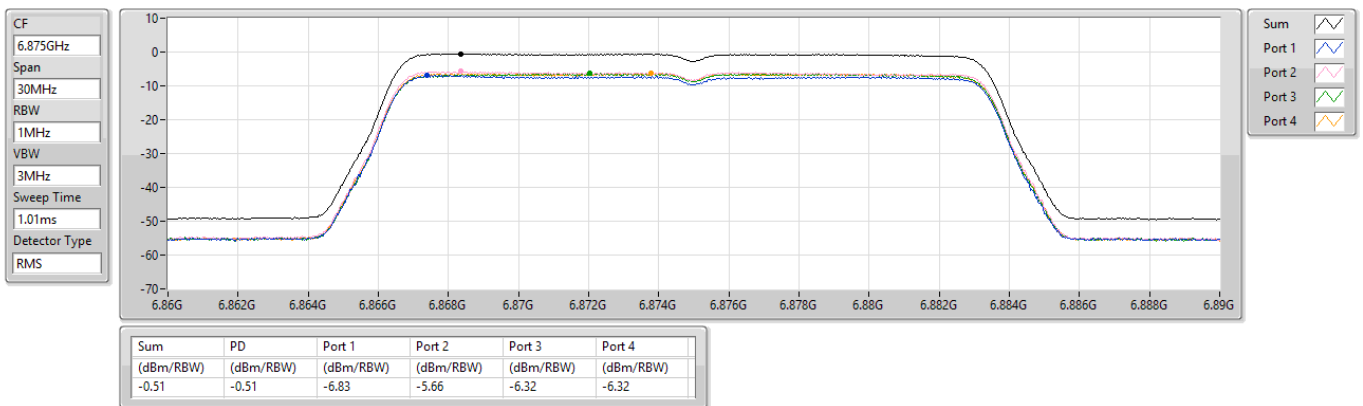


6.875-7.125GHz_802.11a_Nss1,(6Mbps)_4TX

PSD

6895MHz

CF
6.895GHz
Span
30MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS

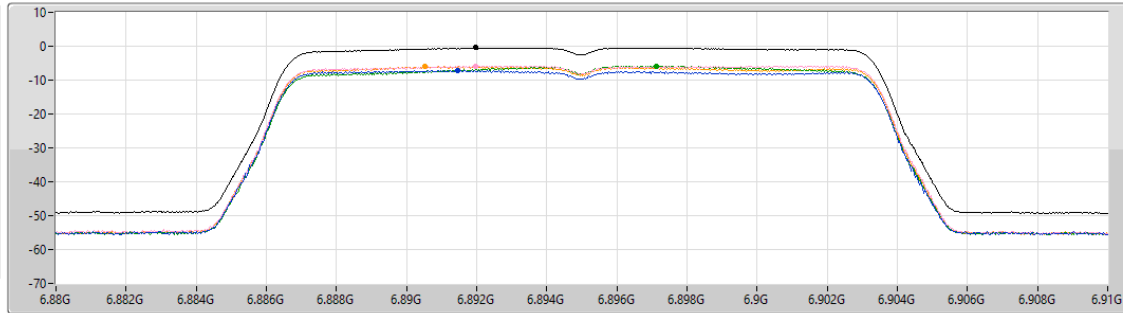


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-0.46	-0.46	-7.07	-5.80	-5.80	-5.94

6.875-7.125GHz_802.11a_Nss1,(6Mbps)_4TX

PSD

7015MHz

CF
7.015GHz
Span
30MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS

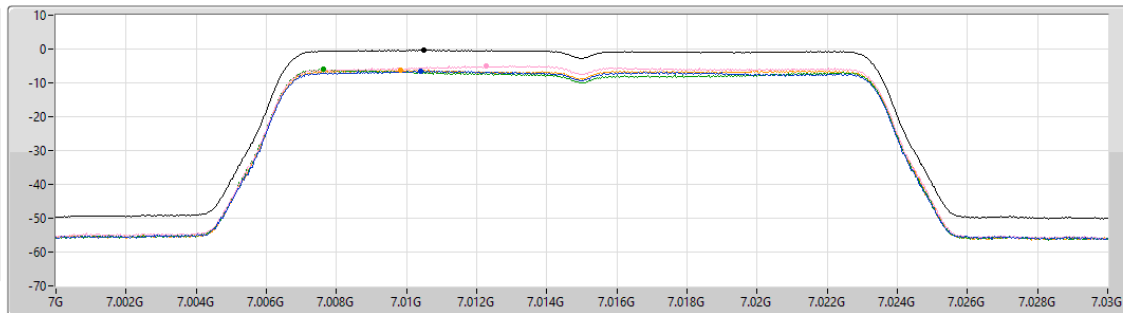


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-0.26	-0.26	-6.44	-5.00	-6.04	-6.17

6.875-7.125GHz_802.11a_Nss1,(6Mbps)_4TX

PSD


7095MHz

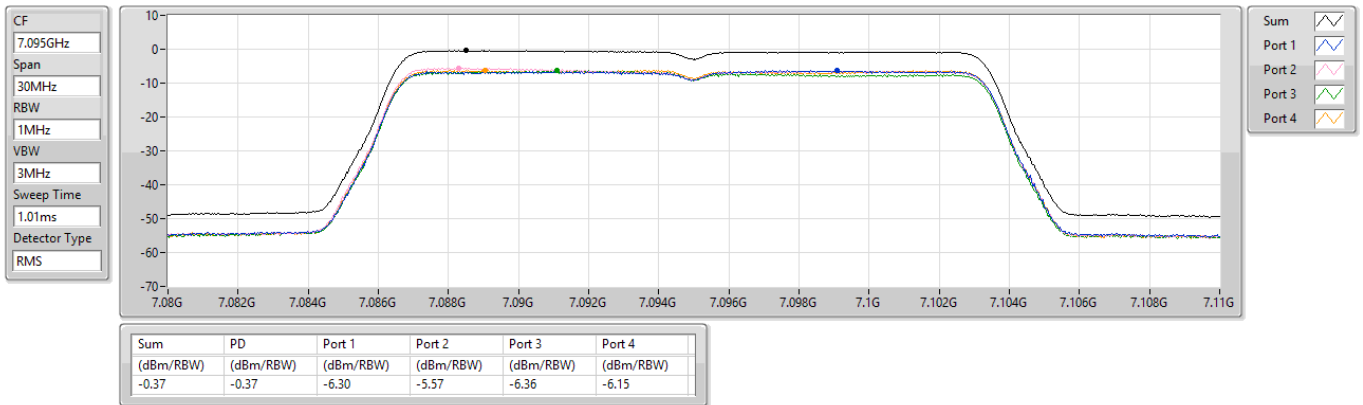

6.875-7.125GHz_802.11a_Nss1,(6Mbps)_4TX

PSD

7115MHz

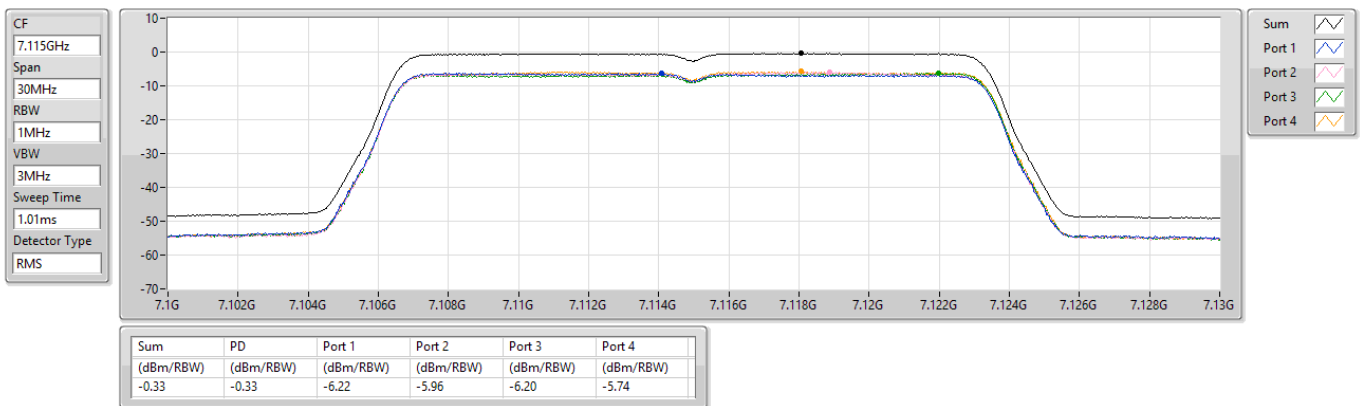


5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD

5955MHz

CF
5.955GHz
Span
30MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS

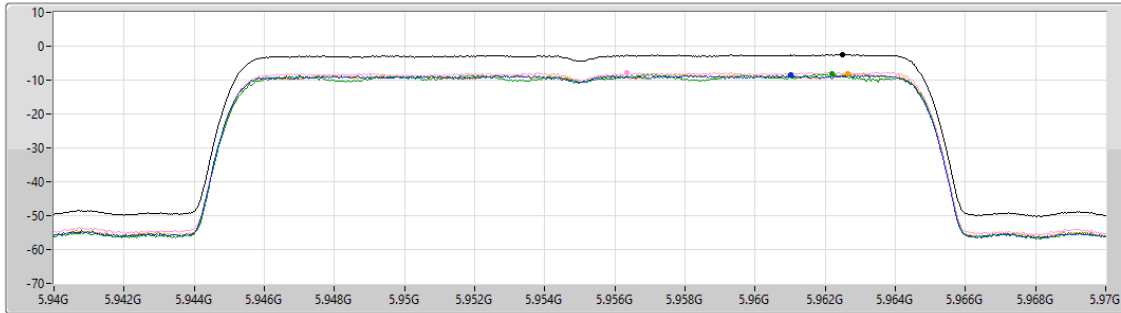

Sum
Port 1
Port 2
Port 3
Port 4


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-2.47	-2.47	-8.54	-7.75	-8.17	-8.16

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD

6175MHz

CF
6.175GHz
Span
30MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS

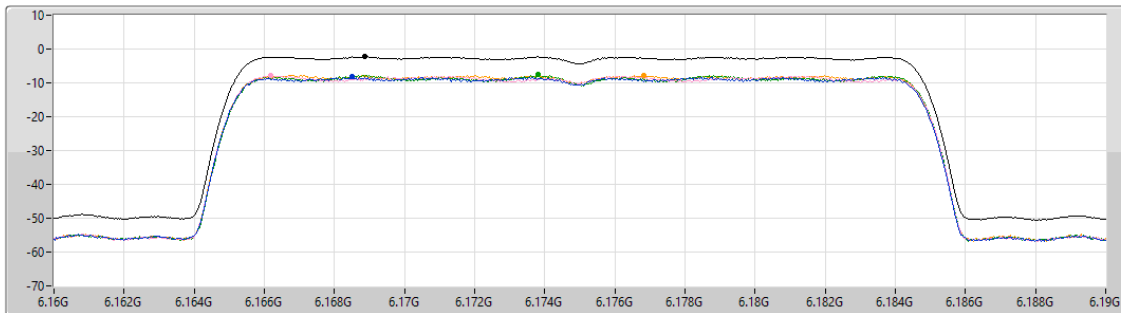


Sum
Port 1
Port 2
Port 3
Port 4

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-2.29	-2.29	-8.26	-7.75	-7.58	-7.66

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD


6415MHz

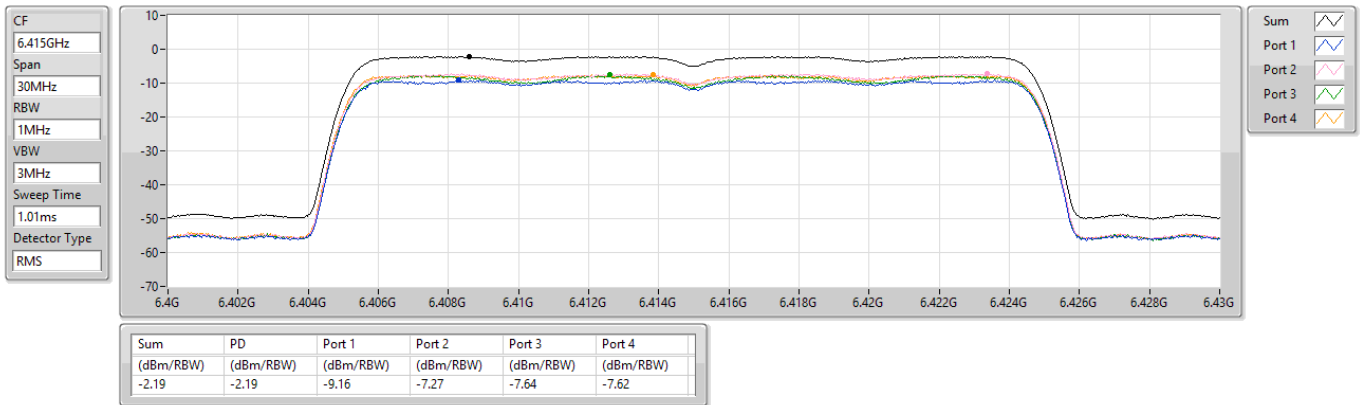

6.425-6.525GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD


6435MHz

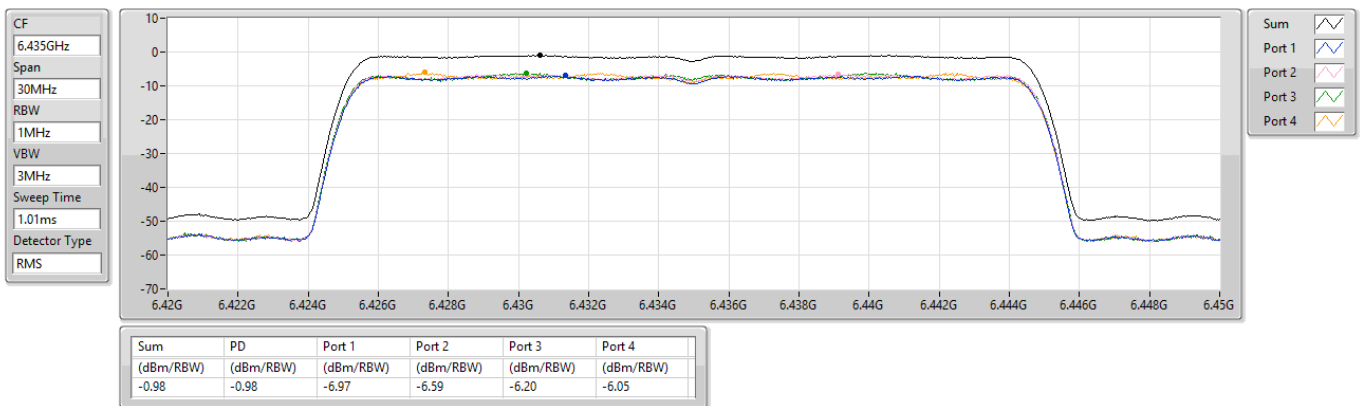

6.425-6.525GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD


6475MHz

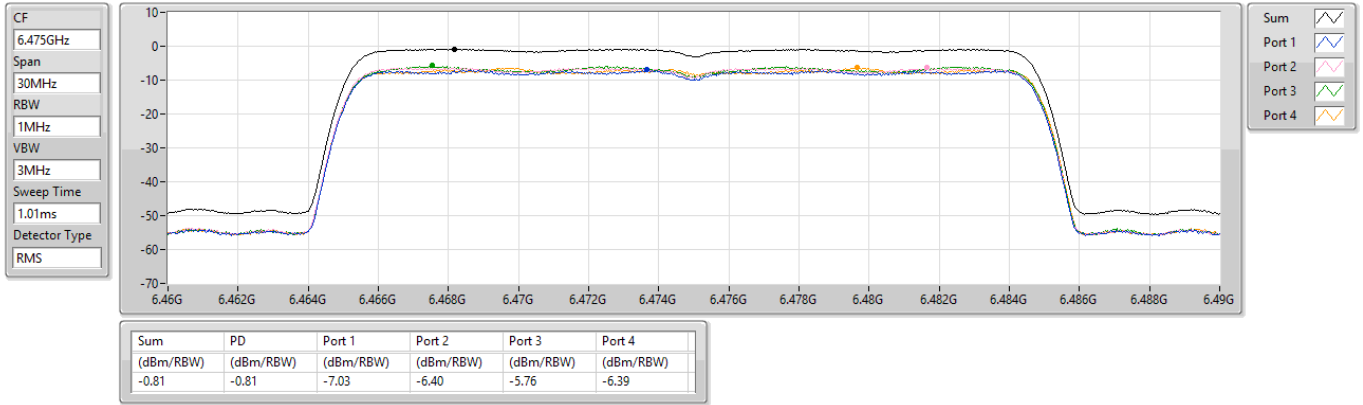

6.425-6.525GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD


6515MHz

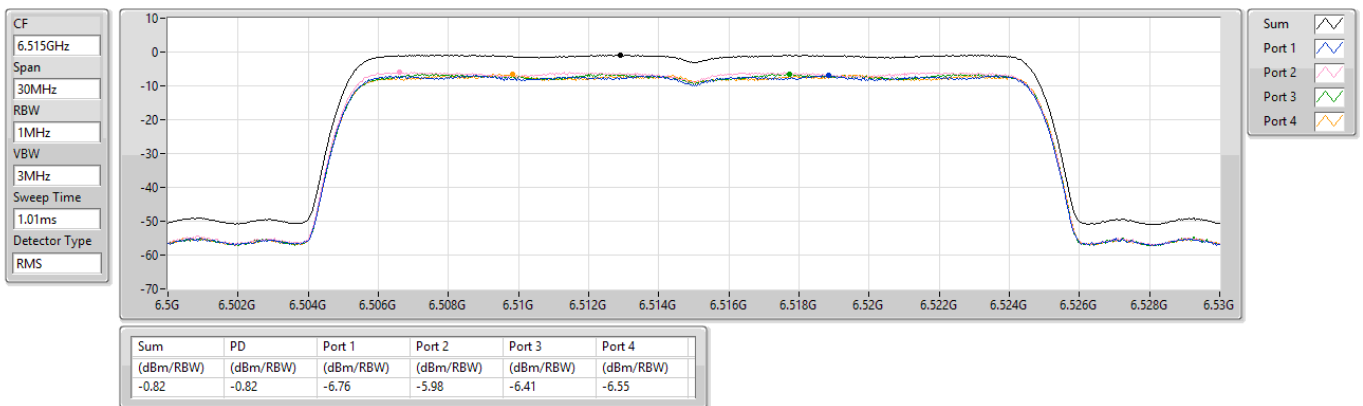

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD


6535MHz

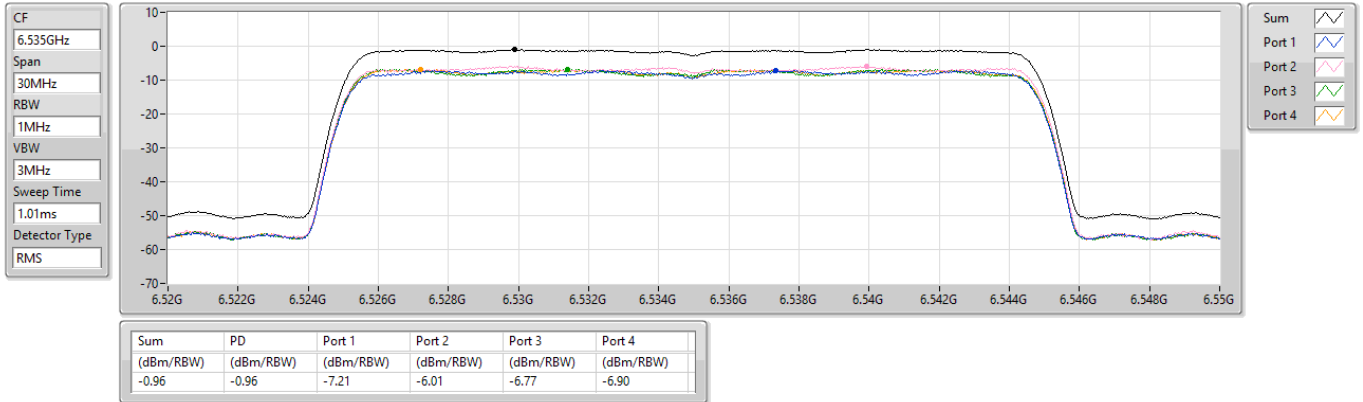

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD

6715MHz

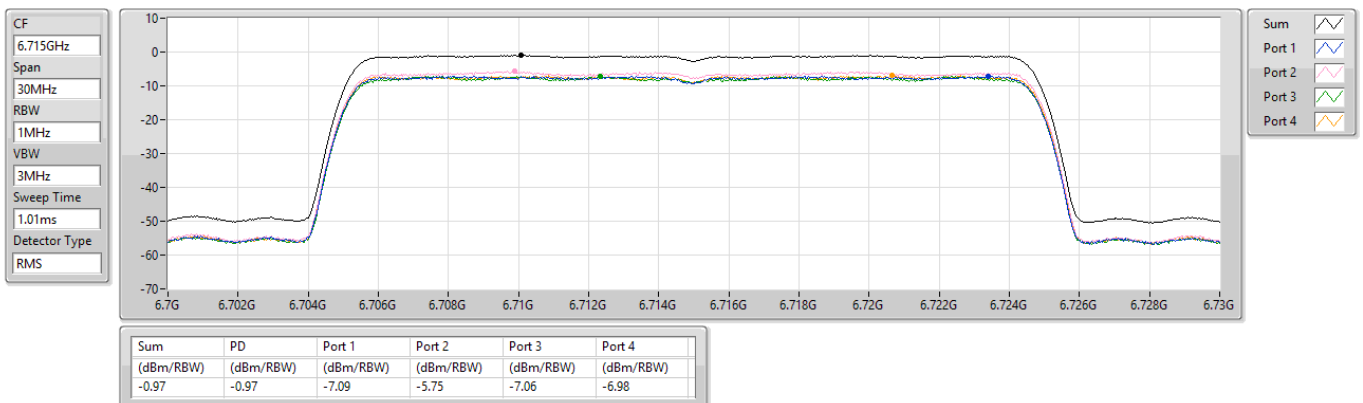


6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD

6855MHz

CF
6.855GHz
Span
30MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS

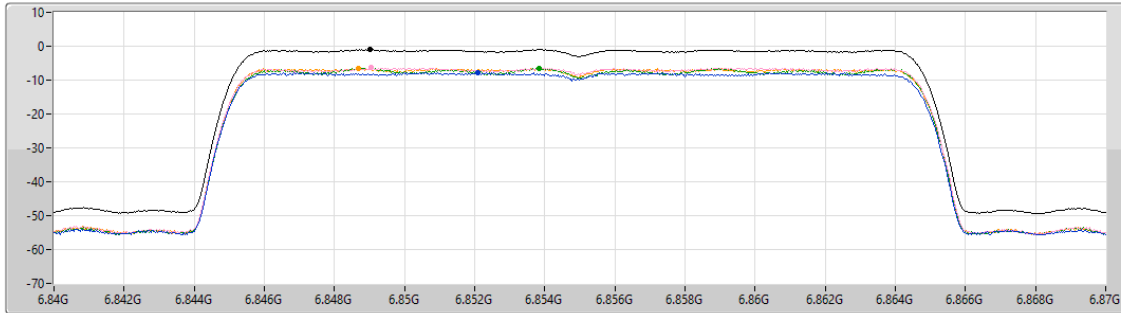

Sum
Port 1
Port 2
Port 3
Port 4


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-1.01	-1.01	-7.76	-6.37	-6.41	-6.53

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD

6875MHz Straddle 6.525-6.875GHz

CF
6.875GHz
Span
30MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS

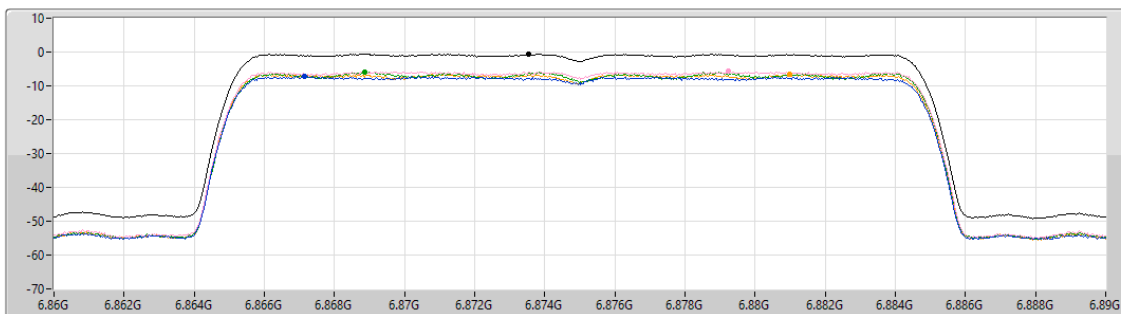


Sum
Port 1
Port 2
Port 3
Port 4

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-0.64	-0.64	-7.19	-5.72	-5.82	-6.54

6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD


6895MHz

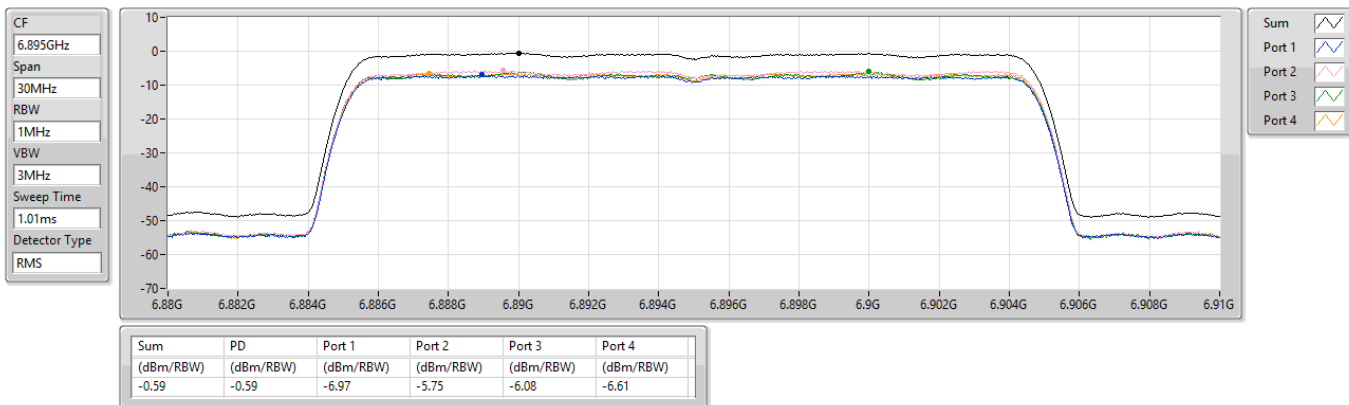

6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD


7015MHz

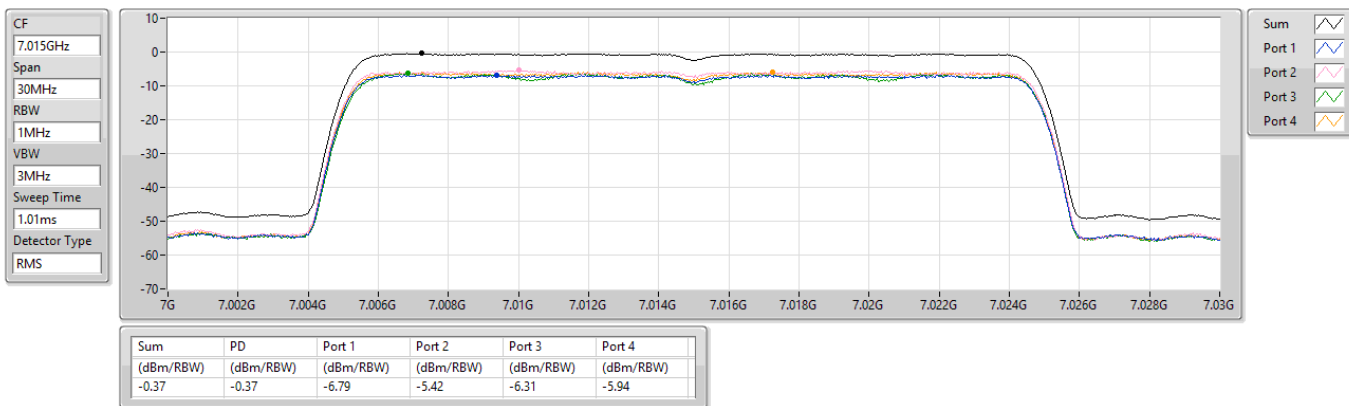

6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD


7095MHz

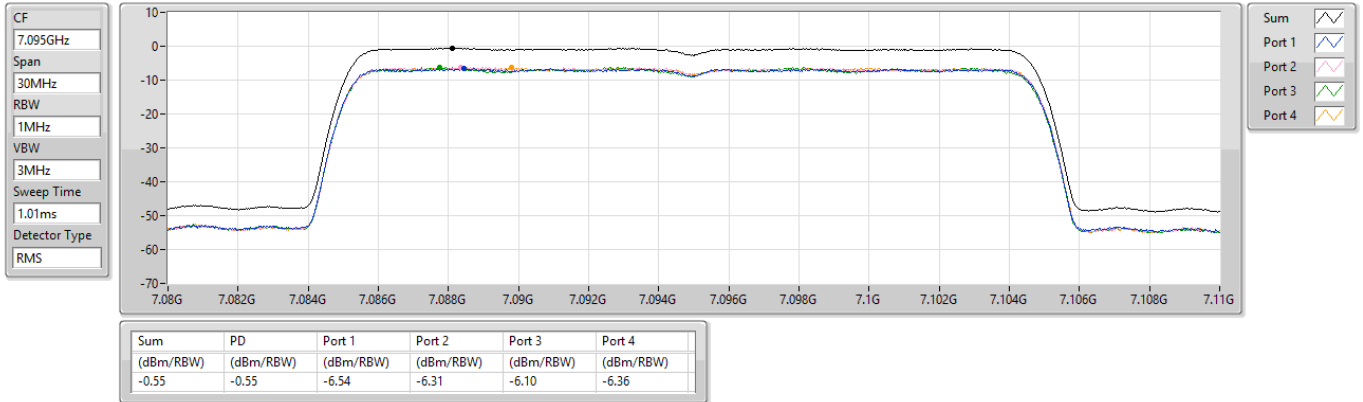

6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD

7115MHz

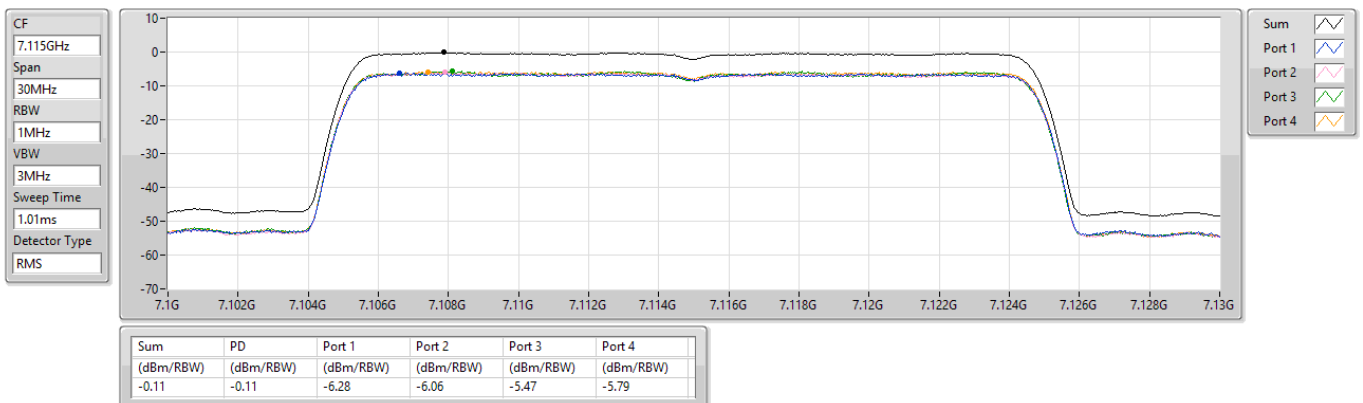


5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD

5965MHz

CF
5.965GHz
Span
60MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS

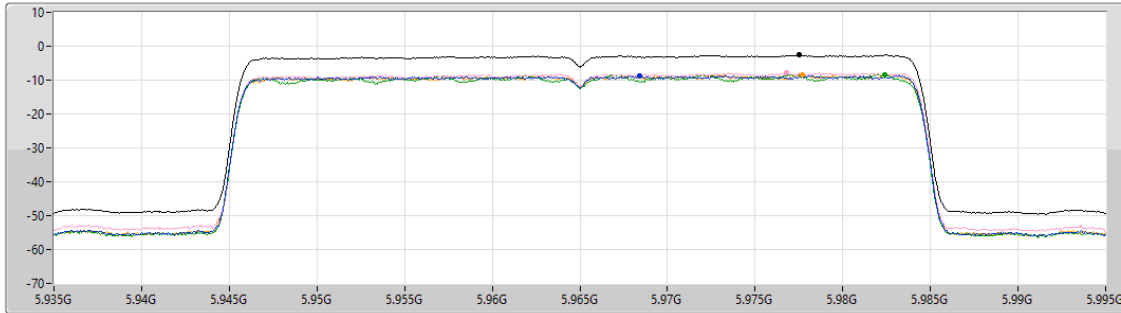

Sum
Port 1
Port 2
Port 3
Port 4


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-2.50	-2.50	-8.73	-7.81	-8.31	-8.35

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD

6165MHz

CF
6.165GHz
Span
60MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS

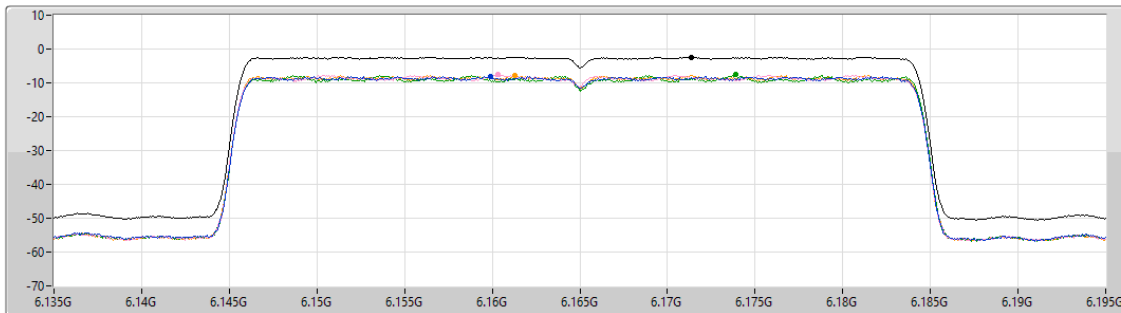


Sum
Port 1
Port 2
Port 3
Port 4

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-2.36	-2.36	-7.98	-7.61	-7.62	-7.73

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD


6405MHz

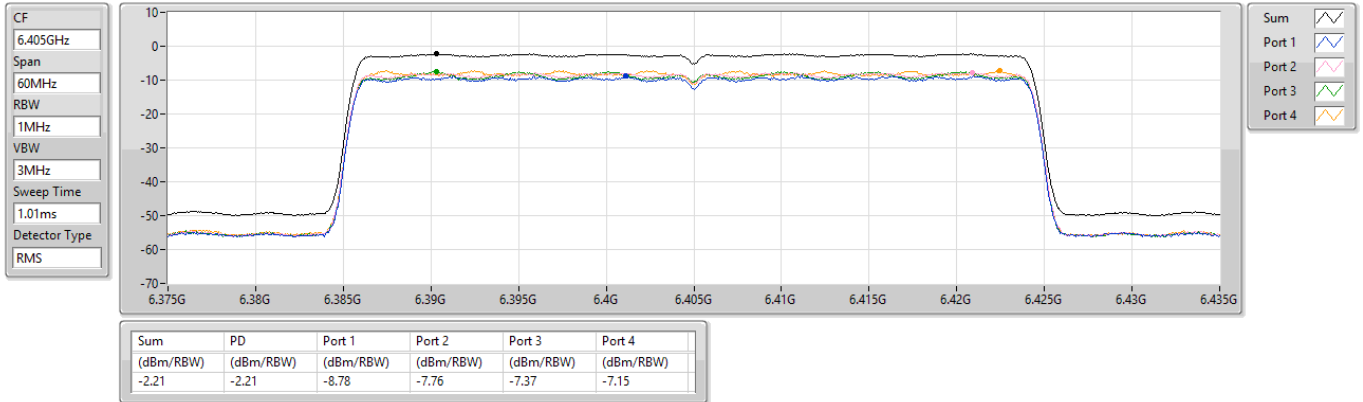

6.425-6.525GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD


6445MHz

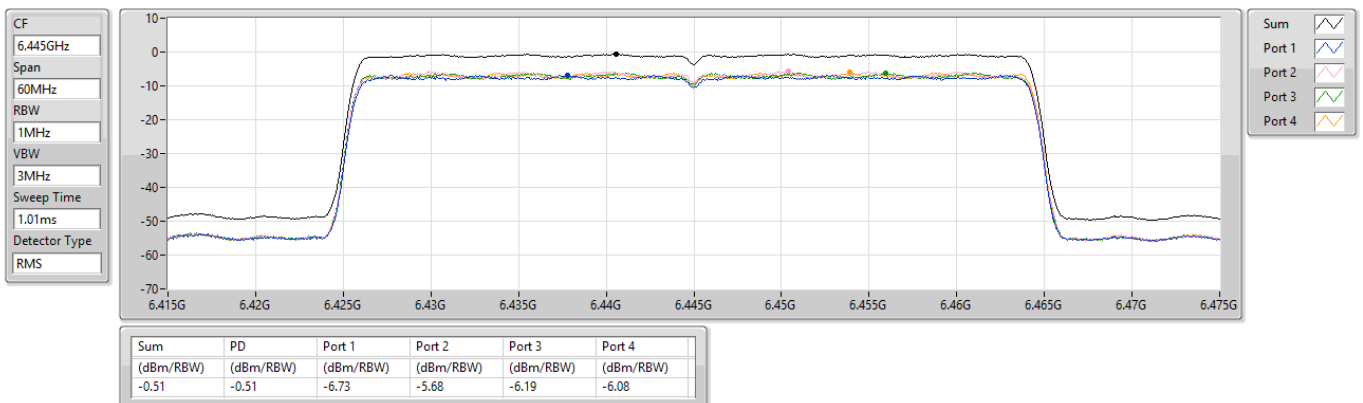

6.425-6.525GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD


6485MHz

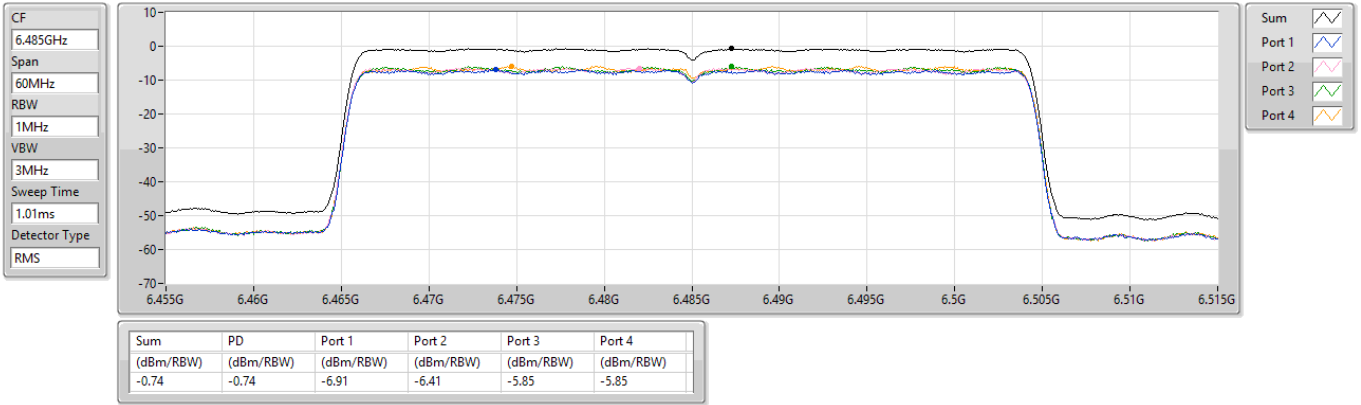

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD


6525MHz Straddle 6.525-6.875GHz

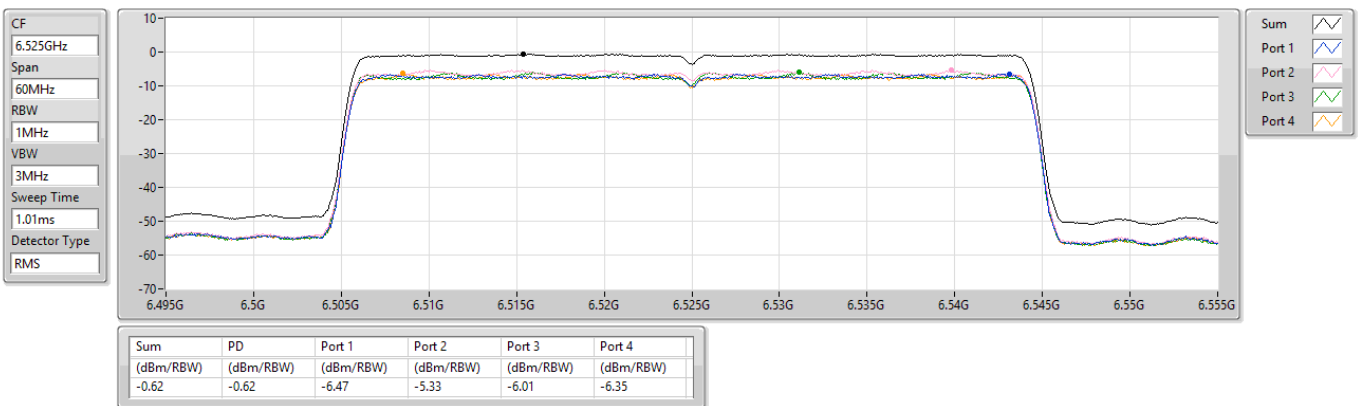

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD


6565MHz

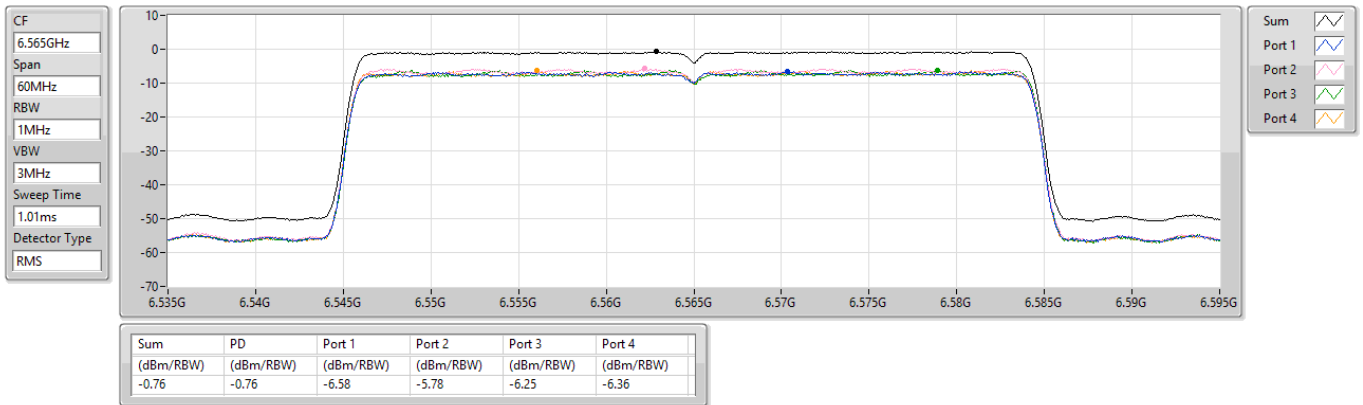

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD


6725MHz

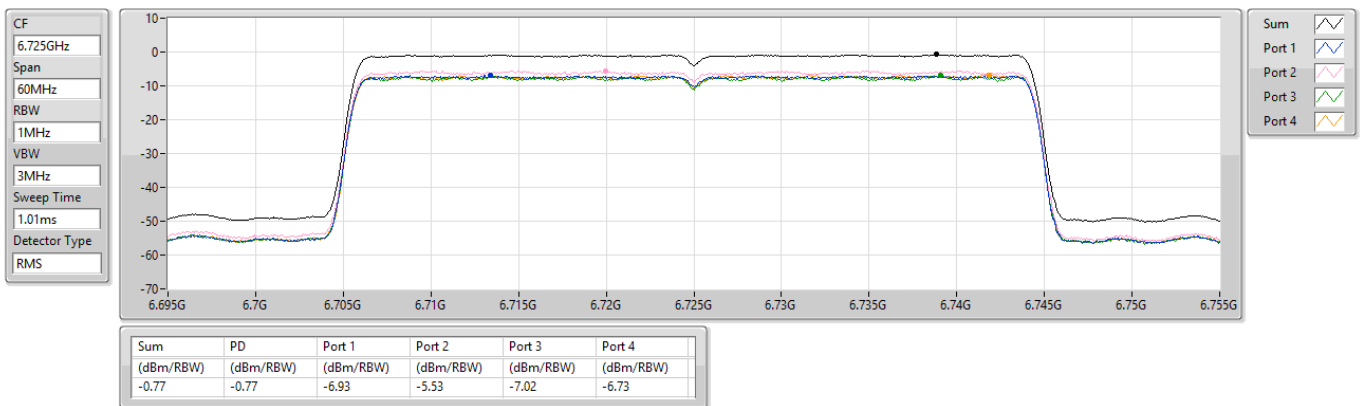

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD


6845MHz

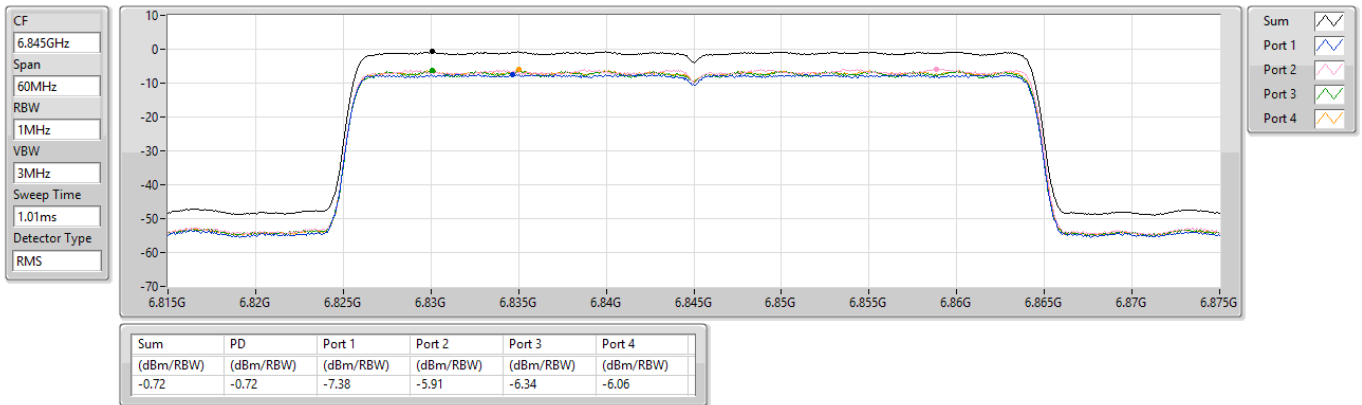

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD


6885MHz Straddle 6.525-6.875GHz

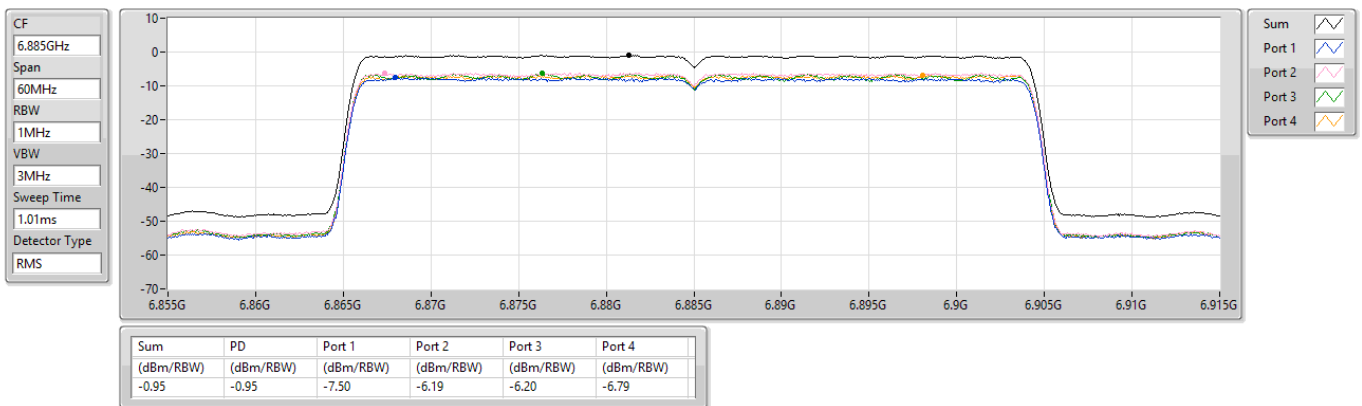

6.875-7.125GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD


6925MHz

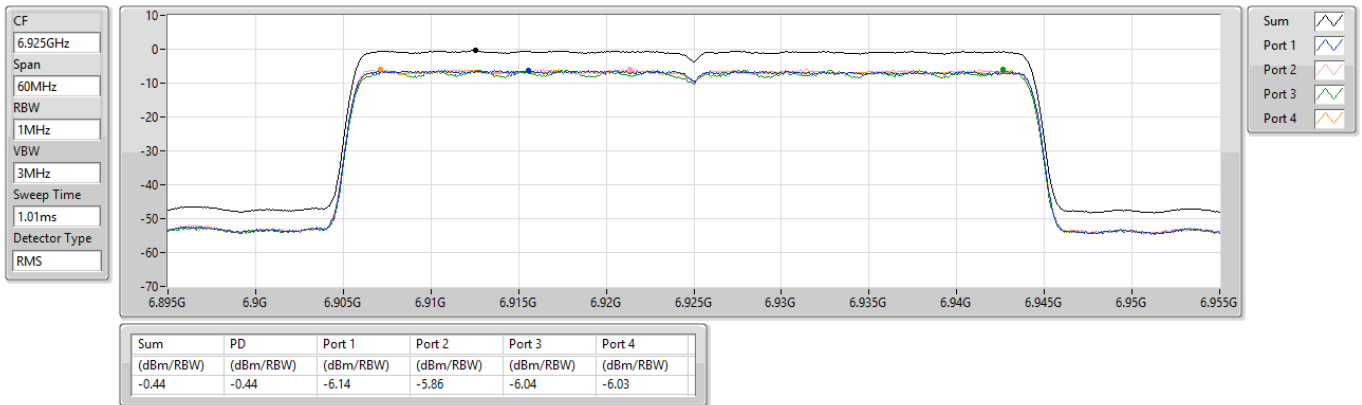

6.875-7.125GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD

7005MHz

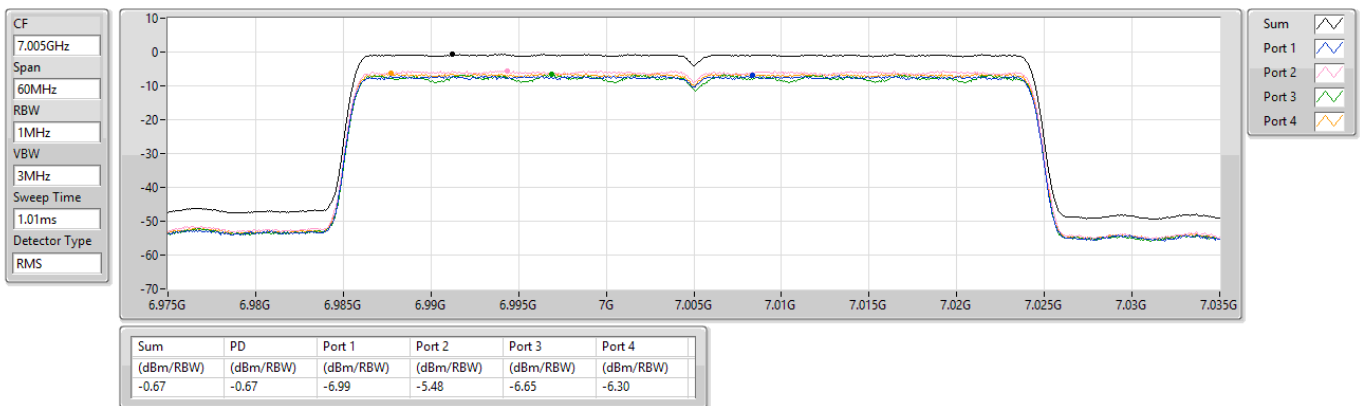


6.875-7.125GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD

7085MHz

CF
7.085GHz
Span
60MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS

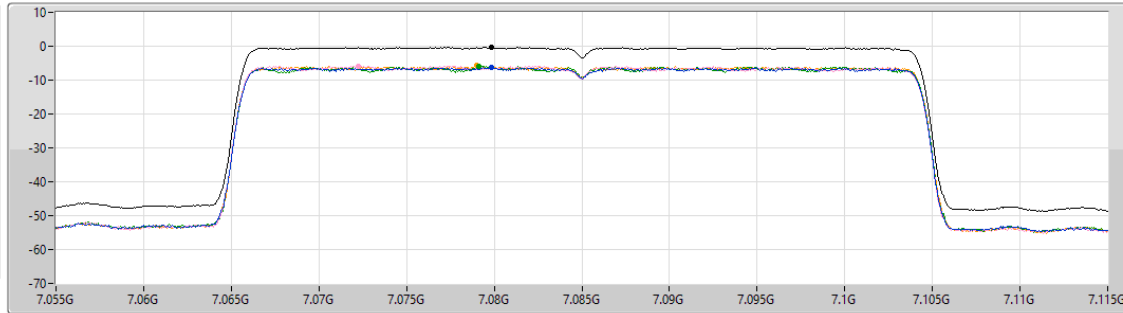

Sum
Port 1
Port 2
Port 3
Port 4


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-0.30	-0.30	-6.30	-5.79	-5.97	-5.78

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_4TX

PSD

5985MHz

CF
5.985GHz
Span
120MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.2ms
Detector Type
RMS

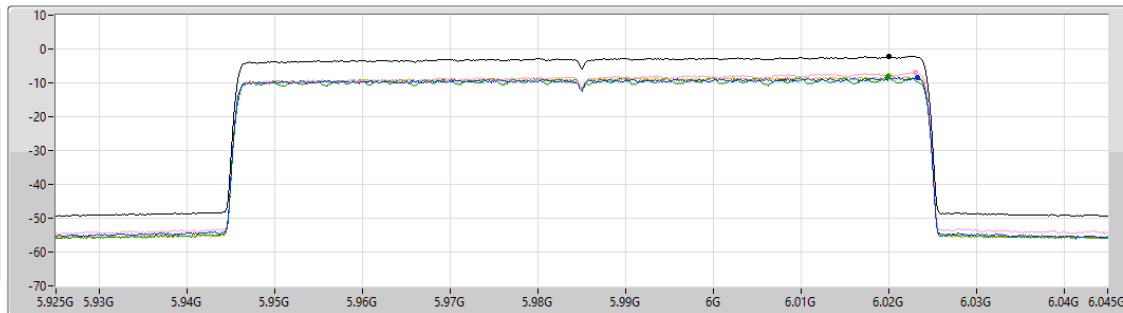


Sum
Port 1
Port 2
Port 3
Port 4

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-2.19	-2.19	-8.40	-6.91	-8.08	-7.87

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_4TX

PSD


6145MHz

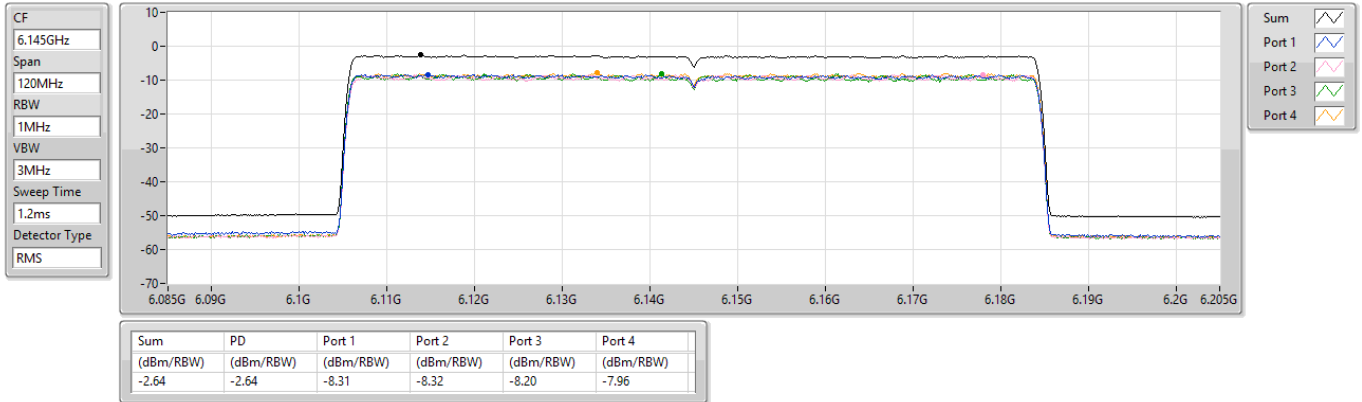

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_4TX

PSD

6385MHz

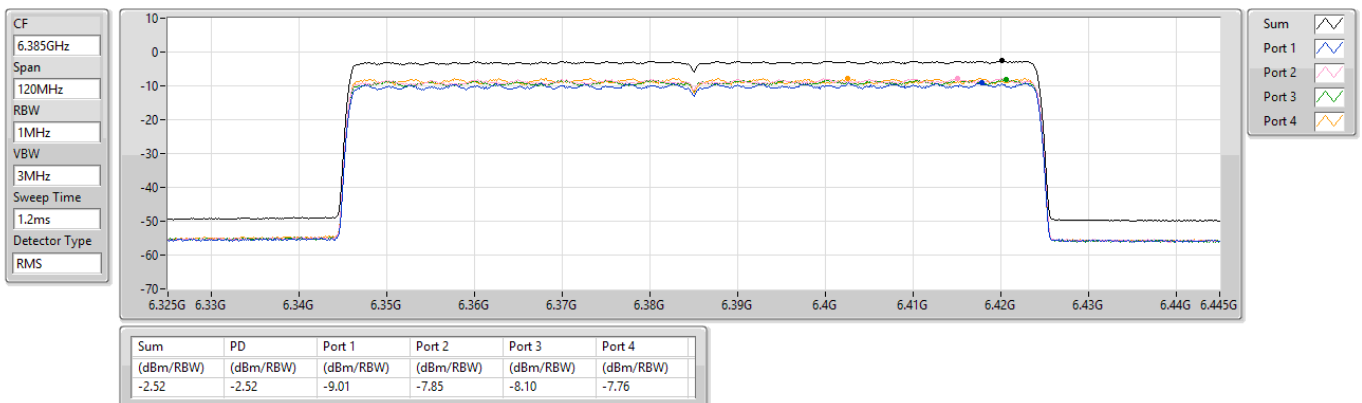


6.425-6.525GHz_802.11be EHT80_Nss1,(MCS0)_4TX

PSD

6465MHz

CF
6.465GHz
Span
120MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.2ms
Detector Type
RMS

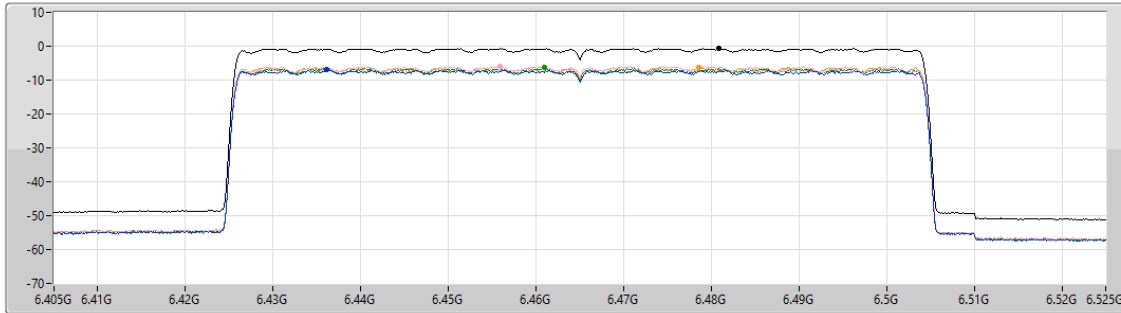

Sum
Port 1
Port 2
Port 3
Port 4


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-0.69	-0.69	-6.96	-5.94	-6.40	-6.27

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_4TX

PSD

6545MHz Straddle 6.525-6.875GHz

CF
6.545GHz
Span
120MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.2ms
Detector Type
RMS

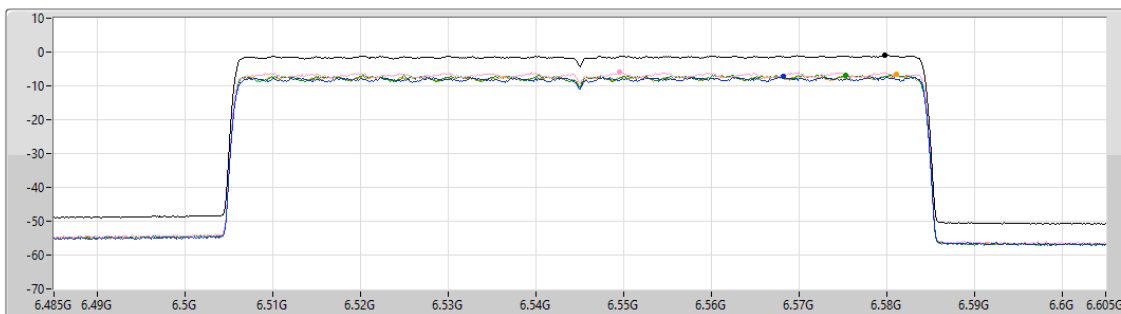


Sum
Port 1
Port 2
Port 3
Port 4

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-0.97	-0.97	-7.23	-6.07	-6.78	-6.70

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_4TX

PSD


6625MHz

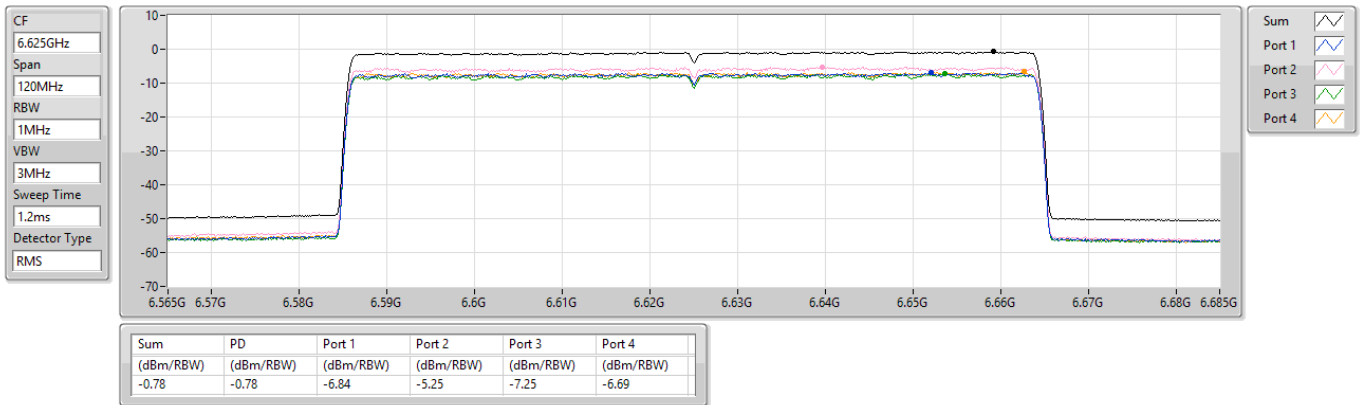

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_4TX

PSD

6705MHz

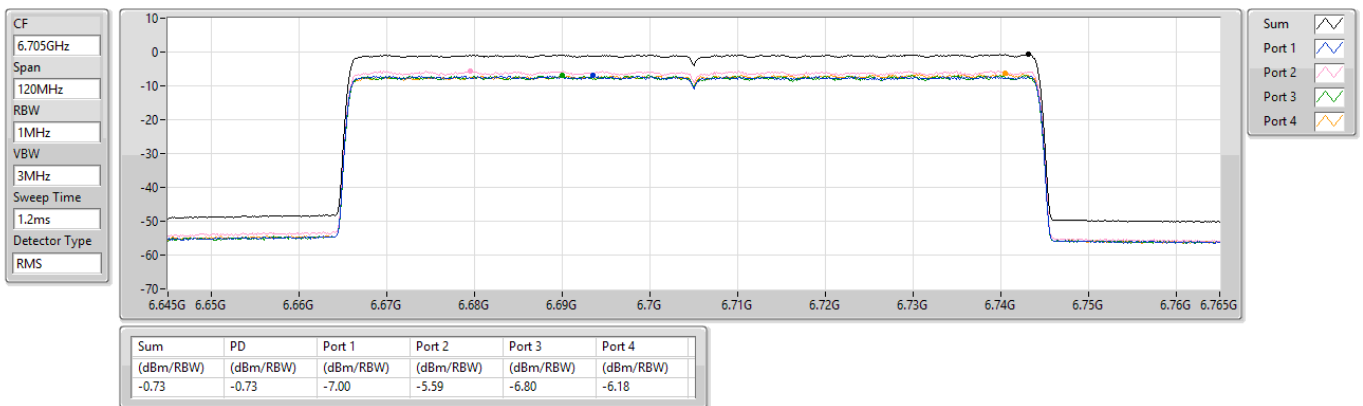


6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_4TX

PSD

6785MHz

CF
6.785GHz
Span
120MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.2ms
Detector Type
RMS

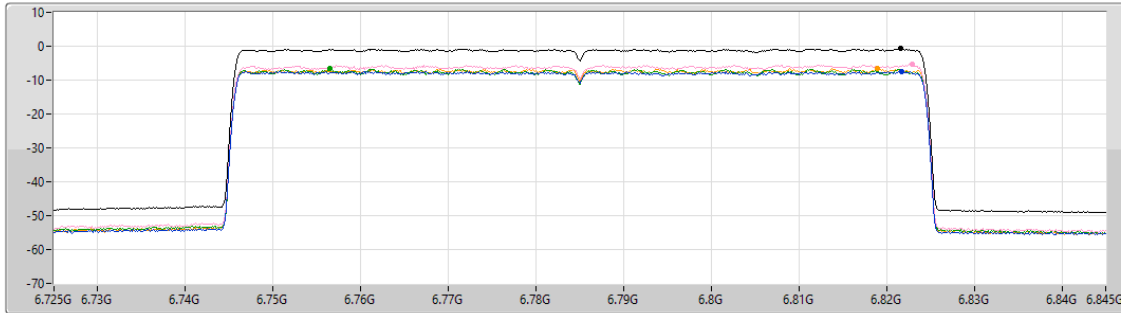


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-0.73	-0.73	-7.38	-5.43	-6.60	-6.58

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_4TX

PSD

6865MHz Straddle 6.525-6.875GHz

CF
6.865GHz
Span
120MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.2ms
Detector Type
RMS

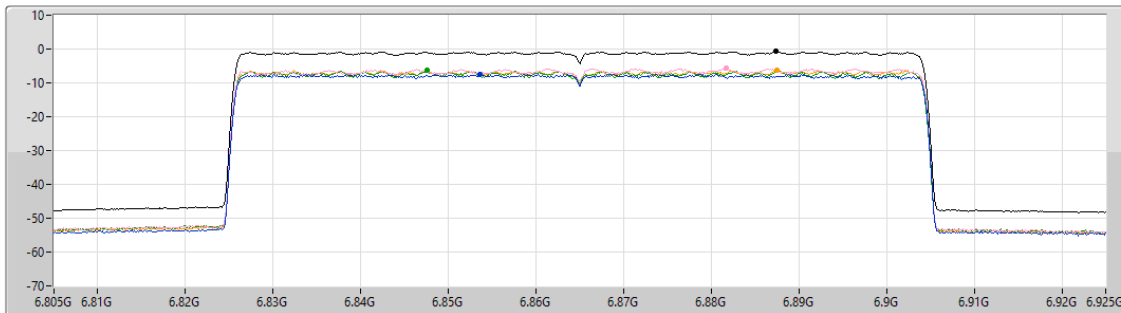


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-0.77	-0.77	-7.43	-5.63	-6.26	-6.25

6.875-7.125GHz_802.11be EHT80_Nss1,(MCS0)_4TX

PSD


6945MHz

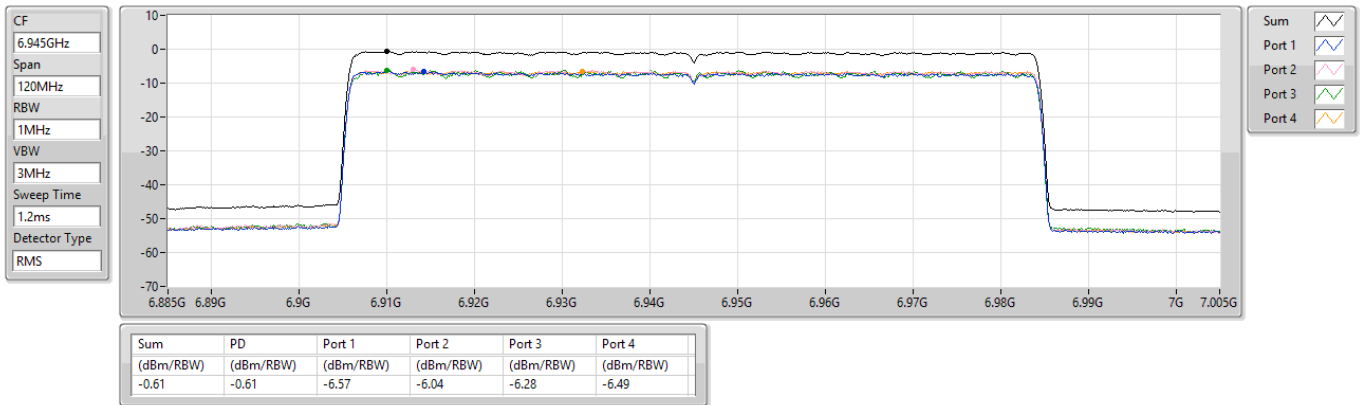

6.875-7.125GHz_802.11be EHT80_Nss1,(MCS0)_4TX

PSD

7025MHz

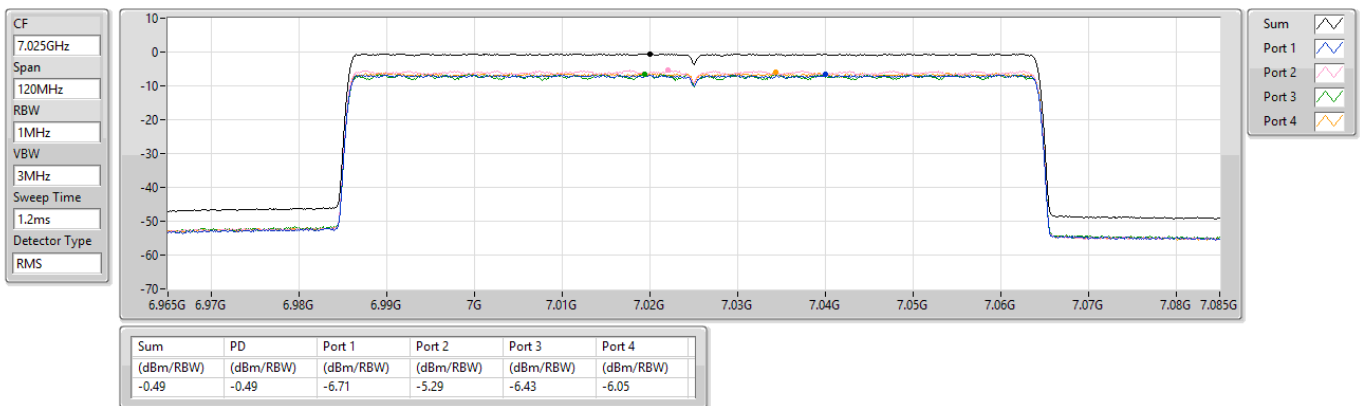


5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_4TX

PSD

6025MHz

CF
6.025GHz
Span
240MHz
RBW
1MHz
VBW
3MHz
Sweep Time
2.4ms
Detector Type
RMS

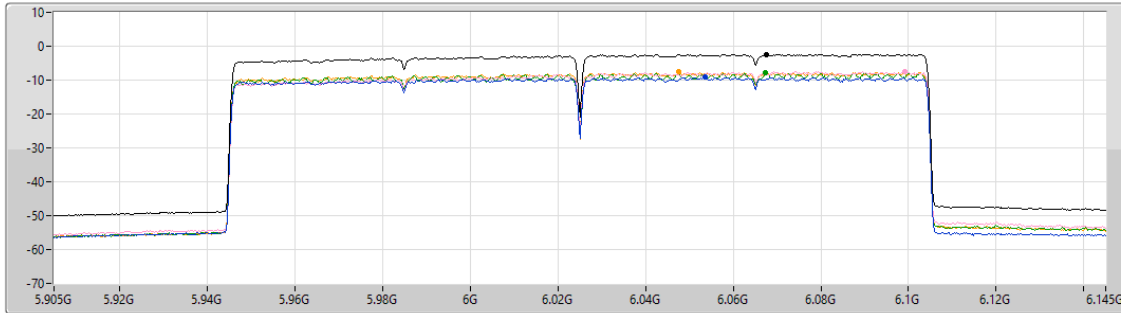

Sum
Port 1
Port 2
Port 3
Port 4


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-2.36	-2.36	-9.13	-7.54	-7.88	-7.62

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_4TX

PSD

6185MHz

CF
6.185GHz
Span
240MHz
RBW
1MHz
VBW
3MHz
Sweep Time
2.4ms
Detector Type
RMS

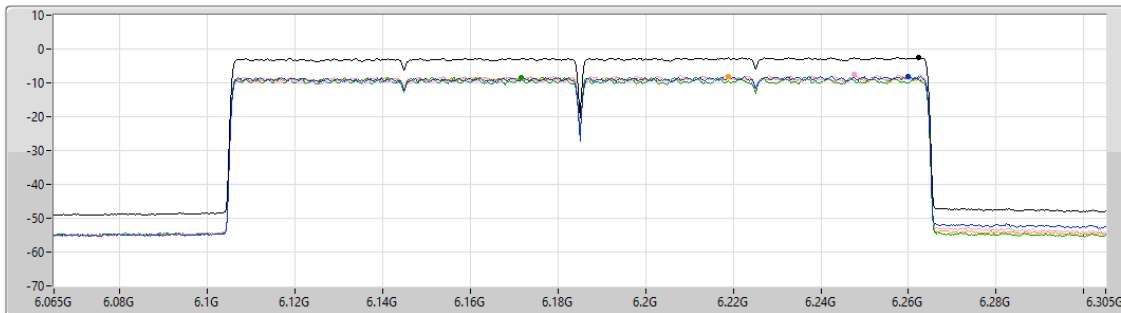


Sum
Port 1
Port 2
Port 3
Port 4

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-2.46	-2.46	-8.07	-7.62	-8.33	-8.01

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_4TX

PSD


6345MHz

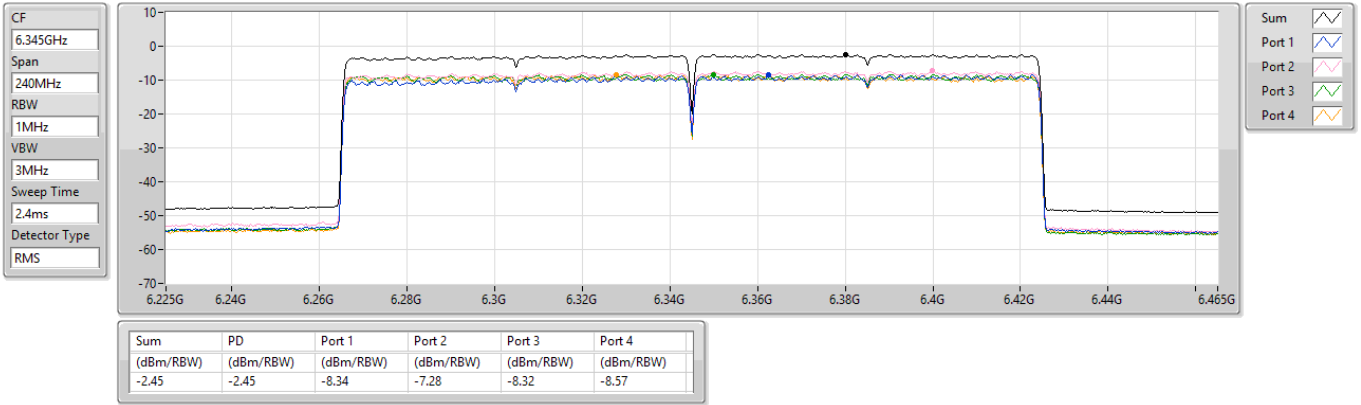

6.525-6.875GHz_802.11be EHT160_Nss1,(MCS0)_4TX

PSD

6505MHz Straddle 6.525-6.875GHz

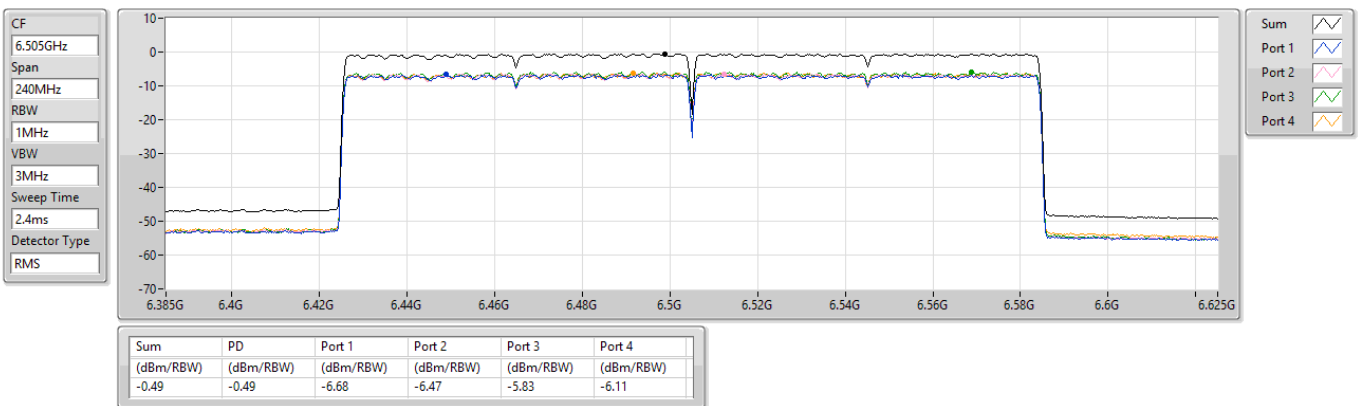


6.525-6.875GHz_802.11be EHT160_Nss1,(MCS0)_4TX

PSD

6665MHz

CF
6.665GHz
Span
240MHz
RBW
1MHz
VBW
3MHz
Sweep Time
2.4ms
Detector Type
RMS

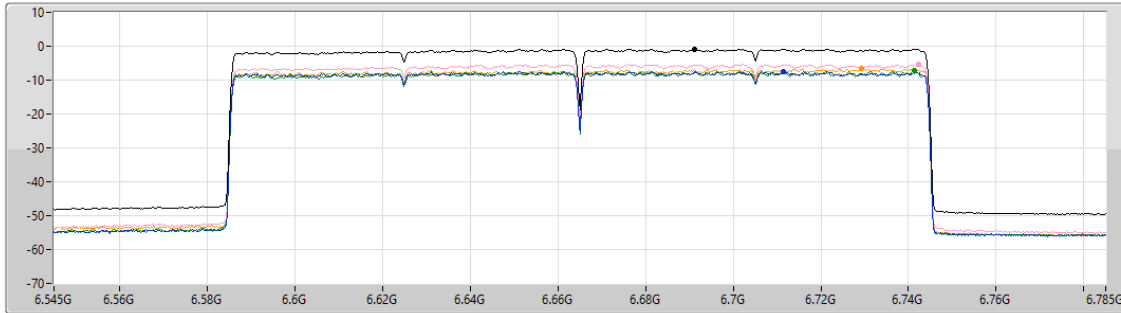

Sum
Port 1
Port 2
Port 3
Port 4


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-0.83	-0.83	-7.43	-5.33	-7.30	-6.69

6.525-6.875GHz_802.11be EHT160_Nss1,(MCS0)_4TX

PSD

6825MHz Straddle 6.525-6.875GHz

CF
6.825GHz
Span
240MHz
RBW
1MHz
VBW
3MHz
Sweep Time
2.4ms
Detector Type
RMS

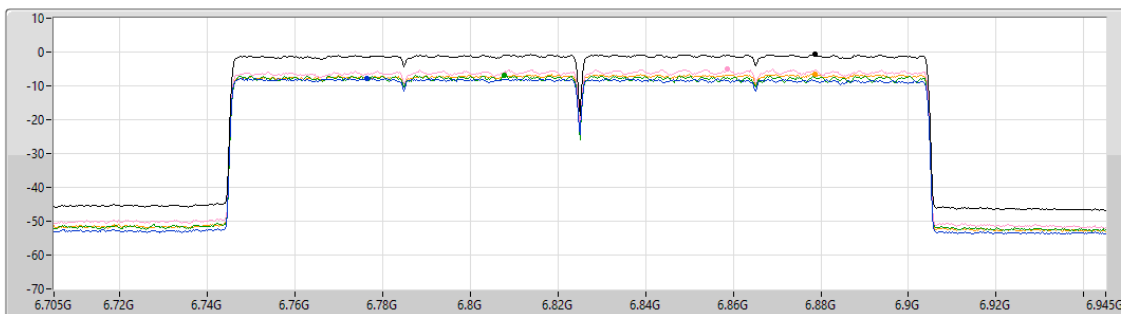

Sum
Port 1
Port 2
Port 3
Port 4


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-0.74	-0.74	-7.75	-5.12	-7.01	-6.56

6.875-7.125GHz_802.11be EHT160_Nss1,(MCS0)_4TX

PSD

6985MHz

CF
6.985GHz
Span
240MHz
RBW
1MHz
VBW
3MHz
Sweep Time
2.4ms
Detector Type
RMS

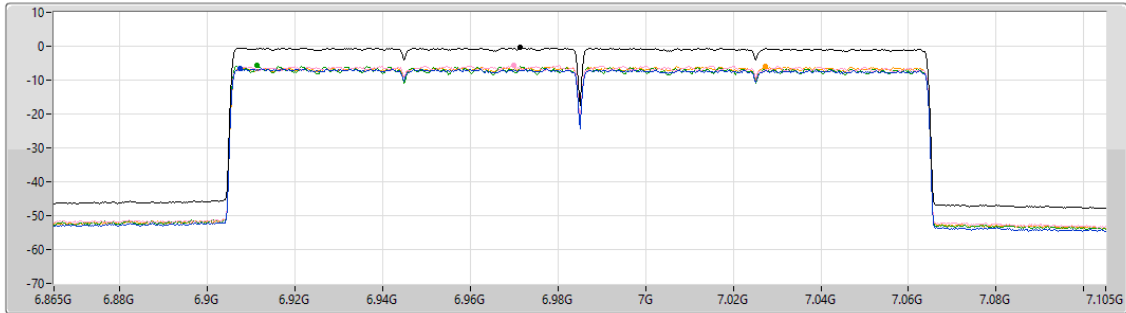

Sum
Port 1
Port 2
Port 3
Port 4


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-0.44	-0.44	-6.50	-5.52	-5.69	-6.03

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_4TX

PSD

6105MHz

CF
6.105GHz
Span
480MHz
RBW
1MHz
VBW
3MHz
Sweep Time
4.8ms
Detector Type
RMS

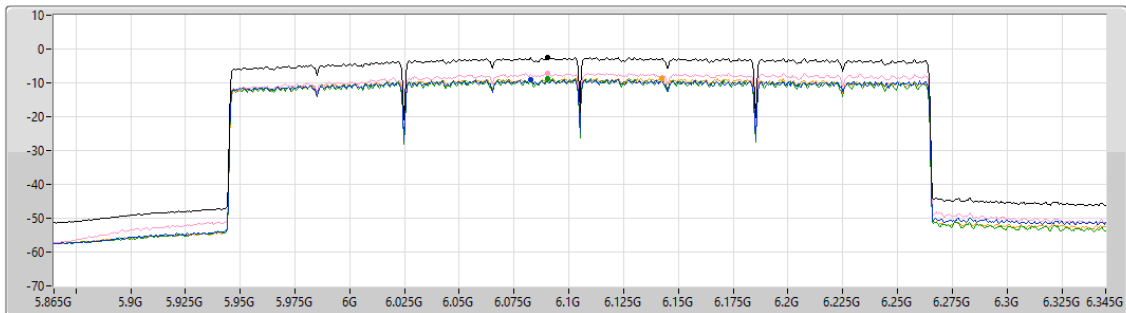


Sum
Port 1
Port 2
Port 3
Port 4

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-2.46	-2.46	-8.93	-7.06	-8.77	-8.63

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_4TX

PSD


6265MHz

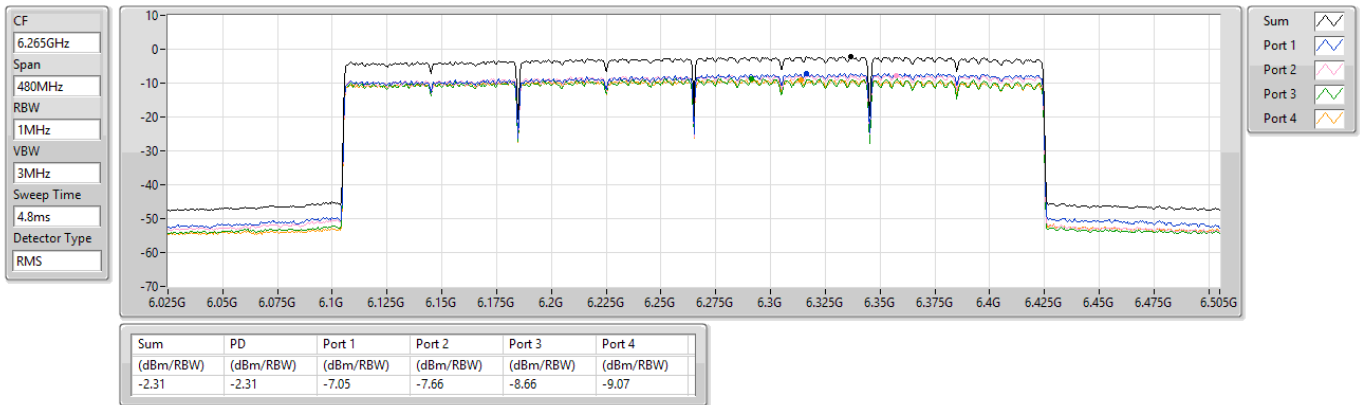

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_4TX

PSD


6425MHz

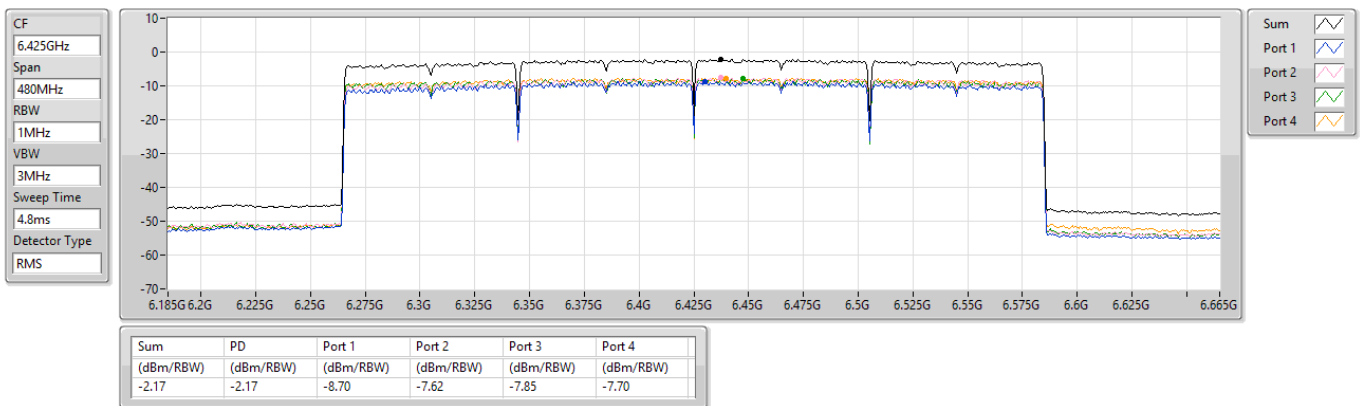

6.525-6.875GHz_802.11be EHT320_Nss1,(MCS0)_4TX

PSD


6585MHz Straddle 6.525-6.875GHz

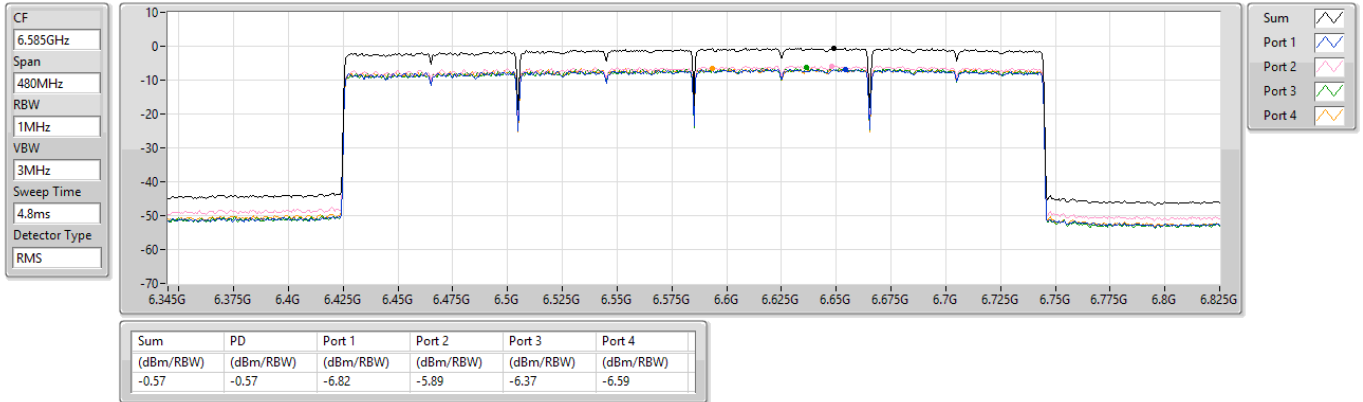

6.525-6.875GHz_802.11be EHT320_Nss1,(MCS0)_4TX

PSD

6745MHz Straddle 6.525-6.875GHz

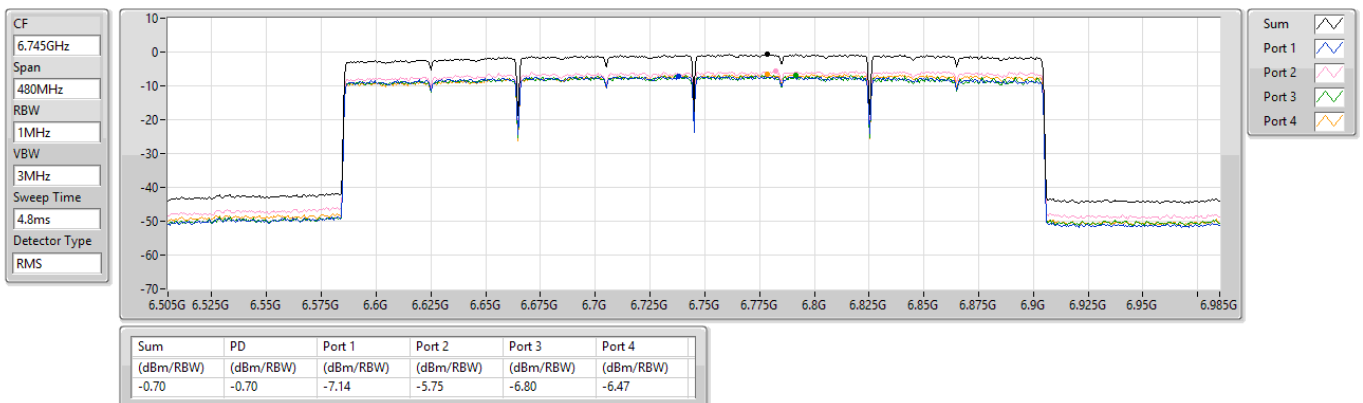




6.525-6.875GHz_802.11be EHT320_Nss1,(MCS0)_4TX

PSD

6905MHz Straddle 6.525-6.875GHz

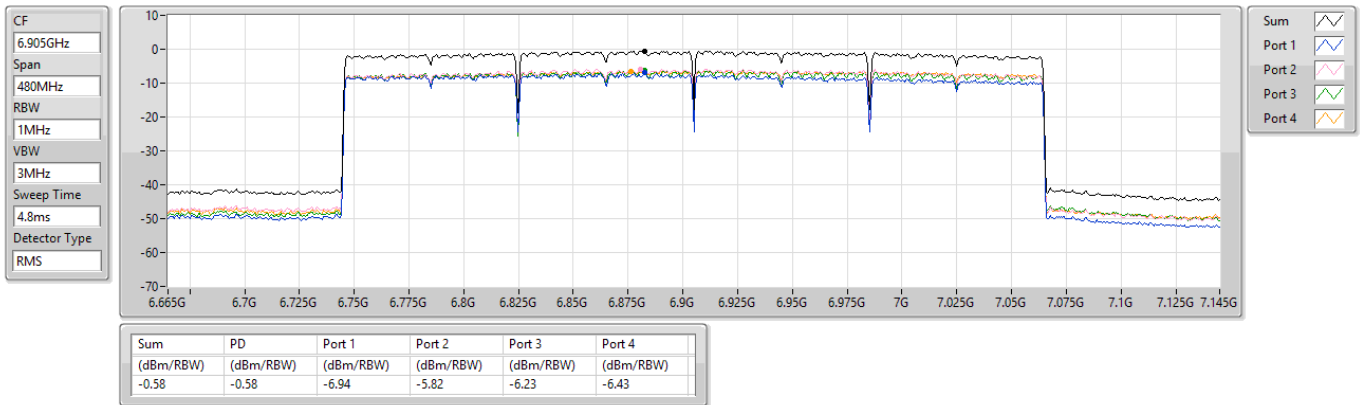




Modulation	be EHT320-OFDMA	Test Freq. (MHz)	6585
Polarization	Vertical		
Test By :Sean Yu- Temperature(°C):21 Humidity(%):64			
Level (dBuV/m)			



Unwanted Emissions (Above 1GHz) for 11a

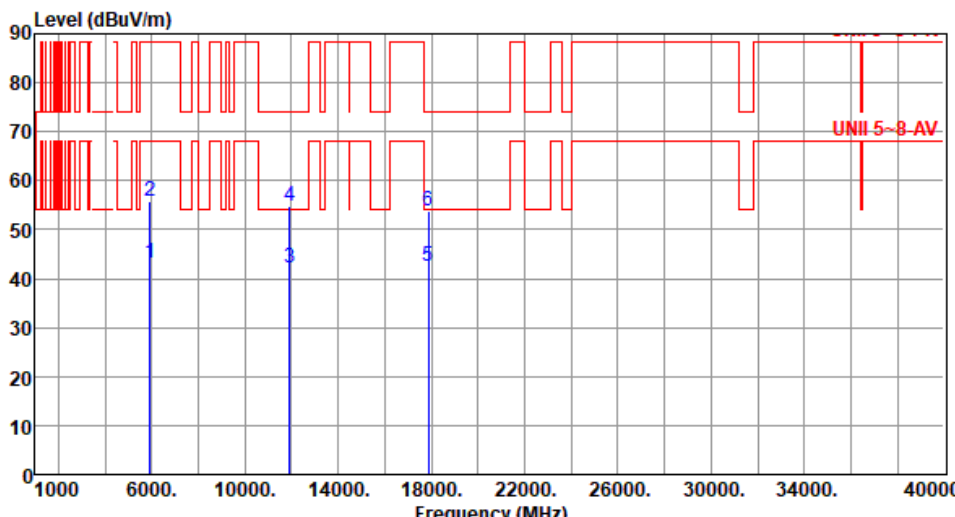Modulation	11a	Test Freq. (MHz)	5955																																																																						
Polarization	Horizontal																																																																								
Test By :Paul Lin Temperature(°C):24 Humidity(%):64																																																																									
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5925.00</td><td>43.10</td><td>68.20</td><td>-25.10</td><td>41.97</td><td>1.13</td><td>Average</td><td>348</td><td>300</td></tr><tr><td>2</td><td>5925.00</td><td>55.75</td><td>88.20</td><td>-32.45</td><td>54.62</td><td>1.13</td><td>Peak</td><td>348</td><td>300</td></tr><tr><td>3</td><td>11910.00</td><td>42.01</td><td>54.00</td><td>-11.99</td><td>35.92</td><td>6.09</td><td>Average</td><td>100</td><td>85</td></tr><tr><td>4</td><td>11910.00</td><td>54.82</td><td>74.00</td><td>-19.18</td><td>48.73</td><td>6.09</td><td>Peak</td><td>100</td><td>85</td></tr><tr><td>5</td><td>17865.00</td><td>42.58</td><td>54.00</td><td>-11.42</td><td>32.13</td><td>10.45</td><td>Average</td><td>100</td><td>94</td></tr><tr><td>6</td><td>17865.00</td><td>53.86</td><td>74.00</td><td>-20.14</td><td>43.41</td><td>10.45</td><td>Peak</td><td>100</td><td>94</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5925.00	43.10	68.20	-25.10	41.97	1.13	Average	348	300	2	5925.00	55.75	88.20	-32.45	54.62	1.13	Peak	348	300	3	11910.00	42.01	54.00	-11.99	35.92	6.09	Average	100	85	4	11910.00	54.82	74.00	-19.18	48.73	6.09	Peak	100	85	5	17865.00	42.58	54.00	-11.42	32.13	10.45	Average	100	94	6	17865.00	53.86	74.00	-20.14	43.41	10.45	Peak	100	94
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	5925.00	43.10	68.20	-25.10	41.97	1.13	Average	348	300																																																																
2	5925.00	55.75	88.20	-32.45	54.62	1.13	Peak	348	300																																																																
3	11910.00	42.01	54.00	-11.99	35.92	6.09	Average	100	85																																																																
4	11910.00	54.82	74.00	-19.18	48.73	6.09	Peak	100	85																																																																
5	17865.00	42.58	54.00	-11.42	32.13	10.45	Average	100	94																																																																
6	17865.00	53.86	74.00	-20.14	43.41	10.45	Peak	100	94																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									




Modulation	11a	Test Freq. (MHz)	5955																																																																						
Polarization	Vertical																																																																								
Test By :Paul Lin Temperature(°C):24 Humidity(%):64																																																																									
Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5925.00</td><td>43.01</td><td>68.20</td><td>-25.19</td><td>41.88</td><td>1.13</td><td>Average</td><td>380</td><td>2</td></tr><tr><td>2</td><td>5925.00</td><td>57.00</td><td>88.20</td><td>-31.20</td><td>55.87</td><td>1.13</td><td>Peak</td><td>380</td><td>2</td></tr><tr><td>3</td><td>11910.00</td><td>41.95</td><td>54.00</td><td>-12.05</td><td>35.86</td><td>6.09</td><td>Average</td><td>100</td><td>76</td></tr><tr><td>4</td><td>11910.00</td><td>55.04</td><td>74.00</td><td>-18.96</td><td>48.95</td><td>6.09</td><td>Peak</td><td>100</td><td>76</td></tr><tr><td>5</td><td>17865.00</td><td>42.66</td><td>54.00</td><td>-11.34</td><td>32.21</td><td>10.45</td><td>Average</td><td>100</td><td>108</td></tr><tr><td>6</td><td>17865.00</td><td>53.63</td><td>74.00</td><td>-20.37</td><td>43.18</td><td>10.45</td><td>Peak</td><td>100</td><td>108</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5925.00	43.01	68.20	-25.19	41.88	1.13	Average	380	2	2	5925.00	57.00	88.20	-31.20	55.87	1.13	Peak	380	2	3	11910.00	41.95	54.00	-12.05	35.86	6.09	Average	100	76	4	11910.00	55.04	74.00	-18.96	48.95	6.09	Peak	100	76	5	17865.00	42.66	54.00	-11.34	32.21	10.45	Average	100	108	6	17865.00	53.63	74.00	-20.37	43.18	10.45	Peak	100	108
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	5925.00	43.01	68.20	-25.19	41.88	1.13	Average	380	2																																																																
2	5925.00	57.00	88.20	-31.20	55.87	1.13	Peak	380	2																																																																
3	11910.00	41.95	54.00	-12.05	35.86	6.09	Average	100	76																																																																
4	11910.00	55.04	74.00	-18.96	48.95	6.09	Peak	100	76																																																																
5	17865.00	42.66	54.00	-11.34	32.21	10.45	Average	100	108																																																																
6	17865.00	53.63	74.00	-20.37	43.18	10.45	Peak	100	108																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									




Modulation	11a	Test Freq. (MHz)	6175
Polarization	Horizontal		
Test By :Paul Lin Temperature(°C):24 Humidity(%):64			
Level (dBUV/m)			

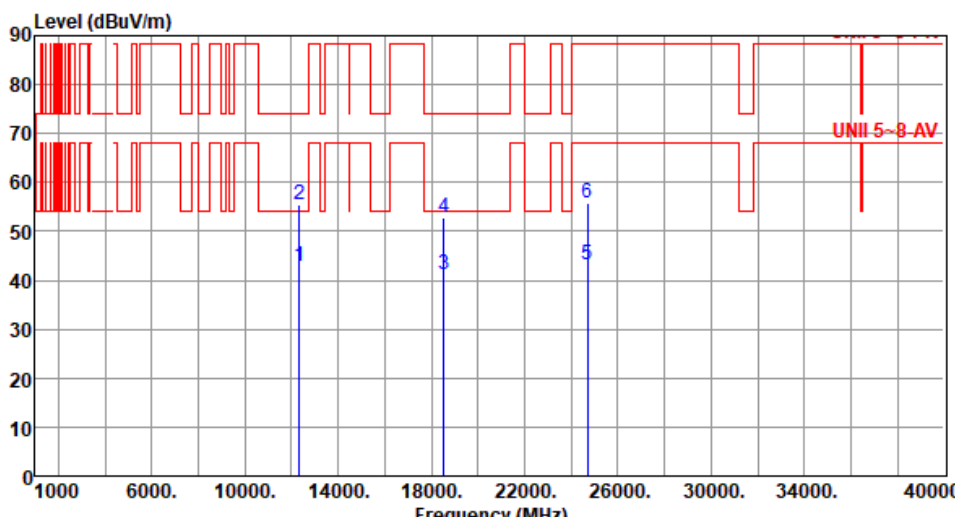


Modulation	11a	Test Freq. (MHz)	6175																																																																																										
Polarization	Vertical																																																																																												
Test By :Paul Lin Temperature(°C):24 Humidity(%):64																																																																																													
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>12350.00</td><td>42.88</td><td>54.00</td><td>-11.12</td><td>37.05</td><td>5.83</td><td>Average</td><td>100</td><td>78</td></tr><tr><td>2</td><td>12350.00</td><td>55.41</td><td>74.00</td><td>-18.59</td><td>49.58</td><td>5.83</td><td>Peak</td><td>100</td><td>78</td></tr><tr><td>3</td><td>18525.00</td><td>41.08</td><td>54.00</td><td>-12.92</td><td>39.29</td><td>1.79</td><td>Average</td><td>100</td><td>310</td></tr><tr><td>4</td><td>18525.00</td><td>52.97</td><td>74.00</td><td>-21.03</td><td>51.18</td><td>1.79</td><td>Peak</td><td>100</td><td>310</td></tr><tr><td>5</td><td>24700.00</td><td>43.16</td><td>68.20</td><td>-25.04</td><td>34.84</td><td>8.32</td><td>Average</td><td>100</td><td>49</td></tr><tr><td>6</td><td>24700.00</td><td>55.76</td><td>88.20</td><td>-32.44</td><td>47.44</td><td>8.32</td><td>Peak</td><td>100</td><td>49</td></tr></tbody></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	12350.00	42.88	54.00	-11.12	37.05	5.83	Average	100	78	2	12350.00	55.41	74.00	-18.59	49.58	5.83	Peak	100	78	3	18525.00	41.08	54.00	-12.92	39.29	1.79	Average	100	310	4	18525.00	52.97	74.00	-21.03	51.18	1.79	Peak	100	310	5	24700.00	43.16	68.20	-25.04	34.84	8.32	Average	100	49	6	24700.00	55.76	88.20	-32.44	47.44	8.32	Peak	100	49
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																				
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																				
		dBuV/m			dBuV			cm	deg																																																																																				
1	12350.00	42.88	54.00	-11.12	37.05	5.83	Average	100	78																																																																																				
2	12350.00	55.41	74.00	-18.59	49.58	5.83	Peak	100	78																																																																																				
3	18525.00	41.08	54.00	-12.92	39.29	1.79	Average	100	310																																																																																				
4	18525.00	52.97	74.00	-21.03	51.18	1.79	Peak	100	310																																																																																				
5	24700.00	43.16	68.20	-25.04	34.84	8.32	Average	100	49																																																																																				
6	24700.00	55.76	88.20	-32.44	47.44	8.32	Peak	100	49																																																																																				

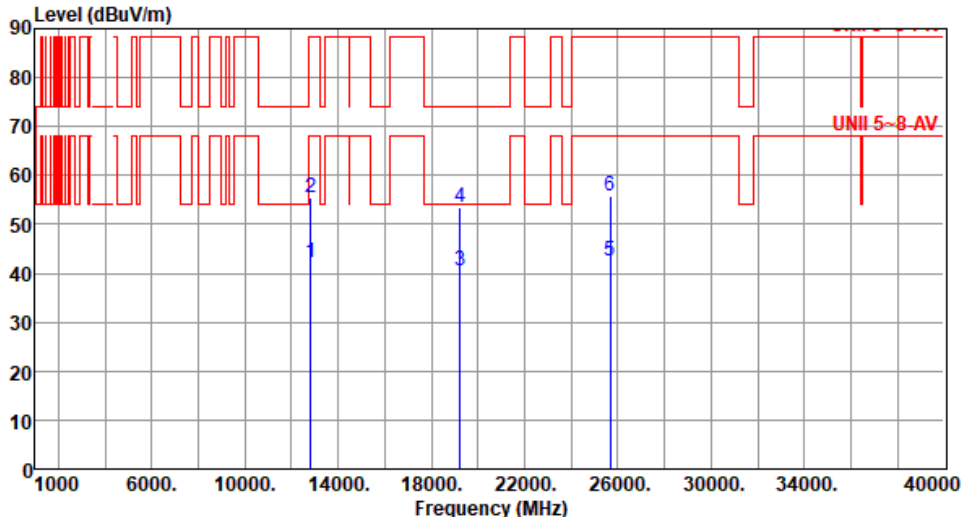


Modulation	11a	Test Freq. (MHz)	6415						
Polarization	Horizontal								
Test By :Paul Lin Temperature(°C):24 Humidity(%):64									
									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	12830.00	42.33	68.20	-25.87	36.18	6.15	Average	100	10
2	12830.00	55.48	88.20	-32.72	49.33	6.15	Peak	100	10
3	19245.00	40.57	54.00	-13.43	38.67	1.90	Average	100	82
4	19245.00	53.49	74.00	-20.51	51.59	1.90	Peak	100	82
5	25660.00	42.59	68.20	-25.61	34.54	8.05	Average	100	149
6	25660.00	55.83	88.20	-32.37	47.78	8.05	Peak	100	149
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).									

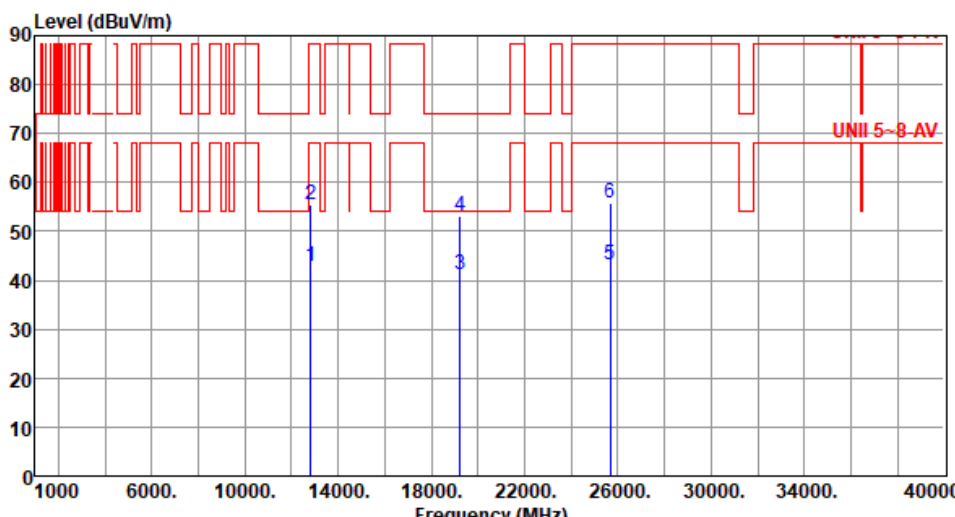

Modulation	11a	Test Freq. (MHz)	6415																																																																																											
Polarization	Vertical																																																																																													
Test By :Paul Lin Temperature(°C):24 Humidity(%):64																																																																																														
																																																																																														
	<table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>12830.00</td><td>42.84</td><td>68.20</td><td>-25.36</td><td>36.69</td><td>6.15</td><td>Average</td><td>100</td><td>83</td></tr><tr><td>2</td><td>12830.00</td><td>55.48</td><td>88.20</td><td>-32.72</td><td>49.33</td><td>6.15</td><td>Peak</td><td>100</td><td>83</td></tr><tr><td>3</td><td>19245.00</td><td>41.18</td><td>54.00</td><td>-12.82</td><td>39.28</td><td>1.90</td><td>Average</td><td>100</td><td>248</td></tr><tr><td>4</td><td>19245.00</td><td>53.16</td><td>74.00</td><td>-20.84</td><td>51.26</td><td>1.90</td><td>Peak</td><td>100</td><td>248</td></tr><tr><td>5</td><td>25660.00</td><td>43.11</td><td>68.20</td><td>-25.09</td><td>35.06</td><td>8.05</td><td>Average</td><td>100</td><td>167</td></tr><tr><td>6</td><td>25660.00</td><td>55.93</td><td>88.20</td><td>-32.27</td><td>47.88</td><td>8.05</td><td>Peak</td><td>100</td><td>167</td></tr></table>		Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	12830.00	42.84	68.20	-25.36	36.69	6.15	Average	100	83	2	12830.00	55.48	88.20	-32.72	49.33	6.15	Peak	100	83	3	19245.00	41.18	54.00	-12.82	39.28	1.90	Average	100	248	4	19245.00	53.16	74.00	-20.84	51.26	1.90	Peak	100	248	5	25660.00	43.11	68.20	-25.09	35.06	8.05	Average	100	167	6	25660.00	55.93	88.20	-32.27	47.88	8.05	Peak	100	167			
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																					
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																					
		dBuV/m			dBuV			cm	deg																																																																																					
1	12830.00	42.84	68.20	-25.36	36.69	6.15	Average	100	83																																																																																					
2	12830.00	55.48	88.20	-32.72	49.33	6.15	Peak	100	83																																																																																					
3	19245.00	41.18	54.00	-12.82	39.28	1.90	Average	100	248																																																																																					
4	19245.00	53.16	74.00	-20.84	51.26	1.90	Peak	100	248																																																																																					
5	25660.00	43.11	68.20	-25.09	35.06	8.05	Average	100	167																																																																																					
6	25660.00	55.93	88.20	-32.27	47.88	8.05	Peak	100	167																																																																																					
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																																														

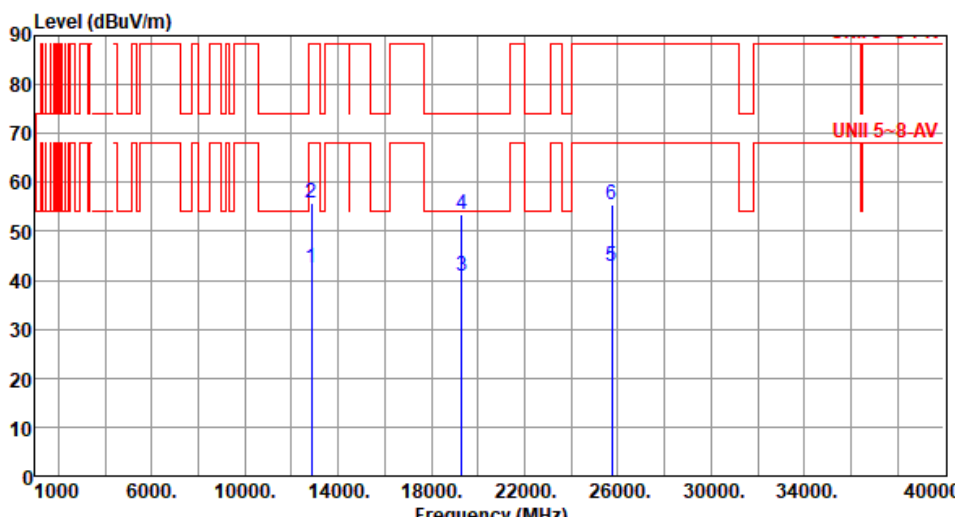


Modulation	11a	Test Freq. (MHz)	6435																																																																						
Polarization	Horizontal																																																																								
Test By :Paul Lin Temperature(°C):24 Humidity(%):64																																																																									
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>12870.00</td><td>42.63</td><td>68.20</td><td>-25.57</td><td>36.56</td><td>6.07</td><td>Average</td><td>100</td><td>79</td></tr><tr><td>2</td><td>12870.00</td><td>55.91</td><td>88.20</td><td>-32.29</td><td>49.84</td><td>6.07</td><td>Peak</td><td>100</td><td>79</td></tr><tr><td>3</td><td>19305.00</td><td>40.83</td><td>54.00</td><td>-13.17</td><td>39.02</td><td>1.81</td><td>Average</td><td>100</td><td>72</td></tr><tr><td>4</td><td>19305.00</td><td>53.52</td><td>74.00</td><td>-20.48</td><td>51.71</td><td>1.81</td><td>Peak</td><td>100</td><td>72</td></tr><tr><td>5</td><td>25740.00</td><td>42.82</td><td>68.20</td><td>-25.38</td><td>34.79</td><td>8.03</td><td>Average</td><td>100</td><td>88</td></tr><tr><td>6</td><td>25740.00</td><td>55.50</td><td>88.20</td><td>-32.70</td><td>47.47</td><td>8.03</td><td>Peak</td><td>100</td><td>88</td></tr></tbody></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	12870.00	42.63	68.20	-25.57	36.56	6.07	Average	100	79	2	12870.00	55.91	88.20	-32.29	49.84	6.07	Peak	100	79	3	19305.00	40.83	54.00	-13.17	39.02	1.81	Average	100	72	4	19305.00	53.52	74.00	-20.48	51.71	1.81	Peak	100	72	5	25740.00	42.82	68.20	-25.38	34.79	8.03	Average	100	88	6	25740.00	55.50	88.20	-32.70	47.47	8.03	Peak	100	88
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	12870.00	42.63	68.20	-25.57	36.56	6.07	Average	100	79																																																																
2	12870.00	55.91	88.20	-32.29	49.84	6.07	Peak	100	79																																																																
3	19305.00	40.83	54.00	-13.17	39.02	1.81	Average	100	72																																																																
4	19305.00	53.52	74.00	-20.48	51.71	1.81	Peak	100	72																																																																
5	25740.00	42.82	68.20	-25.38	34.79	8.03	Average	100	88																																																																
6	25740.00	55.50	88.20	-32.70	47.47	8.03	Peak	100	88																																																																




Modulation	11a	Test Freq. (MHz)	6435																																																																																										
Polarization	Vertical																																																																																												
Test By :Paul Lin Temperature(°C):24 Humidity(%):64																																																																																													
Level (dBUV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>12870.00</td><td>42.74</td><td>68.20</td><td>-25.46</td><td>36.67</td><td>6.07</td><td>Average</td><td>100</td><td>54</td></tr><tr><td>2</td><td>12870.00</td><td>55.51</td><td>88.20</td><td>-32.69</td><td>49.44</td><td>6.07</td><td>Peak</td><td>100</td><td>54</td></tr><tr><td>3</td><td>19305.00</td><td>40.90</td><td>54.00</td><td>-13.10</td><td>39.09</td><td>1.81</td><td>Average</td><td>100</td><td>61</td></tr><tr><td>4</td><td>19305.00</td><td>53.23</td><td>74.00</td><td>-20.77</td><td>51.42</td><td>1.81</td><td>Peak</td><td>100</td><td>61</td></tr><tr><td>5</td><td>25740.00</td><td>43.07</td><td>68.20</td><td>-25.13</td><td>35.04</td><td>8.03</td><td>Average</td><td>100</td><td>74</td></tr><tr><td>6</td><td>25740.00</td><td>55.87</td><td>88.20</td><td>-32.33</td><td>47.84</td><td>8.03</td><td>Peak</td><td>100</td><td>74</td></tr></tbody></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	12870.00	42.74	68.20	-25.46	36.67	6.07	Average	100	54	2	12870.00	55.51	88.20	-32.69	49.44	6.07	Peak	100	54	3	19305.00	40.90	54.00	-13.10	39.09	1.81	Average	100	61	4	19305.00	53.23	74.00	-20.77	51.42	1.81	Peak	100	61	5	25740.00	43.07	68.20	-25.13	35.04	8.03	Average	100	74	6	25740.00	55.87	88.20	-32.33	47.84	8.03	Peak	100	74
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																				
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																				
		dBuV/m			dBuV			cm	deg																																																																																				
1	12870.00	42.74	68.20	-25.46	36.67	6.07	Average	100	54																																																																																				
2	12870.00	55.51	88.20	-32.69	49.44	6.07	Peak	100	54																																																																																				
3	19305.00	40.90	54.00	-13.10	39.09	1.81	Average	100	61																																																																																				
4	19305.00	53.23	74.00	-20.77	51.42	1.81	Peak	100	61																																																																																				
5	25740.00	43.07	68.20	-25.13	35.04	8.03	Average	100	74																																																																																				
6	25740.00	55.87	88.20	-32.33	47.84	8.03	Peak	100	74																																																																																				

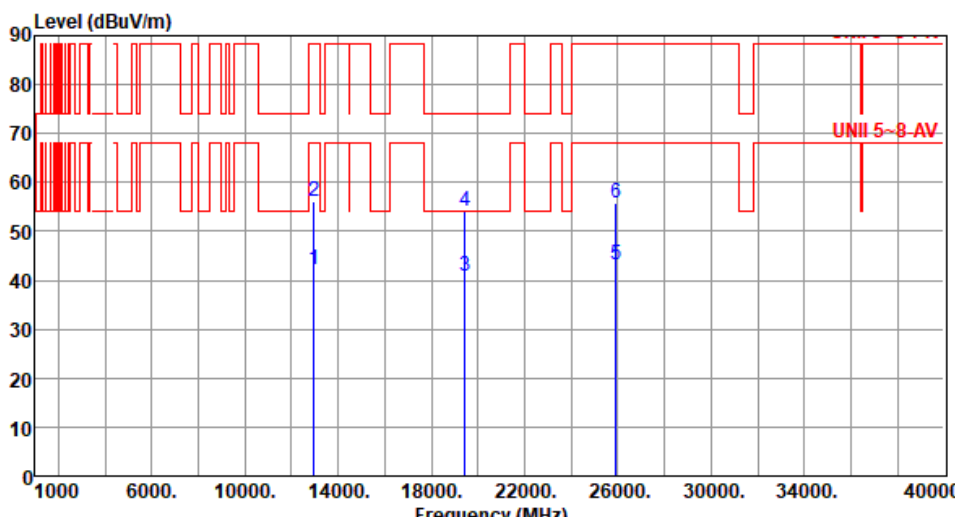

Modulation	11a	Test Freq. (MHz)	6475						
Polarization	Horizontal								
Test By :Paul Lin Temperature(°C):24 Humidity(%):64									
									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	12950.00	42.17	68.20	-26.03	36.07	6.10	Average	100	68
2	12950.00	56.19	88.20	-32.01	50.09	6.10	Peak	100	68
3	19425.00	40.76	54.00	-13.24	39.06	1.70	Average	100	135
4	19425.00	54.03	74.00	-19.97	52.33	1.70	Peak	100	135
5	25900.00	43.21	68.20	-24.99	35.22	7.99	Average	100	237
6	25900.00	55.71	88.20	-32.49	47.72	7.99	Peak	100	237
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).									

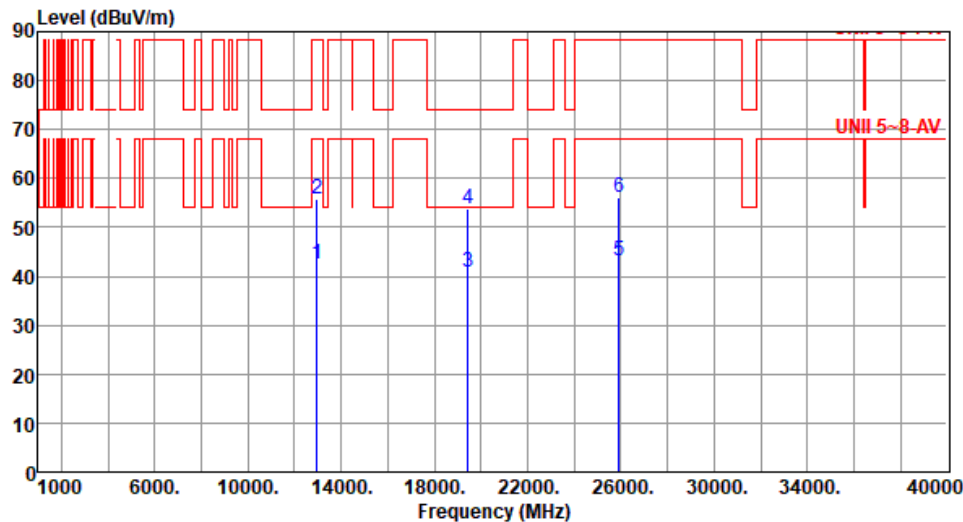


Modulation	11a	Test Freq. (MHz)	6475																																																																						
Polarization	Vertical																																																																								
Test By :Paul Lin Temperature(°C):24 Humidity(%):64																																																																									
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>12950.00</td><td>42.46</td><td>68.20</td><td>-25.74</td><td>36.36</td><td>6.10</td><td>Average</td><td>100</td><td>133</td></tr><tr><td>2</td><td>12950.00</td><td>55.92</td><td>88.20</td><td>-32.28</td><td>49.82</td><td>6.10</td><td>Peak</td><td>100</td><td>133</td></tr><tr><td>3</td><td>19425.00</td><td>40.88</td><td>54.00</td><td>-13.12</td><td>39.18</td><td>1.70</td><td>Average</td><td>100</td><td>344</td></tr><tr><td>4</td><td>19425.00</td><td>53.66</td><td>74.00</td><td>-20.34</td><td>51.96</td><td>1.70</td><td>Peak</td><td>100</td><td>344</td></tr><tr><td>5</td><td>25900.00</td><td>43.32</td><td>68.20</td><td>-24.88</td><td>35.33</td><td>7.99</td><td>Average</td><td>100</td><td>247</td></tr><tr><td>6</td><td>25900.00</td><td>56.08</td><td>88.20</td><td>-32.12</td><td>48.09</td><td>7.99</td><td>Peak</td><td>100</td><td>247</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	12950.00	42.46	68.20	-25.74	36.36	6.10	Average	100	133	2	12950.00	55.92	88.20	-32.28	49.82	6.10	Peak	100	133	3	19425.00	40.88	54.00	-13.12	39.18	1.70	Average	100	344	4	19425.00	53.66	74.00	-20.34	51.96	1.70	Peak	100	344	5	25900.00	43.32	68.20	-24.88	35.33	7.99	Average	100	247	6	25900.00	56.08	88.20	-32.12	48.09	7.99	Peak	100	247
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	12950.00	42.46	68.20	-25.74	36.36	6.10	Average	100	133																																																																
2	12950.00	55.92	88.20	-32.28	49.82	6.10	Peak	100	133																																																																
3	19425.00	40.88	54.00	-13.12	39.18	1.70	Average	100	344																																																																
4	19425.00	53.66	74.00	-20.34	51.96	1.70	Peak	100	344																																																																
5	25900.00	43.32	68.20	-24.88	35.33	7.99	Average	100	247																																																																
6	25900.00	56.08	88.20	-32.12	48.09	7.99	Peak	100	247																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									




Modulation	11a	Test Freq. (MHz)	6515
Polarization	Horizontal		
Test By :Paul Lin Temperature(°C):24 Humidity(%):64			
Level (dBuV/m)			

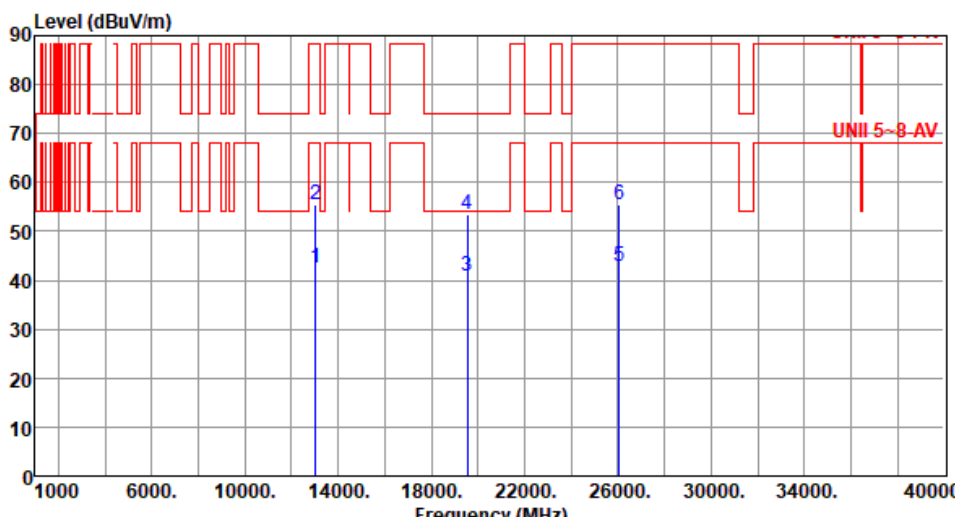


Modulation	11a	Test Freq. (MHz)	6515																																																																						
Polarization	Vertical																																																																								
Test By :Paul Lin Temperature(°C):24 Humidity(%):64																																																																									
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>13030.00</td><td>42.67</td><td>68.20</td><td>-25.53</td><td>36.66</td><td>6.01</td><td>Average</td><td>100</td><td>194</td></tr><tr><td>2</td><td>13030.00</td><td>55.49</td><td>88.20</td><td>-32.71</td><td>49.48</td><td>6.01</td><td>Peak</td><td>100</td><td>194</td></tr><tr><td>3</td><td>19545.00</td><td>40.88</td><td>54.00</td><td>-13.12</td><td>39.04</td><td>1.84</td><td>Average</td><td>100</td><td>82</td></tr><tr><td>4</td><td>19545.00</td><td>53.48</td><td>74.00</td><td>-20.52</td><td>51.64</td><td>1.84</td><td>Peak</td><td>100</td><td>82</td></tr><tr><td>5</td><td>26060.00</td><td>42.99</td><td>68.20</td><td>-25.21</td><td>34.92</td><td>8.07</td><td>Average</td><td>100</td><td>188</td></tr><tr><td>6</td><td>26060.00</td><td>55.46</td><td>88.20</td><td>-32.74</td><td>47.39</td><td>8.07</td><td>Peak</td><td>100</td><td>188</td></tr></tbody></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13030.00	42.67	68.20	-25.53	36.66	6.01	Average	100	194	2	13030.00	55.49	88.20	-32.71	49.48	6.01	Peak	100	194	3	19545.00	40.88	54.00	-13.12	39.04	1.84	Average	100	82	4	19545.00	53.48	74.00	-20.52	51.64	1.84	Peak	100	82	5	26060.00	42.99	68.20	-25.21	34.92	8.07	Average	100	188	6	26060.00	55.46	88.20	-32.74	47.39	8.07	Peak	100	188
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	13030.00	42.67	68.20	-25.53	36.66	6.01	Average	100	194																																																																
2	13030.00	55.49	88.20	-32.71	49.48	6.01	Peak	100	194																																																																
3	19545.00	40.88	54.00	-13.12	39.04	1.84	Average	100	82																																																																
4	19545.00	53.48	74.00	-20.52	51.64	1.84	Peak	100	82																																																																
5	26060.00	42.99	68.20	-25.21	34.92	8.07	Average	100	188																																																																
6	26060.00	55.46	88.20	-32.74	47.39	8.07	Peak	100	188																																																																

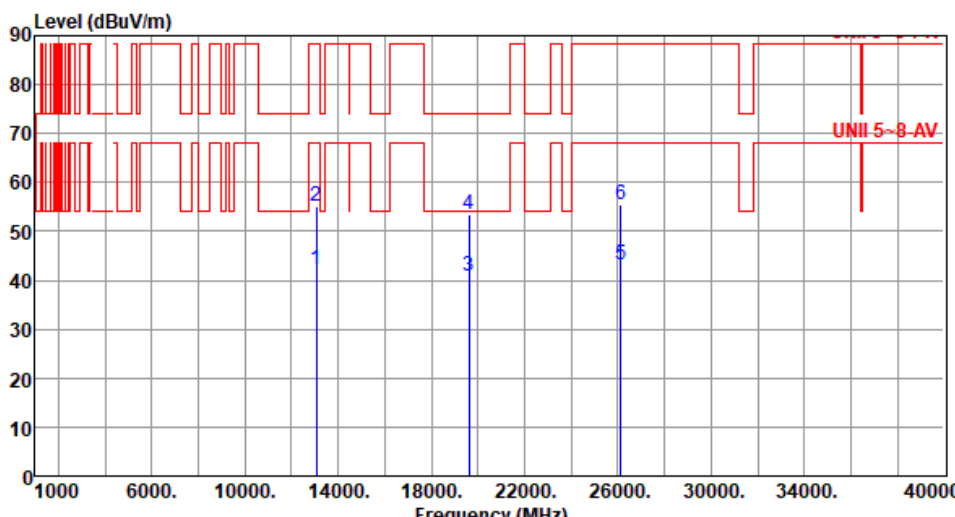


Modulation	11a	Test Freq. (MHz)	6535																																																																																										
Polarization	Horizontal																																																																																												
Test By :Paul Lin Temperature(°C):24 Humidity(%):64																																																																																													
Level (dBUV/m)  <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>13070.00</td><td>42.07</td><td>68.20</td><td>-26.13</td><td>36.27</td><td>5.80</td><td>Average</td><td>100</td><td>49</td></tr><tr><td>2</td><td>13070.00</td><td>55.09</td><td>88.20</td><td>-33.11</td><td>49.29</td><td>5.80</td><td>Peak</td><td>100</td><td>49</td></tr><tr><td>3</td><td>19605.00</td><td>40.78</td><td>54.00</td><td>-13.22</td><td>38.87</td><td>1.91</td><td>Average</td><td>100</td><td>89</td></tr><tr><td>4</td><td>19605.00</td><td>53.56</td><td>74.00</td><td>-20.44</td><td>51.65</td><td>1.91</td><td>Peak</td><td>100</td><td>89</td></tr><tr><td>5</td><td>26140.00</td><td>43.33</td><td>68.20</td><td>-24.87</td><td>35.25</td><td>8.08</td><td>Average</td><td>100</td><td>42</td></tr><tr><td>6</td><td>26140.00</td><td>55.60</td><td>88.20</td><td>-32.60</td><td>47.52</td><td>8.08</td><td>Peak</td><td>100</td><td>42</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	13070.00	42.07	68.20	-26.13	36.27	5.80	Average	100	49	2	13070.00	55.09	88.20	-33.11	49.29	5.80	Peak	100	49	3	19605.00	40.78	54.00	-13.22	38.87	1.91	Average	100	89	4	19605.00	53.56	74.00	-20.44	51.65	1.91	Peak	100	89	5	26140.00	43.33	68.20	-24.87	35.25	8.08	Average	100	42	6	26140.00	55.60	88.20	-32.60	47.52	8.08	Peak	100	42
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																				
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																				
		dBuV/m			dBuV			cm	deg																																																																																				
1	13070.00	42.07	68.20	-26.13	36.27	5.80	Average	100	49																																																																																				
2	13070.00	55.09	88.20	-33.11	49.29	5.80	Peak	100	49																																																																																				
3	19605.00	40.78	54.00	-13.22	38.87	1.91	Average	100	89																																																																																				
4	19605.00	53.56	74.00	-20.44	51.65	1.91	Peak	100	89																																																																																				
5	26140.00	43.33	68.20	-24.87	35.25	8.08	Average	100	42																																																																																				
6	26140.00	55.60	88.20	-32.60	47.52	8.08	Peak	100	42																																																																																				
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																																													

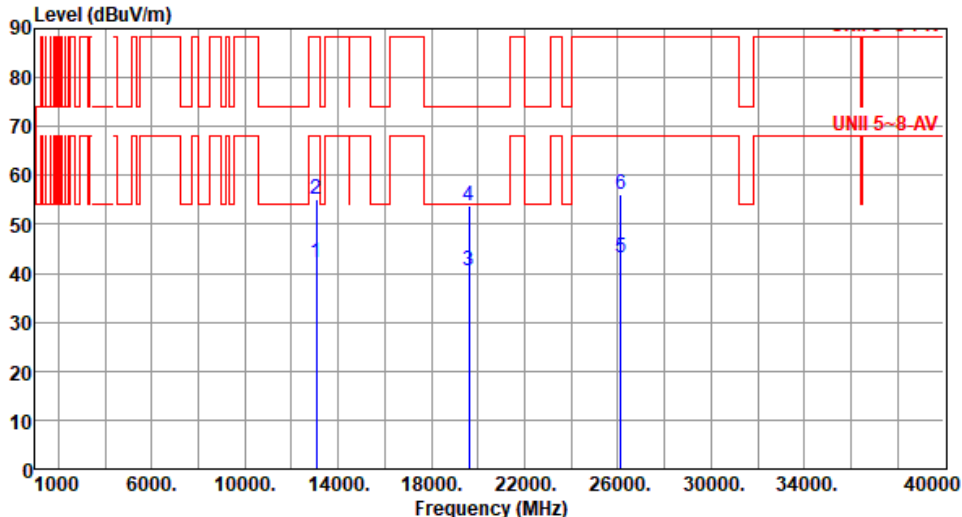


Modulation	11a		Test Freq. (MHz)		6535																																																																																														
Polarization	Vertical																																																																																																		
Test By :Paul Lin Temperature(°C):24 Humidity(%):64																																																																																																			
 <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>13070.00</td><td>42.22</td><td>68.20</td><td>-25.98</td><td>36.42</td><td>5.80</td><td>Average</td><td>100</td><td>50</td></tr><tr><td>2</td><td>13070.00</td><td>55.01</td><td>88.20</td><td>-33.19</td><td>49.21</td><td>5.80</td><td>Peak</td><td>100</td><td>50</td></tr><tr><td>3</td><td>19605.00</td><td>40.67</td><td>54.00</td><td>-13.33</td><td>38.76</td><td>1.91</td><td>Average</td><td>100</td><td>84</td></tr><tr><td>4</td><td>19605.00</td><td>53.72</td><td>74.00</td><td>-20.28</td><td>51.81</td><td>1.91</td><td>Peak</td><td>100</td><td>84</td></tr><tr><td>5</td><td>26140.00</td><td>43.31</td><td>68.20</td><td>-24.89</td><td>35.23</td><td>8.08</td><td>Average</td><td>100</td><td>65</td></tr><tr><td>6</td><td>26140.00</td><td>56.05</td><td>88.20</td><td>-32.15</td><td>47.97</td><td>8.08</td><td>Peak</td><td>100</td><td>65</td></tr></table>											Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	13070.00	42.22	68.20	-25.98	36.42	5.80	Average	100	50	2	13070.00	55.01	88.20	-33.19	49.21	5.80	Peak	100	50	3	19605.00	40.67	54.00	-13.33	38.76	1.91	Average	100	84	4	19605.00	53.72	74.00	-20.28	51.81	1.91	Peak	100	84	5	26140.00	43.31	68.20	-24.89	35.23	8.08	Average	100	65	6	26140.00	56.05	88.20	-32.15	47.97	8.08	Peak	100	65
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																										
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																										
		dBuV/m			dBuV			cm	deg																																																																																										
1	13070.00	42.22	68.20	-25.98	36.42	5.80	Average	100	50																																																																																										
2	13070.00	55.01	88.20	-33.19	49.21	5.80	Peak	100	50																																																																																										
3	19605.00	40.67	54.00	-13.33	38.76	1.91	Average	100	84																																																																																										
4	19605.00	53.72	74.00	-20.28	51.81	1.91	Peak	100	84																																																																																										
5	26140.00	43.31	68.20	-24.89	35.23	8.08	Average	100	65																																																																																										
6	26140.00	56.05	88.20	-32.15	47.97	8.08	Peak	100	65																																																																																										
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																																																			

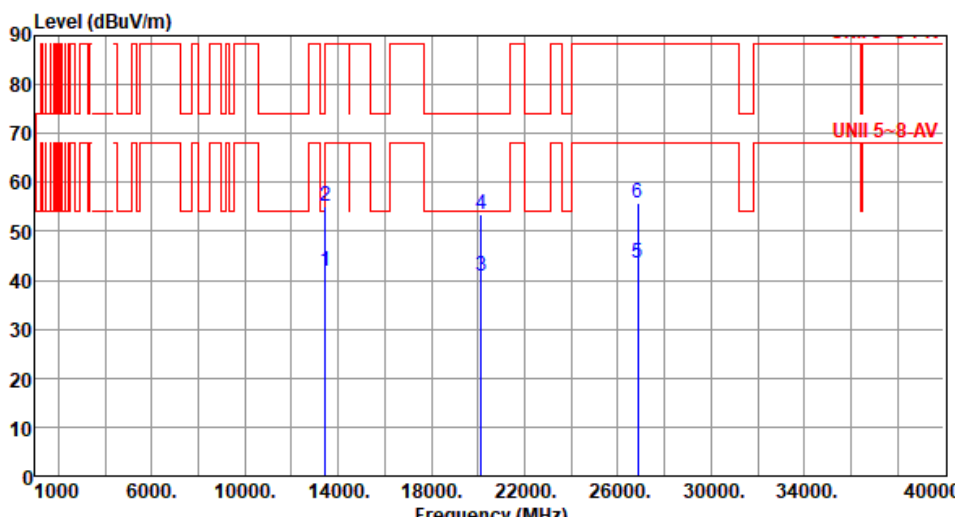


Modulation	11a	Test Freq. (MHz)	6715																																																																						
Polarization	Horizontal																																																																								
Test By :Paul Lin Temperature(°C):24 Humidity(%):64																																																																									
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>13430.00</td><td>42.01</td><td>68.20</td><td>-26.19</td><td>36.06</td><td>5.95</td><td>Average</td><td>100</td><td>58</td></tr><tr><td>2</td><td>13430.00</td><td>55.13</td><td>88.20</td><td>-33.07</td><td>49.18</td><td>5.95</td><td>Peak</td><td>100</td><td>58</td></tr><tr><td>3</td><td>20145.00</td><td>40.89</td><td>54.00</td><td>-13.11</td><td>38.24</td><td>2.65</td><td>Average</td><td>100</td><td>3</td></tr><tr><td>4</td><td>20145.00</td><td>53.60</td><td>74.00</td><td>-20.40</td><td>50.95</td><td>2.65</td><td>Peak</td><td>100</td><td>3</td></tr><tr><td>5</td><td>26860.00</td><td>43.46</td><td>68.20</td><td>-24.74</td><td>35.01</td><td>8.45</td><td>Average</td><td>100</td><td>18</td></tr><tr><td>6</td><td>26860.00</td><td>55.93</td><td>88.20</td><td>-32.27</td><td>47.48</td><td>8.45</td><td>Peak</td><td>100</td><td>18</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13430.00	42.01	68.20	-26.19	36.06	5.95	Average	100	58	2	13430.00	55.13	88.20	-33.07	49.18	5.95	Peak	100	58	3	20145.00	40.89	54.00	-13.11	38.24	2.65	Average	100	3	4	20145.00	53.60	74.00	-20.40	50.95	2.65	Peak	100	3	5	26860.00	43.46	68.20	-24.74	35.01	8.45	Average	100	18	6	26860.00	55.93	88.20	-32.27	47.48	8.45	Peak	100	18
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	13430.00	42.01	68.20	-26.19	36.06	5.95	Average	100	58																																																																
2	13430.00	55.13	88.20	-33.07	49.18	5.95	Peak	100	58																																																																
3	20145.00	40.89	54.00	-13.11	38.24	2.65	Average	100	3																																																																
4	20145.00	53.60	74.00	-20.40	50.95	2.65	Peak	100	3																																																																
5	26860.00	43.46	68.20	-24.74	35.01	8.45	Average	100	18																																																																
6	26860.00	55.93	88.20	-32.27	47.48	8.45	Peak	100	18																																																																

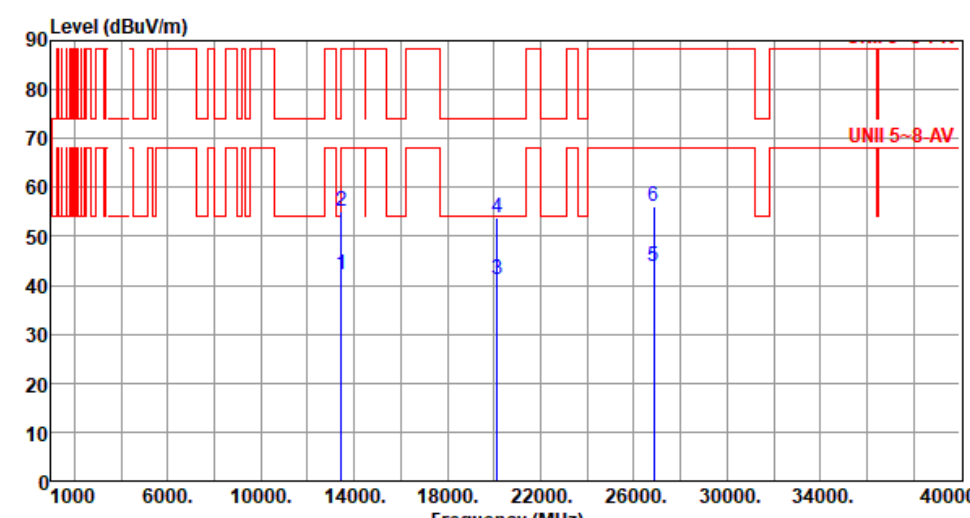

Modulation	11a	Test Freq. (MHz)	6715																																																																						
Polarization	Vertical																																																																								
Test By :Paul Lin Temperature(°C):24 Humidity(%):64																																																																									
Level (dBUV/m)  <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>13430.00</td><td>42.28</td><td>68.20</td><td>-25.92</td><td>36.33</td><td>5.95</td><td>Average</td><td>100</td><td>105</td></tr><tr><td>2</td><td>13430.00</td><td>54.97</td><td>88.20</td><td>-33.23</td><td>49.02</td><td>5.95</td><td>Peak</td><td>100</td><td>105</td></tr><tr><td>3</td><td>20145.00</td><td>41.14</td><td>54.00</td><td>-12.86</td><td>38.49</td><td>2.65</td><td>Average</td><td>100</td><td>28</td></tr><tr><td>4</td><td>20145.00</td><td>53.91</td><td>74.00</td><td>-20.09</td><td>51.26</td><td>2.65</td><td>Peak</td><td>100</td><td>28</td></tr><tr><td>5</td><td>26860.00</td><td>43.71</td><td>68.20</td><td>-24.49</td><td>35.26</td><td>8.45</td><td>Average</td><td>100</td><td>49</td></tr><tr><td>6</td><td>26860.00</td><td>56.23</td><td>88.20</td><td>-31.97</td><td>47.78</td><td>8.45</td><td>Peak</td><td>100</td><td>49</td></tr></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13430.00	42.28	68.20	-25.92	36.33	5.95	Average	100	105	2	13430.00	54.97	88.20	-33.23	49.02	5.95	Peak	100	105	3	20145.00	41.14	54.00	-12.86	38.49	2.65	Average	100	28	4	20145.00	53.91	74.00	-20.09	51.26	2.65	Peak	100	28	5	26860.00	43.71	68.20	-24.49	35.26	8.45	Average	100	49	6	26860.00	56.23	88.20	-31.97	47.78	8.45	Peak	100	49
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	13430.00	42.28	68.20	-25.92	36.33	5.95	Average	100	105																																																																
2	13430.00	54.97	88.20	-33.23	49.02	5.95	Peak	100	105																																																																
3	20145.00	41.14	54.00	-12.86	38.49	2.65	Average	100	28																																																																
4	20145.00	53.91	74.00	-20.09	51.26	2.65	Peak	100	28																																																																
5	26860.00	43.71	68.20	-24.49	35.26	8.45	Average	100	49																																																																
6	26860.00	56.23	88.20	-31.97	47.78	8.45	Peak	100	49																																																																

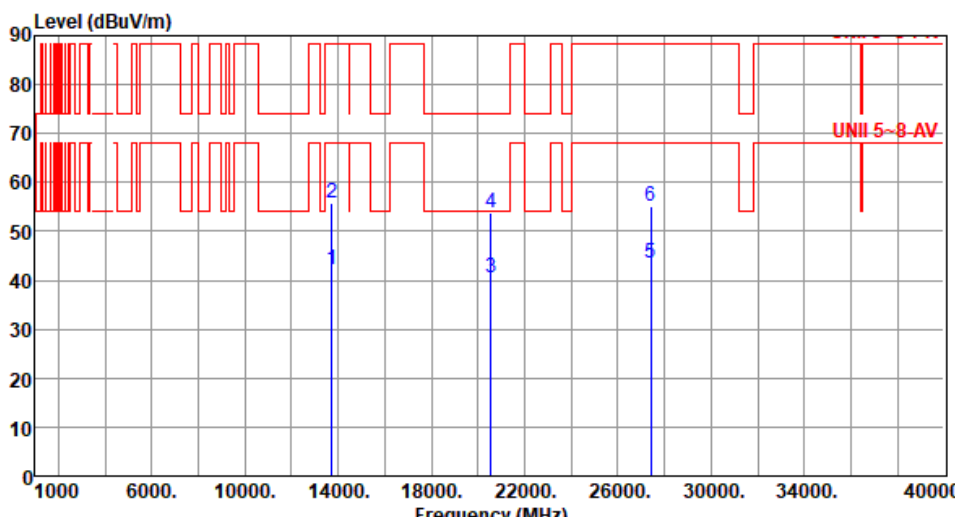

Modulation	11a	Test Freq. (MHz)	6855																																																																																										
Polarization	Horizontal																																																																																												
Test By :Paul Lin Temperature(°C):24 Humidity(%):64																																																																																													
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>13710.00</td><td>42.05</td><td>68.20</td><td>-26.15</td><td>36.02</td><td>6.03</td><td>Average</td><td>100</td><td>69</td></tr><tr><td>2</td><td>13710.00</td><td>55.78</td><td>88.20</td><td>-32.42</td><td>49.75</td><td>6.03</td><td>Peak</td><td>100</td><td>69</td></tr><tr><td>3</td><td>20565.00</td><td>40.51</td><td>54.00</td><td>-13.49</td><td>37.40</td><td>3.11</td><td>Average</td><td>100</td><td>114</td></tr><tr><td>4</td><td>20565.00</td><td>53.84</td><td>74.00</td><td>-20.16</td><td>50.73</td><td>3.11</td><td>Peak</td><td>100</td><td>114</td></tr><tr><td>5</td><td>27420.00</td><td>43.61</td><td>68.20</td><td>-24.59</td><td>35.13</td><td>8.48</td><td>Average</td><td>100</td><td>289</td></tr><tr><td>6</td><td>27420.00</td><td>55.17</td><td>88.20</td><td>-33.03</td><td>46.69</td><td>8.48</td><td>Peak</td><td>100</td><td>289</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	13710.00	42.05	68.20	-26.15	36.02	6.03	Average	100	69	2	13710.00	55.78	88.20	-32.42	49.75	6.03	Peak	100	69	3	20565.00	40.51	54.00	-13.49	37.40	3.11	Average	100	114	4	20565.00	53.84	74.00	-20.16	50.73	3.11	Peak	100	114	5	27420.00	43.61	68.20	-24.59	35.13	8.48	Average	100	289	6	27420.00	55.17	88.20	-33.03	46.69	8.48	Peak	100	289
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																				
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																				
		dBuV/m			dBuV			cm	deg																																																																																				
1	13710.00	42.05	68.20	-26.15	36.02	6.03	Average	100	69																																																																																				
2	13710.00	55.78	88.20	-32.42	49.75	6.03	Peak	100	69																																																																																				
3	20565.00	40.51	54.00	-13.49	37.40	3.11	Average	100	114																																																																																				
4	20565.00	53.84	74.00	-20.16	50.73	3.11	Peak	100	114																																																																																				
5	27420.00	43.61	68.20	-24.59	35.13	8.48	Average	100	289																																																																																				
6	27420.00	55.17	88.20	-33.03	46.69	8.48	Peak	100	289																																																																																				
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																													




Modulation	11a	Test Freq. (MHz)	6855
Polarization	Vertical		
Test By :Paul Lin Temperature(°C):24 Humidity(%):64			
Level (dBuV/m)			



Modulation	11a	Test Freq. (MHz)	6875																																																																						
Polarization	Horizontal																																																																								
Test By :Paul Lin Temperature(°C):24 Humidity(%):64																																																																									
Level (dBuV/m) 90 80 70 60 50 40 30 20 10 0 1000 6000 10000 14000 18000 22000 26000 30000 34000 40000 Frequency (MHz) 1 2 3 4 5 6 13750.00 13750.00 20625.00 20625.00 27500.00 27500.00 44.15 57.74 40.99 54.66 43.03 55.39 68.20 88.20 54.00 74.00 68.20 88.20 -24.05 -30.46 -13.01 -19.34 -25.17 -32.81 38.15 51.74 37.81 51.48 34.52 46.88 6.00 6.00 3.18 3.18 8.51 8.51 Average Peak Average Peak Average Peak 100 100 100 100 100 100 321 321 67 67 25 25 UNI 5~8-AV <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>13750.00</td><td>44.15</td><td>68.20</td><td>-24.05</td><td>38.15</td><td>6.00</td><td>Average</td><td>100</td><td>321</td></tr><tr><td>2</td><td>13750.00</td><td>57.74</td><td>88.20</td><td>-30.46</td><td>51.74</td><td>6.00</td><td>Peak</td><td>100</td><td>321</td></tr><tr><td>3</td><td>20625.00</td><td>40.99</td><td>54.00</td><td>-13.01</td><td>37.81</td><td>3.18</td><td>Average</td><td>100</td><td>67</td></tr><tr><td>4</td><td>20625.00</td><td>54.66</td><td>74.00</td><td>-19.34</td><td>51.48</td><td>3.18</td><td>Peak</td><td>100</td><td>67</td></tr><tr><td>5</td><td>27500.00</td><td>43.03</td><td>68.20</td><td>-25.17</td><td>34.52</td><td>8.51</td><td>Average</td><td>100</td><td>25</td></tr><tr><td>6</td><td>27500.00</td><td>55.39</td><td>88.20</td><td>-32.81</td><td>46.88</td><td>8.51</td><td>Peak</td><td>100</td><td>25</td></tr></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13750.00	44.15	68.20	-24.05	38.15	6.00	Average	100	321	2	13750.00	57.74	88.20	-30.46	51.74	6.00	Peak	100	321	3	20625.00	40.99	54.00	-13.01	37.81	3.18	Average	100	67	4	20625.00	54.66	74.00	-19.34	51.48	3.18	Peak	100	67	5	27500.00	43.03	68.20	-25.17	34.52	8.51	Average	100	25	6	27500.00	55.39	88.20	-32.81	46.88	8.51	Peak	100	25
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	13750.00	44.15	68.20	-24.05	38.15	6.00	Average	100	321																																																																
2	13750.00	57.74	88.20	-30.46	51.74	6.00	Peak	100	321																																																																
3	20625.00	40.99	54.00	-13.01	37.81	3.18	Average	100	67																																																																
4	20625.00	54.66	74.00	-19.34	51.48	3.18	Peak	100	67																																																																
5	27500.00	43.03	68.20	-25.17	34.52	8.51	Average	100	25																																																																
6	27500.00	55.39	88.20	-32.81	46.88	8.51	Peak	100	25																																																																

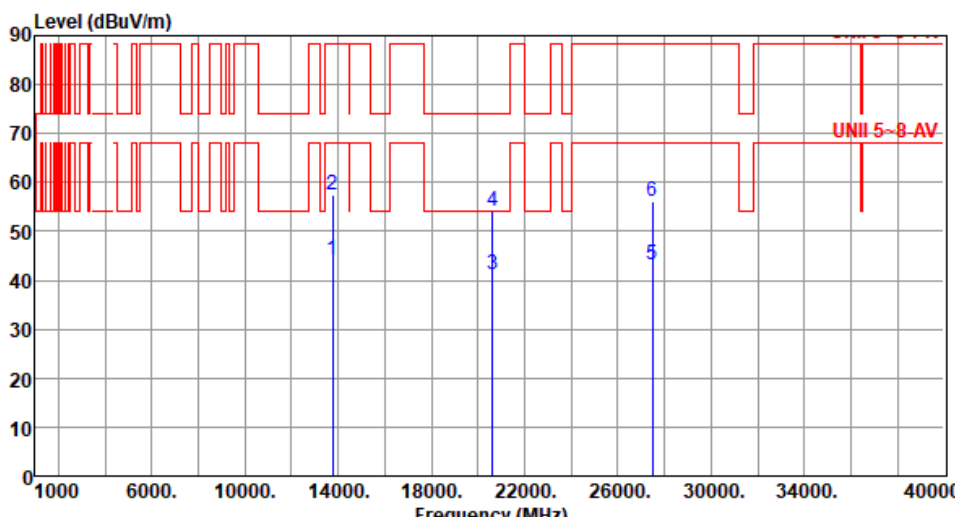


Modulation	11a	Test Freq. (MHz)	6875																																																																																											
Polarization	Vertical																																																																																													
Test By :Paul Lin Temperature(°C):24 Humidity(%):64																																																																																														
																																																																																														
	<table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>13750.00</td><td>44.19</td><td>68.20</td><td>-24.01</td><td>38.19</td><td>6.00</td><td>Average</td><td>100</td><td>258</td></tr><tr><td>2</td><td>13750.00</td><td>57.45</td><td>88.20</td><td>-30.75</td><td>51.45</td><td>6.00</td><td>Peak</td><td>100</td><td>258</td></tr><tr><td>3</td><td>20625.00</td><td>41.29</td><td>54.00</td><td>-12.71</td><td>38.11</td><td>3.18</td><td>Average</td><td>100</td><td>306</td></tr><tr><td>4</td><td>20625.00</td><td>54.04</td><td>74.00</td><td>-19.96</td><td>50.86</td><td>3.18</td><td>Peak</td><td>100</td><td>306</td></tr><tr><td>5</td><td>27500.00</td><td>43.13</td><td>68.20</td><td>-25.07</td><td>34.62</td><td>8.51</td><td>Average</td><td>100</td><td>8</td></tr><tr><td>6</td><td>27500.00</td><td>55.97</td><td>88.20</td><td>-32.23</td><td>47.46</td><td>8.51</td><td>Peak</td><td>100</td><td>8</td></tr></table>		Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	13750.00	44.19	68.20	-24.01	38.19	6.00	Average	100	258	2	13750.00	57.45	88.20	-30.75	51.45	6.00	Peak	100	258	3	20625.00	41.29	54.00	-12.71	38.11	3.18	Average	100	306	4	20625.00	54.04	74.00	-19.96	50.86	3.18	Peak	100	306	5	27500.00	43.13	68.20	-25.07	34.62	8.51	Average	100	8	6	27500.00	55.97	88.20	-32.23	47.46	8.51	Peak	100	8			
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																					
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																					
		dBuV/m			dBuV			cm	deg																																																																																					
1	13750.00	44.19	68.20	-24.01	38.19	6.00	Average	100	258																																																																																					
2	13750.00	57.45	88.20	-30.75	51.45	6.00	Peak	100	258																																																																																					
3	20625.00	41.29	54.00	-12.71	38.11	3.18	Average	100	306																																																																																					
4	20625.00	54.04	74.00	-19.96	50.86	3.18	Peak	100	306																																																																																					
5	27500.00	43.13	68.20	-25.07	34.62	8.51	Average	100	8																																																																																					
6	27500.00	55.97	88.20	-32.23	47.46	8.51	Peak	100	8																																																																																					
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																																														




Modulation	11a	Test Freq. (MHz)	6895
Polarization	Horizontal		
Test By :Paul Lin Temperature(°C):24 Humidity(%):64			
Level (dBuV/m) <			

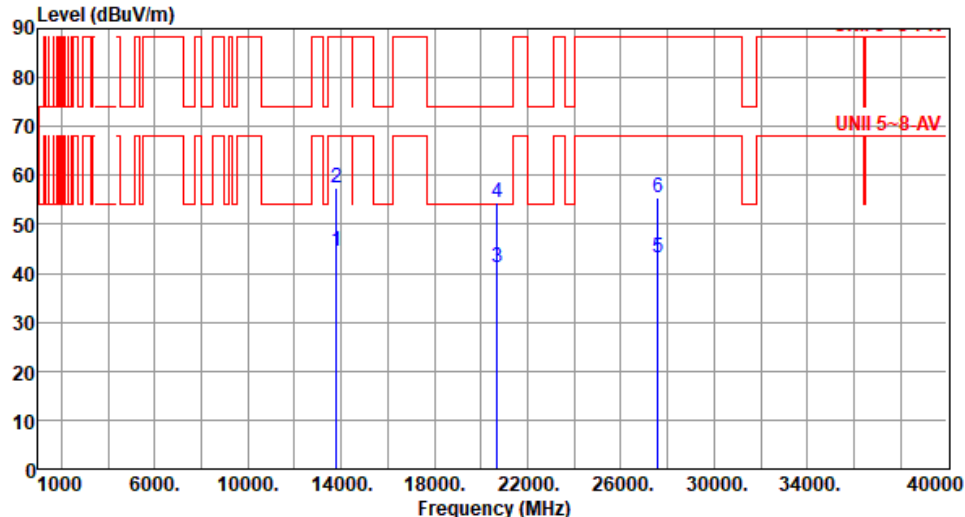

Modulation	11a	Test Freq. (MHz)	6895						
Polarization	Vertical								
Test By :Paul Lin Temperature(°C):24 Humidity(%):64									
Level (dBuV/m)  Frequency (MHz)									
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table
		dBuV/m			dBuV			cm	deg
1	13790.00	44.38	68.20	-23.82	38.16	6.22	Average	100	16
2	13790.00	57.54	88.20	-30.66	51.32	6.22	Peak	100	16
3	20685.00	41.21	54.00	-12.79	37.96	3.25	Average	100	144
4	20685.00	54.40	74.00	-19.60	51.15	3.25	Peak	100	144
5	27580.00	43.20	68.20	-25.00	34.65	8.55	Average	100	77
6	27580.00	55.54	88.20	-32.66	46.99	8.55	Peak	100	77

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

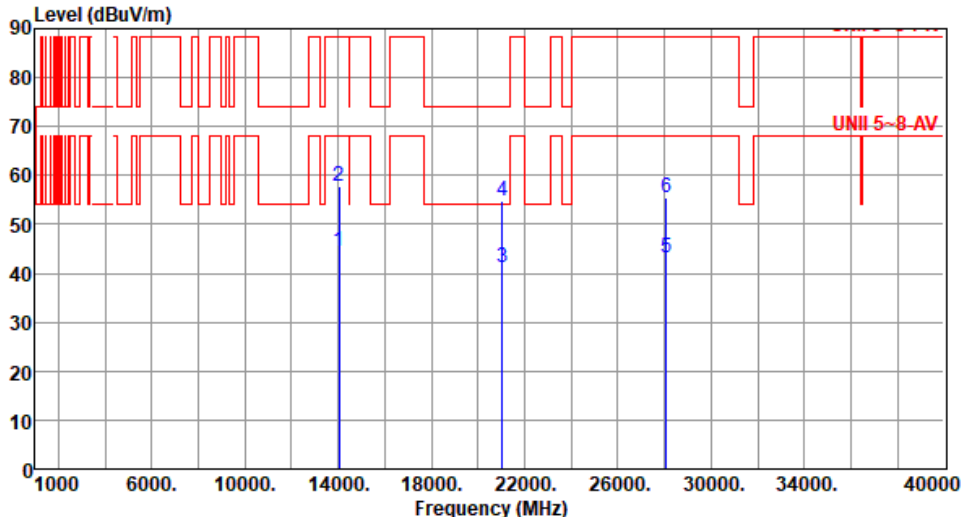

Modulation	11a	Test Freq. (MHz)	7015						
Polarization	Horizontal								
Test By :Paul Lin Temperature(°C):24 Humidity(%):64									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	14030.00	44.59	68.20	-23.61	37.85	6.74	Average	100	68
2	14030.00	57.67	88.20	-30.53	50.93	6.74	Peak	100	68
3	21045.00	41.26	54.00	-12.74	37.37	3.89	Average	100	90
4	21045.00	54.75	74.00	-19.25	50.86	3.89	Peak	100	90
5	28060.00	43.21	68.20	-24.99	34.30	8.91	Average	100	85
6	28060.00	55.49	88.20	-32.71	46.58	8.91	Peak	100	85
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).									



Modulation	11a	Test Freq. (MHz)	7015																																																																						
Polarization	Vertical																																																																								
Test By :Paul Lin Temperature(°C):24 Humidity(%):64																																																																									
Level (dBuV/m) UNII 5-8-AV Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>14030.00</td><td>44.62</td><td>68.20</td><td>-23.58</td><td>37.88</td><td>6.74</td><td>Average</td><td>100</td><td>316</td></tr><tr><td>2</td><td>14030.00</td><td>57.61</td><td>88.20</td><td>-30.59</td><td>50.87</td><td>6.74</td><td>Peak</td><td>100</td><td>316</td></tr><tr><td>3</td><td>21045.00</td><td>44.98</td><td>54.00</td><td>-9.02</td><td>41.09</td><td>3.89</td><td>Average</td><td>100</td><td>299</td></tr><tr><td>4</td><td>21045.00</td><td>58.55</td><td>74.00</td><td>-15.45</td><td>54.66</td><td>3.89</td><td>Peak</td><td>100</td><td>299</td></tr><tr><td>5</td><td>28060.00</td><td>43.43</td><td>68.20</td><td>-24.77</td><td>34.52</td><td>8.91</td><td>Average</td><td>100</td><td>164</td></tr><tr><td>6</td><td>28060.00</td><td>55.62</td><td>88.20</td><td>-32.58</td><td>46.71</td><td>8.91</td><td>Peak</td><td>100</td><td>164</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	14030.00	44.62	68.20	-23.58	37.88	6.74	Average	100	316	2	14030.00	57.61	88.20	-30.59	50.87	6.74	Peak	100	316	3	21045.00	44.98	54.00	-9.02	41.09	3.89	Average	100	299	4	21045.00	58.55	74.00	-15.45	54.66	3.89	Peak	100	299	5	28060.00	43.43	68.20	-24.77	34.52	8.91	Average	100	164	6	28060.00	55.62	88.20	-32.58	46.71	8.91	Peak	100	164
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	14030.00	44.62	68.20	-23.58	37.88	6.74	Average	100	316																																																																
2	14030.00	57.61	88.20	-30.59	50.87	6.74	Peak	100	316																																																																
3	21045.00	44.98	54.00	-9.02	41.09	3.89	Average	100	299																																																																
4	21045.00	58.55	74.00	-15.45	54.66	3.89	Peak	100	299																																																																
5	28060.00	43.43	68.20	-24.77	34.52	8.91	Average	100	164																																																																
6	28060.00	55.62	88.20	-32.58	46.71	8.91	Peak	100	164																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									




Modulation	11a	Test Freq. (MHz)	7095																																																																																										
Polarization	Horizontal																																																																																												
Test By :Paul Lin Temperature(°C):24 Humidity(%):64																																																																																													
Level (dBuV/m) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>14190.00</td><td>44.34</td><td>68.20</td><td>-23.86</td><td>37.44</td><td>6.90</td><td>Average</td><td>100</td><td>67</td></tr><tr><td>2</td><td>14190.00</td><td>57.48</td><td>88.20</td><td>-30.72</td><td>50.58</td><td>6.90</td><td>Peak</td><td>100</td><td>67</td></tr><tr><td>3</td><td>21285.00</td><td>41.02</td><td>54.00</td><td>-12.98</td><td>36.83</td><td>4.19</td><td>Average</td><td>100</td><td>285</td></tr><tr><td>4</td><td>21285.00</td><td>54.61</td><td>74.00</td><td>-19.39</td><td>50.42</td><td>4.19</td><td>Peak</td><td>100</td><td>285</td></tr><tr><td>5</td><td>28380.00</td><td>43.08</td><td>68.20</td><td>-25.12</td><td>33.88</td><td>9.20</td><td>Average</td><td>100</td><td>107</td></tr><tr><td>6</td><td>28380.00</td><td>55.84</td><td>88.20</td><td>-32.36</td><td>46.64</td><td>9.20</td><td>Peak</td><td>100</td><td>107</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	14190.00	44.34	68.20	-23.86	37.44	6.90	Average	100	67	2	14190.00	57.48	88.20	-30.72	50.58	6.90	Peak	100	67	3	21285.00	41.02	54.00	-12.98	36.83	4.19	Average	100	285	4	21285.00	54.61	74.00	-19.39	50.42	4.19	Peak	100	285	5	28380.00	43.08	68.20	-25.12	33.88	9.20	Average	100	107	6	28380.00	55.84	88.20	-32.36	46.64	9.20	Peak	100	107
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																				
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																				
		dBuV/m			dBuV			cm	deg																																																																																				
1	14190.00	44.34	68.20	-23.86	37.44	6.90	Average	100	67																																																																																				
2	14190.00	57.48	88.20	-30.72	50.58	6.90	Peak	100	67																																																																																				
3	21285.00	41.02	54.00	-12.98	36.83	4.19	Average	100	285																																																																																				
4	21285.00	54.61	74.00	-19.39	50.42	4.19	Peak	100	285																																																																																				
5	28380.00	43.08	68.20	-25.12	33.88	9.20	Average	100	107																																																																																				
6	28380.00	55.84	88.20	-32.36	46.64	9.20	Peak	100	107																																																																																				
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																													



Modulation	11a	Test Freq. (MHz)	7095						
Polarization	Vertical								
Test By :Paul Lin Temperature(°C):24 Humidity(%):64									
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
	MHz	level			reading			High	Table
		dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1	14190.00	44.56	68.20	-23.64	37.66	6.90	Average	100	22
2	14190.00	57.48	88.20	-30.72	50.58	6.90	Peak	100	22
3	21285.00	41.33	54.00	-12.67	37.14	4.19	Average	100	266
4	21285.00	54.86	74.00	-19.14	50.67	4.19	Peak	100	266
5	28380.00	43.63	68.20	-24.57	34.43	9.20	Average	100	334
6	28380.00	55.89	88.20	-32.31	46.69	9.20	Peak	100	334


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

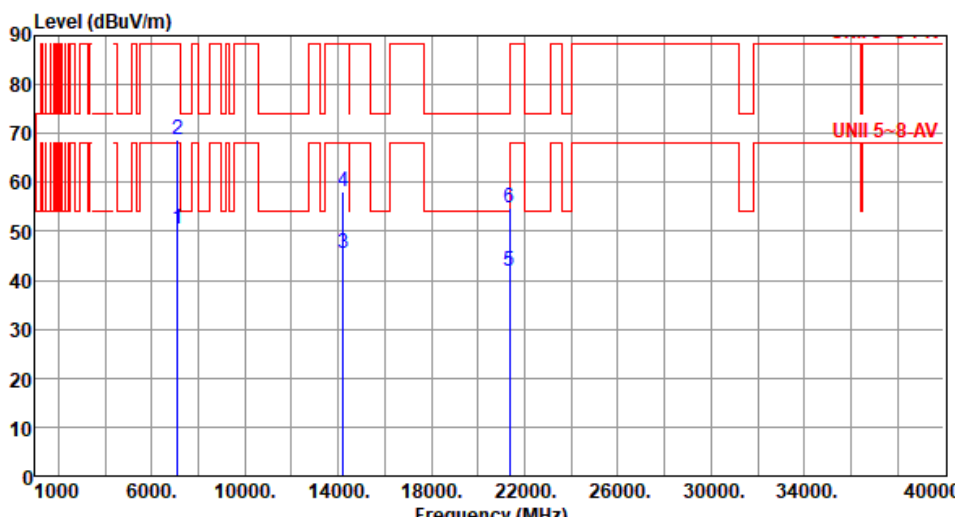


Modulation	11a	Test Freq. (MHz)	7115						
Polarization	Horizontal								
Test By :Paul Lin Temperature(°C):24 Humidity(%):64									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	7125.00	50.49	68.20	-17.71	45.63	4.86	Average	126	277
2	7125.00	68.78	88.20	-19.42	63.92	4.86	Peak	126	277
3	14230.00	45.49	68.20	-22.71	38.37	7.12	Average	100	25
4	14230.00	58.17	88.20	-30.03	51.05	7.12	Peak	100	25
5	21345.00	41.87	54.00	-12.13	37.62	4.25	Average	100	75
6	21345.00	54.81	74.00	-19.19	50.56	4.25	Peak	100	75

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

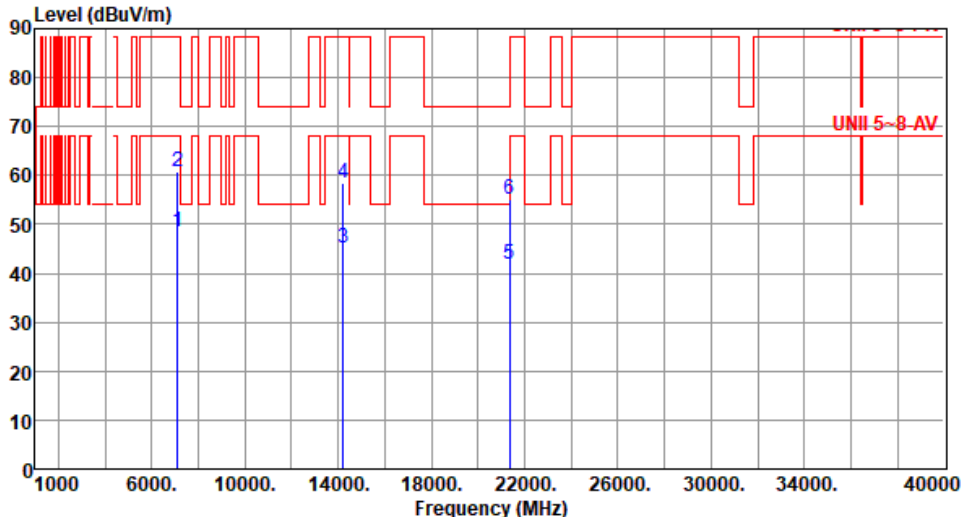

Modulation	11a	Test Freq. (MHz)	7115																																																																																											
Polarization	Vertical																																																																																													
Test By :Paul Lin Temperature(°C):24 Humidity(%):64																																																																																														
																																																																																														
	<table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>7125.00</td><td>48.59</td><td>68.20</td><td>-19.61</td><td>43.73</td><td>4.86</td><td>Average</td><td>115</td><td>154</td></tr><tr><td>2</td><td>7125.00</td><td>60.70</td><td>88.20</td><td>-27.50</td><td>55.84</td><td>4.86</td><td>Peak</td><td>115</td><td>154</td></tr><tr><td>3</td><td>14230.00</td><td>45.32</td><td>68.20</td><td>-22.88</td><td>38.20</td><td>7.12</td><td>Average</td><td>100</td><td>125</td></tr><tr><td>4</td><td>14230.00</td><td>58.50</td><td>88.20</td><td>-29.70</td><td>51.38</td><td>7.12</td><td>Peak</td><td>100</td><td>125</td></tr><tr><td>5</td><td>21345.00</td><td>41.71</td><td>54.00</td><td>-12.29</td><td>37.46</td><td>4.25</td><td>Average</td><td>100</td><td>68</td></tr><tr><td>6</td><td>21345.00</td><td>55.02</td><td>74.00</td><td>-18.98</td><td>50.77</td><td>4.25</td><td>Peak</td><td>100</td><td>68</td></tr></table>		Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	7125.00	48.59	68.20	-19.61	43.73	4.86	Average	115	154	2	7125.00	60.70	88.20	-27.50	55.84	4.86	Peak	115	154	3	14230.00	45.32	68.20	-22.88	38.20	7.12	Average	100	125	4	14230.00	58.50	88.20	-29.70	51.38	7.12	Peak	100	125	5	21345.00	41.71	54.00	-12.29	37.46	4.25	Average	100	68	6	21345.00	55.02	74.00	-18.98	50.77	4.25	Peak	100	68			
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																					
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																					
		dBuV/m			dBuV			cm	deg																																																																																					
1	7125.00	48.59	68.20	-19.61	43.73	4.86	Average	115	154																																																																																					
2	7125.00	60.70	88.20	-27.50	55.84	4.86	Peak	115	154																																																																																					
3	14230.00	45.32	68.20	-22.88	38.20	7.12	Average	100	125																																																																																					
4	14230.00	58.50	88.20	-29.70	51.38	7.12	Peak	100	125																																																																																					
5	21345.00	41.71	54.00	-12.29	37.46	4.25	Average	100	68																																																																																					
6	21345.00	55.02	74.00	-18.98	50.77	4.25	Peak	100	68																																																																																					
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																														

Unwanted Emissions (Above 1GHz) for be EHT20-OFDMA

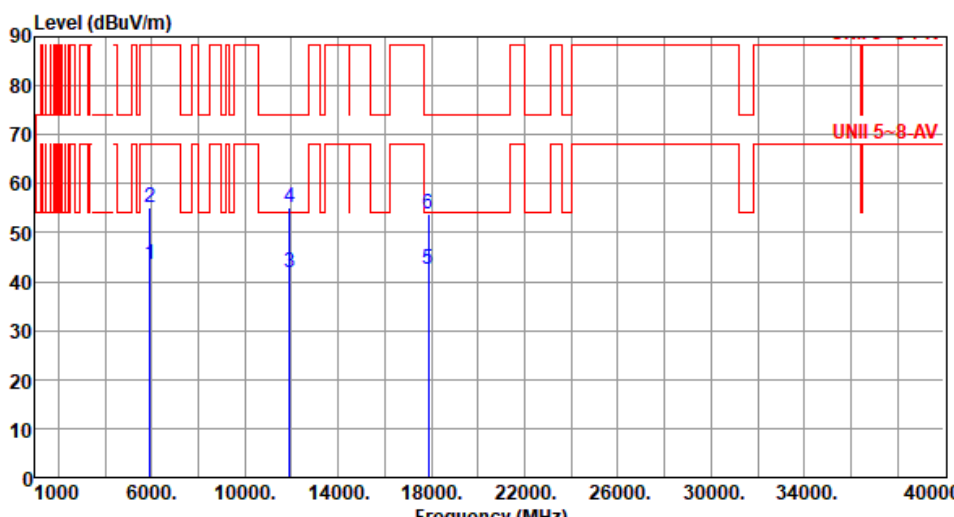Modulation	be EHT20-OFDMA	Test Freq. (MHz)	5955																																																																						
Polarization	Horizontal																																																																								
Test By :Paul Lin Temperature(°C):24 Humidity(%):64																																																																									
Level (dBuV/m)  <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5925.00</td><td>43.37</td><td>68.20</td><td>-24.83</td><td>42.24</td><td>1.13</td><td>Average</td><td>355</td><td>301</td></tr><tr><td>2</td><td>5925.00</td><td>55.04</td><td>88.20</td><td>-33.16</td><td>53.91</td><td>1.13</td><td>Peak</td><td>355</td><td>301</td></tr><tr><td>3</td><td>11910.00</td><td>41.76</td><td>54.00</td><td>-12.24</td><td>35.67</td><td>6.09</td><td>Average</td><td>100</td><td>79</td></tr><tr><td>4</td><td>11910.00</td><td>55.27</td><td>74.00</td><td>-18.73</td><td>49.18</td><td>6.09</td><td>Peak</td><td>100</td><td>79</td></tr><tr><td>5</td><td>17865.00</td><td>42.64</td><td>54.00</td><td>-11.36</td><td>32.19</td><td>10.45</td><td>Average</td><td>100</td><td>62</td></tr><tr><td>6</td><td>17865.00</td><td>53.71</td><td>74.00</td><td>-20.29</td><td>43.26</td><td>10.45</td><td>Peak</td><td>100</td><td>62</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5925.00	43.37	68.20	-24.83	42.24	1.13	Average	355	301	2	5925.00	55.04	88.20	-33.16	53.91	1.13	Peak	355	301	3	11910.00	41.76	54.00	-12.24	35.67	6.09	Average	100	79	4	11910.00	55.27	74.00	-18.73	49.18	6.09	Peak	100	79	5	17865.00	42.64	54.00	-11.36	32.19	10.45	Average	100	62	6	17865.00	53.71	74.00	-20.29	43.26	10.45	Peak	100	62
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	5925.00	43.37	68.20	-24.83	42.24	1.13	Average	355	301																																																																
2	5925.00	55.04	88.20	-33.16	53.91	1.13	Peak	355	301																																																																
3	11910.00	41.76	54.00	-12.24	35.67	6.09	Average	100	79																																																																
4	11910.00	55.27	74.00	-18.73	49.18	6.09	Peak	100	79																																																																
5	17865.00	42.64	54.00	-11.36	32.19	10.45	Average	100	62																																																																
6	17865.00	53.71	74.00	-20.29	43.26	10.45	Peak	100	62																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									



Modulation	be EHT20-OFDMA	Test Freq. (MHz)	5955																																																																						
Polarization	Vertical																																																																								
Test By :Paul Lin Temperature(°C):24 Humidity(%):64																																																																									
Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5925.00</td><td>43.30</td><td>68.20</td><td>-24.90</td><td>42.17</td><td>1.13</td><td>Average</td><td>377</td><td>354</td></tr><tr><td>2</td><td>5925.00</td><td>55.63</td><td>88.20</td><td>-32.57</td><td>54.50</td><td>1.13</td><td>Peak</td><td>377</td><td>354</td></tr><tr><td>3</td><td>11910.00</td><td>41.65</td><td>54.00</td><td>-12.35</td><td>35.56</td><td>6.09</td><td>Average</td><td>100</td><td>73</td></tr><tr><td>4</td><td>11910.00</td><td>54.50</td><td>74.00</td><td>-19.50</td><td>48.41</td><td>6.09</td><td>Peak</td><td>100</td><td>73</td></tr><tr><td>5</td><td>17865.00</td><td>42.69</td><td>54.00</td><td>-11.31</td><td>32.24</td><td>10.45</td><td>Average</td><td>100</td><td>65</td></tr><tr><td>6</td><td>17865.00</td><td>53.53</td><td>74.00</td><td>-20.47</td><td>43.08</td><td>10.45</td><td>Peak</td><td>100</td><td>65</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5925.00	43.30	68.20	-24.90	42.17	1.13	Average	377	354	2	5925.00	55.63	88.20	-32.57	54.50	1.13	Peak	377	354	3	11910.00	41.65	54.00	-12.35	35.56	6.09	Average	100	73	4	11910.00	54.50	74.00	-19.50	48.41	6.09	Peak	100	73	5	17865.00	42.69	54.00	-11.31	32.24	10.45	Average	100	65	6	17865.00	53.53	74.00	-20.47	43.08	10.45	Peak	100	65
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	5925.00	43.30	68.20	-24.90	42.17	1.13	Average	377	354																																																																
2	5925.00	55.63	88.20	-32.57	54.50	1.13	Peak	377	354																																																																
3	11910.00	41.65	54.00	-12.35	35.56	6.09	Average	100	73																																																																
4	11910.00	54.50	74.00	-19.50	48.41	6.09	Peak	100	73																																																																
5	17865.00	42.69	54.00	-11.31	32.24	10.45	Average	100	65																																																																
6	17865.00	53.53	74.00	-20.47	43.08	10.45	Peak	100	65																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									



Modulation	be EHT20-OFDMA	Test Freq. (MHz)	6175						
Polarization	Horizontal								
Test By :Paul Lin Temperature(°C):24 Humidity(%):64									
Level (dBUV/m) Frequency (MHz)									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	12350.00	42.25	54.00	-11.75	36.42	5.83	Average	100	52
2	12350.00	55.34	74.00	-18.66	49.51	5.83	Peak	100	52
3	18525.00	41.06	54.00	-12.94	39.27	1.79	Average	100	358
4	18525.00	53.38	74.00	-20.62	51.59	1.79	Peak	100	358
5	24700.00	43.08	68.20	-25.12	34.76	8.32	Average	100	346
6	24700.00	56.18	88.20	-32.02	47.86	8.32	Peak	100	346
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).									




Modulation	be EHT20-OFDMA	Test Freq. (MHz)	6175																																																																						
Polarization	Vertical																																																																								
Test By :Paul Lin Temperature(°C):24 Humidity(%):64																																																																									
Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>12350.00</td><td>42.55</td><td>54.00</td><td>-11.45</td><td>36.72</td><td>5.83</td><td>Average</td><td>100</td><td>249</td></tr><tr><td>2</td><td>12350.00</td><td>55.76</td><td>74.00</td><td>-18.24</td><td>49.93</td><td>5.83</td><td>Peak</td><td>100</td><td>249</td></tr><tr><td>3</td><td>18525.00</td><td>40.53</td><td>54.00</td><td>-13.47</td><td>38.74</td><td>1.79</td><td>Average</td><td>100</td><td>48</td></tr><tr><td>4</td><td>18525.00</td><td>54.67</td><td>74.00</td><td>-19.33</td><td>52.88</td><td>1.79</td><td>Peak</td><td>100</td><td>48</td></tr><tr><td>5</td><td>24700.00</td><td>43.21</td><td>68.20</td><td>-24.99</td><td>34.89</td><td>8.32</td><td>Average</td><td>100</td><td>291</td></tr><tr><td>6</td><td>24700.00</td><td>56.54</td><td>88.20</td><td>-31.66</td><td>48.22</td><td>8.32</td><td>Peak</td><td>100</td><td>291</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	12350.00	42.55	54.00	-11.45	36.72	5.83	Average	100	249	2	12350.00	55.76	74.00	-18.24	49.93	5.83	Peak	100	249	3	18525.00	40.53	54.00	-13.47	38.74	1.79	Average	100	48	4	18525.00	54.67	74.00	-19.33	52.88	1.79	Peak	100	48	5	24700.00	43.21	68.20	-24.99	34.89	8.32	Average	100	291	6	24700.00	56.54	88.20	-31.66	48.22	8.32	Peak	100	291
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	12350.00	42.55	54.00	-11.45	36.72	5.83	Average	100	249																																																																
2	12350.00	55.76	74.00	-18.24	49.93	5.83	Peak	100	249																																																																
3	18525.00	40.53	54.00	-13.47	38.74	1.79	Average	100	48																																																																
4	18525.00	54.67	74.00	-19.33	52.88	1.79	Peak	100	48																																																																
5	24700.00	43.21	68.20	-24.99	34.89	8.32	Average	100	291																																																																
6	24700.00	56.54	88.20	-31.66	48.22	8.32	Peak	100	291																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									




Modulation	be EHT20-OFDMA	Test Freq. (MHz)	6415																																																																						
Polarization	Horizontal																																																																								
Test By :Paul Lin Temperature(°C):24 Humidity(%):64																																																																									
Level (dBUV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>12830.00</td><td>42.16</td><td>68.20</td><td>-26.04</td><td>36.01</td><td>6.15</td><td>Average</td><td>100</td><td>59</td></tr><tr><td>2</td><td>12830.00</td><td>55.43</td><td>88.20</td><td>-32.77</td><td>49.28</td><td>6.15</td><td>Peak</td><td>100</td><td>59</td></tr><tr><td>3</td><td>19245.00</td><td>42.95</td><td>54.00</td><td>-11.05</td><td>41.05</td><td>1.90</td><td>Average</td><td>100</td><td>159</td></tr><tr><td>4</td><td>19245.00</td><td>55.59</td><td>74.00</td><td>-18.41</td><td>53.69</td><td>1.90</td><td>Peak</td><td>100</td><td>159</td></tr><tr><td>5</td><td>25660.00</td><td>42.91</td><td>68.20</td><td>-25.29</td><td>34.86</td><td>8.05</td><td>Average</td><td>100</td><td>245</td></tr><tr><td>6</td><td>25660.00</td><td>56.13</td><td>88.20</td><td>-32.07</td><td>48.08</td><td>8.05</td><td>Peak</td><td>100</td><td>245</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	12830.00	42.16	68.20	-26.04	36.01	6.15	Average	100	59	2	12830.00	55.43	88.20	-32.77	49.28	6.15	Peak	100	59	3	19245.00	42.95	54.00	-11.05	41.05	1.90	Average	100	159	4	19245.00	55.59	74.00	-18.41	53.69	1.90	Peak	100	159	5	25660.00	42.91	68.20	-25.29	34.86	8.05	Average	100	245	6	25660.00	56.13	88.20	-32.07	48.08	8.05	Peak	100	245
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	12830.00	42.16	68.20	-26.04	36.01	6.15	Average	100	59																																																																
2	12830.00	55.43	88.20	-32.77	49.28	6.15	Peak	100	59																																																																
3	19245.00	42.95	54.00	-11.05	41.05	1.90	Average	100	159																																																																
4	19245.00	55.59	74.00	-18.41	53.69	1.90	Peak	100	159																																																																
5	25660.00	42.91	68.20	-25.29	34.86	8.05	Average	100	245																																																																
6	25660.00	56.13	88.20	-32.07	48.08	8.05	Peak	100	245																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									

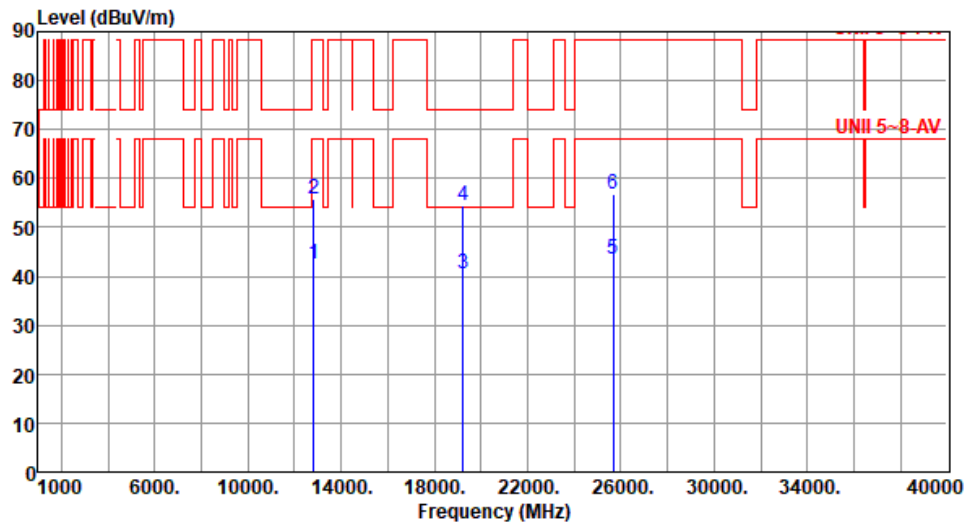


Modulation	be EHT20-OFDMA	Test Freq. (MHz)	6415						
Polarization	Vertical								
Test By :Paul Lin Temperature(°C):24 Humidity(%):64									
									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	12830.00	42.51	68.20	-25.69	36.36	6.15	Average	100	88
2	12830.00	55.71	88.20	-32.49	49.56	6.15	Peak	100	88
3	19245.00	40.38	54.00	-13.62	38.48	1.90	Average	100	81
4	19245.00	54.32	74.00	-19.68	52.42	1.90	Peak	100	81
5	25660.00	43.51	68.20	-24.69	35.46	8.05	Average	100	98
6	25660.00	56.87	88.20	-31.33	48.82	8.05	Peak	100	98
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).									

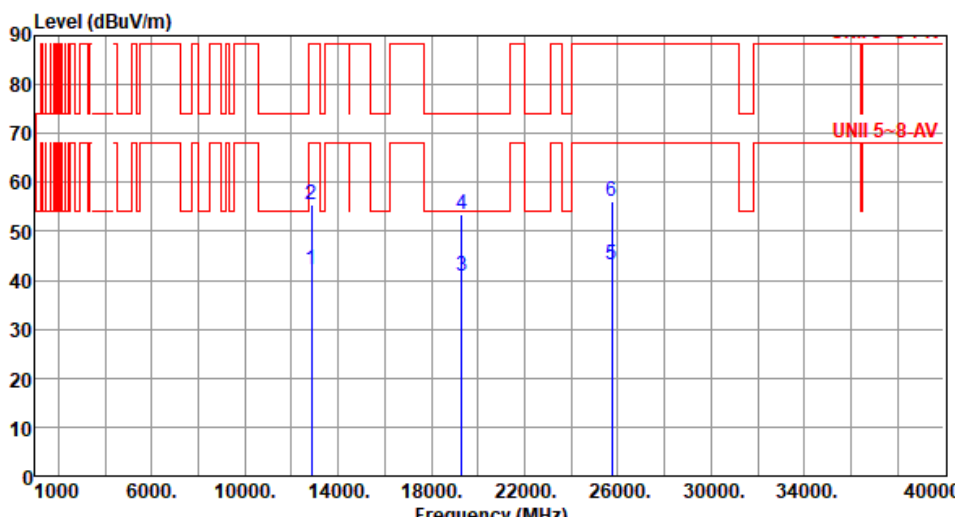

Modulation	be EHT20-OFDMA	Test Freq. (MHz)	6435																																																																						
Polarization	Horizontal																																																																								
Test By :Paul Lin Temperature(°C):24 Humidity(%):64																																																																									
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>12870.00</td><td>42.25</td><td>68.20</td><td>-25.95</td><td>36.18</td><td>6.07</td><td>Average</td><td>100</td><td>93</td></tr><tr><td>2</td><td>12870.00</td><td>55.40</td><td>88.20</td><td>-32.80</td><td>49.33</td><td>6.07</td><td>Peak</td><td>100</td><td>93</td></tr><tr><td>3</td><td>19305.00</td><td>40.80</td><td>54.00</td><td>-13.20</td><td>38.99</td><td>1.81</td><td>Average</td><td>100</td><td>96</td></tr><tr><td>4</td><td>19305.00</td><td>53.62</td><td>74.00</td><td>-20.38</td><td>51.81</td><td>1.81</td><td>Peak</td><td>100</td><td>96</td></tr><tr><td>5</td><td>25740.00</td><td>43.02</td><td>68.20</td><td>-25.18</td><td>34.99</td><td>8.03</td><td>Average</td><td>100</td><td>64</td></tr><tr><td>6</td><td>25740.00</td><td>56.09</td><td>88.20</td><td>-32.11</td><td>48.06</td><td>8.03</td><td>Peak</td><td>100</td><td>64</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	12870.00	42.25	68.20	-25.95	36.18	6.07	Average	100	93	2	12870.00	55.40	88.20	-32.80	49.33	6.07	Peak	100	93	3	19305.00	40.80	54.00	-13.20	38.99	1.81	Average	100	96	4	19305.00	53.62	74.00	-20.38	51.81	1.81	Peak	100	96	5	25740.00	43.02	68.20	-25.18	34.99	8.03	Average	100	64	6	25740.00	56.09	88.20	-32.11	48.06	8.03	Peak	100	64
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	12870.00	42.25	68.20	-25.95	36.18	6.07	Average	100	93																																																																
2	12870.00	55.40	88.20	-32.80	49.33	6.07	Peak	100	93																																																																
3	19305.00	40.80	54.00	-13.20	38.99	1.81	Average	100	96																																																																
4	19305.00	53.62	74.00	-20.38	51.81	1.81	Peak	100	96																																																																
5	25740.00	43.02	68.20	-25.18	34.99	8.03	Average	100	64																																																																
6	25740.00	56.09	88.20	-32.11	48.06	8.03	Peak	100	64																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									

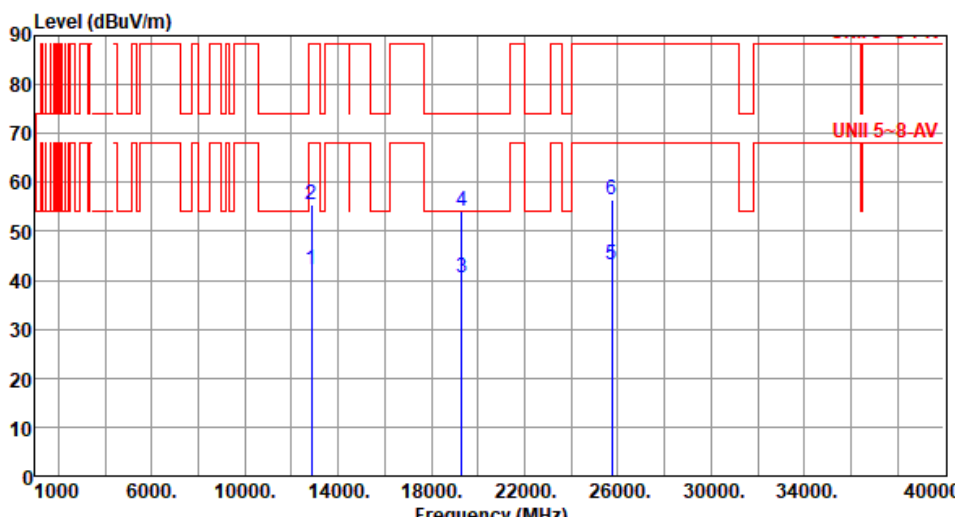


Modulation	be EHT20-OFDMA	Test Freq. (MHz)	6435																																																																						
Polarization	Vertical																																																																								
Test By :Paul Lin Temperature(°C):24 Humidity(%):64																																																																									
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>12870.00</td><td>42.20</td><td>68.20</td><td>-26.00</td><td>36.13</td><td>6.07</td><td>Average</td><td>100</td><td>47</td></tr><tr><td>2</td><td>12870.00</td><td>55.38</td><td>88.20</td><td>-32.82</td><td>49.31</td><td>6.07</td><td>Peak</td><td>100</td><td>47</td></tr><tr><td>3</td><td>19305.00</td><td>40.62</td><td>54.00</td><td>-13.38</td><td>38.81</td><td>1.81</td><td>Average</td><td>100</td><td>118</td></tr><tr><td>4</td><td>19305.00</td><td>54.24</td><td>74.00</td><td>-19.76</td><td>52.43</td><td>1.81</td><td>Peak</td><td>100</td><td>118</td></tr><tr><td>5</td><td>25740.00</td><td>43.13</td><td>68.20</td><td>-25.07</td><td>35.10</td><td>8.03</td><td>Average</td><td>100</td><td>57</td></tr><tr><td>6</td><td>25740.00</td><td>56.45</td><td>88.20</td><td>-31.75</td><td>48.42</td><td>8.03</td><td>Peak</td><td>100</td><td>57</td></tr></tbody></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	12870.00	42.20	68.20	-26.00	36.13	6.07	Average	100	47	2	12870.00	55.38	88.20	-32.82	49.31	6.07	Peak	100	47	3	19305.00	40.62	54.00	-13.38	38.81	1.81	Average	100	118	4	19305.00	54.24	74.00	-19.76	52.43	1.81	Peak	100	118	5	25740.00	43.13	68.20	-25.07	35.10	8.03	Average	100	57	6	25740.00	56.45	88.20	-31.75	48.42	8.03	Peak	100	57
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	12870.00	42.20	68.20	-26.00	36.13	6.07	Average	100	47																																																																
2	12870.00	55.38	88.20	-32.82	49.31	6.07	Peak	100	47																																																																
3	19305.00	40.62	54.00	-13.38	38.81	1.81	Average	100	118																																																																
4	19305.00	54.24	74.00	-19.76	52.43	1.81	Peak	100	118																																																																
5	25740.00	43.13	68.20	-25.07	35.10	8.03	Average	100	57																																																																
6	25740.00	56.45	88.20	-31.75	48.42	8.03	Peak	100	57																																																																



Modulation	be EHT20-OFDMA	Test Freq. (MHz)	6475																																																																						
Polarization	Horizontal																																																																								
Test By :Paul Lin Temperature(°C):24 Humidity(%):64																																																																									
Level (dBUV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>12950.00</td><td>42.38</td><td>68.20</td><td>-25.82</td><td>36.28</td><td>6.10</td><td>Average</td><td>100</td><td>36</td></tr><tr><td>2</td><td>12950.00</td><td>55.73</td><td>88.20</td><td>-32.47</td><td>49.63</td><td>6.10</td><td>Peak</td><td>100</td><td>36</td></tr><tr><td>3</td><td>19425.00</td><td>40.93</td><td>54.00</td><td>-13.07</td><td>39.23</td><td>1.70</td><td>Average</td><td>100</td><td>56</td></tr><tr><td>4</td><td>19425.00</td><td>53.77</td><td>74.00</td><td>-20.23</td><td>52.07</td><td>1.70</td><td>Peak</td><td>100</td><td>56</td></tr><tr><td>5</td><td>25900.00</td><td>43.28</td><td>68.20</td><td>-24.92</td><td>35.29</td><td>7.99</td><td>Average</td><td>100</td><td>297</td></tr><tr><td>6</td><td>25900.00</td><td>56.37</td><td>88.20</td><td>-31.83</td><td>48.38</td><td>7.99</td><td>Peak</td><td>100</td><td>297</td></tr></tbody></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	12950.00	42.38	68.20	-25.82	36.28	6.10	Average	100	36	2	12950.00	55.73	88.20	-32.47	49.63	6.10	Peak	100	36	3	19425.00	40.93	54.00	-13.07	39.23	1.70	Average	100	56	4	19425.00	53.77	74.00	-20.23	52.07	1.70	Peak	100	56	5	25900.00	43.28	68.20	-24.92	35.29	7.99	Average	100	297	6	25900.00	56.37	88.20	-31.83	48.38	7.99	Peak	100	297
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	12950.00	42.38	68.20	-25.82	36.28	6.10	Average	100	36																																																																
2	12950.00	55.73	88.20	-32.47	49.63	6.10	Peak	100	36																																																																
3	19425.00	40.93	54.00	-13.07	39.23	1.70	Average	100	56																																																																
4	19425.00	53.77	74.00	-20.23	52.07	1.70	Peak	100	56																																																																
5	25900.00	43.28	68.20	-24.92	35.29	7.99	Average	100	297																																																																
6	25900.00	56.37	88.20	-31.83	48.38	7.99	Peak	100	297																																																																

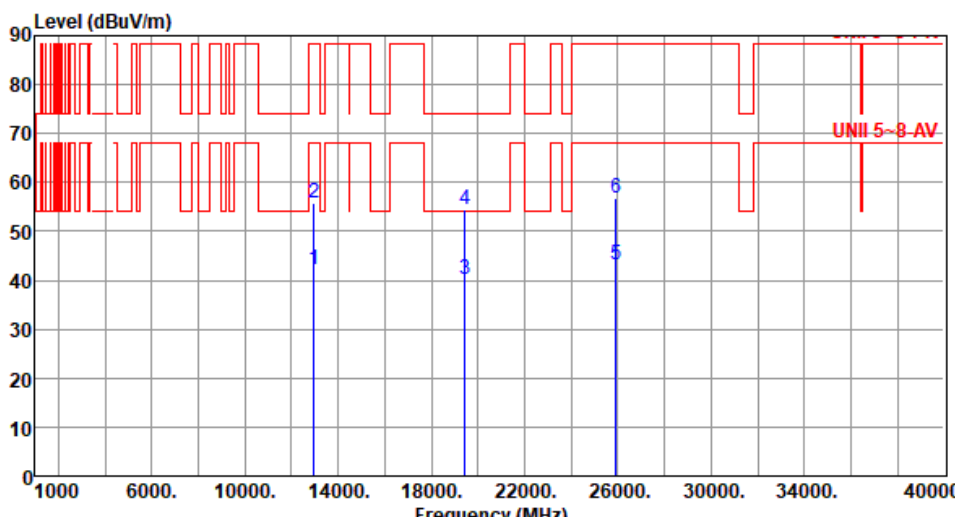

Modulation	be EHT20-OFDMA	Test Freq. (MHz)	6475																																																																																										
Polarization	Vertical																																																																																												
Test By :Paul Lin Temperature(°C):24 Humidity(%):64																																																																																													
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>12950.00</td><td>42.32</td><td>68.20</td><td>-25.88</td><td>36.22</td><td>6.10</td><td>Average</td><td>100</td><td>9</td></tr><tr><td>2</td><td>12950.00</td><td>55.85</td><td>88.20</td><td>-32.35</td><td>49.75</td><td>6.10</td><td>Peak</td><td>100</td><td>9</td></tr><tr><td>3</td><td>19425.00</td><td>40.18</td><td>54.00</td><td>-13.82</td><td>38.48</td><td>1.70</td><td>Average</td><td>100</td><td>263</td></tr><tr><td>4</td><td>19425.00</td><td>54.49</td><td>74.00</td><td>-19.51</td><td>52.79</td><td>1.70</td><td>Peak</td><td>100</td><td>263</td></tr><tr><td>5</td><td>25900.00</td><td>43.29</td><td>68.20</td><td>-24.91</td><td>35.30</td><td>7.99</td><td>Average</td><td>100</td><td>306</td></tr><tr><td>6</td><td>25900.00</td><td>56.78</td><td>88.20</td><td>-31.42</td><td>48.79</td><td>7.99</td><td>Peak</td><td>100</td><td>306</td></tr></tbody></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	12950.00	42.32	68.20	-25.88	36.22	6.10	Average	100	9	2	12950.00	55.85	88.20	-32.35	49.75	6.10	Peak	100	9	3	19425.00	40.18	54.00	-13.82	38.48	1.70	Average	100	263	4	19425.00	54.49	74.00	-19.51	52.79	1.70	Peak	100	263	5	25900.00	43.29	68.20	-24.91	35.30	7.99	Average	100	306	6	25900.00	56.78	88.20	-31.42	48.79	7.99	Peak	100	306
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																				
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																				
		dBuV/m			dBuV			cm	deg																																																																																				
1	12950.00	42.32	68.20	-25.88	36.22	6.10	Average	100	9																																																																																				
2	12950.00	55.85	88.20	-32.35	49.75	6.10	Peak	100	9																																																																																				
3	19425.00	40.18	54.00	-13.82	38.48	1.70	Average	100	263																																																																																				
4	19425.00	54.49	74.00	-19.51	52.79	1.70	Peak	100	263																																																																																				
5	25900.00	43.29	68.20	-24.91	35.30	7.99	Average	100	306																																																																																				
6	25900.00	56.78	88.20	-31.42	48.79	7.99	Peak	100	306																																																																																				
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																																													



Modulation	be EHT20-OFDMA		Test Freq. (MHz)		6515																																																																																														
Polarization	Horizontal																																																																																																		
Test By :Paul Lin			Temperature(°C):24			Humidity(%):64																																																																																													
Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>13030.00</td><td>42.18</td><td>68.20</td><td>-26.02</td><td>36.17</td><td>6.01</td><td>Average</td><td>100</td><td>193</td></tr><tr><td>2</td><td>13030.00</td><td>55.61</td><td>88.20</td><td>-32.59</td><td>49.60</td><td>6.01</td><td>Peak</td><td>100</td><td>193</td></tr><tr><td>3</td><td>19545.00</td><td>40.55</td><td>54.00</td><td>-13.45</td><td>38.71</td><td>1.84</td><td>Average</td><td>100</td><td>55</td></tr><tr><td>4</td><td>19545.00</td><td>53.68</td><td>74.00</td><td>-20.32</td><td>51.84</td><td>1.84</td><td>Peak</td><td>100</td><td>55</td></tr><tr><td>5</td><td>26060.00</td><td>43.28</td><td>68.20</td><td>-24.92</td><td>35.21</td><td>8.07</td><td>Average</td><td>100</td><td>251</td></tr><tr><td>6</td><td>26060.00</td><td>56.04</td><td>88.20</td><td>-32.16</td><td>47.97</td><td>8.07</td><td>Peak</td><td>100</td><td>251</td></tr></table>											Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	13030.00	42.18	68.20	-26.02	36.17	6.01	Average	100	193	2	13030.00	55.61	88.20	-32.59	49.60	6.01	Peak	100	193	3	19545.00	40.55	54.00	-13.45	38.71	1.84	Average	100	55	4	19545.00	53.68	74.00	-20.32	51.84	1.84	Peak	100	55	5	26060.00	43.28	68.20	-24.92	35.21	8.07	Average	100	251	6	26060.00	56.04	88.20	-32.16	47.97	8.07	Peak	100	251
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																										
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																										
		dBuV/m			dBuV			cm	deg																																																																																										
1	13030.00	42.18	68.20	-26.02	36.17	6.01	Average	100	193																																																																																										
2	13030.00	55.61	88.20	-32.59	49.60	6.01	Peak	100	193																																																																																										
3	19545.00	40.55	54.00	-13.45	38.71	1.84	Average	100	55																																																																																										
4	19545.00	53.68	74.00	-20.32	51.84	1.84	Peak	100	55																																																																																										
5	26060.00	43.28	68.20	-24.92	35.21	8.07	Average	100	251																																																																																										
6	26060.00	56.04	88.20	-32.16	47.97	8.07	Peak	100	251																																																																																										
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																																			



Modulation	be EHT20-OFDMA	Test Freq. (MHz)	6515																																																																						
Polarization	Vertical																																																																								
Test By :Paul Lin Temperature(°C):24 Humidity(%):64																																																																									
Level (dBUV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>13030.00</td><td>42.49</td><td>68.20</td><td>-25.71</td><td>36.48</td><td>6.01</td><td>Average</td><td>100</td><td>58</td></tr><tr><td>2</td><td>13030.00</td><td>55.27</td><td>88.20</td><td>-32.93</td><td>49.26</td><td>6.01</td><td>Peak</td><td>100</td><td>58</td></tr><tr><td>3</td><td>19545.00</td><td>40.85</td><td>54.00</td><td>-13.15</td><td>39.01</td><td>1.84</td><td>Average</td><td>100</td><td>4</td></tr><tr><td>4</td><td>19545.00</td><td>54.82</td><td>74.00</td><td>-19.18</td><td>52.98</td><td>1.84</td><td>Peak</td><td>100</td><td>4</td></tr><tr><td>5</td><td>26060.00</td><td>43.11</td><td>68.20</td><td>-25.09</td><td>35.04</td><td>8.07</td><td>Average</td><td>100</td><td>99</td></tr><tr><td>6</td><td>26060.00</td><td>56.72</td><td>88.20</td><td>-31.48</td><td>48.65</td><td>8.07</td><td>Peak</td><td>100</td><td>99</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13030.00	42.49	68.20	-25.71	36.48	6.01	Average	100	58	2	13030.00	55.27	88.20	-32.93	49.26	6.01	Peak	100	58	3	19545.00	40.85	54.00	-13.15	39.01	1.84	Average	100	4	4	19545.00	54.82	74.00	-19.18	52.98	1.84	Peak	100	4	5	26060.00	43.11	68.20	-25.09	35.04	8.07	Average	100	99	6	26060.00	56.72	88.20	-31.48	48.65	8.07	Peak	100	99
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	13030.00	42.49	68.20	-25.71	36.48	6.01	Average	100	58																																																																
2	13030.00	55.27	88.20	-32.93	49.26	6.01	Peak	100	58																																																																
3	19545.00	40.85	54.00	-13.15	39.01	1.84	Average	100	4																																																																
4	19545.00	54.82	74.00	-19.18	52.98	1.84	Peak	100	4																																																																
5	26060.00	43.11	68.20	-25.09	35.04	8.07	Average	100	99																																																																
6	26060.00	56.72	88.20	-31.48	48.65	8.07	Peak	100	99																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									




Modulation	be EHT20-OFDMA	Test Freq. (MHz)	6535																																																																						
Polarization	Horizontal																																																																								
Test By :Paul Lin Temperature(°C):24 Humidity(%):64																																																																									
Level (dBUV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>13070.00</td><td>41.94</td><td>68.20</td><td>-26.26</td><td>36.14</td><td>5.80</td><td>Average</td><td>100</td><td>143</td></tr><tr><td>2</td><td>13070.00</td><td>55.80</td><td>88.20</td><td>-32.40</td><td>50.00</td><td>5.80</td><td>Peak</td><td>100</td><td>143</td></tr><tr><td>3</td><td>19605.00</td><td>40.72</td><td>54.00</td><td>-13.28</td><td>38.81</td><td>1.91</td><td>Average</td><td>100</td><td>73</td></tr><tr><td>4</td><td>19605.00</td><td>53.44</td><td>74.00</td><td>-20.56</td><td>51.53</td><td>1.91</td><td>Peak</td><td>100</td><td>73</td></tr><tr><td>5</td><td>26140.00</td><td>43.07</td><td>68.20</td><td>-25.13</td><td>34.99</td><td>8.08</td><td>Average</td><td>100</td><td>24</td></tr><tr><td>6</td><td>26140.00</td><td>56.02</td><td>88.20</td><td>-32.18</td><td>47.94</td><td>8.08</td><td>Peak</td><td>100</td><td>24</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13070.00	41.94	68.20	-26.26	36.14	5.80	Average	100	143	2	13070.00	55.80	88.20	-32.40	50.00	5.80	Peak	100	143	3	19605.00	40.72	54.00	-13.28	38.81	1.91	Average	100	73	4	19605.00	53.44	74.00	-20.56	51.53	1.91	Peak	100	73	5	26140.00	43.07	68.20	-25.13	34.99	8.08	Average	100	24	6	26140.00	56.02	88.20	-32.18	47.94	8.08	Peak	100	24
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	13070.00	41.94	68.20	-26.26	36.14	5.80	Average	100	143																																																																
2	13070.00	55.80	88.20	-32.40	50.00	5.80	Peak	100	143																																																																
3	19605.00	40.72	54.00	-13.28	38.81	1.91	Average	100	73																																																																
4	19605.00	53.44	74.00	-20.56	51.53	1.91	Peak	100	73																																																																
5	26140.00	43.07	68.20	-25.13	34.99	8.08	Average	100	24																																																																
6	26140.00	56.02	88.20	-32.18	47.94	8.08	Peak	100	24																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									




Modulation	be EHT20-OFDMA	Test Freq. (MHz)	6535																																																																																										
Polarization	Vertical																																																																																												
Test By :Paul Lin Temperature(°C):24 Humidity(%):64																																																																																													
Level (dBUV/m) Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>13070.00</td><td>41.82</td><td>68.20</td><td>-26.38</td><td>36.02</td><td>5.80</td><td>Average</td><td>100</td><td>38</td></tr><tr><td>2</td><td>13070.00</td><td>55.27</td><td>88.20</td><td>-32.93</td><td>49.47</td><td>5.80</td><td>Peak</td><td>100</td><td>38</td></tr><tr><td>3</td><td>19605.00</td><td>40.88</td><td>54.00</td><td>-13.12</td><td>38.97</td><td>1.91</td><td>Average</td><td>100</td><td>53</td></tr><tr><td>4</td><td>19605.00</td><td>53.71</td><td>74.00</td><td>-20.29</td><td>51.80</td><td>1.91</td><td>Peak</td><td>100</td><td>53</td></tr><tr><td>5</td><td>26140.00</td><td>43.25</td><td>68.20</td><td>-24.95</td><td>35.17</td><td>8.08</td><td>Average</td><td>100</td><td>77</td></tr><tr><td>6</td><td>26140.00</td><td>55.62</td><td>88.20</td><td>-32.58</td><td>47.54</td><td>8.08</td><td>Peak</td><td>100</td><td>77</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	13070.00	41.82	68.20	-26.38	36.02	5.80	Average	100	38	2	13070.00	55.27	88.20	-32.93	49.47	5.80	Peak	100	38	3	19605.00	40.88	54.00	-13.12	38.97	1.91	Average	100	53	4	19605.00	53.71	74.00	-20.29	51.80	1.91	Peak	100	53	5	26140.00	43.25	68.20	-24.95	35.17	8.08	Average	100	77	6	26140.00	55.62	88.20	-32.58	47.54	8.08	Peak	100	77
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																				
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																				
		dBuV/m			dBuV			cm	deg																																																																																				
1	13070.00	41.82	68.20	-26.38	36.02	5.80	Average	100	38																																																																																				
2	13070.00	55.27	88.20	-32.93	49.47	5.80	Peak	100	38																																																																																				
3	19605.00	40.88	54.00	-13.12	38.97	1.91	Average	100	53																																																																																				
4	19605.00	53.71	74.00	-20.29	51.80	1.91	Peak	100	53																																																																																				
5	26140.00	43.25	68.20	-24.95	35.17	8.08	Average	100	77																																																																																				
6	26140.00	55.62	88.20	-32.58	47.54	8.08	Peak	100	77																																																																																				
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																																													

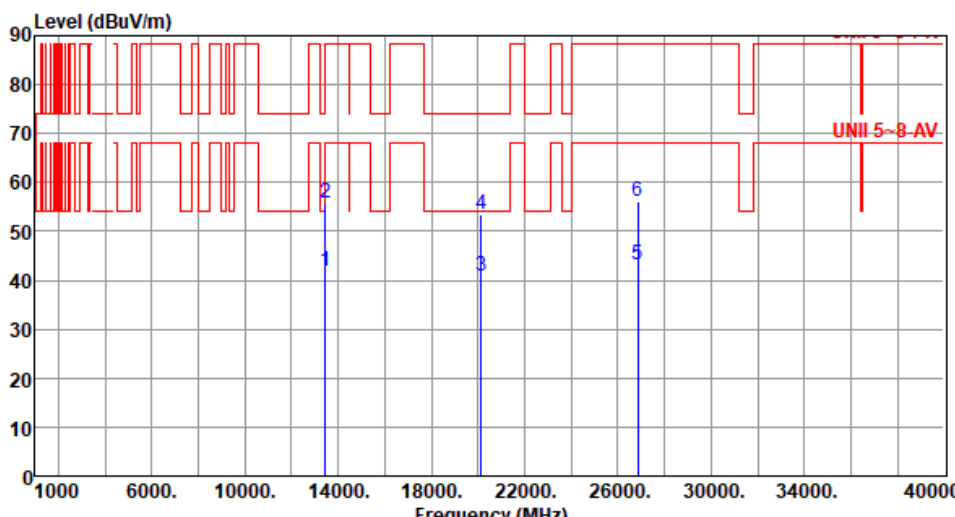


Modulation	be EHT20-OFDMA	Test Freq. (MHz)	6715																																																																																										
Polarization	Horizontal																																																																																												
Test By :Paul Lin Temperature(°C):24 Humidity(%):64																																																																																													
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>13430.00</td><td>41.96</td><td>68.20</td><td>-26.24</td><td>36.01</td><td>5.95</td><td>Average</td><td>100</td><td>48</td></tr><tr><td>2</td><td>13430.00</td><td>55.84</td><td>88.20</td><td>-32.36</td><td>49.89</td><td>5.95</td><td>Peak</td><td>100</td><td>48</td></tr><tr><td>3</td><td>20145.00</td><td>40.81</td><td>54.00</td><td>-13.19</td><td>38.16</td><td>2.65</td><td>Average</td><td>100</td><td>95</td></tr><tr><td>4</td><td>20145.00</td><td>53.49</td><td>74.00</td><td>-20.51</td><td>50.84</td><td>2.65</td><td>Peak</td><td>100</td><td>95</td></tr><tr><td>5</td><td>26860.00</td><td>43.14</td><td>68.20</td><td>-25.06</td><td>34.69</td><td>8.45</td><td>Average</td><td>100</td><td>222</td></tr><tr><td>6</td><td>26860.00</td><td>56.13</td><td>88.20</td><td>-32.07</td><td>47.68</td><td>8.45</td><td>Peak</td><td>100</td><td>222</td></tr></tbody></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	13430.00	41.96	68.20	-26.24	36.01	5.95	Average	100	48	2	13430.00	55.84	88.20	-32.36	49.89	5.95	Peak	100	48	3	20145.00	40.81	54.00	-13.19	38.16	2.65	Average	100	95	4	20145.00	53.49	74.00	-20.51	50.84	2.65	Peak	100	95	5	26860.00	43.14	68.20	-25.06	34.69	8.45	Average	100	222	6	26860.00	56.13	88.20	-32.07	47.68	8.45	Peak	100	222
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																				
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																				
		dBuV/m			dBuV			cm	deg																																																																																				
1	13430.00	41.96	68.20	-26.24	36.01	5.95	Average	100	48																																																																																				
2	13430.00	55.84	88.20	-32.36	49.89	5.95	Peak	100	48																																																																																				
3	20145.00	40.81	54.00	-13.19	38.16	2.65	Average	100	95																																																																																				
4	20145.00	53.49	74.00	-20.51	50.84	2.65	Peak	100	95																																																																																				
5	26860.00	43.14	68.20	-25.06	34.69	8.45	Average	100	222																																																																																				
6	26860.00	56.13	88.20	-32.07	47.68	8.45	Peak	100	222																																																																																				
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																													

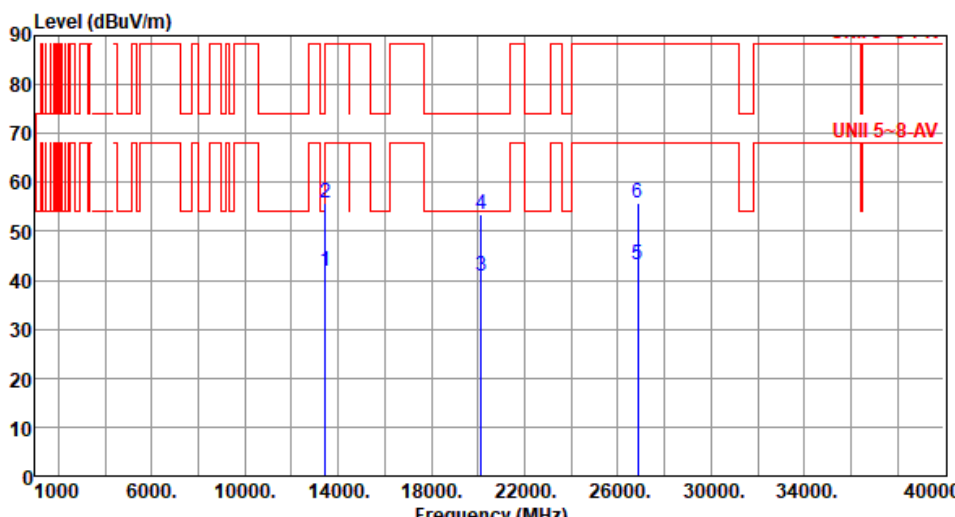


Modulation	be EHT20-OFDMA	Test Freq. (MHz)	6715																																																																																										
Polarization	Vertical																																																																																												
Test By :Paul Lin Temperature(°C):24 Humidity(%):64																																																																																													
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>13430.00</td><td>41.76</td><td>68.20</td><td>-26.44</td><td>35.81</td><td>5.95</td><td>Average</td><td>100</td><td>308</td></tr><tr><td>2</td><td>13430.00</td><td>55.93</td><td>88.20</td><td>-32.27</td><td>49.98</td><td>5.95</td><td>Peak</td><td>100</td><td>308</td></tr><tr><td>3</td><td>20145.00</td><td>40.93</td><td>54.00</td><td>-13.07</td><td>38.28</td><td>2.65</td><td>Average</td><td>100</td><td>84</td></tr><tr><td>4</td><td>20145.00</td><td>53.49</td><td>74.00</td><td>-20.51</td><td>50.84</td><td>2.65</td><td>Peak</td><td>100</td><td>84</td></tr><tr><td>5</td><td>26860.00</td><td>43.29</td><td>68.20</td><td>-24.91</td><td>34.84</td><td>8.45</td><td>Average</td><td>100</td><td>211</td></tr><tr><td>6</td><td>26860.00</td><td>55.66</td><td>88.20</td><td>-32.54</td><td>47.21</td><td>8.45</td><td>Peak</td><td>100</td><td>211</td></tr></tbody></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	13430.00	41.76	68.20	-26.44	35.81	5.95	Average	100	308	2	13430.00	55.93	88.20	-32.27	49.98	5.95	Peak	100	308	3	20145.00	40.93	54.00	-13.07	38.28	2.65	Average	100	84	4	20145.00	53.49	74.00	-20.51	50.84	2.65	Peak	100	84	5	26860.00	43.29	68.20	-24.91	34.84	8.45	Average	100	211	6	26860.00	55.66	88.20	-32.54	47.21	8.45	Peak	100	211
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																				
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																				
		dBuV/m			dBuV			cm	deg																																																																																				
1	13430.00	41.76	68.20	-26.44	35.81	5.95	Average	100	308																																																																																				
2	13430.00	55.93	88.20	-32.27	49.98	5.95	Peak	100	308																																																																																				
3	20145.00	40.93	54.00	-13.07	38.28	2.65	Average	100	84																																																																																				
4	20145.00	53.49	74.00	-20.51	50.84	2.65	Peak	100	84																																																																																				
5	26860.00	43.29	68.20	-24.91	34.84	8.45	Average	100	211																																																																																				
6	26860.00	55.66	88.20	-32.54	47.21	8.45	Peak	100	211																																																																																				
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																																													

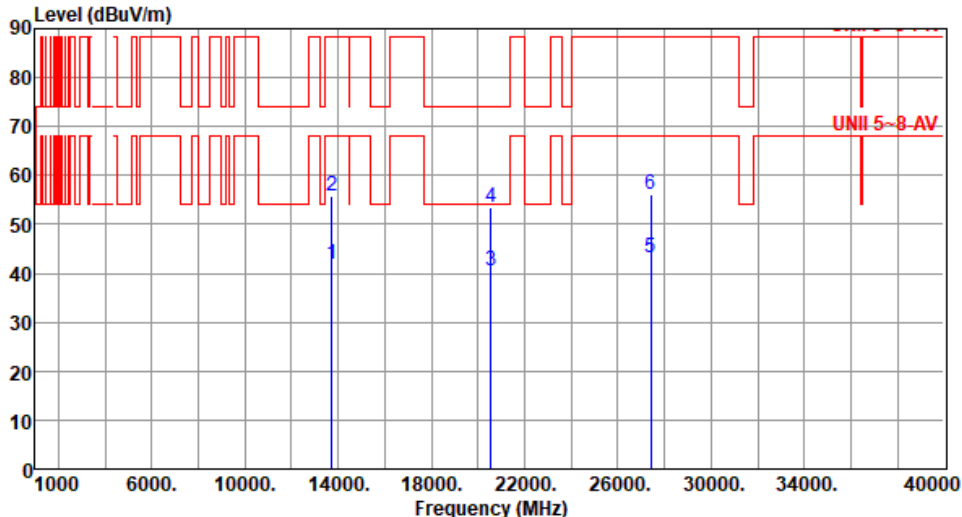

Modulation	be EHT20-OFDMA	Test Freq. (MHz)	6855
Polarization	Horizontal		
Test By :Paul Lin Temperature(°C):24 Humidity(%):64			
Level (dBuV/m)  Freq. Emission Limit Margin SA Factor Remark ANT Turn MHz level dBuV/m dBuV/m dB reading dBuV dB/m cm Table deg 113710.0041.8368.20-26.3735.806.03Average1007 213710.0055.7988.20-32.4149.766.03Peak1007 320565.0040.6654.00-13.3437.553.11Average100114 420565.0053.5274.00-20.4850.413.11Peak100114 527420.0043.2068.20-25.0034.728.48Average100185 627420.0055.9688.20-32.2447.488.48Peak100185			
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).			

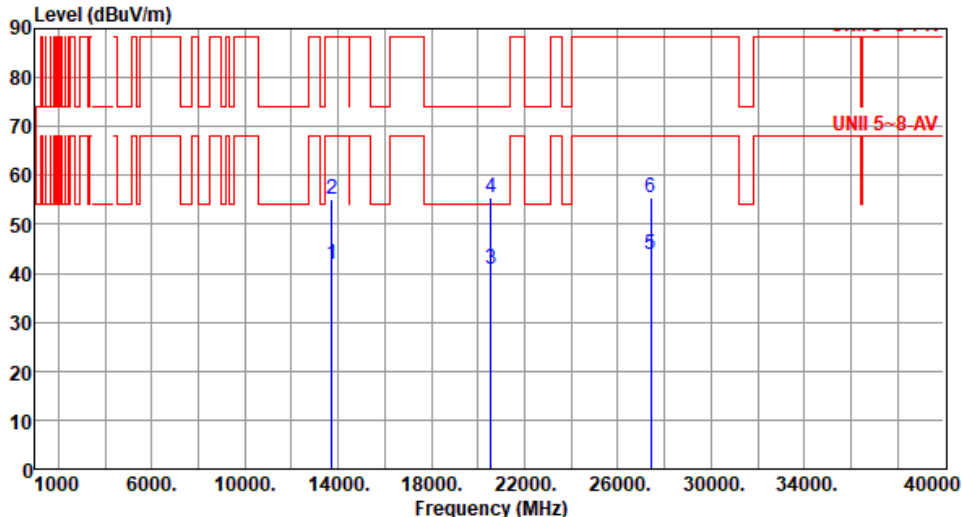


Modulation	be EHT20-OFDMA	Test Freq. (MHz)	6855																																																												
Polarization	Vertical																																																														
Test By :Paul Lin Temperature(°C):24 Humidity(%):64																																																															
Level (dBuV/m)  Freq. Emission Limit Margin SA Factor Remark ANT Turn level reading High Table MHz dBuV/m dBuV/m dB dBuV dB/m cm deg <table><tr><td>1</td><td>13710.00</td><td>41.84</td><td>68.20</td><td>-26.36</td><td>35.81</td><td>6.03</td><td>Average</td><td>100</td><td>187</td></tr><tr><td>2</td><td>13710.00</td><td>55.22</td><td>88.20</td><td>-32.98</td><td>49.19</td><td>6.03</td><td>Peak</td><td>100</td><td>187</td></tr><tr><td>3</td><td>20565.00</td><td>40.99</td><td>54.00</td><td>-13.01</td><td>37.88</td><td>3.11</td><td>Average</td><td>100</td><td>196</td></tr><tr><td>4</td><td>20565.00</td><td>55.33</td><td>74.00</td><td>-18.67</td><td>52.22</td><td>3.11</td><td>Peak</td><td>100</td><td>196</td></tr><tr><td>5</td><td>27420.00</td><td>43.86</td><td>68.20</td><td>-24.34</td><td>35.38</td><td>8.48</td><td>Average</td><td>100</td><td>160</td></tr><tr><td>6</td><td>27420.00</td><td>55.34</td><td>88.20</td><td>-32.86</td><td>46.86</td><td>8.48</td><td>Peak</td><td>100</td><td>160</td></tr></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).				1	13710.00	41.84	68.20	-26.36	35.81	6.03	Average	100	187	2	13710.00	55.22	88.20	-32.98	49.19	6.03	Peak	100	187	3	20565.00	40.99	54.00	-13.01	37.88	3.11	Average	100	196	4	20565.00	55.33	74.00	-18.67	52.22	3.11	Peak	100	196	5	27420.00	43.86	68.20	-24.34	35.38	8.48	Average	100	160	6	27420.00	55.34	88.20	-32.86	46.86	8.48	Peak	100	160
1	13710.00	41.84	68.20	-26.36	35.81	6.03	Average	100	187																																																						
2	13710.00	55.22	88.20	-32.98	49.19	6.03	Peak	100	187																																																						
3	20565.00	40.99	54.00	-13.01	37.88	3.11	Average	100	196																																																						
4	20565.00	55.33	74.00	-18.67	52.22	3.11	Peak	100	196																																																						
5	27420.00	43.86	68.20	-24.34	35.38	8.48	Average	100	160																																																						
6	27420.00	55.34	88.20	-32.86	46.86	8.48	Peak	100	160																																																						




Modulation	be EHT20-OFDMA	Test Freq. (MHz)	6875																																																																						
Polarization	Horizontal																																																																								
Test By :Paul Lin Temperature(°C):24 Humidity(%):64																																																																									
Level (dBuV/m) UNI 5~8-AV Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>13750.00</td><td>44.08</td><td>68.20</td><td>-24.12</td><td>38.08</td><td>6.00</td><td>Average</td><td>100</td><td>81</td></tr><tr><td>2</td><td>13750.00</td><td>57.06</td><td>88.20</td><td>-31.14</td><td>51.06</td><td>6.00</td><td>Peak</td><td>100</td><td>81</td></tr><tr><td>3</td><td>20625.00</td><td>41.26</td><td>54.00</td><td>-12.74</td><td>38.08</td><td>3.18</td><td>Average</td><td>100</td><td>349</td></tr><tr><td>4</td><td>20625.00</td><td>54.29</td><td>74.00</td><td>-19.71</td><td>51.11</td><td>3.18</td><td>Peak</td><td>100</td><td>349</td></tr><tr><td>5</td><td>27500.00</td><td>43.09</td><td>68.20</td><td>-25.11</td><td>34.58</td><td>8.51</td><td>Average</td><td>100</td><td>16</td></tr><tr><td>6</td><td>27500.00</td><td>55.93</td><td>88.20</td><td>-32.27</td><td>47.42</td><td>8.51</td><td>Peak</td><td>100</td><td>16</td></tr></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13750.00	44.08	68.20	-24.12	38.08	6.00	Average	100	81	2	13750.00	57.06	88.20	-31.14	51.06	6.00	Peak	100	81	3	20625.00	41.26	54.00	-12.74	38.08	3.18	Average	100	349	4	20625.00	54.29	74.00	-19.71	51.11	3.18	Peak	100	349	5	27500.00	43.09	68.20	-25.11	34.58	8.51	Average	100	16	6	27500.00	55.93	88.20	-32.27	47.42	8.51	Peak	100	16
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	13750.00	44.08	68.20	-24.12	38.08	6.00	Average	100	81																																																																
2	13750.00	57.06	88.20	-31.14	51.06	6.00	Peak	100	81																																																																
3	20625.00	41.26	54.00	-12.74	38.08	3.18	Average	100	349																																																																
4	20625.00	54.29	74.00	-19.71	51.11	3.18	Peak	100	349																																																																
5	27500.00	43.09	68.20	-25.11	34.58	8.51	Average	100	16																																																																
6	27500.00	55.93	88.20	-32.27	47.42	8.51	Peak	100	16																																																																

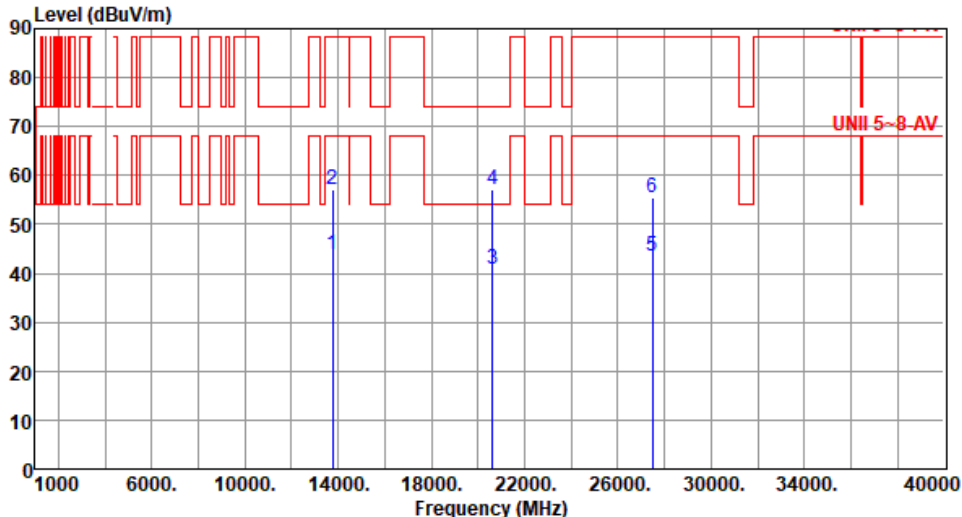


Modulation	be EHT20-OFDMA	Test Freq. (MHz)	6875																																																																																
Polarization	Vertical																																																																																		
Test By :Paul Lin Temperature(°C):24 Humidity(%):64																																																																																			
Level (dBuV/m)  <table><tr><th></th><th>Freq.</th><th>Emission level</th><th>Limit</th><th>Margin</th><th>SA reading</th><th>Factor</th><th>Remark</th><th>ANT High</th><th>Turn Table</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>13750.00</td><td>43.98</td><td>68.20</td><td>-24.22</td><td>37.98</td><td>6.00</td><td>Average</td><td>100</td><td>106</td></tr><tr><td>2</td><td>13750.00</td><td>57.23</td><td>88.20</td><td>-30.97</td><td>51.23</td><td>6.00</td><td>Peak</td><td>100</td><td>106</td></tr><tr><td>3</td><td>20625.00</td><td>41.01</td><td>54.00</td><td>-12.99</td><td>37.83</td><td>3.18</td><td>Average</td><td>100</td><td>117</td></tr><tr><td>4</td><td>20625.00</td><td>57.26</td><td>74.00</td><td>-16.74</td><td>54.08</td><td>3.18</td><td>Peak</td><td>100</td><td>117</td></tr><tr><td>5</td><td>27500.00</td><td>43.55</td><td>68.20</td><td>-24.65</td><td>35.04</td><td>8.51</td><td>Average</td><td>100</td><td>197</td></tr><tr><td>6</td><td>27500.00</td><td>55.62</td><td>88.20</td><td>-32.58</td><td>47.11</td><td>8.51</td><td>Peak</td><td>100</td><td>197</td></tr></table>					Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg	1	13750.00	43.98	68.20	-24.22	37.98	6.00	Average	100	106	2	13750.00	57.23	88.20	-30.97	51.23	6.00	Peak	100	106	3	20625.00	41.01	54.00	-12.99	37.83	3.18	Average	100	117	4	20625.00	57.26	74.00	-16.74	54.08	3.18	Peak	100	117	5	27500.00	43.55	68.20	-24.65	35.04	8.51	Average	100	197	6	27500.00	55.62	88.20	-32.58	47.11	8.51	Peak	100	197
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg																																																																										
1	13750.00	43.98	68.20	-24.22	37.98	6.00	Average	100	106																																																																										
2	13750.00	57.23	88.20	-30.97	51.23	6.00	Peak	100	106																																																																										
3	20625.00	41.01	54.00	-12.99	37.83	3.18	Average	100	117																																																																										
4	20625.00	57.26	74.00	-16.74	54.08	3.18	Peak	100	117																																																																										
5	27500.00	43.55	68.20	-24.65	35.04	8.51	Average	100	197																																																																										
6	27500.00	55.62	88.20	-32.58	47.11	8.51	Peak	100	197																																																																										
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																			

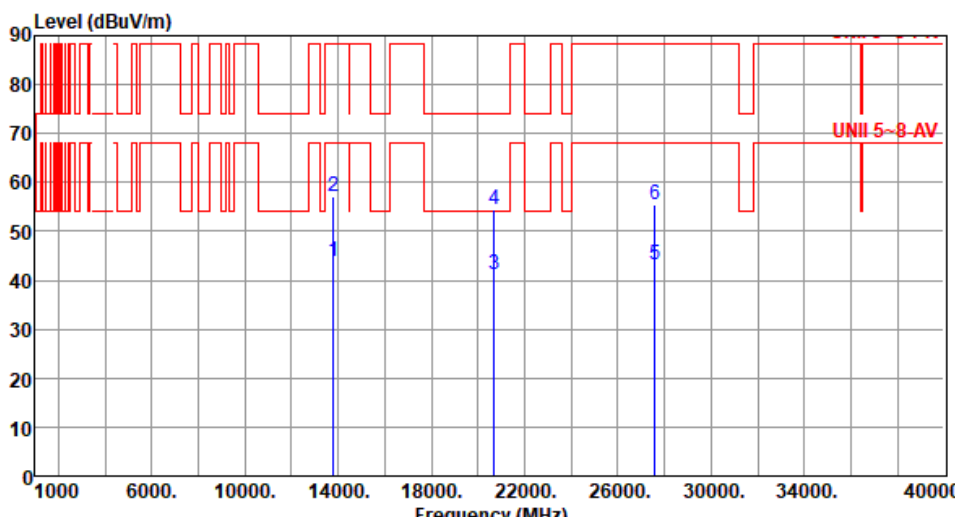

Modulation	be EHT20-OFDMA	Test Freq. (MHz)	6895																																																																																										
Polarization	Horizontal																																																																																												
Test By :Paul Lin Temperature(°C):24 Humidity(%):64																																																																																													
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>13790.00</td><td>43.96</td><td>68.20</td><td>-24.24</td><td>37.74</td><td>6.22</td><td>Average</td><td>100</td><td>59</td></tr><tr><td>2</td><td>13790.00</td><td>57.05</td><td>88.20</td><td>-31.15</td><td>50.83</td><td>6.22</td><td>Peak</td><td>100</td><td>59</td></tr><tr><td>3</td><td>20685.00</td><td>41.16</td><td>54.00</td><td>-12.84</td><td>37.91</td><td>3.25</td><td>Average</td><td>100</td><td>63</td></tr><tr><td>4</td><td>20685.00</td><td>54.41</td><td>74.00</td><td>-19.59</td><td>51.16</td><td>3.25</td><td>Peak</td><td>100</td><td>63</td></tr><tr><td>5</td><td>27580.00</td><td>43.13</td><td>68.20</td><td>-25.07</td><td>34.58</td><td>8.55</td><td>Average</td><td>100</td><td>81</td></tr><tr><td>6</td><td>27580.00</td><td>55.46</td><td>88.20</td><td>-32.74</td><td>46.91</td><td>8.55</td><td>Peak</td><td>100</td><td>81</td></tr></tbody></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	13790.00	43.96	68.20	-24.24	37.74	6.22	Average	100	59	2	13790.00	57.05	88.20	-31.15	50.83	6.22	Peak	100	59	3	20685.00	41.16	54.00	-12.84	37.91	3.25	Average	100	63	4	20685.00	54.41	74.00	-19.59	51.16	3.25	Peak	100	63	5	27580.00	43.13	68.20	-25.07	34.58	8.55	Average	100	81	6	27580.00	55.46	88.20	-32.74	46.91	8.55	Peak	100	81
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																				
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																				
		dBuV/m			dBuV			cm	deg																																																																																				
1	13790.00	43.96	68.20	-24.24	37.74	6.22	Average	100	59																																																																																				
2	13790.00	57.05	88.20	-31.15	50.83	6.22	Peak	100	59																																																																																				
3	20685.00	41.16	54.00	-12.84	37.91	3.25	Average	100	63																																																																																				
4	20685.00	54.41	74.00	-19.59	51.16	3.25	Peak	100	63																																																																																				
5	27580.00	43.13	68.20	-25.07	34.58	8.55	Average	100	81																																																																																				
6	27580.00	55.46	88.20	-32.74	46.91	8.55	Peak	100	81																																																																																				
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																													

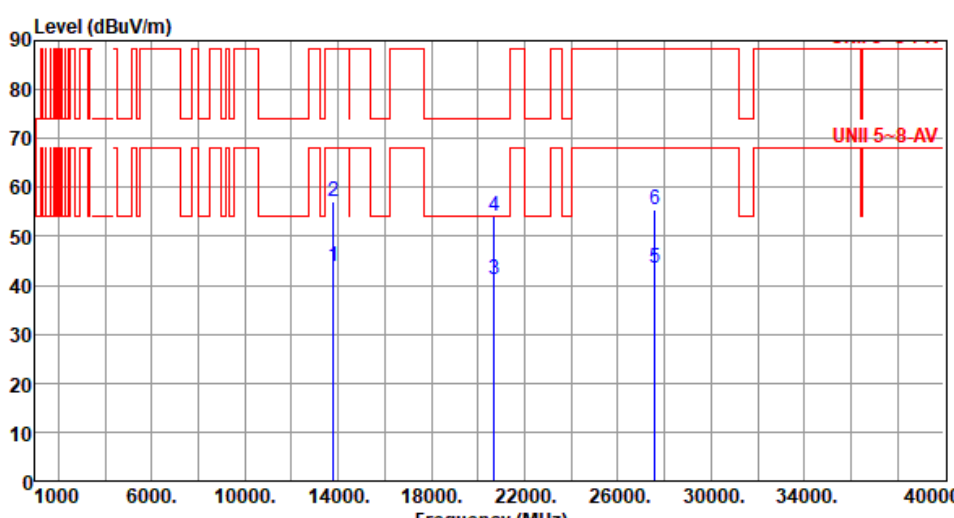

Modulation	be EHT20-OFDMA	Test Freq. (MHz)	6895																																																												
Polarization	Vertical																																																														
Test By :Paul Lin Temperature(°C):24 Humidity(%):64																																																															
Level (dBuV/m)  Freq. Emission Limit Margin SA Factor Remark ANT Turn MHz level dBuV/m dBuV/m dB reading dBuV dB/m cm Table deg <table><tr><td>1</td><td>13790.00</td><td>43.88</td><td>68.20</td><td>-24.32</td><td>37.66</td><td>6.22</td><td>Average</td><td>100</td><td>38</td></tr><tr><td>2</td><td>13790.00</td><td>57.19</td><td>88.20</td><td>-31.01</td><td>50.97</td><td>6.22</td><td>Peak</td><td>100</td><td>38</td></tr><tr><td>3</td><td>20685.00</td><td>41.07</td><td>54.00</td><td>-12.93</td><td>37.82</td><td>3.25</td><td>Average</td><td>100</td><td>71</td></tr><tr><td>4</td><td>20685.00</td><td>54.27</td><td>74.00</td><td>-19.73</td><td>51.02</td><td>3.25</td><td>Peak</td><td>100</td><td>71</td></tr><tr><td>5</td><td>27580.00</td><td>43.35</td><td>68.20</td><td>-24.85</td><td>34.80</td><td>8.55</td><td>Average</td><td>100</td><td>46</td></tr><tr><td>6</td><td>27580.00</td><td>55.33</td><td>88.20</td><td>-32.87</td><td>46.78</td><td>8.55</td><td>Peak</td><td>100</td><td>46</td></tr></table>				1	13790.00	43.88	68.20	-24.32	37.66	6.22	Average	100	38	2	13790.00	57.19	88.20	-31.01	50.97	6.22	Peak	100	38	3	20685.00	41.07	54.00	-12.93	37.82	3.25	Average	100	71	4	20685.00	54.27	74.00	-19.73	51.02	3.25	Peak	100	71	5	27580.00	43.35	68.20	-24.85	34.80	8.55	Average	100	46	6	27580.00	55.33	88.20	-32.87	46.78	8.55	Peak	100	46
1	13790.00	43.88	68.20	-24.32	37.66	6.22	Average	100	38																																																						
2	13790.00	57.19	88.20	-31.01	50.97	6.22	Peak	100	38																																																						
3	20685.00	41.07	54.00	-12.93	37.82	3.25	Average	100	71																																																						
4	20685.00	54.27	74.00	-19.73	51.02	3.25	Peak	100	71																																																						
5	27580.00	43.35	68.20	-24.85	34.80	8.55	Average	100	46																																																						
6	27580.00	55.33	88.20	-32.87	46.78	8.55	Peak	100	46																																																						
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																															




Modulation	be EHT20-OFDMA		Test Freq. (MHz)		7015																																																																																														
Polarization	Horizontal																																																																																																		
Test By :Paul Lin Temperature(°C):24 Humidity(%):64																																																																																																			
Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>14030.00</td><td>43.88</td><td>68.20</td><td>-24.32</td><td>37.14</td><td>6.74</td><td>Average</td><td>100</td><td>176</td></tr><tr><td>2</td><td>14030.00</td><td>57.12</td><td>88.20</td><td>-31.08</td><td>50.38</td><td>6.74</td><td>Peak</td><td>100</td><td>176</td></tr><tr><td>3</td><td>21045.00</td><td>41.37</td><td>54.00</td><td>-12.63</td><td>37.48</td><td>3.89</td><td>Average</td><td>100</td><td>217</td></tr><tr><td>4</td><td>21045.00</td><td>54.33</td><td>74.00</td><td>-19.67</td><td>50.44</td><td>3.89</td><td>Peak</td><td>100</td><td>217</td></tr><tr><td>5</td><td>28060.00</td><td>43.22</td><td>68.20</td><td>-24.98</td><td>34.31</td><td>8.91</td><td>Average</td><td>100</td><td>176</td></tr><tr><td>6</td><td>28060.00</td><td>55.54</td><td>88.20</td><td>-32.66</td><td>46.63</td><td>8.91</td><td>Peak</td><td>100</td><td>176</td></tr></table>											Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	14030.00	43.88	68.20	-24.32	37.14	6.74	Average	100	176	2	14030.00	57.12	88.20	-31.08	50.38	6.74	Peak	100	176	3	21045.00	41.37	54.00	-12.63	37.48	3.89	Average	100	217	4	21045.00	54.33	74.00	-19.67	50.44	3.89	Peak	100	217	5	28060.00	43.22	68.20	-24.98	34.31	8.91	Average	100	176	6	28060.00	55.54	88.20	-32.66	46.63	8.91	Peak	100	176
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																										
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																										
		dBuV/m			dBuV			cm	deg																																																																																										
1	14030.00	43.88	68.20	-24.32	37.14	6.74	Average	100	176																																																																																										
2	14030.00	57.12	88.20	-31.08	50.38	6.74	Peak	100	176																																																																																										
3	21045.00	41.37	54.00	-12.63	37.48	3.89	Average	100	217																																																																																										
4	21045.00	54.33	74.00	-19.67	50.44	3.89	Peak	100	217																																																																																										
5	28060.00	43.22	68.20	-24.98	34.31	8.91	Average	100	176																																																																																										
6	28060.00	55.54	88.20	-32.66	46.63	8.91	Peak	100	176																																																																																										
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																																			




Modulation	be EHT20-OFDMA	Test Freq. (MHz)	7015																																																																																										
Polarization	Vertical																																																																																												
Test By :Paul Lin Temperature(°C):24 Humidity(%):64																																																																																													
Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>14030.00</td><td>43.94</td><td>68.20</td><td>-24.26</td><td>37.20</td><td>6.74</td><td>Average</td><td>100</td><td>201</td></tr><tr><td>2</td><td>14030.00</td><td>57.11</td><td>88.20</td><td>-31.09</td><td>50.37</td><td>6.74</td><td>Peak</td><td>100</td><td>201</td></tr><tr><td>3</td><td>21045.00</td><td>41.22</td><td>54.00</td><td>-12.78</td><td>37.33</td><td>3.89</td><td>Average</td><td>100</td><td>203</td></tr><tr><td>4</td><td>21045.00</td><td>54.38</td><td>74.00</td><td>-19.62</td><td>50.49</td><td>3.89</td><td>Peak</td><td>100</td><td>203</td></tr><tr><td>5</td><td>28060.00</td><td>43.38</td><td>68.20</td><td>-24.82</td><td>34.47</td><td>8.91</td><td>Average</td><td>100</td><td>172</td></tr><tr><td>6</td><td>28060.00</td><td>55.46</td><td>88.20</td><td>-32.74</td><td>46.55</td><td>8.91</td><td>Peak</td><td>100</td><td>172</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	14030.00	43.94	68.20	-24.26	37.20	6.74	Average	100	201	2	14030.00	57.11	88.20	-31.09	50.37	6.74	Peak	100	201	3	21045.00	41.22	54.00	-12.78	37.33	3.89	Average	100	203	4	21045.00	54.38	74.00	-19.62	50.49	3.89	Peak	100	203	5	28060.00	43.38	68.20	-24.82	34.47	8.91	Average	100	172	6	28060.00	55.46	88.20	-32.74	46.55	8.91	Peak	100	172
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																				
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																				
		dBuV/m			dBuV			cm	deg																																																																																				
1	14030.00	43.94	68.20	-24.26	37.20	6.74	Average	100	201																																																																																				
2	14030.00	57.11	88.20	-31.09	50.37	6.74	Peak	100	201																																																																																				
3	21045.00	41.22	54.00	-12.78	37.33	3.89	Average	100	203																																																																																				
4	21045.00	54.38	74.00	-19.62	50.49	3.89	Peak	100	203																																																																																				
5	28060.00	43.38	68.20	-24.82	34.47	8.91	Average	100	172																																																																																				
6	28060.00	55.46	88.20	-32.74	46.55	8.91	Peak	100	172																																																																																				
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																													

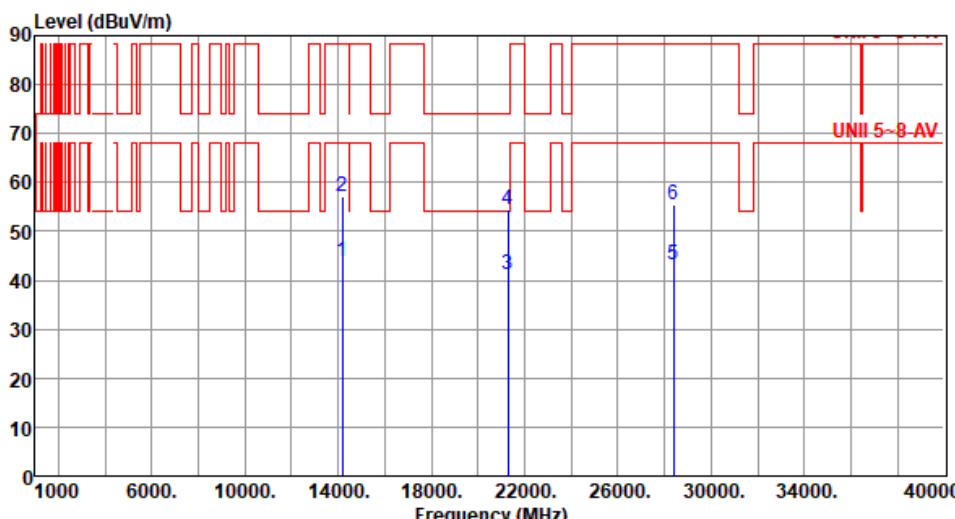

Modulation	be EHT20-OFDMA	Test Freq. (MHz)	7095																																																																																										
Polarization	Horizontal																																																																																												
Test By :Paul Lin Temperature(°C):24 Humidity(%):64																																																																																													
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>14190.00</td><td>43.84</td><td>68.20</td><td>-24.36</td><td>36.94</td><td>6.90</td><td>Average</td><td>100</td><td>184</td></tr><tr><td>2</td><td>14190.00</td><td>57.21</td><td>88.20</td><td>-30.99</td><td>50.31</td><td>6.90</td><td>Peak</td><td>100</td><td>184</td></tr><tr><td>3</td><td>21285.00</td><td>41.29</td><td>54.00</td><td>-12.71</td><td>37.10</td><td>4.19</td><td>Average</td><td>100</td><td>281</td></tr><tr><td>4</td><td>21285.00</td><td>54.56</td><td>74.00</td><td>-19.44</td><td>50.37</td><td>4.19</td><td>Peak</td><td>100</td><td>281</td></tr><tr><td>5</td><td>28380.00</td><td>43.29</td><td>68.20</td><td>-24.91</td><td>34.09</td><td>9.20</td><td>Average</td><td>100</td><td>118</td></tr><tr><td>6</td><td>28380.00</td><td>55.62</td><td>88.20</td><td>-32.58</td><td>46.42</td><td>9.20</td><td>Peak</td><td>100</td><td>118</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	14190.00	43.84	68.20	-24.36	36.94	6.90	Average	100	184	2	14190.00	57.21	88.20	-30.99	50.31	6.90	Peak	100	184	3	21285.00	41.29	54.00	-12.71	37.10	4.19	Average	100	281	4	21285.00	54.56	74.00	-19.44	50.37	4.19	Peak	100	281	5	28380.00	43.29	68.20	-24.91	34.09	9.20	Average	100	118	6	28380.00	55.62	88.20	-32.58	46.42	9.20	Peak	100	118
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																				
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																				
		dBuV/m			dBuV			cm	deg																																																																																				
1	14190.00	43.84	68.20	-24.36	36.94	6.90	Average	100	184																																																																																				
2	14190.00	57.21	88.20	-30.99	50.31	6.90	Peak	100	184																																																																																				
3	21285.00	41.29	54.00	-12.71	37.10	4.19	Average	100	281																																																																																				
4	21285.00	54.56	74.00	-19.44	50.37	4.19	Peak	100	281																																																																																				
5	28380.00	43.29	68.20	-24.91	34.09	9.20	Average	100	118																																																																																				
6	28380.00	55.62	88.20	-32.58	46.42	9.20	Peak	100	118																																																																																				
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																																													

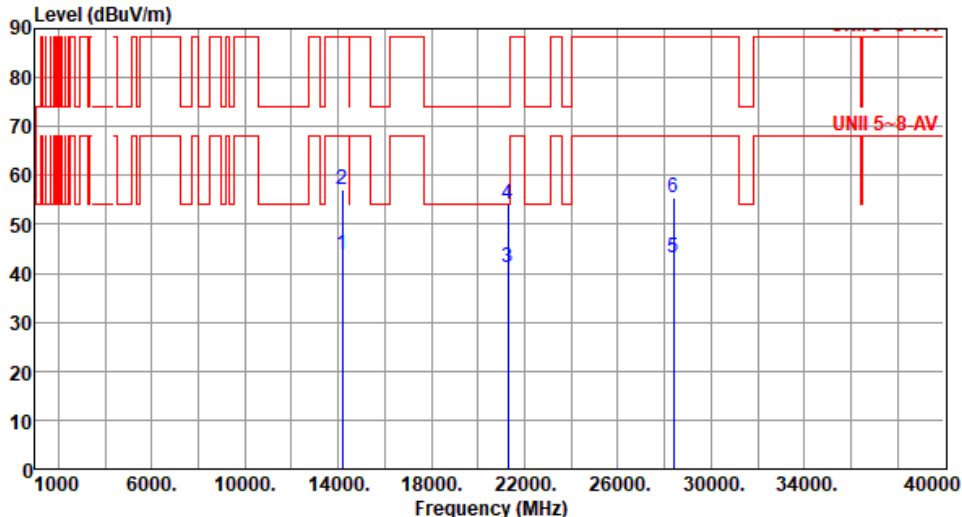


Modulation	be EHT20-OFDMA	Test Freq. (MHz)	7095																																																																						
Polarization	Vertical																																																																								
Test By :Paul Lin Temperature(°C):24 Humidity(%):64																																																																									
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>14190.00</td><td>43.94</td><td>68.20</td><td>-24.26</td><td>37.04</td><td>6.90</td><td>Average</td><td>100</td><td>203</td></tr><tr><td>2</td><td>14190.00</td><td>57.16</td><td>88.20</td><td>-31.04</td><td>50.26</td><td>6.90</td><td>Peak</td><td>100</td><td>203</td></tr><tr><td>3</td><td>21285.00</td><td>41.32</td><td>54.00</td><td>-12.68</td><td>37.13</td><td>4.19</td><td>Average</td><td>100</td><td>151</td></tr><tr><td>4</td><td>21285.00</td><td>54.22</td><td>74.00</td><td>-19.78</td><td>50.03</td><td>4.19</td><td>Peak</td><td>100</td><td>151</td></tr><tr><td>5</td><td>28380.00</td><td>43.29</td><td>68.20</td><td>-24.91</td><td>34.09</td><td>9.20</td><td>Average</td><td>100</td><td>207</td></tr><tr><td>6</td><td>28380.00</td><td>55.53</td><td>88.20</td><td>-32.67</td><td>46.33</td><td>9.20</td><td>Peak</td><td>100</td><td>207</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	14190.00	43.94	68.20	-24.26	37.04	6.90	Average	100	203	2	14190.00	57.16	88.20	-31.04	50.26	6.90	Peak	100	203	3	21285.00	41.32	54.00	-12.68	37.13	4.19	Average	100	151	4	21285.00	54.22	74.00	-19.78	50.03	4.19	Peak	100	151	5	28380.00	43.29	68.20	-24.91	34.09	9.20	Average	100	207	6	28380.00	55.53	88.20	-32.67	46.33	9.20	Peak	100	207
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	14190.00	43.94	68.20	-24.26	37.04	6.90	Average	100	203																																																																
2	14190.00	57.16	88.20	-31.04	50.26	6.90	Peak	100	203																																																																
3	21285.00	41.32	54.00	-12.68	37.13	4.19	Average	100	151																																																																
4	21285.00	54.22	74.00	-19.78	50.03	4.19	Peak	100	151																																																																
5	28380.00	43.29	68.20	-24.91	34.09	9.20	Average	100	207																																																																
6	28380.00	55.53	88.20	-32.67	46.33	9.20	Peak	100	207																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									




Modulation	be EHT20-OFDMA	Test Freq. (MHz)	7115																																																																						
Polarization	Horizontal																																																																								
Test By :Paul Lin Temperature(°C):24 Humidity(%):64																																																																									
Level (dBuV/m) UNII 5-8-AV Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>7125.00</td><td>52.27</td><td>68.20</td><td>-15.93</td><td>47.41</td><td>4.86</td><td>Average</td><td>127</td><td>278</td></tr><tr><td>2</td><td>7125.00</td><td>62.72</td><td>88.20</td><td>-25.48</td><td>57.86</td><td>4.86</td><td>Peak</td><td>127</td><td>278</td></tr><tr><td>3</td><td>14230.00</td><td>45.30</td><td>68.20</td><td>-22.90</td><td>38.18</td><td>7.12</td><td>Average</td><td>100</td><td>43</td></tr><tr><td>4</td><td>14230.00</td><td>58.27</td><td>88.20</td><td>-29.93</td><td>51.15</td><td>7.12</td><td>Peak</td><td>100</td><td>43</td></tr><tr><td>5</td><td>21345.00</td><td>41.46</td><td>54.00</td><td>-12.54</td><td>37.21</td><td>4.25</td><td>Average</td><td>100</td><td>104</td></tr><tr><td>6</td><td>21345.00</td><td>54.95</td><td>74.00</td><td>-19.05</td><td>50.70</td><td>4.25</td><td>Peak</td><td>100</td><td>104</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7125.00	52.27	68.20	-15.93	47.41	4.86	Average	127	278	2	7125.00	62.72	88.20	-25.48	57.86	4.86	Peak	127	278	3	14230.00	45.30	68.20	-22.90	38.18	7.12	Average	100	43	4	14230.00	58.27	88.20	-29.93	51.15	7.12	Peak	100	43	5	21345.00	41.46	54.00	-12.54	37.21	4.25	Average	100	104	6	21345.00	54.95	74.00	-19.05	50.70	4.25	Peak	100	104
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	7125.00	52.27	68.20	-15.93	47.41	4.86	Average	127	278																																																																
2	7125.00	62.72	88.20	-25.48	57.86	4.86	Peak	127	278																																																																
3	14230.00	45.30	68.20	-22.90	38.18	7.12	Average	100	43																																																																
4	14230.00	58.27	88.20	-29.93	51.15	7.12	Peak	100	43																																																																
5	21345.00	41.46	54.00	-12.54	37.21	4.25	Average	100	104																																																																
6	21345.00	54.95	74.00	-19.05	50.70	4.25	Peak	100	104																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									

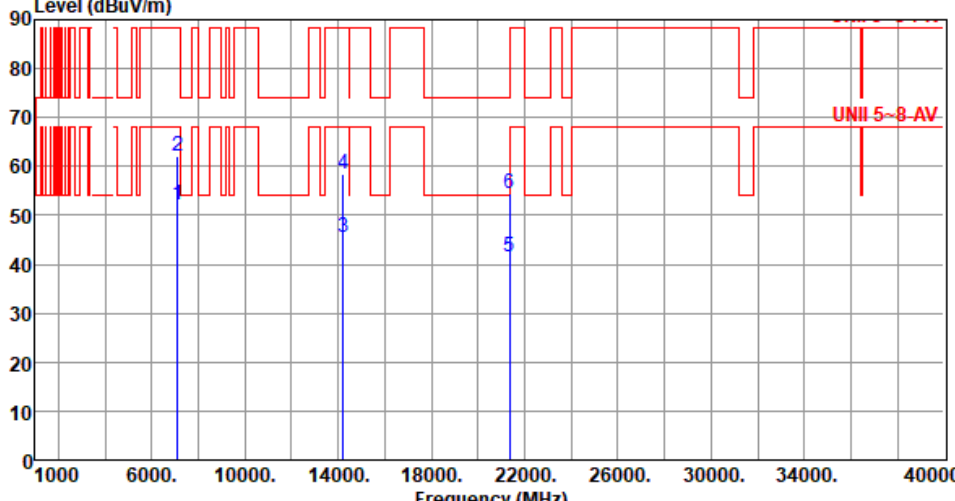

Modulation	be EHT20-OFDMA	Test Freq. (MHz)	7115																																																																						
Polarization	Vertical																																																																								
Test By :Paul Lin Temperature(°C):24 Humidity(%):64																																																																									
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>7125.00</td><td>52.09</td><td>68.20</td><td>-16.11</td><td>47.23</td><td>4.86</td><td>Average</td><td>259</td><td>351</td></tr><tr><td>2</td><td>7125.00</td><td>62.07</td><td>88.20</td><td>-26.13</td><td>57.21</td><td>4.86</td><td>Peak</td><td>259</td><td>351</td></tr><tr><td>3</td><td>14230.00</td><td>45.36</td><td>68.20</td><td>-22.84</td><td>38.24</td><td>7.12</td><td>Average</td><td>100</td><td>54</td></tr><tr><td>4</td><td>14230.00</td><td>58.47</td><td>88.20</td><td>-29.73</td><td>51.35</td><td>7.12</td><td>Peak</td><td>100</td><td>54</td></tr><tr><td>5</td><td>21345.00</td><td>41.53</td><td>54.00</td><td>-12.47</td><td>37.28</td><td>4.25</td><td>Average</td><td>100</td><td>41</td></tr><tr><td>6</td><td>21345.00</td><td>54.52</td><td>74.00</td><td>-19.48</td><td>50.27</td><td>4.25</td><td>Peak</td><td>100</td><td>41</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7125.00	52.09	68.20	-16.11	47.23	4.86	Average	259	351	2	7125.00	62.07	88.20	-26.13	57.21	4.86	Peak	259	351	3	14230.00	45.36	68.20	-22.84	38.24	7.12	Average	100	54	4	14230.00	58.47	88.20	-29.73	51.35	7.12	Peak	100	54	5	21345.00	41.53	54.00	-12.47	37.28	4.25	Average	100	41	6	21345.00	54.52	74.00	-19.48	50.27	4.25	Peak	100	41
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	7125.00	52.09	68.20	-16.11	47.23	4.86	Average	259	351																																																																
2	7125.00	62.07	88.20	-26.13	57.21	4.86	Peak	259	351																																																																
3	14230.00	45.36	68.20	-22.84	38.24	7.12	Average	100	54																																																																
4	14230.00	58.47	88.20	-29.73	51.35	7.12	Peak	100	54																																																																
5	21345.00	41.53	54.00	-12.47	37.28	4.25	Average	100	41																																																																
6	21345.00	54.52	74.00	-19.48	50.27	4.25	Peak	100	41																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									

Unwanted Emissions (Above 1GHz) for be EHT40-OFDMA

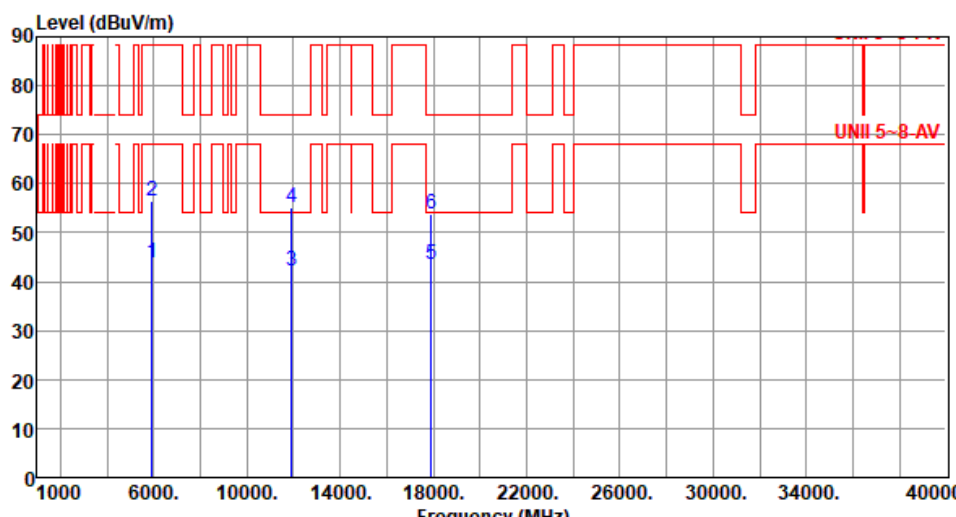Modulation	be EHT40-OFDMA	Test Freq. (MHz)	5965																																																												
Polarization	Horizontal																																																														
Test By :Paul Lin Temperature(°C):24 Humidity(%):64																																																															
Level (dBUV/m)  Freq. Emission Limit Margin SA Factor Remark ANT Turn level MHz dBuV/m dBuV/m dB reading dBuV dB/m cm deg <table><tr><td>1</td><td>5925.00</td><td>43.94</td><td>68.20</td><td>-24.26</td><td>42.81</td><td>1.13</td><td>Average</td><td>355</td><td>299</td></tr><tr><td>2</td><td>5925.00</td><td>56.54</td><td>88.20</td><td>-31.66</td><td>55.41</td><td>1.13</td><td>Peak</td><td>355</td><td>299</td></tr><tr><td>3</td><td>11930.00</td><td>42.11</td><td>54.00</td><td>-11.89</td><td>36.02</td><td>6.09</td><td>Average</td><td>100</td><td>67</td></tr><tr><td>4</td><td>11930.00</td><td>55.14</td><td>74.00</td><td>-18.86</td><td>49.05</td><td>6.09</td><td>Peak</td><td>100</td><td>67</td></tr><tr><td>5</td><td>17895.00</td><td>43.40</td><td>54.00</td><td>-10.60</td><td>32.42</td><td>10.98</td><td>Average</td><td>100</td><td>114</td></tr><tr><td>6</td><td>17895.00</td><td>53.76</td><td>74.00</td><td>-20.24</td><td>42.78</td><td>10.98</td><td>Peak</td><td>100</td><td>114</td></tr></table>				1	5925.00	43.94	68.20	-24.26	42.81	1.13	Average	355	299	2	5925.00	56.54	88.20	-31.66	55.41	1.13	Peak	355	299	3	11930.00	42.11	54.00	-11.89	36.02	6.09	Average	100	67	4	11930.00	55.14	74.00	-18.86	49.05	6.09	Peak	100	67	5	17895.00	43.40	54.00	-10.60	32.42	10.98	Average	100	114	6	17895.00	53.76	74.00	-20.24	42.78	10.98	Peak	100	114
1	5925.00	43.94	68.20	-24.26	42.81	1.13	Average	355	299																																																						
2	5925.00	56.54	88.20	-31.66	55.41	1.13	Peak	355	299																																																						
3	11930.00	42.11	54.00	-11.89	36.02	6.09	Average	100	67																																																						
4	11930.00	55.14	74.00	-18.86	49.05	6.09	Peak	100	67																																																						
5	17895.00	43.40	54.00	-10.60	32.42	10.98	Average	100	114																																																						
6	17895.00	53.76	74.00	-20.24	42.78	10.98	Peak	100	114																																																						
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																															




Modulation	be EHT40-OFDMA	Test Freq. (MHz)	5965																																																																						
Polarization	Vertical																																																																								
Test By :Paul Lin Temperature(°C):24 Humidity(%):64																																																																									
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5925.00</td><td>43.52</td><td>68.20</td><td>-24.68</td><td>42.39</td><td>1.13</td><td>Average</td><td>322</td><td>25</td></tr><tr><td>2</td><td>5925.00</td><td>55.92</td><td>88.20</td><td>-32.28</td><td>54.79</td><td>1.13</td><td>Peak</td><td>322</td><td>25</td></tr><tr><td>3</td><td>11930.00</td><td>41.80</td><td>54.00</td><td>-12.20</td><td>35.71</td><td>6.09</td><td>Average</td><td>100</td><td>72</td></tr><tr><td>4</td><td>11930.00</td><td>54.97</td><td>74.00</td><td>-19.03</td><td>48.88</td><td>6.09</td><td>Peak</td><td>100</td><td>72</td></tr><tr><td>5</td><td>17895.00</td><td>43.36</td><td>54.00</td><td>-10.64</td><td>32.38</td><td>10.98</td><td>Average</td><td>100</td><td>107</td></tr><tr><td>6</td><td>17895.00</td><td>53.64</td><td>74.00</td><td>-20.36</td><td>42.66</td><td>10.98</td><td>Peak</td><td>100</td><td>107</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5925.00	43.52	68.20	-24.68	42.39	1.13	Average	322	25	2	5925.00	55.92	88.20	-32.28	54.79	1.13	Peak	322	25	3	11930.00	41.80	54.00	-12.20	35.71	6.09	Average	100	72	4	11930.00	54.97	74.00	-19.03	48.88	6.09	Peak	100	72	5	17895.00	43.36	54.00	-10.64	32.38	10.98	Average	100	107	6	17895.00	53.64	74.00	-20.36	42.66	10.98	Peak	100	107
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	5925.00	43.52	68.20	-24.68	42.39	1.13	Average	322	25																																																																
2	5925.00	55.92	88.20	-32.28	54.79	1.13	Peak	322	25																																																																
3	11930.00	41.80	54.00	-12.20	35.71	6.09	Average	100	72																																																																
4	11930.00	54.97	74.00	-19.03	48.88	6.09	Peak	100	72																																																																
5	17895.00	43.36	54.00	-10.64	32.38	10.98	Average	100	107																																																																
6	17895.00	53.64	74.00	-20.36	42.66	10.98	Peak	100	107																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									




Modulation	be EHT40-OFDMA	Test Freq. (MHz)	6165																																																																																										
Polarization	Horizontal																																																																																												
Test By :Paul Lin Temperature(°C):24 Humidity(%):64																																																																																													
Level (dBUV/m) Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>12330.00</td><td>42.17</td><td>54.00</td><td>-11.83</td><td>36.20</td><td>5.97</td><td>Average</td><td>100</td><td>217</td></tr><tr><td>2</td><td>12330.00</td><td>55.41</td><td>74.00</td><td>-18.59</td><td>49.44</td><td>5.97</td><td>Peak</td><td>100</td><td>217</td></tr><tr><td>3</td><td>18495.00</td><td>41.03</td><td>54.00</td><td>-12.97</td><td>39.26</td><td>1.77</td><td>Average</td><td>100</td><td>142</td></tr><tr><td>4</td><td>18495.00</td><td>53.57</td><td>74.00</td><td>-20.43</td><td>51.80</td><td>1.77</td><td>Peak</td><td>100</td><td>142</td></tr><tr><td>5</td><td>24660.00</td><td>43.11</td><td>68.20</td><td>-25.09</td><td>34.79</td><td>8.32</td><td>Average</td><td>100</td><td>53</td></tr><tr><td>6</td><td>24660.00</td><td>56.28</td><td>88.20</td><td>-31.92</td><td>47.96</td><td>8.32</td><td>Peak</td><td>100</td><td>53</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	12330.00	42.17	54.00	-11.83	36.20	5.97	Average	100	217	2	12330.00	55.41	74.00	-18.59	49.44	5.97	Peak	100	217	3	18495.00	41.03	54.00	-12.97	39.26	1.77	Average	100	142	4	18495.00	53.57	74.00	-20.43	51.80	1.77	Peak	100	142	5	24660.00	43.11	68.20	-25.09	34.79	8.32	Average	100	53	6	24660.00	56.28	88.20	-31.92	47.96	8.32	Peak	100	53
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																				
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																				
		dBuV/m			dBuV			cm	deg																																																																																				
1	12330.00	42.17	54.00	-11.83	36.20	5.97	Average	100	217																																																																																				
2	12330.00	55.41	74.00	-18.59	49.44	5.97	Peak	100	217																																																																																				
3	18495.00	41.03	54.00	-12.97	39.26	1.77	Average	100	142																																																																																				
4	18495.00	53.57	74.00	-20.43	51.80	1.77	Peak	100	142																																																																																				
5	24660.00	43.11	68.20	-25.09	34.79	8.32	Average	100	53																																																																																				
6	24660.00	56.28	88.20	-31.92	47.96	8.32	Peak	100	53																																																																																				
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																																													

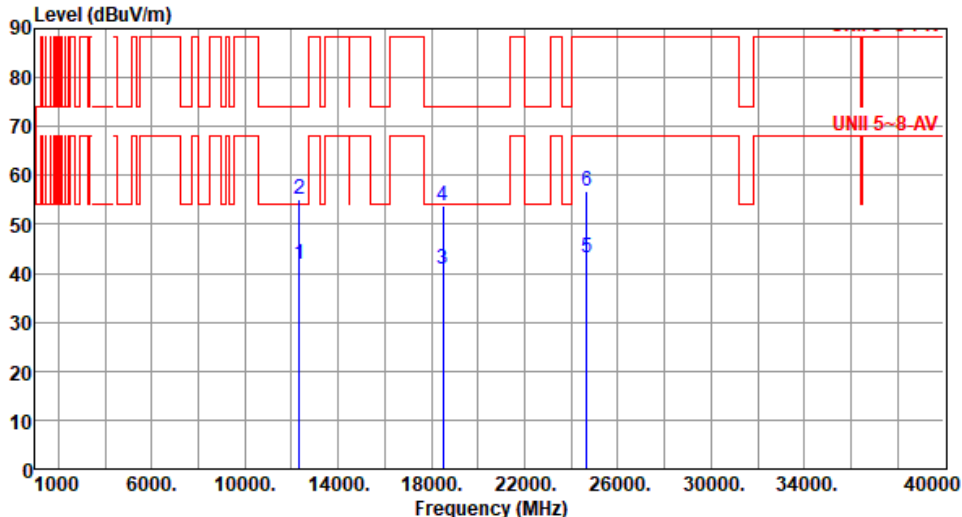


Modulation	be EHT40-OFDMA	Test Freq. (MHz)	6165																																																																						
Polarization	Vertical																																																																								
Test By :Paul Lin Temperature(°C):24 Humidity(%):64																																																																									
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>12330.00</td><td>41.77</td><td>54.00</td><td>-12.23</td><td>35.80</td><td>5.97</td><td>Average</td><td>100</td><td>309</td></tr><tr><td>2</td><td>12330.00</td><td>55.08</td><td>74.00</td><td>-18.92</td><td>49.11</td><td>5.97</td><td>Peak</td><td>100</td><td>309</td></tr><tr><td>3</td><td>18495.00</td><td>40.85</td><td>54.00</td><td>-13.15</td><td>39.08</td><td>1.77</td><td>Average</td><td>100</td><td>83</td></tr><tr><td>4</td><td>18495.00</td><td>53.78</td><td>74.00</td><td>-20.22</td><td>52.01</td><td>1.77</td><td>Peak</td><td>100</td><td>83</td></tr><tr><td>5</td><td>24660.00</td><td>43.21</td><td>68.20</td><td>-24.99</td><td>34.89</td><td>8.32</td><td>Average</td><td>100</td><td>68</td></tr><tr><td>6</td><td>24660.00</td><td>56.74</td><td>88.20</td><td>-31.46</td><td>48.42</td><td>8.32</td><td>Peak</td><td>100</td><td>68</td></tr></tbody></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	12330.00	41.77	54.00	-12.23	35.80	5.97	Average	100	309	2	12330.00	55.08	74.00	-18.92	49.11	5.97	Peak	100	309	3	18495.00	40.85	54.00	-13.15	39.08	1.77	Average	100	83	4	18495.00	53.78	74.00	-20.22	52.01	1.77	Peak	100	83	5	24660.00	43.21	68.20	-24.99	34.89	8.32	Average	100	68	6	24660.00	56.74	88.20	-31.46	48.42	8.32	Peak	100	68
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	12330.00	41.77	54.00	-12.23	35.80	5.97	Average	100	309																																																																
2	12330.00	55.08	74.00	-18.92	49.11	5.97	Peak	100	309																																																																
3	18495.00	40.85	54.00	-13.15	39.08	1.77	Average	100	83																																																																
4	18495.00	53.78	74.00	-20.22	52.01	1.77	Peak	100	83																																																																
5	24660.00	43.21	68.20	-24.99	34.89	8.32	Average	100	68																																																																
6	24660.00	56.74	88.20	-31.46	48.42	8.32	Peak	100	68																																																																

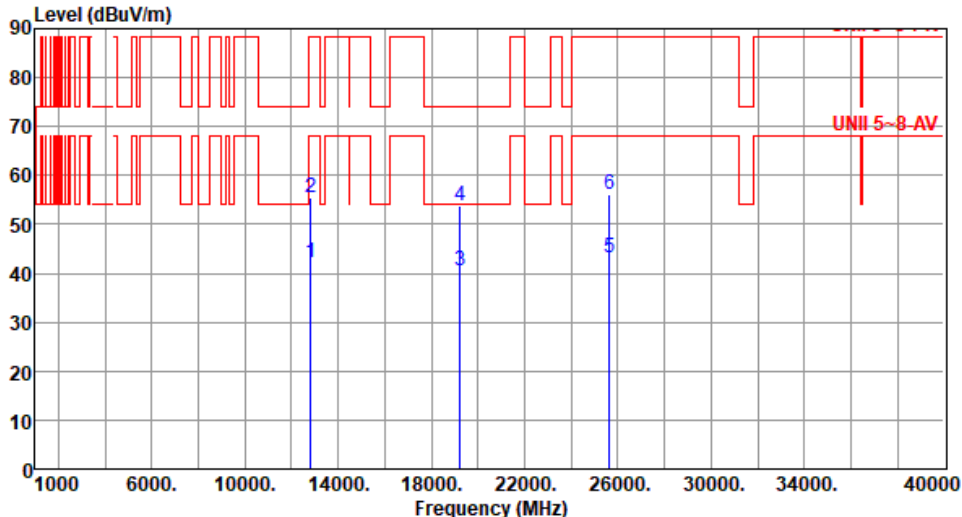


Modulation	be EHT40-OFDMA	Test Freq. (MHz)	6405																																																																						
Polarization	Horizontal																																																																								
Test By :Paul Lin Temperature(°C):24 Humidity(%):64																																																																									
Level (dBUV/m)  <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>12810.00</td><td>42.33</td><td>68.20</td><td>-25.87</td><td>36.21</td><td>6.12</td><td>Average</td><td>100</td><td>97</td></tr><tr><td>2</td><td>12810.00</td><td>55.36</td><td>88.20</td><td>-32.84</td><td>49.24</td><td>6.12</td><td>Peak</td><td>100</td><td>97</td></tr><tr><td>3</td><td>19215.00</td><td>40.63</td><td>54.00</td><td>-13.37</td><td>38.74</td><td>1.89</td><td>Average</td><td>100</td><td>99</td></tr><tr><td>4</td><td>19215.00</td><td>53.81</td><td>74.00</td><td>-20.19</td><td>51.92</td><td>1.89</td><td>Peak</td><td>100</td><td>99</td></tr><tr><td>5</td><td>25620.00</td><td>43.18</td><td>68.20</td><td>-25.02</td><td>35.12</td><td>8.06</td><td>Average</td><td>100</td><td>46</td></tr><tr><td>6</td><td>25620.00</td><td>56.00</td><td>88.20</td><td>-32.20</td><td>47.94</td><td>8.06</td><td>Peak</td><td>100</td><td>46</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	12810.00	42.33	68.20	-25.87	36.21	6.12	Average	100	97	2	12810.00	55.36	88.20	-32.84	49.24	6.12	Peak	100	97	3	19215.00	40.63	54.00	-13.37	38.74	1.89	Average	100	99	4	19215.00	53.81	74.00	-20.19	51.92	1.89	Peak	100	99	5	25620.00	43.18	68.20	-25.02	35.12	8.06	Average	100	46	6	25620.00	56.00	88.20	-32.20	47.94	8.06	Peak	100	46
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	12810.00	42.33	68.20	-25.87	36.21	6.12	Average	100	97																																																																
2	12810.00	55.36	88.20	-32.84	49.24	6.12	Peak	100	97																																																																
3	19215.00	40.63	54.00	-13.37	38.74	1.89	Average	100	99																																																																
4	19215.00	53.81	74.00	-20.19	51.92	1.89	Peak	100	99																																																																
5	25620.00	43.18	68.20	-25.02	35.12	8.06	Average	100	46																																																																
6	25620.00	56.00	88.20	-32.20	47.94	8.06	Peak	100	46																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									

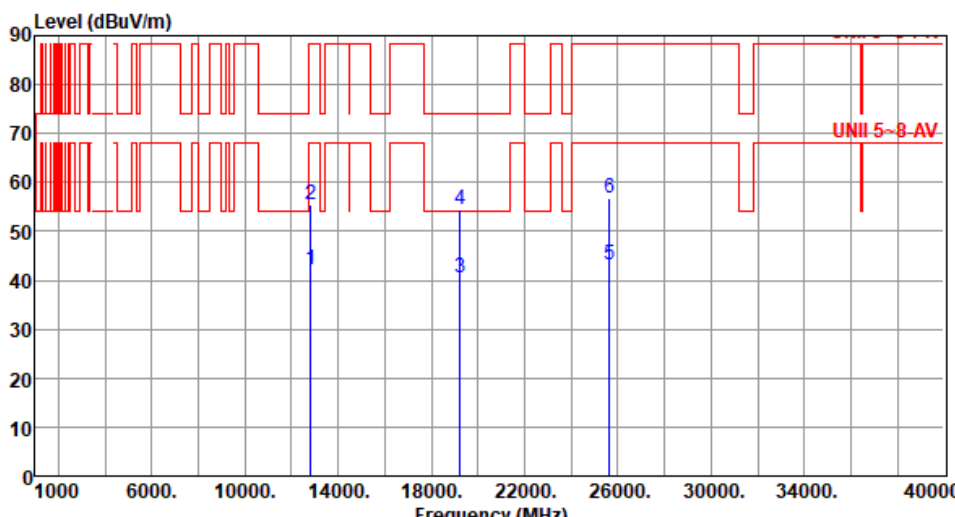


Modulation	be EHT40-OFDMA	Test Freq. (MHz)	6405																																																																						
Polarization	Vertical																																																																								
Test By :Paul Lin Temperature(°C):24 Humidity(%):64																																																																									
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>12810.00</td><td>42.21</td><td>68.20</td><td>-25.99</td><td>36.09</td><td>6.12</td><td>Average</td><td>100</td><td>73</td></tr><tr><td>2</td><td>12810.00</td><td>55.41</td><td>88.20</td><td>-32.79</td><td>49.29</td><td>6.12</td><td>Peak</td><td>100</td><td>73</td></tr><tr><td>3</td><td>19215.00</td><td>40.36</td><td>54.00</td><td>-13.64</td><td>38.47</td><td>1.89</td><td>Average</td><td>100</td><td>255</td></tr><tr><td>4</td><td>19215.00</td><td>54.39</td><td>74.00</td><td>-19.61</td><td>52.50</td><td>1.89</td><td>Peak</td><td>100</td><td>255</td></tr><tr><td>5</td><td>25620.00</td><td>43.25</td><td>68.20</td><td>-24.95</td><td>35.19</td><td>8.06</td><td>Average</td><td>100</td><td>250</td></tr><tr><td>6</td><td>25620.00</td><td>56.73</td><td>88.20</td><td>-31.47</td><td>48.67</td><td>8.06</td><td>Peak</td><td>100</td><td>250</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	12810.00	42.21	68.20	-25.99	36.09	6.12	Average	100	73	2	12810.00	55.41	88.20	-32.79	49.29	6.12	Peak	100	73	3	19215.00	40.36	54.00	-13.64	38.47	1.89	Average	100	255	4	19215.00	54.39	74.00	-19.61	52.50	1.89	Peak	100	255	5	25620.00	43.25	68.20	-24.95	35.19	8.06	Average	100	250	6	25620.00	56.73	88.20	-31.47	48.67	8.06	Peak	100	250
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	12810.00	42.21	68.20	-25.99	36.09	6.12	Average	100	73																																																																
2	12810.00	55.41	88.20	-32.79	49.29	6.12	Peak	100	73																																																																
3	19215.00	40.36	54.00	-13.64	38.47	1.89	Average	100	255																																																																
4	19215.00	54.39	74.00	-19.61	52.50	1.89	Peak	100	255																																																																
5	25620.00	43.25	68.20	-24.95	35.19	8.06	Average	100	250																																																																
6	25620.00	56.73	88.20	-31.47	48.67	8.06	Peak	100	250																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									

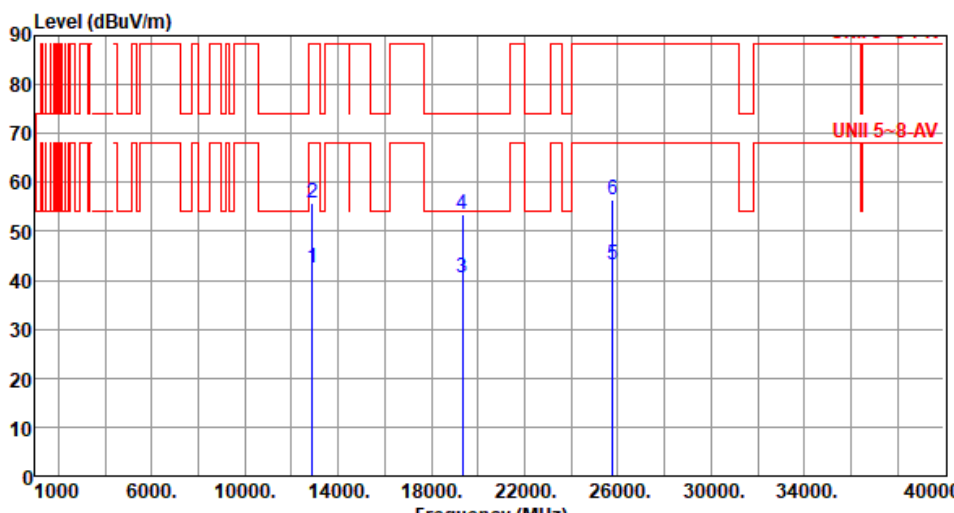


Modulation	be EHT40-OFDMA	Test Freq. (MHz)	6445
Polarization	Horizontal		
Test By :Paul Lin Temperature(°C):24 Humidity(%):64			
Level (dBUV/m)  Freq. Emission Limit Margin SA Factor Remark ANT Turn MHz level dBuV/m dBuV/m dB dBuV dB/m cm Table deg 112890.0042.3668.20-25.8436.385.98Average10045 212890.0055.6788.20-32.5349.695.98Peak10045 319335.0040.5854.00-13.4238.821.76Average100295 419335.0053.5974.00-20.4151.831.76Peak100295 525780.0043.1668.20-25.0435.148.02Average100177 625780.0056.3788.20-31.8348.358.02Peak100177 Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).			

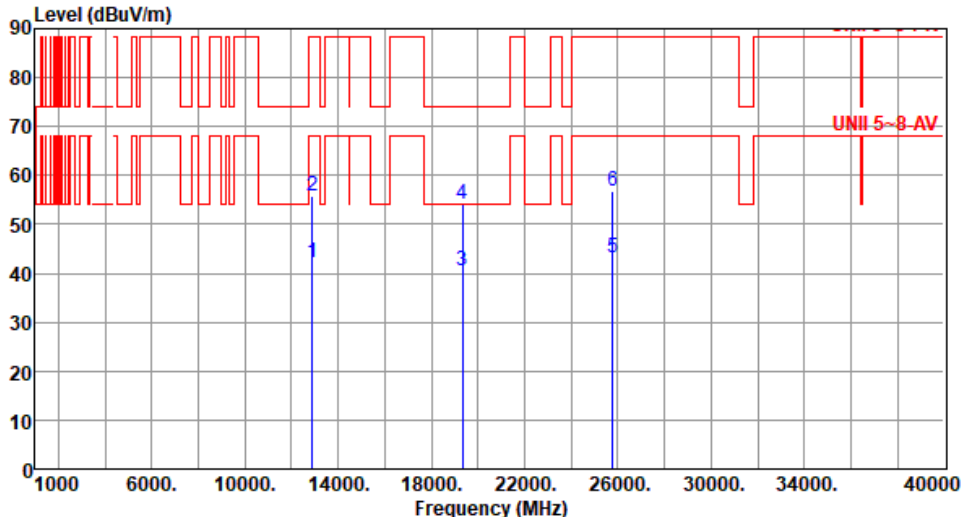


Modulation	be EHT40-OFDMA	Test Freq. (MHz)	6445																																																																						
Polarization	Vertical																																																																								
Test By :Paul Lin Temperature(°C):24 Humidity(%):64																																																																									
Level (dBUV/m)  <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>12890.00</td><td>42.09</td><td>68.20</td><td>-26.11</td><td>36.11</td><td>5.98</td><td>Average</td><td>100</td><td>342</td></tr><tr><td>2</td><td>12890.00</td><td>55.67</td><td>88.20</td><td>-32.53</td><td>49.69</td><td>5.98</td><td>Peak</td><td>100</td><td>342</td></tr><tr><td>3</td><td>19335.00</td><td>40.38</td><td>54.00</td><td>-13.62</td><td>38.62</td><td>1.76</td><td>Average</td><td>100</td><td>101</td></tr><tr><td>4</td><td>19335.00</td><td>54.22</td><td>74.00</td><td>-19.78</td><td>52.46</td><td>1.76</td><td>Peak</td><td>100</td><td>101</td></tr><tr><td>5</td><td>25780.00</td><td>43.02</td><td>68.20</td><td>-25.18</td><td>35.00</td><td>8.02</td><td>Average</td><td>100</td><td>216</td></tr><tr><td>6</td><td>25780.00</td><td>56.66</td><td>88.20</td><td>-31.54</td><td>48.64</td><td>8.02</td><td>Peak</td><td>100</td><td>216</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	12890.00	42.09	68.20	-26.11	36.11	5.98	Average	100	342	2	12890.00	55.67	88.20	-32.53	49.69	5.98	Peak	100	342	3	19335.00	40.38	54.00	-13.62	38.62	1.76	Average	100	101	4	19335.00	54.22	74.00	-19.78	52.46	1.76	Peak	100	101	5	25780.00	43.02	68.20	-25.18	35.00	8.02	Average	100	216	6	25780.00	56.66	88.20	-31.54	48.64	8.02	Peak	100	216
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	12890.00	42.09	68.20	-26.11	36.11	5.98	Average	100	342																																																																
2	12890.00	55.67	88.20	-32.53	49.69	5.98	Peak	100	342																																																																
3	19335.00	40.38	54.00	-13.62	38.62	1.76	Average	100	101																																																																
4	19335.00	54.22	74.00	-19.78	52.46	1.76	Peak	100	101																																																																
5	25780.00	43.02	68.20	-25.18	35.00	8.02	Average	100	216																																																																
6	25780.00	56.66	88.20	-31.54	48.64	8.02	Peak	100	216																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									

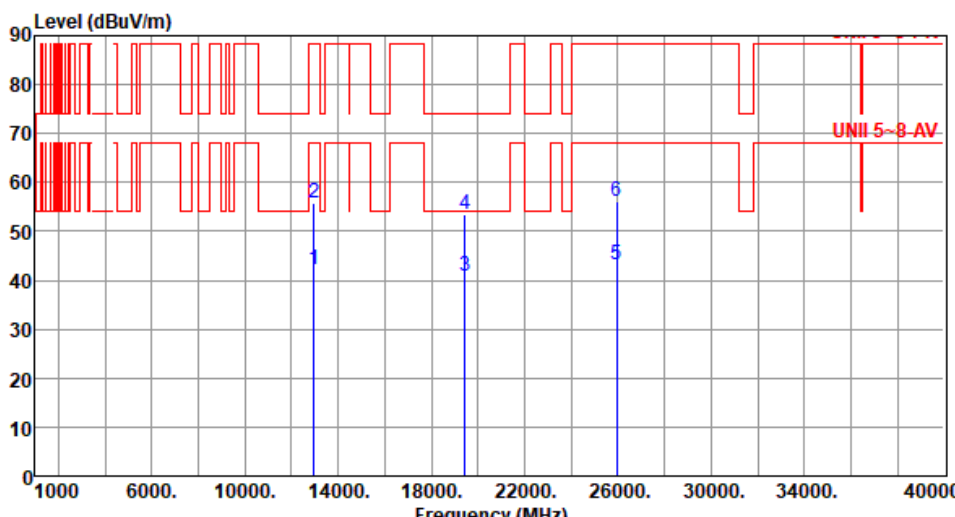

Modulation	be EHT40-OFDMA	Test Freq. (MHz)	6485																																																																						
Polarization	Horizontal																																																																								
Test By :Paul Lin Temperature(°C):24 Humidity(%):64																																																																									
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>12970.00</td><td>42.15</td><td>68.20</td><td>-26.05</td><td>36.03</td><td>6.12</td><td>Average</td><td>100</td><td>26</td></tr><tr><td>2</td><td>12970.00</td><td>55.69</td><td>88.20</td><td>-32.51</td><td>49.57</td><td>6.12</td><td>Peak</td><td>100</td><td>26</td></tr><tr><td>3</td><td>19455.00</td><td>40.89</td><td>54.00</td><td>-13.11</td><td>39.22</td><td>1.67</td><td>Average</td><td>100</td><td>280</td></tr><tr><td>4</td><td>19455.00</td><td>53.61</td><td>74.00</td><td>-20.39</td><td>51.94</td><td>1.67</td><td>Peak</td><td>100</td><td>280</td></tr><tr><td>5</td><td>25940.00</td><td>43.07</td><td>68.20</td><td>-25.13</td><td>35.00</td><td>8.07</td><td>Average</td><td>100</td><td>285</td></tr><tr><td>6</td><td>25940.00</td><td>56.16</td><td>88.20</td><td>-32.04</td><td>48.09</td><td>8.07</td><td>Peak</td><td>100</td><td>285</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	12970.00	42.15	68.20	-26.05	36.03	6.12	Average	100	26	2	12970.00	55.69	88.20	-32.51	49.57	6.12	Peak	100	26	3	19455.00	40.89	54.00	-13.11	39.22	1.67	Average	100	280	4	19455.00	53.61	74.00	-20.39	51.94	1.67	Peak	100	280	5	25940.00	43.07	68.20	-25.13	35.00	8.07	Average	100	285	6	25940.00	56.16	88.20	-32.04	48.09	8.07	Peak	100	285
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	12970.00	42.15	68.20	-26.05	36.03	6.12	Average	100	26																																																																
2	12970.00	55.69	88.20	-32.51	49.57	6.12	Peak	100	26																																																																
3	19455.00	40.89	54.00	-13.11	39.22	1.67	Average	100	280																																																																
4	19455.00	53.61	74.00	-20.39	51.94	1.67	Peak	100	280																																																																
5	25940.00	43.07	68.20	-25.13	35.00	8.07	Average	100	285																																																																
6	25940.00	56.16	88.20	-32.04	48.09	8.07	Peak	100	285																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									

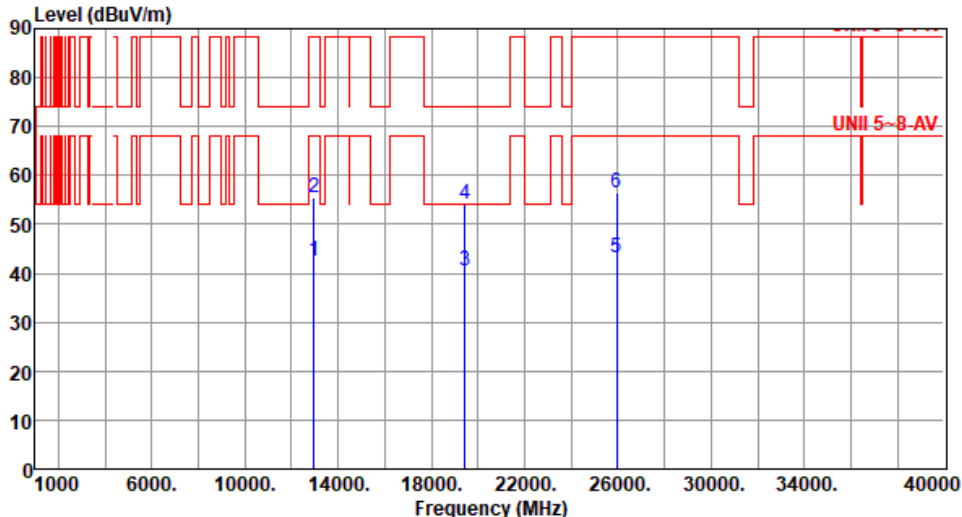


Modulation	be EHT40-OFDMA	Test Freq. (MHz)	6485																																																																						
Polarization	Vertical																																																																								
Test By :Paul Lin Temperature(°C):24 Humidity(%):64																																																																									
Level (dBUV/m)  <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>12970.00</td><td>42.49</td><td>68.20</td><td>-25.71</td><td>36.37</td><td>6.12</td><td>Average</td><td>100</td><td>41</td></tr><tr><td>2</td><td>12970.00</td><td>55.53</td><td>88.20</td><td>-32.67</td><td>49.41</td><td>6.12</td><td>Peak</td><td>100</td><td>41</td></tr><tr><td>3</td><td>19455.00</td><td>40.36</td><td>54.00</td><td>-13.64</td><td>38.69</td><td>1.67</td><td>Average</td><td>100</td><td>10</td></tr><tr><td>4</td><td>19455.00</td><td>54.23</td><td>74.00</td><td>-19.77</td><td>52.56</td><td>1.67</td><td>Peak</td><td>100</td><td>10</td></tr><tr><td>5</td><td>25940.00</td><td>43.09</td><td>68.20</td><td>-25.11</td><td>35.02</td><td>8.07</td><td>Average</td><td>100</td><td>273</td></tr><tr><td>6</td><td>25940.00</td><td>56.54</td><td>88.20</td><td>-31.66</td><td>48.47</td><td>8.07</td><td>Peak</td><td>100</td><td>273</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	12970.00	42.49	68.20	-25.71	36.37	6.12	Average	100	41	2	12970.00	55.53	88.20	-32.67	49.41	6.12	Peak	100	41	3	19455.00	40.36	54.00	-13.64	38.69	1.67	Average	100	10	4	19455.00	54.23	74.00	-19.77	52.56	1.67	Peak	100	10	5	25940.00	43.09	68.20	-25.11	35.02	8.07	Average	100	273	6	25940.00	56.54	88.20	-31.66	48.47	8.07	Peak	100	273
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	12970.00	42.49	68.20	-25.71	36.37	6.12	Average	100	41																																																																
2	12970.00	55.53	88.20	-32.67	49.41	6.12	Peak	100	41																																																																
3	19455.00	40.36	54.00	-13.64	38.69	1.67	Average	100	10																																																																
4	19455.00	54.23	74.00	-19.77	52.56	1.67	Peak	100	10																																																																
5	25940.00	43.09	68.20	-25.11	35.02	8.07	Average	100	273																																																																
6	25940.00	56.54	88.20	-31.66	48.47	8.07	Peak	100	273																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									




Modulation	be EHT40-OFDMA	Test Freq. (MHz)	6525
Polarization	Horizontal		
Test By :Paul Lin Temperature(°C):24 Humidity(%):64			
Level (dBUV/m) </			

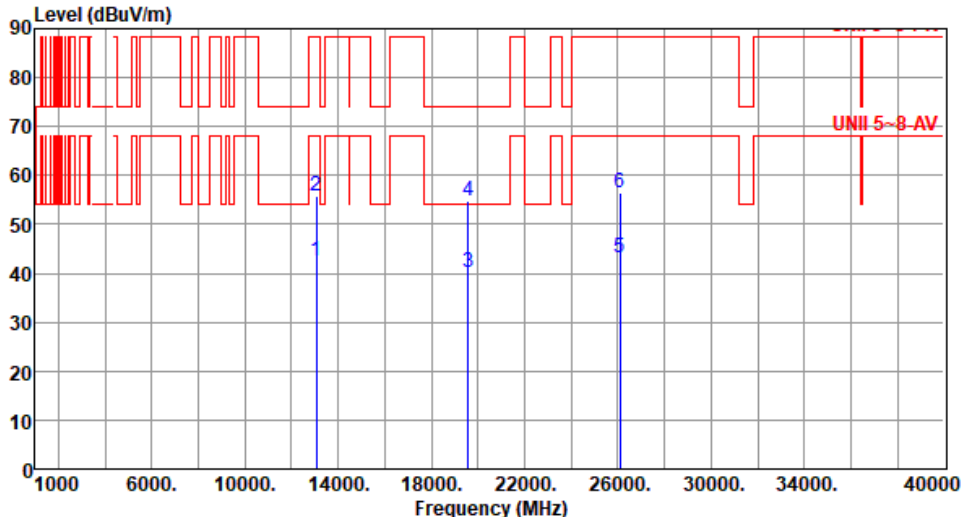

Modulation	be EHT40-OFDMA		Test Freq. (MHz)		6525																																																																										
Polarization	Vertical																																																																														
Test By :Paul Lin Temperature(°C):24 Humidity(%):64																																																																															
 <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>13050.00</td><td>42.49</td><td>68.20</td><td>-25.71</td><td>36.59</td><td>5.90</td><td>Average</td><td>100</td><td>163</td></tr><tr><td>2</td><td>13050.00</td><td>55.83</td><td>88.20</td><td>-32.37</td><td>49.93</td><td>5.90</td><td>Peak</td><td>100</td><td>163</td></tr><tr><td>3</td><td>19575.00</td><td>40.34</td><td>54.00</td><td>-13.66</td><td>38.47</td><td>1.87</td><td>Average</td><td>100</td><td>304</td></tr><tr><td>4</td><td>19575.00</td><td>54.77</td><td>74.00</td><td>-19.23</td><td>52.90</td><td>1.87</td><td>Peak</td><td>100</td><td>304</td></tr><tr><td>5</td><td>26100.00</td><td>43.27</td><td>68.20</td><td>-24.93</td><td>35.19</td><td>8.08</td><td>Average</td><td>100</td><td>304</td></tr><tr><td>6</td><td>26100.00</td><td>56.55</td><td>88.20</td><td>-31.65</td><td>48.47</td><td>8.08</td><td>Peak</td><td>100</td><td>304</td></tr></table>											Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13050.00	42.49	68.20	-25.71	36.59	5.90	Average	100	163	2	13050.00	55.83	88.20	-32.37	49.93	5.90	Peak	100	163	3	19575.00	40.34	54.00	-13.66	38.47	1.87	Average	100	304	4	19575.00	54.77	74.00	-19.23	52.90	1.87	Peak	100	304	5	26100.00	43.27	68.20	-24.93	35.19	8.08	Average	100	304	6	26100.00	56.55	88.20	-31.65	48.47	8.08	Peak	100	304
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																						
1	13050.00	42.49	68.20	-25.71	36.59	5.90	Average	100	163																																																																						
2	13050.00	55.83	88.20	-32.37	49.93	5.90	Peak	100	163																																																																						
3	19575.00	40.34	54.00	-13.66	38.47	1.87	Average	100	304																																																																						
4	19575.00	54.77	74.00	-19.23	52.90	1.87	Peak	100	304																																																																						
5	26100.00	43.27	68.20	-24.93	35.19	8.08	Average	100	304																																																																						
6	26100.00	56.55	88.20	-31.65	48.47	8.08	Peak	100	304																																																																						
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																															

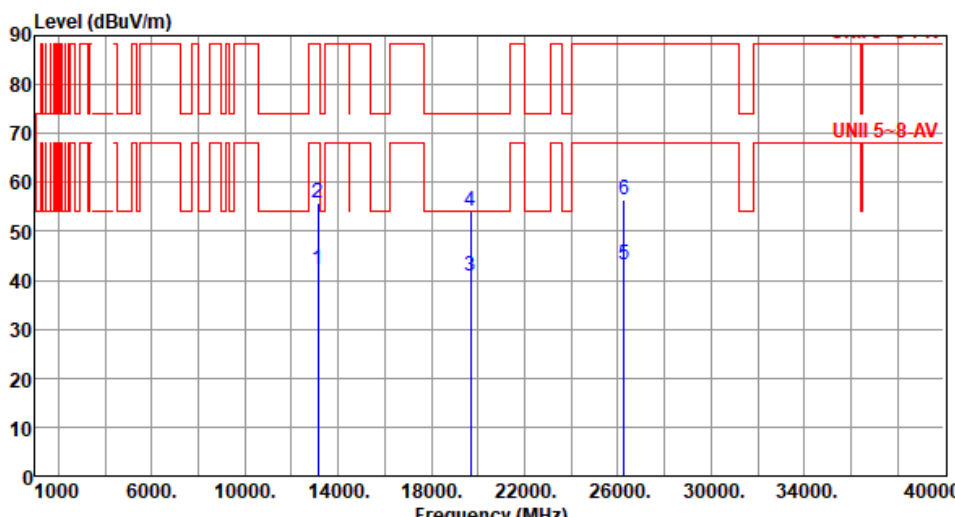

Modulation	be EHT40-OFDMA	Test Freq. (MHz)	6565																																																																						
Polarization	Horizontal																																																																								
Test By :Paul Lin Temperature(°C):24 Humidity(%):64																																																																									
Level (dBuV/m)  <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>13130.00</td><td>42.08</td><td>68.20</td><td>-26.12</td><td>36.30</td><td>5.78</td><td>Average</td><td>100</td><td>163</td></tr><tr><td>2</td><td>13130.00</td><td>55.69</td><td>88.20</td><td>-32.51</td><td>49.91</td><td>5.78</td><td>Peak</td><td>100</td><td>163</td></tr><tr><td>3</td><td>19695.00</td><td>40.72</td><td>54.00</td><td>-13.28</td><td>38.70</td><td>2.02</td><td>Average</td><td>100</td><td>31</td></tr><tr><td>4</td><td>19695.00</td><td>54.08</td><td>74.00</td><td>-19.92</td><td>52.06</td><td>2.02</td><td>Peak</td><td>100</td><td>31</td></tr><tr><td>5</td><td>26260.00</td><td>43.06</td><td>68.20</td><td>-25.14</td><td>34.78</td><td>8.28</td><td>Average</td><td>100</td><td>316</td></tr><tr><td>6</td><td>26260.00</td><td>56.32</td><td>88.20</td><td>-31.88</td><td>48.04</td><td>8.28</td><td>Peak</td><td>100</td><td>316</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13130.00	42.08	68.20	-26.12	36.30	5.78	Average	100	163	2	13130.00	55.69	88.20	-32.51	49.91	5.78	Peak	100	163	3	19695.00	40.72	54.00	-13.28	38.70	2.02	Average	100	31	4	19695.00	54.08	74.00	-19.92	52.06	2.02	Peak	100	31	5	26260.00	43.06	68.20	-25.14	34.78	8.28	Average	100	316	6	26260.00	56.32	88.20	-31.88	48.04	8.28	Peak	100	316
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	13130.00	42.08	68.20	-26.12	36.30	5.78	Average	100	163																																																																
2	13130.00	55.69	88.20	-32.51	49.91	5.78	Peak	100	163																																																																
3	19695.00	40.72	54.00	-13.28	38.70	2.02	Average	100	31																																																																
4	19695.00	54.08	74.00	-19.92	52.06	2.02	Peak	100	31																																																																
5	26260.00	43.06	68.20	-25.14	34.78	8.28	Average	100	316																																																																
6	26260.00	56.32	88.20	-31.88	48.04	8.28	Peak	100	316																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									



Modulation	be EHT40-OFDMA		Test Freq. (MHz)		6565																																																																																														
Polarization	Vertical																																																																																																		
Test By :Paul Lin Temperature(°C):24 Humidity(%):64																																																																																																			
Level (dBUV/m) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th></th><th></th><th>reading</th><th></th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBUV/m</th><th>dBUV/m</th><th>dB</th><th>dBUV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>13130.00</td><td>41.64</td><td>68.20</td><td>-26.56</td><td>35.86</td><td>5.78</td><td>Average</td><td>100</td><td>4</td></tr><tr><td>2</td><td>13130.00</td><td>55.84</td><td>88.20</td><td>-32.36</td><td>50.06</td><td>5.78</td><td>Peak</td><td>100</td><td>4</td></tr><tr><td>3</td><td>19695.00</td><td>40.88</td><td>54.00</td><td>-13.12</td><td>38.86</td><td>2.02</td><td>Average</td><td>100</td><td>20</td></tr><tr><td>4</td><td>19695.00</td><td>53.59</td><td>74.00</td><td>-20.41</td><td>51.57</td><td>2.02</td><td>Peak</td><td>100</td><td>20</td></tr><tr><td>5</td><td>26260.00</td><td>43.95</td><td>68.20</td><td>-24.25</td><td>35.67</td><td>8.28</td><td>Average</td><td>100</td><td>46</td></tr><tr><td>6</td><td>26260.00</td><td>55.34</td><td>88.20</td><td>-32.86</td><td>47.06</td><td>8.28</td><td>Peak</td><td>100</td><td>46</td></tr></table>											Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level			reading			High	Table			dBUV/m	dBUV/m	dB	dBUV	dB/m		cm	deg	1	13130.00	41.64	68.20	-26.56	35.86	5.78	Average	100	4	2	13130.00	55.84	88.20	-32.36	50.06	5.78	Peak	100	4	3	19695.00	40.88	54.00	-13.12	38.86	2.02	Average	100	20	4	19695.00	53.59	74.00	-20.41	51.57	2.02	Peak	100	20	5	26260.00	43.95	68.20	-24.25	35.67	8.28	Average	100	46	6	26260.00	55.34	88.20	-32.86	47.06	8.28	Peak	100	46
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																										
	MHz	level			reading			High	Table																																																																																										
		dBUV/m	dBUV/m	dB	dBUV	dB/m		cm	deg																																																																																										
1	13130.00	41.64	68.20	-26.56	35.86	5.78	Average	100	4																																																																																										
2	13130.00	55.84	88.20	-32.36	50.06	5.78	Peak	100	4																																																																																										
3	19695.00	40.88	54.00	-13.12	38.86	2.02	Average	100	20																																																																																										
4	19695.00	53.59	74.00	-20.41	51.57	2.02	Peak	100	20																																																																																										
5	26260.00	43.95	68.20	-24.25	35.67	8.28	Average	100	46																																																																																										
6	26260.00	55.34	88.20	-32.86	47.06	8.28	Peak	100	46																																																																																										
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																																																			



Modulation	be EHT40-OFDMA	Test Freq. (MHz)	6725																																																																						
Polarization	Horizontal																																																																								
Test By :Paul Lin Temperature(°C):24 Humidity(%):64																																																																									
Level (dBUV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>13450.00</td><td>41.82</td><td>68.20</td><td>-26.38</td><td>35.81</td><td>6.01</td><td>Average</td><td>100</td><td>45</td></tr><tr><td>2</td><td>13450.00</td><td>55.48</td><td>88.20</td><td>-32.72</td><td>49.47</td><td>6.01</td><td>Peak</td><td>100</td><td>45</td></tr><tr><td>3</td><td>20175.00</td><td>40.84</td><td>54.00</td><td>-13.16</td><td>38.16</td><td>2.68</td><td>Average</td><td>100</td><td>67</td></tr><tr><td>4</td><td>20175.00</td><td>54.68</td><td>74.00</td><td>-19.32</td><td>52.00</td><td>2.68</td><td>Peak</td><td>100</td><td>67</td></tr><tr><td>5</td><td>26900.00</td><td>43.29</td><td>68.20</td><td>-24.91</td><td>34.83</td><td>8.46</td><td>Average</td><td>100</td><td>132</td></tr><tr><td>6</td><td>26900.00</td><td>56.25</td><td>88.20</td><td>-31.95</td><td>47.79</td><td>8.46</td><td>Peak</td><td>100</td><td>132</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13450.00	41.82	68.20	-26.38	35.81	6.01	Average	100	45	2	13450.00	55.48	88.20	-32.72	49.47	6.01	Peak	100	45	3	20175.00	40.84	54.00	-13.16	38.16	2.68	Average	100	67	4	20175.00	54.68	74.00	-19.32	52.00	2.68	Peak	100	67	5	26900.00	43.29	68.20	-24.91	34.83	8.46	Average	100	132	6	26900.00	56.25	88.20	-31.95	47.79	8.46	Peak	100	132
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	13450.00	41.82	68.20	-26.38	35.81	6.01	Average	100	45																																																																
2	13450.00	55.48	88.20	-32.72	49.47	6.01	Peak	100	45																																																																
3	20175.00	40.84	54.00	-13.16	38.16	2.68	Average	100	67																																																																
4	20175.00	54.68	74.00	-19.32	52.00	2.68	Peak	100	67																																																																
5	26900.00	43.29	68.20	-24.91	34.83	8.46	Average	100	132																																																																
6	26900.00	56.25	88.20	-31.95	47.79	8.46	Peak	100	132																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									



Modulation	be EHT40-OFDMA	Test Freq. (MHz)	6725																																																																						
Polarization	Vertical																																																																								
Test By :Paul Lin Temperature(°C):24 Humidity(%):64																																																																									
Level (dBUV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>13450.00</td><td>41.74</td><td>68.20</td><td>-26.46</td><td>35.73</td><td>6.01</td><td>Average</td><td>100</td><td>229</td></tr><tr><td>2</td><td>13450.00</td><td>56.00</td><td>88.20</td><td>-32.20</td><td>49.99</td><td>6.01</td><td>Peak</td><td>100</td><td>229</td></tr><tr><td>3</td><td>20175.00</td><td>41.07</td><td>54.00</td><td>-12.93</td><td>38.39</td><td>2.68</td><td>Average</td><td>100</td><td>322</td></tr><tr><td>4</td><td>20175.00</td><td>53.55</td><td>74.00</td><td>-20.45</td><td>50.87</td><td>2.68</td><td>Peak</td><td>100</td><td>322</td></tr><tr><td>5</td><td>26900.00</td><td>43.44</td><td>68.20</td><td>-24.76</td><td>34.98</td><td>8.46</td><td>Average</td><td>100</td><td>138</td></tr><tr><td>6</td><td>26900.00</td><td>55.49</td><td>88.20</td><td>-32.71</td><td>47.03</td><td>8.46</td><td>Peak</td><td>100</td><td>138</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13450.00	41.74	68.20	-26.46	35.73	6.01	Average	100	229	2	13450.00	56.00	88.20	-32.20	49.99	6.01	Peak	100	229	3	20175.00	41.07	54.00	-12.93	38.39	2.68	Average	100	322	4	20175.00	53.55	74.00	-20.45	50.87	2.68	Peak	100	322	5	26900.00	43.44	68.20	-24.76	34.98	8.46	Average	100	138	6	26900.00	55.49	88.20	-32.71	47.03	8.46	Peak	100	138
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	13450.00	41.74	68.20	-26.46	35.73	6.01	Average	100	229																																																																
2	13450.00	56.00	88.20	-32.20	49.99	6.01	Peak	100	229																																																																
3	20175.00	41.07	54.00	-12.93	38.39	2.68	Average	100	322																																																																
4	20175.00	53.55	74.00	-20.45	50.87	2.68	Peak	100	322																																																																
5	26900.00	43.44	68.20	-24.76	34.98	8.46	Average	100	138																																																																
6	26900.00	55.49	88.20	-32.71	47.03	8.46	Peak	100	138																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									




Modulation	be EHT40-OFDMA	Test Freq. (MHz)	6845
Polarization	Horizontal		
Test By :Paul Lin Temperature(°C):24 Humidity(%):64			
Level (dBuV/m) </			




Modulation	be EHT40-OFDMA	Test Freq. (MHz)	6845																																																																																										
Polarization	Vertical																																																																																												
Test By :Paul Lin Temperature(°C):24 Humidity(%):64																																																																																													
Level (dBUV/m) Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>13690.00</td><td>42.17</td><td>68.20</td><td>-26.03</td><td>36.17</td><td>6.00</td><td>Average</td><td>100</td><td>162</td></tr><tr><td>2</td><td>13690.00</td><td>56.22</td><td>88.20</td><td>-31.98</td><td>50.22</td><td>6.00</td><td>Peak</td><td>100</td><td>162</td></tr><tr><td>3</td><td>20535.00</td><td>41.28</td><td>54.00</td><td>-12.72</td><td>38.22</td><td>3.06</td><td>Average</td><td>100</td><td>170</td></tr><tr><td>4</td><td>20535.00</td><td>54.08</td><td>74.00</td><td>-19.92</td><td>51.02</td><td>3.06</td><td>Peak</td><td>100</td><td>170</td></tr><tr><td>5</td><td>27380.00</td><td>43.86</td><td>68.20</td><td>-24.34</td><td>35.39</td><td>8.47</td><td>Average</td><td>100</td><td>317</td></tr><tr><td>6</td><td>27380.00</td><td>56.09</td><td>88.20</td><td>-32.11</td><td>47.62</td><td>8.47</td><td>Peak</td><td>100</td><td>317</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	13690.00	42.17	68.20	-26.03	36.17	6.00	Average	100	162	2	13690.00	56.22	88.20	-31.98	50.22	6.00	Peak	100	162	3	20535.00	41.28	54.00	-12.72	38.22	3.06	Average	100	170	4	20535.00	54.08	74.00	-19.92	51.02	3.06	Peak	100	170	5	27380.00	43.86	68.20	-24.34	35.39	8.47	Average	100	317	6	27380.00	56.09	88.20	-32.11	47.62	8.47	Peak	100	317
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																				
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																				
		dBuV/m			dBuV			cm	deg																																																																																				
1	13690.00	42.17	68.20	-26.03	36.17	6.00	Average	100	162																																																																																				
2	13690.00	56.22	88.20	-31.98	50.22	6.00	Peak	100	162																																																																																				
3	20535.00	41.28	54.00	-12.72	38.22	3.06	Average	100	170																																																																																				
4	20535.00	54.08	74.00	-19.92	51.02	3.06	Peak	100	170																																																																																				
5	27380.00	43.86	68.20	-24.34	35.39	8.47	Average	100	317																																																																																				
6	27380.00	56.09	88.20	-32.11	47.62	8.47	Peak	100	317																																																																																				
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																																													

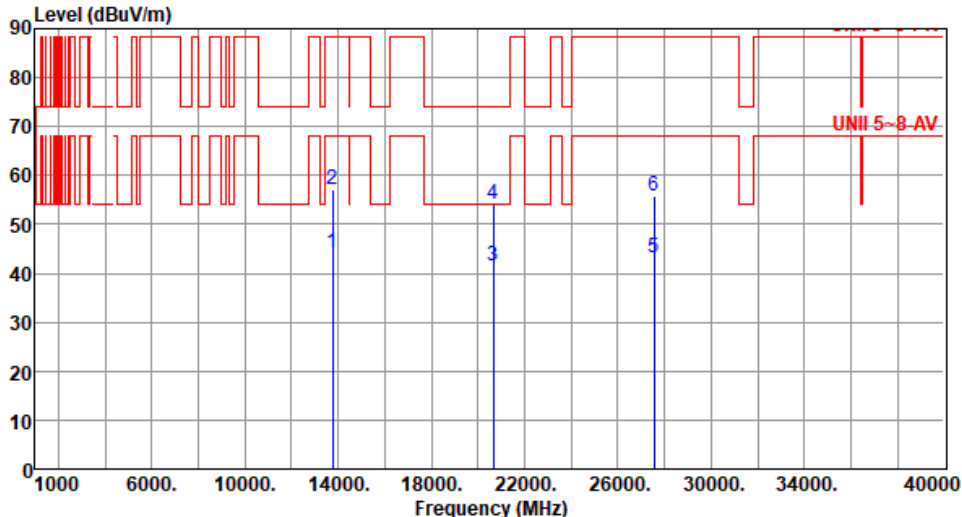


Modulation	be EHT40-OFDMA	Test Freq. (MHz)	6885																																																												
Polarization	Horizontal																																																														
Test By :Paul Lin Temperature(°C):24 Humidity(%):64																																																															
Level (dBUV/m)  Freq. Emission Limit Margin SA Factor Remark ANT Turn MHz level dBUV/m dB reading dB/m High Table dBUV/m dB dBuV dB/m cm deg <table><tr><td>1</td><td>13770.00</td><td>44.08</td><td>68.20</td><td>-24.12</td><td>37.96</td><td>6.12</td><td>Average</td><td>100</td><td>242</td></tr><tr><td>2</td><td>13770.00</td><td>57.26</td><td>88.20</td><td>-30.94</td><td>51.14</td><td>6.12</td><td>Peak</td><td>100</td><td>242</td></tr><tr><td>3</td><td>20655.00</td><td>41.40</td><td>54.00</td><td>-12.60</td><td>38.19</td><td>3.21</td><td>Average</td><td>100</td><td>257</td></tr><tr><td>4</td><td>20655.00</td><td>54.26</td><td>74.00</td><td>-19.74</td><td>51.05</td><td>3.21</td><td>Peak</td><td>100</td><td>46</td></tr><tr><td>5</td><td>27540.00</td><td>43.26</td><td>68.20</td><td>-24.94</td><td>34.73</td><td>8.53</td><td>Average</td><td>100</td><td>311</td></tr><tr><td>6</td><td>27540.00</td><td>55.66</td><td>88.20</td><td>-32.54</td><td>47.13</td><td>8.53</td><td>Peak</td><td>100</td><td>311</td></tr></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).				1	13770.00	44.08	68.20	-24.12	37.96	6.12	Average	100	242	2	13770.00	57.26	88.20	-30.94	51.14	6.12	Peak	100	242	3	20655.00	41.40	54.00	-12.60	38.19	3.21	Average	100	257	4	20655.00	54.26	74.00	-19.74	51.05	3.21	Peak	100	46	5	27540.00	43.26	68.20	-24.94	34.73	8.53	Average	100	311	6	27540.00	55.66	88.20	-32.54	47.13	8.53	Peak	100	311
1	13770.00	44.08	68.20	-24.12	37.96	6.12	Average	100	242																																																						
2	13770.00	57.26	88.20	-30.94	51.14	6.12	Peak	100	242																																																						
3	20655.00	41.40	54.00	-12.60	38.19	3.21	Average	100	257																																																						
4	20655.00	54.26	74.00	-19.74	51.05	3.21	Peak	100	46																																																						
5	27540.00	43.26	68.20	-24.94	34.73	8.53	Average	100	311																																																						
6	27540.00	55.66	88.20	-32.54	47.13	8.53	Peak	100	311																																																						

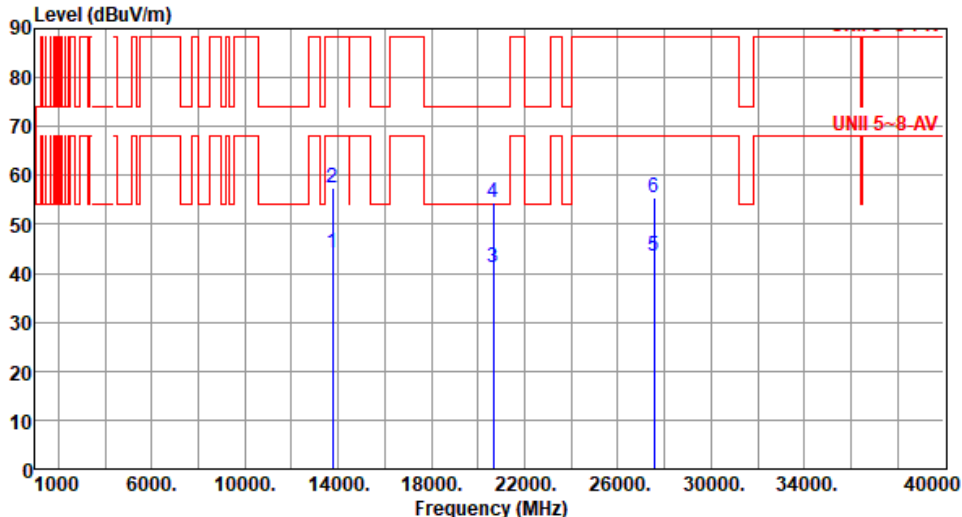


Modulation	be EHT40-OFDMA	Test Freq. (MHz)	6885																																																																						
Polarization	Vertical																																																																								
Test By :Paul Lin Temperature(°C):24 Humidity(%):64																																																																									
Level (dBuV/m)  <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>13770.00</td><td>44.06</td><td>68.20</td><td>-24.14</td><td>37.94</td><td>6.12</td><td>Average</td><td>100</td><td>253</td></tr><tr><td>2</td><td>13770.00</td><td>57.43</td><td>88.20</td><td>-30.77</td><td>51.31</td><td>6.12</td><td>Peak</td><td>100</td><td>253</td></tr><tr><td>3</td><td>20655.00</td><td>41.26</td><td>54.00</td><td>-12.74</td><td>38.05</td><td>3.21</td><td>Average</td><td>100</td><td>172</td></tr><tr><td>4</td><td>20655.00</td><td>54.52</td><td>74.00</td><td>-19.48</td><td>51.31</td><td>3.21</td><td>Peak</td><td>100</td><td>172</td></tr><tr><td>5</td><td>27540.00</td><td>43.53</td><td>68.20</td><td>-24.67</td><td>35.00</td><td>8.53</td><td>Average</td><td>100</td><td>265</td></tr><tr><td>6</td><td>27540.00</td><td>55.49</td><td>88.20</td><td>-32.71</td><td>46.96</td><td>8.53</td><td>Peak</td><td>100</td><td>265</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13770.00	44.06	68.20	-24.14	37.94	6.12	Average	100	253	2	13770.00	57.43	88.20	-30.77	51.31	6.12	Peak	100	253	3	20655.00	41.26	54.00	-12.74	38.05	3.21	Average	100	172	4	20655.00	54.52	74.00	-19.48	51.31	3.21	Peak	100	172	5	27540.00	43.53	68.20	-24.67	35.00	8.53	Average	100	265	6	27540.00	55.49	88.20	-32.71	46.96	8.53	Peak	100	265
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	13770.00	44.06	68.20	-24.14	37.94	6.12	Average	100	253																																																																
2	13770.00	57.43	88.20	-30.77	51.31	6.12	Peak	100	253																																																																
3	20655.00	41.26	54.00	-12.74	38.05	3.21	Average	100	172																																																																
4	20655.00	54.52	74.00	-19.48	51.31	3.21	Peak	100	172																																																																
5	27540.00	43.53	68.20	-24.67	35.00	8.53	Average	100	265																																																																
6	27540.00	55.49	88.20	-32.71	46.96	8.53	Peak	100	265																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									

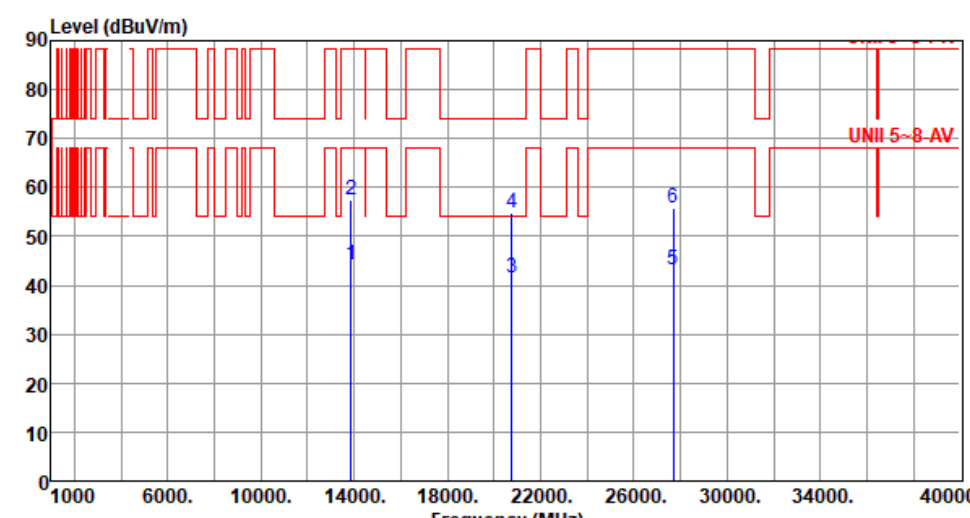


Modulation	be EHT40-OFDMA	Test Freq. (MHz)	6925																																																																						
Polarization	Horizontal																																																																								
Test By :Paul Lin Temperature(°C):24 Humidity(%):64																																																																									
 <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>13850.00</td><td>44.06</td><td>68.20</td><td>-24.14</td><td>38.01</td><td>6.05</td><td>Average</td><td>100</td><td>175</td></tr><tr><td>2</td><td>13850.00</td><td>57.33</td><td>88.20</td><td>-30.87</td><td>51.28</td><td>6.05</td><td>Peak</td><td>100</td><td>175</td></tr><tr><td>3</td><td>20775.00</td><td>41.59</td><td>54.00</td><td>-12.41</td><td>38.22</td><td>3.37</td><td>Average</td><td>100</td><td>48</td></tr><tr><td>4</td><td>20775.00</td><td>54.84</td><td>74.00</td><td>-19.16</td><td>51.47</td><td>3.37</td><td>Peak</td><td>100</td><td>48</td></tr><tr><td>5</td><td>27700.00</td><td>43.23</td><td>68.20</td><td>-24.97</td><td>34.62</td><td>8.61</td><td>Average</td><td>100</td><td>158</td></tr><tr><td>6</td><td>27700.00</td><td>55.74</td><td>88.20</td><td>-32.46</td><td>47.13</td><td>8.61</td><td>Peak</td><td>100</td><td>158</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13850.00	44.06	68.20	-24.14	38.01	6.05	Average	100	175	2	13850.00	57.33	88.20	-30.87	51.28	6.05	Peak	100	175	3	20775.00	41.59	54.00	-12.41	38.22	3.37	Average	100	48	4	20775.00	54.84	74.00	-19.16	51.47	3.37	Peak	100	48	5	27700.00	43.23	68.20	-24.97	34.62	8.61	Average	100	158	6	27700.00	55.74	88.20	-32.46	47.13	8.61	Peak	100	158
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	13850.00	44.06	68.20	-24.14	38.01	6.05	Average	100	175																																																																
2	13850.00	57.33	88.20	-30.87	51.28	6.05	Peak	100	175																																																																
3	20775.00	41.59	54.00	-12.41	38.22	3.37	Average	100	48																																																																
4	20775.00	54.84	74.00	-19.16	51.47	3.37	Peak	100	48																																																																
5	27700.00	43.23	68.20	-24.97	34.62	8.61	Average	100	158																																																																
6	27700.00	55.74	88.20	-32.46	47.13	8.61	Peak	100	158																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									

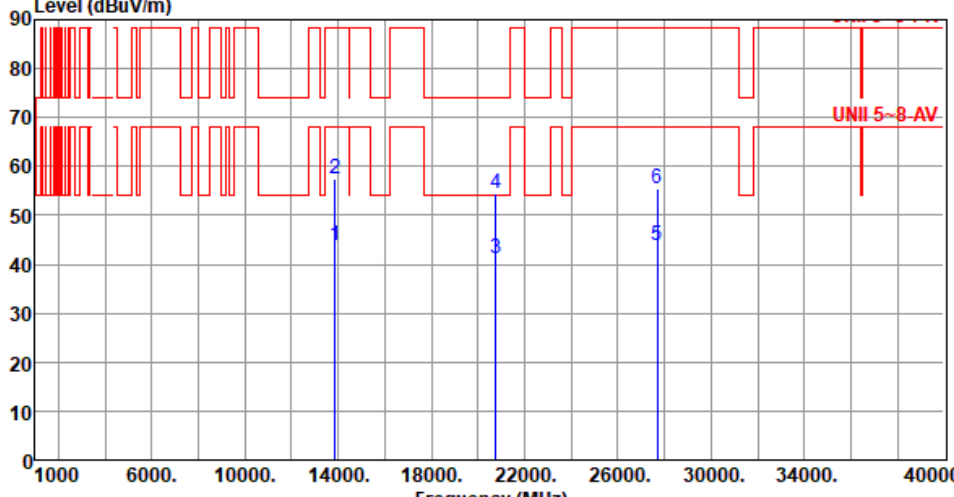

Modulation	be EHT40-OFDMA	Test Freq. (MHz)	6925						
Polarization	Vertical								
Test By :Paul Lin Temperature(°C):24 Humidity(%):64									
Level (dBuV/m)  Frequency (MHz)									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13850.00	43.96	68.20	-24.24	37.91	6.05	Average	100	49
2	13850.00	57.34	88.20	-30.86	51.29	6.05	Peak	100	49
3	20775.00	41.23	54.00	-12.77	37.86	3.37	Average	100	3
4	20775.00	54.50	74.00	-19.50	51.13	3.37	Peak	100	3
5	27700.00	43.85	68.20	-24.35	35.24	8.61	Average	100	12
6	27700.00	55.49	88.20	-32.71	46.88	8.61	Peak	100	12

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

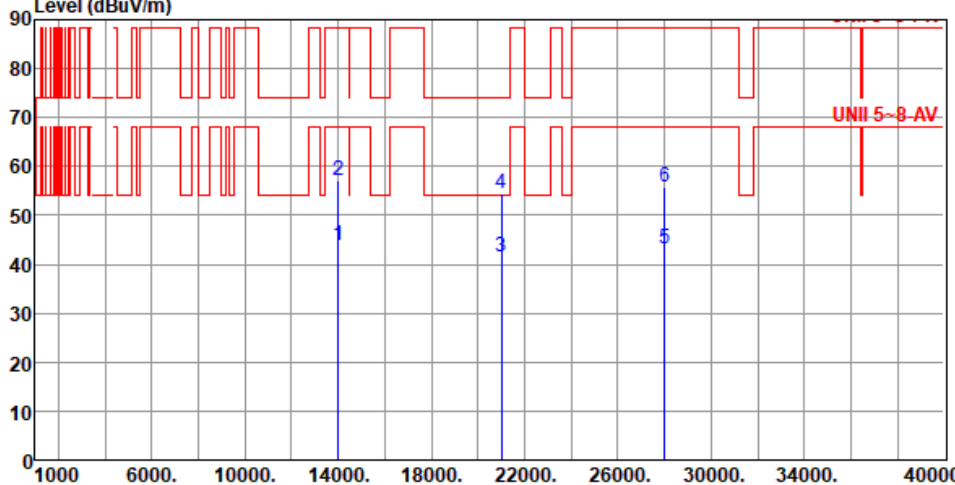


Modulation	be EHT40-OFDMA	Test Freq. (MHz)	7005						
Polarization	Horizontal								
Test By :Paul Lin Temperature(°C):24 Humidity(%):64									
Level (dBUV/m)  Frequency (MHz)									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	14010.00	43.99	68.20	-24.21	37.24	6.75	Average	100	306
2	14010.00	57.15	88.20	-31.05	50.40	6.75	Peak	100	306
3	21015.00	41.38	54.00	-12.62	37.59	3.79	Average	100	302
4	21015.00	54.59	74.00	-19.41	50.80	3.79	Peak	100	302
5	28020.00	43.29	68.20	-24.91	34.42	8.87	Average	100	214
6	28020.00	55.88	88.20	-32.32	47.01	8.87	Peak	100	214

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).




Modulation	be EHT40-OFDMA	Test Freq. (MHz)	7005																																																																						
Polarization	Vertical																																																																								
Test By :Paul Lin Temperature(°C):24 Humidity(%):64																																																																									
Level (dBuV/m) UNII 5~8-AV <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>14010.00</td><td>43.93</td><td>68.20</td><td>-24.27</td><td>37.18</td><td>6.75</td><td>Average</td><td>100</td><td>85</td></tr><tr><td>2</td><td>14010.00</td><td>57.38</td><td>88.20</td><td>-30.82</td><td>50.63</td><td>6.75</td><td>Peak</td><td>100</td><td>85</td></tr><tr><td>3</td><td>21015.00</td><td>41.27</td><td>54.00</td><td>-12.73</td><td>37.48</td><td>3.79</td><td>Average</td><td>100</td><td>145</td></tr><tr><td>4</td><td>21015.00</td><td>54.11</td><td>74.00</td><td>-19.89</td><td>50.32</td><td>3.79</td><td>Peak</td><td>100</td><td>145</td></tr><tr><td>5</td><td>28020.00</td><td>43.85</td><td>68.20</td><td>-24.35</td><td>34.98</td><td>8.87</td><td>Average</td><td>100</td><td>210</td></tr><tr><td>6</td><td>28020.00</td><td>55.68</td><td>88.20</td><td>-32.52</td><td>46.81</td><td>8.87</td><td>Peak</td><td>100</td><td>210</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	14010.00	43.93	68.20	-24.27	37.18	6.75	Average	100	85	2	14010.00	57.38	88.20	-30.82	50.63	6.75	Peak	100	85	3	21015.00	41.27	54.00	-12.73	37.48	3.79	Average	100	145	4	21015.00	54.11	74.00	-19.89	50.32	3.79	Peak	100	145	5	28020.00	43.85	68.20	-24.35	34.98	8.87	Average	100	210	6	28020.00	55.68	88.20	-32.52	46.81	8.87	Peak	100	210
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	14010.00	43.93	68.20	-24.27	37.18	6.75	Average	100	85																																																																
2	14010.00	57.38	88.20	-30.82	50.63	6.75	Peak	100	85																																																																
3	21015.00	41.27	54.00	-12.73	37.48	3.79	Average	100	145																																																																
4	21015.00	54.11	74.00	-19.89	50.32	3.79	Peak	100	145																																																																
5	28020.00	43.85	68.20	-24.35	34.98	8.87	Average	100	210																																																																
6	28020.00	55.68	88.20	-32.52	46.81	8.87	Peak	100	210																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									

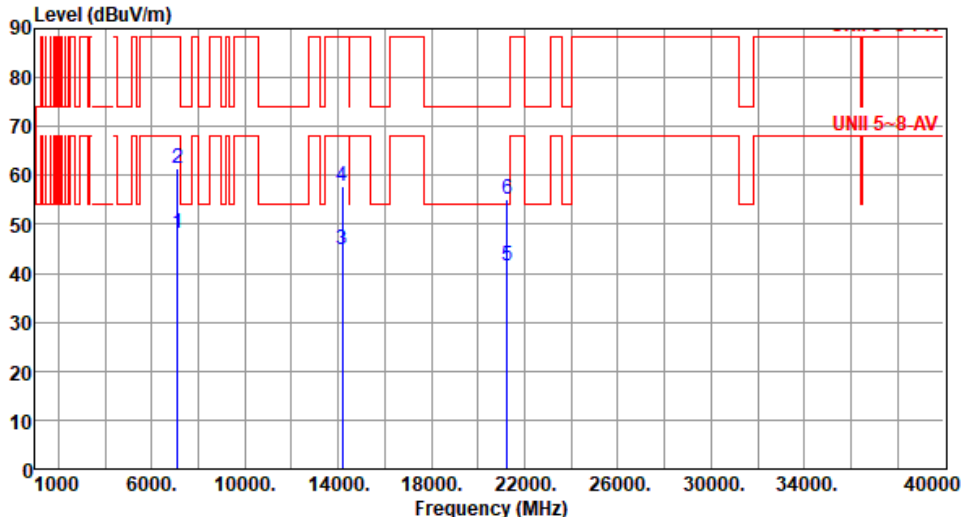


Modulation	be EHT40-OFDMA	Test Freq. (MHz)	7085																																																																						
Polarization	Horizontal																																																																								
Test By :Paul Lin Temperature(°C):24 Humidity(%):64																																																																									
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>7125.00</td><td>48.31</td><td>68.20</td><td>-19.89</td><td>43.45</td><td>4.86</td><td>Average</td><td>170</td><td>276</td></tr><tr><td>2</td><td>7125.00</td><td>61.32</td><td>88.20</td><td>-26.88</td><td>56.46</td><td>4.86</td><td>Peak</td><td>170</td><td>276</td></tr><tr><td>3</td><td>14170.00</td><td>44.70</td><td>68.20</td><td>-23.50</td><td>37.91</td><td>6.79</td><td>Average</td><td>100</td><td>43</td></tr><tr><td>4</td><td>14170.00</td><td>57.81</td><td>88.20</td><td>-30.39</td><td>51.02</td><td>6.79</td><td>Peak</td><td>100</td><td>43</td></tr><tr><td>5</td><td>21255.00</td><td>41.66</td><td>54.00</td><td>-12.34</td><td>37.51</td><td>4.15</td><td>Average</td><td>100</td><td>98</td></tr><tr><td>6</td><td>21255.00</td><td>55.03</td><td>74.00</td><td>-18.97</td><td>50.88</td><td>4.15</td><td>Peak</td><td>100</td><td>98</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7125.00	48.31	68.20	-19.89	43.45	4.86	Average	170	276	2	7125.00	61.32	88.20	-26.88	56.46	4.86	Peak	170	276	3	14170.00	44.70	68.20	-23.50	37.91	6.79	Average	100	43	4	14170.00	57.81	88.20	-30.39	51.02	6.79	Peak	100	43	5	21255.00	41.66	54.00	-12.34	37.51	4.15	Average	100	98	6	21255.00	55.03	74.00	-18.97	50.88	4.15	Peak	100	98
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	7125.00	48.31	68.20	-19.89	43.45	4.86	Average	170	276																																																																
2	7125.00	61.32	88.20	-26.88	56.46	4.86	Peak	170	276																																																																
3	14170.00	44.70	68.20	-23.50	37.91	6.79	Average	100	43																																																																
4	14170.00	57.81	88.20	-30.39	51.02	6.79	Peak	100	43																																																																
5	21255.00	41.66	54.00	-12.34	37.51	4.15	Average	100	98																																																																
6	21255.00	55.03	74.00	-18.97	50.88	4.15	Peak	100	98																																																																

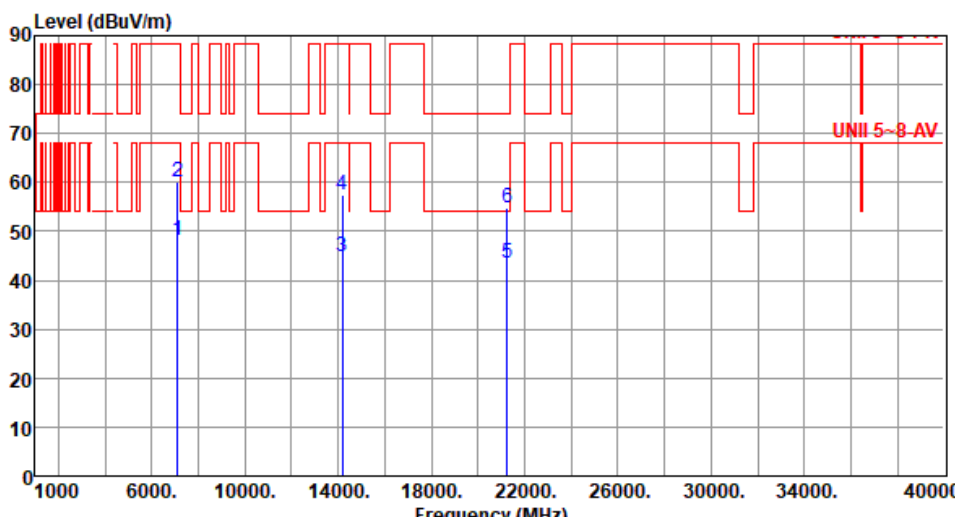

Modulation	be EHT40-OFDMA	Test Freq. (MHz)	7085																																																																						
Polarization	Vertical																																																																								
Test By :Paul Lin Temperature(°C):24 Humidity(%):64																																																																									
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>7125.00</td><td>48.01</td><td>68.20</td><td>-20.19</td><td>43.15</td><td>4.86</td><td>Average</td><td>263</td><td>349</td></tr><tr><td>2</td><td>7125.00</td><td>60.25</td><td>88.20</td><td>-27.95</td><td>55.39</td><td>4.86</td><td>Peak</td><td>263</td><td>349</td></tr><tr><td>3</td><td>14170.00</td><td>44.71</td><td>68.20</td><td>-23.49</td><td>37.92</td><td>6.79</td><td>Average</td><td>100</td><td>51</td></tr><tr><td>4</td><td>14170.00</td><td>57.60</td><td>88.20</td><td>-30.60</td><td>50.81</td><td>6.79</td><td>Peak</td><td>100</td><td>51</td></tr><tr><td>5</td><td>21255.00</td><td>43.53</td><td>54.00</td><td>-10.47</td><td>39.38</td><td>4.15</td><td>Average</td><td>100</td><td>174</td></tr><tr><td>6</td><td>21255.00</td><td>54.73</td><td>74.00</td><td>-19.27</td><td>50.58</td><td>4.15</td><td>Peak</td><td>100</td><td>174</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7125.00	48.01	68.20	-20.19	43.15	4.86	Average	263	349	2	7125.00	60.25	88.20	-27.95	55.39	4.86	Peak	263	349	3	14170.00	44.71	68.20	-23.49	37.92	6.79	Average	100	51	4	14170.00	57.60	88.20	-30.60	50.81	6.79	Peak	100	51	5	21255.00	43.53	54.00	-10.47	39.38	4.15	Average	100	174	6	21255.00	54.73	74.00	-19.27	50.58	4.15	Peak	100	174
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	7125.00	48.01	68.20	-20.19	43.15	4.86	Average	263	349																																																																
2	7125.00	60.25	88.20	-27.95	55.39	4.86	Peak	263	349																																																																
3	14170.00	44.71	68.20	-23.49	37.92	6.79	Average	100	51																																																																
4	14170.00	57.60	88.20	-30.60	50.81	6.79	Peak	100	51																																																																
5	21255.00	43.53	54.00	-10.47	39.38	4.15	Average	100	174																																																																
6	21255.00	54.73	74.00	-19.27	50.58	4.15	Peak	100	174																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									


Unwanted Emissions (Above 1GHz) for be EHT80-OFDMA

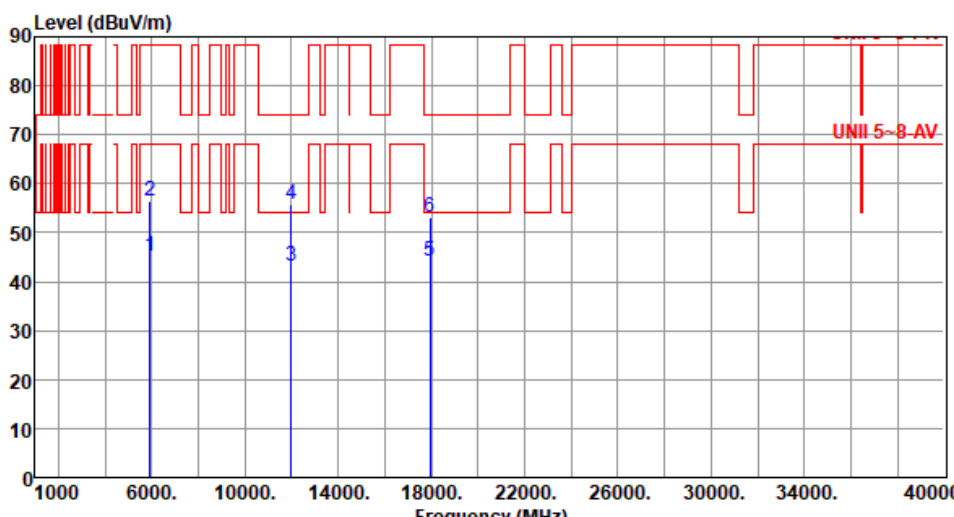Modulation	be EHT80-OFDMA	Test Freq. (MHz)	5985																																																																						
Polarization	Horizontal																																																																								
Test By :Paul Lin Temperature(°C):24 Humidity(%):64																																																																									
Level (dBUV/m)  <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5925.00</td><td>45.12</td><td>68.20</td><td>-23.08</td><td>43.99</td><td>1.13</td><td>Average</td><td>352</td><td>291</td></tr><tr><td>2</td><td>5925.00</td><td>56.32</td><td>88.20</td><td>-31.88</td><td>55.19</td><td>1.13</td><td>Peak</td><td>352</td><td>291</td></tr><tr><td>3</td><td>11970.00</td><td>43.06</td><td>54.00</td><td>-10.94</td><td>36.89</td><td>6.17</td><td>Average</td><td>100</td><td>94</td></tr><tr><td>4</td><td>11970.00</td><td>55.84</td><td>74.00</td><td>-18.16</td><td>49.67</td><td>6.17</td><td>Peak</td><td>100</td><td>94</td></tr><tr><td>5</td><td>17955.00</td><td>44.16</td><td>54.00</td><td>-9.84</td><td>32.31</td><td>11.85</td><td>Average</td><td>100</td><td>341</td></tr><tr><td>6</td><td>17955.00</td><td>53.06</td><td>74.00</td><td>-20.94</td><td>41.21</td><td>11.85</td><td>Peak</td><td>100</td><td>341</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5925.00	45.12	68.20	-23.08	43.99	1.13	Average	352	291	2	5925.00	56.32	88.20	-31.88	55.19	1.13	Peak	352	291	3	11970.00	43.06	54.00	-10.94	36.89	6.17	Average	100	94	4	11970.00	55.84	74.00	-18.16	49.67	6.17	Peak	100	94	5	17955.00	44.16	54.00	-9.84	32.31	11.85	Average	100	341	6	17955.00	53.06	74.00	-20.94	41.21	11.85	Peak	100	341
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	5925.00	45.12	68.20	-23.08	43.99	1.13	Average	352	291																																																																
2	5925.00	56.32	88.20	-31.88	55.19	1.13	Peak	352	291																																																																
3	11970.00	43.06	54.00	-10.94	36.89	6.17	Average	100	94																																																																
4	11970.00	55.84	74.00	-18.16	49.67	6.17	Peak	100	94																																																																
5	17955.00	44.16	54.00	-9.84	32.31	11.85	Average	100	341																																																																
6	17955.00	53.06	74.00	-20.94	41.21	11.85	Peak	100	341																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									




Modulation	be EHT80-OFDMA	Test Freq. (MHz)	5985																																																																						
Polarization	Vertical																																																																								
Test By :Paul Lin Temperature(°C):24 Humidity(%):64																																																																									
Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5925.00</td><td>43.81</td><td>68.20</td><td>-24.39</td><td>42.68</td><td>1.13</td><td>Average</td><td>372</td><td>351</td></tr><tr><td>2</td><td>5925.00</td><td>56.33</td><td>88.20</td><td>-31.87</td><td>55.20</td><td>1.13</td><td>Peak</td><td>372</td><td>351</td></tr><tr><td>3</td><td>11970.00</td><td>42.95</td><td>54.00</td><td>-11.05</td><td>36.78</td><td>6.17</td><td>Average</td><td>100</td><td>114</td></tr><tr><td>4</td><td>11970.00</td><td>55.69</td><td>74.00</td><td>-18.31</td><td>49.52</td><td>6.17</td><td>Peak</td><td>100</td><td>114</td></tr><tr><td>5</td><td>17955.00</td><td>44.09</td><td>54.00</td><td>-9.91</td><td>32.24</td><td>11.85</td><td>Average</td><td>100</td><td>255</td></tr><tr><td>6</td><td>17955.00</td><td>53.03</td><td>74.00</td><td>-20.97</td><td>41.18</td><td>11.85</td><td>Peak</td><td>100</td><td>255</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5925.00	43.81	68.20	-24.39	42.68	1.13	Average	372	351	2	5925.00	56.33	88.20	-31.87	55.20	1.13	Peak	372	351	3	11970.00	42.95	54.00	-11.05	36.78	6.17	Average	100	114	4	11970.00	55.69	74.00	-18.31	49.52	6.17	Peak	100	114	5	17955.00	44.09	54.00	-9.91	32.24	11.85	Average	100	255	6	17955.00	53.03	74.00	-20.97	41.18	11.85	Peak	100	255
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	5925.00	43.81	68.20	-24.39	42.68	1.13	Average	372	351																																																																
2	5925.00	56.33	88.20	-31.87	55.20	1.13	Peak	372	351																																																																
3	11970.00	42.95	54.00	-11.05	36.78	6.17	Average	100	114																																																																
4	11970.00	55.69	74.00	-18.31	49.52	6.17	Peak	100	114																																																																
5	17955.00	44.09	54.00	-9.91	32.24	11.85	Average	100	255																																																																
6	17955.00	53.03	74.00	-20.97	41.18	11.85	Peak	100	255																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									

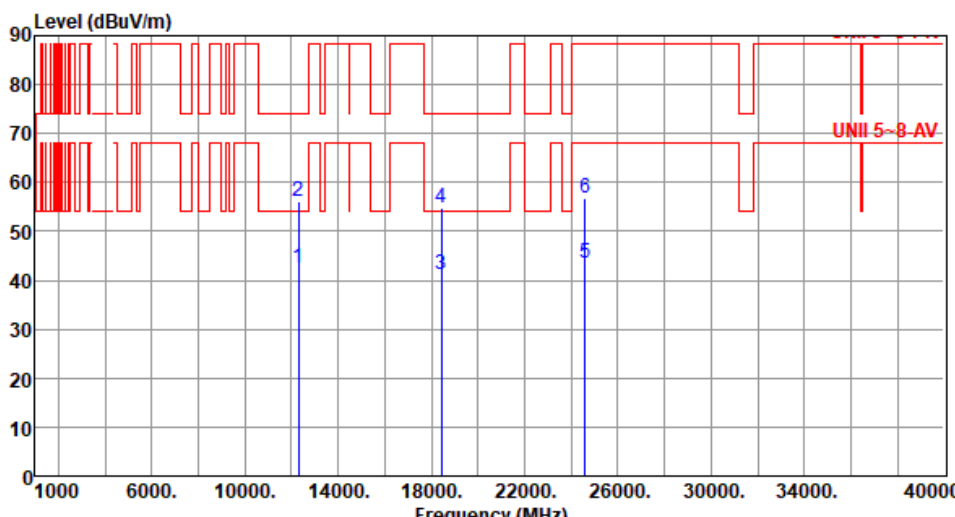


Modulation	be EHT80-OFDMA	Test Freq. (MHz)	6145						
Polarization	Horizontal								
Test By :Paul Lin Temperature(°C):24 Humidity(%):64									
Level (dBUV/m)  Frequency (MHz)									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	12290.00	42.67	54.00	-11.33	36.48	6.19	Average	100	247
2	12290.00	56.11	74.00	-17.89	49.92	6.19	Peak	100	247
3	18435.00	41.03	54.00	-12.97	39.34	1.69	Average	100	97
4	18435.00	54.93	74.00	-19.07	53.24	1.69	Peak	100	97
5	24580.00	43.56	68.20	-24.64	35.36	8.20	Average	100	316
6	24580.00	56.66	88.20	-31.54	48.46	8.20	Peak	100	316
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).									

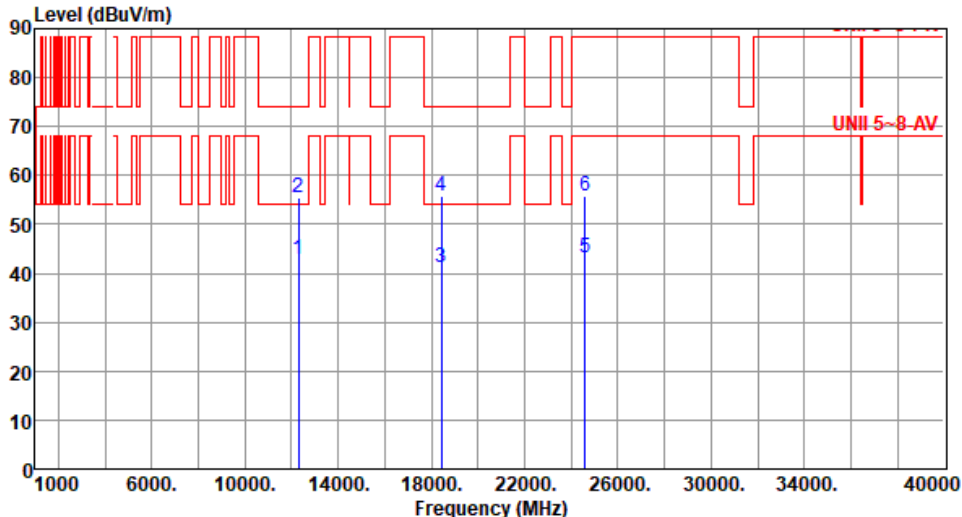


Modulation	be EHT80-OFDMA	Test Freq. (MHz)	6145																																																																						
Polarization	Vertical																																																																								
Test By :Paul Lin Temperature(°C):24 Humidity(%):64																																																																									
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>12290.00</td><td>42.95</td><td>54.00</td><td>-11.05</td><td>36.76</td><td>6.19</td><td>Average</td><td>100</td><td>218</td></tr><tr><td>2</td><td>12290.00</td><td>55.39</td><td>74.00</td><td>-18.61</td><td>49.20</td><td>6.19</td><td>Peak</td><td>100</td><td>218</td></tr><tr><td>3</td><td>18435.00</td><td>41.29</td><td>54.00</td><td>-12.71</td><td>39.60</td><td>1.69</td><td>Average</td><td>100</td><td>56</td></tr><tr><td>4</td><td>18435.00</td><td>55.64</td><td>74.00</td><td>-18.36</td><td>53.95</td><td>1.69</td><td>Peak</td><td>100</td><td>56</td></tr><tr><td>5</td><td>24580.00</td><td>43.25</td><td>68.20</td><td>-24.95</td><td>35.05</td><td>8.20</td><td>Average</td><td>100</td><td>239</td></tr><tr><td>6</td><td>24580.00</td><td>55.91</td><td>88.20</td><td>-32.29</td><td>47.71</td><td>8.20</td><td>Peak</td><td>100</td><td>239</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	12290.00	42.95	54.00	-11.05	36.76	6.19	Average	100	218	2	12290.00	55.39	74.00	-18.61	49.20	6.19	Peak	100	218	3	18435.00	41.29	54.00	-12.71	39.60	1.69	Average	100	56	4	18435.00	55.64	74.00	-18.36	53.95	1.69	Peak	100	56	5	24580.00	43.25	68.20	-24.95	35.05	8.20	Average	100	239	6	24580.00	55.91	88.20	-32.29	47.71	8.20	Peak	100	239
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	12290.00	42.95	54.00	-11.05	36.76	6.19	Average	100	218																																																																
2	12290.00	55.39	74.00	-18.61	49.20	6.19	Peak	100	218																																																																
3	18435.00	41.29	54.00	-12.71	39.60	1.69	Average	100	56																																																																
4	18435.00	55.64	74.00	-18.36	53.95	1.69	Peak	100	56																																																																
5	24580.00	43.25	68.20	-24.95	35.05	8.20	Average	100	239																																																																
6	24580.00	55.91	88.20	-32.29	47.71	8.20	Peak	100	239																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									

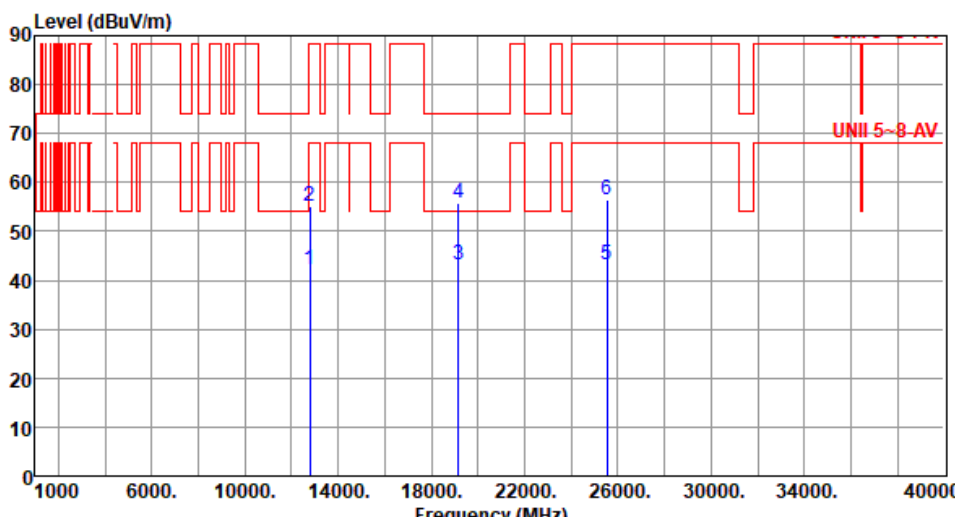


Modulation	be EHT80-OFDMA		Test Freq. (MHz)		6385																																																																																														
Polarization	Horizontal																																																																																																		
Test By :Paul Lin Temperature(°C):24 Humidity(%):64																																																																																																			
 <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>12770.00</td><td>42.14</td><td>68.20</td><td>-26.06</td><td>36.25</td><td>5.89</td><td>Average</td><td>100</td><td>156</td></tr><tr><td>2</td><td>12770.00</td><td>55.15</td><td>88.20</td><td>-33.05</td><td>49.26</td><td>5.89</td><td>Peak</td><td>100</td><td>156</td></tr><tr><td>3</td><td>19155.00</td><td>43.03</td><td>54.00</td><td>-10.97</td><td>41.16</td><td>1.87</td><td>Average</td><td>100</td><td>61</td></tr><tr><td>4</td><td>19155.00</td><td>55.76</td><td>74.00</td><td>-18.24</td><td>53.89</td><td>1.87</td><td>Peak</td><td>100</td><td>61</td></tr><tr><td>5</td><td>25540.00</td><td>43.14</td><td>68.20</td><td>-25.06</td><td>35.04</td><td>8.10</td><td>Average</td><td>100</td><td>48</td></tr><tr><td>6</td><td>25540.00</td><td>56.35</td><td>88.20</td><td>-31.85</td><td>48.25</td><td>8.10</td><td>Peak</td><td>100</td><td>48</td></tr></table>											Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	12770.00	42.14	68.20	-26.06	36.25	5.89	Average	100	156	2	12770.00	55.15	88.20	-33.05	49.26	5.89	Peak	100	156	3	19155.00	43.03	54.00	-10.97	41.16	1.87	Average	100	61	4	19155.00	55.76	74.00	-18.24	53.89	1.87	Peak	100	61	5	25540.00	43.14	68.20	-25.06	35.04	8.10	Average	100	48	6	25540.00	56.35	88.20	-31.85	48.25	8.10	Peak	100	48
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																										
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																										
		dBuV/m			dBuV			cm	deg																																																																																										
1	12770.00	42.14	68.20	-26.06	36.25	5.89	Average	100	156																																																																																										
2	12770.00	55.15	88.20	-33.05	49.26	5.89	Peak	100	156																																																																																										
3	19155.00	43.03	54.00	-10.97	41.16	1.87	Average	100	61																																																																																										
4	19155.00	55.76	74.00	-18.24	53.89	1.87	Peak	100	61																																																																																										
5	25540.00	43.14	68.20	-25.06	35.04	8.10	Average	100	48																																																																																										
6	25540.00	56.35	88.20	-31.85	48.25	8.10	Peak	100	48																																																																																										
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																																																			

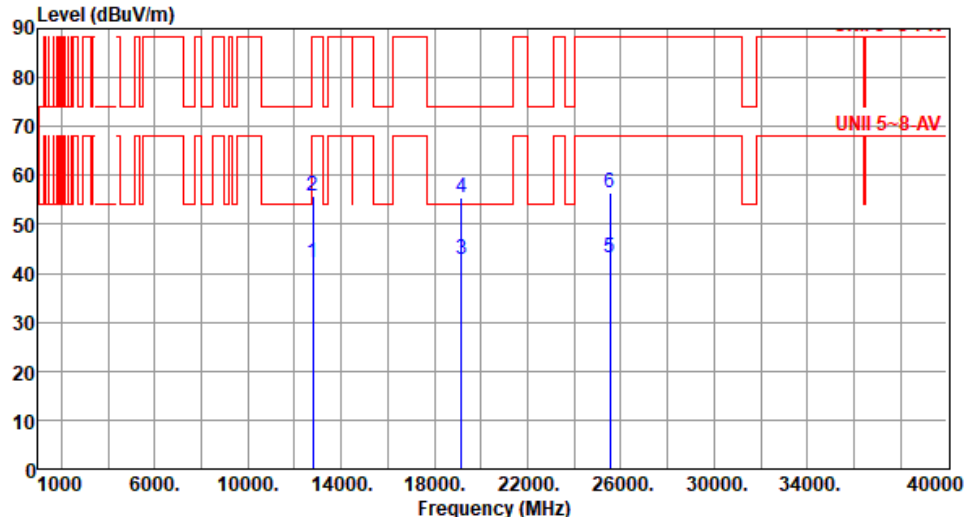


Modulation	be EHT80-OFDMA	Test Freq. (MHz)	6385						
Polarization	Vertical								
Test By :Paul Lin Temperature(°C):24 Humidity(%):64									
									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	12770.00	42.08	68.20	-26.12	36.19	5.89	Average	100	48
2	12770.00	55.94	88.20	-32.26	50.05	5.89	Peak	100	48
3	19155.00	42.95	54.00	-11.05	41.08	1.87	Average	100	104
4	19155.00	55.61	74.00	-18.39	53.74	1.87	Peak	100	104
5	25540.00	43.22	68.20	-24.98	35.12	8.10	Average	100	66
6	25540.00	56.48	88.20	-31.72	48.38	8.10	Peak	100	66
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).									

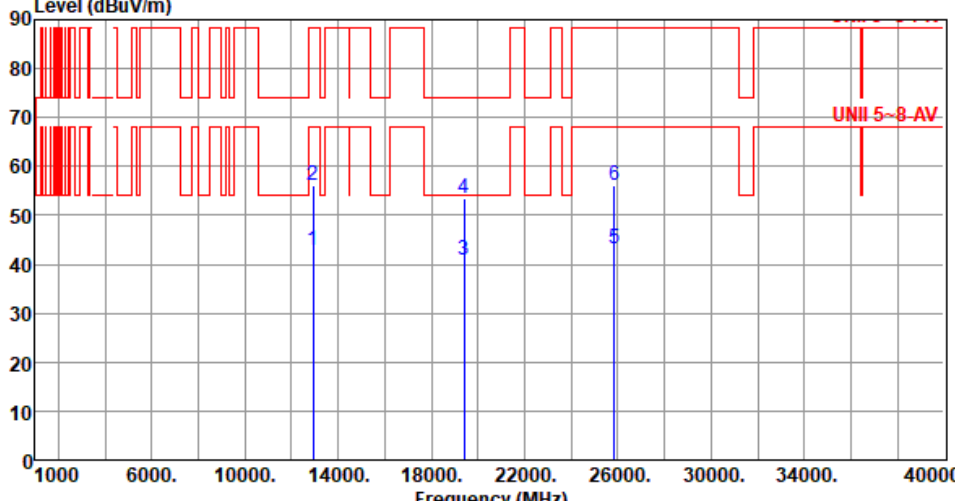


Modulation	be EHT80-OFDMA	Test Freq. (MHz)	6465																																																																																										
Polarization	Horizontal																																																																																												
Test By :Paul Lin Temperature(°C):24 Humidity(%):64																																																																																													
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>12930.00</td><td>42.82</td><td>68.20</td><td>-25.38</td><td>36.78</td><td>6.04</td><td>Average</td><td>100</td><td>331</td></tr><tr><td>2</td><td>12930.00</td><td>56.17</td><td>88.20</td><td>-32.03</td><td>50.13</td><td>6.04</td><td>Peak</td><td>100</td><td>331</td></tr><tr><td>3</td><td>19395.00</td><td>40.86</td><td>54.00</td><td>-13.14</td><td>39.11</td><td>1.75</td><td>Average</td><td>100</td><td>77</td></tr><tr><td>4</td><td>19395.00</td><td>53.61</td><td>74.00</td><td>-20.39</td><td>51.86</td><td>1.75</td><td>Peak</td><td>100</td><td>77</td></tr><tr><td>5</td><td>25860.00</td><td>43.19</td><td>68.20</td><td>-25.01</td><td>35.19</td><td>8.00</td><td>Average</td><td>100</td><td>228</td></tr><tr><td>6</td><td>25860.00</td><td>56.27</td><td>88.20</td><td>-31.93</td><td>48.27</td><td>8.00</td><td>Peak</td><td>100</td><td>228</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	12930.00	42.82	68.20	-25.38	36.78	6.04	Average	100	331	2	12930.00	56.17	88.20	-32.03	50.13	6.04	Peak	100	331	3	19395.00	40.86	54.00	-13.14	39.11	1.75	Average	100	77	4	19395.00	53.61	74.00	-20.39	51.86	1.75	Peak	100	77	5	25860.00	43.19	68.20	-25.01	35.19	8.00	Average	100	228	6	25860.00	56.27	88.20	-31.93	48.27	8.00	Peak	100	228
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																				
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																				
		dBuV/m			dBuV			cm	deg																																																																																				
1	12930.00	42.82	68.20	-25.38	36.78	6.04	Average	100	331																																																																																				
2	12930.00	56.17	88.20	-32.03	50.13	6.04	Peak	100	331																																																																																				
3	19395.00	40.86	54.00	-13.14	39.11	1.75	Average	100	77																																																																																				
4	19395.00	53.61	74.00	-20.39	51.86	1.75	Peak	100	77																																																																																				
5	25860.00	43.19	68.20	-25.01	35.19	8.00	Average	100	228																																																																																				
6	25860.00	56.27	88.20	-31.93	48.27	8.00	Peak	100	228																																																																																				
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																																													

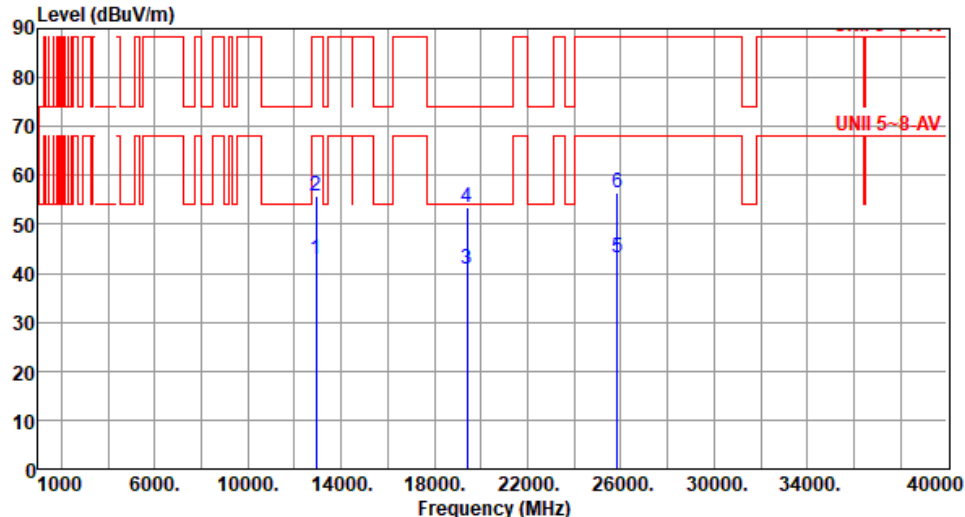


Modulation	be EHT80-OFDMA	Test Freq. (MHz)	6465						
Polarization	Vertical								
Test By :Paul Lin Temperature(°C):24 Humidity(%):64									
Level (dBUV/m)  Frequency (MHz)									
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table
		dBuV/m			dBuV			cm	deg
1	12930.00	42.93	68.20	-25.27	36.89	6.04	Average	100	248
2	12930.00	55.88	88.20	-32.32	49.84	6.04	Peak	100	248
3	19395.00	40.93	54.00	-13.07	39.18	1.75	Average	100	64
4	19395.00	53.54	74.00	-20.46	51.79	1.75	Peak	100	64
5	25860.00	43.24	68.20	-24.96	35.24	8.00	Average	100	185
6	25860.00	56.39	88.20	-31.81	48.39	8.00	Peak	100	185

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

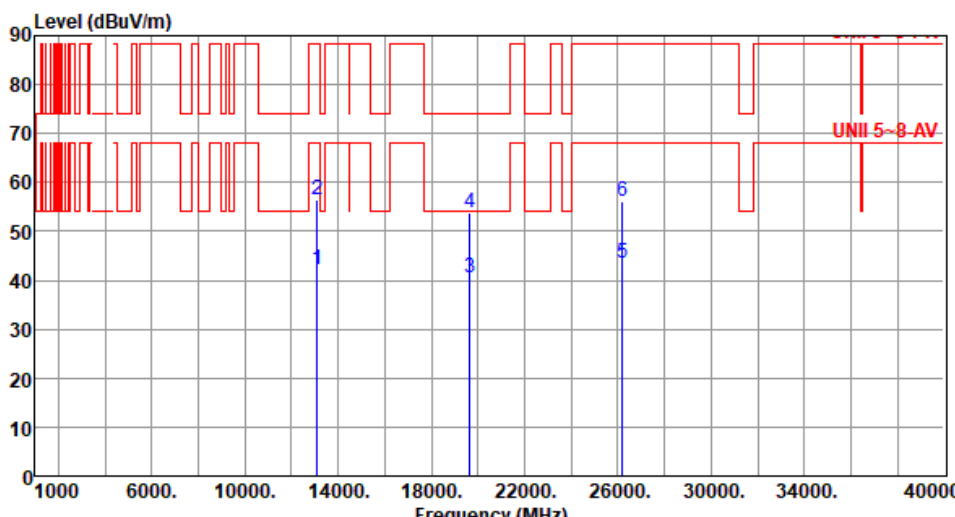

Modulation	be EHT80-OFDMA	Test Freq. (MHz)	6545																																																																						
Polarization	Horizontal																																																																								
Test By :Paul Lin Temperature(°C):24 Humidity(%):64																																																																									
Level (dBUV/m)  <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>13090.00</td><td>42.04</td><td>68.20</td><td>-26.16</td><td>36.35</td><td>5.69</td><td>Average</td><td>100</td><td>14</td></tr><tr><td>2</td><td>13090.00</td><td>56.30</td><td>88.20</td><td>-31.90</td><td>50.61</td><td>5.69</td><td>Peak</td><td>100</td><td>14</td></tr><tr><td>3</td><td>19635.00</td><td>40.68</td><td>54.00</td><td>-13.32</td><td>38.73</td><td>1.95</td><td>Average</td><td>100</td><td>79</td></tr><tr><td>4</td><td>19635.00</td><td>53.81</td><td>74.00</td><td>-20.19</td><td>51.86</td><td>1.95</td><td>Peak</td><td>100</td><td>79</td></tr><tr><td>5</td><td>26180.00</td><td>43.37</td><td>68.20</td><td>-24.83</td><td>35.23</td><td>8.14</td><td>Average</td><td>100</td><td>141</td></tr><tr><td>6</td><td>26180.00</td><td>56.19</td><td>88.20</td><td>-32.01</td><td>48.05</td><td>8.14</td><td>Peak</td><td>100</td><td>141</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13090.00	42.04	68.20	-26.16	36.35	5.69	Average	100	14	2	13090.00	56.30	88.20	-31.90	50.61	5.69	Peak	100	14	3	19635.00	40.68	54.00	-13.32	38.73	1.95	Average	100	79	4	19635.00	53.81	74.00	-20.19	51.86	1.95	Peak	100	79	5	26180.00	43.37	68.20	-24.83	35.23	8.14	Average	100	141	6	26180.00	56.19	88.20	-32.01	48.05	8.14	Peak	100	141
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	13090.00	42.04	68.20	-26.16	36.35	5.69	Average	100	14																																																																
2	13090.00	56.30	88.20	-31.90	50.61	5.69	Peak	100	14																																																																
3	19635.00	40.68	54.00	-13.32	38.73	1.95	Average	100	79																																																																
4	19635.00	53.81	74.00	-20.19	51.86	1.95	Peak	100	79																																																																
5	26180.00	43.37	68.20	-24.83	35.23	8.14	Average	100	141																																																																
6	26180.00	56.19	88.20	-32.01	48.05	8.14	Peak	100	141																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									

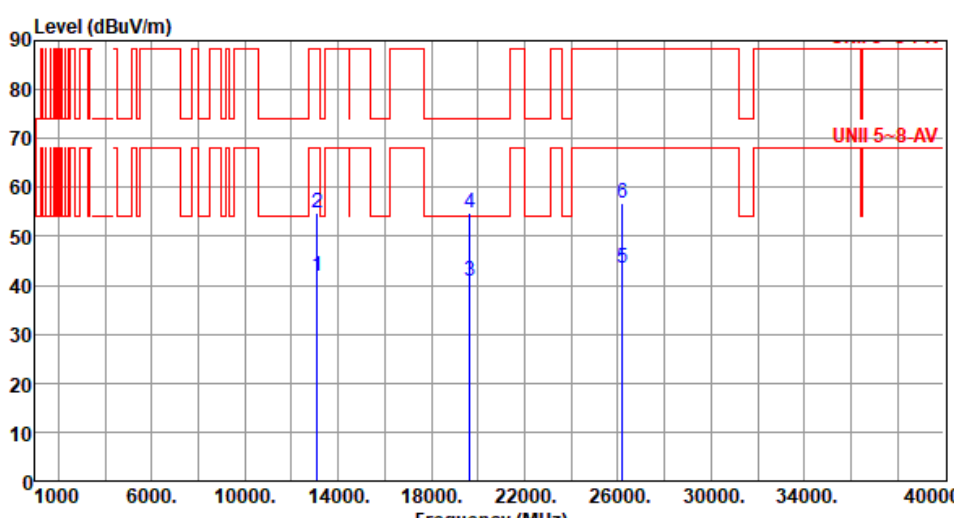


Modulation	be EHT80-OFDMA	Test Freq. (MHz)	6545																																																																						
Polarization	Vertical																																																																								
Test By :Paul Lin Temperature(°C):24 Humidity(%):64																																																																									
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>13090.00</td><td>41.84</td><td>68.20</td><td>-26.36</td><td>36.15</td><td>5.69</td><td>Average</td><td>100</td><td>31</td></tr><tr><td>2</td><td>13090.00</td><td>54.79</td><td>88.20</td><td>-33.41</td><td>49.10</td><td>5.69</td><td>Peak</td><td>100</td><td>31</td></tr><tr><td>3</td><td>19635.00</td><td>40.98</td><td>54.00</td><td>-13.02</td><td>39.03</td><td>1.95</td><td>Average</td><td>100</td><td>12</td></tr><tr><td>4</td><td>19635.00</td><td>54.94</td><td>74.00</td><td>-19.06</td><td>52.99</td><td>1.95</td><td>Peak</td><td>100</td><td>12</td></tr><tr><td>5</td><td>26180.00</td><td>43.35</td><td>68.20</td><td>-24.85</td><td>35.21</td><td>8.14</td><td>Average</td><td>100</td><td>114</td></tr><tr><td>6</td><td>26180.00</td><td>56.91</td><td>88.20</td><td>-31.29</td><td>48.77</td><td>8.14</td><td>Peak</td><td>100</td><td>114</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13090.00	41.84	68.20	-26.36	36.15	5.69	Average	100	31	2	13090.00	54.79	88.20	-33.41	49.10	5.69	Peak	100	31	3	19635.00	40.98	54.00	-13.02	39.03	1.95	Average	100	12	4	19635.00	54.94	74.00	-19.06	52.99	1.95	Peak	100	12	5	26180.00	43.35	68.20	-24.85	35.21	8.14	Average	100	114	6	26180.00	56.91	88.20	-31.29	48.77	8.14	Peak	100	114
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	13090.00	41.84	68.20	-26.36	36.15	5.69	Average	100	31																																																																
2	13090.00	54.79	88.20	-33.41	49.10	5.69	Peak	100	31																																																																
3	19635.00	40.98	54.00	-13.02	39.03	1.95	Average	100	12																																																																
4	19635.00	54.94	74.00	-19.06	52.99	1.95	Peak	100	12																																																																
5	26180.00	43.35	68.20	-24.85	35.21	8.14	Average	100	114																																																																
6	26180.00	56.91	88.20	-31.29	48.77	8.14	Peak	100	114																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									




Modulation	be EHT80-OFDMA	Test Freq. (MHz)	6625																																																																																										
Polarization	Horizontal																																																																																												
Test By :Paul Lin Temperature(°C):24 Humidity(%):64																																																																																													
Level (dBUV/m) Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>13250.00</td><td>42.31</td><td>54.00</td><td>-11.69</td><td>36.66</td><td>5.65</td><td>Average</td><td>100</td><td>159</td></tr><tr><td>2</td><td>13250.00</td><td>56.13</td><td>74.00</td><td>-17.87</td><td>50.48</td><td>5.65</td><td>Peak</td><td>100</td><td>159</td></tr><tr><td>3</td><td>19875.00</td><td>40.76</td><td>54.00</td><td>-13.24</td><td>38.47</td><td>2.29</td><td>Average</td><td>100</td><td>71</td></tr><tr><td>4</td><td>19875.00</td><td>53.76</td><td>74.00</td><td>-20.24</td><td>51.47</td><td>2.29</td><td>Peak</td><td>100</td><td>71</td></tr><tr><td>5</td><td>26500.00</td><td>43.38</td><td>68.20</td><td>-24.82</td><td>34.68</td><td>8.70</td><td>Average</td><td>100</td><td>54</td></tr><tr><td>6</td><td>26500.00</td><td>55.82</td><td>88.20</td><td>-32.38</td><td>47.12</td><td>8.70</td><td>Peak</td><td>100</td><td>54</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	13250.00	42.31	54.00	-11.69	36.66	5.65	Average	100	159	2	13250.00	56.13	74.00	-17.87	50.48	5.65	Peak	100	159	3	19875.00	40.76	54.00	-13.24	38.47	2.29	Average	100	71	4	19875.00	53.76	74.00	-20.24	51.47	2.29	Peak	100	71	5	26500.00	43.38	68.20	-24.82	34.68	8.70	Average	100	54	6	26500.00	55.82	88.20	-32.38	47.12	8.70	Peak	100	54
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																				
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																				
		dBuV/m			dBuV			cm	deg																																																																																				
1	13250.00	42.31	54.00	-11.69	36.66	5.65	Average	100	159																																																																																				
2	13250.00	56.13	74.00	-17.87	50.48	5.65	Peak	100	159																																																																																				
3	19875.00	40.76	54.00	-13.24	38.47	2.29	Average	100	71																																																																																				
4	19875.00	53.76	74.00	-20.24	51.47	2.29	Peak	100	71																																																																																				
5	26500.00	43.38	68.20	-24.82	34.68	8.70	Average	100	54																																																																																				
6	26500.00	55.82	88.20	-32.38	47.12	8.70	Peak	100	54																																																																																				
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																																													

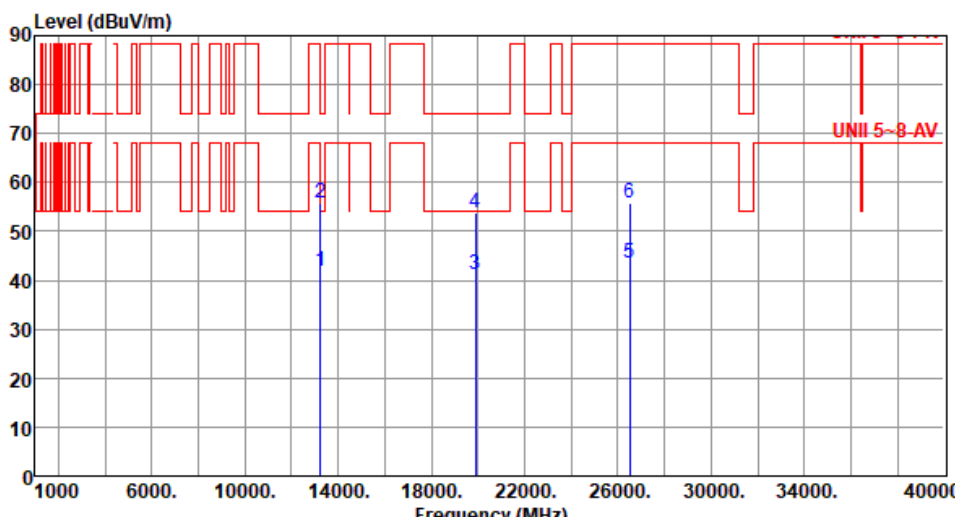


Modulation	be EHT80-OFDMA	Test Freq. (MHz)	6625																																																																						
Polarization	Vertical																																																																								
Test By :Paul Lin Temperature(°C):24 Humidity(%):64																																																																									
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>13250.00</td><td>41.98</td><td>54.00</td><td>-12.02</td><td>36.33</td><td>5.65</td><td>Average</td><td>100</td><td>55</td></tr><tr><td>2</td><td>13250.00</td><td>55.93</td><td>74.00</td><td>-18.07</td><td>50.28</td><td>5.65</td><td>Peak</td><td>100</td><td>55</td></tr><tr><td>3</td><td>19875.00</td><td>41.02</td><td>54.00</td><td>-12.98</td><td>38.73</td><td>2.29</td><td>Average</td><td>100</td><td>26</td></tr><tr><td>4</td><td>19875.00</td><td>53.87</td><td>74.00</td><td>-20.13</td><td>51.58</td><td>2.29</td><td>Peak</td><td>100</td><td>26</td></tr><tr><td>5</td><td>26500.00</td><td>43.45</td><td>68.20</td><td>-24.75</td><td>34.75</td><td>8.70</td><td>Average</td><td>100</td><td>93</td></tr><tr><td>6</td><td>26500.00</td><td>55.84</td><td>88.20</td><td>-32.36</td><td>47.14</td><td>8.70</td><td>Peak</td><td>100</td><td>93</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13250.00	41.98	54.00	-12.02	36.33	5.65	Average	100	55	2	13250.00	55.93	74.00	-18.07	50.28	5.65	Peak	100	55	3	19875.00	41.02	54.00	-12.98	38.73	2.29	Average	100	26	4	19875.00	53.87	74.00	-20.13	51.58	2.29	Peak	100	26	5	26500.00	43.45	68.20	-24.75	34.75	8.70	Average	100	93	6	26500.00	55.84	88.20	-32.36	47.14	8.70	Peak	100	93
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	13250.00	41.98	54.00	-12.02	36.33	5.65	Average	100	55																																																																
2	13250.00	55.93	74.00	-18.07	50.28	5.65	Peak	100	55																																																																
3	19875.00	41.02	54.00	-12.98	38.73	2.29	Average	100	26																																																																
4	19875.00	53.87	74.00	-20.13	51.58	2.29	Peak	100	26																																																																
5	26500.00	43.45	68.20	-24.75	34.75	8.70	Average	100	93																																																																
6	26500.00	55.84	88.20	-32.36	47.14	8.70	Peak	100	93																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									

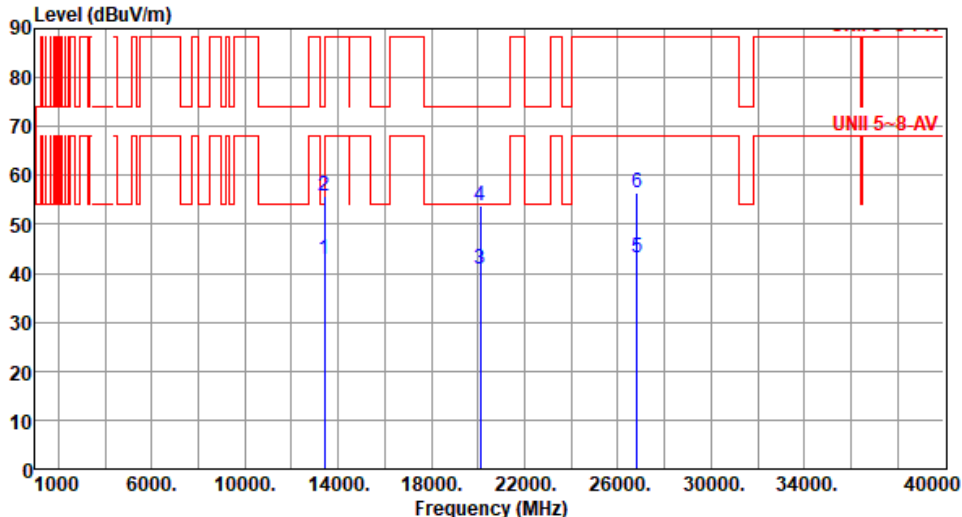

Modulation	be EHT80-OFDMA	Test Freq. (MHz)	6705																																																																						
Polarization	Horizontal																																																																								
Test By :Paul Lin Temperature(°C):24 Humidity(%):64																																																																									
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>13410.00</td><td>42.94</td><td>68.20</td><td>-25.26</td><td>37.04</td><td>5.90</td><td>Average</td><td>100</td><td>147</td></tr><tr><td>2</td><td>13410.00</td><td>55.69</td><td>88.20</td><td>-32.51</td><td>49.79</td><td>5.90</td><td>Peak</td><td>100</td><td>147</td></tr><tr><td>3</td><td>20115.00</td><td>40.95</td><td>54.00</td><td>-13.05</td><td>38.33</td><td>2.62</td><td>Average</td><td>100</td><td>116</td></tr><tr><td>4</td><td>20115.00</td><td>53.64</td><td>74.00</td><td>-20.36</td><td>51.02</td><td>2.62</td><td>Peak</td><td>100</td><td>116</td></tr><tr><td>5</td><td>26820.00</td><td>43.28</td><td>68.20</td><td>-24.92</td><td>34.84</td><td>8.44</td><td>Average</td><td>100</td><td>197</td></tr><tr><td>6</td><td>26820.00</td><td>56.37</td><td>88.20</td><td>-31.83</td><td>47.93</td><td>8.44</td><td>Peak</td><td>100</td><td>197</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13410.00	42.94	68.20	-25.26	37.04	5.90	Average	100	147	2	13410.00	55.69	88.20	-32.51	49.79	5.90	Peak	100	147	3	20115.00	40.95	54.00	-13.05	38.33	2.62	Average	100	116	4	20115.00	53.64	74.00	-20.36	51.02	2.62	Peak	100	116	5	26820.00	43.28	68.20	-24.92	34.84	8.44	Average	100	197	6	26820.00	56.37	88.20	-31.83	47.93	8.44	Peak	100	197
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	13410.00	42.94	68.20	-25.26	37.04	5.90	Average	100	147																																																																
2	13410.00	55.69	88.20	-32.51	49.79	5.90	Peak	100	147																																																																
3	20115.00	40.95	54.00	-13.05	38.33	2.62	Average	100	116																																																																
4	20115.00	53.64	74.00	-20.36	51.02	2.62	Peak	100	116																																																																
5	26820.00	43.28	68.20	-24.92	34.84	8.44	Average	100	197																																																																
6	26820.00	56.37	88.20	-31.83	47.93	8.44	Peak	100	197																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									

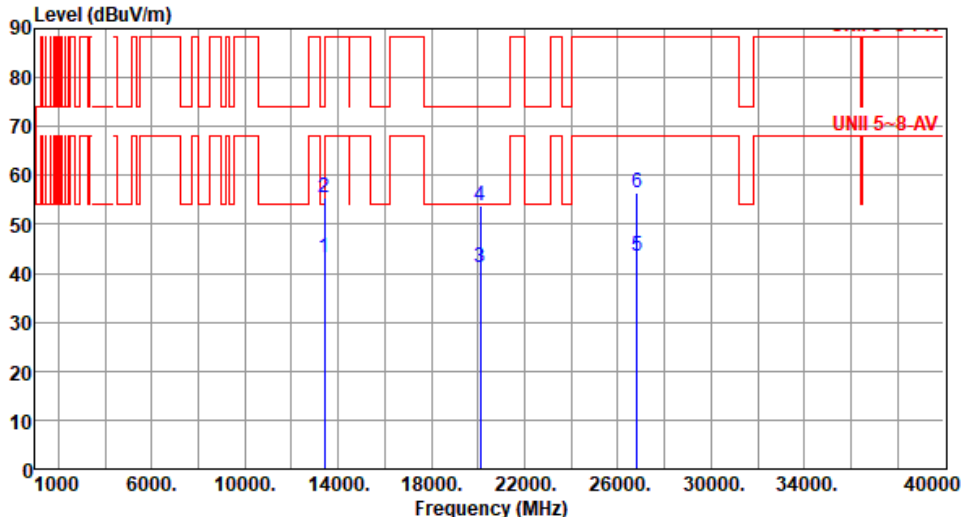


Modulation	be EHT80-OFDMA	Test Freq. (MHz)	6705																																																																						
Polarization	Vertical																																																																								
Test By :Paul Lin Temperature(°C):24 Humidity(%):64																																																																									
Level (dBUV/m)  <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>13410.00</td><td>43.01</td><td>68.20</td><td>-25.19</td><td>37.11</td><td>5.90</td><td>Average</td><td>100</td><td>18</td></tr><tr><td>2</td><td>13410.00</td><td>55.59</td><td>88.20</td><td>-32.61</td><td>49.69</td><td>5.90</td><td>Peak</td><td>100</td><td>18</td></tr><tr><td>3</td><td>20115.00</td><td>41.07</td><td>54.00</td><td>-12.93</td><td>38.45</td><td>2.62</td><td>Average</td><td>100</td><td>95</td></tr><tr><td>4</td><td>20115.00</td><td>53.84</td><td>74.00</td><td>-20.16</td><td>51.22</td><td>2.62</td><td>Peak</td><td>100</td><td>95</td></tr><tr><td>5</td><td>26820.00</td><td>43.36</td><td>68.20</td><td>-24.84</td><td>34.92</td><td>8.44</td><td>Average</td><td>100</td><td>172</td></tr><tr><td>6</td><td>26820.00</td><td>56.44</td><td>88.20</td><td>-31.76</td><td>48.00</td><td>8.44</td><td>Peak</td><td>100</td><td>172</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13410.00	43.01	68.20	-25.19	37.11	5.90	Average	100	18	2	13410.00	55.59	88.20	-32.61	49.69	5.90	Peak	100	18	3	20115.00	41.07	54.00	-12.93	38.45	2.62	Average	100	95	4	20115.00	53.84	74.00	-20.16	51.22	2.62	Peak	100	95	5	26820.00	43.36	68.20	-24.84	34.92	8.44	Average	100	172	6	26820.00	56.44	88.20	-31.76	48.00	8.44	Peak	100	172
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	13410.00	43.01	68.20	-25.19	37.11	5.90	Average	100	18																																																																
2	13410.00	55.59	88.20	-32.61	49.69	5.90	Peak	100	18																																																																
3	20115.00	41.07	54.00	-12.93	38.45	2.62	Average	100	95																																																																
4	20115.00	53.84	74.00	-20.16	51.22	2.62	Peak	100	95																																																																
5	26820.00	43.36	68.20	-24.84	34.92	8.44	Average	100	172																																																																
6	26820.00	56.44	88.20	-31.76	48.00	8.44	Peak	100	172																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									




Modulation	be EHT80-OFDMA	Test Freq. (MHz)	6785																																																																																										
Polarization	Horizontal																																																																																												
Test By :Paul Lin Temperature(°C):24 Humidity(%):64																																																																																													
Level (dBuV/m) <table><thead><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>13570.00</td><td>41.92</td><td>68.20</td><td>-26.28</td><td>35.63</td><td>6.29</td><td>Average</td><td>100</td><td>315</td></tr><tr><td>2</td><td>13570.00</td><td>56.03</td><td>88.20</td><td>-32.17</td><td>49.74</td><td>6.29</td><td>Peak</td><td>100</td><td>315</td></tr><tr><td>3</td><td>20355.00</td><td>40.87</td><td>54.00</td><td>-13.13</td><td>38.09</td><td>2.78</td><td>Average</td><td>100</td><td>115</td></tr><tr><td>4</td><td>20355.00</td><td>53.64</td><td>74.00</td><td>-20.36</td><td>50.86</td><td>2.78</td><td>Peak</td><td>100</td><td>115</td></tr><tr><td>5</td><td>27140.00</td><td>43.26</td><td>68.20</td><td>-24.94</td><td>34.78</td><td>8.48</td><td>Average</td><td>100</td><td>211</td></tr><tr><td>6</td><td>27140.00</td><td>56.27</td><td>88.20</td><td>-31.93</td><td>47.79</td><td>8.48</td><td>Peak</td><td>100</td><td>211</td></tr></tbody></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	13570.00	41.92	68.20	-26.28	35.63	6.29	Average	100	315	2	13570.00	56.03	88.20	-32.17	49.74	6.29	Peak	100	315	3	20355.00	40.87	54.00	-13.13	38.09	2.78	Average	100	115	4	20355.00	53.64	74.00	-20.36	50.86	2.78	Peak	100	115	5	27140.00	43.26	68.20	-24.94	34.78	8.48	Average	100	211	6	27140.00	56.27	88.20	-31.93	47.79	8.48	Peak	100	211
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																				
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																				
		dBuV/m			dBuV			cm	deg																																																																																				
1	13570.00	41.92	68.20	-26.28	35.63	6.29	Average	100	315																																																																																				
2	13570.00	56.03	88.20	-32.17	49.74	6.29	Peak	100	315																																																																																				
3	20355.00	40.87	54.00	-13.13	38.09	2.78	Average	100	115																																																																																				
4	20355.00	53.64	74.00	-20.36	50.86	2.78	Peak	100	115																																																																																				
5	27140.00	43.26	68.20	-24.94	34.78	8.48	Average	100	211																																																																																				
6	27140.00	56.27	88.20	-31.93	47.79	8.48	Peak	100	211																																																																																				
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																													

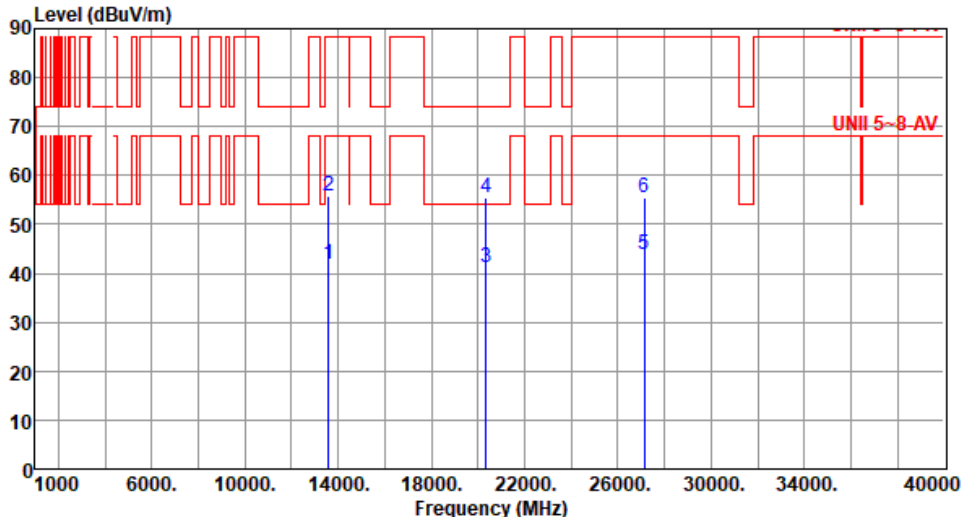


Modulation	be EHT80-OFDMA	Test Freq. (MHz)	6785																																																																						
Polarization	Vertical																																																																								
Test By :Paul Lin Temperature(°C):24 Humidity(%):64																																																																									
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>13570.00</td><td>41.85</td><td>68.20</td><td>-26.35</td><td>35.56</td><td>6.29</td><td>Average</td><td>100</td><td>67</td></tr><tr><td>2</td><td>13570.00</td><td>55.92</td><td>88.20</td><td>-32.28</td><td>49.63</td><td>6.29</td><td>Peak</td><td>100</td><td>67</td></tr><tr><td>3</td><td>20355.00</td><td>41.12</td><td>54.00</td><td>-12.88</td><td>38.34</td><td>2.78</td><td>Average</td><td>100</td><td>214</td></tr><tr><td>4</td><td>20355.00</td><td>55.54</td><td>74.00</td><td>-18.46</td><td>52.76</td><td>2.78</td><td>Peak</td><td>100</td><td>214</td></tr><tr><td>5</td><td>27140.00</td><td>43.97</td><td>68.20</td><td>-24.23</td><td>35.49</td><td>8.48</td><td>Average</td><td>100</td><td>124</td></tr><tr><td>6</td><td>27140.00</td><td>55.48</td><td>88.20</td><td>-32.72</td><td>47.00</td><td>8.48</td><td>Peak</td><td>100</td><td>124</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13570.00	41.85	68.20	-26.35	35.56	6.29	Average	100	67	2	13570.00	55.92	88.20	-32.28	49.63	6.29	Peak	100	67	3	20355.00	41.12	54.00	-12.88	38.34	2.78	Average	100	214	4	20355.00	55.54	74.00	-18.46	52.76	2.78	Peak	100	214	5	27140.00	43.97	68.20	-24.23	35.49	8.48	Average	100	124	6	27140.00	55.48	88.20	-32.72	47.00	8.48	Peak	100	124
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	13570.00	41.85	68.20	-26.35	35.56	6.29	Average	100	67																																																																
2	13570.00	55.92	88.20	-32.28	49.63	6.29	Peak	100	67																																																																
3	20355.00	41.12	54.00	-12.88	38.34	2.78	Average	100	214																																																																
4	20355.00	55.54	74.00	-18.46	52.76	2.78	Peak	100	214																																																																
5	27140.00	43.97	68.20	-24.23	35.49	8.48	Average	100	124																																																																
6	27140.00	55.48	88.20	-32.72	47.00	8.48	Peak	100	124																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									

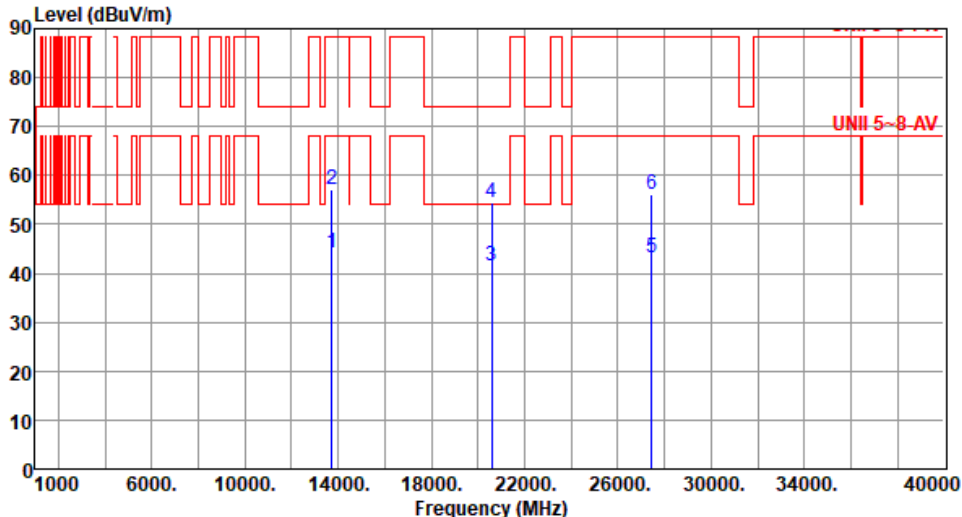

Modulation	be EHT80-OFDMA		Test Freq. (MHz)		6865																																																																																														
Polarization	Horizontal																																																																																																		
Test By :Paul Lin			Temperature(°C):24			Humidity(%):64																																																																																													
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>13730.00</td><td>44.16</td><td>68.20</td><td>-24.04</td><td>38.15</td><td>6.01</td><td>Average</td><td>100</td><td>75</td></tr><tr><td>2</td><td>13730.00</td><td>57.21</td><td>88.20</td><td>-30.99</td><td>51.20</td><td>6.01</td><td>Peak</td><td>100</td><td>75</td></tr><tr><td>3</td><td>20595.00</td><td>41.35</td><td>54.00</td><td>-12.65</td><td>38.21</td><td>3.14</td><td>Average</td><td>100</td><td>355</td></tr><tr><td>4</td><td>20595.00</td><td>54.41</td><td>74.00</td><td>-19.59</td><td>51.27</td><td>3.14</td><td>Peak</td><td>100</td><td>355</td></tr><tr><td>5</td><td>27460.00</td><td>43.18</td><td>68.20</td><td>-25.02</td><td>34.68</td><td>8.50</td><td>Average</td><td>100</td><td>24</td></tr><tr><td>6</td><td>27460.00</td><td>56.07</td><td>88.20</td><td>-32.13</td><td>47.57</td><td>8.50</td><td>Peak</td><td>100</td><td>24</td></tr></table>											Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	13730.00	44.16	68.20	-24.04	38.15	6.01	Average	100	75	2	13730.00	57.21	88.20	-30.99	51.20	6.01	Peak	100	75	3	20595.00	41.35	54.00	-12.65	38.21	3.14	Average	100	355	4	20595.00	54.41	74.00	-19.59	51.27	3.14	Peak	100	355	5	27460.00	43.18	68.20	-25.02	34.68	8.50	Average	100	24	6	27460.00	56.07	88.20	-32.13	47.57	8.50	Peak	100	24
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																										
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																										
		dBuV/m			dBuV			cm	deg																																																																																										
1	13730.00	44.16	68.20	-24.04	38.15	6.01	Average	100	75																																																																																										
2	13730.00	57.21	88.20	-30.99	51.20	6.01	Peak	100	75																																																																																										
3	20595.00	41.35	54.00	-12.65	38.21	3.14	Average	100	355																																																																																										
4	20595.00	54.41	74.00	-19.59	51.27	3.14	Peak	100	355																																																																																										
5	27460.00	43.18	68.20	-25.02	34.68	8.50	Average	100	24																																																																																										
6	27460.00	56.07	88.20	-32.13	47.57	8.50	Peak	100	24																																																																																										
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																																			

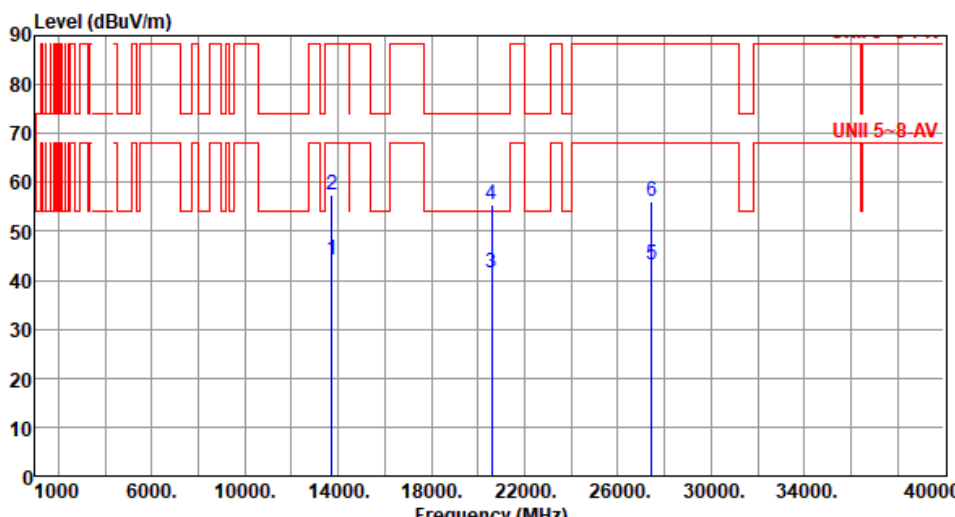

Modulation	be EHT80-OFDMA	Test Freq. (MHz)	6865																																																																						
Polarization	Vertical																																																																								
Test By :Paul Lin Temperature(°C):24 Humidity(%):64																																																																									
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>13730.00</td><td>44.06</td><td>68.20</td><td>-24.14</td><td>38.05</td><td>6.01</td><td>Average</td><td>100</td><td>117</td></tr><tr><td>2</td><td>13730.00</td><td>57.38</td><td>88.20</td><td>-30.82</td><td>51.37</td><td>6.01</td><td>Peak</td><td>100</td><td>117</td></tr><tr><td>3</td><td>20595.00</td><td>41.46</td><td>54.00</td><td>-12.54</td><td>38.32</td><td>3.14</td><td>Average</td><td>100</td><td>124</td></tr><tr><td>4</td><td>20595.00</td><td>55.37</td><td>74.00</td><td>-18.63</td><td>52.23</td><td>3.14</td><td>Peak</td><td>100</td><td>124</td></tr><tr><td>5</td><td>27460.00</td><td>43.29</td><td>68.20</td><td>-24.91</td><td>34.79</td><td>8.50</td><td>Average</td><td>100</td><td>38</td></tr><tr><td>6</td><td>27460.00</td><td>56.19</td><td>88.20</td><td>-32.01</td><td>47.69</td><td>8.50</td><td>Peak</td><td>100</td><td>38</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13730.00	44.06	68.20	-24.14	38.05	6.01	Average	100	117	2	13730.00	57.38	88.20	-30.82	51.37	6.01	Peak	100	117	3	20595.00	41.46	54.00	-12.54	38.32	3.14	Average	100	124	4	20595.00	55.37	74.00	-18.63	52.23	3.14	Peak	100	124	5	27460.00	43.29	68.20	-24.91	34.79	8.50	Average	100	38	6	27460.00	56.19	88.20	-32.01	47.69	8.50	Peak	100	38
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	13730.00	44.06	68.20	-24.14	38.05	6.01	Average	100	117																																																																
2	13730.00	57.38	88.20	-30.82	51.37	6.01	Peak	100	117																																																																
3	20595.00	41.46	54.00	-12.54	38.32	3.14	Average	100	124																																																																
4	20595.00	55.37	74.00	-18.63	52.23	3.14	Peak	100	124																																																																
5	27460.00	43.29	68.20	-24.91	34.79	8.50	Average	100	38																																																																
6	27460.00	56.19	88.20	-32.01	47.69	8.50	Peak	100	38																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									



Modulation	be EHT80-OFDMA	Test Freq. (MHz)	6945
Polarization	Horizontal		
Test By :Paul Lin Temperature(°C):24 Humidity(%):64			
Level (dBuV/m)			