



802.11n-HT40 Out-of-Band Emissions -Ant 0

Channel 03 (2422MHz)


100kHz PSD Reference Level

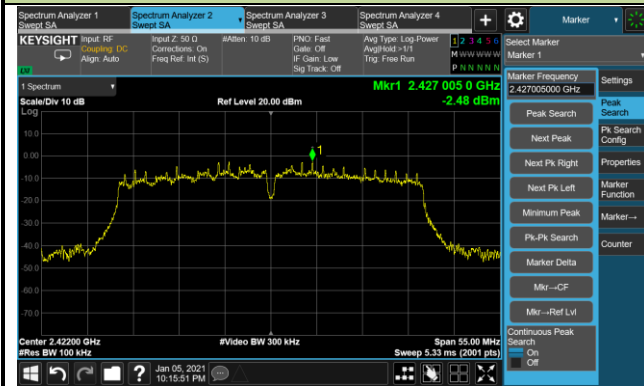

Low Band Edge

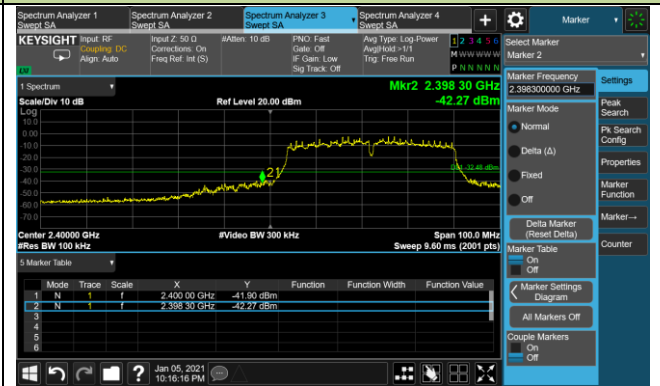


Spurious Emission

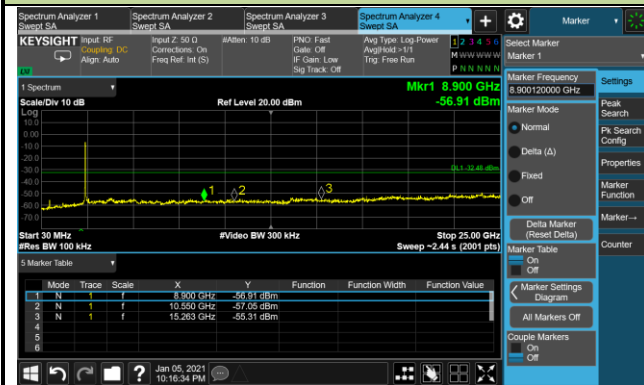


Channel 06 (2437MHz)

100kHz PSD Reference Level

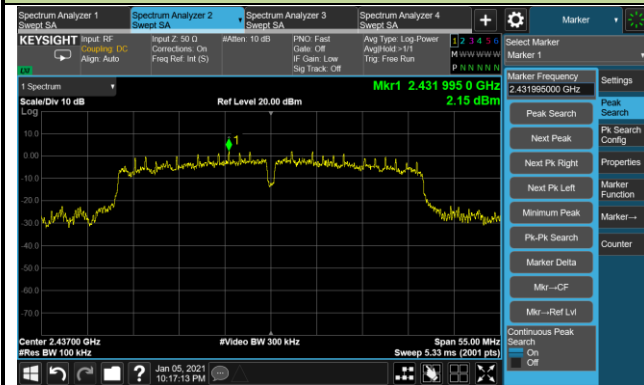


Spurious Emission

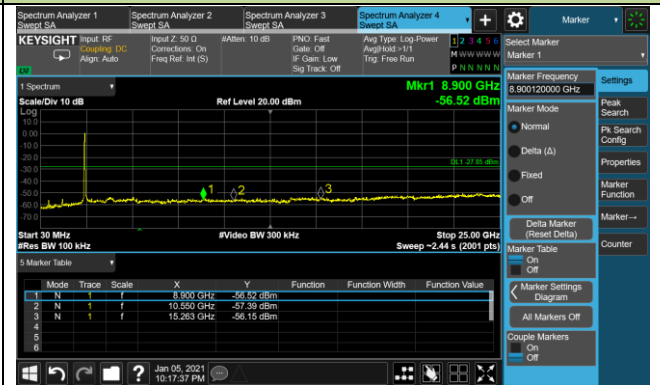


802.11n-HT40 Out-of-Band Emissions -Ant 0

Channel 09 (2452MHz)


100kHz PSD Reference Level

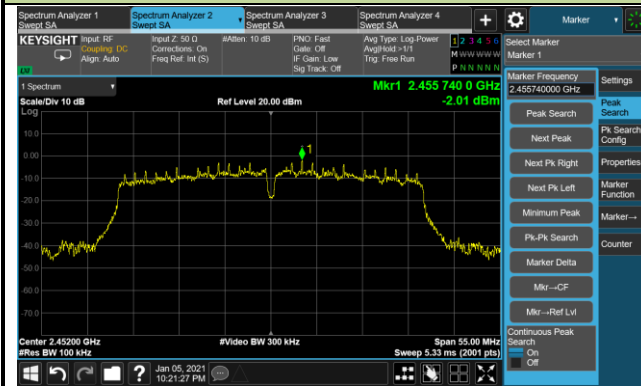

High Band Edge

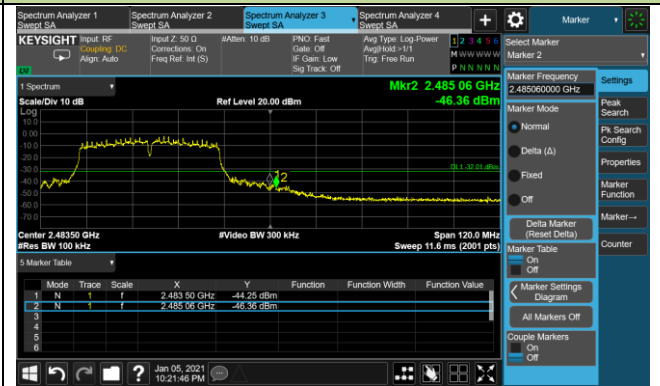


Spurious Emission

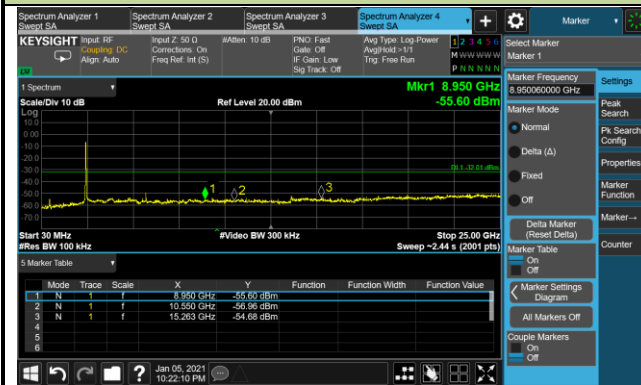


802.11b Out-of-Band Emissions -Ant 1

Channel 01 (2412MHz)


100kHz PSD Reference Level

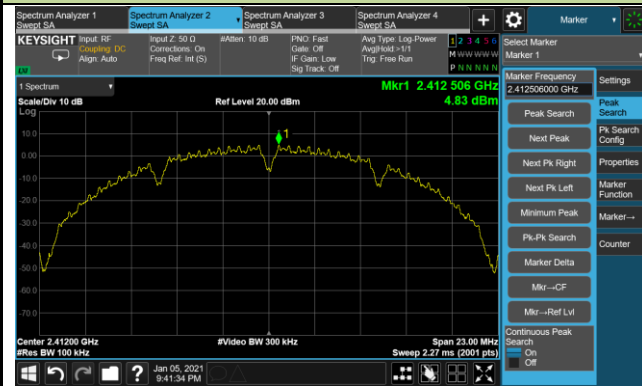

Low Band Edge

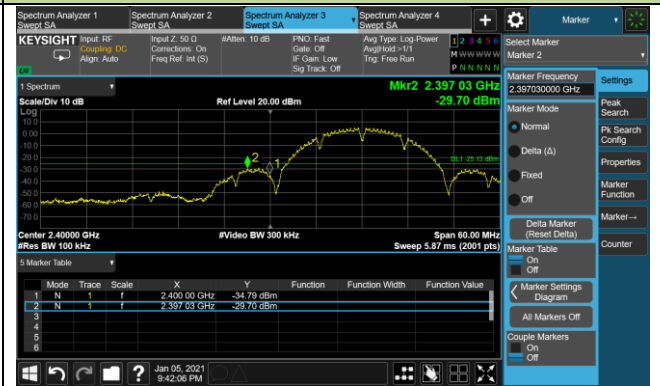


Spurious Emission

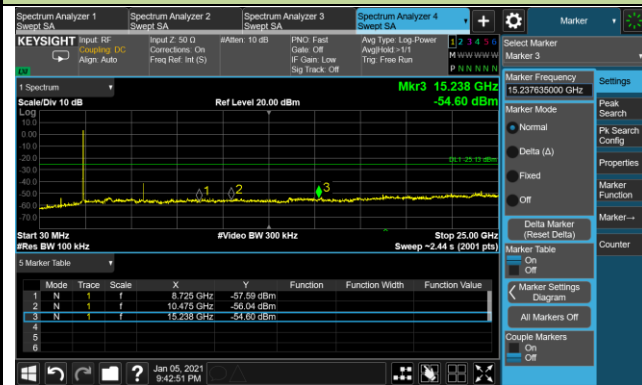


Channel 06 (2437MHz)

100kHz PSD Reference Level

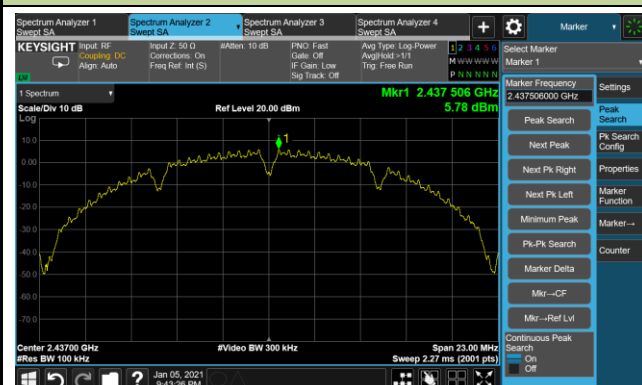


Spurious Emission

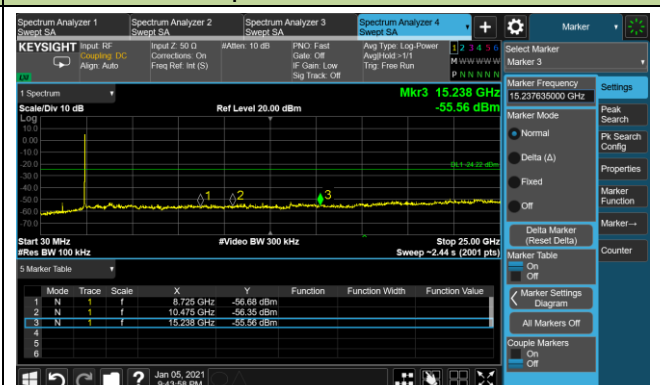

802.11b Out-of-Band Emissions -Ant 1

Channel 11 (2462MHz)


100kHz PSD Reference Level

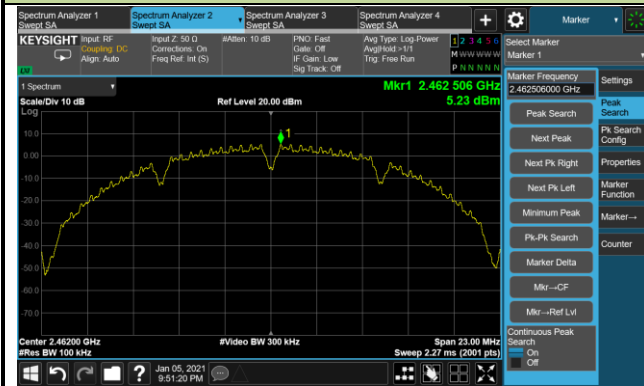

High Band Edge




Spurious Emission

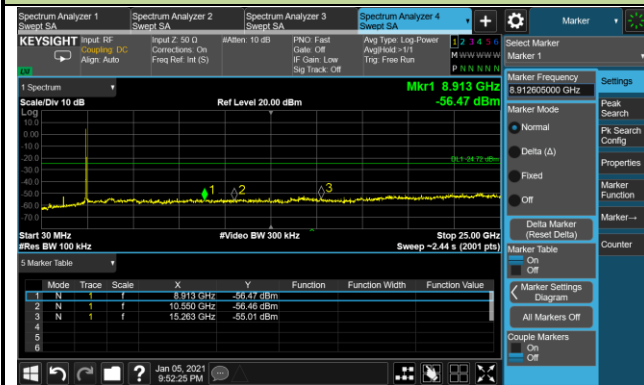


802.11g Out-of-Band Emissions -Ant 1

Channel 01 (2412MHz)


100kHz PSD Reference Level

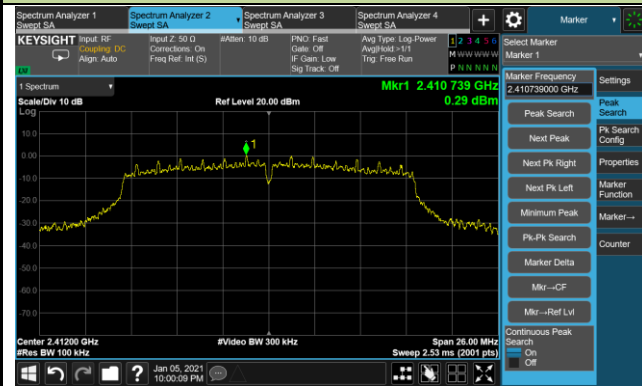

Low Band Edge

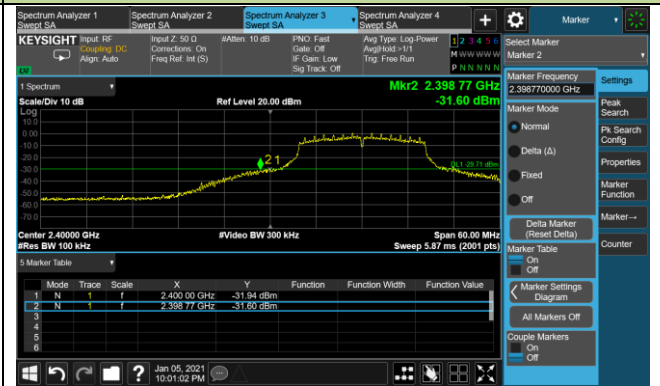


Spurious Emission

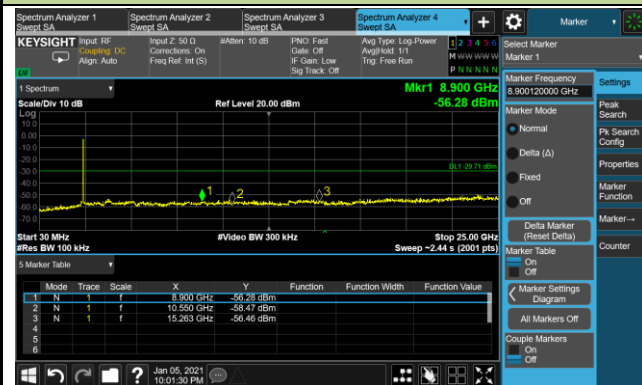


Channel 06 (2437MHz)

100kHz PSD Reference Level

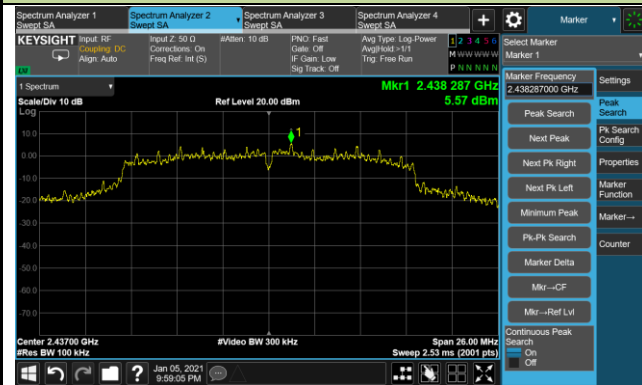


Spurious Emission

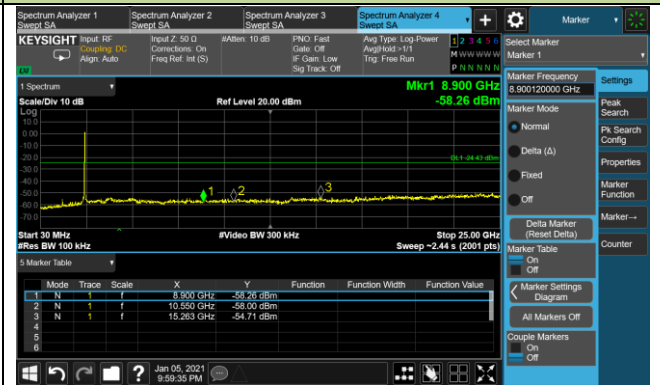


802.11g Out-of-Band Emissions -Ant 1

Channel 11 (2462MHz)


100kHz PSD Reference Level

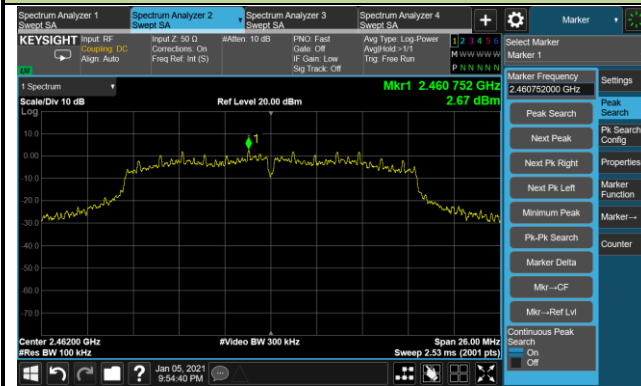

High Band Edge

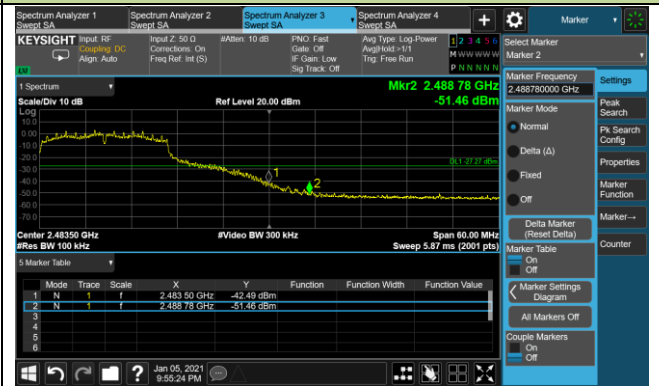


Spurious Emission

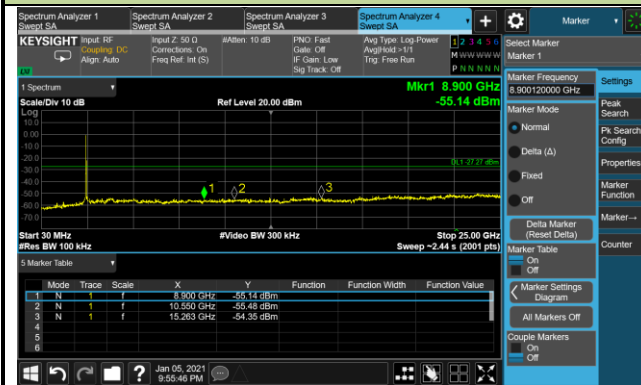


802.11n-HT20 Out-of-Band Emissions -Ant 1

Channel 01 (2412MHz)


100kHz PSD Reference Level

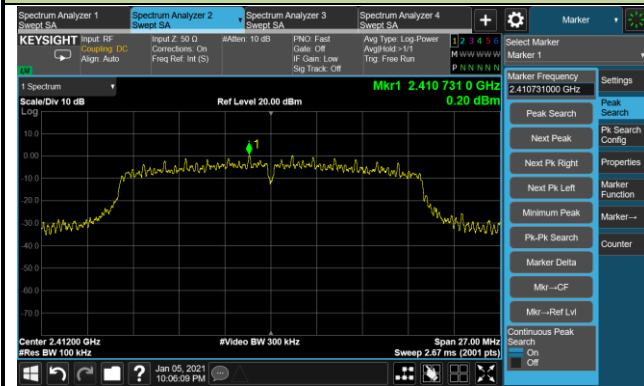

Low Band Edge

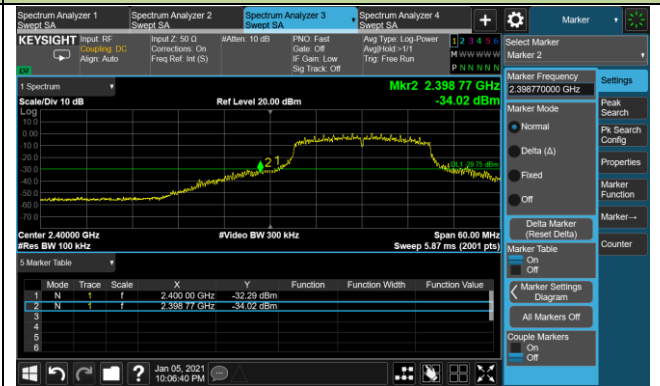


Spurious Emission

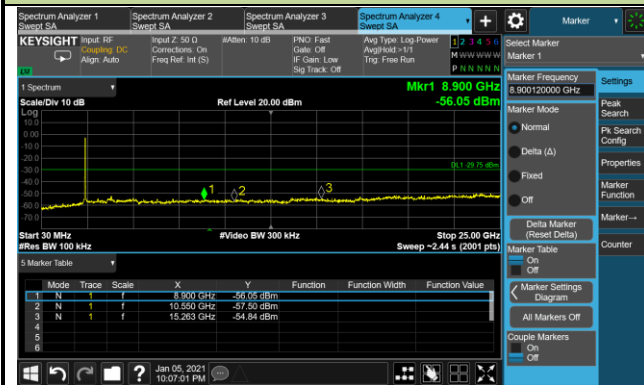


Channel 06 (2437MHz)

100kHz PSD Reference Level

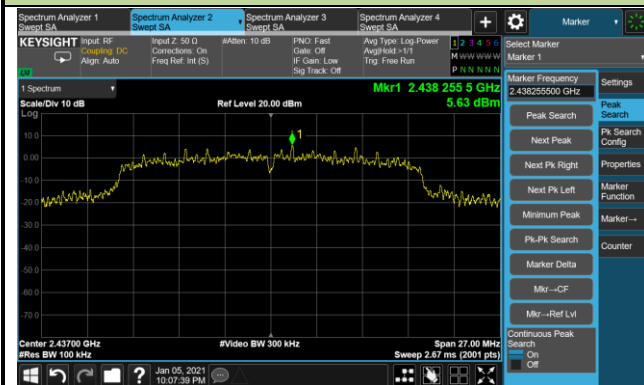


Spurious Emission

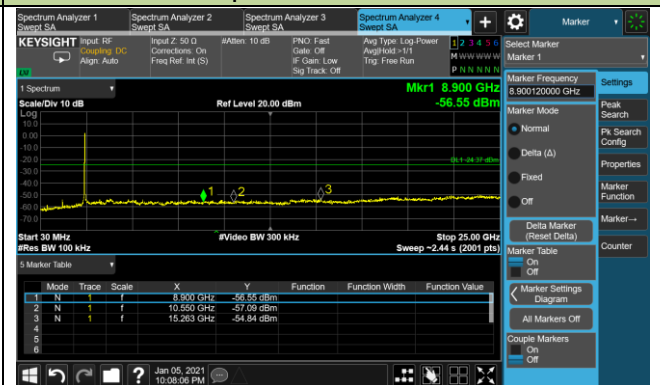


802.11n-HT20 Out-of-Band Emissions -Ant 1

Channel 11 (2462MHz)


100kHz PSD Reference Level

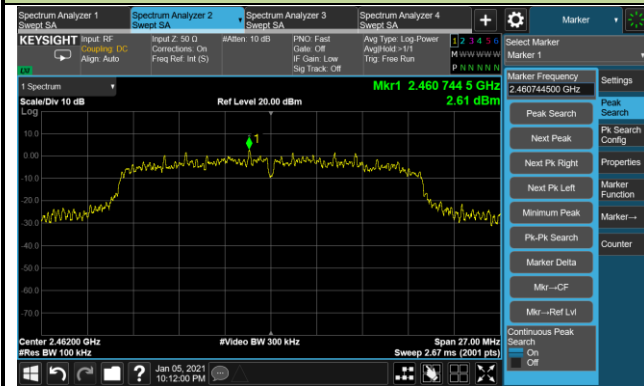

High Band Edge

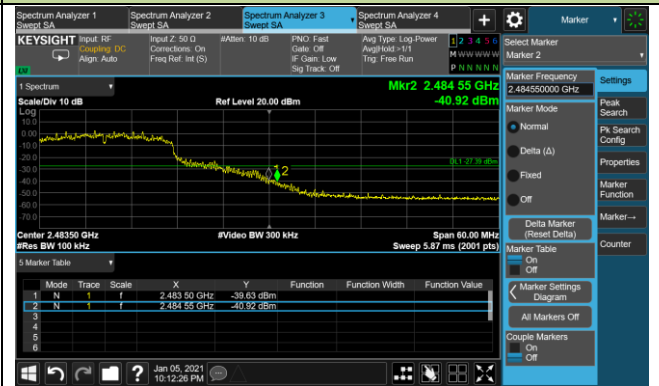


Spurious Emission

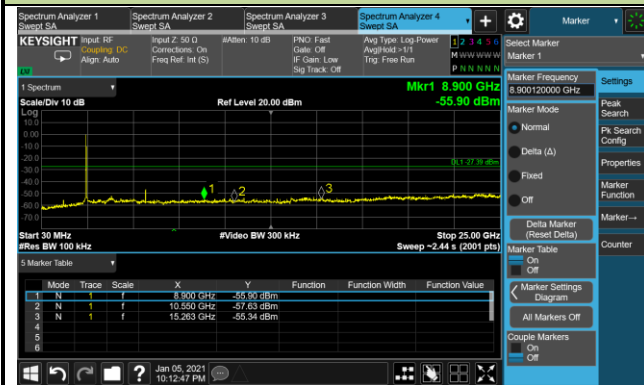


802.11n-HT40 Out-of-Band Emissions -Ant 1

Channel 03 (2422MHz)


100kHz PSD Reference Level

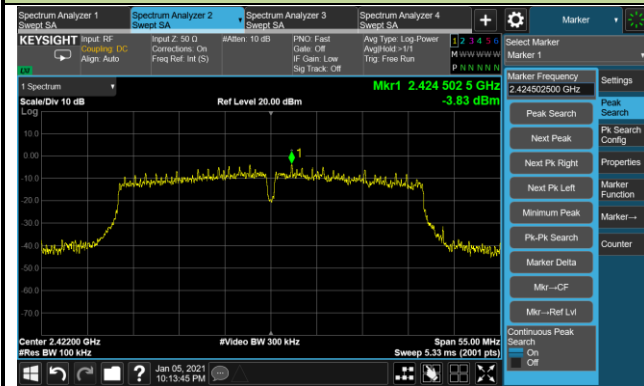

Low Band Edge

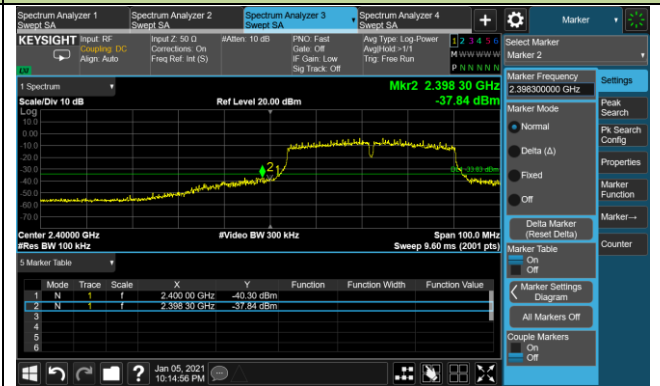


Spurious Emission

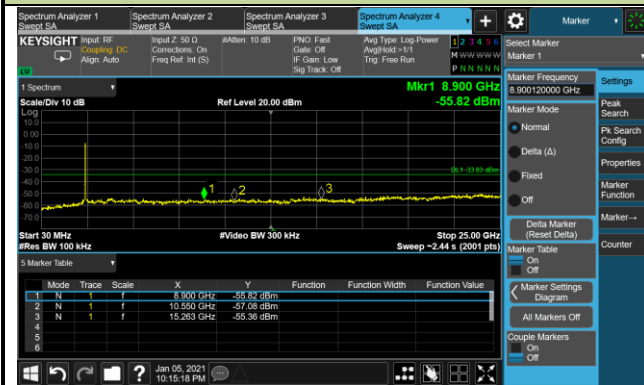


Channel 06 (2437MHz)

100kHz PSD Reference Level

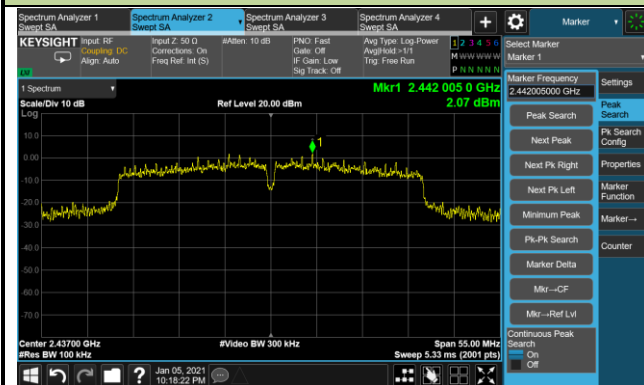


Spurious Emission

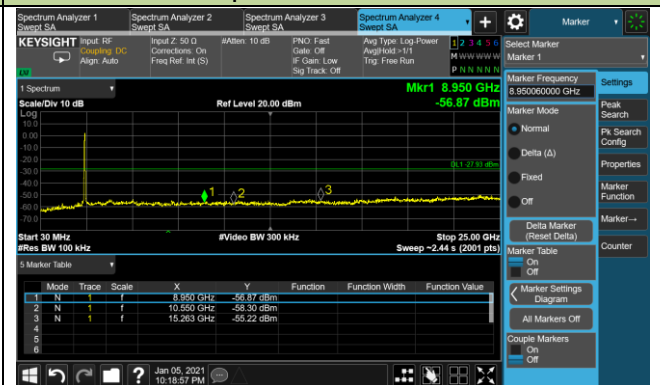


802.11n-HT40 Out-of-Band Emissions -Ant 1

Channel 09 (2452MHz)


100kHz PSD Reference Level

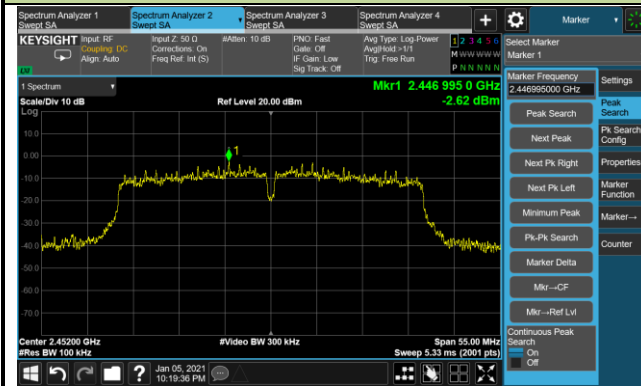

High Band Edge

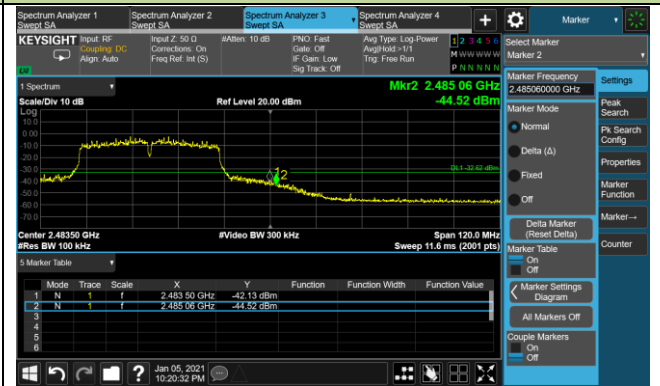

Spurious Emission

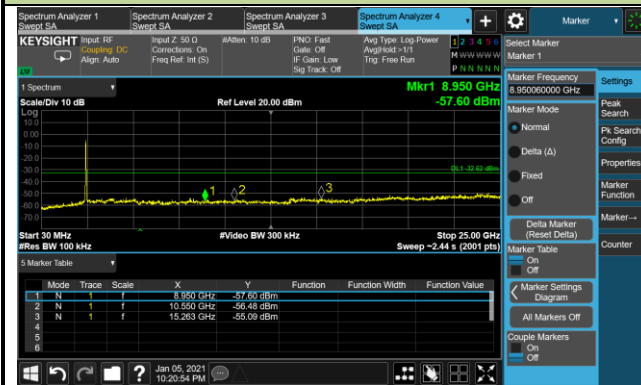

6.6. Radiated Spurious Emission Measurement

6.6.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

6.6.2. Test Procedure Used

ANSI C63.10 - 2013 - Section 11.11 & 11.12

ANSI C63.10 - 2013 - Section 6.3 (General Requirements)

ANSI C63.10 - 2013 - Section 6.4 (Standard test method below 30MHz)

ANSI C63.10 - 2013 - Section 6.5 (Standard test method above 30MHz to 1GHz)

ANSI C63.10 - 2013 - Section 6.6 (Standard test method above 1GHz)

6.6.3. Test Setting

Table 1 - RBW as a function of frequency

Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
> 1000MHz	1MHz

Quasi-Peak Measurements below 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = as specified in Table 1
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

Peak Measurements above 1GHz


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10 Hz.
If the EUT duty cycle is $< 98\%$, set VBW $\geq 1/T$. T is the minimum transmission duration.
4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Trace was allowed to stabilize

6.6.4. Test Setup

Below 1GHz Test Setup:

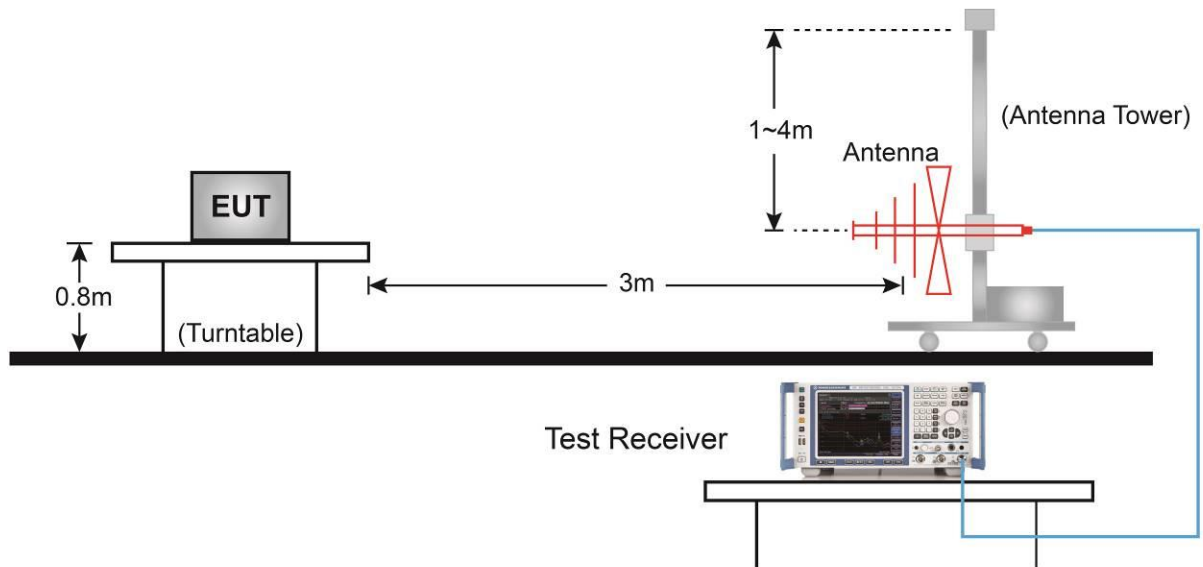

Above 1GHz Test Setup:

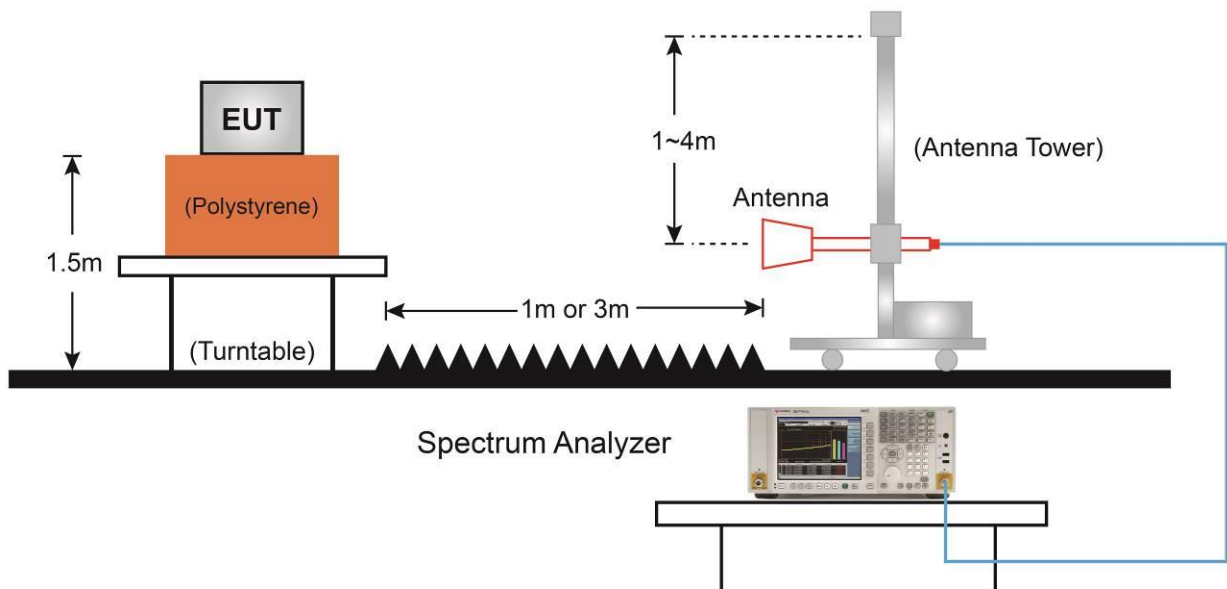

6.6.5. Test Result

Product	AC1200 Wi-Fi Range Extender	Test Engineer	Edgar Ma
Test Site	WZ-AC2	Test Date	2020/08/21
Test Mode:	802.11b	Test Channel:	01
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4119.5	36.6	-2.2	34.4	74.0	-39.6	Peak	Horizontal
	4825.0	47.8	-0.1	47.7	74.0	-26.3	Peak	Horizontal
*	6202.0	35.4	2.9	38.3	74.0	-35.7	Peak	Horizontal
*	9644.5	37.7	10.6	48.3	74.0	-25.7	Peak	Horizontal
	3975.0	37.5	-3.2	34.3	74.0	-39.7	Peak	Vertical
	4825.0	39.1	-0.1	39.0	74.0	-35.0	Peak	Vertical
*	5972.5	35.1	2.1	37.2	74.0	-36.8	Peak	Vertical
*	6584.5	34.2	5.1	39.3	74.0	-34.7	Peak	Vertical

Note 1: "*" means test frequency didn't fall into restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AC1200 Wi-Fi Range Extender	Test Engineer	Edgar Ma
Test Site	WZ-AC2	Test Date	2020/08/22
Test Mode:	802.11b	Test Channel:	06
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4876.0	48.5	-0.4	48.1	74.0	-25.9	Peak	Horizontal
	7307.0	35.7	8.1	43.8	74.0	-30.2	Peak	Horizontal
*	7919.0	33.5	8.2	41.7	74.0	-32.3	Peak	Horizontal
*	9746.5	35.9	10.8	46.7	74.0	-27.3	Peak	Horizontal
	4876.0	38.9	-0.4	38.5	74.0	-35.5	Peak	Vertical
	7315.5	34.3	8.2	42.5	74.0	-31.5	Peak	Vertical
*	7910.5	34.0	8.1	42.1	74.0	-31.9	Peak	Vertical
*	9746.5	34.7	10.8	45.5	74.0	-28.5	Peak	Vertical

Note 1: "*" means test frequency didn't fall into restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AC1200 Wi-Fi Range Extender	Test Engineer	Edgar Ma
Test Site	WZ-AC2	Test Date	2020/08/22
Test Mode:	802.11b	Test Channel:	11
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4927.0	51.3	0.2	51.5	74.0	-22.5	Peak	Horizontal
	7383.5	37.3	8.1	45.4	74.0	-28.6	Peak	Horizontal
*	8769.0	32.0	10.1	42.1	74.0	-31.9	Peak	Horizontal
*	9678.5	34.4	10.7	45.1	74.0	-28.9	Peak	Horizontal
	4927.0	40.9	0.2	41.1	74.0	-32.9	Peak	Vertical
	7383.5	35.9	8.1	44.0	74.0	-30.0	Peak	Vertical
*	8862.5	33.3	9.9	43.2	74.0	-30.8	Peak	Vertical
*	9678.5	32.8	10.7	43.5	74.0	-30.5	Peak	Vertical

Note 1: "*" means test frequency didn't fall into restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AC1200 Wi-Fi Range Extender	Test Engineer	Edgar Ma
Test Site	WZ-AC2	Test Date	2020/08/22
Test Mode:	802.11g	Test Channel:	01
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4034.5	37.7	-2.5	35.2	74.0	-38.8	Peak	Horizontal
	4825.0	42.5	-0.1	42.4	74.0	-31.6	Peak	Horizontal
*	6168.0	36.4	2.8	39.2	74.0	-34.8	Peak	Horizontal
*	7111.5	34.1	7.6	41.7	74.0	-32.3	Peak	Horizontal
	4179.0	37.4	-2.1	35.3	74.0	-38.7	Peak	Vertical
	5046.0	35.9	0.5	36.4	74.0	-37.6	Peak	Vertical
*	5581.5	35.6	0.7	36.3	74.0	-37.7	Peak	Vertical
*	7043.5	34.0	7.2	41.2	74.0	-32.8	Peak	Vertical

Note 1: "*" means test frequency didn't fall into restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AC1200 Wi-Fi Range Extender	Test Engineer	Edgar Ma
Test Site	WZ-AC2	Test Date	2020/08/22
Test Mode:	802.11g	Test Channel:	06
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	3907.0	37.6	-3.2	34.4	74.0	-39.6	Peak	Horizontal
	4876.0	43.6	-0.4	43.2	74.0	-30.8	Peak	Horizontal
*	6210.5	34.9	3.1	38.0	74.0	-36.0	Peak	Horizontal
*	8803.0	32.7	10.0	42.7	74.0	-31.3	Peak	Horizontal
	4119.5	37.4	-2.2	35.2	74.0	-38.8	Peak	Vertical
	5054.5	35.7	0.6	36.3	74.0	-37.7	Peak	Vertical
*	7077.5	33.9	7.7	41.6	74.0	-32.4	Peak	Vertical
*	8735.0	33.1	9.8	42.9	74.0	-31.1	Peak	Vertical

Note 1: "*" means test frequency didn't fall into restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AC1200 Wi-Fi Range Extender	Test Engineer	Edgar Ma
Test Site	WZ-AC2	Test Date	2020/08/22
Test Mode:	802.11g	Test Channel:	11
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	3822.0	38.3	-3.5	34.8	74.0	-39.2	Peak	Horizontal
	4918.5	40.8	0.1	40.9	74.0	-33.1	Peak	Horizontal
*	6151.0	36.1	2.5	38.6	74.0	-35.4	Peak	Horizontal
*	7111.5	33.9	7.6	41.5	74.0	-32.5	Peak	Horizontal
	3686.0	38.5	-3.4	35.1	74.0	-38.9	Peak	Vertical
	4765.5	36.7	0.0	36.7	74.0	-37.3	Peak	Vertical
*	5768.5	34.7	1.8	36.5	74.0	-37.5	Peak	Vertical
*	6958.5	33.8	6.5	40.3	74.0	-33.7	Peak	Vertical

Note 1: "*" means test frequency didn't fall into restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AC1200 Wi-Fi Range Extender	Test Engineer	Edgar Ma
Test Site	WZ-AC2	Test Date	2020/08/22
Test Mode:	802.11n-HT20	Test Channel:	01
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	3949.5	37.3	-3.2	34.1	74.0	-39.9	Peak	Horizontal
	4816.5	40.6	0.1	40.7	74.0	-33.3	Peak	Horizontal
*	5760.0	33.7	1.8	35.5	74.0	-38.5	Peak	Horizontal
*	7001.0	32.2	6.6	38.8	74.0	-35.2	Peak	Horizontal
	4340.5	36.5	-1.6	34.9	74.0	-39.1	Peak	Vertical
	4893.0	34.6	0.0	34.6	74.0	-39.4	Peak	Vertical
*	5530.5	35.2	0.8	36.0	74.0	-38.0	Peak	Vertical
*	6873.5	33.6	5.8	39.4	74.0	-34.6	Peak	Vertical

Note 1: "*" means test frequency didn't fall into restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AC1200 Wi-Fi Range Extender	Test Engineer	Edgar Ma
Test Site	WZ-AC2	Test Date	2020/08/22
Test Mode:	802.11n-HT20	Test Channel:	06
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4094.0	37.1	-2.4	34.7	74.0	-39.3	Peak	Horizontal
	4867.5	42.8	-0.4	42.4	74.0	-31.6	Peak	Horizontal
*	5768.5	35.1	1.8	36.9	74.0	-37.1	Peak	Horizontal
*	7086.0	33.1	7.9	41.0	74.0	-33.0	Peak	Horizontal
	4332.0	36.8	-1.6	35.2	74.0	-38.8	Peak	Vertical
	5046.0	36.2	0.5	36.7	74.0	-37.3	Peak	Vertical
*	6329.5	35.5	3.4	38.9	74.0	-35.1	Peak	Vertical
*	7077.5	34.2	7.7	41.9	74.0	-32.1	Peak	Vertical

Note 1: "*" means test frequency didn't fall into restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AC1200 Wi-Fi Range Extender	Test Engineer	Edgar Ma
Test Site	WZ-AC2	Test Date	2020/08/22
Test Mode:	802.11n-HT20	Test Channel:	11
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4094.0	37.1	-2.4	34.7	74.0	-39.3	Peak	Horizontal
	4918.5	39.5	0.1	39.6	74.0	-34.4	Peak	Horizontal
*	6151.0	35.4	2.5	37.9	74.0	-36.1	Peak	Horizontal
*	7086.0	33.4	7.9	41.3	74.0	-32.7	Peak	Horizontal
	4119.5	36.9	-2.2	34.7	74.0	-39.3	Peak	Vertical
	5088.5	36.8	0.1	36.9	74.0	-37.1	Peak	Vertical
*	6049.0	33.6	2.2	35.8	74.0	-38.2	Peak	Vertical
*	7120.0	33.8	7.7	41.5	74.0	-32.5	Peak	Vertical

Note 1: "*" means test frequency didn't fall into restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AC1200 Wi-Fi Range Extender	Test Engineer	Edgar Ma
Test Site	WZ-AC2	Test Date	2020/08/22
Test Mode:	802.11n-HT40	Test Channel:	03
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4111.0	37.9	-2.3	35.6	74.0	-38.4	Peak	Horizontal
	4663.5	33.5	0.0	33.5	74.0	-40.5	Peak	Horizontal
*	5734.5	33.5	1.4	34.9	74.0	-39.1	Peak	Horizontal
*	7128.5	34.5	7.8	42.3	74.0	-31.7	Peak	Horizontal
	3890.0	37.2	-3.2	34.0	74.0	-40.0	Peak	Vertical
	5003.5	36.2	0.0	36.2	74.0	-37.8	Peak	Vertical
*	6210.5	34.8	3.1	37.9	74.0	-36.1	Peak	Vertical
*	6950.0	33.9	6.5	40.4	74.0	-33.6	Peak	Vertical

Note 1: "*" means test frequency didn't fall into restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AC1200 Wi-Fi Range Extender	Test Engineer	Edgar Ma
Test Site	WZ-AC2	Test Date	2020/08/22
Test Mode:	802.11n-HT40	Test Channel:	06
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4264.0	37.5	-2.0	35.5	74.0	-38.5	Peak	Horizontal
	4876.0	41.6	-0.4	41.2	74.0	-32.8	Peak	Horizontal
*	5760.0	34.9	1.8	36.7	74.0	-37.3	Peak	Horizontal
*	7077.5	33.3	7.7	41.0	74.0	-33.0	Peak	Horizontal
	4111.0	37.4	-2.3	35.1	74.0	-38.9	Peak	Vertical
	5020.5	36.0	0.2	36.2	74.0	-37.8	Peak	Vertical
*	5870.5	36.0	1.9	37.9	74.0	-36.1	Peak	Vertical
*	6780.0	35.0	5.2	40.2	74.0	-33.8	Peak	Vertical

Note 1: "*" means test frequency didn't fall into restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AC1200 Wi-Fi Range Extender	Test Engineer	Edgar Ma
Test Site	WZ-AC2	Test Date	2020/08/22
Test Mode:	802.11n-HT40	Test Channel:	09
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4102.5	37.2	-2.4	34.8	74.0	-39.2	Peak	Horizontal
	4901.5	36.9	0.0	36.9	74.0	-37.1	Peak	Horizontal
*	7077.5	34.1	7.7	41.8	74.0	-32.2	Peak	Horizontal
*	8599.0	33.9	9.3	43.2	74.0	-30.8	Peak	Horizontal
	3958.0	37.6	-3.2	34.4	74.0	-39.6	Peak	Vertical
	4765.5	36.9	0.0	36.9	74.0	-37.1	Peak	Vertical
*	5904.5	34.8	1.9	36.7	74.0	-37.3	Peak	Vertical
*	7094.5	33.2	7.7	40.9	74.0	-33.1	Peak	Vertical


Note 1: "*" means test frequency didn't fall into restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

The Result of Radiated Emission below 1GHz:

Site: WZ-AC1	Time: 2020/09/22 - 23:30
Limit: FCC_Part15.209_RE(3m)	Engineer: Buter Shi
Probe: AC1_VULB 9168 _30-1000MHz	Polarity: Horizontal
EUT: AC1200 Wi-Fi Range Extender	Power: AC 120V/60Hz
Worst Case Mode: Transmit by 802.11n-HT40 at channel 2422MHz	

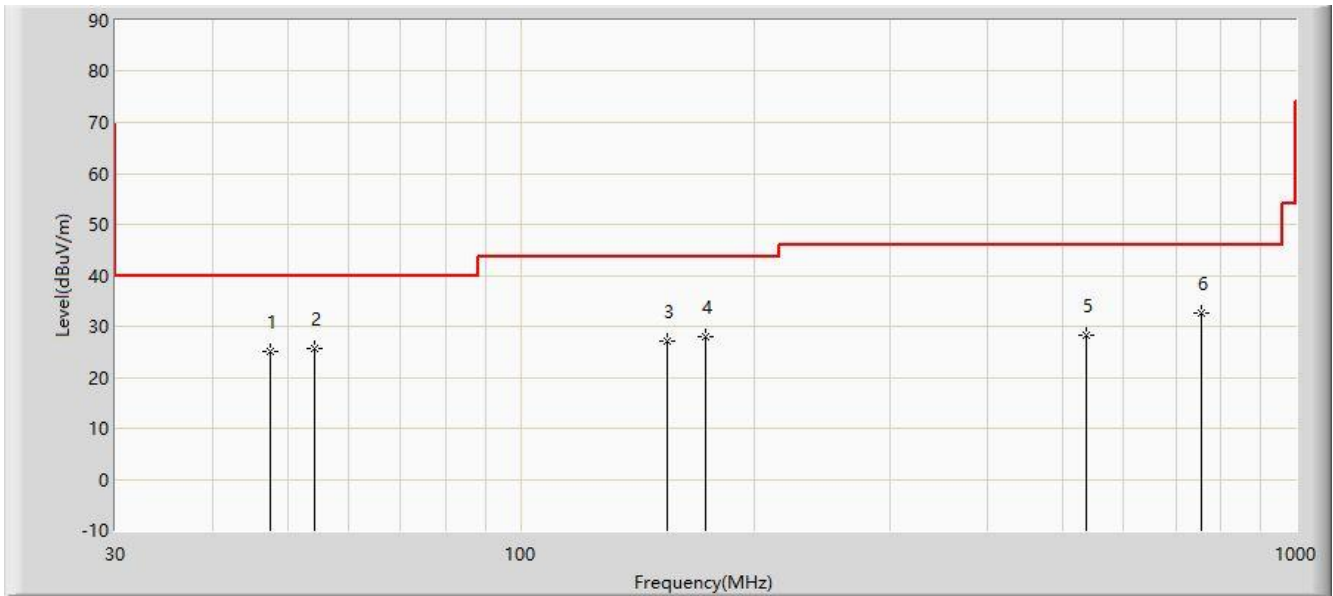

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			47.460	25.069	7.087	-14.931	40.000	17.982	PK
2			54.250	25.623	7.616	-14.377	40.000	18.007	PK
3			154.645	27.033	8.757	-16.467	43.500	18.276	PK
4			173.560	27.868	10.556	-15.632	43.500	17.312	PK
5			535.855	28.337	4.209	-17.663	46.000	24.128	PK
6		*	756.045	32.706	4.220	-13.294	46.000	28.486	PK

Note 1: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)


Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Note 2: QP measurement was not performed when peak measure level was lower than the QP limit by more than 10dB.

Note 3: The amplitude of radiated emissions (frequency range from 9kHz to 30MHz and 18GHz to 25GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value.

Therefore, the data is not presented in the report.

Site: WZ-AC1	Time: 2020/09/22 - 23:35
Limit: FCC_Part15.209_RE(3m)	Engineer: Buter Shi
Probe: AC1_VULB 9168 _30-1000MHz	Polarity: Vertical
EUT: AC1200 Wi-Fi Range Extender	Power: AC 120V/60Hz
Worst Case Mode: Transmit by 802.11n-HT40 at channel 2422MHz	

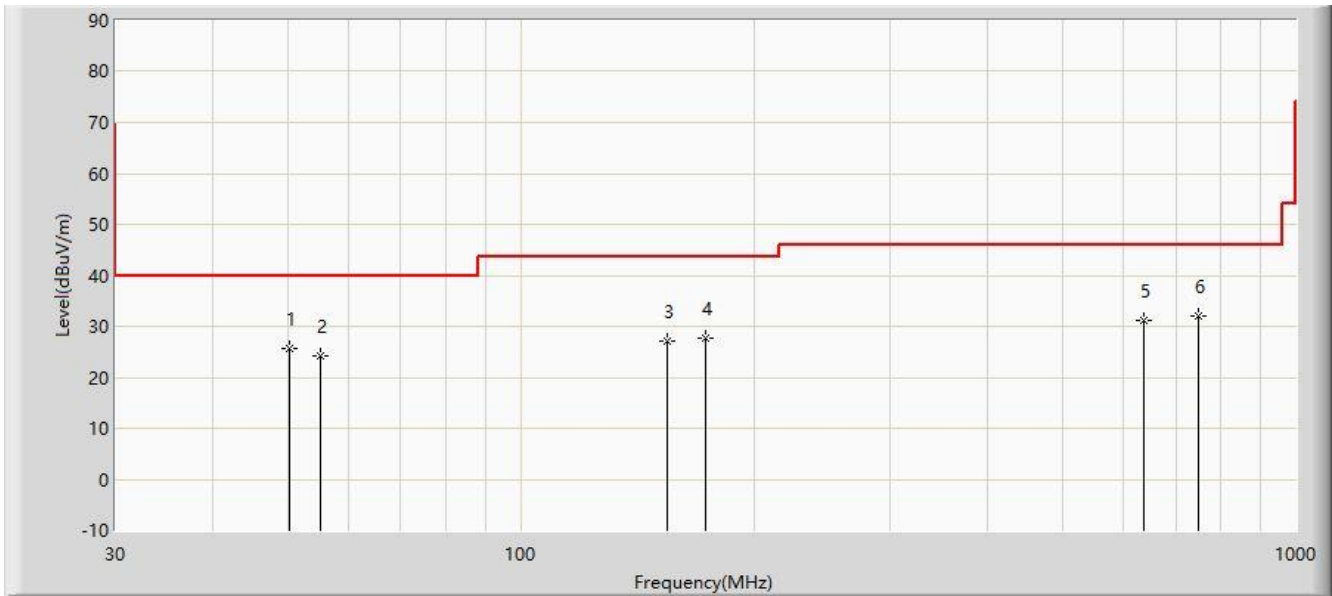

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			50.370	25.599	7.491	-14.401	40.000	18.108	PK
2			55.220	24.171	6.166	-15.829	40.000	18.005	PK
3			154.645	26.999	8.723	-16.501	43.500	18.276	PK
4			173.560	27.753	10.441	-15.747	43.500	17.312	PK
5			635.765	31.137	4.765	-14.863	46.000	26.372	PK
6		*	749.255	32.077	3.639	-13.923	46.000	28.438	PK

Note 1: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Note 2: QP measurement was not performed when peak measure level was lower than the QP limit by more than 10dB.

Note 3: The amplitude of radiated emissions (frequency range from 9kHz to 30MHz and 18GHz to 25GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value.

Therefore, the data is not presented in the report.

6.7. Radiated Restricted Band Edge Measurement

6.7.1. Test Limit

For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41	--	--	--

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

6.7.2.Test Procedure Used

ANSI C63.10-2013 Section 6.3

ANSI C63.10-2013 Section 6.6

ANSI C63.10-2013 Section 11.13


6.7.3.Test Setting

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize


Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW $\geq 1/T$
4. As an alternative, the instrument may be set to linear detector mode. Ensure that video filtering is applied in linear voltage domain (rather than in a log or dB domain). Some instruments require linear display mode in order to accomplish this. Others have a setting for Average-VBW Type, which can be set to "Voltage" regardless of the display mode
5. Detector = Peak
6. Sweep time = auto
7. Trace mode = max hold
8. Allow max hold to run for at least 50 times (1/duty cycle) traces

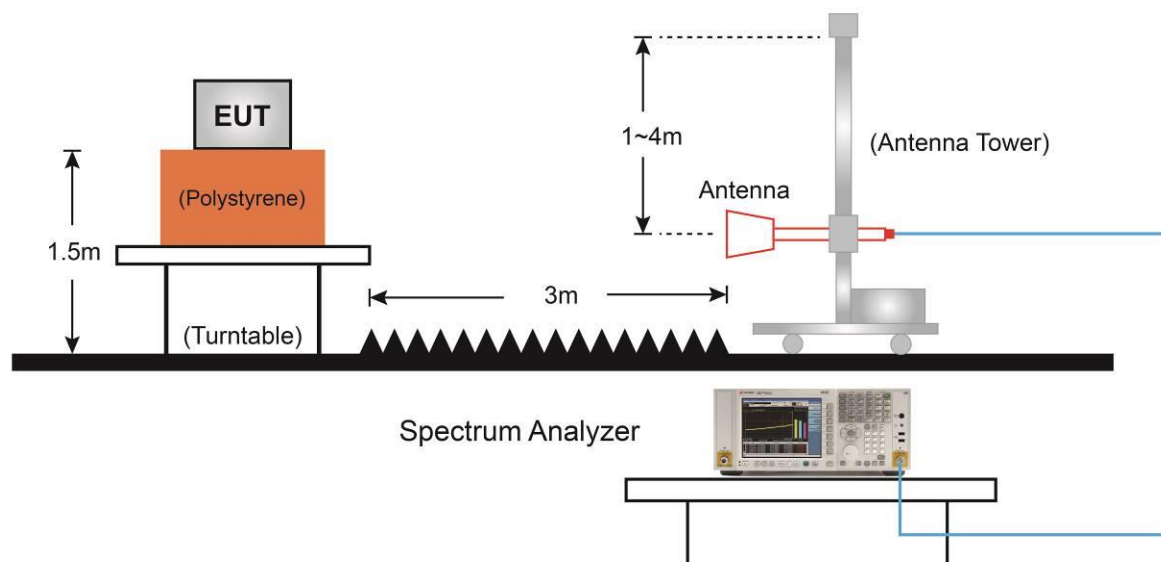6.7.4. Test Setup

6.7.5.Test Result

Site: WZ-AC2	Time: 2020/08/21 - 10:18
Limit: FCC_Part15.209_RE(3m)	Engineer: Hyde Yu
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: AC1200 Wi-Fi Range Extender	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at Channel 2412MHz	

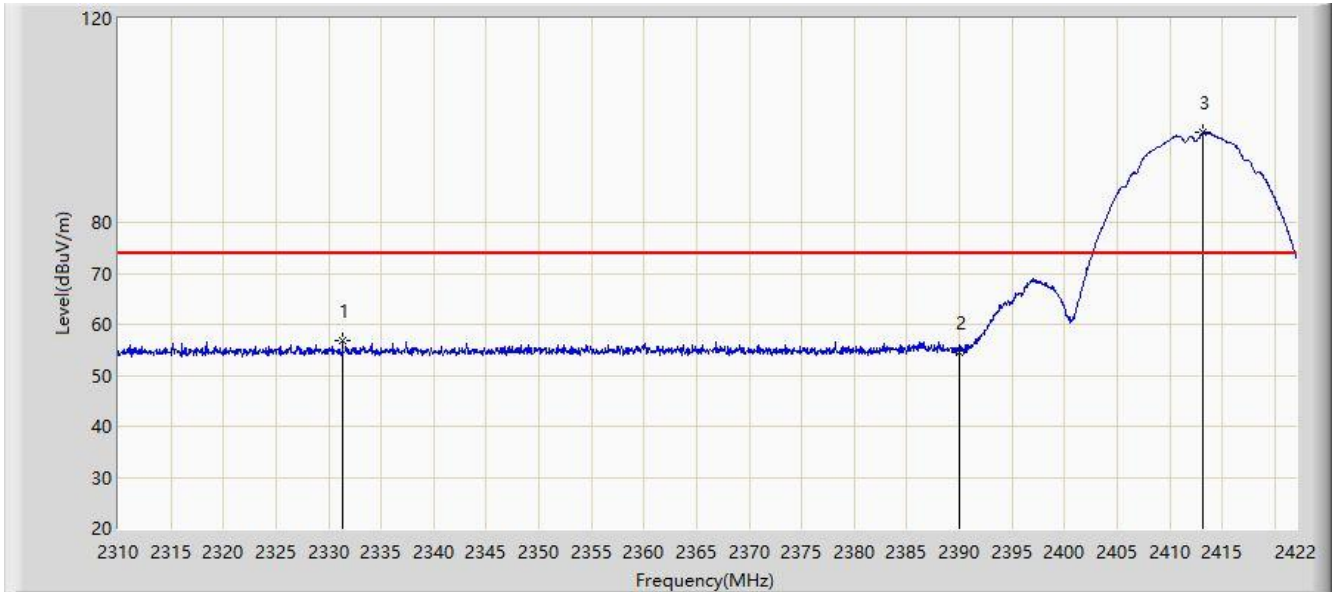


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2331.336	56.846	27.401	-17.154	74.000	29.445	PK
2			2390.000	54.358	25.063	-19.642	74.000	29.296	PK
3		*	2413.208	97.555	68.295	N/A	N/A	29.260	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC2	Time: 2020/08/21 - 10:36
Limit: FCC_Part15.209_RE(3m)	Engineer: Hyde Yu
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: AC1200 Wi-Fi Range Extender	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at Channel 2412MHz	

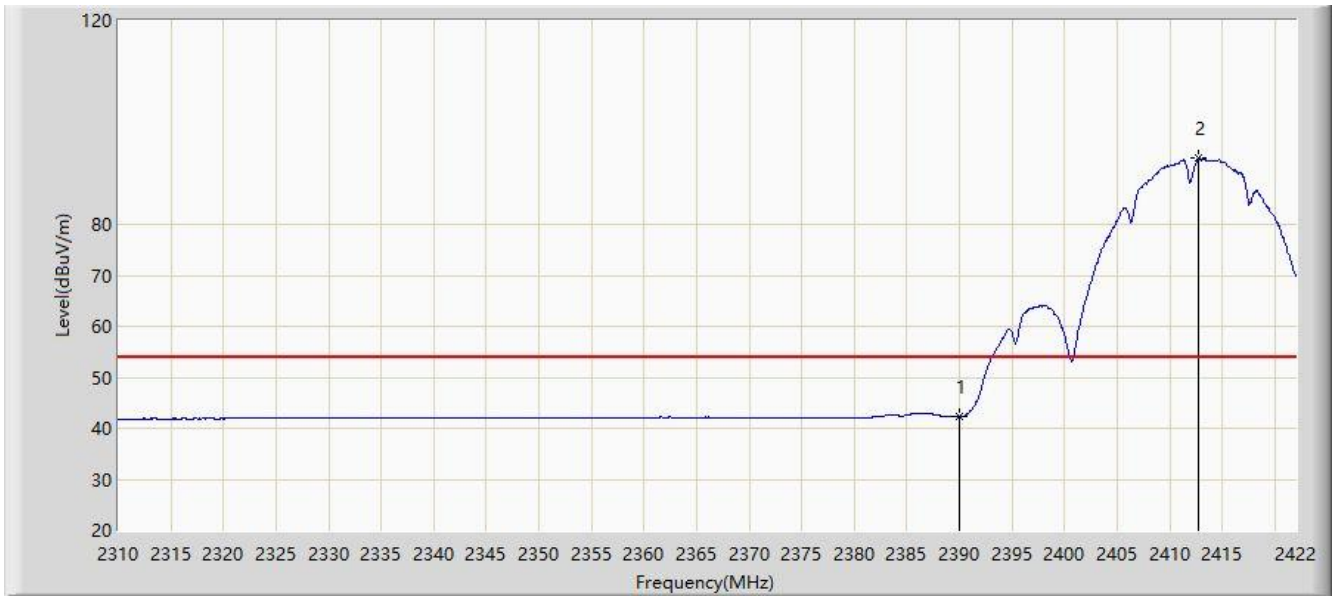


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	42.236	12.941	-11.764	54.000	29.296	AV
2		*	2412.704	92.907	63.646	N/A	N/A	29.261	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC2	Time: 2020/08/21 - 10:40
Limit: FCC_Part15.209_RE(3m)	Engineer: Hyde Yu
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AC1200 Wi-Fi Range Extender	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at Channel 2412MHz	

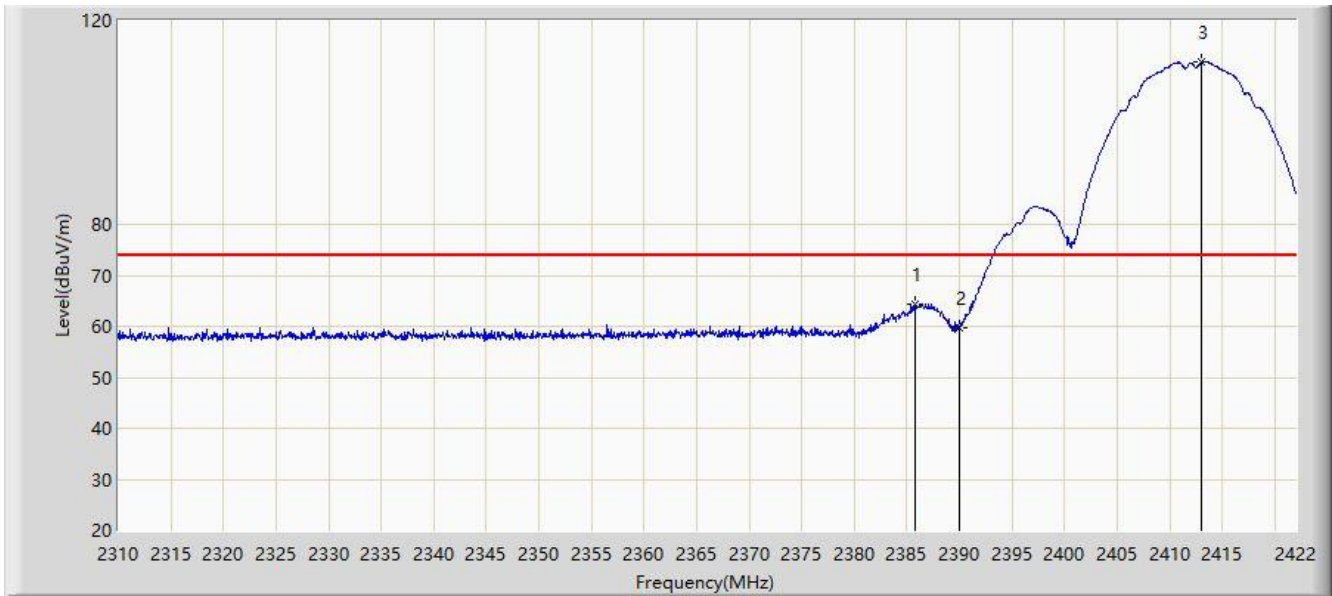


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2385.824	64.260	34.961	-9.740	74.000	29.298	PK
2			2390.000	59.837	30.542	-14.163	74.000	29.296	PK
3		*	2412.984	111.783	82.523	N/A	N/A	29.260	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC2	Time: 2020/08/21 - 10:51
Limit: FCC_Part15.209_RE(3m)	Engineer: Hyde Yu
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AC1200 Wi-Fi Range Extender	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at Channel 2412MHz	

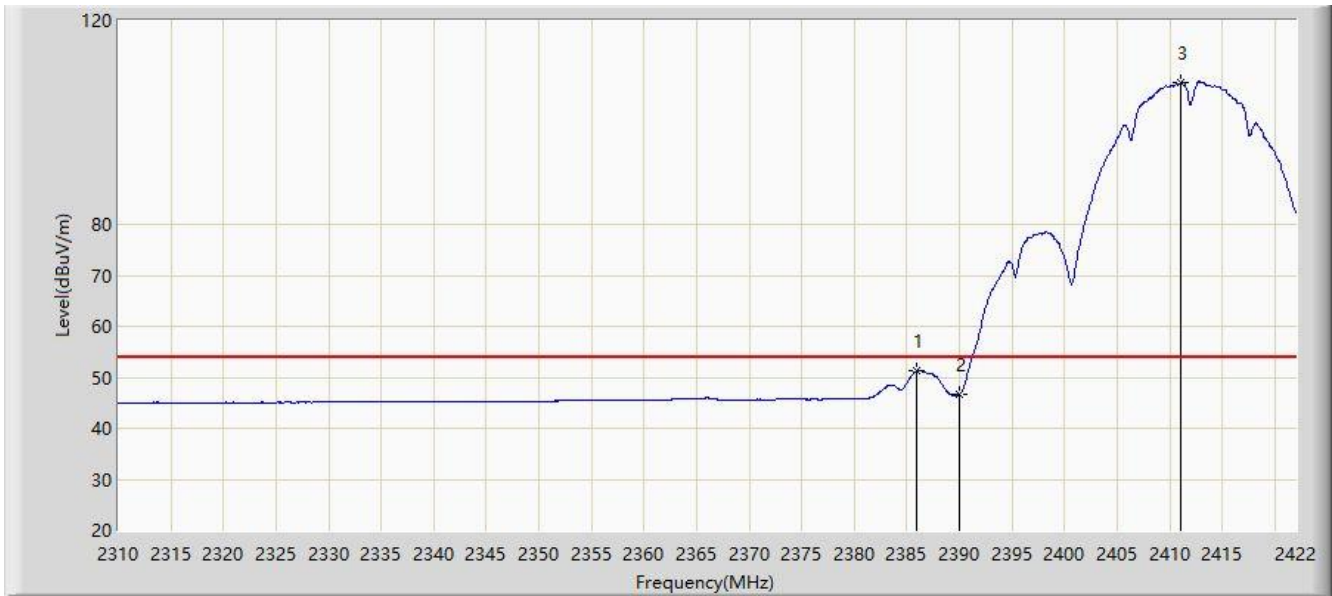


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2385.936	51.216	21.918	-2.784	54.000	29.298	AV
2			2390.000	46.713	17.418	-7.287	54.000	29.296	AV
3		*	2411.080	107.849	78.583	N/A	N/A	29.266	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC2	Time: 2020/08/21 - 11:04
Limit: FCC_Part15.209_RE(3m)	Engineer: Hyde Yu
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: AC1200 Wi-Fi Range Extender	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at Channel 2462MHz	

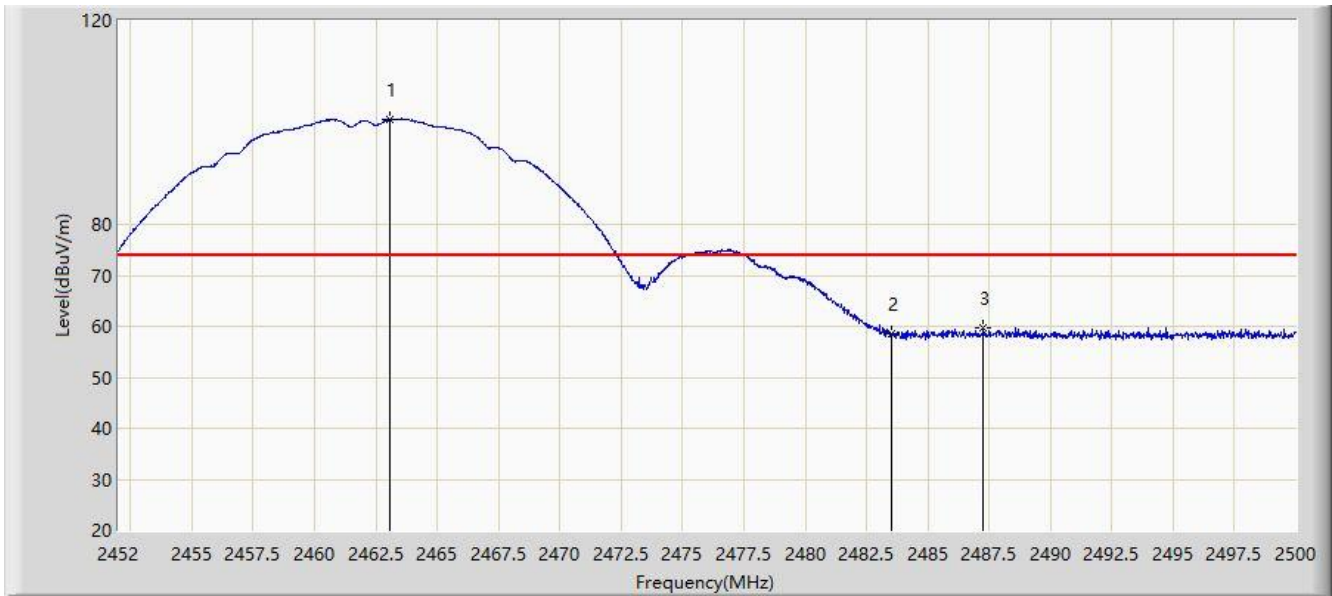

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2463.040	100.597	71.496	N/A	N/A	29.101	PK
2			2483.500	58.425	29.282	-15.575	74.000	29.143	PK
3			2487.256	59.604	30.455	-14.396	74.000	29.149	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC2	Time: 2020/08/21 - 11:07
Limit: FCC_Part15.209_RE(3m)	Engineer: Hyde Yu
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: AC1200 Wi-Fi Range Extender	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at Channel 2462MHz	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2461.096	96.297	67.202	N/A	N/A	29.095	AV
2			2483.500	46.163	17.020	-7.837	54.000	29.143	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC2	Time: 2020/08/21 - 11:10
Limit: FCC_Part15.209_RE(3m)	Engineer: Hyde Yu
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AC1200 Wi-Fi Range Extender	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at Channel 2462MHz	

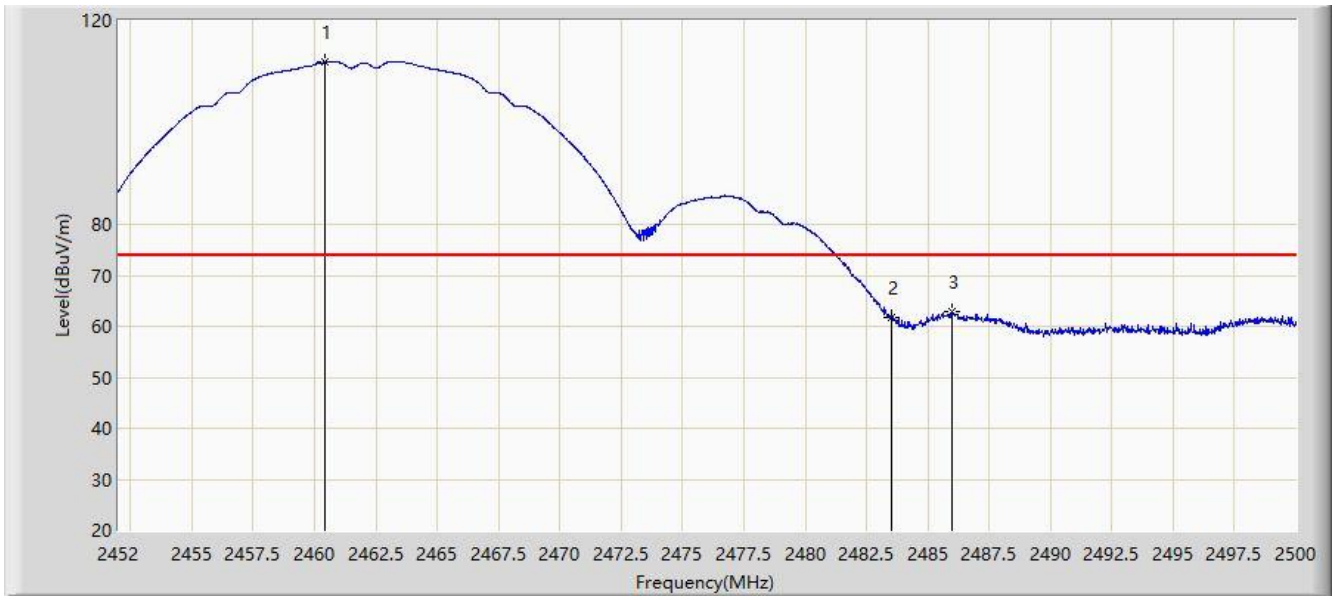

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2460.400	111.802	82.710	N/A	N/A	29.092	PK
2			2483.500	61.717	32.574	-12.283	74.000	29.143	PK
3			2485.984	62.777	33.630	-11.223	74.000	29.147	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC2	Time: 2020/08/21 - 11:12
Limit: FCC_Part15.209_RE(3m)	Engineer: Hyde Yu
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AC1200 Wi-Fi Range Extender	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at Channel 2462MHz	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2461.048	107.757	78.662	N/A	N/A	29.095	AV
2			2483.500	51.805	22.662	-2.195	54.000	29.143	AV
3			2486.608	52.276	23.128	-1.724	54.000	29.148	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC2	Time: 2020/08/21 - 11:35
Limit: FCC_Part15.209_RE(3m)	Engineer: Hyde Yu
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: AC1200 Wi-Fi Range Extender	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at Channel 2412MHz	

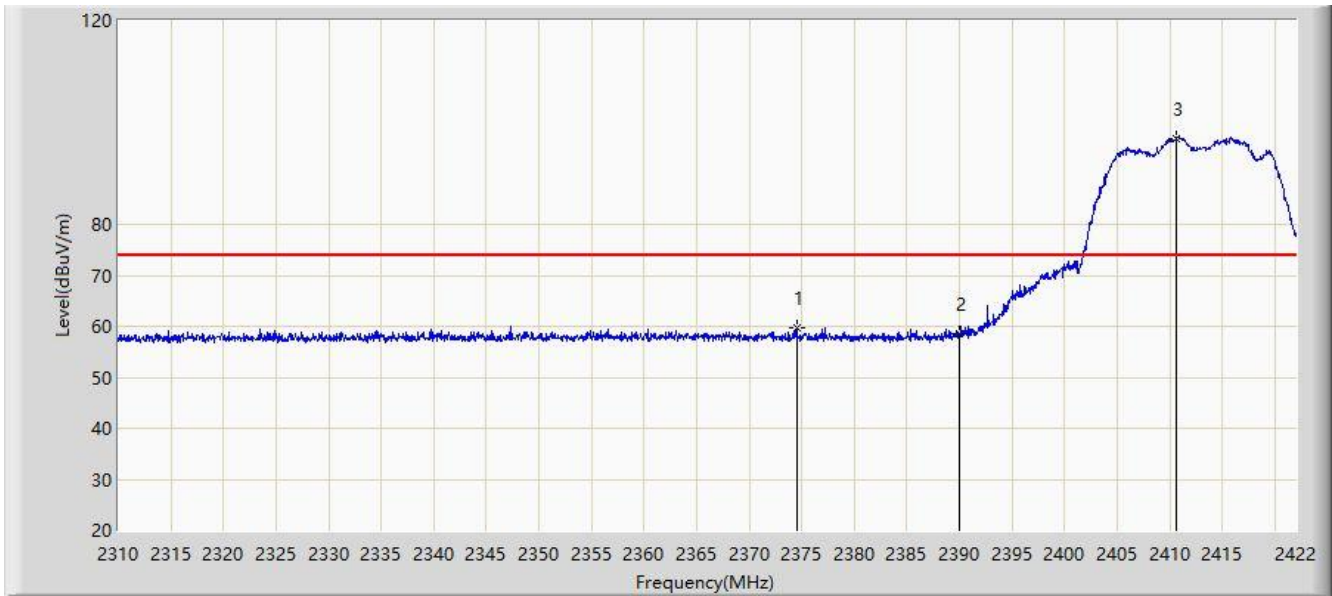


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2374.568	59.628	30.290	-14.372	74.000	29.338	PK
2			2390.000	58.498	29.203	-15.502	74.000	29.296	PK
3		*	2410.576	96.915	67.649	N/A	N/A	29.266	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC2	Time: 2020/08/21 - 11:33
Limit: FCC_Part15.209_RE(3m)	Engineer: Hyde Yu
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: AC1200 Wi-Fi Range Extender	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at Channel 2412MHz	

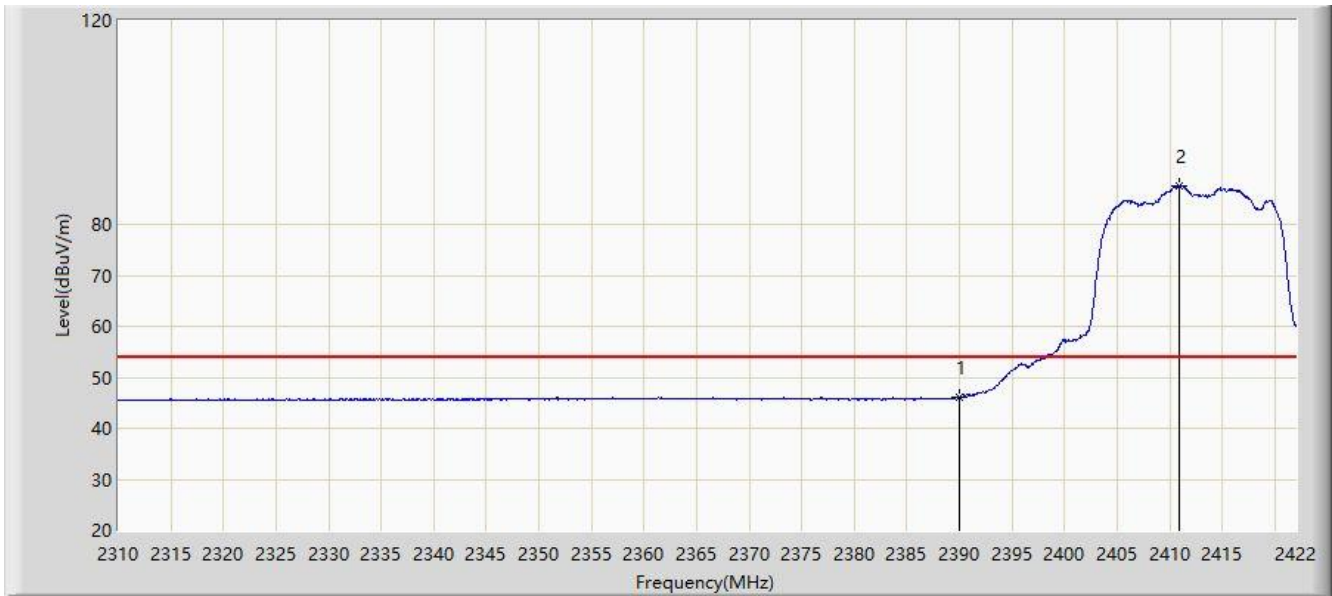


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	46.023	16.728	-7.977	54.000	29.296	AV
2		*	2410.968	87.574	58.308	N/A	N/A	29.266	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC2	Time: 2020/08/21 - 11:36
Limit: FCC_Part15.209_RE(3m)	Engineer: Hyde Yu
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AC1200 Wi-Fi Range Extender	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at Channel 2412MHz	

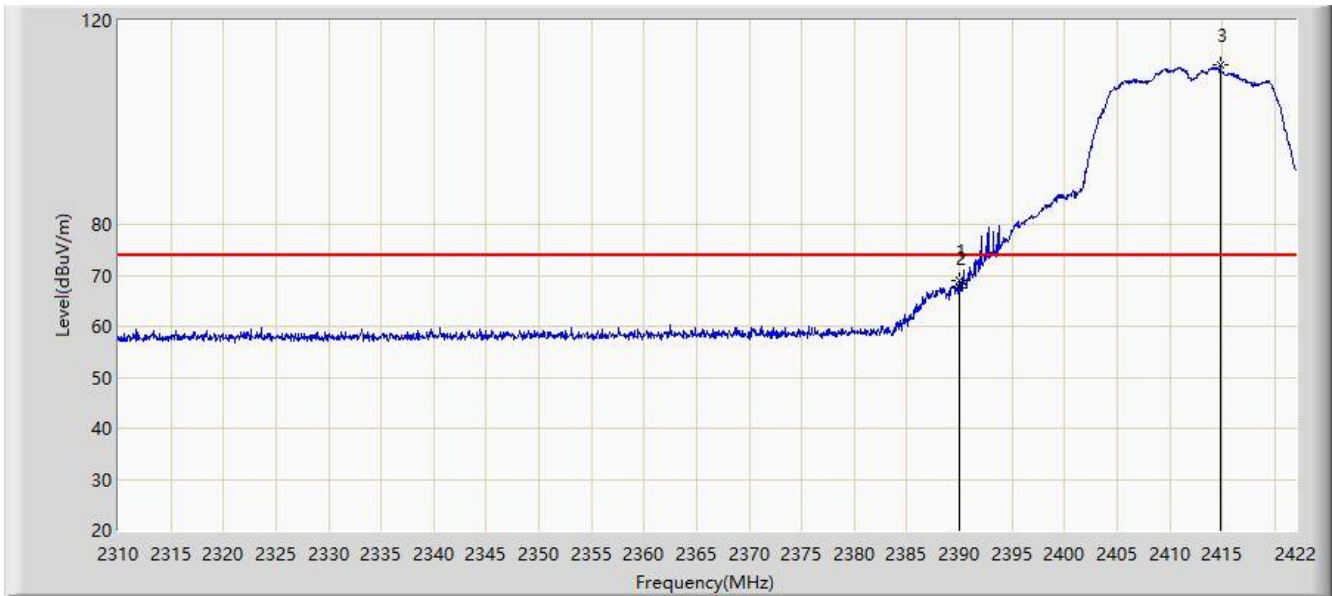


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.968	68.917	39.622	-5.083	74.000	29.296	PK
2			2390.000	67.506	38.211	-6.494	74.000	29.296	PK
3		*	2414.776	111.310	82.055	N/A	N/A	29.255	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC2	Time: 2020/08/21 - 11:30
Limit: FCC_Part15.209_RE(3m)	Engineer: Hyde Yu
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AC1200 Wi-Fi Range Extender	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at Channel 2412MHz	

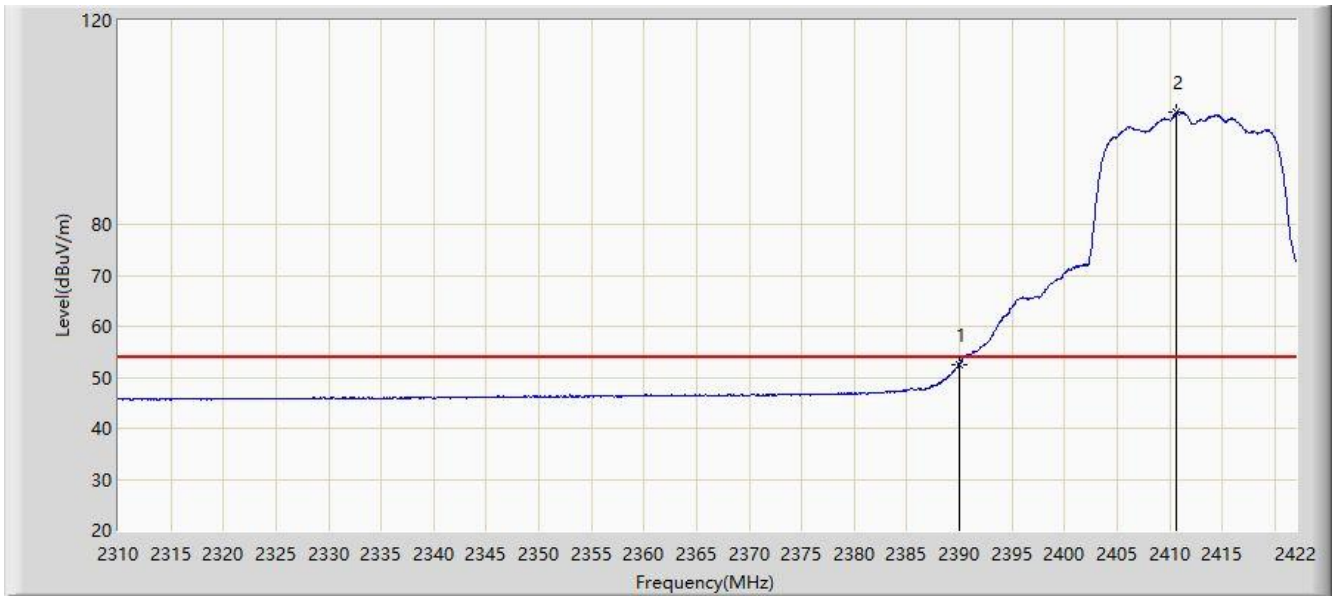


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	52.561	23.266	-1.439	54.000	29.296	AV
2		*	2410.688	101.905	72.639	N/A	N/A	29.266	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC2	Time: 2020/09/03 - 19:59
Limit: FCC_Part15.209_RE(3m)	Engineer: Hyde Yu
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: AC1200 Wi-Fi Range Extender	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at Channel 2417MHz	

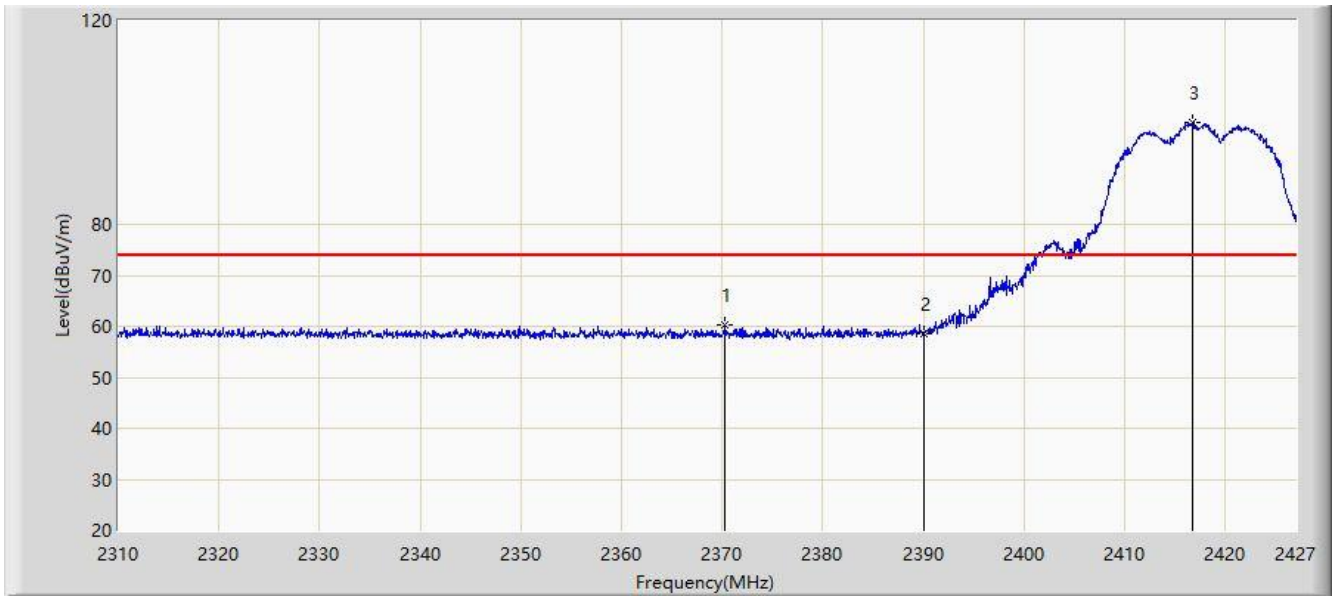


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2370.313	60.148	30.772	-13.852	74.000	29.375	PK
2			2390.000	58.614	29.319	-15.386	74.000	29.296	PK
3		*	2416.704	100.022	70.769	N/A	N/A	29.253	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC2	Time: 2020/09/03 - 20:01
Limit: FCC_Part15.209_RE(3m)	Engineer: Hyde Yu
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: AC1200 Wi-Fi Range Extender	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at Channel 2417MHz	

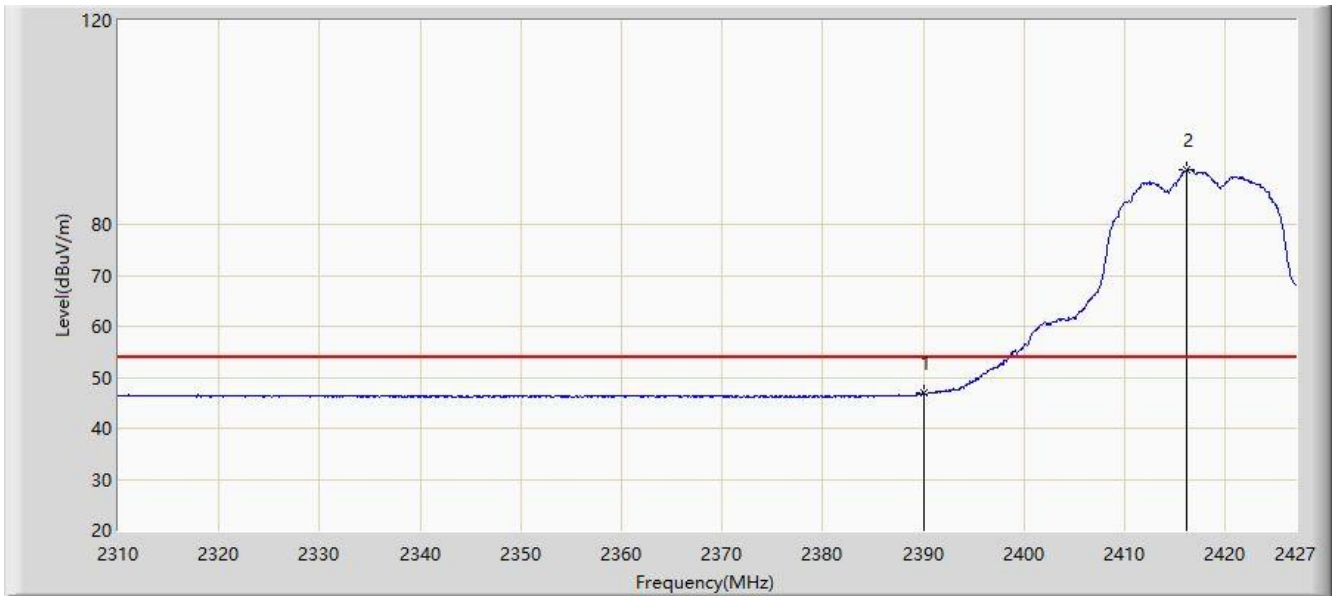


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	46.862	17.567	-7.138	54.000	29.296	AV
2		*	2416.177	90.762	61.509	N/A	N/A	29.253	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC2	Time: 2020/09/03 - 19:58
Limit: FCC_Part15.209_RE(3m)	Engineer: Hyde Yu
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AC1200 Wi-Fi Range Extender	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at Channel 2417MHz	

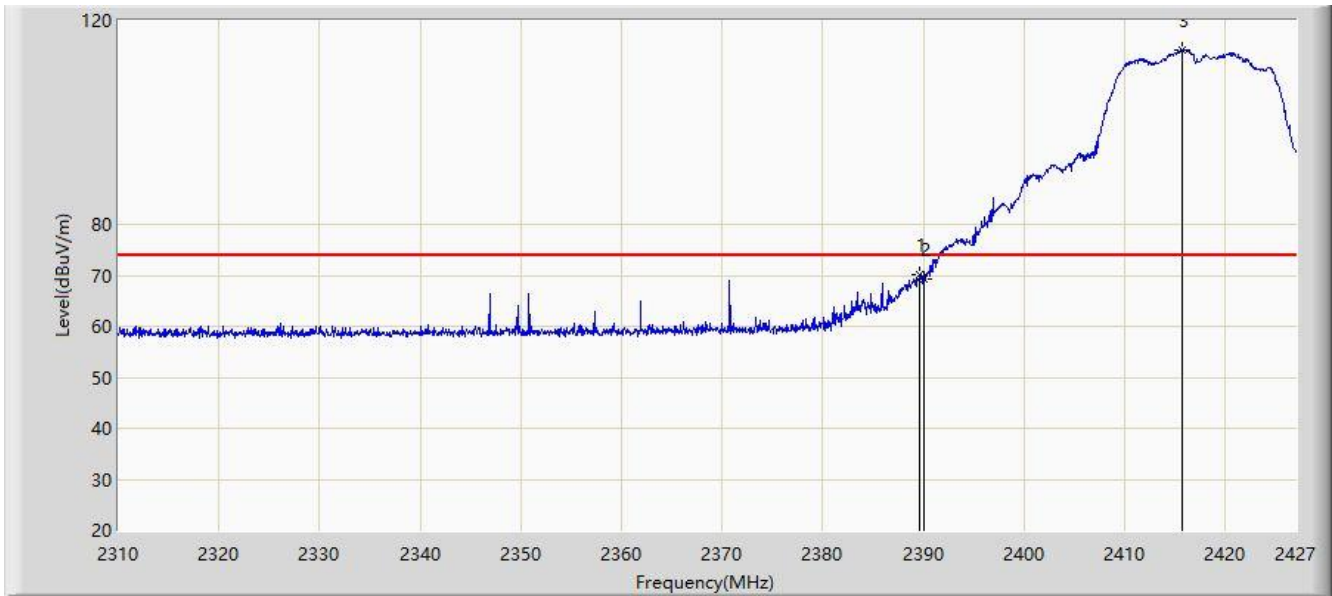


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.618	70.205	40.910	-3.795	74.000	29.296	PK
2			2390.000	69.173	39.878	-4.827	74.000	29.296	PK
3		*	2415.768	114.259	85.006	N/A	N/A	29.253	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC2	Time: 2020/09/03 - 19:52
Limit: FCC_Part15.209_RE(3m)	Engineer: Hyde Yu
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AC1200 Wi-Fi Range Extender	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at Channel 2417MHz	

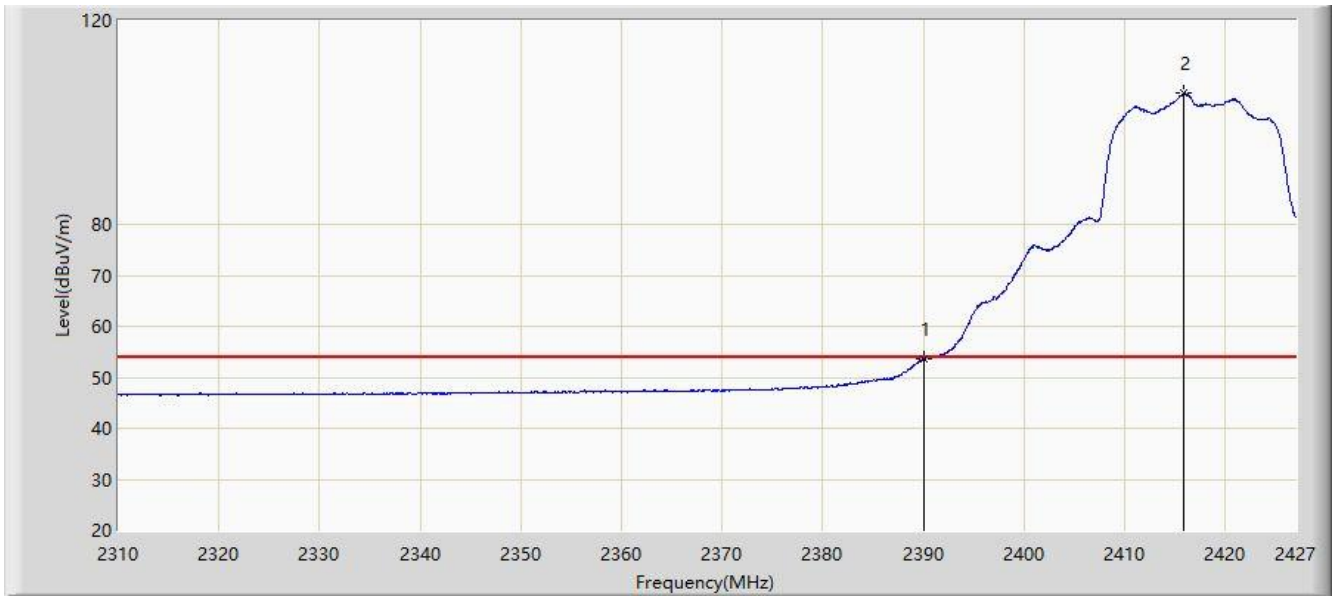


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	53.638	24.343	-0.362	54.000	29.296	AV
2		*	2415.826	105.702	76.449	N/A	N/A	29.253	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC2	Time: 2020/09/03 - 20:06
Limit: FCC_Part15.209_RE(3m)	Engineer: Hyde Yu
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: AC1200 Wi-Fi Range Extender	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at Channel 2437MHz	

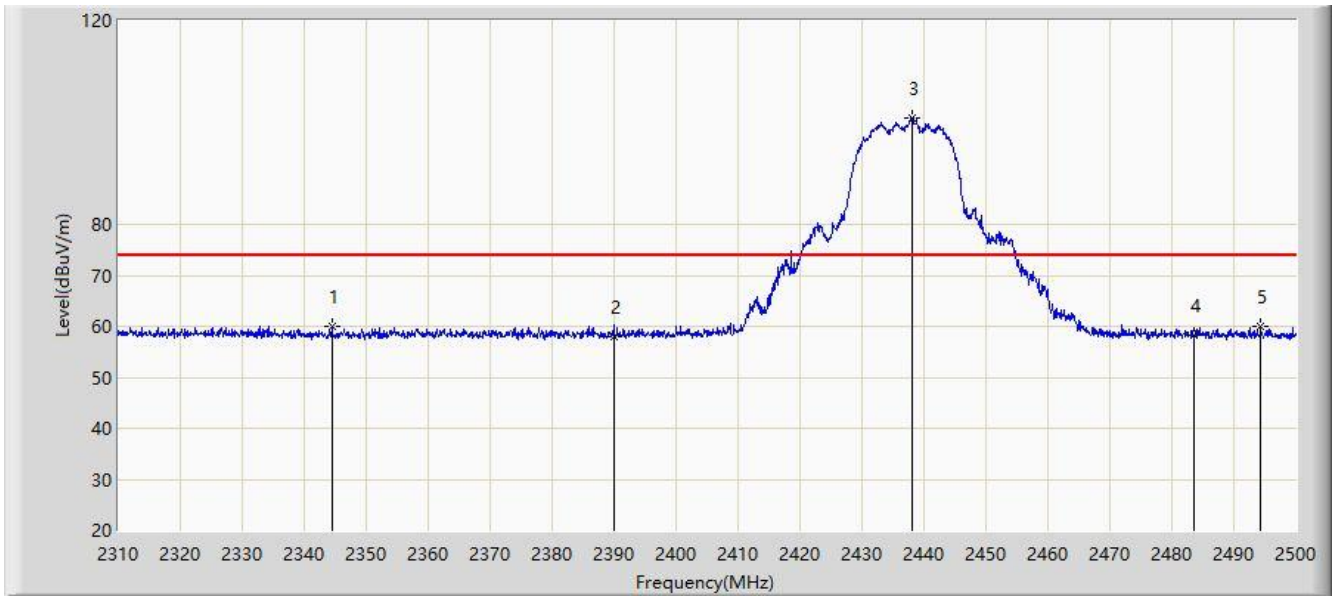


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2344.485	60.050	30.653	-13.950	74.000	29.398	PK
2			2390.000	58.067	28.772	-15.933	74.000	29.296	PK
3		*	2438.060	100.932	71.718	N/A	N/A	29.214	PK
4			2483.500	58.368	29.225	-15.632	74.000	29.143	PK
5			2494.395	60.093	30.964	-13.907	74.000	29.129	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC2	Time: 2020/09/03 - 20:08
Limit: FCC_Part15.209_RE(3m)	Engineer: Hyde Yu
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: AC1200 Wi-Fi Range Extender	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at Channel 2437MHz	

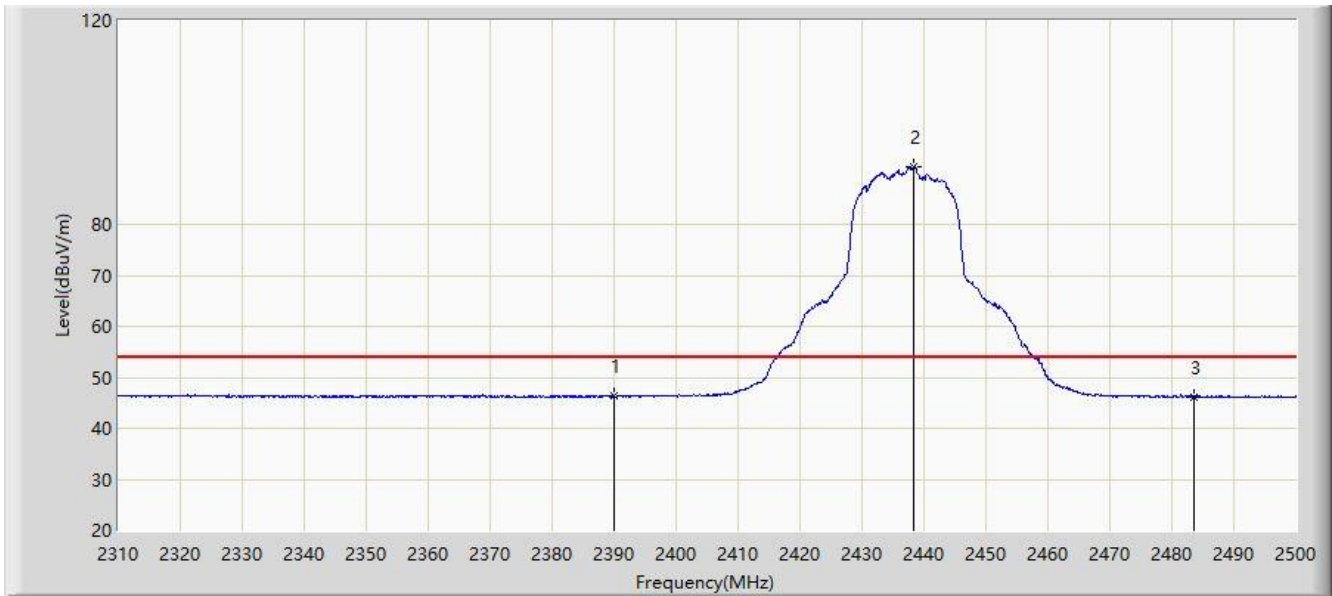


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	46.326	17.031	-7.674	54.000	29.296	AV
2		*	2438.345	91.330	62.120	N/A	N/A	29.210	AV
3			2483.500	46.221	17.078	-7.779	54.000	29.143	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC2	Time: 2020/09/03 - 20:05
Limit: FCC_Part15.209_RE(3m)	Engineer: Hyde Yu
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AC1200 Wi-Fi Range Extender	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at Channel 2437MHz	

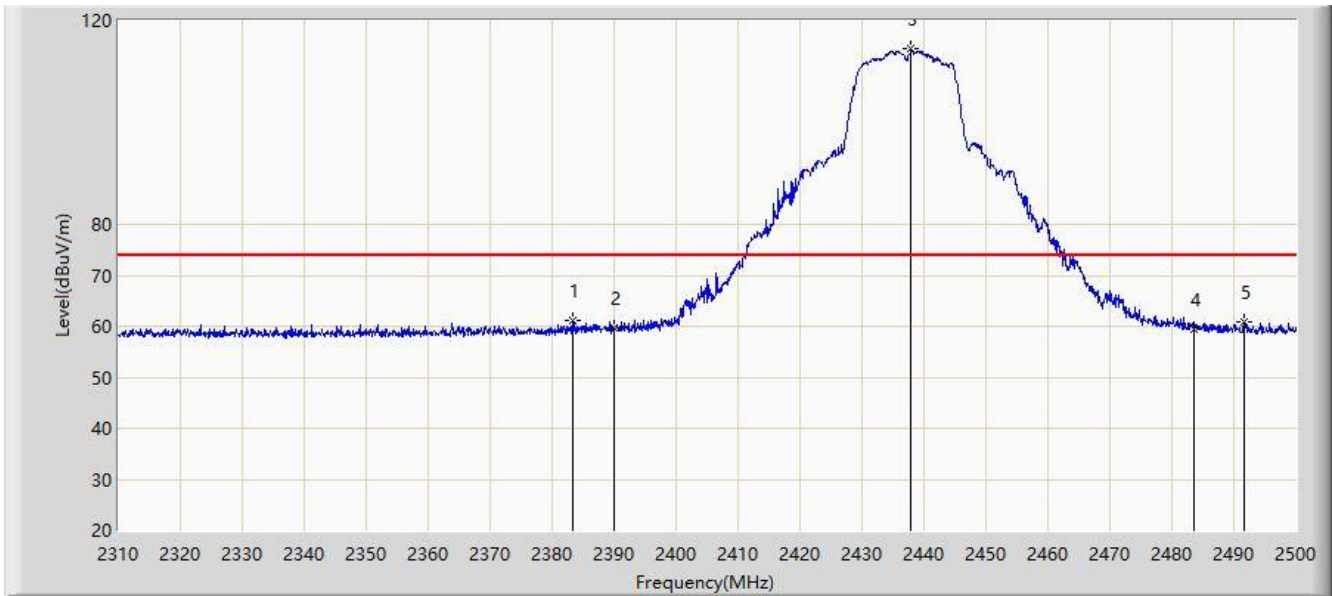


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2383.435	61.090	31.789	-12.910	74.000	29.300	PK
2			2390.000	59.625	30.330	-14.375	74.000	29.296	PK
3		*	2437.965	114.368	85.153	N/A	N/A	29.215	PK
4			2483.500	59.550	30.407	-14.450	74.000	29.143	PK
5			2491.640	60.766	31.629	-13.234	74.000	29.137	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC2	Time: 2020/09/03 - 20:04
Limit: FCC_Part15.209_RE(3m)	Engineer: Hyde Yu
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AC1200 Wi-Fi Range Extender	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at Channel 2437MHz	

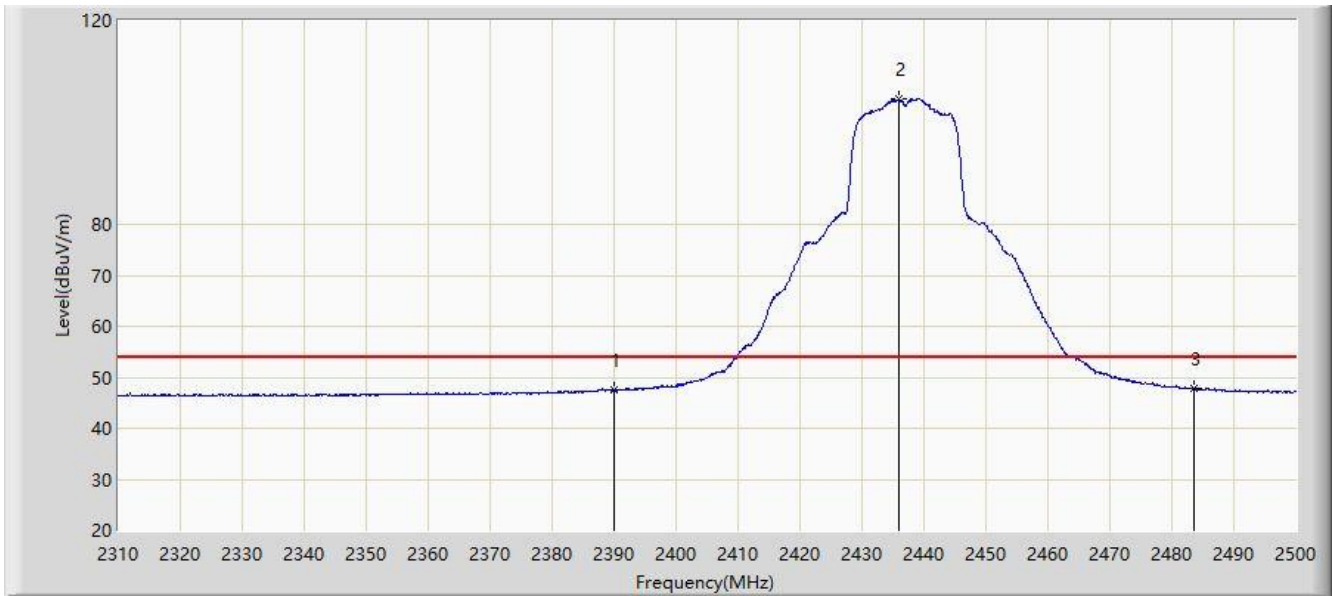

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	47.457	18.162	-6.543	54.000	29.296	AV
2		*	2435.875	104.684	75.442	N/A	N/A	29.242	AV
3			2483.500	47.803	18.660	-6.197	54.000	29.143	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC2	Time: 2020/09/03 - 21:26
Limit: FCC_Part15.209_RE(3m)	Engineer: Hyde Yu
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: AC1200 Wi-Fi Range Extender	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at Channel 2457MHz	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2454.685	113.035	83.962	N/A	N/A	29.073	PK
2			2483.500	69.269	40.126	-4.731	74.000	29.143	PK
3			2484.047	70.492	41.348	-3.508	74.000	29.144	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC2	Time: 2020/09/03 - 21:27
Limit: FCC_Part15.209_RE(3m)	Engineer: Hyde Yu
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: AC1200 Wi-Fi Range Extender	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at Channel 2457MHz	

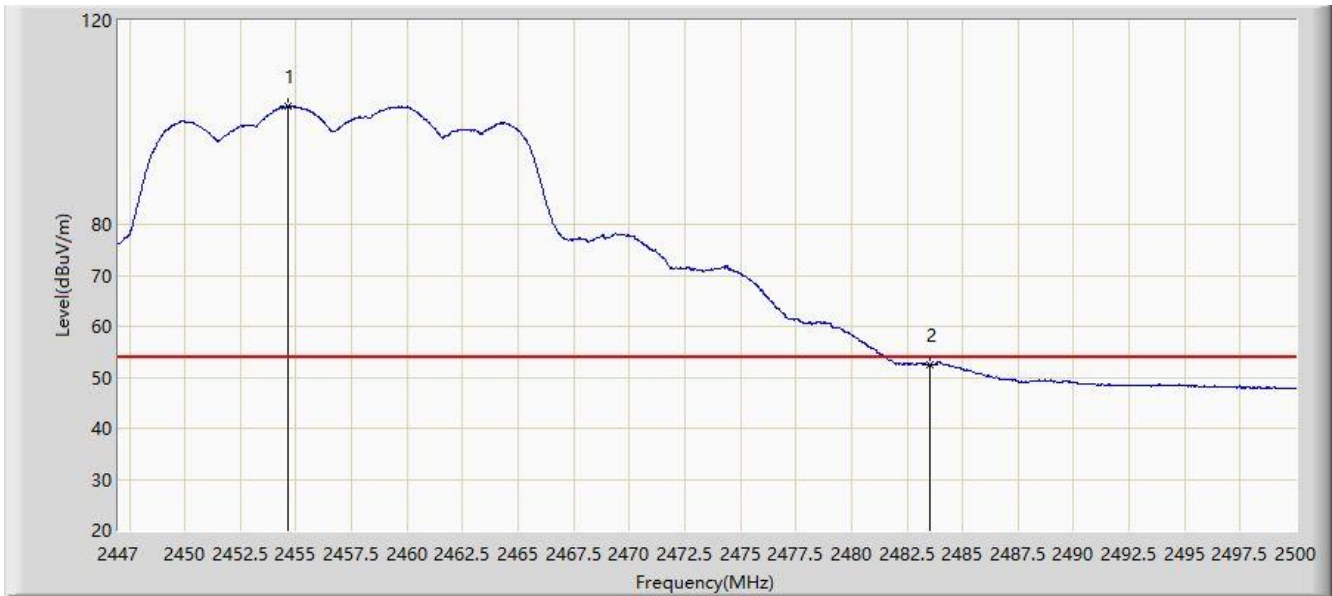

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2454.605	103.112	74.040	N/A	N/A	29.072	AV
2			2483.500	52.500	23.357	-1.500	54.000	29.143	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC2	Time: 2020/09/03 - 21:32
Limit: FCC_Part15.209_RE(3m)	Engineer: Hyde Yu
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AC1200 Wi-Fi Range Extender	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at Channel 2457MHz	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2454.394	101.221	72.149	N/A	N/A	29.072	PK
2			2483.500	60.215	31.072	-13.785	74.000	29.143	PK
3			2485.478	60.943	31.797	-13.057	74.000	29.146	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC2	Time: 2020/09/03 - 21:34
Limit: FCC_Part15.209_RE(3m)	Engineer: Hyde Yu
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AC1200 Wi-Fi Range Extender	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at Channel 2457MHz	

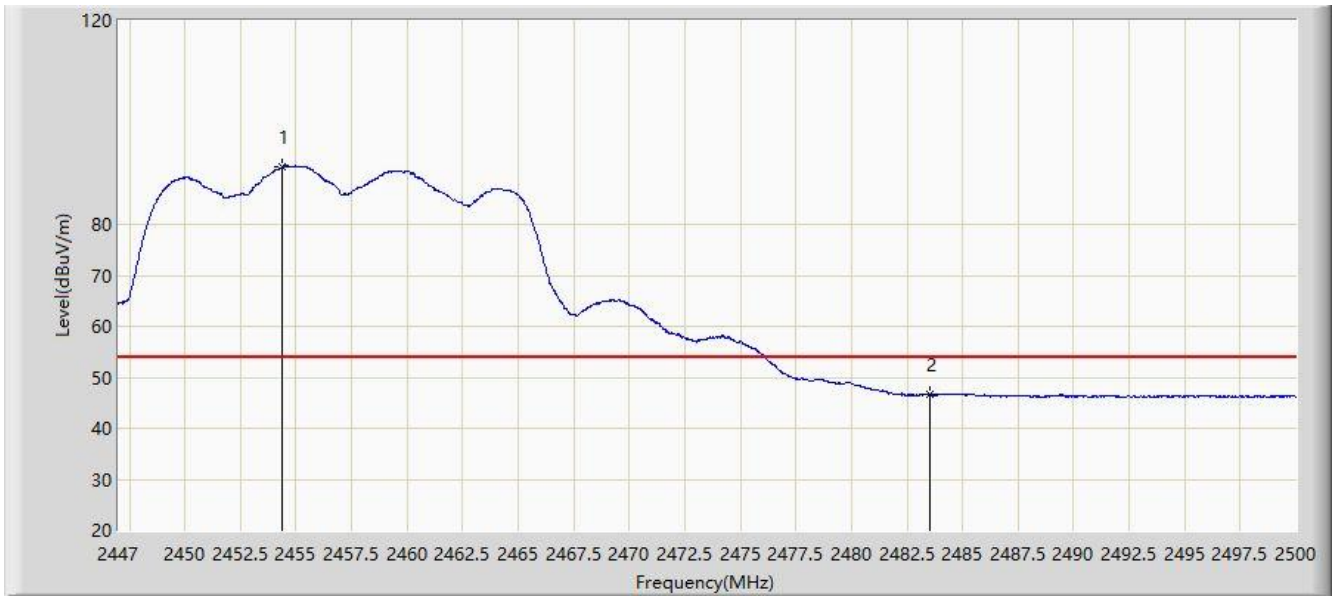


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2454.367	91.299	62.228	N/A	N/A	29.071	AV
2			2483.500	46.607	17.464	-7.393	54.000	29.143	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC2	Time: 2020/08/21 - 11:47
Limit: FCC_Part15.209_RE(3m)	Engineer: Hyde Yu
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: AC1200 Wi-Fi Range Extender	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at Channel 2462MHz	

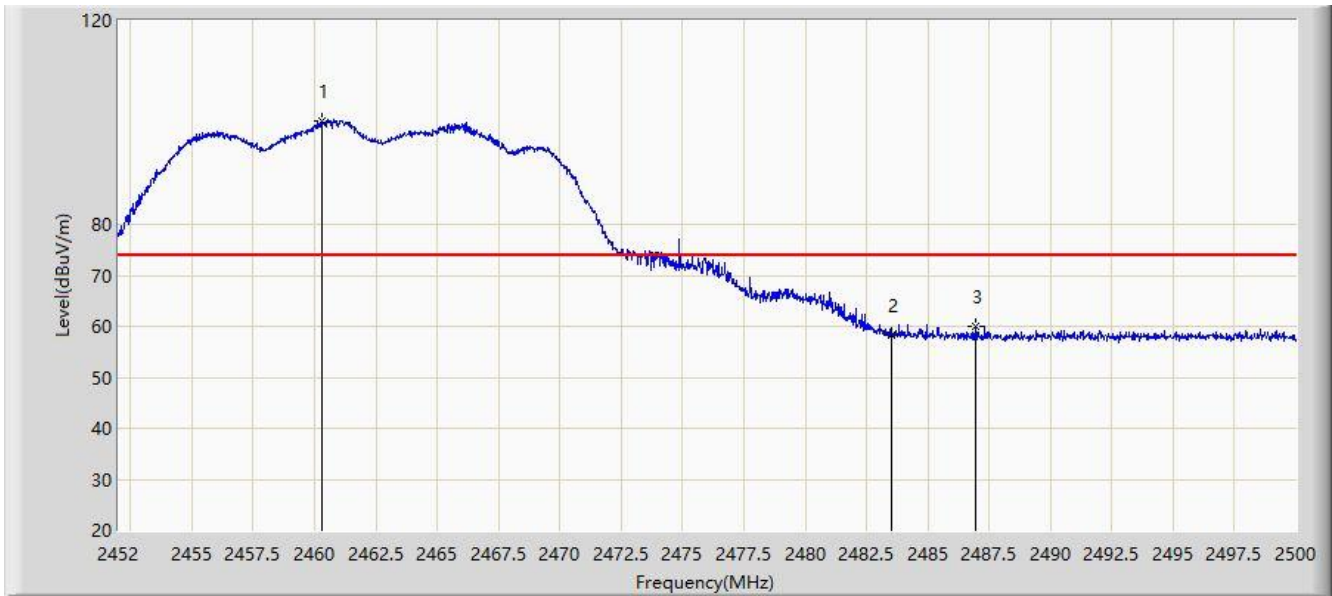

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2460.328	100.349	71.257	N/A	N/A	29.092	PK
2			2483.500	58.178	29.035	-15.822	74.000	29.143	PK
3			2486.920	59.949	30.801	-14.051	74.000	29.148	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC2	Time: 2020/08/21 - 11:46
Limit: FCC_Part15.209_RE(3m)	Engineer: Hyde Yu
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: AC1200 Wi-Fi Range Extender	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at Channel 2462MHz	



No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2460.784	91.319	62.225	N/A	N/A	29.094	AV
2			2483.500	46.521	17.378	-7.479	54.000	29.143	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC2	Time: 2020/08/21 - 11:48
Limit: FCC_Part15.209_RE(3m)	Engineer: Hyde Yu
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AC1200 Wi-Fi Range Extender	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at Channel 2462MHz	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2459.656	111.004	81.914	N/A	N/A	29.090	PK
2			2483.500	69.557	40.414	-4.443	74.000	29.143	PK
3			2483.560	71.455	42.312	-2.545	74.000	29.143	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC2	Time: 2020/08/21 - 11:39
Limit: FCC_Part15.209_RE(3m)	Engineer: Hyde Yu
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AC1200 Wi-Fi Range Extender	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at Channel 2462MHz	

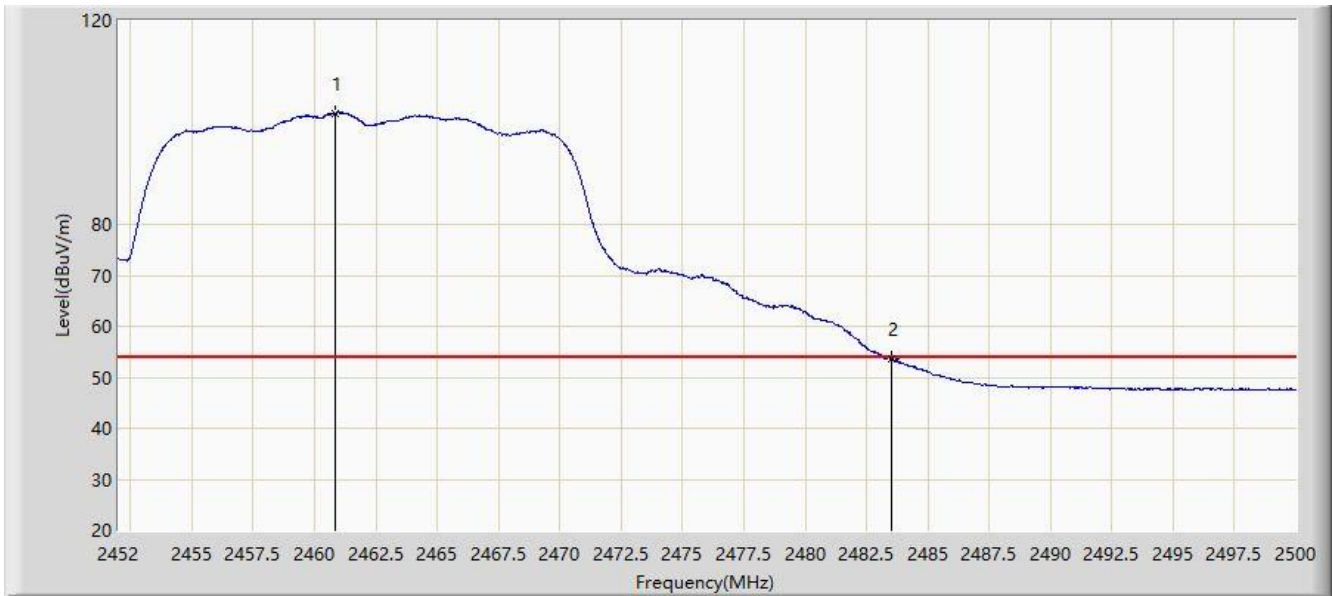


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2460.832	101.857	72.763	N/A	N/A	29.094	AV
2			2483.500	53.654	24.511	-0.346	54.000	29.143	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC2	Time: 2020/08/21 - 13:15
Limit: FCC_Part15.209_RE(3m)	Engineer: Hyde Yu
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: AC1200 Wi-Fi Range Extender	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 2412MHz	

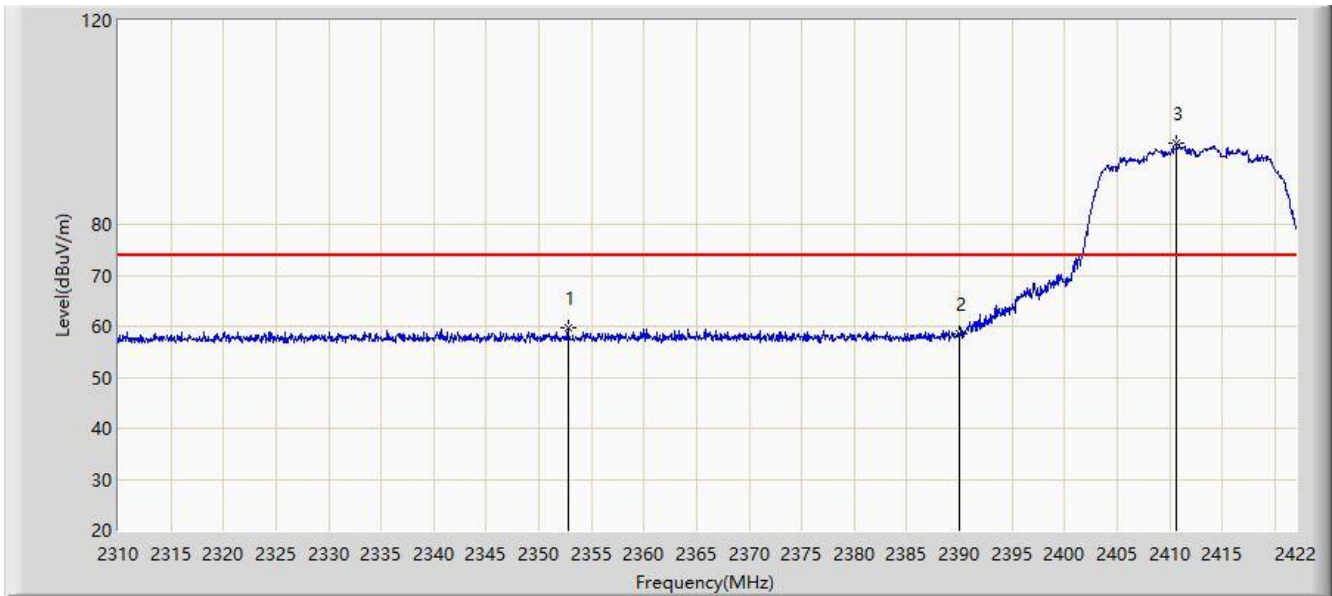


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2352.784	59.615	30.192	-14.385	74.000	29.423	PK
2			2390.000	58.411	29.116	-15.589	74.000	29.296	PK
3		*	2410.632	95.916	66.650	N/A	N/A	29.266	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC2	Time: 2020/08/21 - 13:11
Limit: FCC_Part15.209_RE(3m)	Engineer: Hyde Yu
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: AC1200 Wi-Fi Range Extender	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 2412MHz	

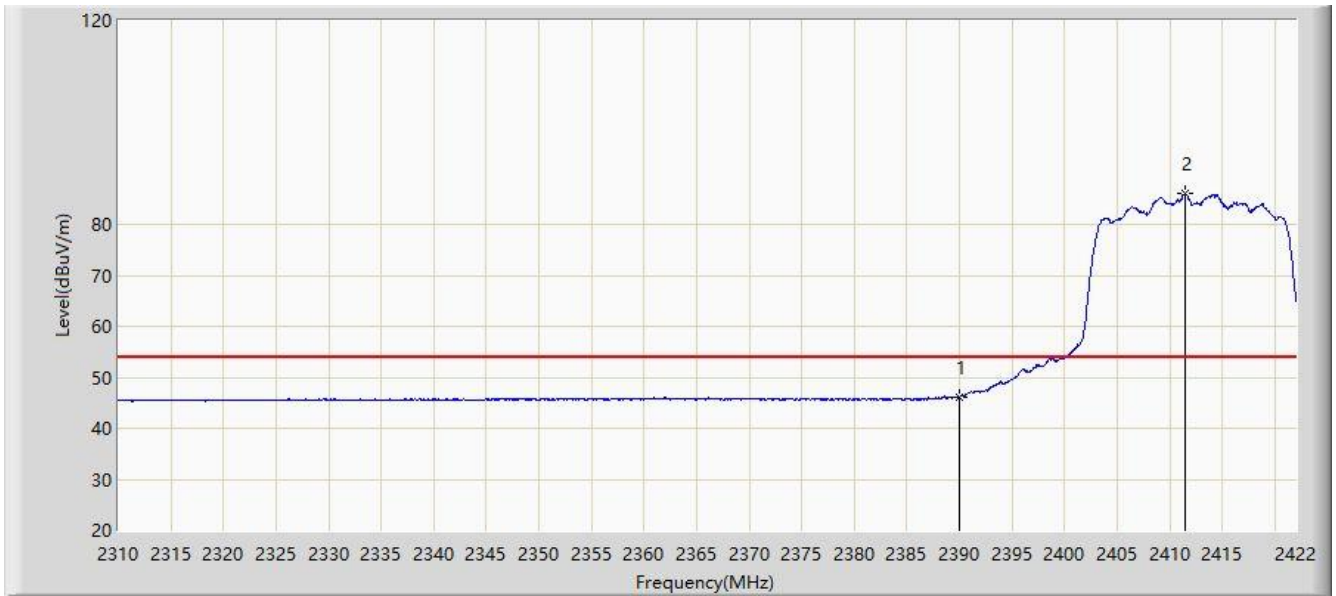


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	46.148	16.853	-7.852	54.000	29.296	AV
2		*	2411.472	86.021	56.756	N/A	N/A	29.265	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC2	Time: 2020/08/21 - 13:16
Limit: FCC_Part15.209_RE(3m)	Engineer: Hyde Yu
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AC1200 Wi-Fi Range Extender	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 2412MHz	

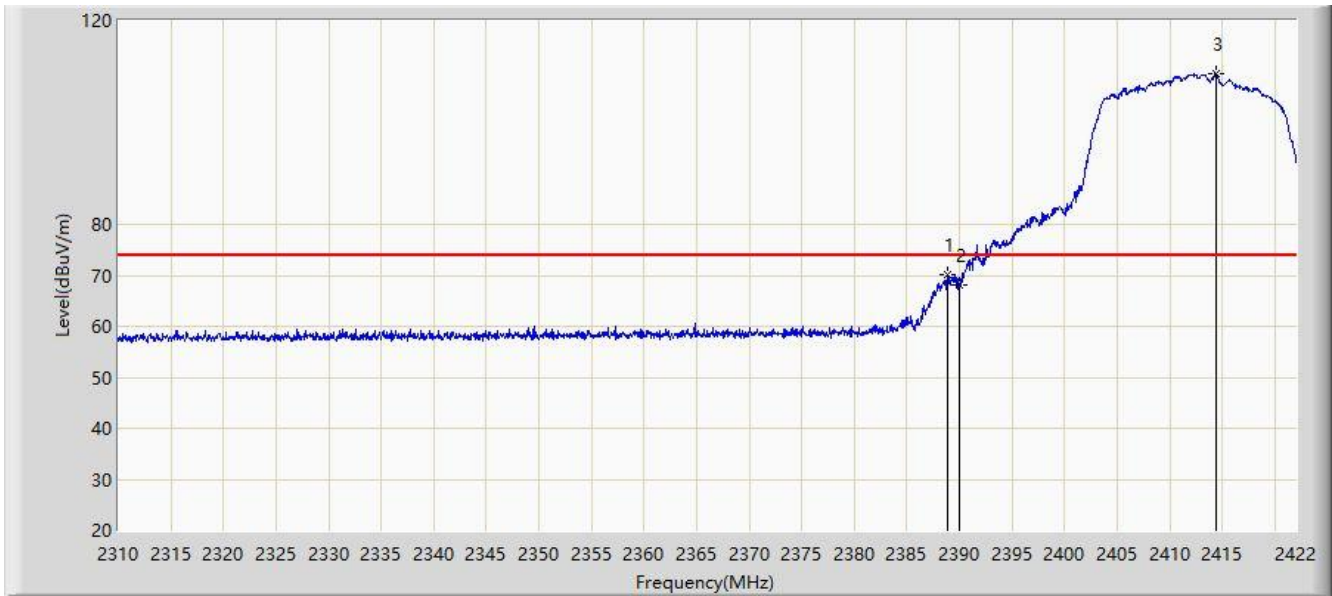


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2388.904	70.181	40.885	-3.819	74.000	29.296	PK
2			2390.000	68.055	38.760	-5.945	74.000	29.296	PK
3		*	2414.384	109.597	80.341	N/A	N/A	29.256	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC2	Time: 2020/08/21 - 13:10
Limit: FCC_Part15.209_RE(3m)	Engineer: Hyde Yu
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AC1200 Wi-Fi Range Extender	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 2412MHz	

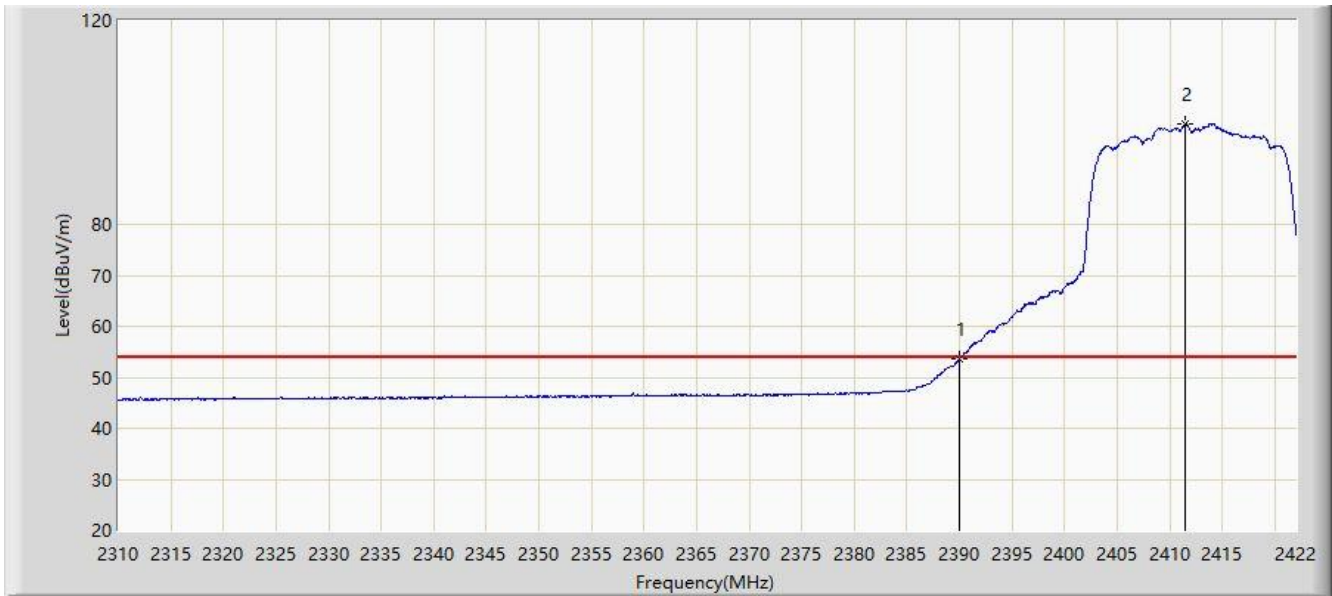


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	53.532	24.237	-0.468	54.000	29.296	AV
2		*	2411.472	99.751	70.486	N/A	N/A	29.265	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC2	Time: 2020/09/03 - 21:37
Limit: FCC_Part15.209_RE(3m)	Engineer: Hyde Yu
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: AC1200 Wi-Fi Range Extender	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 2417MHz	

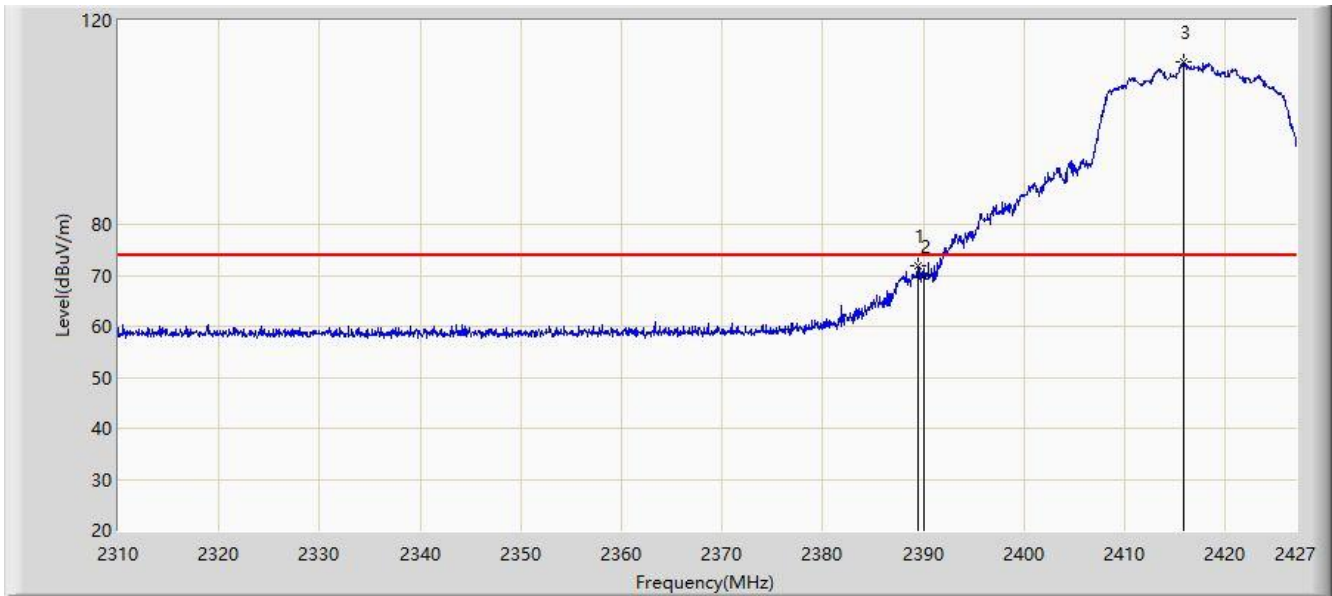


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.443	71.890	42.594	-2.110	74.000	29.296	PK
2			2390.000	69.828	40.533	-4.172	74.000	29.296	PK
3		*	2415.885	111.823	82.570	N/A	N/A	29.253	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC2	Time: 2020/09/03 - 21:39
Limit: FCC_Part15.209_RE(3m)	Engineer: Hyde Yu
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: AC1200 Wi-Fi Range Extender	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 2417MHz	

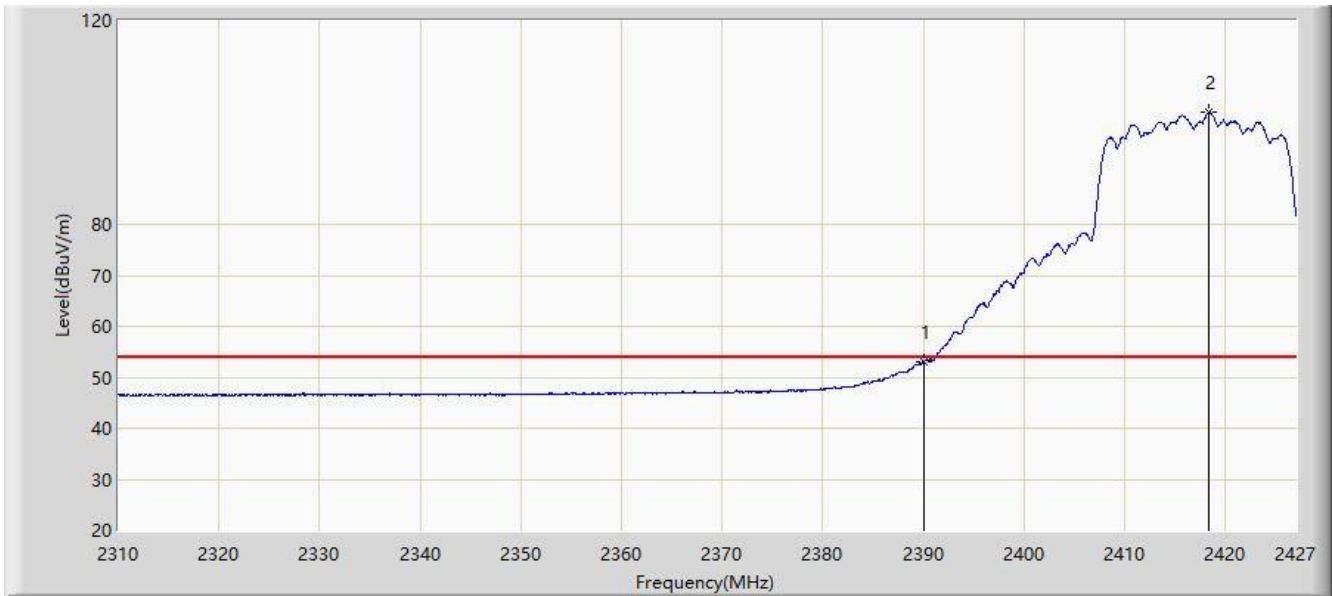


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	53.044	23.749	-0.956	54.000	29.296	AV
2		*	2418.400	101.895	72.641	N/A	N/A	29.254	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC2	Time: 2020/09/03 - 21:43
Limit: FCC_Part15.209_RE(3m)	Engineer: Hyde Yu
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AC1200 Wi-Fi Range Extender	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 2417MHz	

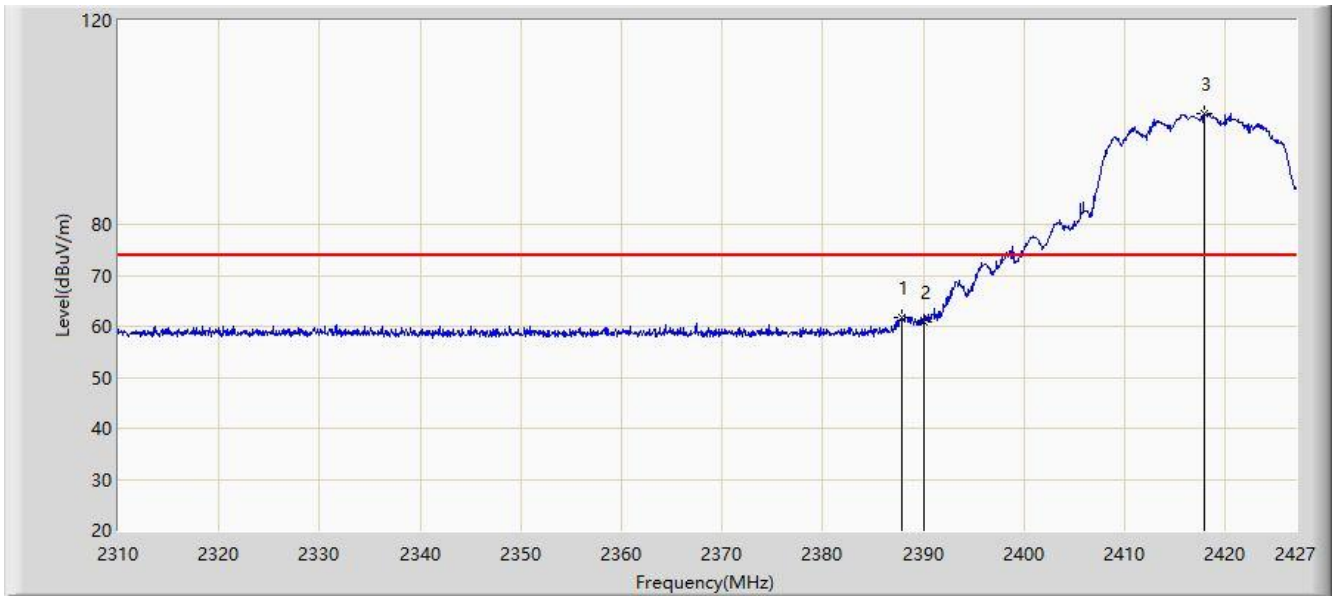


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2387.922	61.806	32.509	-12.194	74.000	29.296	PK
2			2390.000	60.774	31.479	-13.226	74.000	29.296	PK
3		*	2417.933	101.870	72.616	N/A	N/A	29.254	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC2	Time: 2020/09/03 - 21:46
Limit: FCC_Part15.209_RE(3m)	Engineer: Hyde Yu
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AC1200 Wi-Fi Range Extender	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 2417MHz	

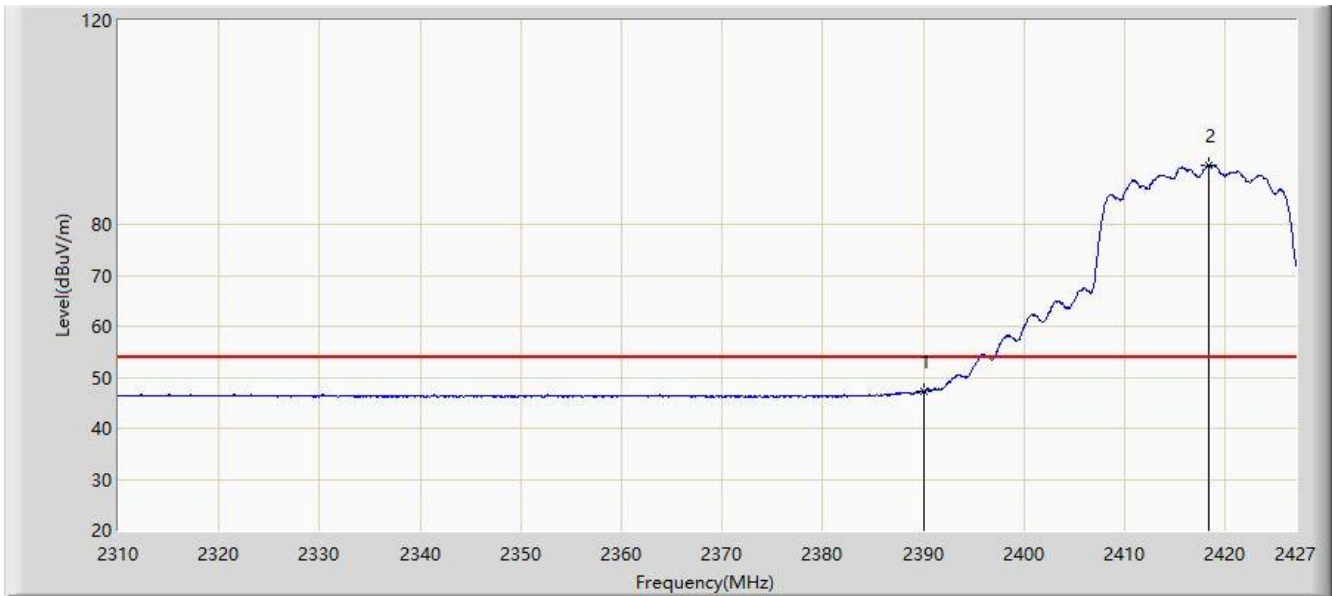


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	47.278	17.983	-6.722	54.000	29.296	AV
2		*	2418.400	91.599	62.345	N/A	N/A	29.254	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC2	Time: 2020/09/03 - 21:48
Limit: FCC_Part15.209_RE(3m)	Engineer: Hyde Yu
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: AC1200 Wi-Fi Range Extender	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 2437MHz	

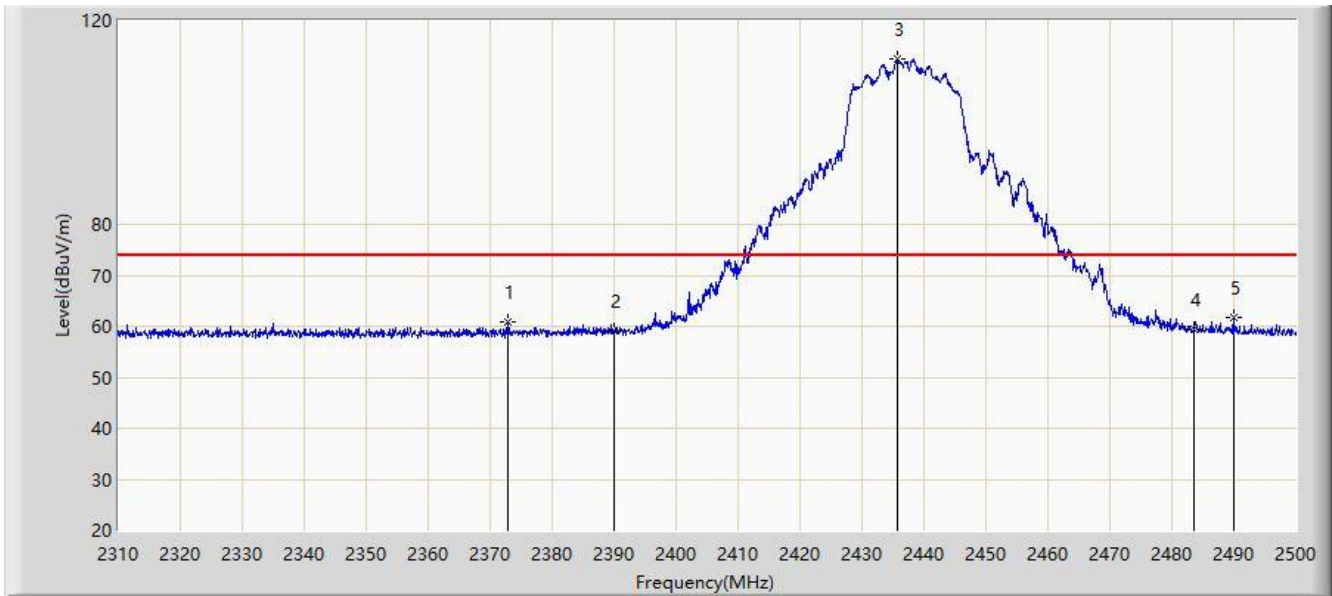


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2372.795	60.766	31.412	-13.234	74.000	29.354	PK
2			2390.000	59.170	29.875	-14.830	74.000	29.296	PK
3		*	2435.780	112.585	83.341	N/A	N/A	29.244	PK
4			2483.500	59.548	30.405	-14.452	74.000	29.143	PK
5			2489.930	61.603	32.461	-12.397	74.000	29.142	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC2	Time: 2020/09/03 - 21:50
Limit: FCC_Part15.209_RE(3m)	Engineer: Hyde Yu
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: AC1200 Wi-Fi Range Extender	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 2437MHz	

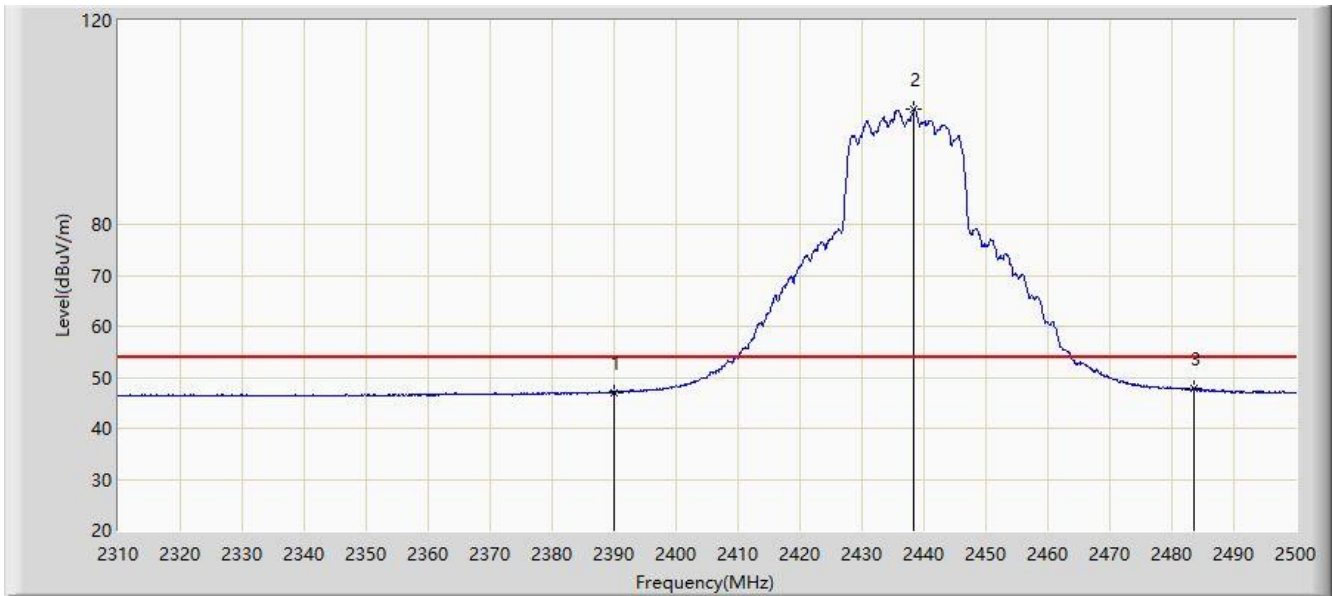


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	47.053	17.758	-6.947	54.000	29.296	AV
2		*	2438.345	102.558	73.348	N/A	N/A	29.210	AV
3			2483.500	47.685	18.542	-6.315	54.000	29.143	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC2	Time: 2020/09/03 - 21:51
Limit: FCC_Part15.209_RE(3m)	Engineer: Hyde Yu
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AC1200 Wi-Fi Range Extender	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 2437MHz	

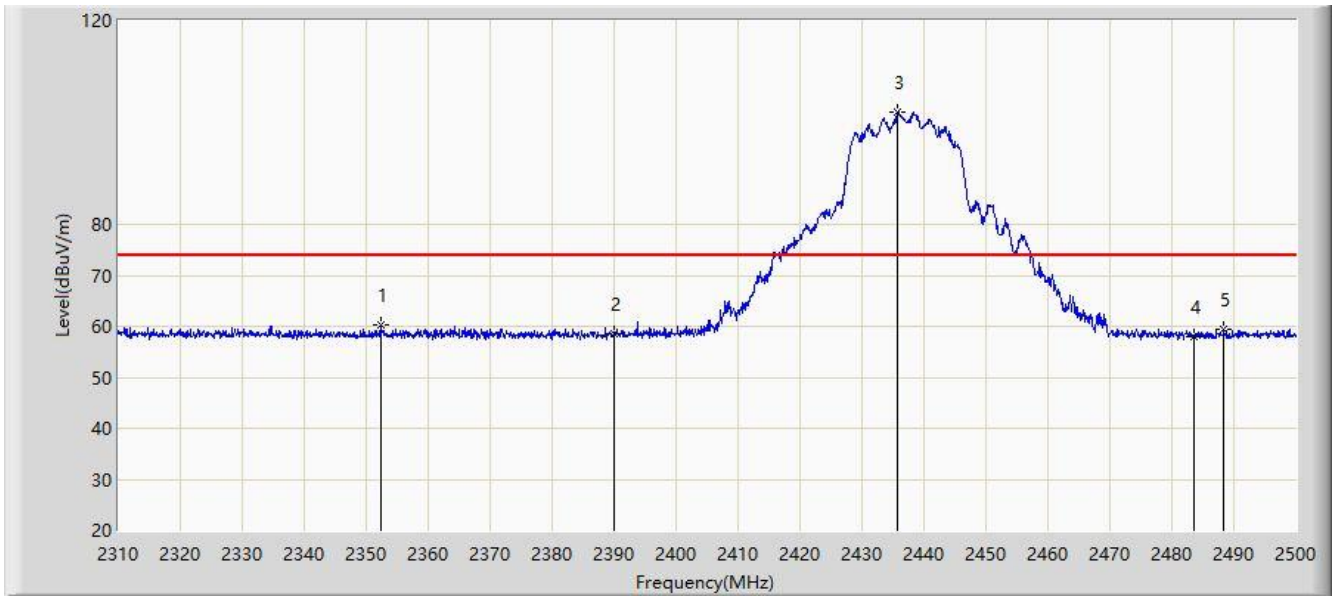


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2352.275	60.385	30.963	-13.615	74.000	29.422	PK
2			2390.000	58.429	29.134	-15.571	74.000	29.296	PK
3		*	2435.780	102.038	72.794	N/A	N/A	29.244	PK
4			2483.500	57.940	28.797	-16.060	74.000	29.143	PK
5			2488.315	59.409	30.262	-14.591	74.000	29.147	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC2	Time: 2020/09/03 - 21:54
Limit: FCC_Part15.209_RE(3m)	Engineer: Hyde Yu
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AC1200 Wi-Fi Range Extender	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 2437MHz	

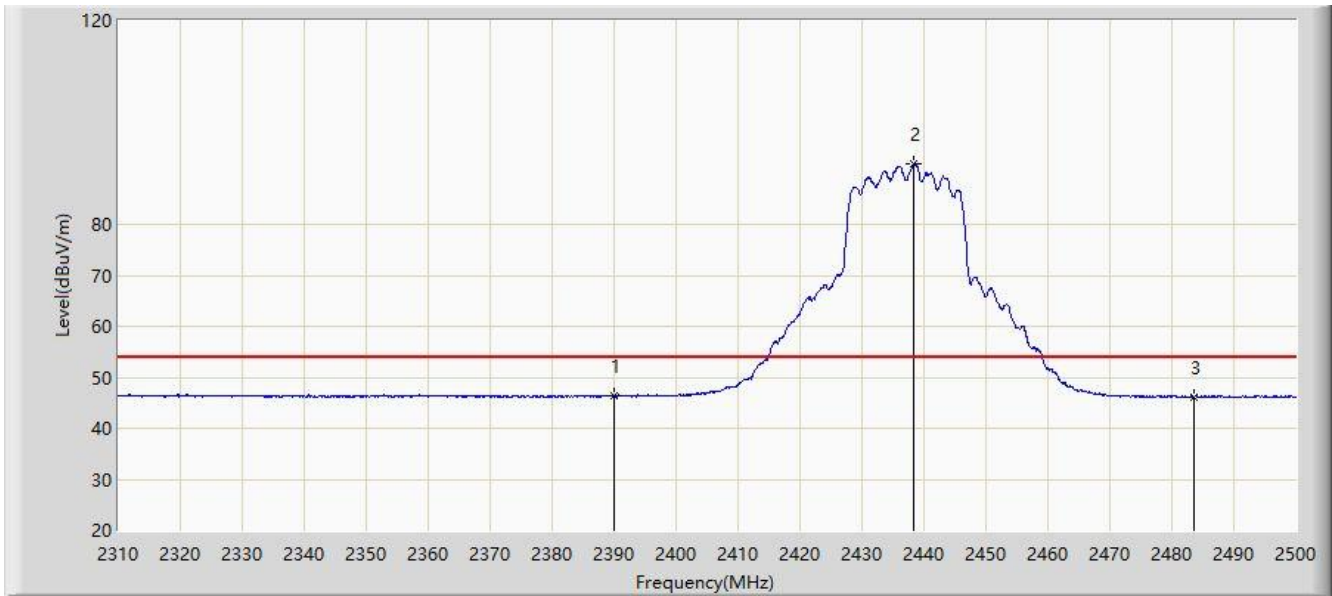

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	46.395	17.100	-7.605	54.000	29.296	AV
2		*	2438.345	91.943	62.733	N/A	N/A	29.210	AV
3			2483.500	46.158	17.015	-7.842	54.000	29.143	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC2	Time: 2020/09/03 - 22:03
Limit: FCC_Part15.209_RE(3m)	Engineer: Hyde Yu
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: AC1200 Wi-Fi Range Extender	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 2457MHz	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2455.666	111.524	82.448	N/A	N/A	29.076	PK
2			2483.500	73.028	43.885	-0.972	74.000	29.143	PK
3			2483.543	73.400	44.257	-0.600	74.000	29.143	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC2	Time: 2020/09/03 - 22:06
Limit: FCC_Part15.209_RE(3m)	Engineer: Hyde Yu
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: AC1200 Wi-Fi Range Extender	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 2457MHz	

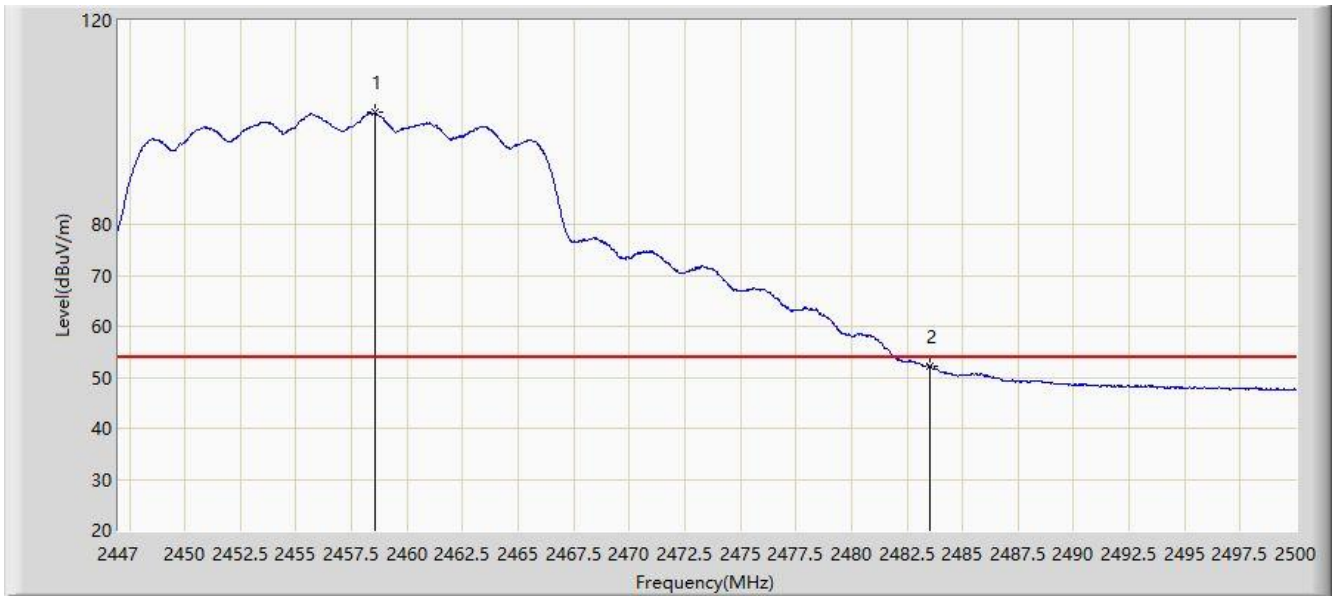

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2458.528	101.905	72.819	N/A	N/A	29.086	AV
2			2483.500	52.138	22.995	-1.862	54.000	29.143	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC2	Time: 2020/09/03 - 22:08
Limit: FCC_Part15.209_RE(3m)	Engineer: Hyde Yu
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AC1200 Wi-Fi Range Extender	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 2457MHz	



No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2455.824	99.951	70.875	N/A	N/A	29.076	PK
2			2483.500	59.149	30.006	-14.851	74.000	29.143	PK
3			2483.543	62.824	33.681	-11.176	74.000	29.143	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)