

承认书

SPECIFICATION FOR APPROVEAL

客户名称(CUSTOMER): ZLGD-A1-0241

客户料号(PART NO.): ZLGD-F19.5×27.5-8-FR

品名(DESCRIPTION): Double coil + magnetic disc
双线圈+磁片

规格(SPECIFICATION): 19.5x27.5,0.08×105P, Magnetic edge from 8MM

日期(DATE): 20230907

本司确认 (TRX APPROVAL)		
制作	审核	承认日期
曾小仙	邱志辉	20230907
客户确认 (CUSTOMER APPROVAL)		
工程	批准	承认日期
确认结果(Result): ☐ 合格 ☐ 不合格 ☐ 其它		

东莞市德弗力五金电子材料有限公司

Dongguan city DFL Electronic Technology Co.,LTD

东莞市石碣镇新风西路107号

电话: 0769-86016320 传真: 0769-86372427


东莞市德弗力五金电子材料有限公司

Dongguan city DFL Electronic Technology Co.,LTD

SPECIFICATION

产品型号: DESC	ZLGD-F19.5×27.5-8-FR	版本 Rev:B	Customer:	ZLGD-A1-0241	
			Description:	双线圈+磁片	
			Date:	20230907	

一、尺寸DIMENSION:(mm)

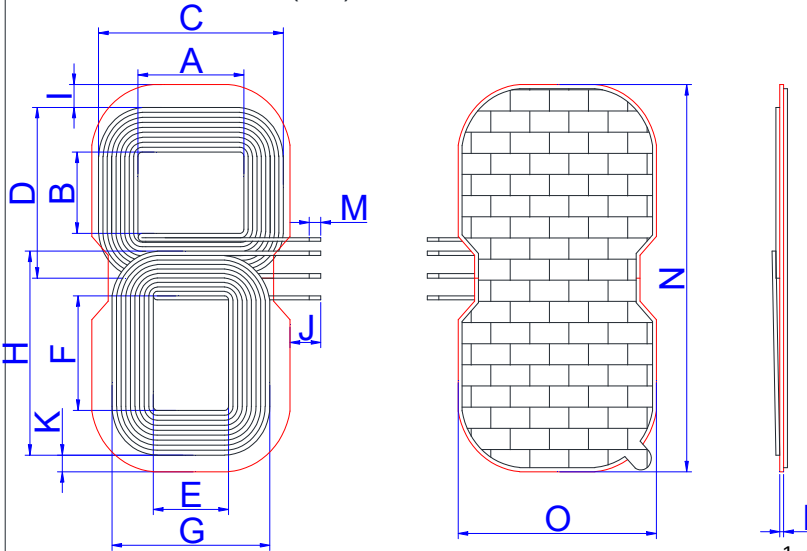

二、

天线增益 Antenna gain:

Operation frequency:	113kHz-205kHz
Antenna Type:	Loop coil Antenna
Antenna gain:	0dBi

三、绕线参数(WindingSpecification:)

序号 NO.	端子 TERMINAL	线径 WIRE	圈数 Turns	绕线方向 Winding Direction
1		0.08×105P silk-covered wire	9TS	anticlockwise

四、电气特性 ELECTRICAL CHARACTERISTICS:

温度 TEMPERATURE:25±10°C,湿度 RELATIVE HUMIDITY:65±20%

序号 NO.	项目 ITEM	端子 TERMINAL	标准 SPECIFICATION	测试条件 TEST FREQUENCY	测试仪器 TEST EQUIPMENTS
1	IND.		7.0uH±0.3 Magnetized sheet	100KHz/1.0V	SHDA 1062
2	IND.				
3	Q值				
4	DCR				

1. Coil attached 51.2*1.0 negative tolerance double hard magnetic

2. Magnetic disc with white double-sided tape with ear

3. The upper coil is 5.5mm away from the magnetic disc, and the lower coil is 4.0mm away from the magnetic disc

4. Exit the cable from the side

5. Do not loosen the coil

拟制/日期PREPARED BY/DATE		审核/日期CHECKED BY/DATE		客户/日期CUSTOMEU/DATE	