





Antenna1:




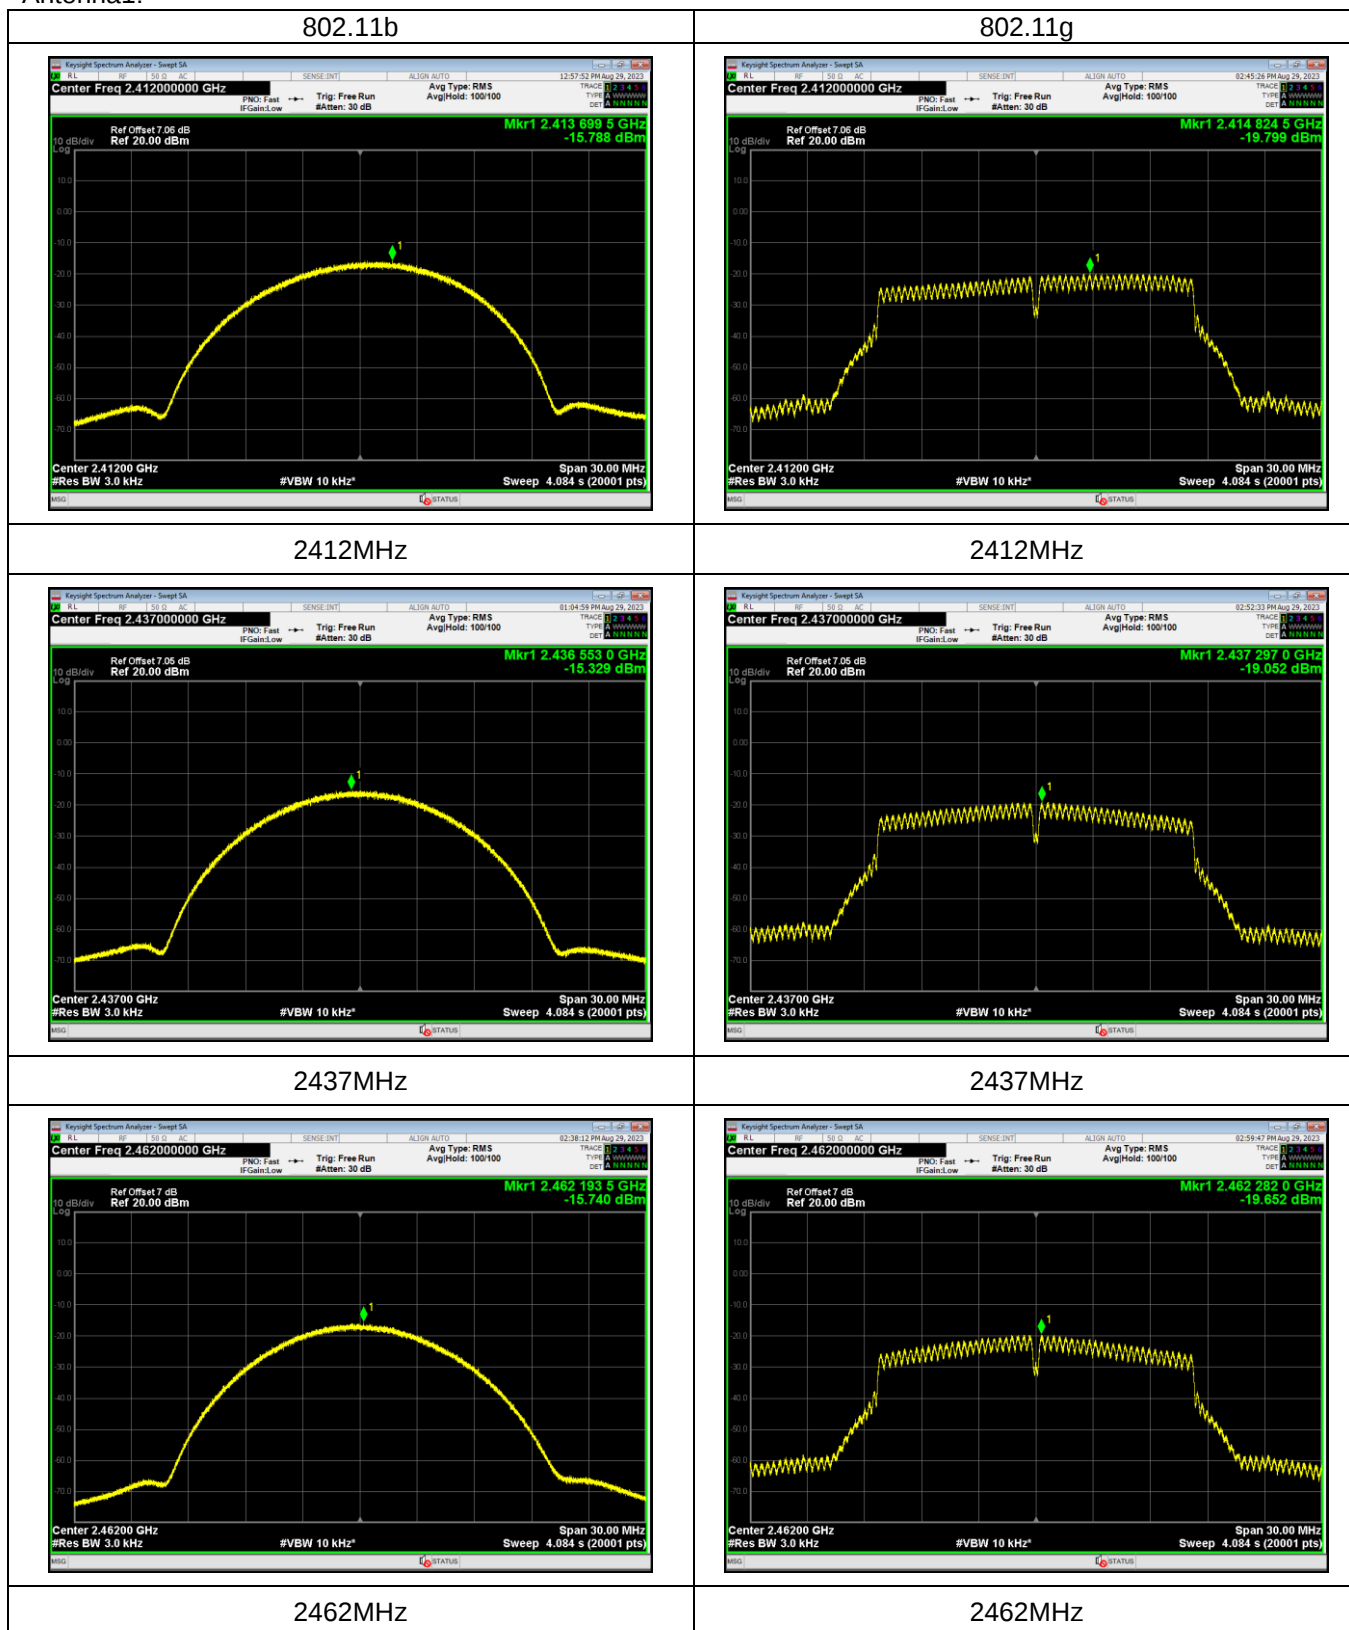


802.11n HT20

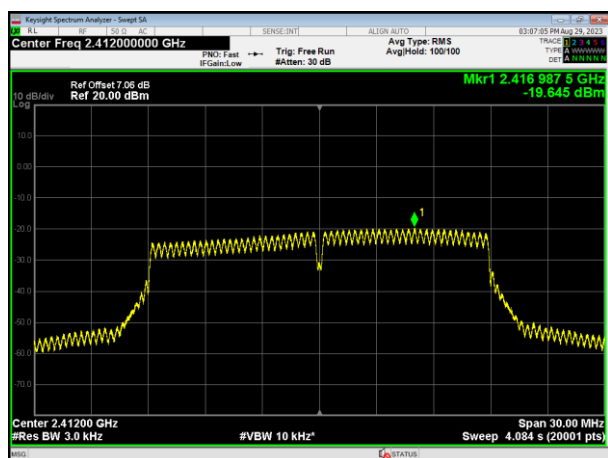


802.11n HT40

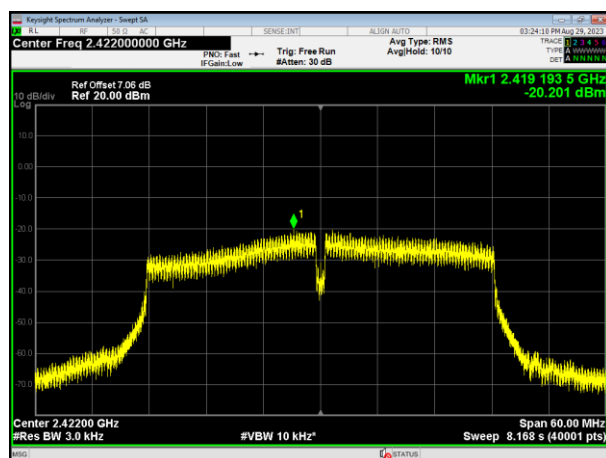


2412MHz

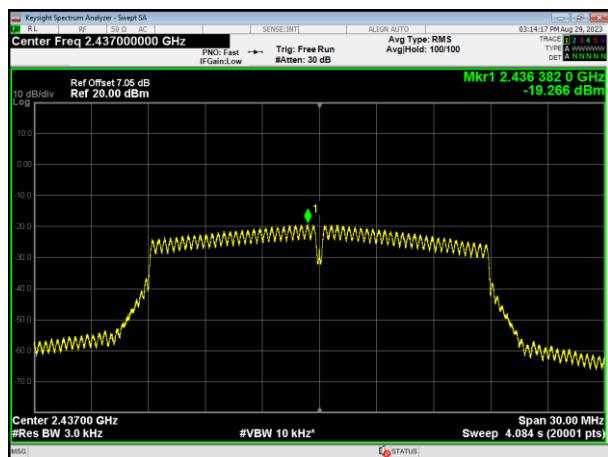


2422MHz

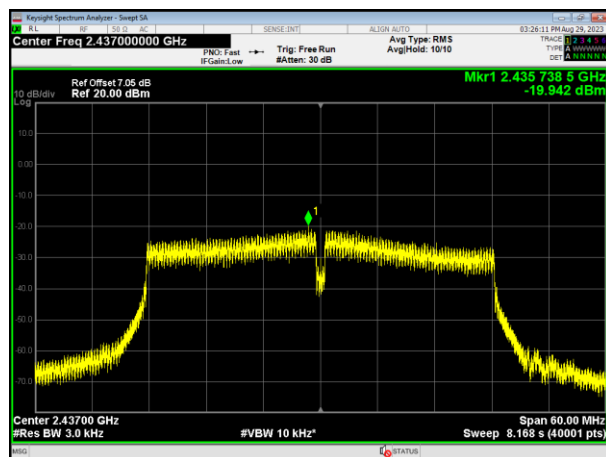

2437MHz

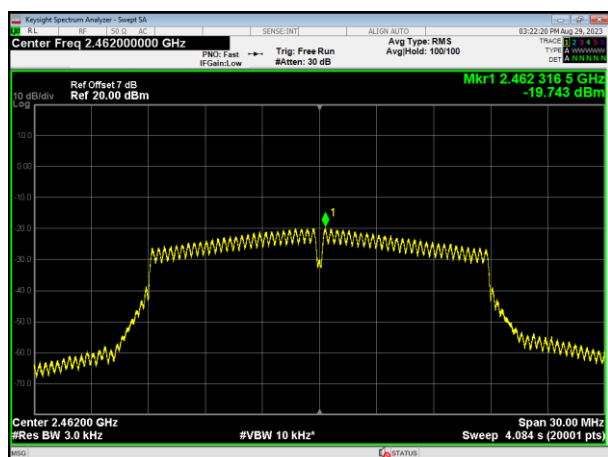

2437MHz

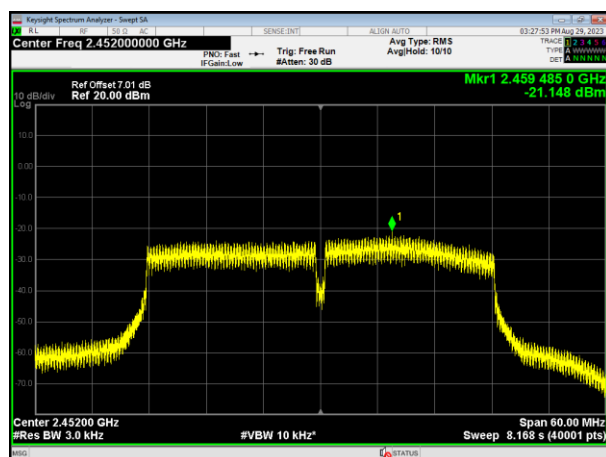


2462MHz

2452MHz




Antenna2:


802.11b

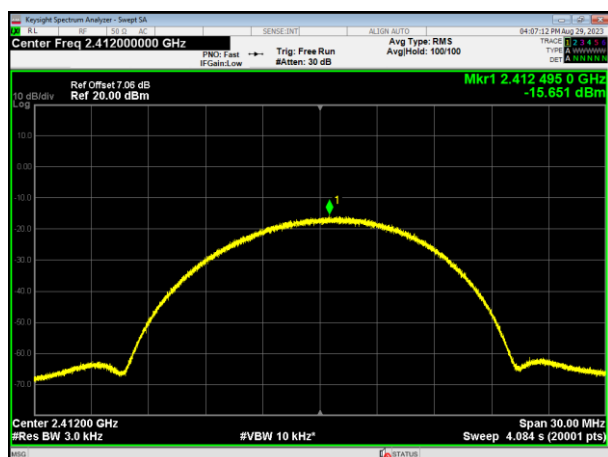


802.11g

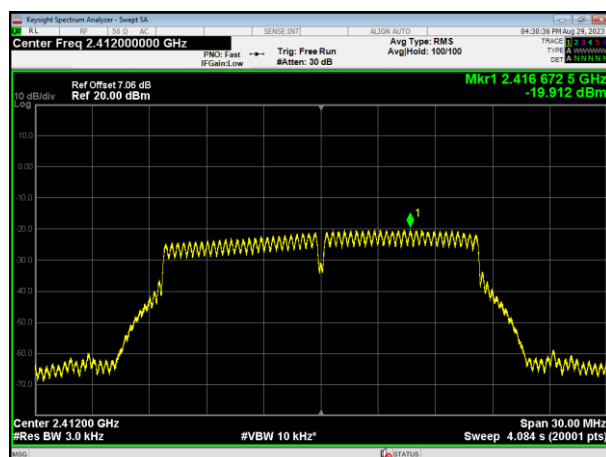


2412MHz

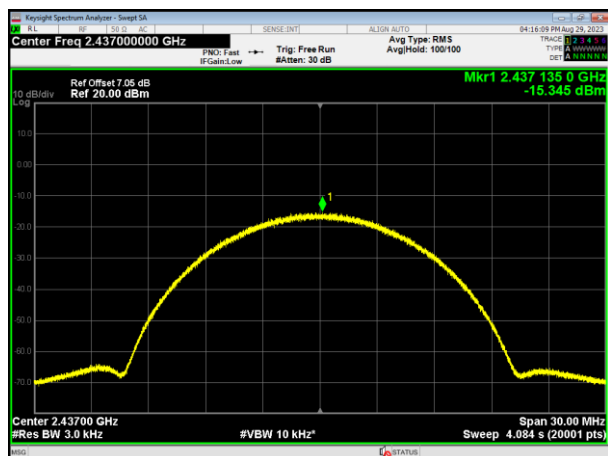


2412MHz

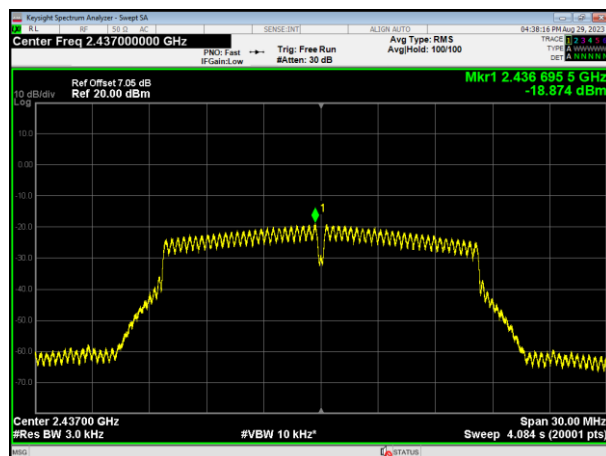

2437MHz

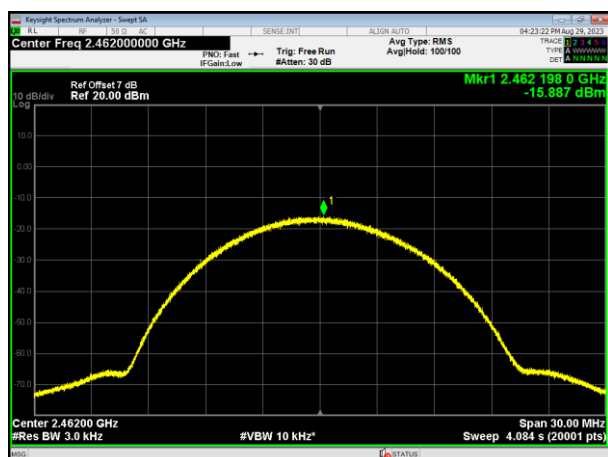

2437MHz

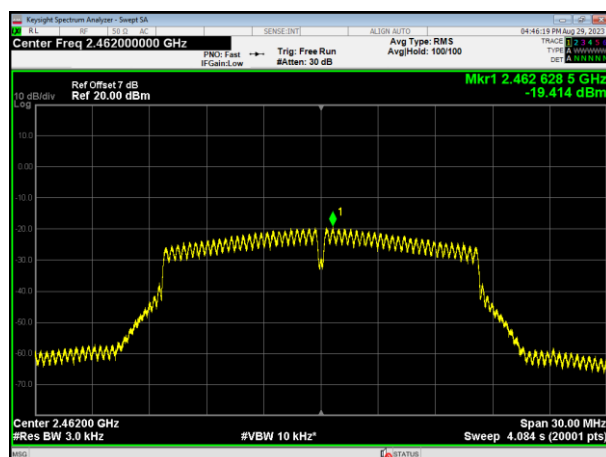


2462MHz


2462MHz




802.11n HT20

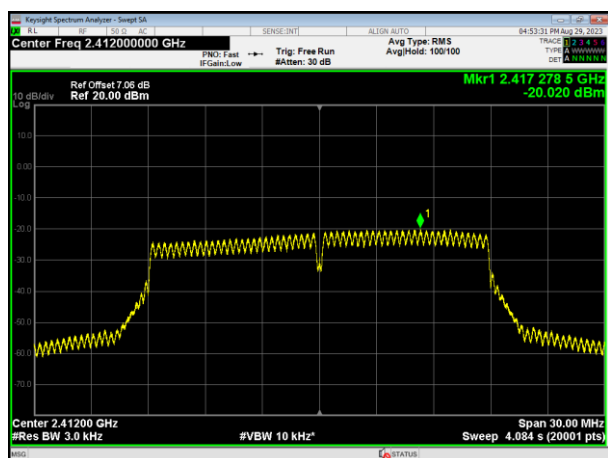


802.11n HT40

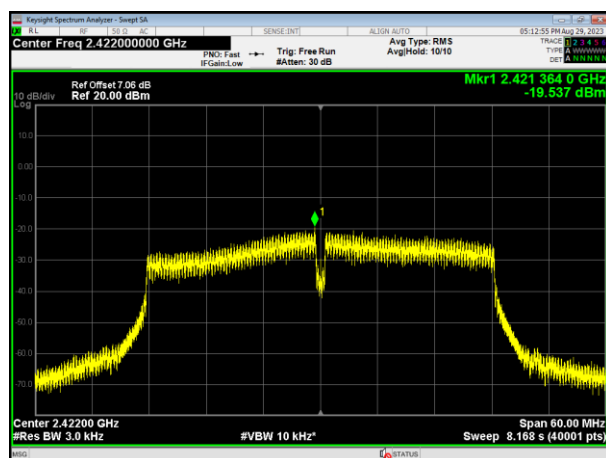


2412MHz

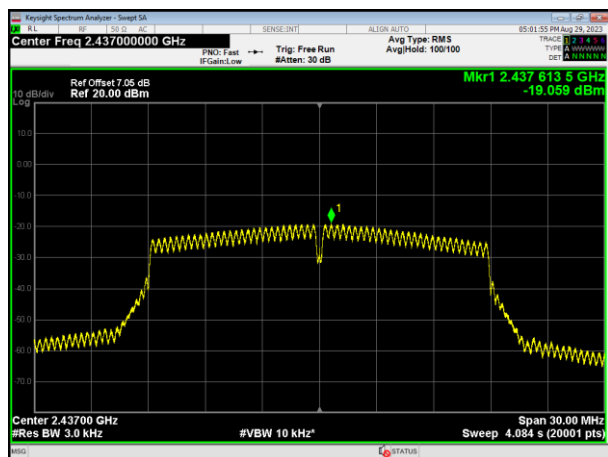


2422MHz

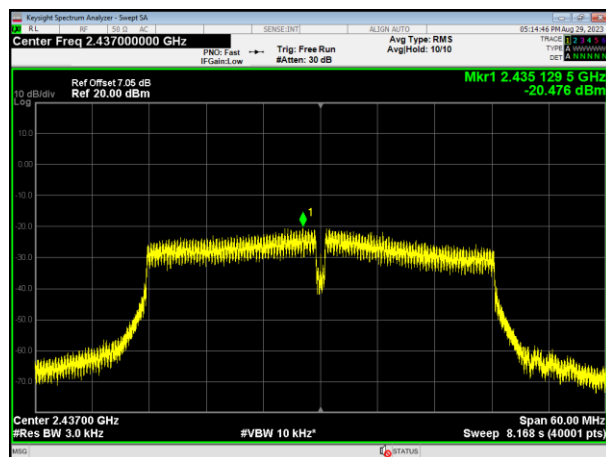

2437MHz

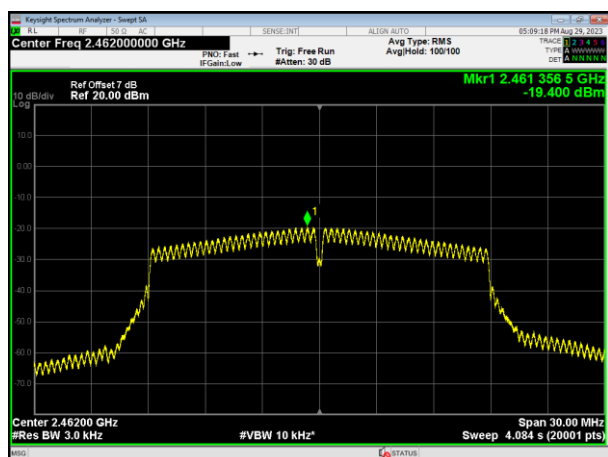

2437MHz

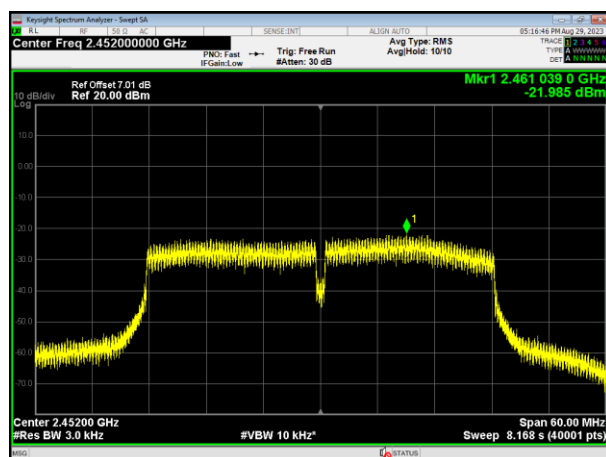

2462MHz

2452MHz



6. 6DB BANDWIDTH TEST

6.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range(MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS


6.1.1 TEST PROCEDURE

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) $\geq$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 20 dB relative to the maximum level measured in the fundamental emission.

6.1.2 DEVIATION FROM STANDARD

No deviation.

6.1.3 TEST SETUP

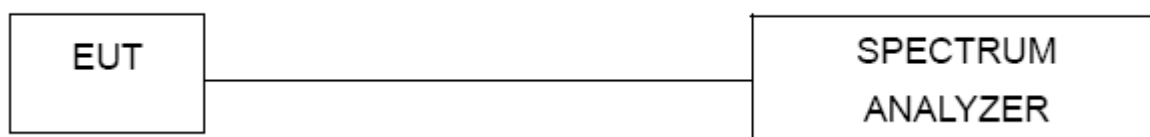

6.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.


**6.1.5 TEST RESULTS**

Test CH		Channel Bandwidth (MHz)		Limit(KHz)	Result
		Ant1	Ant2		
802.11b	Lowest	8.053	8.164	>500	Pass
	Middle	7.089	7.668		
	Highest	8.298	7.361		
802.11g	Lowest	16.209	15.758		
	Middle	15.695	15.655		
	Highest	15.062	15.003		
802.11n (20MHz)	Lowest	15.091	16.34		
	Middle	13.837	15.029		
	Highest	13.848	15.073		
802.11n (40MHz)	Lowest	26.256	28.842		
	Middle	32.566	33.778		
	Highest	35.117	35.118		




Antenna1:


802.11b

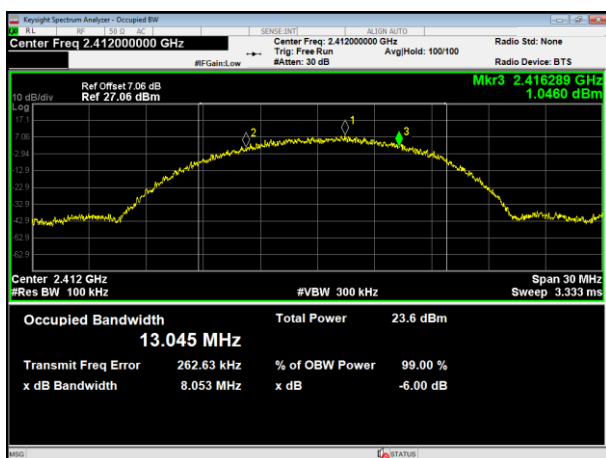


802.11g

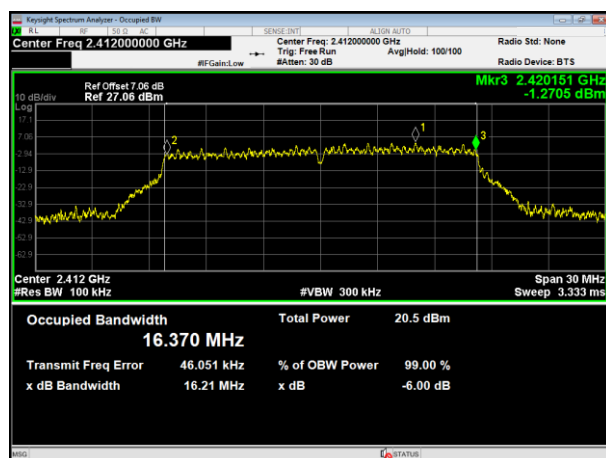


2412MHz

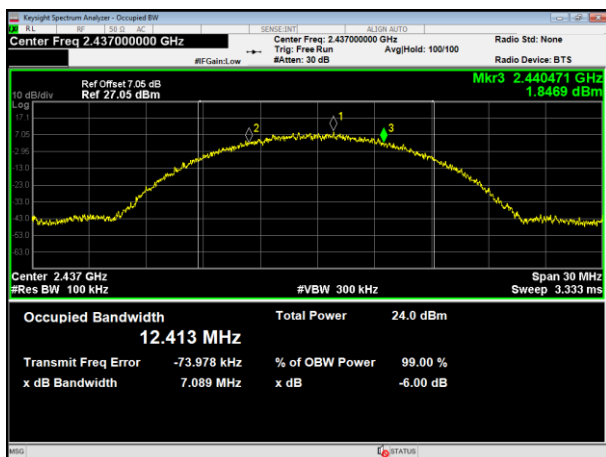


2412MHz

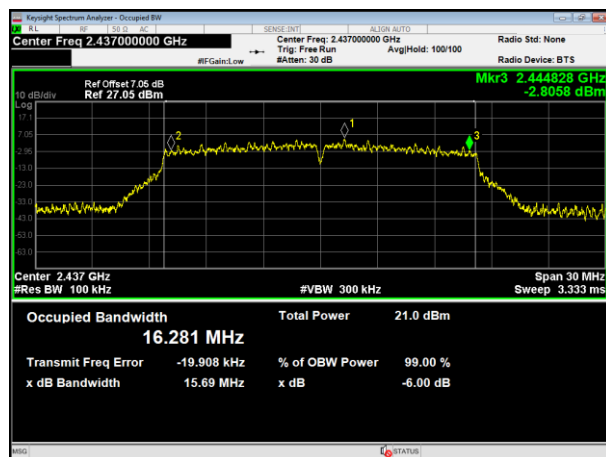

2437MHz

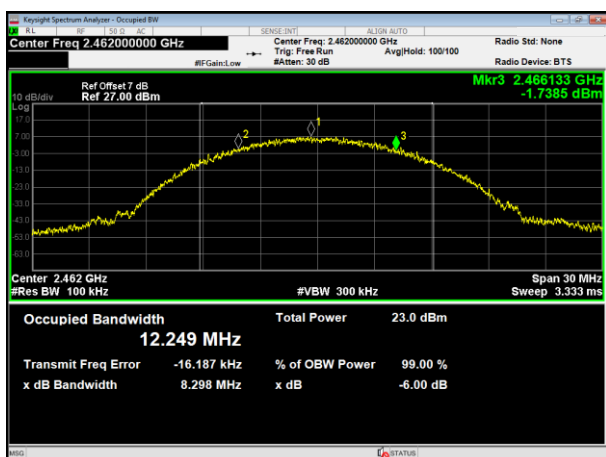

2437MHz

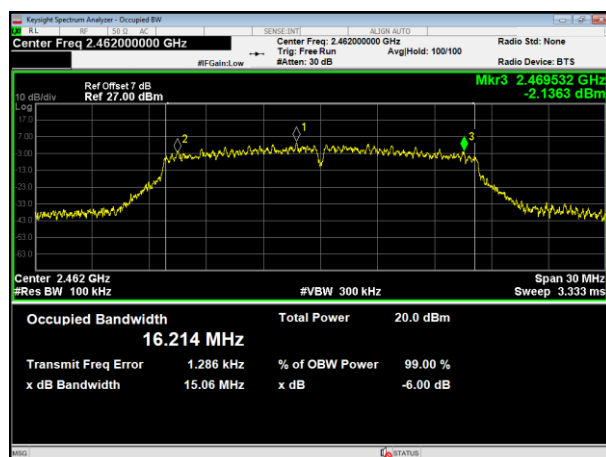


2462MHz


2462MHz




802.11n HT20

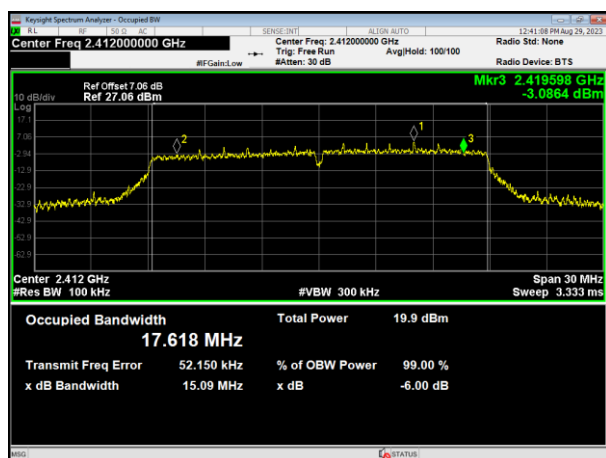


802.11n HT40

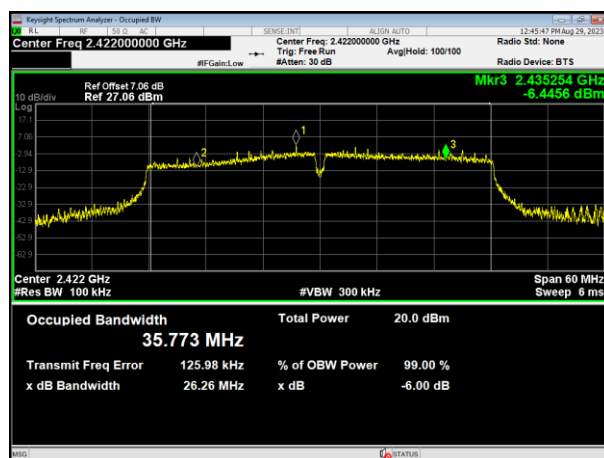


2412MHz

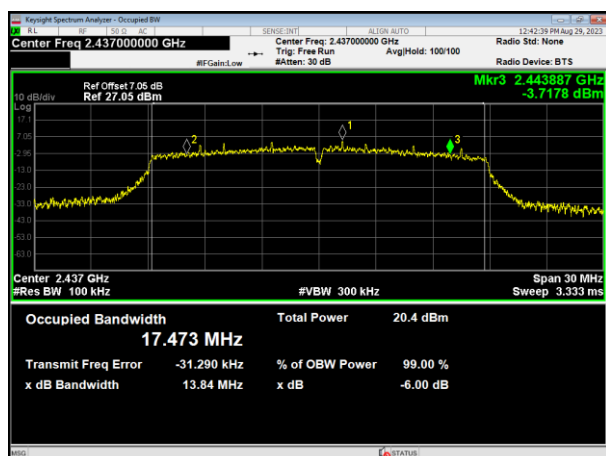


2422MHz

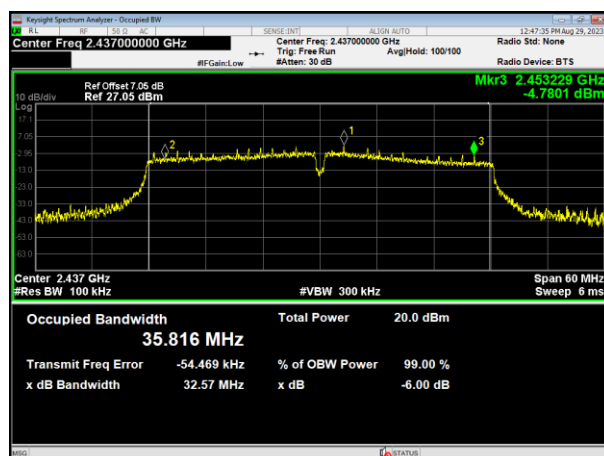

2437MHz

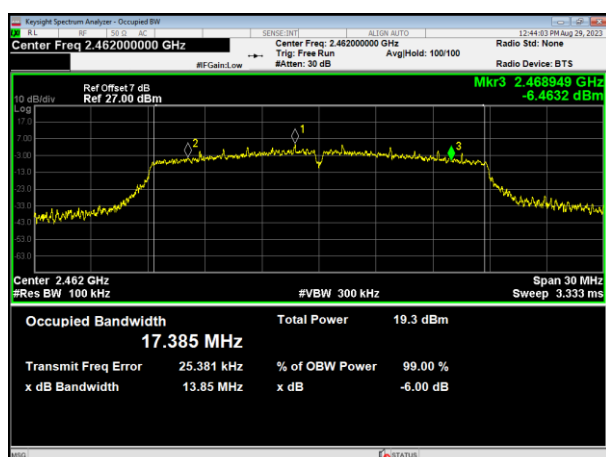

2437MHz

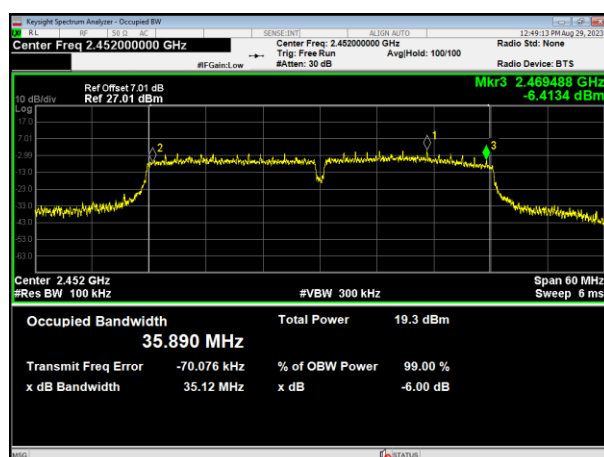


2462MHz

2452MHz




Antenna2:


802.11b

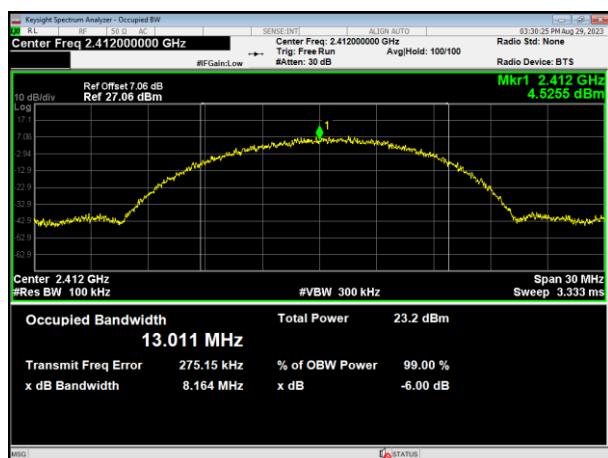


802.11g

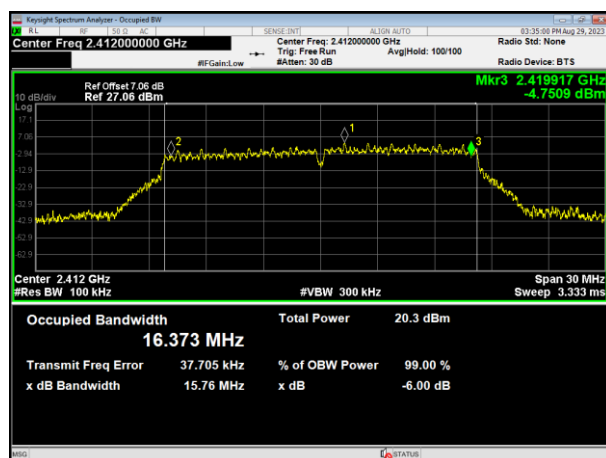


2412MHz

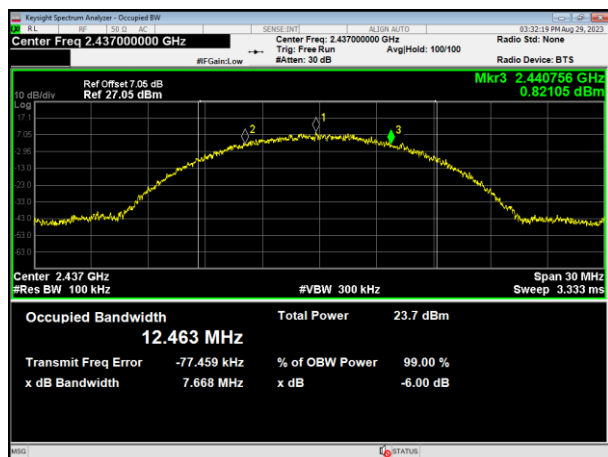


2412MHz

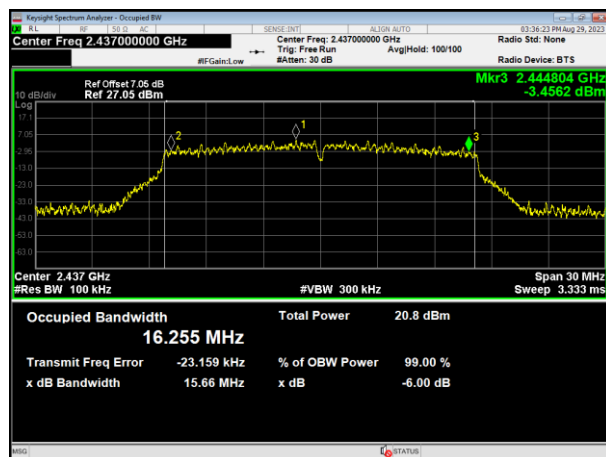

2437MHz

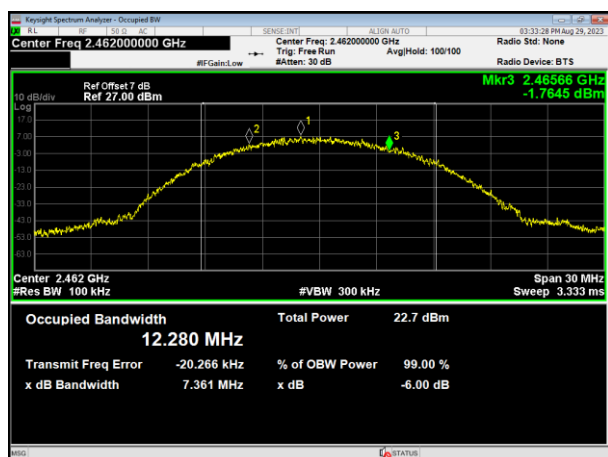

2437MHz

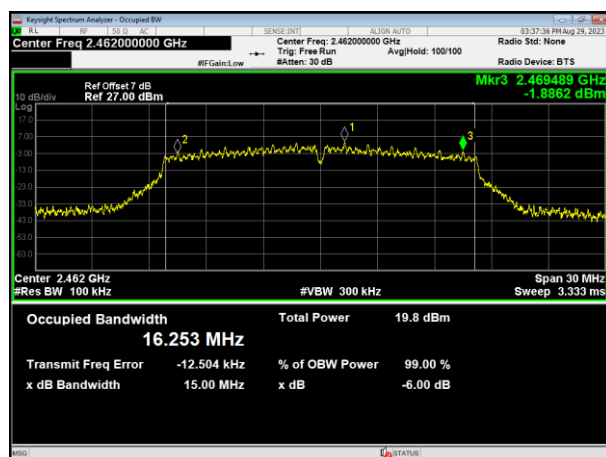


2462MHz


2462MHz




802.11n HT20

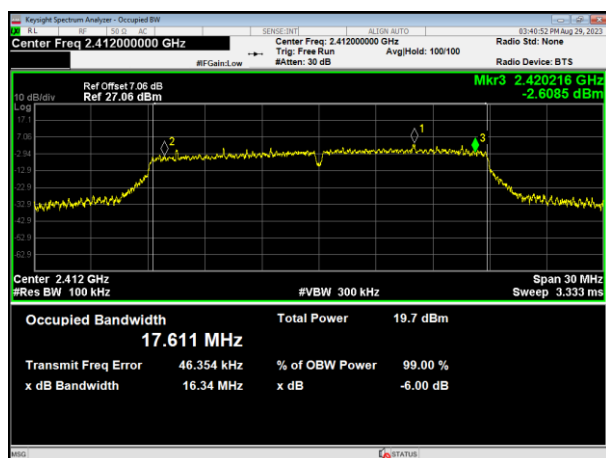


802.11n HT40

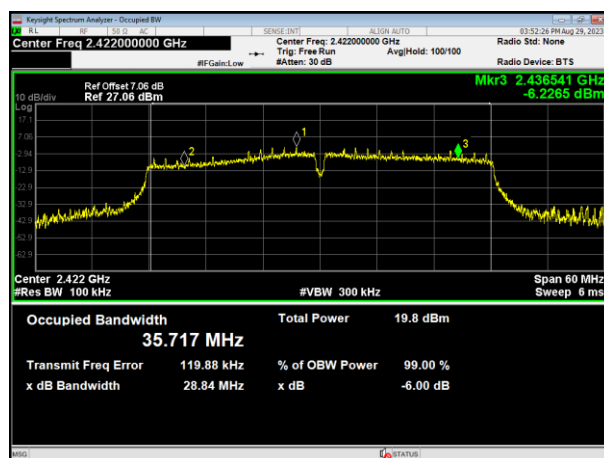


2412MHz

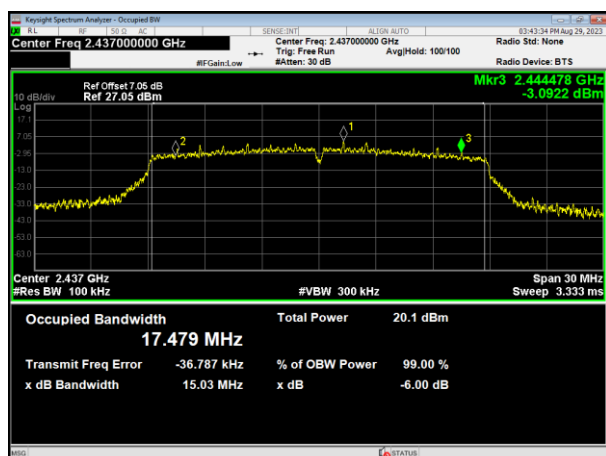


2422MHz

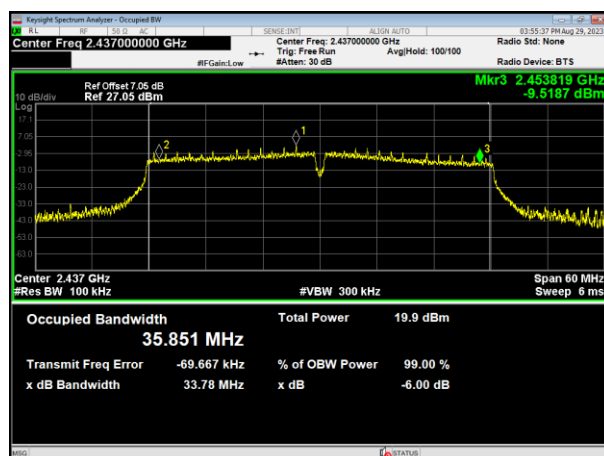

2437MHz

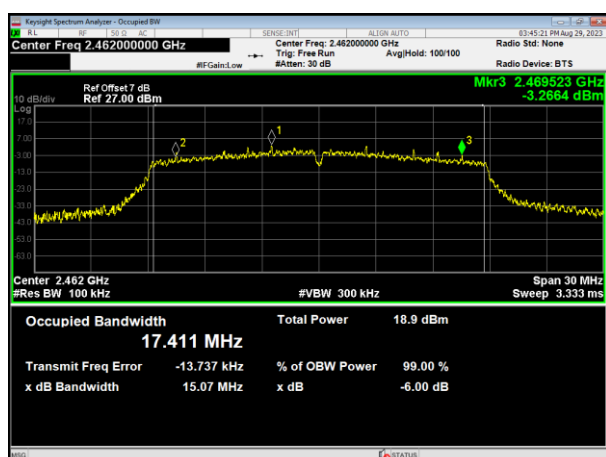

2437MHz

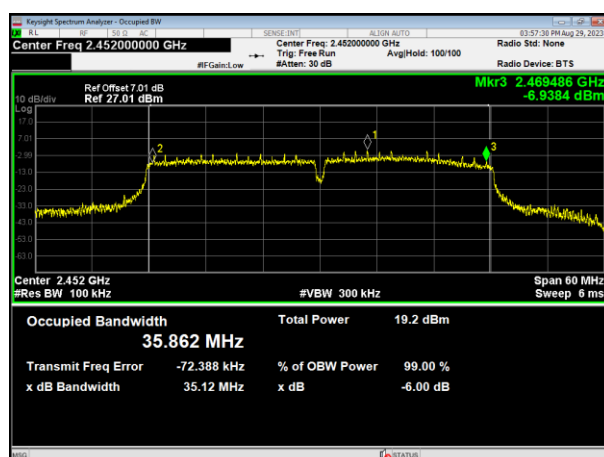

2462MHz

2452MHz



7. ANTENNA REQUIREMENT

7.1 STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.



7.2 EUT ANTENNA

The EUT antenna is Internal antenna, It comply with the standard requirement.



8. TEST SEUUP PHOTO

Radiated Measurement Photos

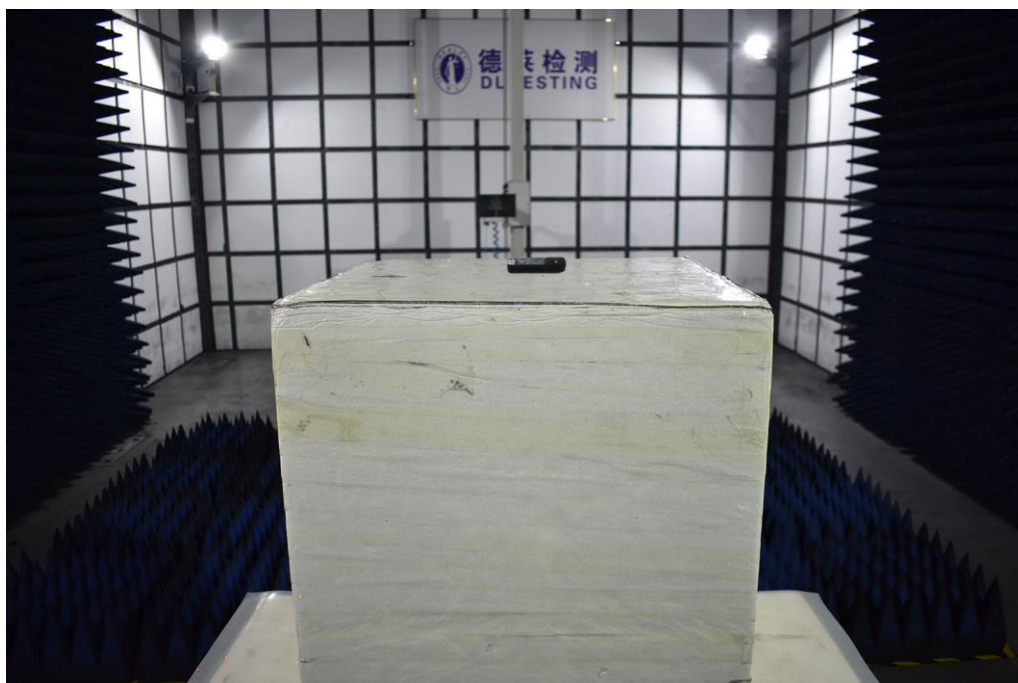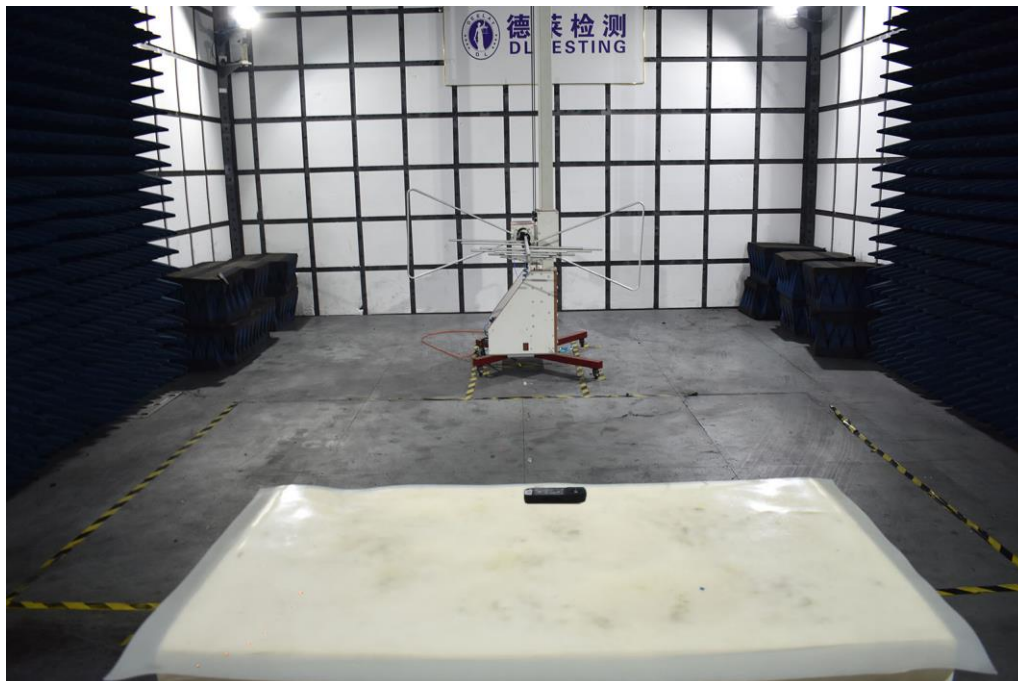



Conducted Measurement Photos









9. EUT PHOTO










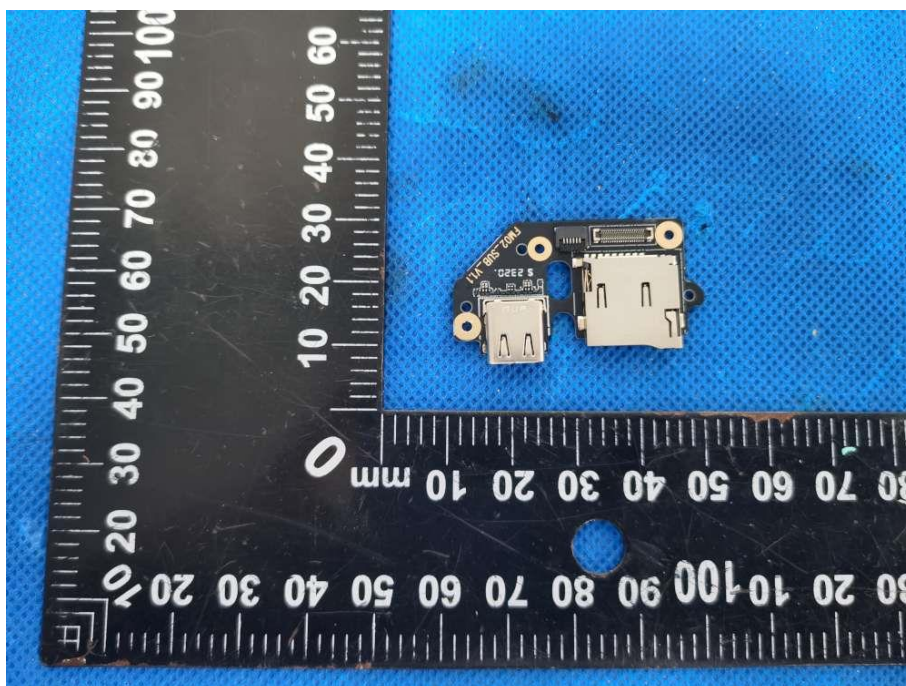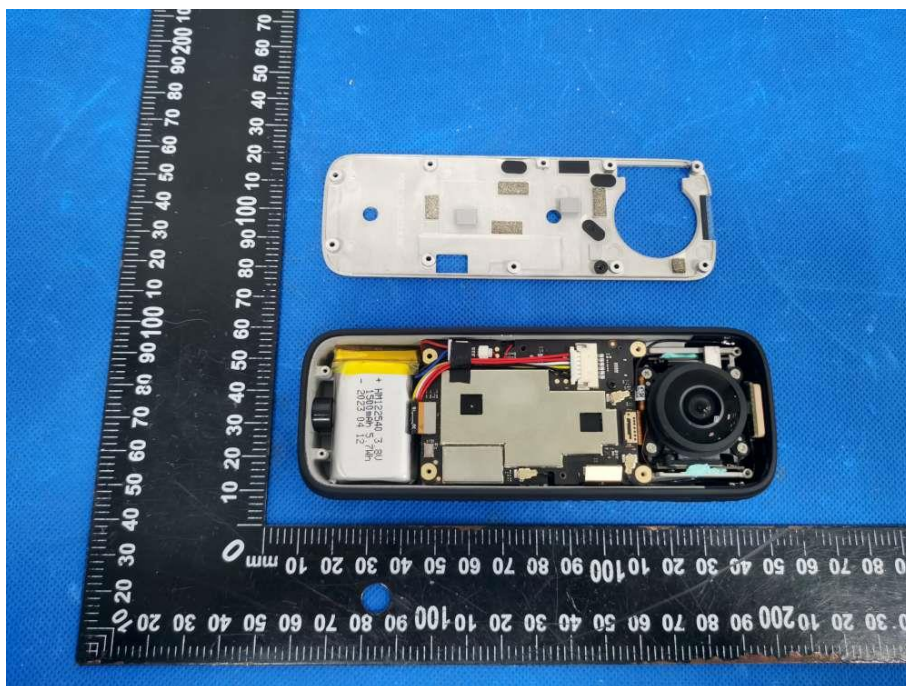

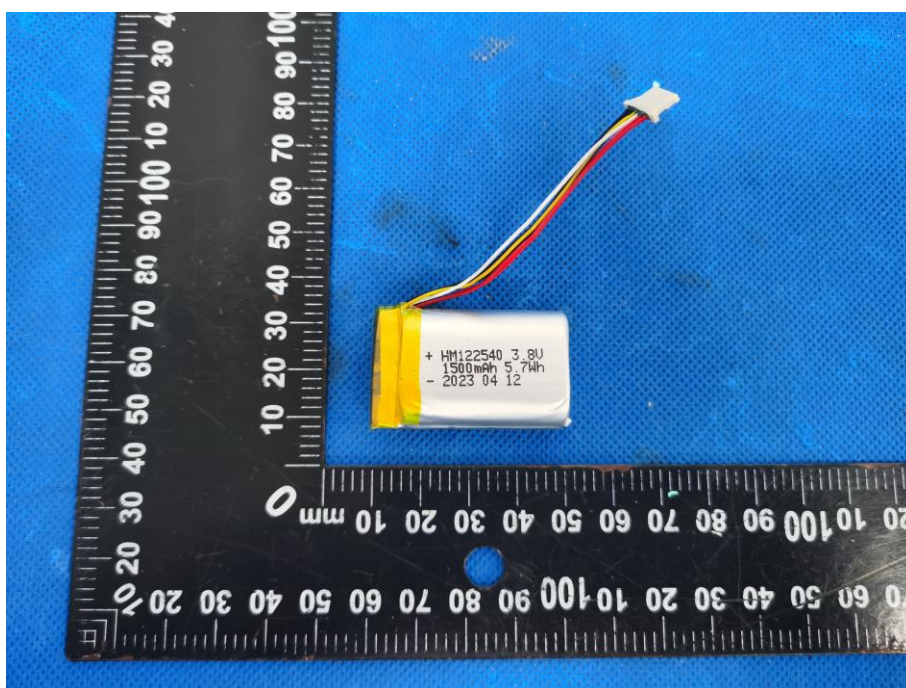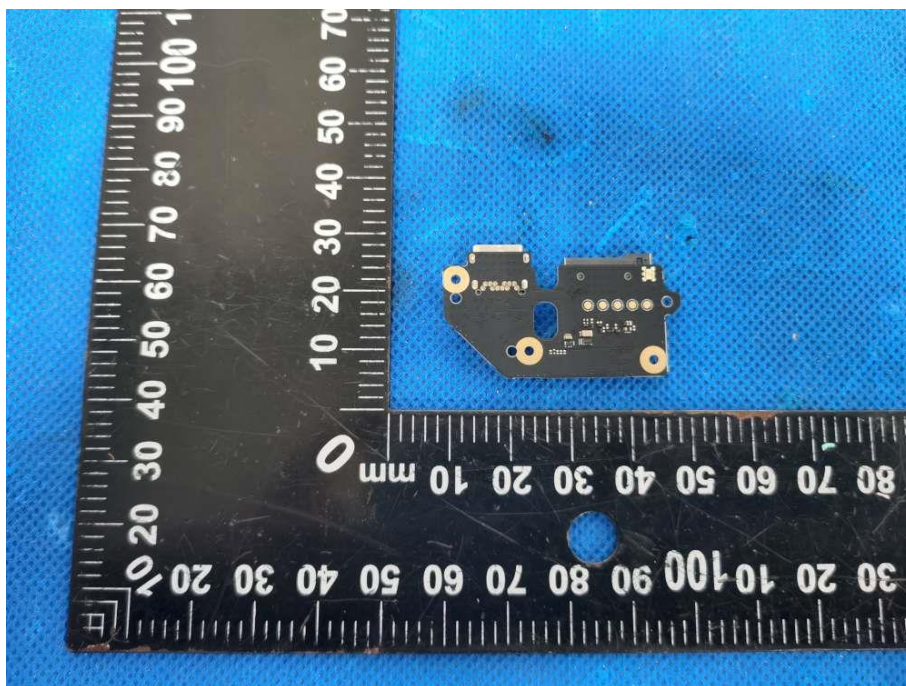

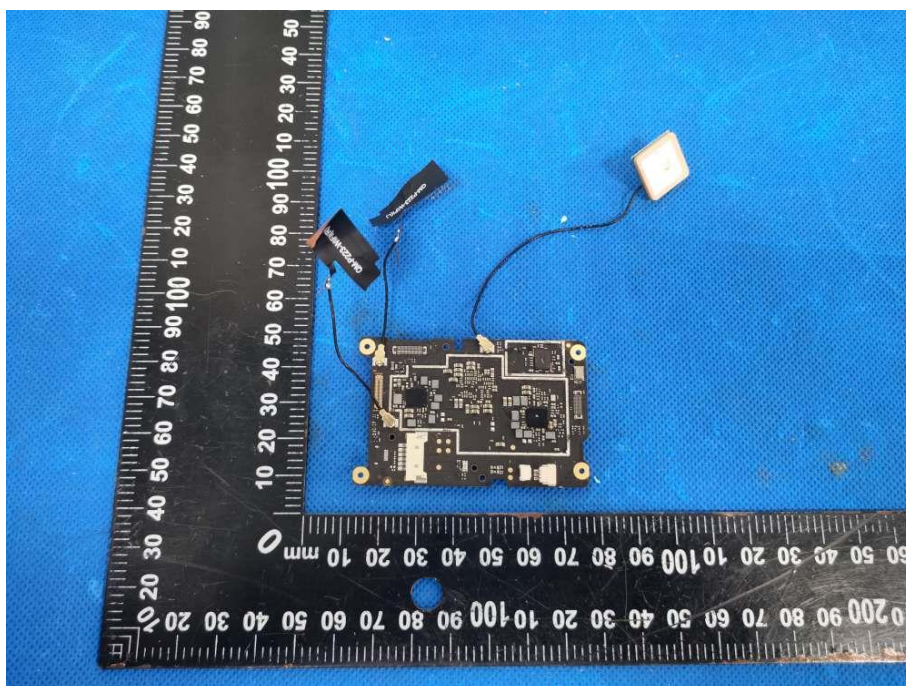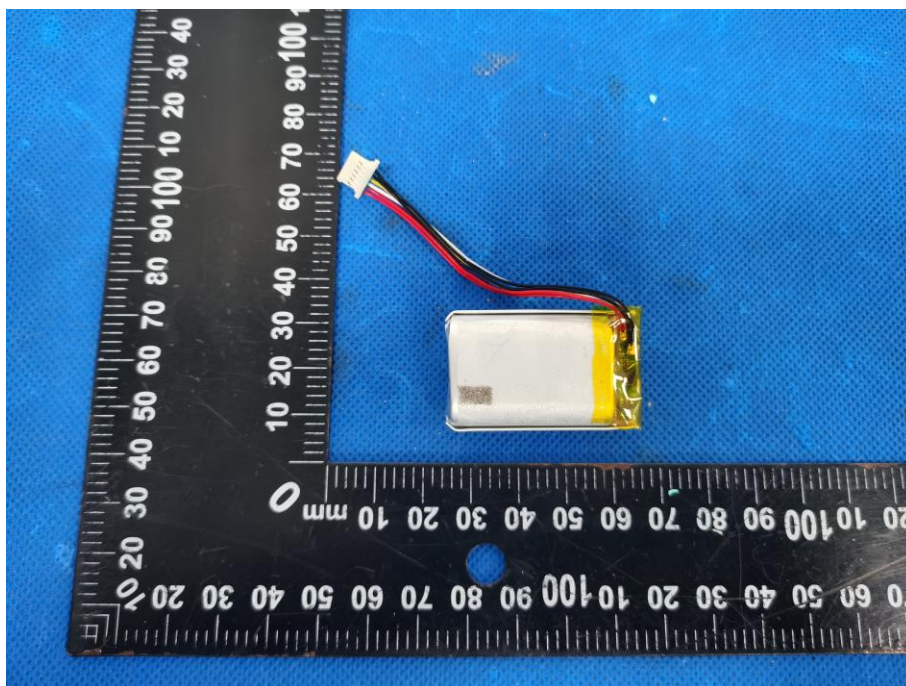

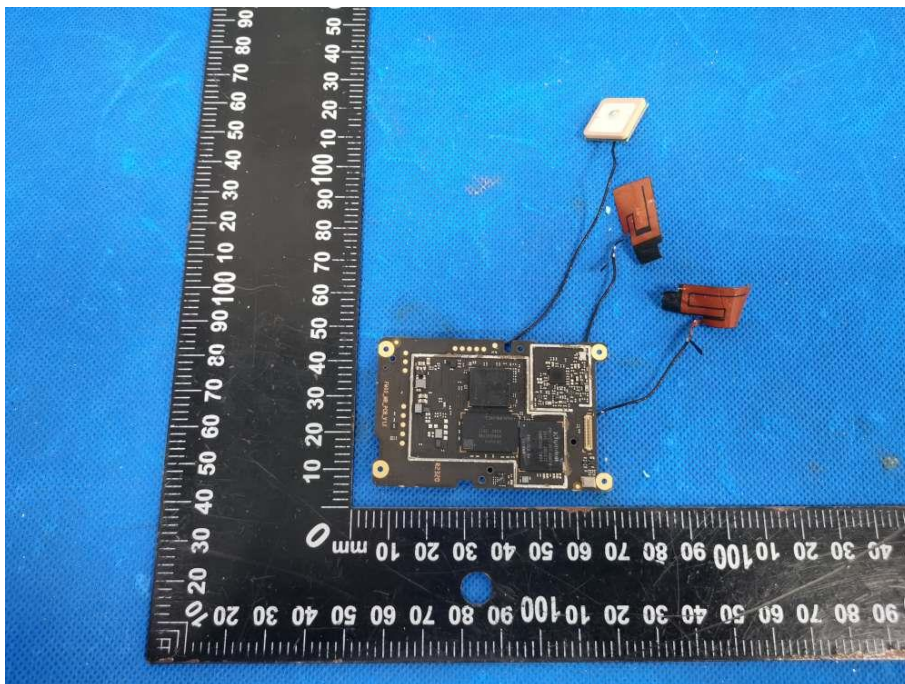

***** END OF REPORT *****