



Compliance Testing, LLC

Previously Flom Test Lab

EMI, EMC, RF Testing Experts Since 1963

toll-free: (866) 311-3268

fax: (480) 926-3598

<http://www.ComplianceTesting.com>

info@ComplianceTesting.com

SAR Test Report

Prepared for: Alinco Inc. Electronics Division

Model: DJ-NX40T

Description: UHF Digital Transceiver

Serial Number: T000401/T000402/T000403

FCC ID: PH3DJ-NX40T

Date of Issue: June 17, 2015

On the behalf of the applicant:

Alinco Inc. Electronics Division
Yodoyabashi-Dai Bldg 13F,
4-4-9, Kroaibahsi, Chou-Ku
Osaka, Japan 541-0043

Attention of:

Katsumi Nakata, Manager Customer Services
Ph: +81-6-7636-2360
E-Mail: nakata@alinco.co.jp

Prepared By
Compliance Testing, LLC
1724 S. Nevada Way
Mesa, AZ 85204
(480) 926-3100 phone / (480) 926-3598 fax
www.compliancetesting.com
Project No: p1550009

Mark Sechrist
Project Test Engineer

I attest to the accuracy and completeness of these measurements taken and the data presented, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment evaluated is capable of compliance for localized specific absorption rate (SAR) for controlled/occupational exposure limits specified in ANSI/IEEE Std. C95.1-1999.



Test Report Revision History

Revision	Date	Revised By	Reason for Revision
1.0	June 5, 2015	Mark Sechrist	Original document
2.0	June 16, 2015	Amanda Reed	Added list of attachments
3.0	June 17, 2015	Mark Sechrist	Filled in modulation type tested.



Table of Contents

Description	Page
Introduction	4
EUT Description.....	5
EUT Accessories	6
SAR Measurement Results	7
SAR Scaling Due to Drift	8
SAR Definition.....	9
SAR Measurement System	10
EAR Reference Point.....	12
Positioning for Cheek/Touch.....	13
Body Worn Configurations.....	14
Data Evaluation Procedures	15
System Performance Check	17
Simulated Equivalent Tissues.....	18
Tissue Verification.....	19
Robot System Specifications	24
Phantom(s):	25
SAR Measurement System	26
Test Equipment Utilized	29
Measurement Uncertainties.....	30
Uncertainty for System Performance Check	31
References.....	32

List of Attachments:

Annex	Description	Number of Pages
Annex A	SAR Plots	30
Annex B	Accessories	11
Annex C	Dosimetric E-Field Probe Calibration Certificate ES3DV3	11
Annex D	Data Acquisition Electronics DAE4 Calibration Certificate	7
Annex E	Dipole 450MHz Calibration Certificate	8
Annex F	Oval Flat Phantom ELI	2

Introduction

This measurement report demonstrates that model **DJ-NX40T**, FCC ID: **PH3DJ-NX40T**, as described within this report, complies with the Specific Absorption Rate (SAR) RF exposure requirements specified in ANSI/IEEE Std. C95.1-1999, FCC 47 CFR §2.1093 and RSS-102 for Occupational/Controlled Exposure.

The test results herein were based on a representative sample and therefore only apply to the sample tested. A description of the device under test, device operating configuration and test conditions, measurement and site description, methodology and procedures used in the evaluation, equipment used, detailed summary of the test results and the various provisions of the rules are included in this dosimetric assessment test report.

Test and Measurement Data

The wireless device referenced in this report was found to be compliant for localized SAR for controlled/occupational exposure limits as specified in ANSI/IEEE Std.C95.1-1999 and has been tested in accordance with measurement procedures specified in IEEE 1528-2013 and EN/IEC 62209:2010

References	Description
FCC KDB 447498 D01v05r02	General SAR Guidance
FCC KDB 643646 D01	SAR Test for PTT Radios v01r01
FCC KDB 865664 D01	SAR measurement 100 MHz to 6 GHz v01r03
FCC KDB 865664 D01	SAR Reporting v01r01



EUT Description

EUT:	DJ-NX40T	
Test Date/s:	May 28 th – 30 th	
RF Exposure Environment:	Occupational/Controlled Exposure	
RF Exposure Category:	Portable	
Power Supply:	Internal battery	
Antenna:	External Whip	
Production/prototype:	Production	
Modulations Tested:	CW	
Duty Cycle Tested:	100%	
TX Range:	450-512MHz	
Max SAR Reported:	Face Held	Body Worn
	4.16 mW/g	5.83 mW/g

EUT Accessories

ID Number	Part Number	Description	Evaluated for SAR
A1	EA-235	Whip antenna	X
M1	EMS-72	Speaker microphone	X
B1	EBP-89	Battery	X
C1	EBC-27	Belt Clip	X

SAR Measurement Results

SAR MEASUREMENT RESULTS FACE HELD Occupational/Controlled Exposure FCC/IC Spatial Peak SAR Limit 8.0W/kg										
Date	Ch	Freq (MHz)	Power (dBm)	EUT Distance	Battery Type	Accessory	Antenna	SAR 1g (mW/g) 100% Duty Cycle		Drift (dB)
								100%	50%	
5/28/15	Low	450.1	38.0	25mm	B1	None	A1	4.22	2.11	-0.658
05/30/15	Low mid	465.0	38.0	25mm	B1	None	A1	6.76	3.38	-0.362
05/28/15	Mid	480.1	38.0	25mm	B1	None	A1	7.13	3.57	-0.670
5/30/15	High mid	496.0	38.1	25mm	B1	None	A1	4.11	2.06	-0.364
5/29/15	High	511.9	38.1	25mm	B1	None	A1	1.84	0.92	-0.325

SAR MEASUREMENT RESULTS Body Worn Occupational/Controlled Exposure FCC/IC Spatial Peak SAR Limit 8.0W/kg										
Date	Ch	Freq (MHz)	Power (dBm)	EUT Distance	Battery Type	Accessory	Antenna	SAR 1g (mW/g) 100% Duty Cycle		Drift (dB)
								100%	50%	
5/29/15	Low	450.1	38.0	0mm	B1	C1, M1	A1	5.61	2.81	0.183
5/30/15	Low mid	465.0	38.0	0mm	B1	C1, M1	A1	9.85	4.93	-0.735
5/29/15	Mid	480.1	38.0	0mm	B1	C1, M1	A1	5.26	2.63	-0.100
5/30/15	High mid	496.0	38.1	0mm	B1	C1, M1	A1	5.40	2.70	-0.401
5/29/15	High	511.9	38.1	0mm	B1	C1, M1	A1	4.17	2.09	-0.330

For FCC Band:

Per KDB 447498 D01 v05r01 Page 7 section 6, the number of channels required to be tested is as follows.

$F_{high} = 512$ MHz

$F_c = 481$ MHz

$F_{Low} = 450$ MHz

$N_c = \text{Round} \{ [100(F_{high} - F_{Low}) / f_c]^{0.5} \times (f_c / 100)^{0.2} \} = \text{Round} \{ [100(512-450)/481]^{0.5} \times (481/100)^{0.2} \} = 5$

Therefore, for the frequency band from 450 MHz to 512, 5 channels are required for testing.

SAR Scaling Due to Drift

EUT Position	Highest SAR (mW/g)	Drift (dB)	Scaled SAR (mW/g)
Face Held	3.57	-0.670	4.16
Body Worn	4.93	-0.735	5.83

1. Scaling only required when fluid deviation is > +5%
2. Scaling required when drift measurement is negative

SAR Sensitivity calculations

$$S(x) = \frac{dSAR/SAR}{dx/x}$$

No Scaling necessary since all fluids were within 5% of target.

SAR Definition

Specific Absorption Rate (SAR) is defined as the time derivative (rate) of the incremental energy (dU) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dV) of a given density (ρ). It is also defined as the rate of RF energy absorption per unit mass at a point in an absorbing body (see Fig. 1.1).

$$SAR = \frac{d}{dt} \left(\frac{dU}{dm} \right) = \frac{d}{dt} \left(\frac{dU}{\rho dv} \right)$$

Figure 1.1

SAR Mathematical Equation

SAR is expressed in units of Watts per Kilogram (W/kg).

$$SAR = \sigma E^2 / \rho$$

where:

σ - conductivity of the tissue - simulant material (S/m)

ρ - mass density of the tissue - simulant material (kg/m³)


E - Total RMS electric field strength (V/m)


NOTE: The primary factors that control rate of energy absorption were found to be the wavelength of the incident field in relations to the dimensions and geometry of the irradiated organism, the orientation of the organism in relation to the polarity of field vectors, the presence of reflecting surfaces, and whether conductive contact is made by the organism with a ground plane.

SAR Measurement System

The SAR measurements used for this evaluation were performed using a DASY4 Dosimetric Assessment System (DASY™) manufactured by Schmid & Partner Engineering AG (SPEAG™) of Zurich, Switzerland. The DASY4 measurement system is comprised of the measurement server, robot controller, computer, near-field probe, probe alignment sensor, specific anthropomorphic mannequin (SAM) phantom, and various planar phantoms for brain and/or body SAR evaluations. The robot is a six-axis industrial robot performing precise movements to position the probe to the location (points) of maximum electromagnetic field (EMF). The Cell controller system contain the power supply, robot controller, teach pendant (Joystick), and remote control, is used to drive the robot motors. The Stäubli robot is connected to the cell controller to allow software manipulation of the robot. A data acquisition electronic (DAE) circuit performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the DASY4 measurement server. The DAE4 utilizes a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16-bit AD-converter and a command decoder and control logic unit.


Transmission to the DASY4 measurement server is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe-mounting device includes two different sensor systems for frontal and sidewise probe contacts. The sensor systems are also used for mechanical surface detection and probe collision detection. The robot uses its own controller with a built in VME-bus computer.

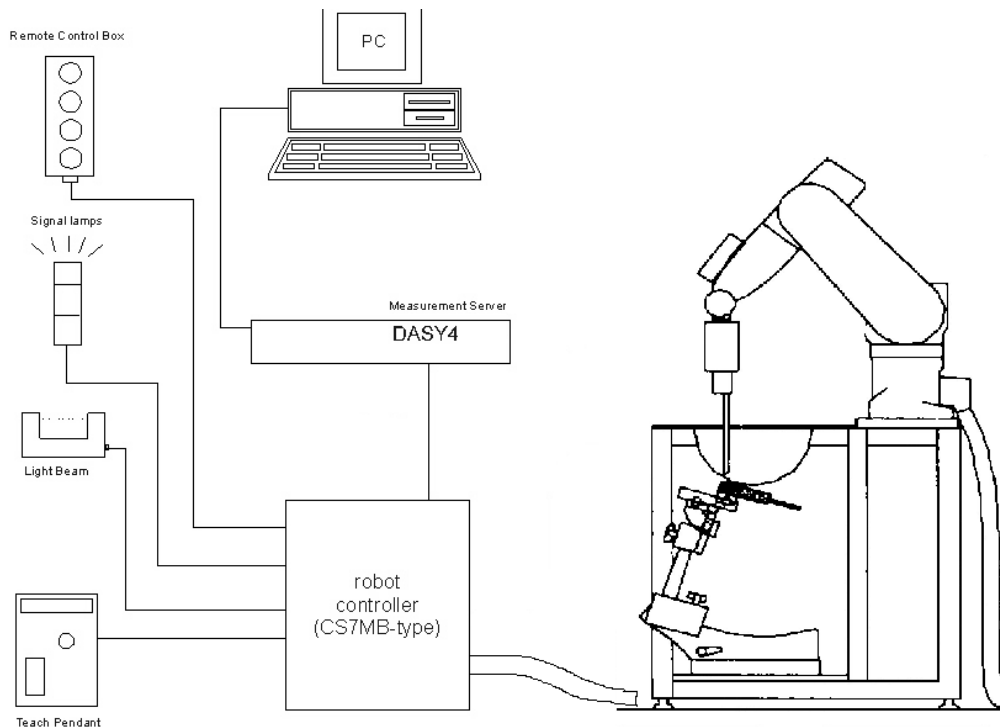

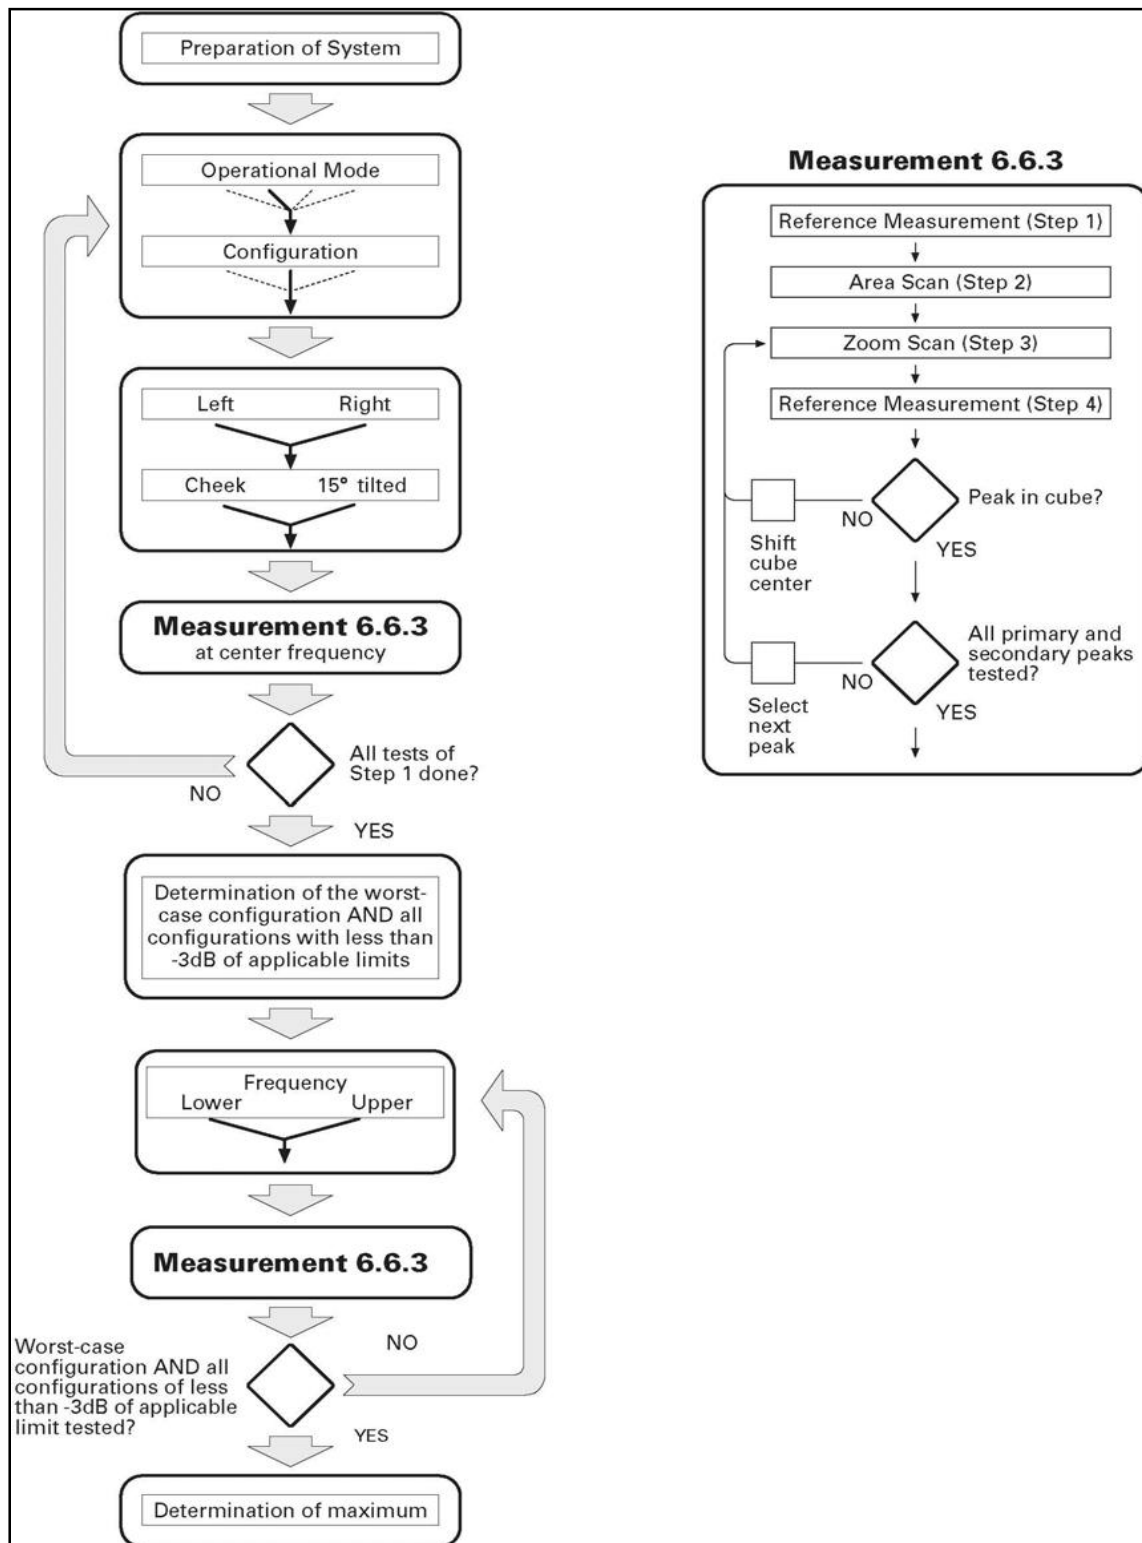


EAR Reference Point

Figure 12.1 shows the front, back and side views of the SAM Twin Phantom. The point M is the reference point for the center of the mouth, LE is the left ear reference point (ERP), and RE is the right ERP. The ERPs are 15mm posterior to the entrance to the ear canal (EEC) along the B-M line (Back-Mouth), as shown in Figure 12.2. The plane passing through the two ear canals and M is defined as the Reference Plane. The line N-F (Neck-Front) is perpendicular to the reference plane and passing through the RE (or LE) is called the Reference Pivoting. Line B-M is perpendicular to the N-F line. Both N-F and B-M lines are marked on the external phantom shell to facilitate handset positioning.

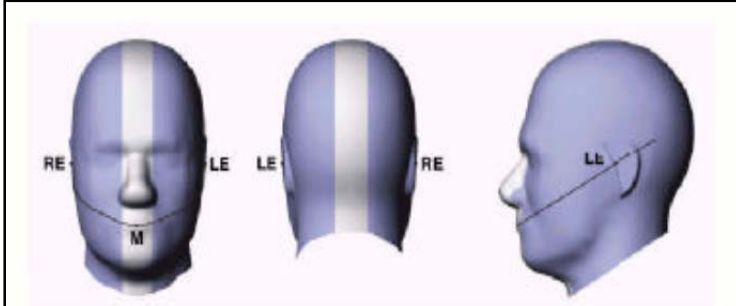


Front, back and side view of SAM Twin Phantom

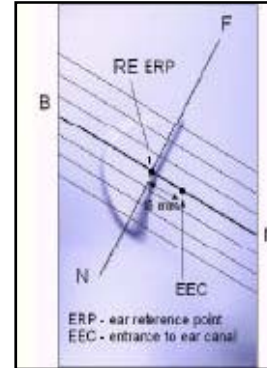

Side view of ERPs

Handset Reference Points


Two imaginary lines on the handset were established: the vertical centerline and the horizontal line. The test device was placed in a normal operating position with the test device reference point located along the vertical centerline on the front of the device aligned to the ear reference point. The test device reference point was then located at the same level as the center of the ear reference point. The test device was positioned so that the vertical centerline was bisecting the front surface of the handset at its top and bottom edges, positioning the ear reference point on the outer surface of the both the left and right head phantoms on the ear reference point.

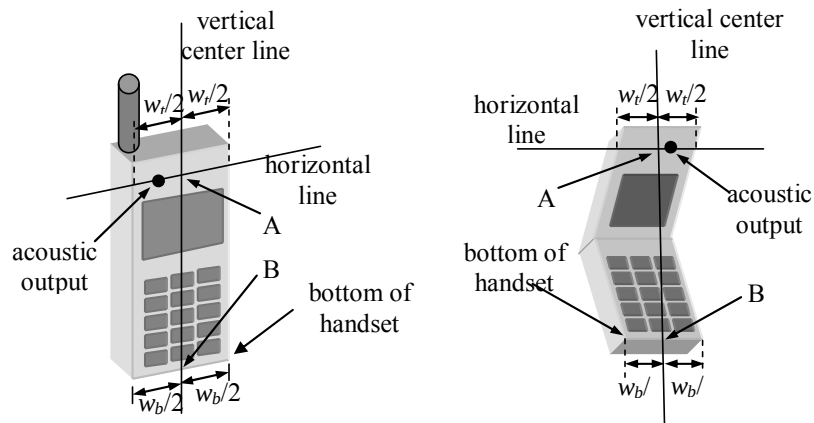


Handset Vertical Center & Horizontal Line Reference Points

Positioning for Cheek/Touch

1. The test device was positioned with the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom, such that the plane defined by the vertical center line and the horizontal line of the phone is approximately parallel to the sagittal plane of the phantom.
2. The handset was translated towards the phantom along the line passing through RE & LE until the handset touches the ear.
3. While maintaining the handset in this plane, the handset was rotated around the LE-RE line until the vertical centerline was in the plane normal to MB-NF including the line MB (reference plane).
4. The phone was then rotated around the vertical centerline until the phone (horizontal line) was symmetrical with respect to the line NF.
5. While maintaining the vertical centerline in the reference plane, keeping point A on the line passing through RE and LE, and maintaining the phone contact with the ear, the handset was rotated about the line NF until any point on the handset made contact with a phantom point below the ear (cheek).

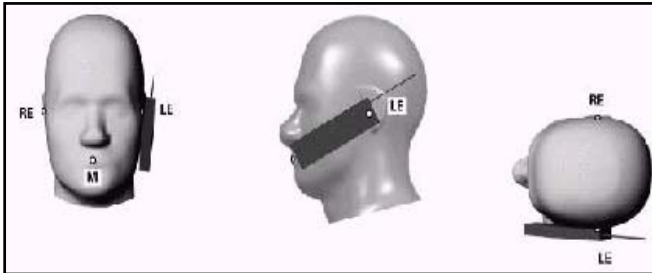

Front, Side and Top View of Cheek/Touch Position



Positioning for Cheek/Touch

1. With the test device aligned in the Cheek/Touch Position:
2. While maintaining the orientation of the phone, the phone was retracted parallel to the reference plane far enough to enable a rotation of the phone by 15 degree.
3. The phone was then rotated around the horizontal line by 15 degree.
4. While maintaining the orientation of the phone, the phone was moved parallel to the reference plane until any part of the phone touches the head. (In this position, point A was located on the line RE-LE). The tilted position is obtained when the contact is on the pinna. If the contact was at any location other than the pinna, the angle of the phone would then be reduced. The tilted position was obtained when any part of the phone was in contact of the ear as well as a second part of the phone was in contact with the head.




Front, Side and Top View of Ear/15 Tilt Position

Body Worn Configurations

The body-worn configurations shall be tested with the supplied accessories (belt-clips, holsters, etc.) attached to the device in normal use configuration.

For body-worn and other configurations a flat phantom shall be used which is comprised of material with electrical properties similar to the corresponding tissues.

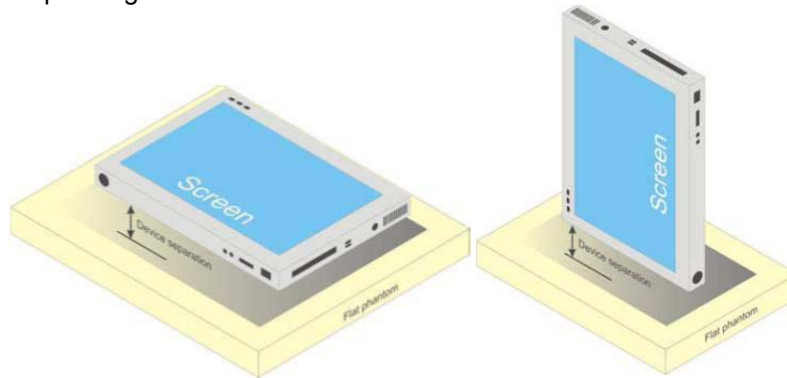

EVALUATION PROCEDURES

The evaluation was performed in the applicable area of the phantom depending on the type of device being tested.

- i. For devices held to the ear during normal operation, both the left and right ear positions were evaluated using the SAM phantom.
- ii. For body-worn and face-held devices a planar phantom was used.
- iii. The SAR was determined by a pre-defined procedure within the DASY4 software. Upon completion of a reference check, the exposed region of the phantom was scanned near the inner surface with a grid spacing of 15mm x 15mm.
- iv. An area scan was determined as follows:
 - a. Based on the defined area scan grid, a more detailed grid is created to increase the points by a factor of 10. The interpolation function then evaluates all field values between corresponding measurement points.
 - b. A linear search is applied to find all the candidate maxima. Subsequently, all maxima are removed that are >2 dB from the global maximum. The remaining maxima are then used to position the cube scans.
- v. A 1g and 10g spatial peak SAR was determined as follows:
 - a. For frequencies $\leq 4.5\text{GHz}$ a 32mm x 32mm x 34mm (7x7x7 data points) zoom scan was assessed at the position where the greatest V/m was detected. For frequencies $\geq 4.5\text{GHz}$ a 28mm x 28mm x 24mm (7x7x9 data points) zoom scan was assessed at the position where the greatest V/m was detected. The data at the surface was extrapolated since the distance from the probes sensors to the surface is 3.9cm. A least squares fourth-order polynomial was used to generate points between the probe detector and the inner surface of the phantom.
 - b. Interpolated data is used to calculate the average SAR over 1g and 10g cubes by spatially discretizing the entire measured cube. The volume used to determine the averaged SAR is a 1mm grid (42875 interpolated points).
- vi. Z-Scan was determined as follows:
 - a. The Z-scan measures points along a vertical straight line. The line runs along a line normal to the inner surface of the phantom surface.



Data Evaluation Procedures

The DASY4 post processing software (SEMCAD) automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe Parameters:	- Sensitivity	$Norm_i, a_{i0}, a_{i1}, a_{i2}$
	- Conversion Factor	$ConvF_i$
	- Dipole Compression Point	dcp_i
Device parameters:	- Frequency	f
	- Crest factor	cf
Media parameters:	- Conductivity	σ
	- Density	ρ

These parameters must be set correctly in the software. They can be found in the component documents or can be imported into the software from the configuration files issued for the DASY components. In the direct measuring mode of the multimeter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used. The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC - transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

with V_i = Compensated signal of channel i (i = x, y, z)
 U_i = Input signal of channel i (i = x, y, z)
 cf = Crest factor of exciting field (DASY parameter)
 dcp_i = Diode compression point (DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

$$\text{E - fieldprobes : } E_i = \sqrt{\frac{V_i}{Norm_i \cdot ConvF}}$$

$$\text{H - fieldprobes : } H_i = \sqrt{V_i} \cdot \frac{a_{i0} + a_{i1}f + a_{i2}f^2}{f}$$

with V_i = Compensated signal of channel i (i = x, y, z)
 $Norm_i$ = Sensor sensitivity of channel i (i = x, y, z)
 $\mu V/(V/m)^2$ for E-field probes
 $ConvF$ = Sensitivity enhancement in solution
 a_{ij} = Sensor sensitivity factors for H-field probes
 f = Carrier frequency (GHz)
 E_i = Electric field strength of channel i in V/m
 H_i = Magnetic field strength of channel i in A/m



The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$$SAR = E_{tot}^2 \cdot \frac{\sigma}{\rho \cdot 1'000}$$

With SAR = local specific absorption rate in mW/g

E_{tot} = total field strength in V/m

σ = conductivity in [mho/m] or [Siemens/m]

ρ = equivalent tissue density in g/cm³

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid.

The power flow density is calculated assuming the excitation field as a free space field.

$$P_{pwe} = \frac{E_{tot}^2}{3770} \quad \text{or} \quad P_{pwe} = H_{tot}^2 \cdot 37.7$$

With P_{pwe} = Equivalent power density of a plane wave in mW/cm²

E_{tot} = total electric field strength in V/m


H_{tot} = total magnetic field strength in A/m

System Performance Check

Prior to the SAR evaluation a system check was performed with a 450MHz dipole. The dielectric parameters of the simulated brain fluid were measured prior to the system performance check using an 85070B Dielectric Probe Kit and an 8753D Network Analyzer. A forward power of 250mW was applied to the dipole and the system was verified to a tolerance of $\pm 5\%$. All results were normalized to 1W.

Test Date	Fluid Type (MHz)	SAR 1g (W/kg)		Permittivity Constant ϵ_r		Conductivity σ (mho/m)		Ambient Temp. (C)	Fluid Temp (C)	Fluid Depth (cm)
		Calibrated Target $\pm 5\%$	Measured	IEEE Target $\pm 5\%$	Measured	IEEE Target $\pm 5\%$	Measured			
5/28/15	450 Head	4.49	4.32	43.5	46.0	0.87	0.83	23.0	22.0	≥ 15

Note: The ambient and fluid temperatures were measured prior to the fluid parameter check and the system performance check. The temperatures listed in the table above were consistent for all measurement periods.

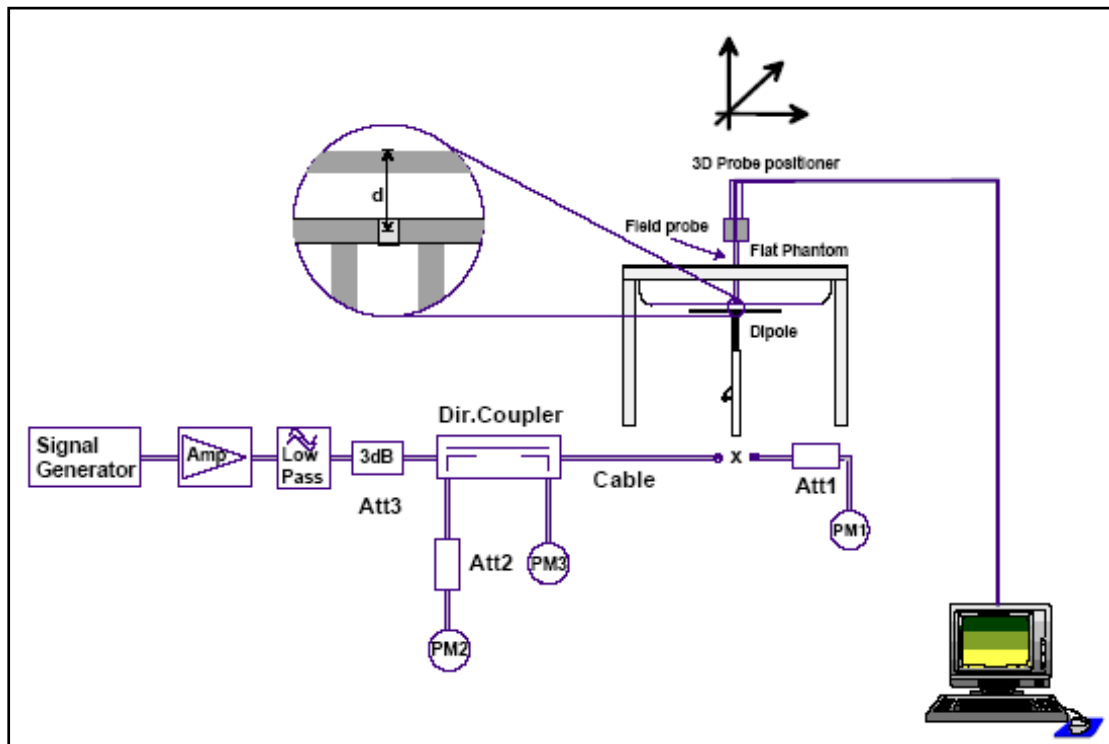



Simulated Equivalent Tissues

Simulated Tissue Mixture	
Ingredient	HSL450MHz
Water	38.56
Sugar	56.32
Salt	5.02
Bactericide	0.1

Simulated Tissue Mixture	
Ingredient	MSL450MHz
Water	52.0
Sugar	45.65
Salt	2.25
Bactericide	0.1



Tissue Verification

Mixture Type	HSL 450MHz		MSL 450MHz	
Date(s) Measured	05/28/2015		05/28/2015	
	Target	Measured	Target	Measured
Dielectric Constant ϵ_r	43.5	46.0	56.7	61.5
Conductivity σ (mho/m)	0.87	0.83	0.94	0.96

450MSL			
Pt#	Frequency (GHz)	Data real	Data imag
1	0.450000000	61.51	38.75
2	0.451000000	61.47	38.68
3	0.452000000	61.44	38.64
4	0.453000000	61.44	38.57
5	0.454000000	61.41	38.53
6	0.455000000	61.38	38.49
7	0.456000000	61.37	38.45
8	0.457000000	61.34	38.38
9	0.458000000	61.33	38.35
10	0.459000000	61.29	38.28
11	0.460000000	61.30	38.23
12	0.461000000	61.25	38.15
13	0.462000000	61.24	38.15
14	0.463000000	61.21	38.07
15	0.464000000	61.18	38.03
16	0.465000000	61.17	37.96
17	0.466000000	61.14	37.92
18	0.467000000	61.12	37.83
19	0.468000000	61.10	37.80
20	0.469000000	61.09	37.79
21	0.470000000	61.06	37.71
22	0.471000000	61.04	37.67
23	0.472000000	61.03	37.60
24	0.473000000	60.99	37.58
25	0.474000000	60.99	37.52
26	0.475000000	60.95	37.47
27	0.476000000	60.94	37.42
28	0.477000000	60.90	37.35
29	0.478000000	60.90	37.31
30	0.479000000	60.86	37.28
31	0.480000000	60.84	37.19



Tissue Verification 450MSL continued

32	0.481000000	60.82	37.15
33	0.482000000	60.82	37.09
34	0.483000000	60.77	37.03
35	0.484000000	60.80	36.99
36	0.485000000	60.74	36.97
37	0.486000000	60.73	36.92
38	0.487000000	60.71	36.84
39	0.488000000	60.70	36.78
40	0.489000000	60.69	36.73
41	0.490000000	60.68	36.70
42	0.491000000	60.65	36.66
43	0.492000000	60.65	36.65
44	0.493000000	60.60	36.59
45	0.494000000	60.60	36.56
46	0.495000000	60.56	36.52
47	0.496000000	60.55	36.44
48	0.497000000	60.55	36.40
49	0.498000000	60.53	36.34
50	0.499000000	60.51	36.28
51	0.500000000	60.51	36.26
52	0.501000000	60.47	36.24
53	0.502000000	60.45	36.19
54	0.503000000	60.44	36.15
55	0.504000000	60.45	36.08
56	0.505000000	60.40	36.04
57	0.506000000	60.41	36.01
58	0.507000000	60.38	35.96
59	0.508000000	60.37	35.92
60	0.509000000	60.37	35.88
61	0.510000000	60.36	35.83
62	0.511000000	60.34	35.81
63	0.512000000	60.33	35.76



Tissue Verification 450HSL

Pt#	Frequency [GHz]	Data real	Data imag
1	0.450000000	46.08	33.21
2	0.451000000	46.04	33.17
3	0.452000000	46.02	33.14
4	0.453000000	45.99	33.10
5	0.454000000	45.98	33.05
6	0.455000000	45.94	33.02
7	0.456000000	45.92	32.99
8	0.457000000	45.89	32.95
9	0.458000000	45.87	32.91
10	0.459000000	45.83	32.87
11	0.460000000	45.81	32.82
12	0.461000000	45.77	32.78
13	0.462000000	45.75	32.76
14	0.463000000	45.70	32.73
15	0.464000000	45.68	32.70
16	0.465000000	45.67	32.64
17	0.466000000	45.63	32.61
18	0.467000000	45.62	32.55
19	0.468000000	45.59	32.53
20	0.469000000	45.54	32.49
21	0.470000000	45.52	32.45
22	0.471000000	45.49	32.41
23	0.472000000	45.47	32.39
24	0.473000000	45.42	32.33
25	0.474000000	45.38	32.30
26	0.475000000	45.36	32.26
27	0.476000000	45.33	32.21
28	0.477000000	45.29	32.17
29	0.478000000	45.29	32.16
30	0.479000000	45.26	32.10
31	0.480000000	45.21	32.08



Tissue Verification 450HSL continued

32	0.481000000	45.18	32.02
33	0.482000000	45.16	31.97
34	0.483000000	45.13	31.93
35	0.484000000	45.14	31.90
36	0.485000000	45.08	31.88
37	0.486000000	45.04	31.84
38	0.487000000	45.02	31.80
39	0.488000000	45.02	31.73
40	0.489000000	45.00	31.69
41	0.490000000	44.98	31.68
42	0.491000000	44.92	31.65
43	0.492000000	44.89	31.63
44	0.493000000	44.86	31.58
45	0.494000000	44.83	31.54
46	0.495000000	44.79	31.50
47	0.496000000	44.78	31.48
48	0.497000000	44.75	31.43
49	0.498000000	44.75	31.40
50	0.499000000	44.72	31.35
51	0.500000000	44.70	31.31
52	0.501000000	44.68	31.33
53	0.502000000	44.64	31.30
54	0.503000000	44.61	31.24
55	0.504000000	44.59	31.22
56	0.505000000	44.58	31.18
57	0.506000000	44.57	31.16
58	0.507000000	44.54	31.11
59	0.508000000	44.51	31.09
60	0.509000000	44.49	31.07
61	0.510000000	44.46	31.02
62	0.511000000	44.43	31.00
63	0.512000000	44.43	30.97



EXPOSURE LIMITS	SAR (W/kg)	
	(General Population / Uncontrolled Exposure Environment)	(Occupational / Controlled Exposure Environment)
Spatial Average (averaged over the whole body)	0.08	0.4
Spatial Peak (averaged over any 1g of tissue)	1.60	8.0
Spatial Peak hands/wrists/feet/ankles (averaged over 10g)	4.0	20.0

Notes:

1. Uncontrolled exposure environments are locations where there is potential exposure of individuals who have no knowledge or control of their potential exposure.
2. Controlled exposure environments are locations where there is potential exposure of individuals who have knowledge of their potential exposure and can exercise control over their exposure.



Robot System Specifications

Positioner:

Robot: Stäubli Robot Model: RX60
Repeatability: 0.02 mm
No. of axis: 6

Data Acquisition Electronic (DAE) System:

DAE4

Computer Controller:

Processor: Intel core 3.2GHz
Operating System: Windows 7

Data Converter:

Features: Signal Amplifier, multiplexer, A/D converter, and control logic
Software: DASY4 software
Connecting Lines: Optical downlink for data and status info.
Optical uplink for commands and clock

Dasy4 Measurement Server:

Function: Real-time data evaluation for field measurements and surface detection
Hardware: PC/104 166MHz Pentium CPU; 32 MB chip disk; 64 MB RAM
Connections: COM1, COM2, DAE, Robot, Ethernet, Service Interface

E-Field Probe:

Model: ES3DV3
Construction: Triangular core mechanical detection system
Frequency: 10 MHz to 4 GHz
Linearity: ± 0.2 dB (30 MHz to 4 GHz)



Phantom(s):


Validation & Evaluation Phantom

Type: SAM V4.0C
Shell Material: Fiberglass
Thickness: 2.0 ± 0.1 mm
Volume: Approx. 20 liters

Validation & Evaluation Phantom

Type: Oval Flat Phantom ELI v6.0
Shell Material: Fiberglass
Thickness: 2.0 ± 0.2 mm
Volume: 30 liters

SAR Measurement System

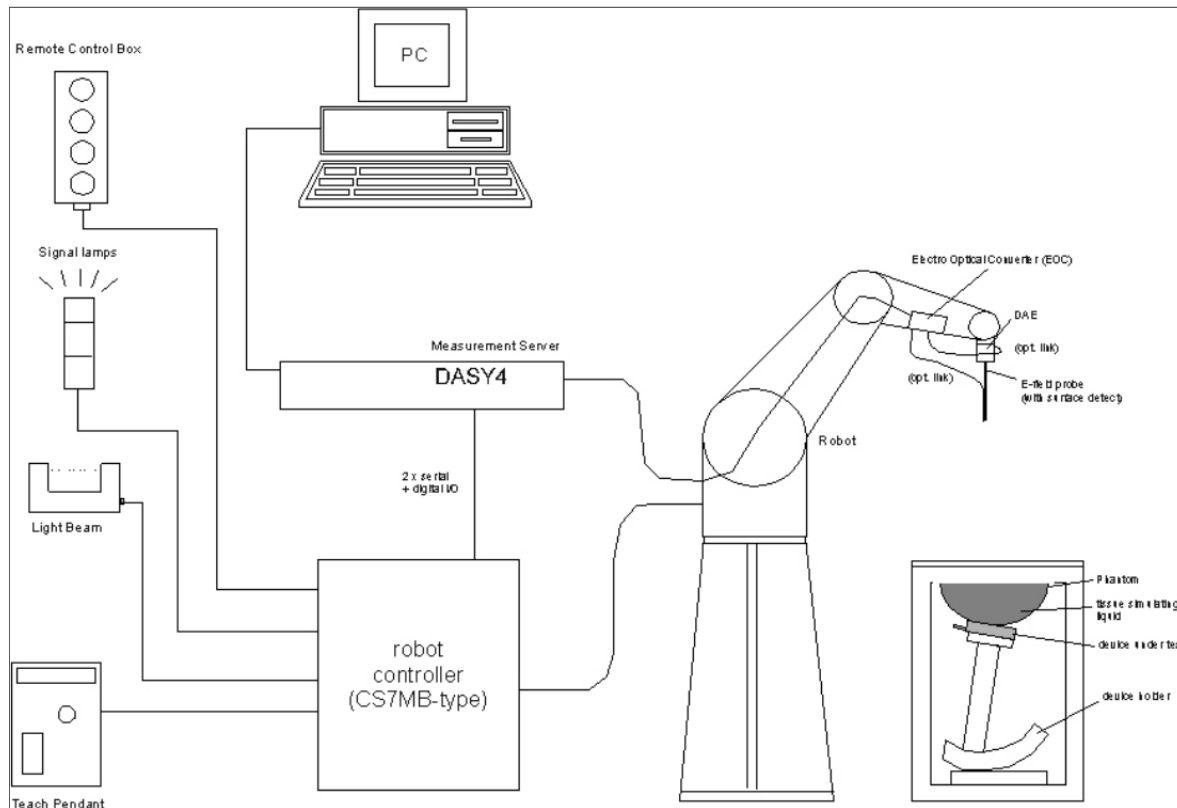

Measurement System Diagram

RX60 Robot

The Stäubli RX60L Robot is a standard high precision 6-axis robot with an arm extension for accommodating the data acquisition electronics (DAE).

Robot Controller

The CS7 Robot Controller system drives the robot motors. The system consists of a power supply, robot controller, and remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.

Light Beam Switch

The Light Beam Switch (Probe alignment tool) allows automatic “tooling” of the probe. During the process, the actual position of the probe tip with respect to the robot arm is measured as well as the probe length and the horizontal probe offset. The software then corrects all movements, so that the robot coordinates are valid for the probe tip. The repeatability of this process is better than 0.1 mm. If a position has been taught with an aligned probe, the same position will be reached with another aligned probe within 0.1 mm, even if the other probe has different dimensions. During probe rotations, the probe tip will keep its actual position.

Data Acquisition Electronics

The Data Acquisition Electronics consists of a highly sensitive electrometer grade preamplifier with auto-zeroing, a channel and gain switching multiplexer, a fast 16-bit A/D converter and a command decoder and control logic unit. Some of the task the DAE performs is signal amplification, signal multiplexing, A/D conversion, and offset measurements. The DAE also contains the mechanical probe-mounting device, which contains two different sensor systems for frontal and sideways probe contacts used for probe collision detection and mechanical surface detection for controlling the distance between the probe and the inner surface of the phantom shell. Transmission from the DAE to the measurement server, via the EOC, is through an optical downlink for data and status information as well as an optical uplink for commands and the clock.

Electro-Optical Converter (EOC)

The Electro-Optical Converter performs the conversion between the optical and electrical of the signals for the digital communication to the DAE and for the analog signal from the optical surface detection. The EOC connects to, and transfers data to, the DASY4 measurement server. The EOC also contains the fiber optical surface detection system for controlling the distance between the probe and the inner surface of the phantom shell.

Measurement Server

The Measurement Server performs time critical tasks such as signal filtering, all real-time data evaluation for field measurements and surface detection, controls robot movements, and handles safety operation. The PC-operating system cannot interfere with these time critical processes. A watchdog supervises all connections, and disconnection of any of the cables to the measurement server will automatically disarm the robot and disable all program-controlled robot movements.

Dosimetric Probe

Dosimetric Probe is a symmetrical design with triangular core that incorporates three 3 mm long dipoles arranged so that the overall response is close to isotropic. The probe sensors are covered by an outer protective shell, which is resistant to organic solvents i.e. glycol. The probe is equipped with an optical multi-fiber line, ending at the front of the probe tip, for optical surface detection. This line connects to the EOC box on the robot arm and provides automatic detection of the phantom surface. The optical surface detection works in transparent liquids and on diffuse reflecting surfaces with a repeatability of better than ± 0.1 mm.

SAM Phantom

The SAM (Specific Anthropomorphic Mannequin) twin phantom is a fiberglass shell phantom with 2mm shell thickness (except the ear region where shell thickness increases to 6mm) integrated into a wooden table. The shape of the shell corresponds to the phantom defined by SCC34-SC2. It enables the dosimetric evaluation of left hand, right hand phone usage as well as body mounted usage at the flat phantom region. The flat section is also used for system validation and the length and width of the flat section are at least $0.75 \lambda_0$ and $0.6 \lambda_0$ respectively at frequencies of 824 MHz and above (λ_0 = wavelength in air).

Reference markings on the phantom top allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points in the robot. A white cover is provided to cover the phantom during off-periods preventing water evaporation and changes in the liquid parameters. Free space scans of devices on the cover are possible. The phantom is filled with a tissue simulating liquid to a depth of at least 15 cm at each ear reference point. The bottom plate of the wooden table contains three pair of bolts for locking the device holder.

ELI Phantom

The planar phantom is constructed of Plexiglas material with a 2.0 mm shell thickness for face-held and body-worn SAR evaluations of handheld radio transceivers. The planar phantom is mounted on the wooden table of the DASY4 system.

Device Holder

The device holder is designed to cope with the different measurement positions in the three sections of the SAM phantom given in the standard. It has two scales, one for device rotation (with respect to the body axis) and one for device inclination (with respect to the line between the ear openings). The rotation center for both scales is the ear opening, thus the device needs no repositioning when changing the angles. The plane between the ear openings and the mouth tip has a rotation angle of 65°.

The DASY device holder has been made out of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon = 3$ and loss tangent $\delta = 0.02$. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.

The dielectric properties of the liquid conform to all the tabulated values [2-5]. Liquids are prepared according to Annex A and dielectric properties are measured according to Annex B.

System Validation Kits

Power Capability: Dipoles > 100 W ($f < 1\text{GHz}$); > 40 W ($f > 1\text{GHz}$)
 Confined Loop Antenna (CLA-150) > 10W

Dipoles:

Symmetrical dipole with 1/4 balun enables measurement of feed point impedance with NWA Matched for use near flat phantoms filled with brain simulating solutions Includes distance holder and tripod adaptor.

CLA-150:

The source is a resonant loop antenna which is integrated in a metallic structure to isolate the resonant structure from the environment.

Frequency: 150, 300, 450, 835, 1900, 2450 MHz,

Return Loss: Dipoles >20 dB at specified validation position
 CLA >10dB

Dimensions:

150 MHz Confined Loop Antenna (CLA-150), 222 x 95 mm
 450 MHz Dipole: Length: 272.0 mm; Overall Height: 330 mm; Diameter: 6 mm
 835 MHz Dipole: Length: 161.0 mm; Overall Height: 340 mm; Diameter: 3.6 mm
 1900 MHz Dipole: Length: 67.7 mm; Overall Height: 300 mm; Diameter: 3.6 mm
 2450 MHz Dipole: Length: 52.0 mm; Overall Height: 390 mm; Diameter: 3.6 mm

Test Equipment Utilized

Test Equipment	Serial Number	Calibration Date
DASY4 System Robot RX60	FO3/5X20A1/C/01	N/A
DAE	602	May 22, 2015
ES3DV3	3035	May 18, 2015
D450V3 Dipole	1090	May 13, 2015
Oval Flat Phantom ELI v6.0	N/A	N/A
HP 8485A Power Sensor	2703A05954	22 April 2015
Spectrum analyzer E8563E	3213A00104	24 March 2015
Signal Generator E4438C	US41460462	26 Sept 2014
HP 8753D Network Analyzer	3410A08514	20 Sept 2014
HP E4418B Power Meter	GB39512470	15 March 2015
Power amp ZHL-42W-5MA	D020501-21	N/A
Power Supply YIHUA PS-3010D	D12130834	N/A
Meca Coupler CS06-1.500v	N/A	N/A
85070B Dielectric Probe Kit	US33020392	N/A

Measurement Uncertainties

UNCERTAINTY ASSESSMENT 300MHz-3GHz

Error Description	Tol. ±%	Prob. Dist.	Div.	C_i 1g	C_i 10g	Std Unc ±% (1g)	Std Unc ±% (10g)	v_i or v_{eff}
Measurement System								
Probe calibration	4.8	N	1	1	1	4.8	4.8	N/A
Axial isotropy of the probe	4.7	R	$\sqrt{3}$	0.7	0.7	1.9	1.9	N/A
Spherical isotropy of the probe	9.6	R	$\sqrt{3}$	0.7	0.7	3.9	3.9	N/A
Boundary effects	1.0	R	$\sqrt{3}$	1	1	4.8	4.8	N/A
Probe linearity	4.7	R	$\sqrt{3}$	1	1	2.7	2.7	N/A
Detection limit	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	N/A
Readout electronics	1.0	N	1	1	1	1.0	1.0	N/A
Response time	0.8	R	$\sqrt{3}$	1	1	0.5	0.5	N/A
Integration time	2.6	R	$\sqrt{3}$	1	1	0.8	0.8	N/A
RF ambient conditions	3.0	R	$\sqrt{3}$	1	1	0.43	0.43	N/A
Mech. constraints of robot	0.4	R	$\sqrt{3}$	1	1	0.2	0.2	N/A
Probe positioning	2.9	R	$\sqrt{3}$	1	1	1.7	1.7	N/A
Extrapolation & integration	1.0	R	$\sqrt{3}$	1	1	2.3	2.3	N/A
Test Sample Related								
Device positioning	2.9	N	1	1	1	2.23	2.23	145
Device holder uncertainty	3.6	N	1	1	1	5.0	5.0	5
Power drift	5.0	R	$\sqrt{3}$			2.9	2.9	N/A
Phantom and Setup								
Phantom uncertainty	4.0	R	$\sqrt{3}$	1	1	2.3	2.3	N/A
Liquid conductivity (target)	5.0	R	$\sqrt{3}$	0.64	0.43	1.8	1.2	N/A
Liquid conductivity (measured)	2.5	N	1	0.64	0.43	1.6	1.1	N/A
Liquid permittivity (target)	5.0	R	$\sqrt{3}$	0.6	0.5	1.7	1.4	N/A
Liquid permittivity (measured)	2.5	N	1	0.6	0.5	1.5	1.2	N/A
Combined Standard Uncertainty (k=1)	RSS				10.3	10.0		
Expanded Uncertainty (k=2) 95% Confidence Level	20.6	20.1						

Table 1: Worst-case uncertainty for DASY4 assessed according to IEEE P1528.

The budget is valid for the frequency range 300MHz to 3GHz and represents a worst-case analysis.

Uncertainty for System Performance Check

Error Description	Tol. ±%	Prob. Dist.	Div.	c_i 1g	c_i 10g	Std Unc ±% (1g)	Std Unc ±% (10g)	v_i or v_{eff}
Measurement System								
Probe calibration	5.9	N	1	1	1	5.9	5.9	∞
Axial Isotropy	4.7	R	$\sqrt{3}$	1	1	2.7	2.7	∞
Hemispherical Isotropy	9.6	R	$\sqrt{3}$	0	0	0	0	∞
Boundary effects	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞
Linearity	4.7	R	$\sqrt{3}$	1	1	2.7	2.7	∞
System Detection limit	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞
Readout electronics	0.3	N	1	1	1	0.3	0.3	∞
Response time	0	R	$\sqrt{3}$	1	1	0	0	∞
Integration time	0	R	$\sqrt{3}$	1	1	0	0	∞
RF Ambient Noise	3.0	R	$\sqrt{3}$	1	1	1.7	1.7	∞
RF Ambient Reflections	3.0	R	$\sqrt{3}$	1	1	1.7	1.7	∞
Probe Positioner	0.4	R	$\sqrt{3}$	1	1	0.2	0.2	∞
Probe positioning	2.9	R	$\sqrt{3}$	1	1	1.7	1.7	∞
Algorithms for Max. SAR Eval.	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞
Dipole								
Dipole Axis to Liquid Distance	2.0	R	$\sqrt{3}$	1	1	1.2	1.2	∞
Input power and SAR drift meas.	4.7	R	$\sqrt{3}$	1	1	2.7	2.7	∞
Phantom and Tissue Parameters								
Phantom uncertainty	4.0	R	$\sqrt{3}$	1	1	2.3	2.3	∞
Liquid conductivity (target)	5.0	R	$\sqrt{3}$	0.64	0.43	1.8	1.2	∞
Liquid conductivity (measured)	2.5	N	1	0.64	0.43	1.6	1.1	∞
Liquid permittivity (target)	5.0	R	$\sqrt{3}$	0.6	0.5	1.7	1.4	∞
Liquid permittivity (measured)	2.5	N	1	0.6	0.5	1.5	1.2	∞
Combined Standard Uncertainty						9.2	8.9	
Coverage Factor for 95%		kp=2						
Expanded Uncertainty						18.4	17.8	

Table 2: Uncertainty of a system performance check with DASY4 system
 The budget is valid for the frequency range 300MHz to 3GHz and represents a worst-case analysis.

References

1. Federal Communications Commission, ET Docket 93-62, Guidelines for Evaluating the Environmental Effects of Radiofrequency Radiation, Aug. 1996.
2. ANSI/IEEE C95.1 - 1992, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 300 kHz to 100GHz, New York: IEEE, Aug. 1992.
3. ANSI/IEEE C95.3 - 1992, IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave, New York: IEEE, 1992.
4. IEEE Standards Coordinating Committee 34, IEEE 1528 (August 2003), Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices.
5. NCRP, National Council on Radiation Protection and Measurements, Biological Effects and Exposure Criteria for Radio Frequency Electromagnetic Fields, NCRP Report No. 86, 1986. Reprinted Feb.1995.
6. Federal Communications Commission, Radiofrequency radiation exposure evaluation: portable devices, Rule Part 47 CFR 2.1093: 1999.
7. Health Canada, Limits of Human Exposure to Radiofrequency Electromagnetic Fields in the Frequency Range from 3 kHz to 300 GHz Safety Code 6.
8. Industry Canada, Evaluation Procedure for Mobile and Portable Radio Transmitters with respect to Health Canada's Safety Code 6 for Exposure of Humans to Radio Frequency Fields, Radio Standards Specification RSS-102 Issue 1 (Provisional): September 1999.

END OF TEST REPORT