



**FCC PART 15
TEST REPORT
No.I21Z70567-IOT02**
for

SAMSUNG Electronics Co., Ltd.

Multi-band GSM/WCDMA/LTE/5GNR Phone with Bluetooth,WLAN

SM-A226B/DSN

With

FCC ID: ZCASMA226BN1

Hardware Version: REV1.1

Software Version: A226B.001

Issued Date: 2021-12-09

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S.Government.

Test Laboratory:

CTTL-Telecommunication Technology Labs, CAICT

No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512, Fax:+86(0)10-62304633-2504

Email: cttl_terminals@caict.ac.cn, website: www.caict.ac.cn

REPORT HISTORY

Report Number	Revision	Description	Issue Date
I21Z70567-IOT02	Rev.0	1st edition	2021-12-09

CONTENTS

CONTENTS	3
1. TEST LATORATORY.....	5
1.1. INTRODUCTION & ACCREDITATION	5
1.2. TESTING LOCATION	5
1.3. TESTING ENVIRONMENT.....	5
1.4. PROJECT DATE	5
1.5. SIGNATURE	6
2. CLIENT INFORMATION.....	7
2.1 APPLICANT INFORMATION	7
2.2 MANUFACTURER INFORMATION	7
3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARYEQUIPMENT(AE)	8
3.1. ABOUT EUT	8
3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST	8
3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST	8
3.4. GENERAL DESCRIPTION.....	10
3.5. INTERPRETATION OF THE TEST ENVIRONMENT.....	10
4. REFERENCE DOCUMENTS	10
4.1. DOCUMENTS SUPPLIED BY APPLICANT	10
4.2. REFERENCE DOCUMENTS FOR TESTING.....	10
5. LABORATORY ENVIRONMENT.....	11
6. SUMMARY OF TEST RESULTS	11
6.1. SUMMARY OF TEST RESULTS.....	11
6.2. STATEMENTS.....	11
6.3. EXPLANATION OF RE-USE OF TEST DATA	11
7. TEST EQUIPMENTS UTILIZED	12
8. MEASUREMENT UNCERTAINTY	13
8.1 TRANSMITTER OUTPUT POWER	13
8.2 PEAK POWER SPECTRAL DENSITY	13
8.3 OCCUPIED CHANNEL BANDWIDTH	13
8.4 BAND EDGES COMPLIANCE	13
8.5 SPURIOUS EMISSIONS	13
ANNEX A: EUT PARAMETERS.....	13
ANNEX B: MEASUREMENT RESULTS.....	14
B.1. MEASUREMENT METHOD	14
B.2. MAXIMUM OUTPUT POWER.....	15



No.I21Z70567-IOT02

B.3. PEAK POWER SPECTRAL DENSITY (CONDUCTED)	18
B.4. OCCUPIED 26DB BANDWIDTH(CONDUCTED).....	19
B.5. BAND EDGES COMPLIANCE	35
B.5.1 BAND EDGES - RADIATED	35
B.6. TRANSMITTER SPURIOUS EMISSION.....	49
B.7. AC POWERLINE CONDUCTED EMISSION (150kHz- 30MHz).....	88
B.8. 99% OCCUPIED BANDWIDTH	91
B.9. POWER CONTROL	96
ANNEX C: ACCREDITATION CERTIFICATE	97

1. TEST LATORATORY

1.1. Introduction & Accreditation

Telecommunication Technology Labs, CAICT is an ISO/IEC 17025:2017 accredited test laboratory under NATIONAL VOLUNTARY LABORATORY ACCREDITATION PROGRAM (NVLAP) with lab code 600118-0, and is also an FCC accredited test laboratory (CN5017), and ISSED accredited test laboratory (ISED#: 24849). The detail accreditation scope can be found on NVLAP website

1.2. Testing Location

Conducted testing Location: CTTL(huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing,
P. R. China100191

Radiated testing Location: CTTL(BDA)

Address: No.18A, Kangding Street, Beijing Economic-Technology
Development Area, Beijing, P. R. China 100176

Radiated testing Location: CTTL(huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing,
P. R. China100191

1.3. Testing Environment

Normal Temperature: 15-35℃

Relative Humidity: 20-75%

1.4. Project date


Testing Start Date: 2021-02-09

Testing End Date: 2021-12-09

1.5. Signature

谢秀珍

Xie Xiuzhen
(Prepared this test report)



Zheng Wei
(Reviewed this test report)

胡晓宇

Hu Xiaoyu
(Approved this test report)

2. CLIENT INFORMATION

2.1 Applicant Information

Company Name: SAMSUNG Electronics Co., Ltd.
Address: Samsung R5, Maetan dong 129, Samsung ro
Youngtong gu, Suwon city 443 742, Korea
Contact: Kobe Cho
Email: ggobi.cho@samsung.com
Telephone: +82 - 10 - 2722 - 4159
Fax: /

2.2 Manufacturer Information

Company Name: SAMSUNG Electronics Co., Ltd.
Address: Samsung R5, Maetan dong 129, Samsung ro
Youngtong gu, Suwon city 443 742, Korea
Contact: Kobe Cho
Email: ggobi.cho@samsung.com
Telephone: +82 - 10 - 2722 – 4159
Fax: /

3. EQUIPMENT UNDER TEST (EUT) AND

ANCILLARY EQUIPMENT (AE)

3.1. About EUT

Description	Multi-band GSM/WCDMA/LTE/5G NR Bluetooth, WLAN	Phone	with
Model name	SM-A226B/DSN		
FCC ID	ZCASHA226BN1		
WLAN Frequency Band	ISM Bands: -5150MHz~5250MHz -5250MHz~5350MHz -5470MHz~5725MHz		
Type of modulation	OFDM		
Antenna	Integral Antenna		
Antenna gain	-2.466dBi		
Voltage	3.85V		

3.2. Internal Identification of EUT used during the test

EUT ID*	SN or IMEI	HW Version	SW Version
UT26a	/	REV1.1	A226B.001
UT33a	/	REV1.1	A226B.001
UT16a	/	REV1.1	A226B.001

*EUT ID: is used to identify the test sample in the lab internally.

3.3. Internal Identification of AE used during the test

AE ID*	Description
AE1	Charger1
AE2	Charger2
AE3	Charger3
AE4	USB cable1
AE5	USB cable1
AE6	USB cable1
AE7	USB cable1
AE8	battery

AE1

Model	EP-TA200
Manufacturer	RFTECH
Length of cable	/

AE2

Model	EP-TA200
Manufacturer	Dongwon
Length of cable	/

AE3

Model	EP-TA200
Manufacturer	SOLUM
Length of cable	/

AE4

Model	EP-DR140AWE
Manufacturer	RFTECH Co., Ltd.
Length of cable	/

AE5

Model	EP-DR140AWE
Manufacturer	Ningbo Broad Telecommunication Co., Ltd
Length of cable	/

AE6

Model	EP-DR140AWE
Manufacturer	DONGGUAN KSD CO.,LTD
Length of cable	/

AE7

Model	EP-DR140AWE
Manufacturer	CRESYN HANOI Co.,Ltd
Length of cable	/

AE8

Model	SCUD-WT-W1
Manufacturer	SCUD(Fujian)Electronic Co.,Ltd.
Capacitance	4900mAh
Nominal voltage	3.85V

*AE ID: is used to identify the test sample in the lab internally.

3.4. General Description

The Equipment under Test (EUT) is a model of Multi-band GSM/WCDMA/LTE/5G NR Phone with Bluetooth, WLAN with integrated antenna and inbuilt battery.

It has Bluetooth (EDR) function.

It consists of normal options: travel charger, USB cable.

Manual and specifications of the EUT were provided to fulfil the test.

Samples undergoing test were selected by the client.

3.5. Interpretation of the Test Environment

For the test methods, the test environment uncertainty figures correspond to an expansion factor $k=2$.

Measurement Uncertainty

Parameter	Uncertainty
temperature	0.48°C
humidity	2 %
DC voltages	0.003V

4. REFERENCE DOCUMENTS

4.1. Documents supplied by applicant

EUT feature information is supplied by the applicant or manufacturer, which is the basis of testing.

4.2. Reference Documents for testing

The following documents listed in this section are referred for testing.

FCC Part15	Title 47 of the Code of Federal Regulations; Chapter I Part 15 - Radio frequency devices	2018
ANSI C63.10	Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	2013
UNII: KDB 789033 D02	General U-NII Test Procedures New Rules v02r01	2017-12
KDB 558074 D01	Federal Communications Commission Office of Engineering and Technology Laboratory Division GUIDANCE FOR COMPLIANCE MEASUREMENTS ON DIGITAL TRANSMISSION SYSTEM, FREQUENCY HOPPING SPREAD SPECTRUM SYSTEM, AND HYBRID SYSTEM DEVICES OPERATING UNDER SECTION 15.247 OF THE FCC RULES	2019

5. LABORATORY ENVIRONMENT

Conducted RF performance testing is performed in shielding room.

EMC performance testing is performed in Semi-anechoic chamber.

6. SUMMARY OF TEST RESULTS

6.1. Summary of Test Results

SUMMARY OF MEASUREMENT RESULTS	Sub-clause of Part15E	Sub-clause of IC	Verdict
Maximum Output Power	15.407	/	BR
Peak Power Spectral Density	15.407	/	BR
Occupied 26dB Bandwidth	15.403	/	BR
Band edge compliance (Radiated)	15.209	/	BR
Transmitter spurious emissions (Radiated)	15.407	/	BR
AC Powerline Conducted Emission (150kHz- 30MHz)	15.407	/	BR
Frequency Stability	15.407	/	BR
99% Occupied bandwidth	/	/	BR
Transmit Power Control	15.407	/	BR

Please refer to **ANNEX A** for detail.

Terms used in Verdict column

P	Pass, The EUT complies with the essential requirements in the standard.
NM	Not measured, The test was not measured by CTTL
BR	Re-use test data from basic model report.
NA	Not Applicable, The test was not applicable
F	Fail, The EUT does not comply with the essential requirements in the standard

6.2. Statements

CTTL has evaluated the test cases requested by the client/manufacture as listed in section 6.1 of this report for the EUT specified in section 3 according to the standards or reference documents listed in section 4.1.

This report only deals with the WLAN function among the features described in section 3.

6.3. Explanation of re-use of test data

The Equipment Under Test (EUT) model SM-A226B/DSN (FCC ID: ZCasma226BN1) is a variant product of SM-A226B/DSN (FCC ID: ZCasma226BN), according to the declaration of changes provided by the applicant and FCC KDB publication 484596 D01, spot check measurements (output power and radiated spurious emission) were performed on this device, all the other test results are derived from test report No.I21Z70103-IOT11.

For detail differences between two models please refer the Declaration of Changes document.

For this report, all the test cases are tested under normal temperature and normal voltage, and

also under norm humidity, the specific condition is shown as follows:

Temperature 26°C
Voltage 3.85V
Humidity 44%

7. TEST EQUIPMENTS UTILIZED

Conducted test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Period	Calibration Due date
1	Vector Signal Analyzer	FSQ40	200089	Rohde & Schwarz	1 year	2022-05-24
2	LISN	ENV216	101200	Rohde & Schwarz	1 year	2021-05-19
3	Test Receiver	ESCI 3	100344	Rohde & Schwarz	1 year	2022-02-23
4	Shielding Room	S81	/	ETS-Lindgren	/	/

Radiated emission test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Period	Calibration Due date
1	Test Receiver	ESU26	100376	R&S	1 year	2021-09-04
2	BiLog Antenna	VULB9163	9163-482	Schwarzbeck	1 year	2021-11-04
3	Dual-Ridge Waveguide Horn Antenna	3117	00139065	ETS-Lindgren	1 year	2021-10-11
4	Dual-Ridge Waveguide Horn Antenna	3116	2663	ETS-Lindgren	1 year	2021-08-05
5	Test Receiver	FSV40	101047	R&S	1 year	2021-05-18

8. Measurement Uncertainty

8.1 Transmitter Output Power

Measurement Uncertainty: 0.387dB,k=1.96

8.2 Peak Power Spectral Density

Measurement Uncertainty: 0.705dB,k=1.96

8.3 Occupied Channel Bandwidth

Measurement Uncertainty: 60.80Hz,k=1.96

8.4 Band Edges Compliance

Measurement Uncertainty : 0.62dB,k=1.96

8.5 Spurious Emissions

Conducted (k=1.96)

Frequency Range	Uncertainty(dB)
$30\text{MHz} \leq f \leq 2\text{GHz}$	1.22
$2\text{GHz} \leq f \leq 3.6\text{GHz}$	1.22
$3.6\text{GHz} \leq f \leq 8\text{GHz}$	1.22
$8\text{GHz} \leq f \leq 12.75\text{GHz}$	1.51
$12.75\text{GHz} \leq f \leq 26\text{GHz}$	1.51
$26\text{GHz} \leq f \leq 40\text{GHz}$	1.59

Radiated (k=2)

Frequency Range	Uncertainty(dB)
9kHz-30MHz	/
$30\text{MHz} \leq f \leq 1\text{GHz}$	5.16
$1\text{GHz} \leq f \leq 18\text{GHz}$	5.44
$18\text{GHz} \leq f \leq 40\text{GHz}$	5.28

ANNEX A: EUT parameters


Disclaimer: the antenna gain provided by the client may affect the validity of the measurement results in this report, and the client shall bear the impact and consequences arising therefrom.

ANNEX B: MEASUREMENT RESULTS

B.1. Measurement Method

B.1.1. Conducted Measurements

- 1). Connect the EUT to the test system correctly.
- 2). Set the EUT to the required work mode.
- 3). Set the EUT to the required channel.
- 4). Set the spectrum analyzer to start measurement.
- 5). Record the values. Vector Signal Analyzer

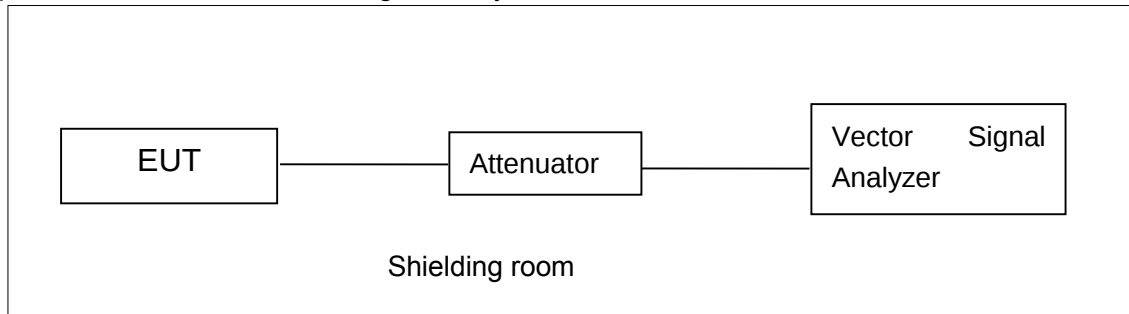


B.1.2. Radiated Emission Measurements

In the case of radiated emission, the used settings are as follows,

Sweep frequency from 30 MHz to 1GHz, RBW = 100 kHz, VBW = 300 kHz;

Sweep frequency from 1 GHz to 26GHz, RBW = 1MHz, VBW = 10Hz;

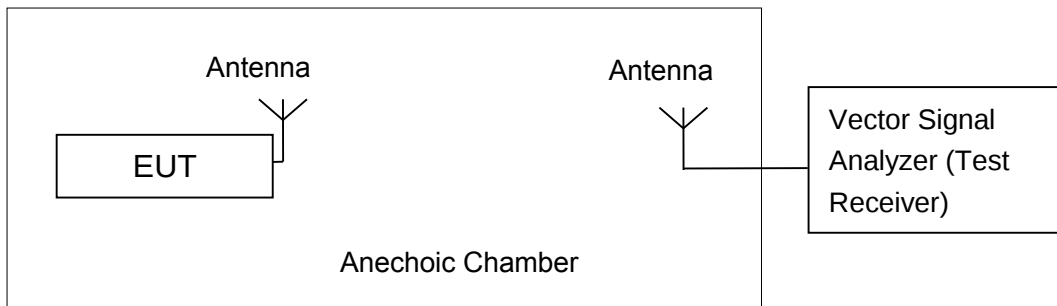

The measurement is made according to KDB 789033

The radiated emission test is performed in semi-anechoic chamber. The distance from the EUT to the reference point of measurement antenna is 3m. The test is carried out on both vertical and horizontal polarization and only maximization result of both polarizations is kept. During the test, the turntable is rotated 360° and the measurement antenna is moved from 1m to 4m to get the maximization result.

B.2. Maximum output Power

Measurement Limit and Method:

Standard	Frequency (MHz)	Limit (dBm)
FCC CRF Part 15.407(a)	5150MHz~5250MHz	24dBm
	5250MHz~5350MHz	24dBm or 11+10logB
	5470MHz~5725MHz	24dBm or 11+10logB

Limit use the less value, and B is the 26dB bandwidth.

The measurement method SA-2 is made according to KDB 789033

Measurement Results:

802.11a mode

Mode	Frequency	Test Result (dBm)							
		Data Rate (Mbps)							
		6	9	12	18	24	36	48	54
802.11a	5180MHz	16.19	/	/	/	/	/	/	/
	5200MHz	16.81	15.79	15.86	15.02	14.84	14.24	14.18	13.82
	5240MHz	16.11	/	/	/	/	/	/	/
	5260MHz	16.71	/	/	/	/	/	/	/
	5280MHz	15.81	/	/	/	/	/	/	/
	5320MHz	15.91	/	/	/	/	/	/	/
	5500MHz	15.33	/	/	/	/	/	/	/
	5580MHz	15.77	/	/	/	/	/	/	/
	5700MHz	16.00	/	/	/	/	/	/	/

The data rate 6Mbps is selected as worse condition, and the following cases are performed with this condition.

802.11n-HT20 mode

Mode	Frequency	Test Result (dBm)							
		Data Rate							
		MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
802.11n (HT20)	5180MHz	16.02	/	/	/	/	/	/	/
	5200MHz	16.29	15.72	15.51	15.02	14.22	14.09	14.07	13.45
	5240MHz	16.03	/	/	/	/	/	/	/
	5260MHz	15.74	/	/	/	/	/	/	/
	5280MHz	15.71	/	/	/	/	/	/	/
	5320MHz	15.69	/	/	/	/	/	/	/
	5500MHz	14.33	/	/	/	/	/	/	/
	5580MHz	14.63	/	/	/	/	/	/	/
	5700MHz	15.38	/	/	/	/	/	/	/

The data rate MCS0 is selected as worse condition, and the following cases are performed with this condition.

802.11ac-HT20 mode

Mode	Frequency	Test Result (dBm)								
		Data Rate								
		MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7	MCS8
802.11ac (HT20)	5180MHz	15.97	/	/	/	/	/	/	/	/
	5200MHz	16.46	16.25	15.25	15.24	14.36	14.14	13.26	13.25	13.13
	5240MHz	16.07	/	/	/	/	/	/	/	/
	5260MHz	15.81	/	/	/	/	/	/	/	/
	5280MHz	15.73	/	/	/	/	/	/	/	/
	5320MHz	15.74	/	/	/	/	/	/	/	/
	5500MHz	15.48	/	/	/	/	/	/	/	/
	5580MHz	16.29	/	/	/	/	/	/	/	/
	5700MHz	16.35	/	/	/	/	/	/	/	/

The data rate MCS0 is selected as worse condition, and the following cases are performed with this condition.

802.11n-HT40 mode

Mode	Frequency	Test Result (dBm)							
		Data Rate							
		MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
802.11n (HT40)	5190MHz	15.31	14.86	14.85	13.87	13.86	12.64	12.63	11.65
	5230MHz	15.08	/	/	/	/	/	/	/
	5270MHz	14.84	/	/	/	/	/	/	/
	5310MHz	15.08	/	/	/	/	/	/	/
	5510MHz	15.32	/	/	/	/	/	/	/
	5550MHz	15.94	/	/	/	/	/	/	/
	5670MHz	16.16	/	/	/	/	/	/	/

The data rate MCS0 is selected as worse condition, and the following cases are performed with this condition.

802.11ac-HT40 mode

Mode	Frequency	Test Result (dBm)									
		Data Rate									
		MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7	MCS8	MCS9
802.11ac (HT40)	5190MHz	14.85	16.12	15.28	15.25	14.39	14.29	13.10	13.07	13.05	12.04
	5230MHz	14.64	/	/	/	/	/	/	/	/	/
	5270MHz	14.37	/	/	/	/	/	/	/	/	/
	5310MHz	14.62	/	/	/	/	/	/	/	/	/
	5510MHz	15.52	/	/	/	/	/	/	/	/	/
	5550MHz	15.90	/	/	/	/	/	/	/	/	/
	5670MHz	16.09	/	/	/	/	/	/	/	/	/

The data rate MCS0 is selected as worse condition, and the following cases are performed with this condition.

802.11ac-HT80 mode

Mode	Frequency	Test Result (dBm)									
		Data Rate									
		MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7	MCS8	MCS9
802.11ac (HT80)	5210MHz	14.99	15.11	14.96	14.48	14.36	13.27	13.26	12.37	11.25	10.41
	5290MHz	14.67	/	/	/	/	/	/	/	/	/
	5530MHz	14.91	/	/	/	/	/	/	/	/	/
	5610MHz	15.52	/	/	/	/	/	/	/	/	/

The data rate MCS0 is selected as worse condition, and the following cases are performed with this condition.

The duty cycle of all mode are 100%.

The spot check result of average output power is 17.79dBm (802.11a 6Mbps ch40 prototype result: 16.81dBm).

Conclusion: Pass

B.3. Peak Power Spectral Density (conducted)

Measurement Limit:

Standard	Frequency (MHz)	Limit (dBm/MHz)
FCC CRF Part 15.407(a)	5150MHz~5250MHz	11
	5250MHz~5350MHz	11
	5470MHz~5725MHz	11

The output power measurement method Section F is made according to KDB 789033

Measurement Results:

Mode	Frequency	Power Spectral Density (dBm/MHz)	Conclusion
802.11a	5180 MHz	4.68	P
	5200 MHz	4.98	P
	5240 MHz	4.96	P
	5260 MHz	4.83	P
	5280 MHz	4.98	P
	5320 MHz	4.59	P
	5500 MHz	4.99	P
	5580 MHz	4.88	P
	5700 MHz	5.70	P
802.11ac HT20	5180 MHz	4.63	P
	5200 MHz	4.75	P
	5240 MHz	4.71	P
	5260 MHz	4.76	P
	5280 MHz	4.59	P
	5320 MHz	4.28	P
	5500 MHz	4.73	P
	5580 MHz	4.57	P
	5700 MHz	5.34	P
802.11ac HT40	5190 MHz	1.81	P
	5230 MHz	1.63	P
	5270 MHz	1.65	P
	5310 MHz	1.35	P
	5510 MHz	1.64	P
	5550 MHz	1.84	P
	5670 MHz	2.47	P
802.11ac HT80	5210MHz	-1.61	P
	5290MHz	-1.67	P
	5530MHz	-1.50	P
	5610MHz	-1.86	P

Conclusion: PASS

B.4. Occupied 26dB Bandwidth(conducted)

Measurement Limit:

Standard	Limit (kHz)
FCC 47 CFR Part 15.403 (i)	/

The measurement is made according to KDB 789033

Measurement Uncertainty:

Measurement Uncertainty	60.80Hz
-------------------------	---------

Measurement Result:

Mode	Frequency	Occupied 26dB Bandwidth (MHz)		conclusion
802.11a	5180 MHz	Fig.1	27.05	P
	5200 MHz	Fig.2	27.35	P
	5240 MHz	Fig.3	27.30	P
	5260 MHz	Fig.4	28.15	P
	5280 MHz	Fig.5	28.20	P
	5320 MHz	Fig.6	25.80	P
	5500 MHz	Fig.7	27.75	P
	5580 MHz	Fig.8	29.05	P
	5700 MHz	Fig.9	38.10	P

802.11ac HT20	5180 MHz	Fig.10	31.65	P
	5200 MHz	Fig.11	29.05	P
	5240 MHz	Fig.12	28.30	P
	5260 MHz	Fig.13	28.90	P
	5280 MHz	Fig.14	27.55	P
	5320 MHz	Fig.15	27.85	P
	5500 MHz	Fig.16	27.60	P
	5580 MHz	Fig.17	29.80	P
	5700 MHz	Fig.18	33.65	P

802.11ac HT40	5190 MHz	Fig.19	45.04	P
	5230 MHz	Fig.20	47.92	P
	5270 MHz	Fig.21	46.88	P
	5310 MHz	Fig.22	47.20	P
	5510 MHz	Fig.23	43.76	P
	5550 MHz	Fig.24	44.16	P
	5670 MHz	Fig.25	56.72	P

802.11ac HT80	5210MHz	Fig.26	112.64	P
	5290MHz	Fig.27	93.76	P
	5530MHz	Fig.28	92.96	P
	5610MHz	Fig.29	102.24	P

Conclusion: PASS

Test graphs as below:

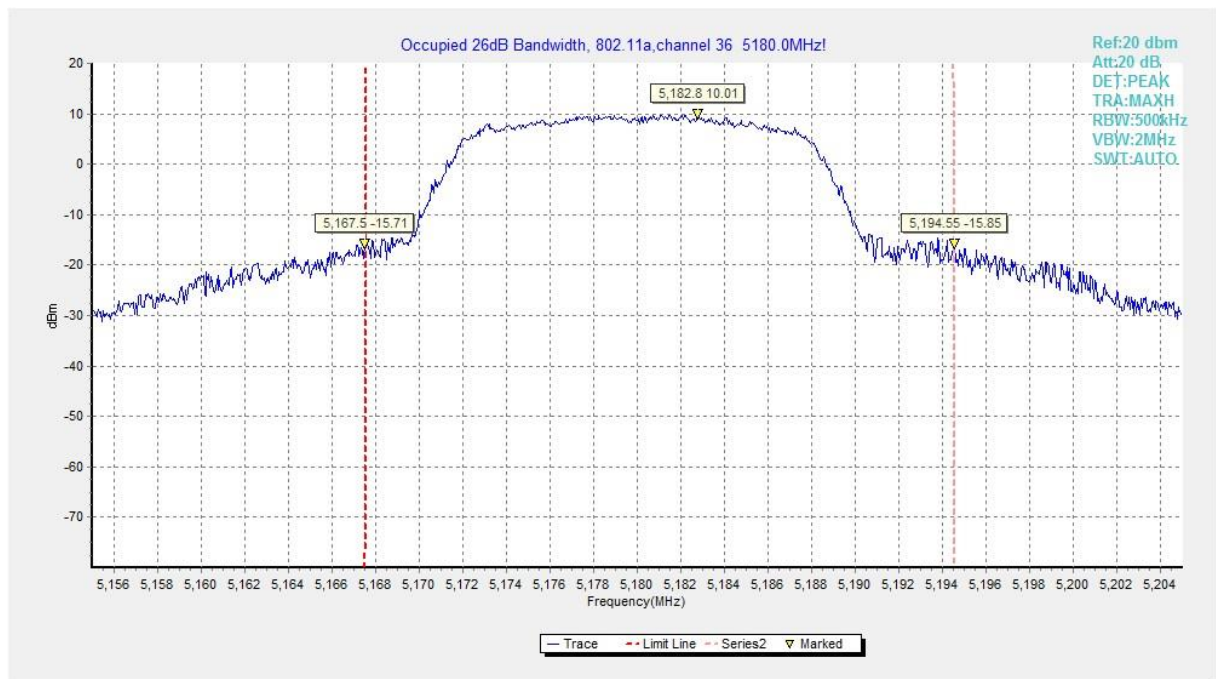


Fig.1 Occupied 26dB Bandwidth (802.11a, 5180MHz)

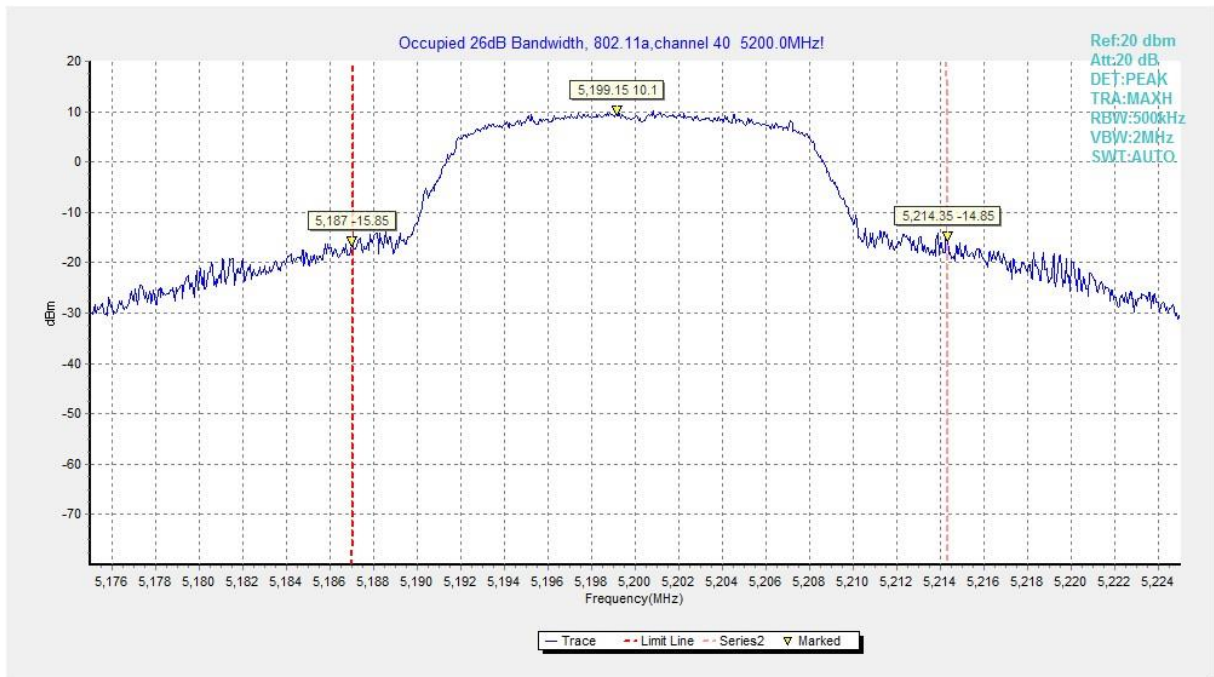


Fig.2 Occupied 26dB Bandwidth (802.11a, 5200MHz)



Fig.3 Occupied 26dB Bandwidth (802.11a, 5240MHz)

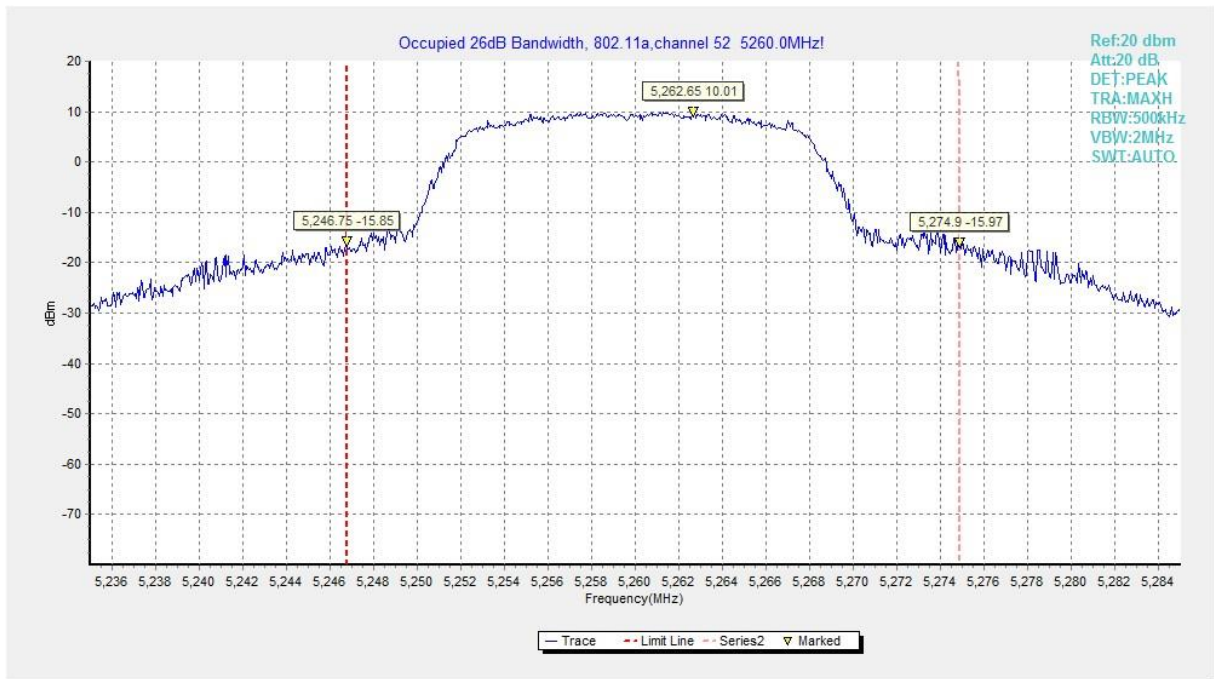


Fig.4 Occupied 26dB Bandwidth (802.11a, 5260MHz)

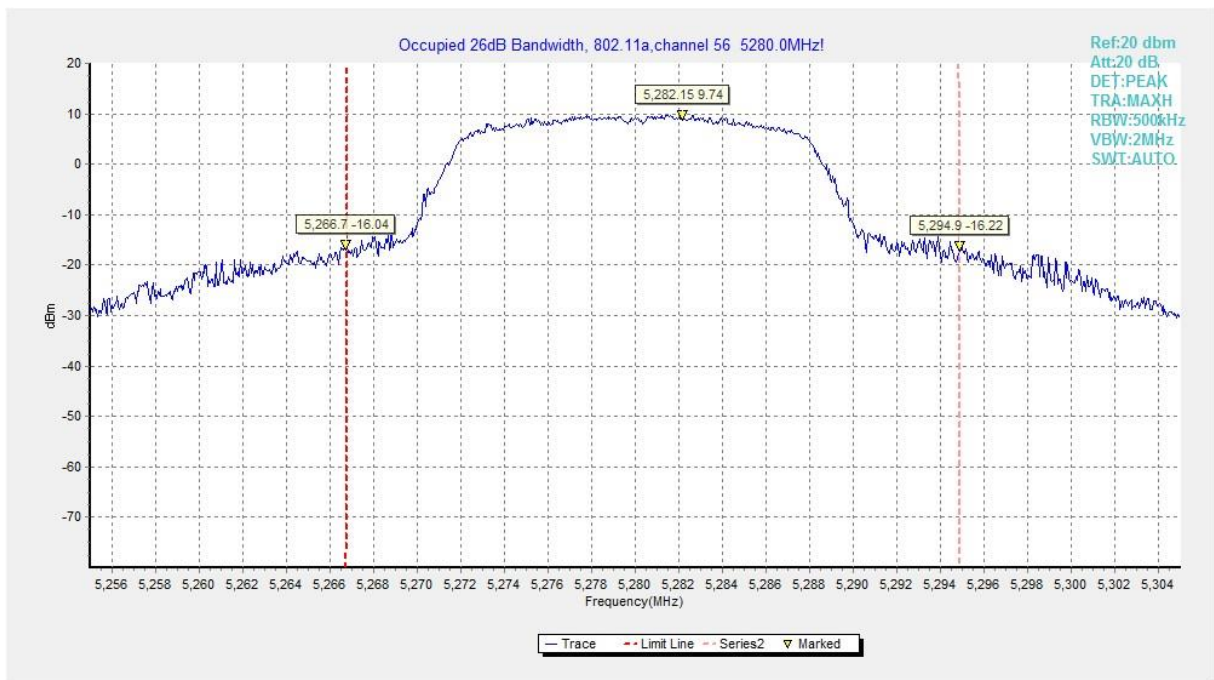


Fig.5 Occupied 26dB Bandwidth (802.11a, 5280MHz)

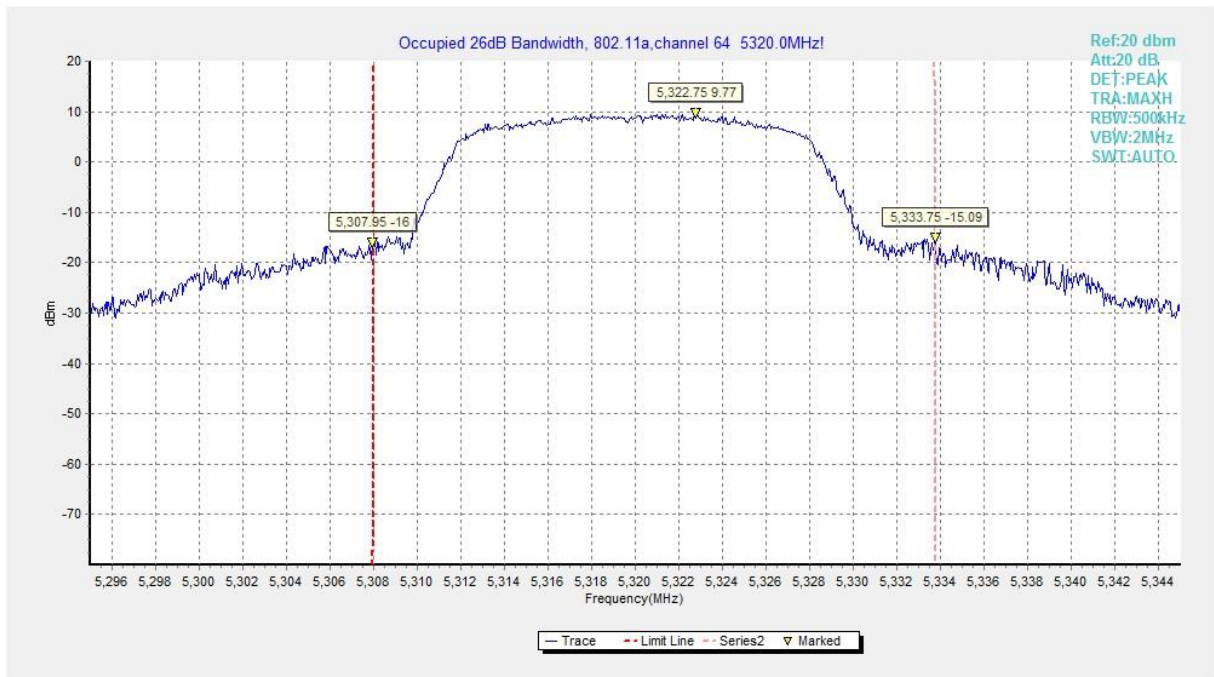


Fig.6 Occupied 26dB Bandwidth (802.11a, 5320MHz)

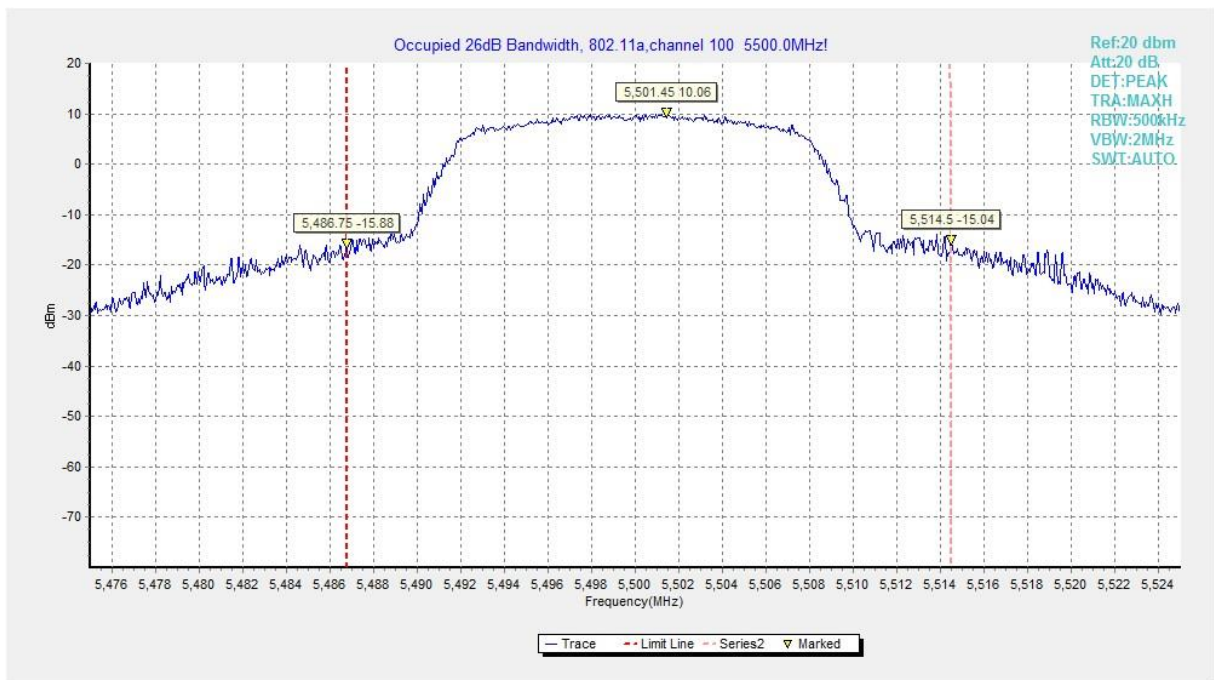


Fig.7 Occupied 26dB Bandwidth (802.11a, 5500MHz)

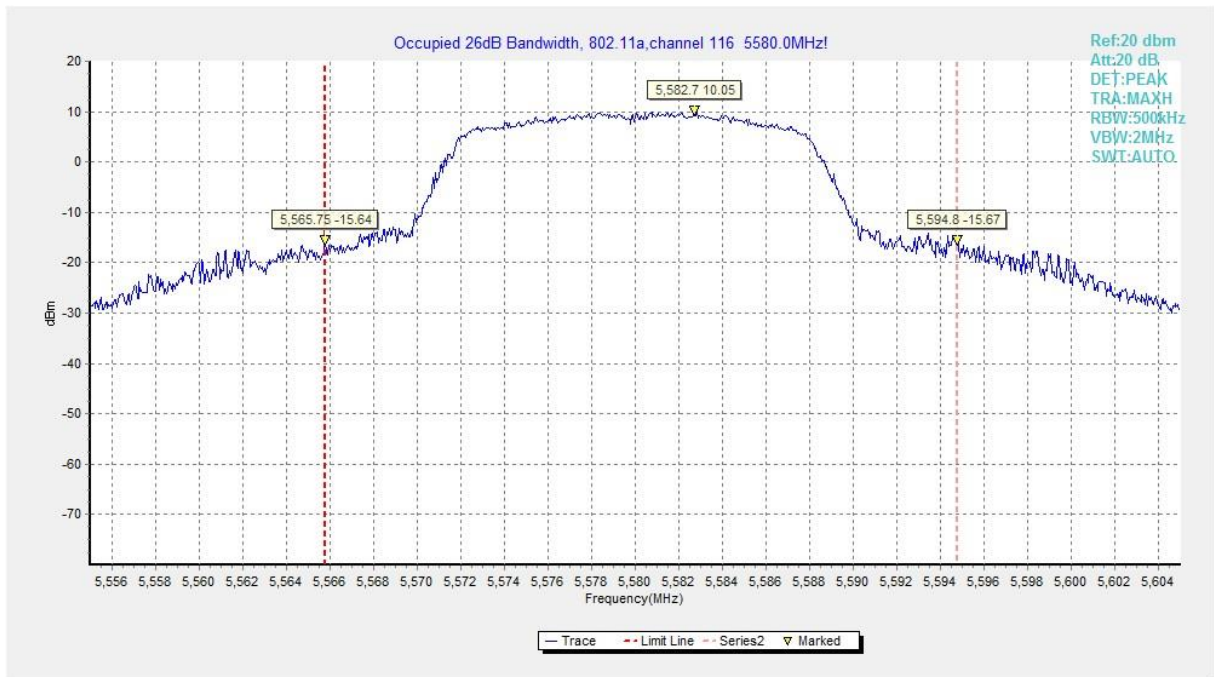


Fig.8 Occupied 26dB Bandwidth (802.11a, 5580MHz)

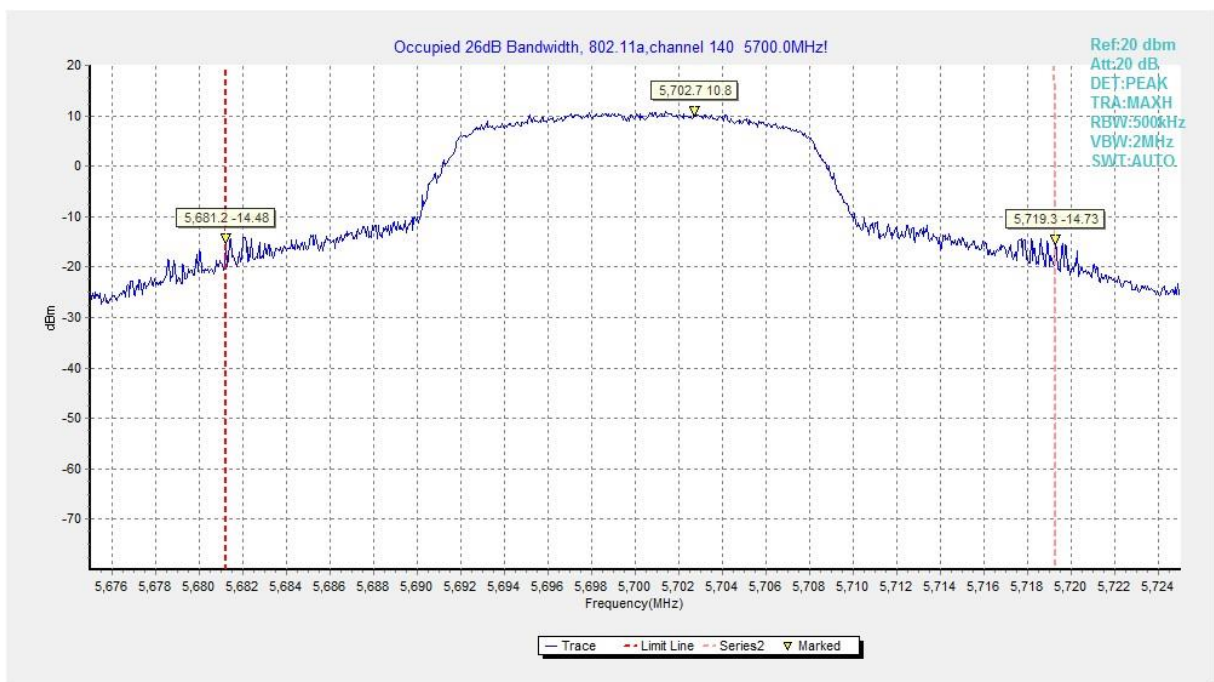


Fig.9 Occupied 26dB Bandwidth (802.11a, 5700MHz)

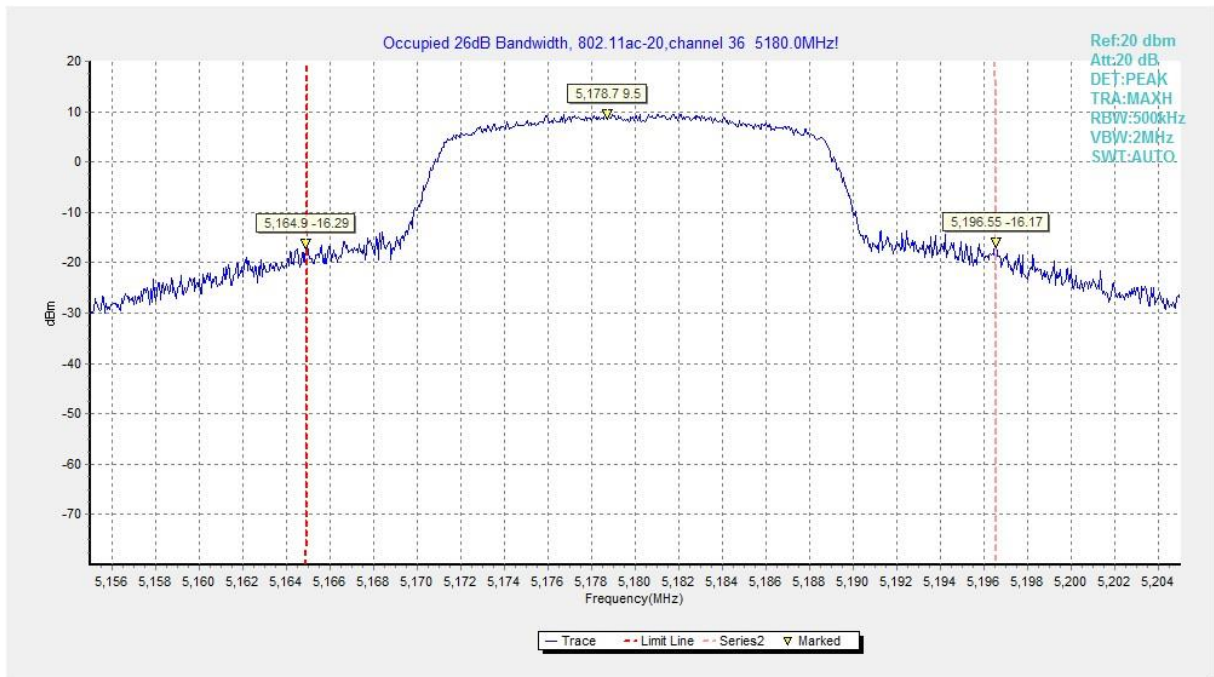


Fig.10 Occupied 26dB Bandwidth (802.11ac-HT20, 5180MHz)

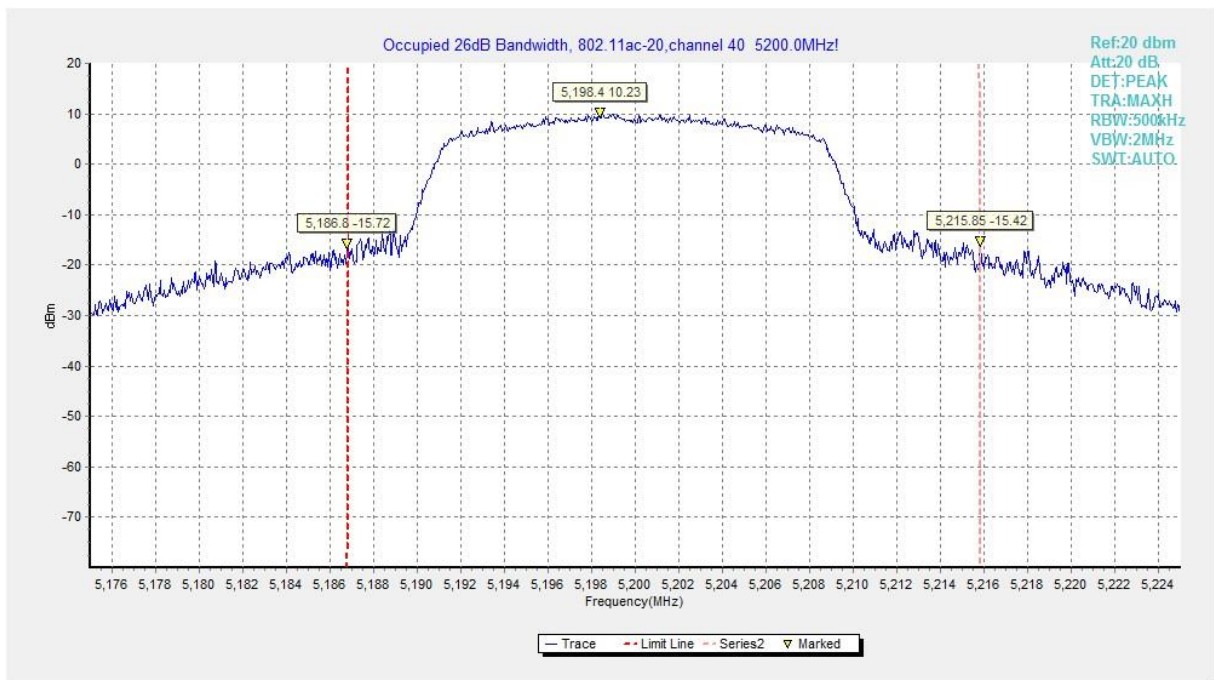


Fig.11 Occupied 26dB Bandwidth (802.11ac-HT20, 5200MHz)

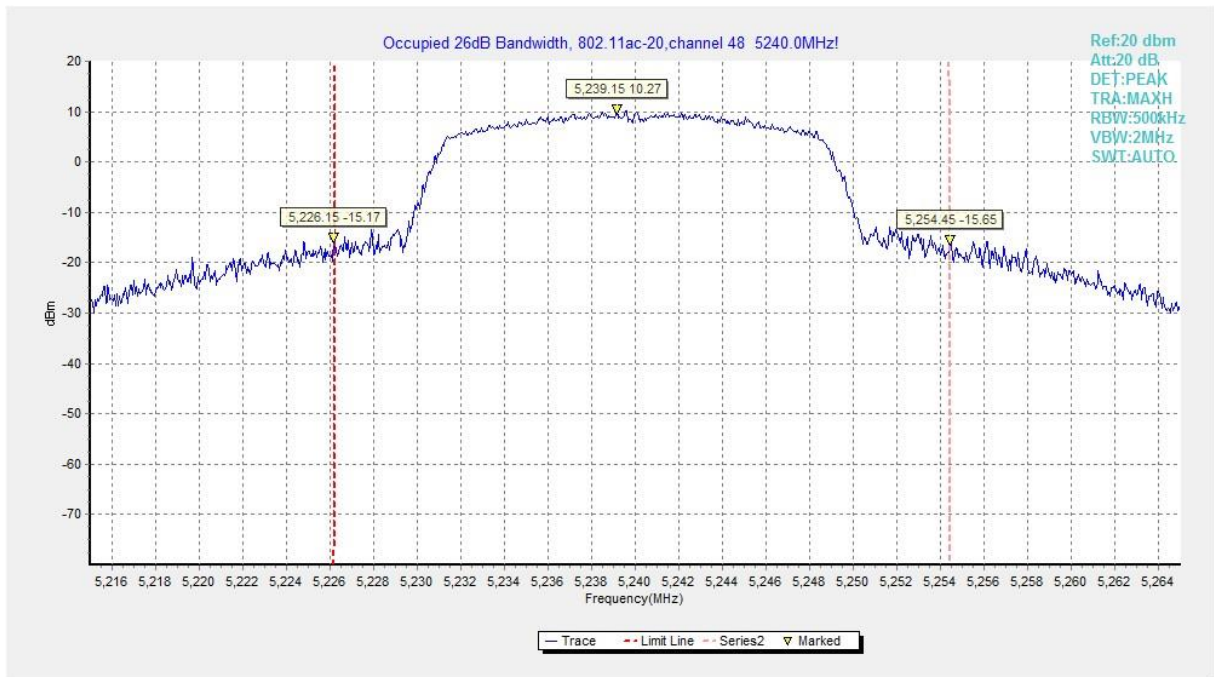


Fig.12 Occupied 26dB Bandwidth (802.11ac-HT20, 5240MHz)

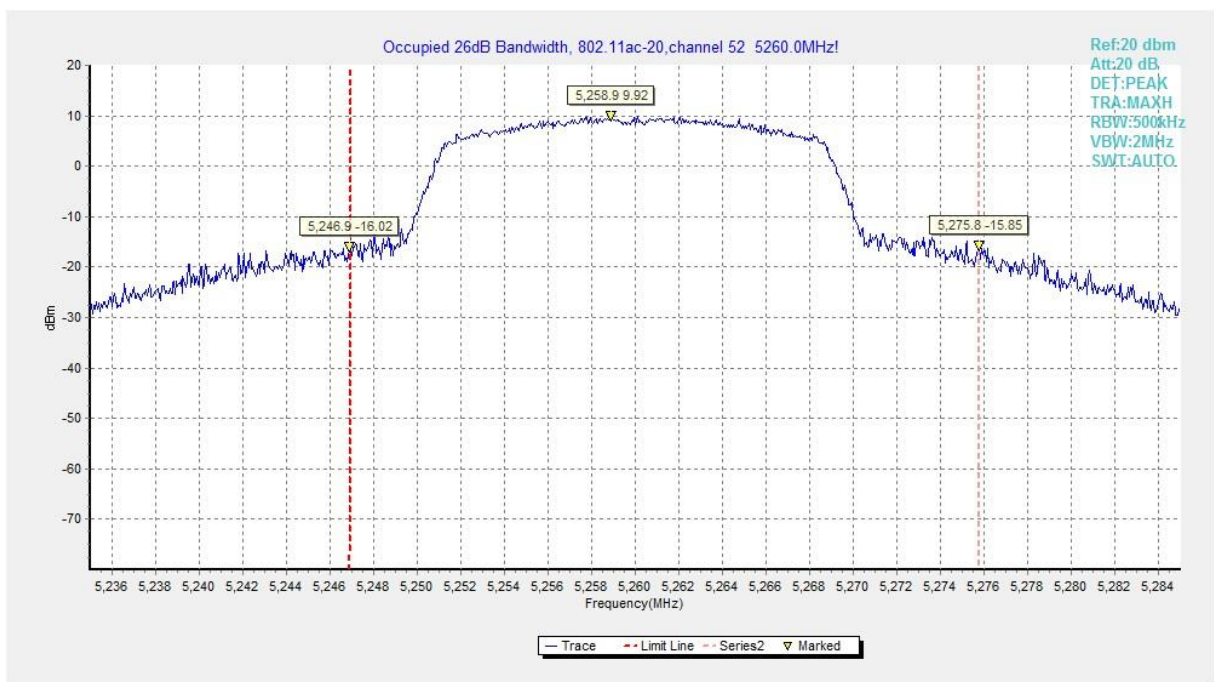


Fig.13 Occupied 26dB Bandwidth (802.11ac-HT20, 5260MHz)

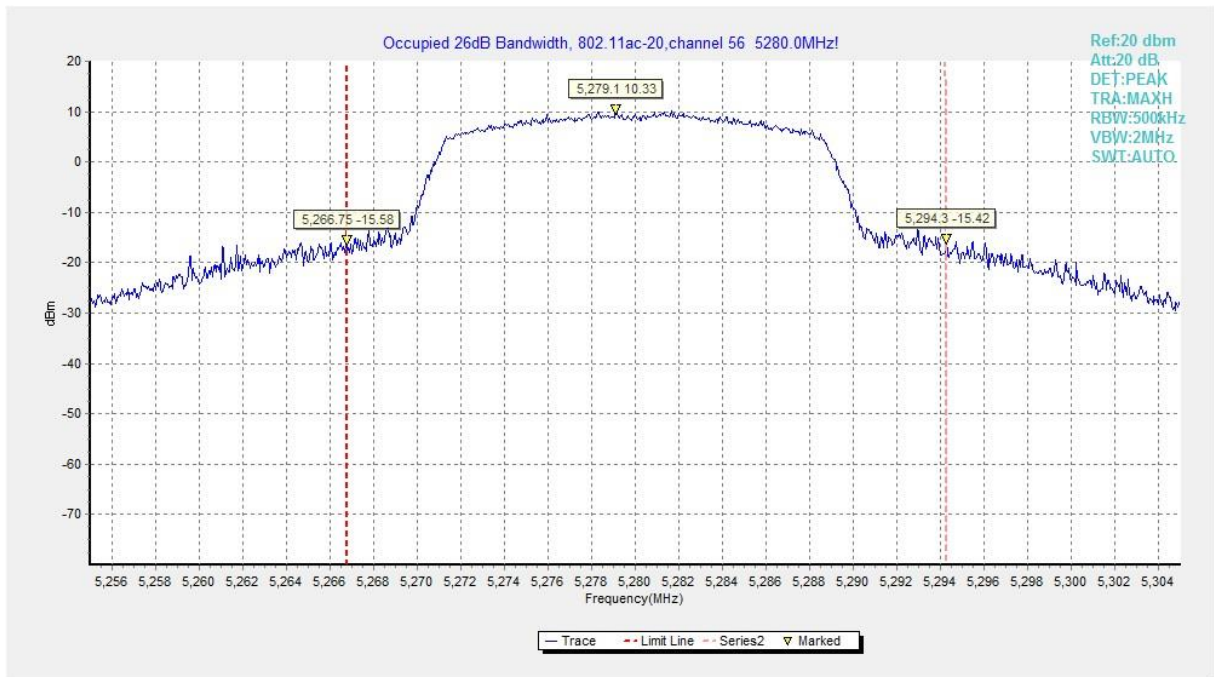


Fig.14 Occupied 26dB Bandwidth (802.11ac-HT20, 5280MHz)

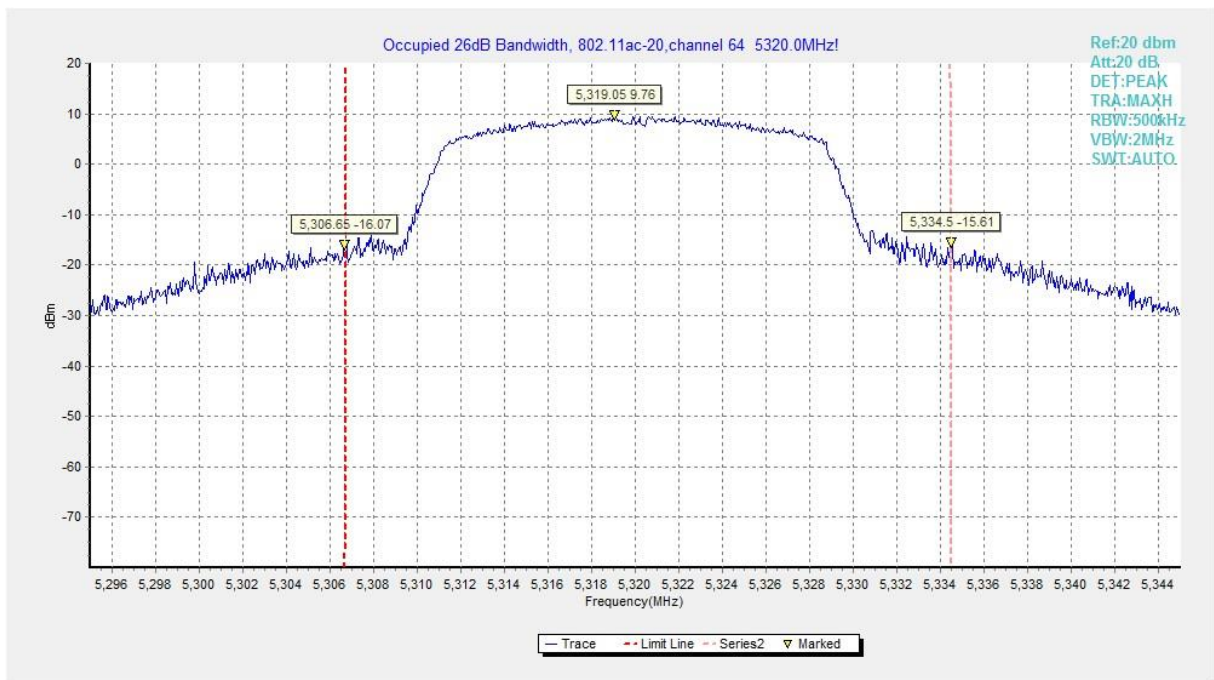


Fig.15 Occupied 26dB Bandwidth (802.11ac-HT20, 5320MHz)

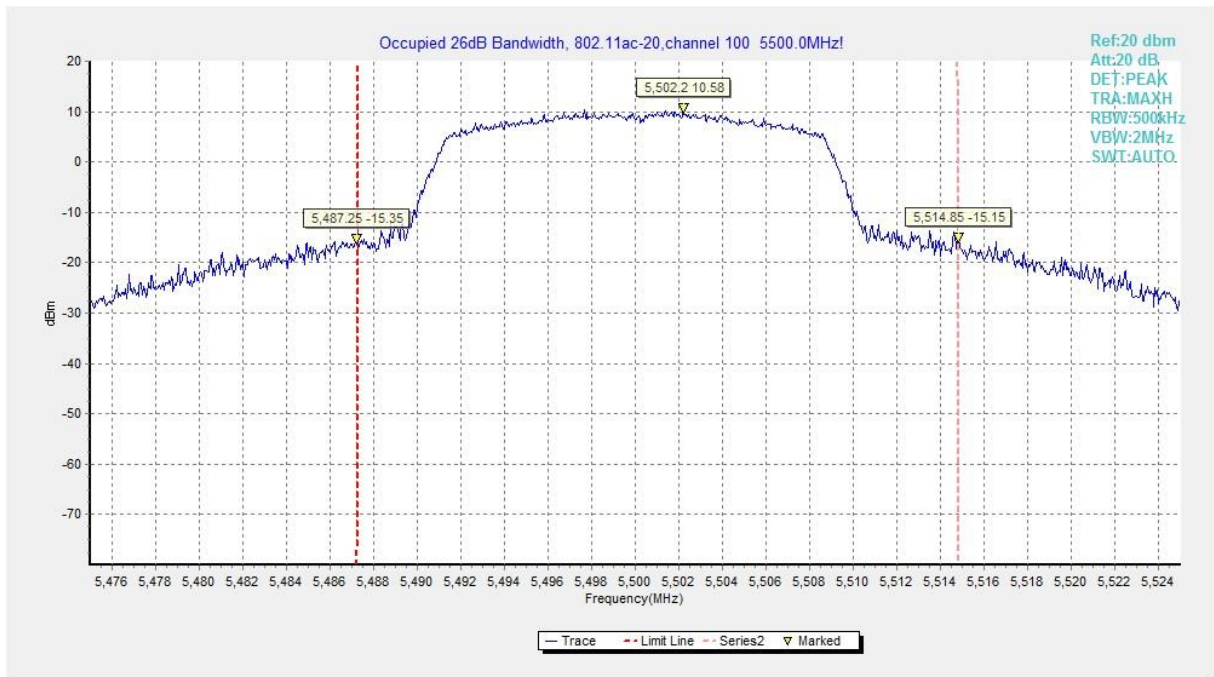


Fig.16 Occupied 26dB Bandwidth (802. 11ac-HT20, 5500MHz)

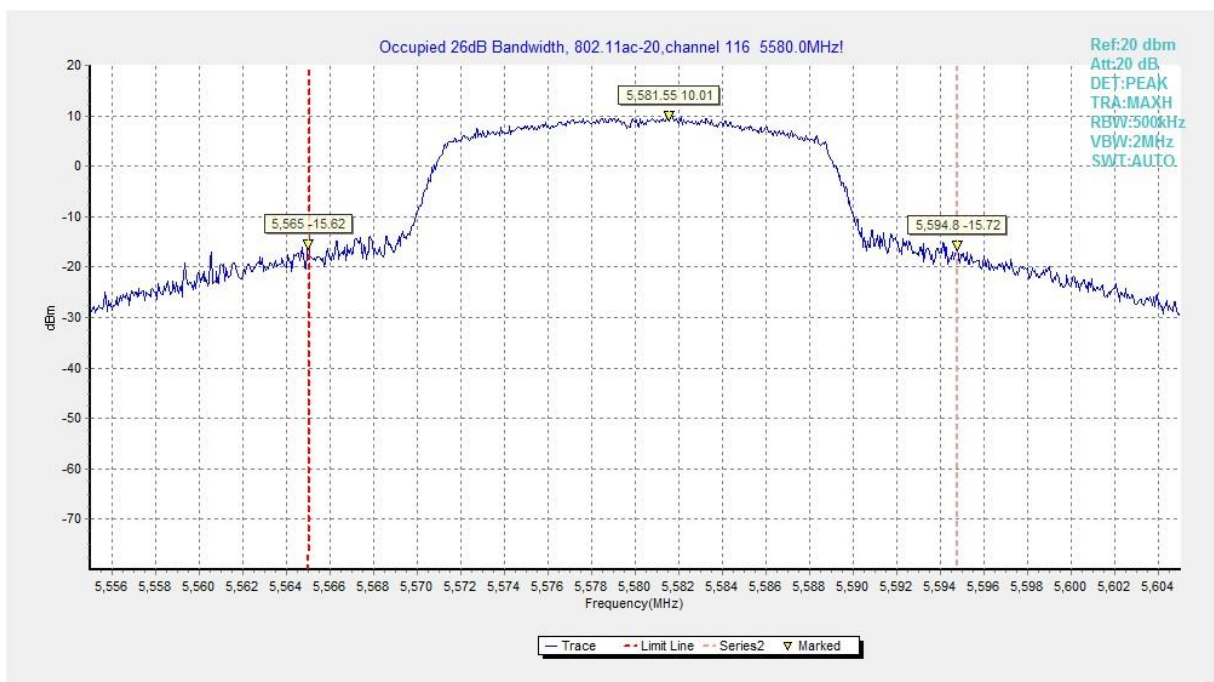


Fig.17 Occupied 26dB Bandwidth (802. 11ac-HT20, 5580MHz)

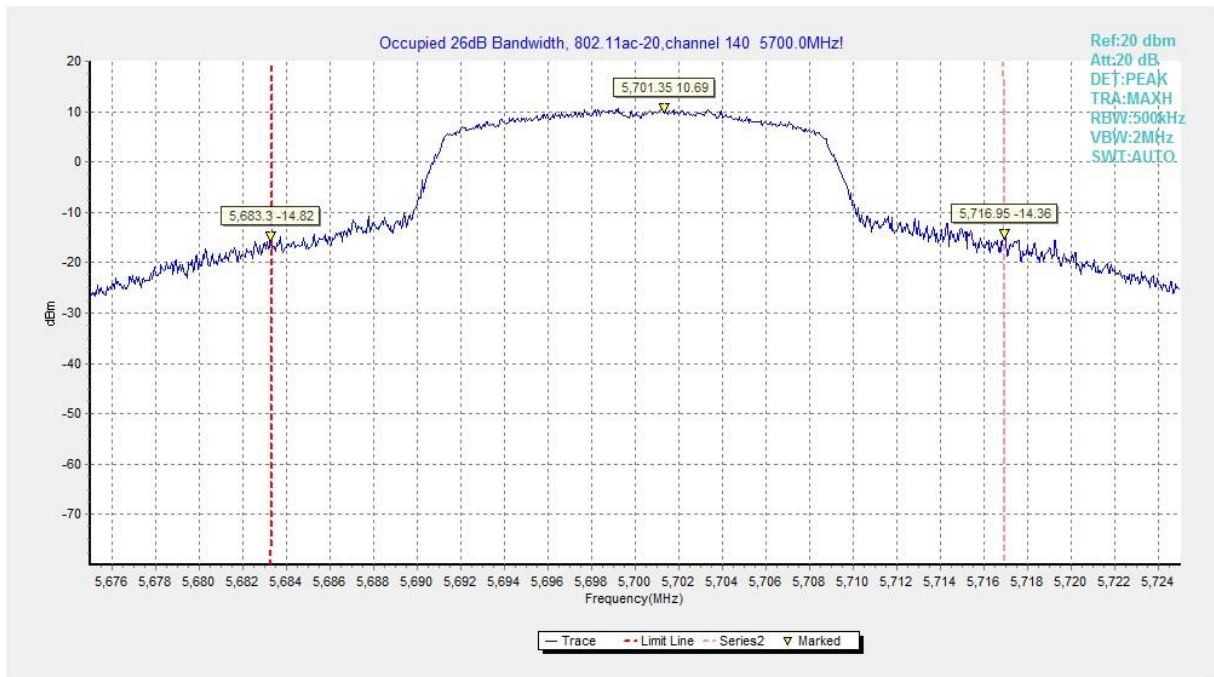


Fig.18 Occupied 26dB Bandwidth (802. 11ac-HT20, 5700MHz)

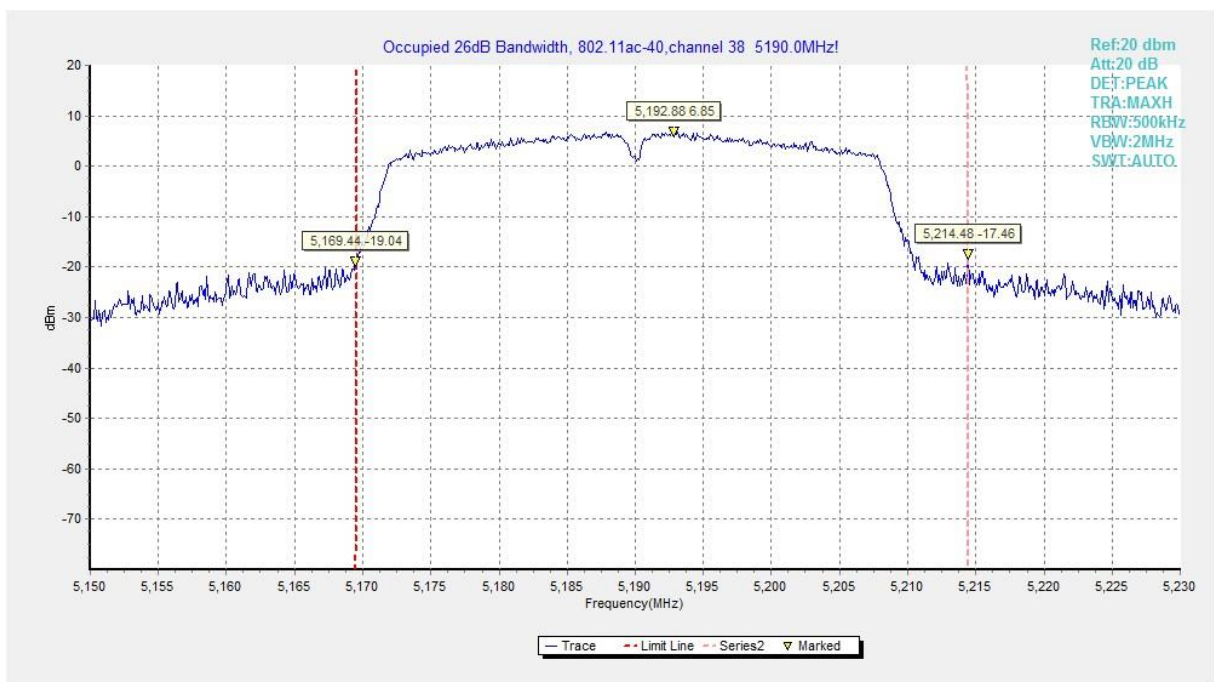


Fig.19 Occupied 26dB Bandwidth (802.11ac-HT40, 5190MHz)

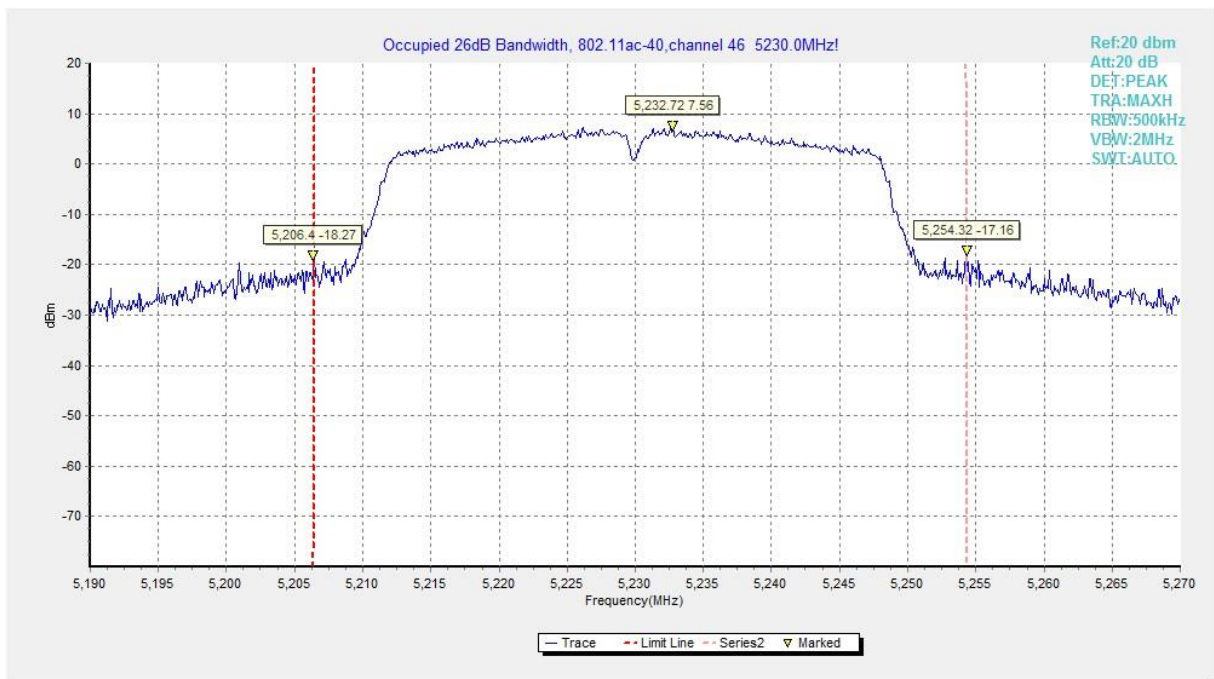


Fig.20 Occupied 26dB Bandwidth (802.11ac-HT40, 5230MHz)

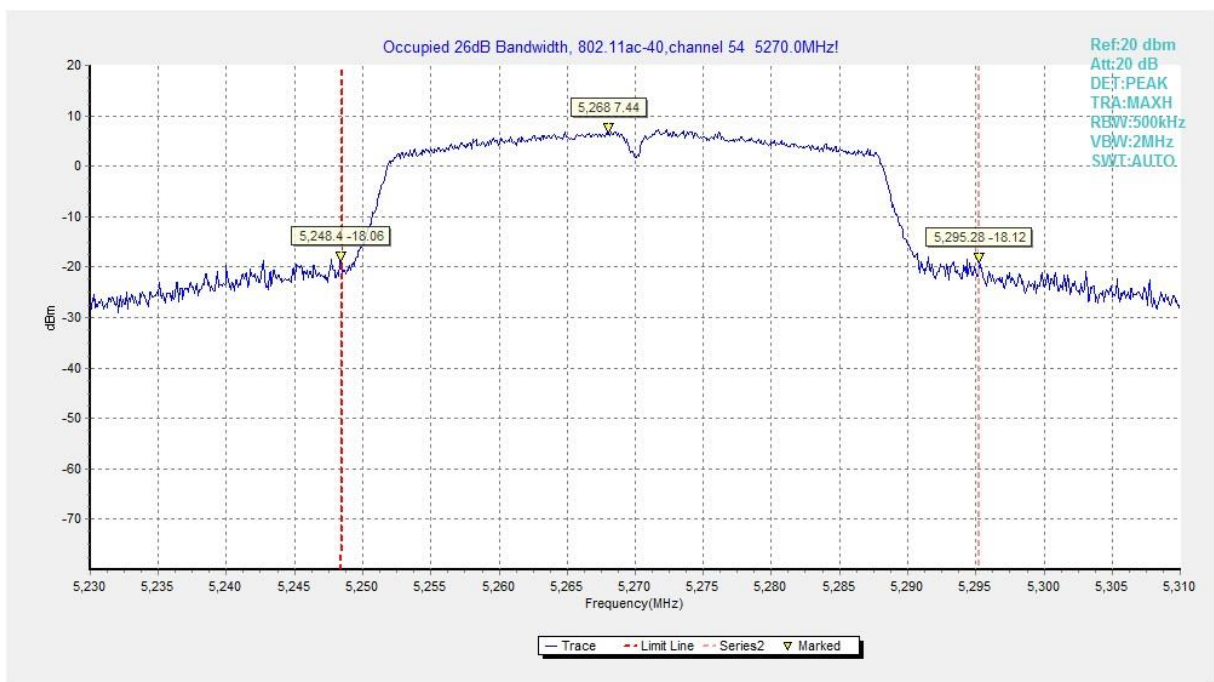


Fig.21 Occupied 26dB Bandwidth (802.11ac-HT40, 5270MHz)

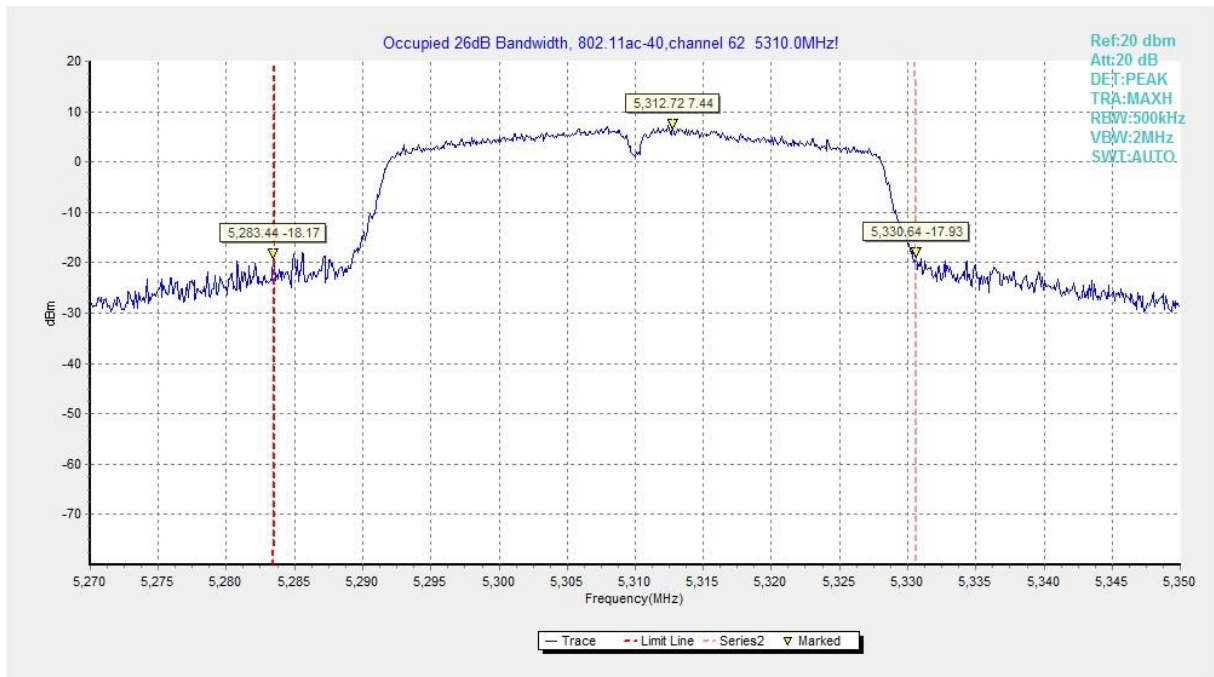


Fig.22 Occupied 26dB Bandwidth (802.11ac-HT40, 5310MHz)

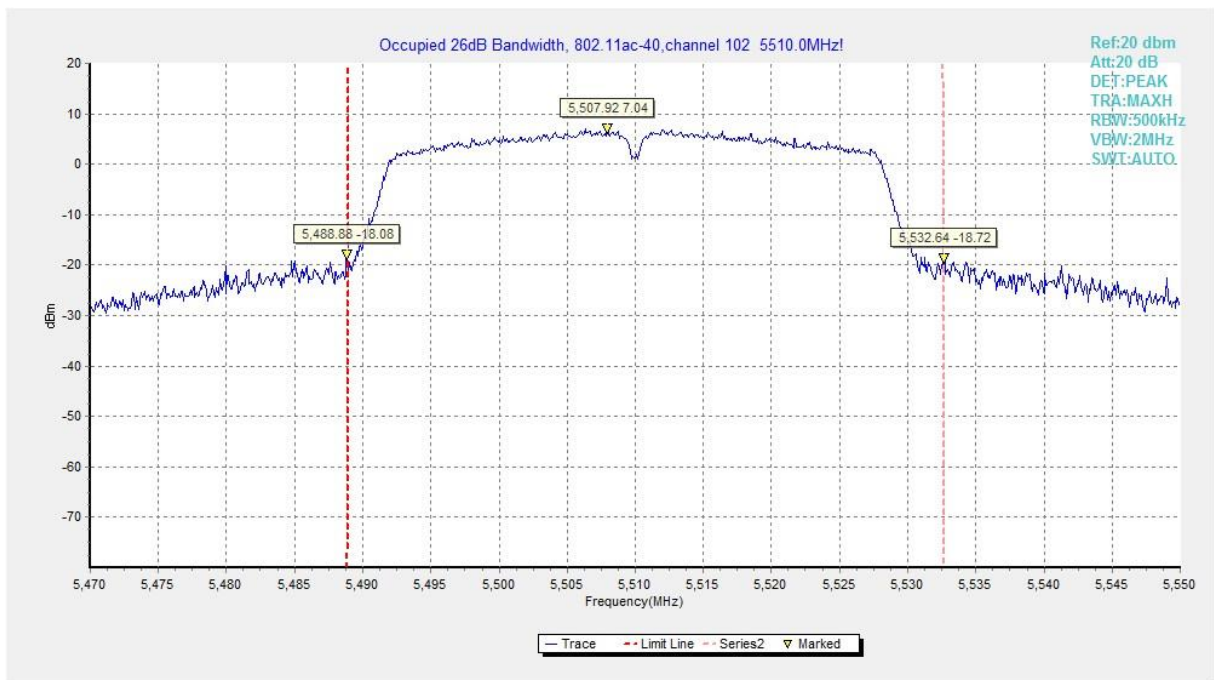


Fig.23 Occupied 26dB Bandwidth (802.11ac-HT40, 5510MHz)

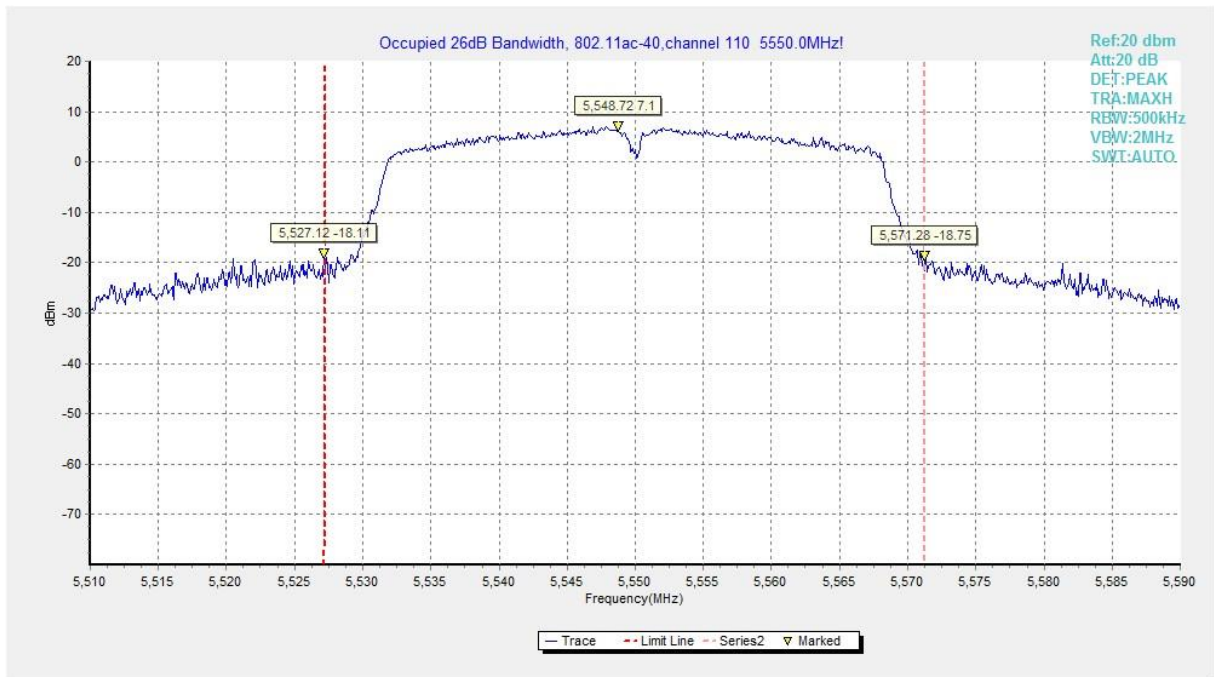


Fig.24 Occupied 26dB Bandwidth (802. 11ac-HT40, 5550MHz)

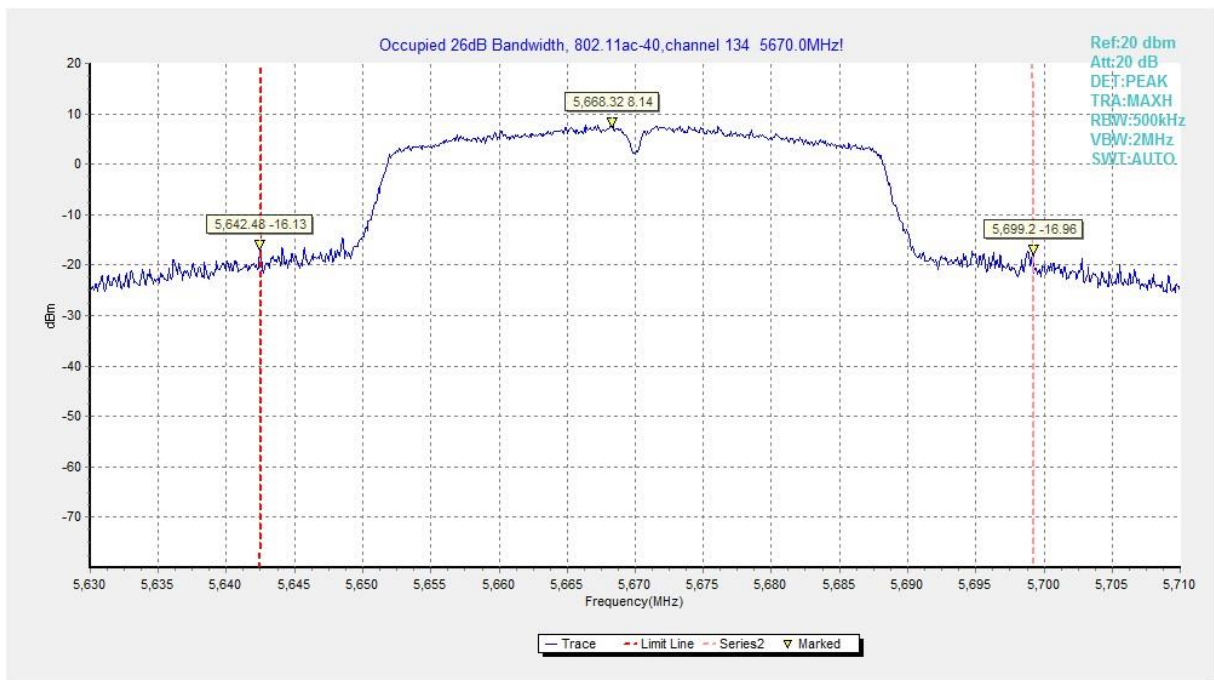


Fig.25 Occupied 26dB Bandwidth (802. 11ac-HT40, 5670MHz)

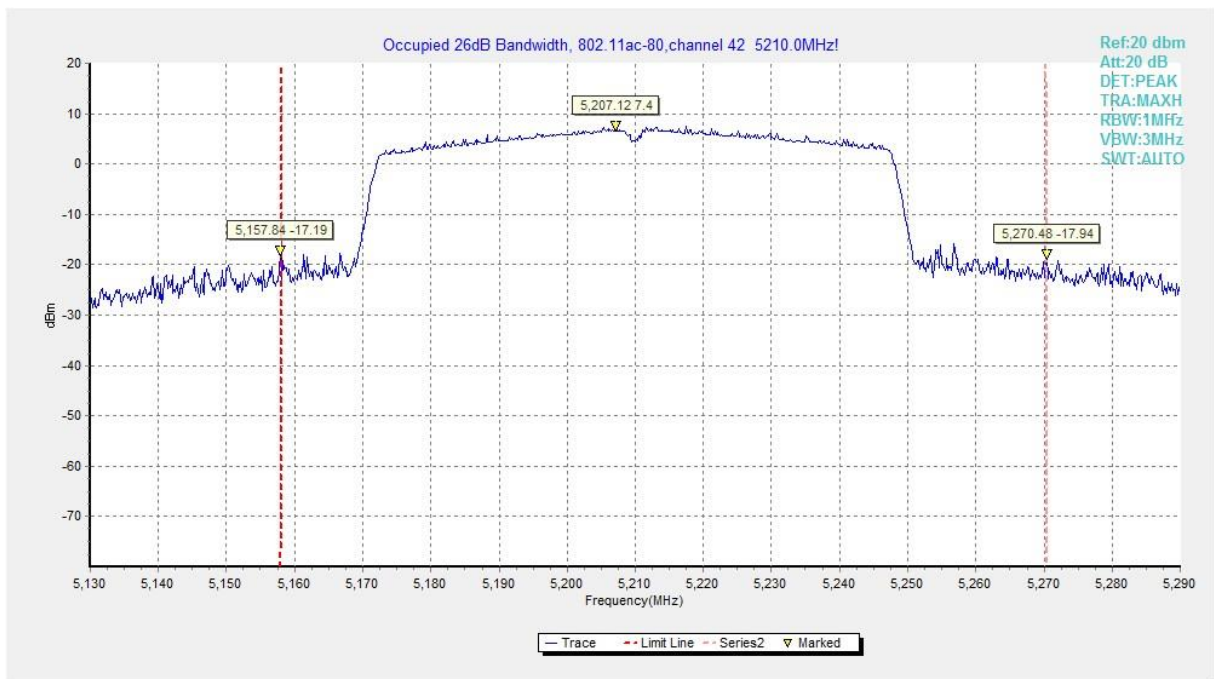


Fig.26 Occupied 26dB Bandwidth (802. 11ac-HT80, 5210MHz)



Fig.27 Occupied 26dB Bandwidth (802. 11ac-HT80, 5290MHz)

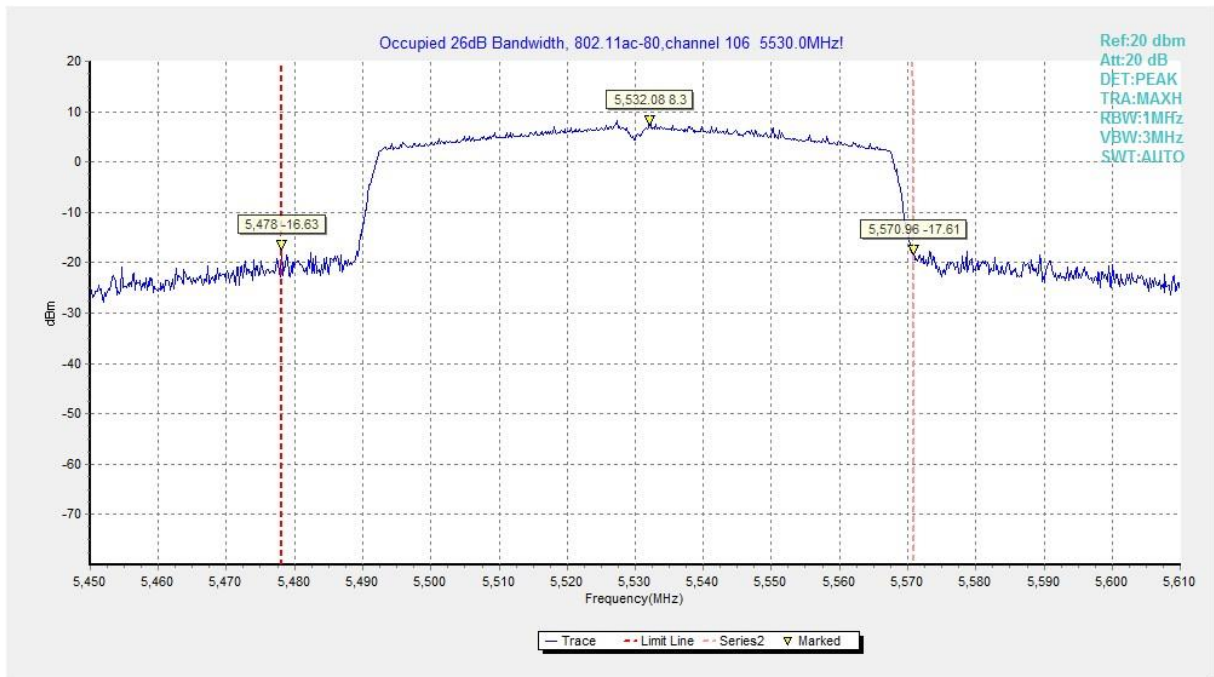


Fig.28 Occupied 26dB Bandwidth (802. 11ac-HT80, 5530MHz)

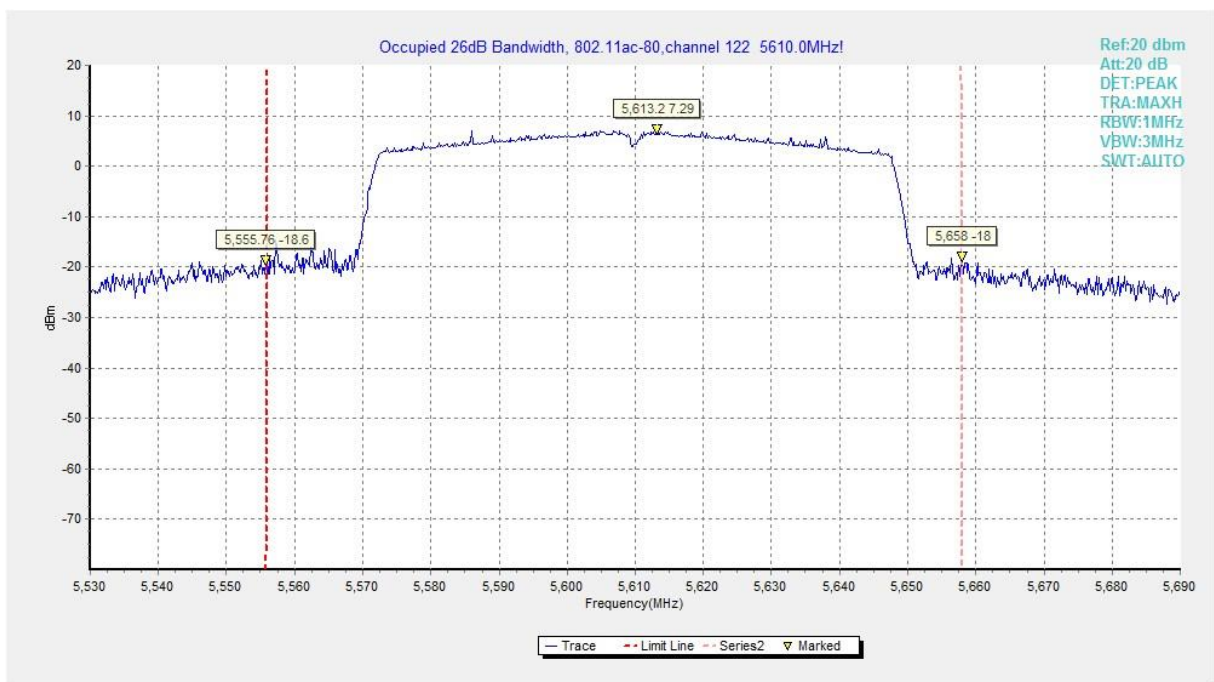


Fig.29 Occupied 26dB Bandwidth (802. 11ac-HT80, 5610MHz)

B.5. Band Edges Compliance

B.5.1 Band Edges - Radiated

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.407	-27 dBm/MHz

In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

Limit in restricted band:

Frequency of emission (MHz)	Field strength(uV/m)	Field strength(dBuV/m)	Measurement distance(m)
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

The measurement is made according to ANSI C63.10-2013 and KDB 789033

Test Condition

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

Measurement Result:

Mode	Channel	Test Results	Conclusion
802.11a	5180 MHz	Fig.30	P
	5320 MHz	Fig.31	P
	5500 MHz	Fig.32	P
	5700 MHz	Fig.33	P
802.11n HT20	5180 MHz	Fig.34	P
	5320 MHz	Fig.35	P
	5500 MHz	Fig.36	P
	5700 MHz	Fig.37	P
802.11ac HT20	5180 MHz	Fig.38	P
	5320 MHz	Fig.39	P
	5500 MHz	Fig.40	P
	5700 MHz	Fig.41	P
802.11n HT40	5190 MHz	Fig.42	P
	5310 MHz	Fig.43	P
	5510 MHz	Fig.44	P
	5670 MHz	Fig.45	P
802.11ac	5190 MHz	Fig.46	P

HT40	5310 MHz	Fig.47	P
	5510 MHz	Fig.48	P
	5670 MHz	Fig.49	P
802.11ac HT80	5210MHz	Fig.50	P
	5290MHz	Fig.51	P
	5530MHz	Fig.52	P
	5610MHz	Fig.53	P

Conclusion: PASS

Test graphs as below:

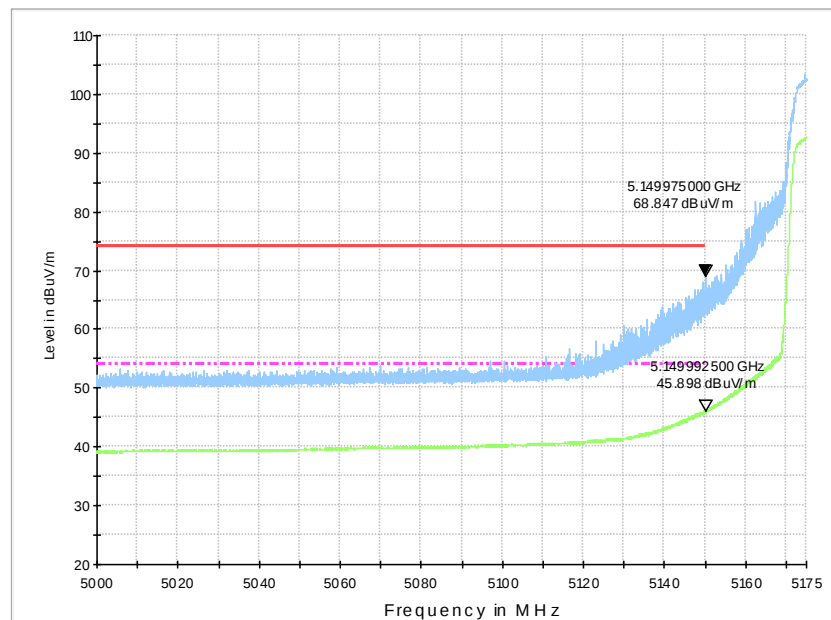


Fig.30 Band Edges (802.11a Ch36, 5180MHz)

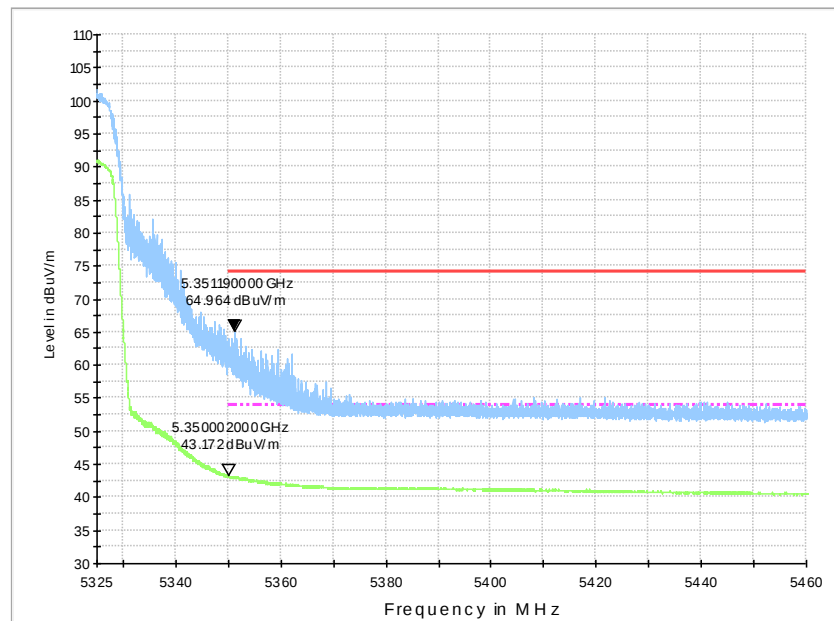


Fig.31 Band Edges (802.11a Ch64, 5320MHz)

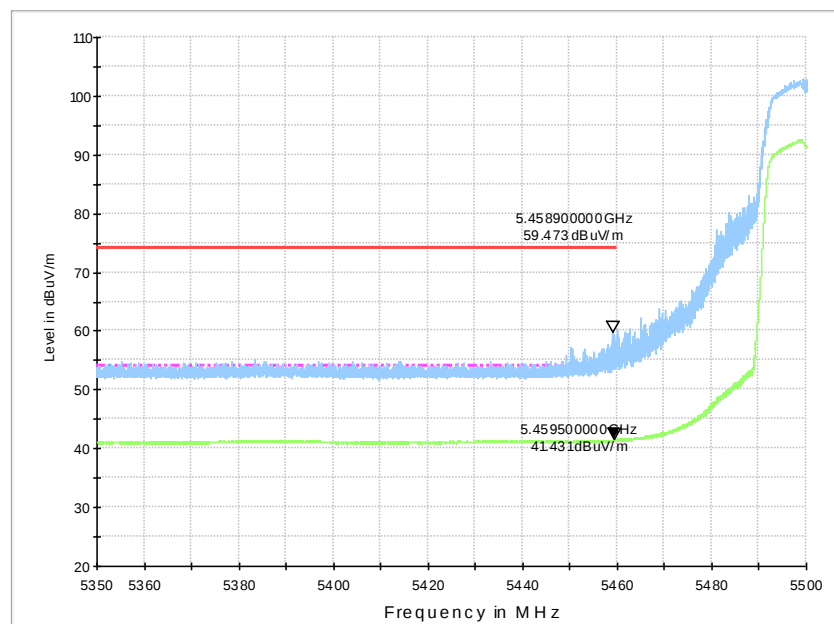


Fig.32 Band Edges (802.11a Ch100, 5500MHz)

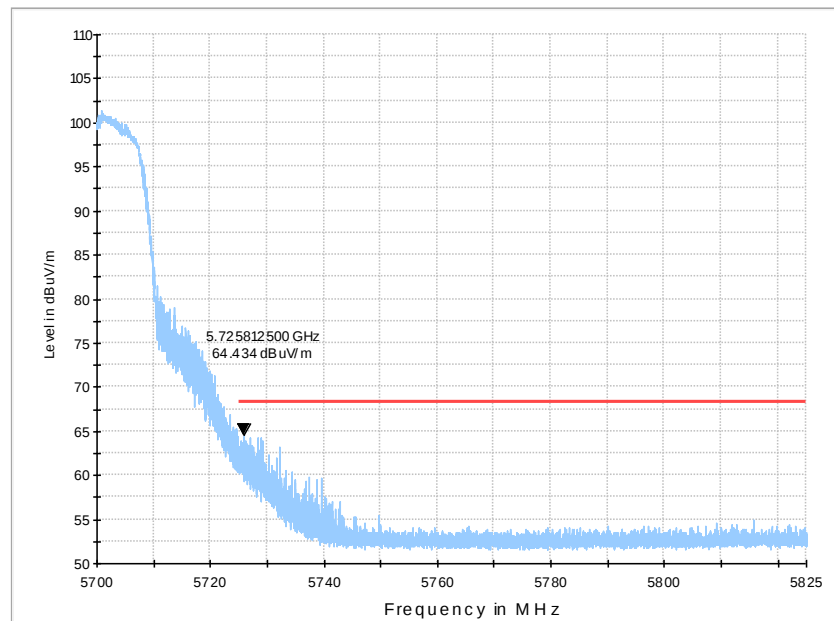


Fig.33 Band Edges (802.11a Ch140, 5700MHz)

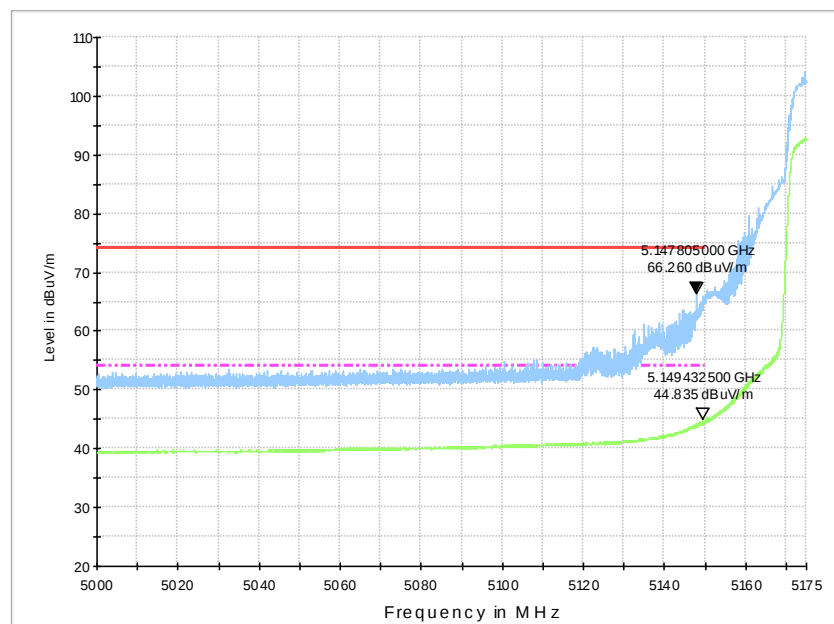


Fig.34 Band Edges (802.11n-HT20 Ch36, 5180MHz)

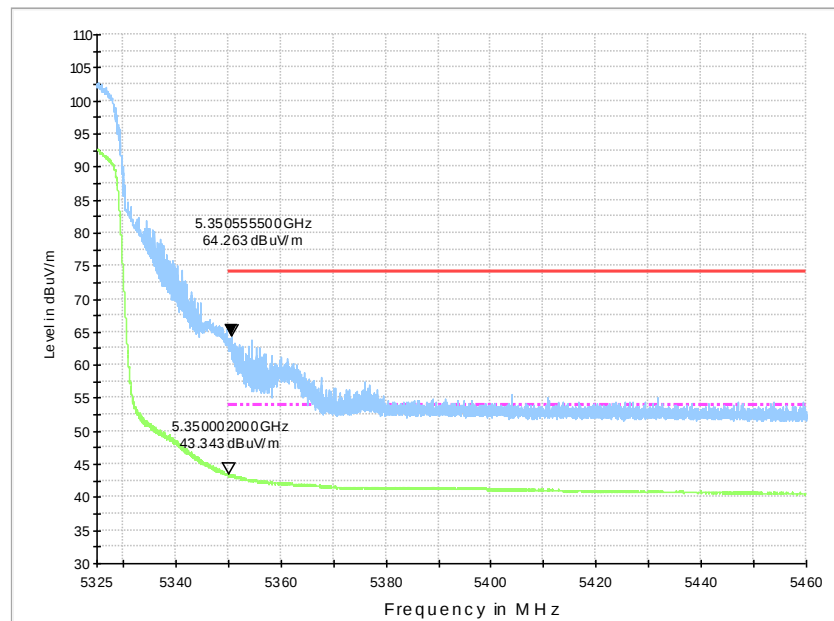


Fig.35 Band Edges (802.11n-HT20 Ch64, 5320MHz)

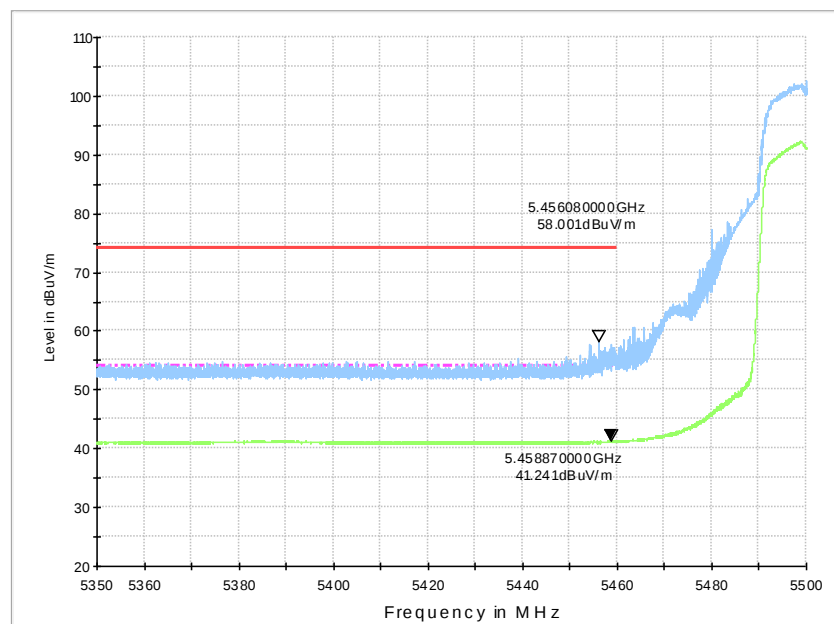


Fig.36 Band Edges (802.11n-HT20 Ch100, 5500MHz)

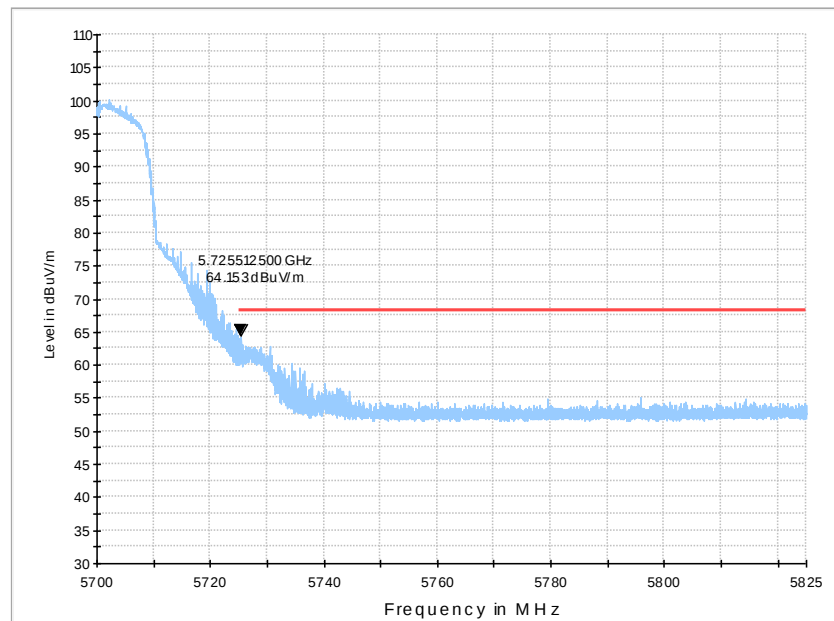


Fig.37 Band Edges (802.11n-HT20 Ch140, 5700MHz)

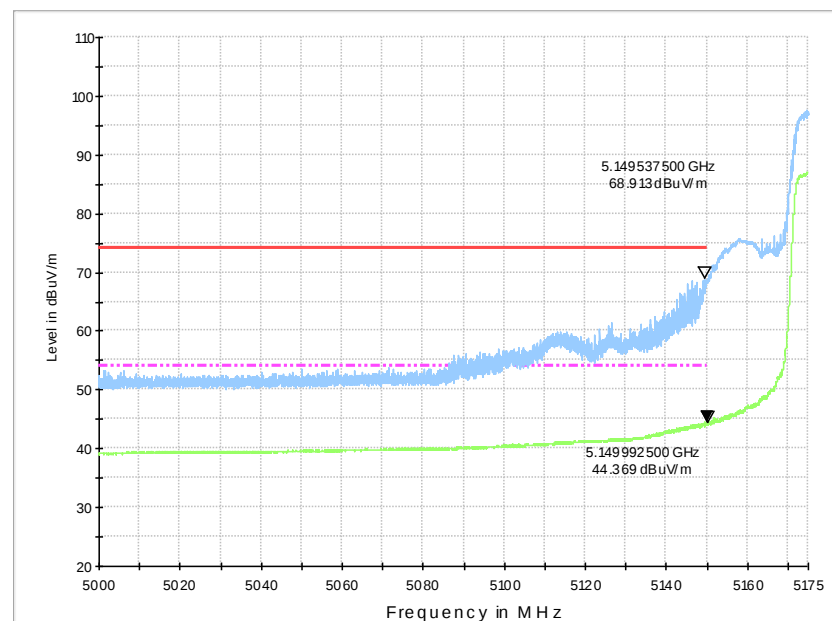


Fig.38 Band Edges (802.11n-HT40 Ch38, 5190MHz)

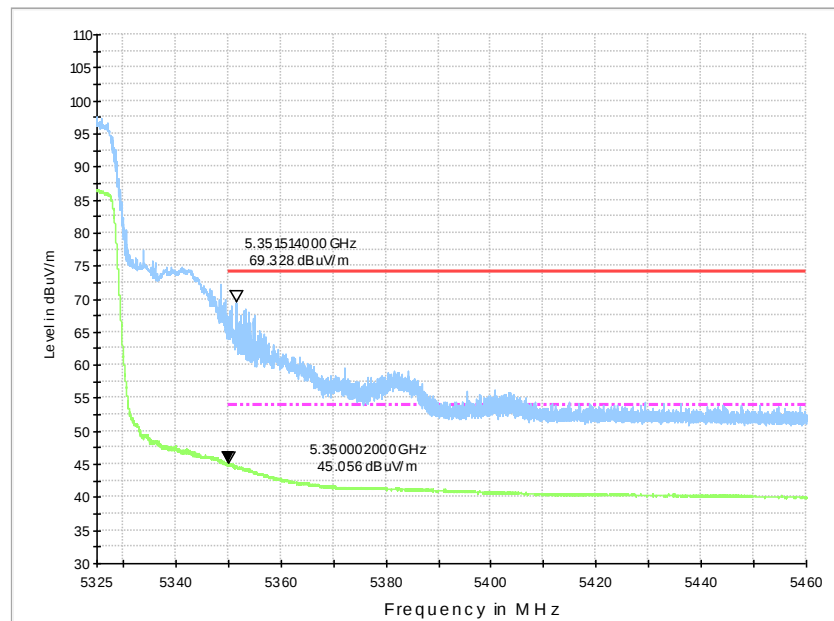


Fig.39 Band Edges (802.11n-HT40 Ch62, 5310MHz)

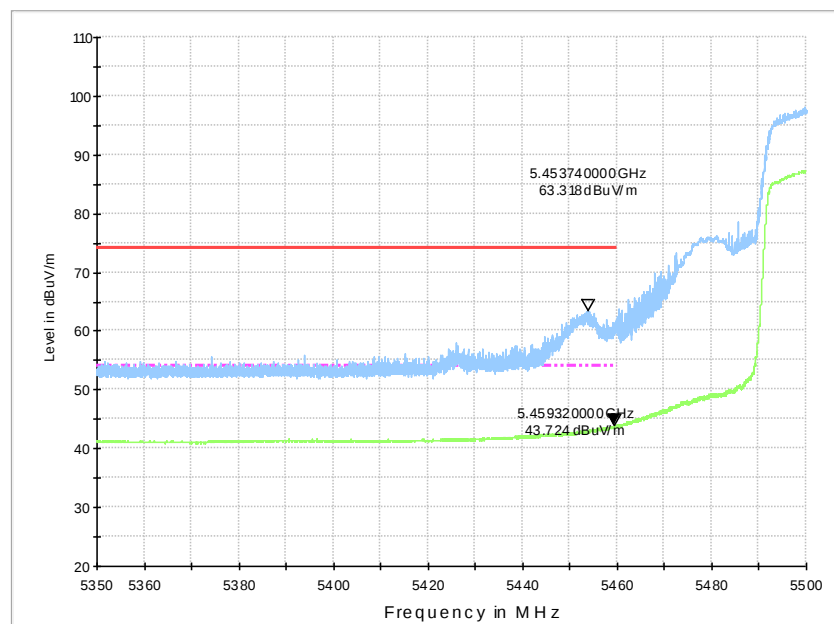


Fig.40 Band Edges (802.11n-HT40 Ch102, 5510MHz)

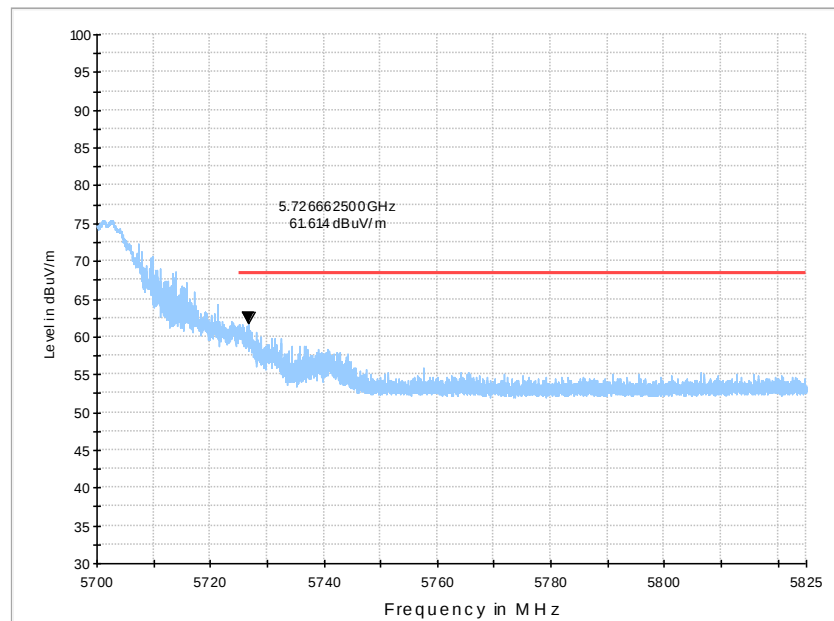


Fig.41 Band Edges (802.11n-HT40 Ch134, 5670MHz)

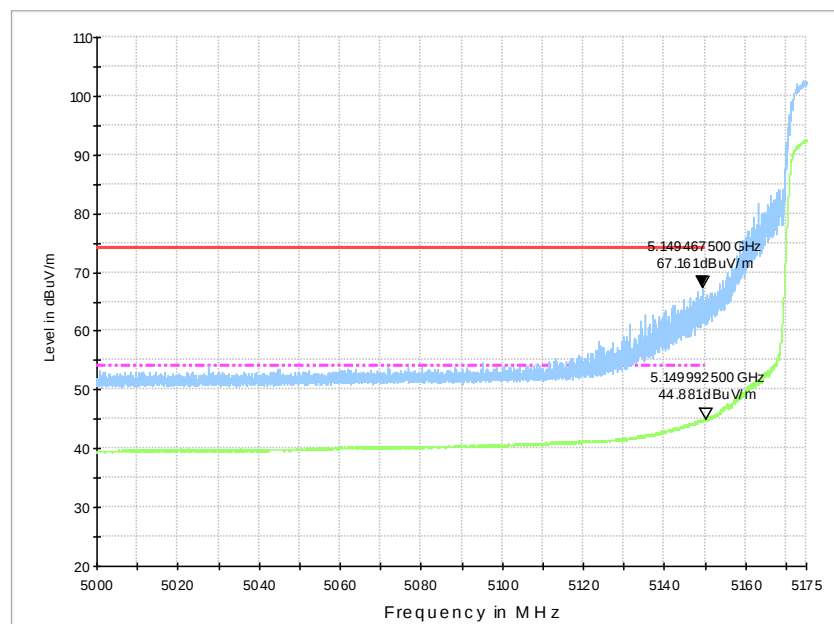


Fig.42 Band Edges (802.11ac-HT20 Ch36, 5180MHz)

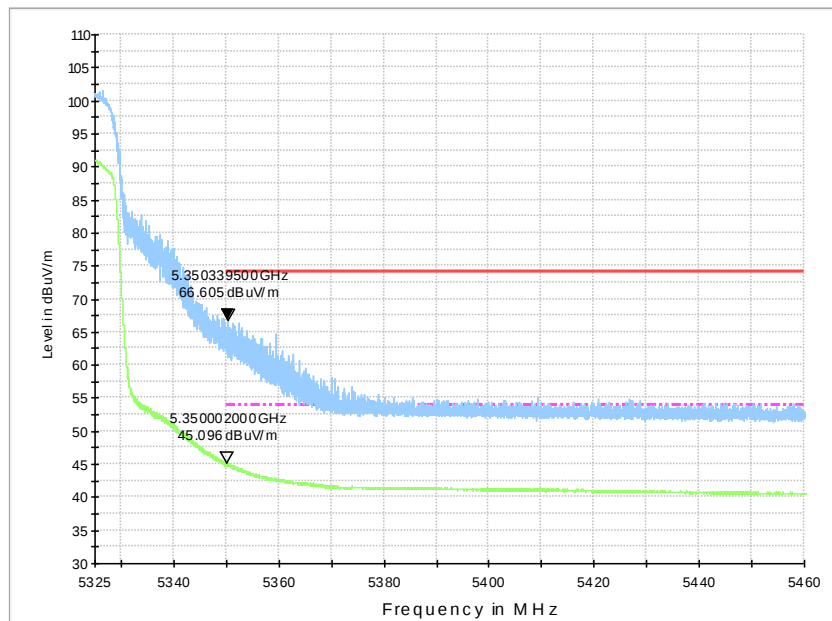


Fig.43 Band Edges (802.11ac-HT20 Ch64, 5320MHz)

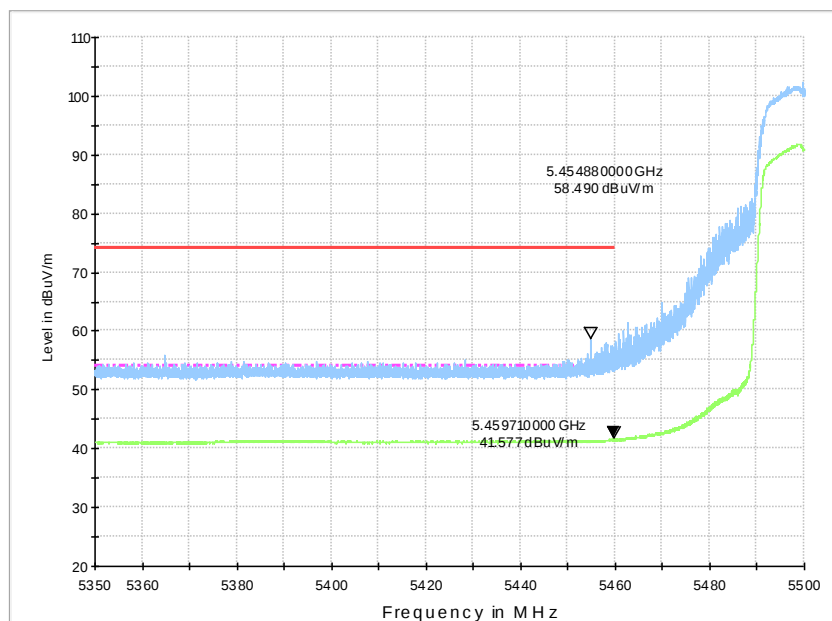


Fig.44 Band Edges (802.11ac-HT20 Ch100, 5500MHz)

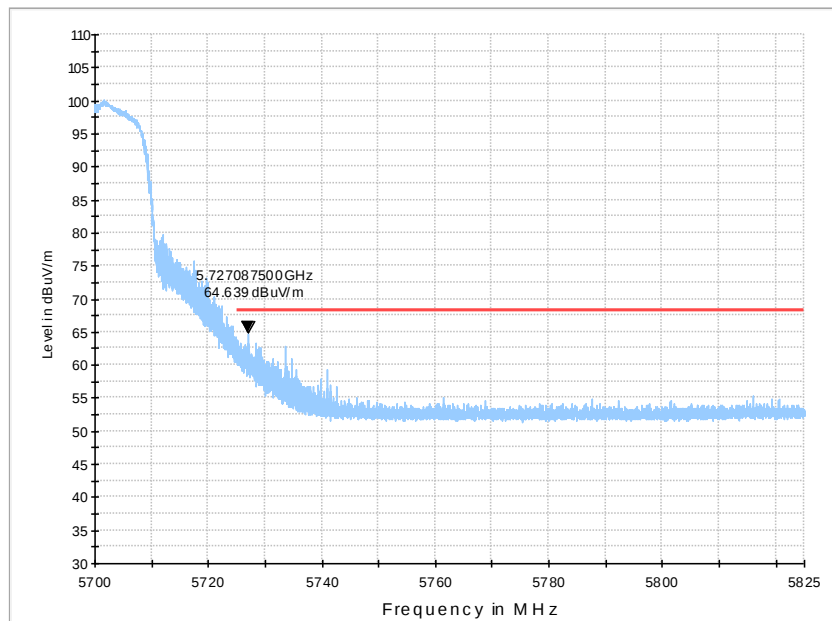


Fig.45 Band Edges (802.11ac-HT20 Ch140, 5700MHz)

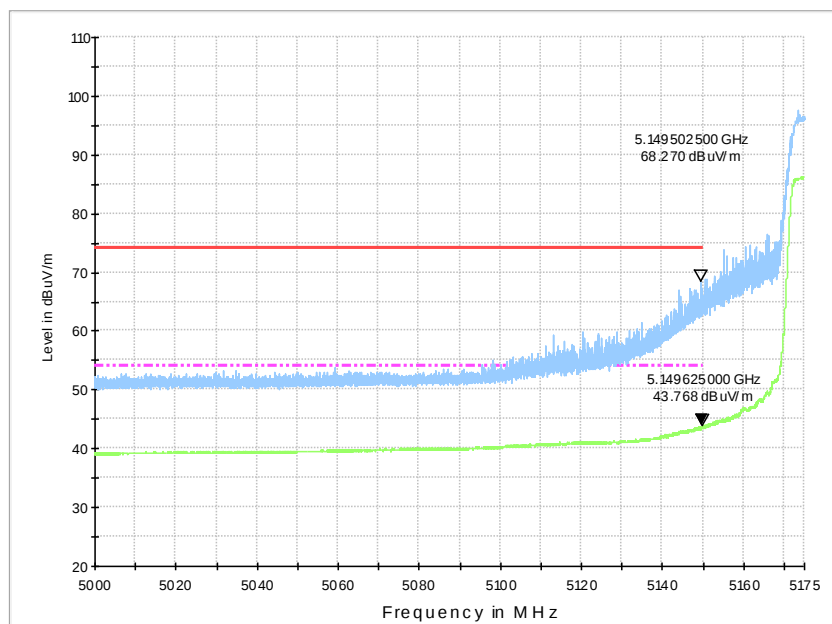


Fig.46 Band Edges (802.11ac-HT40 Ch38, 5190MHz)

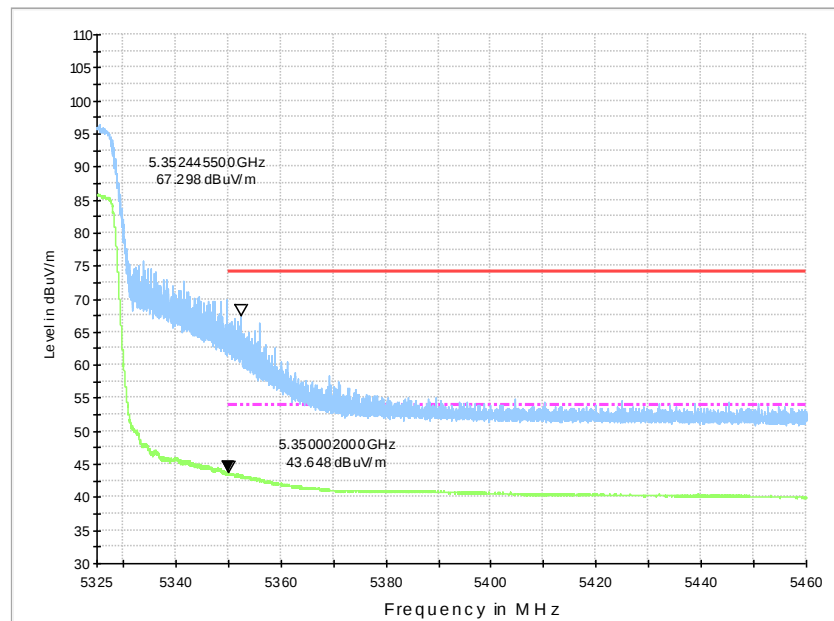


Fig.47 Band Edges (802.11ac-HT40 Ch62, 5310MHz)

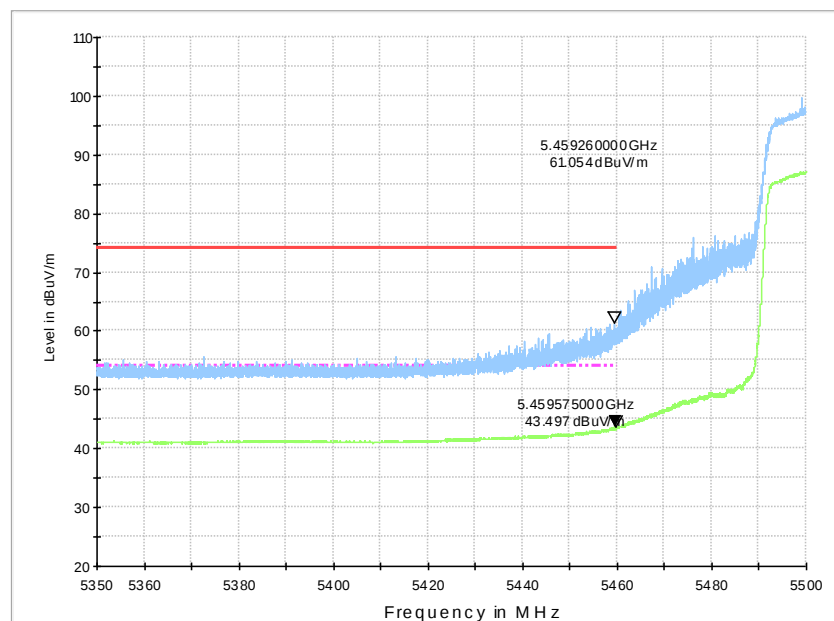


Fig.48 Band Edges (802.11ac-HT40 Ch102, 5510MHz)

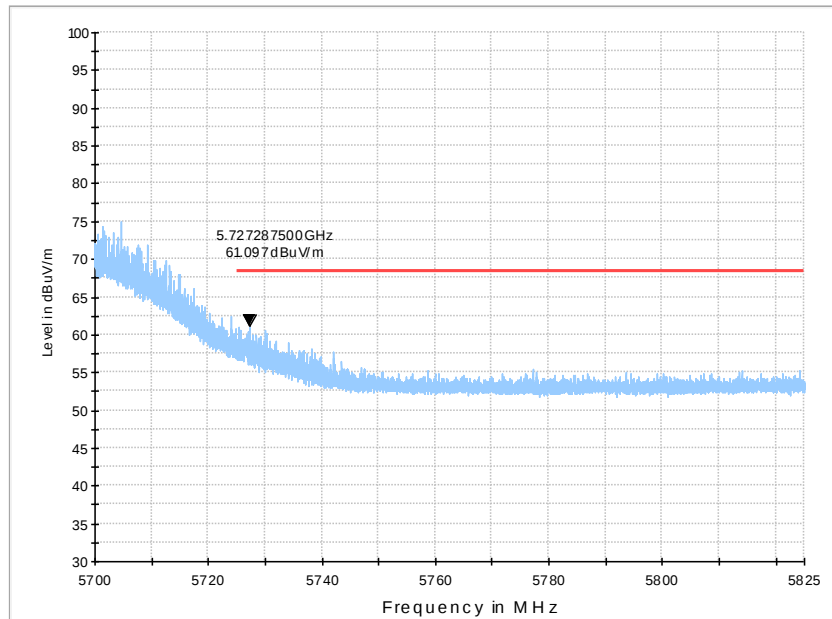


Fig.49 Band Edges (802.11ac-HT40 Ch134, 5670MHz)

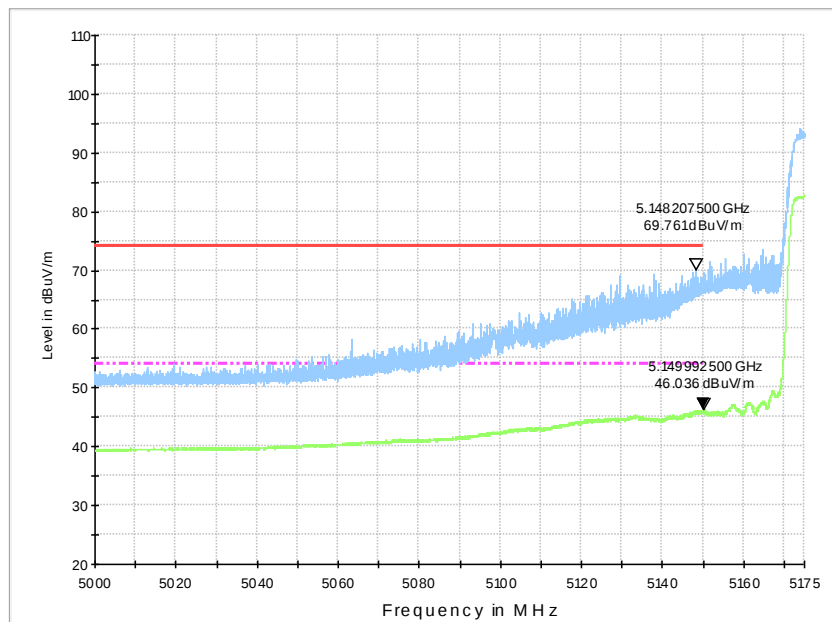


Fig.50 Band Edges (802.11ac-HT80 Ch42 , 5210MHz)

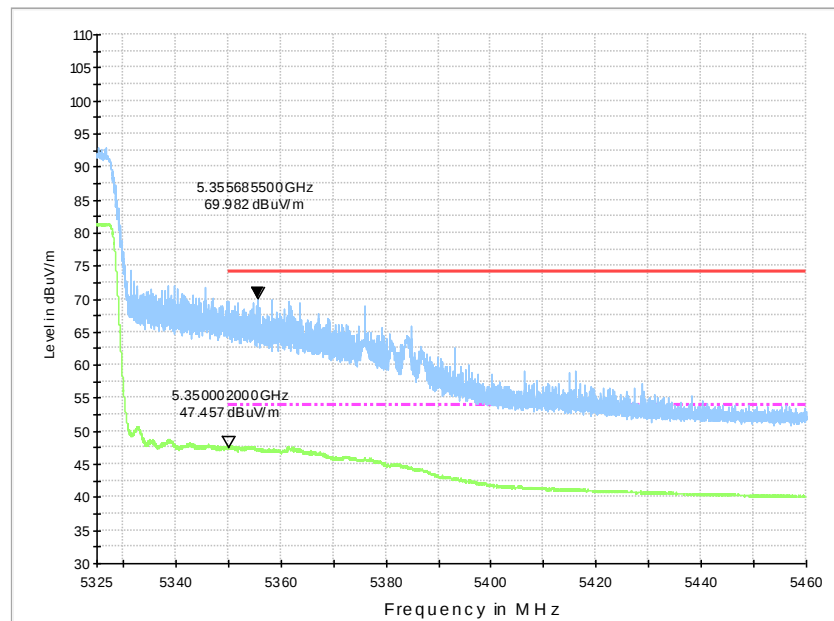


Fig.51 Band Edges (802.11ac-HT80 Ch58, 5290MHz)

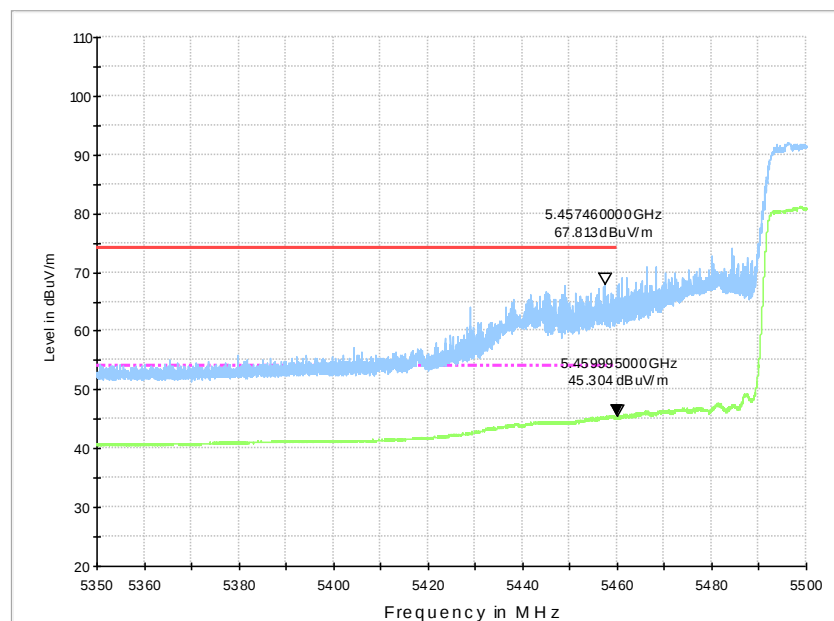


Fig.52 Band Edges (802.11ac-HT80 Ch106, 5530MHz)

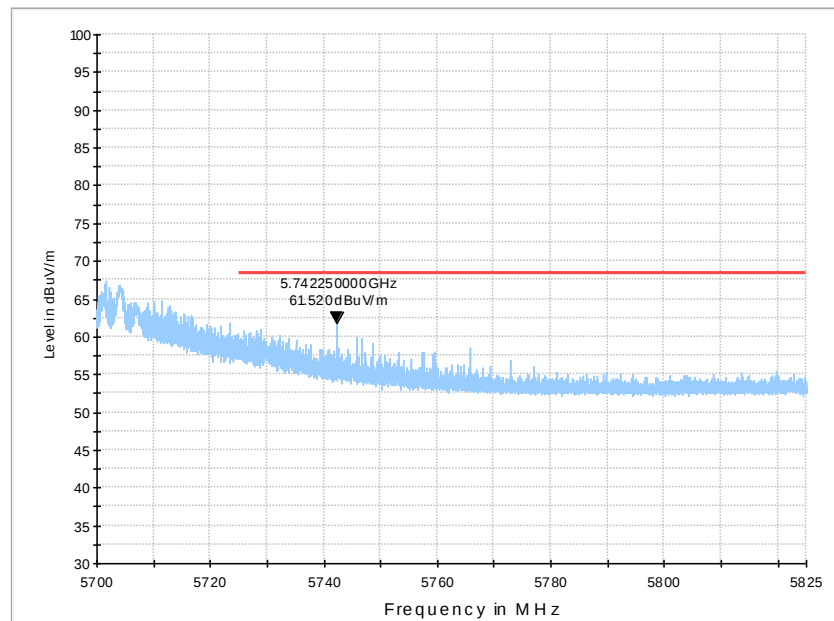


Fig.53 Band Edges (802.11ac-HT80 Ch122, 5610MHz)

B.6. Transmitter Spurious Emission

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.407	-27 dBm/MHz

In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

Limit in restricted band:

Frequency of emission (MHz)	Field strength(uV/m)	Field strength(dBuV/m)	Measurement distance(m)
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

The measurement is made according to ANSI C63.10-2013 and KDB 789033

Test Condition

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

Measurement Results:

802.11a mode

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11a	36(5180MHz)	1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
	40(5200MHz)	30 MHz ~1 GHz	---	P
		1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
		18 GHz ~ 26.5 GHz	---	P
		26.5 GHz ~ 40 GHz	---	P
	48(5240MHz)	1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
	52(5260MHz)	1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
	56(5280MHz)	30 MHz ~1 GHz	---	P
		1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
		18 GHz ~ 26.5 GHz	---	P
		26.5 GHz ~ 40 GHz	---	P
	64(5320MHz)	1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
	100(5500MHz)	1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
	120(5600MHz)	30 MHz ~1 GHz	---	P
		1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
		18 GHz ~ 26.5 GHz	---	P
		26.5 GHz ~ 40 GHz	---	P
	140(5700MHz)	1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P

802.11n-HT20 mode

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11n -HT20	36(5180MHz)	1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
	40(5200MHz)	30 MHz ~1 GHz	---	P
		1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
		18 GHz ~ 26.5 GHz	---	P
		26.5 GHz ~ 40 GHz	---	P
	48(5240MHz)	1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
	52(5260MHz)	1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
	56(5280MHz)	30 MHz ~1 GHz	---	P
		1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
		18 GHz ~ 26.5 GHz	---	P
		26.5 GHz ~ 40 GHz	---	P
	64(5320MHz)	1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
	100(5500MHz)	1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
	120(5600MHz)	30 MHz ~1 GHz	---	P
		1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
		18 GHz ~ 26.5 GHz	---	P
		26.5 GHz ~ 40 GHz	---	P
	140(5700MHz)	1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P

802.11n-HT40 mode

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11n HT40	38(5190MHz)	30 MHz ~1 GHz	---	P
		1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
		18 GHz ~ 26.5 GHz	---	P
		26.5 GHz ~ 40 GHz	---	P
	46(5230MHz)	1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
	54(5270MHz)	30 MHz ~1 GHz	---	P
		1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
		18 GHz ~ 26.5 GHz	---	P
		26.5 GHz ~ 40 GHz	---	P
	62(5310MHz)	30 MHz ~1 GHz	---	P
		1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
		18 GHz ~ 26.5 GHz	---	P
		26.5 GHz ~ 40 GHz	---	P
	102(5510MHz)	30 MHz ~1 GHz	---	P
		1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
		18 GHz ~ 26.5 GHz	---	P
		26.5 GHz ~ 40 GHz	---	P
	118(5590MHz)	1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
	134(5670MHz)	30 MHz ~1 GHz	---	P
		1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
		18 GHz ~ 26.5 GHz	---	P
		26.5 GHz ~ 40 GHz	---	P

802.11ac-HT20 mode

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11ac -HT20	36(5180MHz)	1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
	40(5200MHz)	30 MHz ~1 GHz	---	P
		1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
		18 GHz ~ 26.5 GHz	---	P
		26.5 GHz ~ 40 GHz	---	P
	48(5240MHz)	1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
	52(5260MHz)	1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
	56(5280MHz)	30 MHz ~1 GHz	---	P
		1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
		18 GHz ~ 26.5 GHz	---	P
		26.5 GHz ~ 40 GHz	---	P
	64(5320MHz)	1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
	100(5500MHz)	1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
	120(5600MHz)	30 MHz ~1 GHz	---	P
		1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
		18 GHz ~ 26.5 GHz	---	P
		26.5 GHz ~ 40 GHz	---	P
	140(5700MHz)	1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P

802.11ac-HT40 mode

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11ac HT40	38(5190MHz)	30 MHz ~1 GHz	---	P
		1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
		18 GHz ~ 26.5 GHz	---	P
		26.5 GHz ~ 40 GHz	---	P
	46(5230MHz)	1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
	54(5270MHz)	30 MHz ~1 GHz	---	P
		1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
		18 GHz ~ 26.5 GHz	---	P
		26.5 GHz ~ 40 GHz	---	P
	62(5310MHz)	30 MHz ~1 GHz	---	P
		1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
		18 GHz ~ 26.5 GHz	---	P
		26.5 GHz ~ 40 GHz	---	P
	102(5510MHz)	30 MHz ~1 GHz	---	P
		1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
		18 GHz ~ 26.5 GHz	---	P
		26.5 GHz ~ 40 GHz	---	P
	118(5590MHz)	1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
	134(5670MHz)	30 MHz ~1 GHz	---	P
		1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
		18 GHz ~ 26.5 GHz	---	P
		26.5 GHz ~ 40 GHz	---	P

802.11ac-HT80 mode

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11ac – HT80	42(5210MHz)	1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
	58(5290MHz)	30 MHz ~1 GHz	---	P
		1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
		18 GHz ~ 26.5 GHz	---	P
		26.5 GHz ~ 40 GHz	---	P
	106(5530MHz)	1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
	122(5610MHz)	1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P

Conclusion: PASS

Note:

A "reference path loss" is established and the A_{Rpl} is the attenuation of "reference path loss", and including the gain of receive antenna, the gain of the preamplifier, the cable loss.

P_{Mea} is the field strength recorded from the instrument.

The measurement results are obtained as described below:

Result= $P_{Mea}+A_{Rpl}= P_{Mea}+Cable\ Loss+Antenna\ Factor$

AVERAGE Results:
802.11a
Channel 36

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5146.5	41.49	-33.28	34.26	40.51	54	12.51	V
5150	42.33	-33.27	34.26	41.34	54	11.67	V
10360	30.26	-29.67	37.63	22.3	54	23.74	H
15540	34.85	-24.49	40.15	19.18	54	19.15	H
17830.4	37.7	-22.48	41.53	18.64	54	16.3	V
17916.8	37.99	-22.65	41.52	19.13	54	16.01	V

Channel 40

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5148.9	38.22	-33.27	34.26	37.23	54	15.78	V
5352.6	38.13	-32.29	34.34	36.08	54	15.87	V
10400	30.42	-29.32	37.68	22.05	54	23.58	V
15600	34.84	-24.52	40.22	19.14	54	19.16	V
17829.6	37.71	-22.47	41.53	18.65	54	16.29	V
17937.6	37.82	-22.7	41.51	19	54	16.18	V

Channel 48

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5148.9	38	-33.27	34.26	37.01	54	16	V
5352.6	38.57	-32.29	34.34	36.52	54	15.43	V
10480	30.38	-29.57	37.78	22.17	54	23.63	H
15720	34.49	-24.36	40.37	18.48	54	19.51	V
17830.4	37.66	-22.48	41.53	18.6	54	16.34	V
17915.2	38.04	-22.65	41.52	19.18	54	15.96	H

Channel 52

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5149.8	38.41	-33.27	34.26	37.42	54	15.59	V
5350.2	39	-32.29	34.34	36.95	54	15	V
10520	30.84	-29.65	37.81	22.68	54	23.16	H
15780	34.89	-24.2	40.44	18.65	54	19.11	H
17712.8	37.82	-22.21	41.56	18.47	54	16.18	V
17920.8	38.01	-22.66	41.52	19.15	54	16	H

Channel 56

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5148	38.36	-33.28	34.26	37.38	54	15.64	V
5352	39.37	-32.29	34.34	37.32	54	14.63	V
10560	30.26	-29.45	37.82	21.88	54	23.74	H
15840	35.46	-24.06	40.51	19.01	54	18.54	H
17724.8	37.83	-22.24	41.55	18.51	54	16.17	H
17905.6	38.09	-22.63	41.52	19.2	54	15.91	V

Channel 64

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5350	41.2	-32.29	34.34	39.15	54	12.8	V
5353.8	40.67	-32.29	34.34	38.62	54	13.33	V
10640	30.5	-29.3	37.86	21.94	54	23.5	V
15960	35.58	-23.82	40.65	18.74	54	18.42	V
17741.6	37.85	-22.28	41.55	18.58	54	16.15	V
17834.4	37.87	-22.48	41.53	18.82	54	16.13	H

Channel 100

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5461.25	39.12	-32.69	34.39	37.42	54	14.89	V
5459.15	38.93	-32.69	34.38	37.24	54	15.07	V
11000	31.58	-29.87	38	23.46	54	22.42	V
17831.2	37.87	-22.48	41.53	18.81	54	16.13	H
17904.8	37.9	-22.63	41.52	19.01	54	16.1	H
17941.6	37.98	-22.7	41.51	19.17	54	16.02	V

Channel 120

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5353.8	38.63	-32.29	34.34	36.58	54	15.37	V
5396.45	38.59	-32.29	34.36	36.52	54	15.41	V
11200	31.32	-30.43	38.08	23.67	54	22.68	H
17751.2	37.88	-22.3	41.55	18.63	54	16.12	H
17831.2	37.91	-22.48	41.53	18.86	54	16.09	V
17910.4	38.09	-22.64	41.52	19.21	54	15.91	H

Channel 140

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5396.1	38.55	-32.29	34.36	36.48	48.3	9.75	V
5442.6	38.46	-32.65	34.38	36.72	48.3	9.85	V
11400	31.92	-29.72	38.16	23.47	48.3	16.39	V
17745.6	37.8	-22.28	41.55	18.53	48.3	10.5	H
17832.8	37.75	-22.48	41.53	18.7	48.3	10.55	H
17894.4	37.95	-22.61	41.52	19.04	48.3	10.35	H

802.11n-HT20

Channel 36

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5147.7	41.6	-33.28	34.26	40.62	54	12.4	V
5150	42.57	-33.27	34.26	41.57	54	11.44	V
10360	30.55	-29.67	37.63	22.59	54	23.45	V
15540	34.9	-24.49	40.15	19.24	54	19.1	H
17736	37.9	-22.26	41.55	18.61	54	16.1	H
17904	38.14	-22.63	41.52	19.24	54	15.87	V

Channel 40

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5149.5	38.76	-33.27	34.26	37.78	54	15.24	V
5354.1	38.55	-32.29	34.34	36.5	54	15.45	V
10400	30.57	-29.32	37.68	22.2	54	23.43	H
15600	35.04	-24.52	40.22	19.34	54	18.96	V
17741.6	37.92	-22.28	41.55	18.64	54	16.08	V
17916	38.1	-22.65	41.52	19.24	54	15.9	H

Channel 48

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5149.8	38.36	-33.27	34.26	37.37	54	15.64	V
5352.6	38.81	-32.29	34.34	36.76	54	15.19	V
10480	30.67	-29.57	37.78	22.47	54	23.33	V
15720	34.75	-24.36	40.37	18.74	54	19.25	V
17718.4	37.84	-22.22	41.56	18.5	54	16.16	H
17928	38.08	-22.68	41.51	19.24	54	15.92	H

Channel 52

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5148.9	38.56	-33.27	34.26	37.57	54	15.44	V
5354.4	39.09	-32.29	34.34	37.04	54	14.91	V
10520	30.87	-29.65	37.81	22.71	54	23.13	H
15780	35.01	-24.2	40.44	18.77	54	18.99	H
17740	37.95	-22.27	41.55	18.67	54	16.05	H
17832.8	37.92	-22.48	41.53	18.87	54	16.08	H

Channel 56

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5148.9	38.32	-33.27	34.26	37.33	54	15.69	V
5352.9	39.05	-32.29	34.34	37	54	14.95	V
10560	30.25	-29.45	37.82	21.87	54	23.75	V
15840	35.45	-24.06	40.51	19	54	18.55	H
17744.8	37.97	-22.28	41.55	18.7	54	16.03	H
17900	38.1	-22.62	41.52	19.2	54	15.9	V

Channel 64

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5349.9	40.92	-32.29	34.34	38.87	54	13.08	V
5354.1	40.47	-32.29	34.34	38.42	54	13.53	V
10640	30.46	-29.3	37.86	21.9	54	23.54	V
15960	35.61	-23.82	40.65	18.78	54	18.39	V
17729.6	37.92	-22.25	41.55	18.61	54	16.08	V
17915.2	38.13	-22.65	41.52	19.27	54	15.87	H

Channel 100

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5457.6	39.22	-32.7	34.38	37.53	54	14.78	V
5460	39.26	-32.69	34.38	37.56	54	14.74	V
11000	31.56	-29.87	38	23.43	54	22.44	H
17736.8	37.91	-22.26	41.55	18.62	54	16.09	V
17829.637	37.79	-22.47	41.53	18.73	54	16.21	H
17909.6	38.03	-22.64	41.52	19.15	54	15.97	V

Channel 120

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5417.7	38.45	-32.45	34.37	36.54	54	15.55	V
5433.9	38.47	-32.58	34.37	36.67	54	15.53	V
11200	31.32	-30.43	38.08	23.67	54	22.68	H
17769.6	37.57	-22.34	41.55	18.36	54	16.43	V
17836.8	37.86	-22.49	41.53	18.82	54	16.14	H
17921.6	38.08	-22.66	41.52	19.22	54	15.92	H

Channel 140

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5353.8	38.63	-32.29	34.34	36.58	48.3	9.67	V
5433.9	38.47	-32.58	34.37	36.67	48.3	9.83	V
11400	30.93	-29.72	38.16	22.49	48.3	17.37	H
17100	36.94	-23.04	42.08	17.9	48.3	11.36	H
17717.6	37.18	-22.22	41.56	17.84	48.3	11.13	H
17912	37.51	-22.64	41.52	18.63	48.3	10.79	V

802.11n-HT40

Channel 38

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5147.4	40.36	-33.28	34.26	39.37	54	13.65	V
5149.8	40.62	-33.27	34.26	39.63	54	13.39	V
10380	30.42	-29.49	37.66	22.25	54	23.58	V
15570.4	35.12	-24.51	40.19	19.44	54	18.88	V
17726.4	37.77	-22.24	41.55	18.45	54	16.23	H
17909.6	38.15	-22.64	41.52	19.27	54	15.85	H

Channel 46

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5148.6	39.11	-33.28	34.26	38.12	54	14.9	V
5352	38.88	-32.29	34.34	36.83	54	15.12	V
10460	30.83	-29.49	37.75	22.56	54	23.17	V
15690.4	35.02	-24.44	40.33	19.13	54	18.98	H
17742.4	37.97	-22.28	41.55	18.7	54	16.03	H
17918.4	38.11	-22.66	41.52	19.25	54	15.89	V

Channel 54

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5149.8	38.51	-33.27	34.26	37.52	54	15.49	V
5350.5	40.13	-32.29	34.34	38.08	54	13.87	V
10540	30.48	-29.55	37.82	22.21	54	23.52	H
15810.4	35.35	-24.12	40.47	18.99	54	18.65	V
17720	37.8	-22.22	41.56	18.47	54	16.2	H
17925.6	38.14	-22.67	41.51	19.3	54	15.86	V

Channel 62

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5350.2	42.7	-32.29	34.34	40.65	54	11.3	V
5350.5	42.73	-32.29	34.34	40.68	54	11.27	V
10620	30.79	-29.2	37.85	22.14	54	23.21	V
15930.4	35.54	-23.88	40.62	18.8	54	18.46	V
17738.4	37.93	-22.27	41.55	18.65	54	16.07	V
17912.8	38.12	-22.64	41.52	19.24	54	15.89	H

Channel 102

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5402.25	38.69	-32.33	34.36	36.66	54	15.31	V
5442.6	38.66	-32.65	34.38	36.93	54	15.34	V
11020	31.12	-29.83	38.01	22.94	54	22.88	V
16530.4	35.88	-23.21	41.54	17.55	54	18.12	H
17824.8	37.35	-22.46	41.53	18.28	54	16.65	H
17901.6	37.67	-22.62	41.52	18.77	54	16.33	H

Channel 118

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5421.75	38.47	-32.49	34.37	36.58	54	15.54	V
5384.28	38.67	-32.29	34.36	36.6	54	15.33	V
11180	30.48	-30.45	38.07	22.86	54	23.52	H
16770.4	36.42	-23.01	41.88	17.55	54	17.58	H
17824	37.33	-22.46	41.53	18.26	54	16.67	H
17914.4	37.84	-22.65	41.52	18.97	54	16.16	H

Channel 134

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5435.18	38.95	-32.59	34.38	37.16	48.3	9.36	V
5417.8	38.96	-32.45	34.37	37.05	48.3	9.34	V
11340	31.05	-30.03	38.14	22.94	48.3	17.25	V
17010.4	37.04	-23.02	42.19	17.87	48.3	11.26	V
17828	37.55	-22.47	41.53	18.49	48.3	10.75	V
17911.2	37.82	-22.64	41.52	18.94	48.3	10.48	V

802.11ac-HT20

Channel 36

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5146.2	41.7	-33.28	34.26	40.72	54	12.3	V
5150	42.57	-33.27	34.26	41.58	54	11.43	V
10360	30.45	-29.67	37.63	22.49	54	23.55	H
15540	34.84	-24.49	40.15	19.18	54	19.16	H
17833.6	37.87	-22.48	41.53	18.82	54	16.13	V
17911.2	38.11	-22.64	41.52	19.23	54	15.89	V