

Date : 2017-07-07 No. : DM17050191		rest Report	Page 1 of 78
Applicant	:	The Singing Machine Company Inc. 6301 NW 5th Way, Suite 2900 Fort Lauderdale, F	L, 33309, U.S.A.
Supplier / Manufacturer	:	Zhuhai Fullwing Electronic Co., Ltd. Zhongshan E 4/F & 5/F, No 10, Xingye Road, Xinxu, Sanxiang, Guangdong, China	
Description of Sample(s)	:	Submitted sample(s) said to beProduct:Pedestal Karaoke SystemBrand Name:Singing MachineModel No.:iSM1060BTFCC ID:2AAXO-ISM1060BT	
Date Samples Received	:	2017-05-09	
Date Tested	:	2017-05-13 to 2017-07-06	
Investigation Requested	:	Perform ElectroMagnetic Interference measuremen with FCC 47CFR [Codes of Federal Regulations] ANSI C63.10:2013 for FCC Certification.	
Conclusions	:	The submitted product <u>COMPLIED</u> with the requi Communications Commission [FCC] Rules and Ro The tests were performed in accordance with the su above and on Section 2.2 in this Test Report.	egulations Part 15.
Remarks	:	Bluetooth FHSS (GFSK/ π/4-DQPSK) For additional model(s) details, see page 3.	Department

STC (Dongguan) Company Limited



### Date : 2017-07-07 No. : DM17050191

**CONTENT:** 

Page 2 of 78

	Cover Content	Page 1 of 78 Page 2 of 78
<u>1.0</u>	<u>General Details</u>	
1.1	Test Laboratory	Page 3 of 78
1.2	Equipment Under Test [EUT] Description of EUT operation	Page 3 of 78
1.3	Date of Order	Page 3 of 78
1.4	Submitted Sample(s)	Page 3 of 78
1.5	Test Duration	Page 3 of 78
1.6	Country of Origin	Page 3 of 78
1.7	RF Module Details	Page 4 of 78
1.8	Antenna Details	Page 4 of 78
<u>2.0</u>	Technical Details	
2.1	Investigations Requested	Page 5 of 78
2.2	Test Standards and Results Summary	Page 5 of 78
2.3	Table for Test Modes	Page 6 of 78
<u>3.0</u>	Test Results	
3.1	Emission	Page 7-72 of 78
<u>Append</u> List of N	<u>ix A</u> Aeasurement Equipment	Page 73 of 78
<u>Append</u> Photogra	ix B aph(s) of Product	Page 74-78 of 78

STC (Dongguan) Company Limited



### Date : 2017-07-07

No. : DM17050191

Page 3 of 78

#### 1.0 General Details

#### 1.1 Test Laboratory

STC (Dongguan) Company LimitedEMC Laboratory68 Fumin Nan Road, Dalang, Dongguan, Guangdong, ChinaTelephone:(86 769) 81119888Fax:(86 769) 81116222

#### 1.2 Equipment Under Test [EUT] Description of Sample(s)

Description of Sumple(s)	
Product:	Pedestal Karaoke System
Additional Product:	HI-DEF KARAOKE PEDESTAL
Manufacturer:	Zhuhai Fullwing Electronic Co., Ltd. Zhongshan Branch
	4/F & 5/F, No 10, Xingye Road, Xinxu, Sanxiang, Zhongshan,
	Guangdong, China
Brand Name:	Singing Machine
Model Number:	iSM1060BT
Additional Model Number:	iSM1061BT, iSM1062BT
Rating:	Input: 100-240Va.c. 50/60Hz 1.2A;
	Output: 10.0Vd.c 4.0A
The AC/DC adaptor was provided	by the applicant with following details:

Brand name: KPTEC ; Model no.: K48V100400U

### **1.2.1 Description of EUT Operation**

The Equipment Under Test (EUT) is a Pedestal Karaoke System. The transmission signal is digital modulated with channel frequency range 2402-2480MHz. The R.F. signal was modulated by IC; the type of modulation used was frequency hopping spread spectrum Modulation.

1.3 Date of Order

2017-05-09

- 1.4Submitted Sample(s):1 Sample
- **1.5 Test Duration** 2017-05-13 to 2017-07-06
- **1.6 Country of Origin** China

STC (Dongguan) Company Limited



# Date : 2017-07-07

Page 4 of 78

### No. : DM17050191

#### 1.7 **RF Module Details**

Module Model Number:	AC6905
Module FCC ID:	N/A
Module Transmission Type:	Bluetooth V2.1+EDR
Modulation:	FHSS (GFSK / $\pi$ /4-DQPSK)
Data Rates:	1MBps: GFSK
	2 MBps: $\pi/4$ -DQPSK
Frequency Range:	2400-2483.5MHz
Carrier Frequencies:	2402MHz - 2480MHz

Module Specification (specification provided by manufacturer)

#### 1.8 **Antenna Details**

Antenna Type:	PCB antenna
Antenna Gain:	-0.76dBi

STC (Dongguan) Company Limited



### Date : 2017-07-07

No. : DM17050191

Page 5 of 78

### **<u>2.0</u>** <u>Technical Details</u>

### 2.1 Investigations Requested

Perform Electromagnetic Interference measurements in accordance with FCC 47CFR [Codes of Federal Regulations] Part 15: 2015 Regulations and ANSI C63.10:2013 for FCC Certification. According FCC KDB 558074 D01 DTS Meas Guidance v04, Duty cycle  $\geq$  98%. The device was realized by test software.

### 2.2 Test Standards and Results Summary Tables

EMISSION Results Summary						
Test Condition	Test Requirement	Test Method	Class /	Test Result		-
			Severity	Pass	Failed	N/A
Maximum Peak Conducted Output Power	FCC 47CFR 15.247(b)(1)	ANSI C63.10: 2013	N/A	$\boxtimes$		
Radiated Spurious Emissions	FCC 47CFR 15.209	ANSI C63.10: 2013	N/A	$\boxtimes$		
AC Mains Conducted Emissions	FCC 47CFR 15.207	ANSI C63.10: 2013	N/A	$\boxtimes$		
Number of Hopping Frequency	FCC 47CFR 15.247 (b)(1)	ANSI C63.10: 2013	N/A			
20dB Bandwidth	FCC 47CFR 15.247(a)(2)	ANSI C63.10: 2013	N/A			
Hopping Channel Separation	FCC 47CFR 15.247(a)(1)	ANSI C63.10: 2013	N/A			
Band-edge measurement (Radiated)	FCC 47CFR 15.247(d)	ANSI C63.10: 2013	N/A	$\boxtimes$		
Pseudorandom Hopping Algorithm	FCC 47CFR 15.247(a)(1)	N/A	N/A			
Time of Occupancy (Dwell Time)	FCC 47CFR 15.247(a)(1)(iii)	ANSI C63.10: 2013	N/A			
Antenna requirement	FCC 47CFR 15.203	N/A	N/A	$\square$		

Note: N/A - Not Applicable

STC (Dongguan) Company Limited



#### Date : 2017-07-07 No. : DM17050191

Page 6 of 78

#### 2.3 Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate in the table below is the worst case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The device was realized by test software.

The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate
Maximum Peak Conducted Output Power	GFSK / π/4-DQPSK	1MBps / 2MBps
Hopping Channel Separation	GFSK / π/4-DQPSK	1MBps / 2MBps
Number of Hopping Frequency	GFSK / π/4-DQPSK	1MBps / 2MBps
Time of Occupancy(Dwell Time)	$\pi/4$ -DQPSK (DH1 / DH3 / DH5)	2MBps
Radiated Spurious Emissions	GFSK / π/4-DQPSK	1MBps / 2MBps
Band-edge compliance of Conducted Emission	GFSK / π/4-DQPSK	1MBps / 2MBps

STC (Dongguan) Company Limited



Date : 2017-07-07 No. : DM17050191 Page 7 of 78

- 3.0 Test Results
- 3.1 Emission

#### 3.1.1 Maximum Peak Conducted Output Power

Test Requirement: Test Method: Test Date: Mode of Operation: FCC 47CFR 15.247(b) (1) ANSI C63.10: 2013 2017-05-26 Tx mode


#### **Test Method:**

A temporary antenna connector was soldered to the RF output. The RF output of the EUT was connected to the spectrum analyzer. All the attenuation or cable loss will be added to the measured maximum output power. The results are recorded in Watt.

#### **Spectrum Analyzer Setting:**

RBW = 3 MHz, VBW= 3MHz, Sweep = Auto, Span: Approximately five times the 20 dB bandwidth Detector = Peak, Trace = Max. hold

#### **Test Setup:**



Note: a temporary antenna connector was soldered to the RF output.

STC (Dongguan) Company Limited



Date : 2017-07-07 No. : DM17050191 Page 8 of 78

### Limits for Maximum Peak Conducted Output Power [FCC 47CFR 15.247]:

The maximum peak output power shall not exceeded the following limits: For Digital Transmission systems in 2400-2483.5 MHz Band: 1 Watt Results of Bluetooth Communication mode (GFSK) (Fundamental Power): Pass

Results of Bluetooth Communication mode (GFSK) (Fundamental Power): Pass

Transmitter Frequency (MHz)	Maximum conducted output power (Watt)
2402	0.000388
Transmitter Frequency (MHz)	Maximum conducted output power (Watt)

Transmitter Frequency (MHz)	Maximum conducted output power (Watt)
2480	0.000284

The maximum peak output power shall not exceeded the following limits:

For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 Watts

Results of Bluetooth Communication mode ( $\pi/4$ -DOPSK) (Fundamental Power): Pass

Transmitter Frequency (MHz)	Maximum conducted output power (Watt)
2402	0.000470
2702	0.000470

Transmitter Frequency (MHz)	Maximum conducted output power (Watt)
2441	0.000415
Transmitter Frequency (MHz)	Maximum conducted output power (Watt)

0.000332

Calculated measurement uncertainty	: 30MHz to 1GHz	1.7dB
	1GHz to 18GHz	1.7dB

Remark:

2480

1. All test data for each data rate were verified, but only the worst case was reported.

2. The EUT is programmed to transmit signals continuously for all testing.


STC (Dongguan) Company Limited



Date : 2017-07-07 No. : DM17050191 Page 9 of 78

Test plot of Maximum Peak Conducted Output Power :

#### Bluetooth Communication mode (GFSK, 2402MHz)

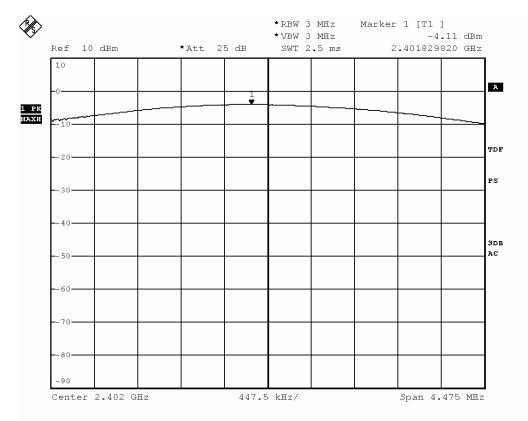


STC (Dongguan) Company Limited



Date : 2017-07-07 No. : DM17050191 Page 10 of 78

#### Bluetooth Communication mode (GFSK, 2441MHz)

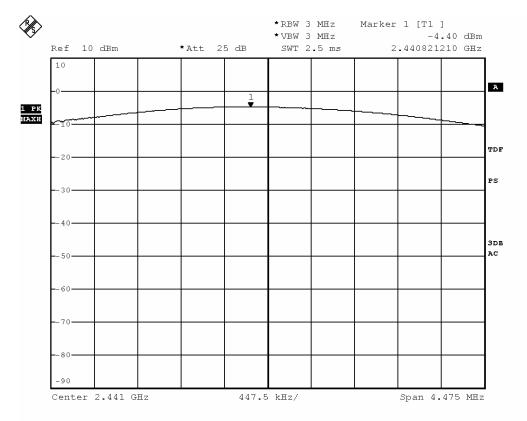


STC (Dongguan) Company Limited



Date : 2017-07-07 No. : DM17050191 Page 11 of 78

#### Bluetooth Communication mode (GFSK, 2480MHz)

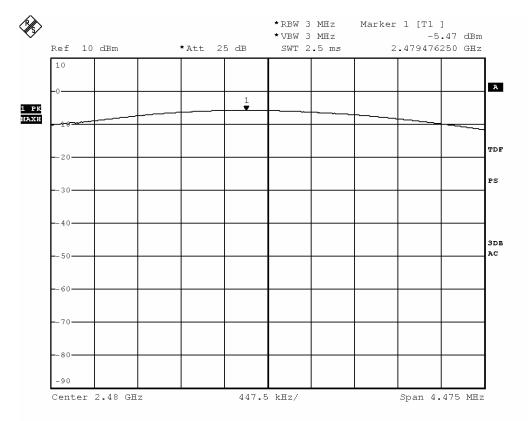


STC (Dongguan) Company Limited



Date : 2017-07-07 No. : DM17050191 Page 12 of 78

#### Bluetooth Communication mode (π/4 DQPSK, 2402MHz)

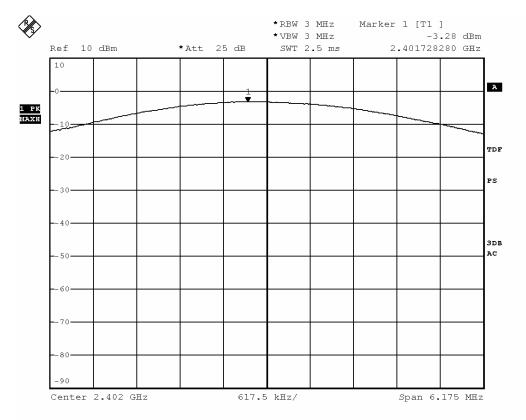


STC (Dongguan) Company Limited



Date : 2017-07-07 No. : DM17050191 Page 13 of 78

#### Bluetooth Communication mode (π/4 DQPSK, 2441MHz)

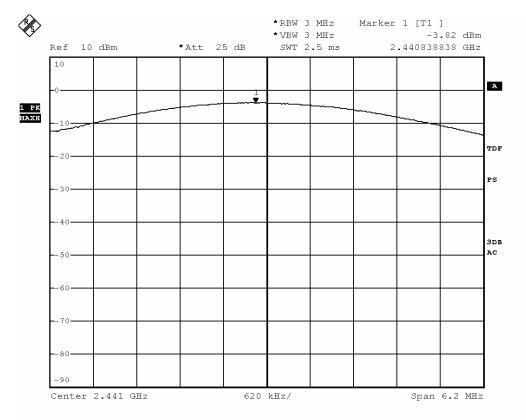


STC (Dongguan) Company Limited



Date : 2017-07-07 No. : DM17050191 Page 14 of 78

#### Bluetooth Communication mode (π/4 DQPSK, 2480MHz)

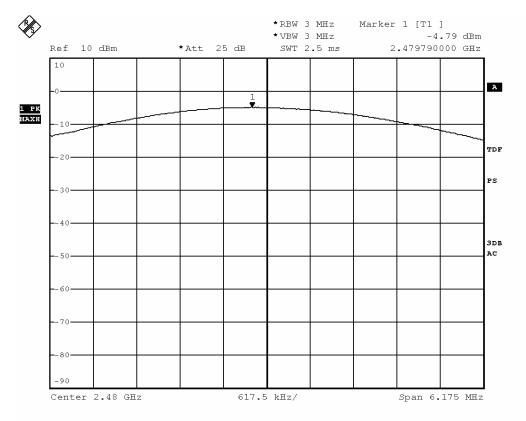

STC (Dongguan) Company Limited



#### Date : 2017-07-07 No. : DM17050191

Page 15 of 78

#### 3.1.2 Radiated Spurious Emissions

Test Requirement:	FCC 47CFR 15.209
Test Method:	ANSI C63.10:2013
Test Date:	2017-05-26 to 2017-07-06
Mode of Operation:	Tx mode / Bluetooth Communication mode (GFSK)

#### **Test Method:**

For emission measurements at or below 1 GHz, the sample was placed 0.8m above the ground plane of semianechoic Chamber\*. For emission measurements above 1 GHz, the sample was placed 1.5m above the ground plane of semi-anechoic Chamber\*. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.

\* Semi-Anechoic chamber located on the G/F of The Hong Kong Standards and Testing Centre Ltd. with a metal ground plane filed with the FCC pursuant to section 2.948 of the FCC rules, with Registration Number: 607756.

STC (Dongguan) Company Limited




Date : 2017-07-07 No. : DM17050191 Page 16 of 78

#### **Spectrum Analyzer Setting:**

9KHz – 30MHz (Pk & Av)	RBW: VBW: Sweep: Span: Trace:	10kHz 30kHz Auto Fully capture the emissions being measured Max. hold
30MHz – 1GHz (QP)	RBW: VBW: Sweep: Span: Trace:	Auto
Above 1GHz (Pk)	RBW: VBW: Sweep: Span: Trace:	Fully capture the emissions being measured
Above 1GHz (Av)	RBW: VBW: Sweep: Span: Trace:	

### **Test Setup:**

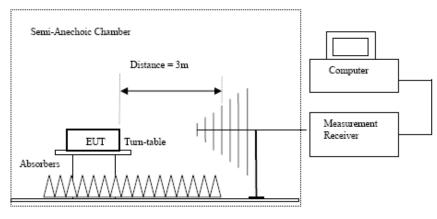

Ground Plane

 Absorbers placed on top of the ground plane are for measurements above 1000MHz only.
Measurements between 30MHz to 1000MHz made with Bi-log antennas, above 1000MHz hom antennas are used, 9kHz to 30MHz loop antennas are used.

#### STC (Dongguan) Company Limited



Date : 2017-07-07 No. : DM17050191 Page 17 of 78

#### Limits for Radiated Emissions FCC 47 CFR 15.247 Class B]:

Frequency Range	Quasi-Peak Limits
[MHz]	[µV/m]
0.009-0.490	2400/F (kHz)
0.490-1.705	24000/F (kHz)
1.705-30	30
30-88	100
88-216	150
216-960	200
Above960	500

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

Result of 1x mode (2402.0 MHz) (GFSK) (9kHz – 30MHz): Pass								
Field Strength of Spurious Emissions								
Peak Value								
Frequency	Measured	Correction	Field	Field	Limit	E-Field		
	Level	Factor	Strength	Strength		Polarity		
MHz	dBuV	dB/m	dBuV/m	uV/m	uV/m			
	Emissions	detected are 1	nore than 20	dB below the	FCC Limits			

### Result of Tx mode (2402.0 MHz) (GFSK) (9kHz - 30MHz): Pass

#### Result of Tx mode (2402.0 MHz) (GFSK) (Above 1GHz): Pass

	Field Strength of Spurious Emissions Peak Value									
Frequency	Measured	Correction	Field	Limit	Margin	E-Field				
	Level @3m	Factor	Strength	@3m		Polarity				
MHz	dBµV	dB/m	dBµV/m	dBµV/m	dB					
4804.0	15.9	41.5	57.4	74.0	16.6	Vertical				
4804.0	14.6	42.4	57.0	74.0	17.0	Horizontal				
7206.0	11.7	45.1	56.8	74.0	17.2	Vertical				
7206.0	10.4	46.2	56.6	74.0	17.4	Horizontal				
9608.0	7.2	48.0	55.2	74.0	18.8	Vertical				
9608.0	6.9	48.8	55.7	74.0	18.3	Horizontal				
12010.0	4.3	51.5	55.8	74.0	18.2	Vertical				
12010.0	3.8	52.4	56.2	74.0	17.8	Horizontal				

STC (Dongguan) Company Limited



### Date : 2017-07-07 No. : DM17050191

	Field Strength of Spurious Emissions Average Value									
Frequency	Measured	Correction	Field	Limit	Margin	E-Field				
	Level @3m	Factor	Strength	@3m		Polarity				
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB					
4804.0	0.6	41.5	42.1	54.0	11.9	Vertical				
4804.0	-0.6	42.4	41.8	54.0	12.2	Horizontal				
7206.0	-2.7	45.1	42.4	54.0	11.6	Vertical				
7206.0	-4.5	46.2	41.7	54.0	12.3	Horizontal				
9608.0	-7.4	48.0	40.6	54.0	13.4	Vertical				
9608.0	-7.5	48.8	41.3	54.0	12.7	Horizontal				
12010.0	-10.6	51.8	41.2	54.0	12.8	Vertical				
12010.0	-10.3	52.4	42.1	54.0	11.9	Horizontal				

### Result of Tx mode (2441.0 MHz) (GFSK) (9kHz - 30MHz): Pass

Field Strength of Spurious Emissions							
Peak Value							
Frequency	Measured	Correction	Field	Field	Limit	E-Field	
	Level	Factor	Strength	Strength		Polarity	
MHz	dBuV	dB/m	dBuV/m	uV/m	uV/m		
	Emissions	detected are 1	nore than 20	dB below the	FCC Limits		

### Result of Tx mode (2441.0 MHz) (GFSK) (Above 1GHz): Pass

	Field Strength of Spurious Emissions Peak Value									
Frequency	Measured	Correction	Field	Limit	Margin	E-Field				
	Level @3m	Factor	Strength	@3m		Polarity				
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB					
4882.0	16.3	41.6	57.9	74.0	16.1	Vertical				
4882.0	15.1	42.5	57.6	74.0	16.4	Horizontal				
7323.0	11.6	53.2	64.8	74.0	9.2	Vertical				
7323.0	10.2	46.3	56.5	74.0	17.5	Horizontal				
9764.0	7.5	48.1	55.6	74.0	18.4	Vertical				
9764.0	6.9	48.9	55.8	74.0	18.2	Horizontal				
12205.0	4.4	51.6	56.0	74.0	18.0	Vertical				
12205.0	3.8	52.5	56.3	74.0	17.7	Horizontal				

STC (Dongguan) Company Limited



### Date : 2017-07-07 No. : DM17050191

	Field Strength of Spurious Emissions Average Value									
Frequency	Measured	Correction	Field	Limit	Margin	E-Field				
	Level @3m	Factor	Strength	@3m		Polarity				
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB					
4882.0	1.2	41.6	42.8	54.0	11.2	Vertical				
4882.0	-0.1	42.5	42.4	54.0	11.6	Horizontal				
7323.0	-4.1	45.2	41.1	54.0	12.9	Vertical				
7323.0	-4.4	46.3	41.9	54.0	12.1	Horizontal				
9764.0	-6.7	48.1	41.4	54.0	12.6	Vertical				
9764.0	-8.9	48.9	40.0	54.0	14.0	Horizontal				
12205.0	-9.6	51.6	42.0	54.0	12.0	Vertical				
12205.0	-10.7	52.5	41.8	54.0	12.2	Horizontal				

### Result of Tx mode (2480.0 MHz) (GFSK) (9kHz - 30MHz): Pass

Field Strength of Spurious Emissions							
Peak Value							
Frequency	Measured	Correction	Field	Field	Limit	E-Field	
	Level	Factor	Strength	Strength		Polarity	
MHz	dBuV	dB/m	dBuV/m	uV/m	uV/m		
	Emissions	detected are 1	nore than 20	dB below the	FCC Limits		

### Result of Tx mode (2480.0 MHz) (GFSK) (Above 1GHz): Pass

	Field Strength of Spurious Emissions Peak Value									
Frequency	Measured	Correction	Field	Limit	Margin	E-Field				
	Level @3m	Factor	Strength	@3m		Polarity				
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB					
4960.0	16.5	41.4	57.9	74.0	16.1	Vertical				
4960.0	14.6	42.7	57.3	74.0	16.7	Horizontal				
7440.0	11.2	45.6	56.8	74.0	17.2	Vertical				
7440.0	10.6	46.5	57.1	74.0	16.9	Horizontal				
9920.0	6.6	48.6	55.2	74.0	18.8	Vertical				
9920.0	5.8	49.7	55.5	74.0	18.5	Horizontal				
12400.0	4.4	51.7	56.1	74.0	17.9	Vertical				
12400.0	3.1	52.7	55.8	74.0	18.2	Horizontal				

STC (Dongguan) Company Limited



#### Date : 2017-07-07 No. : DM17050191

	Field Strength of Spurious Emissions Average Value									
Frequency	Measured	Correction	Field	Limit	Margin	E-Field				
	Level @3m	Factor	Strength	@3m		Polarity				
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB					
4960.0	1.0	41.4	42.4	54.0	11.6	Vertical				
4960.0	-0.8	42.7	41.9	54.0	12.1	Horizontal				
7440.0	-3.4	45.6	42.2	54.0	11.8	Vertical				
7440.0	-4.8	46.5	41.7	54.0	12.3	Horizontal				
9920.0	-8.3	48.6	40.3	54.0	13.7	Vertical				
9920.0	-9.8	49.7	39.9	54.0	14.1	Horizontal				
12400.0	-9.9	51.7	41.8	54.0	12.2	Vertical				
12400.0	-12.5	52.7	40.2	54.0	13.8	Horizontal				

#### Result of Tx mode (2402.0 MHz) (π/4-DQPSK) (9kHz - 30MHz): Pass

	Field Strength of Spurious Emissions								
Peak Value									
Frequency Measured Correction Field Field Limit E-Field									
	Level	Factor	Strength	Strength		Polarity			
MHz	MHz dBuV dB/m dBuV/m uV/m uV/m								
	Emissions detected are more than 20 dB below the FCC Limits								

### Result of Tx mode (2402.0 MHz) (π/4-DQPSK) (Above 1GHz): Pass

	Field Strength of Spurious Emissions Peak Value										
Frequency	equency Measured Correction Field Limit Margin										
	Level @3m	Factor	Strength	@3m		Polarity					
MHz	dBµV	dB/m	dBµV/m	dBµV/m	dB						
4804.0	16.4	41.5	57.9	74.0	16.1	Vertical					
4804.0	15.6	42.4	58.0	74.0	16.0	Horizontal					
7206.0	12.6	45.1	57.7	74.0	16.3	Vertical					
7206.0	11.2	46.2	57.4	74.0	16.6	Horizontal					
9608.0	7.5	48.0	55.5	74.0	18.5	Vertical					
9608.0	6.5	48.8	55.3	74.0	18.7	Horizontal					
12010.0	4.4	51.5	55.9	74.0	18.1	Vertical					
12010.0	3.7	52.4	56.1	74.0	17.9	Horizontal					

STC (Dongguan) Company Limited



### Date : 2017-07-07 No. : DM17050191

	Field Strength of Spurious Emissions Average Value									
Frequency	Measured Correction Field Limit Margin									
	Level @3m	Factor	Strength	@3m		Polarity				
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB					
4804.0	0.8	41.5	42.3	54.0	11.7	Vertical				
4804.0	0.7	42.4	43.1	54.0	10.9	Horizontal				
7206.0	-3.5	45.1	41.6	54.0	12.4	Vertical				
7206.0	-3.3	46.2	42.9	54.0	11.1	Horizontal				
9608.0	-6.3	48.0	41.7	54.0	12.3	Vertical				
9608.0	-7.7	48.8	41.1	54.0	12.9	Horizontal				
12010.0	-9.3	51.5	42.2	54.0	11.8	Vertical				
12010.0	-10.7	52.4	41.7	54.0	12.3	Horizontal				

### Result of Tx mode (2441.0 MHz) (π/4-DQPSK) (9kHz - 30MHz): Pass

	Field Strength of Spurious Emissions							
Peak Value								
Frequency	Frequency Measured Correction Field Field Limit E-Field							
	Level	Factor	Strength	Strength		Polarity		
MHz								
	Emissions detected are more than 20 dB below the FCC Limits							

### Result of Tx mode (2441.0 MHz) (π/4-DQPSK) (Above 1GHz): Pass

	Field Strength of Spurious Emissions Peak Value										
Frequency	cy Measured Correction Field Limit Margin										
	Level @3m	Factor	Strength	@3m	_	Polarity					
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB						
4882.0	16.6	41.6	58.2	74.0	15.8	Vertical					
4882.0	15.1	42.5	57.6	74.0	16.4	Horizontal					
7323.0	12.7	45.2	57.9	74.0	16.1	Vertical					
7323.0	11.2	46.3	57.5	74.0	16.5	Horizontal					
9764.0	6.8	48.1	54.9	74.0	19.1	Vertical					
9764.0	5.7	48.9	54.6	74.0	19.4	Horizontal					
12205.0	4.7	51.6	56.3	74.0	17.7	Vertical					
12205.0	3.5	52.5	56.0	74.0	18.0	Horizontal					

STC (Dongguan) Company Limited



### Date : 2017-07-07 No. : DM17050191

	Field Strength of Spurious Emissions Average Value									
Frequency	Measured	Measured Correction Field Limit Margin								
	Level @3m	Factor	Strength	@3m		Polarity				
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB					
4882.0	1.4	41.6	43.0	54.0	11.0	Vertical				
4882.0	-0.4	42.5	42.1	54.0	11.9	Horizontal				
7323.0	-2.6	45.2	42.6	54.0	11.4	Vertical				
7323.0	-4.2	46.3	42.1	54.0	11.9	Horizontal				
9764.0	-7.3	48.1	40.8	54.0	13.2	Vertical				
9764.0	-8.8	48.9	40.1	54.0	13.9	Horizontal				
12205.0	-9.7	51.6	41.9	54.0	12.1	Vertical				
12205.0	-11.3	52.5	41.2	54.0	12.8	Horizontal				

### Result of Tx mode (2480.0 MHz) (π/4-DQPSK) (9kHz - 30MHz): Pass

	Field Strength of Spurious Emissions							
Peak Value								
Frequency	Frequency Measured Correction Field Field Limit E-Field							
	Level	Factor	Strength	Strength		Polarity		
MHz								
	Emissions detected are more than 20 dB below the FCC Limits							

### Result of Tx mode (2480.0 MHz) (π/4-DQPSK) (Above 1GHz): Pass

	Field Strength of Spurious Emissions Peak Value									
Frequency	Measured	Correction	Field	Limit	Margin	E-Field				
	Level @3m	Factor	Strength	@3m		Polarity				
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB					
4960.0	15.9	41.4	57.3	74.0	16.7	Vertical				
4960.0	14.9	42.7	57.6	74.0	16.4	Horizontal				
7440.0	11.4	45.6	57.0	74.0	17.0	Vertical				
7440.0	10.3	46.5	56.8	74.0	17.2	Horizontal				
9920.0	7.1	48.6	55.7	74.0	18.3	Vertical				
9920.0	5.3	49.7	55.0	74.0	19.0	Horizontal				
12400.0	4.5	51.7	56.2	74.0	17.8	Vertical				
12400.0	3.3	52.7	56.0	74.0	18.0	Horizontal				

STC (Dongguan) Company Limited



### Date : 2017-07-07 No. : DM17050191

	Field Strength of Spurious Emissions									
Average Value										
Frequency	ency Measured Correction Field Limit Margin									
	Level @3m	Factor	Strength	@3m		Polarity				
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB					
4960.0	1.1	41.4	42.5	54.0	11.5	Vertical				
4960.0	-0.5	42.7	42.2	54.0	11.8	Horizontal				
7440.0	-3.4	45.6	42.2	54.0	11.8	Vertical				
7440.0	-5.1	46.5	41.4	54.0	12.6	Horizontal				
9920.0	-7.0	48.6	41.6	54.0	12.4	Vertical				
9920.0	-8.9	49.7	40.8	54.0	13.2	Horizontal				
12400.0	-9.4	51.7	42.3	54.0	11.7	Vertical				
12400.0	-11.0	52.7	41.7	54.0	12.3	Horizontal				

Note: Above 13GHz Emissions detected are more than 20 dB below the FCC Limits .

Remarks:

No additional spurious emissions found between lowest internal used/generated frequency and 30 MHz

\* Denotes restricted band of operation.

Measurements were made using a peak detector. Any emission less than 1000MHz and falling within the restricted bands of FCC Rules Part 15 Section 15.205 and the limits of FCC Rules Part 15 Section 15.209 were applied.

Correction Factor included Antenna Factor and Cable Attenuation.

Calculated measurement uncertainty	:	9kHz-30MHz	3.3dB
		30MHz -1GHz	4.6dB
		1GHz -26GHz	4.4dB
E · · · · · · · · · · · · · · ·		• .• 1 1	· · · · · · · · · · · · · · · · · · ·

Emissions in the vertical and horizontal polarizations have been investigated and the worst-case test results are recorded in this report.

STC (Dongguan) Company Limited



### Date : 2017-07-07 No. : DM17050191

Page 24 of 78

#### **Radiated Emissions Measurement:**

#### Limit :

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.205(c)).

### Result: RF Radiated Emissions (Lowest)-GFSK

	Field Strength of Band-edge Compliance								
Peak Value									
Frequency	Frequency Measured Correction Field Limit Margin E-Field								
	Level @3m	Factor	Strength	@3m		Polarity			
MHz	MHz $dB\mu V$ $dB/m$ $dB\mu V/m$ $dB\mu V/m$ $dB$								
2390.0	18.3	36.8	55.1	74.0	18.9	Vertical			

Field Strength of Band-edge Compliance									
Average Value									
Frequency	uency Measured Correction Field Limit Margin E-Field								
	Level @3m	Factor	Strength	@3m		Polarity			
MHz	MHz $dB\mu V$ $dB/m$ $dB\mu V/m$ $dB\mu V/m$ $dB$								
2390.0	4.4	36.8	41.2	54.0	12.8	Vertical			

#### Result: RF Radiated Emissions (Highest) -GFSK

Field Strength of Band-edge Compliance						
Peak Value						
Frequency	Measured	Correction	Field	Limit	Margin	E-Field
	Level @3m	Factor	Strength	@3m		Polarity
MHz	dBµV	dB/m	dBµV/m	dBµV/m	dB	
2483.5	23.9	36.4	60.3	74.0	13.7	Horizontal

Field Strength of Band-edge Compliance Average Value						
Frequency	Measured	Correction	Field	Limit	Margin	E-Field
	Level @3m	Factor	Strength	@3m		Polarity
MHz	dBµV	dB/m	$dB\mu V/m$	dBµV/m	dB	
2483.5	7.5	36.4	43.9	54.0	10.1	Horizontal

STC (Dongguan) Company Limited



### Date : 2017-07-07 No. : DM17050191

Page 25 of 78

#### **Radiated Emissions Measurement:**

#### Limit :

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.205(c)).

#### **Result: RF Radiated Emissions (Lowest)-** π/4-DQPSK

Field Strength of Band-edge Compliance						
Peak Value						
Frequency	Measured	Correction	Field	Limit	Margin	E-Field
	Level @3m	Factor	Strength	@3m		Polarity
MHz	dBµV	dB/m	dBµV/m	dBµV/m	dB	
2390.0	18.3	36.8	55.1	74.0	18.9	Vertical

Field Strength of Band-edge Compliance Average Value						
FrequencyMeasuredCorrectionFieldLimitMarginE-FieldLevel @3mFactorStrength@3mPolarity						
MHz	dBµV	dB/m	dBµV/m	dBµV/m	dB	Totarity
2390.0	5.1	36.8	41.9	54.0	12.1	Vertical

#### Result: RF Radiated Emissions (Highest) -π/4-DQPSK

Field Strength of Band-edge Compliance						
Peak Value						
Frequency	Measured	Correction	Field	Limit	Margin	E-Field
	Level @3m	Factor	Strength	@3m		Polarity
MHz	dBµV	dB/m	dBµV/m	$dB\mu V/m$	dB	
2483.5	24.9	36.4	61.3	74.0	12.7	Horizontal

Field Strength of Band-edge Compliance Average Value						
Frequency	Measured	Correction	Field	Limit	Margin	E-Field
	Level @3m	Factor	Strength	@3m		Polarity
MHz	dBµV	dB/m	dBµV/m	dBµV/m	dB	
2483.5	7.0	36.4	43.4	54.0	10.6	Horizontal

STC (Dongguan) Company Limited



Date : 2017-07-07 No. : DM17050191 Page 26 of 78


#### Limits for Radiated Emissions FCC 47 CFR 15.247 Class B]:

Frequency Range	Quasi-Peak Limits
[MHz]	[µV/m]
0.009-0.490	2400/F (kHz)
0.490-1.705	24000/F (kHz)
1.705-30	30
30-88	100
88-216	150
216-960	200
Above960	500

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

#### Results of Bluetooth play mode (GFSK 2402.0 MHz) (30MHz - 1GHz): Pass

Please refer to the following table for result details(The data is the worst cases) Horizontal

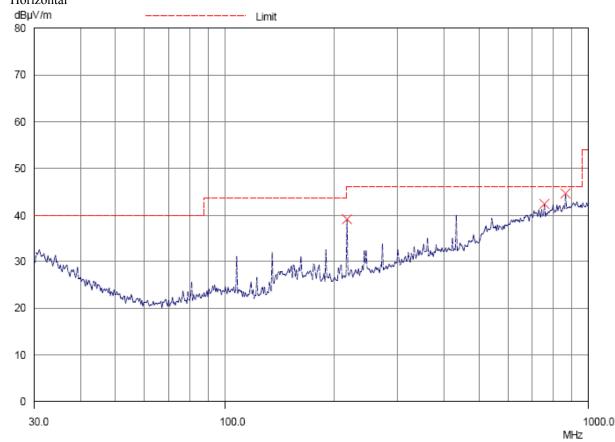

#### STC (Dongguan) Company Limited



Date : 2017-07-07 No. : DM17050191 Page 27 of 78

### Result of Bluetooth play mode (GFSK 2402.0 MHz) (30MHz - 1GHz): Pass

Radiated Emissions							
	Quasi-Peak						
Emission	E-Field	Level	Limit	Level	Limit		
Frequency	Polarity	@3m	@3m	@3m	@3m		
MHz		dBµV/m	dBµV/m	μV/m	μV/m		
216.0	Horizontal	37.1	46.0	71.6	150		
756.1	Horizontal	40.4	46.0	104.7	200		
864.1	Horizontal	44.5	46.0	167.9	200		

STC (Dongguan) Company Limited



Date : 2017-07-07 No. : DM17050191 Page 28 of 78


#### Limits for Radiated Emissions FCC 47 CFR 15.247 Class B]:

Frequency Range	Quasi-Peak Limits
[MHz]	[µV/m]
0.009-0.490	2400/F (kHz)
0.490-1.705	24000/F (kHz)
1.705-30	30
30-88	100
88-216	150
216-960	200
Above960	500

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

#### Results of Bluetooth play mode (GFSK 2402.0 MHz) (30MHz - 1GHz): Pass

Please refer to the following table for result details(The data is the worst cases) Vertical

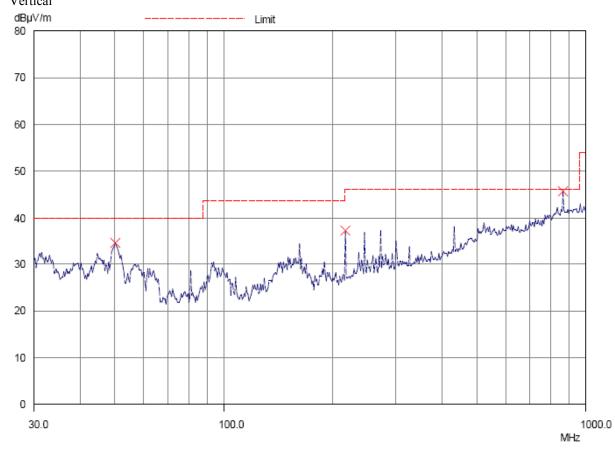

#### STC (Dongguan) Company Limited



Date : 2017-07-07 No. : DM17050191 Page 29 of 78

#### Result of Bluetooth play mode (GFSK 2402.0 MHz) (30MHz - 1GHz): Pass

Radiated Emissions							
	Quasi-Peak						
Emission	E-Field	Level	Limit	Level	Limit		
Frequency	Polarity	@3m	@3m	@3m	@3m		
MHz		dBµV/m	dBµV/m	μV/m	μV/m		
50.1	Vertical	33.6	40.0	47.9	100		
216.0	Vertical	37.1	46.0	71.6	150		
864.1	Vertical	45.4	46.0	186.2	200		

Remarks:

Calculated measurement uncertainty (30MHz - 1GHz): 4.6dB

Emissions in the vertical and horizontal polarizations have been investigated and the worst-case test results are recorded in this report.

STC (Dongguan) Company Limited



#### Date : 2017-07-07 No. : DM17050191

Page 30 of 78

### 3.1.3 AC Mains Conducted Emissions (0.15MHz to 30MHz)

Test Requirement:	FCC 47CFR 15.207
Test Method:	ANSI C63.10:2013
Test Date:	2017-05-13
Mode of Operation:	Bluetooth Communication mode
Test Voltage:	120Va.c. 60Hz


#### **Test Method:**

The test was performed in accordance with ANSI ANSI C63.10:2013, with the following: an initial measurement was performed in peak and average detection mode on the live line, any emissions recorded within 30dB of the relevant limit line were re-measured using quasi-peak and average detection on the live and neutral lines with the worst case recorded in the table of results.

#### **Receiver Setting:**

Bandw. = 9 kHz, Meas. Time= 10.0 ms, Step Width = 5.0kHz Detector = MaxPeak and CISPR AV

### **Test Setup:**

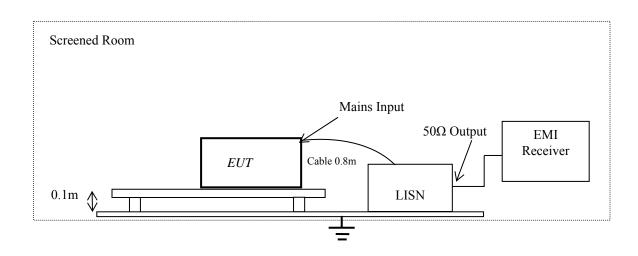

STC (Dongguan) Company Limited



#### Date : 2017-07-07 No. : DM17050191

Page 31 of 78

### Limits for Conducted Emissions (FCC 47 CFR 15.207):


Frequency Range	Quasi-Peak Limits	Average
[MHz]	[dBµV]	[dBµV]
0.15-0.5	66 to 56*	56 to 46*
0.5-5.0	56	46
5.0-30.0	60	50

\* Decreases with the logarithm of the frequency.

Limits for Conducted Emissions Test, please refer to limit lines (Quasi-Peak and Average) in the following diagram.

### **Results of Bluetooth Communication mode (L): PASS**

Please refer to the following diagram for individual results.

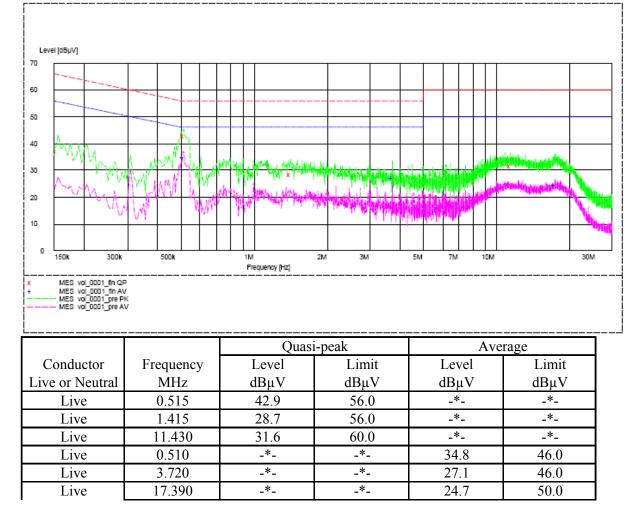

#### STC (Dongguan) Company Limited



#### Date : 2017-07-07 No. : DM17050191

Page 32 of 78


Frequency Range	Quasi-Peak Limits	Average
[MHz]	[dBµV]	[dBµV]
0.15-0.5	66 to 56*	56 to 46*
0.5-5.0	56	46
5.0-30.0	60	50

\* Decreases with the logarithm of the frequency.

Limits for Conducted Emissions Test, please refer to limit lines (Quasi-Peak and Average) in the following diagram.

#### **Results of Bluetooth Communication mode (N): PASS**

Please refer to the following diagram for individual results.

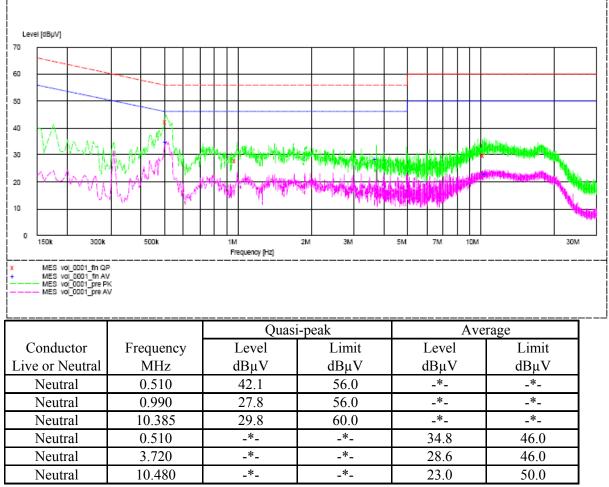

Remarks:

Calculated measurement uncertainty (0.15MHz - 30MHz): 3.2dB

-\*- Emission(s) that is far below the corresponding limit line.

#### STC (Dongguan) Company Limited



Date : 2017-07-07 No. : DM17050191 Page 33 of 78

#### 3.1.4 Number of Hopping Frequency

#### Limit of Number of Hopping Frequency

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels

#### **Test Method:**

The RF output of the EUT was connected to the spectrum analyzer by a low loss cable.


#### **Spectrum Analyzer Setting:**

RBW = 300 kHz,  $VBW \ge RBW$ , Sweep = Auto, Span = the frequency band of operation Detector = Peak, Trace = Max. hold

#### **Test Setup:**

As Test Setup of clause 3.1.1 in this test report.

### Measurement Data:

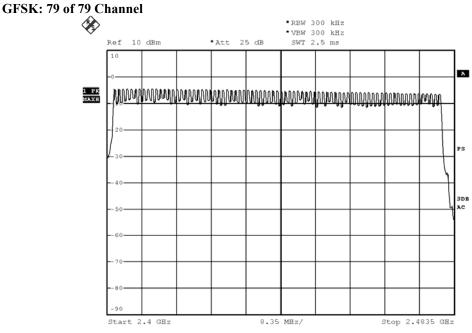


STC (Dongguan) Company Limited



Date : 2017-07-07 No. : DM17050191 Page 34 of 78

### π/4-DQPSK: 79 of 79 Channel

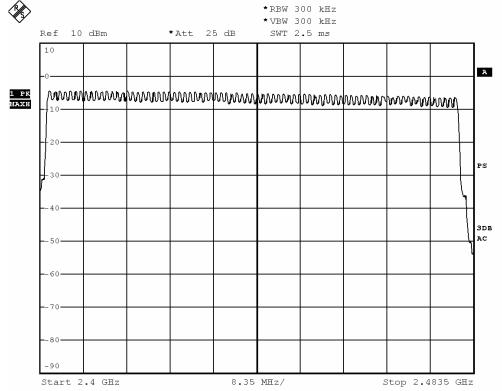

STC (Dongguan) Company Limited



### Date : 2017-07-07 No. : DM17050191

Page 35 of 78

### 3.1.5 20dB Bandwidth

Test Requirement:	FCC 47CFR 15.247(a)(1)
Test Method:	ANSI C63.10:2013
Test Date:	2017-05-26
Mode of Operation:	Tx mode

#### **Remark:**

The result has been done on all the possible configurations for searching the worst cases.

### **Test Method:**

The bandwidth is measured at an amplitude level reduced from the reference level by a specified ratio. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst-case (i.e. the widest) bandwidth.

#### **Spectrum Analyzer Setting:**

RBW = 30kHz,  $VBW \ge RBW$ , Sweep = Auto, Span = two times and five times the OBW Detector = Peak, Trace = Max. hold

### **Test Setup:**

As Test Setup of clause 3.1.1 in this test report.


STC (Dongguan) Company Limited



#### Date : 2017-07-07 No. : DM17050191

Page 36 of 78

Fundamental Frequency	20dB Bandwidth	FCC Limits
[MHz]	[KHz]	[MHz]
2402	850.0	Within 2400-2483.5

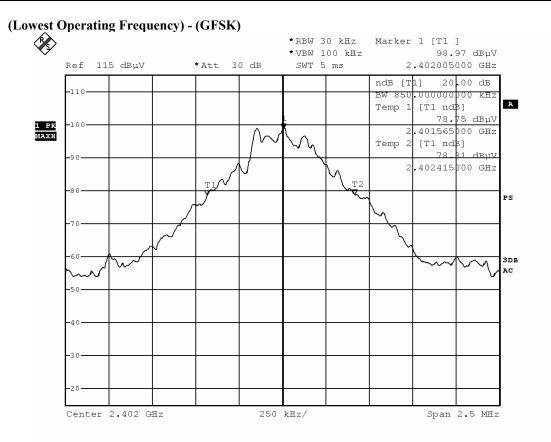


STC (Dongguan) Company Limited



Date : 2017-07-07 No. : DM17050191 Page 37 of 78

Fundamental Frequency	20dB Bandwidth	FCC Limits
[MHz]	[KHz]	[MHz]
2441	845.0	Within 2400-2483.5

(Middle Operating Frequency) - (GFSK)

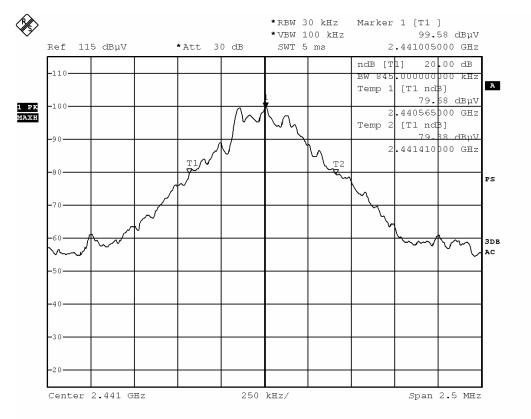

STC (Dongguan) Company Limited




### Date : 2017-07-07 No. : DM17050191

Page 38 of 78

Fundamental Frequency	20dB Bandwidth	FCC Limits
[MHz]	[KHz]	[MHz]
2480	845.0	Within 2400-2483.5

### (Highest Operating Frequency) - (GFSK)

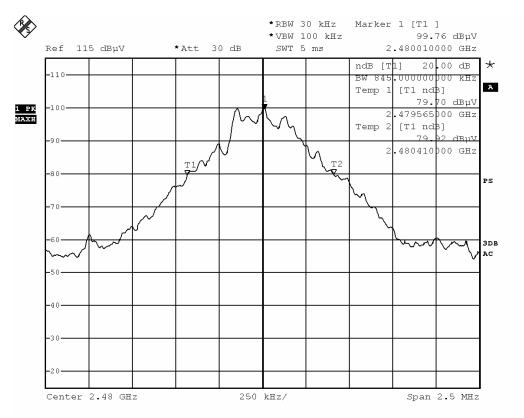


STC (Dongguan) Company Limited



### Date : 2017-07-07 No. : DM17050191

Page 39 of 78

Fundamental Frequency	20dB Bandwidth	FCC Limits
[MHz]	[MHz]	[MHz]
2402	1.215	Within 2400-2483.5

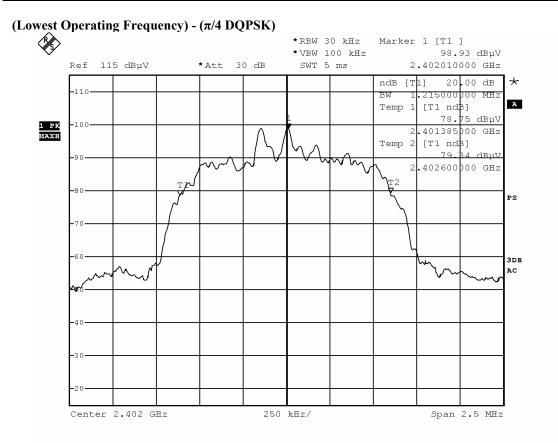


STC (Dongguan) Company Limited



Date : 2017-07-07 No. : DM17050191 Page 40 of 78

Fundamental Frequency	20dB Bandwidth	FCC Limits
[MHz]	[MHz]	[MHz]
2441	1.215	Within 2400-2483.5

(Middle Operating Frequency) - ( $\pi/4$  DQPSK)

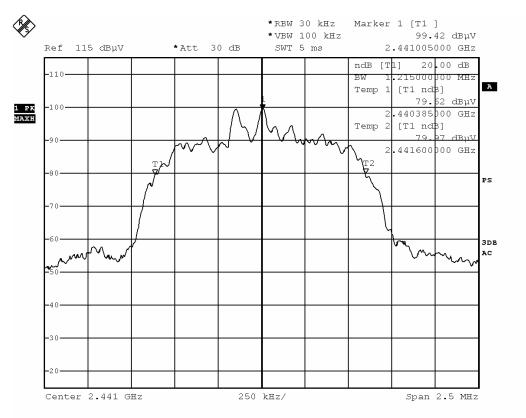

STC (Dongguan) Company Limited




### Date : 2017-07-07 No. : DM17050191

Page 41 of 78

Fundamental Frequency	20dB Bandwidth	FCC Limits
[MHz]	[MHz]	[MHz]
2480	1.215	Within 2400-2483.5

### (Highest Operating Frequency) - (π/4 DQPSK)

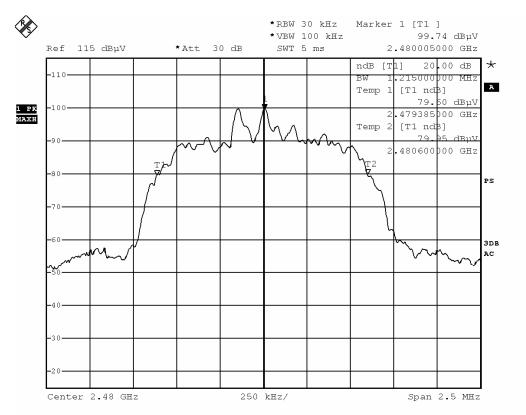

STC (Dongguan) Company Limited



### Date : 2017-07-07 No. : DM17050191

Page 42 of 78

### **3.1.6 Hopping Channel Separation**

#### **Requirements:**

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

### **Spectrum Analyzer Setting:**

RBW = 300kHz,  $VBW \ge RBW$ , Sweep = Auto, Span = Wide enough to captur the peaks of two adjacent channels Detector = Peak, Trace = Max. hold

#### Limit:

The measured maximum bandwidth=850kHz(GFSK)

The measured maximum bandwidth \* 2/3 = 1.215MHz \* 2/3 = 810kHz( $\pi/4$  DQPSK)

STC (Dongguan) Company Limited



Page 43 of 78

Date : 2017-07-07 No. : DM17050191


> \*RBW 300 kHz Marker 1 [T1 ] \*VBW 300 kHz -6.02 dBm Ref 13 dBm \* Att 30 dB SWT 2.5 ms 2.401948000 GHz [TT]] -10 Delta b -0.10 dB A 000000000 MHz 1 PK Maxh 1 2 2.0 PS 403DB AC 50 60 7.0 - 80 Center 2.4025 GHz 400 kHz/ Span 4 MHz

### Channel separation = 1MHz (>850kHz) (Lowest) (GFSK)

STC (Dongguan) Company Limited



Date : 2017-07-07 No. : DM17050191 Page 44 of 78

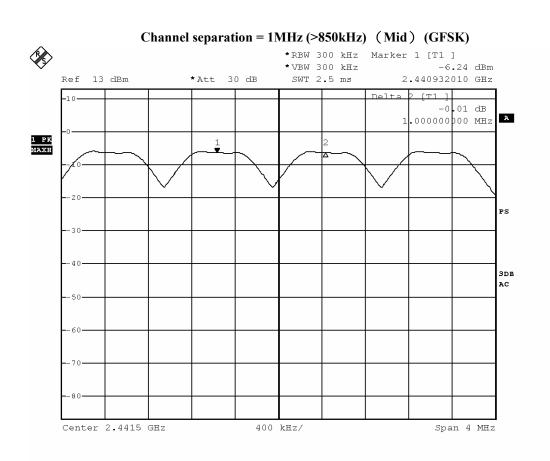

STC (Dongguan) Company Limited



Date : 2017-07-07 No. : DM17050191

> Channel separation = 1MHz (>850kHz) (Highest) (GFSK) \*RBW 300 kHz Marker 1 [T1 ] -6.06 dBm \*VBW 300 kHz Ref 13 dBm \* Att 30 dB SWT 2.5 ms 2.478796060 GHz [T1] -10 Delta b 0.00 dB A 000000000 MHz 1 PK Maxh 1 2 Δ -10 -20 PS -30 403DB AC - 50 60 7.0 - 80 Center 2.4795 GHz 400 kHz/ Span 4 MHz

> > STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, Guangdong, China. Zip Code: 523770 Tel : (86 769) 81119888 Fax : (86 769) 81116222 Email : dgstc@stc.group Website : www.stc.group This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited. For Conditions of issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website

Page 45 of 78



Page 46 of 78

Date : 2017-07-07 No. : DM17050191

> \*RBW 300 kHz Marker 1 [T1 ] \*VBW 300 kHz -5.85 dBm Ref 13 dBm \* Att 30 dB SWT 2.5 ms 2.401812000 GHz [T1] -10 Delta b -0.02 dB A 000000000 MHz 1 PK Maxh 1 2 25 2.0 PS 30 403DB AC 50 60 7.0 - 80 Center 2.4025 GHz 400 kHz/ Span 4 MHz

### Channel separation = 1MHz (>810kHz) (Lowest) ( $\pi/4$ DQPSK)

STC (Dongguan) Company Limited



Date : 2017-07-07 No. : DM17050191

> Channel separation = 1 MHz (>810kHz) (Mid) ( $\pi/4 \text{ DQPSK}$ ) \*RBW 300 kHz Marker 1 [T1 ] \*VBW 300 kHz -6.16 dBm Ref 13 dBm \* Att 30 dB SWT 2.5 ms 2.440788080 GHz [T1] -10 Delta b -0,07 dB A 000000000 MHz 1 PK Maxh 2 1  $\overline{\Delta}$ -10 -20 PS -30 40 3DB AC 50 60 7.0 - 80 Center 2.4415 GHz 400 kHz/ Span 4 MHz

> > STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, Guangdong, China. Zip Code: 523770 Tel : (86 769) 81119888 Fax : (86 769) 81116222 Email : dgstc@stc.group Website : www.stc.group This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited. For Conditions of issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website

Page 47 of 78



Date : 2017-07-07 No. : DM17050191 Page 48 of 78



STC (Dongguan) Company Limited



Date : 2017-07-07 No. : DM17050191 Page 49 of 78

### 3.1.7 Band-edge Compliance of RF Conducted Emissions Measurement:

#### Limit :

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. According to the test method DA 00-705.

#### **Spectrum Analyzer Setting:**

RBW = 100kHz, VBW= 300kHz, Sweep = Coupled, Span = Wide enough to captur the peak level of the emission operating on the channel closest to the band edge, as well as any modulation products that fall outside of the authorized band of operation. Detector = Peak, Trace = Max. hold

Remark: Emissions under the fixed frequency mode and hopping mode have been investigated, the worst-case measurement results were recorded in the test report


STC (Dongguan) Company Limited



Date : 2017-07-07 No. : DM17050191 Page 50 of 78

### Band-edge Compliance of RF Conducted Emissions Measurement:

Frequency Range [MHz]	Radiated Emission Attenuated below the Fundamental [dB]
2400 – Lowest Fundamental (2402)	33.03

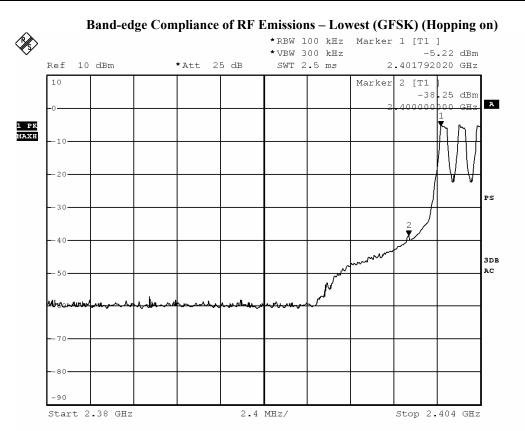


STC (Dongguan) Company Limited



Date : 2017-07-07 No. : DM17050191 Page 51 of 78

### Band-edge Compliance of RF Conducted Emissions Measurement:

Frequency Range [MHz]	Radiated Emission Attenuated below the Fundamental [dB]
2400 – Lowest Fundamental (2402)	33.34

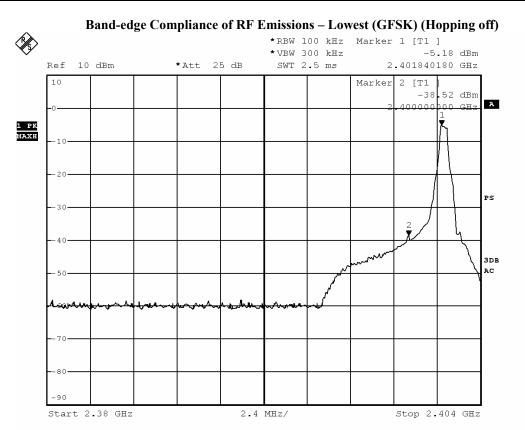

STC (Dongguan) Company Limited




Date : 2017-07-07 No. : DM17050191 Page 52 of 78

### Band-edge Compliance of RF Conducted Emissions Measurement:

Frequency Range [MHz]	Radiated Emission Attenuated below the Fundamental [dB]
2483.5 - Highest Fundamental (2480)	53.88

#### Band-edge Compliance of RF Emissions - Highest (GFSK) (Hopping on)

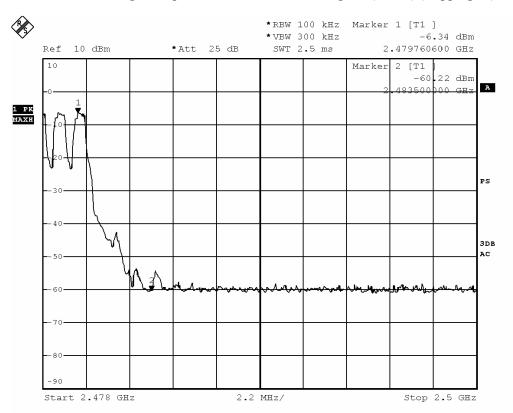

STC (Dongguan) Company Limited




Date : 2017-07-07 No. : DM17050191 Page 53 of 78

### Band-edge Compliance of RF Conducted Emissions Measurement:

Frequency Range [MHz]	Radiated Emission Attenuated below the Fundamental [dB]
2483.5 - Highest Fundamental (2480)	52.99

### Band-edge Compliance of RF Emissions - Highest (GFSK) (Hopping off)

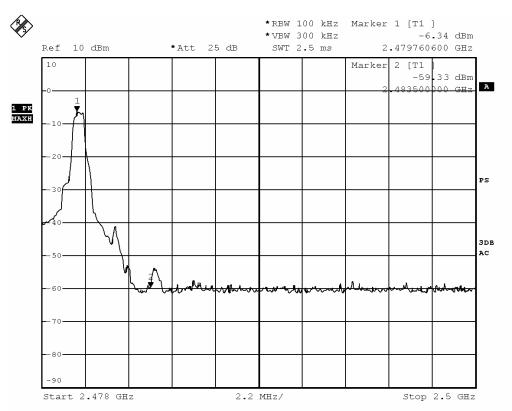


STC (Dongguan) Company Limited



Date : 2017-07-07 No. : DM17050191 Page 54 of 78

### Band-edge Compliance of RF Conducted Emissions Measurement:

Frequency Range [MHz]	Radiated Emission Attenuated below the Fundamental [dB]
2400 – Lowest Fundamental (2402)	35.67

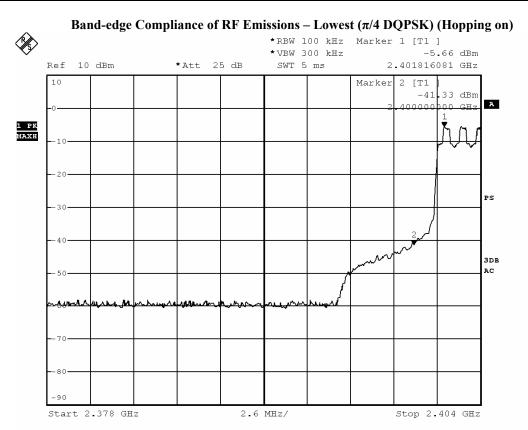


STC (Dongguan) Company Limited



Date : 2017-07-07 No. : DM17050191 Page 55 of 78

### Band-edge Compliance of RF Conducted Emissions Measurement:

Frequency Range [MHz]	Radiated Emission Attenuated below the Fundamental [dB]
2400 – Lowest Fundamental (2402)	35.82

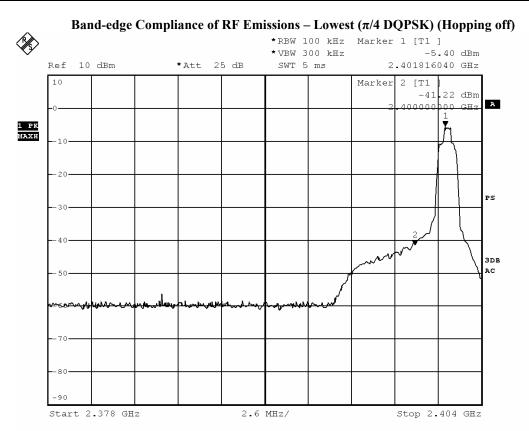

STC (Dongguan) Company Limited




Date : 2017-07-07 No. : DM17050191 Page 56 of 78

### Band-edge Compliance of RF Conducted Emissions Measurement:

Frequency Range [MHz]	Radiated Emission Attenuated below the Fundamental [dB]
2483.5 - Highest Fundamental (2480)	53.88

### Band-edge Compliance of RF Emissions – Highest (π/4 DQPSK) (Hopping on)

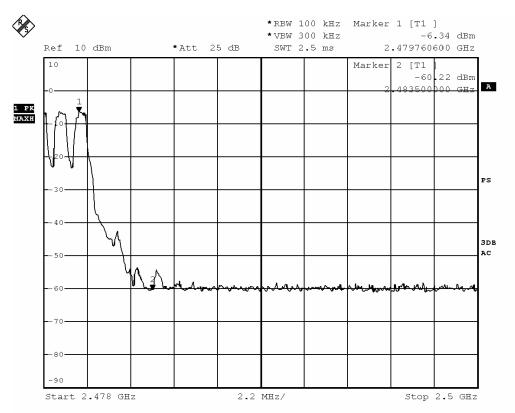

STC (Dongguan) Company Limited




Date : 2017-07-07 No. : DM17050191 Page 57 of 78

### Band-edge Compliance of RF Conducted Emissions Measurement:

Frequency Range [MHz]	Radiated Emission Attenuated below the Fundamental [dB]
2483.5 - Highest Fundamental (2480)	52.99

### Band-edge Compliance of RF Emissions – Highest (π/4 DQPSK) (Hopping off)

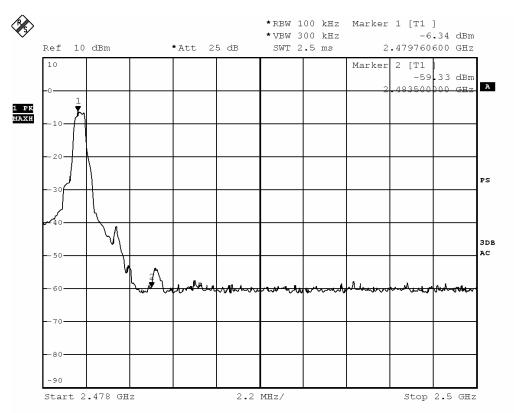

STC (Dongguan) Company Limited



Page 58 of 78


Date : 2017-07-07 No. : DM17050191

Out of Band emissions of RF Conducted Emissions Measurement:

#### Limit :

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required.


Remark: Emissions under the fixed frequency mode and hopping mode have been investigated, the worst-case measurement results were recorded in the test report

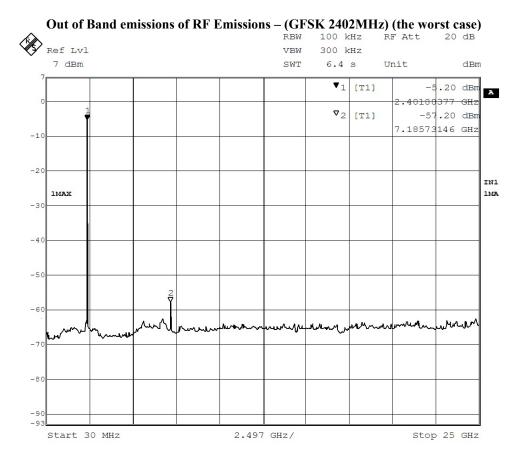

STC (Dongguan) Company Limited



Date : 2017-07-07 No. : DM17050191 Page 59 of 78

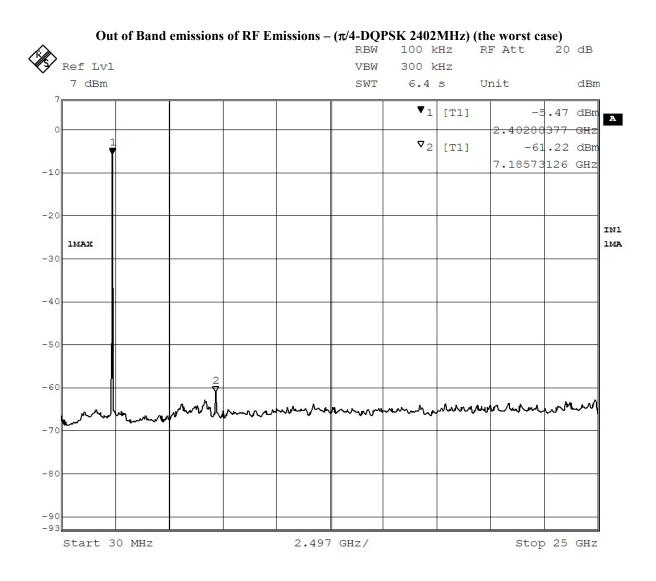

STC (Dongguan) Company Limited



Date : 2017-07-07 No. : DM17050191 Page 60 of 78

#### 3.1.8 Time of Occupancy (Dwell Time)

#### **Requirements:**

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channel employed. No requirements for Digital Transmission System.

#### Spectrum Analyzer Setting:

RBW = 300kHz,  $VBW \ge RBW$ , Sweep = A longer sweep time to show two successive hops on a channel, Span = Zero, Detector = Peak, Trace = Max. hold

Dwell Time = Pulse Duration \* hop rate / number of channel \* observation duration Observed duration:  $0.4s \ge 79 = 31.6s$ 

### **Measurement Data**: Channel Occupied in $\pi/4$ -DQPSK: 79 of 79 Channel \*RBW 300 kHz Ì \*VBW 300 kHz \*Att 25 dB Ref 10 dBm SWT 2.5 ms 10 λ 1 PK MAXH www.www.www.www.www.www.www.www.www.www. 3DB a c 80 90 Start 2.4 GHz 8.35 MHz/ Stop 2.4835 GHz

STC (Dongguan) Company Limited



### Date : 2017-07-07 No. : DM17050191

Page 61 of 78

### π/4-DQPSK DH5 Packet:

DH5 Packet permit maximum 1600/79/6 = 3.37 hops per second in each channel (5 time slots RX, 1 time slot TX). The Dwell time is the time duration of the pulse times  $3.37 \times 31.6 = 106.6$  within 31.6 seconds

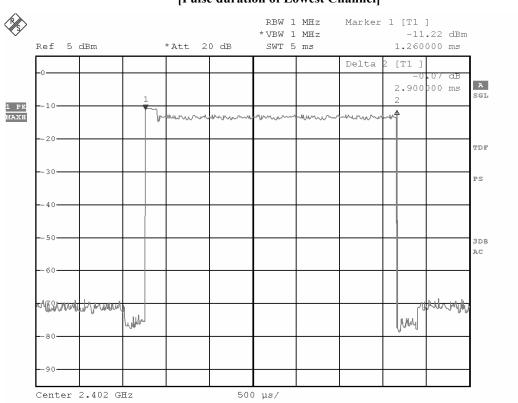


Fig. A [Pulse duration of Lowest Channel]

STC (Dongguan) Company Limited



Date : 2017-07-07 : DM17050191 No.

Page 62 of 78


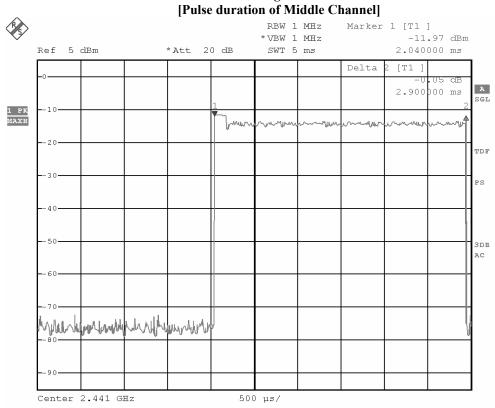


Fig. B

STC (Dongguan) Company Limited



Date : 2017-07-07 No. : DM17050191 Page 63 of 78

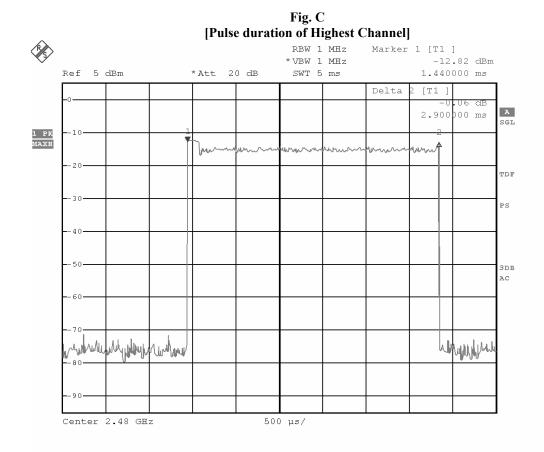


STC (Dongguan) Company Limited



Date : 2017-07-07 No. : DM17050191 Page 64 of 78

### π/4-DQPSK DH3 Packet:

DH3 Packet permit maximum 1600/79/4 = 5.06 hops per second in each channel (3 time slots RX, 1 time slot TX). The Dwell time is the time duration of the pulse times  $5.06 \times 31.6 = 160$  within 31.6 seconds

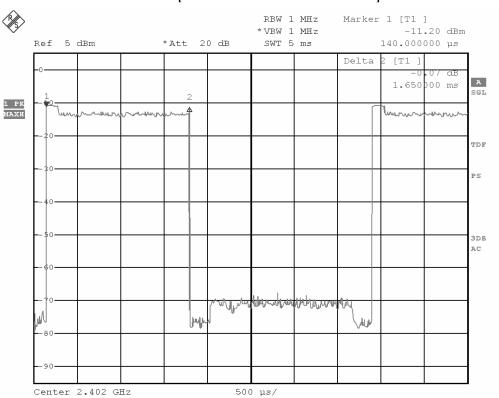


### Fig. D [Pulse duration of Lowest Channel]

STC (Dongguan) Company Limited



Date : 2017-07-07 No. : DM17050191 Page 65 of 78

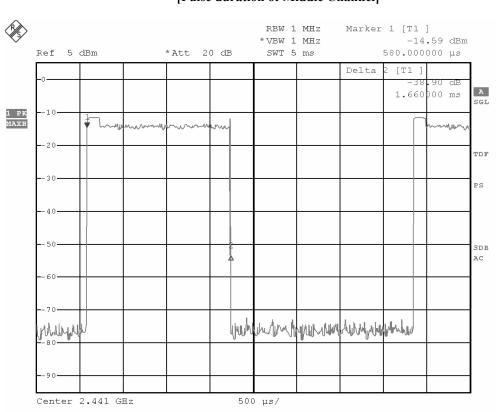


### Fig. E [Pulse duration of Middle Channel]

STC (Dongguan) Company Limited



Date : 2017-07-07 No. : DM17050191 Page 66 of 78

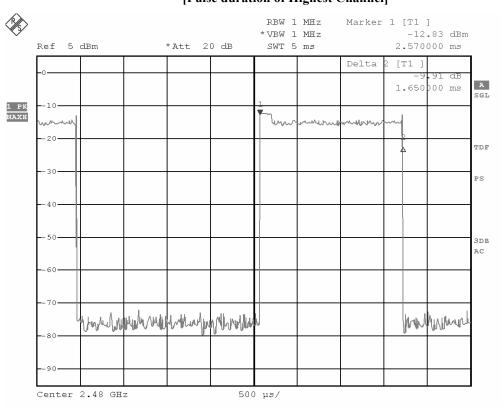

### Fig. F [Pulse duration of Highest Channel]


STC (Dongguan) Company Limited



Date : 2017-07-07 No. : DM17050191 Page 67 of 78

### π/4-DQPSK DH1 Packet:

DH1 Packet permit maximum 1600/79/2 = 10.12 hops per second in each channel (3 time slots RX, 1 time slot TX). The Dwell time is the time duration of the pulse times  $10.12 \times 31.6 = 320$  within 31.6 seconds

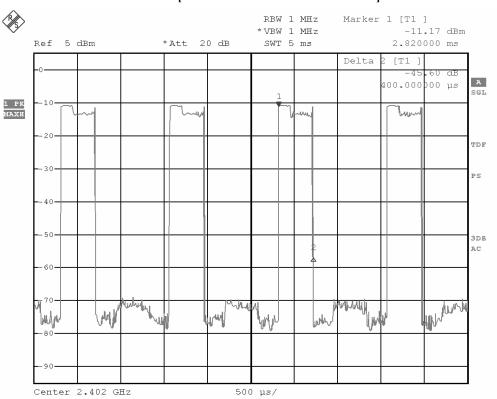


#### Fig. G [Pulse duration of Lowest Channel]

STC (Dongguan) Company Limited




Date : 2017-07-07 No. : DM17050191 Page 68 of 78

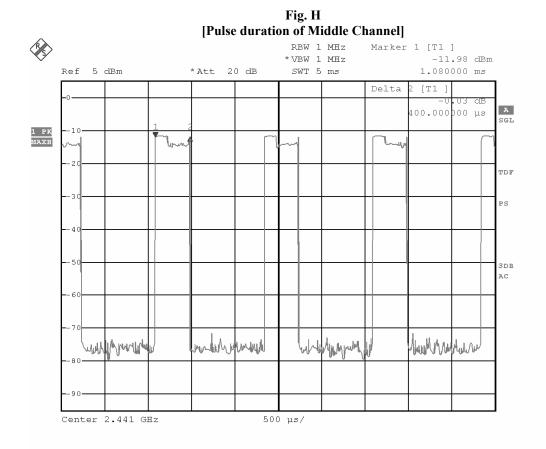

STC (Dongguan) Company Limited



Date : 2017-07-07 No. : DM17050191 Page 69 of 78

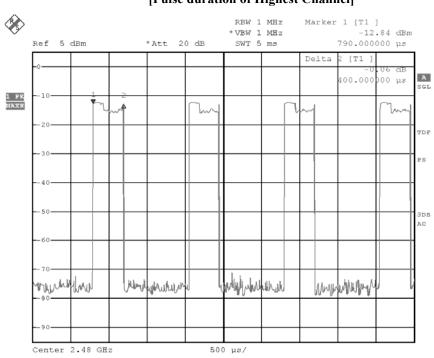

### Fig. I [Pulse duration of Highest Channel]

Time of occupancy (Dwell Time):									
Data Packet	Frequency	Pulse	Pulse Dwell Time		Test Results				
	(MHz)	Duration (ms)	(\$)	<b>(s)</b>					
DH5	2402	2.900	0.309	0.400	Complies				
DH5	2441	2.900	0.309	0.400	Complies				
DH5	2480	2.900	0.309	0.400	Complies				
DH3	2402	1.650	0.264	0.400	Complies				
DH3	2441	1.660	0.265	0.400	Complies				
DH3	2480	1.650	0.264	0.400	Complies				
DH1	2402	0.400	0.128	0.400	Complies				
DH1	2441	0.400	0.128	0.400	Complies				
DH1	2480	0.400	0.128	0.400	Complies				

#### STC (Dongguan) Company Limited



Date : 2017-07-07 No. : DM17050191 Page 70 of 78

#### **3.1.9 Channel Centre Frequency**

#### **Requirements:**

Frequency hopping system in the 2400-2483.5MHz band shall use at least 79 (Channel 1 to 79) non-overlapping channels.

The EUT operates in according with the Bluetooth system specification within the 2400 - 2483.5 MHz frequency band.

RF channels for Bluetooth systems are spaced 1 MHz and are ordered in channel number k. In order to comply with out-of-band regulations, a lower frequency guard band of 2.0 MHz and a higher frequency guard band of 3.5MHz is used.

The operating frequencies of each channel are as follows:

First RF channel start from 2400MHz + 2MHz guard band = 2402MHz Frequency of RF Channel = 2402+k MHz, k = 1,...,79 (Channel separation = 1MHz)

STC (Dongguan) Company Limited



Date : 2017-07-07 No. : DM17050191 Page 71 of 78

#### 3.1.10 Pseudorandom Hopping Algorithm

#### **Requirements:**

The channel frequencies shall be selected from a pseudorandom ordered list of hopping frequencies. Each frequency must be used equally by the transmitter.

#### **EUT Pseudorandom Hopping Algorithm**

The EUT is a Bluetooth device, the Pseudo-random hopping pattern; hopping characteristics and algorithm are based on the Bluetooth specification.

STC (Dongguan) Company Limited



Date : 2017-07-07 No. : DM17050191 Page 72 of 78

3.1.11 Antenna Requirement

Test Requirements: § 15.203

#### **Test Specification:**

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

### **Test Results:**

This is PCB antenna. There is no external antenna, the antenna gain = -0.76dBi. User is unable to remove or changed the Antenna.

STC (Dongguan) Company Limited



### Date : 2017-07-07 No. : DM17050191

Page 73 of 78

Appendix A

#### List of Measurement Equipment

EQP NO.	DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	LAST CAL	DUE CAL
EMD004	LISN	ROHDE & SCHWARZ	ESH3-Z5	100102	2017.04.14	2018.04.14
EMD022	EMI Test Receiver	ROHDE & SCHWARZ	ESCS30	100314	2017.04.15	2018.04.15
EMD035	EMI Test Receiver	ROHDE & SCHWARZ	ESCI	100441	2017.04.14	2018.04.14
EMD036	EMI Test Receiver	ROHDE & SCHWARZ	ESIB 26	100388	2017.04.15	2018.04.15
EMD041	TWO-LINE V- NETWORK	ROHDE & SCHWARZ	ENV216	100261	2017.04.14	2018.04.14
EMD061	Biconilog Antenna	ETS.LINDGREN	3142C	00060439	2016.12.30	2018.12.30
EMD062	Double-Ridged Waveguide (1GHz – 18GHz)	ETS.LINDGREN	3117	00075933	2014.11.15	2017.11.15
EMD084	MULTI-DVICE CONTROLLER	ETS.LINDGREN	2090	00060107	N/A	N/A
EMD088	Video Contol Unit	ETS.LINDGREN	Y21953A	2601073	N/A	N/A
EMD093	Monitor	ViewSonic	VA9036	Q8X064201876	N/A	N/A
EMD102	Intelligent Frequency	Ainuo Instrument Co., Ltd	AN97005SS	79707454	N/A	N/A
EMD103	Intelligent Frequency	Ainuo Instrument Co., Ltd	AN97005SS	79707455	N/A	N/A
EMD105	FACT-3 EMC Chamber	ETS.LINDGREN	FACT-3	3803	N/A	N/A
EMD106	Shielding Room #1	ETS.LINDGREN	RFD-100	3802	N/A	N/A
EMD111	Power meter	ROHDE & SCHWARZ	NRVD	102051	2017.04.14	2018.04.14
	100V Insertion Unit	ROHDE & SCHWARZ	URV5-Z4	100464	2017.04.14	2018.04.14
EMD113	Pre-Amplifier	ROHDE & SCHWARZ	N/A	1129588	2017.04.14	2018.04.14
EMD124	Loop Antenna	ETS-Lindgren	6502	00104905	2017.05.23	2018.05.23
EMD131	Standard Gain Horn Antenna (18GHz – 26.5GHz)	Chengdu AINFO Inc.	JXTXLB-42- 15-C-KF	J2021100721001	2015.06.27	2017.06.27
RE01	RF cable	N/A	N/A	N/A	2016-9-28	2018-9-27
RE02	RF cable	N/A	N/A	N/A	2016-9-28	2018-9-27

Remarks:-

N/A Not Applicable or Not Available

STC (Dongguan) Company Limited




Date : 2017-07-07 No. : DM17050191 Page 74 of 78

Appendix **B** 

**Photographs of EUT** 




Inside View of the product



**Inner Circuit Bottom View** 








**Inner Circuit Top View** 






Date : 2017-07-07 No. : DM17050191 Page 75 of 78

**Photographs of EUT** 



**Inner Circuit Bottom View** 



**Inner Circuit Bottom View** 




**Inner Circuit Top View** 



**Inner Circuit Top View** 



**Inner Circuit Top View** 





Date : 2017-07-07 No. : DM17050191 Page 76 of 78

**Photographs of EUT** 


#### **Inner Circuit Bottom View**



**Inner Circuit Bottom View** 



**Inner Circuit Bottom View** 







**Inner Circuit Top View** 




#### STC (Dongguan) Company Limited



Date : 2017-07-07 No. : DM17050191

Photographs of EUT

Measurement of Radiated Emission Test Set Up

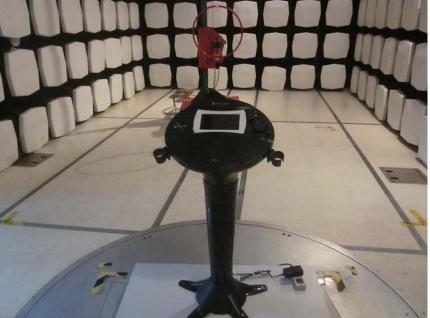

Measurement of Radiated Emission Test Set Up



STC (Dongguan) Company Limited 68 Fumin Nan Road, Dalang, Dongguan, Guangdong, China. Zip Code: 523770 Tel : (86 769) 81119888 Fax : (86 769) 81116222 Email : dgstc@stc.group Website : www.stc.group This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited. For Conditions of issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website

Page 77 of 78



Date : 2017-07-07 No. : DM17050191 Page 78 of 78

Photographs of EUT





Measurement of Conducted Emission Test Set Up



\*\*\*\*\* End of Test Report \*\*\*\*\*

STC (Dongguan) Company Limited

### **Conditions of Issuance of Test Reports**

- 1. All samples and goods are accepted by The STC (Dongguan) Company Limited (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The Company provides its services on the basis that such terms and conditions constitute express agreement between the Company and any person, firm or company requesting its services (the "Clients").
- 2. Any report issued by the Company as a result of this application for testing service (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to his customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.
- 3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.
- 4. The Report refers only to the sample tested and does not apply to the bulk, unless the sampling has been carried out by the Company and is stated as such in the Report.
- 5. In the event of the improper use the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.
- 6. Sample submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.
- 7. The Company will not be liable for or accept responsibility for any loss or damage howsoever arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.
- 8. Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.
- 9. Subject to the variable length of retention time for test data and report stored hereinto as to otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of this test report for a period of three years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after the retention period. Under no circumstances shall we be liable for damages of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.
- 10. Issuance records of the Report are available on the internet at dgstc@dgstc.org. Further enquiry of validity or verification of the Reports should be addressed to the Company.