


Test\_Graph\_802.11ax40\_ANT1\_2452\_MCS0\_PSD

#VBW 62 kHz

Span 57.07 MHz Sweep 136.1 ms (1000 pts)

Log

Center 2.45200 GHz #Res BW 20 kHz



Freq Offset

Scale Type

Log

Span 16.61 MHz Sweep 39.63 ms (1000 pts)






Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test\_Graph\_802.11b\_ANT2\_2437\_1Mbps\_PSD

#VBW 62 kHz

Center 2.437000 GHz #Res BW 20 kHz




Scale Type

Log

Span 24.51 MHz Sweep 58.47 ms (1000 pts)



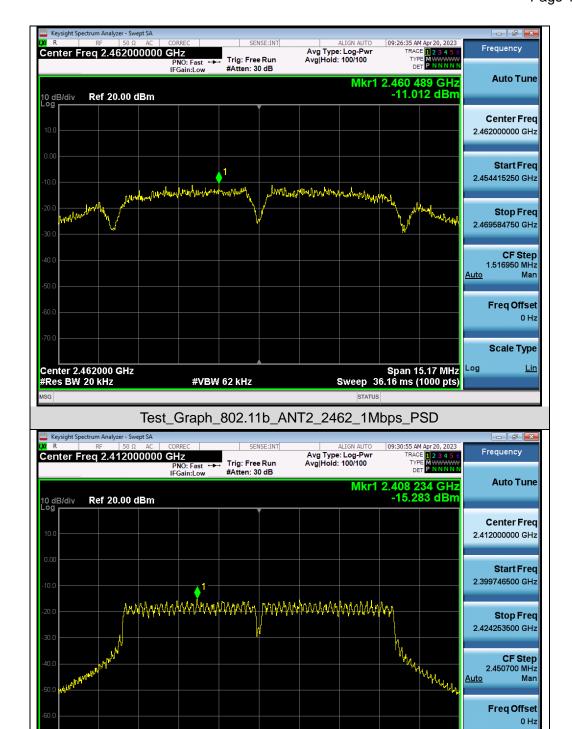


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test\_Graph\_802.11g\_ANT2\_2412\_6Mbps\_PSD

#VBW 62 kHz

Center 2.41200 GHz #Res BW 20 kHz




Scale Type

Log

Span 24.51 MHz Sweep 58.47 ms (1000 pts)



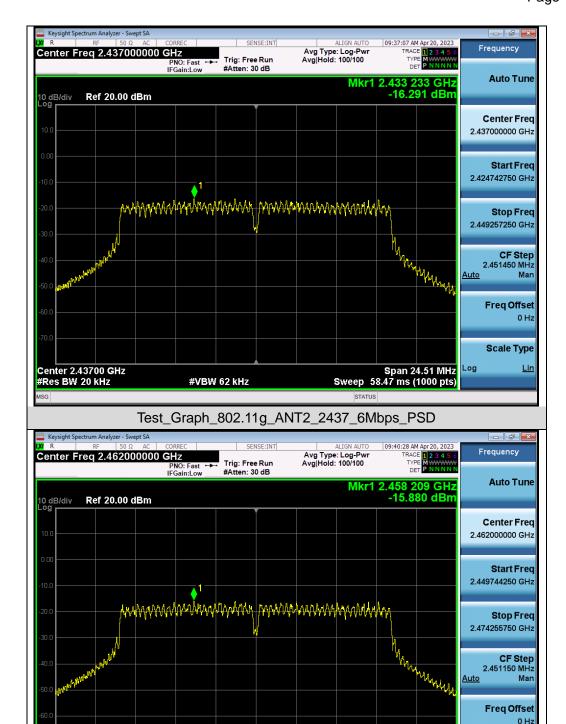


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.


Test\_Graph\_802.11g\_ANT2\_2462\_6Mbps\_PSD

#VBW 62 kHz


Center 2.46200 GHz #Res BW 20 kHz





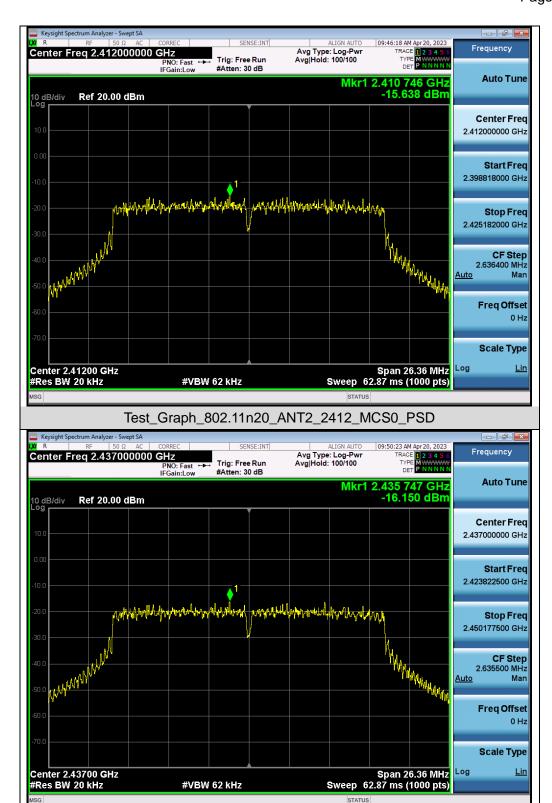

Test\_Graph\_802.11n20\_ANT2\_2437\_MCS0\_PSD




Scale Type

Log

Span 54.69 MHz Sweep 130.4 ms (1000 pts)



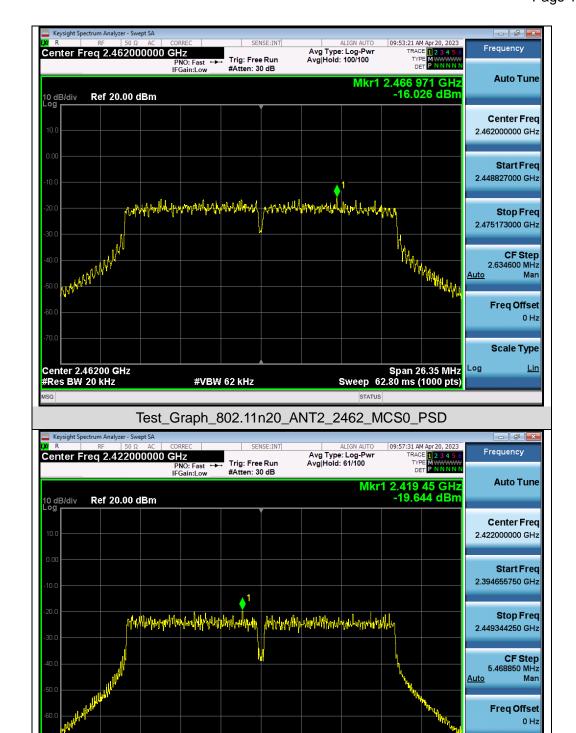


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.


Test\_Graph\_802.11n40\_ANT2\_2422\_MCS0\_PSD

#VBW 62 kHz


Center 2.42200 GHz #Res BW 20 kHz






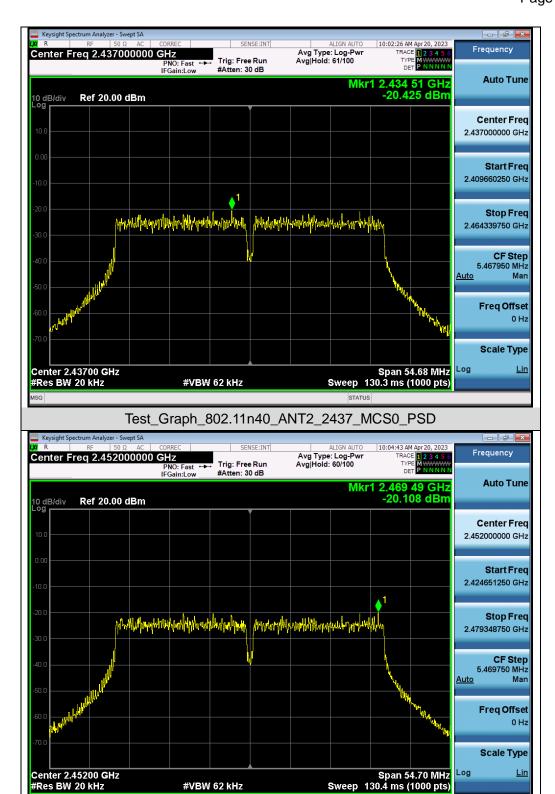


Test\_Graph\_802.11n40\_ANT2\_2452\_MCS0\_PSD






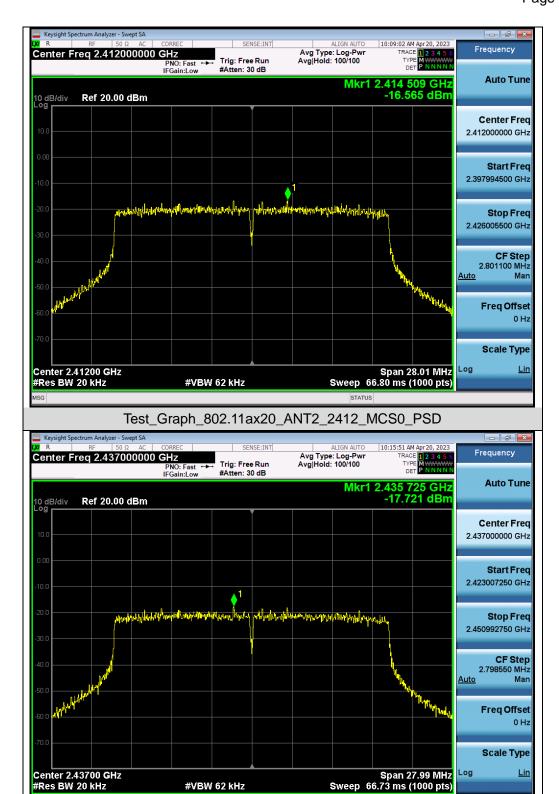

Test\_Graph\_802.11ax20\_ANT2\_2437\_MCS0\_PSD





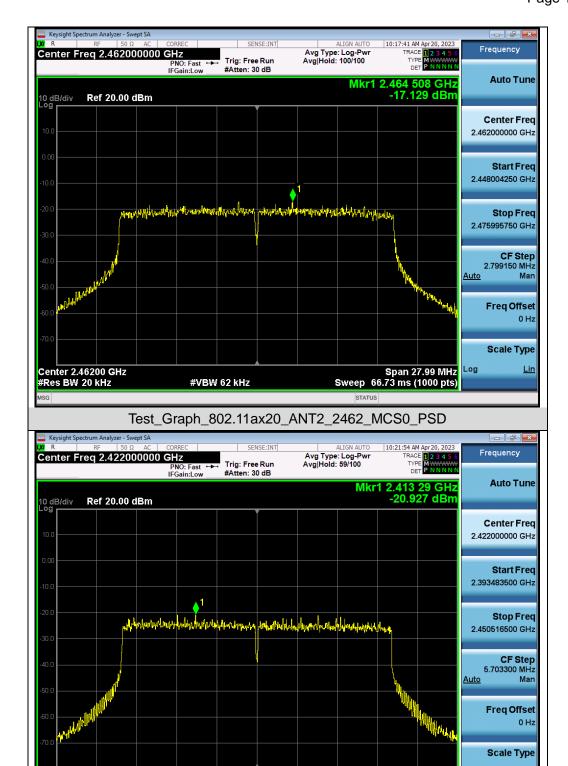


Test\_Graph\_802.11ax40\_ANT2\_2422\_MCS0\_PSD

#VBW 62 kHz

Span 57.03 MHz Sweep 136.0 ms (1000 pts)

Log

Center 2.42200 GHz #Res BW 20 kHz




Scale Type

Log

Span 56.85 MHz Sweep 135.5 ms (1000 pts)



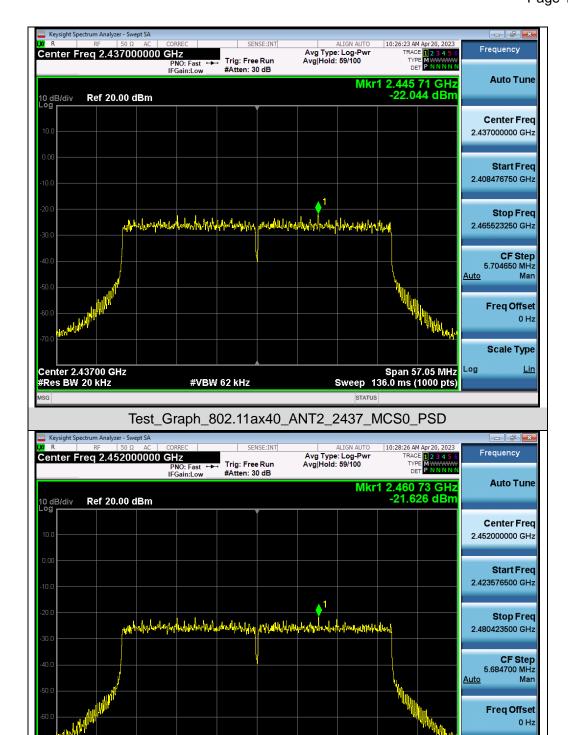

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test\_Graph\_802.11ax40\_ANT2\_2452\_MCS0\_PSD

#VBW 62 kHz

Center 2.45200 GHz #Res BW 20 kHz



Report No.: AGC00688230406FE04

Page 124 of 184

#### 11. RADIATED EMISSION

#### 11.1 MEASUREMENT LIMITS

15.209(a) Limit in the below table has to be followed

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note: All modes were tested for restricted band radiated emission, the test records reported below are the worst result compared to other modes.

#### 11.2 MEASUREMENT PROCEDURE

- The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds.



Report No.: AGC00688230406FE04

Page 125 of 184

As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.

- 8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.

The following table is the setting of spectrum analyzer and receiver.


Spectrum Parameter	Setting		
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP		
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP		
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP		
Start Stan Fraguency	1GHz~26.5GHz		
Start ~Stop Frequency	1MHz/3MHz for Peak, 1MHz/3MHz for Average		

Receiver Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP




#### 11.3 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)


#### RADIATED EMISSION TEST SETUP 9KHz-30MHz

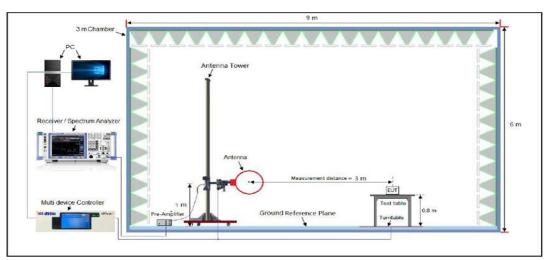

# RADIATED EMISSION TEST SETUP 30MHz-1000MHz

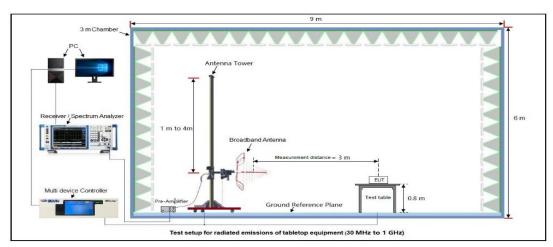

#### RADIATED EMISSION TEST SETUP ABOVE 1000MHz

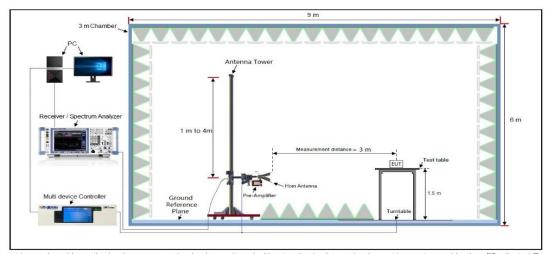




#### 11.4 MEASUREMENT RESULT

#### Radiated emission below 30MHz

The amplitude of spurious emissions from 9kHz to 30MHz which are attenuated more than 20 dB below the permissible value need not be reported.

#### Radiated emission from 30MHz to 1000MHz

EUT	Wireless USB Adapter	Model Name	AX3010
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with 2412MHz	Antenna	Horizontal

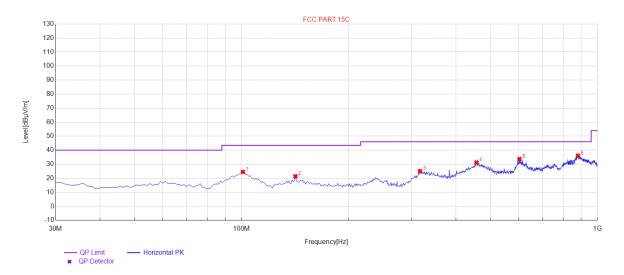


NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	100.81	24.53	21.07	43.50	18.97	100	170	Horizontal
2	141.55	21.40	14.80	43.50	22.10	100	210	Horizontal
3	317.12	25.07	20.65	46.00	20.93	100	50	Horizontal
4	456.8	31.20	27.15	46.00	14.80	100	290	Horizontal
5	603.27	33.68	28.60	46.00	12.32	100	10	Horizontal
6	880.69	36.09	33.22	46.00	9.91	100	110	Horizontal

## **RESULT: PASS**



EUT	Wireless USB Adapter	Model Name	AX3010
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with 2412MHz	Antenna	Vertical

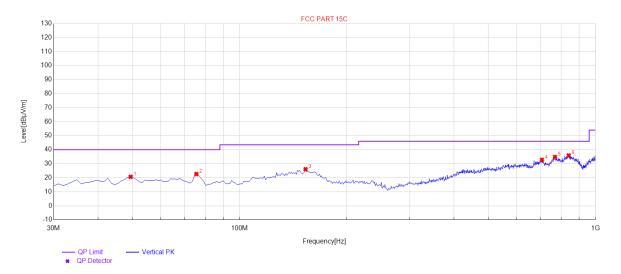

NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	49.4	20.66	13.23	40.00	19.34	100	20	Vertical
2	75.59	22.64	12.76	40.00	17.36	100	20	Vertical
3	153.19	26.10	21.23	43.50	17.40	100	40	Vertical
4	707.06	32.79	28.49	46.00	13.21	100	350	Vertical
5	769.14	34.83	30.70	46.00	11.17	100	130	Vertical
6	840.92	35.93	32.50	46.00	10.07	100	120	Vertical

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

- 2. The "Factor" value can be calculated automatically by software of measurement system.
- 3. All test modes had been pre-tested. All the antennas have been tested. The 802.11b mode of antenna 1 is the worst case and recorded in the report.



Report No.: AGC00688230406FE04

Page 129 of 184

#### Radiated emission above 1GHz


EUT	Wireless USB Adapter	Model Name	AX3010
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1_2412MHz	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4824.000	52.16	0.08	52.24	74.00	-21.76	peak
4824.000	43.51	0.08	43.59	54.00	-10.41	AVG
7236.000	50.13	2.21	52.34	74.00	-21.66	peak
7236.000	41.22	2.21	43.43	54.00	-10.57	AVG
Remark:						
Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

EUT	Wireless USB Adapter	Model Name	AX3010
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1_2412MHz	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	- Value Type	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type	
4824.000	50.69	0.08	50.77	74.00	-23.23	peak	
4824.000	42.84	0.08	42.92	54.00	-11.08	AVG	
7236.000	49.36	2.21	51.57	74.00	-22.43	peak	
7236.000	40.85	2.21	43.06	54.00	-10.94	AVG	
Remark:							
Factor = Anter	Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

## **RESULT: PASS**






EUT	Wireless USB Adapter	Model Name	AX3010
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1_2437MHz	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Tune
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
4874.000	52.85	0.14	52.99	74.00	-21.01	peak
4874.000	37.94	0.14	38.08	54.00	-15.92	AVG
7311.000	51.22	2.36	53.58	74.00	-20.42	peak
7311.000	35.74	2.36	38.10	54.00	-15.90	AVG
Remark:						
Factor = Anter	na Factor + Cabl	e Loss – Pre-	amplifier.			

EUT	Wireless USB Adapter	Model Name	AX3010
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1_2437MHz	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
4874.000	50.44	0.14	50.58	74.00	-23.42	peak
4874.000	38.12	0.14	38.26	54.00	-15.74	AVG
7311.000	50.54	2.36	52.90	74.00	-21.10	peak
7311.000	36.56	2.36	38.92	54.00	-15.08	AVG
Remark:						
Factor = Anter	Factor = Antenna Factor + Cable Loss – Pre-amplifier.					





EUT	Wireless USB Adapter	Model Name	AX3010
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1_2462MHz	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Tune
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
4924.000	51.25	0.22	51.47	74.00	-22.53	peak
4924.000	42.02	0.22	42.24	54.00	-11.76	AVG
7386.000	48.13	2.64	50.77	74.00	-23.23	peak
7386.000	39.52	2.64	42.16	54.00	-11.84	AVG
Remark:						
Factor = Anter	actor = Antenna Factor + Cable Loss – Pre-amplifier.					

EUT	Wireless USB Adapter	Model Name	AX3010
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1_2462MHz	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
4924.000	49.88	0.22	50.10	74.00	-23.90	peak
4924.000	41.15	0.22	41.37	54.00	-12.63	AVG
7386.000	47.36	2.64	50.00	74.00	-24.00	peak
7386.000	38.74	2.64	41.38	54.00	-12.62	AVG
Remark:						
Factor = Anter	Factor = Antenna Factor + Cable Loss – Pre-amplifier.					

#### Note:

The amplitude of other spurious emissions from 1G to 25 GHz which are attenuated more than 20 dB below the permissible value need not be reported.

Factor = Antenna Factor + Cable loss - Amplifier gain, Over= Limit-Measure.

The "Factor" value can be calculated automatically by software of measurement system.

All test modes had been pre-tested. All the antennas have been tested. The 802.11b mode of antenna 1 is the worst case and recorded in the report.




#### Test result for band edge emission at restricted bands\_ATN 1

EUT	Wireless USB Adapter	Model Name	AX3010
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1_2412MHz	Antenna	Horizontal


#### Test Graph for Peak Measurement



Test Graph for Average Measurement

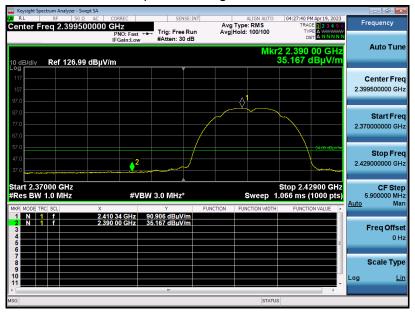


#### **RESULT: PASS**






EUT	Wireless USB Adapter	Model Name	AX3010
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1_2412MHz	Antenna	Vertical

Test Graph for Peak Measurement

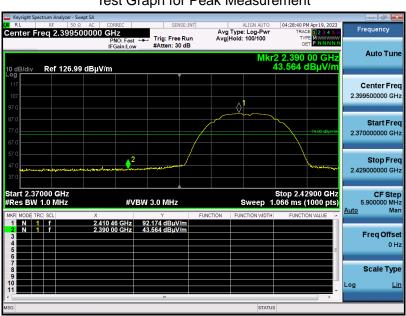

Test Graph for Average Measurement

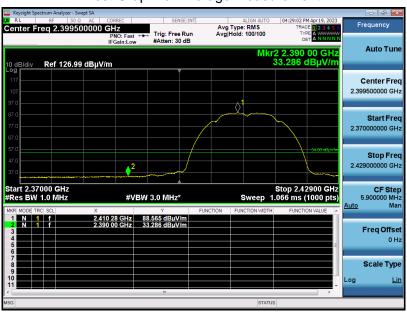





EUT	Wireless USB Adapter	Model Name	AX3010
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with data rate 1_2462MHz	Antenna	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement

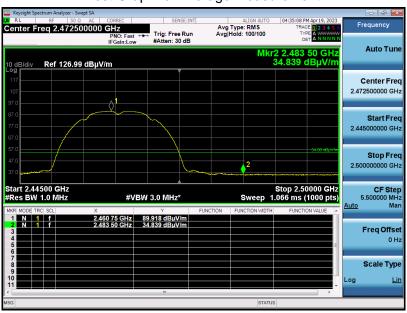







EUT	Wireless USB Adapter	Model Name	AX3010
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with data rate 1_2462MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement

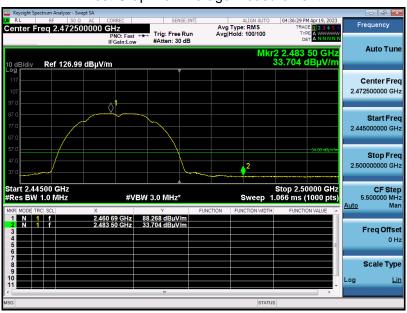






EUT	Wireless USB Adapter	Model Name	AX3010
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11g with data rate 6_2412MHz	Antenna	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement

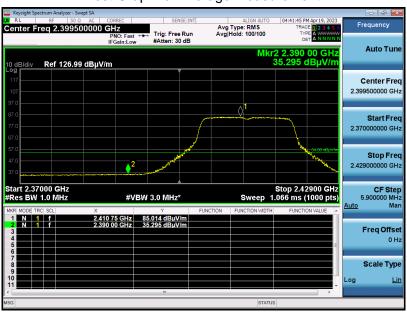



EUT	Wireless USB Adapter	Model Name	AX3010
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11g with data rate 6_2412MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement






EUT	Wireless USB Adapter	Model Name	AX3010
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11g with data rate 6_2462MHz	Antenna	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement








EUT	Wireless USB Adapter	Model Name	AX3010
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11g with data rate 6 2462MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement








EUT	Wireless USB Adapter	Model Name	AX3010
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n20 with data rate 6.5 2412MHz	Antenna	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement








EUT	Wireless USB Adapter	Model Name	AX3010
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n20 with data rate 6.5 2412MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement








EUT	Wireless USB Adapter	Model Name	AX3010
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n20 with data rate 6.5 2462MHz	Antenna	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement








EUT	Wireless USB Adapter	Model Name	AX3010
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n20 with data rate 6.5 2462MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement









EUT	Wireless USB Adapter	Model Name	AX3010
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n40 with data rate 13.5 2422MHz	Antenna	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement

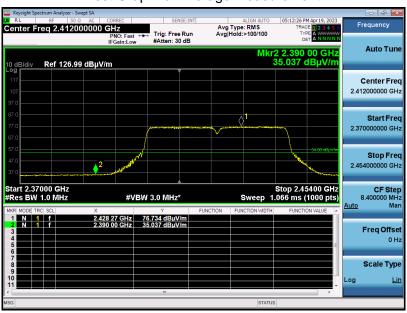







EUT	Wireless USB Adapter	Model Name	AX3010
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n40 with data rate 13.5 2422MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement

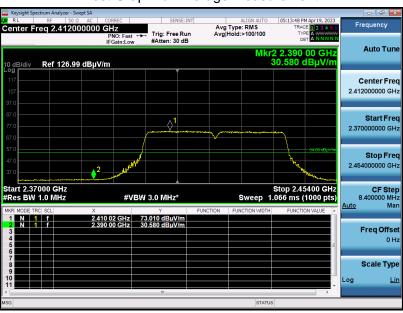






EUT	Wireless USB Adapter	Model Name	AX3010
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n40 with data rate 13.5 2452MHz	Antenna	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement








EUT	Wireless USB Adapter	Model Name	AX3010
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n40 with data rate 13.5 2452MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement









EUT	Wireless USB Adapter	Model Name	AX3010
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11ax20 with data rate 3.6 2412MHz	Antenna	Horizontal

Test Graph for Peak Measurement

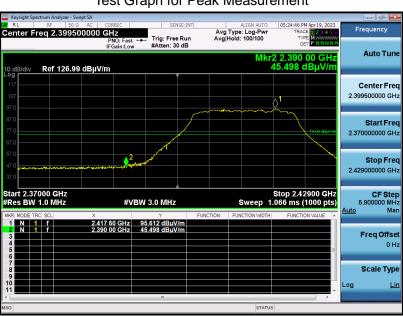

Test Graph for Average Measurement








EUT	Wireless USB Adapter	Model Name	AX3010
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11ax20 with data rate 3.6 2412MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement








EUT	Wireless USB Adapter	Model Name	AX3010
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11ax20 with data rate 3.6 2462MHz	Antenna	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement








EUT	Wireless USB Adapter	Model Name	AX3010
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11ax20 with data rate 3.6 2462MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement









EUT	Wireless USB Adapter	Model Name	AX3010
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11ax40 with data rate 7.3 2422MHz	Antenna	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement

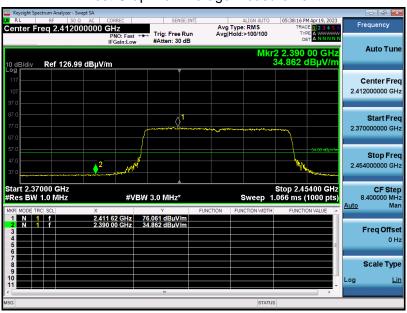







EUT	Wireless USB Adapter	Model Name	AX3010
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11ax40 with data rate 7.3 2422MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement

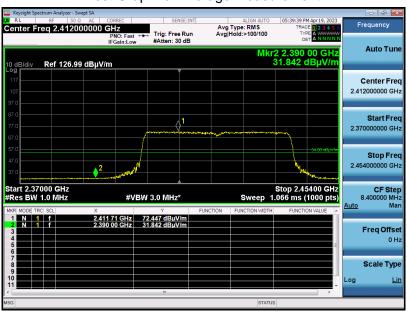






EUT	Wireless USB Adapter	Model Name	AX3010
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11ax40 with data rate 7.3 2452MHz	Antenna	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement







EUT	Wireless USB Adapter	Model Name	AX3010
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11ax40 with data rate 7.3 2452MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement







## Test result for band edge emission at restricted bands\_ANT 2

EUT	Wireless USB Adapter	Model Name	AX3010
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with data rate 1 2412MHz	Antenna	Horizontal

### Test Graph for Peak Measurement

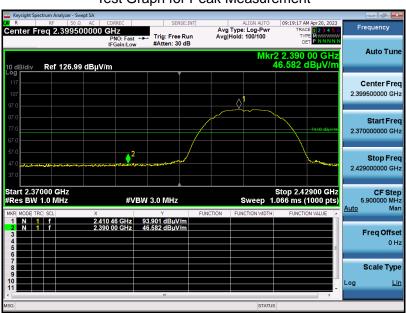


Test Graph for Average Measurement

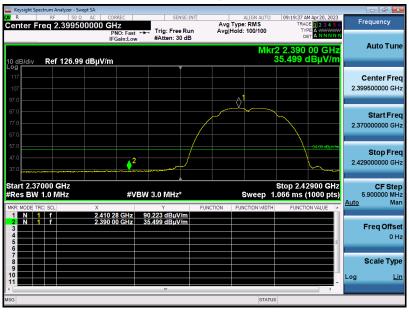

#### **RESULT: PASS**

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.


Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/







EUT	Wireless USB Adapter	Model Name	AX3010
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with data rate 1 2412MHz	Antenna	Vertical

Test Graph for Peak Measurement

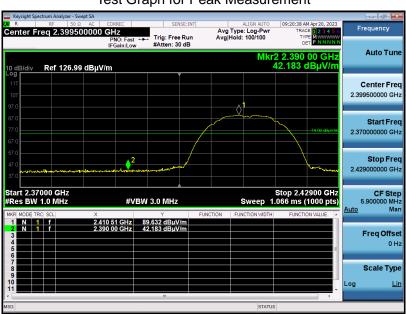

Test Graph for Average Measurement

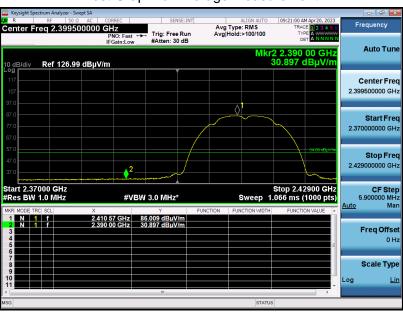







EUT	Wireless USB Adapter	Model Name	AX3010
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with data rate 1 2462MHz	Antenna	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement

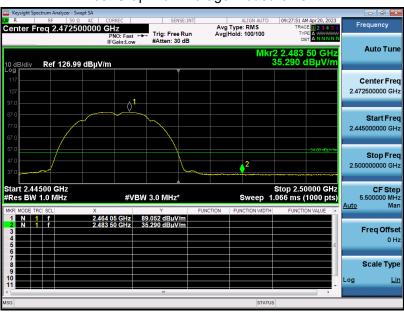






EUT	Wireless USB Adapter	Model Name	AX3010
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with data rate 1 2462MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement








EUT	Wireless USB Adapter	Model Name	AX3010
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11g with data rate 6 2412MHz	Antenna	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement









EUT	Wireless USB Adapter	Model Name	AX3010
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11g with data rate 6 2412MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement

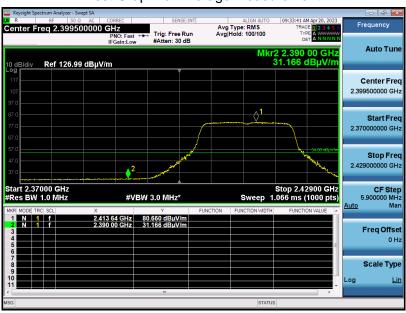






EUT	Wireless USB Adapter	Model Name	AX3010
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11g with data rate 6 2462MHz	Antenna	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement







EUT	Wireless USB Adapter	Model Name	AX3010
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11g with data rate 6 2462MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement

