


File: F:\Test Template\上海ITS\2022\220523032 SA750\B\BT\RSE\4_00001.EMI

Date: 2022-06-10

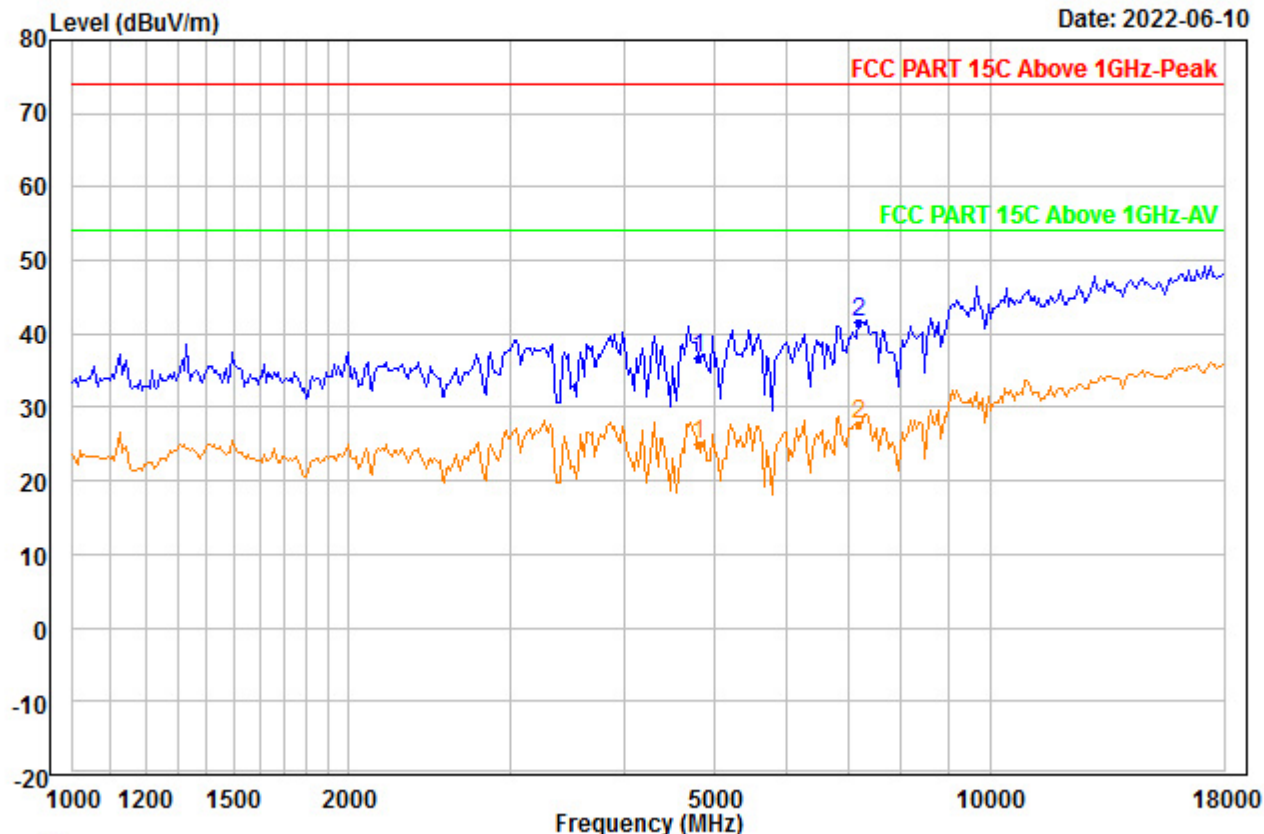


Trace: 1

Condition : Vertical
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : BLE_2402
Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	4804.000	38.90	34.70	46.56	0.00	9.52	36.56	74.00	-37.44	---	---	Peak
2 PP	7206.000	40.16	36.09	46.12	0.00	11.46	41.59	74.00	-32.41	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\BT\RISE\4_00002.EMI

Date: 2022-06-10

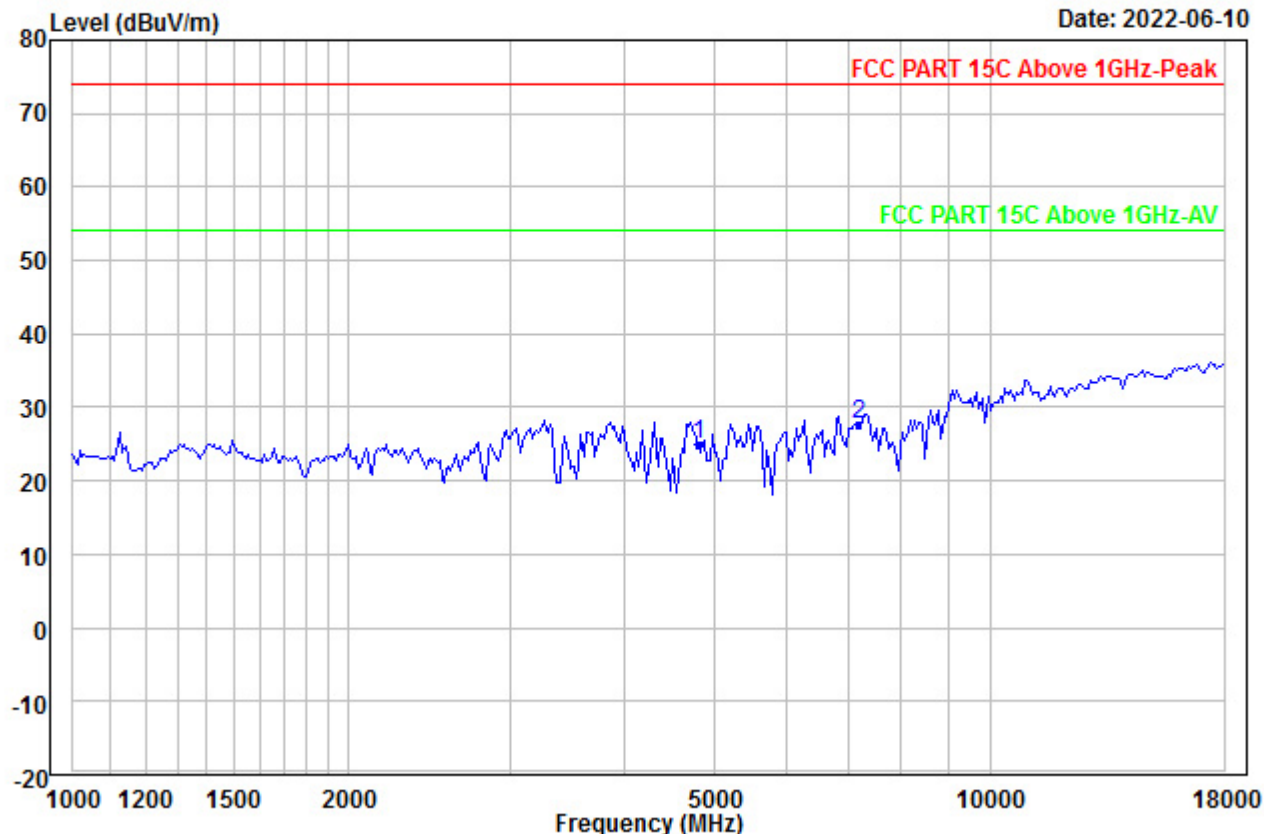


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : BLE_2402
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	4804.000	27.29	34.70	46.56	0.00	9.52	24.95	54.00	-29.05	---	---	Average
2 PP	7206.000	26.16	36.09	46.12	0.00	11.46	27.59	54.00	-26.41	---	---	Average

File: F:\Test Template\上海ITS\2022\220523032 SA750\BIBT\RISE\4_00003.EMI

Date: 2022-06-10

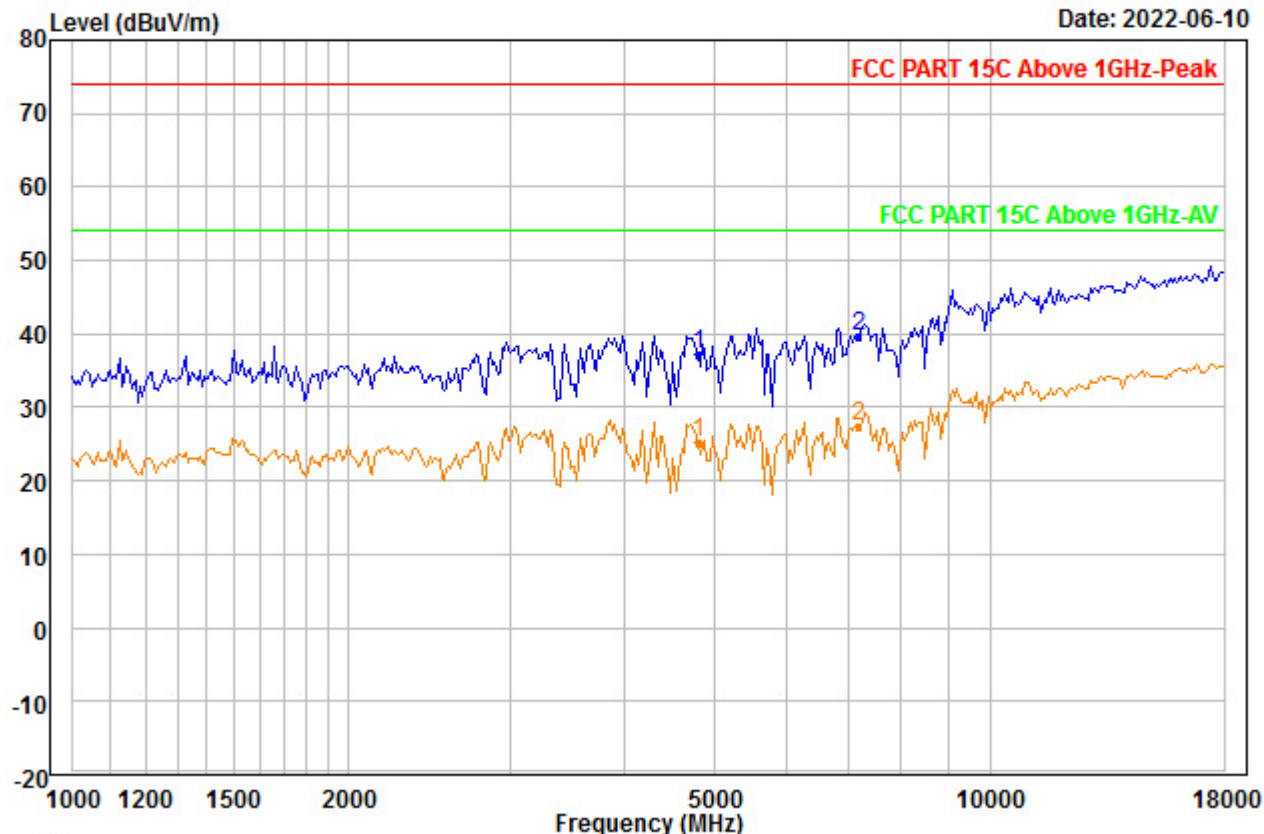


Trace: 1

Condition : Horizontal
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : BLE_2402
Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	4804.000	39.55	34.70	46.56	0.00	9.52	37.21	74.00	-36.79	---	---	Peak
2 PP	7206.000	38.34	36.09	46.12	0.00	11.46	39.77	74.00	-34.23	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\BT\RISE\4_00004.EMI

Date: 2022-06-10

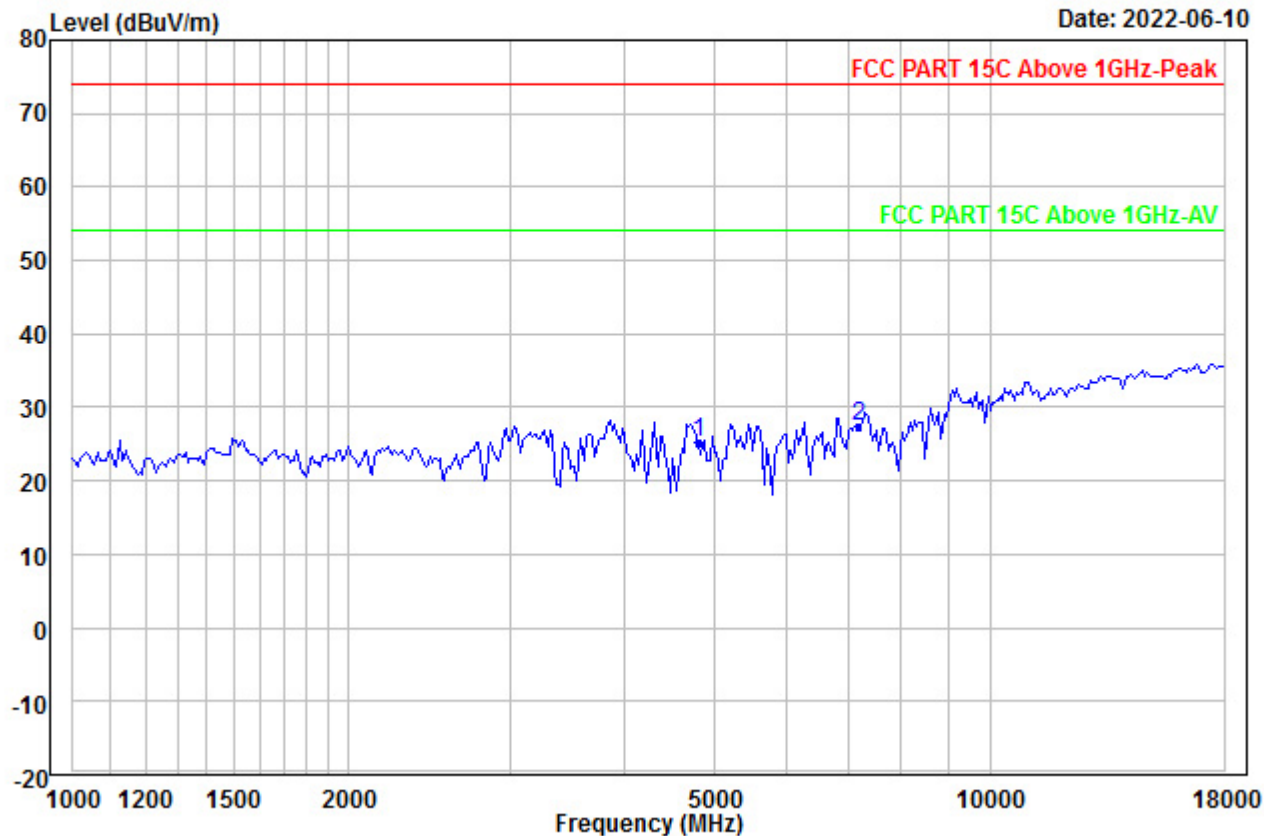


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : BLE_2402
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	4804.000	27.54	34.70	46.56	0.00	9.52	25.20	54.00	-28.80	---	---	Average
2 PP	7206.000	26.09	36.09	46.12	0.00	11.46	27.52	54.00	-26.48	---	---	Average

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\BT\RSE\4_00005.EMI

Date: 2022-06-10

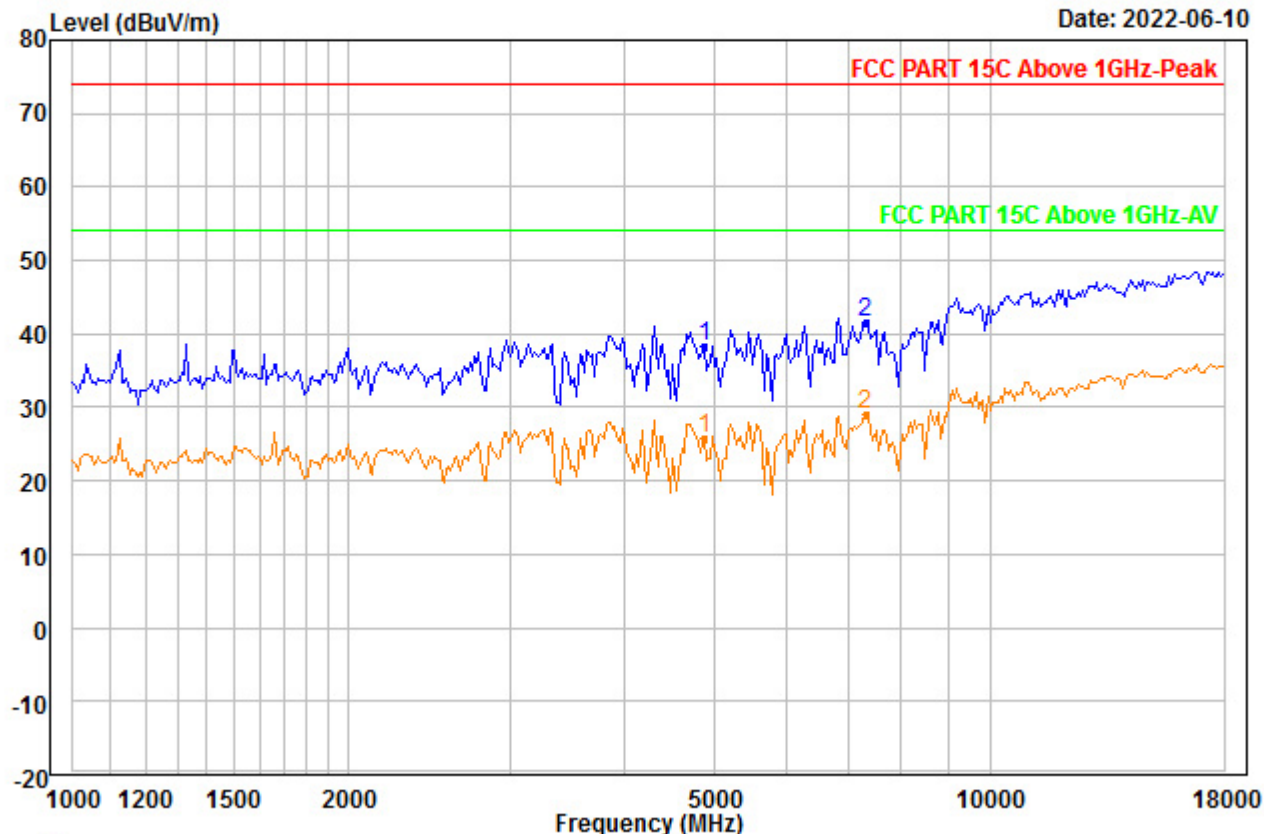


Trace: 1

Condition : Horizontal
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : BLE_2440
Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	4880.000	40.67	34.70	46.58	0.00	9.58	38.37	74.00	-35.63	---	---	Peak
2 PP	7320.000	39.96	36.25	46.19	0.00	11.55	41.57	74.00	-32.43	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\BT\RSE\4_00006.EMI

Date: 2022-06-10

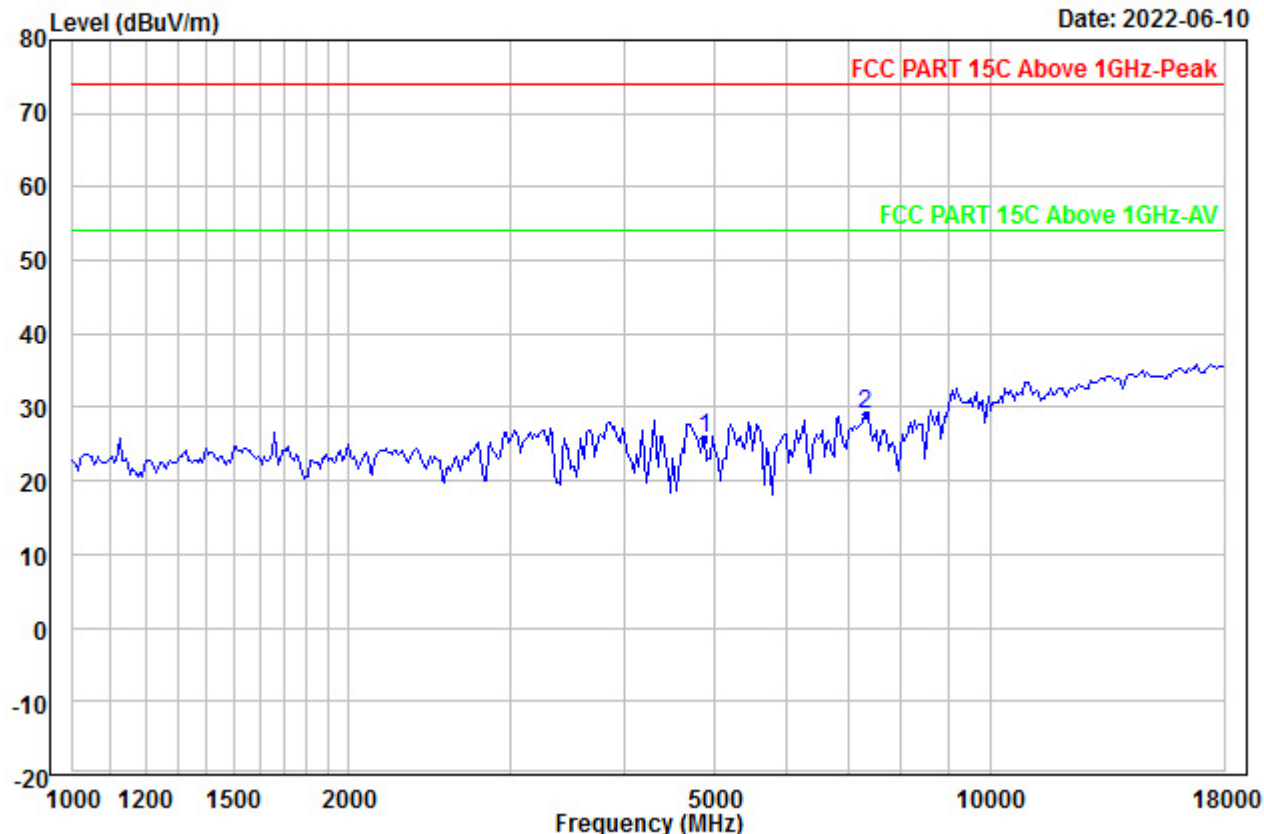


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : BLE_2440
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	4880.000	28.03	34.70	46.58	0.00	9.58	25.73	54.00	-28.27	---	---	Average
2 PP	7320.000	27.44	36.25	46.19	0.00	11.55	29.05	54.00	-24.95	---	---	Average

File: F:\Test Template\上海ITS\2022\220523032 SA750\BIBT\RS4_00007.EMI

Date: 2022-06-10

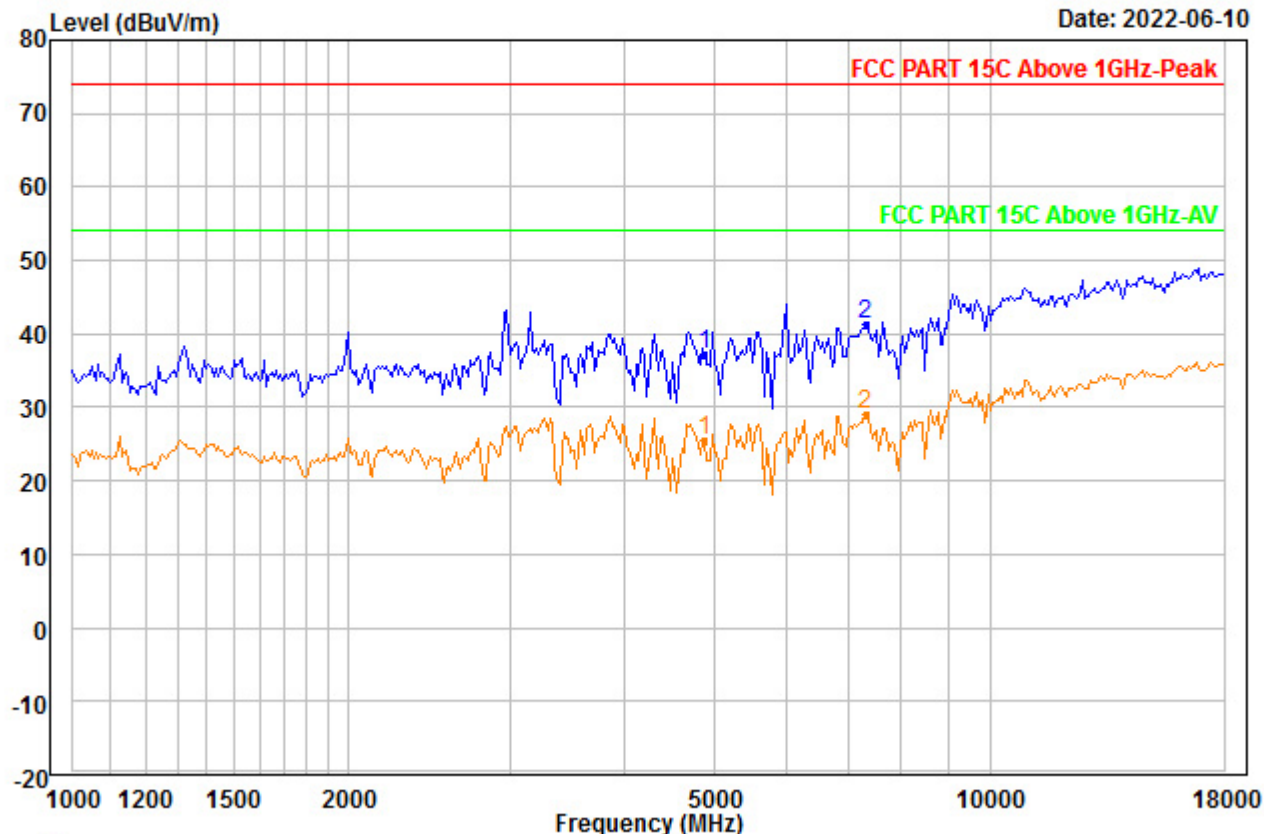


Trace: 1

Condition : Vertical
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : BLE_2440
Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	4880.000	39.61	34.70	46.58	0.00	9.58	37.31	74.00	-36.69	---	---	Peak
2 PP	7320.000	39.69	36.25	46.19	0.00	11.55	41.30	74.00	-32.70	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\BT\RSE\4_00008.EMI

Date: 2022-06-10

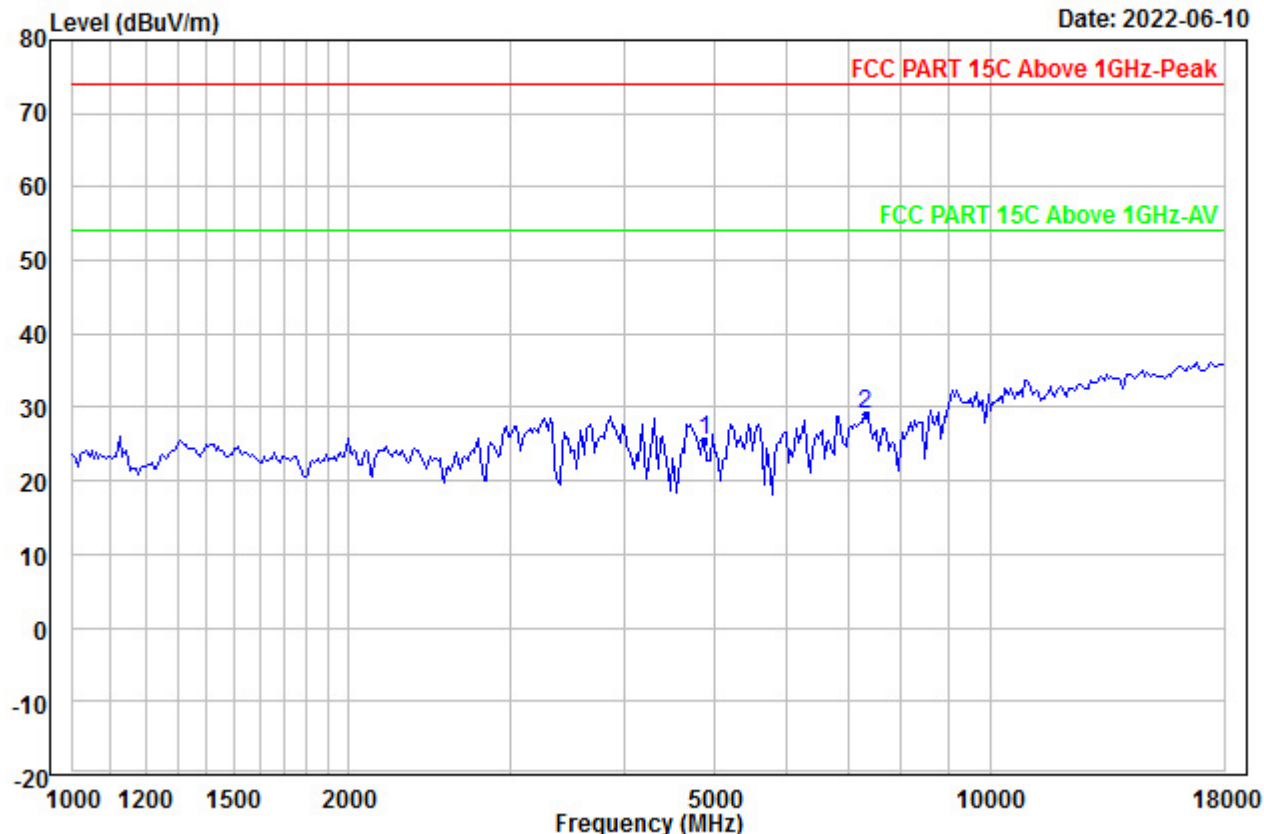


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : BLE_2440
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	4880.000	27.68	34.70	46.58	0.00	9.58	25.38	54.00	-28.62	---	---	Average
2 PP	7320.000	27.56	36.25	46.19	0.00	11.55	29.17	54.00	-24.83	---	---	Average

File: F:\Test Template\上海ITS\2022\220523032 SA750\BIBT\RSE\4_00009.EMI

Date: 2022-06-10

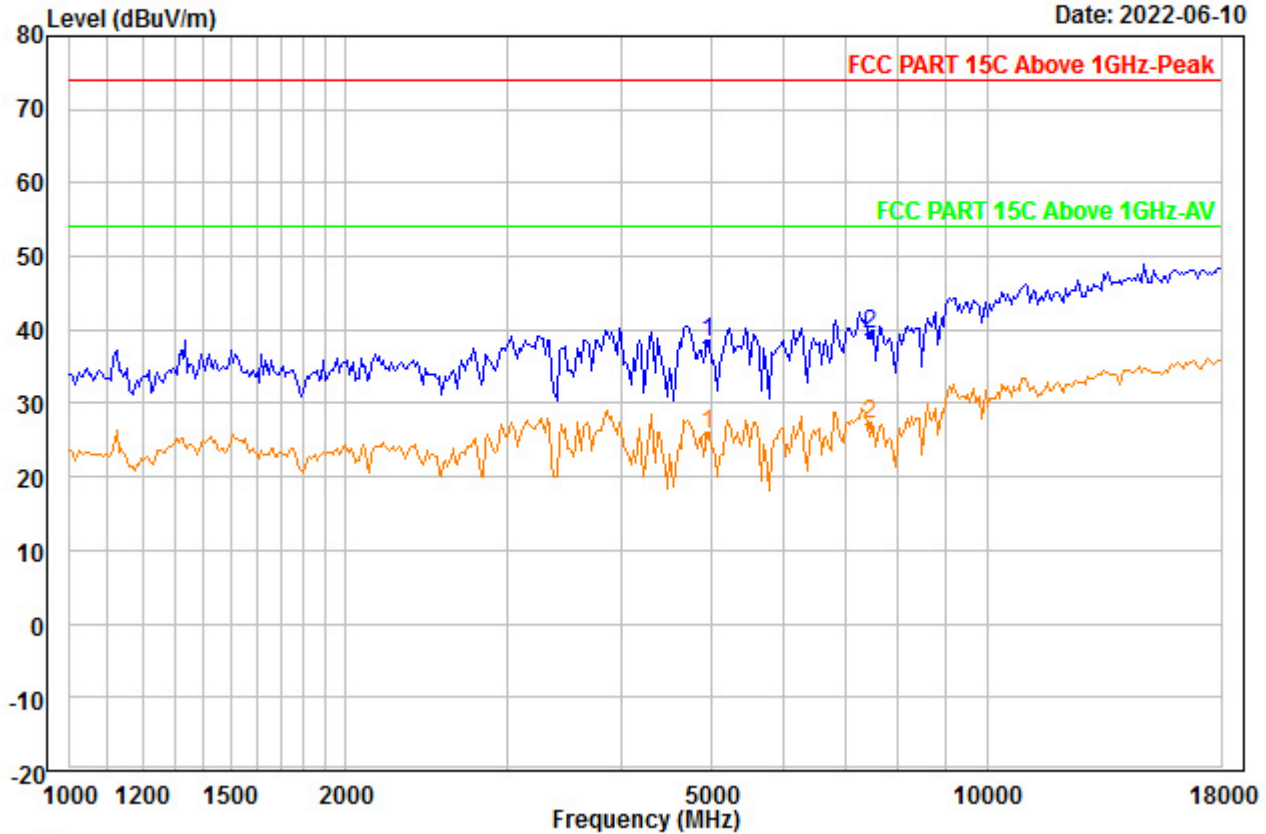


Trace: 1

Condition : Vertical
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : BLE_2480
Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	4960.000	40.45	34.70	46.59	0.00	9.64	38.20	74.00	-35.80	---	---	Peak
2 PP	7440.000	37.63	36.42	46.26	0.00	11.65	39.44	74.00	-34.56	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\BT\RSE\4_00010.EMI

Date: 2022-06-10

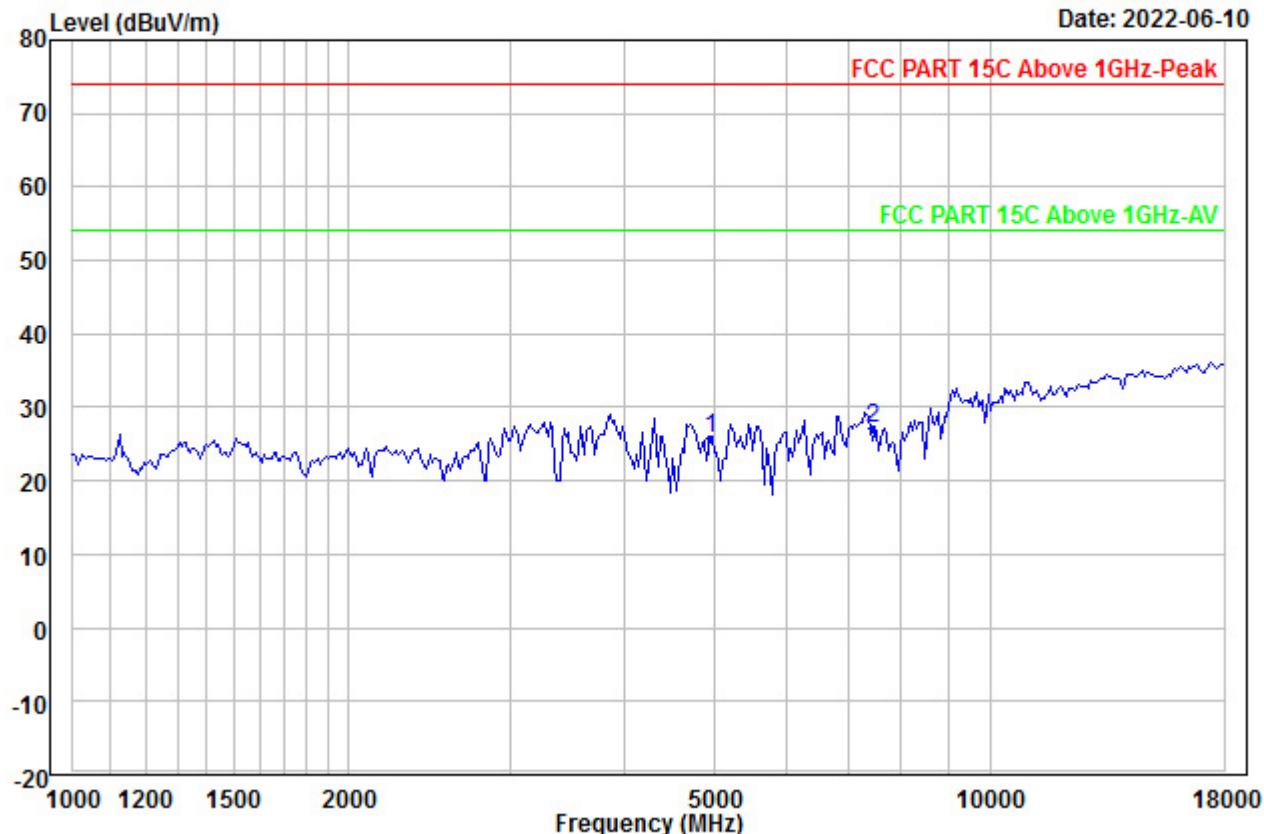


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : BLE_2480
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	4960.000	28.02	34.70	46.59	0.00	9.64	25.77	54.00	-28.23	---	---	Average
2 PP	7440.000	25.38	36.42	46.26	0.00	11.65	27.19	54.00	-26.81	---	---	Average

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\BT\RSE\4_00011.EMI

Date: 2022-06-10

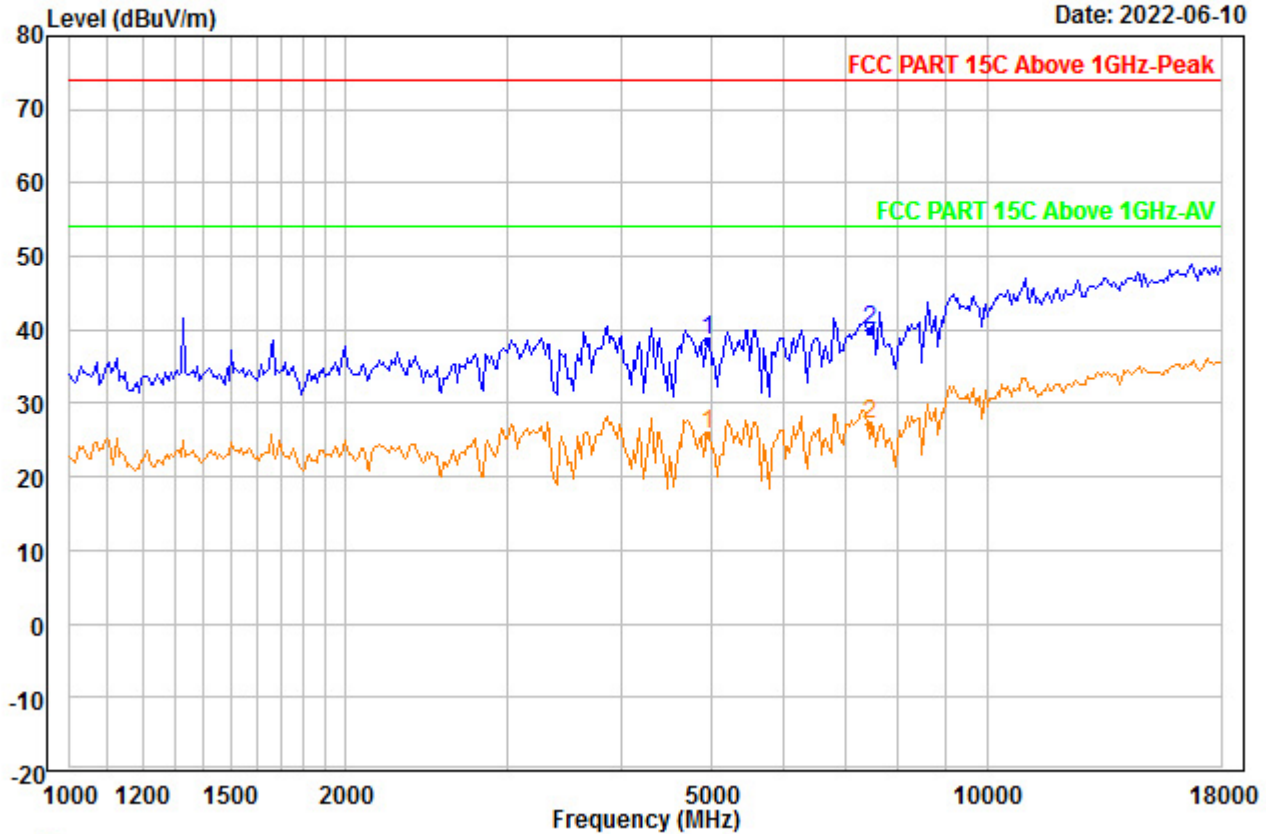


Trace: 1

Condition : Horizontal
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : BLE_2480
Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	4960.000	40.91	34.70	46.59	0.00	9.64	38.66	74.00	-35.34	---	---	Peak
2 PP	7440.000	38.04	36.42	46.26	0.00	11.65	39.85	74.00	-34.15	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\BT\RSE\4_00012.EMI

Date: 2022-06-10

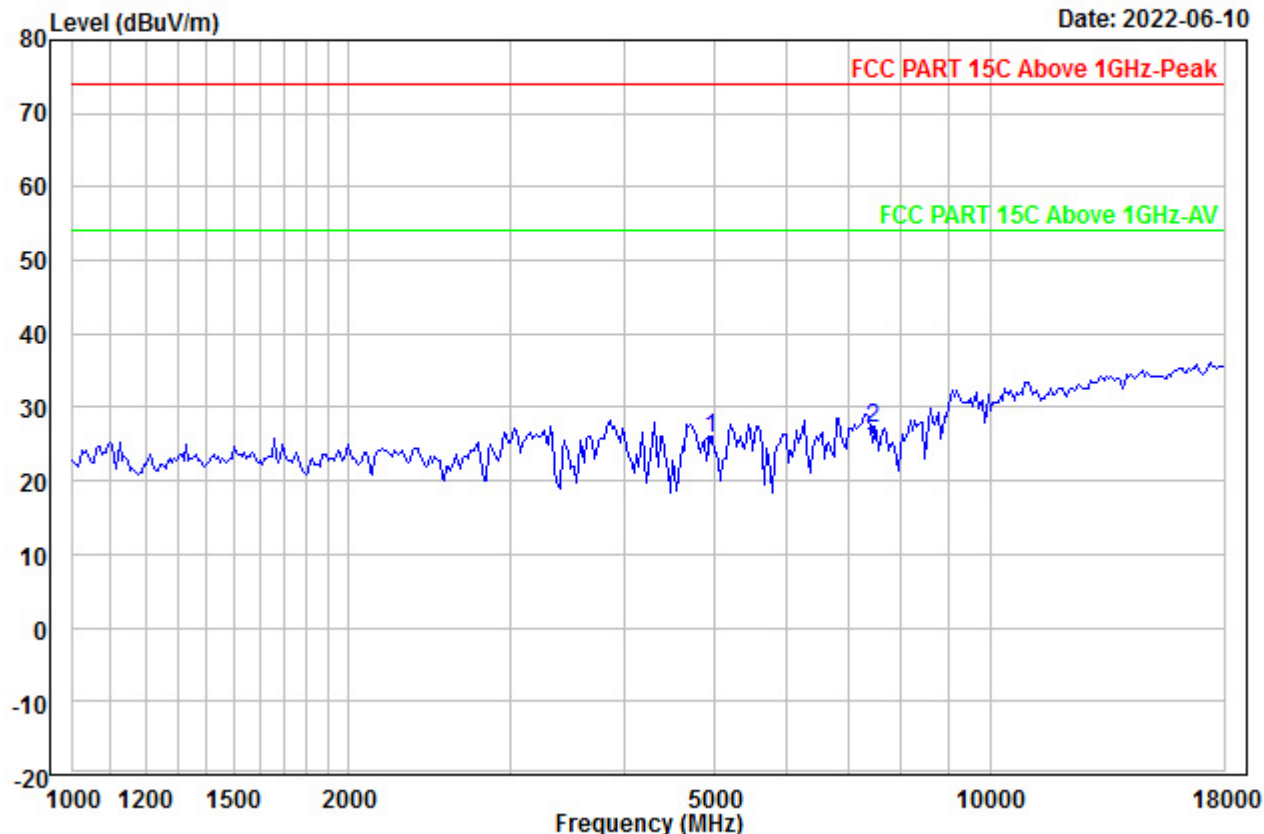

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : BLE_2480
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	4960.000	28.02	34.70	46.59	0.00	9.64	25.77	54.00	-28.23	---	---	Average
2 PP	7440.000	25.30	36.42	46.26	0.00	11.65	27.11	54.00	-26.89	---	---	Average